

FCC Radio Test Report

FCC ID: Q78-ZXHNF680V9

This report concerns: Original Grant

Project No. : 2001H021
Equipment : GPON ONT
Brand Name : ZTE
Test Model : ZXHN F680
Series Model : ZXHN F689
Applicant : ZTE Corporation
Address : ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong,
P.R.China
Manufacturer : ZTE Corporation
Address : ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong,
P.R.China
Date of Receipt : Jan. 17, 2020
Date of Test : Apr. 23, 2020 ~ Apr. 27, 2020
Issued Date : Jun. 05, 2020
Report Version : R00
Test Sample : Engineering Sample No.: SH2020030642, SH2020030642-1
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Krain. Wu

Prepared by : Krain Wu

Ryan. Wang

Approved by : Ryan Wang



Certificate # 5123. 03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

TEL: +86-021-61765666

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 DUTY CYCLE	13
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.6 SUPPORT UNITS	14
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	15
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 EUT OPERATION CONDITIONS	16
3.6 TEST RESULTS	16
4 . RADIATED EMISSIONS TEST	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	20
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	20
4.8 TEST RESULTS - ABOVE 1000 MHZ	20
5 . BANDWIDTH TEST	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM STANDARD	21
5.4 TEST SETUP	21

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	21
5.6 TEST RESULTS	21
6 . MAXIMUM OUTPUT POWER TEST	22
6.1 LIMIT	22
6.2 TEST PROCEDURE	22
6.3 DEVIATION FROM STANDARD	22
6.4 TEST SETUP	22
6.5 EUT OPERATION CONDITIONS	22
6.6 TEST RESULTS	22
7 . CONDUCTED SPURIOUS EMISSIONS	23
7.1 LIMIT	23
7.2 TEST PROCEDURE	23
7.3 DEVIATION FROM STANDARD	23
7.4 TEST SETUP	23
7.5 EUT OPERATION CONDITIONS	23
7.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 LIMIT	24
8.2 TEST PROCEDURE	24
8.3 DEVIATION FROM STANDARD	24
8.4 TEST SETUP	24
8.5 EUT OPERATION CONDITIONS	24
8.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	30
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	33
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	34
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	37
APPENDIX E - BANDWIDTH	86
APPENDIX F - MAXIMUM OUTPUT POWER	91
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	98

Table of Contents**Page****APPENDIX H - POWER SPECTRAL DENSITY****115**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jun. 05, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China
BTL's Test Firm Registration Number for FCC: 476765
BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. AC Power Line Conducted Emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
SH-C01	CISPR	9 kHz ~ 150 MHz	2.92

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	51%	AC 120V	Bill Dong
Radiated Emissions-9K-30MHz	22°C	51%	AC 120V	Bill Dong
Radiated Emissions-30 MHz to 1GHz	20°C	45%	AC 120V	Forest Li
Radiated Emissions-Above 1000 MHz	20°C	45%	AC 120V	Forest Li
Bandwidth	22°C	51%	AC 120V	Bill Dong
Maximum output power & e.i.r.p.	22°C	51%	AC 120V	Bill Dong
Conducted Spurious Emissions	22°C	51%	AC 120V	Bill Dong
Power Spectral Density	22°C	51%	AC 120V	Bill Dong

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	GPON ONT
Brand Name	ZTE
Test Model	ZXHN F680
Series Model	ZXHN F689
Model Difference(s)	Only different in outer covering color.
Software Version	N/A
Hardware Version	N/A
Power Source	DC voltage supplied from AC/DC adapter.
Power Rating	I/P: 100-240V ~ 50/60Hz 1.5A MAX O/P: 12V $\pm$ 2.5A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Peak Output Power Non-Beamforming	IEEE 802.11b: 28.44 dBm (0.6982 W) IEEE 802.11g: 29.95 dBm (0.9886 W) IEEE 802.11n (HT20): 29.63 dBm (0.9183 W) IEEE 802.11n (HT40): 29.76 dBm (0.9462 W)
Maximum Avg Output Power Non-Beamforming	IEEE 802.11b: 25.45 dBm (0.3508 W) IEEE 802.11g: 19.80 dBm (0.0955 W) IEEE 802.11n (HT20): 19.46 dBm (0.0883 W) IEEE 802.11n (HT40): 20.26 dBm (0.1061 W)
Maximum Peak Output Power Beamforming	IEEE 802.11n (HT20): 26.93 dBm (0.4932 W) IEEE 802.11n (HT40): 26.92 dBm (0.4920 W)
Maximum Avg Output Power Beamforming	IEEE 802.11n (HT20): 16.86 dBm (0.0485 W) IEEE 802.11n (HT40): 16.33 dBm (0.0430 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20) CH03 - CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	3
2	N/A	N/A	PCB	N/A	3
3	N/A	N/A	PCB	N/A	3
4	N/A	N/A	PCB	N/A	3

Note:

For Beamforming:

- (1) Antenna Gain=3 dBi. This EUT supports MIMO 4X4, any transmit signals are correlated with each other, so Directional gain = $G_{ANT} + 10\log(N)$ dBi, that is Directional gain=3+10log(4)dBi=9.02; So, the output power limit is 30-9.02+6=26.98, the power spectral density limit is 8-9.02+6=4.98.

For Non-Beamforming:

- (2) This EUT supports CDD, and all antennas have the same gain, Directional gain= $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:

For power spectral density measurements, $N_{ANT} = 4$, $N_{SS} = 1$. So Directional gain = $G_{ANT} + \text{Array Gain} = 10\log(N_{ANT}/N_{SS})$ dB = 3+10log(4/1)dBi=9.02. Then, the power density limit is 8-(9.02-6)=4.98.

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain=3.

4. Table for Antenna Configuration:

Operating Mode TX Mode	1TX	2TX	3TX	4TX
IEEE 802.11a	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n (HT20)	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n (HT40)	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac (VHT20)	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac (VHT40)	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac (VHT80)	V (Ant. 1)	V (Ant. 1 + Ant. 2)	V (Ant. 1 + Ant. 2 + Ant. 3)	V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX G Mode Channel 01

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode:	Description
Mode 5	TX G Mode Channel 01

Radiated emissions test - Below 1GHz	
Final Test Mode:	Description
Mode 5	TX G Mode Channel 01

Radiated emissions test- Above 1GHz	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Conducted test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: CCK (1 Mbps)
802.11g mode: OFDM (6 Mbps)
802.11n HT20 mode : BPSK (13 Mbps)
802.11n HT40 mode : BPSK (27 Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated emission below 1 GHz test, the IEEE 802.11g Channel 01 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

Non-Beamforming


Test Software	QATool		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	20	1F	1E
IEEE 802.11g	16	17	17
IEEE 802.11n (HT20)	17	17	17
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	1A	1A	1A

Beamforming

Test Software	QATool		
Frequency (MHz)	2412	2437	2462
IEEE 802.11n (HT20)	0C	0E	0C
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	0D	0D	0D


2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.

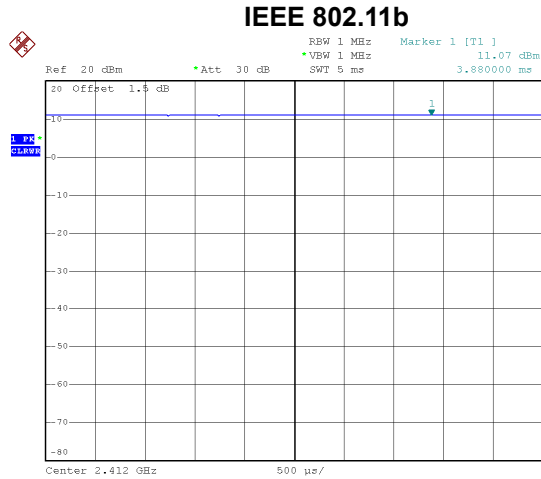


Date: 13.FEB.2020 09:17:29

Duty cycle = $8.410 \text{ ms} / 8.468 \text{ ms} = 99.32\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.03$

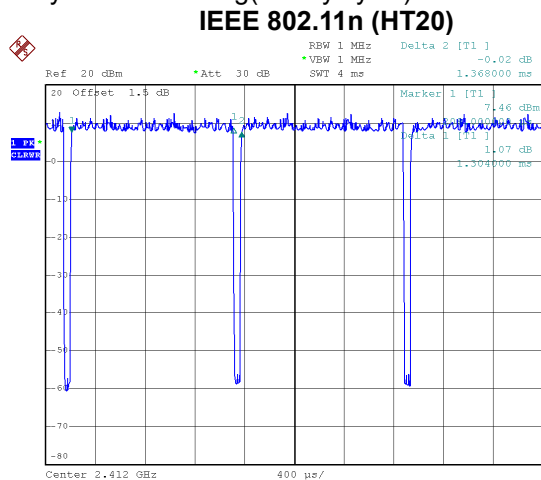


Date: 13.FEB.2020 09:18:26

Duty cycle = $1.304 \text{ ms} / 1.368 \text{ ms} = 95.32\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.21$

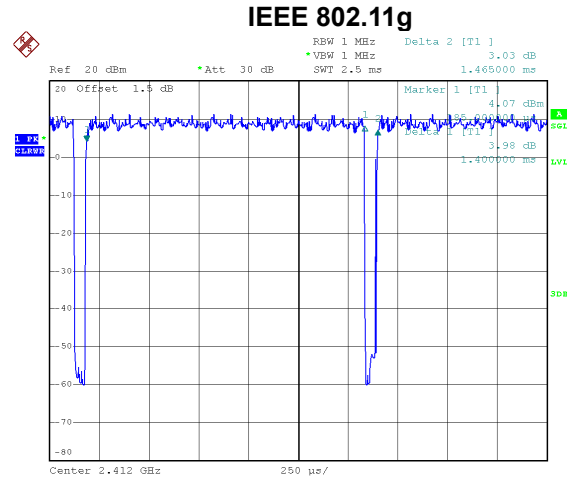

Date: 13.FEB.2020 09:18:07

Duty cycle = $1.400 \text{ ms} / 1.465 \text{ ms} = 95.56\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.20$

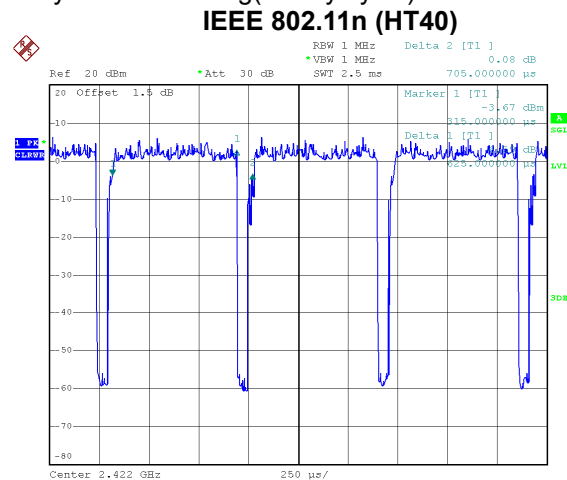

Date: 13.FEB.2020 09:18:45

Duty cycle = $0.625 \text{ ms} / 0.705 \text{ ms} = 88.65\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.52$

NOTE:


For IEEE 802.11g and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.77 kHz (Duty cycle $< 98\%$).

For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1.6 kHz (Duty cycle $< 98\%$).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

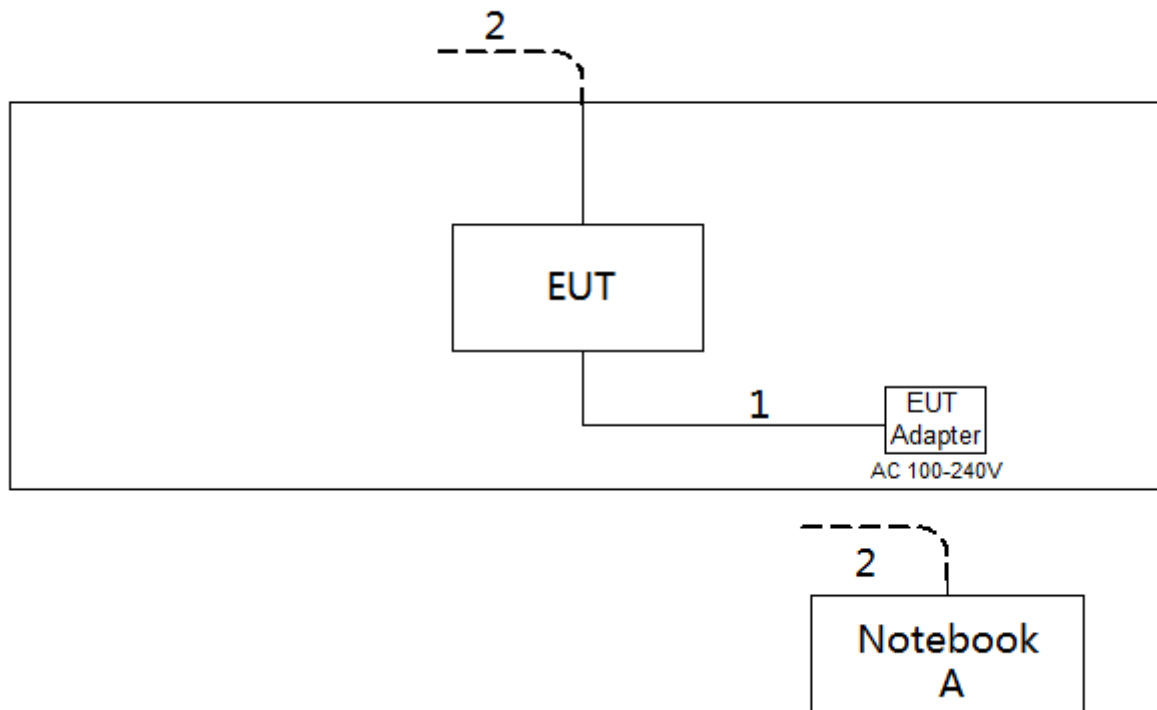

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	#P152014	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

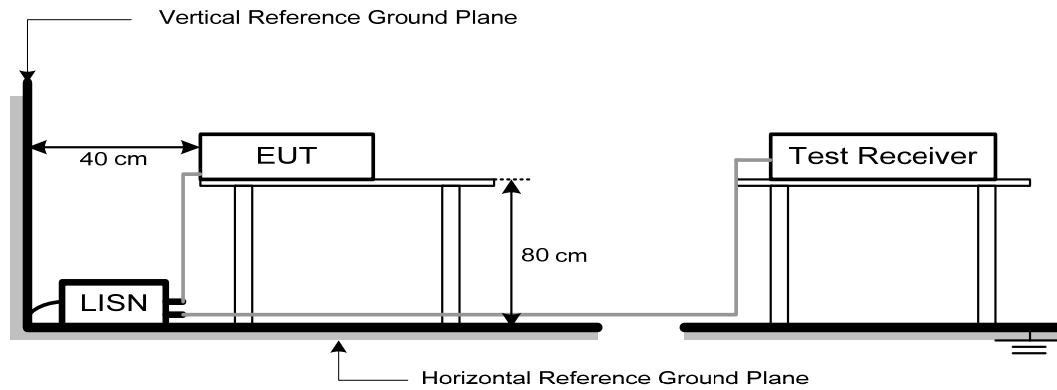

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation


4.4 TEST SETUP

9 kHz-30 MHz

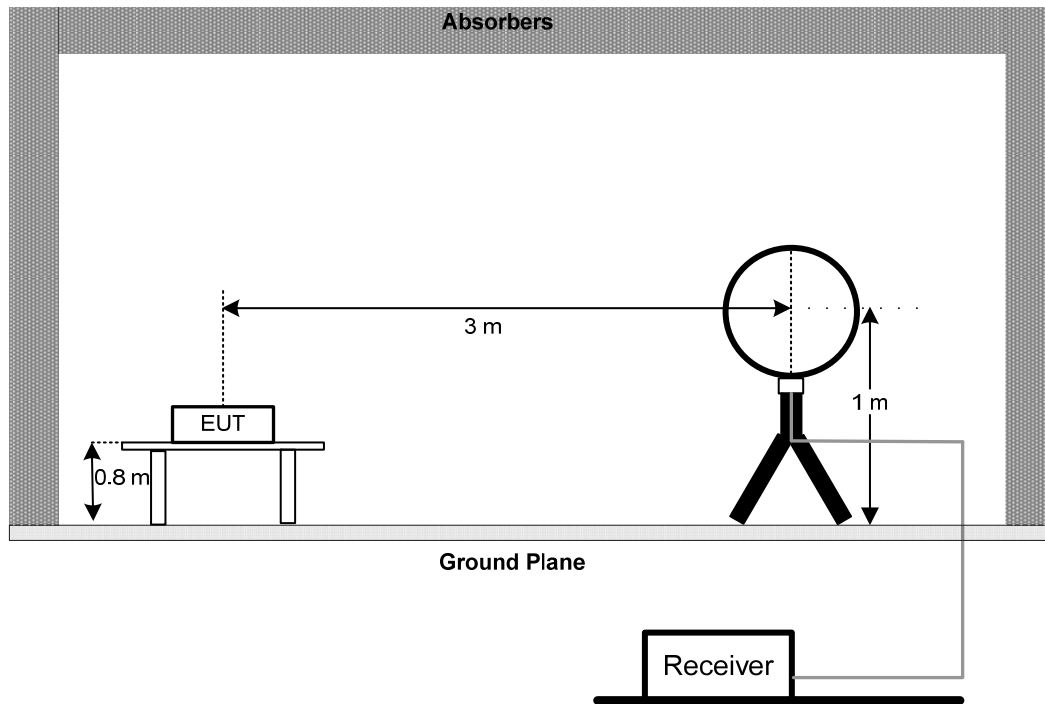

30 MHz to 1 GHz

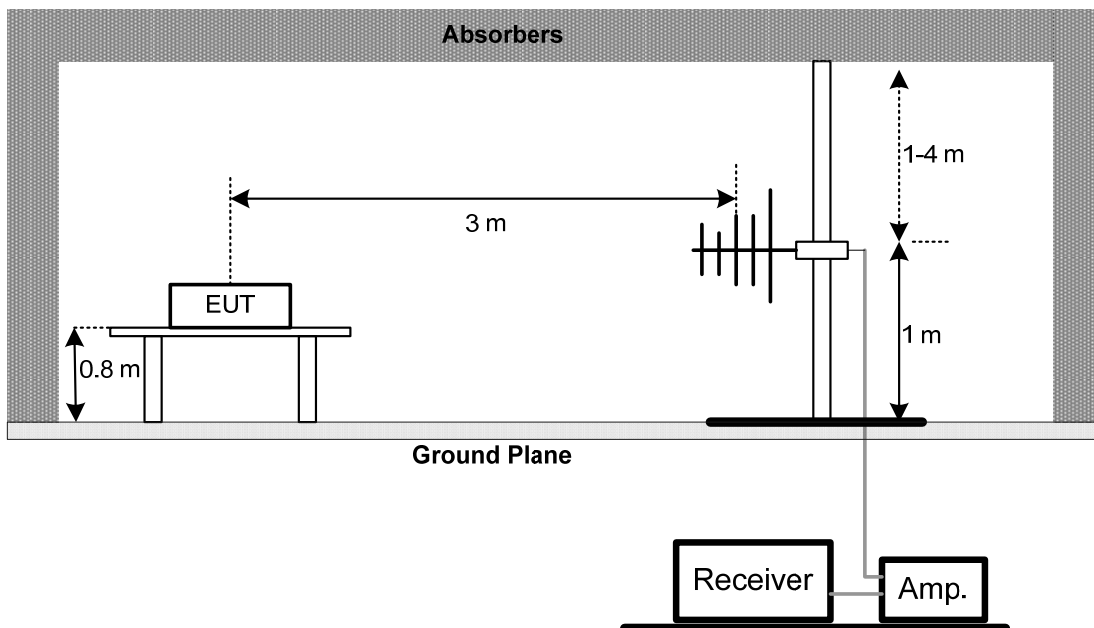

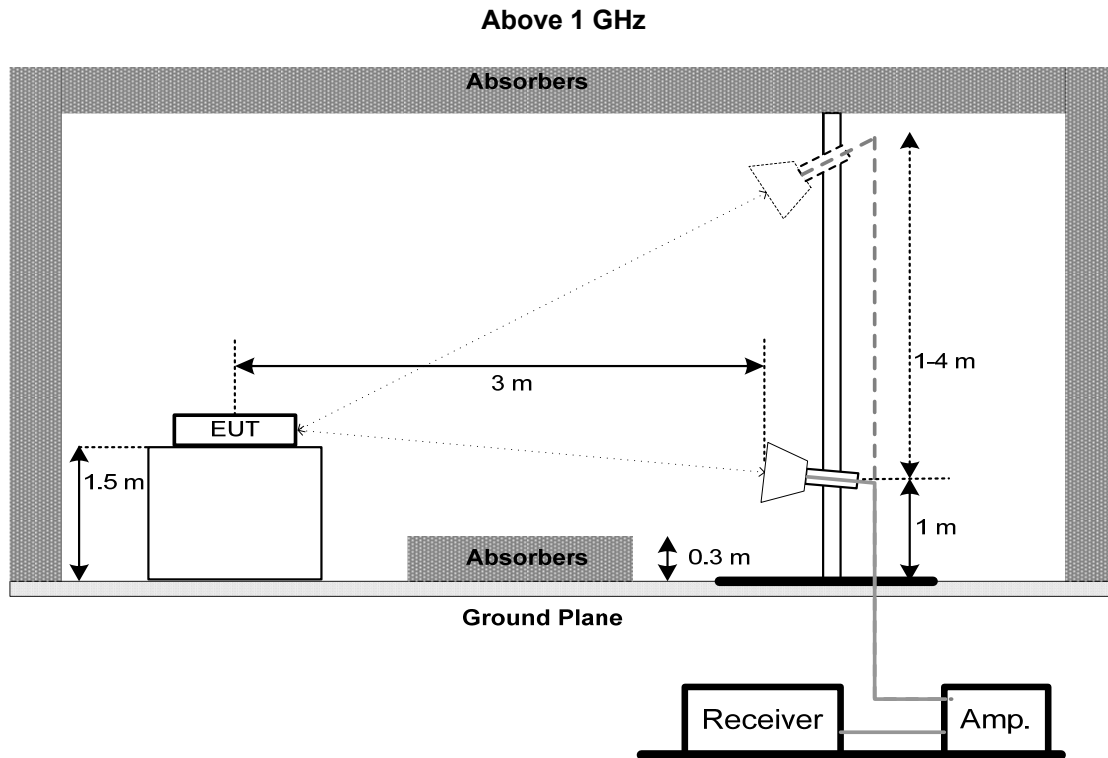

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
 - For 6 dB Bandwidth : RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
 - For 99% Emission Bandwidth B/G/N-20 Mode: RBW= 300 KHz, VBW=1 MHz, Sweep time = 2.5 ms.
 - For 99% Emission Bandwidth N-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.1.3 (for peak power) or 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 21, 2021
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	Jul. 15, 2020
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 21, 2021
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 21, 2021
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7 000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1 000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3 500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 28, 2021
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 28, 2021

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Maximum Output Power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 21, 2021
2	Wideband Power Sensor	Keysight	N9123A	MY58310003	Mar. 21, 2021

Antenna Conducted Spurious Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Power Spectral Density


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



10. EUT TEST PHOTO

Conducted Emissions Test Photos

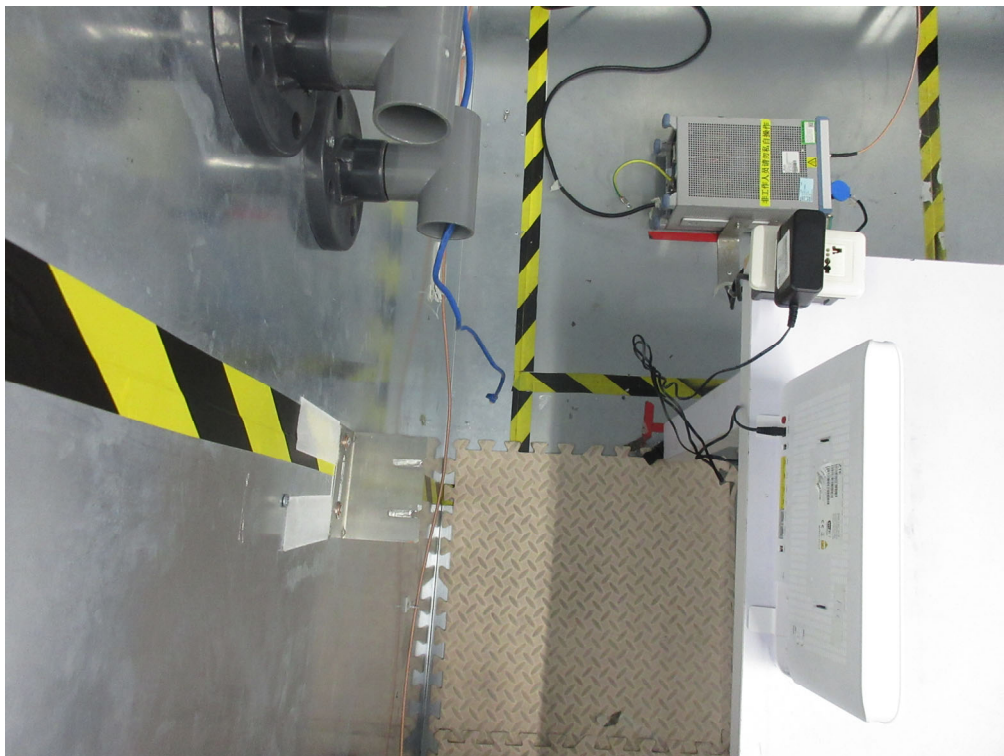



Radiated Emissions Test Photos

30 MHz to 1 GHz

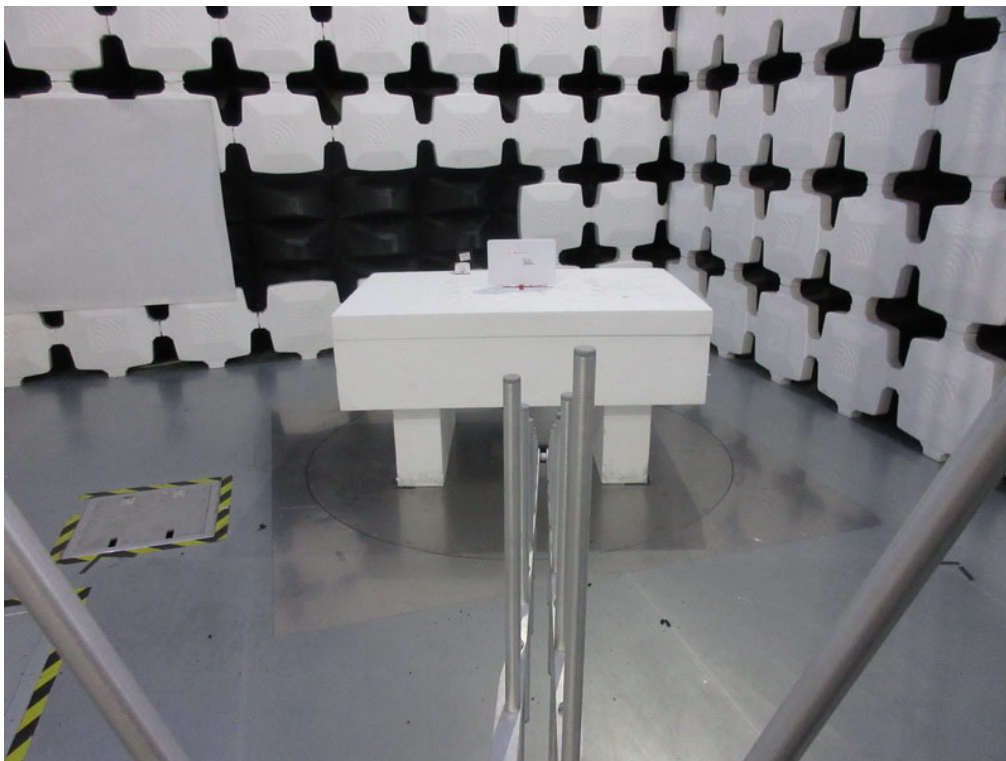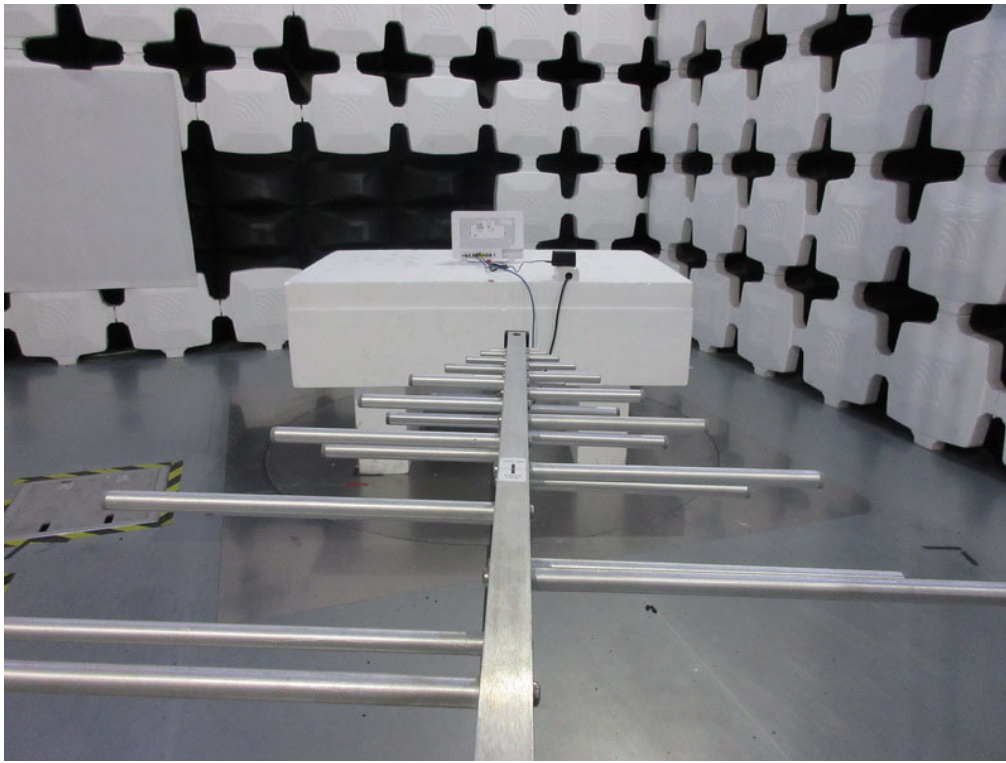


Radiated Emissions Test Photos

Above 1 GHz

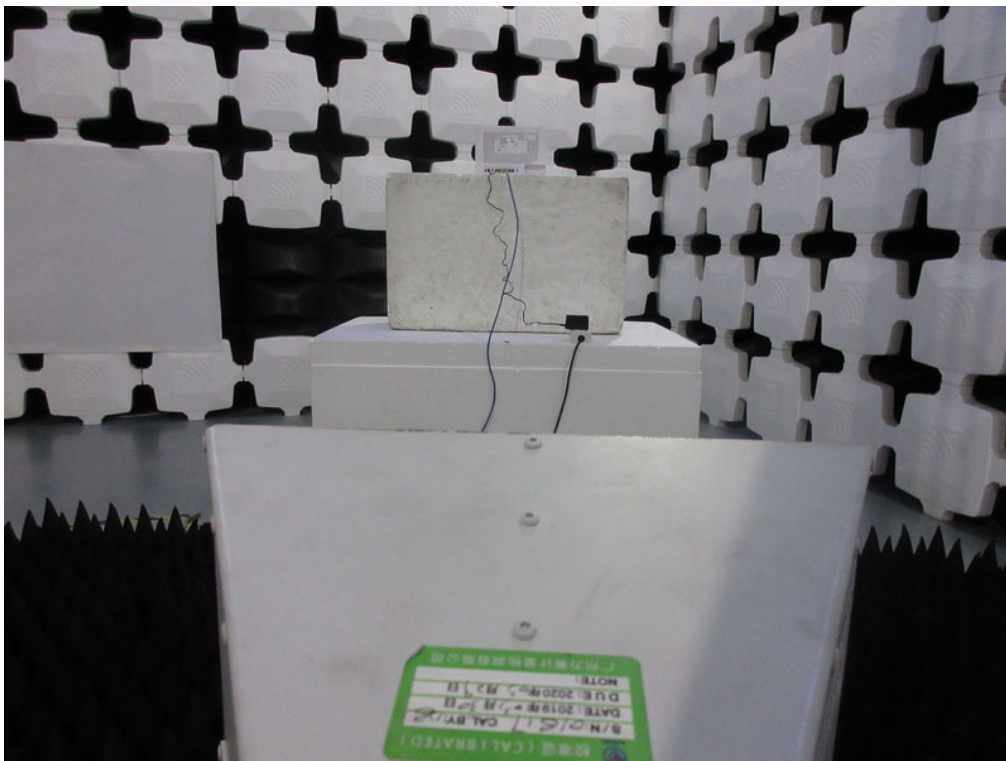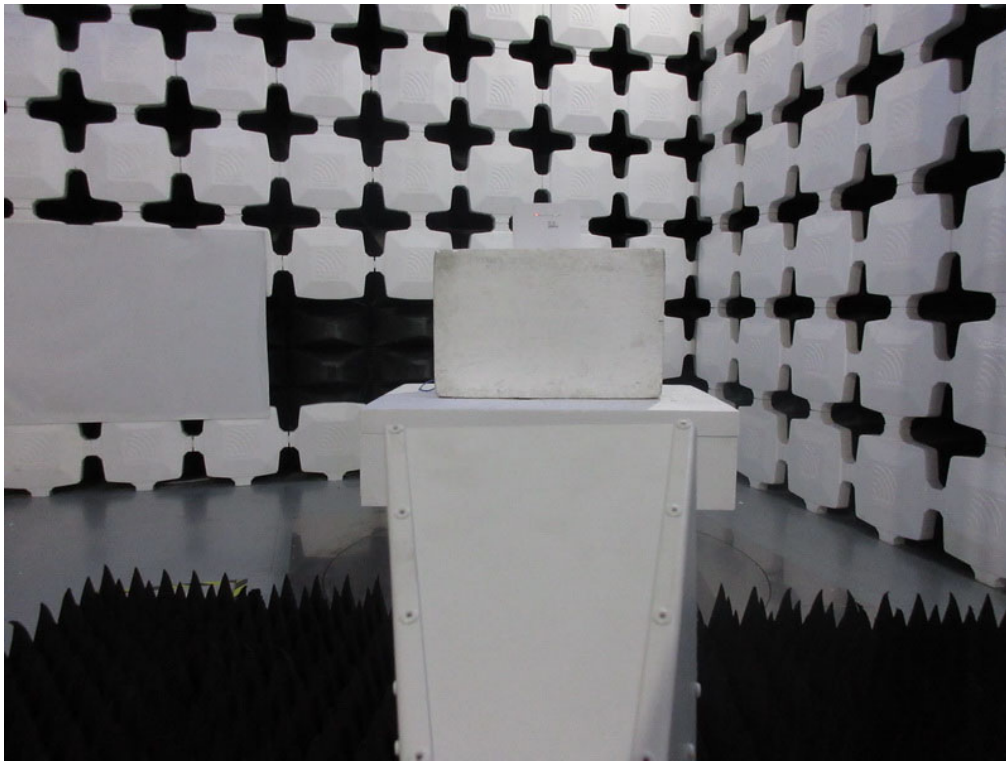

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX Mode

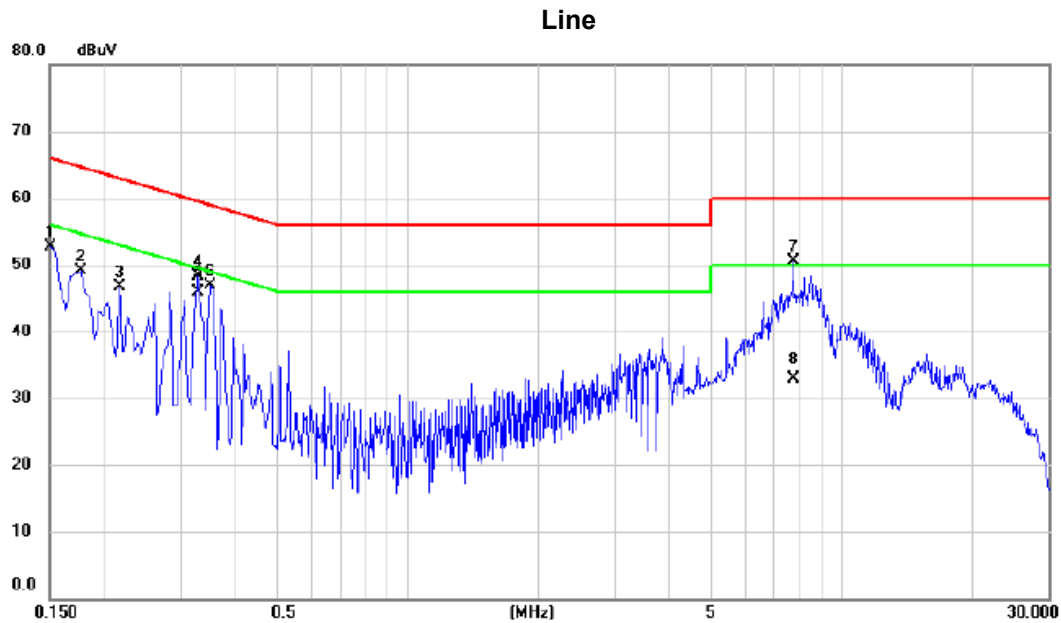

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	42.93	9.73	52.66	66.00	-13.34	peak	
2		0.1770	39.26	9.76	49.02	64.63	-15.61	peak	
3		0.2175	37.00	9.79	46.79	62.91	-16.12	peak	
4		0.3300	38.42	9.83	48.25	59.45	-11.20	peak	
5	*	0.3300	36.08	9.83	45.91	49.45	-3.54	AVG	
6		0.3525	37.04	9.85	46.89	58.90	-12.01	peak	
7		7.7280	40.30	10.11	50.41	60.00	-9.59	peak	
8		7.7280	22.85	10.11	32.96	50.00	-17.04	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode

Neutral

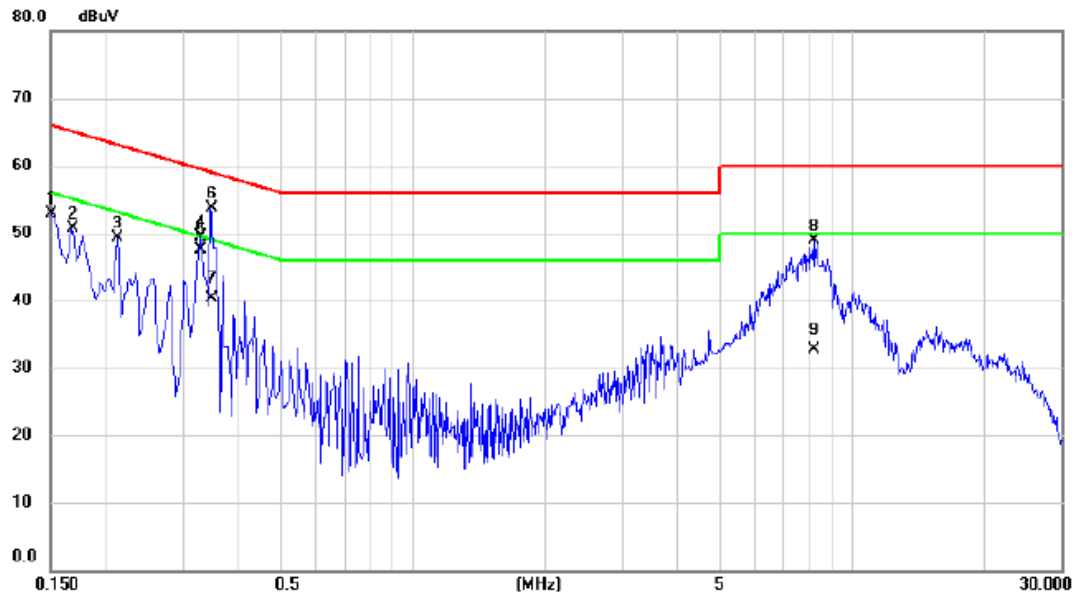

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	43.24	9.73	52.97	66.00	-13.03	peak	
2		0.1680	41.05	9.74	50.79	65.06	-14.27	peak	
3		0.2130	39.45	9.78	49.23	63.09	-13.86	peak	
4		0.3300	39.73	9.83	49.56	59.45	-9.89	peak	
5	*	0.3300	37.61	9.83	47.44	49.45	-2.01	AVG	
6		0.3480	43.79	9.83	53.62	59.01	-5.39	peak	
7		0.3480	30.52	9.83	40.35	49.01	-8.66	AVG	
8		8.2320	38.75	10.13	48.88	60.00	-11.12	peak	
9		8.2320	22.61	10.13	32.74	50.00	-17.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ


Note: Below 30MHz, The measured value have enough margin over 20dB than the limit,
therefore they are not reported

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX G Mode Channel 01

Vertical

80 dBuV/m

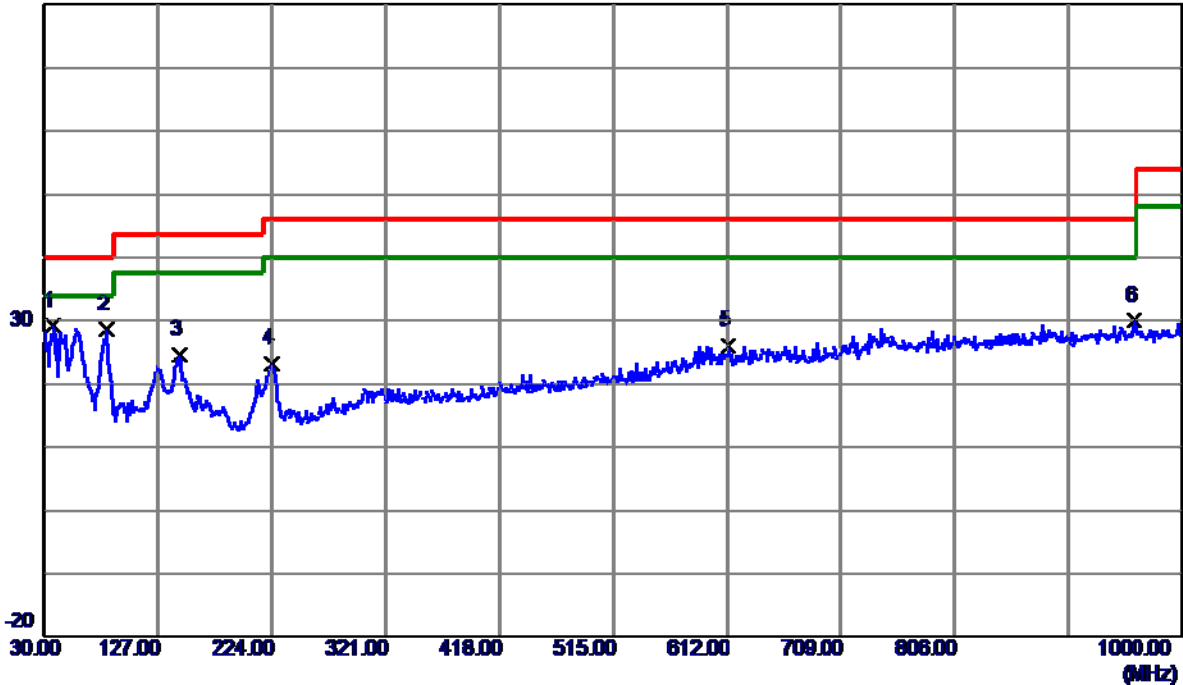

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	37.7599	45.90	-16.66	29.24	40.00	-10.76	Peak	
2	82.3800	48.85	-20.33	28.52	40.00	-11.48	Peak	
3	145.4299	39.83	-15.21	24.62	43.50	-18.88	Peak	
4	224.0000	40.91	-17.72	23.19	46.00	-22.81	Peak	
5	612.9699	34.69	-8.61	26.08	46.00	-19.92	Peak	
6	959.2600	35.03	-5.10	29.93	46.00	-16.07	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode Channel 01

Horizontal

80 dBuV/m

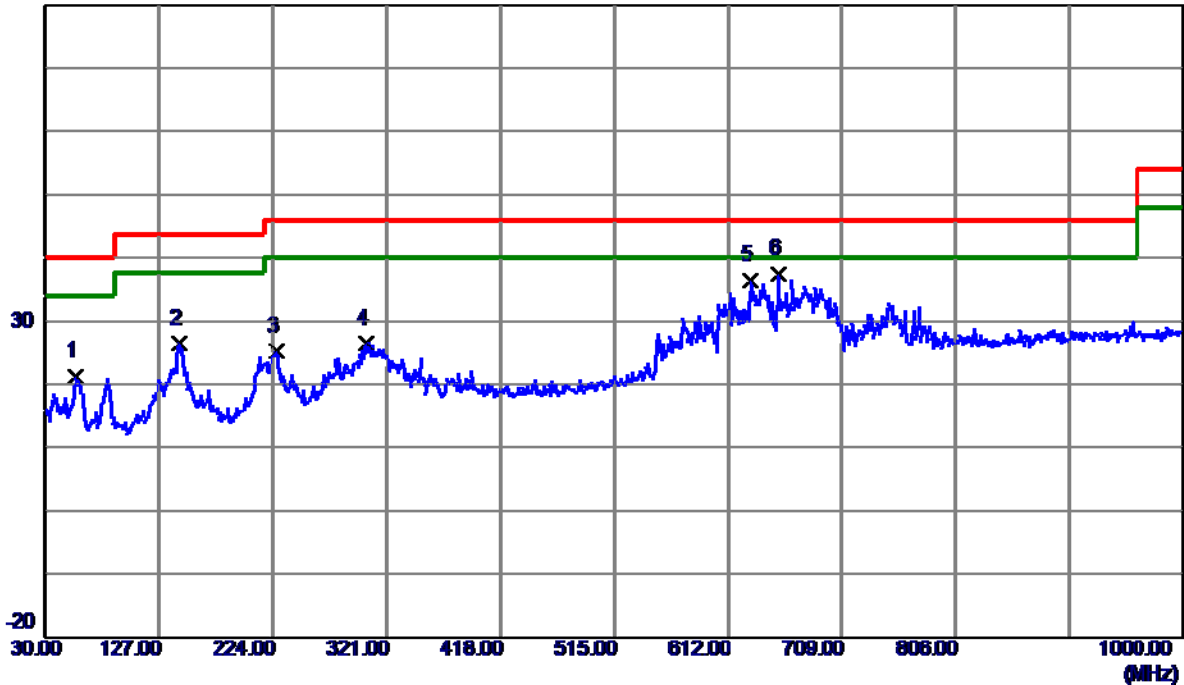

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	56.1900	38.51	-17.36	21.15	40.00	-18.85	Peak	
2	144.4600	41.65	-15.29	26.36	43.50	-17.14	Peak	
3	226.9100	42.73	-17.54	25.19	46.00	-20.81	Peak	
4	303.5400	40.72	-14.26	26.46	46.00	-19.54	Peak	
5	631.4000	44.92	-8.56	36.36	46.00	-9.64	Peak	
6 *	654.6800	45.88	-8.52	37.36	46.00	-8.64	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode: TX B Mode 2412 MHz

Vertical

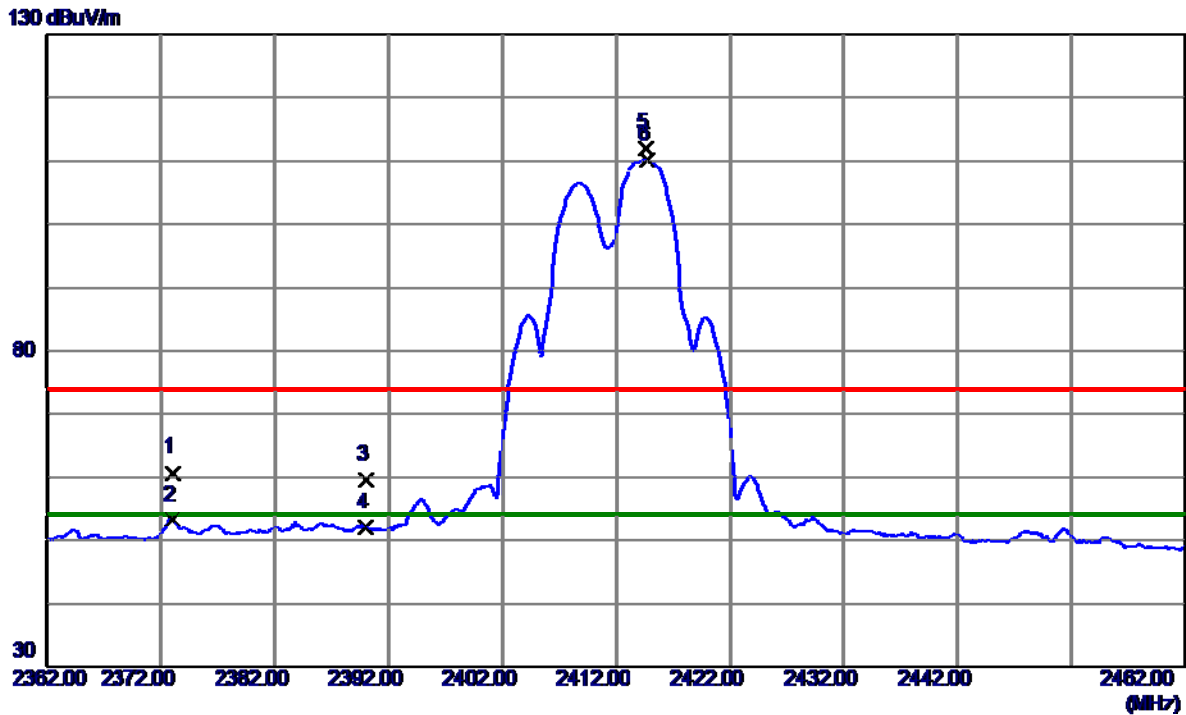


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2373.0000	28.36	32.34	60.70	74.00	-13.30	Peak	
2	2373.0000	20.89	32.34	53.23	54.00	-0.77	AVG	
3	2390.0000	27.23	32.39	59.62	74.00	-14.38	Peak	
4	2390.0000	19.56	32.39	51.95	54.00	-2.05	AVG	
5	2414.7000	79.52	32.46	111.98	74.00	37.98	Peak	No Limit
6 *	2414.8000	77.69	32.46	110.15	54.00	56.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Vertical

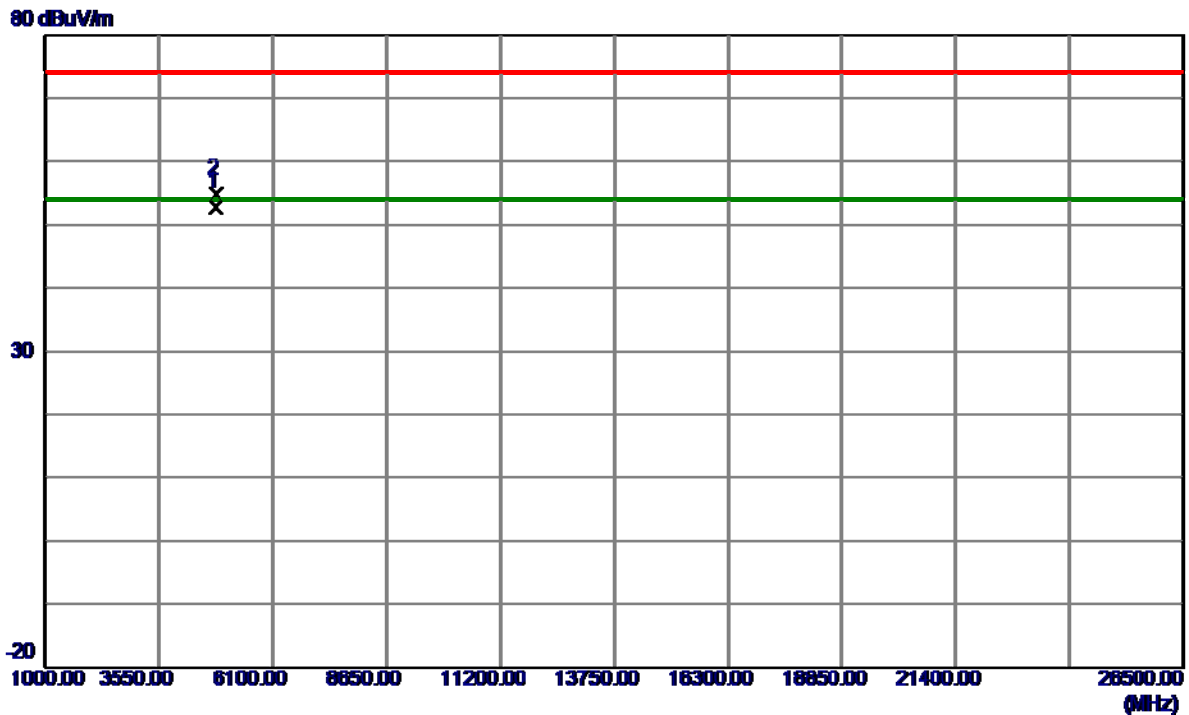


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9400	66.29	-13.55	52.74	54.00	-1.26	AVG	
2	4823.9800	68.26	-13.55	54.71	74.00	-19.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

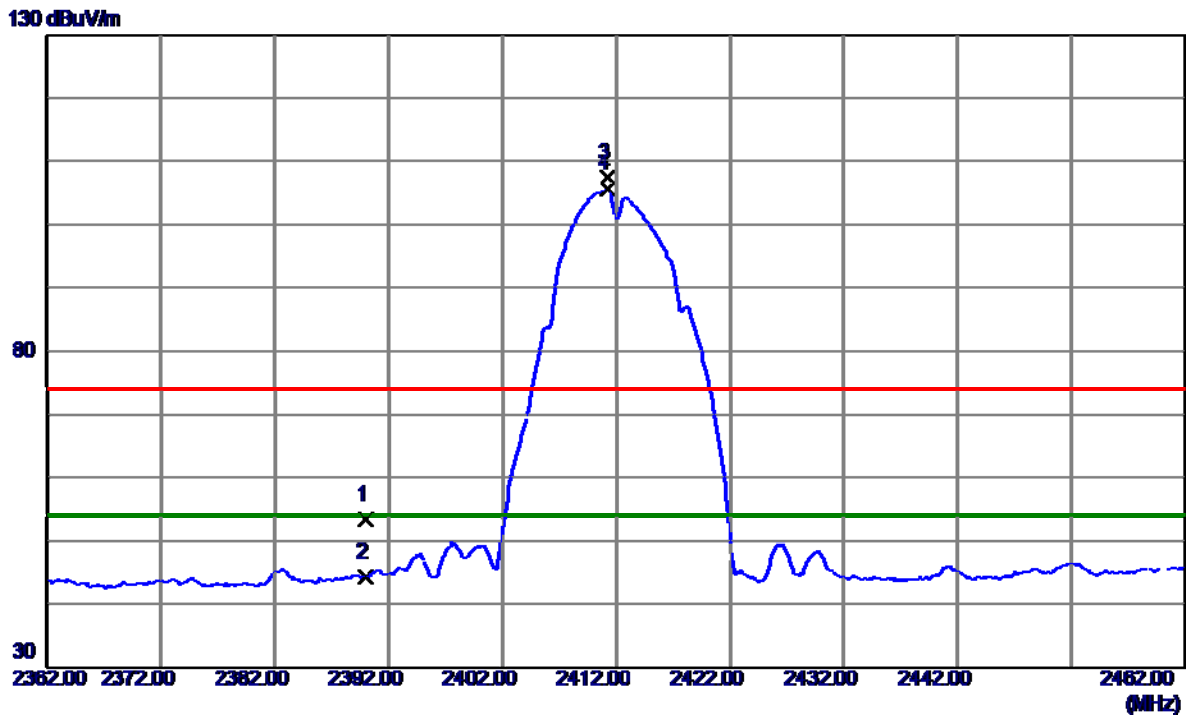


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	20.91	32.39	53.30	74.00	-20.70	Peak	
2	2390.0000	11.87	32.39	44.26	54.00	-9.74	AVG	
3	2411.2000	74.86	32.45	107.31	74.00	33.31	Peak	No Limit
4 *	2411.2000	73.06	32.45	105.51	54.00	51.51	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

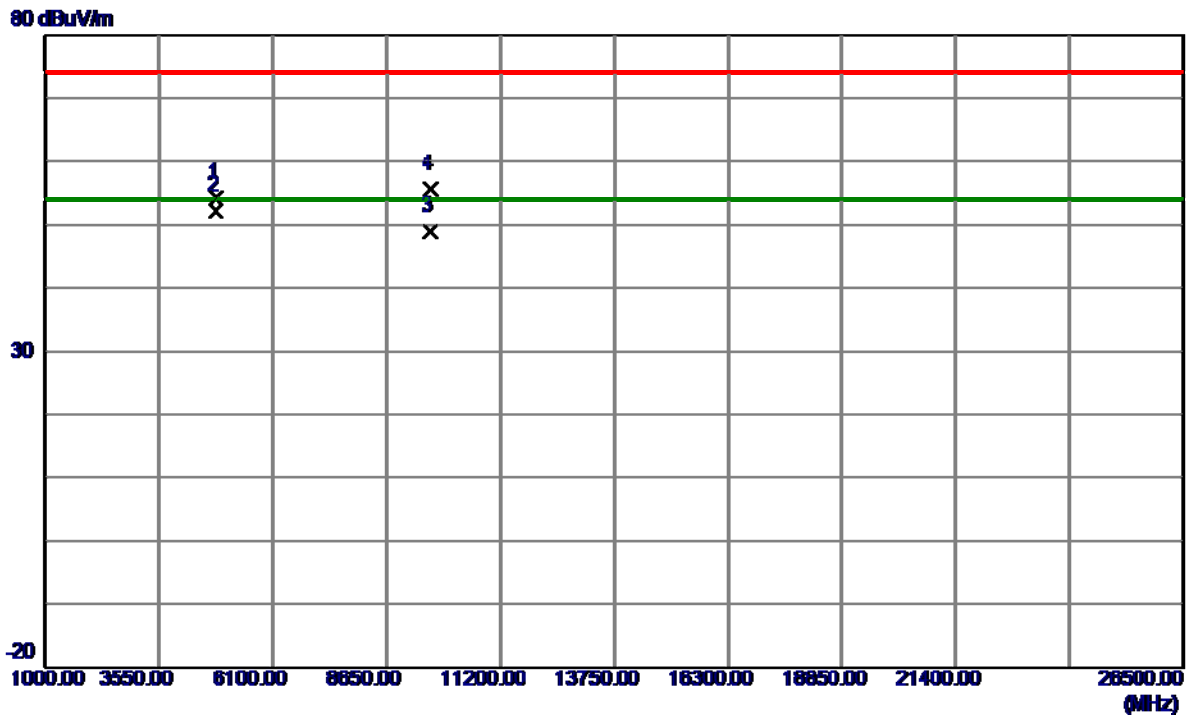


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9800	67.66	-13.55	54.11	74.00	-19.89	Peak	
2 *	4823.9800	65.75	-13.55	52.20	54.00	-1.80	AVG	
3	9647.8800	51.85	-2.78	49.07	54.00	-4.93	AVG	
4	9647.9800	58.40	-2.78	55.62	74.00	-18.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

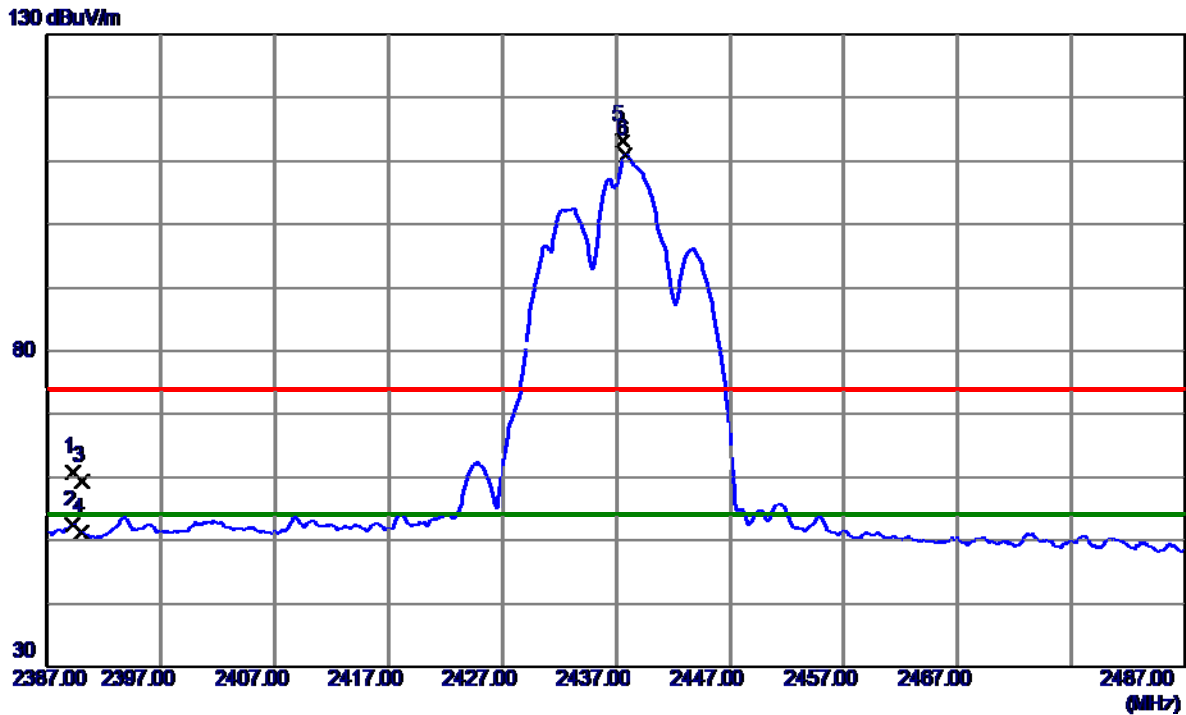

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	28.34	32.39	60.73	74.00	-13.27	Peak	
2	2389.2000	20.03	32.39	52.42	54.00	-1.58	AVG	
3	2390.0000	27.03	32.39	59.42	74.00	-14.58	Peak	
4	2390.0000	18.72	32.39	51.11	54.00	-2.89	AVG	
5	2437.5000	80.66	32.53	113.19	74.00	39.19	Peak	No Limit
6 *	2437.8000	78.47	32.53	111.00	54.00	57.00	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

80 dBuV/m

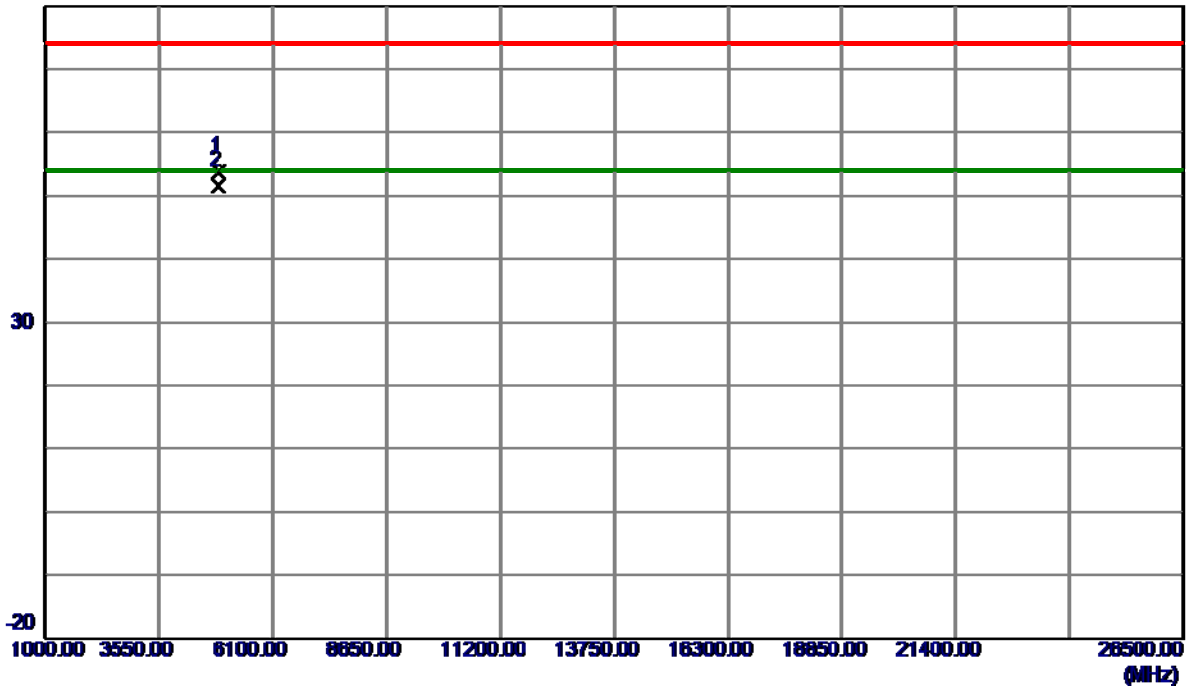


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9000	67.11	-13.36	53.75	74.00	-20.25	Peak	
2 *	4873.9700	64.96	-13.36	51.60	54.00	-2.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

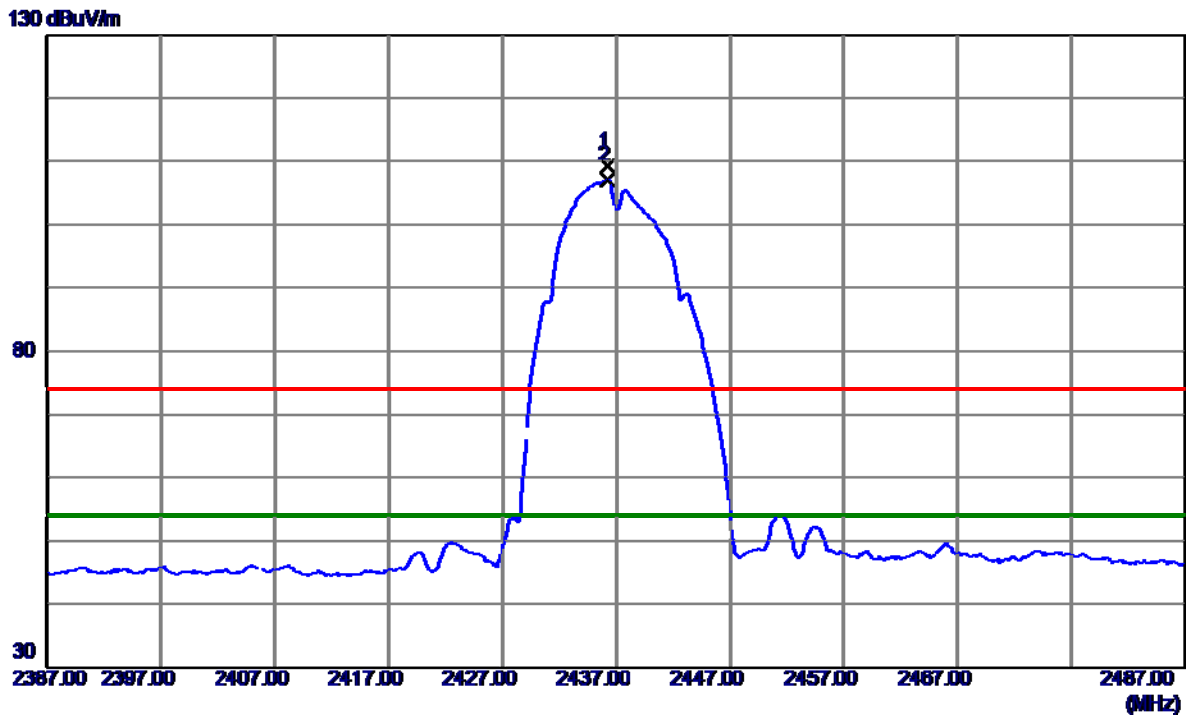


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.2000	76.63	32.53	109.16	74.00	35.16	Peak	No Limit
2 *	2436.2000	74.44	32.53	106.97	54.00	52.97	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2437 MHz
------------	--------------------

Horizontal

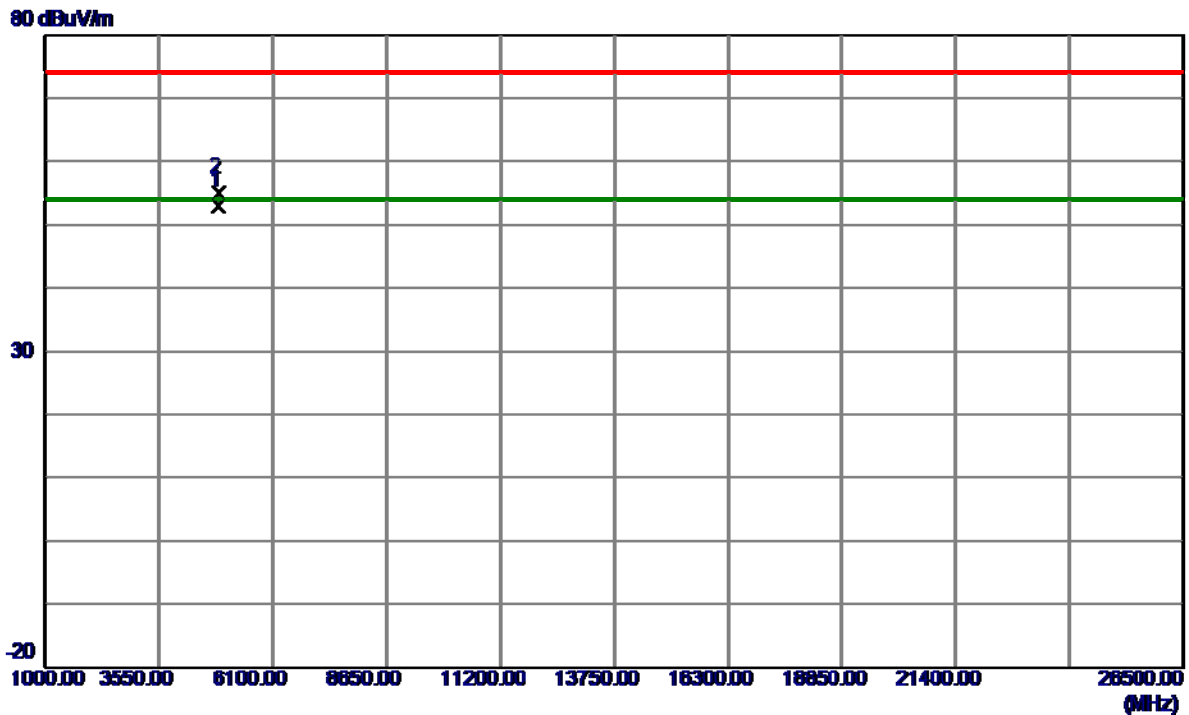


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9900	66.37	-13.36	53.01	54.00	-0.99	AVG	
2	4874.0900	68.42	-13.36	55.06	74.00	-18.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

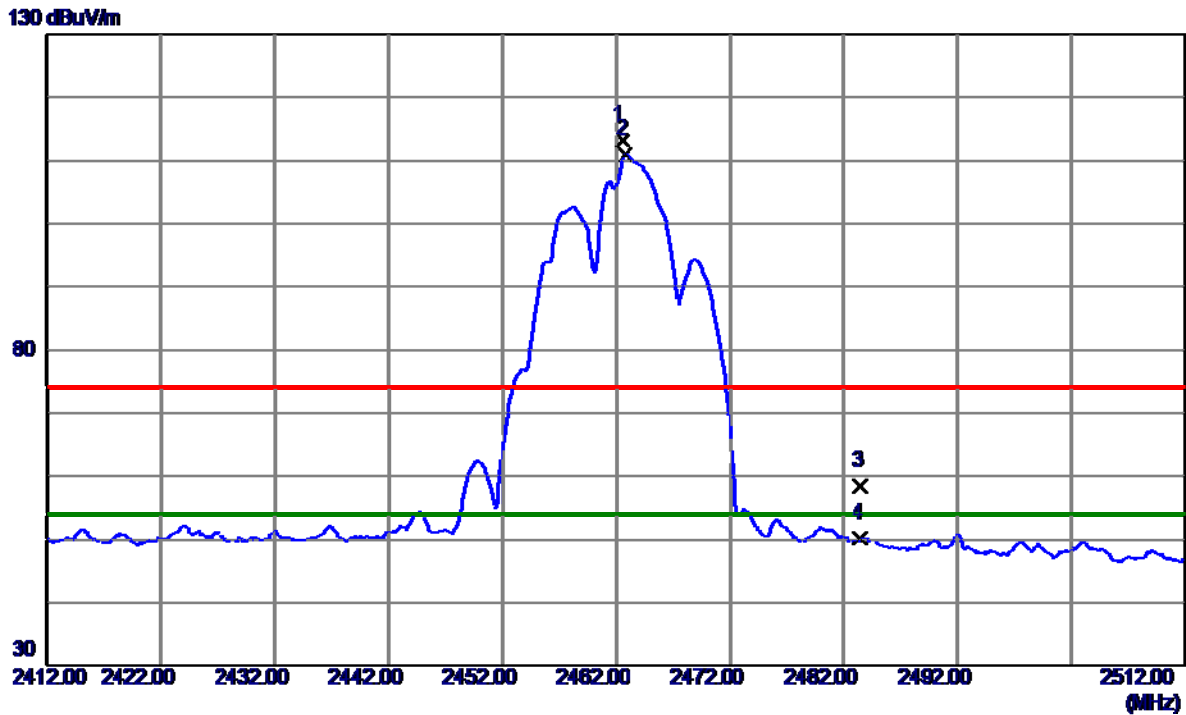

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.5000	80.68	32.60	113.28	74.00	39.28	Peak	No Limit
2 *	2462.8000	78.37	32.60	110.97	54.00	56.97	AVG	No Limit
3	2483.5000	25.81	32.66	58.47	74.00	-15.53	Peak	
4	2483.5000	17.60	32.66	50.26	54.00	-3.74	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

80 dBuV/m

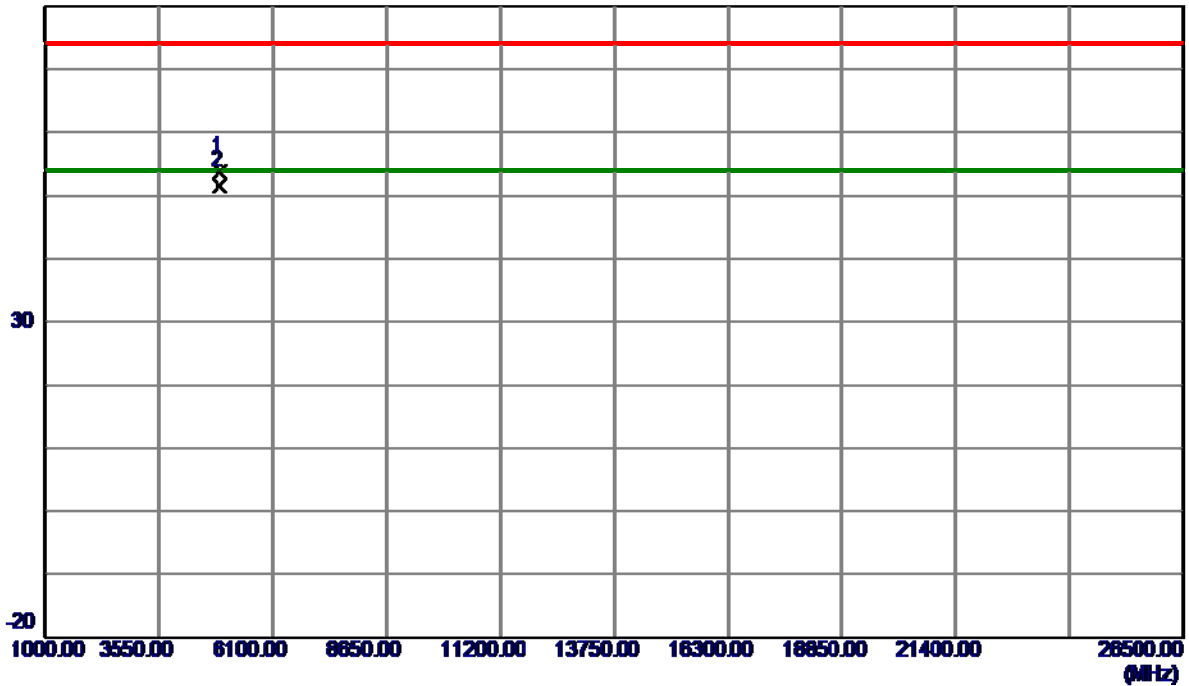


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8900	66.95	-13.18	53.77	74.00	-20.23	Peak	
2 *	4923.9700	64.74	-13.18	51.56	54.00	-2.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

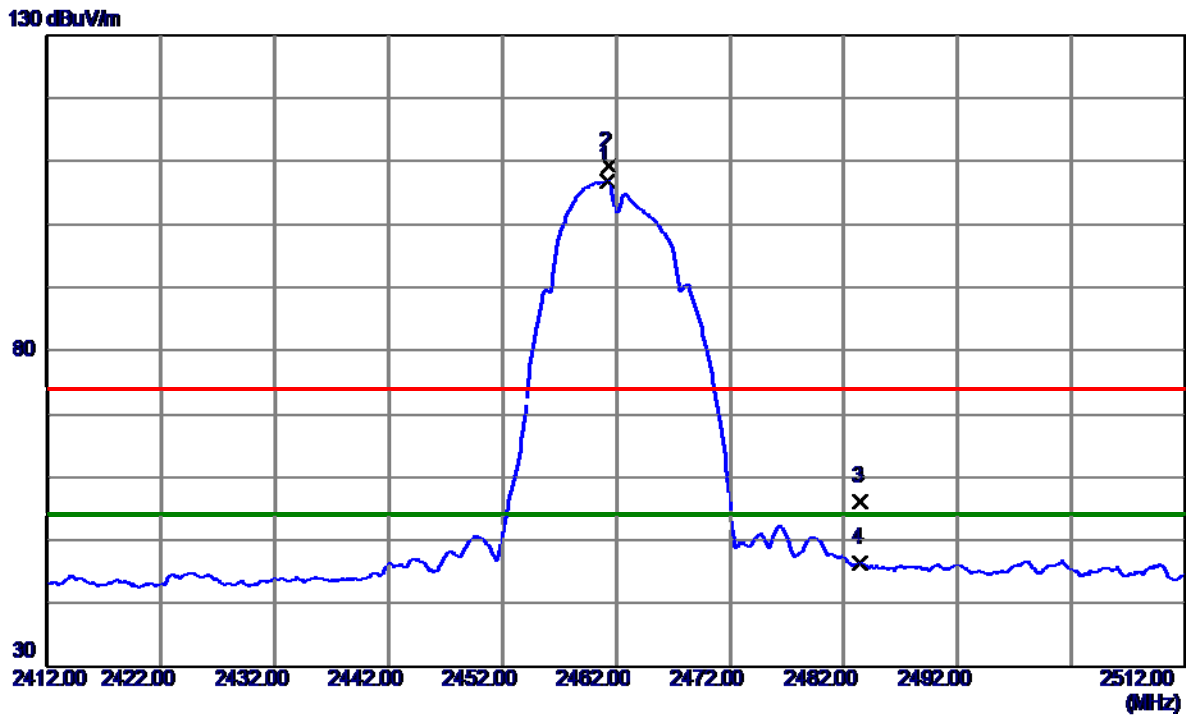


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.2000	74.15	32.60	106.75	54.00	52.75	AVG	No Limit
2	2461.3000	76.69	32.60	109.29	74.00	35.29	Peak	No Limit
3	2483.5000	23.62	32.66	56.28	74.00	-17.72	Peak	
4	2483.5000	13.66	32.66	46.32	54.00	-7.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

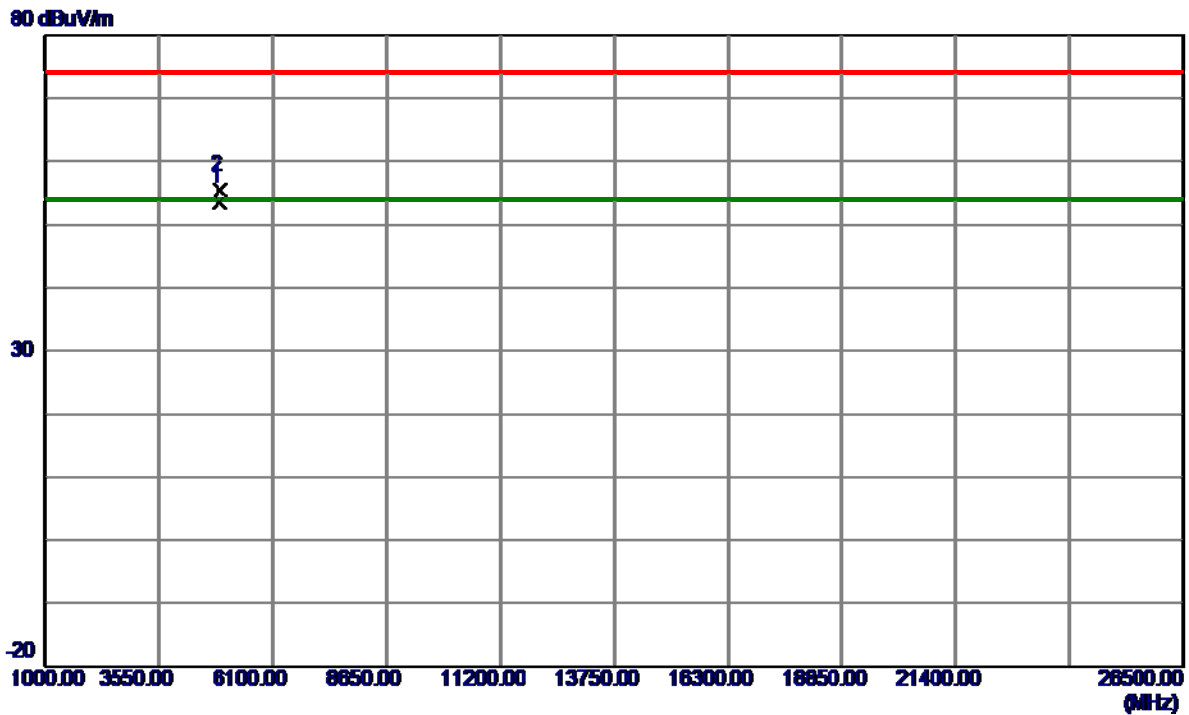


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9900	66.81	-13.18	53.63	54.00	-0.37	AVG	
2	4924.0099	68.55	-13.18	55.37	74.00	-18.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

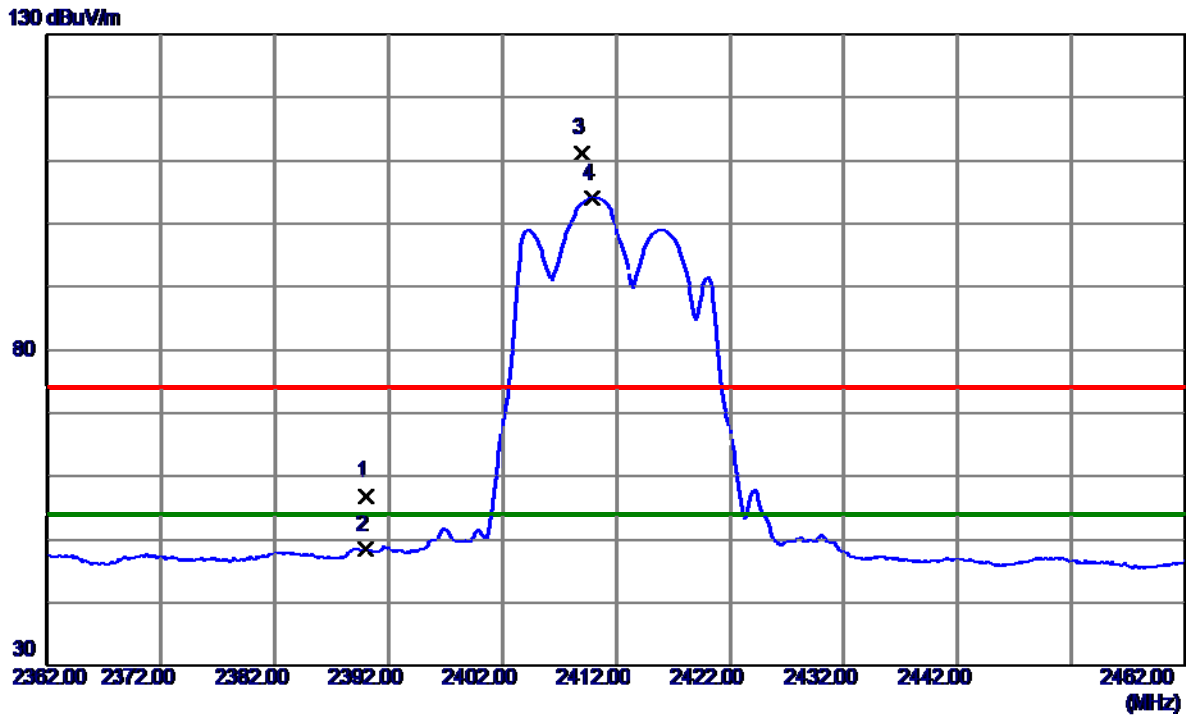

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.45	32.39	56.84	74.00	-17.16	Peak	
2	2390.0000	15.97	32.39	48.36	54.00	-5.64	AVG	
3	2409.0000	78.76	32.45	111.21	74.00	37.21	Peak	No Limit
4 *	2409.9000	71.65	32.45	104.10	54.00	50.10	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

80 dBuV/m

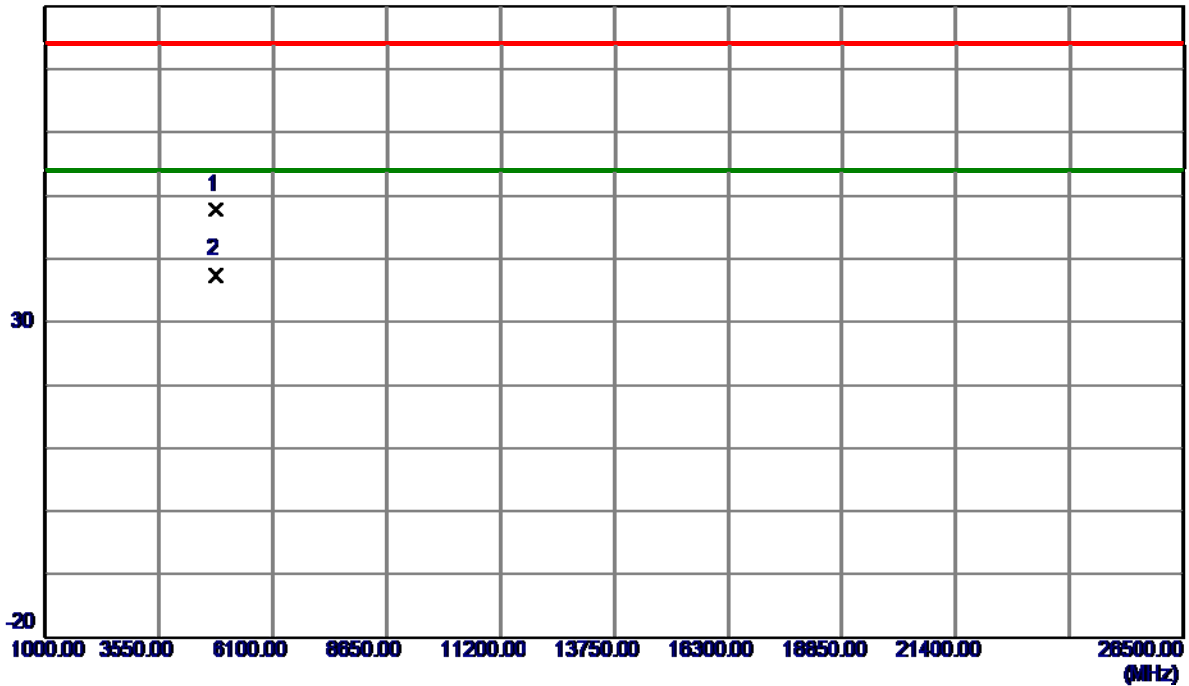


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4826.0800	61.29	-13.54	47.75	74.00	-26.25	Peak	
2 *	4827.6400	51.03	-13.53	37.50	54.00	-16.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

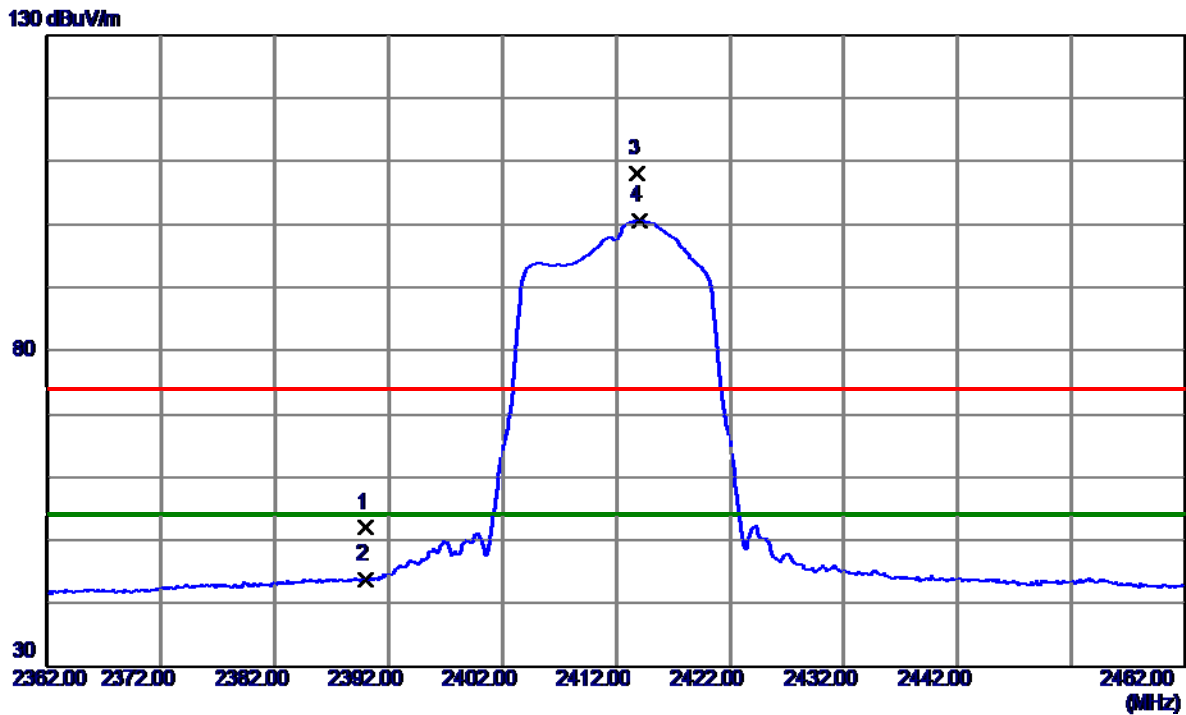


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	19.69	32.39	52.08	74.00	-21.92	Peak	
2	2390.0000	11.32	32.39	43.71	54.00	-10.29	AVG	
3	2413.9000	75.64	32.46	108.10	74.00	34.10	Peak	No Limit
4 *	2414.1000	68.15	32.46	100.61	54.00	46.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

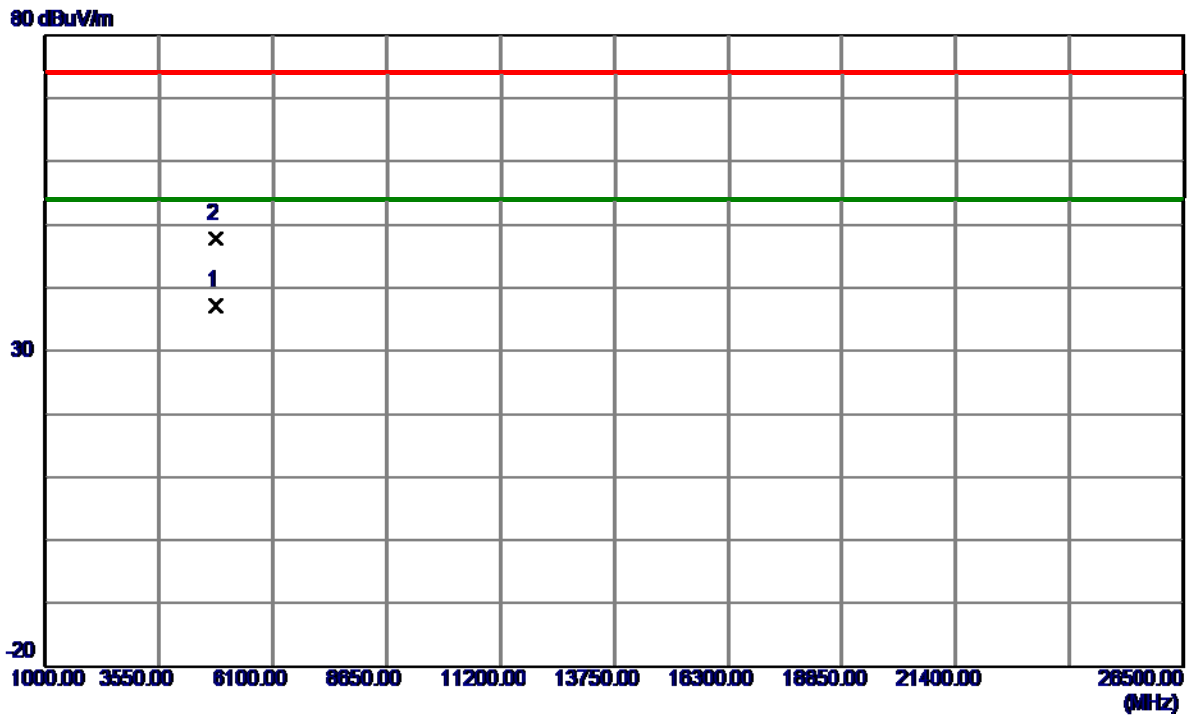

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4821.8700	50.84	-13.56	37.28	54.00	-16.72	AVG	
2	4824.0200	61.44	-13.55	47.89	74.00	-26.11	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

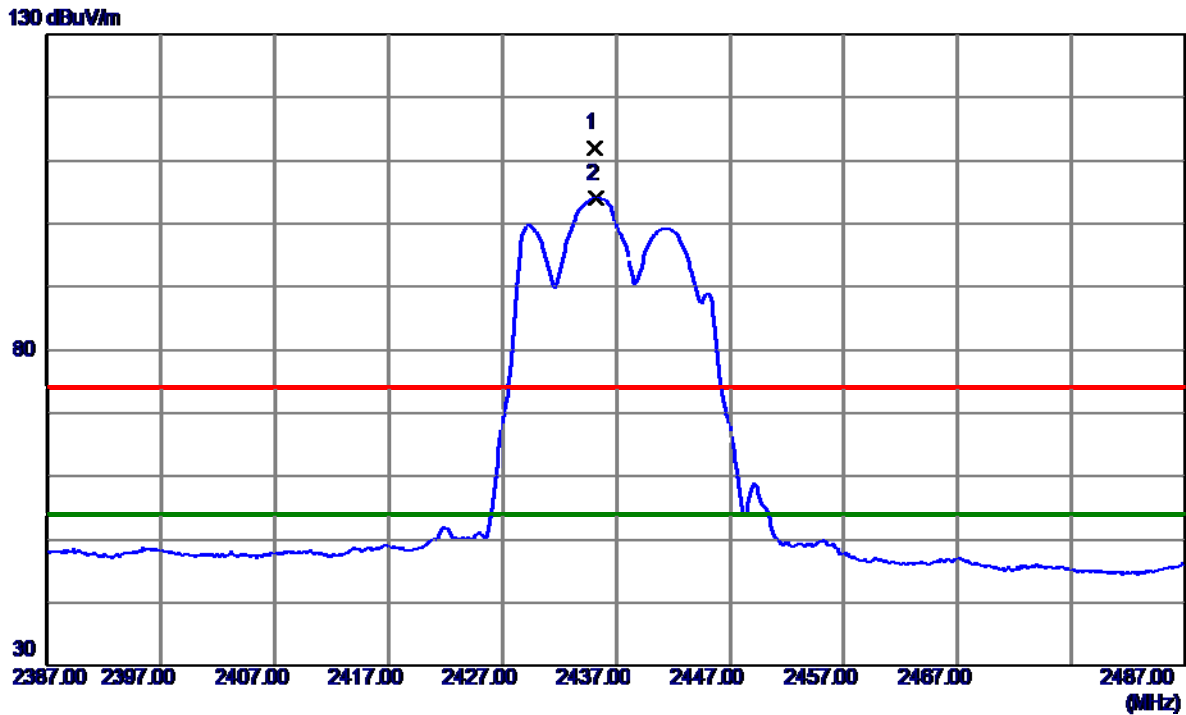

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.1000	79.49	32.52	112.01	74.00	38.01	Peak	No Limit
2 *	2435.2000	71.54	32.52	104.06	54.00	50.06	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

80 dBuV/m

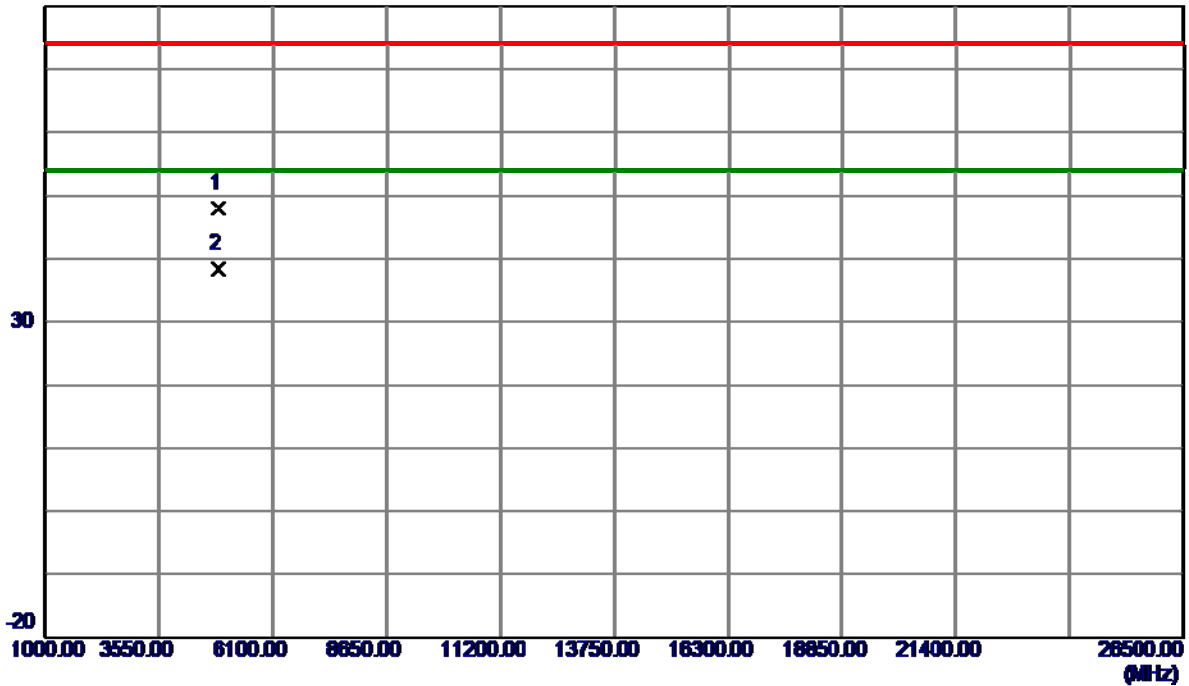


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.9800	61.27	-13.36	47.91	74.00	-26.09	Peak	
2 *	4875.6000	51.72	-13.36	38.36	54.00	-15.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

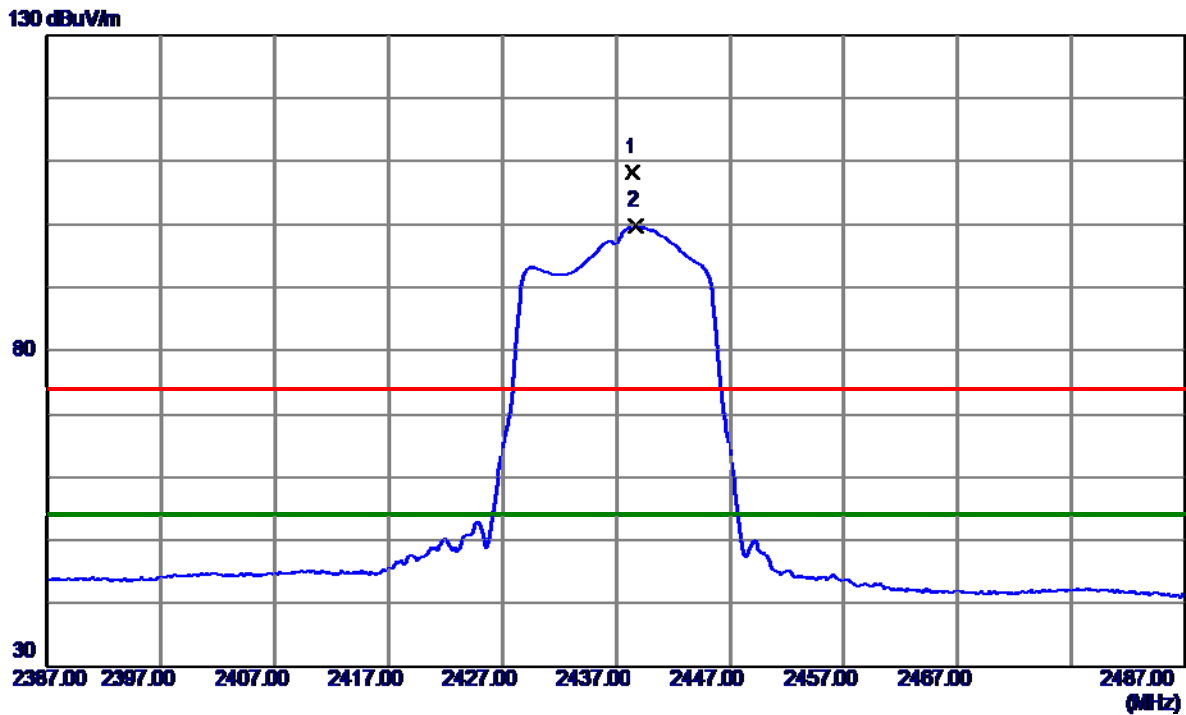


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.5000	75.61	32.53	108.14	74.00	34.14	Peak	No Limit
2 *	2438.8000	67.18	32.53	99.71	54.00	45.71	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

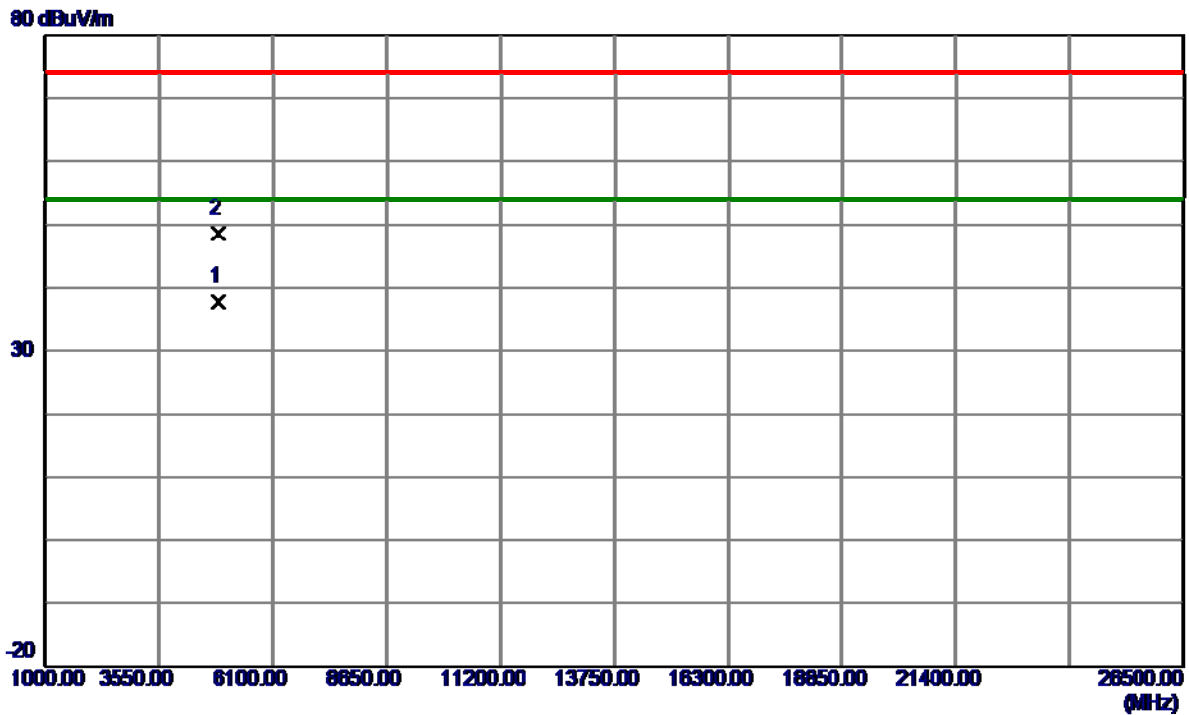

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.1000	51.10	-13.37	37.73	54.00	-16.27	AVG	
2	4872.4100	62.03	-13.37	48.66	74.00	-25.34	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

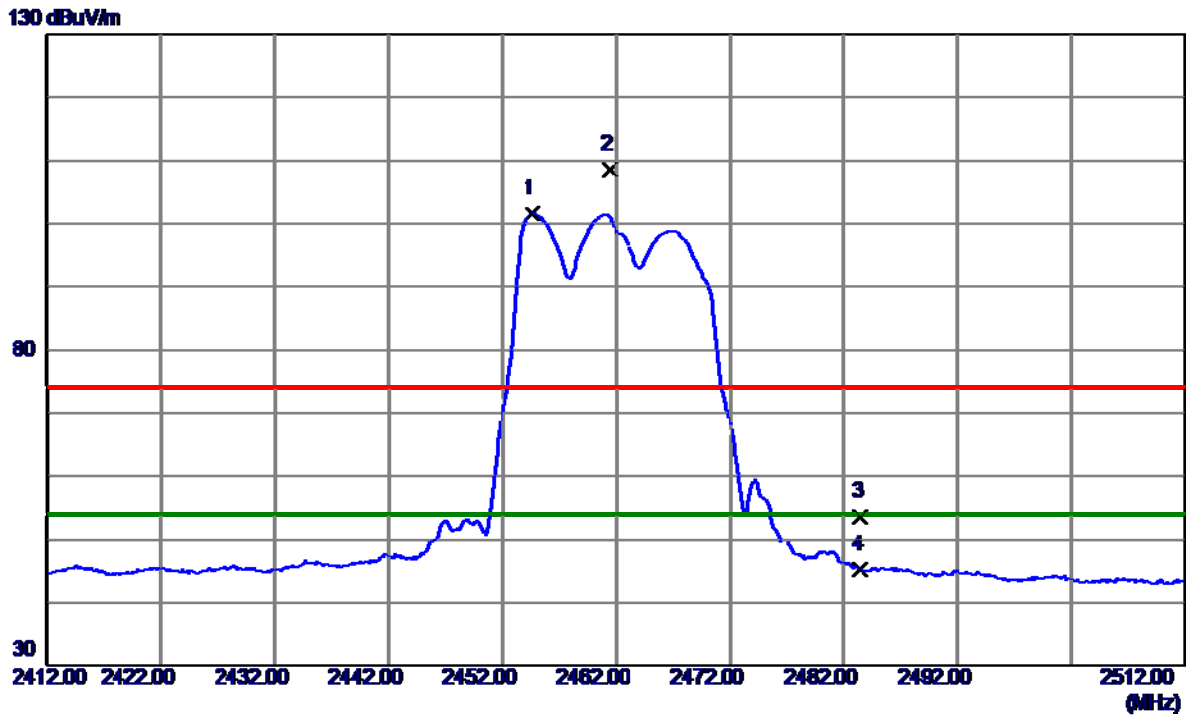


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.7000	68.99	32.58	101.57	54.00	47.57	AVG	No Limit
2	2461.4000	76.06	32.60	108.66	74.00	34.66	Peak	No Limit
3	2483.5000	20.94	32.66	53.60	74.00	-20.40	Peak	
4	2483.5000	12.48	32.66	45.14	54.00	-8.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

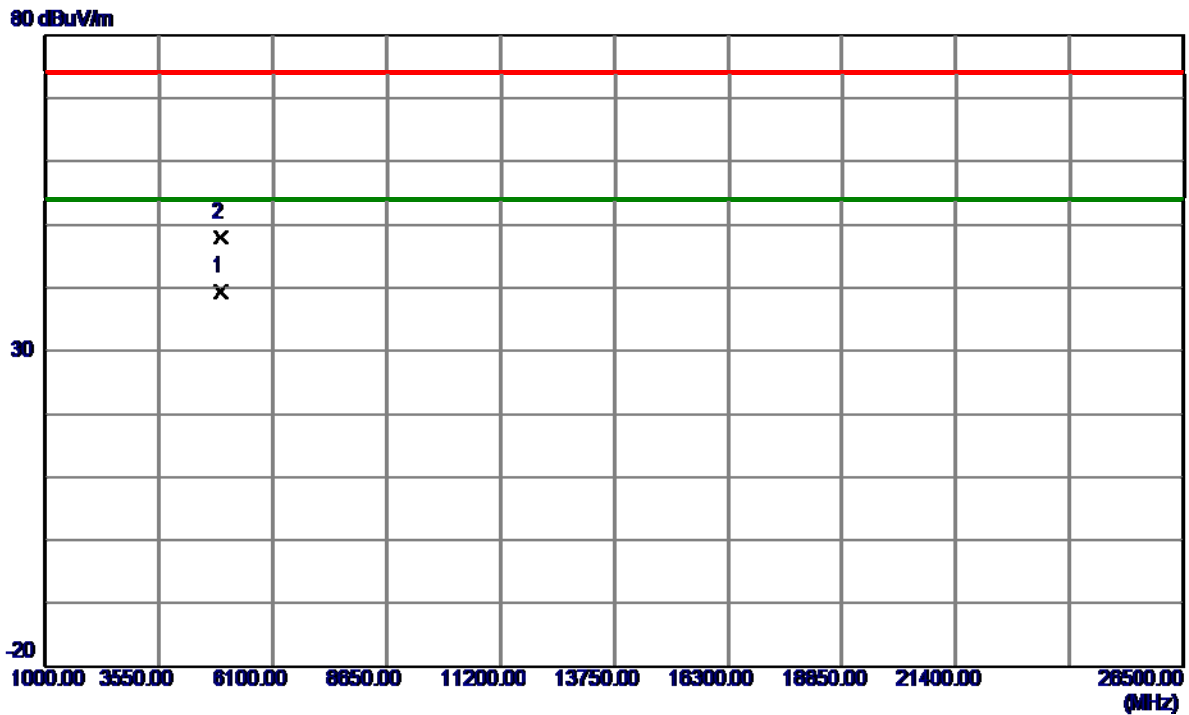


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4925.3800	52.55	-13.17	39.38	54.00	-14.62	AVG	
2	4925.7100	61.13	-13.17	47.96	74.00	-26.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

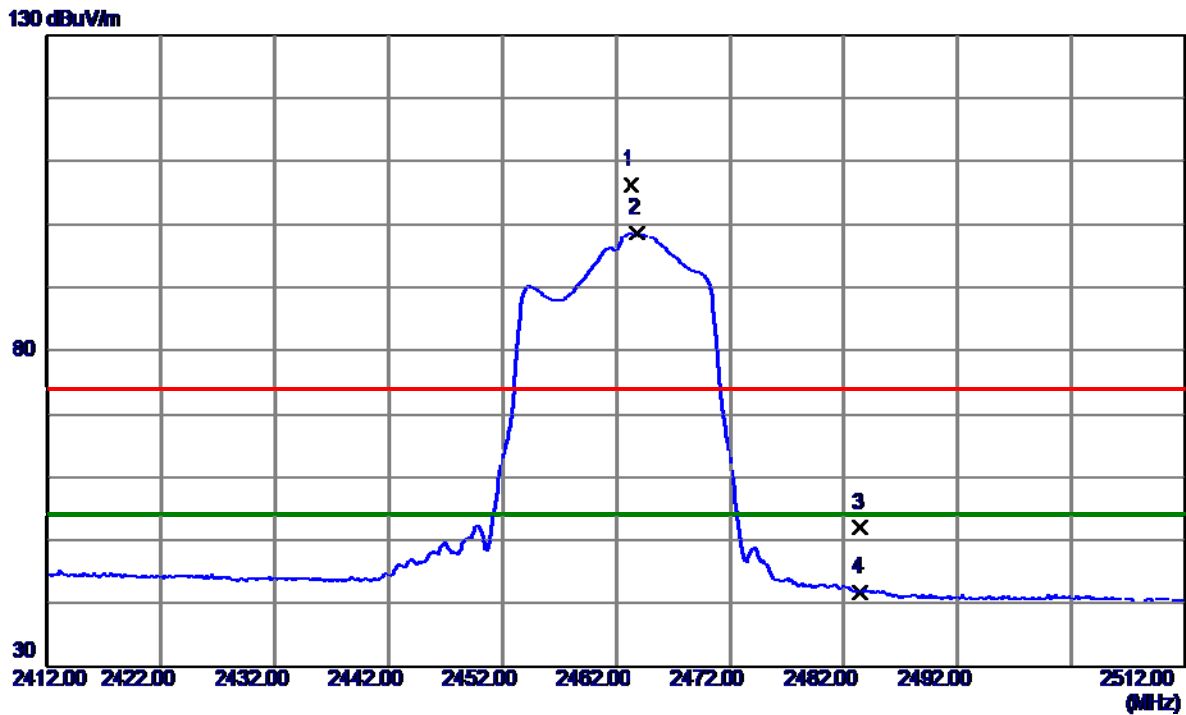

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2463.3000	73.58	32.60	106.18	74.00	32.18	Peak	No Limit
2 *	2463.9000	65.97	32.61	98.58	54.00	44.58	AVG	No Limit
3	2483.5000	19.36	32.66	52.02	74.00	-21.98	Peak	
4	2483.5000	9.05	32.66	41.71	54.00	-12.29	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

80 dBuV/m

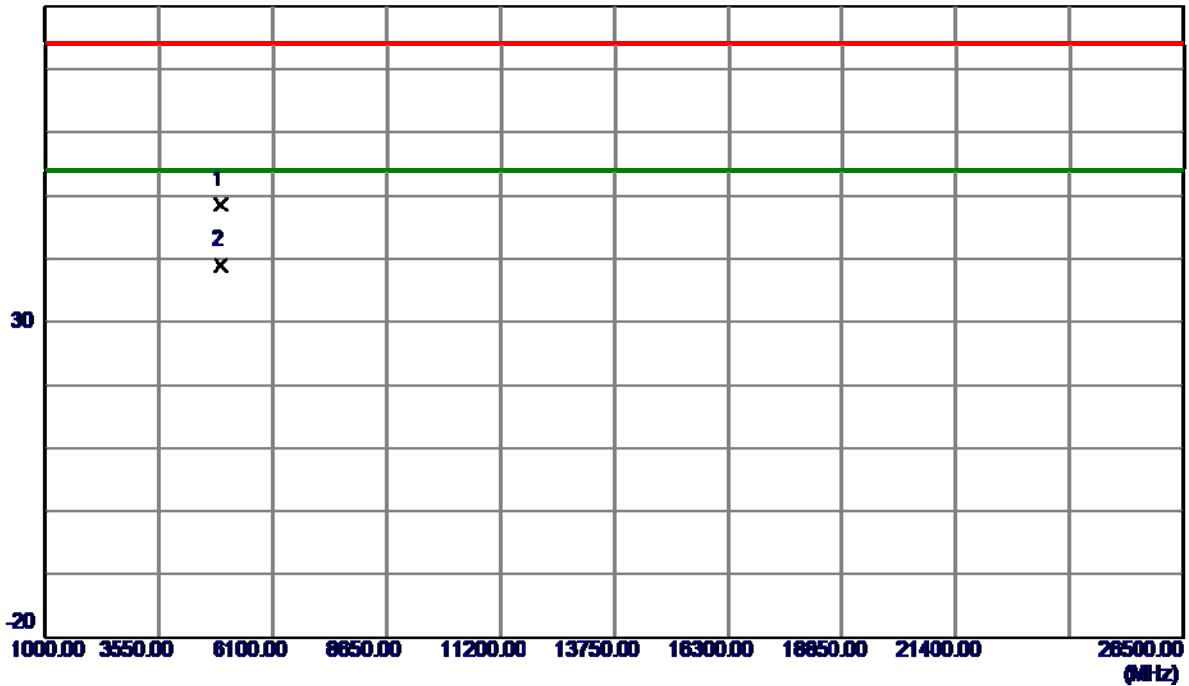


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.9500	61.69	-13.18	48.51	74.00	-25.49	Peak	
2 *	4924.9700	52.16	-13.18	38.98	54.00	-15.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

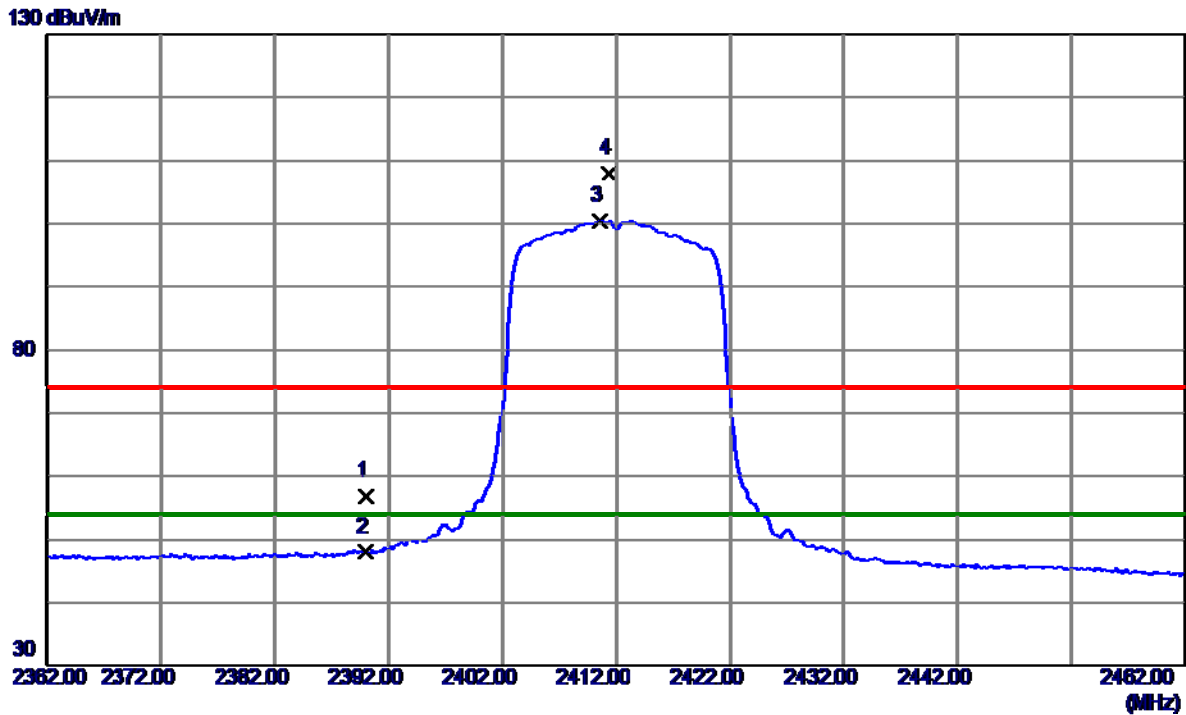

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.33	32.39	56.72	74.00	-17.28	Peak	
2	2390.0000	15.63	32.39	48.02	54.00	-5.98	AVG	
3 *	2410.6000	68.03	32.45	100.48	54.00	46.48	AVG	No Limit
4	2411.3000	75.52	32.45	107.97	74.00	33.97	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

80 dBuV/m

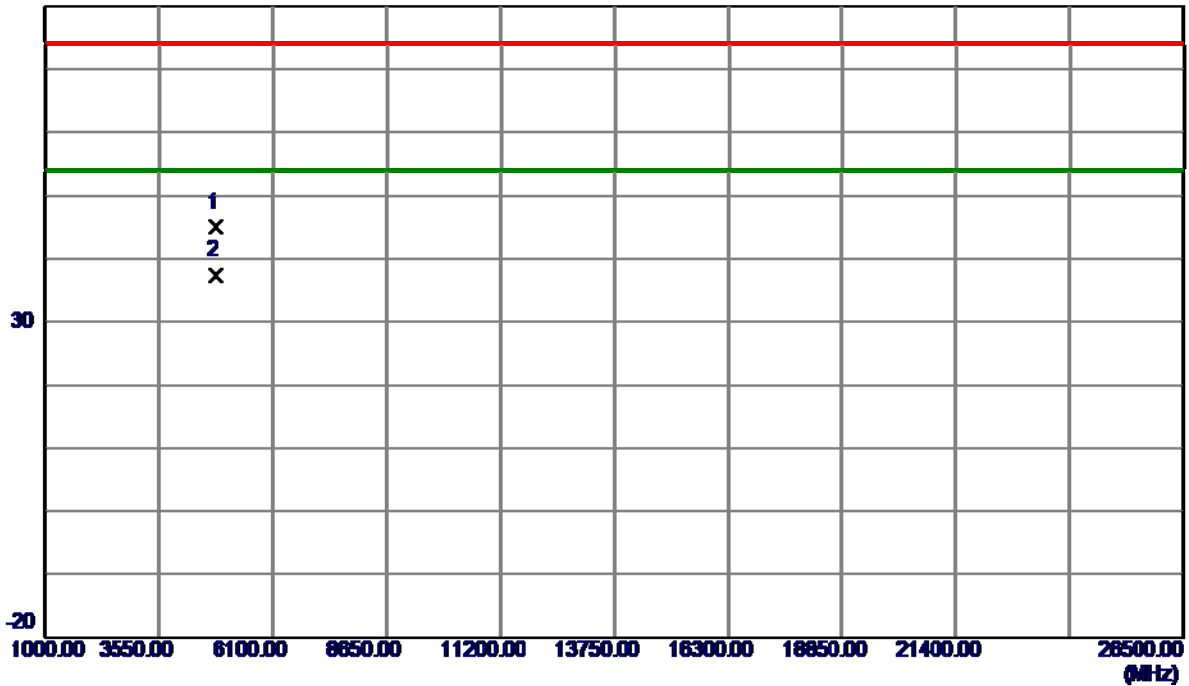


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4821.0600	58.47	-13.56	44.91	74.00	-29.09	Peak	
2 *	4826.7500	50.93	-13.54	37.39	54.00	-16.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

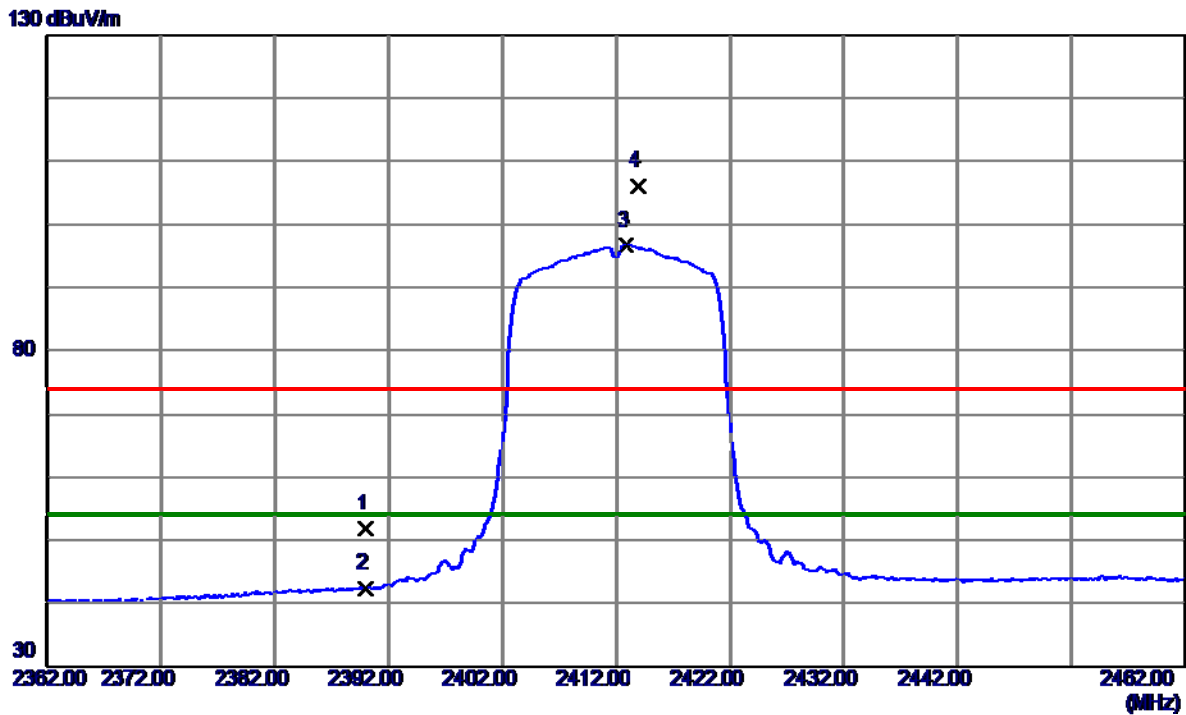

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	19.35	32.39	51.74	74.00	-22.26	Peak	
2	2390.0000	10.05	32.39	42.44	54.00	-11.56	AVG	
3 *	2412.9000	64.20	32.46	96.66	54.00	42.66	AVG	No Limit
4	2414.0000	73.49	32.46	105.95	74.00	31.95	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

80 dBuV/m

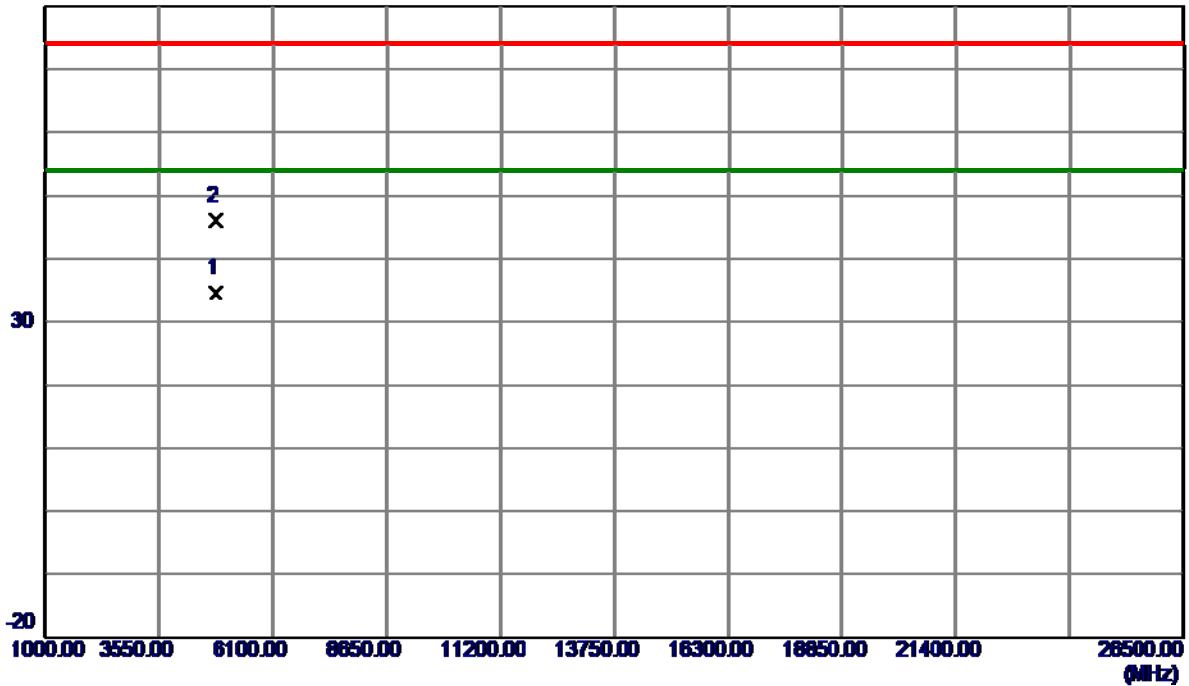


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4821.6600	48.16	-13.56	34.60	54.00	-19.40	AVG	
2	4823.6800	59.49	-13.55	45.94	74.00	-28.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

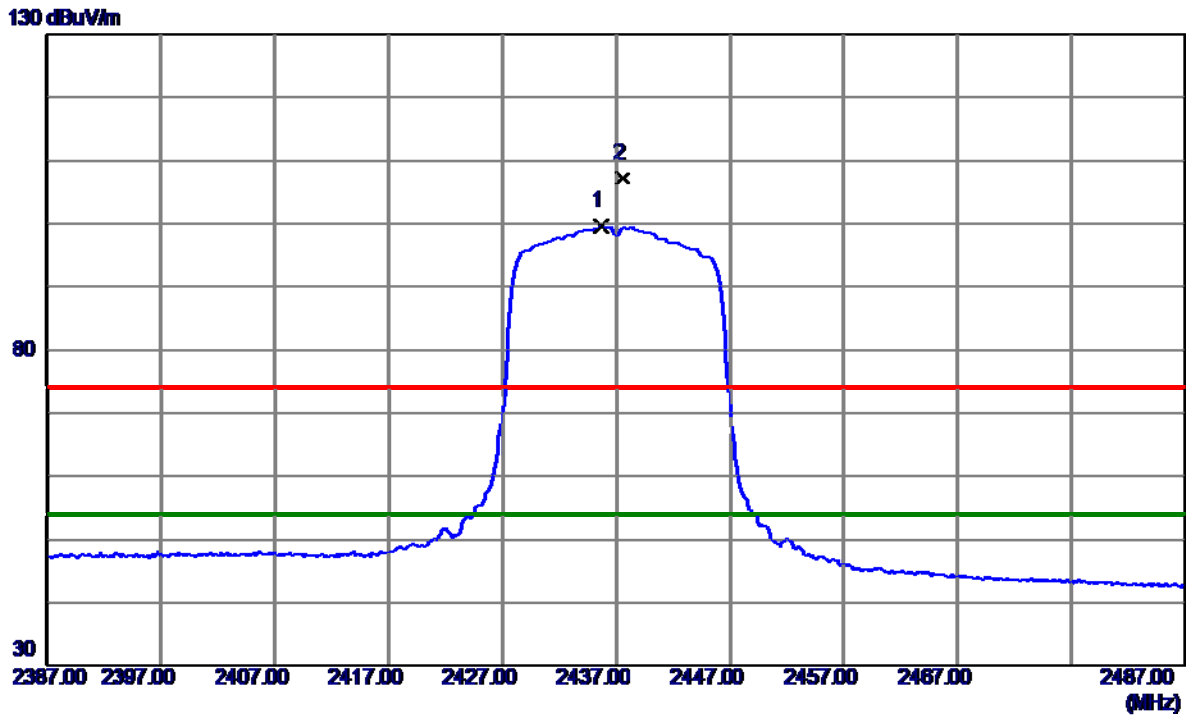

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.7000	67.05	32.52	99.57	54.00	45.57	AVG	No Limit
2	2437.6000	74.64	32.53	107.17	74.00	33.17	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

80 dBuV/m

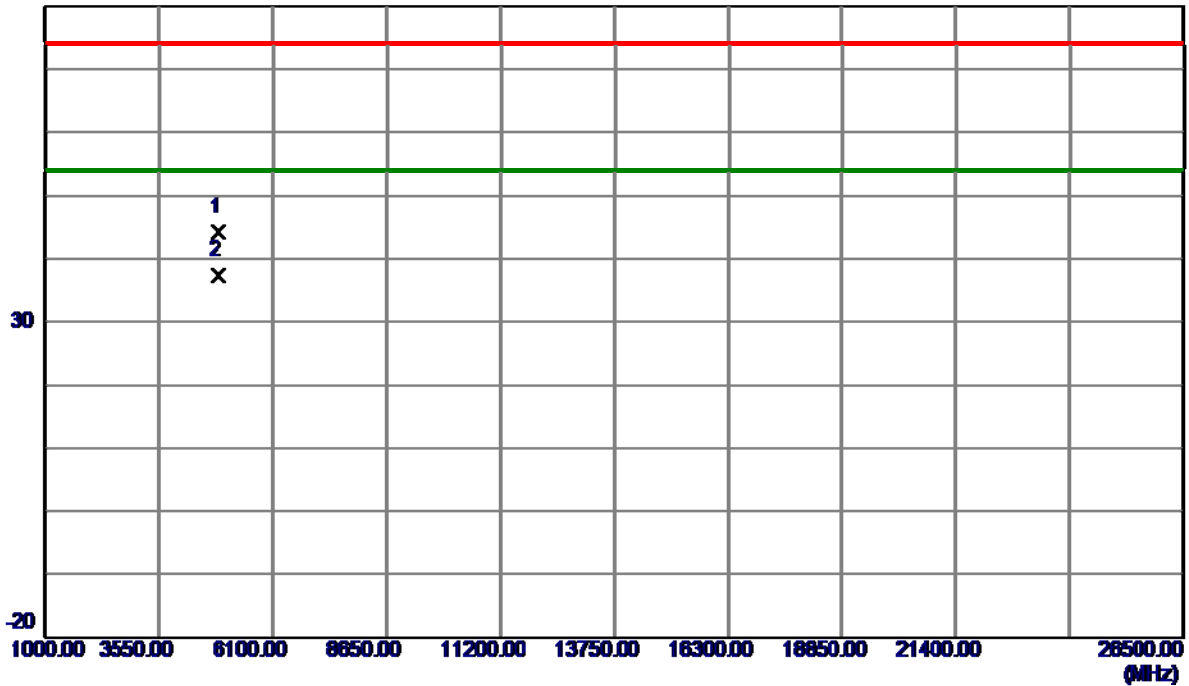


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.8200	57.56	-13.36	44.20	74.00	-29.80	Peak	
2 *	4875.0700	50.83	-13.36	37.47	54.00	-16.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

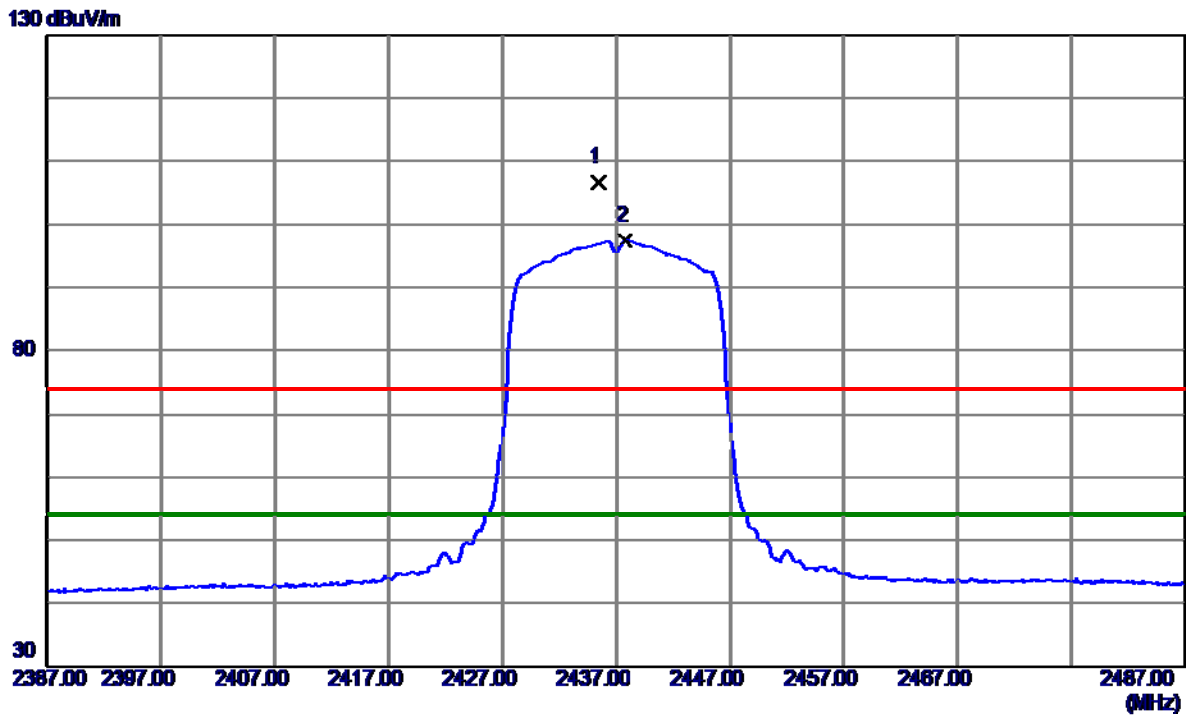

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.4000	73.99	32.52	106.51	74.00	32.51	Peak	No Limit
2 *	2437.8000	64.88	32.53	97.41	54.00	43.41	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

80 dBuV/m

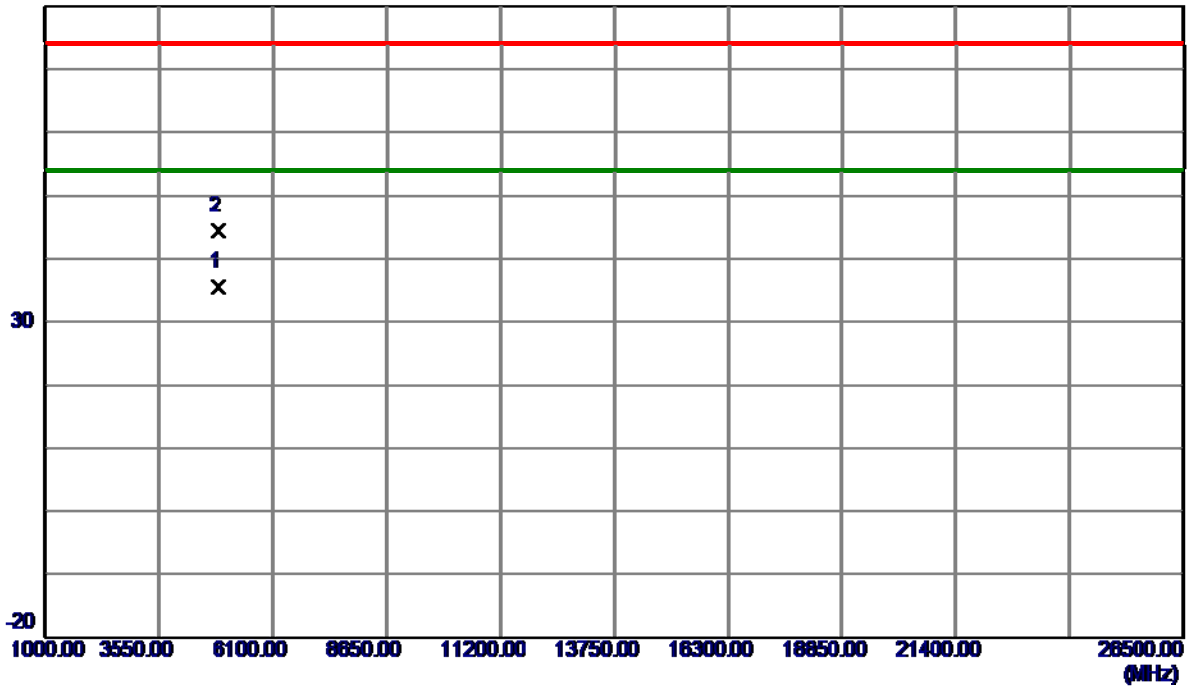


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4870.8100	48.94	-13.38	35.56	54.00	-18.44	AVG	
2	4871.6200	57.82	-13.37	44.45	74.00	-29.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

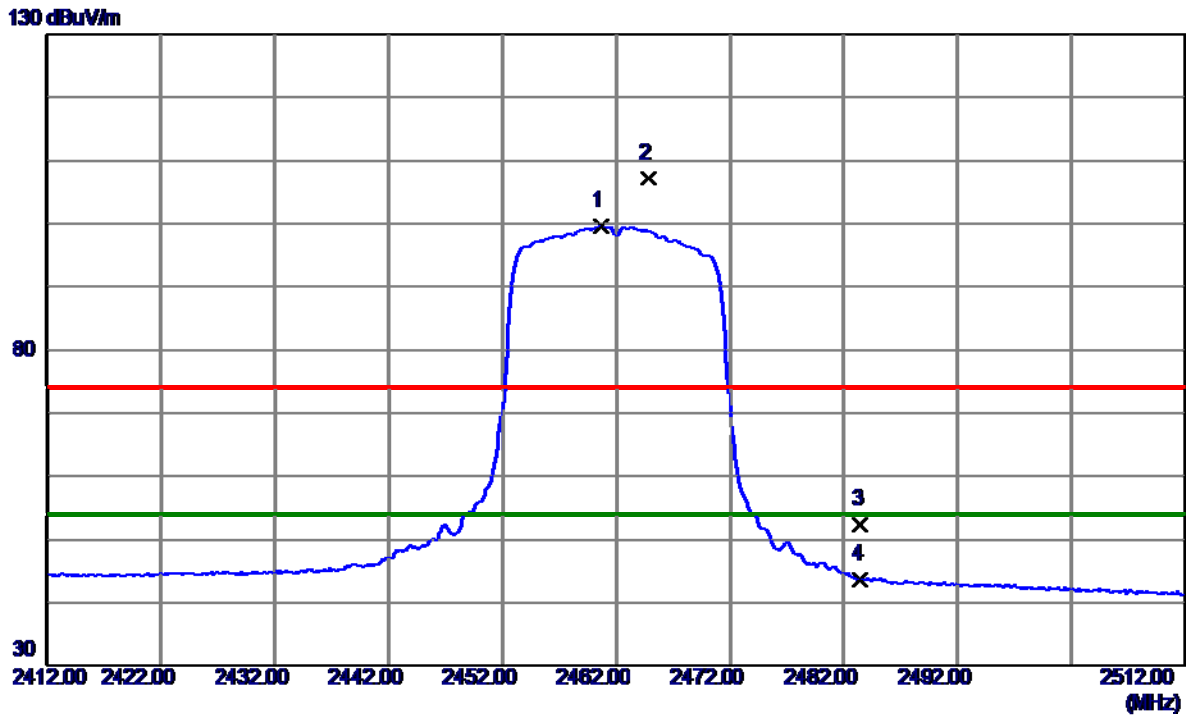

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.7000	67.01	32.60	99.61	54.00	45.61	AVG	No Limit
2	2464.9000	74.56	32.61	107.17	74.00	33.17	Peak	No Limit
3	2483.5000	19.78	32.66	52.44	74.00	-21.56	Peak	
4	2483.5000	10.88	32.66	43.54	54.00	-10.46	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

80 dBuV/m

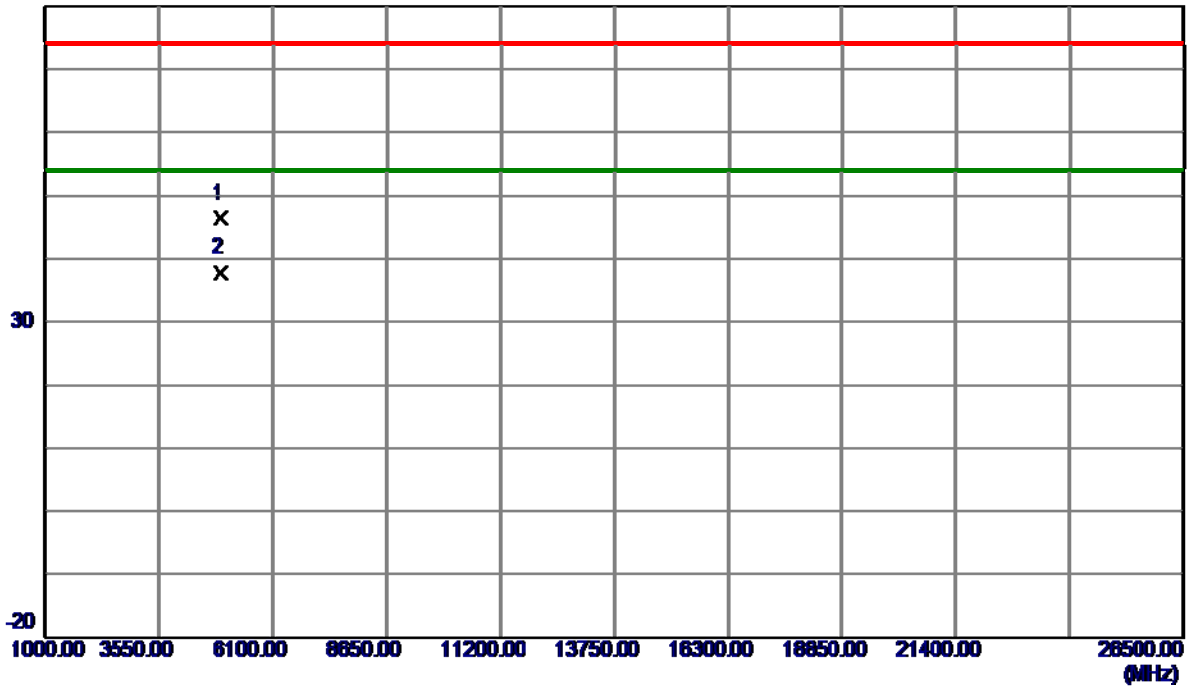


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.4700	59.59	-13.18	46.41	74.00	-27.59	Peak	
2 *	4924.6000	50.95	-13.18	37.77	54.00	-16.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

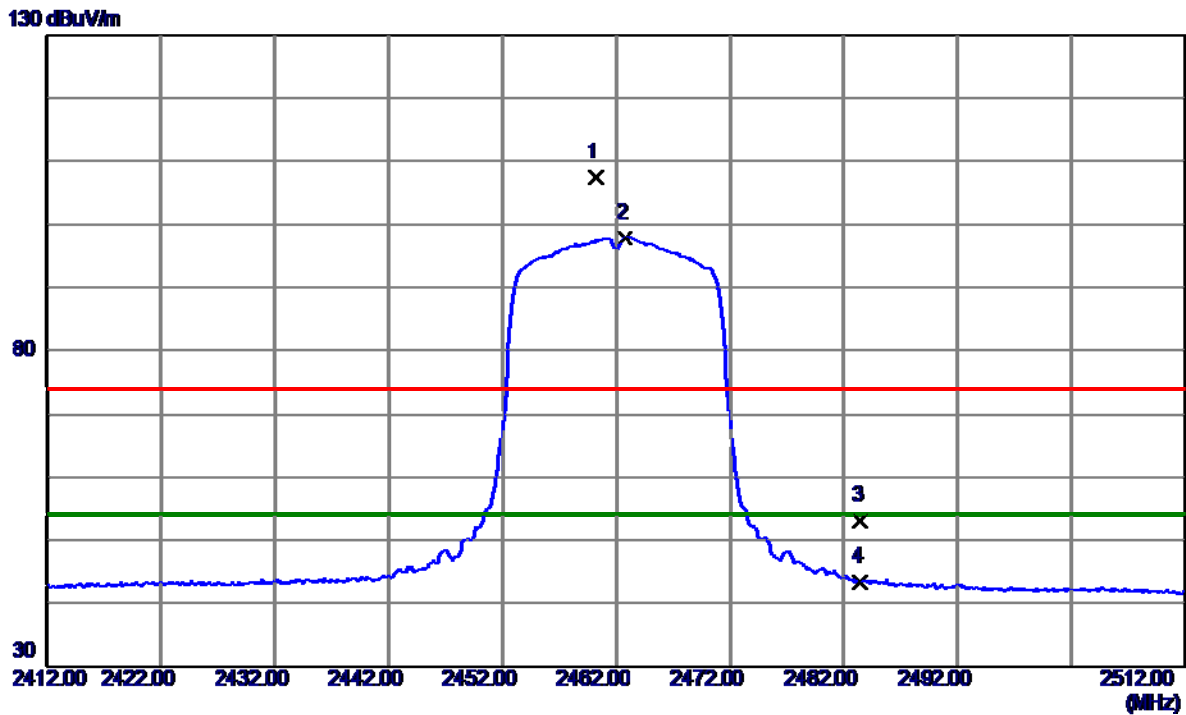

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.2000	74.71	32.60	107.31	74.00	33.31	Peak	No Limit
2 *	2462.8000	65.25	32.60	97.85	54.00	43.85	AVG	No Limit
3	2483.5000	20.44	32.66	53.10	74.00	-20.90	Peak	
4	2483.5000	10.73	32.66	43.39	54.00	-10.61	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

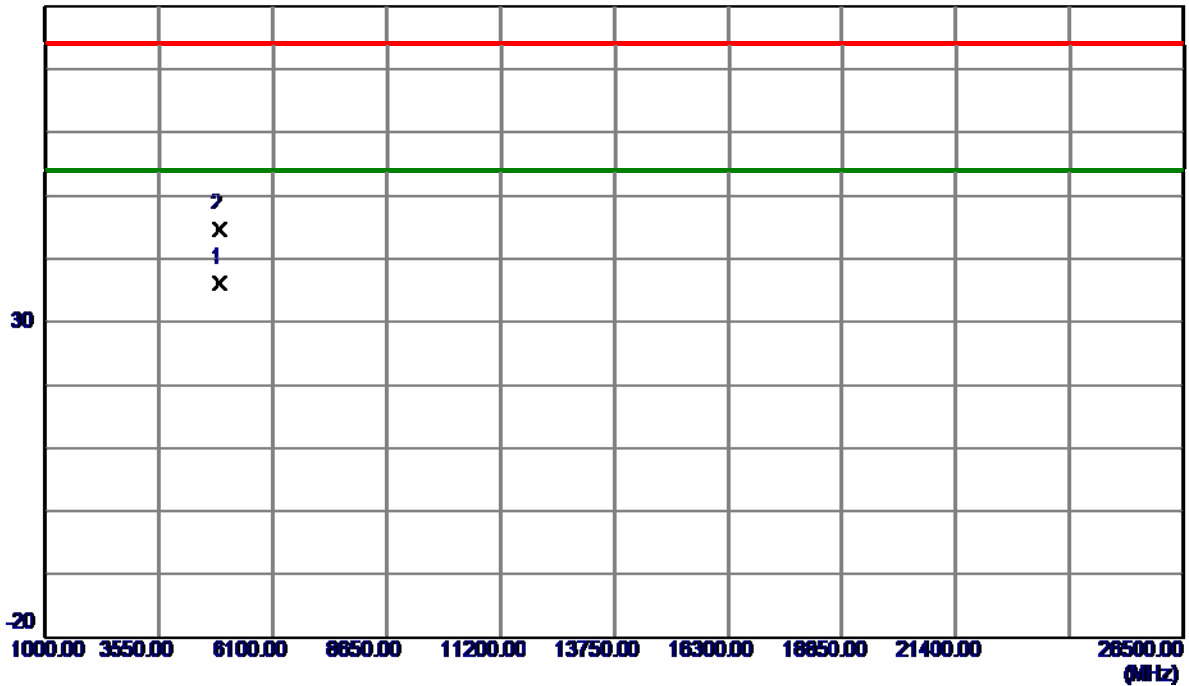


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4919.5500	49.44	-13.20	36.24	54.00	-17.76	AVG	
2	4921.4500	57.89	-13.19	44.70	74.00	-29.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

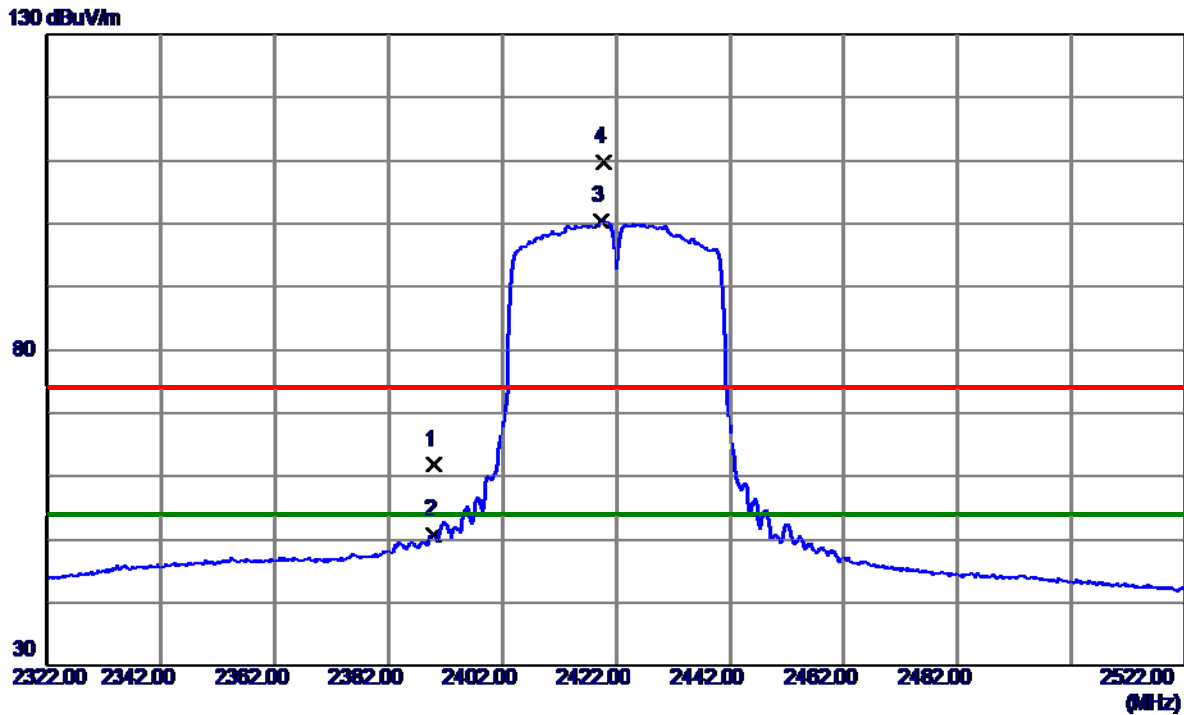

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	29.34	32.39	61.73	74.00	-12.27	Peak	
2	2390.0000	18.35	32.39	50.74	54.00	-3.26	AVG	
3 *	2419.4000	67.90	32.48	100.38	54.00	46.38	AVG	No Limit
4	2419.8000	77.25	32.48	109.73	74.00	35.73	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

80 dBuV/m

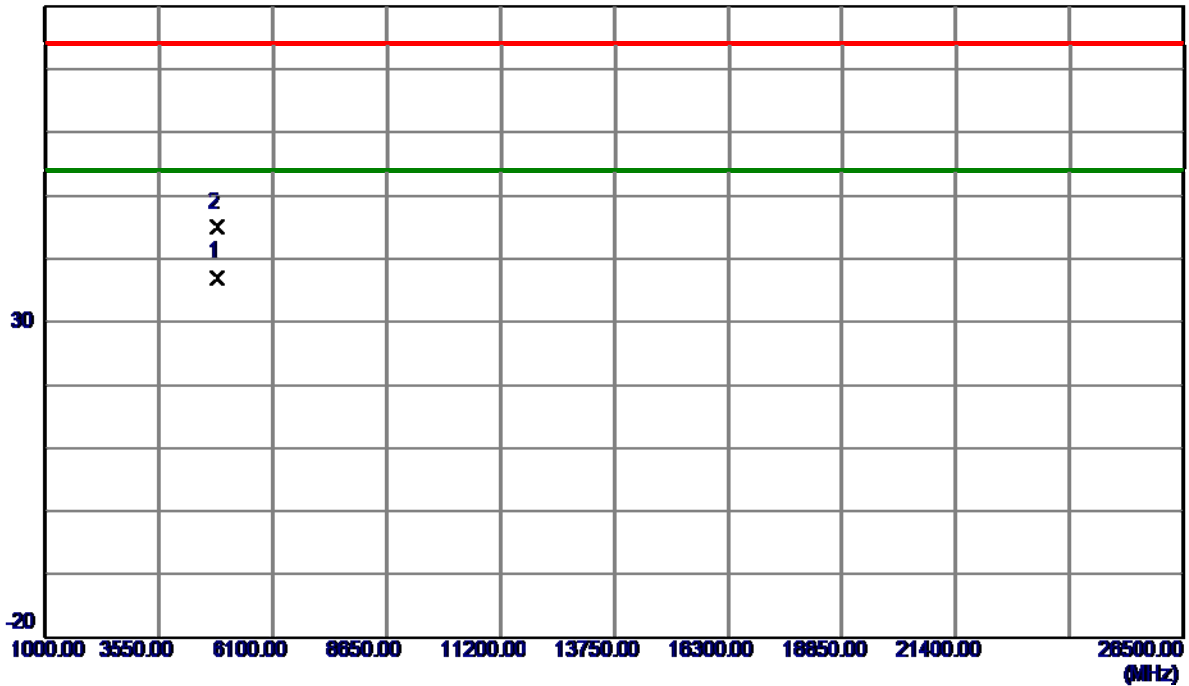


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4839.7900	50.59	-13.49	37.10	54.00	-16.90	AVG	
2	4843.5500	58.52	-13.48	45.04	74.00	-28.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

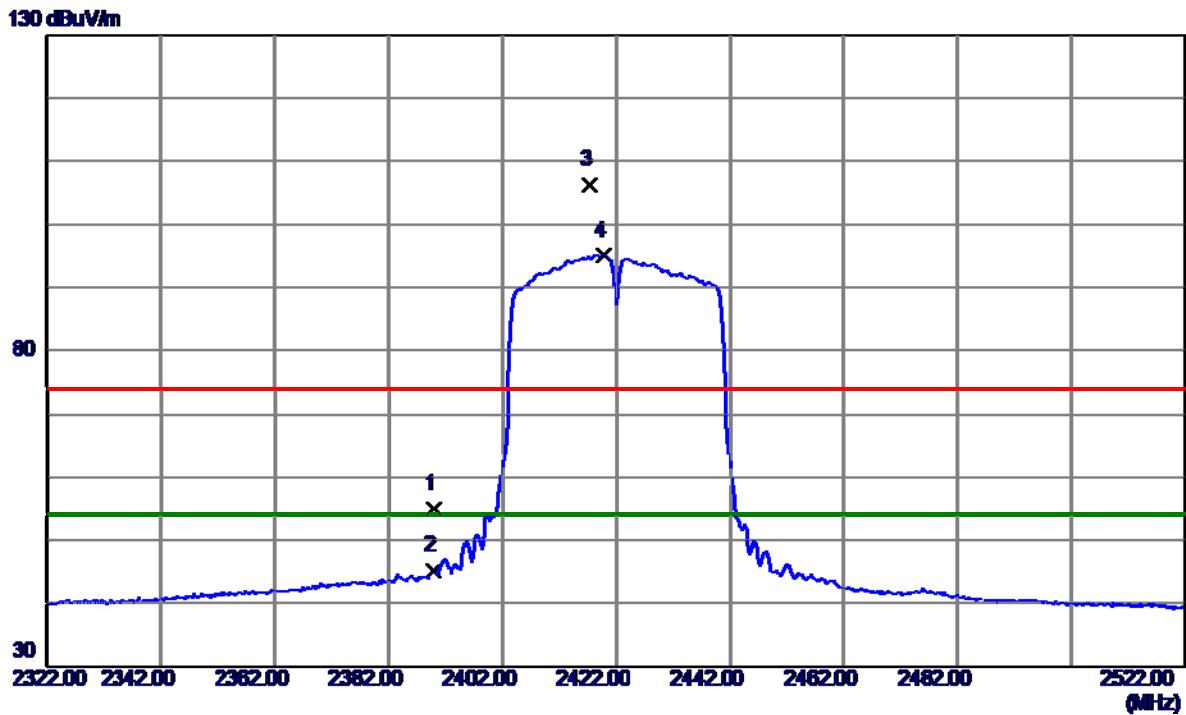

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.55	32.39	54.94	74.00	-19.06	Peak	
2	2390.0000	12.78	32.39	45.17	54.00	-8.83	AVG	
3	2417.4000	73.73	32.47	106.20	74.00	32.20	Peak	No Limit
4 *	2419.8000	62.57	32.48	95.05	54.00	41.05	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

80 dBuV/m

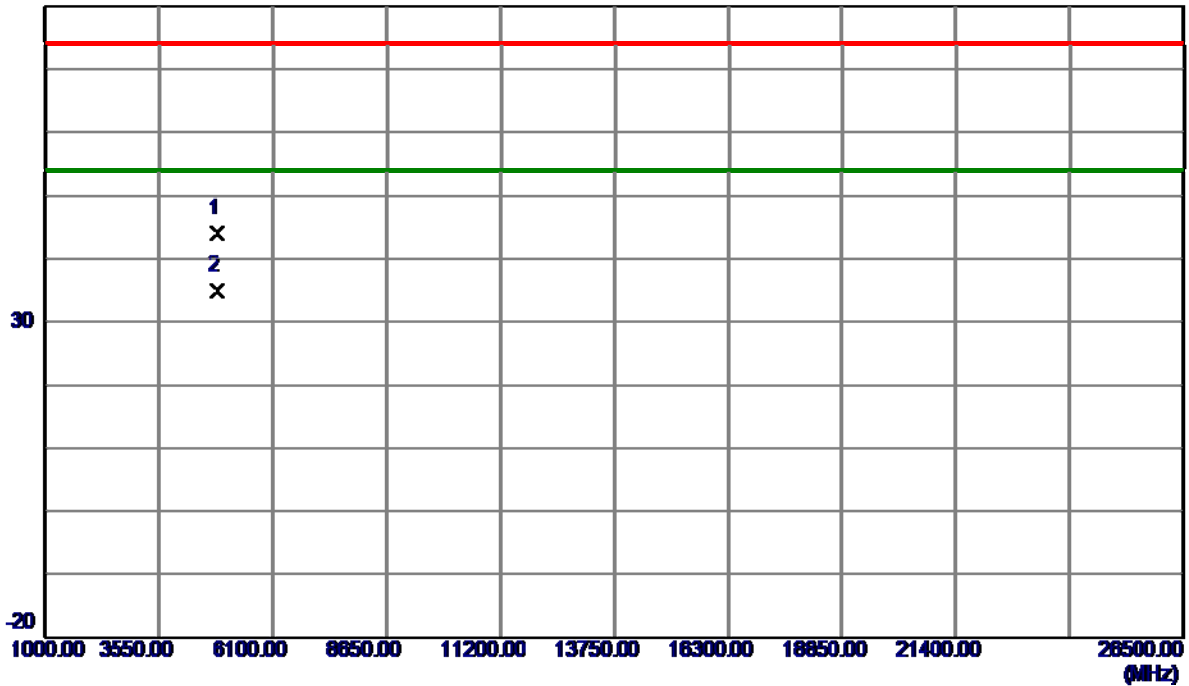


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4841.1500	57.40	-13.48	43.92	74.00	-30.08	Peak	
2 *	4844.4400	48.43	-13.47	34.96	54.00	-19.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

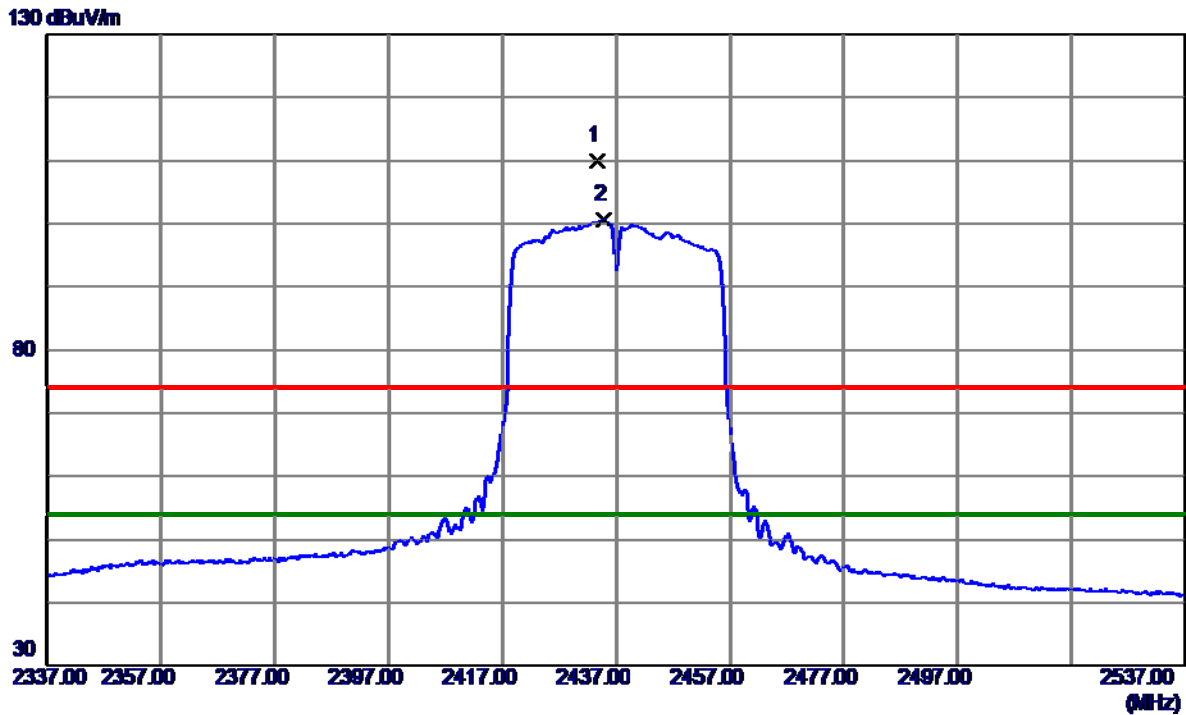

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2433.6000	77.58	32.52	110.10	74.00	36.10	Peak	No Limit
2 *	2434.8000	68.17	32.52	100.69	54.00	46.69	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

80 dBuV/m

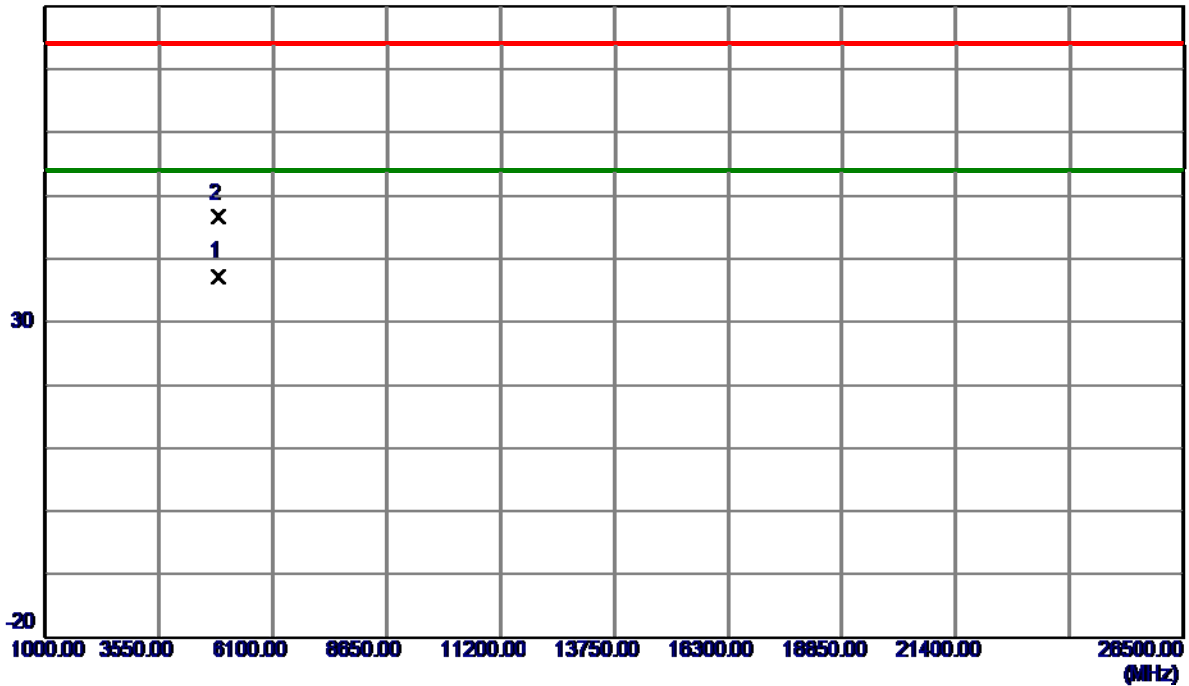


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4871.0500	50.64	-13.37	37.27	54.00	-16.73	AVG	
2	4877.9000	59.85	-13.35	46.50	74.00	-27.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

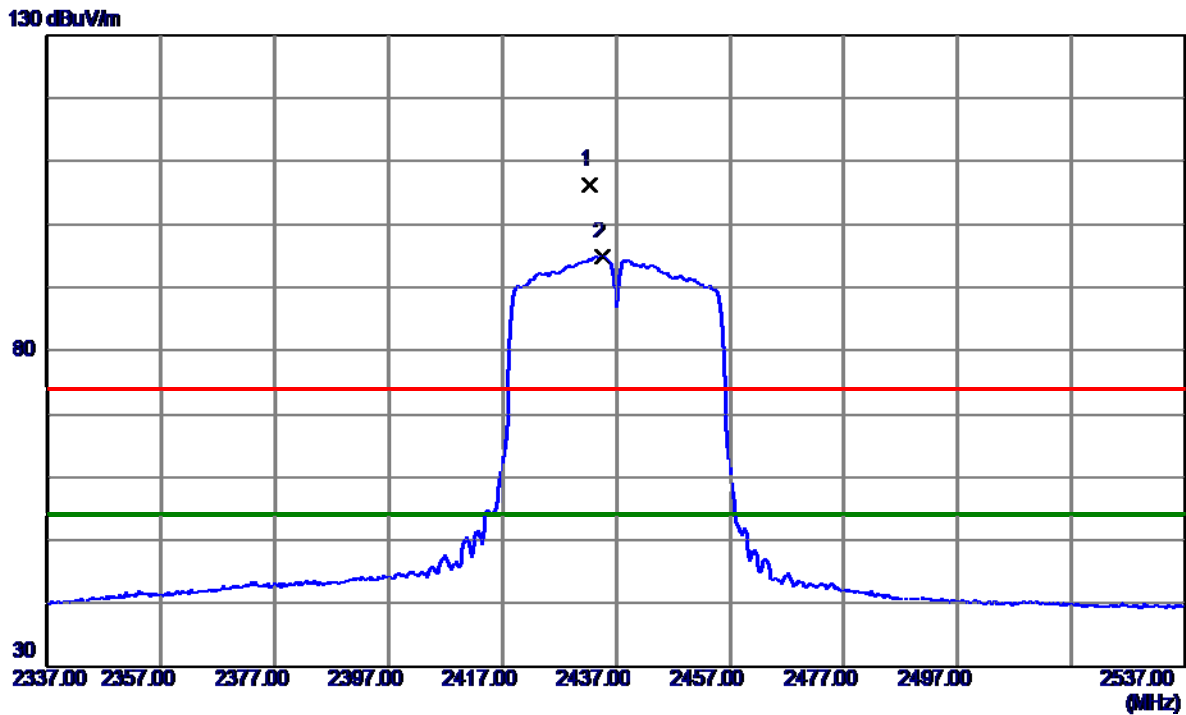

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2432.4000	73.70	32.52	106.22	74.00	32.22	Peak	No Limit
2 *	2434.6000	62.26	32.52	94.78	54.00	40.78	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

80 dBuV/m

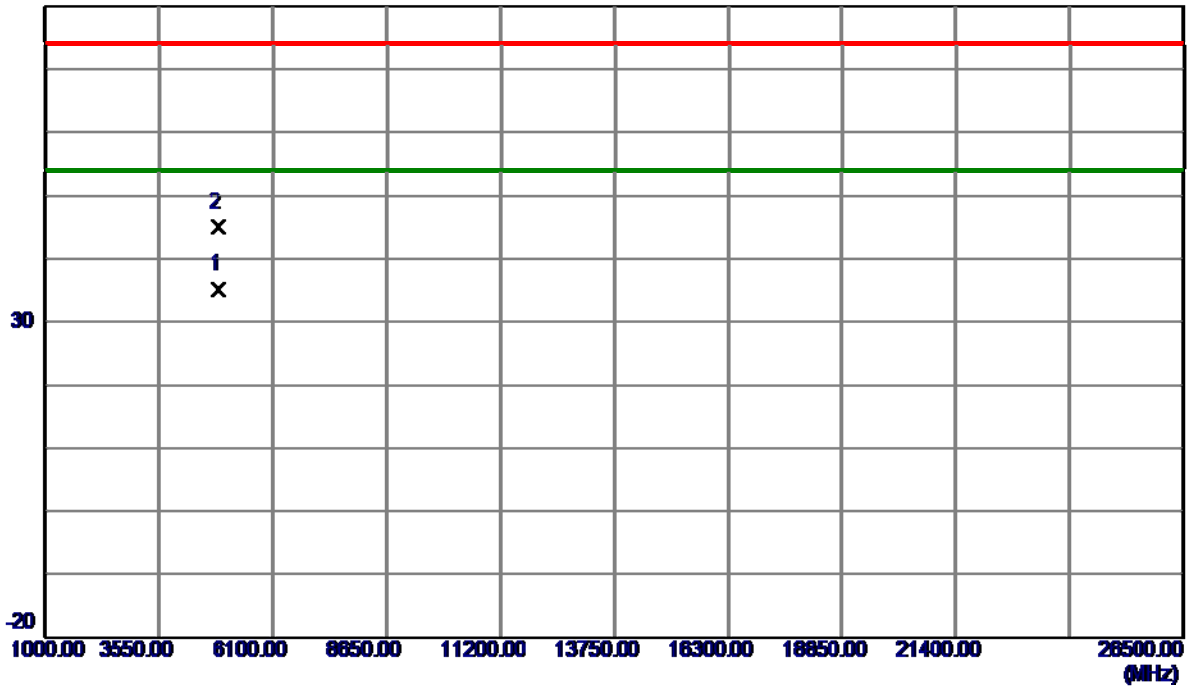


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.1100	48.56	-13.37	35.19	54.00	-18.81	AVG	
2	4877.4600	58.32	-13.35	44.97	74.00	-29.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

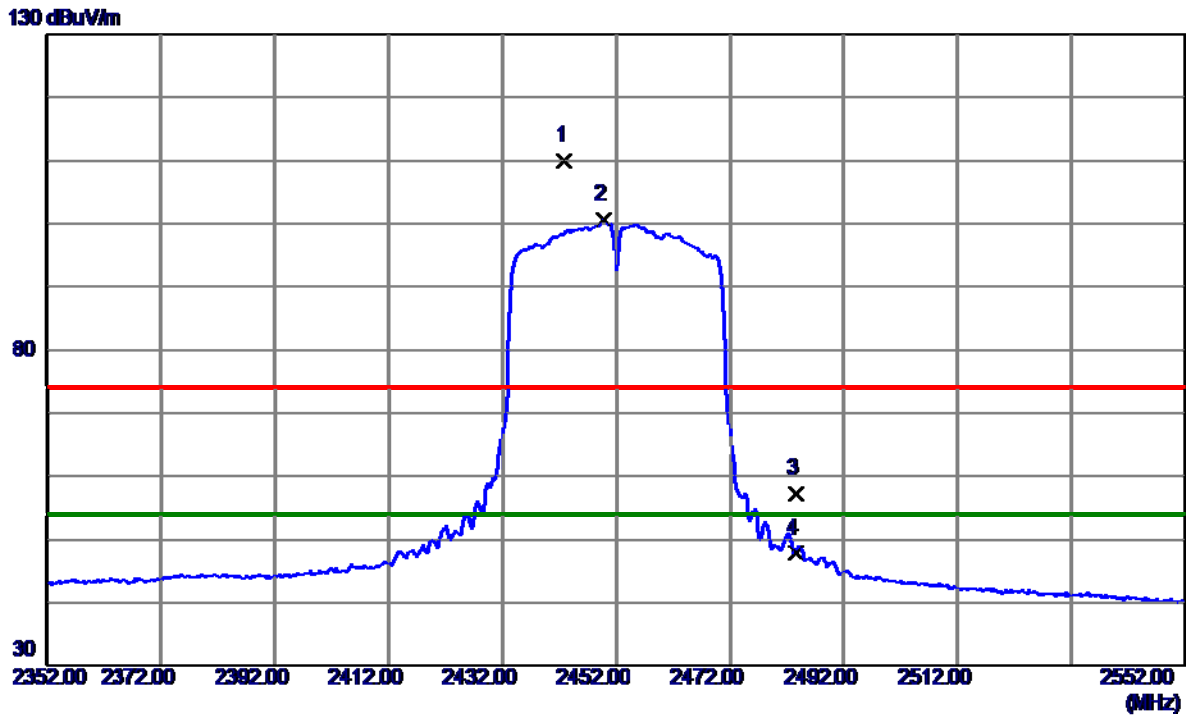

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2443.0000	77.49	32.55	110.04	74.00	36.04	Peak	No Limit
2 *	2449.8000	67.97	32.57	100.54	54.00	46.54	AVG	No Limit
3	2483.5000	24.54	32.66	57.20	74.00	-16.80	Peak	
4	2483.5000	15.22	32.66	47.88	54.00	-6.12	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

80 dBuV/m

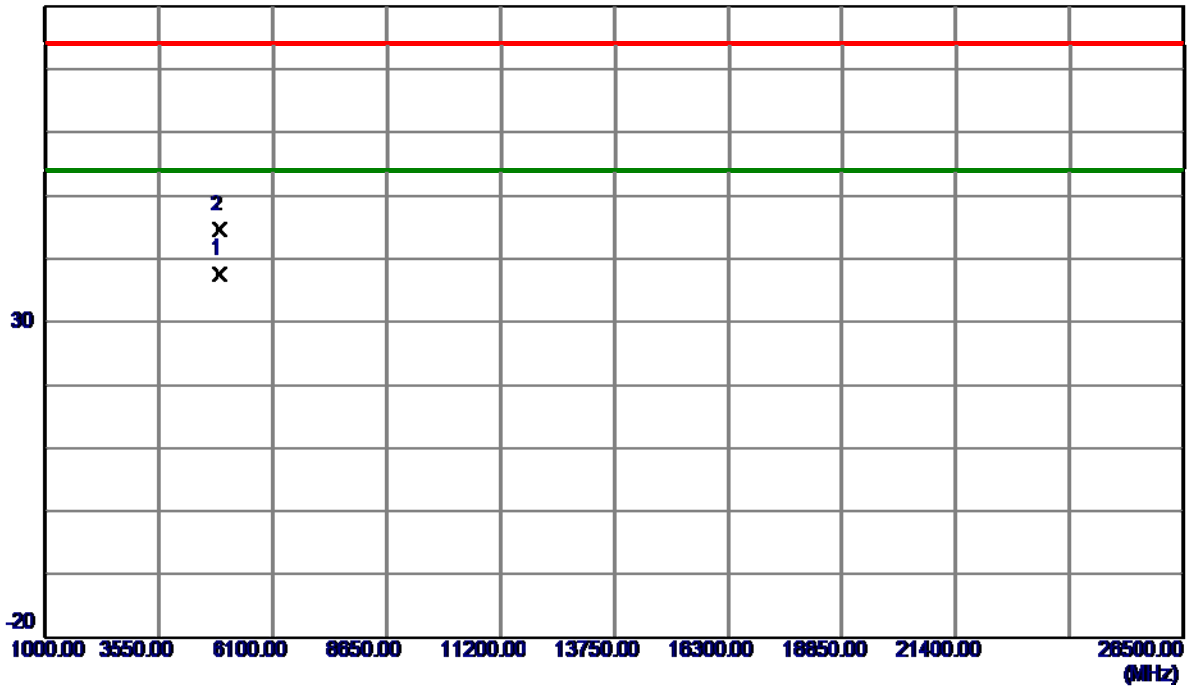


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4901.2700	50.85	-13.26	37.59	54.00	-16.41	AVG	
2	4908.9300	57.88	-13.24	44.64	74.00	-29.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

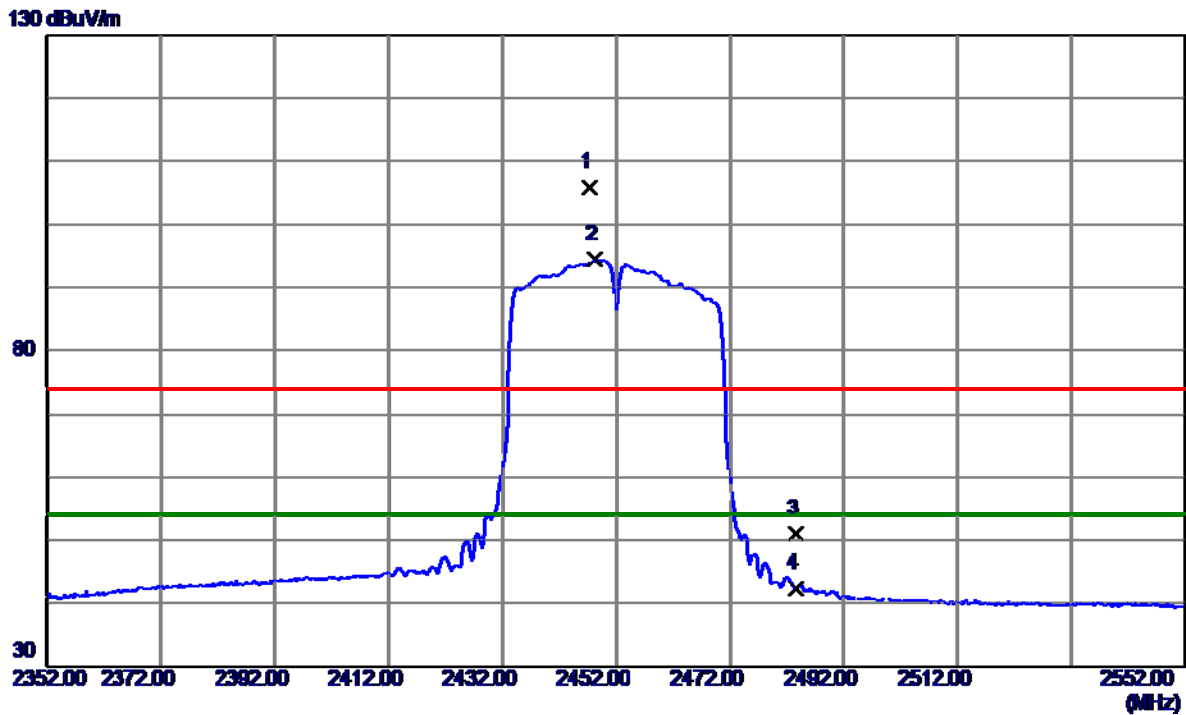

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2447.4000	73.15	32.56	105.71	74.00	31.71	Peak	No Limit
2 *	2448.2000	61.75	32.56	94.31	54.00	40.31	AVG	No Limit
3	2483.5000	18.43	32.66	51.09	74.00	-22.91	Peak	
4	2483.5000	9.67	32.66	42.33	54.00	-11.67	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

80 dBuV/m

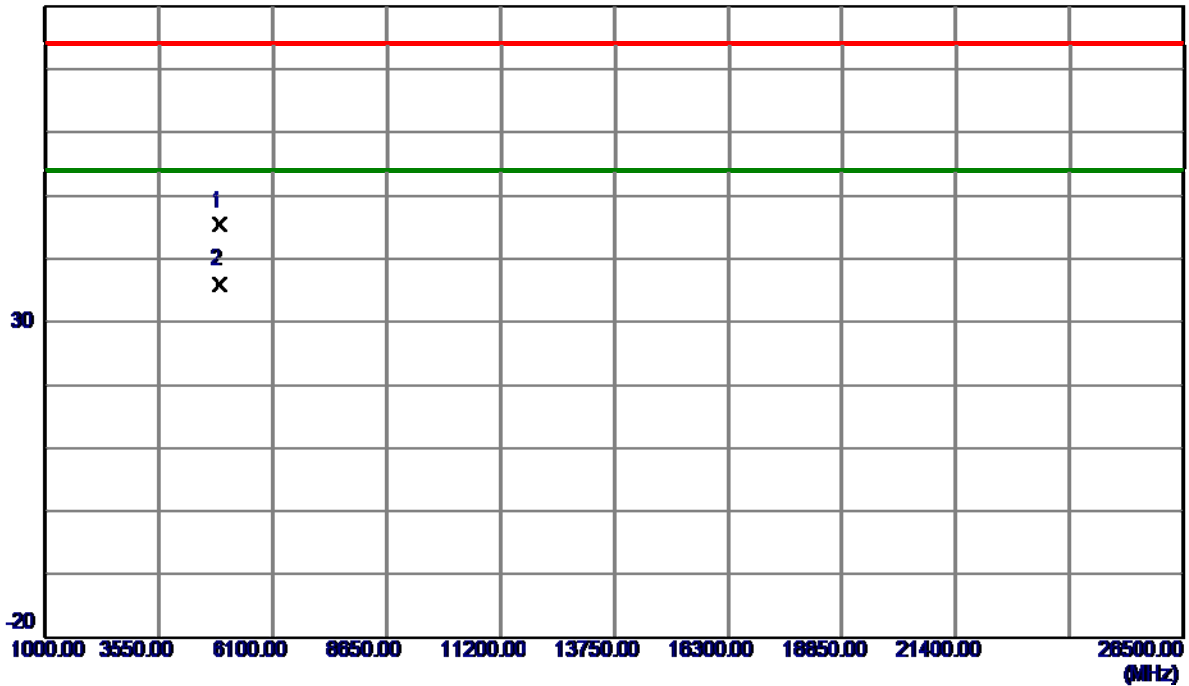

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4904.0000	58.55	-13.25	45.30	74.00	-28.70	Peak	
2 *	4904.0900	49.28	-13.25	36.03	54.00	-17.97	AVG	

REMARKS:




- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH




Non-Beamforming

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	8.10	500	Complies
06	2437	8.10	500	Complies
11	2462	8.06	500	Complies

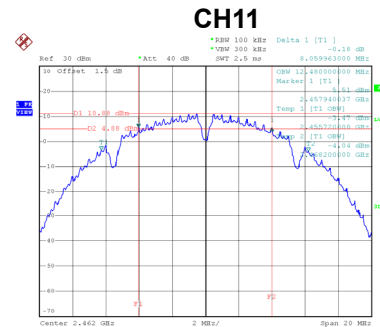
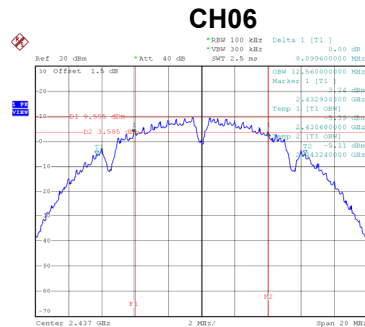
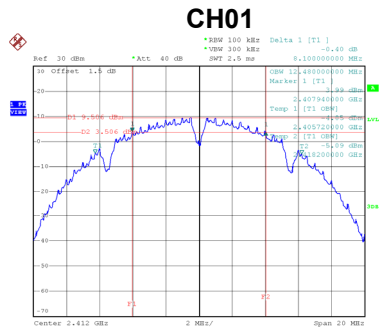


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	12.40	Complies
06	2437	12.50	Complies
11	2462	12.40	Complies

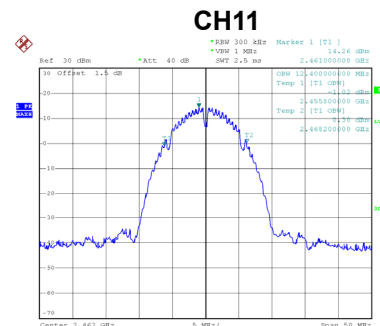
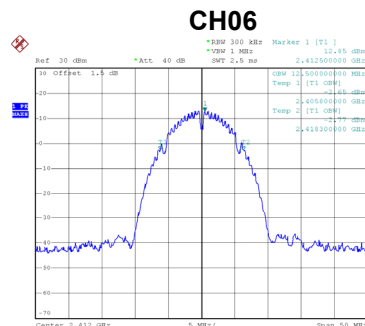
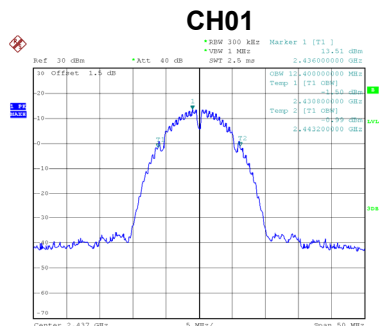


Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	14.24	500	Complies
06	2437	14.05	500	Complies
11	2462	15.14	500	Complies

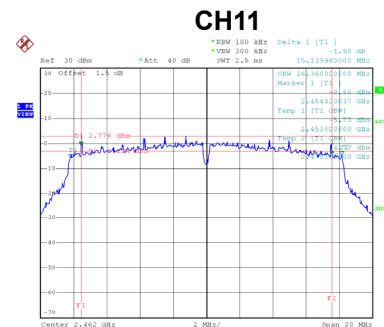
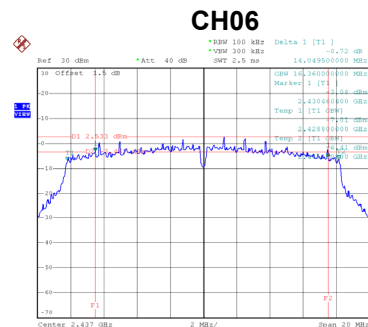
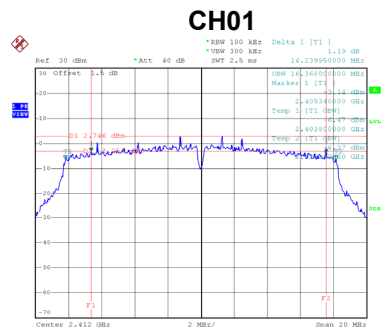


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	16.60	Complies
06	2437	16.60	Complies
11	2462	16.60	Complies

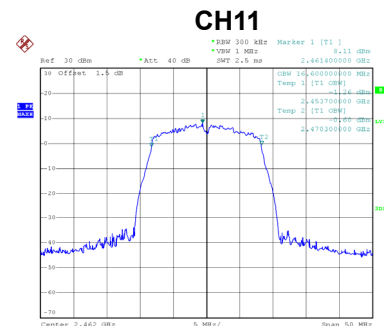
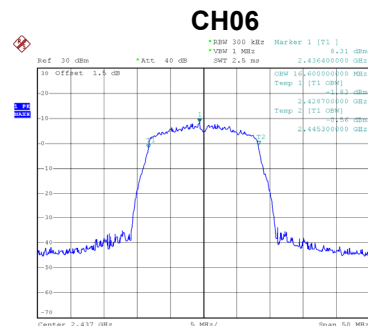
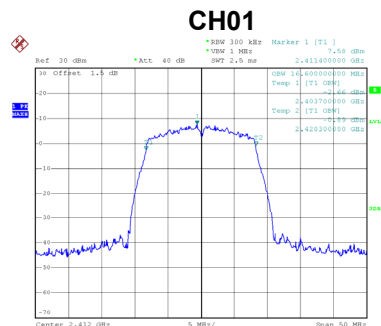


Test Mode	TX N-20M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	15.11	500	Complies
06	2437	15.10	500	Complies
11	2462	15.10	500	Complies

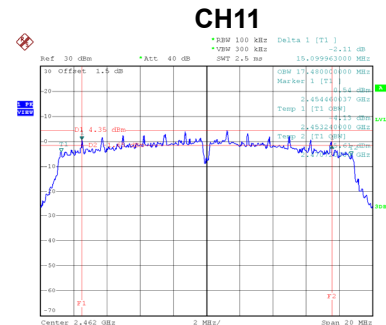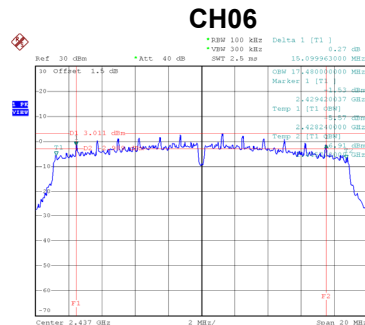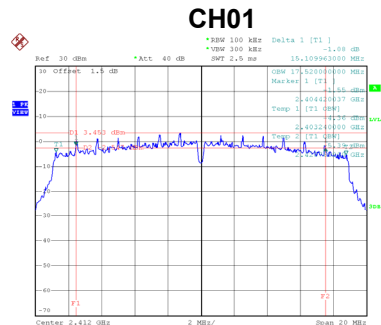


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.70	Complies
06	2437	17.70	Complies
11	2462	17.70	Complies

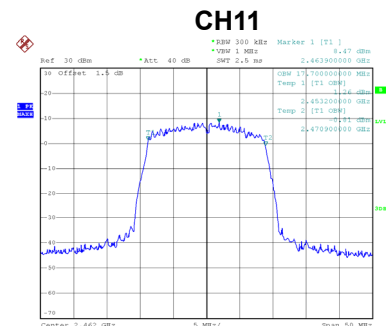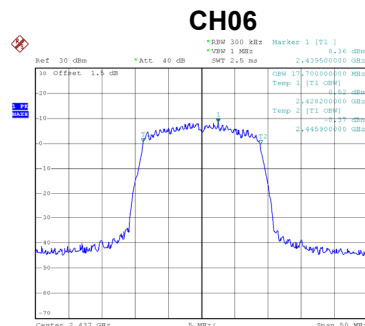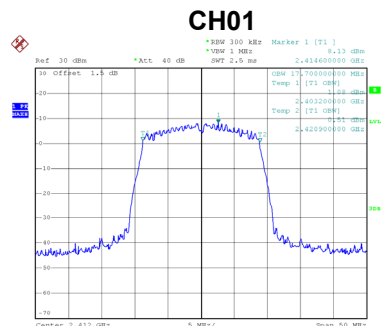


Test Mode	TX N-40M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.24	500	Complies
06	2437	35.24	500	Complies
09	2452	35.24	500	Complies

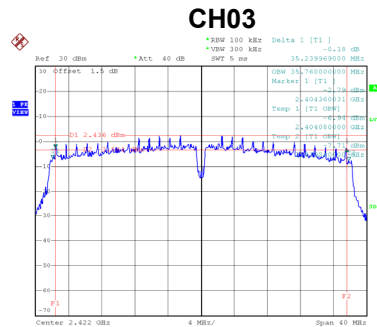

Date: 20.FEB.2020 13:44:05

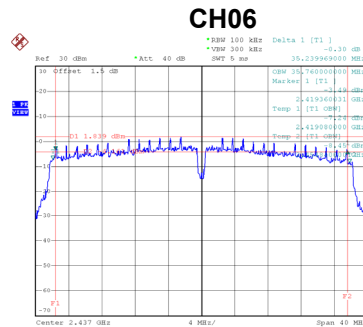


Date: 20.FEB.2020 13:45:26

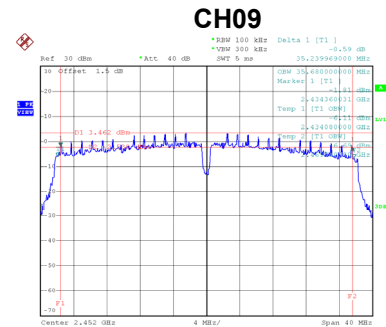


Date: 20.FEB.2020 13:46:50


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.20	Complies
06	2437	36.20	Complies
09	2452	36.20	Complies

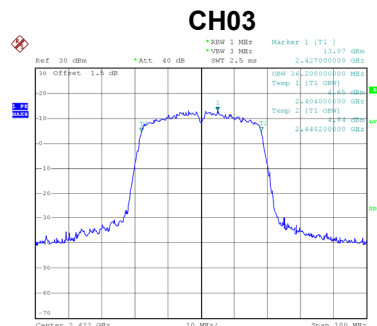

Date: 20.FEB.2020 13:18:57

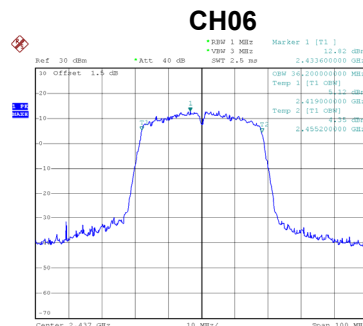

Date: 20.FEB.2020 13:19:13

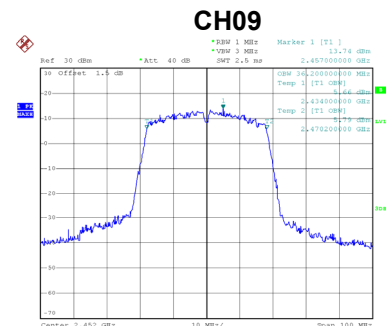

Date: 20.FEB.2020 13:22:38

APPENDIX F - MAXIMUM OUTPUT POWER

Non-Beamforming

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.71	18.71	30.00	1.0000	Complies
06	2437	19.91	16.93	30.00	1.0000	Complies
11	2462	20.58	17.52	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.22	20.34	30.00	1.0000	Complies
06	2437	22.71	19.67	30.00	1.0000	Complies
11	2462	22.03	18.97	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 3
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.70	18.74	30.00	1.0000	Complies
06	2437	22.53	17.33	30.00	1.0000	Complies
11	2462	23.12	17.02	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 4
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.78	19.72	30.00	1.0000	Complies
06	2437	20.40	18.96	30.00	1.0000	Complies
11	2462	20.21	18.11	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	28.44	25.45	30.00	1.0000	Complies
06	2437	27.40	24.39	30.00	1.0000	Complies
11	2462	27.06	23.99	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.42	13.09	30.00	1.0000	Complies
06	2437	22.83	12.43	30.00	1.0000	Complies
11	2462	23.41	13.28	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.02	13.65	30.00	1.0000	Complies
06	2437	23.71	13.46	30.00	1.0000	Complies
11	2462	24.10	13.83	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 3
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.85	12.49	30.00	1.0000	Complies
06	2437	22.95	12.09	30.00	1.0000	Complies
11	2462	23.46	13.45	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 4
-----------	------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.53	13.25	30.00	1.0000	Complies
06	2437	23.41	13.09	30.00	1.0000	Complies
11	2462	24.63	14.47	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	29.50	19.16	30.00	1.0000	Complies
06	2437	29.26	18.82	30.00	1.0000	Complies
11	2462	29.95	19.80	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.70	13.38	30.00	1.0000	Complies
06	2437	22.53	12.07	30.00	1.0000	Complies
11	2462	23.12	12.71	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.66	13.99	30.00	1.0000	Complies
06	2437	23.75	13.24	30.00	1.0000	Complies
11	2462	23.21	12.98	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.48	12.79	30.00	1.0000	Complies
06	2437	22.29	12.04	30.00	1.0000	Complies
11	2462	22.46	12.42	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 4
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	24.40	13.51	30.00	1.0000	Complies
06	2437	24.11	13.23	30.00	1.0000	Complies
11	2462	23.99	13.13	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	29.63	19.46	30.00	1.0000	Complies
06	2437	29.26	18.71	30.00	1.0000	Complies
11	2462	29.25	18.84	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	23.16	13.46	30.00	1.0000	Complies
06	2437	23.21	13.06	30.00	1.0000	Complies
09	2452	23.66	14.01	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	24.03	14.22	30.00	1.0000	Complies
06	2437	23.72	14.06	30.00	1.0000	Complies
09	2452	23.49	14.27	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.95	13.25	30.00	1.0000	Complies
06	2437	23.11	12.84	30.00	1.0000	Complies
09	2452	23.85	13.99	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 4
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	23.54	14.14	30.00	1.0000	Complies
06	2437	23.39	13.82	30.00	1.0000	Complies
09	2452	23.95	14.65	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	29.46	19.81	30.00	1.0000	Complies
06	2437	29.38	19.50	30.00	1.0000	Complies
09	2452	29.76	20.26	30.00	1.0000	Complies

Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.89	9.06	30.00	1.0000	Complies
06	2437	19.83	9.38	30.00	1.0000	Complies
11	2462	19.79	9.4	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.80	11.07	30.00	1.0000	Complies
06	2437	22.07	12.39	30.00	1.0000	Complies
11	2462	22.19	11.26	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.34	9.01	30.00	1.0000	Complies
06	2437	19.65	9.72	30.00	1.0000	Complies
11	2462	19.56	9.38	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 4
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.32	10.37	30.00	1.0000	Complies
06	2437	21.52	11.2	30.00	1.0000	Complies
11	2462	21.52	10.48	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	26.72	15.99	26.98	0.4989	Complies
06	2437	26.91	16.86	26.98	0.4989	Complies
11	2462	26.93	16.22	26.98	0.4989	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.11	9.22	30.00	1.0000	Complies
06	2437	19.00	7.73	30.00	1.0000	Complies
09	2452	19.68	9.17	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	22.12	11.6	30.00	1.0000	Complies
06	2437	22.36	10.78	30.00	1.0000	Complies
09	2452	22.35	11.18	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 3
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.04	9.29	30.00	1.0000	Complies
06	2437	19.32	8.39	30.00	1.0000	Complies
09	2452	19.29	8.77	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 4
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	21.00	10.66	30.00	1.0000	Complies
06	2437	21.26	10.26	30.00	1.0000	Complies
09	2452	20.60	9.75	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------


Channel	Frequency (MHz)	Peak Output Power (dBm)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	26.92	16.33	26.98	0.4989	Complies
06	2437	26.73	15.49	26.98	0.4989	Complies
09	2452	26.67	15.84	26.98	0.4989	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Non-Beamforming


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

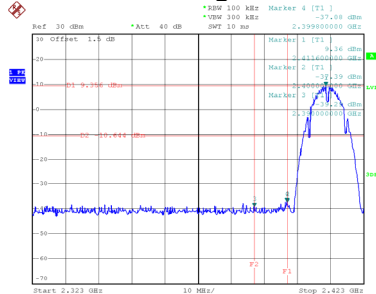


Date: 20.FEB.2020 13:28:00

Bandedge-CH11

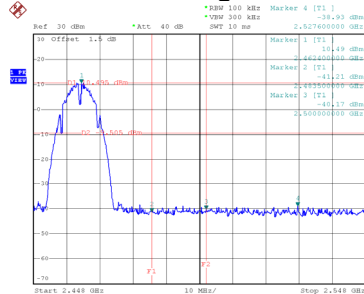


Date: 20.FEB.2020 13:32:34


CH01 – 10th Harmonic of the fundamental frequency

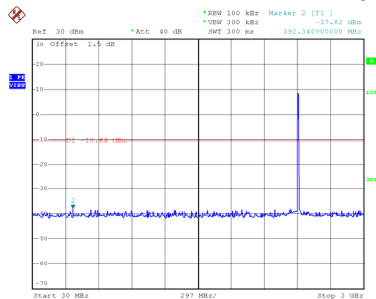

Date: 20.FEB.2020 13:28:14

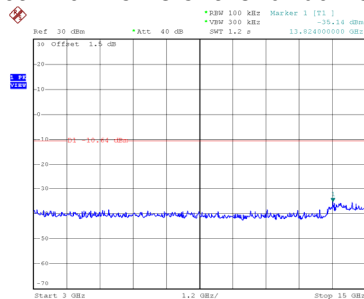


Date: 20.FEB.2020 13:28:24

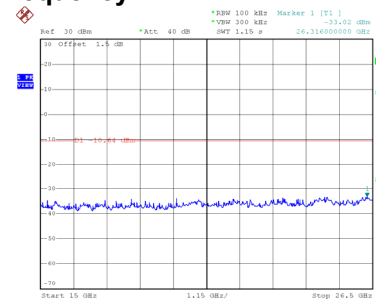


Date: 20.FEB.2020 13:28:33


CH06 – 10th Harmonic of the fundamental frequency

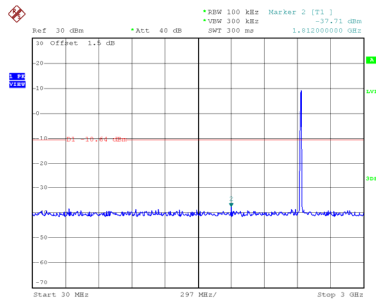

Date: 20.FEB.2020 13:30:42

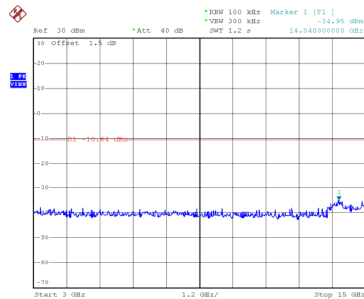


Date: 20.FEB.2020 13:30:51

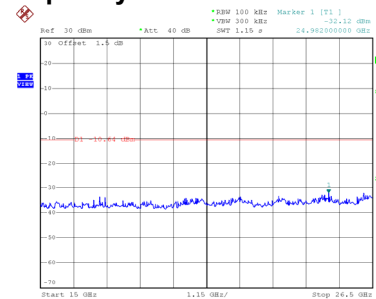


Date: 20.FEB.2020 13:31:00


CH11 – 10th Harmonic of the fundamental frequency

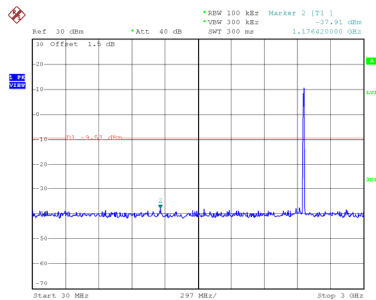

Date: 20.FEB.2020 13:32:48

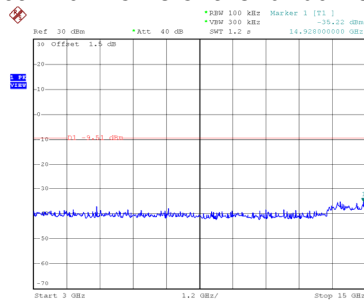


Date: 20.FEB.2020 13:32:57

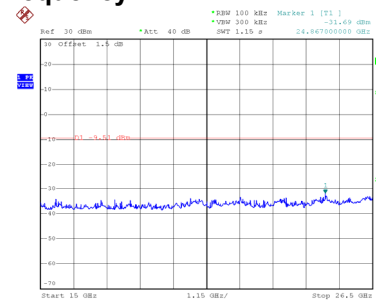

Date: 20.FEB.2020 13:33:07


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

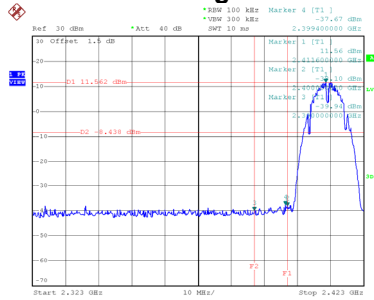


Date: 20.FEB.2020 13:25:18

Bandedge-CH11

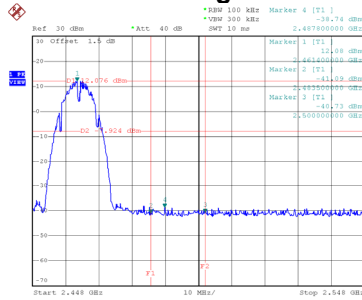


Date: 20.FEB.2020 13:05:13


CH01 – 10th Harmonic of the fundamental frequency

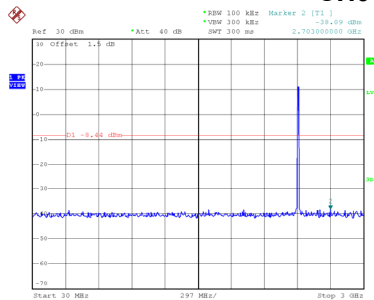

Date: 20.FEB.2020 13:25:12

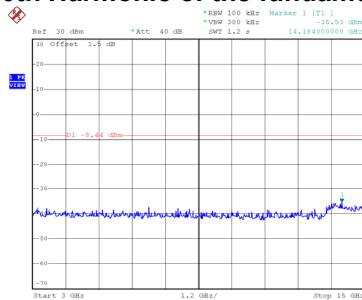


Date: 20.FEB.2020 13:25:42

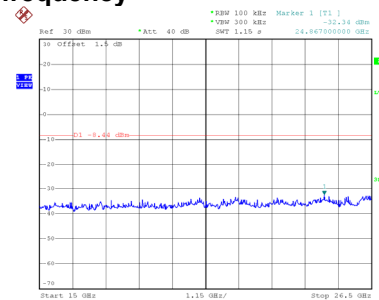


Date: 20.FEB.2020 13:25:51


CH06 – 10th Harmonic of the fundamental frequency

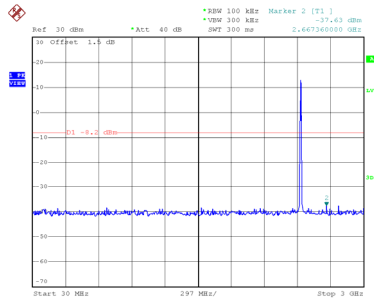

Date: 20.FEB.2020 13:00:50

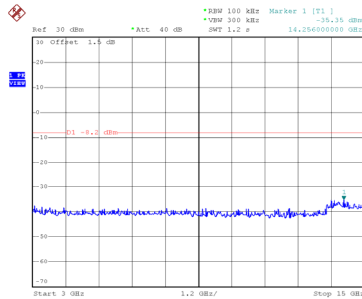


Date: 20.FEB.2020 13:00:59

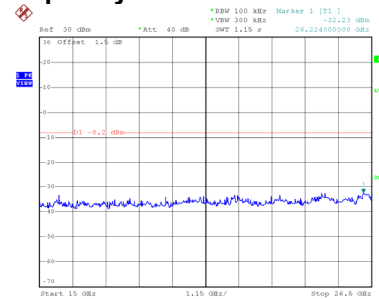


Date: 20.FEB.2020 13:01:08


CH11 – 10th Harmonic of the fundamental frequency

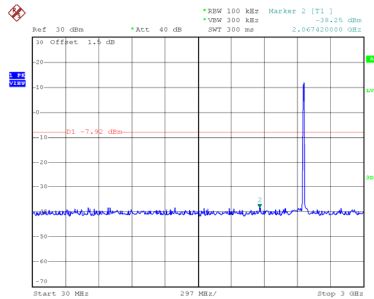

Date: 20.FEB.2020 13:05:17

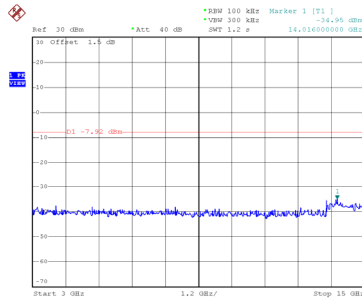


Date: 20.FEB.2020 13:05:37

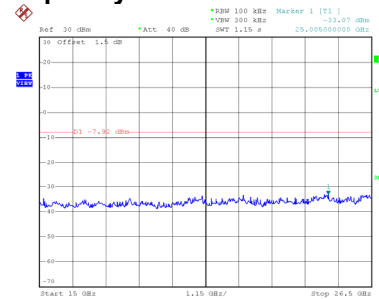

Date: 20.FEB.2020 13:05:46


Test Mode TX B Mode_Ant. 3

Bandedge-CH01

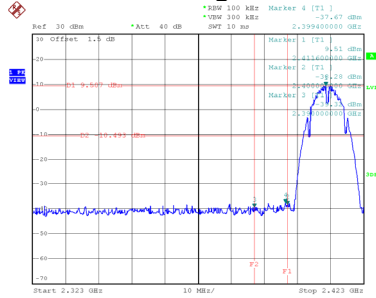


Date: 20.FEB.2020 13:49:51

Bandedge-CH11

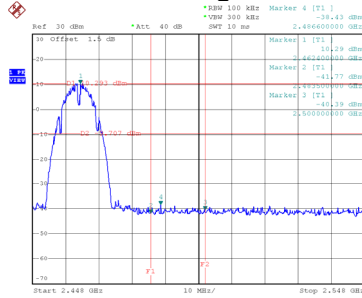


Date: 20.FEB.2020 13:54:06


CH01 – 10th Harmonic of the fundamental frequency

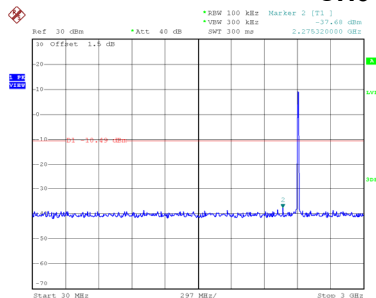

Date: 20.FEB.2020 13:50:05

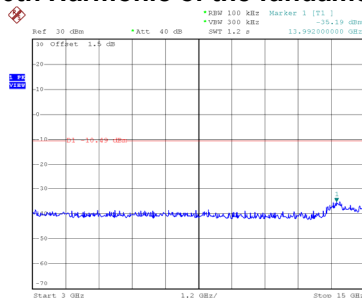


Date: 20.FEB.2020 13:50:14

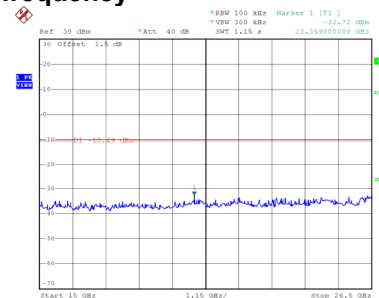


Date: 20.FEB.2020 13:50:23


CH06 – 10th Harmonic of the fundamental frequency

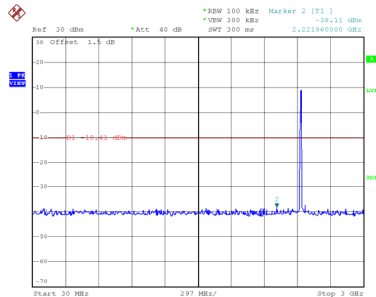

Date: 20.FEB.2020 13:51:59

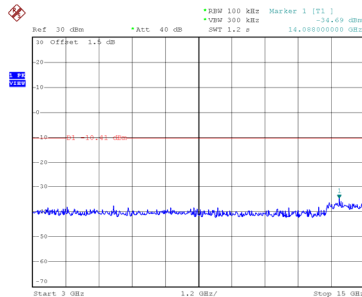


Date: 20.FEB.2020 13:52:08

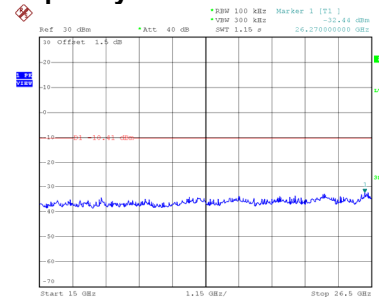


Date: 20.FEB.2020 13:52:17


CH11 – 10th Harmonic of the fundamental frequency

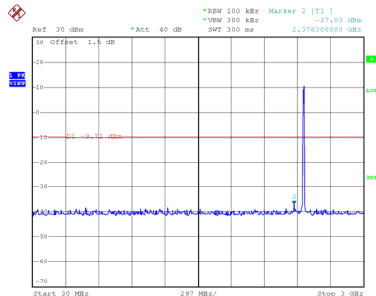

Date: 20.FEB.2020 13:54:20

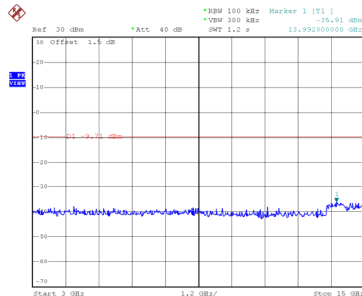


Date: 20.FEB.2020 13:54:29

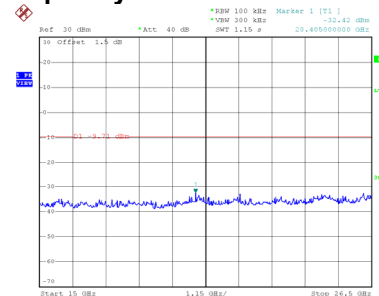

Date: 20.FEB.2020 13:54:38


Test Mode TX B Mode_Ant. 4

Bandedge-CH01

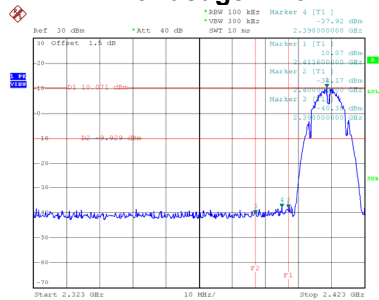


Date: 20.FEB.2020 14:18:09

Bandedge-CH11

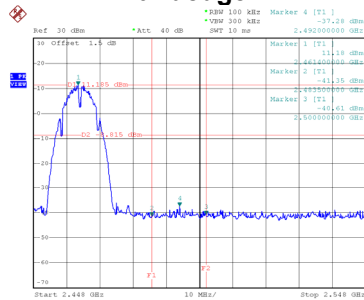


Date: 20.FEB.2020 14:22:28


CH01 – 10th Harmonic of the fundamental frequency

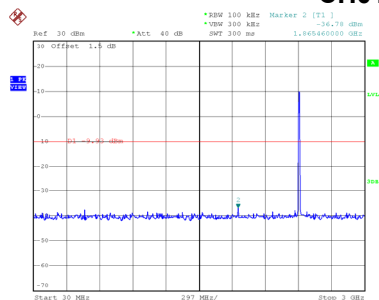

Date: 20.FEB.2020 14:18:23

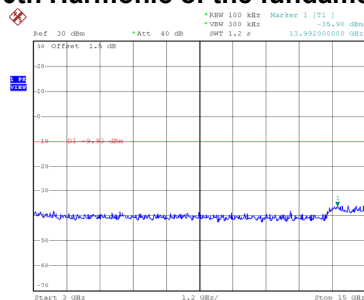


Date: 20.FEB.2020 14:18:32

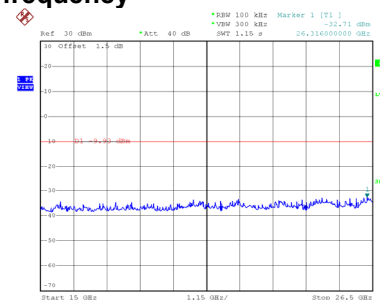


Date: 20.FEB.2020 14:18:41


CH06 – 10th Harmonic of the fundamental frequency

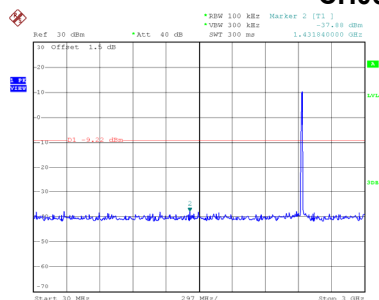

Date: 20.FEB.2020 14:20:24

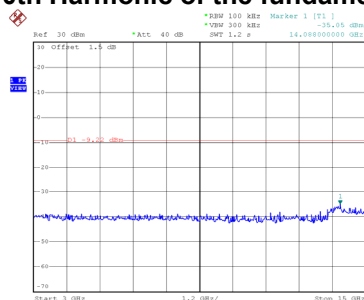


Date: 20.FEB.2020 14:20:33

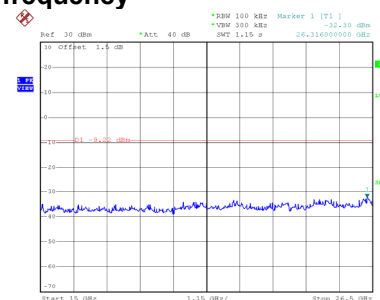


Date: 20.FEB.2020 14:20:41


CH11 – 10th Harmonic of the fundamental frequency

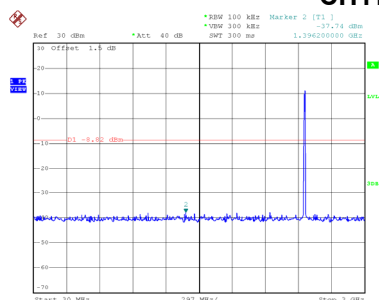

Date: 20.FEB.2020 14:22:12

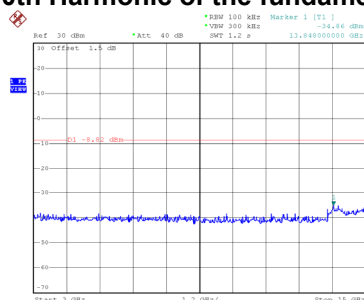


Date: 20.FEB.2020 14:22:51

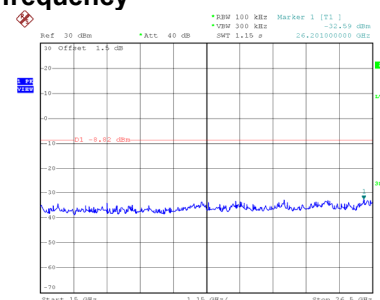


Date: 20.FEB.2020 14:23:01

Test Mode TX G Mode_Ant. 1




Bandedge-CH01

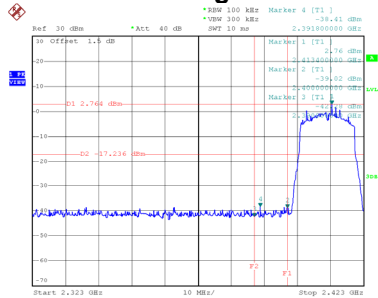




Bandedge-CH11

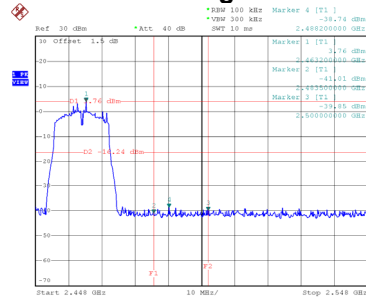




CH01 – 10th Harmonic of the fundamental frequency

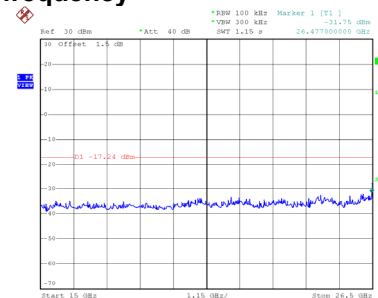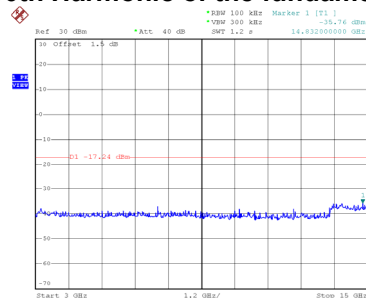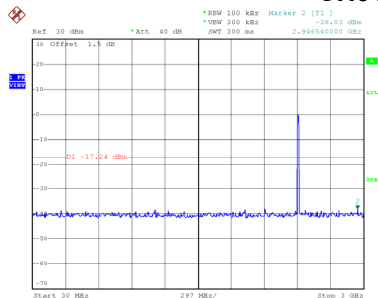

CH06 – 10th Harmonic of the fundamental frequency

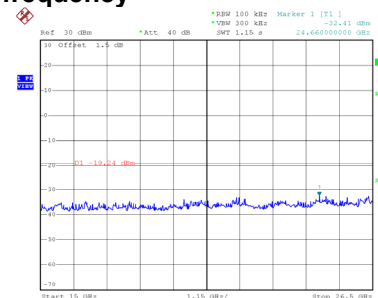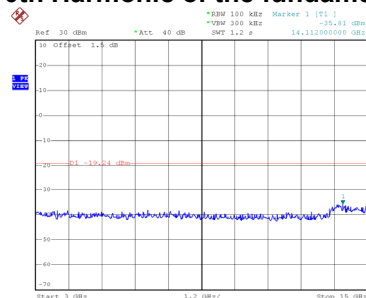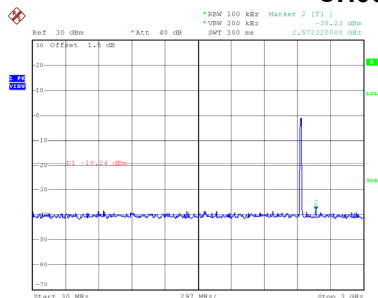


CH11 – 10th Harmonic of the fundamental frequency

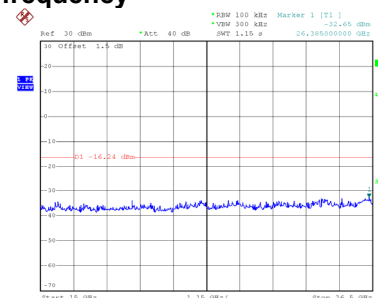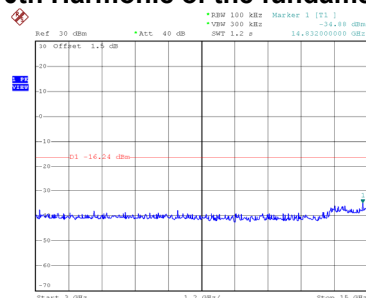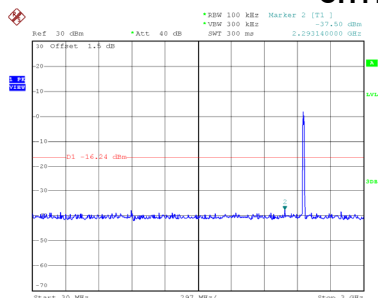


Test Mode TX G Mode_Ant. 2

Bandedge-CH01

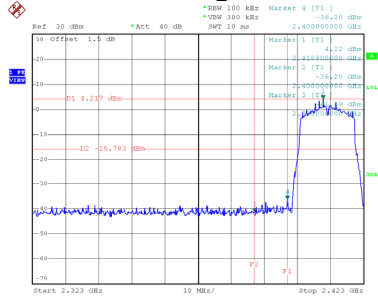


Date: 20.FEB.2020 13:07:23

Bandedge-CH11

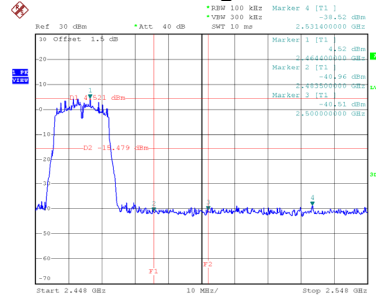


Date: 20.FEB.2020 13:10:54


CH01 – 10th Harmonic of the fundamental frequency

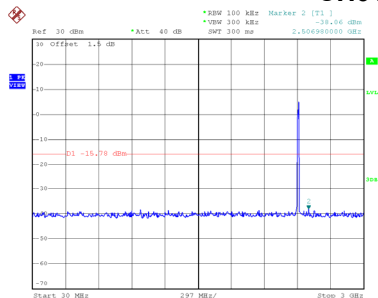

Date: 20.FEB.2020 13:07:17

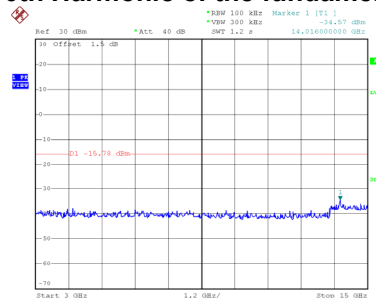


Date: 20.FEB.2020 13:07:46

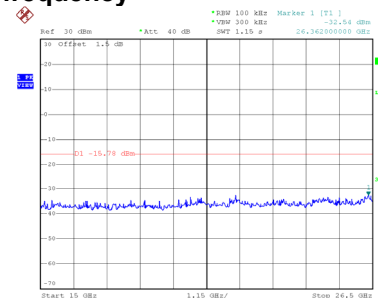


Date: 20.FEB.2020 13:07:56


CH06 – 10th Harmonic of the fundamental frequency

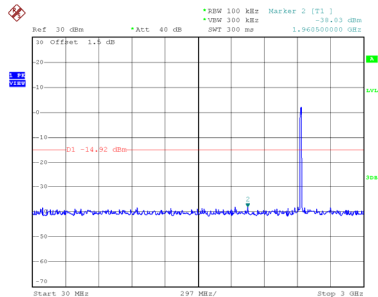

Date: 20.FEB.2020 13:09:35

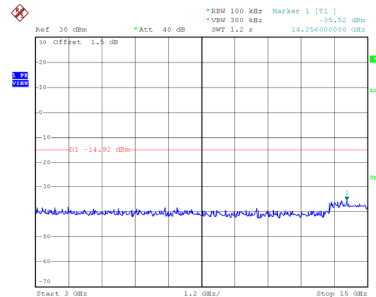


Date: 20.FEB.2020 13:09:44

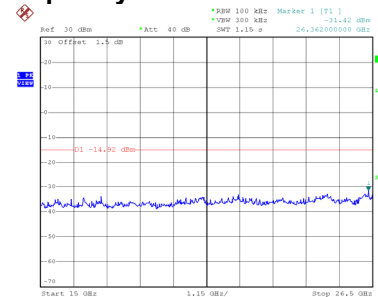


Date: 20.FEB.2020 13:09:53


CH11 – 10th Harmonic of the fundamental frequency

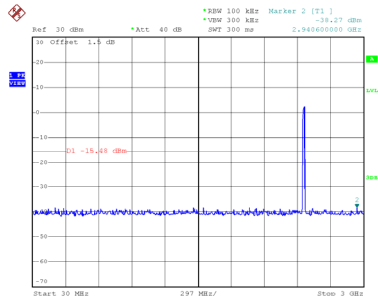

Date: 20.FEB.2020 13:11:08

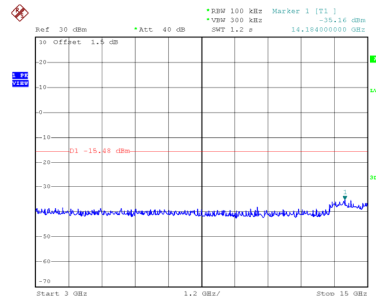


Date: 20.FEB.2020 13:11:17

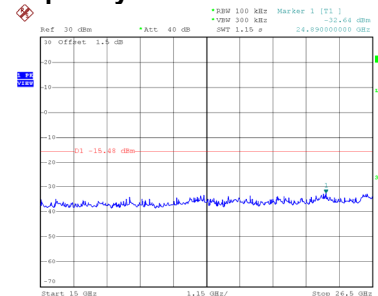

Date: 20.FEB.2020 13:11:27


Test Mode	TX G Mode_Ant. 3
-----------	------------------

Bandedge-CH01

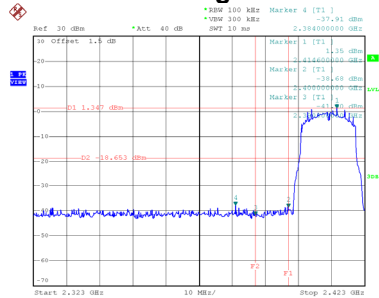


Date: 20.FEB.2020 13:55:44

Bandedge-CH11

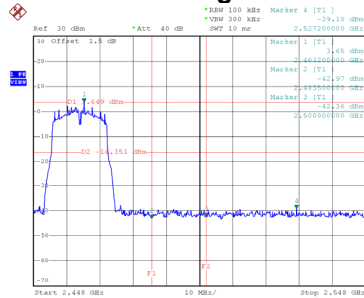


Date: 20.FEB.2020 13:58:39


CH01 – 10th Harmonic of the fundamental frequency

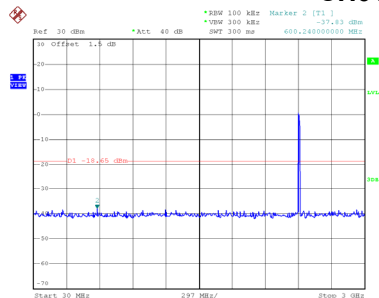

Date: 20.FEB.2020 13:55:59

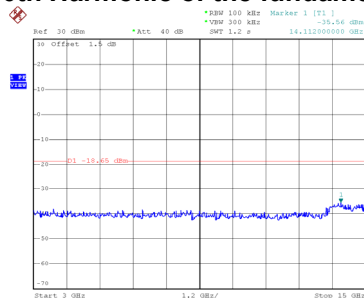


Date: 20.FEB.2020 13:56:08

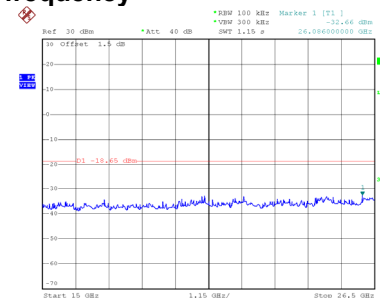


Date: 20.FEB.2020 13:56:17


CH06 – 10th Harmonic of the fundamental frequency

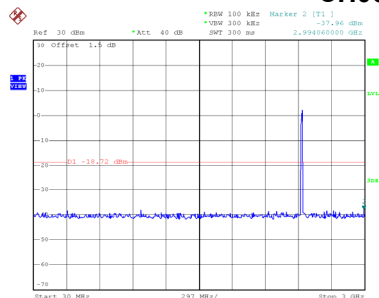

Date: 20.FEB.2020 13:57:28

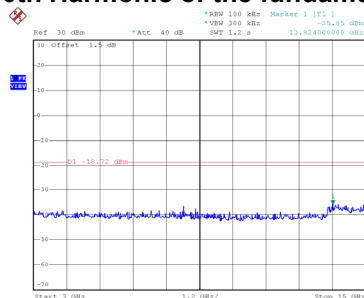


Date: 20.FEB.2020 13:57:37

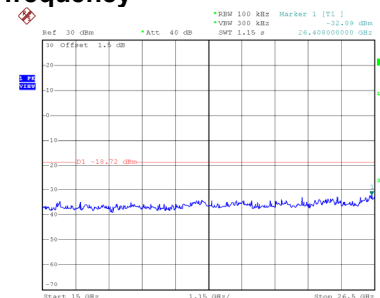


Date: 20.FEB.2020 13:57:46


CH11 – 10th Harmonic of the fundamental frequency

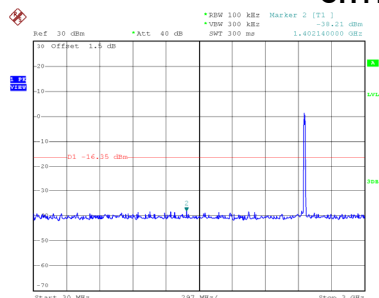

Date: 20.FEB.2020 13:58:53

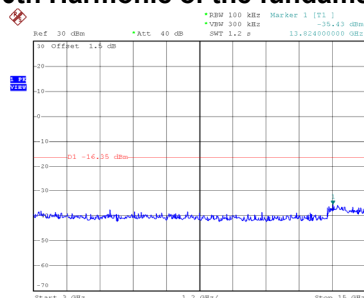


Date: 20.FEB.2020 13:59:02

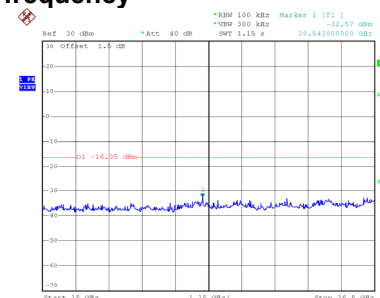

Date: 20.FEB.2020 13:59:11


Test Mode TX G Mode_Ant. 4

Bandedge-CH01

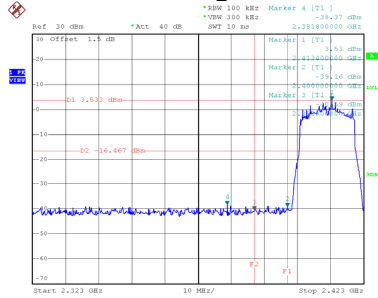


Date: 20.FEB.2020 14:24:11

Bandedge-CH11

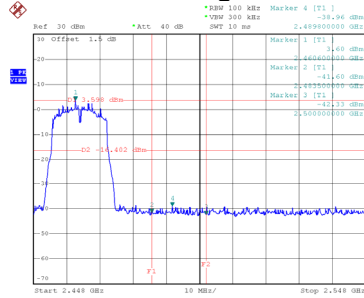


Date: 20.FEB.2020 14:27:19


CH01 – 10th Harmonic of the fundamental frequency

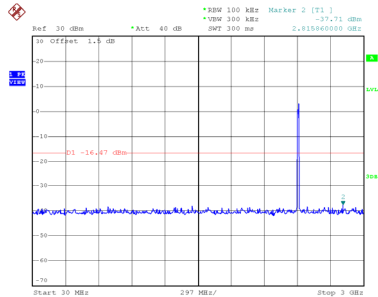

Date: 20.FEB.2020 14:24:26

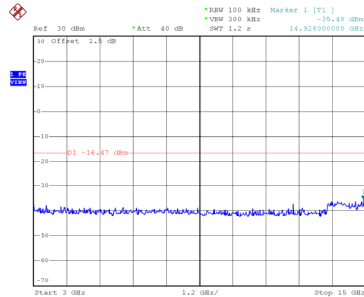


Date: 20.FEB.2020 14:24:35

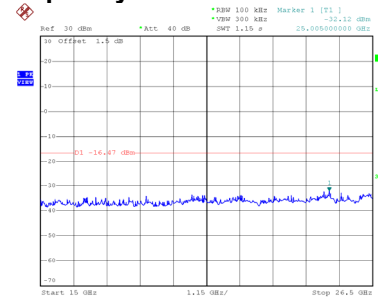


Date: 20.FEB.2020 14:24:44


CH06 – 10th Harmonic of the fundamental frequency

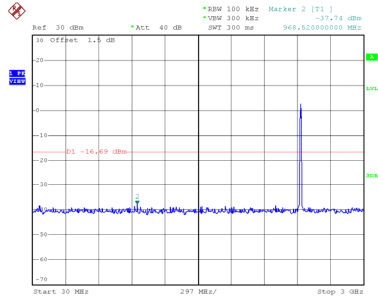

Date: 20.FEB.2020 14:25:14

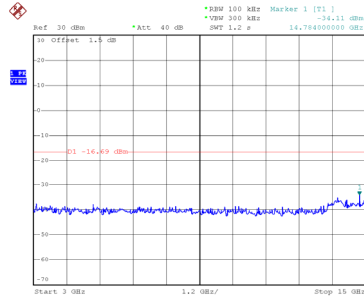


Date: 20.FEB.2020 14:26:03

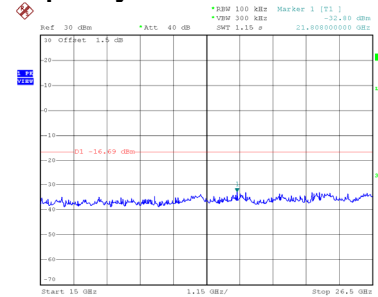


Date: 20.FEB.2020 14:26:12


CH11 – 10th Harmonic of the fundamental frequency

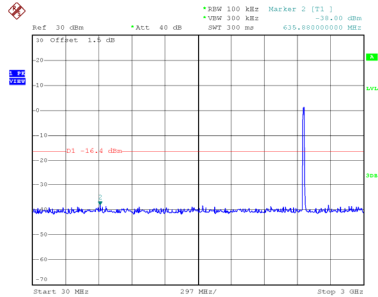

Date: 20.FEB.2020 14:27:33

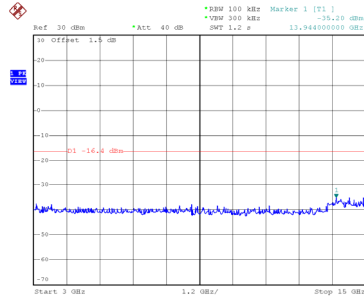


Date: 20.FEB.2020 14:27:42

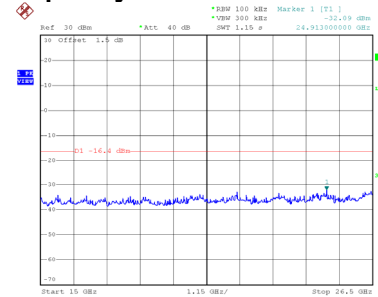

Date: 20.FEB.2020 14:27:51


Test Mode TX N-20M Mode_Ant. 1

Bandedge-CH01

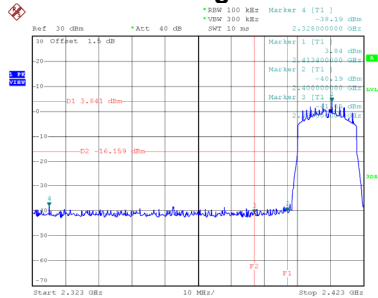


Date: 20.FEB.2020 13:39:45

Bandedge-CH11

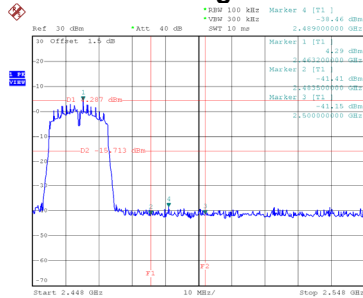


Date: 20.FEB.2020 13:42:37


CH01 – 10th Harmonic of the fundamental frequency

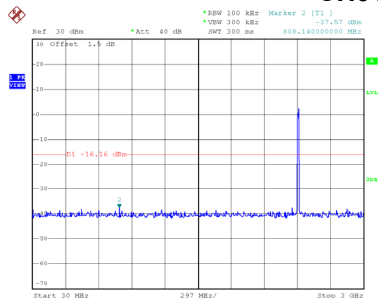

Date: 20.FEB.2020 13:39:59

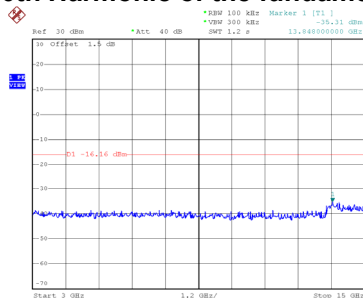


Date: 20.FEB.2020 13:40:08

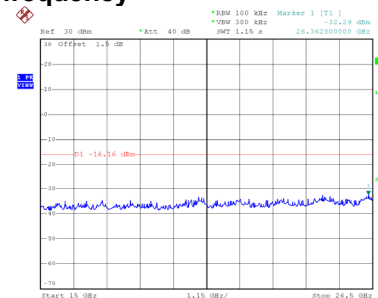


Date: 20.FEB.2020 13:40:17


CH06 – 10th Harmonic of the fundamental frequency

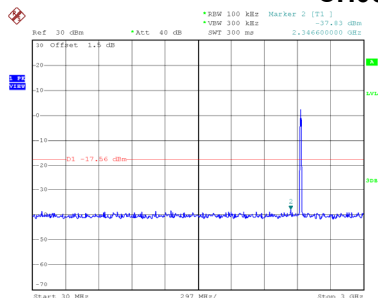

Date: 20.FEB.2020 13:41:24

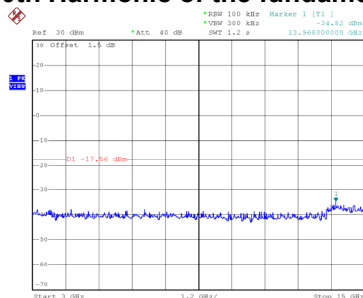


Date: 20.FEB.2020 13:41:33

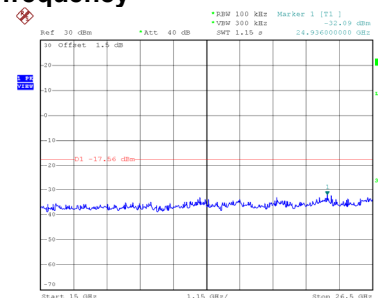


Date: 20.FEB.2020 13:41:42


CH11 – 10th Harmonic of the fundamental frequency

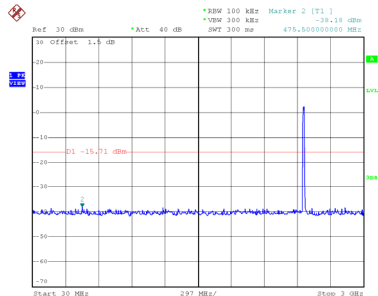

Date: 20.FEB.2020 13:42:15

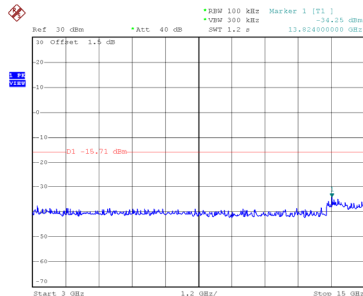


Date: 20.FEB.2020 13:43:00

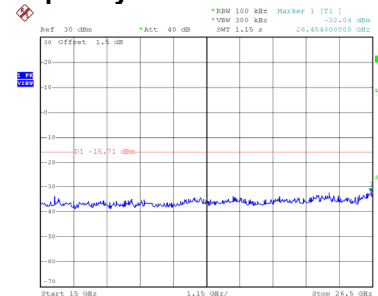

Date: 20.FEB.2020 13:43:09


Test Mode TX N-20M Mode_Ant. 2

Bandedge-CH01

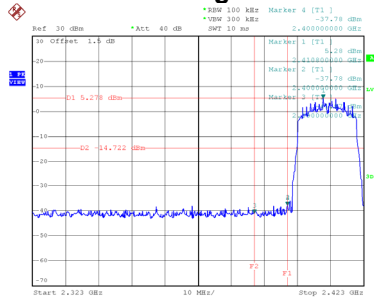


Date: 20.FEB.2020 13:12:55

Bandedge-CH11

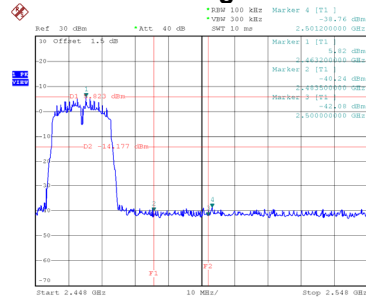


Date: 20.FEB.2020 13:16:12


CH01 – 10th Harmonic of the fundamental frequency

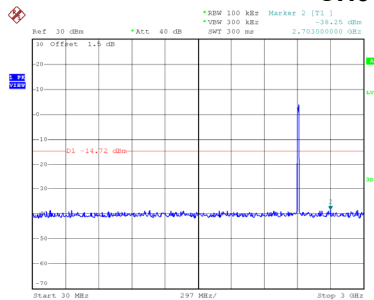

Date: 20.FEB.2020 13:13:09

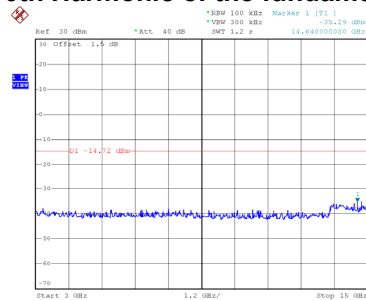


Date: 20.FEB.2020 13:13:19

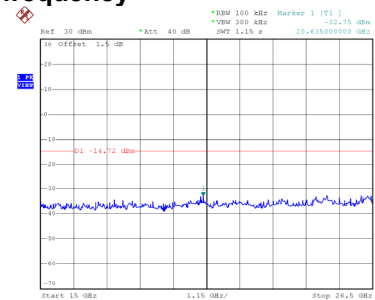


Date: 20.FEB.2020 13:13:28


CH06 – 10th Harmonic of the fundamental frequency

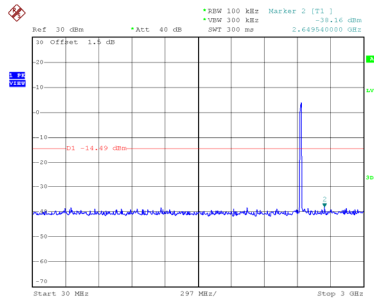

Date: 20.FEB.2020 13:14:36

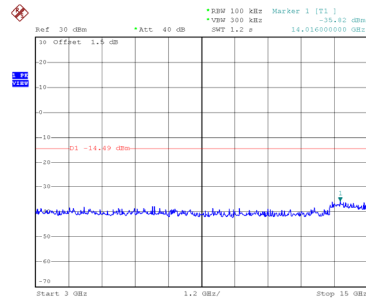


Date: 20.FEB.2020 13:14:45

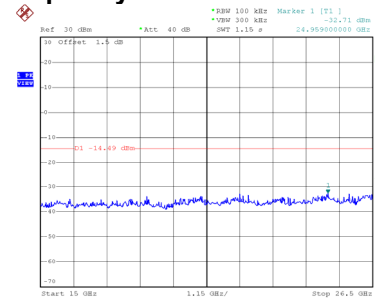


Date: 20.FEB.2020 13:14:54


CH11 – 10th Harmonic of the fundamental frequency

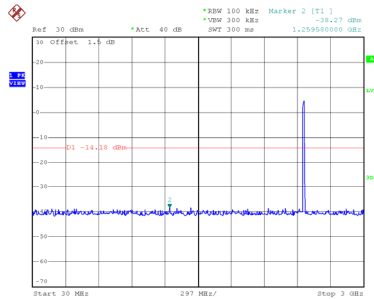

Date: 20.FEB.2020 13:16:27

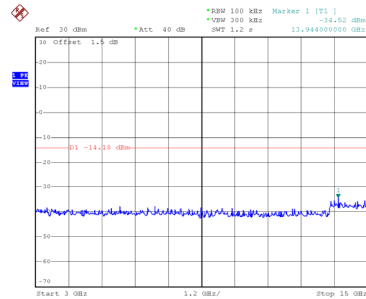


Date: 20.FEB.2020 13:16:36

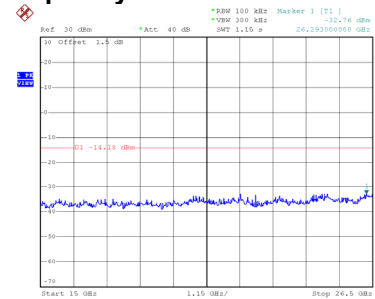

Date: 20.FEB.2020 13:16:45


Test Mode TX N-20M Mode_Ant. 3

Bandedge-CH01

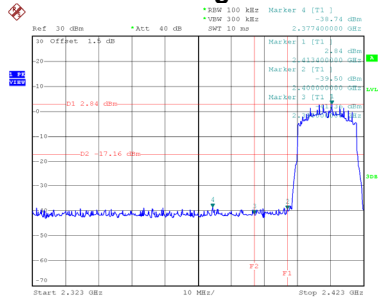


Date: 20.FEB.2020 14:01:11

Bandedge-CH11

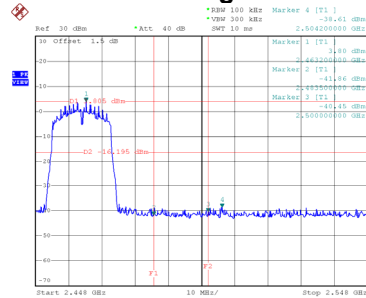


Date: 20.FEB.2020 14:04:15


CH01 – 10th Harmonic of the fundamental frequency

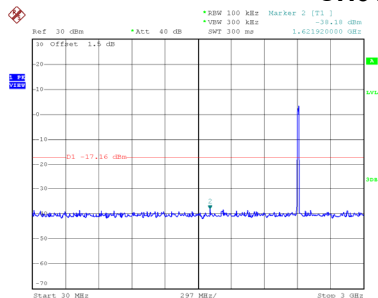

Date: 20.FEB.2020 14:01:25

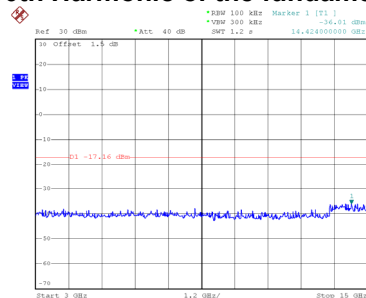


Date: 20.FEB.2020 14:01:34

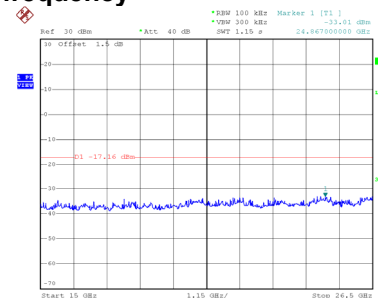


Date: 20.FEB.2020 14:01:44


CH06 – 10th Harmonic of the fundamental frequency

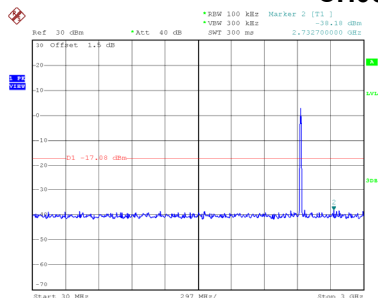

Date: 20.FEB.2020 14:02:17

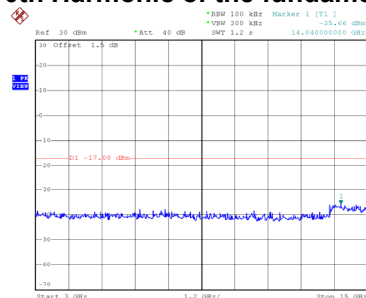


Date: 20.FEB.2020 14:03:06

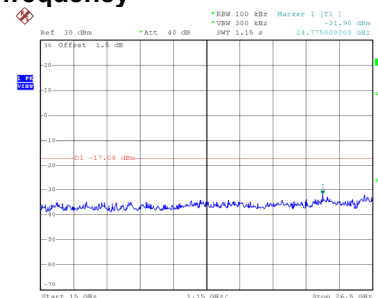


Date: 20.FEB.2020 14:03:15


CH11 – 10th Harmonic of the fundamental frequency

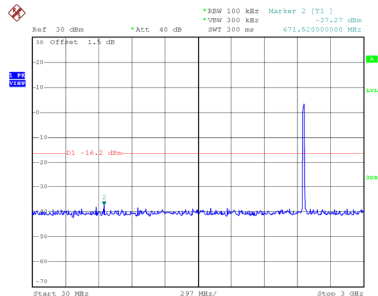

Date: 20.FEB.2020 14:04:29

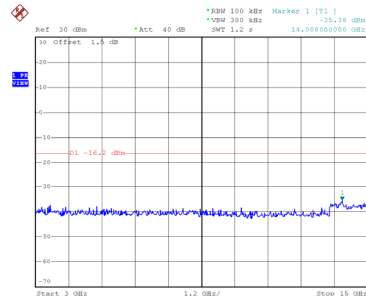


Date: 20.FEB.2020 14:04:38

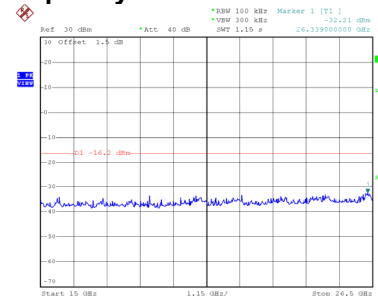

Date: 20.FEB.2020 14:04:47


Test Mode TX N-20M Mode_Ant. 4

Bandedge-CH01

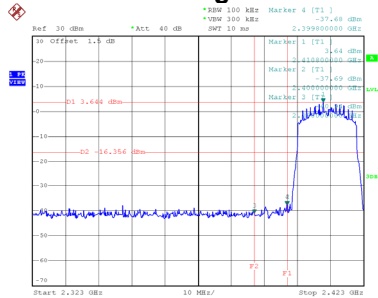


Date: 20.FEB.2020 14:28:53

Bandedge-CH11

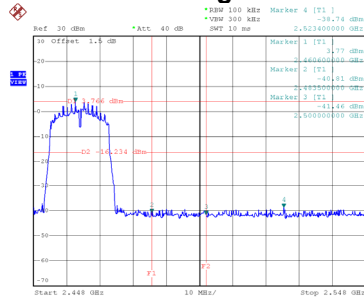


Date: 20.FEB.2020 14:32:59


CH01 – 10th Harmonic of the fundamental frequency

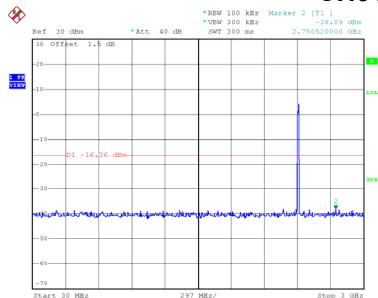

Date: 20.FEB.2020 14:29:08

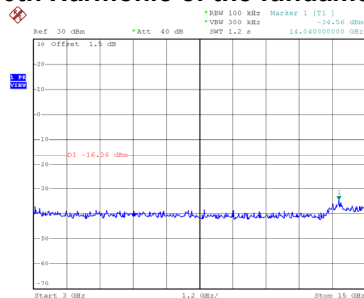


Date: 20.FEB.2020 14:29:17

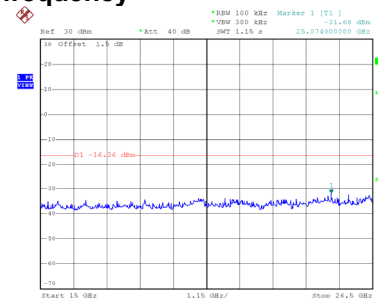


Date: 20.FEB.2020 14:29:26


CH06 – 10th Harmonic of the fundamental frequency

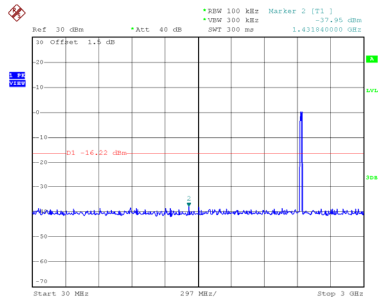

Date: 20.FEB.2020 14:31:47

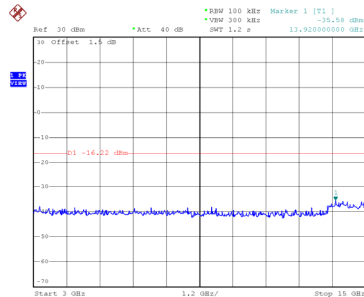


Date: 20.FEB.2020 14:31:56

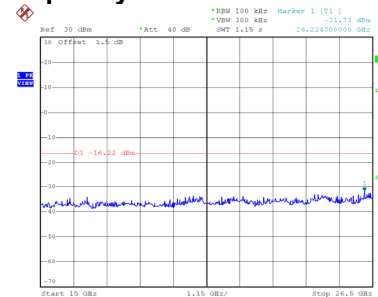


Date: 20.FEB.2020 14:32:05


CH11 – 10th Harmonic of the fundamental frequency

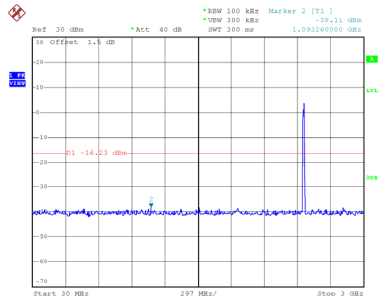

Date: 20.FEB.2020 14:33:13

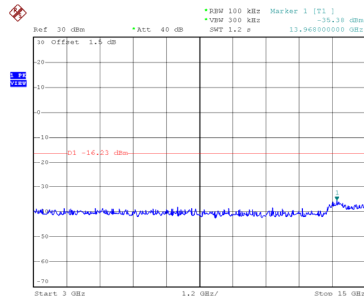


Date: 20.FEB.2020 14:33:22

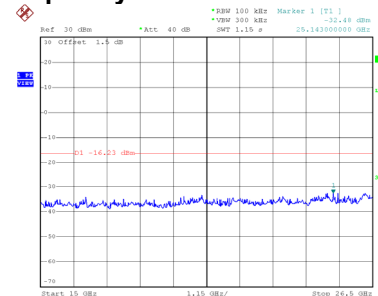

Date: 20.FEB.2020 14:33:31


Test Mode TX N-40M Mode_Ant. 1

Bandedge-CH03

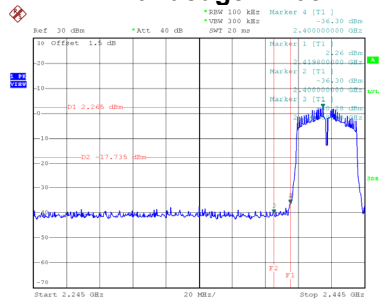


Date: 20.FEB.2020 13:44:14

Bandedge-CH09

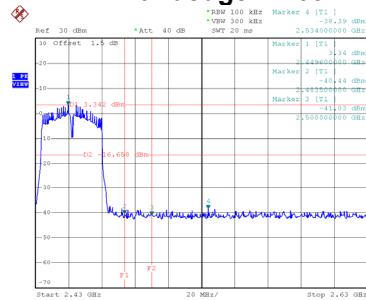


Date: 20.FEB.2020 13:47:15


CH03 – 10th Harmonic of the fundamental frequency

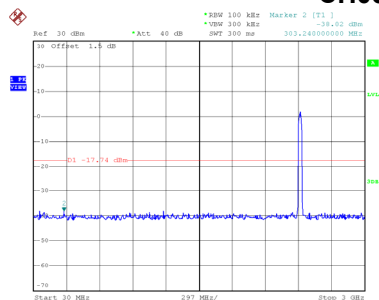

Date: 20.FEB.2020 13:44:28

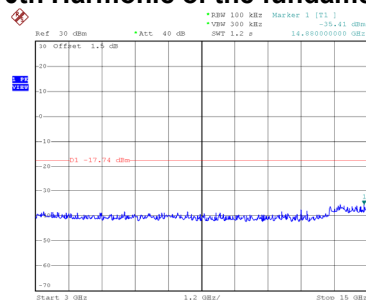


Date: 20.FEB.2020 13:44:37

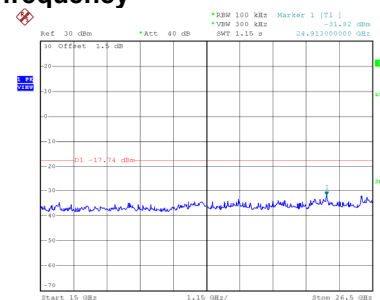


Date: 20.FEB.2020 13:44:46


CH06 – 10th Harmonic of the fundamental frequency

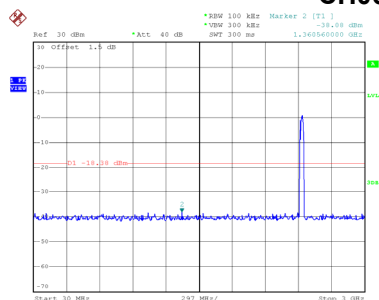

Date: 20.FEB.2020 13:45:19

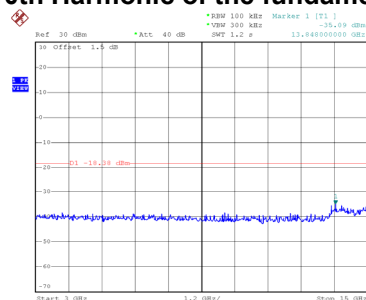


Date: 20.FEB.2020 13:45:58

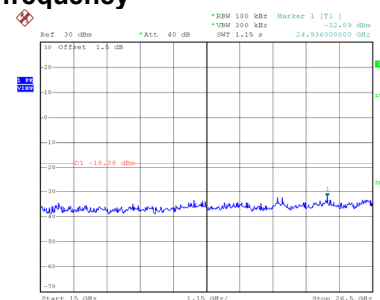


Date: 20.FEB.2020 13:46:07


CH09 – 10th Harmonic of the fundamental frequency

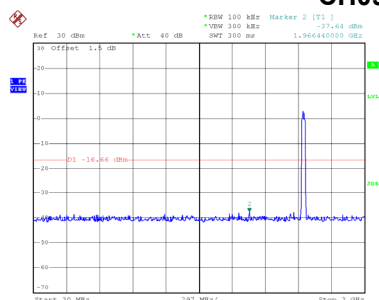

Date: 20.FEB.2020 13:47:30

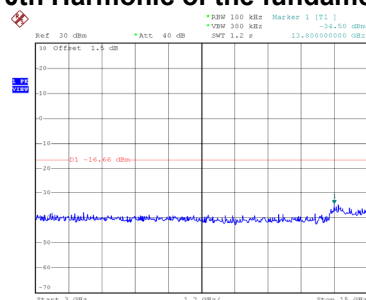


Date: 20.FEB.2020 13:47:39

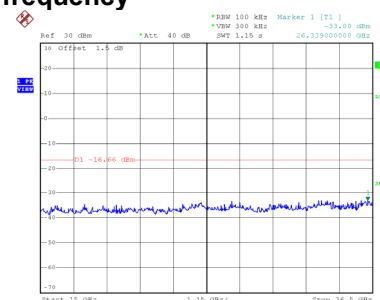

Date: 20.FEB.2020 13:47:48


Test Mode TX N-40M Mode_Ant. 2

Bandedge-CH03

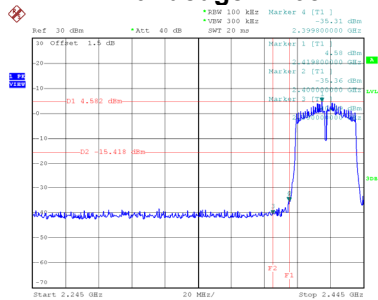


Date: 20.FEB.2020 13:17:54

Bandedge-CH09

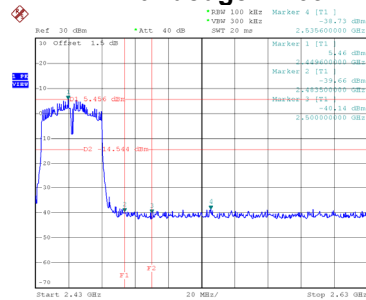


Date: 20.FEB.2020 13:21:32


CH03 – 10th Harmonic of the fundamental frequency

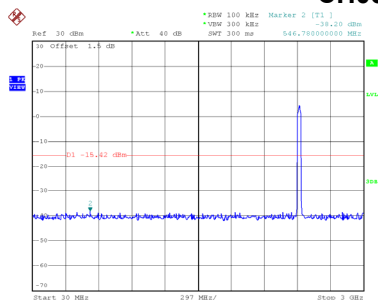

Date: 20.FEB.2020 13:18:08

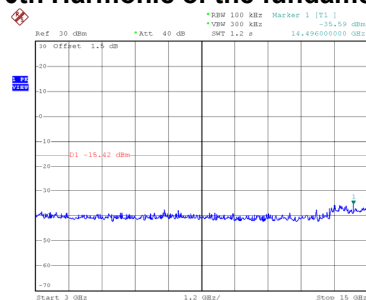


Date: 20.FEB.2020 13:18:17

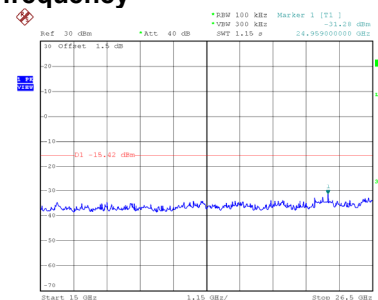


Date: 20.FEB.2020 13:18:27


CH06 – 10th Harmonic of the fundamental frequency

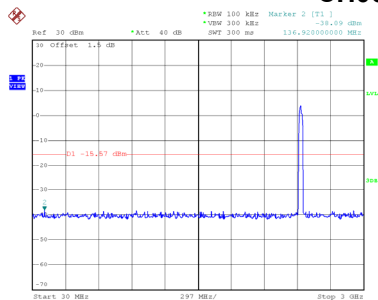

Date: 20.FEB.2020 13:20:16

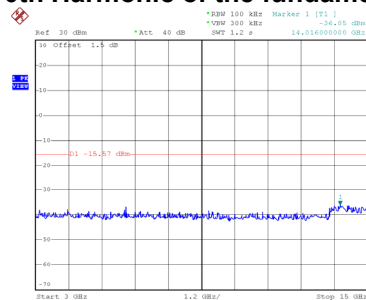


Date: 20.FEB.2020 13:20:25

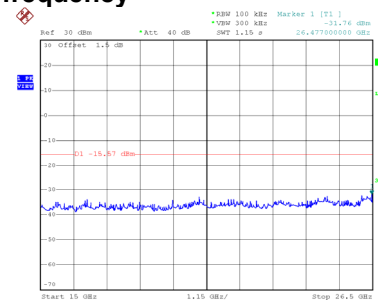


Date: 20.FEB.2020 13:20:34


CH09 – 10th Harmonic of the fundamental frequency

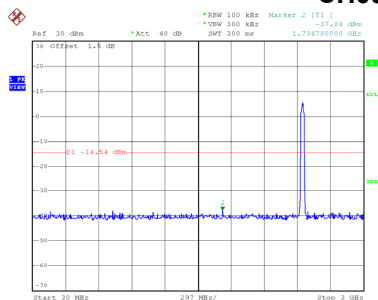

Date: 20.FEB.2020 13:21:46

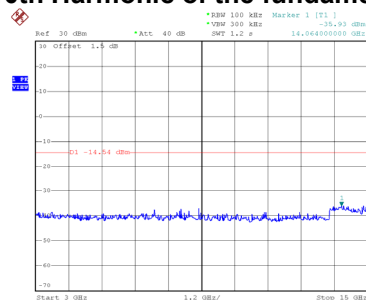


Date: 20.FEB.2020 13:21:55

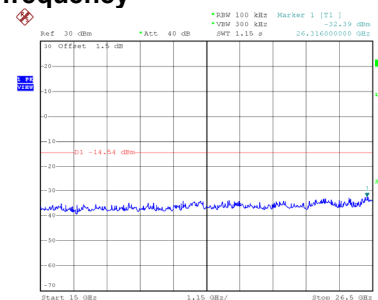

Date: 20.FEB.2020 13:22:05


Test Mode TX N-40M Mode_Ant. 3

Bandedge-CH03

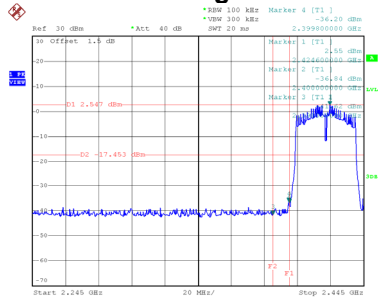


Date: 20.FEB.2020 14:05:58

Bandedge-CH09

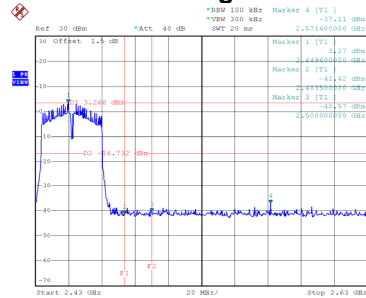


Date: 20.FEB.2020 14:08:32


CH03 – 10th Harmonic of the fundamental frequency

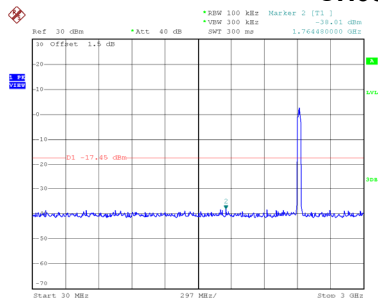

Date: 20.FEB.2020 14:06:12

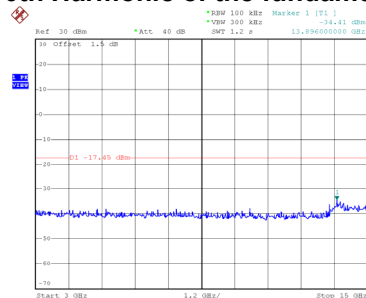


Date: 20.FEB.2020 14:06:21

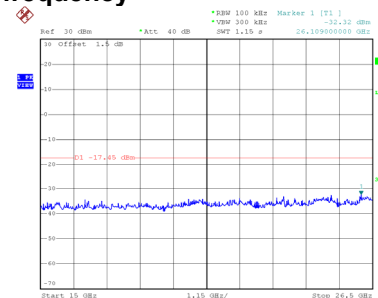


Date: 20.FEB.2020 14:06:30


CH06 – 10th Harmonic of the fundamental frequency

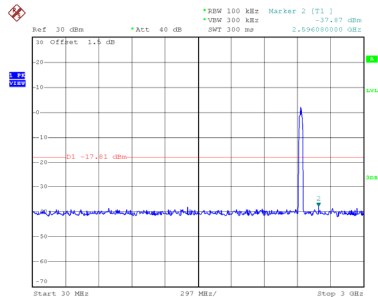

Date: 20.FEB.2020 14:07:13

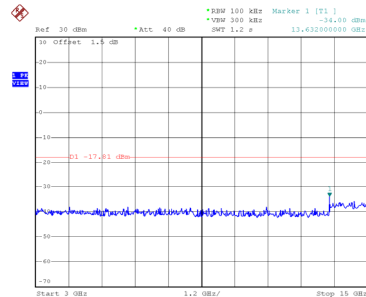


Date: 20.FEB.2020 14:07:40

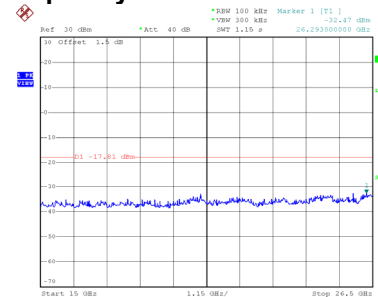


Date: 20.FEB.2020 14:07:49


CH09 – 10th Harmonic of the fundamental frequency

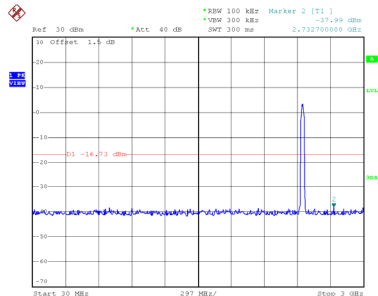

Date: 20.FEB.2020 14:08:47

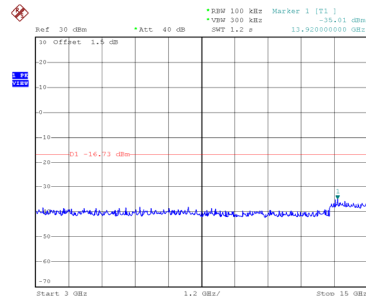


Date: 20.FEB.2020 14:08:56

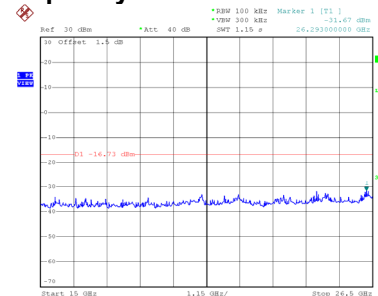

Date: 20.FEB.2020 14:09:05


Test Mode TX N-40M Mode_Ant. 4

Bandedge-CH03

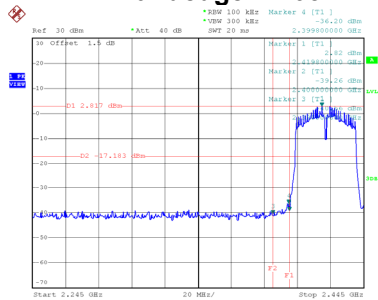


Date: 20.FEB.2020 14:34:19

Bandedge-CH09

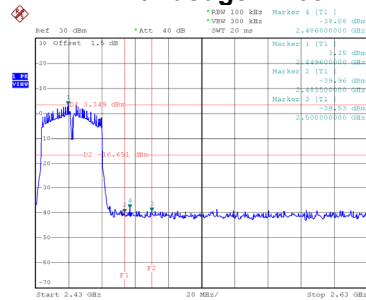


Date: 20.FEB.2020 14:37:02


CH03 – 10th Harmonic of the fundamental frequency

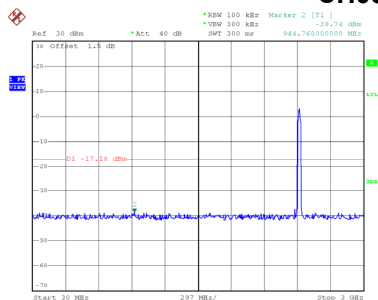

Date: 20.FEB.2020 14:34:33

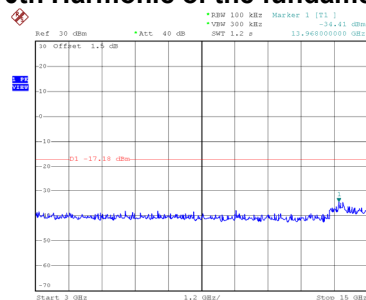


Date: 20.FEB.2020 14:34:42

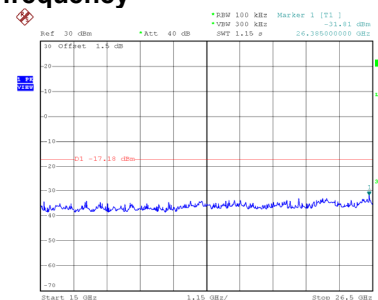


Date: 20.FEB.2020 14:34:51


CH06 – 10th Harmonic of the fundamental frequency

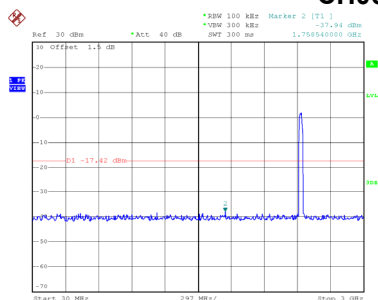

Date: 20.FEB.2020 14:35:11

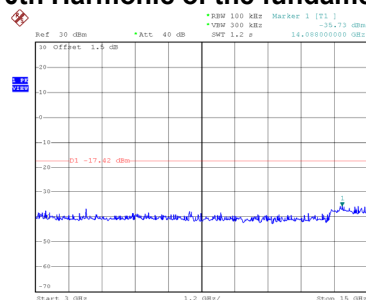


Date: 20.FEB.2020 14:36:00

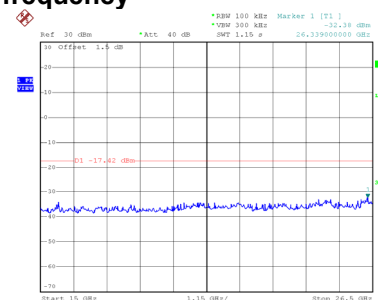


Date: 20.FEB.2020 14:36:09


CH09 – 10th Harmonic of the fundamental frequency

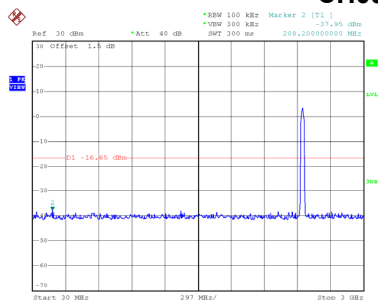

Date: 20.FEB.2020 14:37:17

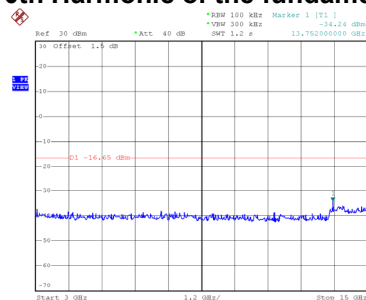

Date: 20.FEB.2020 14:37:26

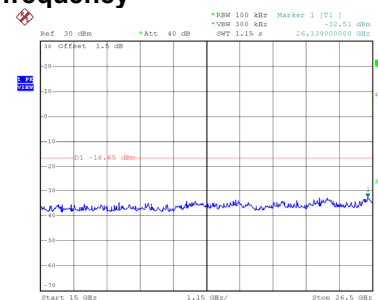




Date: 20.FEB.2020 14:37:35

APPENDIX H - POWER SPECTRAL DENSITY

Non-Beamforming




Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-8.12	8	Complies
06	2437	-7.76	8	Complies
11	2462	-5.26	8	Complies

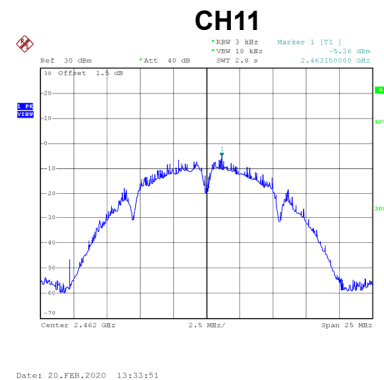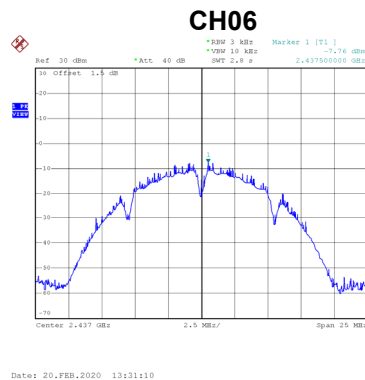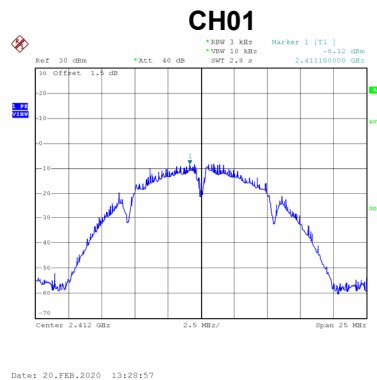


Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.50	8	Complies
06	2437	-5.64	8	Complies
11	2462	-4.40	8	Complies

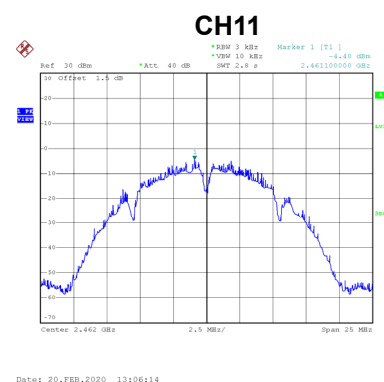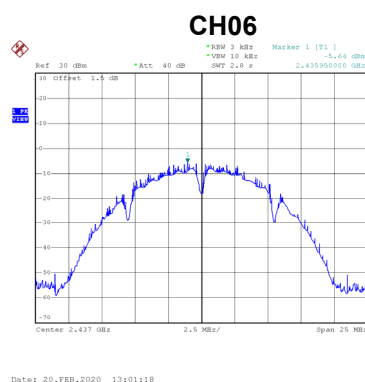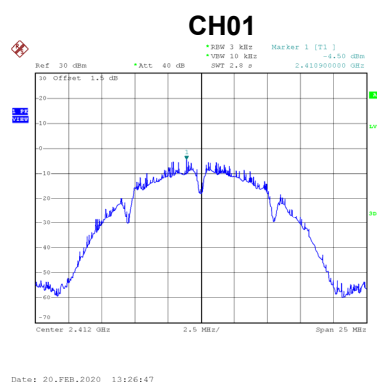


Test Mode	TX B Mode_Ant. 3
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.26	8	Complies
06	2437	-7.00	8	Complies
11	2462	-6.10	8	Complies

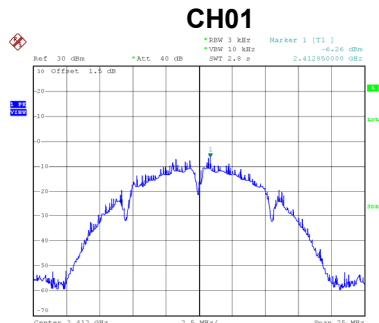

Date: 20.FEB.2020 13:50:33

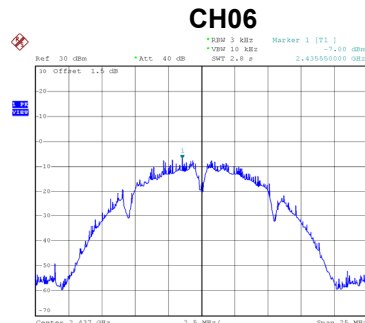


Date: 20.FEB.2020 13:52:45

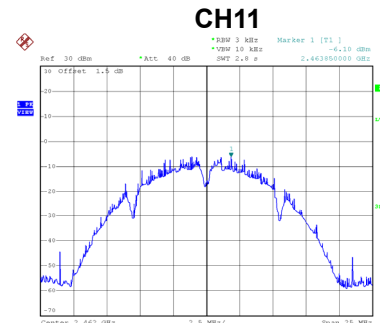


Date: 20.FEB.2020 13:54:48

Test Mode	TX B Mode_Ant. 4
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.72	8	Complies
06	2437	-3.78	8	Complies
11	2462	-5.21	8	Complies

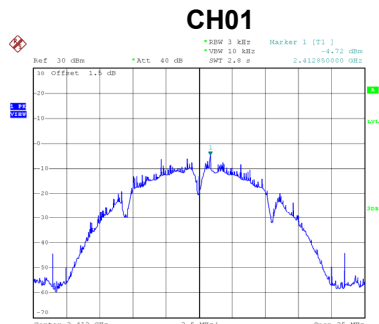

Date: 20.FEB.2020 14:18:51

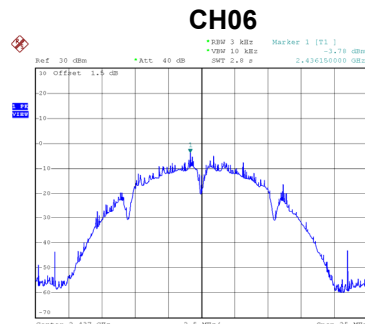

Date: 20.FEB.2020 14:21:13

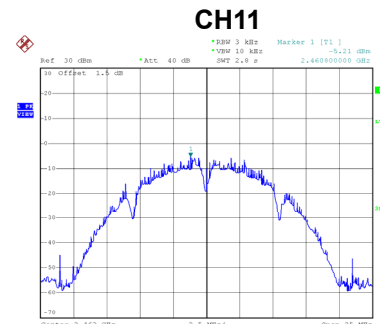


Date: 20.FEB.2020 14:23:11

Test Mode	TX B Mode_Total
-----------	-----------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	0.35	4.98	Complies
06	2437	0.25	4.98	Complies
11	2462	0.82	4.98	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-13.70	8	Complies
06	2437	-14.00	8	Complies
11	2462	-11.80	8	Complies

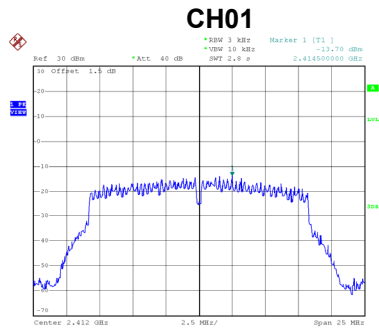

Date: 20.FEB.2020 13:35:28

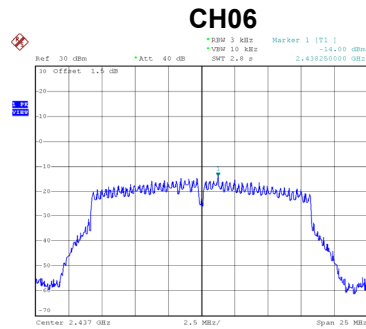


Date: 20.FEB.2020 13:37:23

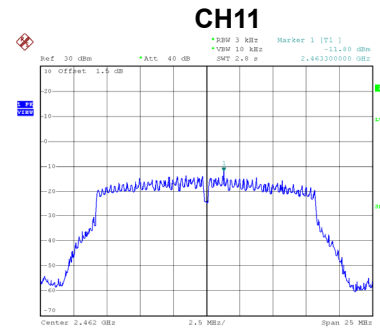


Date: 20.FEB.2020 13:38:56

Test Mode	TX G Mode_Ant. 2
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-12.23	8	Complies
06	2437	-12.04	8	Complies
11	2462	-11.42	8	Complies

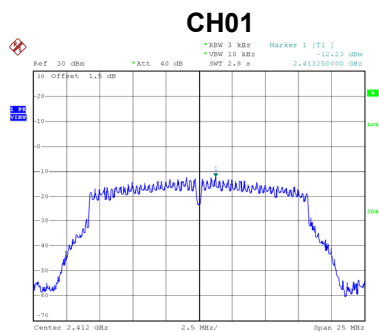

Date: 20.FEB.2020 13:08:06

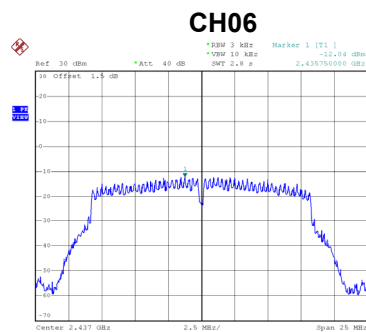


Date: 20.FEB.2020 13:10:03

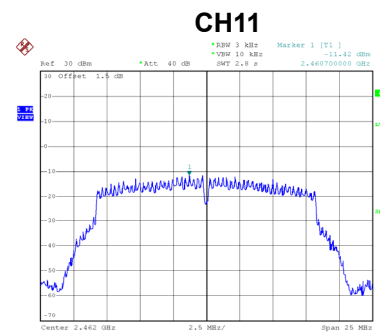


Date: 20.FEB.2020 13:11:37

Test Mode	TX G Mode_Ant. 3
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-14.17	8	Complies
06	2437	-13.67	8	Complies
11	2462	-13.70	8	Complies

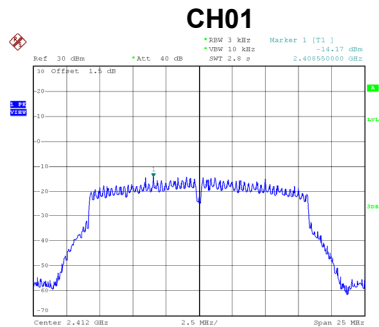

Date: 20.FEB.2020 13:56:27

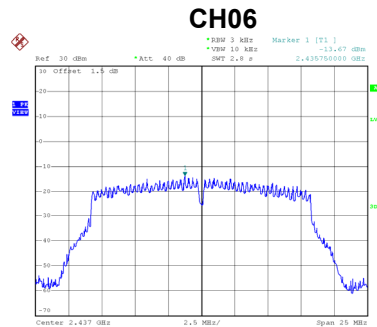


Date: 20.FEB.2020 13:57:56

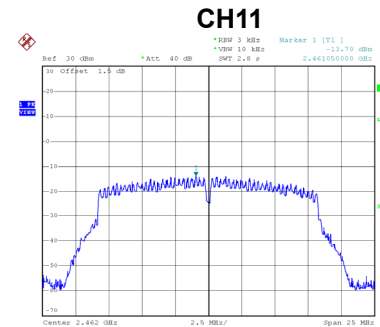


Date: 20.FEB.2020 13:59:21

Test Mode	TX G Mode_Ant. 4
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-13.64	8	Complies
06	2437	-13.01	8	Complies
11	2462	-12.03	8	Complies

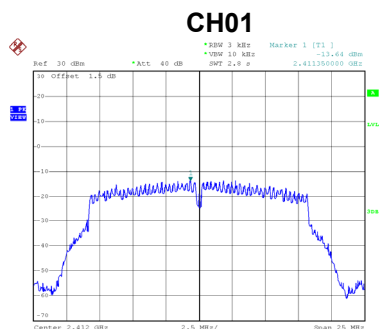

Date: 20.FEB.2020 14:24:54

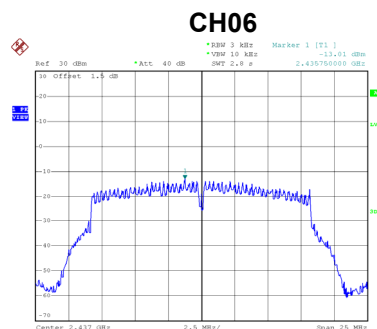

Date: 20.FEB.2020 14:26:22

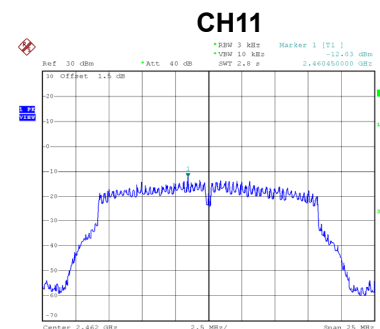


Date: 20.FEB.2020 14:28:01

Test Mode	TX G Mode_Total
-----------	-----------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-7.35	4.98	Complies
06	2437	-7.09	4.98	Complies
11	2462	-6.14	4.98	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-12.98	8	Complies
06	2437	-14.03	8	Complies
11	2462	-12.82	8	Complies

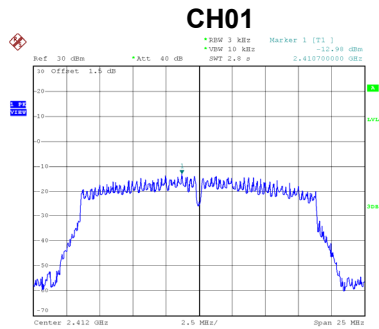

Date: 20.FEB.2020 13:40:27

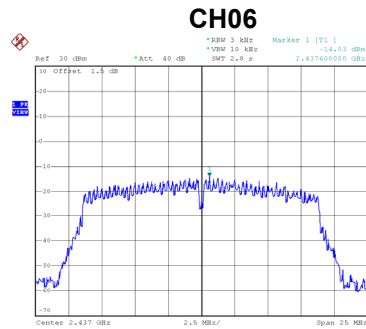


Date: 20.FEB.2020 13:41:52

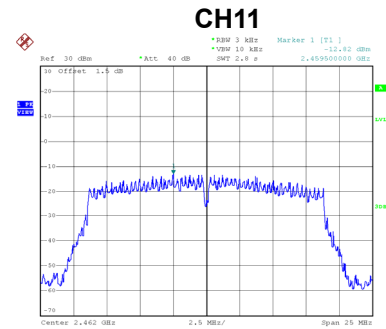


Date: 20.FEB.2020 13:43:19

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-10.84	8	Complies
06	2437	-10.82	8	Complies
11	2462	-9.10	8	Complies

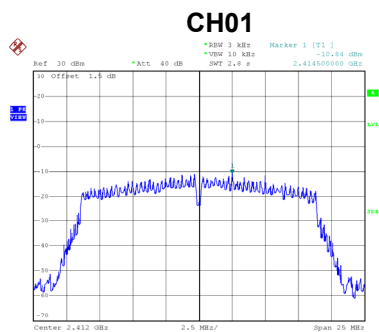

Date: 20.FEB.2020 13:13:38

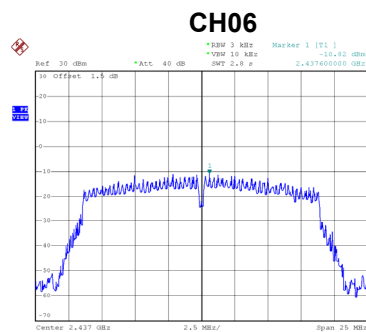


Date: 20.FEB.2020 13:15:05

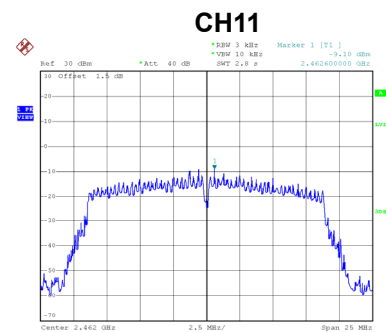


Date: 20.FEB.2020 13:16:56

Test Mode	TX N-20M Mode_Ant. 3
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-11.33	8	Complies
06	2437	-13.01	8	Complies
11	2462	-12.36	8	Complies

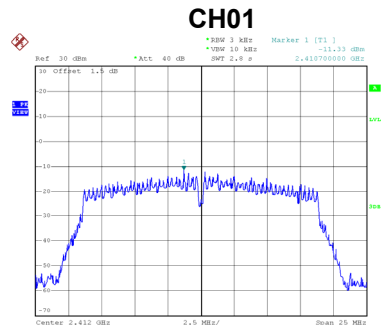

Date: 20.FEB.2020 14:01:54

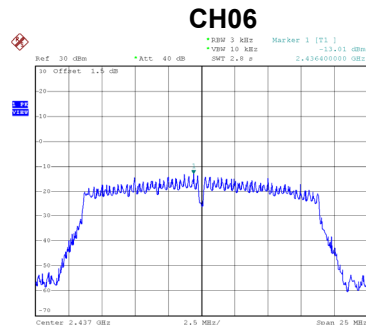


Date: 20.FEB.2020 14:03:25

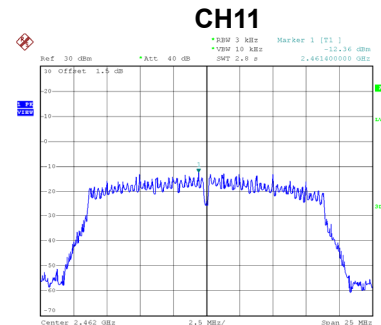


Date: 20.FEB.2020 14:04:57

Test Mode	TX N-20M Mode_Ant. 4
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-12.53	8	Complies
06	2437	-13.10	8	Complies
11	2462	-12.41	8	Complies

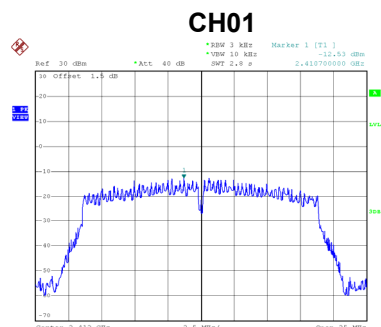

Date: 20.FEB.2020 14:29:36

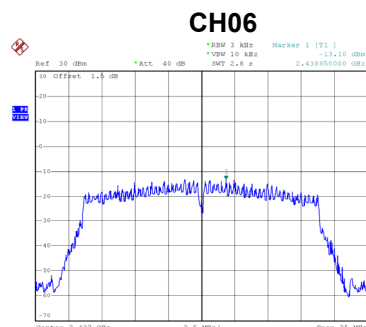

Date: 20.FEB.2020 14:32:15

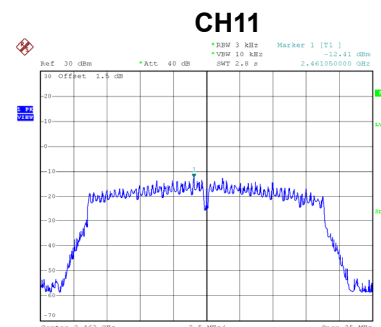


Date: 20.FEB.2020 14:33:41

Test Mode	TX N-20M Mode_Total
-----------	---------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.81	4.98	Complies
06	2437	-6.55	4.98	Complies
11	2462	-5.36	4.98	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-14.46	8	Complies
06	2437	-14.40	8	Complies
09	2452	-13.50	8	Complies

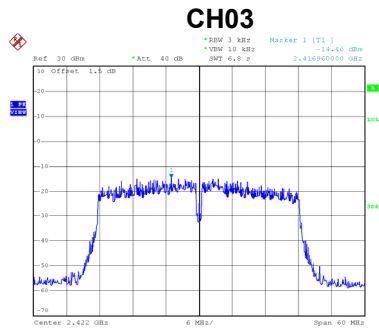

Date: 20.FEB.2020 13:44:59

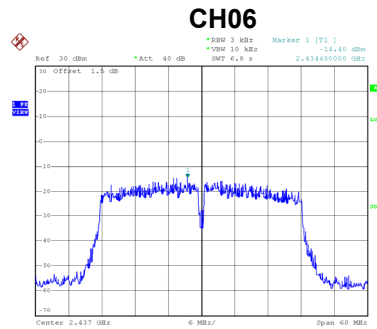


Date: 20.FEB.2020 13:46:20

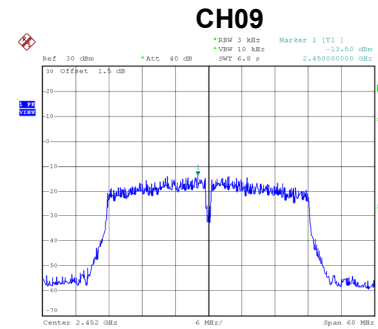


Date: 20.FEB.2020 13:46:01

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-10.84	8	Complies
06	2437	-10.01	8	Complies
09	2452	-10.30	8	Complies

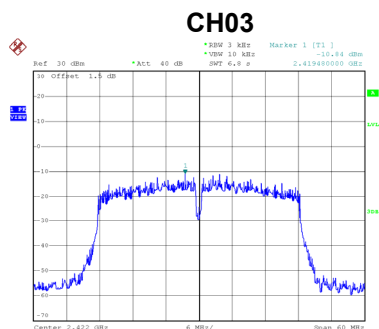

Date: 20.FEB.2020 13:18:40

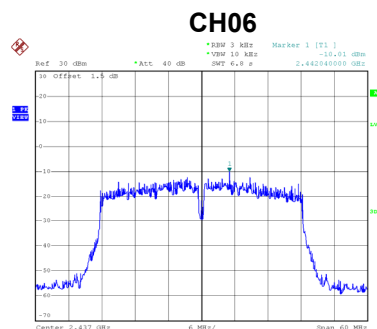


Date: 20.FEB.2020 13:20:47

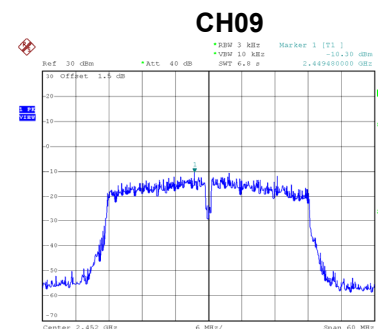


Date: 20.FEB.2020 13:22:18

Test Mode	TX N-40M Mode_Ant. 3
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-11.56	8	Complies
06	2437	-12.77	8	Complies
09	2452	-13.03	8	Complies

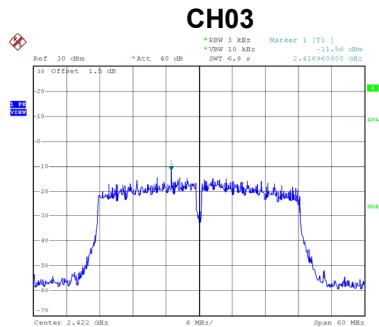

Date: 20.FEB.2020 14:06:43

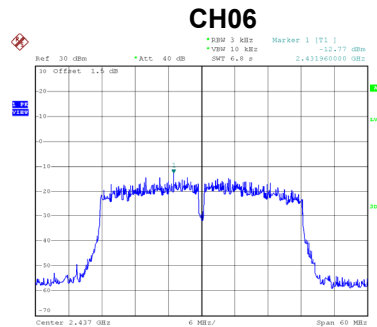


Date: 20.FEB.2020 14:08:01

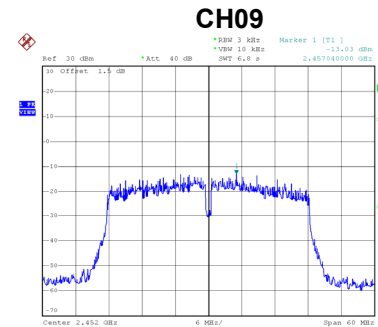


Date: 20.FEB.2020 14:09:18

Test Mode	TX N-40M Mode_Ant. 4
-----------	----------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-13.58	8	Complies
06	2437	-13.49	8	Complies
09	2452	-12.87	8	Complies

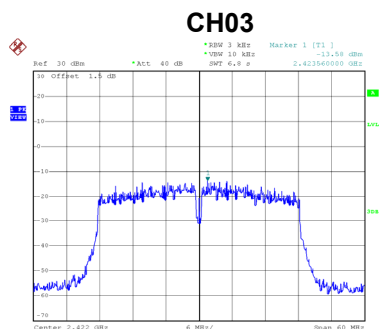

Date: 20.FEB.2020 14:35:04

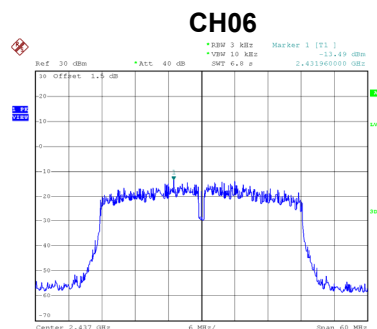

Date: 20.FEB.2020 14:36:22

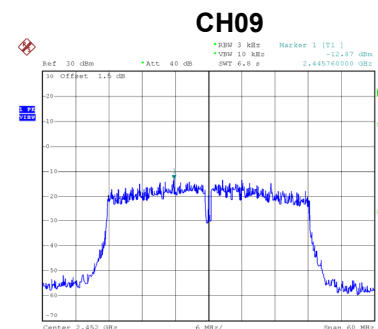

Date: 20.FEB.2020 14:37:47

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-6.35	4.98	Complies
06	2437	-6.31	4.98	Complies
09	2452	-6.21	4.98	Complies

End of Test Report