

FCC RF Test Report

APPLICANT : unitech electronics co., ltd.
EQUIPMENT : Rugged Handheld Computer
BRAND NAME : unitech
MODEL NAME : EA660
FCC ID : HLEEA660BWNW
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Aug. 25, 2023 ~ Sep. 14, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	6
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power	12
3.3 EIRP	13
3.4 Occupied Bandwidth	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability.....	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	19
4.4 Radiated Spurious Emission	20
5 List of Measuring Equipment.....	21
6 Measurement Uncertainty	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG372407H	01	Initial issue of report	Oct. 13, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.3	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 3.09 dB at 10740.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

unitech electronics co., ltd.

5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City, Taiwan

1.2 Manufacturer

unitech electronics co., ltd.

5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Rugged Handheld Computer
Brand Name	unitech
Model Name	EA660
FCC ID	HLEEA660BWNW
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	30kHz
Bandwidth	20MHz / 40MHz
Antenna Gain	<Ant. 5>: -2.2 dBi <Ant. 8>: -1.2 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted: 004400152020000 Radiation: 357458980006695
HW Version	V4
SW Version	ST6729A_1280_Unitech_patchbuild_20230815181058934
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. 5G NR n48 supports SA mode only.
3. The maximum EIRP is calculated from max output power and antenna gain, only the maximum EIRP of Ant. 8 is shown in the report.
4. 5G NR n48 UL_MIMO mode only supports CP-OFDM Modulation, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
5. For n48 MIMO mode, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{\text{ANT}})$ according to KDB 662911 D01.

1.4 Maximum EIRP Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3560.01~3690.00	0.1406	18M2G7D	0.1109	18M3W7D
40	3570.00~3679.98	0.1462	37M9G7D	0.1143	37M9W7D

Note: All modulations have been tested, and only the worst test results are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-KS	AUDIX	E3	210616

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n48	-		-	v		v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n48	-		-	v		v		v	v	v	v		v		v	
Adjacent Channel Leakage Ratio	n48	-		-	v		v	v	v				v	v	v	v	v
Conducted Band Edge	n48	-		-	v		v	v	v				v	v	v	v	v
Conducted Spurious Emission	n48	-		-	v		v	v	v				v		v	v	v
E.I.R.P	n48	-		-	v		v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	n48	-		-			v		v					v		v	
Radiated Spurious Emission	n48	Worst Case													v	v	v
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. Frequency Stability: Normal Voltage =3.87V ; Low Voltage =3.4V; High Voltage =4.45V																

2.2 Connection Diagram of Test System

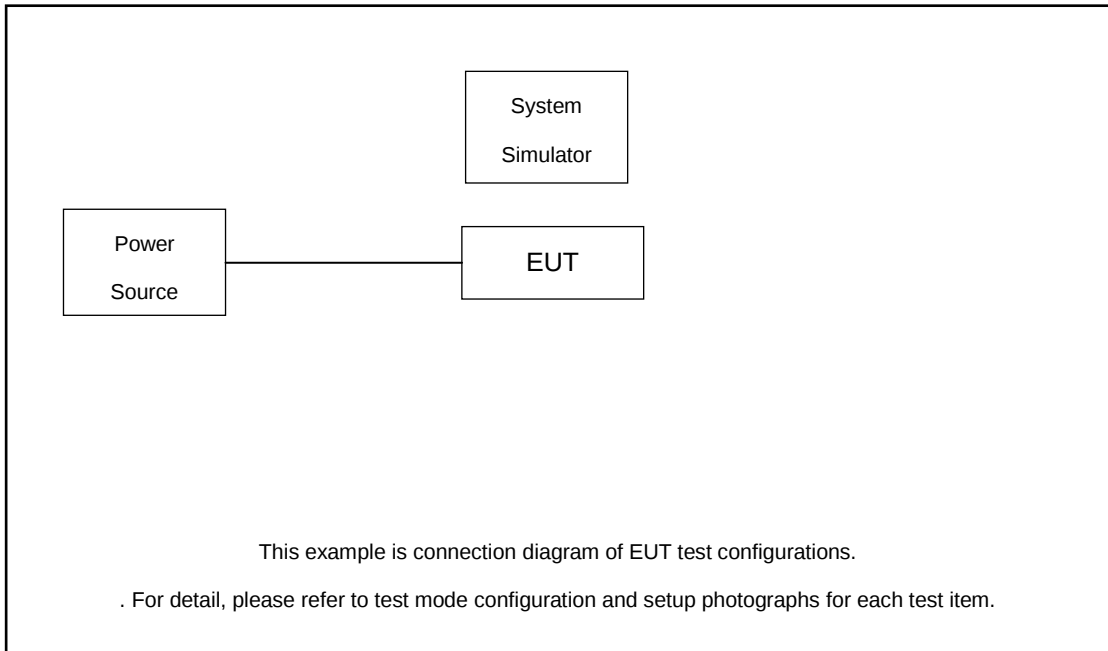

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 6.5 + 20 = 26.5 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power / ACLR



3.1.3 Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.1.4 Frequency Stability

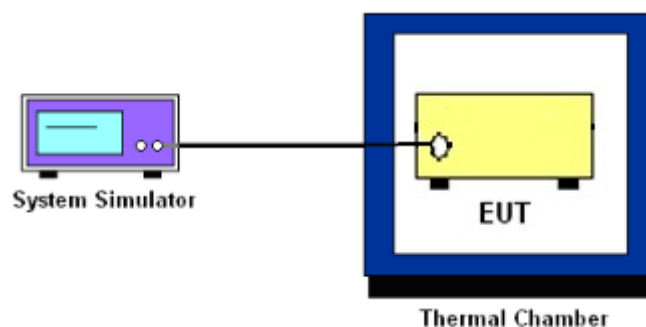

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark:

The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

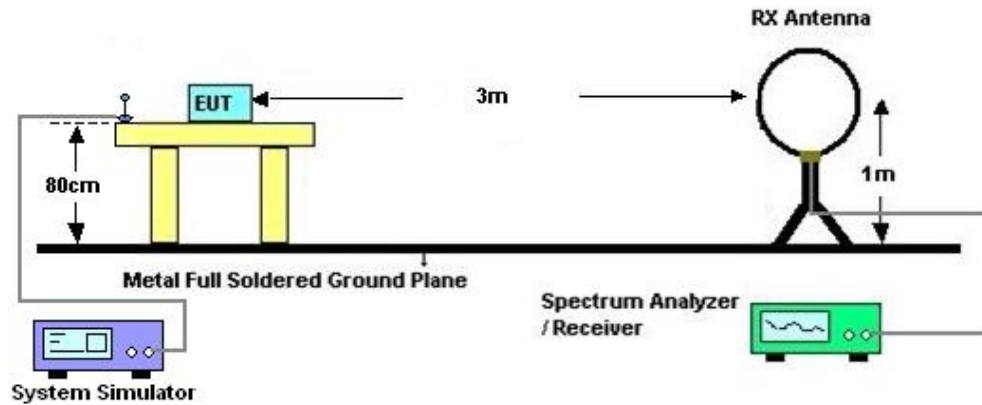

4.2.2 For radiated test from 30MHz to 1GHz

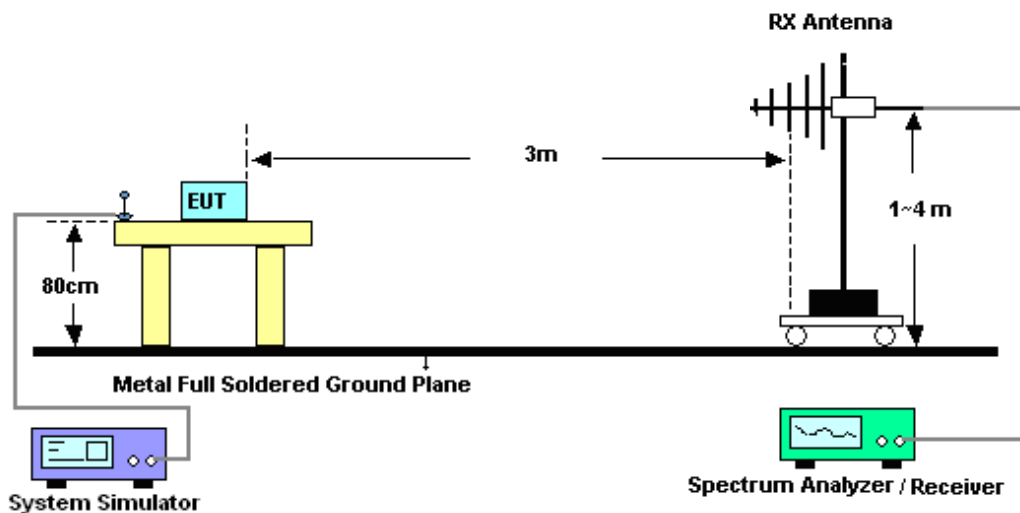

4.2.3 For radiated test above 1GHz

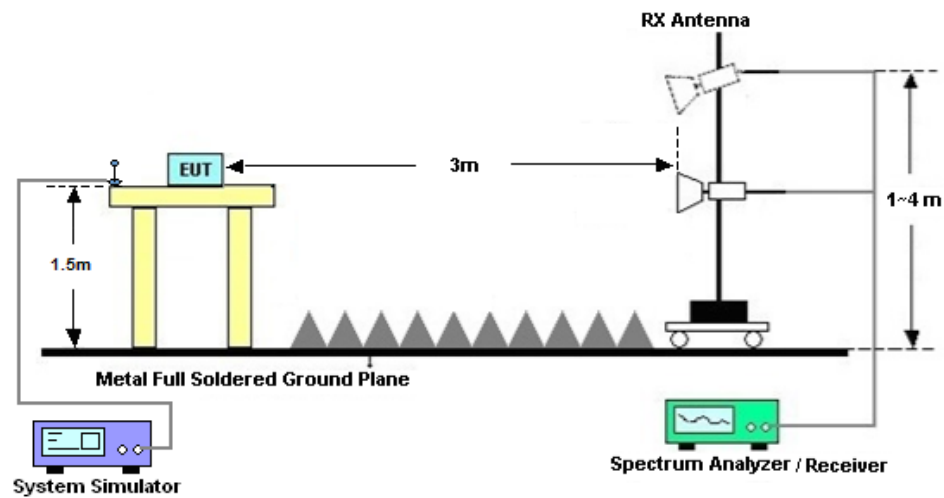

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Aug. 25, 2023~ Sep. 14, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	/	Aug. 25, 2023~ Sep. 14, 2023	/	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Aug. 25, 2023~ Sep. 14, 2023	Jul. 05, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	May 15, 2023	Sep. 05, 2023	May 14, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Sep. 05, 2023	Oct. 15, 2023	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 23, 2022	Sep. 05, 2023	Dec. 22, 2023	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 15, 2022	Sep. 05, 2023	Nov. 14, 2023	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 17, 2022	Sep. 05, 2023	Oct. 16, 2023	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 05, 2023	Sep. 05, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 05, 2023	Sep. 05, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 05, 2023	Sep. 05, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 12, 2022	Sep. 05, 2023	Oct. 11, 2023	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 05, 2023	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 05, 2023	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 05, 2023	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 2.26 dB
Occupied Channel Bandwidth	± 0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N48 SISO_ANT8

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-1.2dB

NR Band	SCS	Band Width	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@1	22.59	21.39	0.1377
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	22.59	21.39	0.1377
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	21.54	20.34	0.1081
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	22.58	21.38	0.1374
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.54	21.34	0.1361
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.54	20.34	0.1081
48	30	20	646000	3690	DFT-s-OFDM PI/2 BPSK	1@1	22.68	21.48	0.1406
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	22.67	21.47	0.1403
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	21.65	20.45	0.1109
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	22.63	21.43	0.1390
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	22.71	21.51	0.1416
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	22.58	21.38	0.1374
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	22.64	21.44	0.1393
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	22.71	21.51	0.1416
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	22.59	21.39	0.1377
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	50@25	21.61	20.41	0.1099
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	21.7	20.5	0.1122
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@104	21.57	20.37	0.1089
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	50@25	20.24	19.04	0.0802
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	20.06	18.86	0.0769
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@104	19.93	18.73	0.0746
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	50@25	18.12	16.92	0.0492
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	18.09	16.89	0.0489
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@104	17.97	16.77	0.0475
48	30	40	638000	3570	CP-OFDM QPSK	53@26	21.19	19.99	0.0998
48	30	40	638000	3570	CP-OFDM QPSK	1@1	21.23	20.03	0.1007
48	30	40	638000	3570	CP-OFDM QPSK	1@104	21.16	19.96	0.0991
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	22.69	21.49	0.1409
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	22.73	21.53	0.1422

48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	22.65	21.45	0.1396
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	22.65	21.45	0.1396
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	22.67	21.47	0.1403
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	22.67	21.47	0.1403
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	50@25	21.67	20.47	0.1114
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	21.68	20.48	0.1117
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@104	21.57	20.37	0.1089
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	50@25	20.27	19.07	0.0807
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	20.05	18.85	0.0767
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@104	20.02	18.82	0.0762
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	50@25	18.16	16.96	0.0497
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	18.13	16.93	0.0493
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@104	18.08	16.88	0.0488
48	30	40	641666	3624.99	CP-OFDM QPSK	53@26	21.26	20.06	0.1014
48	30	40	641666	3624.99	CP-OFDM QPSK	1@1	21.36	20.16	0.1038
48	30	40	641666	3624.99	CP-OFDM QPSK	1@104	21.26	20.06	0.1014
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	22.84	21.64	0.1459
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	22.69	21.49	0.1409
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	22.84	21.64	0.1459
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	22.83	21.63	0.1455
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	22.69	21.49	0.1409
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	22.85	21.65	0.1462
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	50@25	21.77	20.57	0.1140
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	21.67	20.47	0.1114
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@104	21.78	20.58	0.1143
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	50@25	20.32	19.12	0.0817
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	20.06	18.86	0.0769
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@104	20.14	18.94	0.0783
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	50@25	18.22	17.02	0.0504
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	18.16	16.96	0.0497
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@104	18.19	16.99	0.0500
48	30	40	645332	3679.98	CP-OFDM QPSK	53@26	21.24	20.04	0.1009
48	30	40	645332	3679.98	CP-OFDM QPSK	1@1	21.27	20.07	0.1016
48	30	40	645332	3679.98	CP-OFDM QPSK	1@104	21.31	20.11	0.1026


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0016	PASS	NV
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0014	PASS	LV
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0021	PASS	HV
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0018	PASS	-30°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0025	PASS	-20°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-0.0013	PASS	-10°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0027	PASS	0°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0009	PASS	10°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-0.0015	PASS	20°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0024	PASS	30°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0011	PASS	40°C
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0013	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
48	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.186	19.83
48	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.238	20.07
48	30	20	641666	3624.99	CP-OFDM 64 QAM	51@0	18.178	21.27
48	30	20	641666	3624.99	CP-OFDM 256 QAM	51@0	18.265	19.82
48	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.907	41.93
48	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.851	39.21
48	30	40	641666	3624.99	CP-OFDM 64 QAM	106@0	37.874	39.25
48	30	40	641666	3624.99	CP-OFDM 256 QAM	106@0	37.875	39.1

N48(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

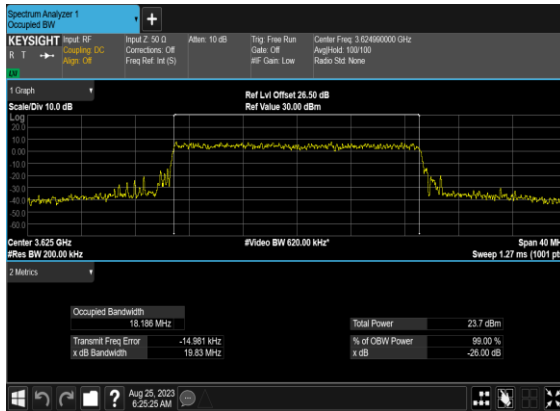


N48(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

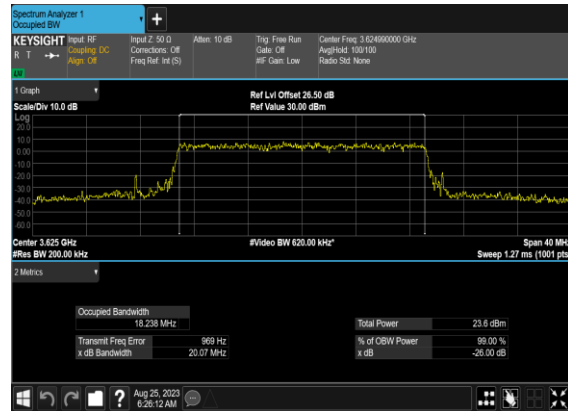


N48(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH




N48(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

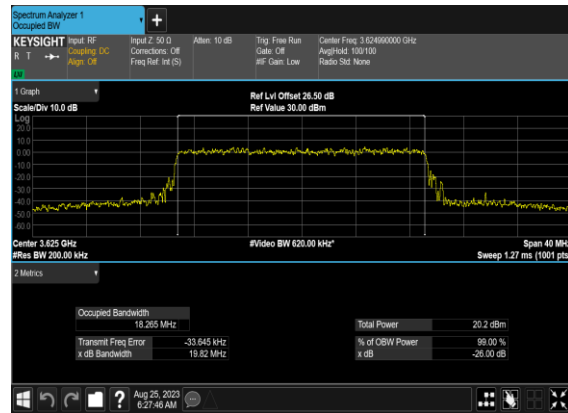

N48(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

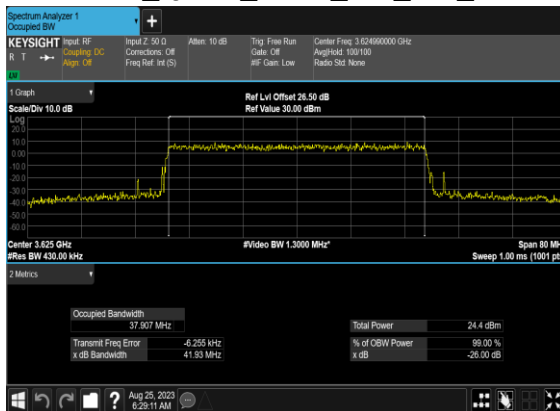


N48(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

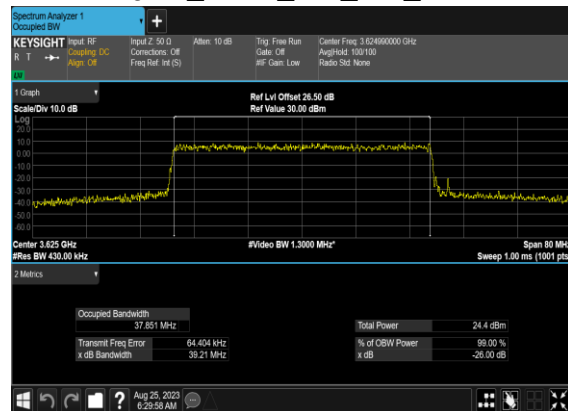

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH



N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

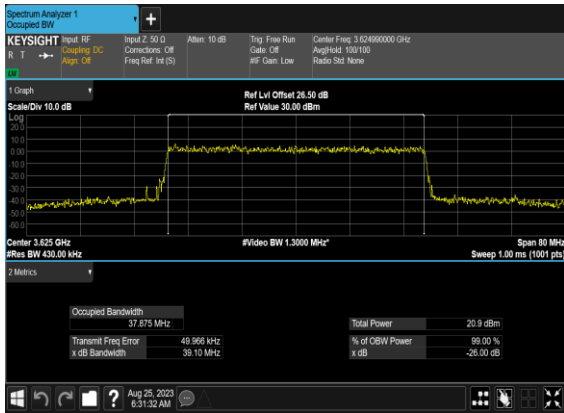

Adjacent Channel Leakage Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	50@0	-15.4	-15.86	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-9.32	-24.73	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@50	-26.3	-11.84	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	-13.38	-14.64	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-11.89	-24.12	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	-26.1	-11.68	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-14.16	-15.45	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-9.08	-22.04	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@50	-21.77	-10.99	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	-12.88	-14.03	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-9.49	-21.37	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	-21.29	-10.22	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	50@0	-13.8	-14.19	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.24	-22.97	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@50	-23.19	-12.85	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	-13.58	-13.77	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-10.02	-21.33	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	-22.13	-12.01	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	100@0	-14.57	-14.85	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.88	-19.47	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@105	-20.01	-12.46	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	-13.91	-13.82	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-11.36	-18.14	see graph	PASS

48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	-19.37	-11.24	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-15.24	-14.79	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.67	-20.94	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-20.06	-12.45	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-13.44	-13.34	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-13.13	-19.41	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	-21.22	-12.39	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	100@0	-13.78	-14.28	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-11.25	-19.09	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@105	-20.44	-12.83	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	-13.08	-13.27	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-11.49	-18.27	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	-19.03	-10.96	see graph	PASS

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: ☐ Input 2: 50 Ω
R T → → Corrections: Off
Align Off: ☐ Freq Ref: Int (S)

Att: 10 dB
P/N: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.560010000 GHz
AmpHzd: 150150
Ratio Set: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB
Ref Lvl Offset 33.48 dB
Ref Value 36.98 dBm

Center 21.815 GHz
#Res BW 300.00 MHz
Span 60 MHz
Sweep Time 20.0 ms (1001 pts)

2 Metrics
Total Car Power: 21.812 dBm/20.00 MHz
Total PSD

	Lower	Ref Carrier	ACP	Upper
	Offs Freq	Integ BW	ACP	Ref Carrier
	dBc	dBm	dBm	dBm
A	20.00 MHz	20.00 MHz	-45.40	-23.59
			21.81	-1
			-45.86	-24.04
			21.81	-1
			-3	dB

Spectrum Analyzer 1
ACP

KEYSTAGE Input: RF, Output: DC, Modulation: ASK, Demod: PSK, Filter: 100 Hz, Span: 60 MHz, Center Freq: 20.833 MHz, Res BW: 100 kHz, Video BW: 300.00 kHz, Span: 60 MHz, Sweep Time: 20.0 ms (1001 pts)

1 Graph
Scale/Div: 10.0 dB

2 Metrics
Total Car Power: 20.833 dBm/20.00 MHz
Total PSD: -

Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier
dBc	dBm	dBm	dBm	dBm	dBm
A: 20.800 MHz	20.00 MHz	-39.32	-18.49	20.83	-54.73

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → Coupling DC
Align Off

Input 2, 50 Ohm
Connections: DC
Freq Ref: Int (S)
Attenuation: 10 dB
PNO: Best Wide
Trig: Free Run
Gate: Off
Center Freq: 3.500010000 GHz
ArgH44: 131150
Ratio Set: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB
Ref Lvl Offset: 33.47 dBm
Ref Value 36.97 dBm

Span 60 MHz
Sweep Time 20.0 ms (1001 pt)

Carrier: 3.50 GHz
#Res BW 100 kHz
#Video BW 300.00 MHz*

2 Metrics
Total Car Power: 22.164 dBm/20.00 MHz
Total PSD: 22.164 dBm/20.00 MHz

Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier	Filter
dBc	dBm	dBm	Car #	dBc	dBm	
A 20.00 MHz	20.00 MHz	-56.30	-34.14	22.16	1	-41.84 -19.67
				22.16	1	-3 dB

Spectrum Analyzer 1 ACP

KEYSIGHT Input RF: **Clipping DC** **PASS**
 R T → Corrections: Off
 ACP On

Input Z: 50 Ω PNO: Best Wide
 Freq Ref: 1st (S)

Attm: 10 dB
 Trig: Free Run Gate: Off
 I/F: Span Low

Center Freq: 3.56010000 GHz
 Aligned: 1011515
 Ratio: Std Noise
 Name: Correction: Off

1 Graph
 Scale/Div: 10.0 dB

Ref Lvl Offset: 23.41 dB
 Ref Value: 36.94 dBm

20.0
 10.0
 0.0
 -10.0
 -20.0
 -30.0
 -40.0
 -50.0

-43.41 dBm
 -22.37 dBm
 -44.6 dBm

Center 3.56 GHz
 #Res BW 100 kHz

#Video BW 300.00 kHz

Span 60 MHz
 Sweep Time 20.0 ms (1001 pts)

2 Metrics

Total CW Pwr: 21.011 dBm/20.00 MHz
 Total PSD: --

		Lower		Ref Carrier		Upper		Ref Carrier		
Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier	ACP	Ref Carrier	Filter		
dBc	dBm	dBm	dBm	dBm	dBm	dBm	dBm			
A: 20.00 MHz	20.00 MHz	-43.38	-22.37	21.01	-1	-44.64	-23.63	21.01	-1	-3 dB

Aug 26, 2023
 9:38:52 AM

[illegible]

The screenshot displays the Keysight Spectrum Analyzer 1 ACAP interface. The main display shows a spectrum plot with a peak at 3.58 GHz. The plot is titled "Spectrum Analyzer 1 ACAP" and "KEYSIGHT". The plot shows a signal with a peak at 3.58 GHz, with a level of -56.10 dBm. The plot is titled "Spectrum Analyzer 1 ACAP" and "KEYSIGHT". The plot shows a signal with a peak at 3.58 GHz, with a level of -56.10 dBm. The plot is titled "Spectrum Analyzer 1 ACAP" and "KEYSIGHT".


Top Panel:

- Input:** RF, **Output:** DC, **Mode:** ACAP
- Input 2:** 50.0, **Corrections:** Off, **Ref Freq:** Ref (1st)
- Attenuation:** 10 dB, **PNO:** Best Wide
- Trigger:** Free Run, **Gate:** Off, **IF Gain:** Low
- Center Freq:** 3.58000000 GHz, **Span:** 60 MHz, **Resolution BW:** 300.00 kHz, **Sweep Time:** 20.0 ms


Plot Area:

- Ref Lvl Offset:** 33.42 dB
- Ref Value:** 56.52 dBm
- Peak Level:** -56.10 dBm
- Marker 1:** 3.58 GHz, -56.10 dBm
- Marker 2:** 3.58 GHz, -56.10 dBm
- Marker 3:** 3.58 GHz, -56.10 dBm
- Marker 4:** 3.58 GHz, -56.10 dBm
- Marker 5:** 3.58 GHz, -56.10 dBm
- Marker 6:** 3.58 GHz, -56.10 dBm
- Marker 7:** 3.58 GHz, -56.10 dBm
- Marker 8:** 3.58 GHz, -56.10 dBm
- Marker 9:** 3.58 GHz, -56.10 dBm
- Marker 10:** 3.58 GHz, -56.10 dBm
- Marker 11:** 3.58 GHz, -56.10 dBm
- Marker 12:** 3.58 GHz, -56.10 dBm
- Marker 13:** 3.58 GHz, -56.10 dBm
- Marker 14:** 3.58 GHz, -56.10 dBm
- Marker 15:** 3.58 GHz, -56.10 dBm
- Marker 16:** 3.58 GHz, -56.10 dBm
- Marker 17:** 3.58 GHz, -56.10 dBm
- Marker 18:** 3.58 GHz, -56.10 dBm
- Marker 19:** 3.58 GHz, -56.10 dBm
- Marker 20:** 3.58 GHz, -56.10 dBm
- Marker 21:** 3.58 GHz, -56.10 dBm
- Marker 22:** 3.58 GHz, -56.10 dBm
- Marker 23:** 3.58 GHz, -56.10 dBm
- Marker 24:** 3.58 GHz, -56.10 dBm
- Marker 25:** 3.58 GHz, -56.10 dBm
- Marker 26:** 3.58 GHz, -56.10 dBm
- Marker 27:** 3.58 GHz, -56.10 dBm
- Marker 28:** 3.58 GHz, -56.10 dBm
- Marker 29:** 3.58 GHz, -56.10 dBm
- Marker 30:** 3.58 GHz, -56.10 dBm
- Marker 31:** 3.58 GHz, -56.10 dBm
- Marker 32:** 3.58 GHz, -56.10 dBm
- Marker 33:** 3.58 GHz, -56.10 dBm
- Marker 34:** 3.58 GHz, -56.10 dBm
- Marker 35:** 3.58 GHz, -56.10 dBm
- Marker 36:** 3.58 GHz, -56.10 dBm
- Marker 37:** 3.58 GHz, -56.10 dBm
- Marker 38:** 3.58 GHz, -56.10 dBm
- Marker 39:** 3.58 GHz, -56.10 dBm
- Marker 40:** 3.58 GHz, -56.10 dBm
- Marker 41:** 3.58 GHz, -56.10 dBm
- Marker 42:** 3.58 GHz, -56.10 dBm
- Marker 43:** 3.58 GHz, -56.10 dBm
- Marker 44:** 3.58 GHz, -56.10 dBm
- Marker 45:** 3.58 GHz, -56.10 dBm
- Marker 46:** 3.58 GHz, -56.10 dBm
- Marker 47:** 3.58 GHz, -56.10 dBm
- Marker 48:** 3.58 GHz, -56.10 dBm
- Marker 49:** 3.58 GHz, -56.10 dBm
- Marker 50:** 3.58 GHz, -56.10 dBm
- Marker 51:** 3.58 GHz, -56.10 dBm
- Marker 52:** 3.58 GHz, -56.10 dBm
- Marker 53:** 3.58 GHz, -56.10 dBm
- Marker 54:** 3.58 GHz, -56.10 dBm
- Marker 55:** 3.58 GHz, -56.10 dBm
- Marker 56:** 3.58 GHz, -56.10 dBm
- Marker 57:** 3.58 GHz, -56.10 dBm
- Marker 58:** 3.58 GHz, -56.10 dBm
- Marker 59:** 3.58 GHz, -56.10 dBm
- Marker 60:** 3.58 GHz, -56.10 dBm
- Marker 61:** 3.58 GHz, -56.10 dBm
- Marker 62:** 3.58 GHz, -56.10 dBm
- Marker 63:** 3.58 GHz, -56.10 dBm
- Marker 64:** 3.58 GHz, -56.10 dBm
- Marker 65:** 3.58 GHz, -56.10 dBm
- Marker 66:** 3.58 GHz, -56.10 dBm
- Marker 67:** 3.58 GHz, -56.10 dBm
- Marker 68:** 3.58 GHz, -56.10 dBm
- Marker 69:** 3.58 GHz, -56.10 dBm
- Marker 70:** 3.58 GHz, -56.10 dBm
- Marker 71:** 3.58 GHz, -56.10 dBm
- Marker 72:** 3.58 GHz, -56.10 dBm
- Marker 73:** 3.58 GHz, -56.10 dBm
- Marker 74:** 3.58 GHz, -56.10 dBm
- Marker 75:** 3.58 GHz, -56.10 dBm
- Marker 76:** 3.58 GHz, -56.10 dBm
- Marker 77:** 3.58 GHz, -56.10 dBm
- Marker 78:** 3.58 GHz, -56.10 dBm
- Marker 79:** 3.58 GHz, -56.10 dBm
- Marker 80:** 3.58 GHz, -56.10 dBm
- Marker 81:** 3.58 GHz, -56.10 dBm
- Marker 82:** 3.58 GHz, -56.10 dBm
- Marker 83:** 3.58 GHz, -56.10 dBm
- Marker 84:** 3.58 GHz, -56.10 dBm
- Marker 85:** 3.58 GHz, -56.10 dBm
- Marker 86:** 3.58 GHz, -56.10 dBm
- Marker 87:** 3.58 GHz, -56.10 dBm
- Marker 88:** 3.58 GHz, -56.10 dBm
- Marker 89:** 3.58 GHz, -56.10 dBm
- Marker 90:** 3.58 GHz, -56.10 dBm
- Marker 91:** 3.58 GHz, -56.10 dBm
- Marker 92:** 3.58 GHz, -56.10 dBm
- Marker 93:** 3.58 GHz, -56.10 dBm
- Marker 94:** 3.58 GHz, -56.10 dBm
- Marker 95:** 3.58 GHz, -56.10 dBm
- Marker 96:** 3.58 GHz, -56.10 dBm
- Marker 97:** 3.58 GHz, -56.10 dBm
- Marker 98:** 3.58 GHz, -56.10 dBm
- Marker 99:** 3.58 GHz, -56.10 dBm
- Marker 100:** 3.58 GHz, -56.10 dBm
- Marker 101:** 3.58 GHz, -56.10 dBm
- Marker 102:** 3.58 GHz, -56.10 dBm
- Marker 103:** 3.58 GHz, -56.10 dBm
- Marker 104:** 3.58 GHz, -56.10 dBm
- Marker 105:** 3.58 GHz, -56.10 dBm
- Marker 106:** 3.58 GHz, -56.10 dBm
- Marker 107:** 3.58 GHz, -56.10 dBm
- Marker 108:** 3.58 GHz, -56.10 dBm
- Marker 109:** 3.58 GHz, -56.10 dBm
- Marker 110:** 3.58 GHz, -56.10 dBm
- Marker 111:** 3.58 GHz, -56.10 dBm
- Marker 112:** 3.58 GHz, -56.10 dBm
- Marker 113:** 3.58 GHz, -56.10 dBm
- Marker 114:** 3.58 GHz, -56.10 dBm
- Marker 115:** 3.58 GHz, -56.10 dBm
- Marker 116:** 3.58 GHz, -56.10 dBm
- Marker 117:** 3.58 GHz, -56.10 dBm
- Marker 118:** 3.58 GHz, -56.10 dBm
- Marker 119:** 3.58 GHz, -56.10 dBm
- Marker 120:** 3.58 GHz, -56.10 dBm


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

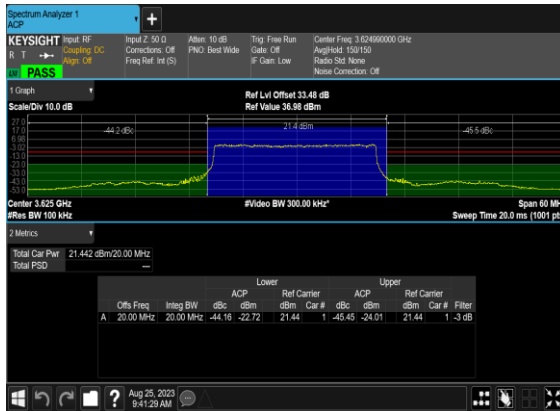


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

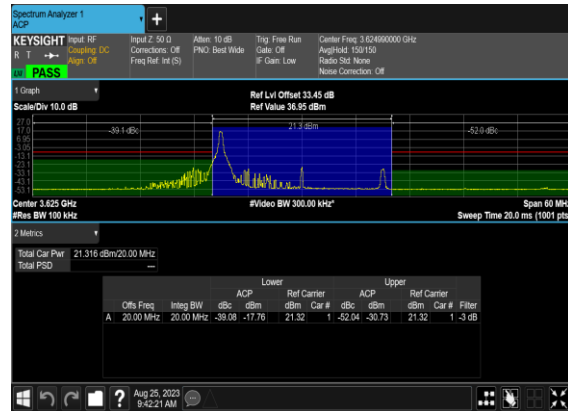


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

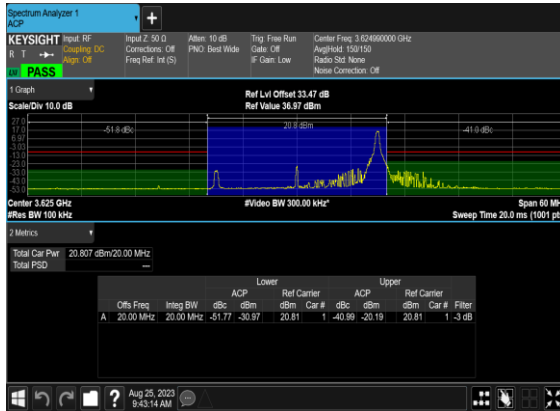


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

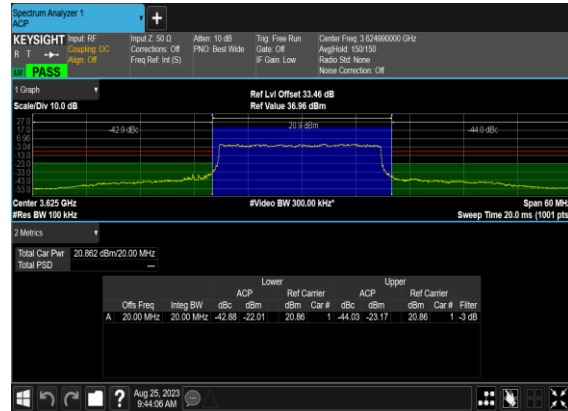


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

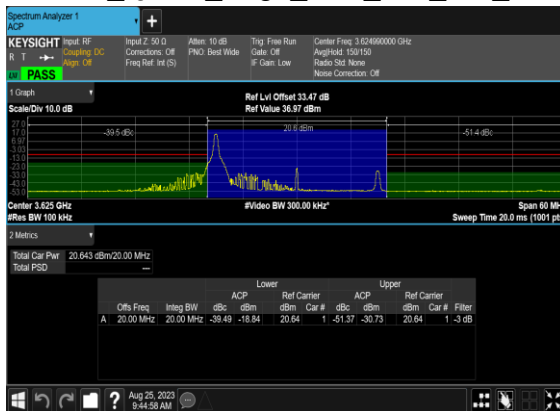


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

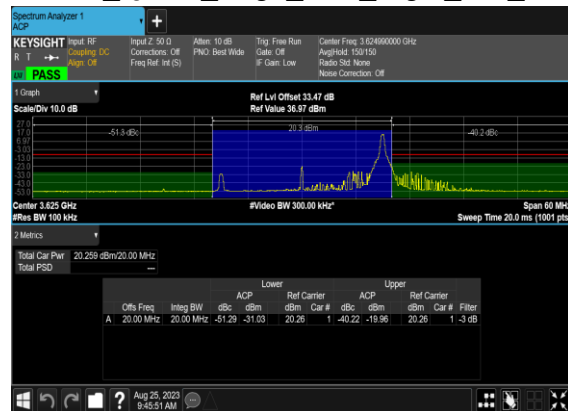


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

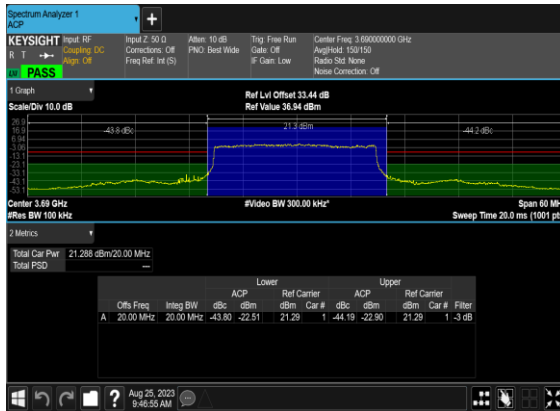


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

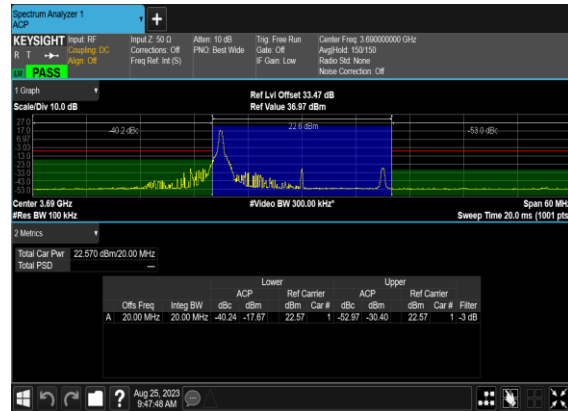


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

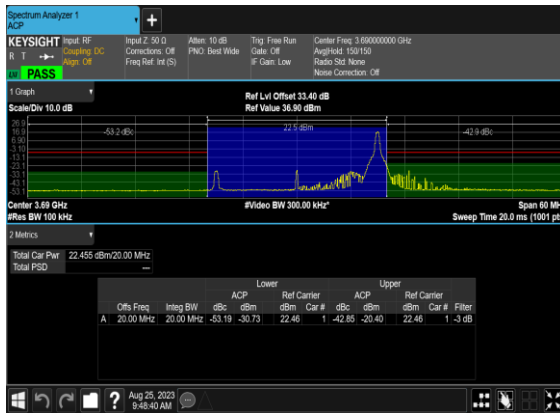


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

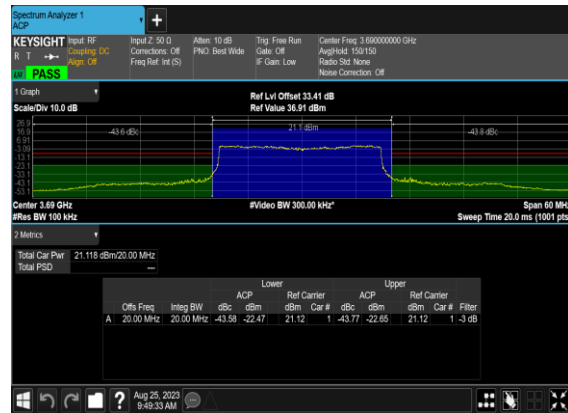


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

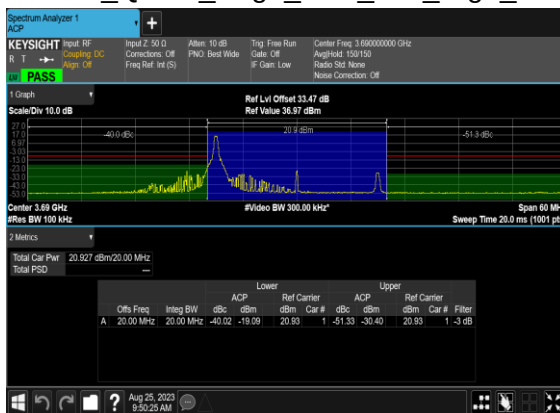


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

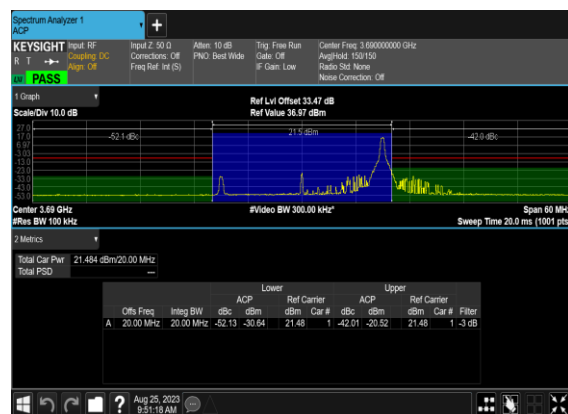


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

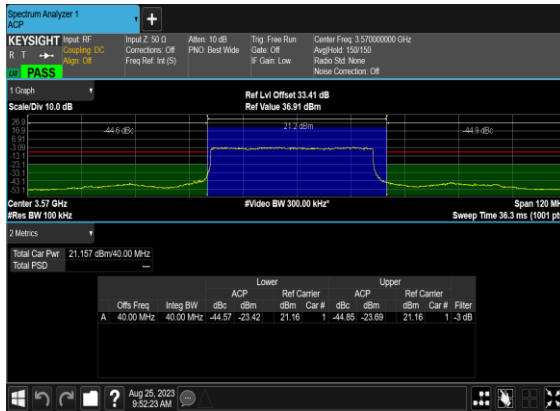


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

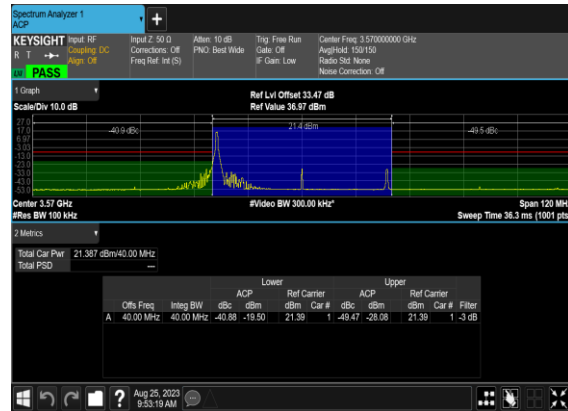


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

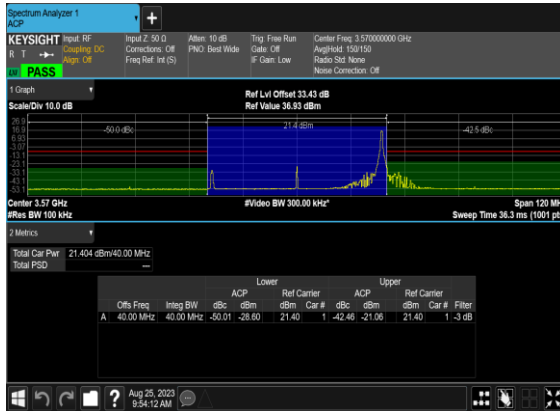


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

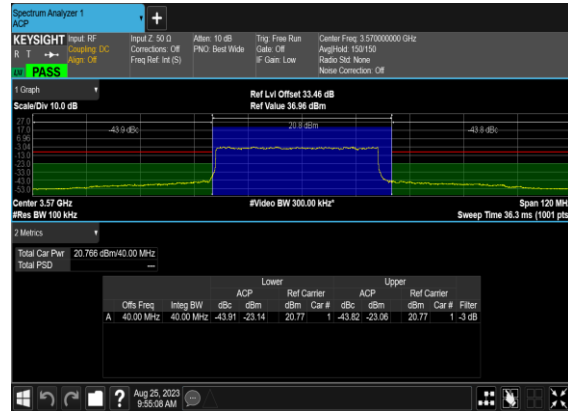

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

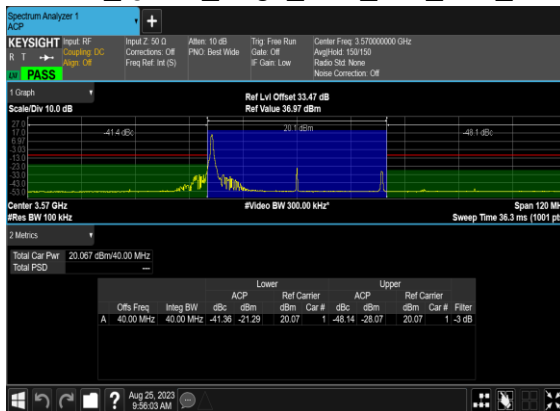

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

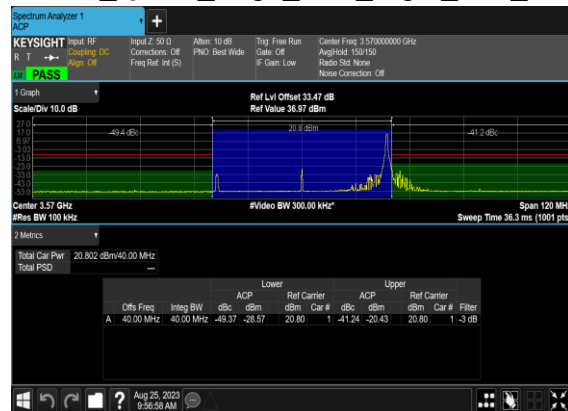

[illegible]

Spectrum Analyzer 1
ACAP

KEYSTEPS Input RF: **Clocking DC** (green)
R T → **PASS** (green)

Input 2: 50.0 Corrections: Off
Freq Ref: 1st (S)

Attm: 10 dB
PNO: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.62460000 GHz
Assigned: 153.150
Ratio Set: None
Noise Correction: Off

1 Graph
Scale Div: 10.0 dB

Ref Lvl Offset: 23.47 dB
Ref Value: 36.97 dBm

23.31 dBm

Center 3.625 GHz
#Res BW 100 kHz

Span 120 MHz
Sweep Time 36.3 ms (1001 pts)

2 Metrics

Total Car Pow: 23.311 dBm(40.00 MHz)
Total PSD

Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier
dBc	dBm	dBm	dBm	dBm	dBm
A: 40.00 MHz	40.00 MHz	-41.67	23.31	-50.94	23.31

Spectrum Analyzer 1
ACP

KEYSTREAM Input RF
 R T → Coupling DC
 Ager Off

Input Z: 50 Ω
 Connections: Off
 Freq Ref: Int (S)

Atten: 10 dB
 PNO: Best Wide

Trig: Free Run
 Gate: Off
 IF Gain: Low

Center Freq: 3.62490000 GHz
 ArgH44: 131150
 Ratio Set: None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset: 33.47 dB
 Ref Value: 36.97 dBm

Span 120 MHz
 Res BW 100 MHz
 #Video BW 300.00 MHz*
 Sweep Time 36.3 ms (1001 pt)

2 Metrics
 Total Car Power: 21.720 dBm@40.00 MHz
 Total PSD

	Lower	Ref Carrier	ACP	Upper						
	Offs Freq	Integ BW	dBc	dBm	Car #	dBc	dBm	Ref Carrier	Filter	
A	40.00 MHz	40.00 MHz	-50.06	-28.34	21.72	1	-42.45	-20.73	21.72	1 -3 dB

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Output: DC, Corrections: Off, Freq Ref: 1st Ss

REF **PASS**

1 Graph
Scale/Div: 10.0 dB

Center Freq: 3.625 GHz
#Res BW: 100 kHz

Ref Lvl Offset: 23.45 dB
Ref Value: 36.98 dBm

#Video BW: 300.00 kHz

Span: 120 MHz
Sweep Time: 36.3 ms (1001 pts)

2 Metrics

Total Ch Pwr		Total PSD	
20.832 dBm/40.00 MHz		---	

Lower		Upper						
Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier	Filter		
dBc	dBm	dBm	dBm	dBm	dBm			
A: 40.00 MHz	40.00 MHz	-43.44	-22.61	20.83	-43.34	-22.51	20.83	1-3 dB

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: Off
R T → Creating DC: Off
AI Off

Input Z: 50 Ω
Connections: Off
Freq Ref: Int (S)

Attain: 10 dB
PNO: Best Wide

Trig Pres: Run
Gate: Off
IF Gain: Low

Center Freq: 3.024900000 GHz
AvalchId: 150150
Stats Std: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 33.46 dB
Ref Value 36.98 dBm

-43.1 dBc
-17.0 dBm
-10.0 dBm
-30.0 dBm
-40.0 dBm
-50.0 dBm
-60.0 dBm
-70.0 dBm
-80.0 dBm
-90.0 dBm
-100.0 dBm
-110.0 dBm
-120.0 dBm
-130.0 dBm
-140.0 dBm

Center 3.025 GHz
#Res BW 190 kHz
#Video BW 300.00 MHz
Span 120 MHz
Sweep Time 36.3 ms (1001 pts)

2 Metrics

Total Car Power
Total PSD

21.719 dBm/40.00 MHz

	Lower	Ref Carrier	ACP	Upper	Ref Carrier					
	Offs Freq	Integ BW	dBc	dBm	Car #	dBc	dBm	Car #	Filter	
A	40.00 MHz	40.00 MHz	-43.13	-21.41	21.72	1	-48.41	-27.69	21.72	1-3 dB

Aug 25, 2023
10:01:43 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF → Coupling: DC
R 1 → Corrections: Off
Ags: Off
Freq Ref: Int (5)

Att: 10 dB
PNO: Best Wtd

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.62490000 GHz
AgtHnd: 153150
Ratio: Std: None
Noise Correction: Off

1 Graph
Scale/Div: 10.0 dB

Ref Lvl Offset 33.44 dBm
Ref Value 36.94 dBm

3.620 GHz 3.625 GHz 3.630 GHz

0 dBm -50 dBm

Video BW 300.0 MHz


Span 120 MHz
Sweep Time 36.3 ms (1001 pts)

2 Metrics


Total Car Pwr: 22.876 dBm(40.00 MHz)
Total PSD

	Offs Freq	Integ BW	ACP	Ref Carrier	ACP	Ref Carrier
	dBc	dBm	dBm	Car #	dBm	Car #
A	40.00 MHz	40.00 MHz	-51.22	-26.34	22.88	1
				-42.39	-18.51	2
				22.88	1	-3


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

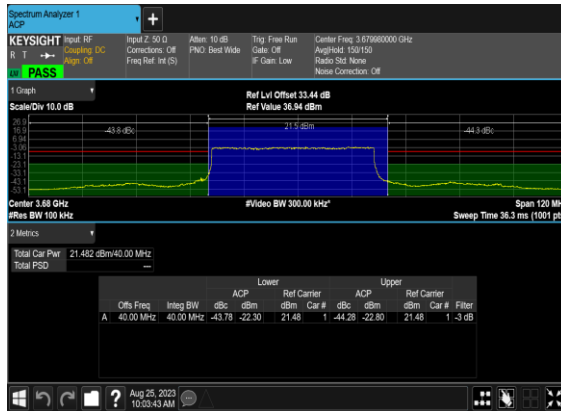


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

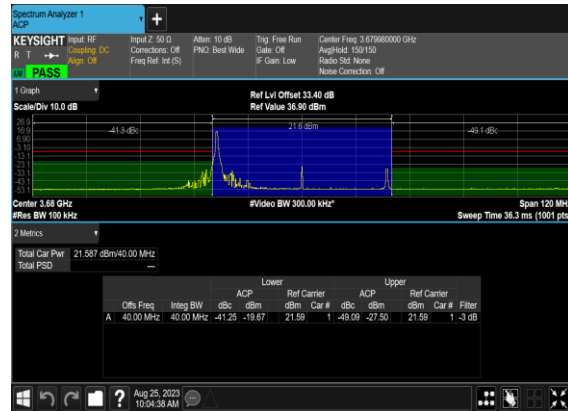


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

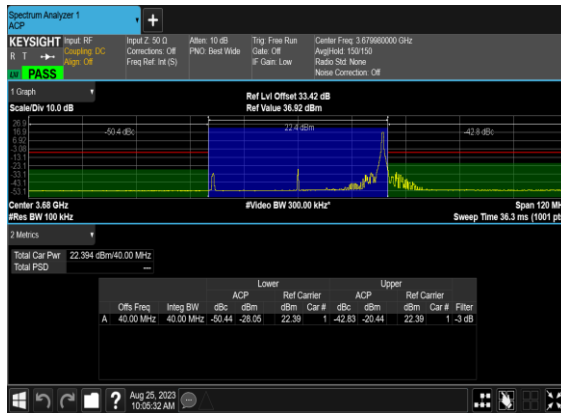


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

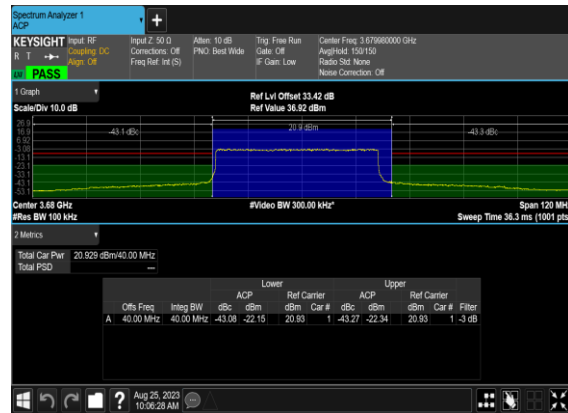

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

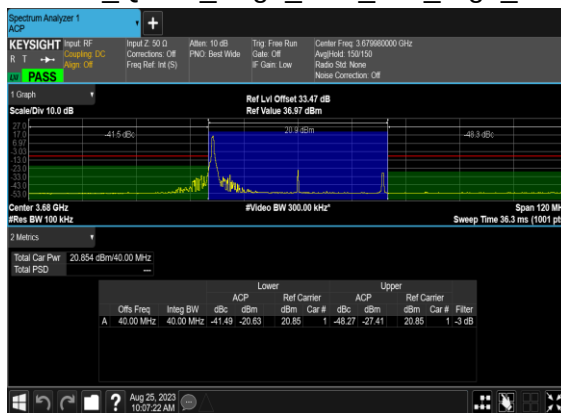

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

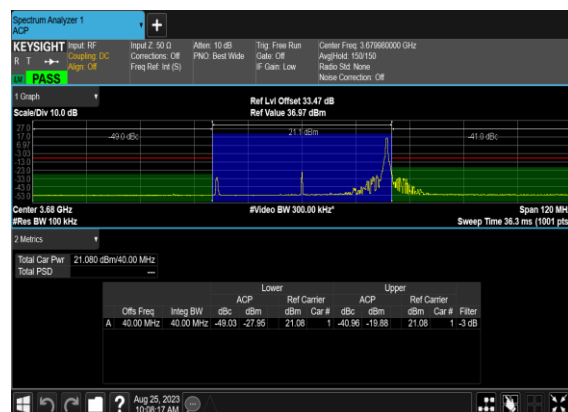


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

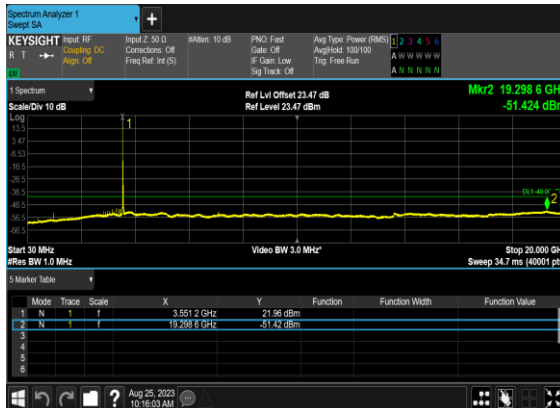


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

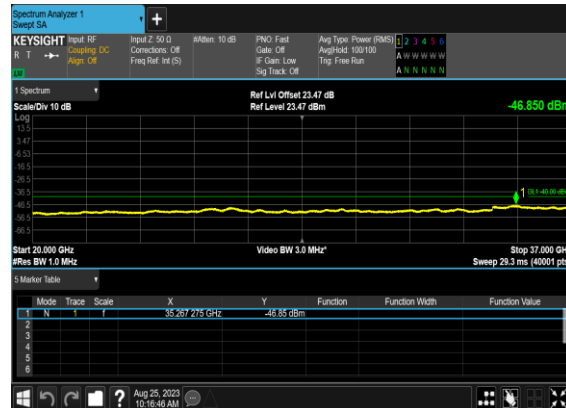


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

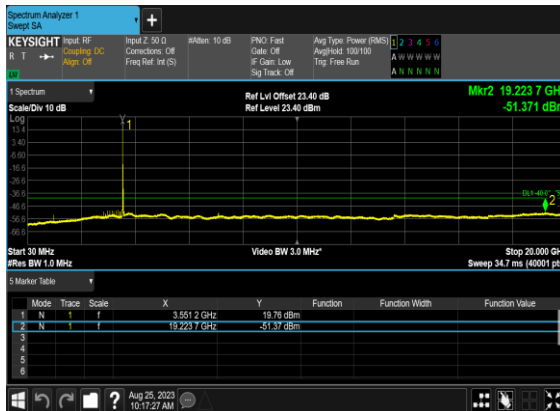


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

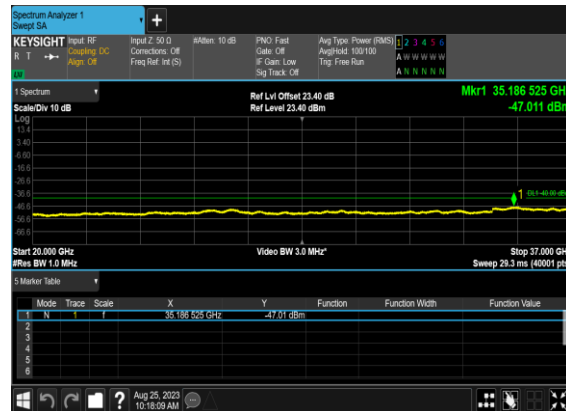


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

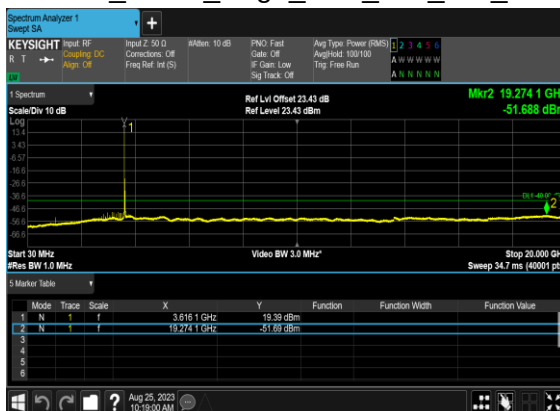


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

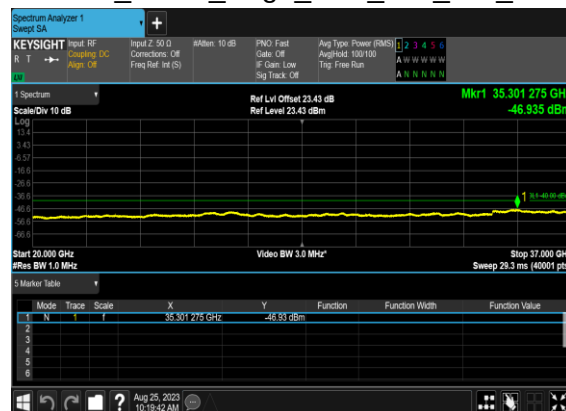


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

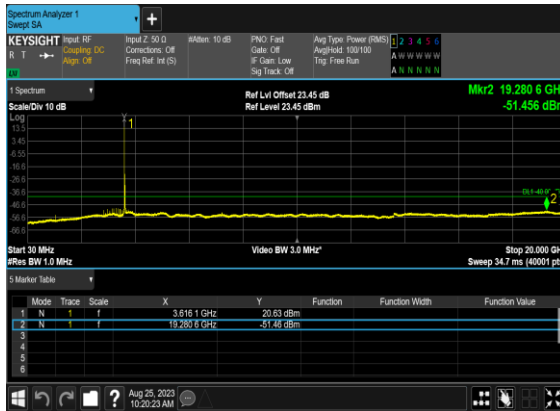


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

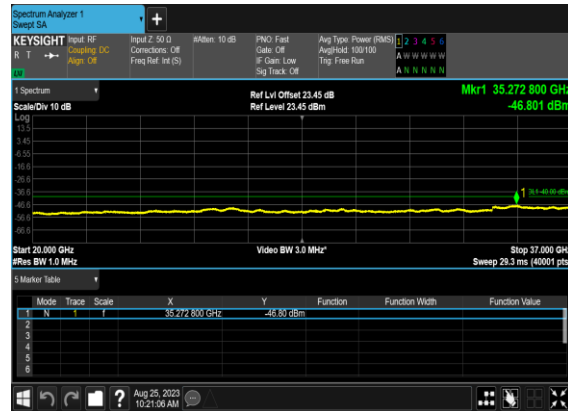


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

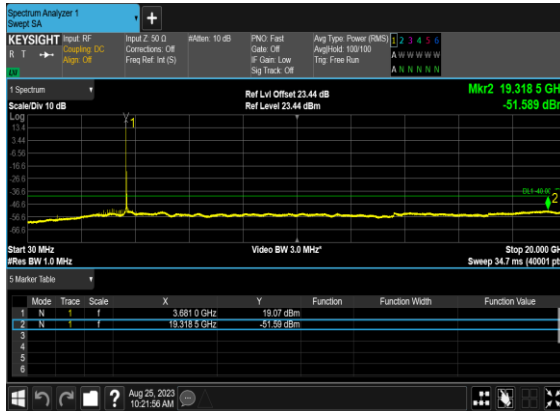


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

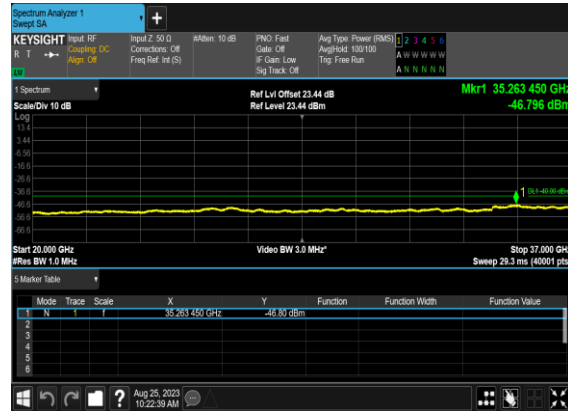


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

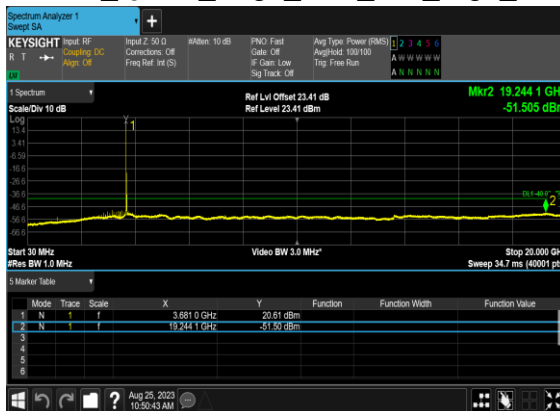


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

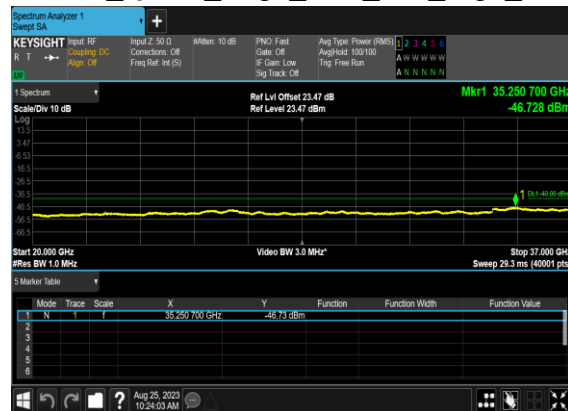


N48(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

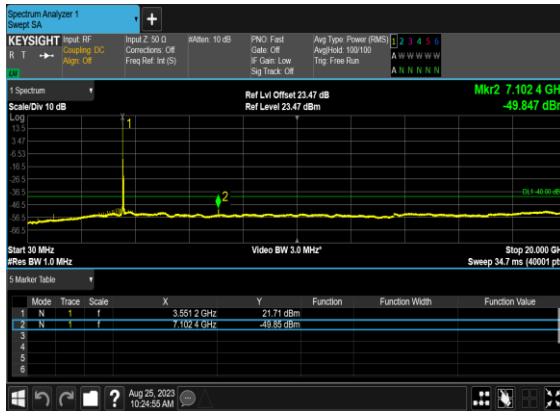


N48(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

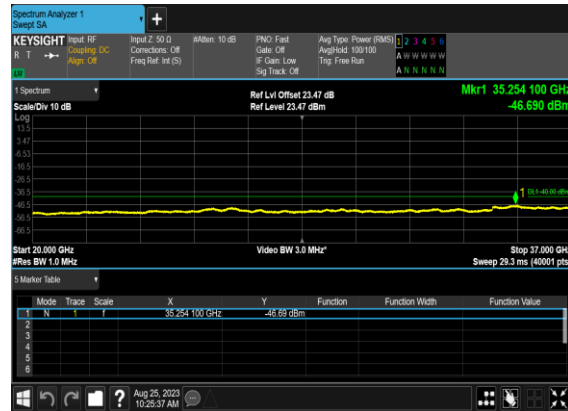


N48(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

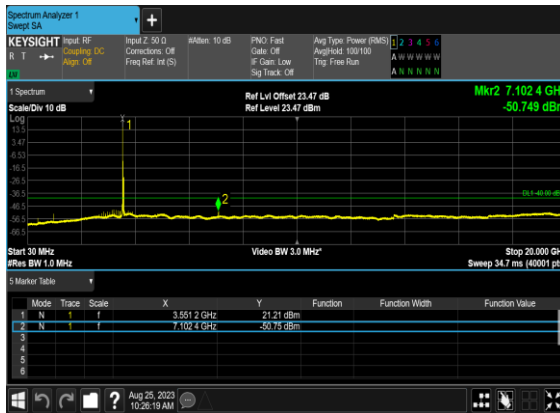


N48(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

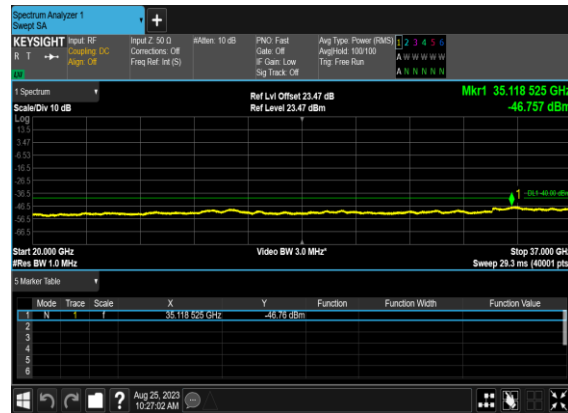


N48(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

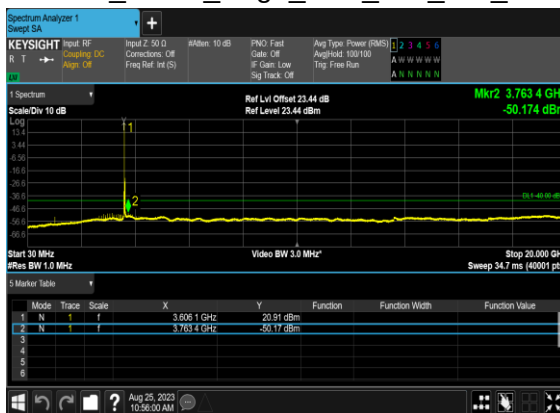


N48(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

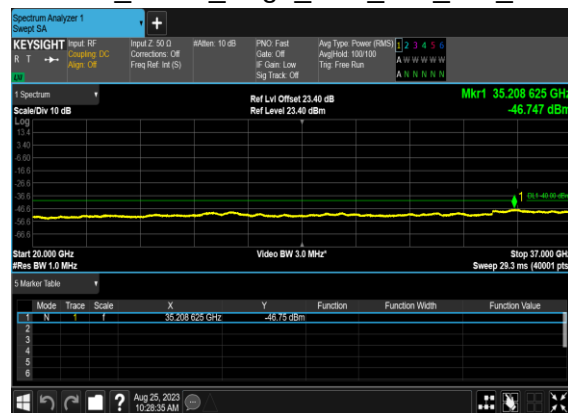


N48(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

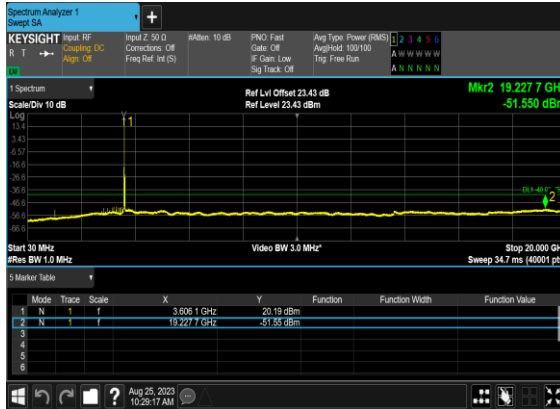


N48(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

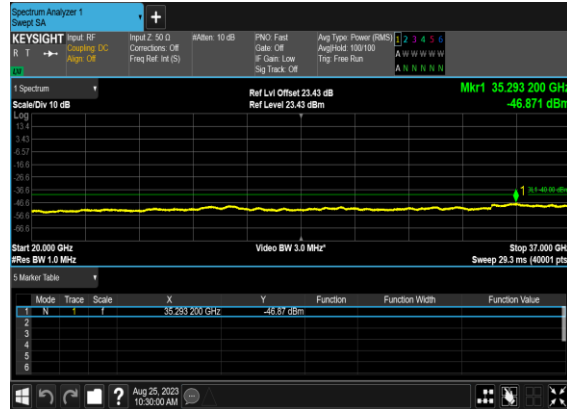


N48(40M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

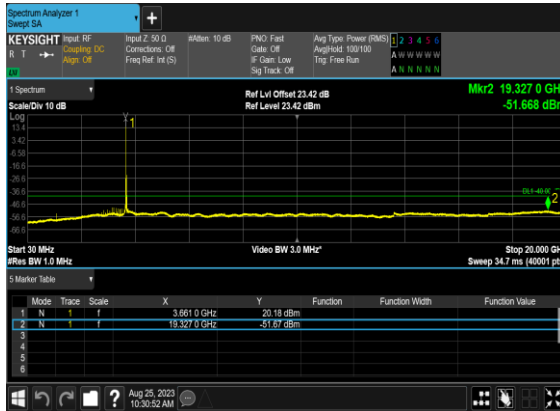


N48(40M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

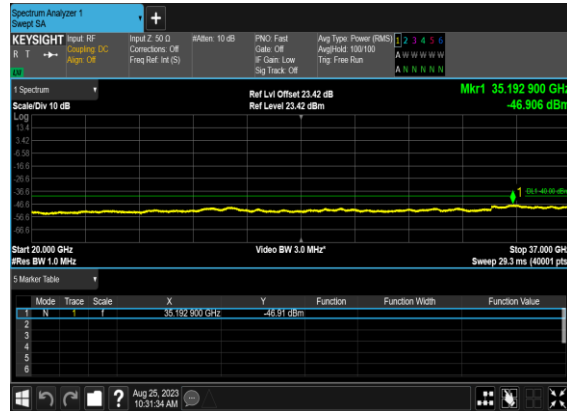

N48(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

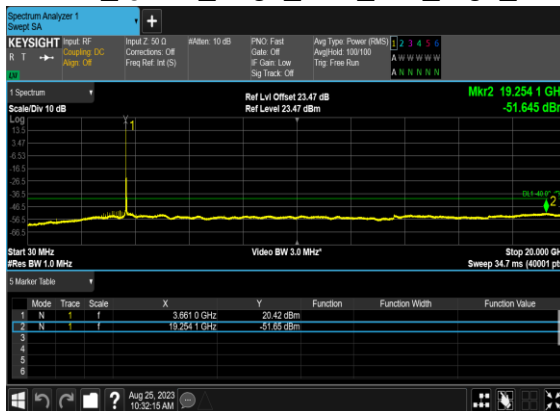

N48(40M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

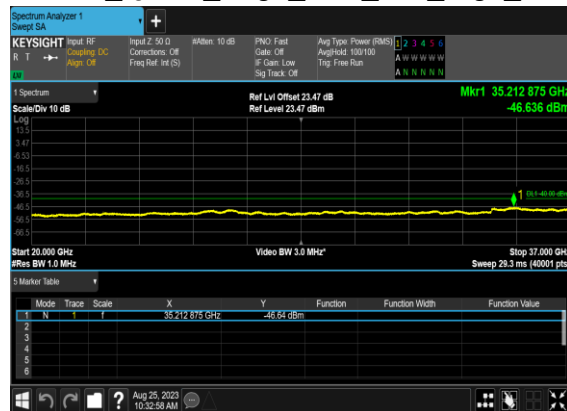


Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	see graph	PASS

48	30	40	638000	3570.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	100@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	see graph	PASS


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

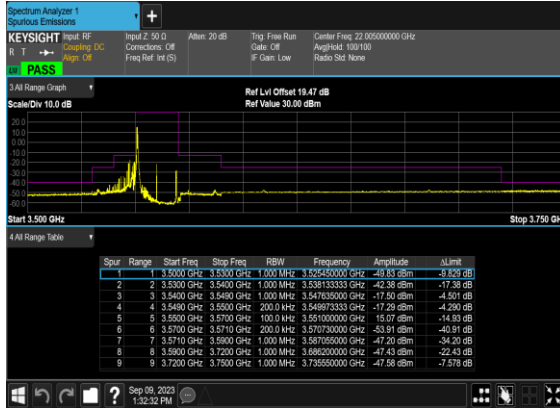


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

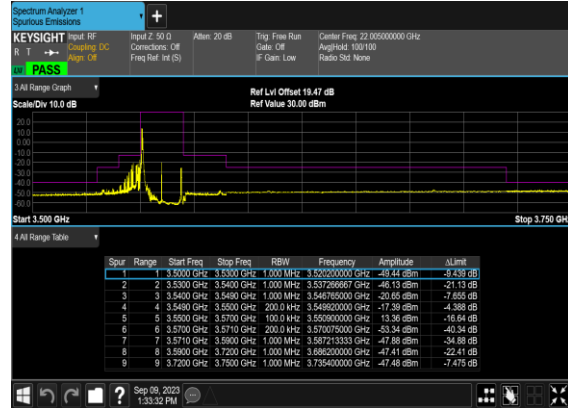


N48(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_Low_CH

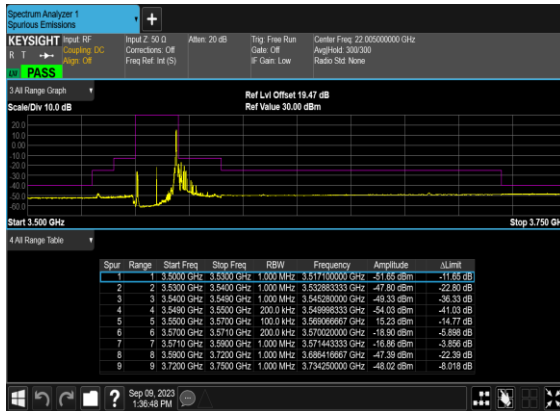


N48(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_Low_CH

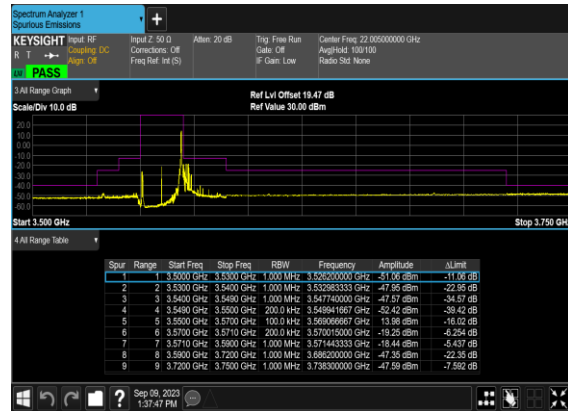


N48(20M)_DFT-s- OFDM_BPSK_Outer_Full_Low_CH

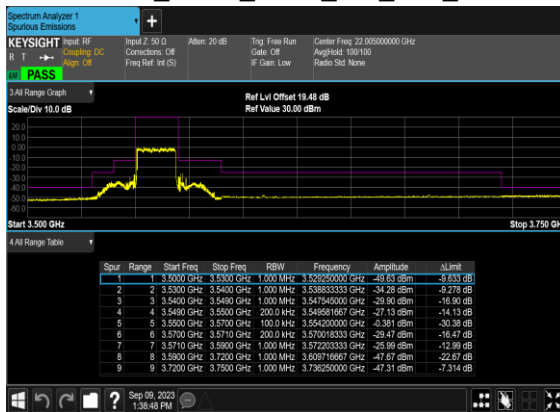


N48(20M)_DFT-s- OFDM_QPSK_Outer_Full_Low_CH

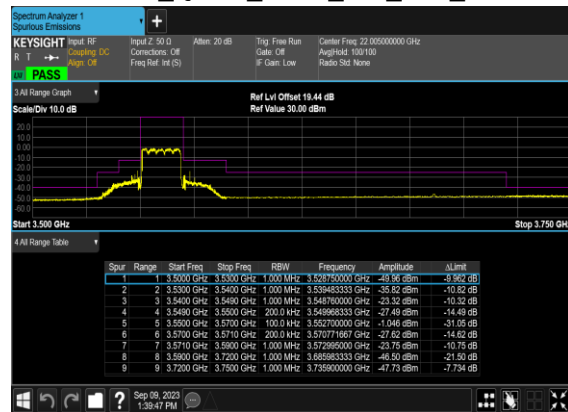


N48(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

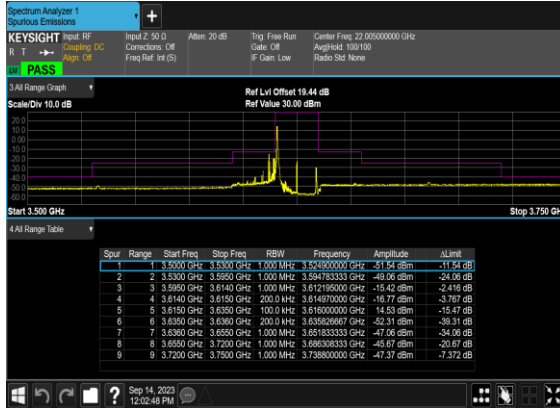


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

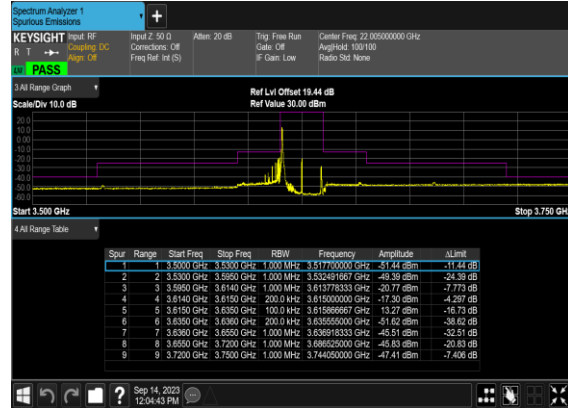


N48(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Mid_CH

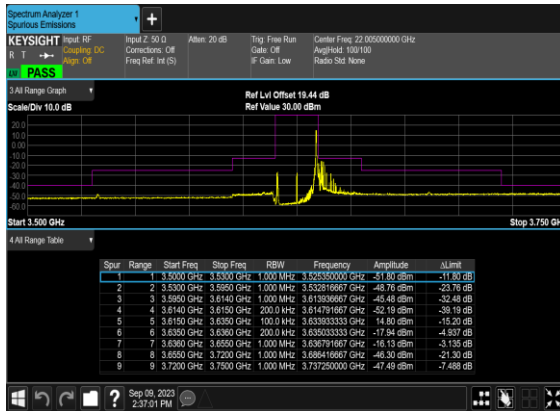

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

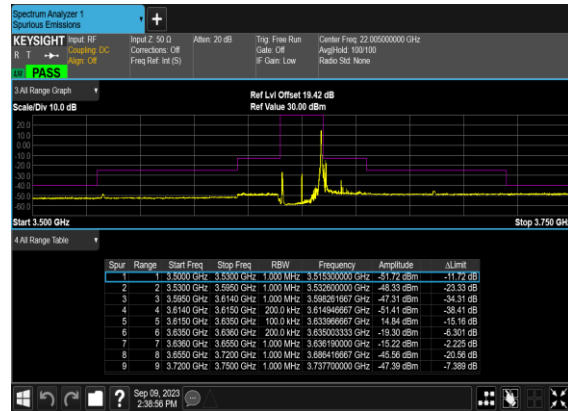

N48(20M)_DFT-s-OFDM_BPSK_Outer_Full_Mid_CH

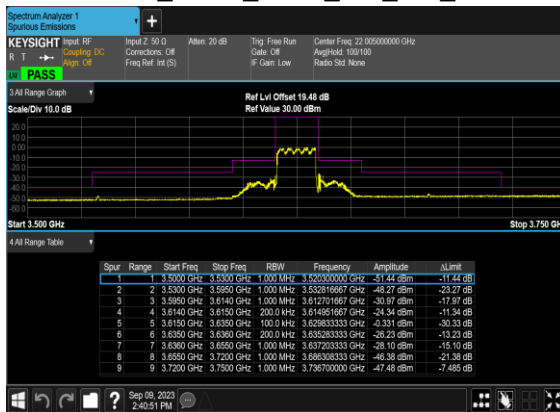

N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

