

FCC RADIO TEST REPORT

FCC ID: 2BAWSRDL-NA

Sample : Dride4K

Trade Mark : N/A

Main Model : DR4K1-RDL-NA

Additional Model : N/A

Report No.: 23032013ER-63

Prepared for

Dride Technology LTD

Eliyahu Eitan 1, Rishon Letzion, Israel

Prepared by

Global United Technology Services Co. Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

TEST RESULT CERTIFICATION

Applicant.....: Dride Technology LTD

Address.....: Eliyahu Eitan 1, Rishon Letzion, Israel

Manufacturer.....: Dride Technology LTD

Address.....: Eliyahu Eitan 1, Rishon Letzion, Israel

Product description

Product.....: Dride4K

Trade Mark.....: N/A

Model Name.....: DR4K1-RDL-NA

Test Methods.....: FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Global United Technology Services Co. Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval, this document may be altered or revised by Global United Technology Services Co. Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Mar. 20, 2023 ~ May. 09, 2023

Date of Issue.....: Jul. 13, 2023

Test Result: Pass

Prepared By:



Date:

2023-7-13

Project Engineer

Check By:



Date:

2023-7-13

Reviewer

Table of Contents	Page
1 TEST SUMMARY	5
1.1 TEST PROCEDURES AND RESULTS	5
1.2 TEST FACILITY	6
1.3 MEASUREMENT UNCERTAINTY	7
1.4 ENVIRONMENTAL CONDITIONS	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 CARRIER FREQUENCY OF CHANNELS	9
2.3 TEST MODE	9
2.4 DESCRIPTION OF THE TEST MODES	9
2.5 TEST SETUP	10
2.6 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.7 MEASUREMENT INSTRUMENTS LIST	11
3 CONDUCTED EMISSION	12
3.1 TEST LIMIT	12
3.2 TEST SETUP	12
3.3 TEST PROCEDURE	13
3.4 TEST RESULT	13
4 RADIATED EMISSION	14
4.1 TEST LIMIT	14
4.2 TEST SETUP	15
4.3 TEST PROCEDURE	16
4.4 TEST RESULT	16
5 OCCUPIED BANDWIDTH	39
5.1 TEST LIMIT	39
5.2 TEST PROCEDURE	39
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
5.4 MEASUREMENT EQUIPMENT USED	39
5.5 TEST RESULT	39
6 POWER SPECTRAL DENSITY	48
6.1 TEST LIMIT	48
6.2 TEST PROCEDURE	48
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	48
6.4 EQUIPMENT USED	48
6.5 TEST RESULT	48

Table of Contents	Page
7 PEAK OUTPUT POWER	57
7.1 TEST LIMIT	57
7.2 TEST PROCEDURE	57
7.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	57
7.4 EQUIPMENT USED	57
7.5 TEST RESULT	58
8 OUT OF BAND EMISSIONS	59
8.1 TEST LIMIT	59
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	59
8.3 TEST PROCEDURE	59
8.4 MEASUREMENT EQUIPMENT USED	59
8.5 TEST RESULT	59
9 ANTENNA REQUIREMENT	72
10 PHOTO OF TEST	73

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC Part 15.207	Conducted Emission	N/A
2	FCC Part 15.209(a)	Radiated Emission	Pass
3	FCC Part 15.247(a)(2)	Occupied Bandwidth	Pass
4	FCC Part 15.247(e)	Power Spectral Density	Pass
5	FCC Part 15.247(b)	Peak Output Power	Pass
6	FCC Part 15.247(d)	Out Of Band Emissions	Pass
7	FCC Part 15.247(d)	Conducted Spurious Emission	Pass
8	FCC Part 15.203	Antenna Requirement	Pass

Note:

“N/A” denotes test is not applicable in this Test Report.

1.2 TEST FACILITY

Test Firm : Global United Technology Services Co. Ltd.
Address : No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co. Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co. Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

- **NVLAP (LAB CODE: 600179-0)**

Global United Technology Services Co. Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.44

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 30MHz	2.50
		30MHz ~ 1000MHz	4.80
		1000MHz ~ 18000MHz	4.13

C. RF Conducted Method:

Item	Measurement Uncertainty
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$

1.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°C)	15 - 35	-20 - 50
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.		

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product:	Dride4K
Trade Mark:	N/A
Main Model:	DR4K1-RDL-NA
Additional Model:	N/A
Model Difference:	N/A
Operation Frequency:	802.11b/g/n20:2412~2462MHz 802.11n40: 2422~2452MHz
Number of Channels:	802.11b/g/n20: 11CH 802.11n40: 7CH
Maximum Peak Conducted Output Power:	17.14 dBm
Modulation Type:	CCK, OFDM, DBPSK, DAPSK
Antenna Type:	Chip Antenna
Antenna Gain:	0.5dBi
Battery:	N/A
Adapter:	N/A
Power Source:	DC 12-24V from car charger

2.2 CARRIER FREQUENCY OF CHANNELS

Channel List for 802.11b/g/n(HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

2.3 TEST MODE

The EUT was programmed to be in continuously transmitting mode.

Channel List for 802.11b/g/n(HT20)		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH01	2412
Middle	CH06	2437
High	CH11	2462

Channel List for 802.11n(40MHz)		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH03	2422
Middle	CH06	2437
High	CH09	2452

2.4 DESCRIPTION OF THE TEST MODES


During the measurement the environmental conditions were within the listed ranges:

Voltage	Normal Voltage	DC 24V
	High Voltage	DC 26.4V
	Low Voltage	DC 21.6V
Other	Normal Temperature	24°C
	Relative Humidity	55 %
	Air Pressure	989 hPa


Note: All modes were test at Normal Voltage, High Voltage, and Low Voltage, only the worst results of Normal Voltage was reported in the test report.

2.5 TEST SETUP

Operation of EUT during Radiation testing:



Operation of EUT during RF Conducted testing:

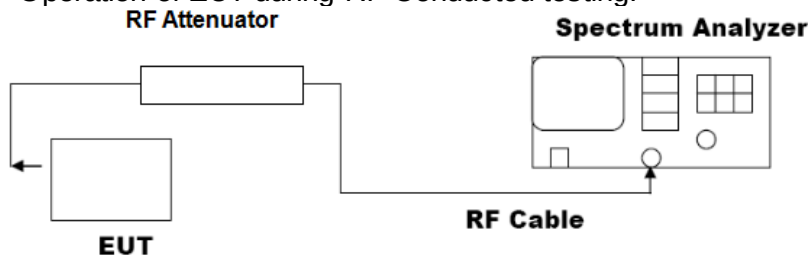

2.6 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model No.	Cable Length(cm)	Remark
1	Dride4K	DR4K1-RDL-NA	3m	EUT
2	DC power supply	--	--	AE

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

2.7 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2023.09.22
3	AAN	TESEQ	T8-Cat6	38888	2023.09.22
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2023.05.17
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2023.09.22
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2023.09.27
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2024.02.26
4	PREAMP	HP	8449B	3008A00160	2023.09.22
5	PREAMP	HP	8447D	2944A07999	2023.05.17
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2023.09.22
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2023.09.22
8	Signal Generator	Agilent	E4421B	MY4335105	2023.09.22
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2023.09.22
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2023.09.22
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2023.05.17
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2023.05.17
13	RF power divider	Anritsu	K241B	992289	2023.09.22
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2023.09.22
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2023.07.25
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2023.09.22
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2023.05.23
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2023.09.27
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2023.09.22
20	Signal Generator	Agilent	N5183A	MY47420153	2023.09.22
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2023.09.22
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2023.09.22
23	Frequency Meter	VICTOR	VC2000	997406086	2023.09.22
24	DC Power Source	HYELEC	HY5020E	055161818	2023.09.22

3 CONDUCTED EMISSION

3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 TEST SETUP

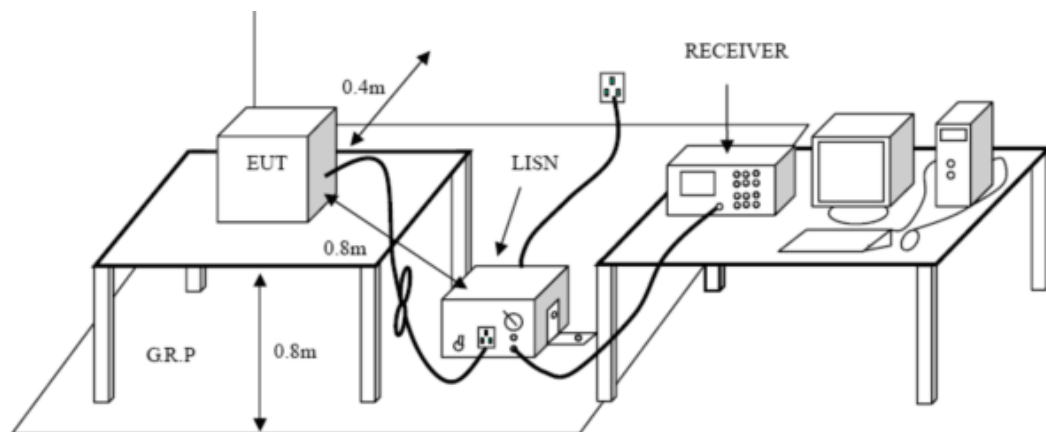

3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10: 2013.
2. Support equipment, if needed, was placed as per ANSI C63.10: 2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10: 2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hzpower through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

3.4 TEST RESULT

N/A

Remark:

The EUT is powered by DC power.

4 RADIATED EMISSION

4.1 TEST LIMIT

For unintentional device, according to §15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3


Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(KHz))+40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(KHz))+40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3


For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 TEST SETUP


1. Radiated Emission Test-Up Frequency Below 30MHz

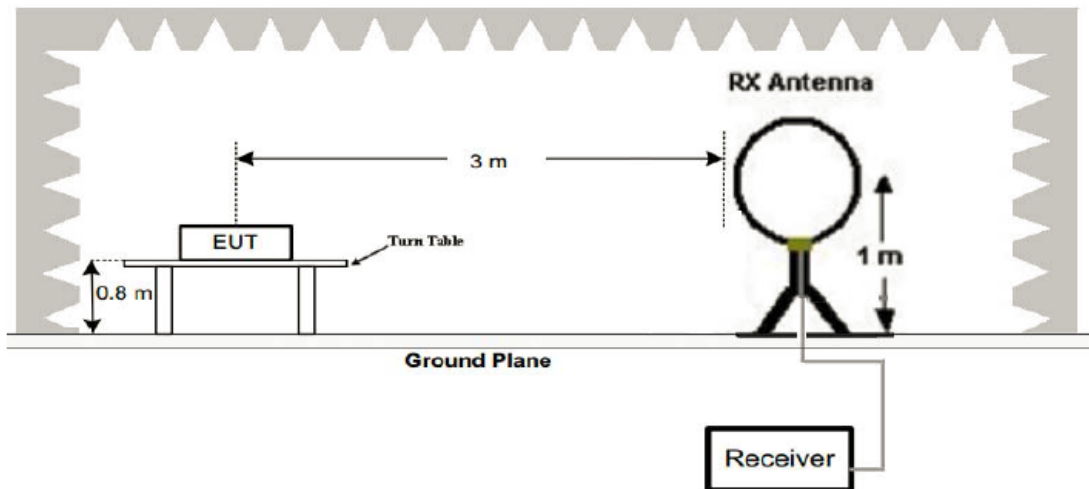

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

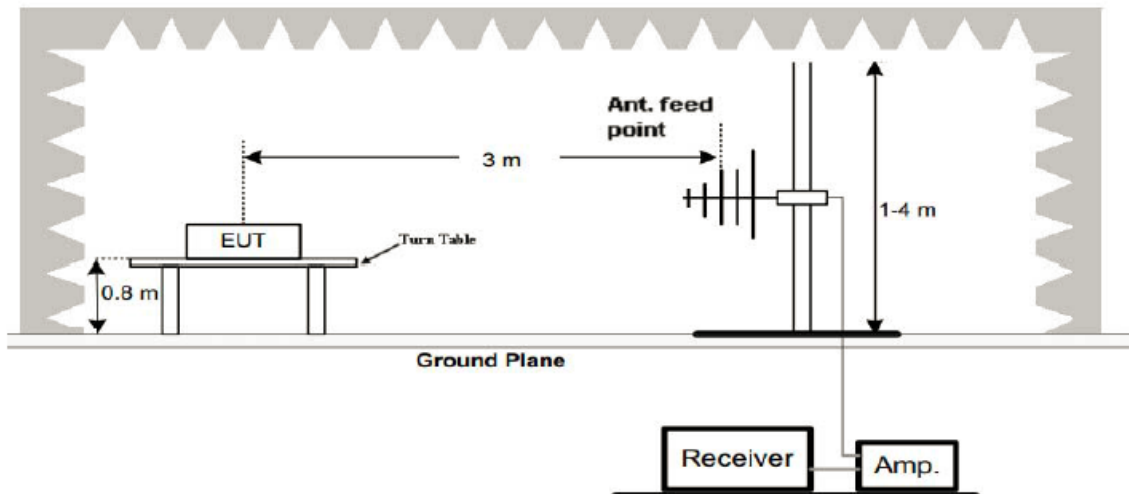

3. Radiated Emission Test-Up Frequency Above 1GHz

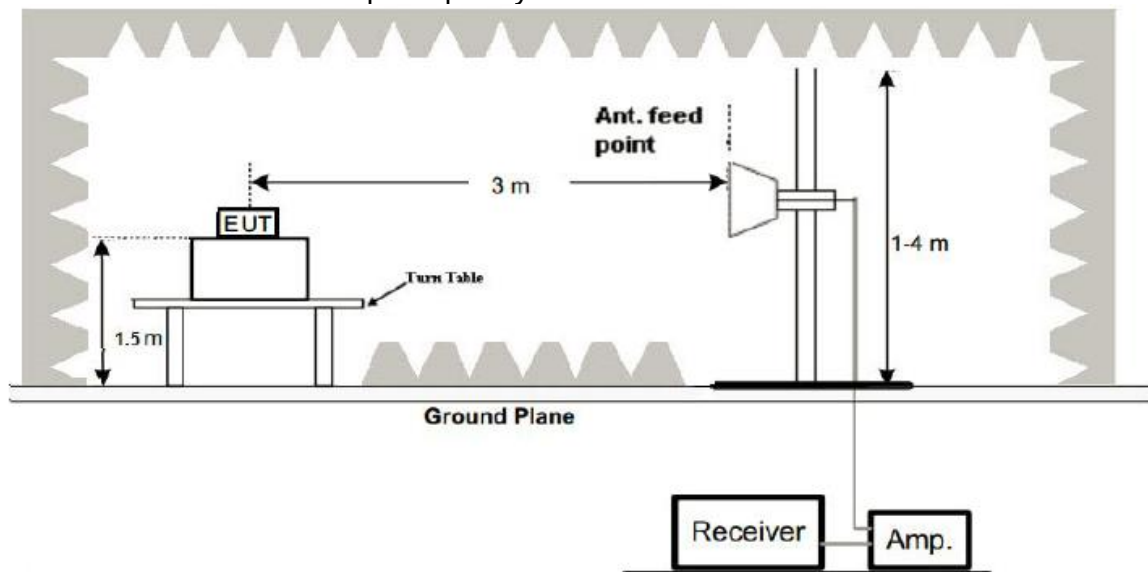

4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note: For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 TEST RESULT


PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.


Below 1GHz Test Results:

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Mar. 28, 2023	Pressure:	1010hPa
Test Voltage:	DC 24V	Phase:	Horizontal
Test Mode:	Transmitting mode of 802.11b 2412MHz		

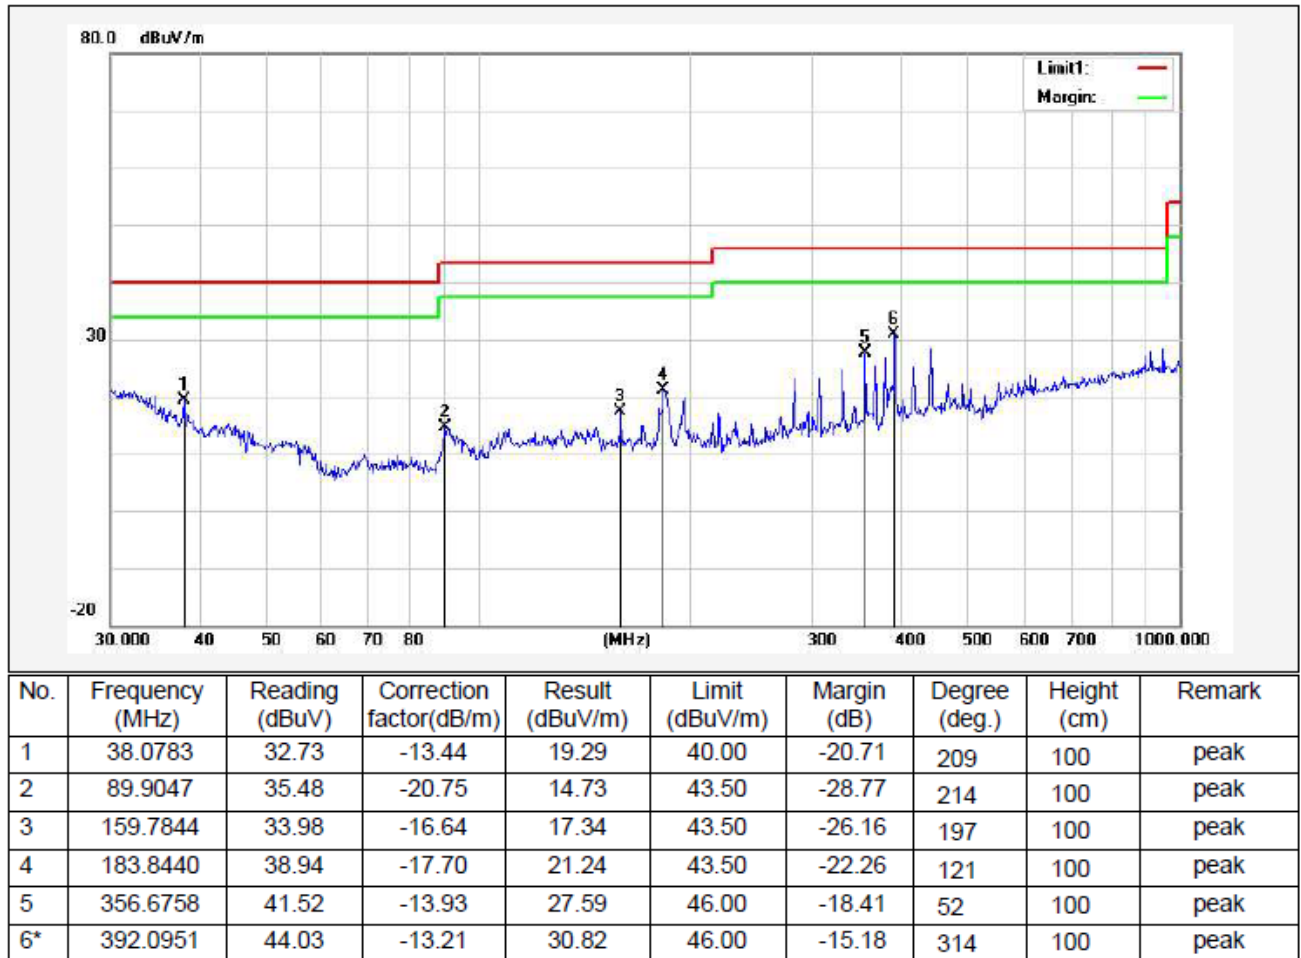

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Mar. 28, 2023	Pressure:	1010hPa
Test Voltage:	DC 24V	Phase:	Vertical
Test Mode:	Transmitting mode of 802.11b 2412MHz		

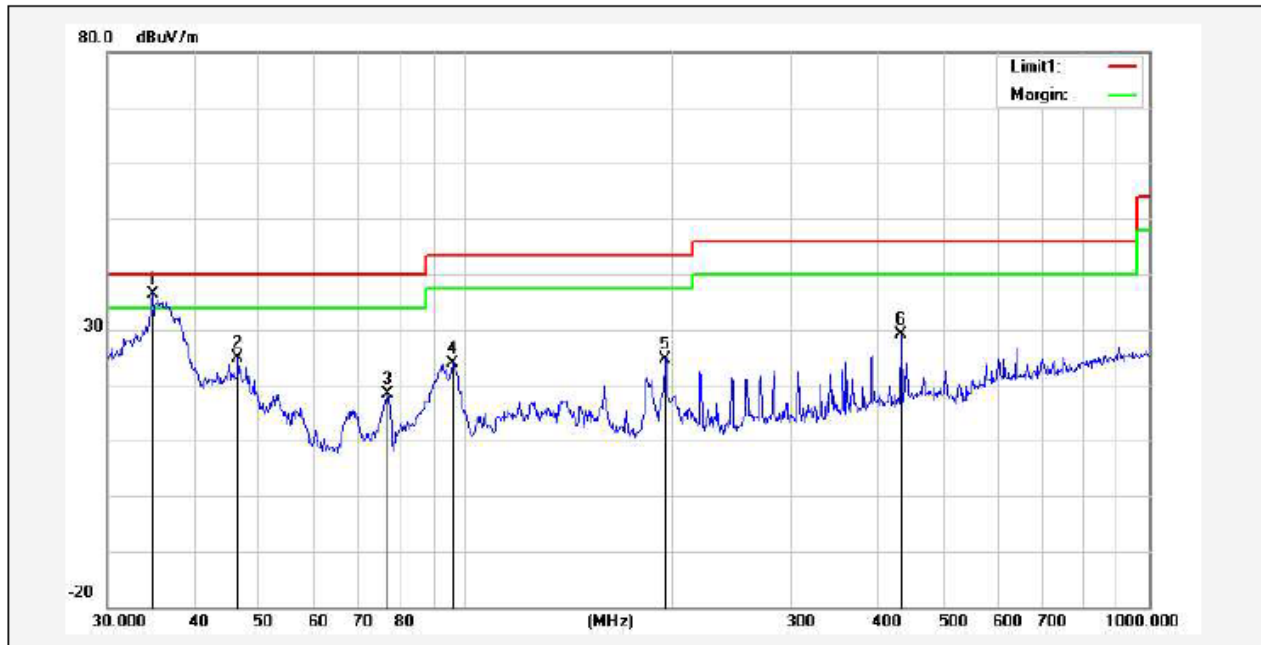

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	34.8823	47.28	-10.78	36.50	40.00	-3.50	138	100	peak
2	46.5030	43.70	-18.76	24.94	40.00	-15.06	201	100	peak
3	76.7808	39.18	-20.76	18.42	40.00	-21.58	96	100	peak
4	95.7622	43.60	-19.80	23.80	43.50	-19.70	54	100	peak
5	195.8220	41.67	-16.93	24.74	43.50	-18.76	182	100	peak
6	434.0651	41.62	-12.53	29.09	46.00	-16.91	304	100	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, emission from 9kHz to 30MHz are more than 20dB below the limit, so it was not recorded in this report.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1MHz for measuring above 1GHz, below 30MHz was 10kHz.

CH01 of 802.11b Mode (2412MHz):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.64	-3.64	55	74	-19	PK
4824	50.37	-3.64	46.73	54	-7.27	AV
7236	56.3	-0.95	55.35	74	-18.65	PK
7236	45.97	-0.95	45.02	54	-8.98	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.94	-3.64	55.3	74	-18.7	PK
4824	48.16	-3.64	44.52	54	-9.48	AV
7236	56.35	-0.95	55.4	74	-18.6	PK
7236	45.98	-0.95	45.03	54	-8.97	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.31		-3.51	55.8	74	-18.2	PK
4874	48.37		-3.51	44.86	54	-9.14	AV
7311	56		-0.82	55.18	74	-18.82	PK
7311	46.04		-0.82	45.22	54	-8.78	AV

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.25		-3.51	55.74	74	-18.26	PK
4874	47.87		-3.51	44.36	54	-9.64	AV
7311	56.11		-0.82	55.29	74	-18.71	PK
7311	45.64		-0.82	44.82	54	-9.18	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	58.94	-3.43	55.51	74	-18.49	PK
4924	48.55	-3.43	45.12	54	-8.88	AV
7386	55.74	-0.75	54.99	74	-19.01	PK
7386	45.86	-0.75	45.11	54	-8.89	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

[illegible]

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	59.25		-3.64	55.61	74	-18.39	PK
4824	47.84		-3.64	44.2	54	-9.8	AV
7236	55.27		-0.95	54.32	74	-19.68	PK
7236	45.66		-0.95	44.71	54	-9.29	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	58.84		-3.64	55.2	74	-18.8	PK
4824	48		-3.64	44.36	54	-9.64	AV
7236	55.65		-0.95	54.7	74	-19.3	PK
7236	45.07		-0.95	44.12	54	-9.88	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Horizontal:

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	59.01		-3.43	55.58	74	-18.42	PK
4924	48.56		-3.43	45.13	54	-8.87	AV
7386	54.97		-0.75	54.22	74	-19.78	PK
7386	45.08		-0.75	44.33	54	-9.67	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	59.4		-3.43	55.97	74	-18.03	PK
4924	48.46		-3.43	45.03	54	-8.97	AV
7386	55.32		-0.75	54.57	74	-19.43	PK
7386	45.37		-0.75	44.62	54	-9.38	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824		59.1	-3.64	55.46	74	-18.54	PK
4824		48.65	-3.64	45.01	54	-8.99	AV
7236		55.09	-0.95	54.14	74	-19.86	PK
7236		45.42	-0.95	44.47	54	-9.53	AV

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824		59.28	-3.64	55.64	74	-18.36	PK
4824		48.4	-3.64	44.76	54	-9.24	AV
7236		55.15	-0.95	54.2	74	-19.8	PK
7236		45.71	-0.95	44.76	54	-9.24	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	59.04		-3.51	55.53	74	-18.47	PK
4874	48.61		-3.51	45.1	54	-8.9	AV
7311	55.94		-0.82	55.12	74	-18.88	PK
7311	45.05		-0.82	44.23	54	-9.77	AV

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874		59.37	-3.51	55.86	74	-18.14	PK
4874		47.98	-3.51	44.47	54	-9.53	AV
7311		55.2	-0.82	54.38	74	-19.62	PK
7311		45.11	-0.82	44.29	54	-9.71	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924		57.97	-3.43	54.54	74	-19.46	PK
4924		48.1	-3.43	44.67	54	-9.33	AV
7386		54.75	-0.75	54	74	-20	PK
7386		45.66	-0.75	44.91	54	-9.09	AV

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)		(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924		58.78	-3.43	55.35	74	-18.65	PK
4924		48.21	-3.43	44.78	54	-9.22	AV
7386		55.68	-0.75	54.93	74	-19.07	PK
7386		45.29	-0.75	44.54	54	-9.46	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)		(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	58.11		-3.63	54.48	74	-19.52	PK
4844	48.37		-3.63	44.74	54	-9.26	AV
7266	55.26		-0.94	54.32	74	-19.68	PK
7266	44.09		-0.94	43.15	54	-10.85	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	60.31	-3.63	56.68	74	-17.32	PK
4844	49.05	-3.63	45.42	54	-8.58	AV
7266	54.47	-0.94	53.53	74	-20.47	PK
7266	41.9	-0.94	40.96	54	-13.04	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	57.98	-3.51	54.47	74	-19.53	PK
4874	48.2	-3.51	44.69	54	-9.31	AV
7311	54.79	-0.82	53.97	74	-20.03	PK
7311	45.31	-0.82	44.49	54	-9.51	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

[illegible]

CH09 of 802.11n/H40 Mode (2452MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	58.94	-3.43	55.51	74	-18.49	PK
4904	48.01	-3.43	44.58	54	-9.42	AV
7356	55.37	-0.75	54.62	74	-19.38	PK
7356	45.1	-0.75	44.35	54	-9.65	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	58.27	-3.43	54.84	74	-19.16	PK
4904	48.41	-3.43	44.98	54	-9.02	AV
7356	55.69	-0.75	54.94	74	-19.06	PK
7356	44.21	-0.75	43.46	54	-10.54	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Remark:

1. Measuring frequencies from 1GHz to the 25GHz.
2. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
3. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.
7. All modes of operation were investigated and the worst-case emissions are reported.

Horizontal:

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.88	-5.65	50.23	74	-23.77	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.2	-5.72	50.48	74	-23.52	PK
2500	/	-5.72	/	54	/	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.31	-5.65	50.66	74	-23.34	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.37	-5.72	50.65	74	-23.35	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

[illegible]

Vertical:

Frequency	Reading	Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.98	-5.81	50.17	74	-23.83	PK	
2310	/	-5.81	/	54	/	AV	
2390	64.06	-5.84	58.22	74	-15.78	PK	
2390	46.37	-5.84	40.53	54	-13.47	AV	
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit							

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.3	-5.65	50.65	74	-23.35	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.35	-5.72	50.63	74	-23.37	PK
2500	/	-5.72	/	54	/	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.98	-5.65	50.33	74	-23.67	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.15	-5.72	50.43	74	-23.57	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

[illegible]

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.2	-5.81	50.39	74	-23.61	PK
2310	/	-5.81	/	54	/	AV
2390	64.27	-5.84	58.43	74	-15.57	PK
2390	46.01	-5.84	40.17	54	-13.83	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.1	-5.65	50.45	74	-23.55	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.42	-5.72	50.7	74	-23.3	PK
2500	/	-5.72	/	54	/	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.09	-5.65	50.44	74	-23.56	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.65	-5.72	50.93	74	-23.07	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.87	-5.81	50.06	74	-23.94	PK
2310	/	-5.81	/	54	/	AV
2390	64.2	-5.84	58.36	74	-15.64	PK
2390	46.11	-5.84	40.27	54	-13.73	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.25	-5.81	50.44	74	-23.56	PK
2310	/	-5.81	/	54	/	AV
2390	63.97	-5.84	58.13	74	-15.87	PK
2390	46.1	-5.84	40.26	54	-13.74	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.09	-5.65	50.44	74	-23.56	PK
2483.5	/	-5.65	/	54	/	AV
2500	56.14	-5.72	50.42	74	-23.58	PK
2500	/	-5.72	/	54	/	AV

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.3	-5.65	49.65	74	-24.35	PK
2483.5	/	-5.65	/	54	/	AV
2500	55.35	-5.72	49.63	74	-24.37	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

5 OCCUPIED BANDWIDTH

5.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.2 TEST PROCEDURE


5.2.1 -6dB BANDWIDTH MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq 3 \times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

5.2.2 99% OCCUPIED BANDWIDTH

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

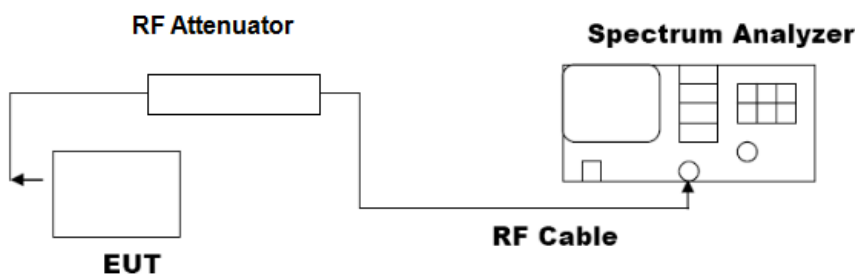


5.4 MEASUREMENT EQUIPMENT USED


The same as described in section 2.7.

5.5 TEST RESULT


PASS

TX 802.11b Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Channel Separation (kHz)	Result
2412	9.67	≥ 500	PASS
2437	9.67	≥ 500	PASS
2462	9.68	≥ 500	PASS

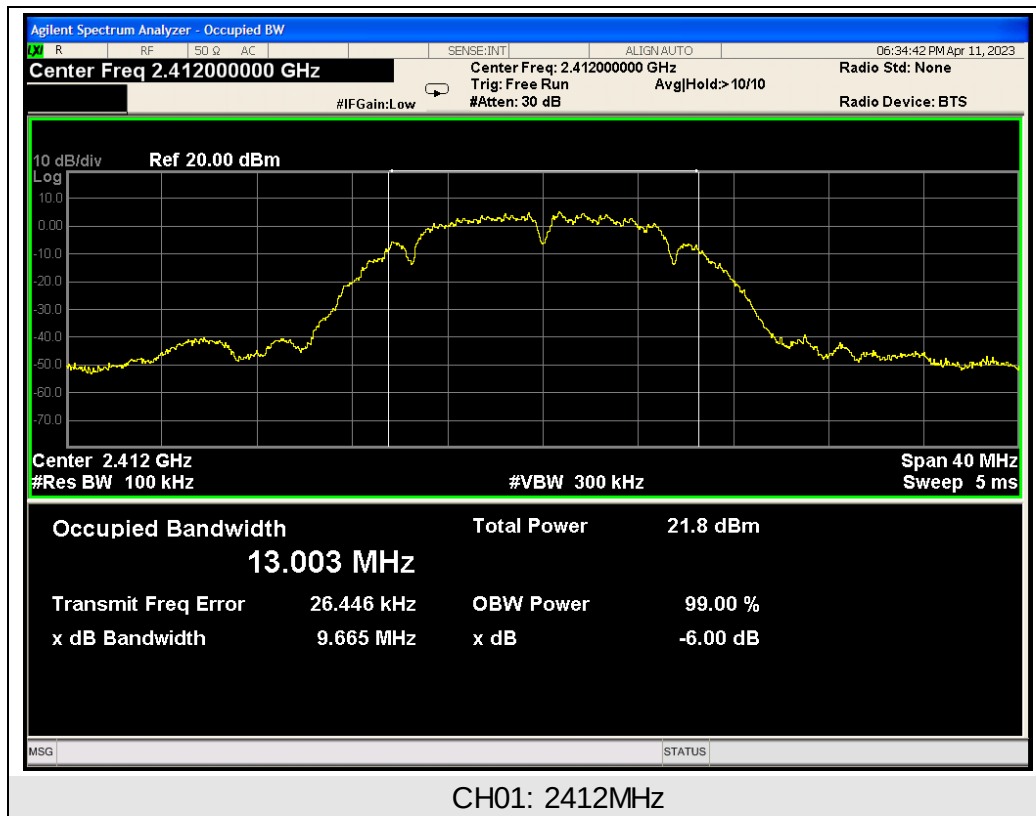

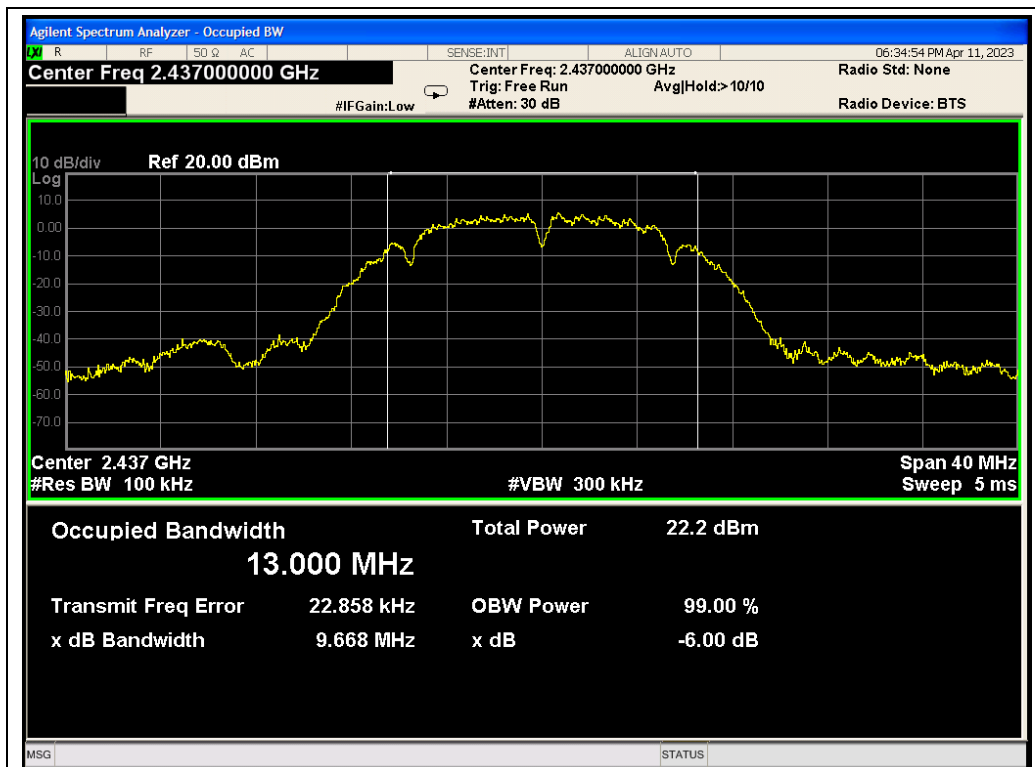



CH06: 2437MHz

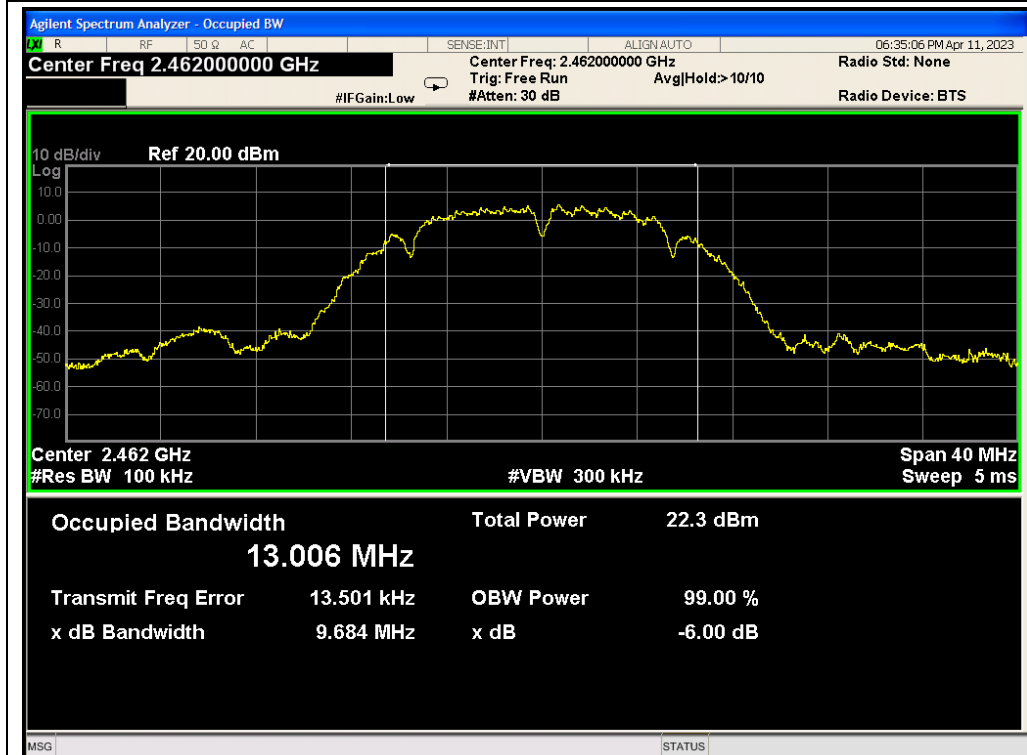


CH11: 2462MHz

TX 802.11g Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Channel Separation (kHz)	Result
2412	16.45	≥ 500	PASS
2437	16.39	≥ 500	PASS
2462	16.38	≥ 500	PASS

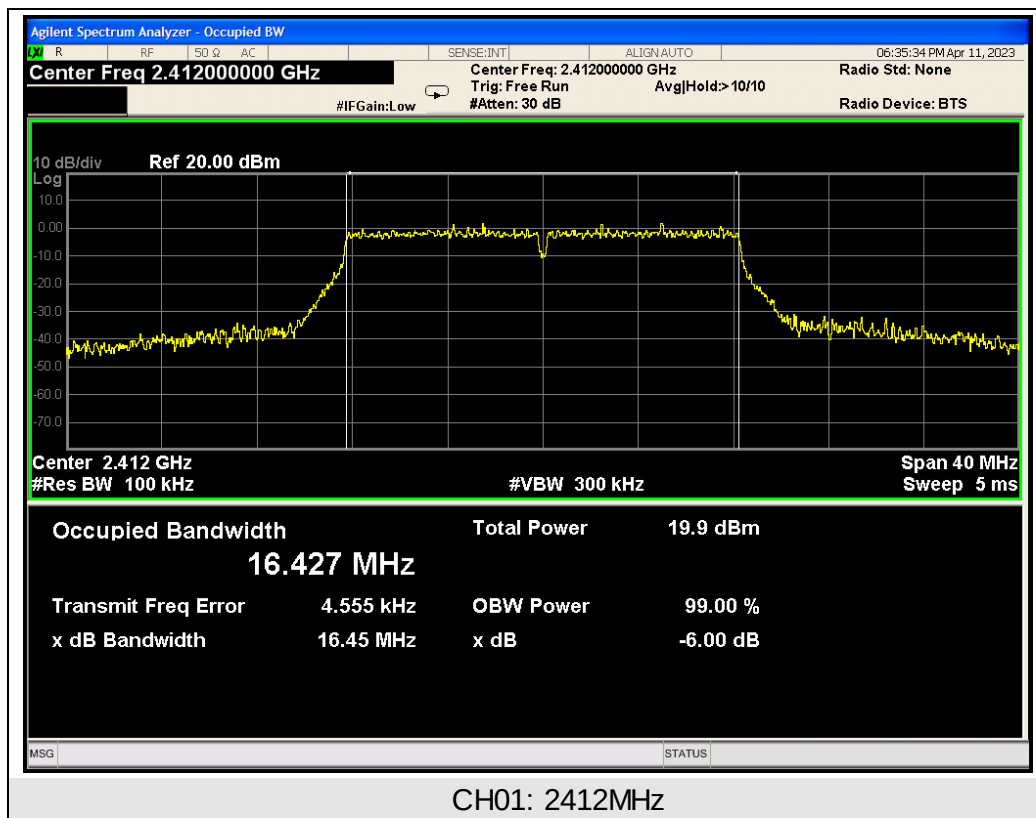

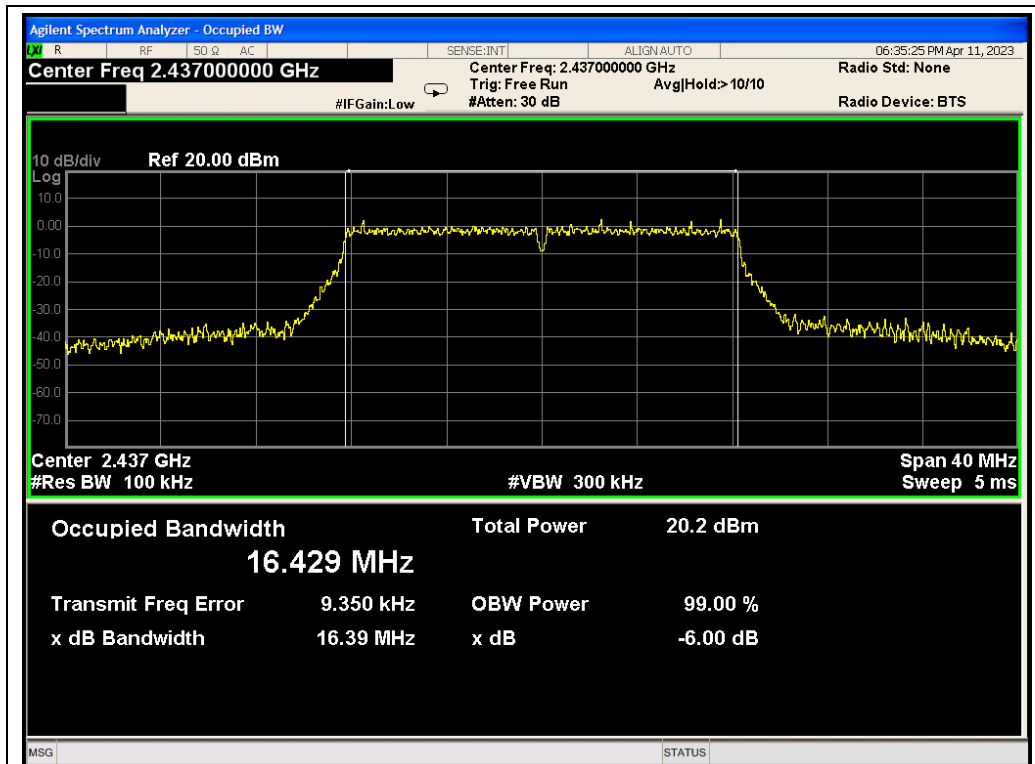



CH06: 2437MHz

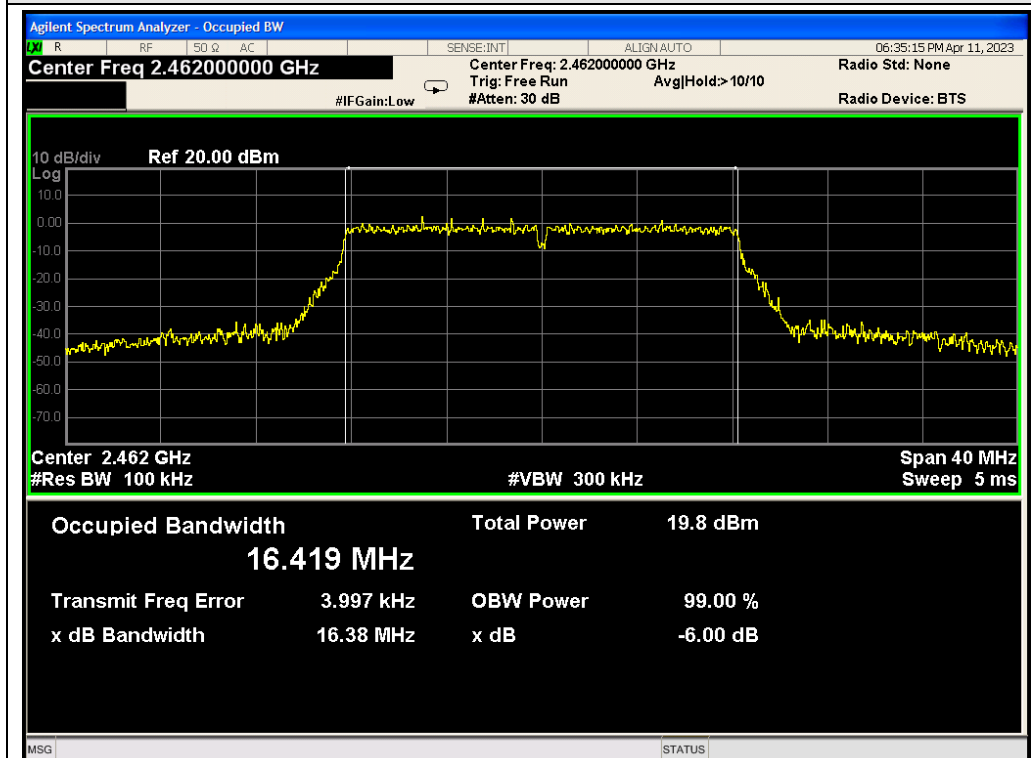


CH11: 2462MHz

TX 802.11n/HT20 Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Channel Separation (kHz)	Result
2412	17.33	≥ 500	PASS
2437	17.55	≥ 500	PASS
2462	17.52	≥ 500	PASS

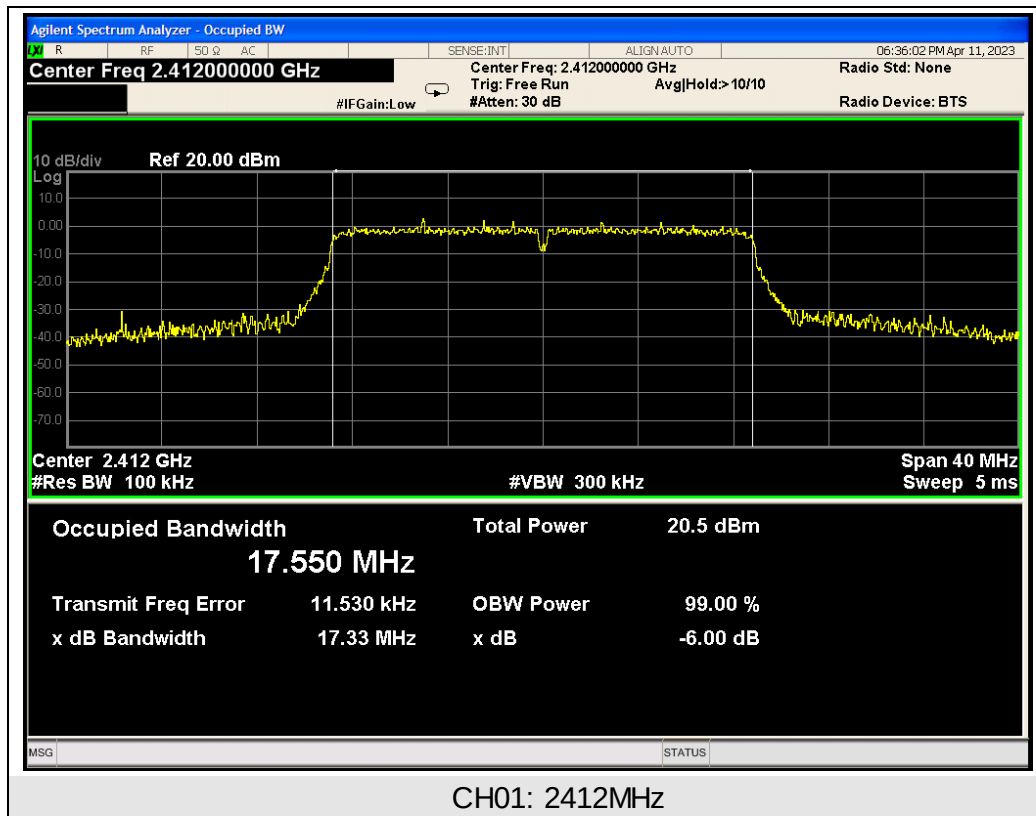

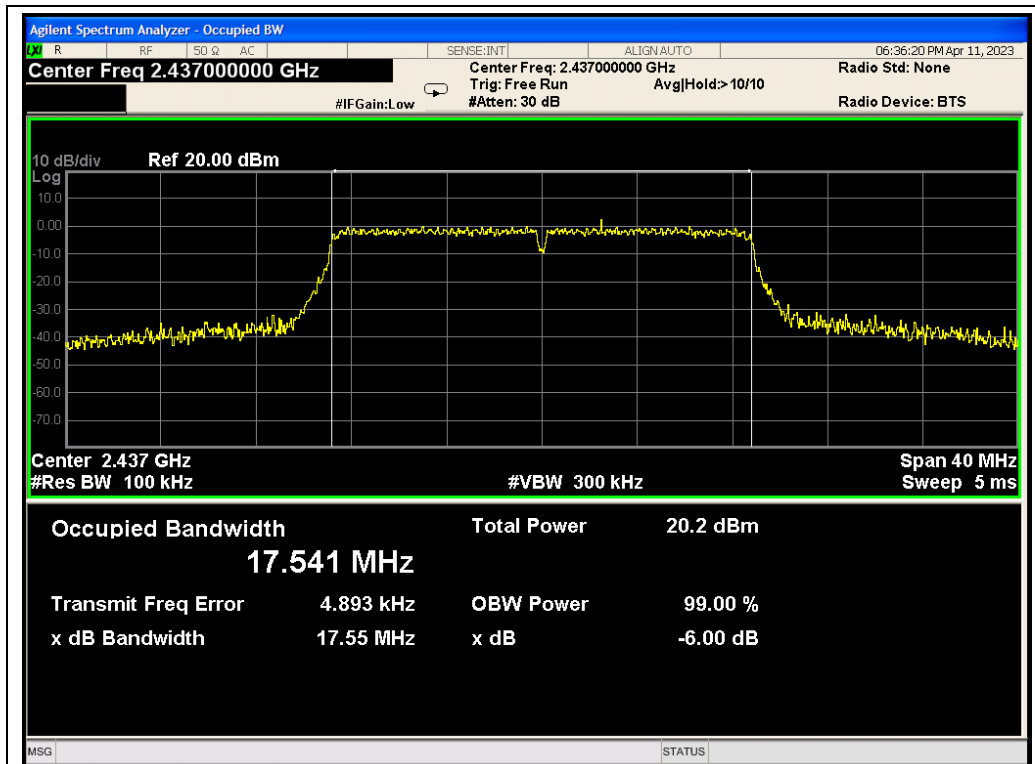



CH06: 2437MHz

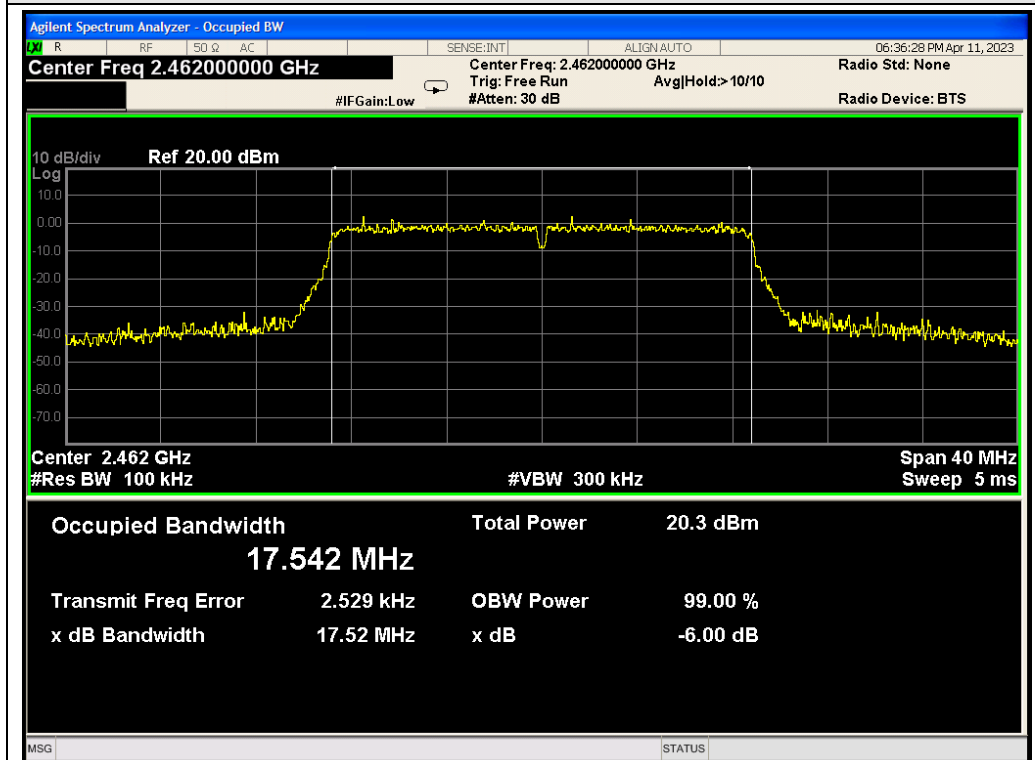


CH11: 2462MHz

TX 802.11n/HT40 Mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Channel Separation (kHz)	Result
2422	32.30	≥ 500	PASS
2437	33.02	≥ 500	PASS
2452	32.61	≥ 500	PASS

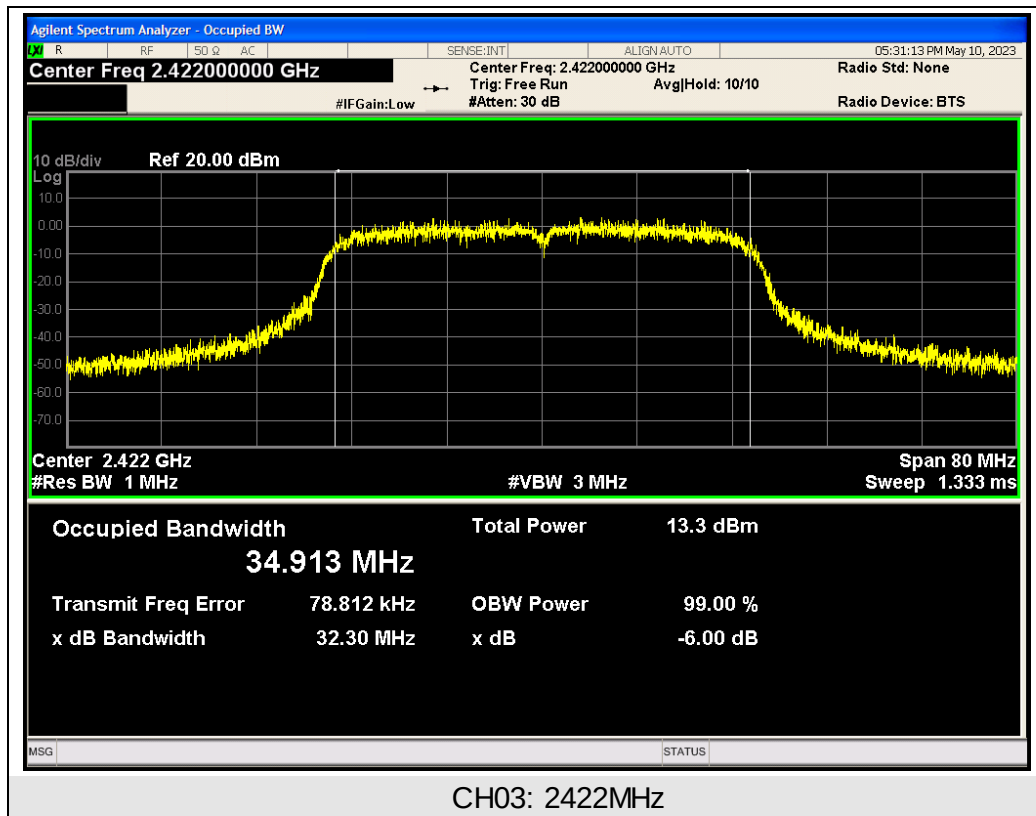

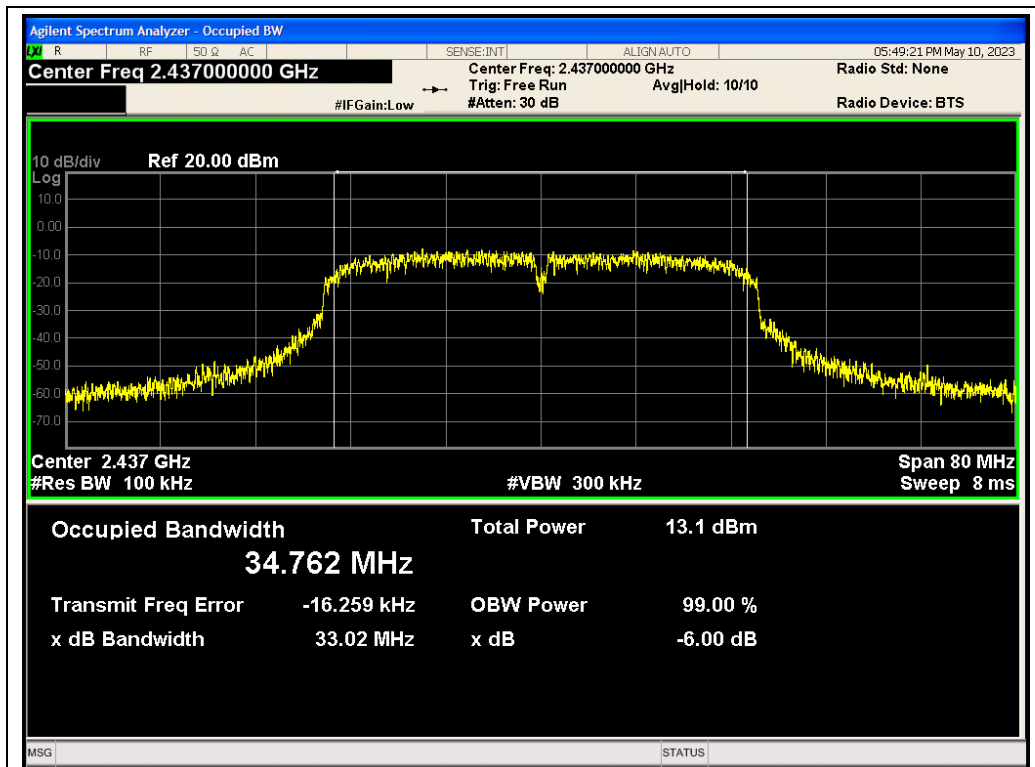

CH06: 2437MHz

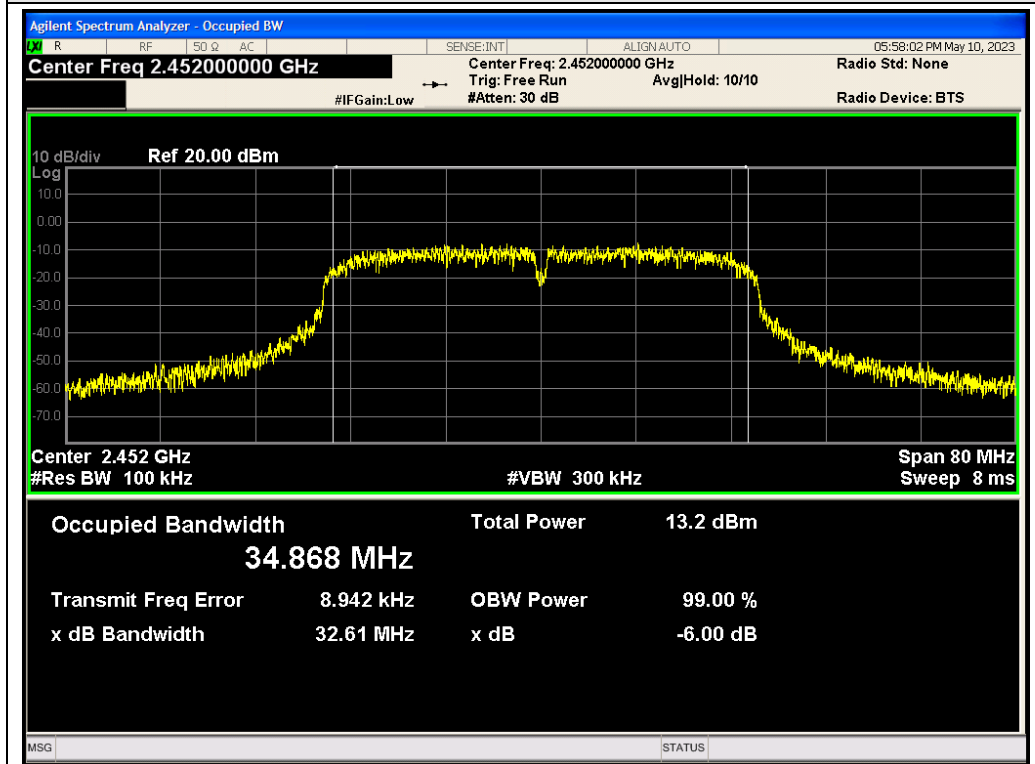

CH09: 2452MHz

6 POWER SPECTRAL DENSITY

6.1 TEST LIMIT


FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

6.2 TEST PROCEDURE

- (1) Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2) Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3) Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

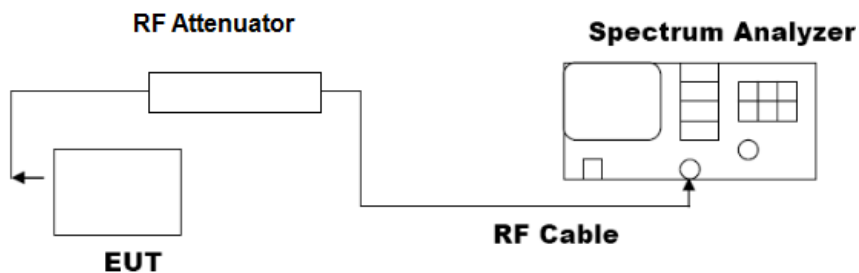


6.4 EQUIPMENT USED


The same as described in section 2.7.

6.5 TEST RESULT


PASS

TX 802.11b Mode			
Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-18.654	8	PASS
2437	-14.882	8	PASS
2462	-14.852	8	PASS

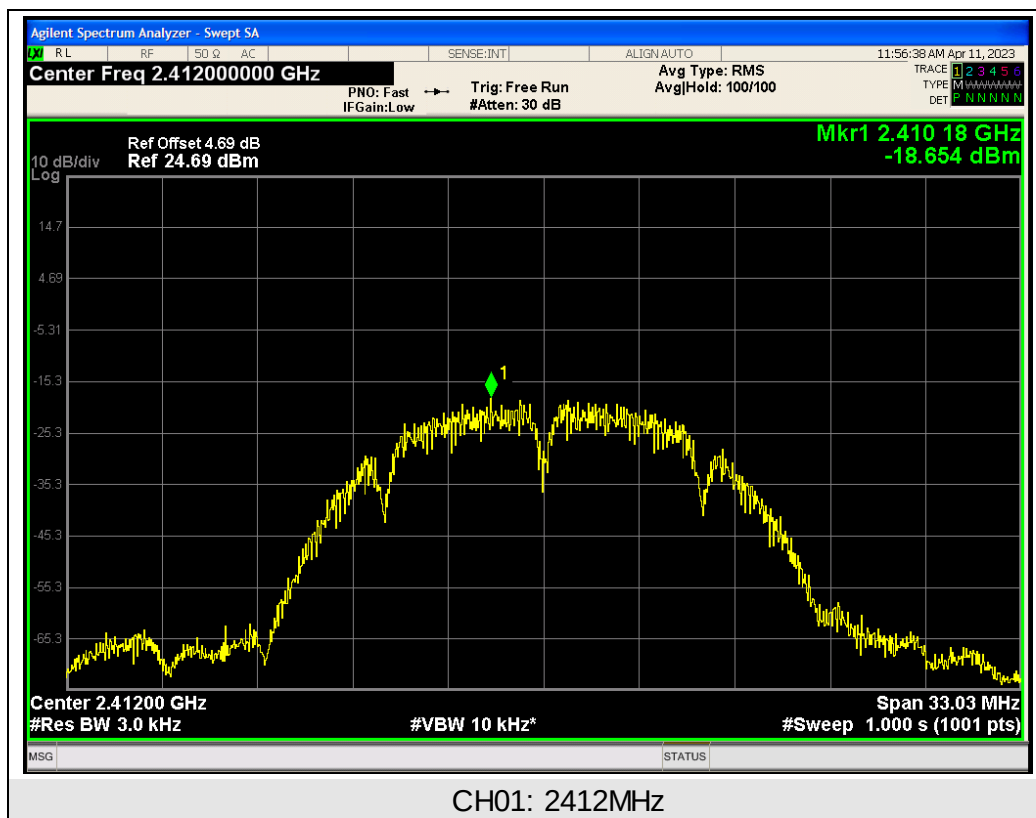

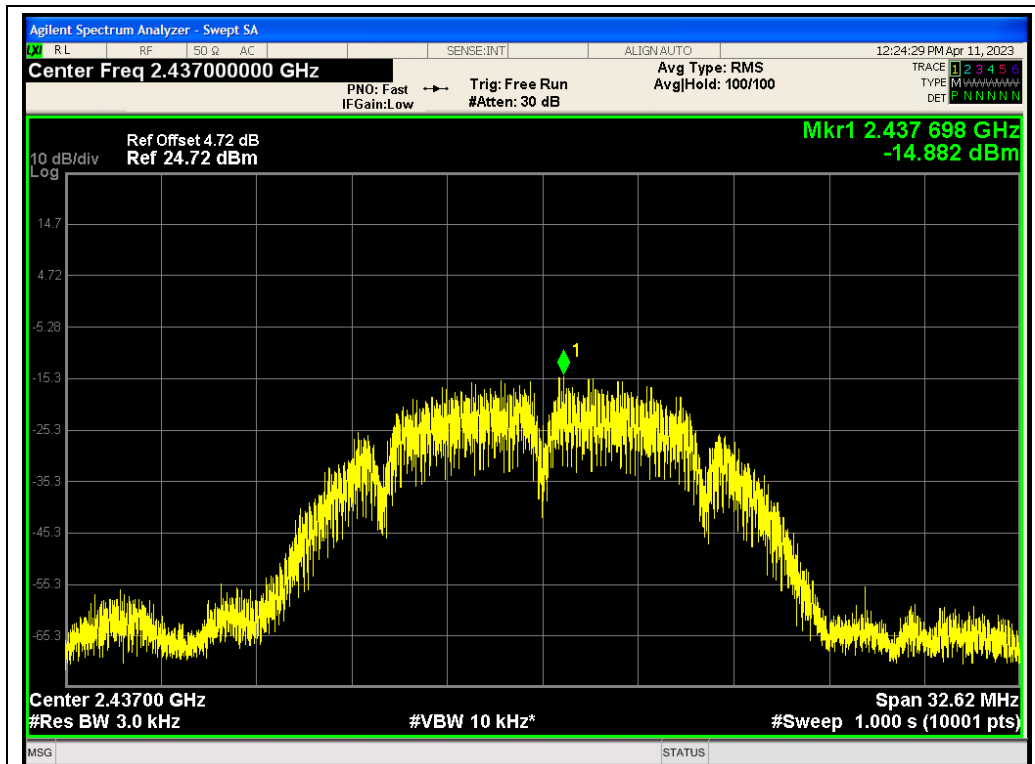



CH06: 2437MHz

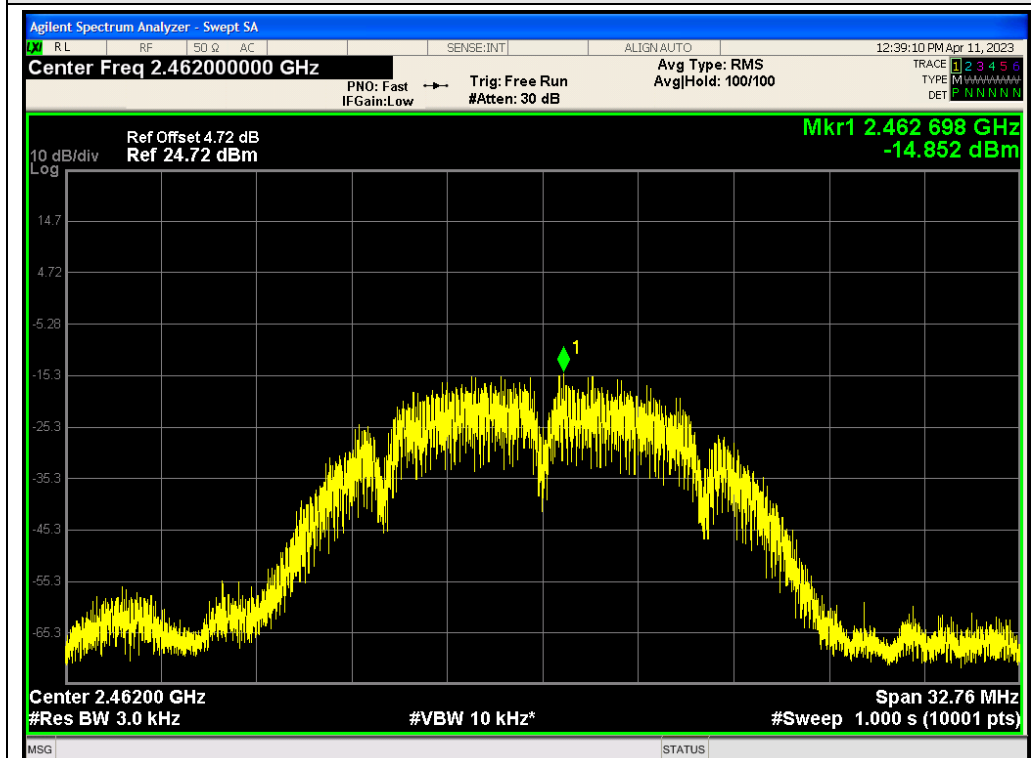


CH11: 2462MHz

TX 802.11g Mode			
Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-10.564	8	PASS
2437	-14.589	8	PASS
2462	-16.471	8	PASS

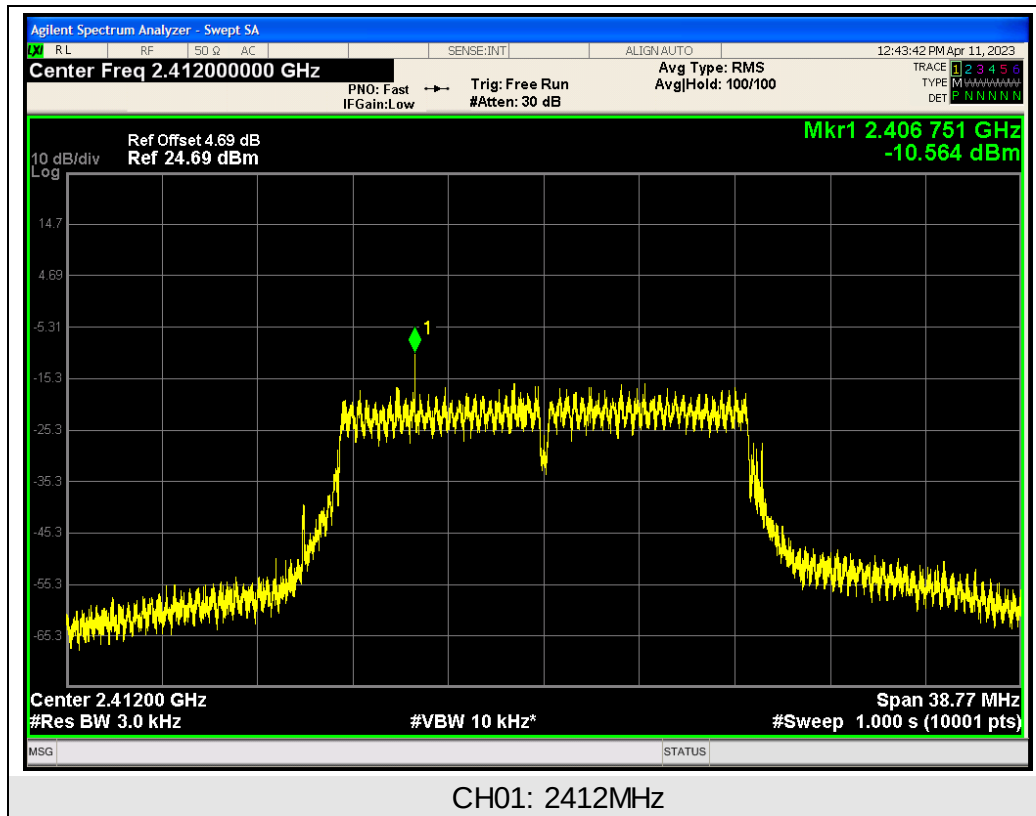

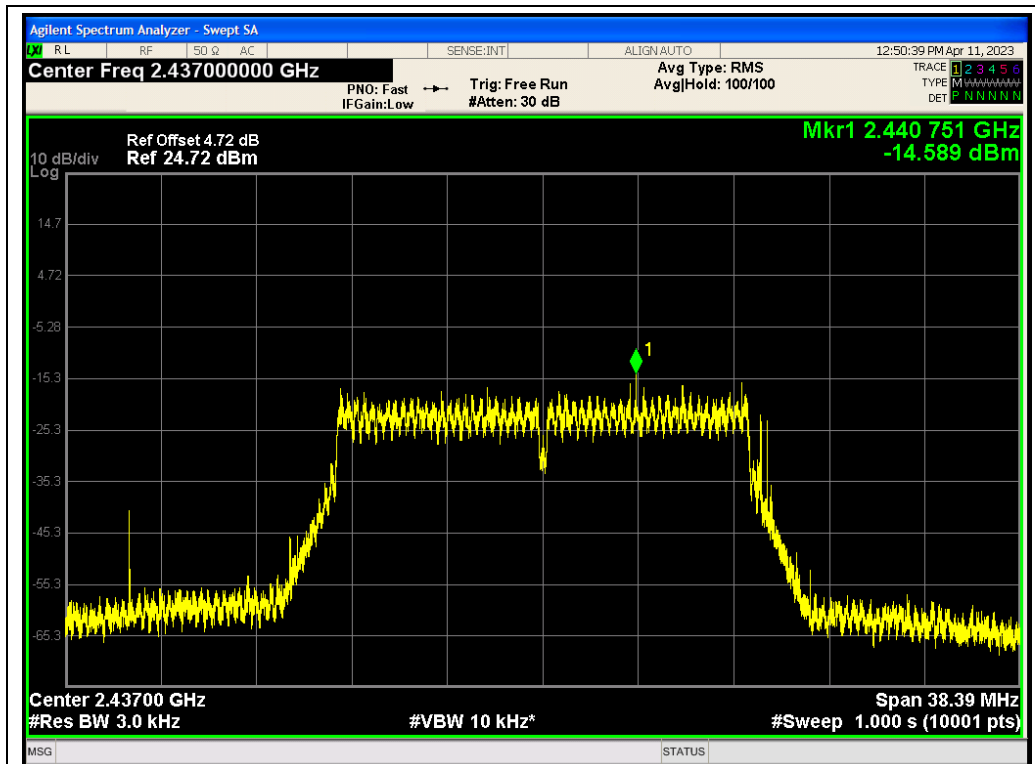



CH06: 2437MHz

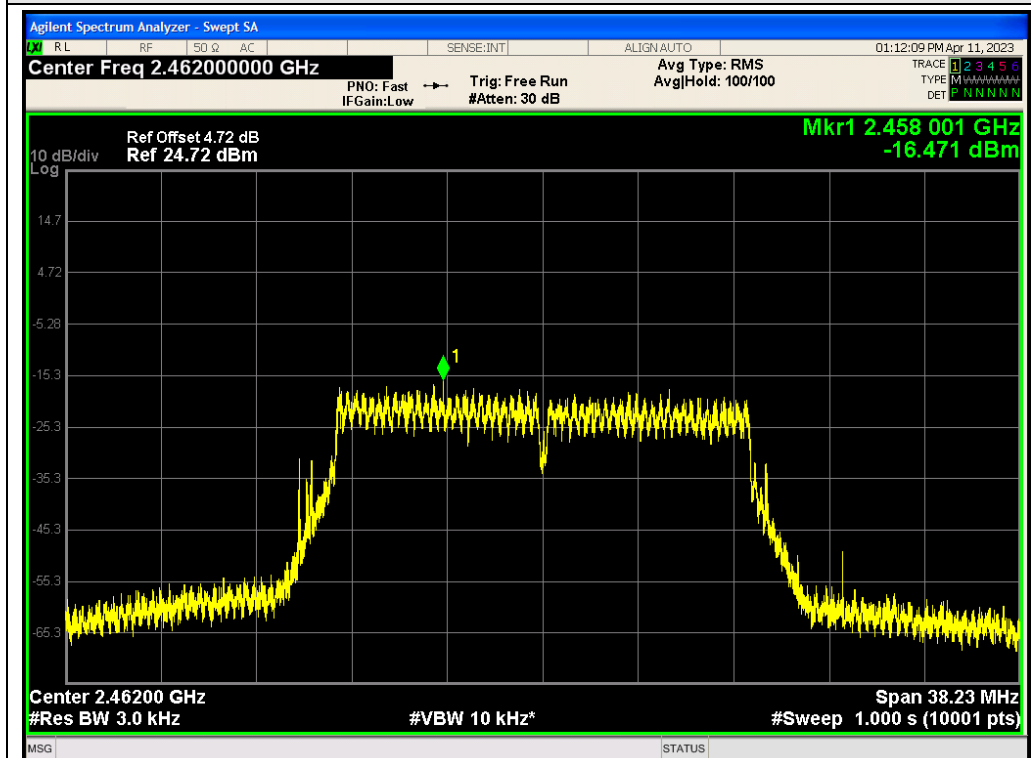


CH11: 2462MHz

TX 802.11n/HT20 Mode			
Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-15.991	8	PASS
2437	-15.751	8	PASS
2462	-15.966	8	PASS

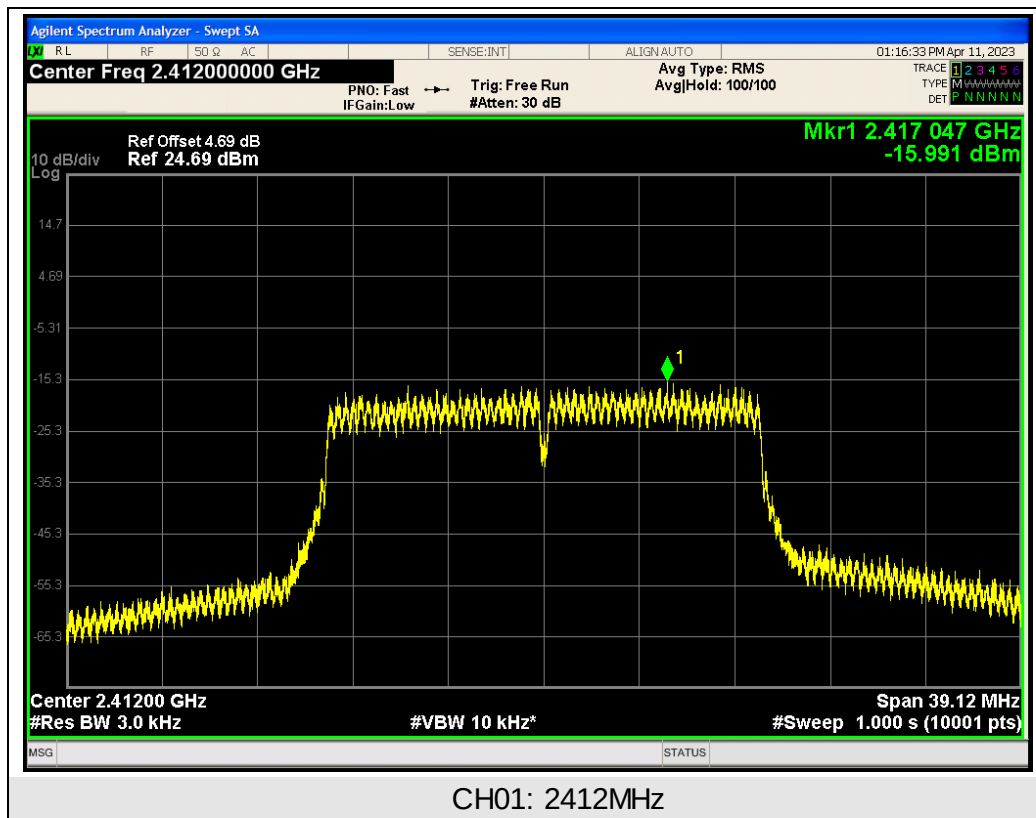

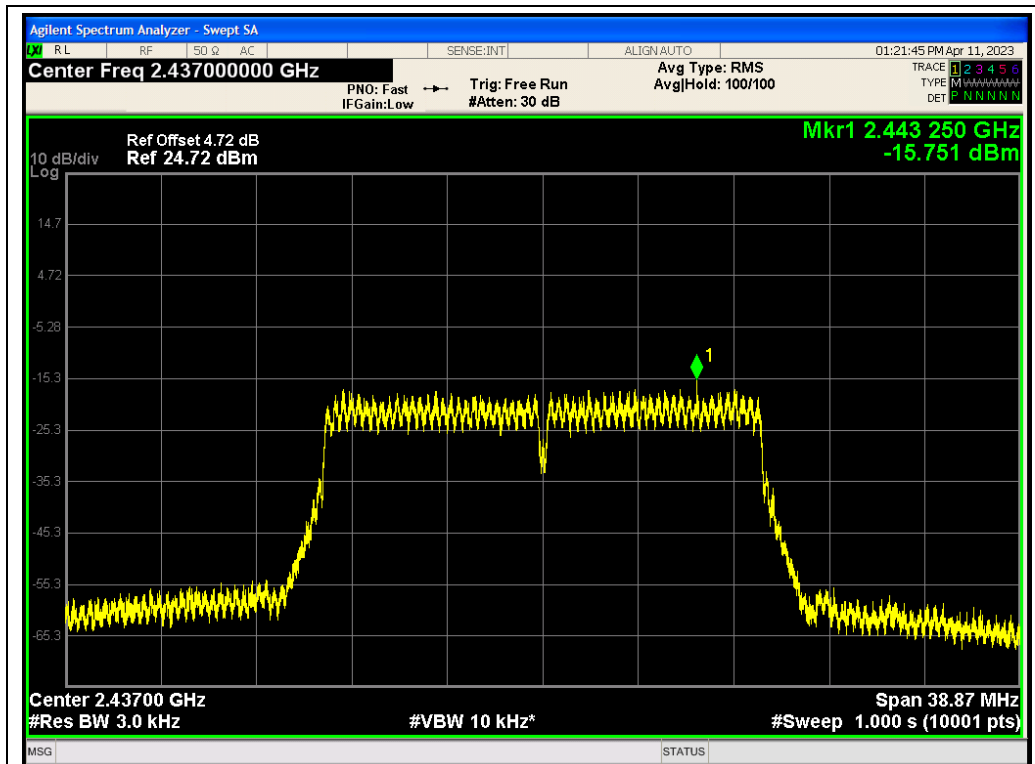



CH06: 2437MHz

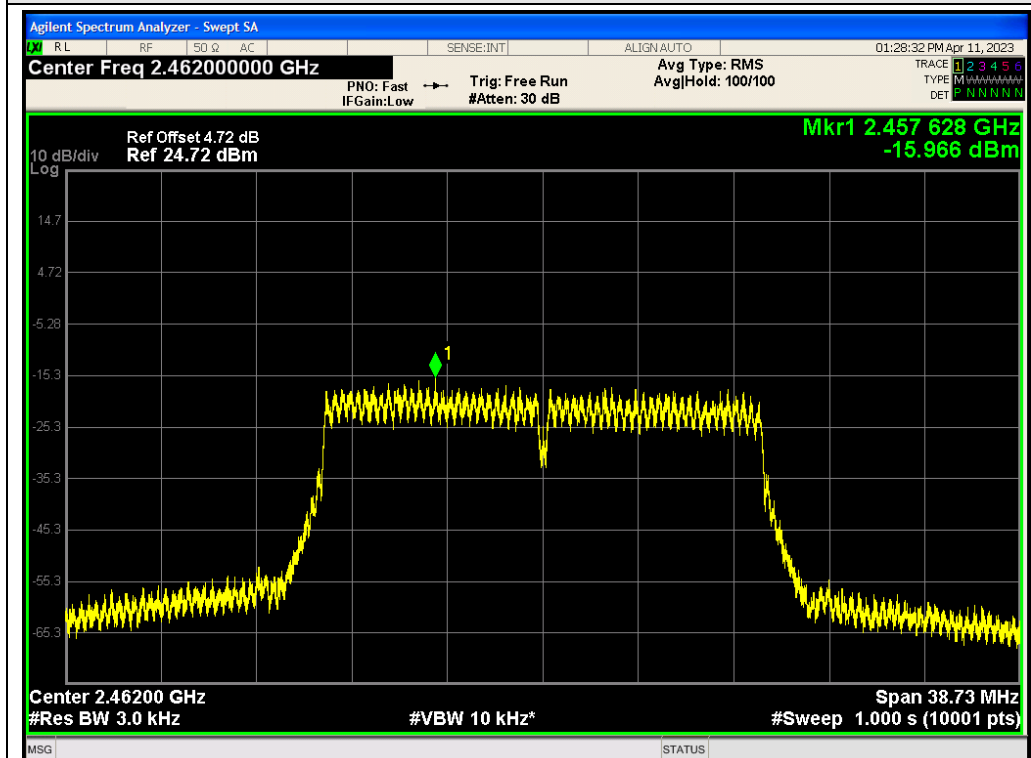


CH11: 2462MHz

TX 802.11n/HT40 Mode			
Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422	-12.654	8	PASS
2437	-13.073	8	PASS
2452	-12.811	8	PASS

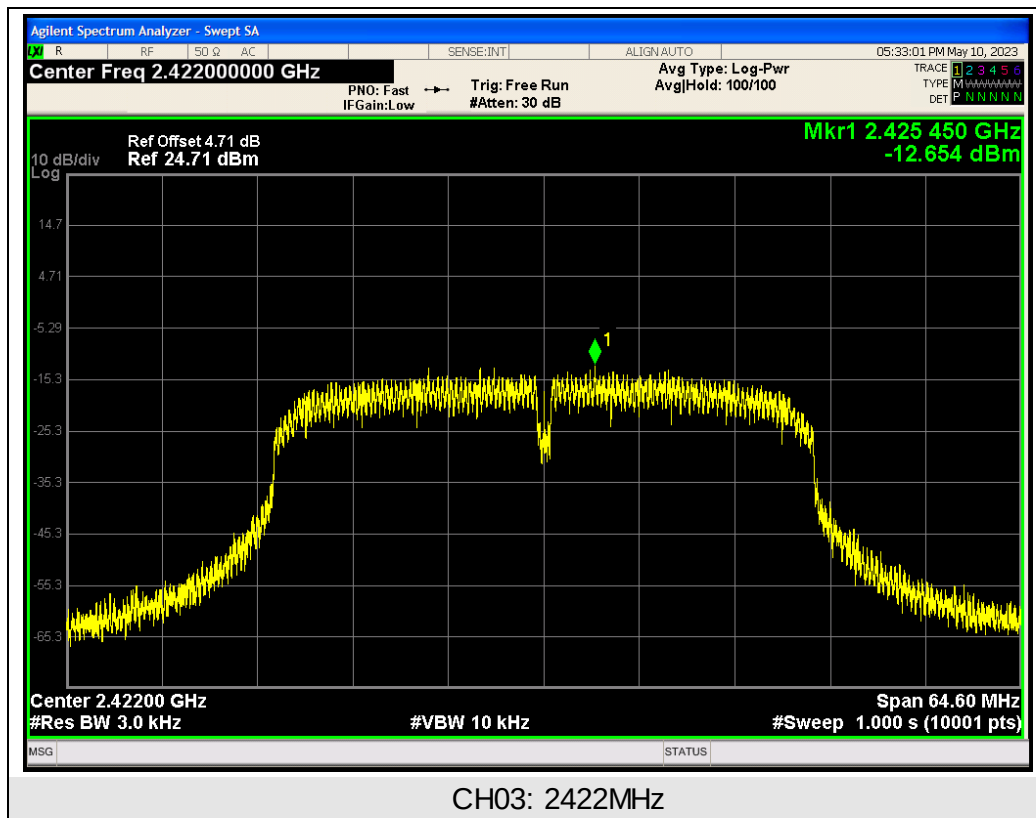

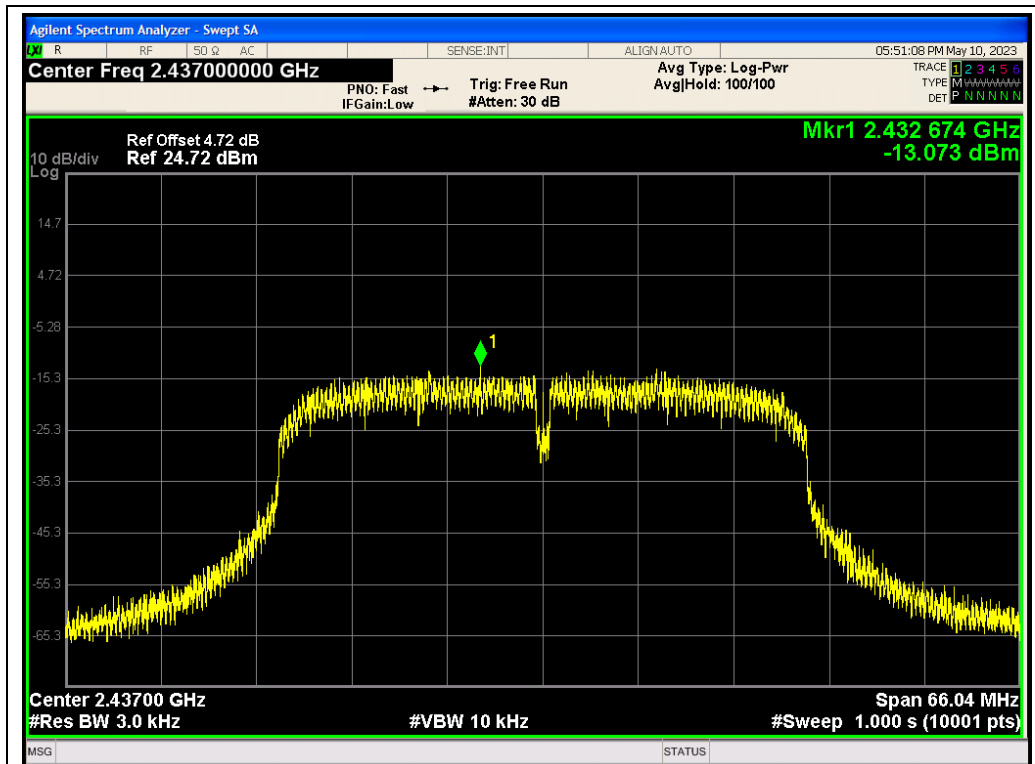

CH06: 2437MHz

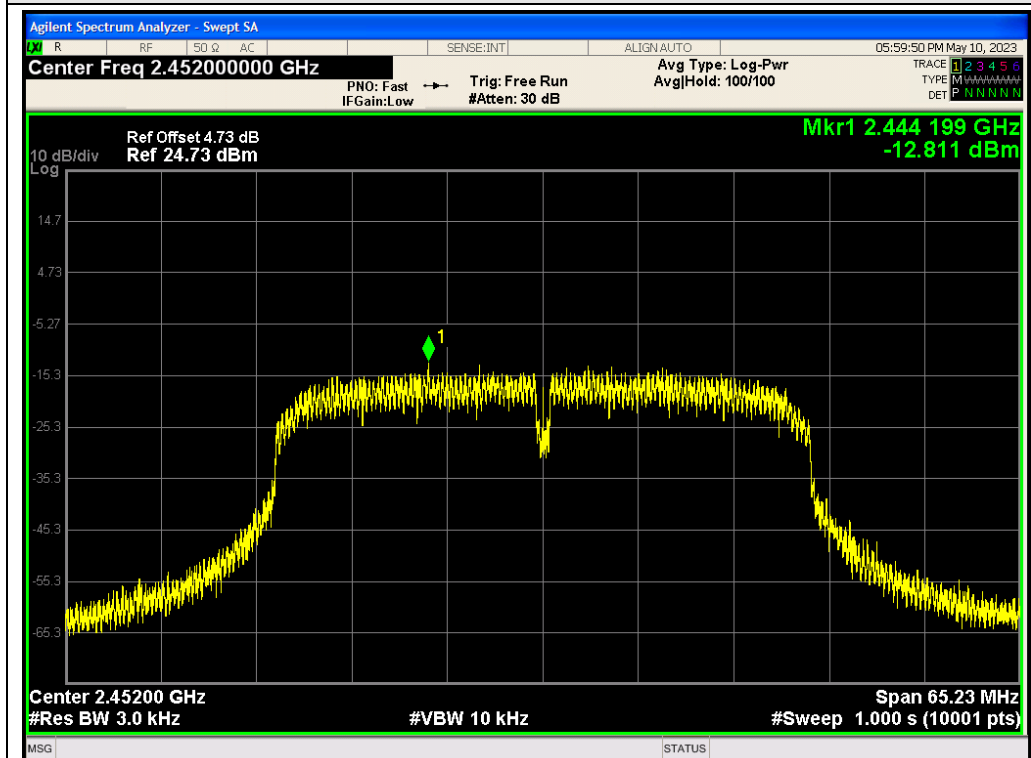

CH09: 2452MHz

7 PEAK OUTPUT POWER

7.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


7.2 TEST PROCEDURE

For average power test:

1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)



7.4 EQUIPMENT USED

The same as described in section 2.7.

7.5 TEST RESULT

PASS


Test Mode	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
802.11b	2412	17.14	30
	2437	14.37	30
	2462	15.76	30
802.11g	2412	14.33	30
	2437	10.02	30
	2462	11.72	30
802.11n/HT20	2412	12.44	30
	2437	7.9	30
	2462	9.76	30
802.11n/HT40	2422	8.65	30
	2437	8.29	30
	2452	8.38	30

8 OUT OF BAND EMISSIONS

8.1 TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

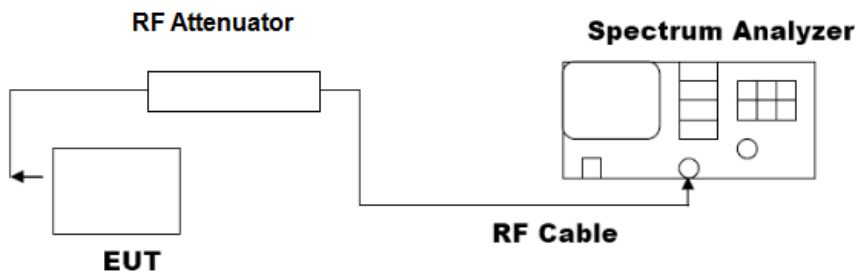


8.3 TEST PROCEDURE


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
4. Set detected by the spectrum analyzer with peak detector.


8.4 MEASUREMENT EQUIPMENT USED


The same as described in section 2.7.


8.5 TEST RESULT

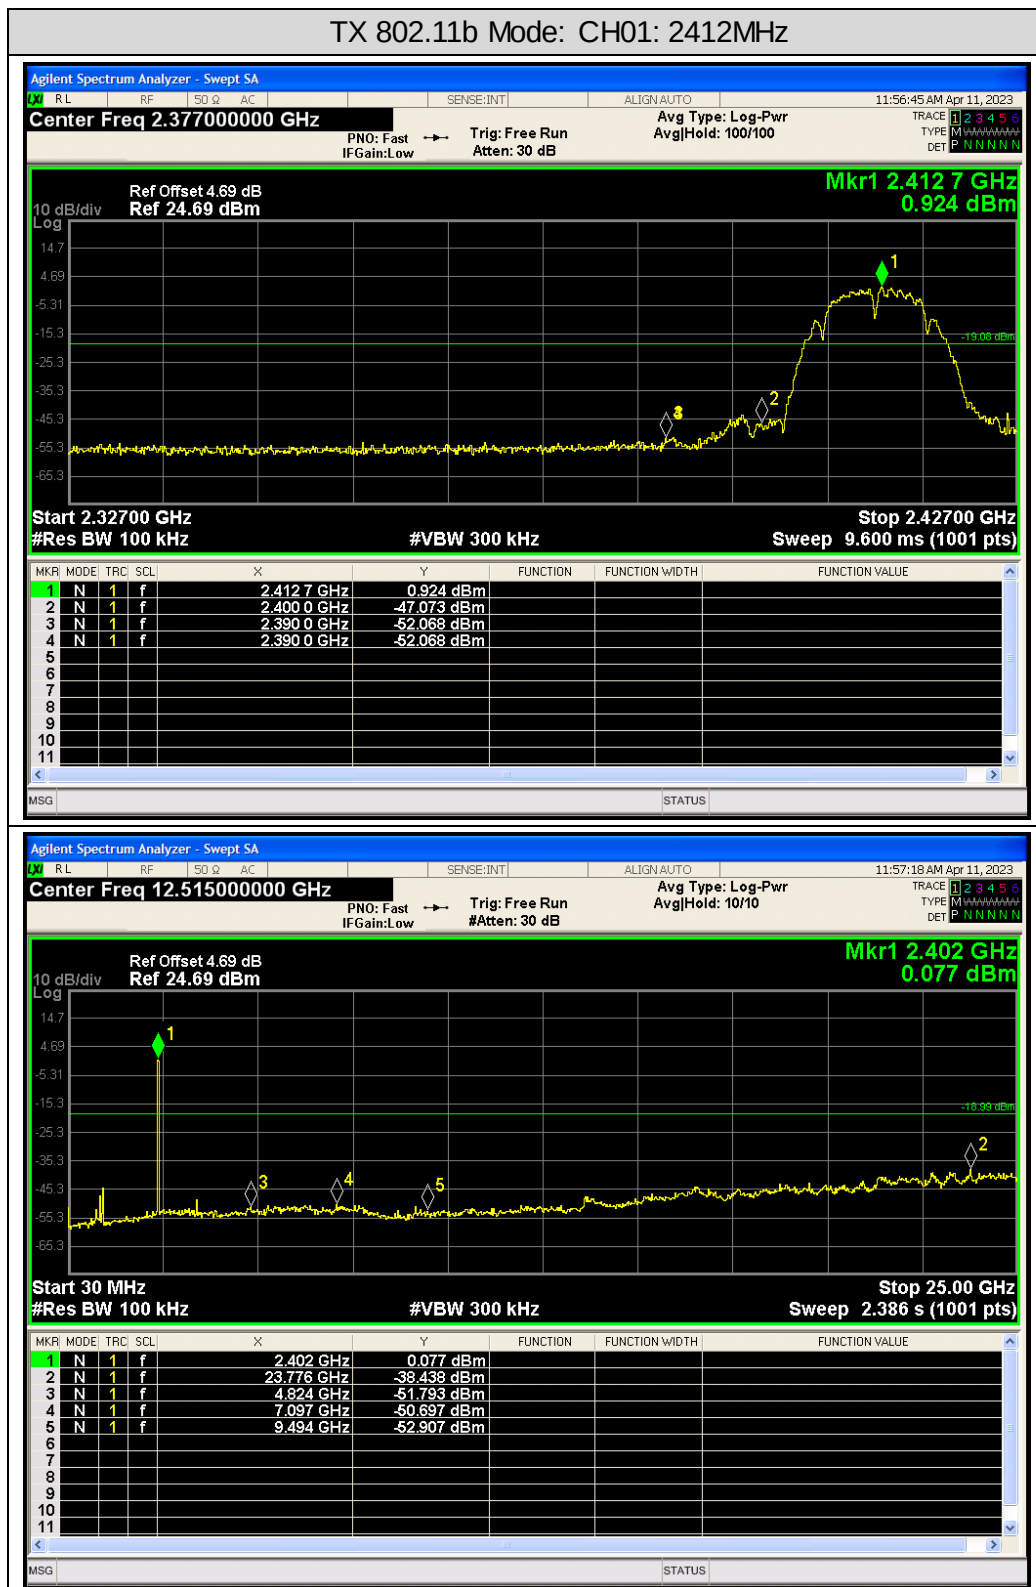


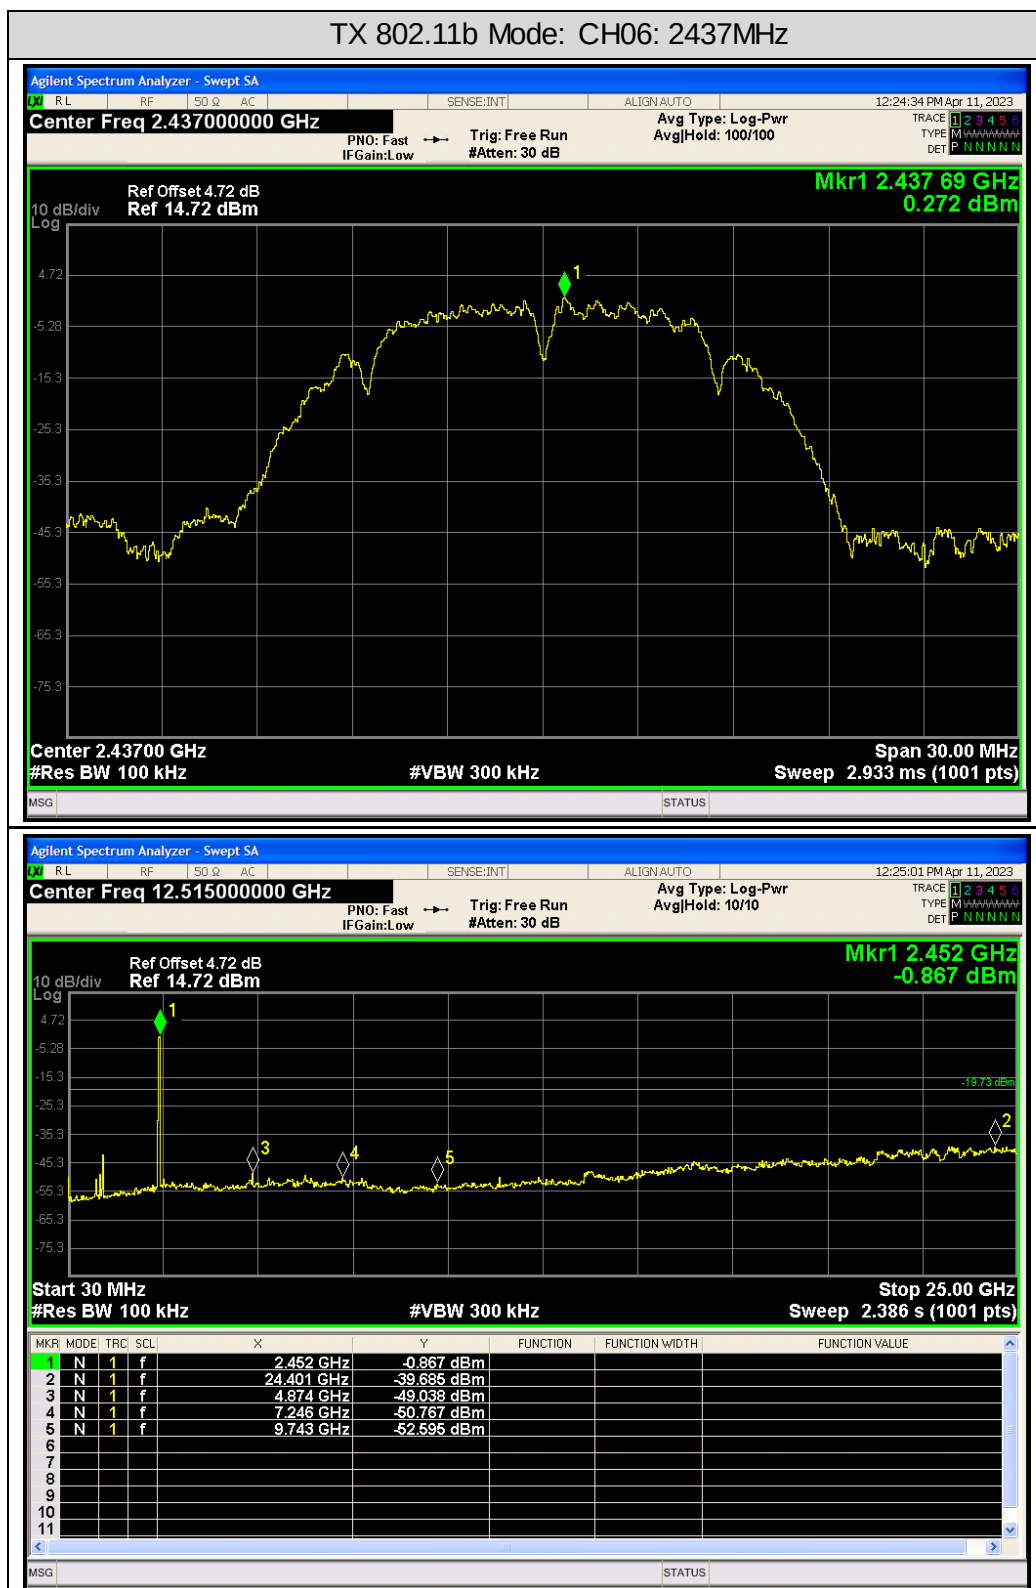


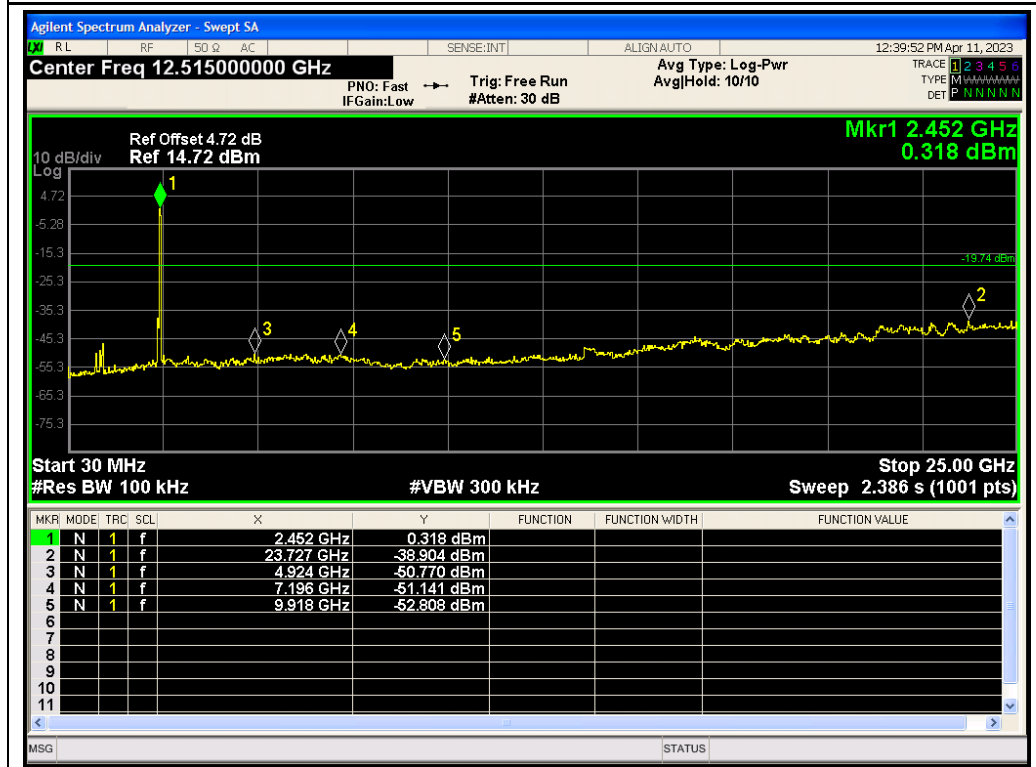



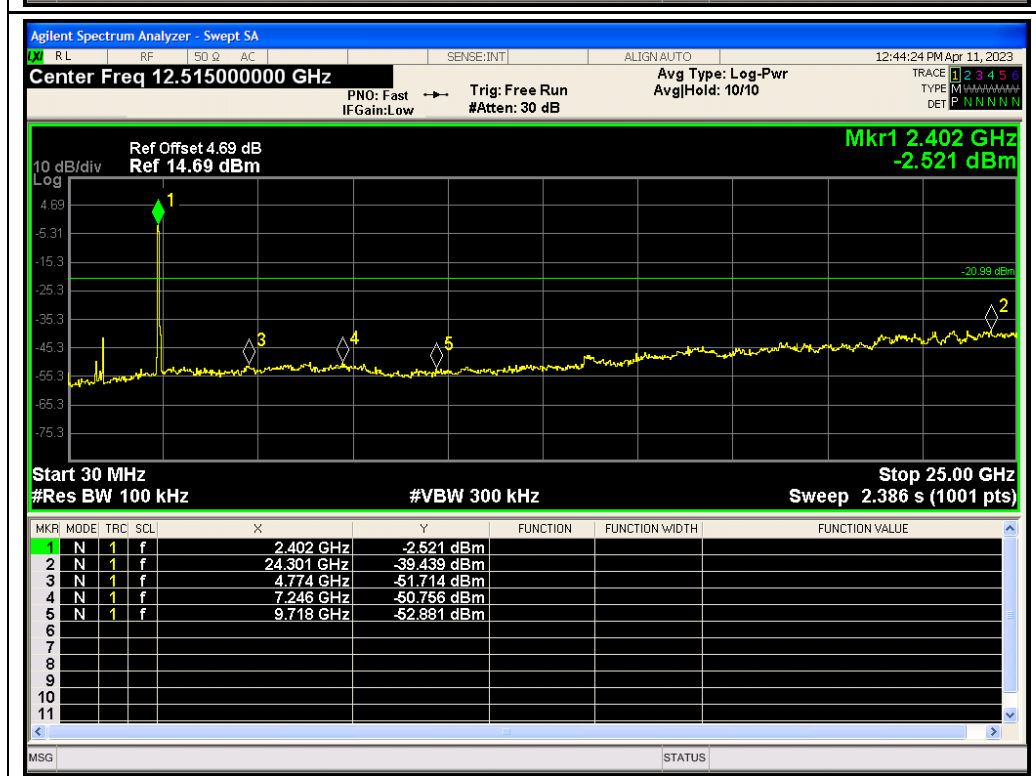


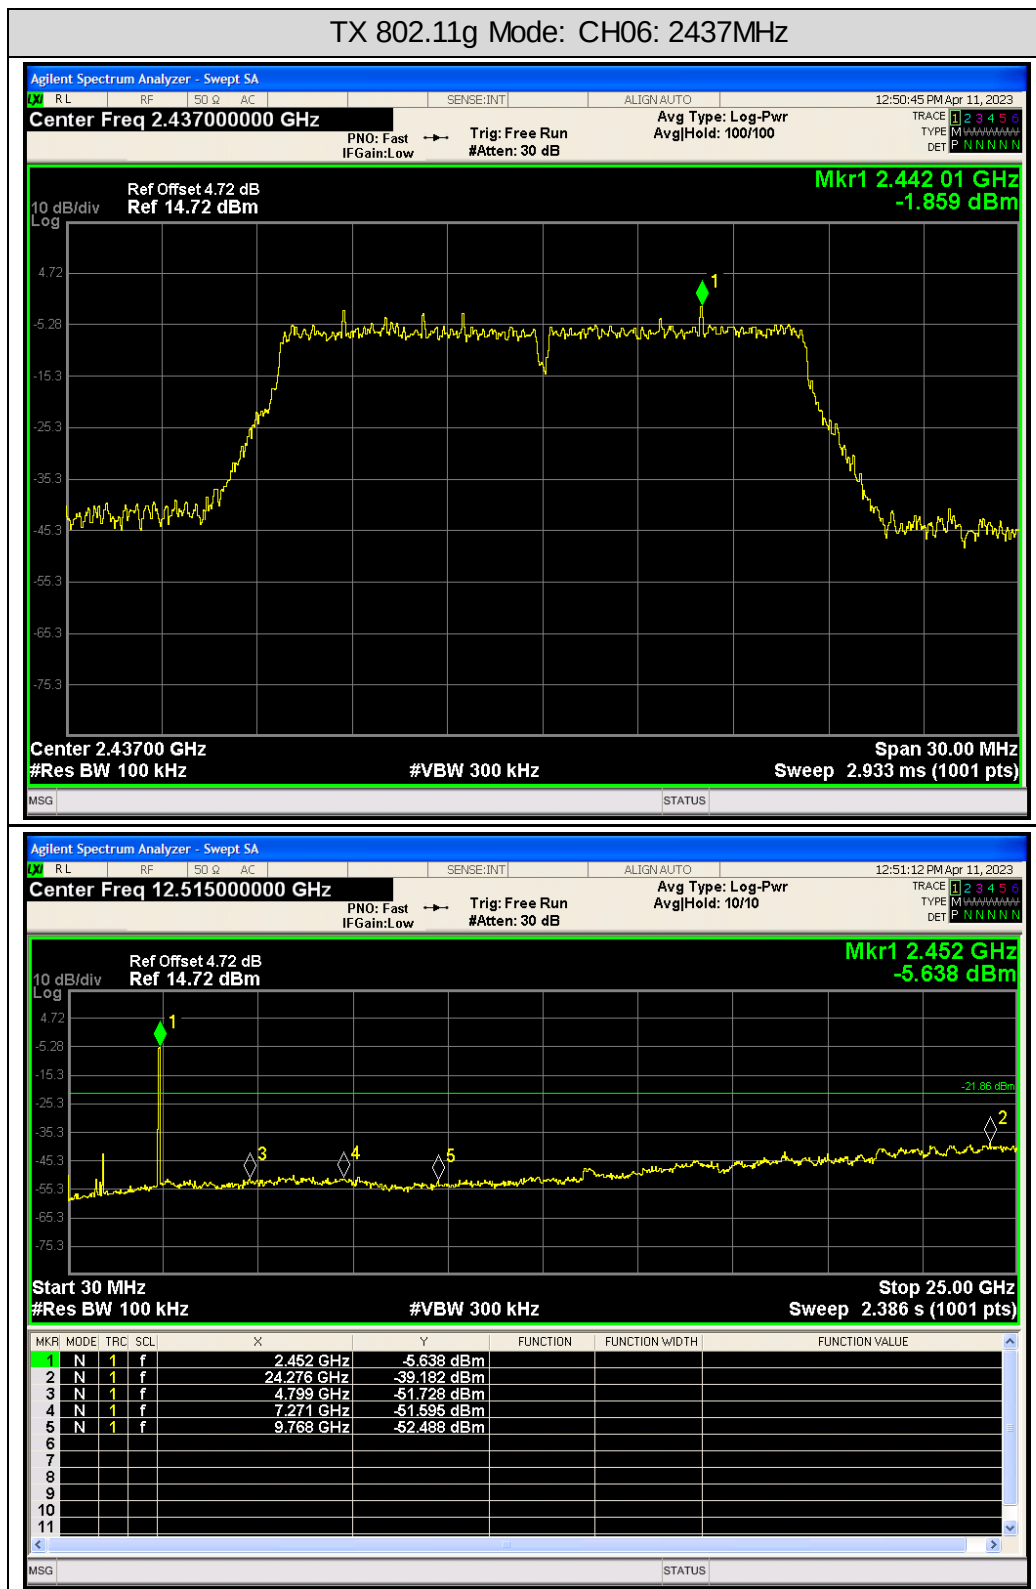


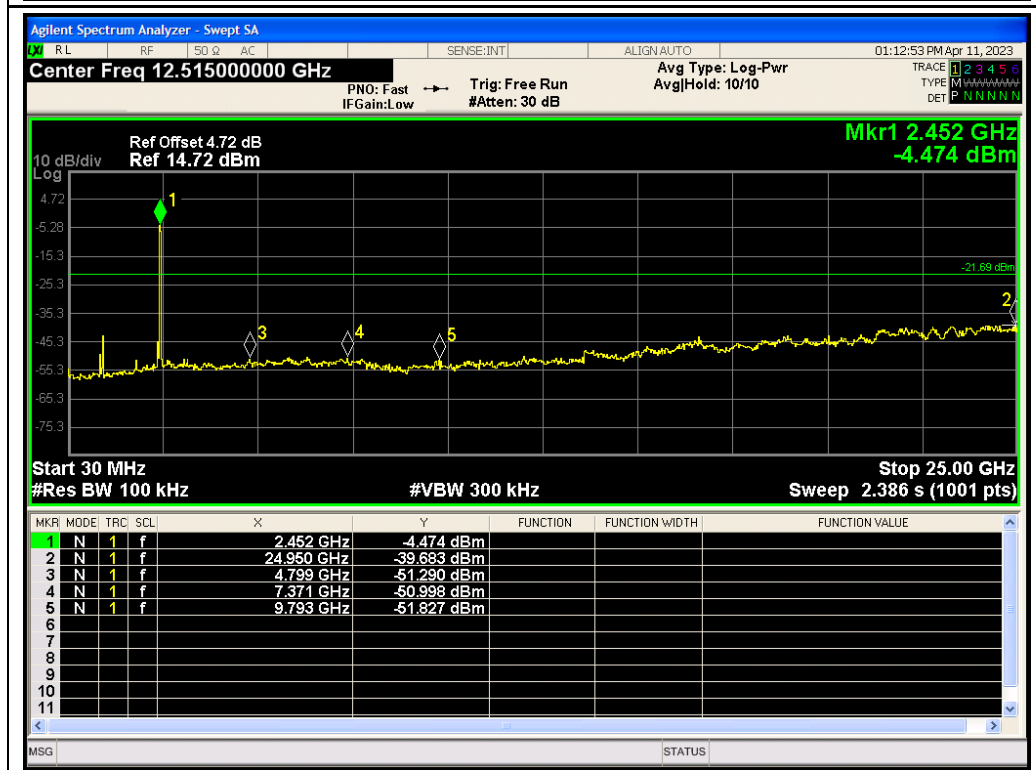


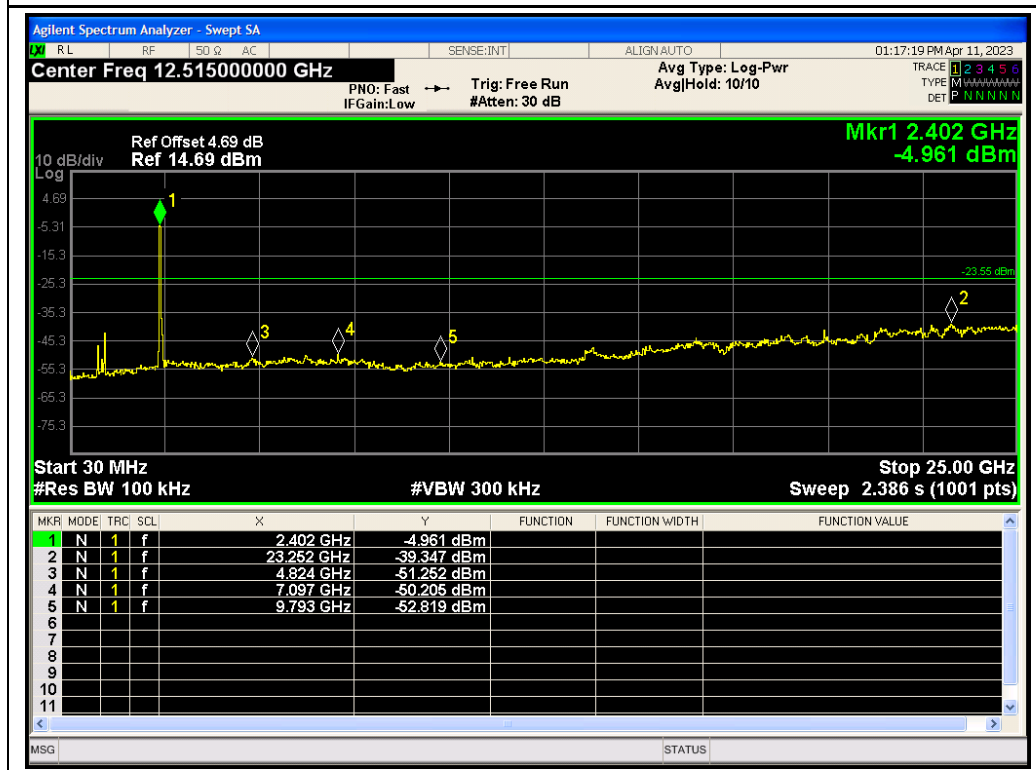


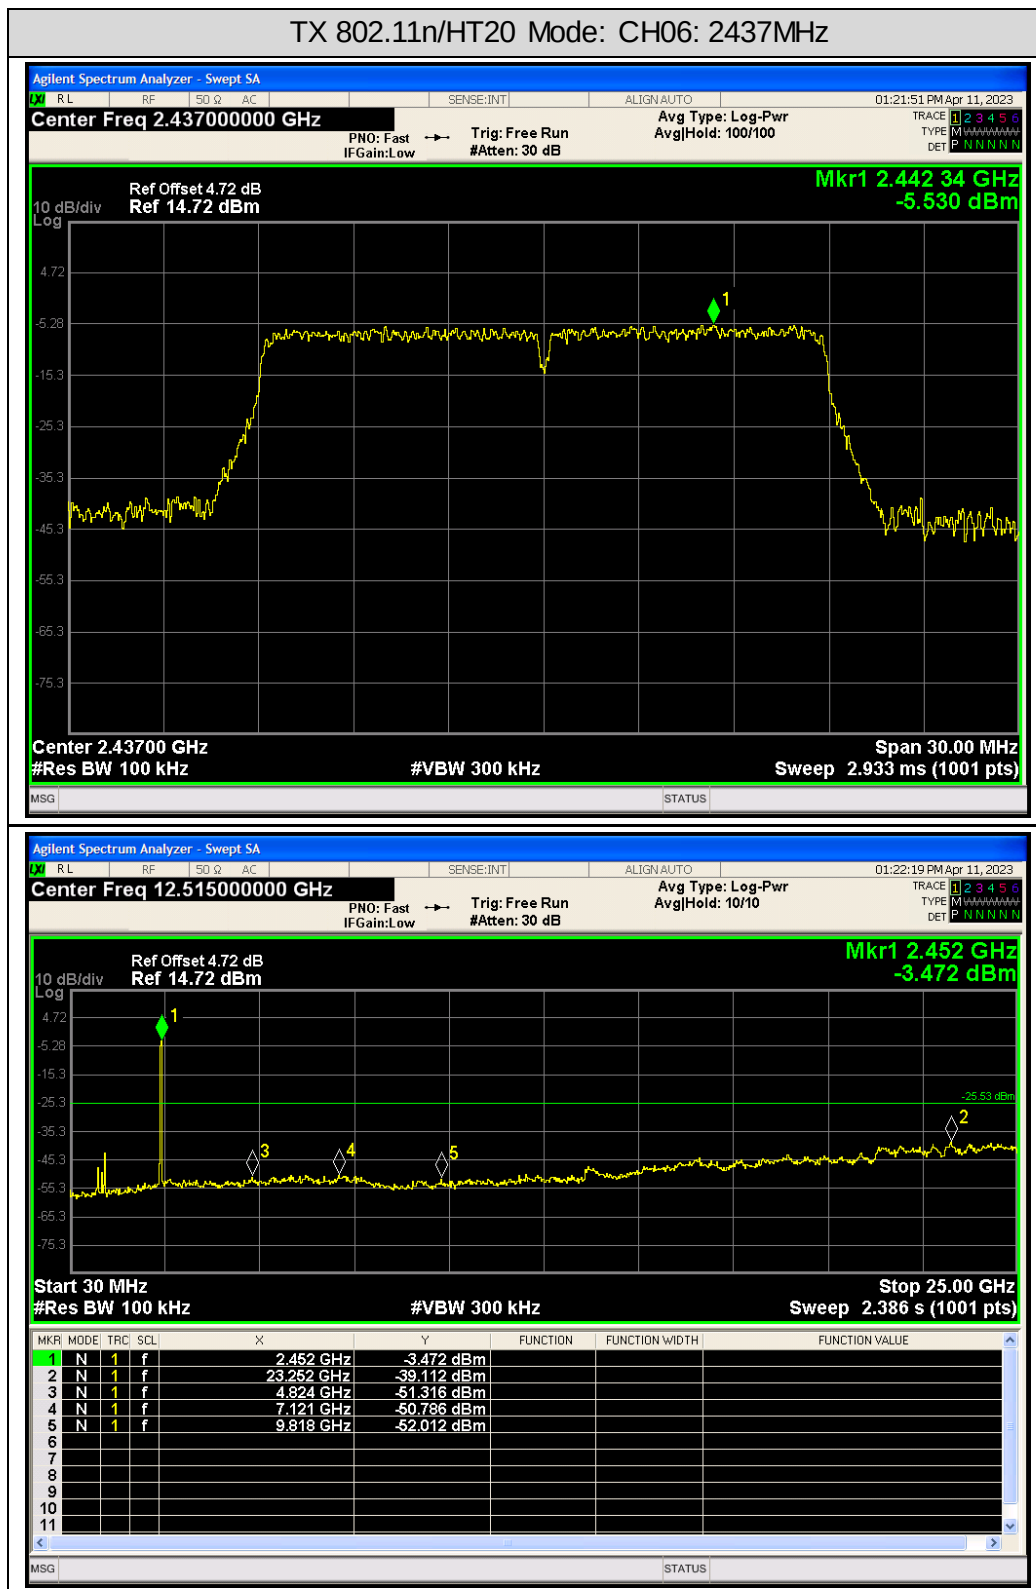

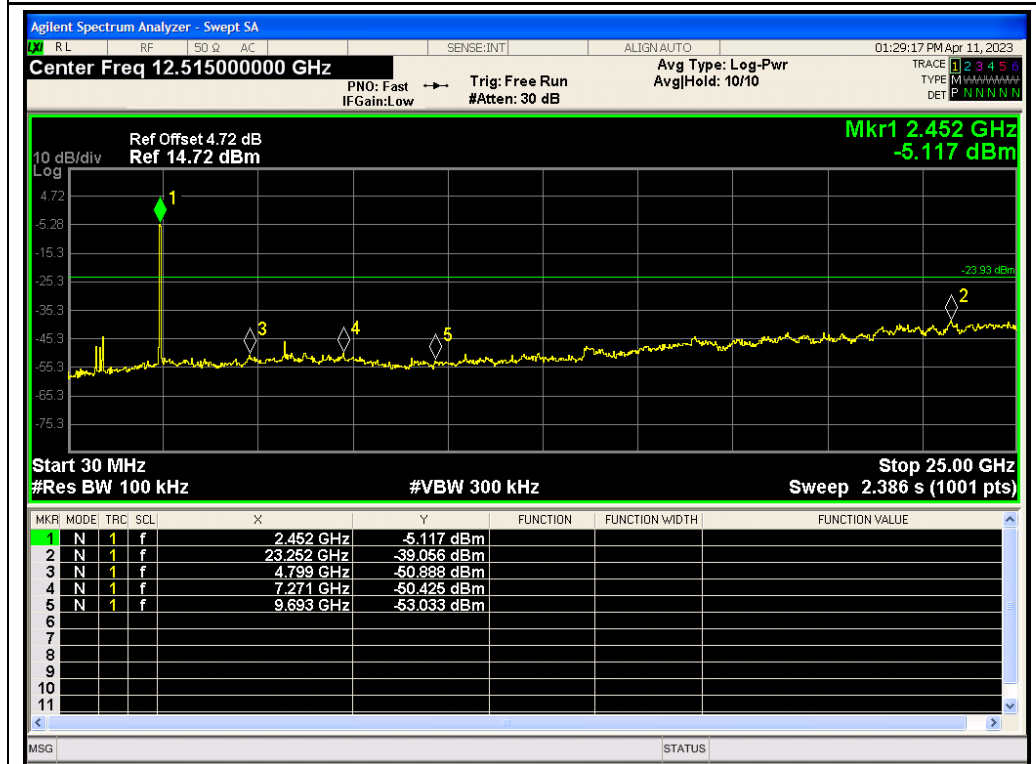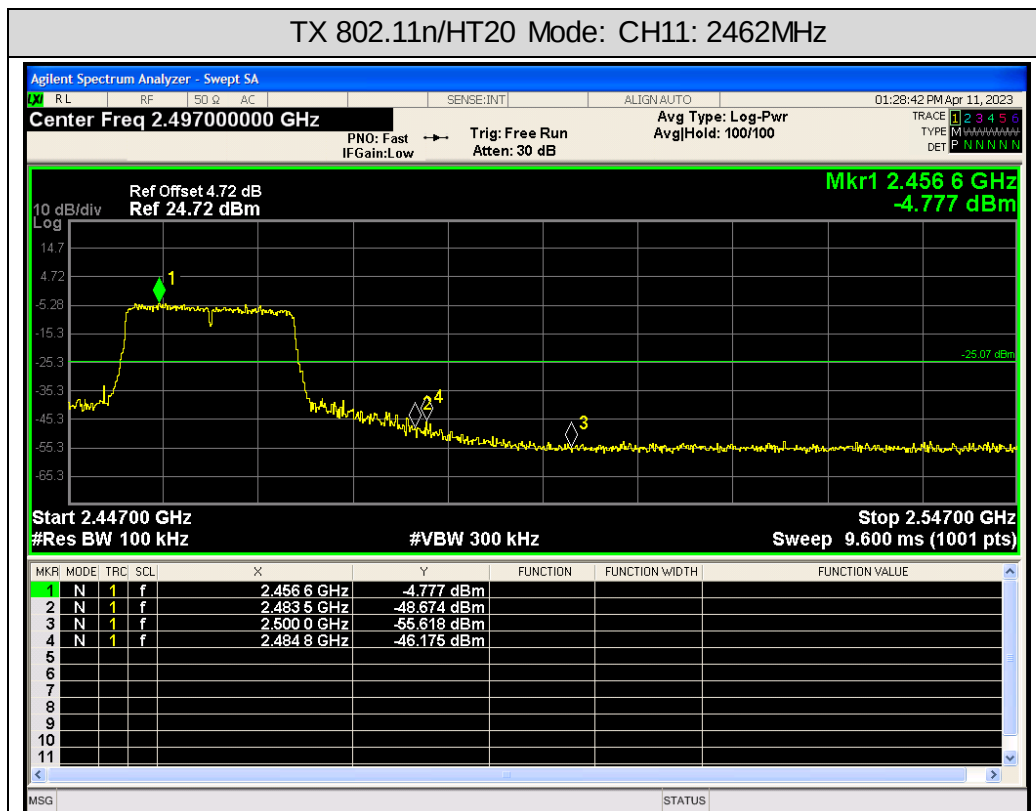

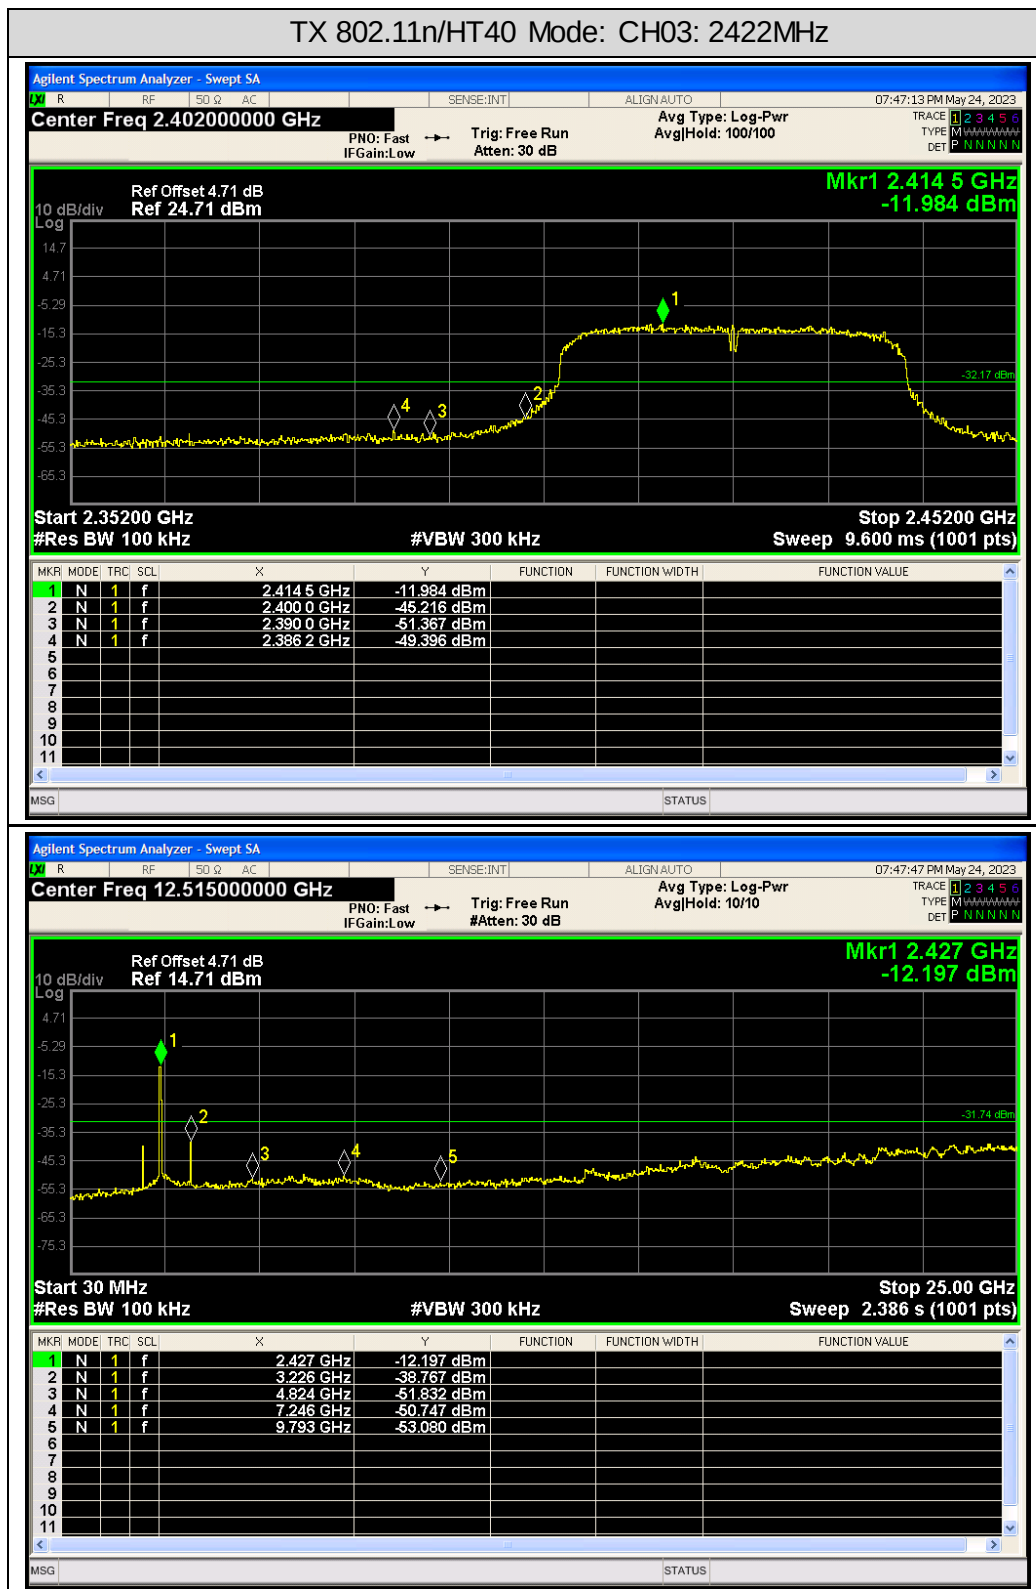

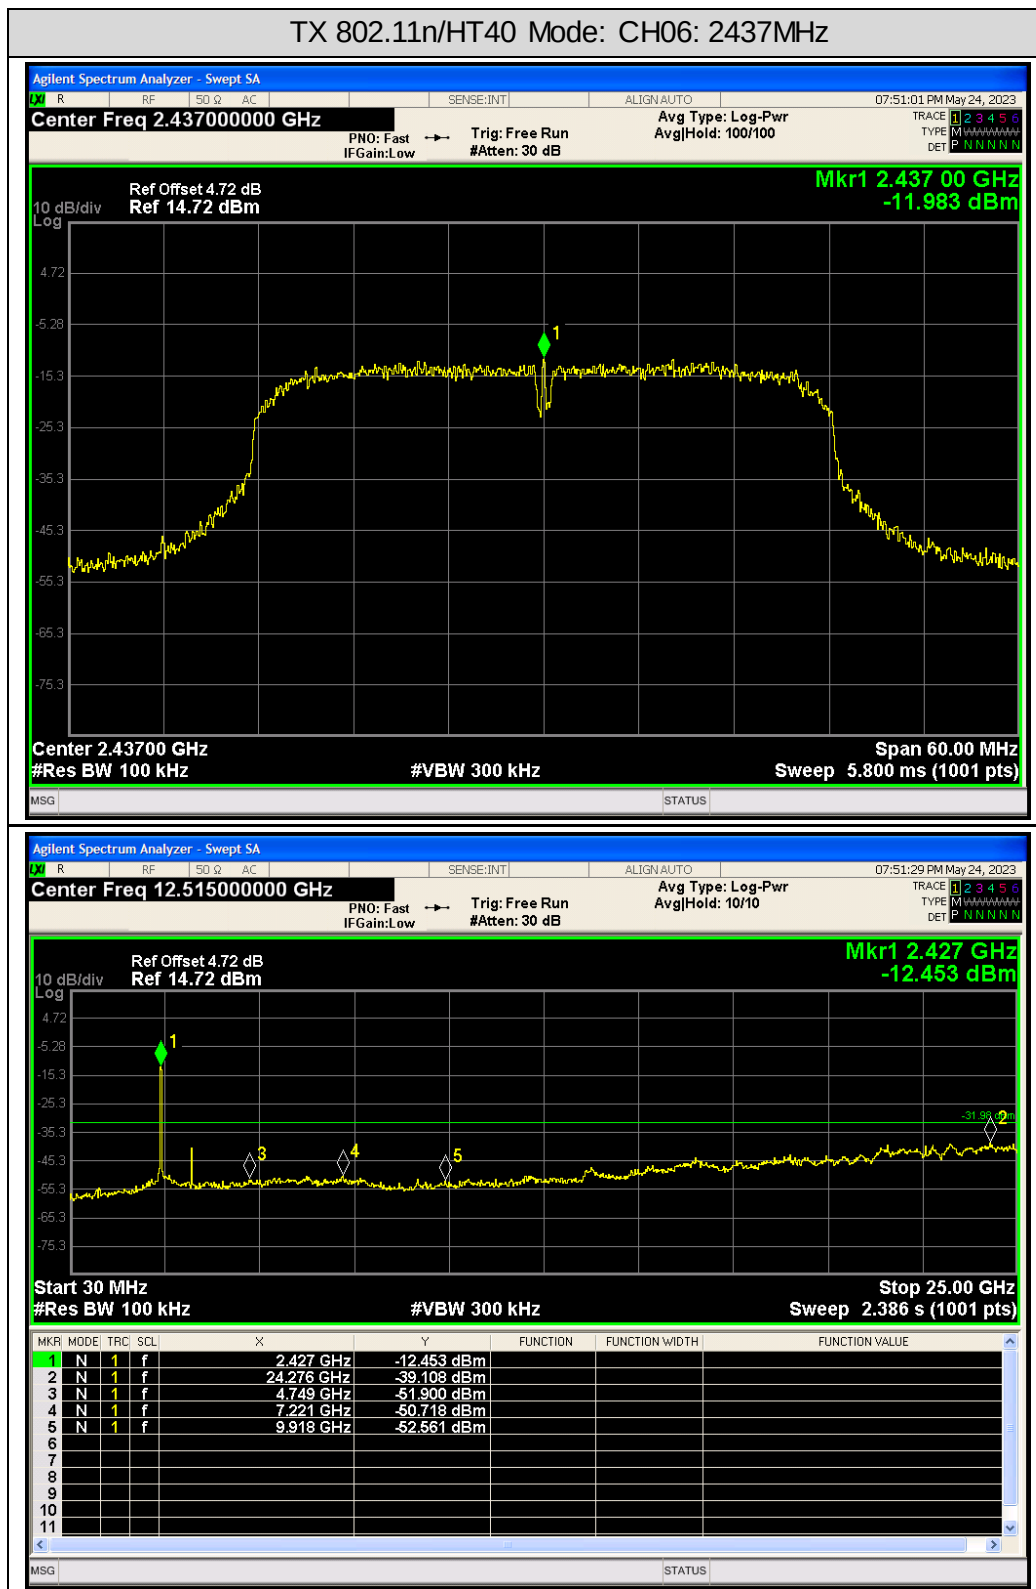

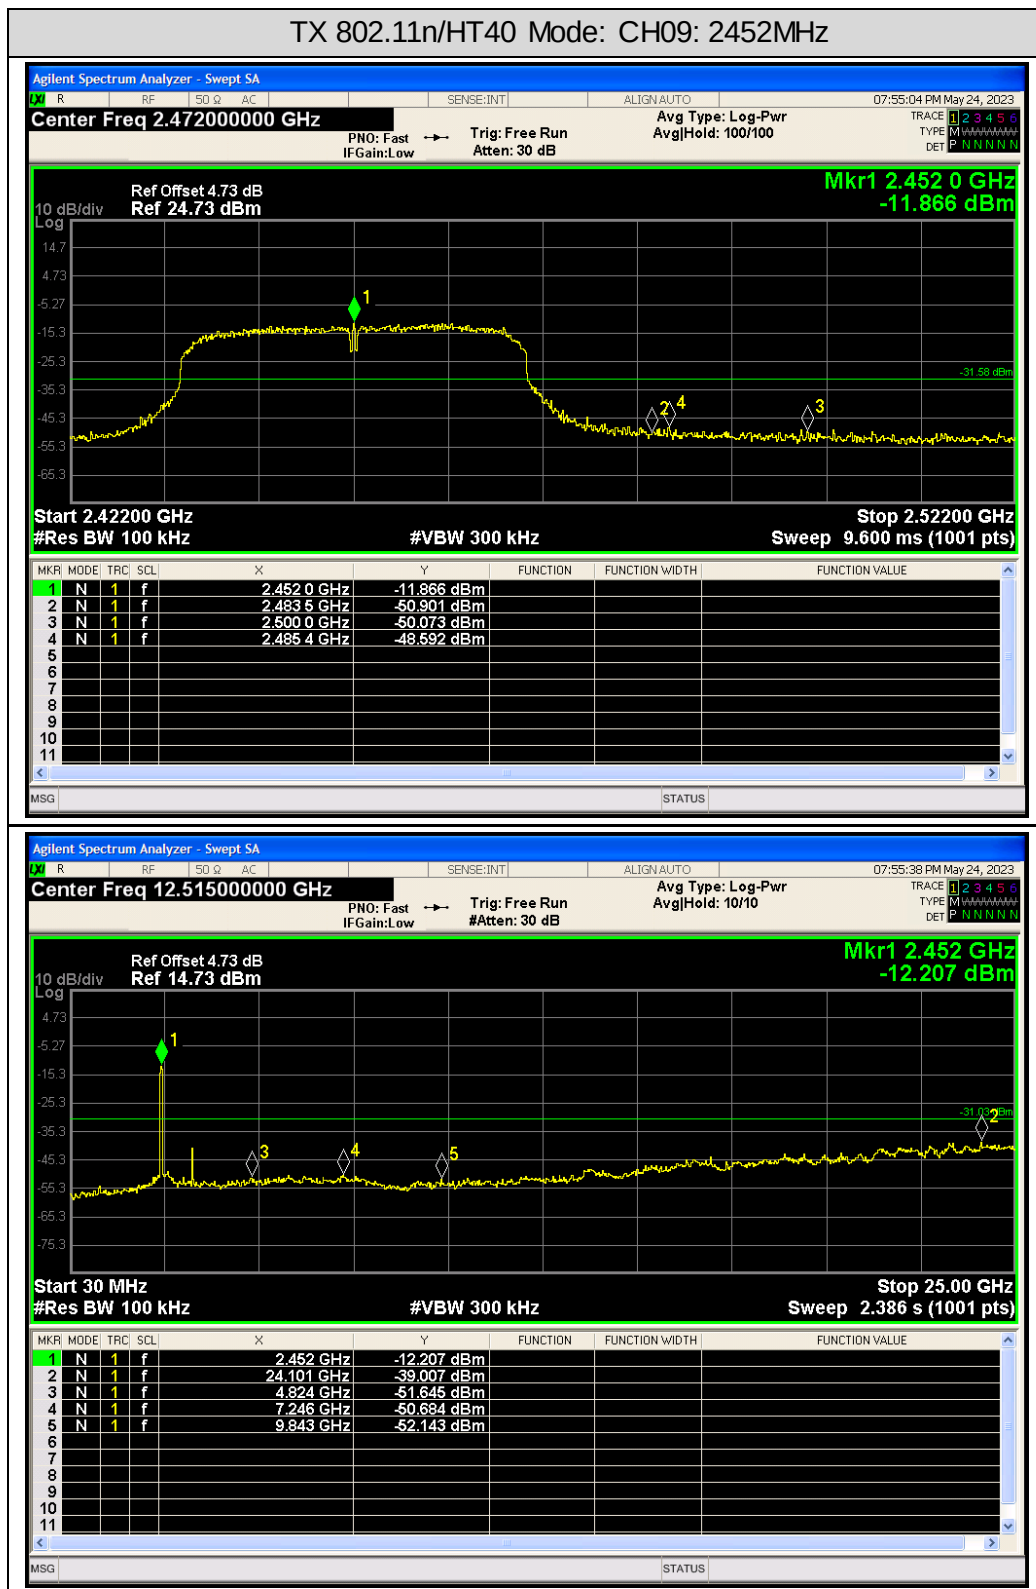

9 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction


The antenna used in this product is a Chip Antenna, The directional gains of antenna used for transmitting is 0.5dBi.

ANTENNA:

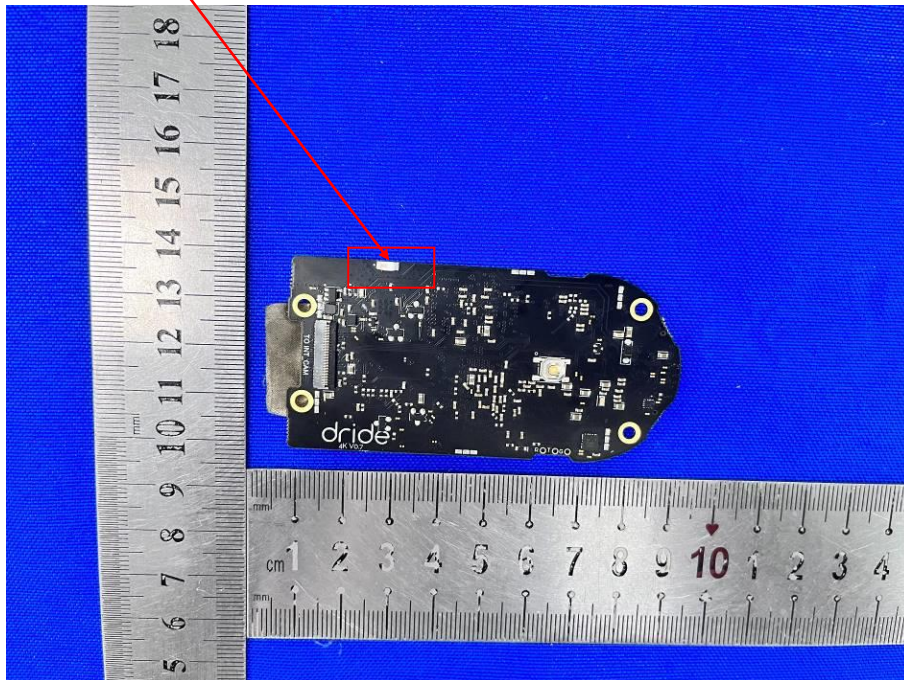


10 PHOTO OF TEST

RADIATED EMISSION

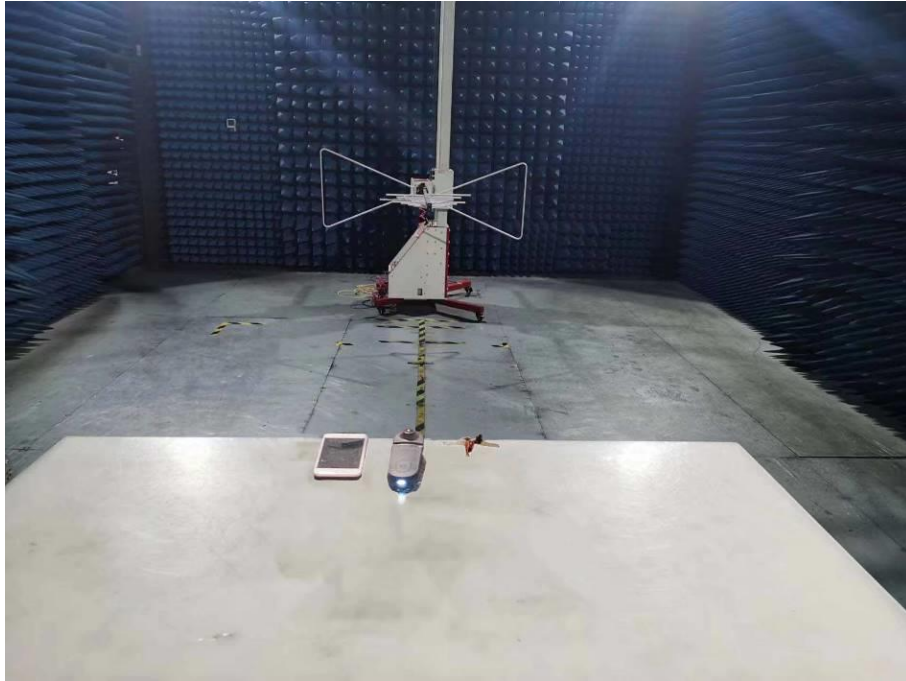


30MHz-1000MHz

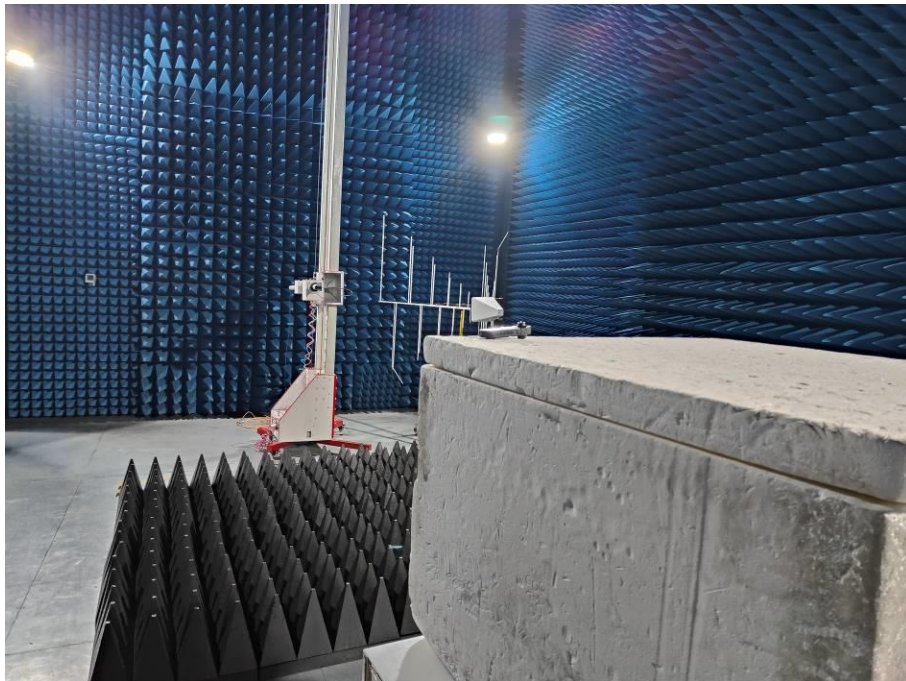

Above 1GHz

RF Conducted

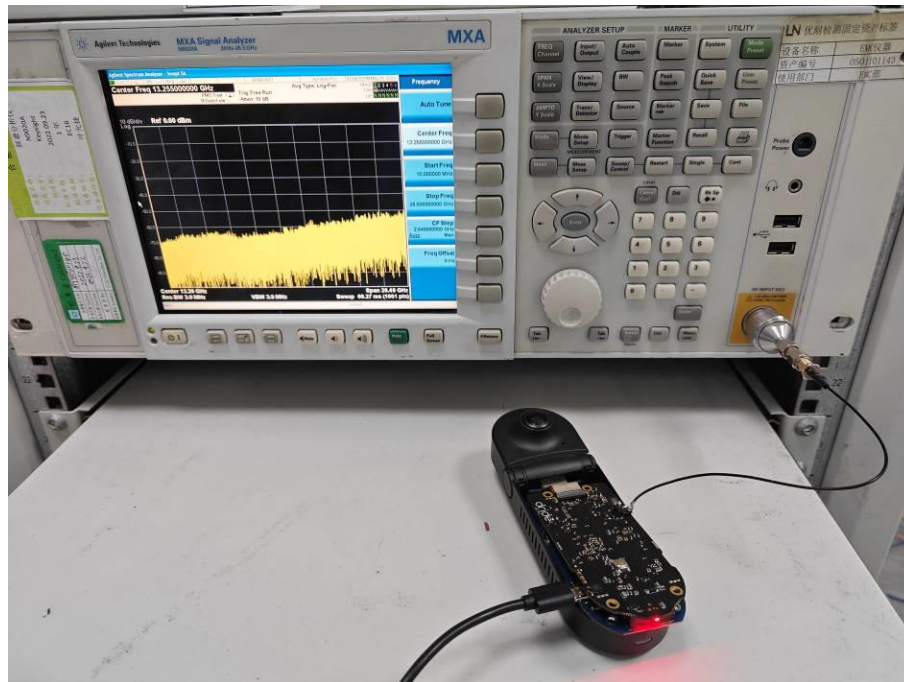

End of Report