

FCC TEST REPORT

FCC ID : 2APYS-LPS05WBI
Equipment : Wireless Charger
Brand Name : Sonos
Model Name : LPS-05WB-I
Applicant : Lanto Electronic Ltd
No.399 baisheng Road, jinxi Town, Kunshan City,
Jiangsu, 215324, China
Manufacturer : Lanto Electronic Ltd
No.399 baisheng Road, jinxi Town, Kunshan City,
Jiangsu, 215324, China
Standard : 47 CFR FCC Part 15.209

The product was received on Nov. 06, 2020, and testing was started from Nov. 09, 2020 and completed on Dec. 08, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 Test Condition	8
2.2 The Worst Case Configuration	8
2.3 The Worst Case Measurement Configuration	8
2.4 Support Equipment.....	9
2.5 Test Setup Diagram	10
3 TRANSMITTER TEST RESULT	12
3.1 AC Power-line Conducted Emissions	12
3.2 Transmitter Radiated Emissions	17
3.3 Emission Bandwidth	27
4 TEST EQUIPMENT AND CALIBRATION DATA	29
APPENDIX A. TEST PHOTOS	
PHOTOGRAPHS OF EUT v01	



History of this test report

TEL : 886-3-327-3456
FAX : 886-3-327-0973
Report Template No.: HE1-C5 Ver.2.7
FCC ID: 2APYS-LPS05WBI



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.209	Transmitter Radiated Emissions	PASS	-
3.3	15.215(c)	Emission Bandwidth	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None.

Reviewed by: Sam Tsai

Report Producer: Amber Chiu

1 General Description

1.1 Information

1.1.1 General Information

Wireless Power Transfer General Information			
Frequency Range	Modulation Mode	Charging Freq. (kHz)	Field Strength (dBuV/m)
112-148 kHz	FSK	139	75.04
Power Transfer Method	Output power from each primary coil	That may have multiple primary coils	Charging Method
Magnetic induction and only single primary coil	<15W	No	Client directly contact
Note 1: Field strength performed peak level at 3m.			

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Wireless charging antenna coils

**1.1.3 EUT Information**

Operational Condition	
EUT Power Type	From AC Adapter
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/>	Operated normally mode for worst duty cycle
<input type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	
<input checked="" type="checkbox"/>	100%

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 680106 D01 RF Exposure Wireless Charging Apps v03
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
<input type="checkbox"/>	Wen Shan	ADD : No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
		TEL : 886-3-318-0787	FAX : 886-3-318-0287
Test site Designation No. TW1097 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Daniel Lin	21.5~23.4°C/54~62%	08/Dec/2020
RF Conducted	TH06-HY	Alan Chien	20.1~26.9°C/50~60%	09/Nov/2020~ 12/Nov/2020
Radiated Emission	03CH03-HY	Tony Chang	23.4~25.7°C/55~63%	17/Nov/2020

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	0.9 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.0 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

Condition Item	Abbreviation/Remark	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 The Worst Case Configuration


Mode	Field Strength (dBuV/m at 3 m)	Charger Frequencies (kHz)	Power Setting
WPC	75.04	139	default

Note.1: Wireless charger were performed all charging conditions including variable loading and non-charging operation, the worst mode is full charging loading.

Note.2: Wireless charger frequencies are variable frequency range (112-148 kHz) and depend on charging loading.

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
	1. Adapter Mode
Mode 1 configuration was pretested and found to be the worst case and measured during the test.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Emissions, Emission Bandwidth
Test Condition	Radiated measurement
Operating Mode	CTX
	1. Adapter Mode
Mode 1 configuration was pretested and found to be the worst case and measured during the test.	
Orthogonal Planes of EUT	Z Plane
	

2.4 Support Equipment

Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Fixture	-	-	-
2	Load	-	-	-
3	AC adapter	Sonos	CPS012050210U	-
4	DC power cable(+)	MiSUMi	WTN1227-RED	-
5	DC power cable(-)	MiSUMi	WTN1227-BLACK	-

Note: Support equipment No.1 & 2 & 3 was provided by customer.

Support Equipment – Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Fixture	-	-	-
2	Load	-	-	-
3	AC adapter	Sonos	CPS012050210U	-
4	DC power cable(+)	MiSUMi	WTN1227-RED	-
5	DC power cable(-)	MiSUMi	WTN1227-BLACK	-


Note: Support equipment No.1 & 2 & 3 was provided by customer.

Support Equipment – Radiated				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Fixture	-	-	-
2	Load	-	-	-
3	AC adapte	Sonos	CPS012050210U	-
4	DC power cable(+)	MiSUMi	WTN1227-RED	-
5	DC power cable(-)	MiSUMi	WTN1227-BLACK	-


Note: Support equipment No.1 & 2 & 3 was provided by customer.

2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

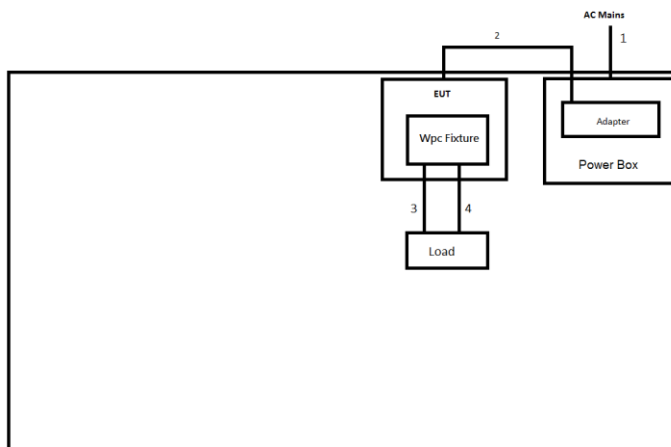

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	USB cable	No	1.2	-
3	DC Power cable(+)	No	0.18	-
4	DC Power cable(-)	No	0.18	-

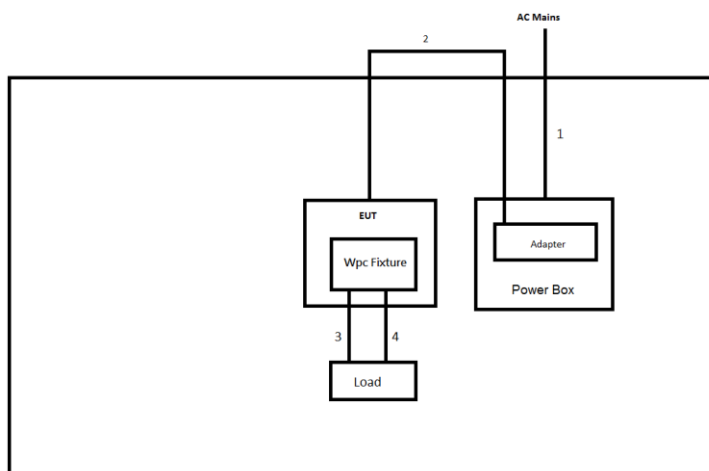Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	USB cable	No	1.2	-
3	DC Power cable(+)	No	0.18	-
4	DC Power cable(-)	No	0.18	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

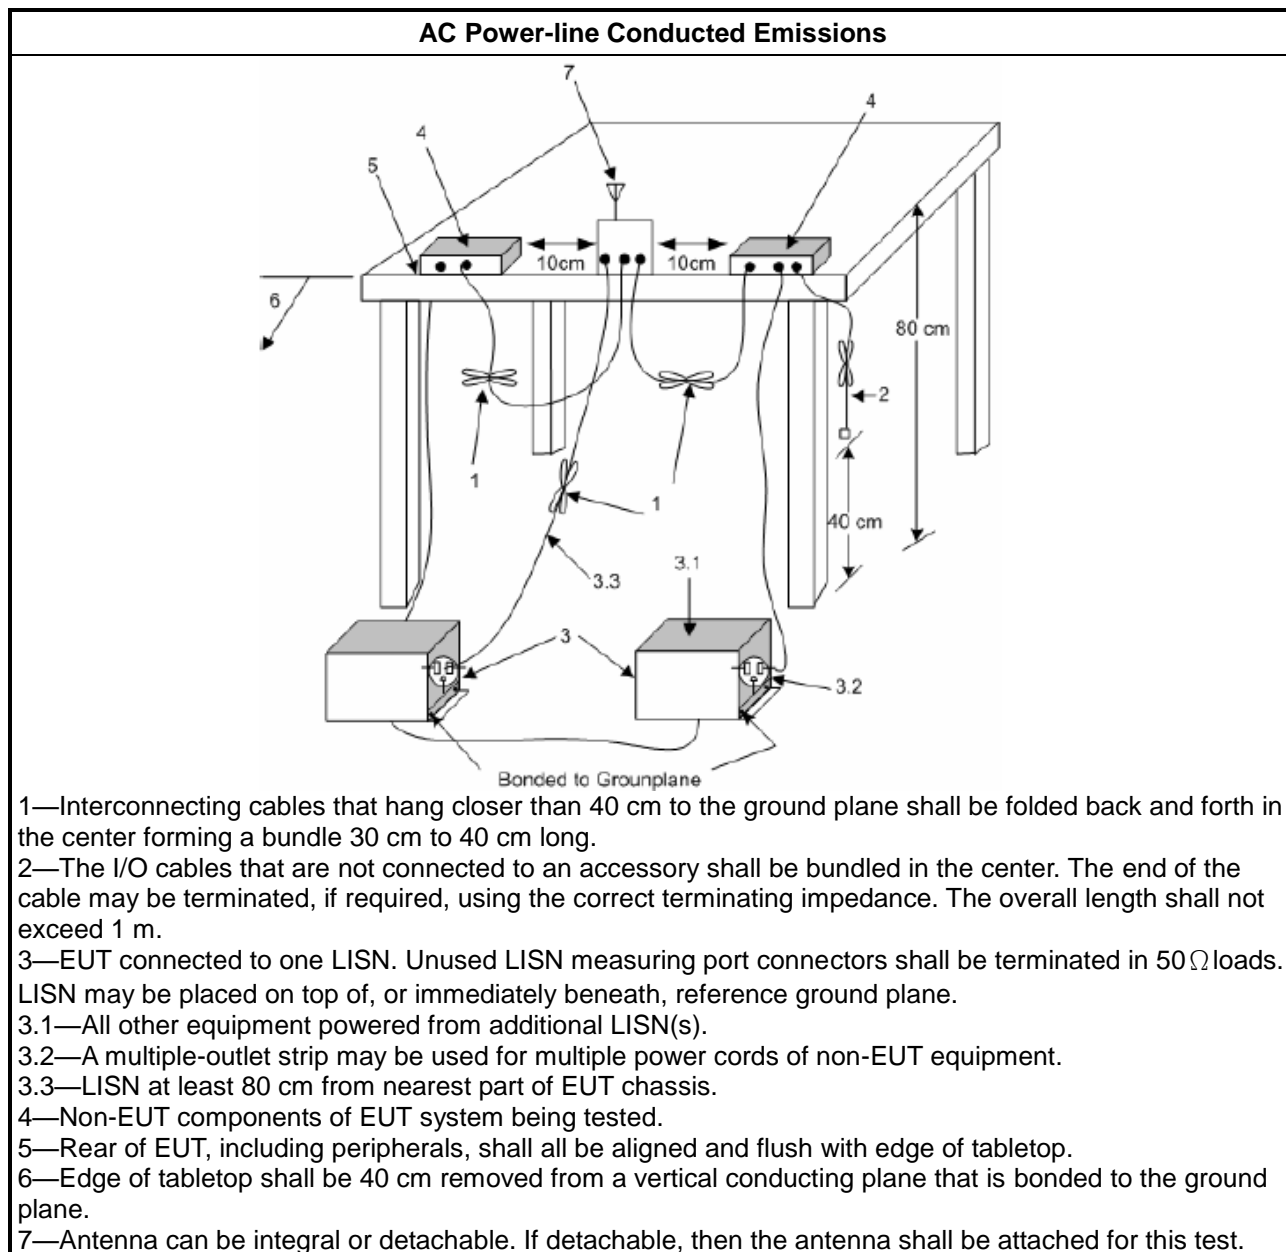


**3.1.6 Test Result of AC Power-line Conducted Emissions****Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	4.122M	25.88	46.00	-20.12	Line


Mode Configure

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	152.414k	39.02	65.87	-26.85	Line	-
Mode 1	Pass	AV	152.414k	27.84	55.87	-28.03	Line	-
Mode 1	Pass	QP	217.434k	34.72	62.92	-28.20	Line	-
Mode 1	Pass	AV	217.434k	26.94	52.92	-25.98	Line	-
Mode 1	Pass	QP	458.702k	34.57	56.71	-22.14	Line	-
Mode 1	Pass	AV	458.702k	24.69	46.71	-22.02	Line	-
Mode 1	Pass	QP	1.149M	29.71	56.00	-26.29	Line	-
Mode 1	Pass	AV	1.149M	19.30	46.00	-26.70	Line	-
Mode 1	Pass	QP	4.122M	29.68	56.00	-26.32	Line	-
Mode 1	Pass	AV	4.122M	25.88	46.00	-20.12	Line	"Worst"
Mode 1	Pass	QP	11.683M	23.22	60.00	-36.78	Line	-
Mode 1	Pass	AV	11.683M	18.85	50.00	-31.15	Line	-
Mode 1	Pass	QP	150.6k	40.53	65.96	-25.43	Neutral	-
Mode 1	Pass	AV	150.6k	29.87	55.96	-26.09	Neutral	-
Mode 1	Pass	QP	215.704k	33.80	62.98	-29.18	Neutral	-
Mode 1	Pass	AV	215.704k	26.33	52.98	-26.65	Neutral	-
Mode 1	Pass	QP	372.716k	29.41	58.45	-29.04	Neutral	-
Mode 1	Pass	AV	372.716k	21.02	48.45	-27.43	Neutral	-
Mode 1	Pass	QP	1.37M	24.37	56.00	-31.63	Neutral	-
Mode 1	Pass	AV	1.37M	16.79	46.00	-29.21	Neutral	-
Mode 1	Pass	QP	2.083M	26.56	56.00	-29.44	Neutral	-
Mode 1	Pass	AV	2.083M	18.34	46.00	-27.66	Neutral	-
Mode 1	Pass	QP	10.079M	29.88	60.00	-30.12	Neutral	-
Mode 1	Pass	AV	10.079M	25.98	50.00	-24.02	Neutral	"Worst"

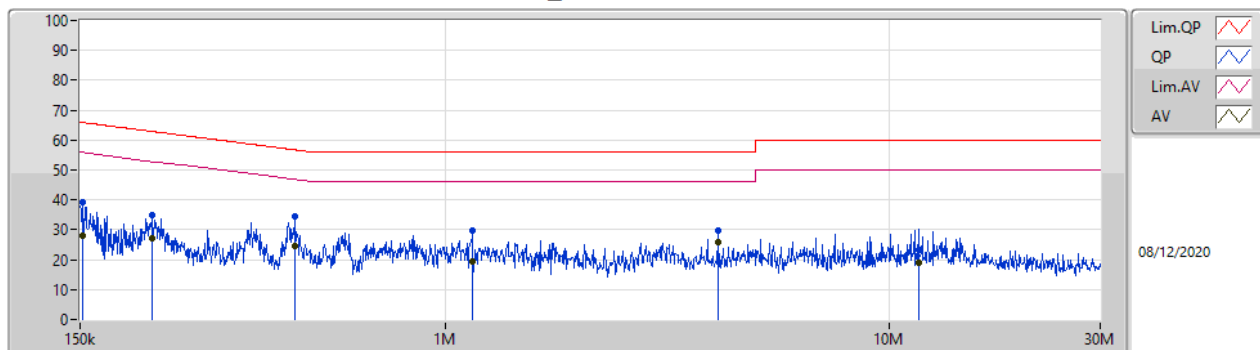Conducted Emissions at Powerline_Mode 1


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	152.414k	39.02	65.87	-26.85	19.60	Line	-	19.42	9.69	0.01	9.90			
AV	152.414k	27.84	55.87	-28.03	19.60	Line	-	8.24	9.69	0.01	9.90			
QP	217.434k	34.72	62.92	-28.20	19.59	Line	-	15.13	9.68	0.01	9.90			
AV	217.434k	26.94	52.92	-25.98	19.59	Line	-	7.35	9.68	0.01	9.90			
QP	458.702k	34.57	56.71	-22.14	19.57	Line	-	15.00	9.67	0.02	9.88			
AV	458.702k	24.69	46.71	-22.02	19.57	Line	-	5.12	9.67	0.02	9.88			
QP	1.149M	29.71	56.00	-26.29	19.53	Line	-	10.18	9.67	0.06	9.80			
AV	1.149M	19.30	46.00	-26.70	19.53	Line	-	-0.23	9.67	0.06	9.80			
QP	4.122M	29.68	56.00	-26.32	19.71	Line	-	9.97	9.69	0.12	9.90			
AV	4.122M	25.88	46.00	-20.12	19.71	Line	"Worst"	6.17	9.69	0.12	9.90			
QP	11.683M	23.22	60.00	-36.78	19.84	Line	-	3.38	9.71	0.23	9.90			
AV	11.683M	18.85	50.00	-31.15	19.84	Line	-	-0.99	9.71	0.23	9.90			

Conducted Emissions at Powerline_Mode 1

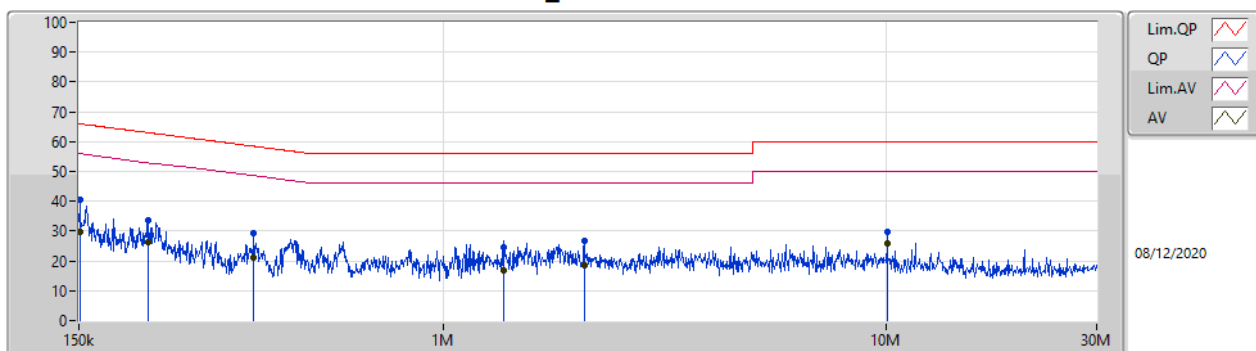

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150.6k	40.53	65.96	-25.43	19.60	Neutral	-	20.93	9.69	0.01	9.90			
AV	150.6k	29.87	55.96	-26.09	19.60	Neutral	-	10.27	9.69	0.01	9.90			
QP	215.704k	33.80	62.98	-29.18	19.59	Neutral	-	14.21	9.68	0.01	9.90			
AV	215.704k	26.33	52.98	-26.65	19.59	Neutral	-	6.74	9.68	0.01	9.90			
QP	372.716k	29.41	58.45	-29.04	19.59	Neutral	-	9.82	9.67	0.02	9.90			
AV	372.716k	21.02	48.45	-27.43	19.59	Neutral	-	1.43	9.67	0.02	9.90			
QP	1.37M	24.37	56.00	-31.63	19.53	Neutral	-	4.84	9.67	0.06	9.80			
AV	1.37M	16.79	46.00	-29.21	19.53	Neutral	-	-2.74	9.67	0.06	9.80			
QP	2.083M	26.56	56.00	-29.44	19.57	Neutral	-	6.99	9.68	0.08	9.81			
AV	2.083M	18.34	46.00	-27.66	19.57	Neutral	-	-1.23	9.68	0.08	9.81			
QP	10.079M	29.88	60.00	-30.12	19.84	Neutral	-	10.04	9.73	0.21	9.90			
AV	10.079M	25.98	50.00	-24.02	19.84	Neutral	"Worst"	6.14	9.73	0.21	9.90			

3.2 Transmitter Radiated Emissions

3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures



Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3 m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
<input checked="" type="checkbox"/>	KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.
<input checked="" type="checkbox"/>	Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
<input checked="" type="checkbox"/>	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

3.2.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.2.5 Test Setup

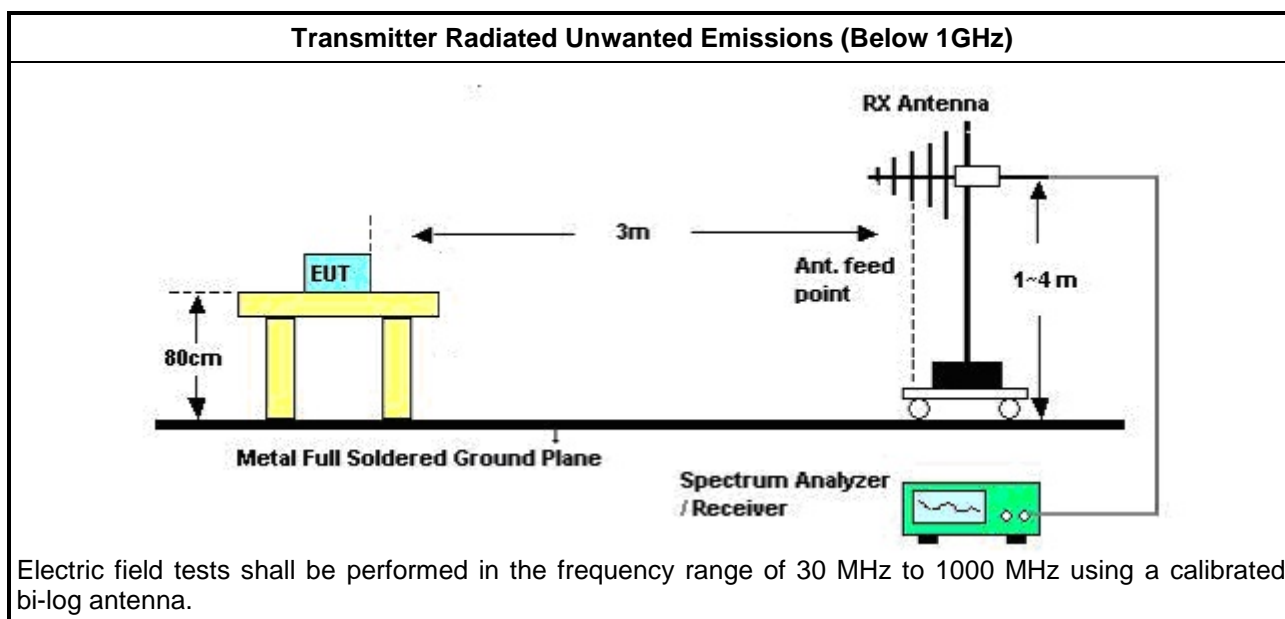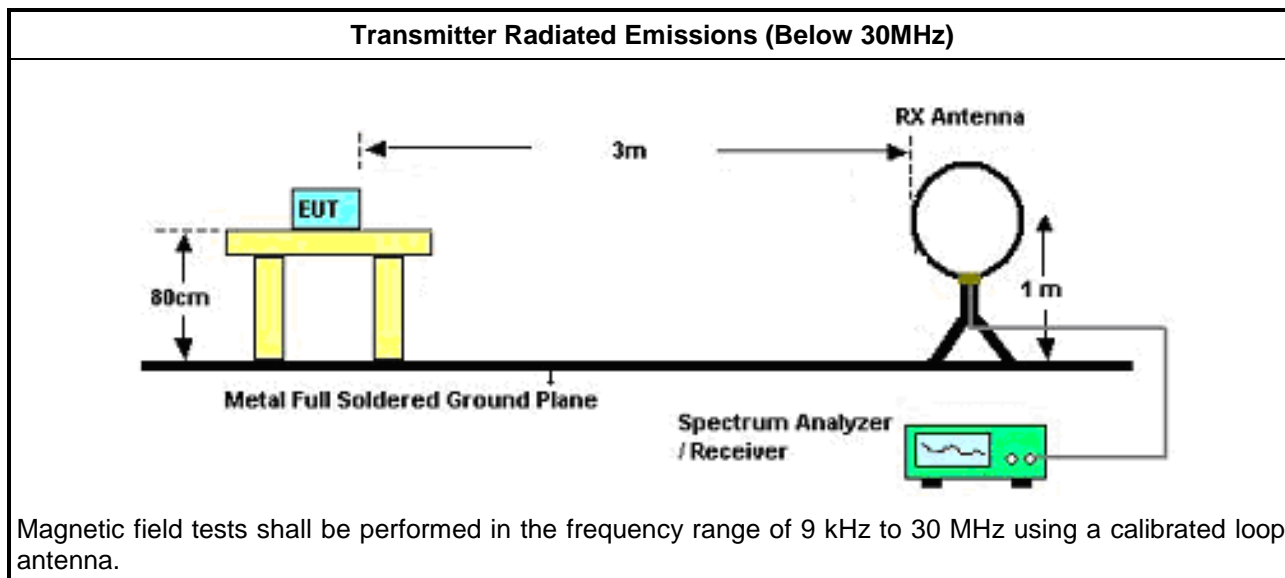

3.2.6 Transmitter Radiated Emissions (Below 30MHz)

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
WPT	-	-	-	-	-	-	-	-	-	-	-	-
110-205kHz	Pass	PK	2.24M	51.20	69.50	-18.30	20.18	3	Horizontal	0	1.00	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
110-205kHz	-	-	-	-	-	-	-	-	-	-	-	-
0.139MHz_TX	Pass	PK	136.78k	75.04	104.87	-29.83	20.11	3	Horizontal	0	1.00	-
0.139MHz_TX	Pass	PK	29.586k	55.13	118.17	-63.04	21.22	3	Horizontal	360	1.00	-
0.139MHz_TX	Pass	PK	41.712k	57.38	115.19	-57.81	21.25	3	Horizontal	360	1.00	-
0.139MHz_TX	Pass	PK	63.99k	58.84	111.47	-52.63	20.79	3	Horizontal	360	1.00	-
0.139MHz_TX	Pass	PK	388.8k	54.91	95.80	-40.89	20.55	3	Horizontal	0	1.00	-
0.139MHz_TX	Pass	PK	627.6k	43.83	71.65	-27.82	20.59	3	Horizontal	0	1.00	-
0.139MHz_TX	Pass	PK	2.24M	51.20	69.50	-18.30	20.18	3	Horizontal	0	1.00	-

110-205kHz

17/11/2020

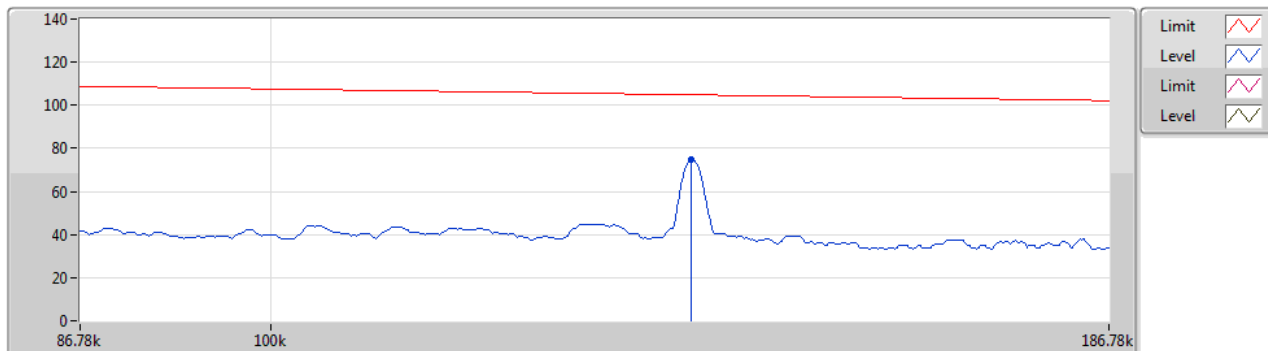
0.139MHz_TX


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	136.78k	75.04	104.87	-29.83	20.11	3	Horizontal	0	1.00	-	54.93	20.04	0.07	-

110-205kHz

0.139MHz_TX


17/11/2020

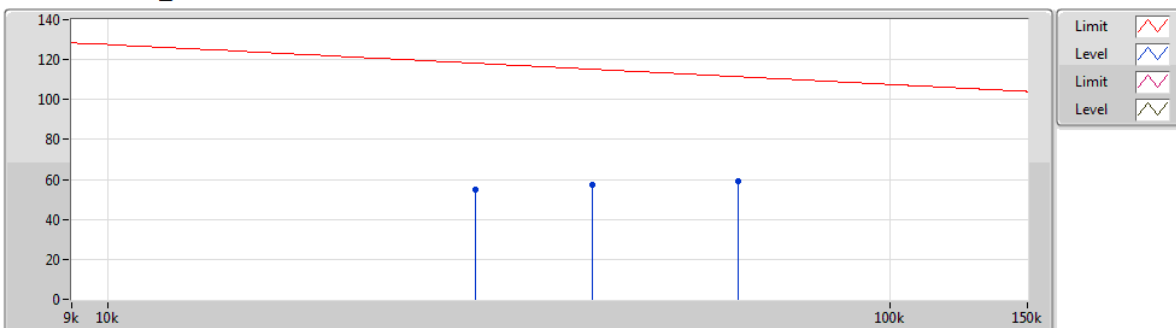

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	29.586k	55.13	118.17	-63.04	21.22	3	Horizontal	360	1.00	-	33.91	21.18	0.04	-
PK	41.712k	57.38	115.19	-57.81	21.25	3	Horizontal	360	1.00	-	36.13	21.20	0.05	-
PK	63.99k	58.84	111.47	-52.63	20.79	3	Horizontal	360	1.00	-	38.05	20.74	0.05	-

110-205kHz

17/11/2020

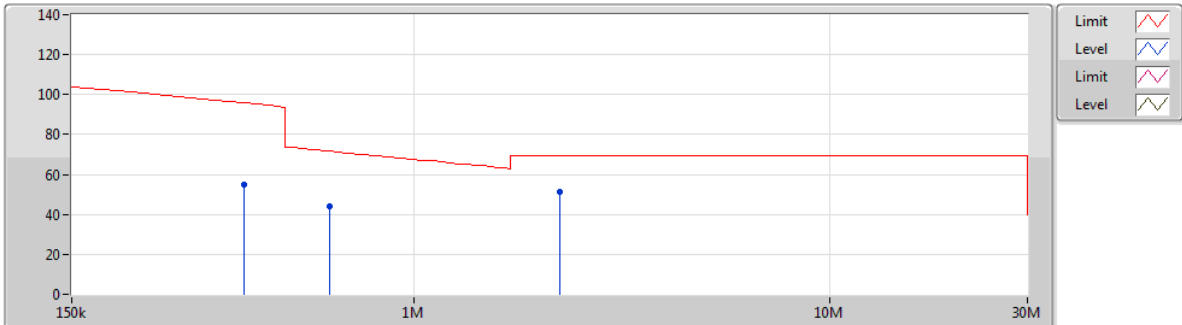0.139MHz_TX


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	388.8k	54.91	95.80	-40.89	20.55	3	Horizontal	0	1.00	-	34.36	20.45	0.10	-
PK	627.6k	43.83	71.65	-27.82	20.59	3	Horizontal	0	1.00	-	23.24	20.47	0.12	-
PK	2.24M	51.20	69.50	-18.30	20.18	3	Horizontal	0	1.00	-	31.02	19.96	0.22	-

**3.2.7 Transmitter Radiated Emissions (Above 30MHz)****Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
WPT	-	-	-	-	-	-	-	-	-	-	-	-
110-205kHz	Pass	PK	74.62M	25.78	40.00	-14.22	-14.70	3	Vertical	360	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
110-205kHz	-	-	-	-	-	-	-	-	-	-	-	-
0.139MHz_Adapter	Pass	PK	74.62M	25.78	40.00	-14.22	-14.70	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	134.76M	25.06	43.50	-18.44	-8.56	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	255.04M	20.47	46.00	-25.53	-5.72	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	412.18M	24.03	46.00	-21.97	-2.43	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	499.48M	25.68	46.00	-20.32	-1.34	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	546.04M	27.93	46.00	-18.07	0.45	3	Vertical	360	1.00	-
0.139MHz_Adapter	Pass	PK	107.6M	17.25	43.50	-26.25	-8.80	3	Horizontal	0	1.00	-
0.139MHz_Adapter	Pass	PK	266.68M	26.09	46.00	-19.91	-5.57	3	Horizontal	0	1.00	-
0.139MHz_Adapter	Pass	PK	299.66M	24.04	46.00	-21.96	-5.37	3	Horizontal	0	1.00	-
0.139MHz_Adapter	Pass	PK	381.14M	23.81	46.00	-22.19	-3.67	3	Horizontal	0	1.00	-
0.139MHz_Adapter	Pass	PK	478.14M	25.90	46.00	-20.10	-1.46	3	Horizontal	0	1.00	-
0.139MHz_Adapter	Pass	PK	639.16M	28.00	46.00	-18.00	0.46	3	Horizontal	0	1.00	-

110-205kHz

0.139MHz_Adapter


17/11/2020

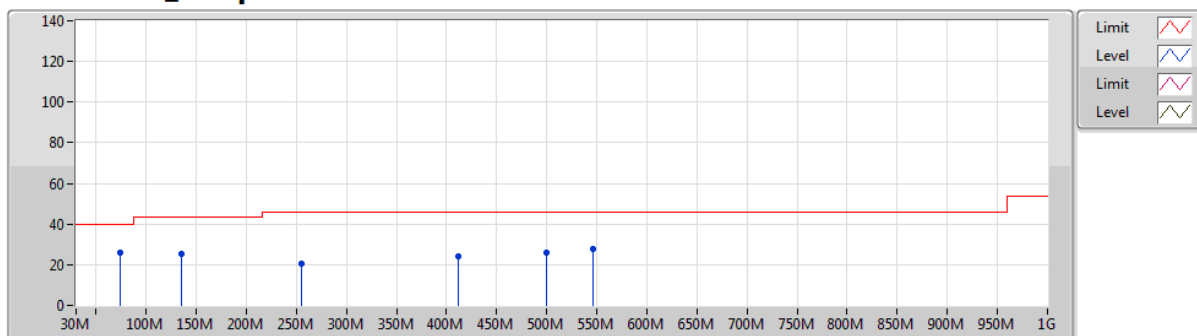

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	74.62M	25.78	40.00	-14.22	-14.70	3	Vertical	360	1.00	-	40.48	11.35	1.39	27.44
PK	134.76M	25.06	43.50	-18.44	-8.56	3	Vertical	360	1.00	-	33.62	16.82	1.87	27.25
PK	255.04M	20.47	46.00	-25.53	-5.72	3	Vertical	360	1.00	-	26.19	18.35	2.63	26.70
PK	412.18M	24.03	46.00	-21.97	-2.43	3	Vertical	360	1.00	-	26.46	21.61	3.32	27.36
PK	499.48M	25.68	46.00	-20.32	-1.34	3	Vertical	360	1.00	-	27.02	22.75	3.70	27.79
PK	546.04M	27.93	46.00	-18.07	0.45	3	Vertical	360	1.00	-	27.48	24.57	3.88	28.00

110-205kHz
0.139MHz_Adapter

17/11/2020

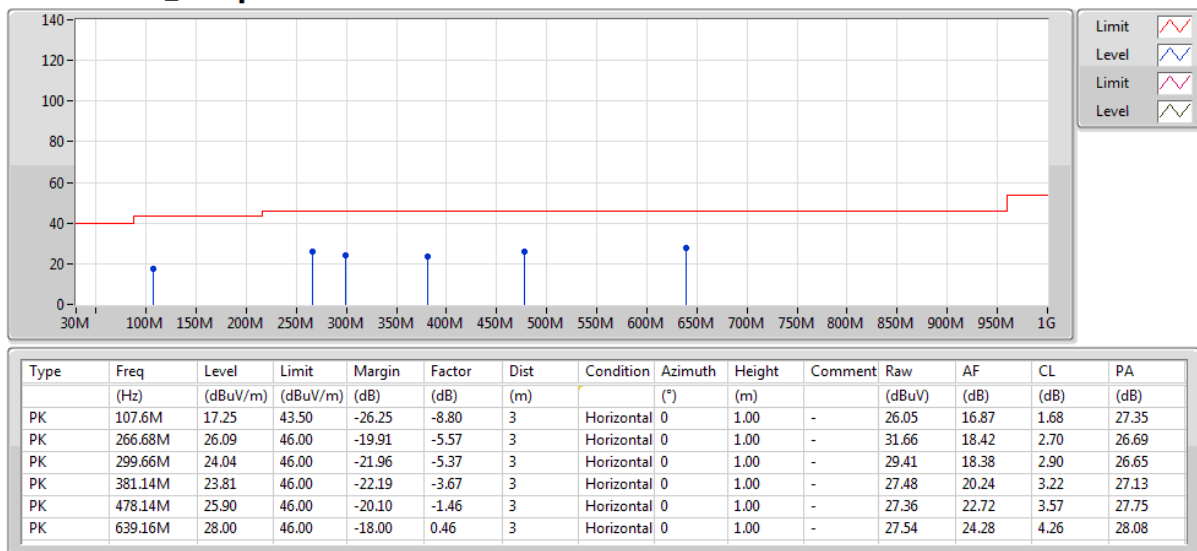

3.3 Emission Bandwidth

3.3.1 Emission Bandwidth Limit

Emission Bandwidth Limit
N/A


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.3.4 Test Setup

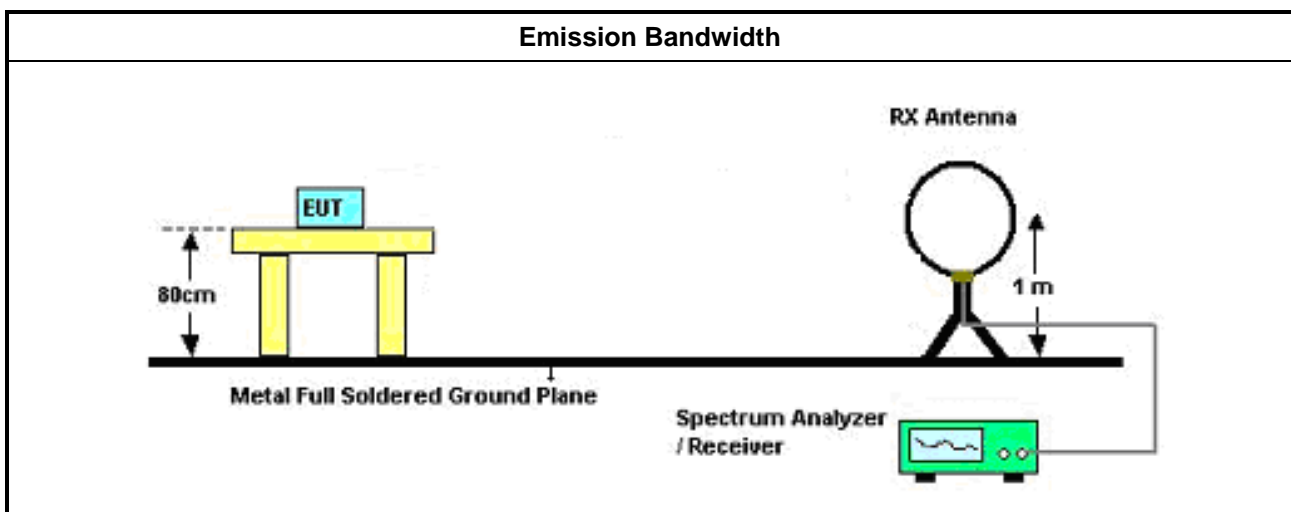


3.3.5 Test Result of Emission Bandwidth

Summary

Mode	20dB (Hz)	OBW (Hz)
WPC_Nss1_1TX	2.819k	2.411k

Result

Mode	Result	20dB (Hz)	FI-20dB (Hz)	Fh-20dB (Hz)	OBW (Hz)	FI-OBW (Hz)	Fh-OBW (Hz)	Limit (Range)
WPC_Nss1_1TX	-	-	-	-	-	-	-	-
0.1392285MHz_TnomVnom	Pass	2.819k	135.40975k	138.22850k	2.411k	135.59282k	138.00411k	-

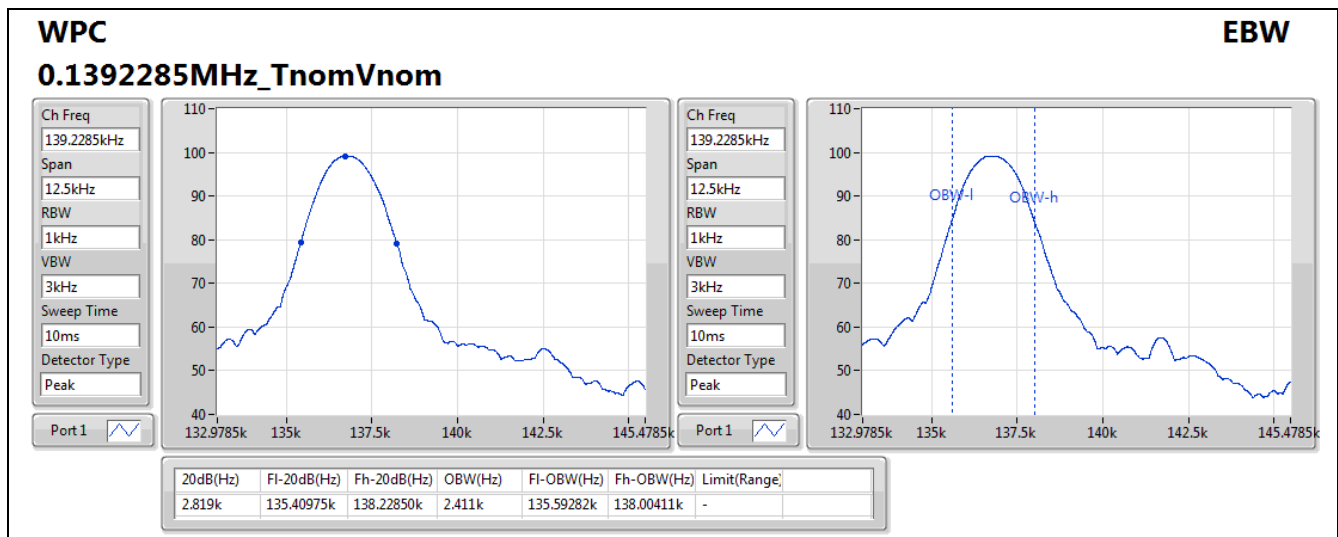



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR3	102051	9kHz~3.6GHz	29/May/2020	28/May/2021
LISN	R&S	ENV216	101295	9kHz~30MHz	11/Nov/2020	10/Nov/2021
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz~200MHz	31/Aug/2020	30/Aug/2021
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz~30MHz	21/Sep/2020	20/Sep/2021

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	19/Oct/2020	18/Oct/2021

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	06/Aug/2020	05/Aug/2021
Signal Analyzer	R&S	FSV40	101500	10Hz~40GHz	19/Aug/2020	18/Aug/2021
Amplifier	HP	8447D	2944A08033	10kHz~1.3GHz	14/Apr/2020	13/Apr/2021
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMC1	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz~1GHz	25/Oct/2020	24/Oct/2021
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~30MHz	19/Jun/2020	18/Jun/2021
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	18/Mar/2020	17/Mar/2021
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2020	15/Mar/2021
EMI Test Receiver	R&S	ESR3	102051	9kHz~3.6GHz	29/May/2020	28/May/2021