


FCC REPORT

Report Reference No. : CHTEW21010033 Report verification: 

Project No. : SHT2012103601EW

FCC ID. : 2AXDV-N402i

Applicant's name : NEXT4

Address : 3 avenue Didier Daurat 31400 TOULOUSE, France

Test item description : N402i

Trade Mark : -

Model/Type reference : N402i

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22
FCC CFR Title 47 Part 24

Date of receipt of test sample : Dec. 30, 2020

Date of testing : Jan. 04, 2021- Jan. 11, 2021

Date of issue : Jan. 12, 2021

Result : Pass

Compiled by
(position+printedname+signature).... : File administrators Silvia Li

Supervised by
(position+printedname+signature).... : Project Engineer Aaron Fang

Approved by
(position+printedname+signature).... : Manager Hans Hu

Silvia Li

Aaron Fang

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Applicable Standards	3
1.2.	Report version information	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
4.	TEST ENVIRONMENT	7
4.1.	Testing Laboratory Information	7
4.2.	Equipments Used during the Test	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
5.	TEST CONDITIONS AND RESULTS	9
5.1.	ERP and EIRP	9
5.2.	Radiated Spurious Emission	12
6.	TEST SETUP PHOTOS OF THE EUT	16
7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	17
8.	APPENDIX REPORT	20

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 2:](#) FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 22:](#) PUBLIC MOBILE SERVICES

[FCC Rules Part 24:](#) PERSONAL COMMUNICATIONS SERVICES

[TIA/EIA 603 E March 2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03:](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2021-01-12	Original

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c)	Pass*	N/A
Peak-to-Average Ratio	Part 24.232	Pass*	N/A
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b)	Pass*	N/A
Band Edge	Part 2.1051 Part 22.917 Part 24.238	Pass*	N/A
Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238	Pass*	N/A
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235	Pass*	N/A
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235	Pass*	N/A
ERP and EIRP	Part 22.913(a) Part 24.232(b)	Pass	Pan Xie
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238	Pass	Pan Xie

Note:

1. The measurement uncertainty is not included in the test result.
2. * reference to module report , which FCC ID is XMR201707BG96

3. SUMMARY

3.1. Client Information

Applicant:	NEXT4
Address:	3 avenue Didier Daurat 31400 TOULOUSE, France
Manufacturer:	NEXT4
Address:	3 avenue Didier Daurat 31400 TOULOUSE, France

3.2. Product Description

Name of EUT:	N402i
Trade Mark:	-
Model No.:	N402i
Listed Model(s):	-
SIM Information:	Support One eSIM Card
Power supply:	DC4.5V by 3*AA battery
Hardware version:	2.2.b
Software version:	1.3.0
2G:	
Support Network:	GPRS, EGPRS
Support Band:	GSM850, PCS1900
Modulation:	GPRS: GMSK EGPRS: 8PSK
Transmit Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz
Receive Frequency:	GSM850: 869.20MHz-893.80MHz PCS1900: 1930.20MHz-1989.80MHz
GPRS Multislot Class:	12
EGPRS Multislot Class:	12
Antenna type:	Flex Antenna
Antenna gain:	GSM850: -2.0dBi PCS1900: -2.0dBi

3.3. Operation state

➤ Test frequency list

GSM850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

➤ Test mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 and ANSI C63.26-2015 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

30 MHz to 10th harmonic for GSM850, PCS1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test modes		
Band	Radiated	Conducted
GSM 850	■ GPRS Class 8 link	■ GPRS Class 8 link
	■ EGPRS Class 8 link	■ EGPRS Class 8 link
PCS 1900	■ GPRS Class 8 link	■ GPRS Class 8 link
	■ EGPRS Class 8 link	■ EGPRS Class 8 link

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn

4.2. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2020/10/19	2021/10/18
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2020/10/19	2021/10/18
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2020/10/19	2021/10/18
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2020/10/19	2021/10/18
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Radiated Spurious Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2020/10/20	2021/10/19
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/12	2021/10/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2020/11/12	2021/11/11
●	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

● Auxiliary Equipment

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	HTWE0254	GPL-2	N/A	2020/10/21	2021/10/20
●	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	VN=Nominal Voltage	DC 4.50V
	VL=Lower Voltage	DC 4.05V
	VH=Higher Voltage	DC 4.95V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30° to + 50° centigrade
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Transmitter power Radiated	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Radiated spurious emissions	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Frequency error	15Hz for <1GHz 70Hz for >1GHz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

5. TEST CONDITIONS AND RESULTS


5.1. ERP and EIRP

LIMIT

GSM850: 7W (38.45dBm) ERP

PCS1900: 2W (33dBm) EIRP

TEST CONFIGURATION

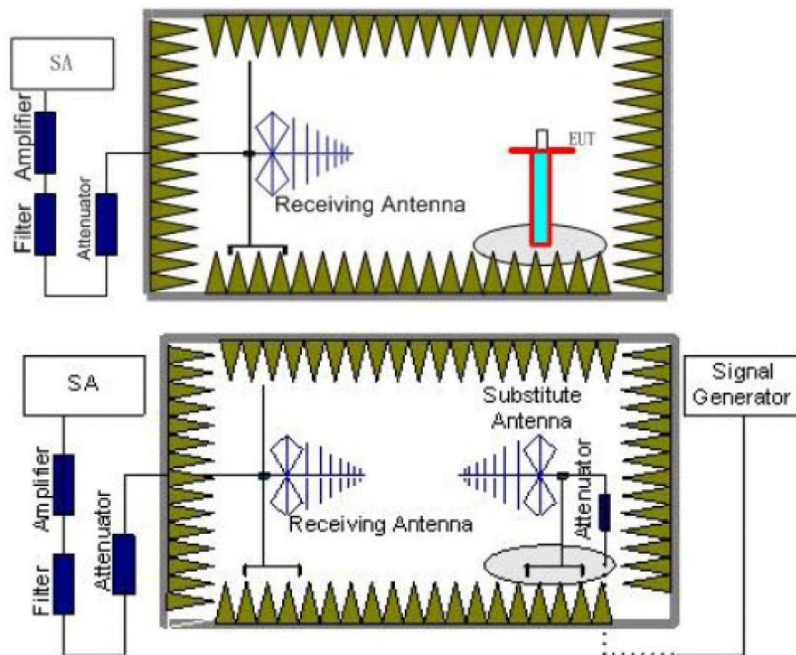

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
 Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
 Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
GPRS850	128	V	28.35	<38.45	Pass
		H	20.16		
	190	V	27.42		
		H	20.47		
	251	V	27.03		
		H	20.59		
EGPRS850	128	V	21.12	<38.45	Pass
		H	13.85		
	190	V	20.42		
		H	14.31		
	251	V	20.60		
		H	13.48		


Mode	Channel	Antenna Pol.	EIRP	Limit (dBm)	Result
GPRS1900	512	V	21.26	<33.00	Pass
		H	24.01		
	661	V	22.28		
		H	25.61		
	810	V	22.91		
		H	25.25		
EGPRS1900	512	V	15.63	<33.00	Pass
		H	18.14		
	661	V	16.40		
		H	19.33		
	810	V	16.76		
		H	18.90		

5.2. Radiated Spurious Emission

LIMIT

-13dBm

TEST CONFIGURATION

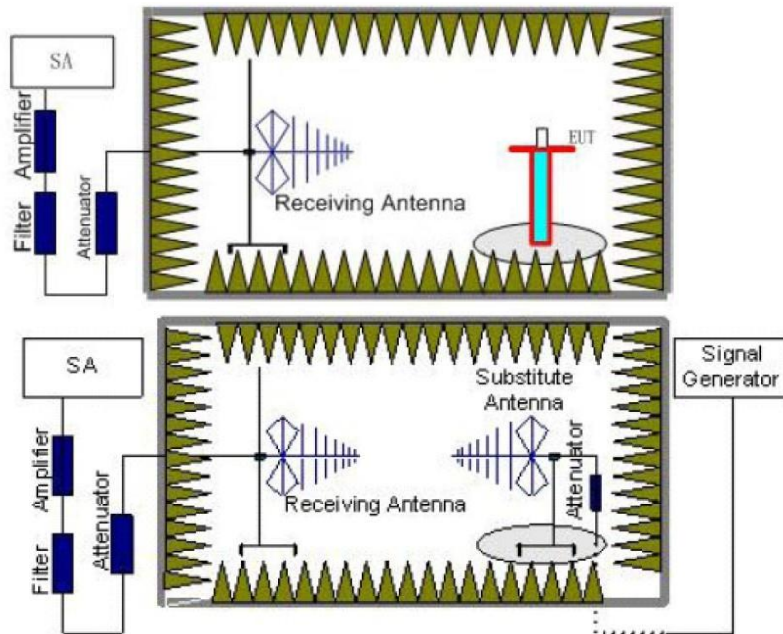

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
 Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
 Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by

- the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
 11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
 12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
 13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
 14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: Worst case at GPRS850/GPRS1900

Channel: 251					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	37.70	-72.01	28.63	6.53	30.80	-67.65	-13.00	-54.65	Peak
2	389.45	-79.45	25.85	8.28	30.11	-75.43	-13.00	-62.43	Peak
3	1355.70	-69.50	37.07	12.66	29.23	-49.00	-13.00	-36.00	Peak
4	2361.07	-68.83	40.04	13.07	28.69	-44.41	-13.00	-31.41	Peak
5	4359.43	-75.04	42.80	10.68	36.18	-57.74	-13.00	-44.74	Peak
6	8027.71	-75.13	48.03	14.28	33.31	-46.13	-13.00	-33.13	Peak
Channel: 251					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	31.62	-61.24	20.79	6.47	30.85	-64.83	-13.00	-51.83	Peak
2	400.56	-78.52	26.03	8.32	30.11	-74.28	-13.00	-61.28	Peak
3	1349.75	-68.95	37.54	12.70	29.24	-47.95	-13.00	-34.95	Peak
4	2257.08	-69.38	41.02	12.76	29.47	-45.07	-13.00	-32.07	Peak
5	4653.42	-75.98	43.54	10.99	35.98	-57.43	-13.00	-44.43	Peak
6	7433.79	-75.41	48.53	14.29	33.98	-46.57	-13.00	-33.57	Peak
Channel: 190					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	31.74	-62.86	28.78	6.47	30.85	-58.46	-13.00	-45.46	Peak
2	411.99	-77.95	26.01	8.35	30.17	-73.76	-13.00	-60.76	Peak
3	1379.74	-69.46	37.12	12.54	29.16	-48.96	-13.00	-35.96	Peak
4	2279.51	-69.45	40.50	12.82	29.39	-45.52	-13.00	-32.52	Peak
5	4346.80	-75.12	42.76	10.70	36.20	-57.86	-13.00	-44.86	Peak
6	7958.16	-75.51	48.08	14.42	33.32	-46.33	-13.00	-33.33	Peak
Channel: 190					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.19	-79.13	28.23	6.92	30.67	-74.65	-13.00	-61.65	Peak
2	410.54	-78.08	25.63	8.34	30.17	-74.28	-13.00	-61.28	Peak
3	1373.69	-69.32	37.65	12.57	29.17	-48.27	-13.00	-35.27	Peak
4	2205.60	-69.43	41.66	12.61	29.63	-44.79	-13.00	-31.79	Peak
5	4410.30	-74.51	43.04	10.64	36.15	-56.98	-13.00	-43.98	Peak
6	7741.87	-76.60	48.47	14.55	33.17	-46.75	-13.00	-33.75	Peak
Channel: 128					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	40.03	-76.04	28.56	6.56	30.86	-71.78	-13.00	-58.78	Peak
2	390.82	-78.53	25.89	8.28	30.11	-74.47	-13.00	-61.47	Peak
3	1284.65	-69.13	36.92	12.70	29.39	-48.90	-13.00	-35.90	Peak
4	2205.60	-69.68	40.94	12.61	29.63	-45.76	-13.00	-32.76	Peak
5	4481.22	-75.40	43.15	10.66	36.25	-57.84	-13.00	-44.84	Peak
6	7912.13	-75.14	48.02	14.56	33.33	-45.89	-13.00	-32.89	Peak
Channel: 128					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.19	-78.33	28.23	6.92	30.67	-73.85	-13.00	-60.85	Peak
2	400.56	-77.03	26.03	8.32	30.11	-72.79	-13.00	-59.79	Peak
3	1402.66	-69.08	37.76	12.41	29.10	-48.01	-13.00	-35.01	Peak
4	2195.93	-69.62	41.66	12.58	29.65	-45.03	-13.00	-32.03	Peak
5	4334.21	-74.76	42.85	10.71	36.19	-57.39	-13.00	-44.39	Peak
6	7619.34	-76.02	48.28	14.68	33.18	-46.24	-13.00	-33.24	Peak

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report.



Channel: 810					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	36.92	-76.01	28.65	6.53	30.78	-71.61	-13.00	-58.61	Peak
2	448.27	-78.48	26.14	8.48	30.35	-74.21	-13.00	-61.21	Peak
3	1327.69	-67.90	37.01	12.82	29.31	-47.38	-13.00	-34.38	Peak
4	2279.51	-69.44	40.50	12.82	29.39	-45.51	-13.00	-32.51	Peak
5	5725.84	-72.01	43.90	12.43	34.86	-50.54	-13.00	-37.54	Peak
6	7630.40	-71.39	47.67	14.69	33.18	-42.21	-13.00	-29.21	Peak
Channel: 810					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.19	-78.95	28.23	6.92	30.67	-74.47	-13.00	-61.47	Peak
2	401.97	-77.98	25.97	8.32	30.12	-73.81	-13.00	-60.81	Peak
3	1411.94	-69.23	37.76	12.35	29.10	-48.22	-13.00	-35.22	Peak
4	2345.56	-68.72	39.96	13.02	28.85	-44.59	-13.00	-31.59	Peak
5	3814.91	-67.89	41.98	9.86	37.00	-53.05	-13.00	-40.05	Peak
6	6246.40	-75.91	45.80	13.16	34.60	-51.55	-13.00	-38.55	Peak
Channel: 661					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	36.92	-75.39	28.65	6.53	30.78	-70.99	-13.00	-57.99	Peak
2	809.30	-78.50	29.95	9.60	29.52	-68.47	-13.00	-55.47	Peak
3	1379.74	-68.88	37.12	12.54	29.16	-48.38	-13.00	-35.38	Peak
4	2322.48	-69.23	40.25	12.95	29.09	-45.12	-13.00	-32.12	Peak
5	5643.40	-74.17	43.78	12.46	35.00	-52.93	-13.00	-39.93	Peak
6	7520.54	-73.99	47.99	14.23	33.78	-45.55	-13.00	-32.55	Peak
Channel: 661					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.50	-77.89	28.13	6.92	30.67	-73.51	-13.00	-60.51	Peak
2	610.85	-78.75	27.90	8.98	31.19	-73.06	-13.00	-60.06	Peak
3	1369.17	-69.08	37.63	12.59	29.19	-48.05	-13.00	-35.05	Peak
4	2297.11	-69.24	40.53	12.87	29.34	-45.18	-13.00	-32.18	Peak
5	3754.53	-71.13	42.15	9.82	37.13	-56.29	-13.00	-43.29	Peak
6	7935.11	-75.77	47.92	14.49	33.32	-46.68	-13.00	-33.68	Peak
Channel: 512					Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	38.37	-76.45	28.62	6.54	30.82	-72.11	-13.00	-59.11	Peak
2	378.65	-78.34	25.46	8.23	30.12	-74.77	-13.00	-61.77	Peak
3	1333.54	-69.09	37.02	12.78	29.29	-48.58	-13.00	-35.58	Peak
4	2376.69	-70.18	39.95	13.12	28.53	-45.64	-13.00	-32.64	Peak
5	3705.85	-70.81	42.28	9.79	37.06	-55.80	-13.00	-42.80	Peak
6	5554.08	-73.74	43.80	12.21	35.25	-52.98	-13.00	-39.98	Peak
Channel: 512					Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.50	-77.60	28.13	6.92	30.67	-73.22	-13.00	-60.22	Peak
2	366.85	-78.20	25.01	8.19	30.12	-75.12	-13.00	-62.12	Peak
3	1367.66	-68.95	37.62	12.60	29.19	-47.92	-13.00	-34.92	Peak
4	2162.42	-68.94	41.11	12.50	29.66	-44.99	-13.00	-31.99	Peak
5	3700.48	-69.14	42.31	9.79	37.05	-54.09	-13.00	-41.09	Peak
6	7730.65	-76.49	48.45	14.60	33.17	-46.61	-13.00	-33.61	Peak

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report




6. TEST SETUP PHOTOS OF THE EUT



Radiated emission:

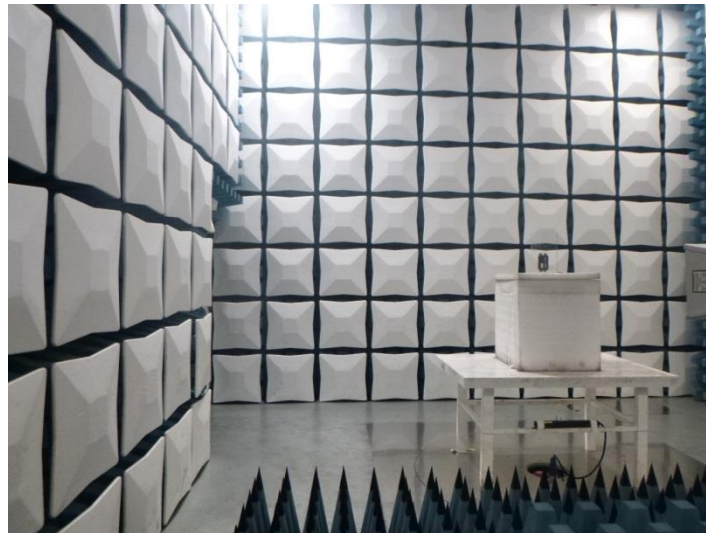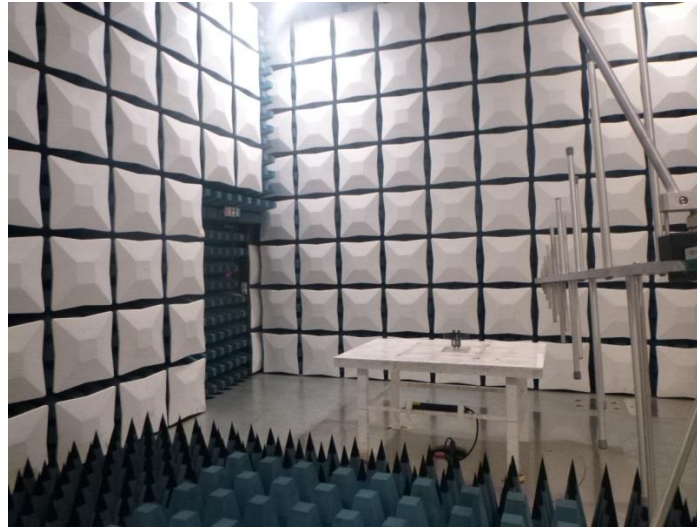




7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

External photos of the EUT

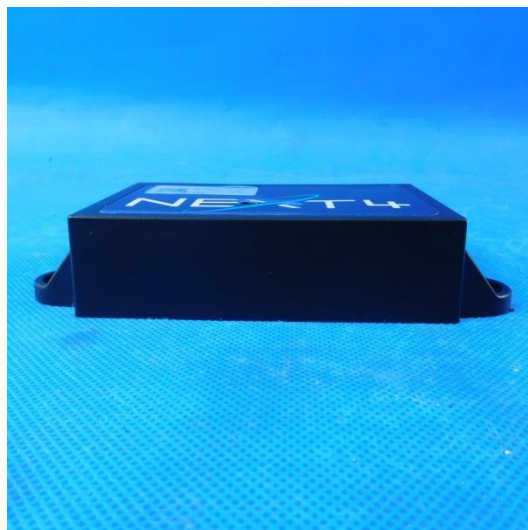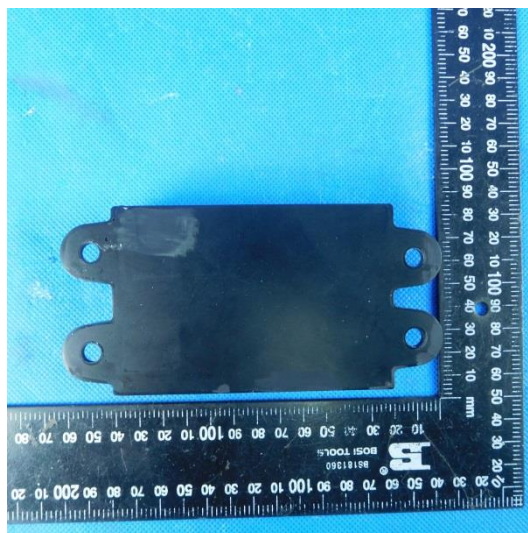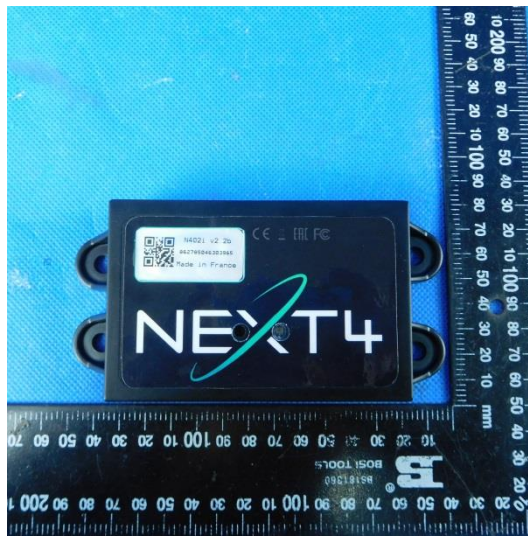

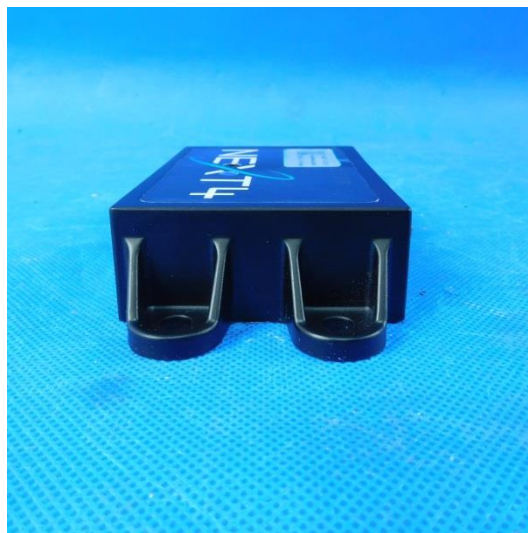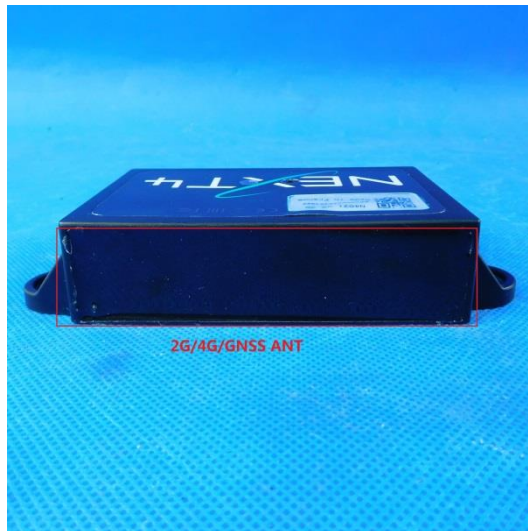

Internal photos of the EUT

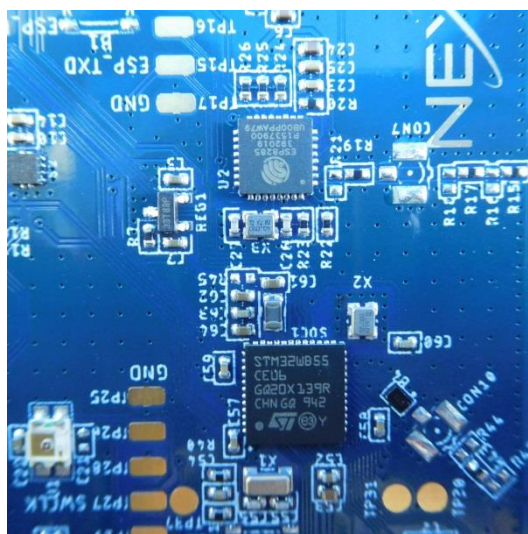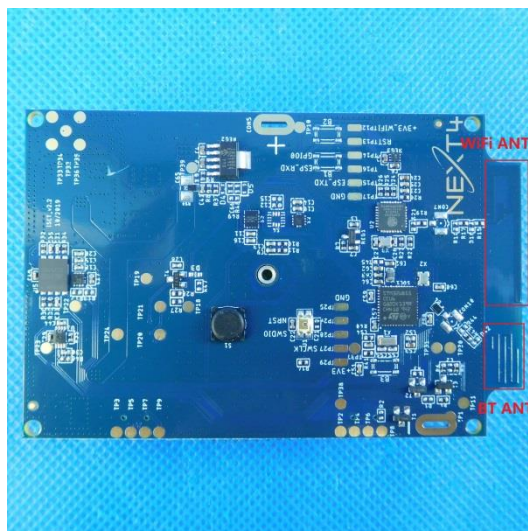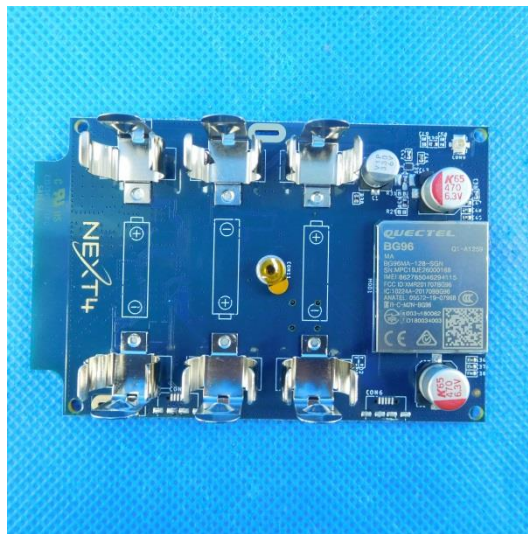



8. APPENDIX REPORT