



RF Exposure Evaluation Report

1. Product Information

Number of tested samples	2
Sample number	A240618058-1(Engineer sample), A240618058-2(Normal sample)
Product Name	Embedded 3-in-1 Wireless Charging Board for apple
Model Number	GF-17-01B
Power Supply	Input: DC 24-36V Wireless Charging Output: (Mobile phone: 15W Max, AirPods/ iWatch: 5W Max) Type-C Output: 30W Max USB -A Output: 18W Max A+C Combined Output: 15W Max
Modulation Type	ASK
Frequency Range	110.0~205.0KHz, 360KHz
Antenna Type	Coil Antenna
Hardware version	/
Software version	/
Accessories	/
Exposure category	General population/uncontrolled environment
EUT Type	Production Unit
Device Type	Mobile Device

2. Evaluation Method

Per KDB 680106 D01 Section 3. RF Exposure Requirements;

- 1) Wireless power transfer devices must comply with RF exposure requirements for all design configurations in which they can operate. At a minimum, RF exposure must be evaluated for the worst-case scenario, typically when the transmitter, while delivering energy to a client device, is operating at maximum output power. RF exposure compliance for equipment authorization must be determined following the guidance of KDB447498, which includes consideration of the different test requirements for *Mobile Device* and *Portable Device* exposure categories, as defined in §§ 2.1091 and 2.1093 of the Rules.
- 2) The RF exposure limits, as set forth in § 1.1310, do not cover the frequency range below 100 kHz for Specific Absorption Rate (SAR) and below 300 kHz for Maximum Permitted Exposure (MPE). In addition, present limitations of RF exposure evaluation systems prevent an accurate evaluation of SAR below 4 MHz. For these reasons, a specific MPE-based RF Exposure compliance procedure for devices operating in the aforementioned low-frequency ranges has been set in place. This procedure is applicable to Equipment Authorization of all RF devices, thus including, but not limited to, Part 18 and WPT devices. Accordingly, for § 2.1091-*Mobile* devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively. For § 2.1093-*Portable* devices below 4 MHz and down to 100 kHz, the MPE limits in § 1.1310 (with the 300 kHz limit applicable all the way down to 100 kHz) can be used for the purpose of equipment authorization in lieu of SAR evaluations.

Furthermore, consistent with FCC's equipment authorization RF exposure guidance, any device



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



(both portable and mobile) operating at frequencies below 100 kHz is considered compliant for the purpose of equipment authorization when the external (unperturbed) temporal peak field strengths do not exceed the following reference levels:

83 V/m for the electric field strength (E)

and 90 A/m for the magnetic field strength (H)

These data may be provided through measurements and/or numerical simulations, and for all the positions in space relevant for any possible body exposure.

- 3) “Large size” probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), as in the example shown in Figure 1.

If the center of the probe sensing element is located more than 5 mm from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable. The estimates may be done either via numerical calculation, or via analytic model: e.g., approximated formulas for circular coils, dipoles, etc., may be acceptable if it is shown that the model is applicable for the design parameters considered. A typical example is the use of a quasi-static approximation formula for a low-frequency magnetic field source. These estimates shall include points spaced no more than 2 cm from each other. Thus, in the example of Figure 1, at least the estimates at 0 cm and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two closest points to the device surface, and with 2-cm increments, as indicated in Figure 1. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.

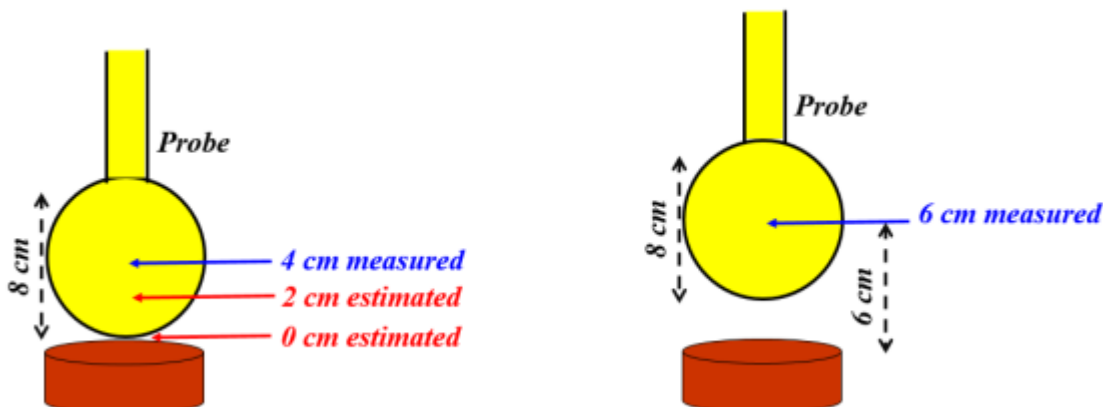


Figure 1. Example of probe (in yellow) measurements in points close to the WPT device (in red/brown). The probe radius is 4 cm, thus the closest point to the device where the field can be measured is at 4 cm from the surface (this example assumes that the probe calibration refers to the center of the sensing element structure, in this case a sphere of 4 cm radius). Data at 0 cm and 2 cm must be estimated through a model, and then the same model must be validated via comparison with the actual measurements at 4 cm and 6 cm, where the probe center can be positioned and collect valid data.

- 4) Part 18 Wireless Power Transfer up to One-Meter Distance. This section applies only to WPT transmitters that, by design, can provide power to a load located at a distance no greater than one meter. This distance shall be measured between the closest points between the transmitter and the receiver enclosure surfaces. For instance, two coils positioned as in Figure 2-a may be operated and considered under the provisions of this section, because both receivers are within one-meter distance from the transmitter. However, the case in Figure 2-b cannot be considered



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



in the same way, and it is treated according to the prescription of Section 5.3.

For WPT designs with more than one radiating structure the distance to the load shall be considered as in Figure 3, thus measured between the receiver and the closest transmitting structure.

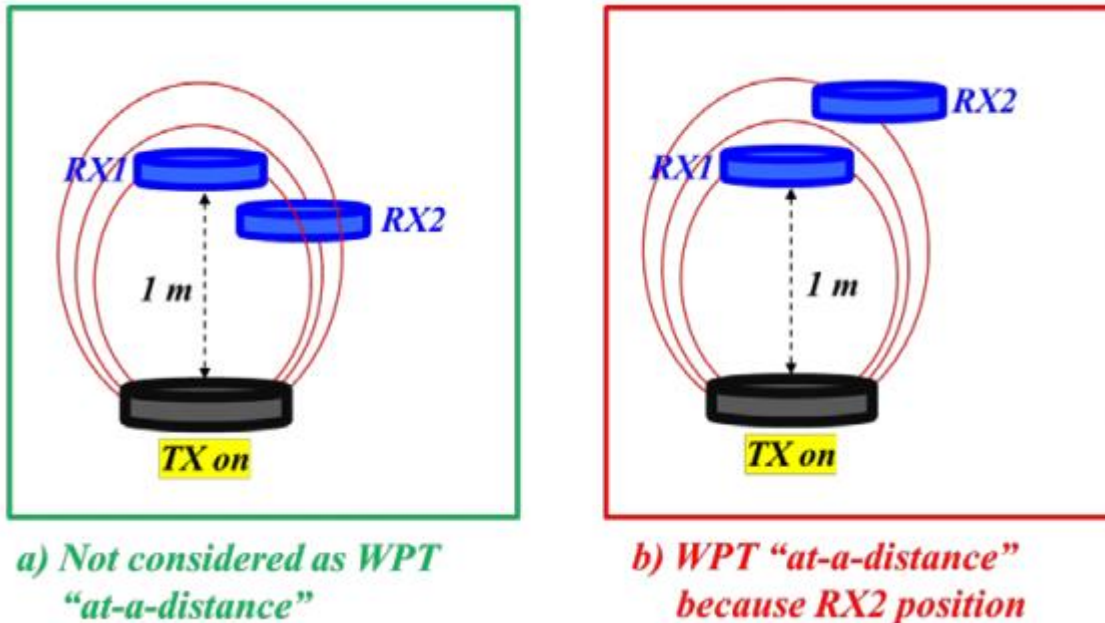


Figure 2-a) For multiple-receiver systems (here shown with two receivers, indicated with RX1 and RX2) the one-meter distance limit must apply for all the receivers that are engaged in the charging process. **b)** The WPT system is considered "at-a-distance" because it can function when the RX2 is further away than one meter from the transmitter.

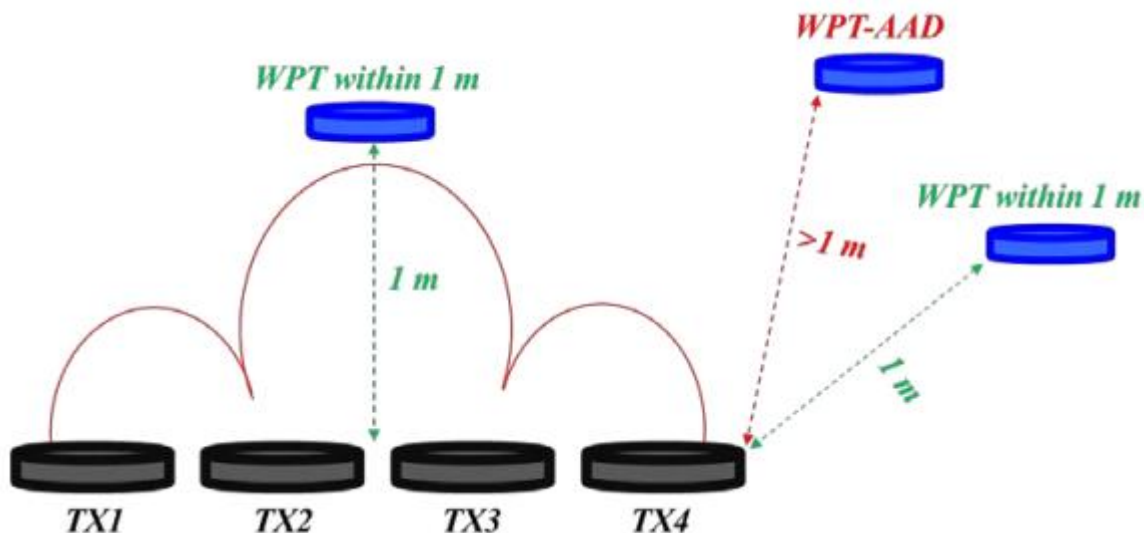


Figure 3. For multiple-coil transmitter systems, the one-meter distance limit is measured from the closest coil edge. A WPT within one meter operates with loads configured as those labeled in green font, if a load can be powered beyond one meter (in red), then it shall be considered "at-a-distance"

There might be situations where the WPT RF emissions are limited enough that even operations in a "crowded" environment, where many similar WPT devices are present, do not pose significant



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EMC and RF exposure concerns. In this scenario, and for devices operating within a one-meter distance from the receiver, as defined above, a manufacturer will not have to submit an "Equipment Compliance Review" KDB, and receive FCC concurrence before proceeding with equipment authorization. This exception to the requirement of submitting the ECR to obtain FCC concurrence only applies when all the following criteria (1) through (6) are met:

- (1) The power transfer frequency is below 1 MHz.
 - (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
 - (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
 - (4) Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093 – Portable exposure conditions).
 - (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
- 5) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested

3. Evaluation Limit

3.1 Refer evaluation method

[ANSI C95.1-1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v03](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

[FCC CFR 47 part 18.107](#): Industrial, Scientific, and Medical Equipment



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. Test Setup Diagram

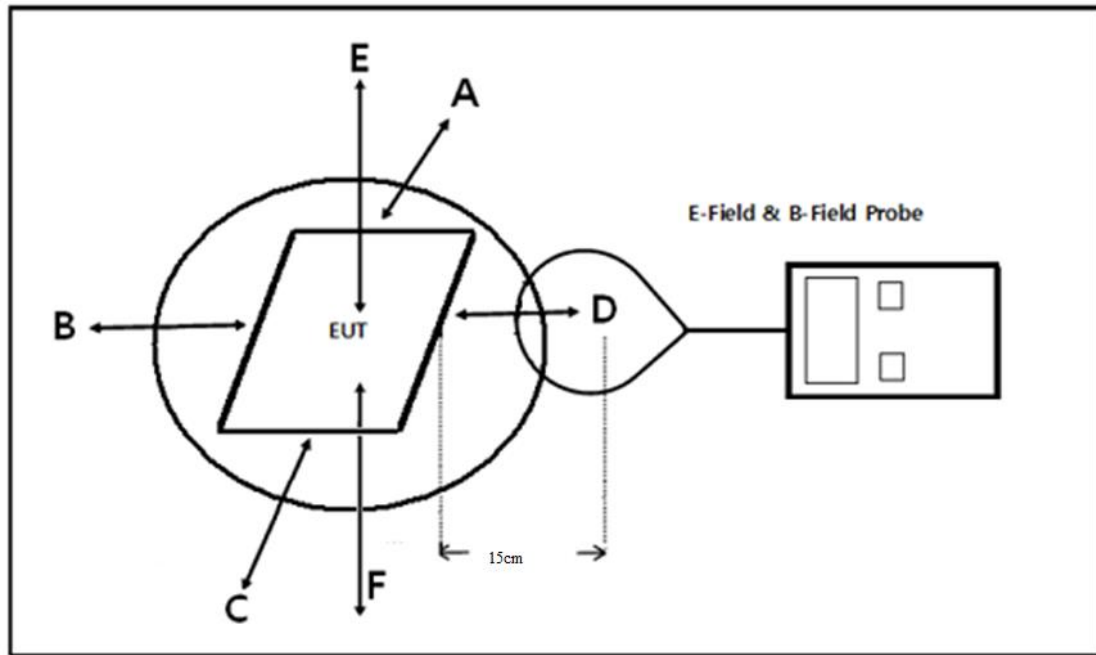

5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2023-10-28	2024-10-27
B-Field Probe	Narda	ELT-400	M-1154	2023-10-28	2024-10-27
Electric field probe	Narda	EP601	611WX70332	2024-01-28	2025-01-27

6. Measurement Procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm and 20cm) which is between the edges of the charger and the geometric center of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v04 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110.0 KHz - 205 KHz, 360KHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of the primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	Yes	Mobile exposure conditions only
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not	No	Only three radiating structure and tested at maximum Output Power



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



powered, then those cases must be tested as well.
For instance, a device may use three RF coils
powered at 5 W, or one coil powered at 15 W: in this
case, both scenarios shall be tested

There might be situations where the WPT RF emissions are limited enough that even operations in a “crowded” environment, where many similar WPT devices are present, do not pose significant EMC and RF exposure concerns. In this scenario, and for devices operating within a one-meter distance from the receiver, as defined above, a manufacturer will not have to submit an “Equipment Compliance Review” KDB, and receive FCC concurrence before proceeding with equipment authorization. This exception to the requirement of submitting the ECR to obtain FCC concurrence only applies when all the following criteria (1) through (6) are met.

8. E and H field Strength

Test Modes		
Mode 1	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Record
Mode 2	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Record
Mode 3	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Record
Mode 4	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 5	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 6	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 7	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 8	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 9	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 10	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 11	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 12	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 13	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 14	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 15	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 16	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 17	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 18	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 19	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 20	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 21	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 22	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Mode 23	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 24	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 25	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 26	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 27	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 28	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 29	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 30	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 31	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 32	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 33	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 34	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 35	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 36	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 37	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 38	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 39	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 40	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 41	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 42	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 43	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Record
Mode 44	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Record
Mode 45	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Record
Mode 46	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 47	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 48	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 49	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 50	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 51	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 52	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <1%) ((360KHz)	Pre-tested
Mode 53	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 54	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 55	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 56	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 57	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 58	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 59	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 60	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 61	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Mode 62	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 63	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 64	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 65	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 66	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 67	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 68	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 69	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 70	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 71	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 72	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 73	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 74	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 75	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 76	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 77	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 78	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 79	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 80	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 81	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 82	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 83	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 84	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested

Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 1	110.0~205	uT	0.127	0.140	0.135	0.129	0.140	--	--
Mode 1	110.0~205	A/m	0.101	0.112	0.108	0.104	0.112	0.815	1.63
Mode 1	110.0~205	V/m	38.073	41.996	40.447	38.934	42.226	307.0	614.0
Mode 2	110.0~205	uT	0.126	0.140	0.134	0.129	0.149	--	--
Mode 2	110.0~205	A/m	0.101	0.112	0.108	0.103	0.119	0.815	1.63
Mode 2	110.0~205	V/m	37.883	42.051	40.436	38.769	44.790	307.0	614.0
Mode 3	110.0~205	uT	0.124	0.135	0.138	0.133	0.145	--	--
Mode 3	110.0~205	A/m	0.100	0.108	0.111	0.107	0.116	0.815	1.63
Mode 3	110.0~205	V/m	37.412	40.578	41.593	40.079	43.468	307.0	614.0



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 44	360	uT	0.143	0.171	0.182	0.166	0.179	--	--
Mode 44	360	A/m	0.114	0.136	0.146	0.133	0.143	0.815	1.63
Mode 44	360	V/m	42.996	51.415	54.772	49.911	53.820	307.0	614.0
Mode 45	360	uT	0.132	0.166	0.172	0.159	0.168	--	--
Mode 45	360	A/m	0.106	0.133	0.138	0.127	0.134	0.815	1.63
Mode 45	360	V/m	39.688	49.911	51.715	47.807	50.513	307.0	614.0
Mode 46	360	uT	0.128	0.161	0.166	0.154	0.159	--	--
Mode 46	360	A/m	0.102	0.129	0.133	0.123	0.127	0.815	1.63
Mode 46	360	V/m	38.486	48.408	49.911	46.303	47.807	307.0	614.0

Field Strength at 20 cm from the edges surrounding the EUT and 20cm from the top surface of the EUT

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values	50% Limits	Limits
			Test Position E		
Mode 1	110.0~205	uT	0.146	--	--
Mode 1	110.0~205	A/m	0.117	0.815	1.63
Mode 1	110.0~205	V/m	43.840	307.0	614.0
Mode 2	110.0~205	uT	0.142	--	--
Mode 2	110.0~205	A/m	0.114	0.815	1.63
Mode 2	110.0~205	V/m	42.764	307.0	614.0
Mode 3	110.0~205	uT	0.147	--	--
Mode 3	110.0~205	A/m	0.117	0.815	1.63
Mode 3	110.0~205	V/m	44.060	307.0	614.0

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values	50% Limits	Limits
			Test Position E		
Mode 44	360	uT	0.165	--	--
Mode 44	360	A/m	0.132	0.815	1.63
Mode 44	360	V/m	49.611	307.0	614.0
Mode 45	360	uT	0.160	--	--
Mode 45	360	A/m	0.128	0.815	1.63
Mode 45	360	V/m	48.107	307.0	614.0
Mode 46	360	uT	0.154	--	--
Mode 46	360	A/m	0.123	0.815	1.63
Mode 46	360	V/m	46.303	307.0	614.0

Note: $V/m = 10^{\frac{((20 \lg(A/m \cdot 10^6) + 51.5) - 120)}{20}}$

Note: $A/m = uT / 1.25$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




9. Test Setup Photos

9.1. Test Position A - Exposure photo from side edge surface-Rear

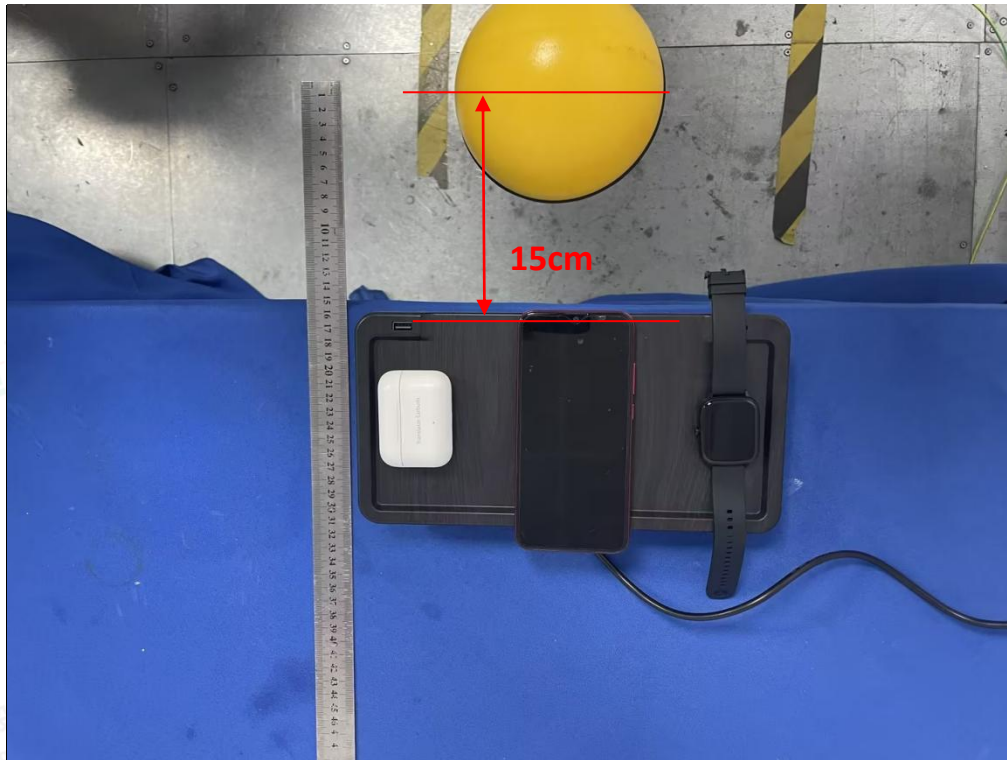

(TM1)

9.2. Test Position B - Exposure photo from side edge surface-Left

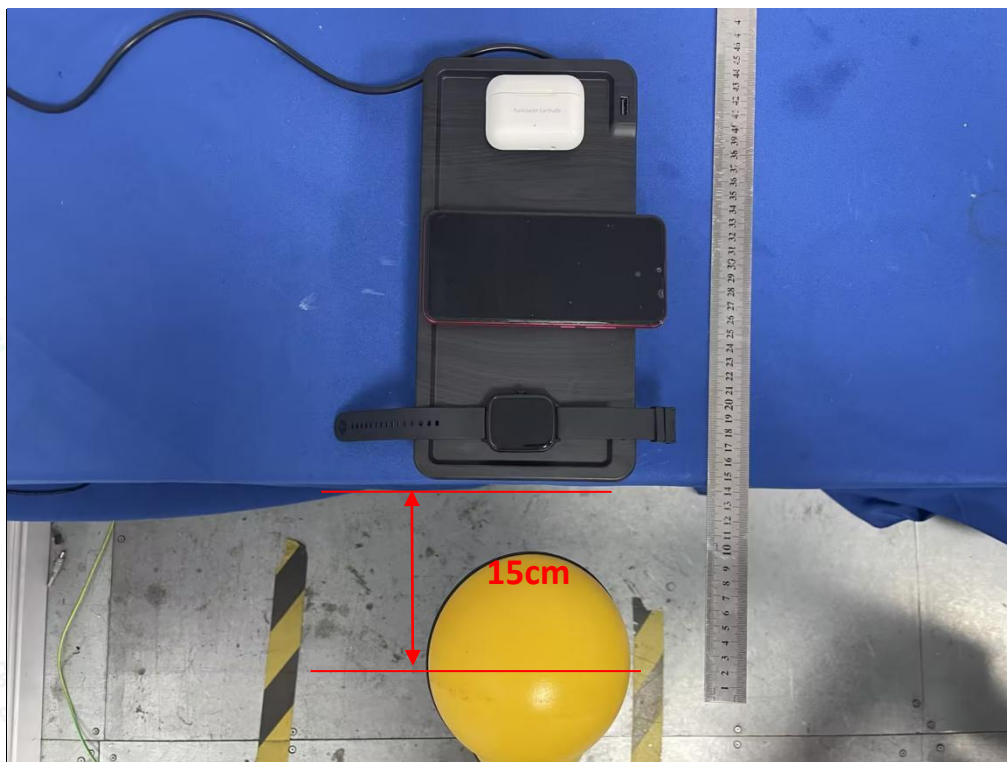

(TM1)



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




9.3. Test Position C - Exposure photo from side edge surface-Front

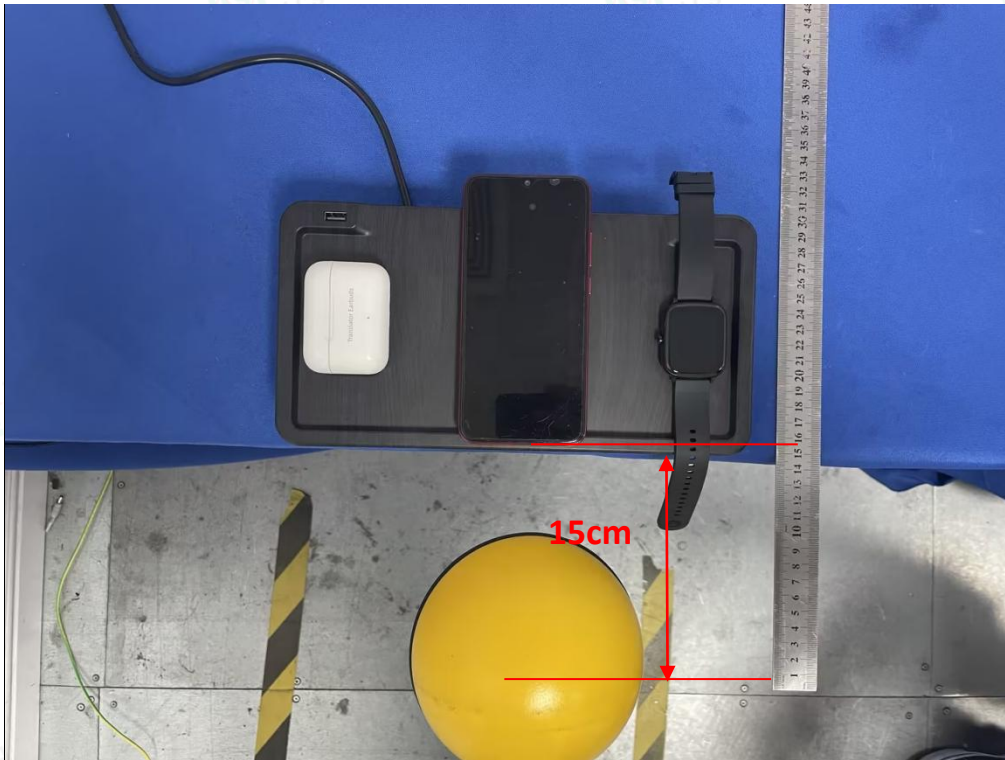

(TM1)

9.4. Test Position D - Exposure photo from side edge surface-Right

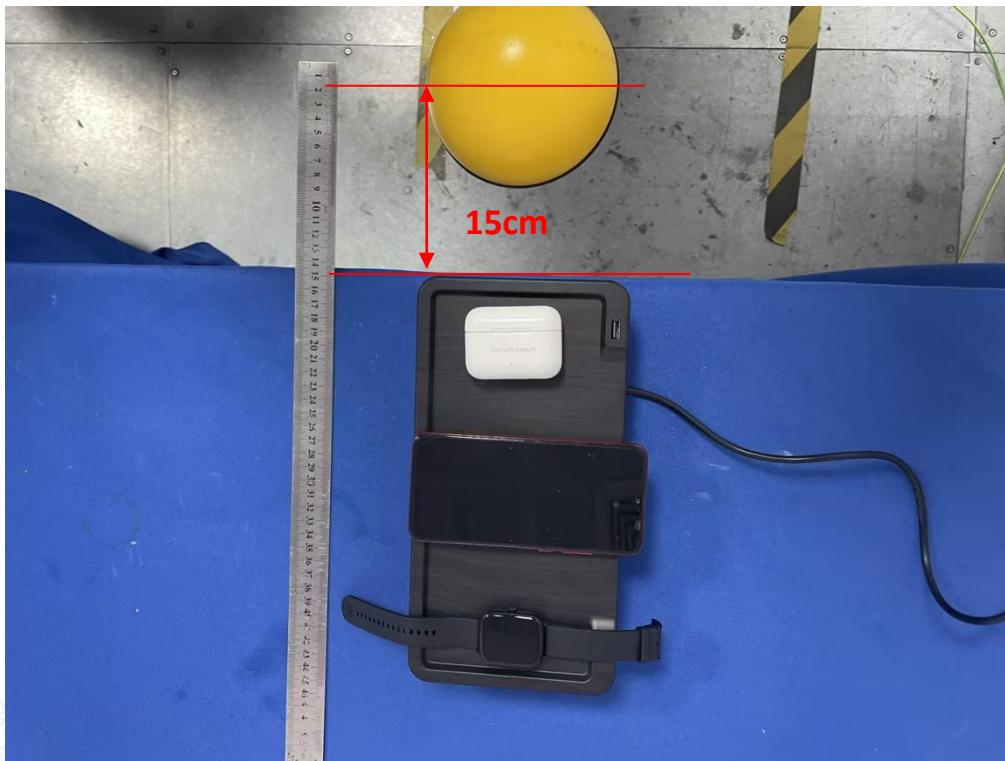

(TM1)



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




9.5. Test Position E - Exposure photo from top surface (20cm)

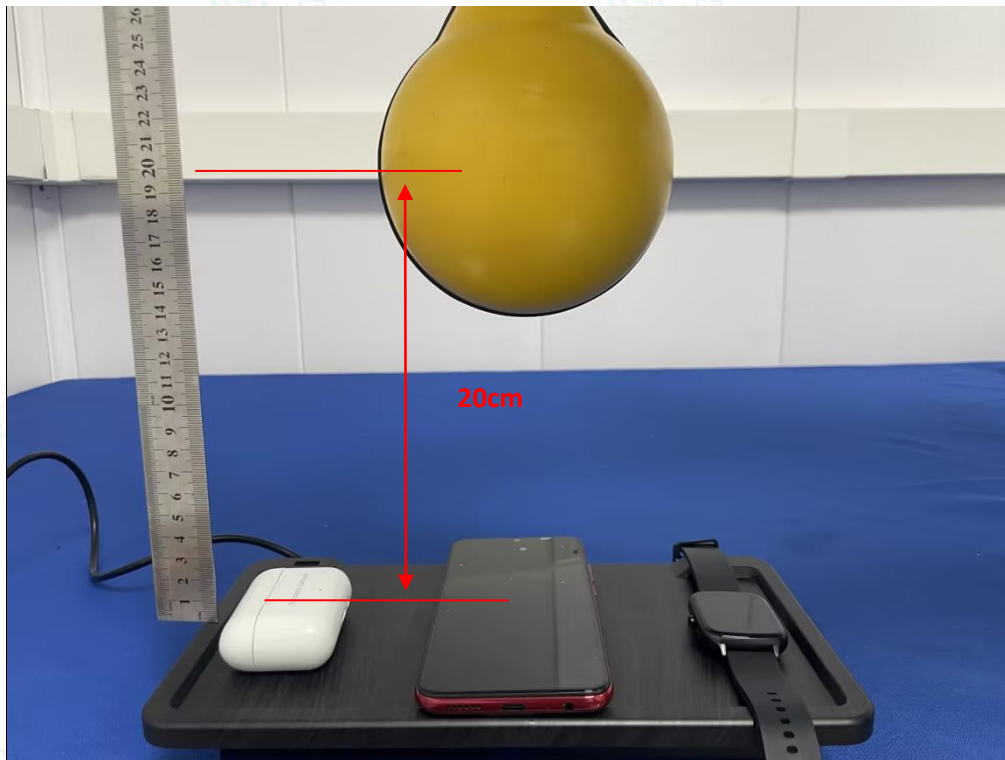

(TM1)

9.6. Test Position E- Exposure photo from top surface (15cm)

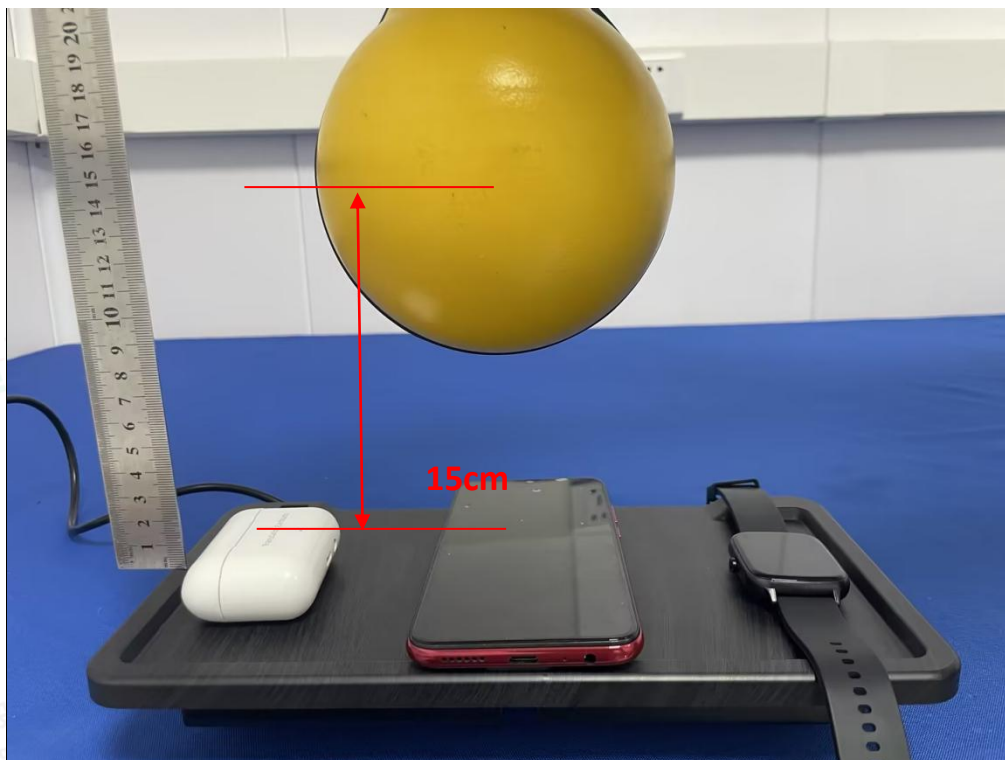

(TM1)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



9 Conclusion

A minimum safety distance of at 15 cm surrounding the device and 20 cm above the top surface of the device is required when the device is charging a smart phone. The detected emissions with a distance of 15 cm surrounding the device and 20 cm above the top surface of the device are below the limitations according to FCC KDB 680106 D01 Section 3. RF Exposure Requirement Clause 3.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 02, 2024	Initial Issue	--

.....END OF REPORT.....

