



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

|                        |                                                             |
|------------------------|-------------------------------------------------------------|
| Applicant's company    | ZEBRA TECHNOLOGIES CORPORATION                              |
| Applicant Address      | One Motorola Plaza Holtsville, NY 11742 USA                 |
| FCC ID                 | H9PAP7562                                                   |
| Manufacturer's company | Wistron NeWeb Corporation                                   |
| Manufacturer Address   | 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan |

|                   |                                       |
|-------------------|---------------------------------------|
| Product Name      | 802.11 abgn/ac Access Point           |
| Brand Name        | ZEBRA                                 |
| Model No.         | AP-7562                               |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range  | 2400 ~ 2483.5MHz                      |
| Received Date     | Dec. 04, 2014                         |
| Final Test Date   | Jan. 30, 2015                         |
| Submission Type   | Original Equipment                    |

### Statement

**Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|                                                               |                |
|---------------------------------------------------------------|----------------|
| <b>1. VERIFICATION OF COMPLIANCE .....</b>                    | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                    | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                           | <b>3</b>       |
| 3.1. Product Details.....                                     | 3              |
| 3.2. Accessories.....                                         | 7              |
| 3.3. Table for Filed Antenna.....                             | 8              |
| 3.4. Table for Carrier Frequencies .....                      | 11             |
| 3.5. Table for Test Modes .....                               | 12             |
| 3.6. Table for Testing Locations.....                         | 15             |
| 3.7. Table for Supporting Units .....                         | 16             |
| 3.8. Table for Parameters of Test Software Setting .....      | 17             |
| 3.9. EUT Operation during Test .....                          | 22             |
| 3.10. Duty Cycle .....                                        | 22             |
| 3.11. Test Configurations .....                               | 23             |
| <b>4. TEST RESULT .....</b>                                   | <b>27</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....       | 27             |
| 4.2. Maximum Conducted Output Power Measurement.....          | 31             |
| 4.3. Power Spectral Density Measurement .....                 | 44             |
| 4.4. 6dB Spectrum Bandwidth Measurement .....                 | 87             |
| 4.5. Radiated Emissions Measurement .....                     | 124            |
| 4.6. Emissions Measurement .....                              | 211            |
| 4.7. Antenna Requirements .....                               | 366            |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                  | <b>367</b>     |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                        | <b>369</b>     |
| <b>APPENDIX A. TEST PHOTOS .....</b>                          | <b>A1 ~ A7</b> |
| <b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT .....</b> | <b>B1 ~ B3</b> |

## History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR4D0488AA | Rev. 01 | Initial issue of report | Mar. 26, 2015 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11 abgn/ac Access Point  
Brand Name : ZEBRA  
Model No. : AP-7562  
Applicant : ZEBRA TECHNOLOGIES CORPORATION  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 04, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |             |
|------------------------------------------------|--------------|-----------------------------------|----------|-------------|
| Part                                           | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions | Complies | 4.14 dB     |
| 4.2                                            | 15.247(b)(3) | Maximum Conducted Output Power    | Complies | 0.2 dB      |
| 4.3                                            | 15.247(e)    | Power Spectral Density            | Complies | 0.2 dB      |
| 4.4                                            | 15.247(a)(2) | 6dB Spectrum Bandwidth            | Complies | -           |
| 4.5                                            | 15.247(d)    | Radiated Emissions                | Complies | 1.19 dB     |
| 4.6                                            | 15.247(d)    | Band Edge Emissions               | Complies | 1.00 dB     |
| 4.7                                            | 15.203       | Antenna Requirements              | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items            | Description                                                                                                                                                |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Type     | WLAN (1TX,2TX,3TX, 1RX,2RX,3RX)                                                                                                                            |
| Radio Type       | Intentional Transceiver                                                                                                                                    |
| Power Type       | From PoE                                                                                                                                                   |
| Modulation       | IEEE 802.11b: DSSS<br>IEEE 802.11g: OFDM<br>IEEE 802.11n/ac: see the below table                                                                           |
| Data Modulation  | IEEE 802.11b: DSSS (BPSK / QPSK / CCK)<br>IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) |
| Data Rate (Mbps) | IEEE 802.11b: DSSS (1/ 2/ 5.5/11)<br>IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54)<br>IEEE 802.11n/ac: see the below table                                    |
| Frequency Range  | 2400 ~ 2483.5MHz                                                                                                                                           |
| Channel Number   | 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth                                                                                                             |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Channel Band Width (99%) | <p><b>Mode 1 (Ant.6 Dipole antenna / 5.3 dBi)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 12.50 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 18.58 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz</p> <p>2TX: IEEE 802.11b: 12.24 MHz</p> <p>3TX: IEEE 802.11b: 12.24 MHz</p> <p>For Beamforming mode:</p> <p>2TX:IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz</p> <p>3TX:IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz</p> <p><b>Mode 2 (Ant.7 Panel antenna / 6.5 dBi)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 12.32 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 19.45 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz</p> <p>2TX: IEEE 802.11b: 12.59 MHz</p> <p>3TX: IEEE 802.11b: 12.41 MHz</p> <p>For Beamforming mode:</p> <p>2TX:IEEE 802.11ac MCS0/Nss1 (VHT20): 18.23 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.61 MHz</p> <p>3TX:IEEE 802.11ac MCS0/Nss1 (VHT20): 18.14 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.46 MHz</p> <p><b>Mode 3 (Ant.9 CROSS-POLARIZED PANEL ANTENNA/<br/>Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dB)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 11.98 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 19.71 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.69 MHz</p> <p>2TX: IEEE 802.11b: 11.98 MHz</p> <p>3TX: IEEE 802.11b: 11.80 MHz</p> <p>For Beamforming mode:</p> <p>2TX:IEEE 802.11ac MCS0/Nss2 (VHT20): 18.23 MHz</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 36.75 MHz</p> <p>3TX:IEEE 802.11ac MCS0/Nss2 (VHT20): 17.80 MHz</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 36.32 MHz</p> |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Conducted Output Power | <p><b>Mode 1 (Ant.6 Dipole antenna / 5.3 dBi)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 22.45 dBm<br/> IEEE 802.11g: 21.13 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 21.13 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 18.85 dBm</p> <p>2TX: IEEE 802.11b: 24.69 dBm<br/> IEEE 802.11g: 23.38 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 23.51 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 17.64 dBm</p> <p>3TX: IEEE 802.11b: 26.28 dBm<br/> IEEE 802.11g: 26.28 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 24.16 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 18.60 dBm</p> <p>For Beamforming mode:</p> <p>2TX: IEEE 802.11g: 23.38 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 23.51 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 17.64 dBm</p> <p>3TX: IEEE 802.11g: 24.20 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 24.16 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 18.60 dBm</p> <p><b>Mode 2 (Ant.7 Panel antenna / 6.5 dBi)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 22.45 dBm<br/> IEEE 802.11g: 21.82 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 21.85 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 16.38 dBm</p> <p>2TX: IEEE 802.11b: 25.08 dBm<br/> IEEE 802.11g: 23.91 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 23.87 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 18.49 dBm</p> <p>3TX: IEEE 802.11b: 26.69 dBm<br/> IEEE 802.11g: 24.53 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT20): 24.53 dBm<br/> IEEE 802.11ac MCS0/Nss1 (VHT40): 18.60 dBm</p> |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     | <p>For Beamforming mode:</p> <p>2TX: IEEE 802.11g: 23.91 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 23.87 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 18.49 dBm</p> <p>3TX: IEEE 802.11g: 24.53 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 24.53 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 18.60 dBm</p> <p><b>Mode 3 (Ant.9 CROSS-POLARIZED PANEL ANTENNA/<br/>Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dB)</b></p> <p>For Non-beamforming mode:</p> <p>1TX: IEEE 802.11b: 20.47 dBm</p> <p>IEEE 802.11g: 21.07 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 21.16 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 15.51 dBm</p> <p>2TX: IEEE 802.11b: 23.20 dBm</p> <p>IEEE 802.11g: 23.74 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 23.78 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 18.53 dBm</p> <p>3TX: IEEE 802.11b: 24.08 dBm</p> <p>IEEE 802.11g: 22.73 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 22.69 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 19.18 dBm</p> <p>For Beamforming mode:</p> <p>2TX: IEEE 802.11g: 23.74 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 23.78 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 18.53 dBm</p> <p>3TX: IEEE 802.11g: 22.73 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 22.69 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 19.18 dBm</p> |
| Carrier Frequencies | Please refer to section 3.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Antenna             | Please refer to section 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| Items                | Description                                          |                                              |
|----------------------|------------------------------------------------------|----------------------------------------------|
| Beamforming Function | <input checked="" type="checkbox"/> With beamforming | <input type="checkbox"/> Without beamforming |
| STBC Function        | <input checked="" type="checkbox"/> With STBC        | <input type="checkbox"/> Without STBC        |
| LDPC Function        | <input checked="" type="checkbox"/> With LDPC        | <input type="checkbox"/> Without LDPC        |

Note 1: The product has beamforming function for 802.11g/n/ac in 2.4GHz and 802.11a/n/ac in 5GHz.

Note 2: The product has STBC and LDPC in 2TX/3TX function for 802.11n/ac in 2.4GHz and 802.11n/ac in 5GHz.

### Antenna and Band width

| Antenna         | Single (TX) |        | Two (TX) |        | Three (TX) |        |
|-----------------|-------------|--------|----------|--------|------------|--------|
| Band width Mode | 20 MHz      | 40 MHz | 20 MHz   | 40 MHz | 20 MHz     | 40 MHz |
| IEEE 802.11b    | V           | X      | V        | X      | V          | X      |
| IEEE 802.11g    | V           | X      | V        | X      | V          | X      |
| IEEE 802.11n    | V           | V      | V        | V      | V          | V      |
| IEEE 802.11ac   | V           | V      | V        | V      | V          | V      |

### IEEE 802.11n/ac Spec.

| Protocol         | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20)   | 1, 2, 3                         | MCS0-23         |
| 802.11n (HT40)   | 1, 2, 3                         | MCS0-23         |
| 802.11ac (VHT20) | 1, 2, 3                         | MCS 0-9/Nss1-3  |
| 802.11ac (VHT40) | 1, 2, 3                         | MCS 0-9/Nss1-3  |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). The EUT supports VHT20, VHT40 in 2.4GHz and VHT20, VHT40, VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

| Ant. | Brand | Zebra P/N          | Antenna Type                      | Connector | Indoor/<br>Outdoor | Antenna Gain (dBi) |     | Cable Loss (dB) |     | True Gain (dBi) |     |
|------|-------|--------------------|-----------------------------------|-----------|--------------------|--------------------|-----|-----------------|-----|-----------------|-----|
|      |       |                    |                                   |           |                    | 2.4G               | 5G  | 2.4G            | 5G  | 2.4G            | 5G  |
| 1    | Zebra | ML-5299-HPA5-01    | Dipole                            | N Male    | Indoor/<br>Outdoor | -                  | 5.6 | -               | 0.9 | -               | 4.7 |
| 2    | Zebra | ML-2452-HPAG4A6-01 | Dipole                            | N Male    | Indoor/<br>Outdoor | 4                  | 7.3 | -               | -   | 4               | 7.3 |
| 3    | Laird | ML-2499-FHPA5-01R  | Dipole                            | N Male    | Indoor/<br>Outdoor | 5.3                | -   | 0.7             | -   | 4.6             | -   |
| 4    | Zebra | ML-2499-HPA4-01    | Dipole                            | N Male    | Indoor/<br>Outdoor | 4.5                | -   | 0.7             | -   | 3.8             | -   |
| 5    | Zebra | ML-2452-HPA6X6-036 | Dipole                            | N Male    | Indoor/<br>Outdoor | 4                  | 6   | 0.7             | 0.9 | 3.3             | 5.1 |
| 6    | Zebra | ML-2452-HPA6-01    | Dipole                            | N Male    | Indoor/<br>Outdoor | 5.3                | 6.1 | -               | -   | 5.3             | 6.1 |
| 7    | Zebra | ML-2499-5PNL-72-N  | Panel                             | N Male    | Indoor/<br>Outdoor | 6.5                | -   | -               | -   | 6.5             | -   |
| 8    | Zebra | ML-2452-PNA5-01R   | Panel                             | N Male    | Indoor/<br>Outdoor | 5.5                | 6   | 0.7             | 0.9 | 4.8             | 5.1 |
| 9    | Zebra | ML-2452-PNL3M3-1   | CROSS-POLARIZED<br>PANEL ANTENNA* | N Female  | Indoor/<br>Outdoor | Note 1             |     |                 |     |                 |     |

Note 1:

| Antenna | Antenna Gain (dBi) |      | Cable loss (dB) |      | True Gain (dBi) |      |
|---------|--------------------|------|-----------------|------|-----------------|------|
|         | 2.4GHz             | 5GHz | 2.4GHz          | 5GHz | 2.4GHz          | 5GHz |
| A       | 9.5                | 9.2  | 0.7             | 0.9  | 8.8             | 8.3  |
| B       | 6.6                | 6.8  | 0.7             | 0.9  | 5.9             | 5.9  |
| C       | 9.7                | 9.1  | 0.7             | 0.9  | 9               | 8.2  |

Note 2: Ant. 1~9 are the different antenna type in the antenna list. Only the highest gain antenna was selected from each different type of antenna to test and record in this report. Ant. 6, Ant. 7 and Ant. 9 for 2.4GHz and Ant. 2, Ant. 8 and Ant. 9 for 5GHz were selected to perform the test and recorded in this report.

Note 3: \*This Antenna has 3 of the same CROSS-POLARIZED PANEL ANTENNA in a single housing

**<For 2.4GHz Band>**

**For IEEE 802.11b/g/n/ac mode (1TX, 2TX, 3TX / 1RX, 2RX, 3RX):**

The EUT can support 1TX, 2TX, 3TX and 1RX, 2RX, 3RX functions.

For 1TX (Ant. 6 and Ant. 7)

Both Chain 1 and Chain 2 support transmit and receive functions, but only one of them will be used at one time. After evaluating, Chain 2 has been evaluated to be the worst case, so it's selected to record in this test report.

For 1TX (Ant. 9)

Both Chain 1 and Chain 2 support transmit and receive functions, but only one of them will be used at one time. After evaluating, Chain 1 has been evaluated to be the worst case, so it's selected to record in this test report.

For 2TX

Chain 1 and Chain 2 could transmit/receive simultaneously.

For 3TX

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

**<For 5GHz Band>**

**For IEEE 802.11a/n/ac mode (1TX, 2TX, 3TX / 1RX, 2RX, 3RX):**

The EUT can support 1TX, 2TX, 3TX and 1RX, 2RX, 3RX functions.

For 1TX (Ant. 2)

Both Chain 4 and Chain 5 support transmit and receive functions, but only one of them will be used at one time. After evaluating, Chain 5 has been evaluated to be the worst case, so it's selected to record in this test report.

For 1TX (Ant. 8 and Ant. 9)


Both Chain 4 and Chain 5 support transmit and receive functions, but only one of them will be used at one time. After evaluating, Chain 4 has been evaluated to be the worst case, so it's selected to record in this test report.

For 2TX

Chain 4 and Chain 5 could transmit/receive simultaneously.

For 3TX

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

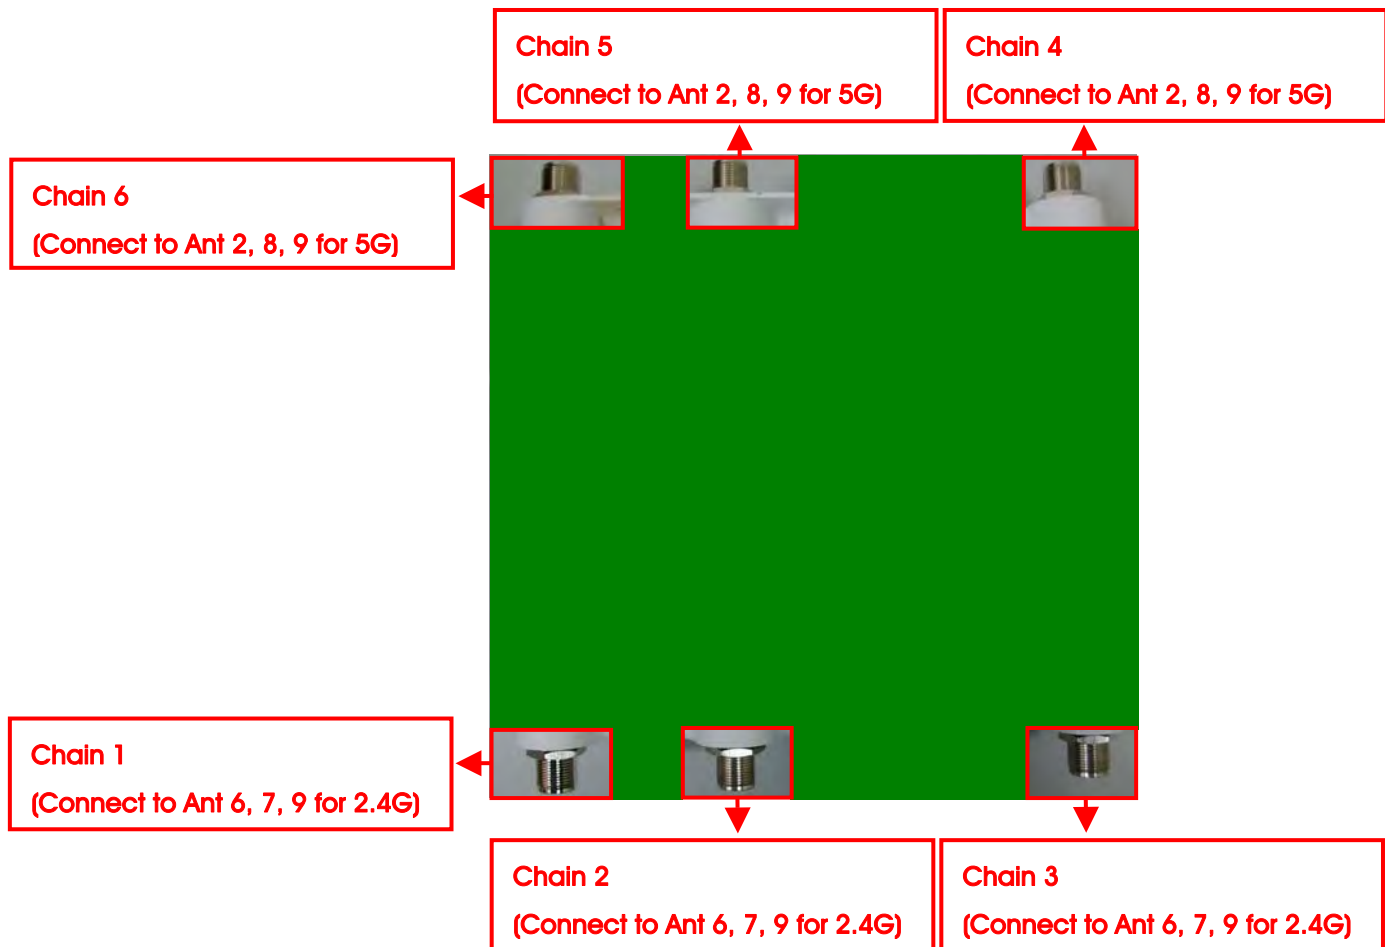

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 7           | 2442 MHz  |
|                | 2           | 2417 MHz  | 8           | 2447 MHz  |
|                | 3           | 2422 MHz  | 9           | 2452 MHz  |
|                | 4           | 2427 MHz  | 10          | 2457 MHz  |
|                | 5           | 2432 MHz  | 11          | 2462 MHz  |
|                | 6           | 2437 MHz  | -           | -         |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                        | Mode                 | Data Rate | Channel | Chain                                                                 |
|-----------------------------------|----------------------|-----------|---------|-----------------------------------------------------------------------|
| AC Power Line Conducted Emissions | Normal Link          | -         | -       | -                                                                     |
| Maximum Conducted Output Power    | Non-beamforming Mode |           |         |                                                                       |
|                                   | 11b/CCK              | 1 Mbps    | 1/6/11  | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7, 9)<br>1+2+3 (Ant.6, 7, 9) |
|                                   | 11g/BPSK             | 6 Mbps    | 1/6/11  | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7, 9)<br>1+2+3 (Ant.6, 7, 9) |
|                                   | 11ac VHT20           | MCS0/Nss1 | 1/6/11  | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)       |
|                                   |                      | MCS0/Nss2 | 1/6/11  | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                          |
|                                   | 11ac VHT40           | MCS0/Nss1 | 3/6/9   | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)       |
|                                   |                      | MCS0/Nss2 | 3/6/9   | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                          |
|                                   | Beamforming Mode     |           |         |                                                                       |
|                                   | 11g/BPSK             | 6 Mbps    | 1/6/11  | 1+2(Ant.6, 7, 9)<br>1+2+3(Ant.6, 7, 9)                                |
|                                   | 11ac VHT20           | MCS0/Nss1 | 1/6/11  | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                    |
|                                   |                      | MCS0/Nss2 | 1/6/11  | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                          |
|                                   | 11ac VHT40           | MCS0/Nss1 | 3/6/9   | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                    |

|                        |                      |           |        |                                                                             |
|------------------------|----------------------|-----------|--------|-----------------------------------------------------------------------------|
|                        |                      | MCS0/Nss2 | 3/6/9  | 1 + 2 (Ant.9)<br>1 + 2 + 3 (Ant.9)                                          |
| Power Spectral Density | Non-beamforming Mode |           |        |                                                                             |
|                        | 11b/CCK              | 1 Mbps    | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1 + 2 (Ant.6, 7, 9)<br>1 + 2 + 3 (Ant.6, 7, 9) |
|                        | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)                                                   |
|                        | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 2 (Ant.6, 7)<br>1 (Ant.9)                                                   |
|                        | Beamforming Mode     |           |        |                                                                             |
|                        | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 1 + 2 (Ant.6, 7)<br>1 + 2 + 3 (Ant.6, 7)                                    |
|                        |                      | MCS0/Nss2 | 1/6/11 | 1 + 2 (Ant.9)<br>1 + 2 + 3 (Ant.9)                                          |
|                        | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 1 + 2 (Ant.6, 7)<br>1 + 2 + 3 (Ant.6, 7)                                    |
|                        |                      | MCS0/Nss2 | 3/6/9  | 1 + 2 (Ant.9)<br>1 + 2 + 3 (Ant.9)                                          |
| 6dB Spectrum Bandwidth | Non-beamforming Mode |           |        |                                                                             |
|                        | 11b/CCK              | 1 Mbps    | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1 + 2 (Ant.6, 7, 9)<br>1 + 2 + 3 (Ant.6, 7, 9) |
|                        | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)                                                   |
|                        | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 2 (Ant.6, 7)<br>1 (Ant.9)                                                   |
|                        | Beamforming Mode     |           |        |                                                                             |
|                        | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 1 + 2 (Ant.6, 7)<br>1 + 2 + 3 (Ant.6, 7)                                    |
|                        |                      | MCS0/Nss2 | 1/6/11 | 1 + 2 (Ant.9)<br>1 + 2 + 3 (Ant.9)                                          |
|                        | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 1 + 2 (Ant.6, 7)<br>1 + 2 + 3 (Ant.6, 7)                                    |
|                        |                      | MCS0/Nss2 | 3/6/9  | 1 + 2 (Ant.9)<br>1 + 2 + 3 (Ant.9)                                          |



|                               |                      |           |        |                                                                            |
|-------------------------------|----------------------|-----------|--------|----------------------------------------------------------------------------|
| Radiated Emissions Below 1GHz | Normal Link          | -         | -      | -                                                                          |
| Radiated Emissions Above 1GHz | Non-beamforming Mode |           |        |                                                                            |
|                               | 11b/CCK              | 1 Mbps    | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7, 9)<br>1+2+3 (Ant.6, 7, 9)      |
|                               | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)                                                  |
|                               | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 2 (Ant.6, 7)<br>1 (Ant.9)                                                  |
|                               | Beamforming Mode     |           |        |                                                                            |
|                               | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                         |
|                               |                      | MCS0/Nss2 | 1/6/11 | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                               |
|                               | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                         |
|                               |                      | MCS0/Nss2 | 3/6/9  | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                               |
| Band Edge Emissions           | Non-beamforming Mode |           |        |                                                                            |
|                               | 11b/CCK              | 1 Mbps    | 1/6/11 | 2 (Ant.6, Ant. 7)<br>1 (Ant.9)<br>1+2 (Ant.6, 7, 9)<br>1+2+3 (Ant.6, 7, 9) |
|                               | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 2 (Ant.6, 7)<br>1 (Ant.9)                                                  |
|                               | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 2 (Ant.6, 7)<br>1 (Ant.9)                                                  |
|                               | Beamforming Mode     |           |        |                                                                            |
|                               | 11ac VHT20           | MCS0/Nss1 | 1/6/11 | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                         |
|                               |                      | MCS0/Nss2 | 1/6/11 | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                               |
|                               | 11ac VHT40           | MCS0/Nss1 | 3/6/9  | 1+2 (Ant.6, 7)<br>1+2+3 (Ant.6, 7)                                         |
|                               |                      | MCS0/Nss2 | 3/6/9  | 1+2 (Ant.9)<br>1+2+3 (Ant.9)                                               |

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: Beam forming cover Non-Beam forming, STBC, LDPC.

Note 3: The EUT only can standing use.

Note 4: The PoE is for measurement only, would not be marketed.

The PoE information as below:

| Power | Brand    | Model          | Rating                                            |
|-------|----------|----------------|---------------------------------------------------|
| PoE   | MOTOROLA | AP-PSBIAS-7161 | Input: 100-240Vac, 50/60Hz, 1.0A<br>Output: 55Vdc |

Note 5: Point-to-Multiple covers point-to-point.

The following test modes were performed for all tests:

Ant. 9 is the higher gain antenna, so it was selected to perform Conducted Emission test and Radiated Emission below 1GHz test:

#### For Conducted Emission test:

Test Mode 1: Normal Link - EUT standing + PoE + Ant.9

#### For Radiated Emission below 1GHz test:

Test Mode 1: Normal Link - EUT standing + PoE + Ant.9

#### For Radiated Emission above 1GHz test:

Test Mode 1: CTX - EUT standing + Ant. 6

Test Mode 2: CTX - EUT standing + Ant. 7

Test Mode 3: CTX - EUT standing + Ant. 9

#### For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4D0488) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

| Test Site Location |                                                                            |          |              |             |
|--------------------|----------------------------------------------------------------------------|----------|--------------|-------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |
| TEL:               | 886-3-656-9065                                                             |          |              |             |
| FAX:               | 886-3-656-9085                                                             |          |              |             |
| Test Site No.      | Site Category                                                              | Location | FCC Reg. No. | IC File No. |
| 03CH01-CB          | SAC                                                                        | Hsin Chu | 262045       | IC 4086D    |
| CO01-CB            | Conduction                                                                 | Hsin Chu | 262045       | IC 4086D    |
| TH01-CB            | OVEN Room                                                                  | Hsin Chu | -            | -           |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

| Support Unit | Brand    | Model          | FCC ID      |
|--------------|----------|----------------|-------------|
| Notebook     | DELL     | M1330          | E2K4965AGNM |
| Notebook     | DELL     | M1340          | E2K4965AGNM |
| Notebook     | DELL     | E6430          | DoC         |
| Notebook     | DELL     | E6430          | DoC         |
| PoE          | MOTOROLA | AP-PSBIAS-7161 | DoC         |

For Test Site No: 03CH01-CB (For Above 1GHz)

<For Non-Beamforming Mode>

| Support Unit | Brand    | Model          | FCC ID      |
|--------------|----------|----------------|-------------|
| Notebook     | DELL     | M1330          | E2K4965AGNM |
| PoE          | MOTOROLA | AP-PSBIAS-7161 | DoC         |

<For Beamforming Mode>

| Support Unit   | Brand    | Model          | FCC ID      |
|----------------|----------|----------------|-------------|
| Notebook       | DELL     | M1330          | E2K4965AGNM |
| Notebook       | DELL     | M1340          | E2K4965AGNM |
| WLAN ac Dongle | Netgear  | A6200          | PY312200200 |
| PoE            | MOTOROLA | AP-PSBIAS-7161 | DoC         |

For Test Site No: CO01-CB

| Support Unit | Brand    | Model          | FCC ID |
|--------------|----------|----------------|--------|
| Notebook     | DELL     | E6430          | DoC    |
| Notebook     | DELL     | E6430          | DoC    |
| Notebook     | DELL     | E6430          | DoC    |
| Notebook     | DELL     | E6430          | DoC    |
| PoE          | MOTOROLA | AP-PSBIAS-7161 | DoC    |

For Test Site No: TH01-CB

| Support Unit | Brand    | Model          | FCC ID |
|--------------|----------|----------------|--------|
| Notebook     | DELL     | E6220          | DoC    |
| PoE          | MOTOROLA | AP-PSBIAS-7161 | DoC    |

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX)

| Test Software Version    | Mtool 2.0.1.0        |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 81                   | 90       | 85       | -          | -        | -        |
| 802.11g                  | 62                   | 87       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 62                   | 87       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 56         | 62       | 57       |

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 78                   | 85       | 78       | -          | -        | -        |
| 802.11g                  | 58                   | 82       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 58                   | 82       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 46         | 57       | 54       |

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)

| Test Software Version    | MTool2.0.1.0         |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 63                   | 85       | 66       | -          | -        | -        |
| 802.11g                  | 43                   | 78       | 61       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 43                   | 78       | 61       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 40         | 54       | 54       |

## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX)

| Test Software Version    | Mtool 2.0.1.0        |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 83                   | 90       | 83       | -          | -        | -        |
| 802.11g                  | 12                   | 12       | 12       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 65                   | 90       | 64       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 57         | 64       | 57       |

## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 80                   | 86       | 80       | -          | -        | -        |
| 802.11g                  | 60                   | 84       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 60                   | 84       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 55         | 61       | 52       |

## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)

| Test Software Version    | MTool2.0.1.0         |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 79                   | 86       | 79       | -          | -        | -        |
| 802.11g                  | 59                   | 80       | 59       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 59                   | 80       | 59       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 50         | 54       | 48       |

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX)

| Test Software Version    | Mtool 2.0.1.0        |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 79                   | 79       | 80       | -          | -        | -        |
| 802.11g                  | 63                   | 83       | 64       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 63                   | 83       | 64       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 57         | 60       | 55       |

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 79                   | 79       | 80       | -          | -        | -        |
| 802.11g                  | 62                   | 83       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT20 | 62                   | 83       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT40 | -                    | -        | -        | 56         | 60       | 53       |

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)

| Test Software Version    | MTool2.0.1.0         |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                  | 62                   | 73       | 77       | -          | -        | -        |
| 802.11g                  | 52                   | 72       | 57       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT20 | 52                   | 72       | 57       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT40 | -                    | -        | -        | 48         | 55       | 50       |

### <For Beamforming Mode>

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 58                   | 82       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 58                   | 82       | 63       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 46         | 57       | 54       |

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 43                   | 78       | 61       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 43                   | 78       | 61       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 40         | 54       | 54       |

Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 60                   | 84       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 60                   | 84       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 55         | 61       | 52       |

Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)

| Test Software Version    | MTool2.0.1.0         |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 59                   | 80       | 59       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT20 | 59                   | 80       | 59       | -          | -        | -        |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 50         | 54       | 48       |

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)

| Test Software Version    | DOS                  |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 62                   | 83       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT20 | 62                   | 83       | 60       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT40 | -                    | -        | -        | 56         | 60       | 53       |

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)

| Test Software Version    | MTool2.0.1.0         |          |          |            |          |          |
|--------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |          |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                          | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11g                  | 52                   | 72       | 57       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT20 | 52                   | 72       | 57       | -          | -        | -        |
| 802.11ac MCS0/Nss2 VHT40 | -                    | -        | -        | 48         | 55       | 50       |



### 3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac dongle and transmit duty cycle no less 98%

### 3.10. Duty Cycle

<For Non-Beamforming Mode>

| Mode                     | On Time<br>(ms) | On+Off Time<br>(ms) | Duty Cycle<br>(%) | Duty Factor<br>(dB) | 1/T Minimum VBW<br>(kHz) |
|--------------------------|-----------------|---------------------|-------------------|---------------------|--------------------------|
| 802.11b                  | 1.000           | 1.000               | 100.00%           | 0.00                | 0.01                     |
| 802.11ac MCS0/Nss1 VHT20 | 1.920           | 1.950               | 98.46%            | 0.07                | 0.01                     |
| 802.11ac MCS0/Nss1 VHT40 | 0.952           | 0.984               | 96.75%            | 0.14                | 1.05                     |

<For Beamforming Mode>

For 2TX


| Mode                     | On Time<br>(ms) | On+Off Time<br>(ms) | Duty Cycle<br>(%) | Duty Factor<br>(dB) | 1/T Minimum VBW<br>(kHz) |
|--------------------------|-----------------|---------------------|-------------------|---------------------|--------------------------|
| 802.11ac MCS0/Nss1 VHT20 | 3.791           | 3.958               | 95.78%            | 0.19                | 0.26                     |
| 802.11ac MCS0/Nss1 VHT40 | 4.536           | 4.750               | 95.49%            | 0.20                | 0.22                     |

For 3TX

| Mode                     | On Time<br>(ms) | On+Off Time<br>(ms) | Duty Cycle<br>(%) | Duty Factor<br>(dB) | 1/T Minimum VBW<br>(kHz) |
|--------------------------|-----------------|---------------------|-------------------|---------------------|--------------------------|
| 802.11ac MCS0/Nss1 VHT20 | 3.814           | 3.954               | 96.46%            | 0.16                | 0.26                     |
| 802.11ac MCS0/Nss1 VHT40 | 4.557           | 4.730               | 96.34%            | 0.16                | 0.22                     |

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

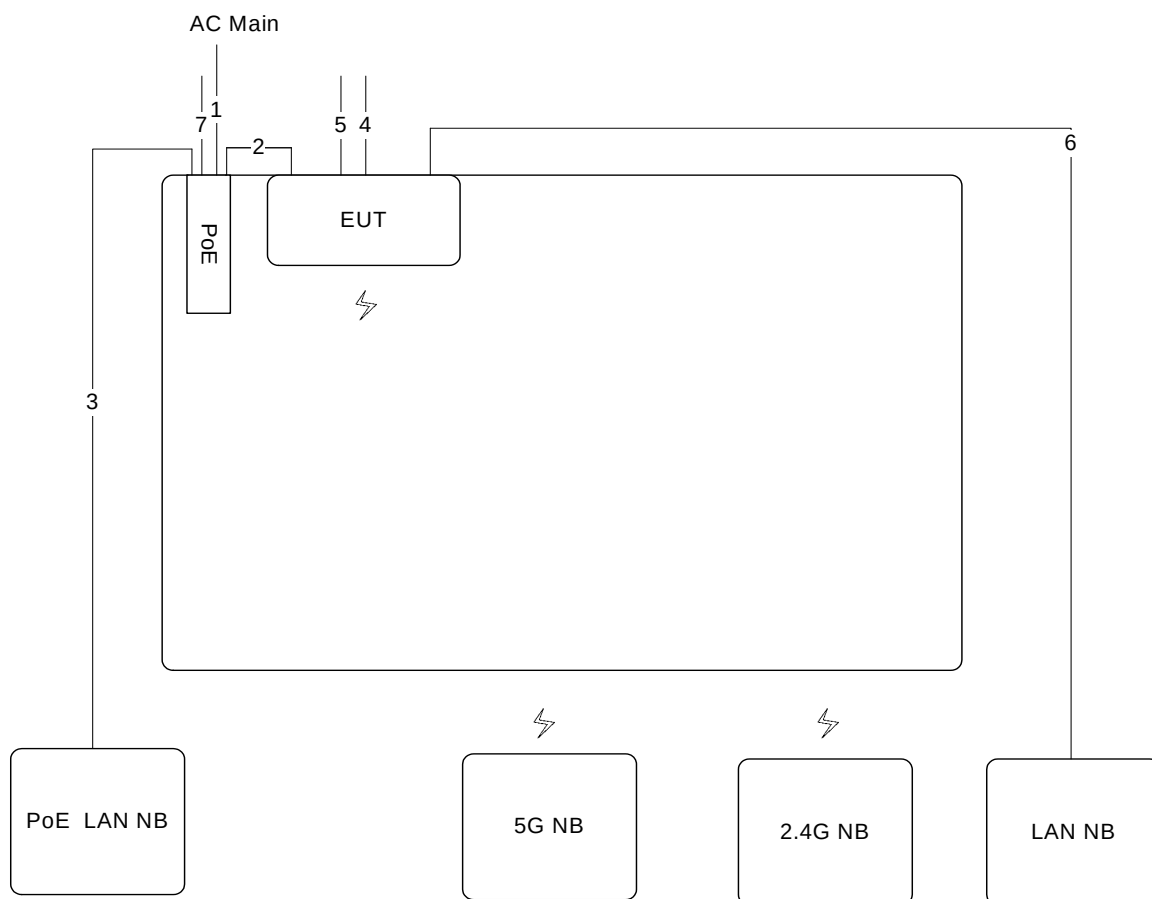

| Item | Connection    | Shielded | Length(m) |
|------|---------------|----------|-----------|
| 1    | Power cable   | No       | 3         |
| 2    | RJ-45 cable   | No       | 1.5       |
| 3    | RJ-45 cable   | No       | 10        |
| 4    | Ground cable  | No       | 1.8       |
| 5    | Console cable | No       | 1.5       |
| 6    | RJ-45 cable   | No       | 10        |
| 7    | Ground cable  | No       | 2         |




Test Configuration: 30MHz~1GHz

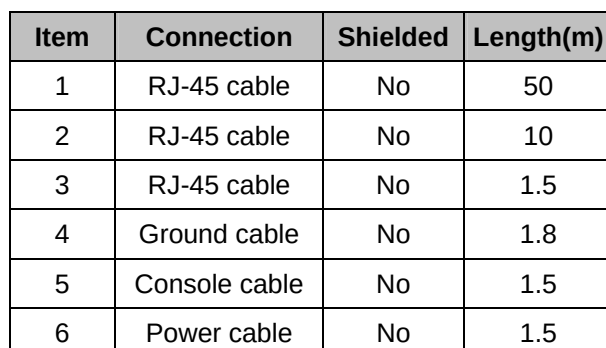


Test Configuration: above 1GHz

<For Non-Beamforming Mode>

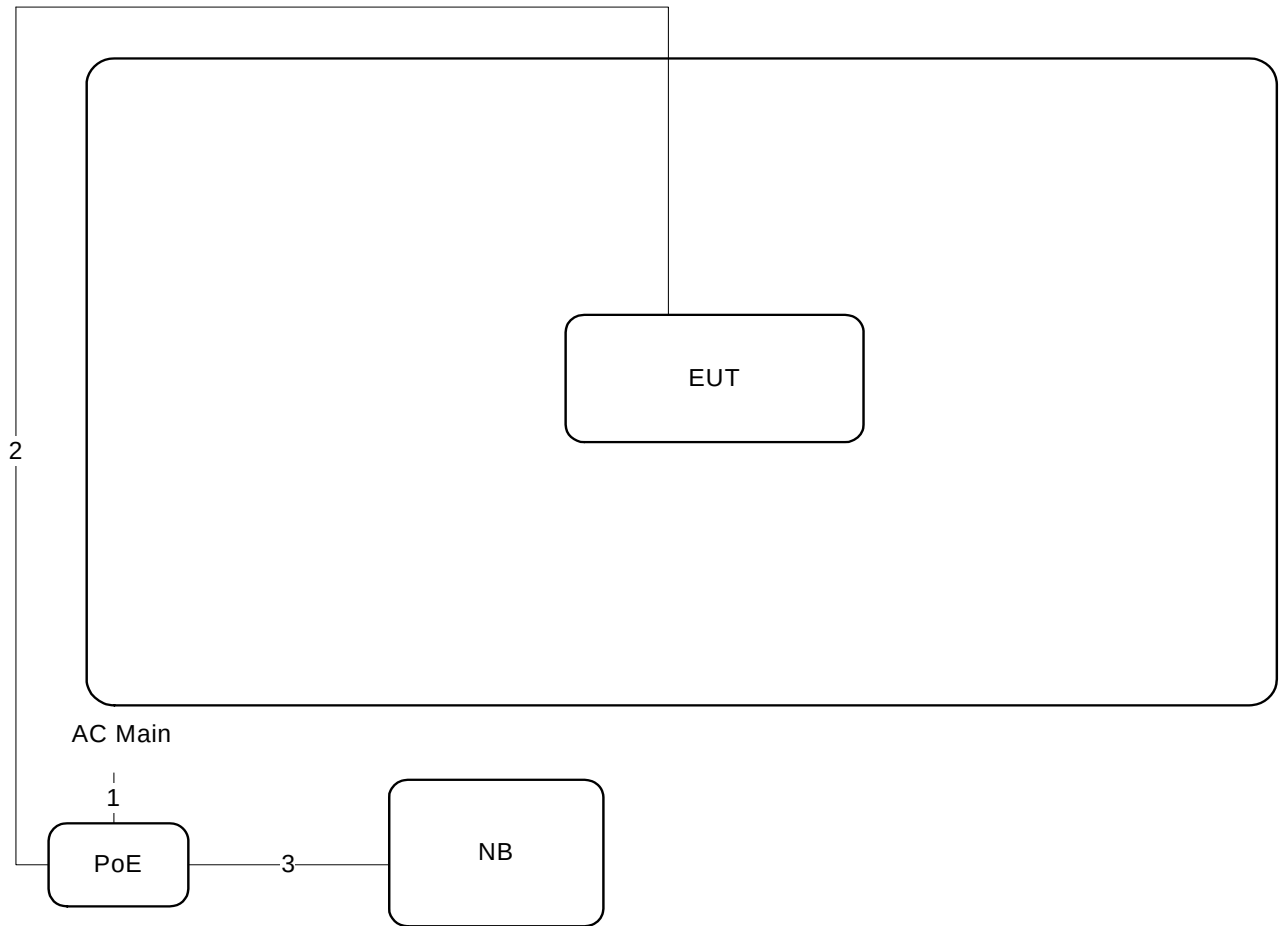

| Item | Connection  | Shielded | Length (m) |
|------|-------------|----------|------------|
| 1    | Power cable | No       | 1.5        |
| 2    | RJ-45 cable | No       | 10         |
| 3    | RJ-45 cable | No       | 1.5        |

<For Beamforming Mode>

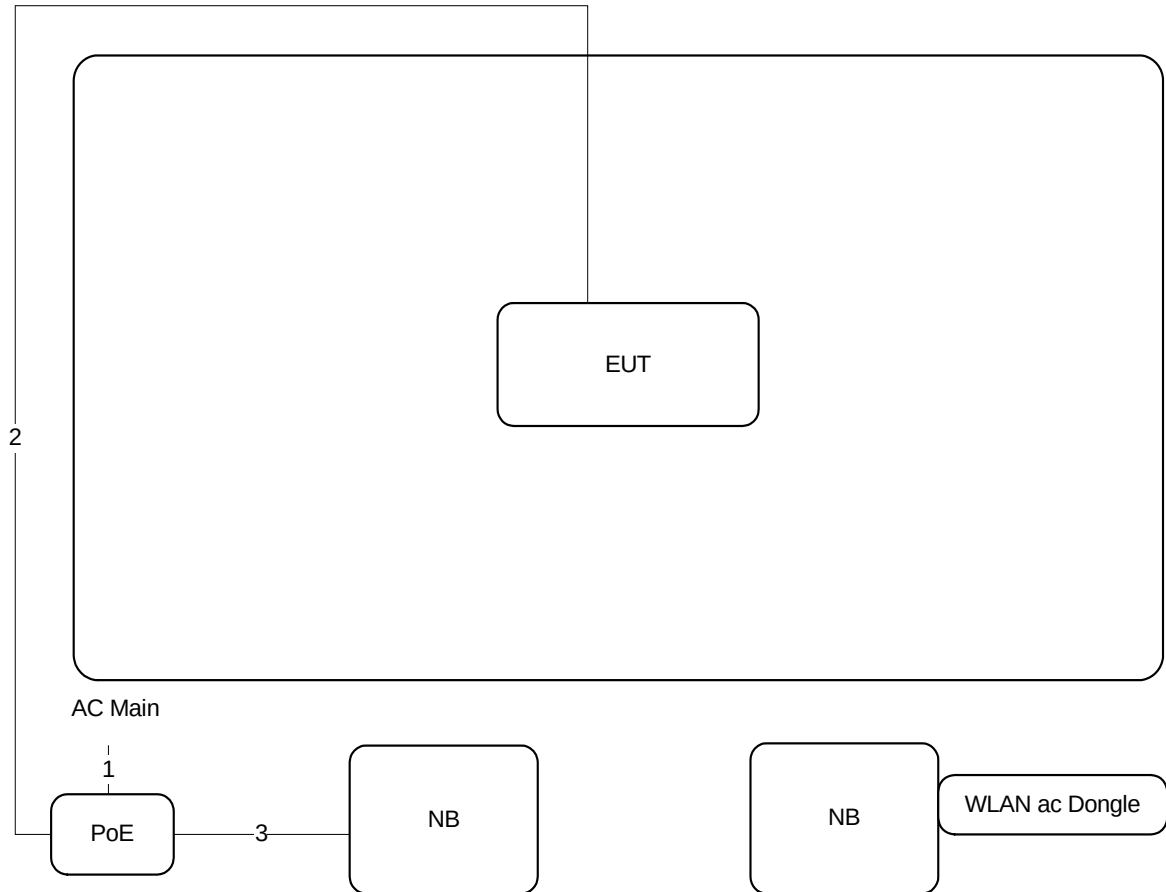

| Item | Connection  | Shielded | Length (m) |
|------|-------------|----------|------------|
| 1    | Power cable | No       | 1.5        |
| 2    | RJ-45 cable | No       | 10         |
| 3    | RJ-45 cable | No       | 1.5        |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

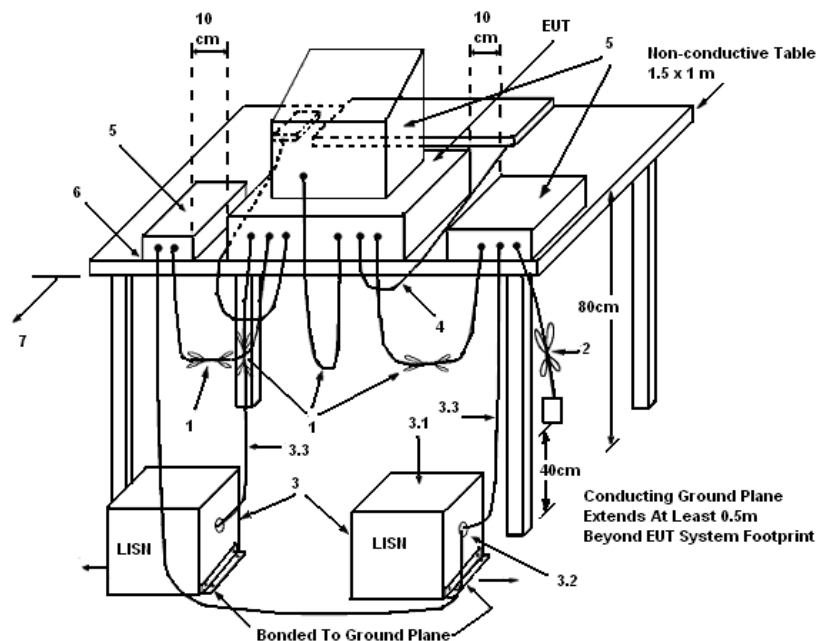

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement


|               |             |          |      |
|---------------|-------------|----------|------|
| Temperature   | 23°C        | Humidity | 56%  |
| Test Engineer | Parody Lin  | Phase    | Line |
| Configuration | Normal Link |          |      |

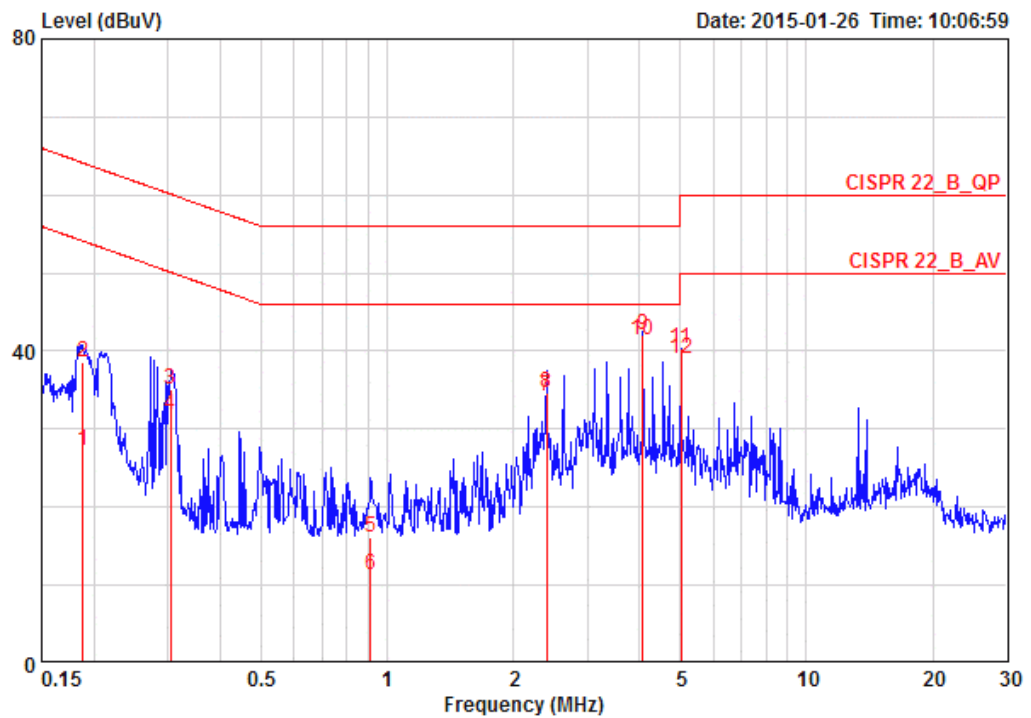

|    | Freq    | Level | Over   | Limit | Read  | LISN   | Cable |         |           |
|----|---------|-------|--------|-------|-------|--------|-------|---------|-----------|
|    | MHz     | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  | Pol/Phase |
|    |         |       | dB     | dBuV  | dBuV  | dB     | dB    |         |           |
| 1  | 0.18814 | 27.24 | -26.88 | 54.12 | 17.22 | 9.78   | 0.24  | AVERAGE | LINE      |
| 2  | 0.18814 | 38.55 | -25.57 | 64.12 | 28.53 | 9.78   | 0.24  | QP      | LINE      |
| 3  | 0.30509 | 35.01 | -25.09 | 60.10 | 24.96 | 9.77   | 0.28  | QP      | LINE      |
| 4  | 0.30509 | 31.73 | -18.37 | 50.10 | 21.68 | 9.77   | 0.28  | AVERAGE | LINE      |
| 5  | 0.91357 | 16.18 | -39.82 | 56.00 | 6.08  | 9.77   | 0.33  | QP      | LINE      |
| 6  | 0.91357 | 11.38 | -34.62 | 46.00 | 1.28  | 9.77   | 0.33  | AVERAGE | LINE      |
| 7  | 2.396   | 34.16 | -11.84 | 46.00 | 24.07 | 9.74   | 0.36  | AVERAGE | LINE      |
| 8  | 2.396   | 34.55 | -21.45 | 56.00 | 24.46 | 9.74   | 0.36  | QP      | LINE      |
| 9  | 4.073   | 42.14 | -13.86 | 56.00 | 32.06 | 9.71   | 0.37  | QP      | LINE      |
| 10 | 4.073   | 41.43 | -4.57  | 46.00 | 31.35 | 9.71   | 0.37  | AVERAGE | LINE      |
| 11 | 5.031   | 40.30 | -19.70 | 60.00 | 30.24 | 9.68   | 0.38  | QP      | LINE      |
| 12 | 5.031   | 39.03 | -10.97 | 50.00 | 28.97 | 9.68   | 0.38  | AVERAGE | LINE      |



|               |             |          |         |
|---------------|-------------|----------|---------|
| Temperature   | 23°C        | Humidity | 56%     |
| Test Engineer | Parody Lin  | Phase    | Neutral |
| Configuration | Normal Link |          |         |

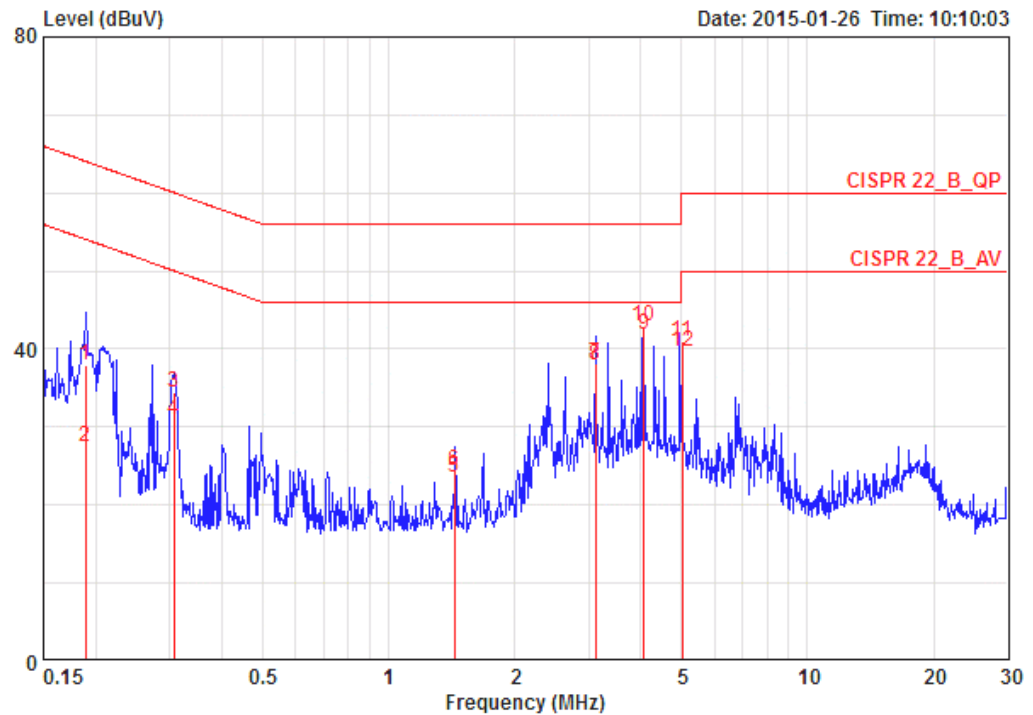

|     | Freq    | Level | Over   | Limit | Read  | LISN   | Cable |         |           |
|-----|---------|-------|--------|-------|-------|--------|-------|---------|-----------|
|     | MHz     | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  | Pol/Phase |
|     |         |       | dB     | dBuV  | dBuV  | dB     | dB    |         |           |
| 1   | 0.18938 | 38.02 | -26.04 | 64.06 | 27.86 | 9.92   | 0.24  | QP      | NEUTRAL   |
| 2   | 0.18938 | 27.46 | -26.60 | 54.06 | 17.30 | 9.92   | 0.24  | AVERAGE | NEUTRAL   |
| 3   | 0.30671 | 34.50 | -25.55 | 60.06 | 24.31 | 9.91   | 0.28  | QP      | NEUTRAL   |
| 4   | 0.30671 | 30.95 | -19.10 | 50.06 | 20.76 | 9.91   | 0.28  | AVERAGE | NEUTRAL   |
| 5   | 1.437   | 23.54 | -22.46 | 46.00 | 13.29 | 9.91   | 0.34  | AVERAGE | NEUTRAL   |
| 6   | 1.437   | 24.48 | -31.52 | 56.00 | 14.23 | 9.91   | 0.34  | QP      | NEUTRAL   |
| 7   | 3.114   | 38.12 | -17.88 | 56.00 | 27.88 | 9.87   | 0.36  | QP      | NEUTRAL   |
| 8   | 3.114   | 37.86 | -8.14  | 46.00 | 27.62 | 9.87   | 0.36  | AVERAGE | NEUTRAL   |
| 9 @ | 4.072   | 41.86 | -4.14  | 46.00 | 31.63 | 9.86   | 0.37  | AVERAGE | NEUTRAL   |
| 10  | 4.072   | 42.99 | -13.01 | 56.00 | 32.76 | 9.86   | 0.37  | QP      | NEUTRAL   |
| 11  | 5.029   | 40.92 | -19.08 | 60.00 | 30.70 | 9.84   | 0.38  | QP      | NEUTRAL   |
| 12  | 5.029   | 39.58 | -10.42 | 50.00 | 29.36 | 9.84   | 0.38  | AVERAGE | NEUTRAL   |

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector              | Average |

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

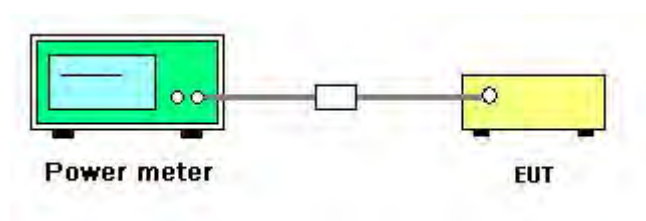

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<For Non-Beamforming Mode>

|               |                                                |           |               |
|---------------|------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                           | Humidity  | 63%           |
| Test Engineer | Nick Peng                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|------------------|----------|
|                          |           | Chain 2               |                  |          |
| 802.11b                  | 2412 MHz  | 20.05                 | 30.00            | Complies |
|                          | 2437 MHz  | 22.45                 | 30.00            | Complies |
|                          | 2462 MHz  | 20.95                 | 30.00            | Complies |
| 802.11g                  | 2412 MHz  | 15.50                 | 30.00            | Complies |
|                          | 2437 MHz  | 21.13                 | 30.00            | Complies |
|                          | 2462 MHz  | 15.52                 | 30.00            | Complies |
| 802.11ac MCS0/Nss1 VHT20 | 2412 MHz  | 15.51                 | 30.00            | Complies |
|                          | 2437 MHz  | 21.13                 | 30.00            | Complies |
|                          | 2462 MHz  | 15.42                 | 30.00            | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 2422 MHz  | 14.41                 | 30.00            | Complies |
|                          | 2437 MHz  | 15.85                 | 30.00            | Complies |
|                          | 2452 MHz  | 14.45                 | 30.00            | Complies |

|               |                                                |           |               |
|---------------|------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                           | Humidity  | 63%           |
| Test Engineer | Nick Peng                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                          |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11b                  | 2412 MHz  | 19.86                 | 19.53   | 22.71 | 30.00            | Complies |
|                          | 2437 MHz  | 21.96                 | 21.39   | 24.69 | 30.00            | Complies |
|                          | 2462 MHz  | 19.42                 | 19.18   | 22.31 | 30.00            | Complies |
| 802.11g                  | 2412 MHz  | 14.56                 | 14.50   | 17.54 | 30.00            | Complies |
|                          | 2437 MHz  | 20.59                 | 20.13   | 23.38 | 30.00            | Complies |
|                          | 2462 MHz  | 15.24                 | 15.52   | 18.39 | 30.00            | Complies |
| 802.11ac MCS0/Nss1 VHT20 | 2412 MHz  | 14.51                 | 14.36   | 17.45 | 30.00            | Complies |
|                          | 2437 MHz  | 20.84                 | 20.12   | 23.51 | 30.00            | Complies |
|                          | 2462 MHz  | 15.17                 | 15.42   | 18.31 | 30.00            | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 2422 MHz  | 12.15                 | 11.83   | 15.00 | 30.00            | Complies |
|                          | 2437 MHz  | 14.62                 | 14.63   | 17.64 | 30.00            | Complies |
|                          | 2452 MHz  | 13.68                 | 13.69   | 16.70 | 30.00            | Complies |

|               |                                                |           |               |
|---------------|------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                           | Humidity  | 63%           |
| Test Engineer | Nick Peng                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11b                        | 2412 MHz  | 15.62                 | 15.82   | 15.94   | 20.57 | 30.00            | Complies |
|                                | 2437 MHz  | 21.96                 | 21.09   | 21.42   | 26.28 | 30.00            | Complies |
|                                | 2462 MHz  | 16.05                 | 16.32   | 16.50   | 21.07 | 30.00            | Complies |
| 802.11g                        | 2412 MHz  | 15.62                 | 15.82   | 15.94   | 20.57 | 30.00            | Complies |
|                                | 2437 MHz  | 21.96                 | 21.09   | 21.42   | 26.28 | 30.00            | Complies |
|                                | 2462 MHz  | 16.05                 | 16.32   | 16.50   | 21.07 | 30.00            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 11.06                 | 10.50   | 11.16   | 15.69 | 30.00            | Complies |
|                                | 2437 MHz  | 19.62                 | 19.05   | 19.49   | 24.16 | 30.00            | Complies |
|                                | 2462 MHz  | 14.73                 | 14.86   | 15.12   | 19.68 | 30.00            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 10.94                 | 10.13   | 10.72   | 15.38 | 30.00            | Complies |
|                                | 2437 MHz  | 13.84                 | 13.66   | 13.99   | 18.60 | 30.00            | Complies |
|                                | 2452 MHz  | 13.58                 | 13.59   | 14.02   | 18.51 | 30.00            | Complies |

|               |                                               |           |               |
|---------------|-----------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                          | Humidity  | 63%           |
| Test Engineer | Nick Peng                                     | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|------------------|----------|
|                          |           | Chain 2               |                  |          |
| 802.11b                  | 2412 MHz  | 20.58                 | 29.50            | Complies |
|                          | 2437 MHz  | 22.45                 | 29.50            | Complies |
|                          | 2462 MHz  | 20.51                 | 29.50            | Complies |
| 802.11g                  | 2412 MHz  | 16.25                 | 29.50            | Complies |
|                          | 2437 MHz  | 21.82                 | 29.50            | Complies |
|                          | 2462 MHz  | 15.83                 | 29.50            | Complies |
| 802.11ac MCS0/Nss1 VHT20 | 2412 MHz  | 16.13                 | 29.50            | Complies |
|                          | 2437 MHz  | 21.85                 | 29.50            | Complies |
|                          | 2462 MHz  | 15.76                 | 29.50            | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 2422 MHz  | 14.68                 | 29.50            | Complies |
|                          | 2437 MHz  | 16.38                 | 29.50            | Complies |
|                          | 2452 MHz  | 14.45                 | 29.50            | Complies |

Note: Antenna gain = 6.50dBi > 6dBi, So Power Limit = 30-(6.50-6)=29.50dBm

|               |                                               |           |               |
|---------------|-----------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                          | Humidity  | 63%           |
| Test Engineer | Nick Peng                                     | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                          |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11b                  | 2412 MHz  | 20.40                 | 19.75   | 23.10 | 29.50            | Complies |
|                          | 2437 MHz  | 22.79                 | 21.21   | 25.08 | 29.50            | Complies |
|                          | 2462 MHz  | 20.14                 | 19.64   | 22.91 | 29.50            | Complies |
| 802.11g                  | 2412 MHz  | 15.03                 | 14.98   | 18.02 | 29.50            | Complies |
|                          | 2437 MHz  | 21.29                 | 20.46   | 23.91 | 29.50            | Complies |
|                          | 2462 MHz  | 14.59                 | 14.59   | 17.60 | 29.50            | Complies |
| 802.11ac MCS0/Nss1 VHT20 | 2412 MHz  | 15.01                 | 14.84   | 17.94 | 29.50            | Complies |
|                          | 2437 MHz  | 21.23                 | 20.45   | 23.87 | 29.50            | Complies |
|                          | 2462 MHz  | 14.58                 | 14.57   | 17.59 | 29.50            | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 2422 MHz  | 14.15                 | 14.12   | 17.15 | 29.50            | Complies |
|                          | 2437 MHz  | 15.47                 | 15.49   | 18.49 | 29.50            | Complies |
|                          | 2452 MHz  | 13.20                 | 13.27   | 16.25 | 29.50            | Complies |

Note: Antenna gain=6.5dBi > 6dBi, So Power Limit = 30-(6.5-6)=29.50dBm

|               |                                               |           |               |
|---------------|-----------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                          | Humidity  | 63%           |
| Test Engineer | Nick Peng                                     | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11b                        | 2412 MHz  | 20.00                 | 19.70   | 20.01   | 24.68 | 29.50            | Complies |
|                                | 2437 MHz  | 22.79                 | 21.21   | 21.61   | 26.69 | 29.50            | Complies |
|                                | 2462 MHz  | 19.73                 | 19.29   | 19.71   | 24.35 | 29.50            | Complies |
| 802.11g                        | 2412 MHz  | 14.73                 | 14.63   | 15.02   | 19.57 | 29.50            | Complies |
|                                | 2437 MHz  | 20.06                 | 19.39   | 19.81   | 24.53 | 29.50            | Complies |
|                                | 2462 MHz  | 14.40                 | 14.47   | 14.72   | 19.30 | 29.50            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 14.72                 | 14.74   | 15.04   | 19.61 | 29.50            | Complies |
|                                | 2437 MHz  | 20.06                 | 19.39   | 19.81   | 24.53 | 29.50            | Complies |
|                                | 2462 MHz  | 14.33                 | 14.34   | 14.64   | 19.21 | 29.50            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 13.03                 | 12.89   | 13.38   | 17.88 | 29.50            | Complies |
|                                | 2437 MHz  | 13.84                 | 13.66   | 13.99   | 18.60 | 29.50            | Complies |
|                                | 2452 MHz  | 12.31                 | 12.20   | 12.50   | 17.11 | 29.50            | Complies |

Note: Antenna gain=6.5dBi > 6dBi, So Power Limit = 30-(6.5-6)=29.50dBm



|               |                                                                                                  |           |               |
|---------------|--------------------------------------------------------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                                                                             | Humidity  | 63%           |
| Test Engineer | Lucas Huang                                                                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|------------------|----------|
|                          |           | Chain 1               |                  |          |
| 802.11b                  | 2412 MHz  | 20.17                 | 27.20            | Complies |
|                          | 2437 MHz  | 20.47                 | 27.20            | Complies |
|                          | 2462 MHz  | 20.23                 | 27.20            | Complies |
| 802.11g                  | 2412 MHz  | 15.93                 | 27.20            | Complies |
|                          | 2437 MHz  | 21.07                 | 27.20            | Complies |
|                          | 2462 MHz  | 15.76                 | 27.20            | Complies |
| 802.11ac MCS0/Nss1 VHT20 | 2412 MHz  | 16.07                 | 27.20            | Complies |
|                          | 2437 MHz  | 21.16                 | 27.20            | Complies |
|                          | 2462 MHz  | 15.83                 | 27.20            | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 2422 MHz  | 15.13                 | 27.20            | Complies |
|                          | 2437 MHz  | 15.51                 | 27.20            | Complies |
|                          | 2452 MHz  | 14.61                 | 27.20            | Complies |

Note: Antenna gain = 8.8dBi > 6dBi, So Power Limit = 30-(8.8-6)=27.20dBm

|               |                                                                                                  |           |               |
|---------------|--------------------------------------------------------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                                                                             | Humidity  | 63%           |
| Test Engineer | Nick Peng                                                                                        | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |           |               |

| Mode                     | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                          |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11b                  | 2412 MHz  | 20.17                 | 19.81   | 23.00 | 27.20            | Complies |
|                          | 2437 MHz  | 20.47                 | 19.89   | 23.20 | 27.20            | Complies |
|                          | 2462 MHz  | 20.23                 | 19.64   | 22.96 | 27.20            | Complies |
| 802.11g                  | 2412 MHz  | 15.57                 | 15.49   | 18.54 | 27.20            | Complies |
|                          | 2437 MHz  | 21.07                 | 20.36   | 23.74 | 27.20            | Complies |
|                          | 2462 MHz  | 14.91                 | 14.70   | 17.82 | 27.20            | Complies |
| 802.11ac MCS0/Nss2 VHT20 | 2412 MHz  | 15.54                 | 15.49   | 18.53 | 27.20            | Complies |
|                          | 2437 MHz  | 21.16                 | 20.35   | 23.78 | 27.20            | Complies |
|                          | 2462 MHz  | 14.93                 | 14.81   | 17.88 | 27.20            | Complies |
| 802.11ac MCS0/Nss2 VHT40 | 2422 MHz  | 14.64                 | 14.59   | 17.63 | 27.20            | Complies |
|                          | 2437 MHz  | 15.51                 | 15.53   | 18.53 | 27.20            | Complies |
|                          | 2452 MHz  | 13.88                 | 13.72   | 16.81 | 27.20            | Complies |

Note: Antenna gain = 8.8dBi > 6dBi, So Power Limit = 30-(8.8-6)=27.20dBm

|               |                                                                                                  |           |               |
|---------------|--------------------------------------------------------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                                                                             | Humidity  | 63%           |
| Test Engineer | Nick Peng                                                                                        | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11b                        | 2412 MHz  | 15.52                 | 15.62   | 15.82   | 20.43 | 27.00            | Complies |
|                                | 2437 MHz  | 18.45                 | 18.48   | 18.50   | 23.25 | 27.00            | Complies |
|                                | 2462 MHz  | 19.45                 | 19.02   | 19.45   | 24.08 | 27.00            | Complies |
| 802.11g                        | 2412 MHz  | 13.22                 | 13.21   | 13.57   | 18.11 | 27.00            | Complies |
|                                | 2437 MHz  | 18.06                 | 17.85   | 17.95   | 22.73 | 27.00            | Complies |
|                                | 2462 MHz  | 14.05                 | 13.92   | 14.46   | 18.92 | 27.00            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT20 | 2412 MHz  | 13.25                 | 13.13   | 13.45   | 18.05 | 27.00            | Complies |
|                                | 2437 MHz  | 17.95                 | 17.87   | 17.93   | 22.69 | 27.00            | Complies |
|                                | 2462 MHz  | 14.20                 | 14.05   | 14.37   | 18.98 | 27.00            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT40 | 2422 MHz  | 13.02                 | 12.56   | 13.14   | 17.68 | 27.00            | Complies |
|                                | 2437 MHz  | 14.45                 | 14.20   | 14.57   | 19.18 | 27.00            | Complies |
|                                | 2452 MHz  | 13.12                 | 13.08   | 13.38   | 17.97 | 27.00            | Complies |

Note: Antenna gain = 9dBi > 6dBi, So Power Limit = 30-(9-6)=27.00dBm

## &lt;For Beamforming Mode&gt;

|               |                                                |           |               |
|---------------|------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                           | Humidity  | 63%           |
| Test Engineer | Nick Peng                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 14.56                 | 14.50   | 17.54 | 27.69            | Complies |
|                                | 2437 MHz  | 20.59                 | 20.13   | 23.38 | 27.69            | Complies |
|                                | 2462 MHz  | 15.24                 | 15.52   | 18.39 | 27.69            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 14.51                 | 14.36   | 17.45 | 27.69            | Complies |
|                                | 2437 MHz  | 20.84                 | 20.12   | 23.51 | 27.69            | Complies |
|                                | 2462 MHz  | 15.17                 | 15.42   | 18.31 | 27.69            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 12.15                 | 11.83   | 15.00 | 27.69            | Complies |
|                                | 2437 MHz  | 14.62                 | 14.63   | 17.64 | 27.69            | Complies |
|                                | 2452 MHz  | 13.58                 | 13.59   | 16.60 | 27.69            | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.31 \text{ dBi} > 6 \text{ dBi}$ , So Power Limit = 30-(8.31-6)=27.69dBm

|               |                                                |           |               |
|---------------|------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                           | Humidity  | 63%           |
| Test Engineer | Nick Peng                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 11.10                 | 10.55   | 11.14   | 15.71 | 25.93            | Complies |
|                                | 2437 MHz  | 19.58                 | 19.26   | 19.43   | 24.20 | 25.93            | Complies |
|                                | 2462 MHz  | 14.84                 | 14.87   | 15.23   | 19.75 | 25.93            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 11.06                 | 10.50   | 11.16   | 15.69 | 25.93            | Complies |
|                                | 2437 MHz  | 19.62                 | 19.05   | 19.49   | 24.16 | 25.93            | Complies |
|                                | 2462 MHz  | 14.73                 | 14.86   | 15.12   | 19.68 | 25.93            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 10.94                 | 10.13   | 10.72   | 15.38 | 25.93            | Complies |
|                                | 2437 MHz  | 13.84                 | 13.66   | 13.99   | 18.60 | 25.93            | Complies |
|                                | 2452 MHz  | 13.58                 | 13.59   | 14.02   | 18.51 | 25.93            | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.07 \text{ dBi} > 6 \text{ dBi}$ , So Power Limit = 30-(10.07-6)=25.93dBm

|               |                                               |           |               |
|---------------|-----------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                          | Humidity  | 63%           |
| Test Engineer | Nick Peng                                     | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 15.03                 | 14.98   | 18.02 | 26.49            | Complies |
|                                | 2437 MHz  | 21.29                 | 20.46   | 23.91 | 26.49            | Complies |
|                                | 2462 MHz  | 14.59                 | 14.59   | 17.60 | 26.49            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 15.01                 | 14.84   | 17.94 | 26.49            | Complies |
|                                | 2437 MHz  | 21.23                 | 20.45   | 23.87 | 26.49            | Complies |
|                                | 2462 MHz  | 14.58                 | 14.57   | 17.59 | 26.49            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 14.15                 | 14.12   | 17.15 | 26.49            | Complies |
|                                | 2437 MHz  | 15.47                 | 15.49   | 18.49 | 26.49            | Complies |
|                                | 2452 MHz  | 13.20                 | 13.27   | 16.25 | 26.49            | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{sub}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$ , So Power Limit =  $30 - (9.51 - 6) = 26.49 \text{ dBm}$

|               |                                               |           |               |
|---------------|-----------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                          | Humidity  | 63%           |
| Test Engineer | Nick Peng                                     | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 14.73                 | 14.63   | 15.02   | 19.57 | 24.73            | Complies |
|                                | 2437 MHz  | 20.06                 | 19.39   | 19.81   | 24.53 | 24.73            | Complies |
|                                | 2462 MHz  | 14.40                 | 14.47   | 14.72   | 19.30 | 24.73            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 14.72                 | 14.74   | 15.04   | 19.61 | 24.73            | Complies |
|                                | 2437 MHz  | 20.06                 | 19.39   | 19.81   | 24.53 | 24.73            | Complies |
|                                | 2462 MHz  | 14.33                 | 14.34   | 14.64   | 19.21 | 24.73            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 13.03                 | 12.89   | 13.38   | 17.88 | 24.73            | Complies |
|                                | 2437 MHz  | 13.84                 | 13.66   | 13.99   | 18.60 | 24.73            | Complies |
|                                | 2452 MHz  | 12.31                 | 12.20   | 12.50   | 17.11 | 24.73            | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{sub}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.27 \text{ dBi} > 6 \text{ dBi}$ , So Power Limit =  $30 - (11.27 - 6) = 24.73 \text{ dBm}$

|               |                                                                                                  |           |               |
|---------------|--------------------------------------------------------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                                                                             | Humidity  | 63%           |
| Test Engineer | Nick Peng                                                                                        | Test Date | Jan. 08, 2015 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 15.57                 | 15.49   | 18.54 | 28.41            | Complies |
|                                | 2437 MHz  | 21.07                 | 20.36   | 23.74 | 28.41            | Complies |
|                                | 2462 MHz  | 14.91                 | 14.70   | 17.82 | 28.41            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT20 | 2412 MHz  | 15.54                 | 15.49   | 18.53 | 28.41            | Complies |
|                                | 2437 MHz  | 21.16                 | 20.35   | 23.78 | 28.41            | Complies |
|                                | 2462 MHz  | 14.93                 | 14.81   | 17.88 | 28.41            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT40 | 2422 MHz  | 14.64                 | 14.59   | 17.63 | 28.41            | Complies |
|                                | 2437 MHz  | 15.51                 | 15.53   | 18.53 | 28.41            | Complies |
|                                | 2452 MHz  | 13.88                 | 13.72   | 16.81 | 28.41            | Complies |

Note: Antenna gain = 7.59dBi > 6dBi, So Power Limit = 30-(7.59-6)=28.41dBm

|               |                                                                                                  |           |               |
|---------------|--------------------------------------------------------------------------------------------------|-----------|---------------|
| Temperature   | 22°C                                                                                             | Humidity  | 63%           |
| Test Engineer | Lucas Huang                                                                                      | Test Date | Jan. 06, 2015 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |           |               |

| Mode                           | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|                                |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 802.11g                        | 2412 MHz  | 13.22                 | 13.21   | 13.57   | 18.11 | 26.13            | Complies |
|                                | 2437 MHz  | 18.06                 | 17.85   | 17.95   | 22.73 | 26.13            | Complies |
|                                | 2462 MHz  | 14.05                 | 13.92   | 14.46   | 18.92 | 26.13            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT20 | 2412 MHz  | 13.25                 | 13.13   | 13.45   | 18.05 | 26.13            | Complies |
|                                | 2437 MHz  | 17.95                 | 17.87   | 17.93   | 22.69 | 26.13            | Complies |
|                                | 2462 MHz  | 14.20                 | 14.05   | 14.37   | 18.98 | 26.13            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT40 | 2422 MHz  | 13.02                 | 12.56   | 13.14   | 17.68 | 26.13            | Complies |
|                                | 2437 MHz  | 14.45                 | 14.20   | 14.57   | 19.18 | 26.13            | Complies |
|                                | 2452 MHz  | 13.12                 | 13.08   | 13.38   | 17.97 | 26.13            | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SB}} \left\{ \sum_{k=1}^{N_{DET}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.87\text{dBi} > 6\text{dBi}$ , So Power Limit = 30-(9.87-6)=26.13dBm

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting                                              |
|--------------------|------------------------------------------------------|
| Attenuation        | Auto                                                 |
| Span Frequency     | Set the span to 1.5 times the DTS channel bandwidth. |
| RBW                | $3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$   |
| VBW                | $\geq 3 \times \text{RBW}$                           |
| Detector           | Peak                                                 |
| Trace              | Max Hold                                             |
| Sweep Time         | Auto couple                                          |

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout



#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.



#### 4.3.7. Test Result of Power Spectral Density

<For Non-Beamforming Mode>

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|--------------------------------|----------|
|                             |           | Chain 2                  |                                |          |
| 802.11b                     | 2412 MHz  | -1.18                    | 8.00                           | Complies |
|                             | 2437 MHz  | 0.00                     | 8.00                           | Complies |
|                             | 2462 MHz  | -1.91                    | 8.00                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -9.25                    | 8.00                           | Complies |
|                             | 2437 MHz  | -3.84                    | 8.00                           | Complies |
|                             | 2462 MHz  | -9.72                    | 8.00                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -12.66                   | 8.00                           | Complies |
|                             | 2437 MHz  | -11.02                   | 8.00                           | Complies |
|                             | 2452 MHz  | -13.66                   | 8.00                           | Complies |

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Total |                                |          |
| 802.11b | 2412 MHz  | -2.35                    | -3.85   | -0.03 | 5.69                           | Complies |
|         | 2437 MHz  | 0.11                     | -1.69   | 2.31  | 5.69                           | Complies |
|         | 2462 MHz  | -3.14                    | -4.74   | -0.86 | 5.69                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.31 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (8.31 - 6) = 5.69 \text{ dBm/3kHz}$

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Chain 3 | Total |                                |          |
| 802.11b | 2412 MHz  | -4.92                    | -7.31   | -5.63   | -1.07 | 3.93                           | Complies |
|         | 2437 MHz  | -1.26                    | -0.57   | -1.07   | 3.81  | 3.93                           | Complies |
|         | 2462 MHz  | -6.18                    | -6.28   | -5.87   | -1.34 | 3.93                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ant}} \left\{ \sum_{k=1}^{N_{freq}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.07 \text{dBi} > 6 \text{dBi}$ , So Power Density Limit =  $8 - (10.07 - 6) = 3.93 \text{dBm/3kHz}$

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|--------------------------------|----------|
|                             |           | Chain 2                  |                                |          |
| 802.11b                     | 2412 MHz  | -2.42                    | 7.50                           | Complies |
|                             | 2437 MHz  | -1.13                    | 7.50                           | Complies |
|                             | 2462 MHz  | -2.46                    | 7.50                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -9.28                    | 7.50                           | Complies |
|                             | 2437 MHz  | -4.38                    | 7.50                           | Complies |
|                             | 2462 MHz  | -10.23                   | 7.50                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -13.74                   | 7.50                           | Complies |
|                             | 2437 MHz  | -11.98                   | 7.50                           | Complies |
|                             | 2452 MHz  | -14.49                   | 7.50                           | Complies |

Antenna Gain=6.5dBi>6dBi, so Power Density Limit=8-(6.50-6)=7.50dBm/3kHz

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Total |                                |          |
| 802.11b | 2412 MHz  | -1.96                    | -0.41   | 1.89  | 4.49                           | Complies |
|         | 2437 MHz  | 0.89                     | -0.73   | 3.17  | 4.49                           | Complies |
|         | 2462 MHz  | -1.76                    | -1.65   | 1.31  | 4.49                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (9.51 - 6) = 4.49 \text{ dBm/3kHz}$

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Chain 3 | Total |                                |          |
| 802.11b | 2412 MHz  | -2.92                    | -1.98   | -2.26   | 2.40  | 2.73                           | Complies |
|         | 2437 MHz  | -1.25                    | -2.41   | -3.28   | 2.54  | 2.73                           | Complies |
|         | 2462 MHz  | -3.43                    | -3.18   | -2.50   | 1.75  | 2.73                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.27 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (11.27 - 6) = 2.73 \text{ dBm/3kHz}$

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Lucas Huang                                                                                      |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|--------------------------------|----------|
|                             |           | Chain 1                  |                                |          |
| 802.11b                     | 2412 MHz  | -0.90                    | 5.20                           | Complies |
|                             | 2437 MHz  | -0.38                    | 5.20                           | Complies |
|                             | 2462 MHz  | -1.40                    | 5.20                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -8.60                    | 5.20                           | Complies |
|                             | 2437 MHz  | -4.01                    | 5.20                           | Complies |
|                             | 2462 MHz  | -9.19                    | 5.20                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -12.75                   | 5.20                           | Complies |
|                             | 2437 MHz  | -12.37                   | 5.20                           | Complies |
|                             | 2452 MHz  | -10.85                   | 5.20                           | Complies |

Antenna Gain=8.8dBi>6dBi, so Power Density Limit=8-(8.8-6)=5.20dBm/3kHz

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Total |                                |          |
| 802.11b | 2412 MHz  | -2.01                    | -3.44   | 0.34  | 6.41                           | Complies |
|         | 2437 MHz  | -1.77                    | -2.39   | 0.94  | 6.41                           | Complies |
|         | 2462 MHz  | -2.44                    | -3.59   | 0.03  | 6.41                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.59\text{dBi} > 6\text{dBi}$ , So Power Density Limit = 8-(7.59-6)=6.41 dBm/3kHz

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |          |     |

| Mode    | Frequency | Power Density (dBm/3kHz) |         |         |       | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|---------|---------|-------|--------------------------------|----------|
|         |           | Chain 1                  | Chain 2 | Chain 3 | Total |                                |          |
| 802.11b | 2412 MHz  | -4.19                    | -5.81   | -6.45   | -0.61 | 4.13                           | Complies |
|         | 2437 MHz  | -3.74                    | -4.26   | -4.88   | 0.50  | 4.13                           | Complies |
|         | 2462 MHz  | -3.40                    | -3.35   | -4.36   | 1.09  | 4.13                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{sk}} \left\{ \sum_{k=1}^{N_{sk}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.87\text{dBi} > 6\text{dBi}$ , So Power Density Limit =  $8 - (9.87 - 6) = 4.13\text{dBm/3kHz}$

## &lt;For Beamforming Mode&gt;

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|--------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Total  |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -11.24                   | -11.67  | -8.44  | 5.69                           | Complies |
|                             | 2437 MHz  | -4.42                    | -5.92   | -2.10  | 5.69                           | Complies |
|                             | 2462 MHz  | -10.26                   | -10.58  | -7.41  | 5.69                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -16.59                   | -17.21  | -13.88 | 5.69                           | Complies |
|                             | 2437 MHz  | -13.87                   | -13.54  | -10.69 | 5.69                           | Complies |
|                             | 2452 MHz  | -13.74                   | -14.19  | -10.95 | 5.69                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.31 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (8.31 - 6) = 5.69 \text{ dBm/3kHz}$

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |         |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|---------|--------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Chain 3 | Total  |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -13.69                   | -14.57  | -13.83  | -9.24  | 3.93                           | Complies |
|                             | 2437 MHz  | -5.85                    | -5.83   | -6.16   | -1.17  | 3.93                           | Complies |
|                             | 2462 MHz  | -9.27                    | -9.72   | -9.69   | -4.78  | 3.93                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -16.95                   | -16.95  | -17.05  | -12.21 | 3.93                           | Complies |
|                             | 2437 MHz  | -14.34                   | -13.10  | -13.18  | -8.73  | 3.93                           | Complies |
|                             | 2452 MHz  | -14.00                   | -13.99  | -12.83  | -8.80  | 3.93                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SA}} \left\{ \sum_{k=1}^{N_{AQ}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.07 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (10.07 - 6) = 3.93 \text{ dBm/3kHz}$

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|--------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Total  |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -9.50                    | -10.39  | -6.91  | 4.49                           | Complies |
|                             | 2437 MHz  | -3.60                    | -4.95   | -1.21  | 4.49                           | Complies |
|                             | 2462 MHz  | -10.47                   | -8.70   | -6.49  | 4.49                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -11.57                   | -12.60  | -9.04  | 4.49                           | Complies |
|                             | 2437 MHz  | -11.59                   | -10.41  | -7.95  | 4.49                           | Complies |
|                             | 2452 MHz  | -14.66                   | -13.44  | -11.00 | 4.49                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (9.51 - 6) = 4.49 \text{ dBm/3kHz}$

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |         |       | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|---------|-------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Chain 3 | Total |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -9.68                    | -9.17   | -9.94   | -4.81 | 2.73                           | Complies |
|                             | 2437 MHz  | -4.82                    | -6.01   | -6.48   | -0.94 | 2.73                           | Complies |
|                             | 2462 MHz  | -8.94                    | -9.70   | -9.96   | -4.74 | 2.73                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -13.21                   | -12.38  | -13.54  | -8.24 | 2.73                           | Complies |
|                             | 2437 MHz  | -13.18                   | -12.71  | -13.97  | -8.48 | 2.73                           | Complies |
|                             | 2452 MHz  | -13.96                   | -14.60  | -15.21  | -9.79 | 2.73                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.27 \text{ dBi} > 6 \text{ dBi}$ , So Power Density Limit =  $8 - (11.27 - 6) = 2.73 \text{ dBm/3kHz}$

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|--------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Total  |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -9.97                    | -8.86   | -6.37  | 6.41                           | Complies |
|                             | 2437 MHz  | -4.69                    | -5.57   | -2.10  | 6.41                           | Complies |
|                             | 2462 MHz  | -10.35                   | -9.70   | -7.00  | 6.41                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -13.04                   | -13.05  | -10.03 | 6.41                           | Complies |
|                             | 2437 MHz  | -12.51                   | -13.12  | -9.79  | 6.41                           | Complies |
|                             | 2452 MHz  | -14.78                   | -14.84  | -11.80 | 6.41                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.59\text{dBi} > 6\text{dBi}$ , So Power Density Limit =  $8 - (7.59 - 6) = 6.41\text{dBm/3kHz}$

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Lucas Huang                                                                                      |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |          |     |

| Mode                        | Frequency | Power Density (dBm/3kHz) |         |         |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------------------------|-----------|--------------------------|---------|---------|--------|--------------------------------|----------|
|                             |           | Chain 1                  | Chain 2 | Chain 3 | Total  |                                |          |
| 802.11ac<br>MCS0/Nss1 VHT20 | 2412 MHz  | -11.69                   | -11.67  | -10.95  | -6.65  | 4.13                           | Complies |
|                             | 2437 MHz  | -5.93                    | -6.78   | -6.68   | -1.68  | 4.13                           | Complies |
|                             | 2462 MHz  | -11.23                   | -10.51  | -10.48  | -5.96  | 4.13                           | Complies |
| 802.11ac<br>MCS0/Nss1 VHT40 | 2422 MHz  | -14.78                   | -13.99  | -15.74  | -10.01 | 4.13                           | Complies |
|                             | 2437 MHz  | -13.76                   | -13.12  | -12.30  | -8.25  | 4.13                           | Complies |
|                             | 2452 MHz  | -13.61                   | -14.96  | -13.54  | -9.22  | 4.13                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.87\text{dBi} > 6\text{dBi}$ , So Power Density Limit =  $8 - (9.87 - 6) = 4.13\text{dBm/3kHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.




<For Non-Beamforming Mode>

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

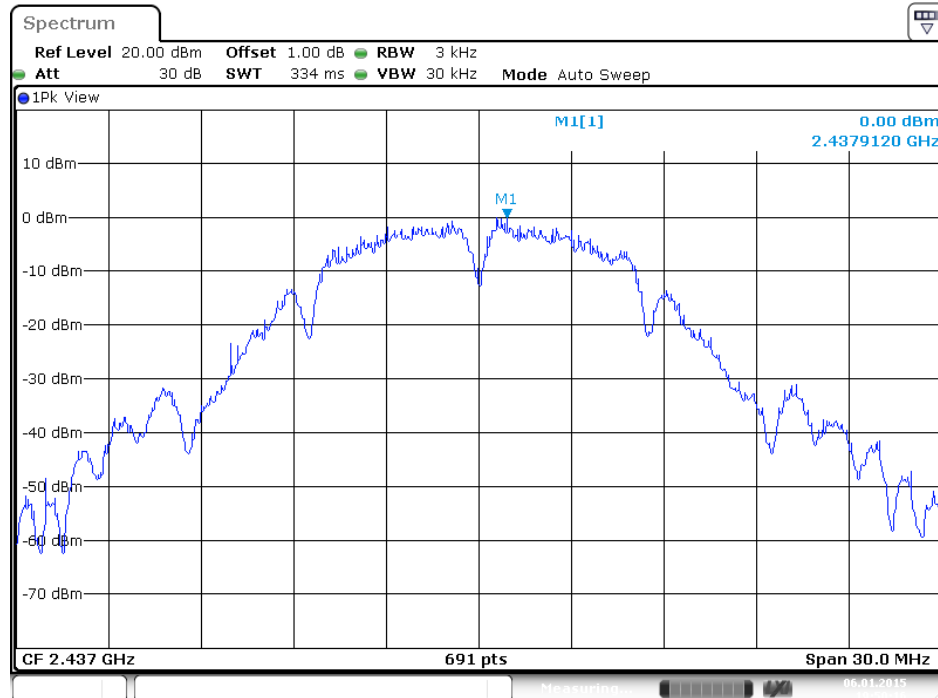

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

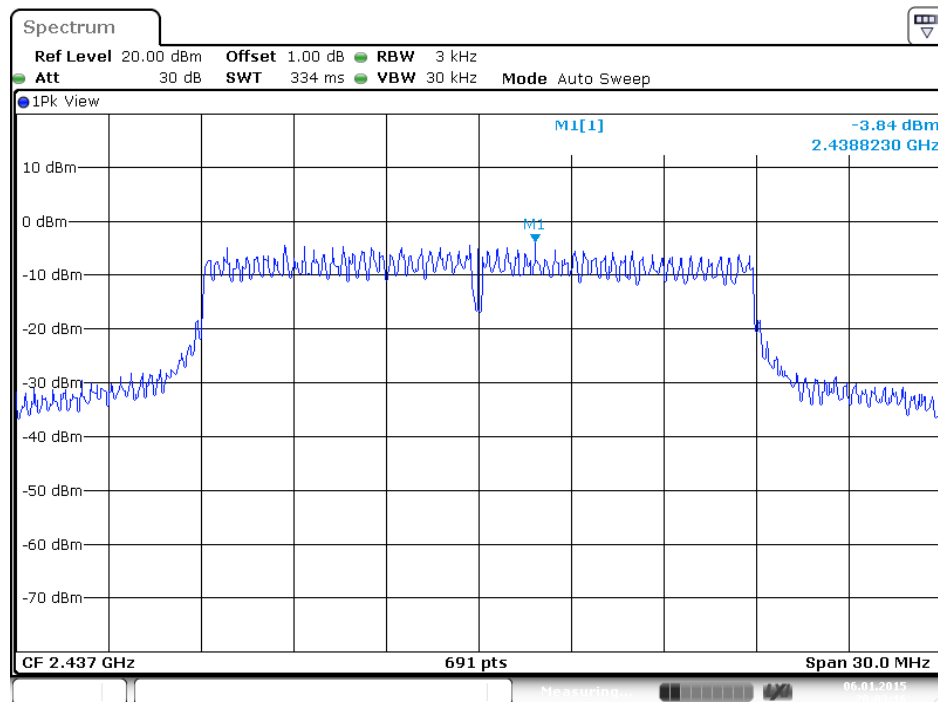


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

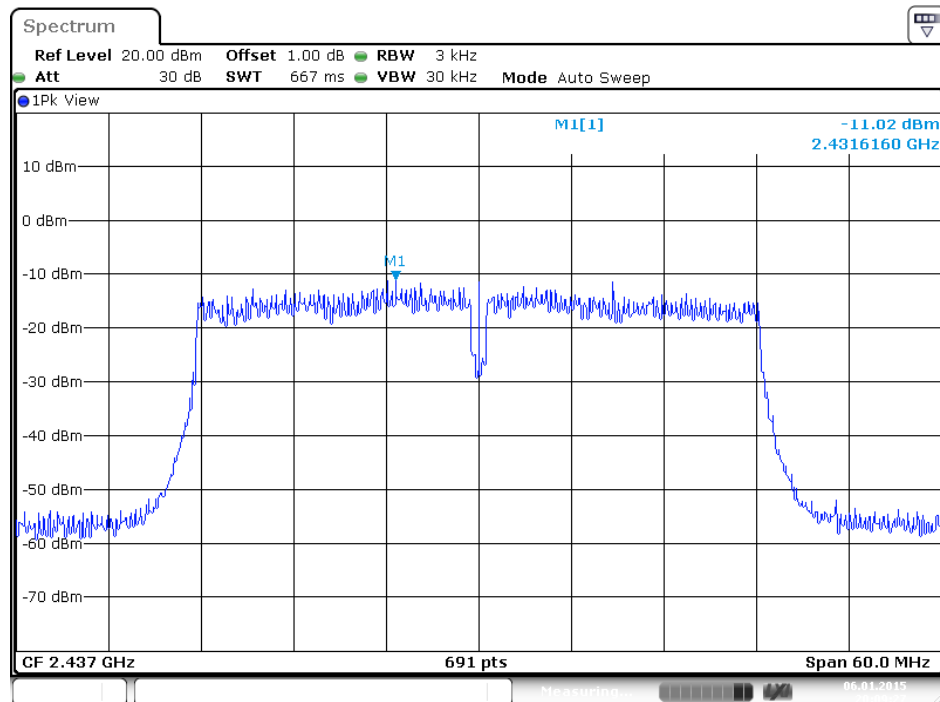

Date: 6 JAN 2015 20:09:27


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX)

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

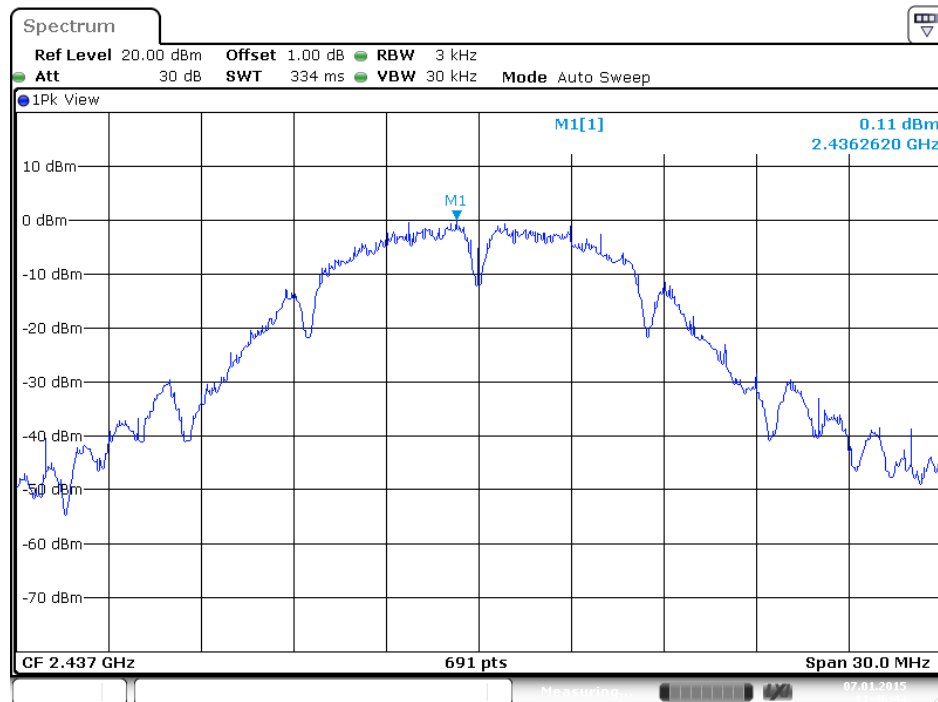

Date: 7.JAN 2015 11:46:44


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

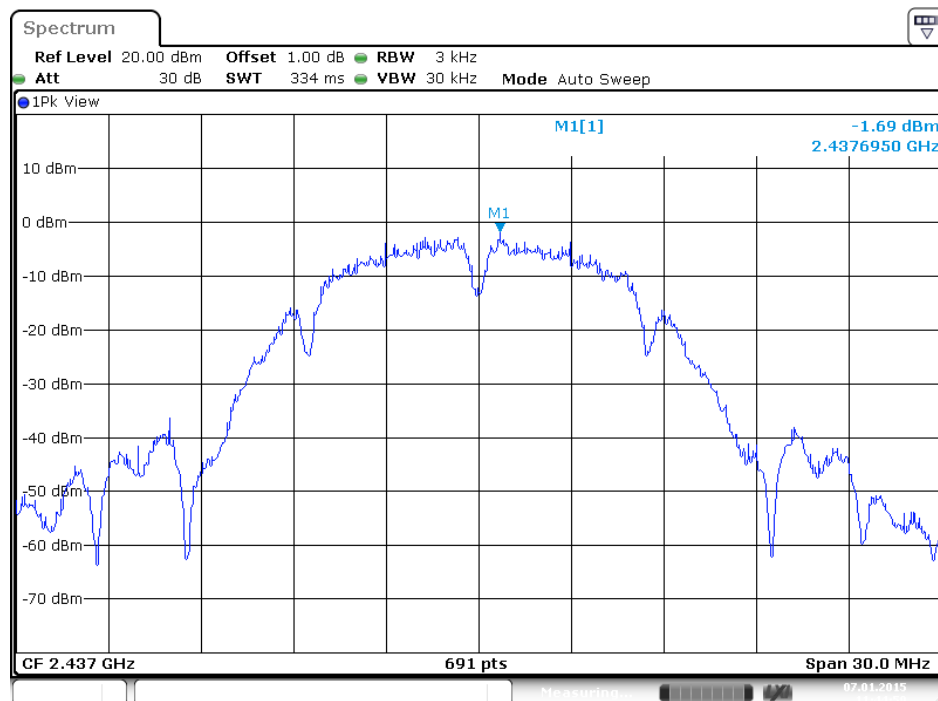

Date: 7.JAN 2015 11:44:58


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)

Power Density Plot on Configuration IEEE 802.11b / 2437MHz / Chain 1

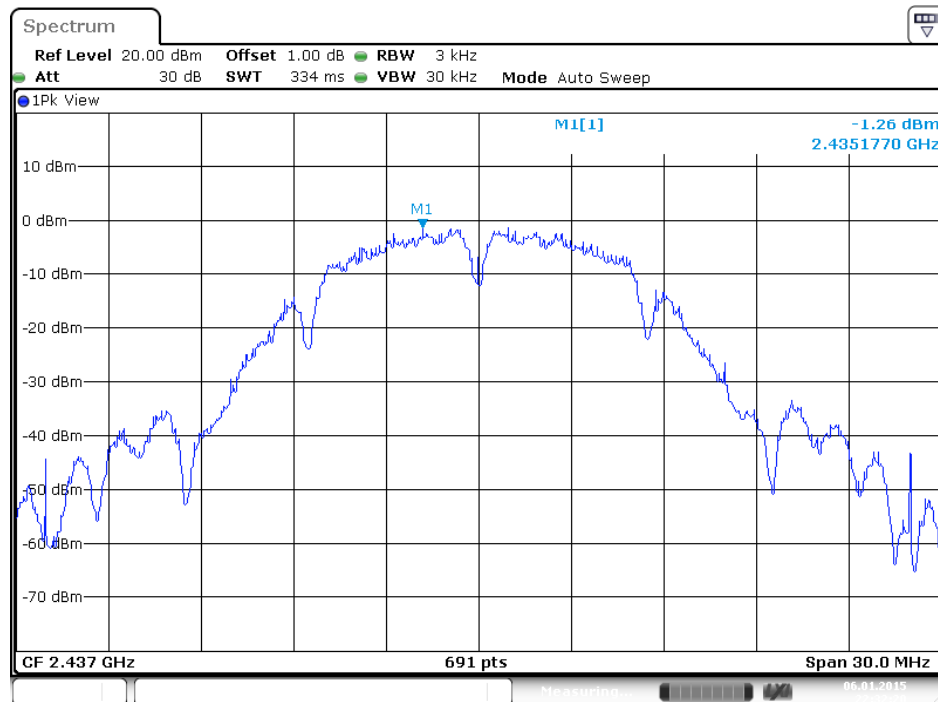


Date: 6 JAN 2015 22:32:20

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

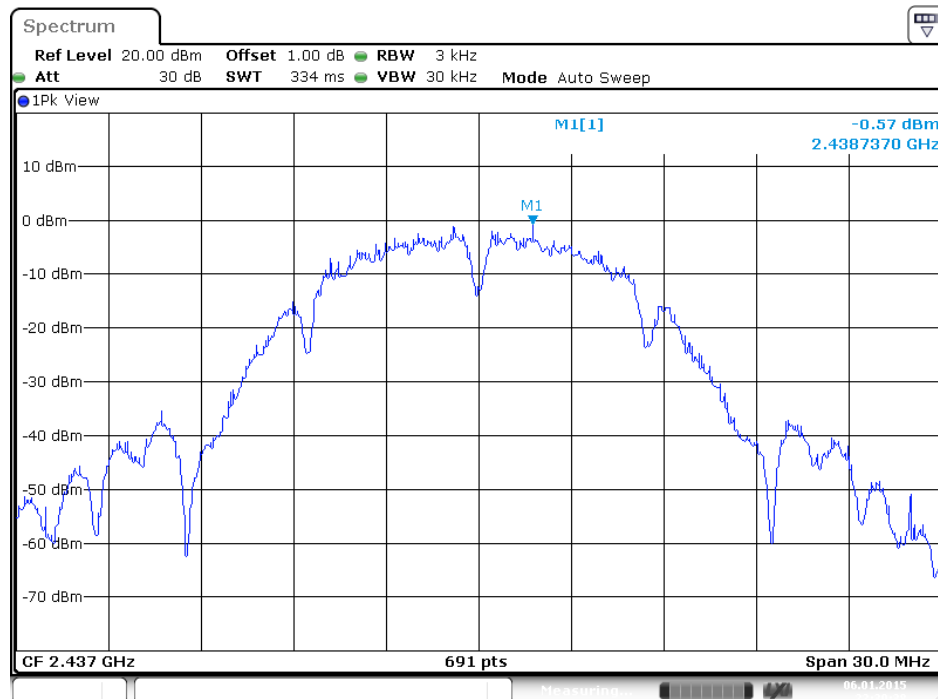

Date: 6 JAN 2015 22:30:38


### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

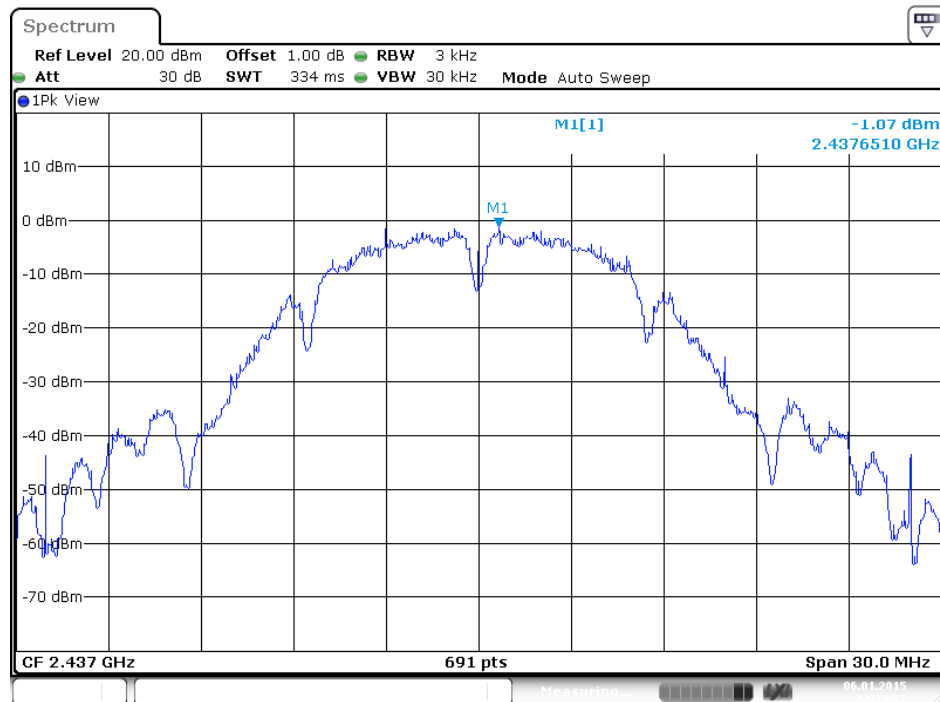

Date: 6 JAN 2015 22:33:57


## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX)

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

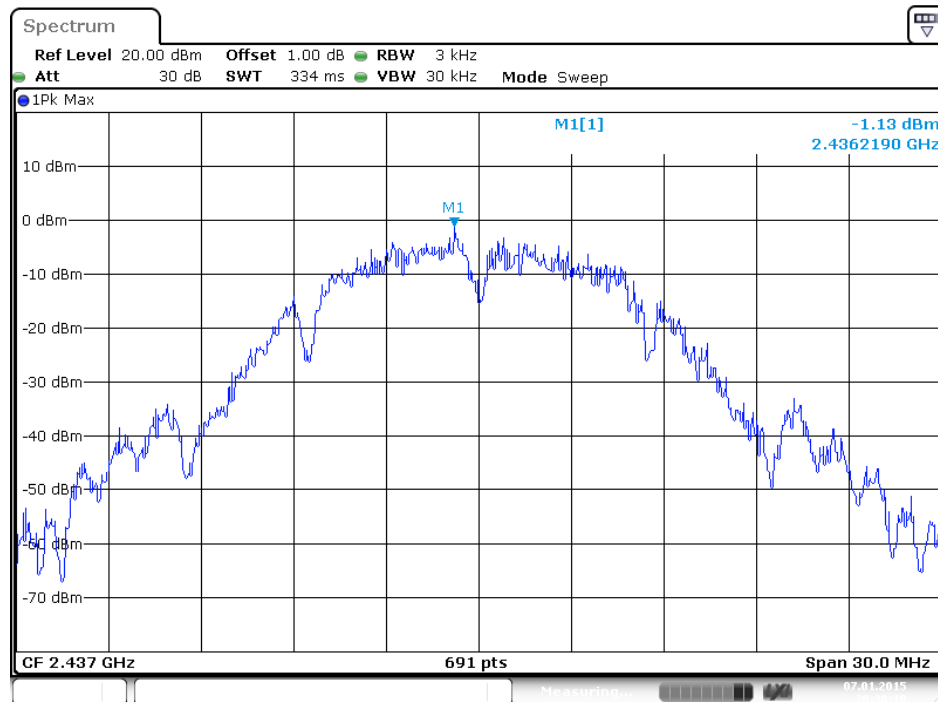


Date: 7.JAN 2015 20:38:11

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

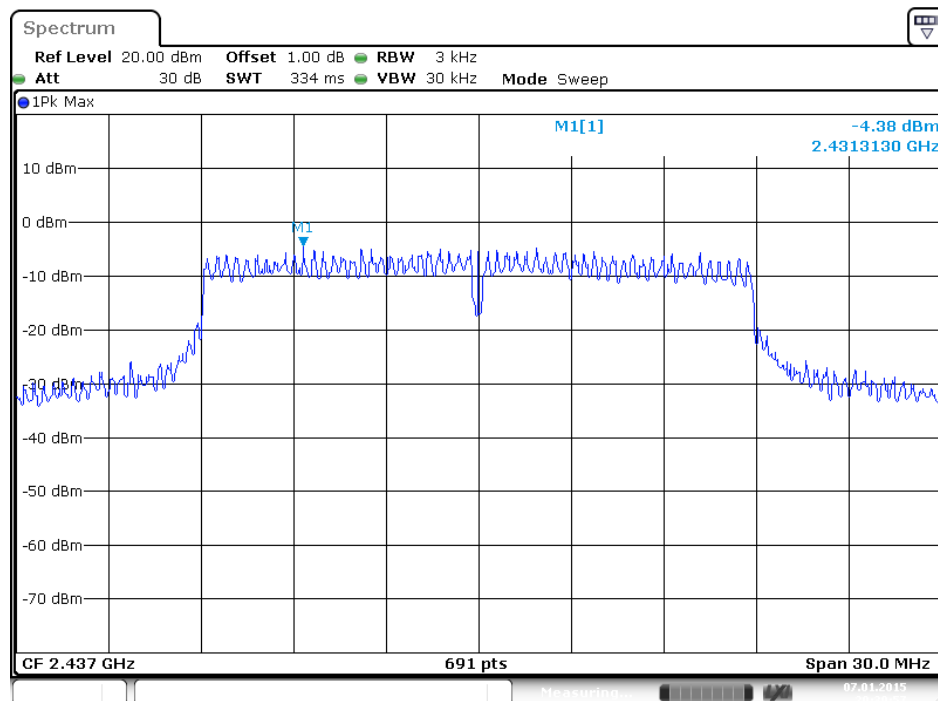

Date: 7.JAN 2015 20:39:57


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

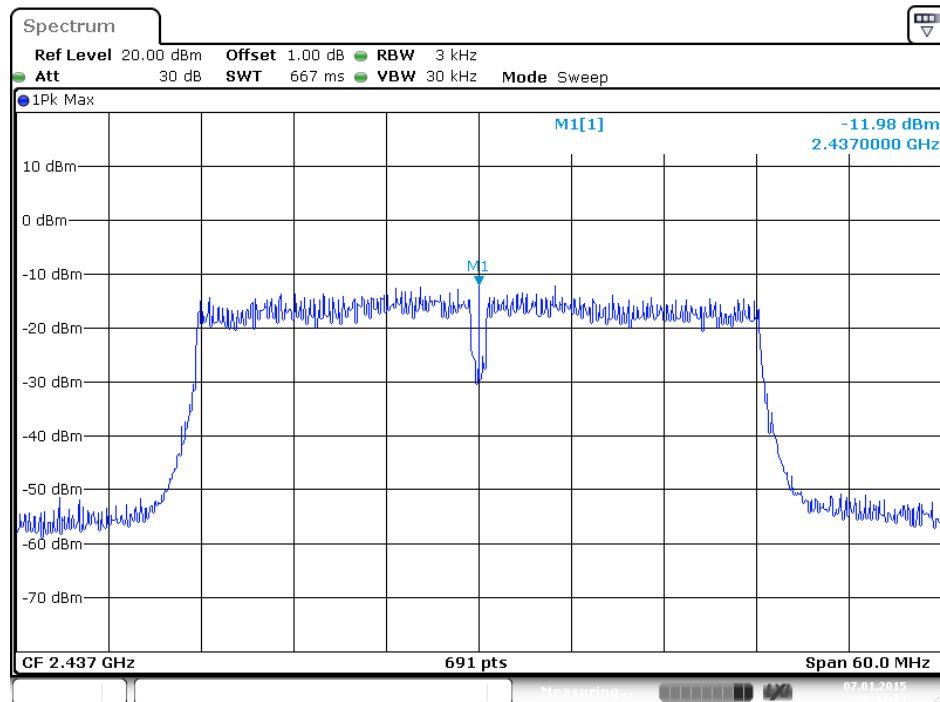

Date: 7.JAN.2015 20:44:33


## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

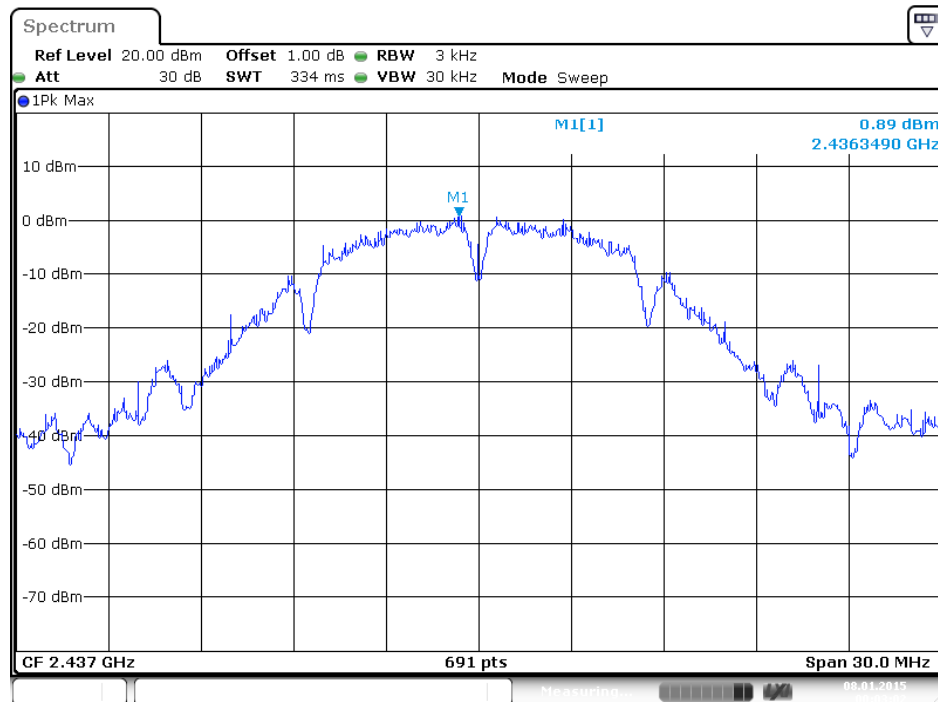

Date: 8 JAN 2015 00:03:02

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

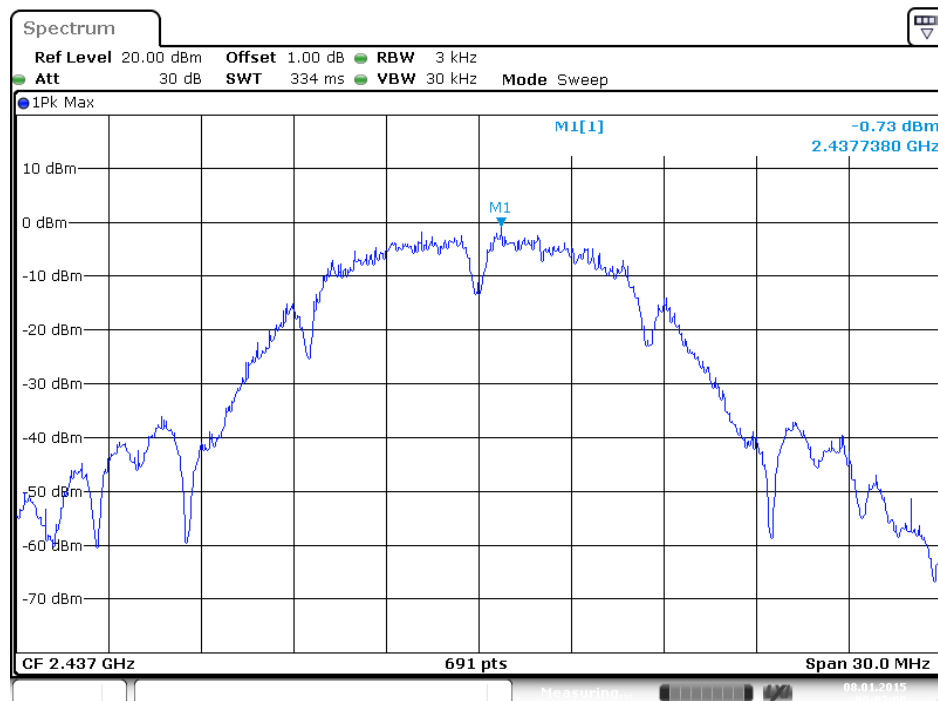


Date: 8 JAN 2015 00:02:01




## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)


### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

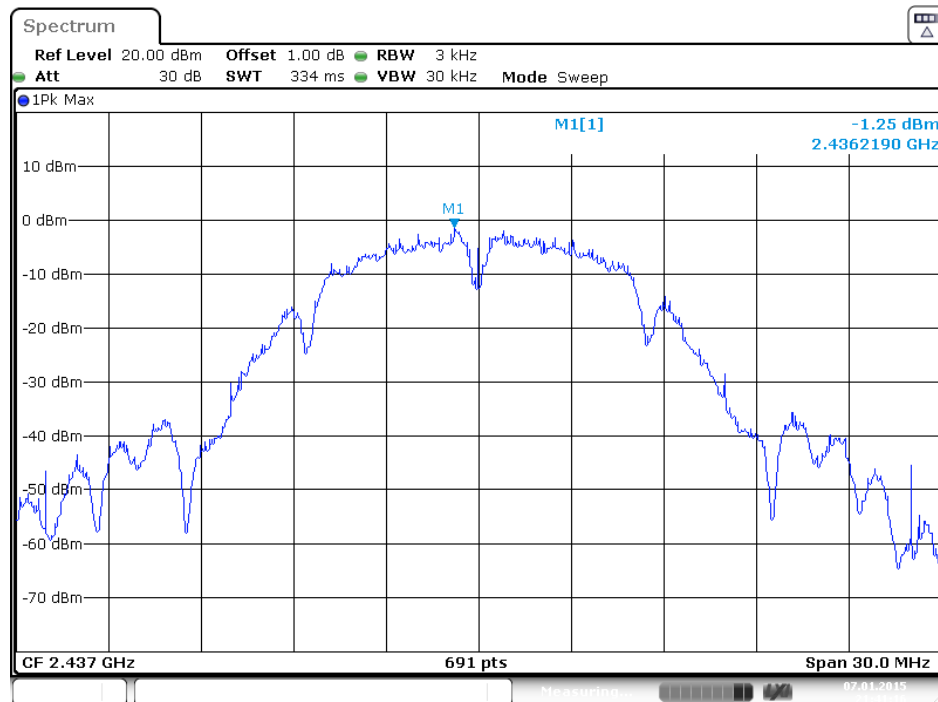

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

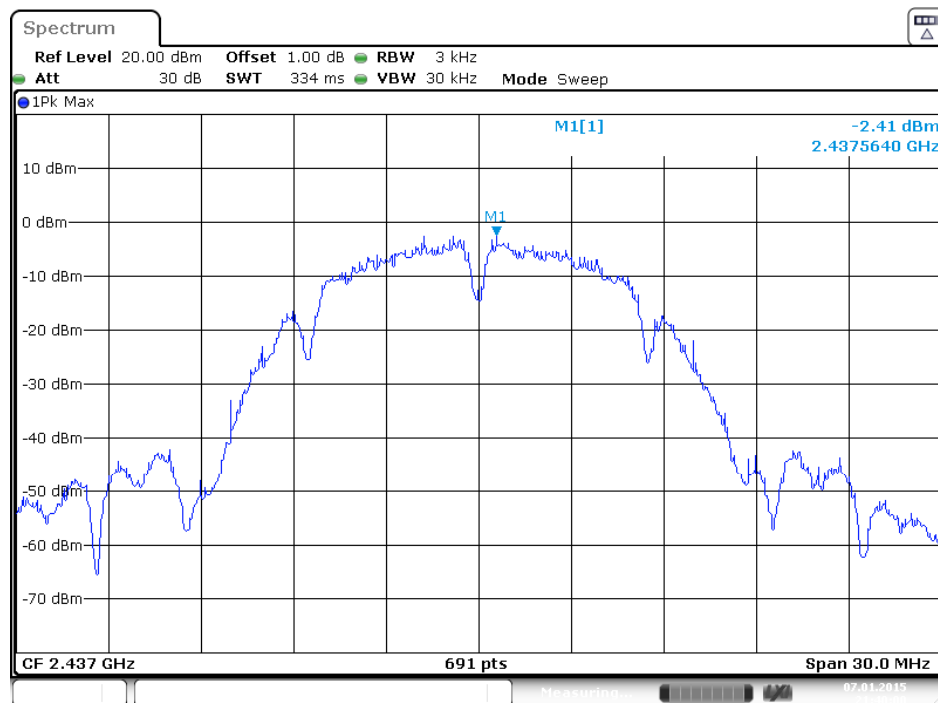


### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

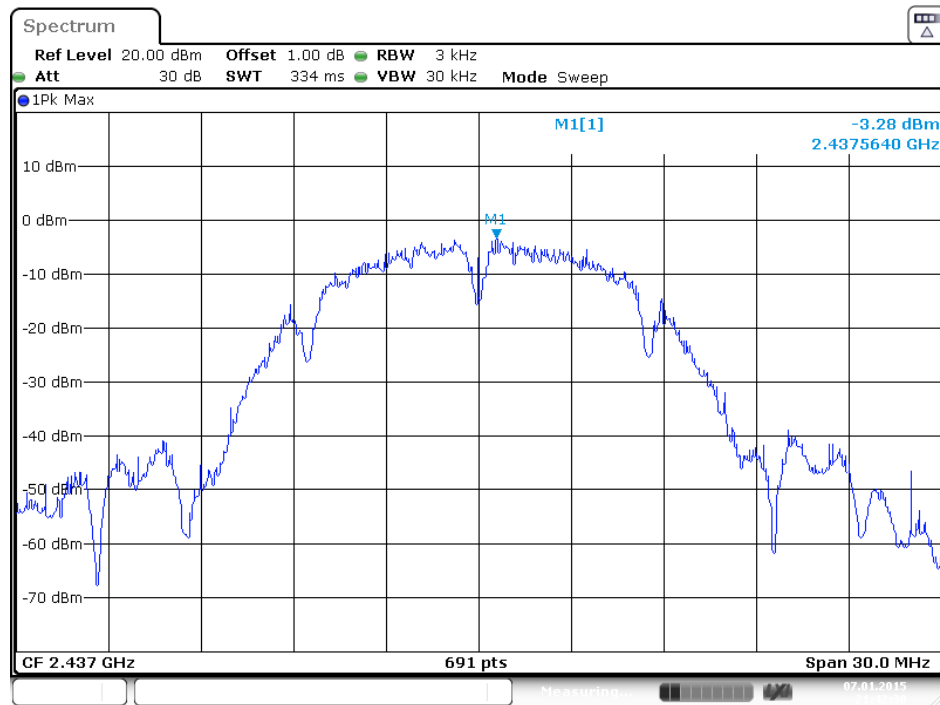


Date: 7.JAN.2015 21:42:30

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

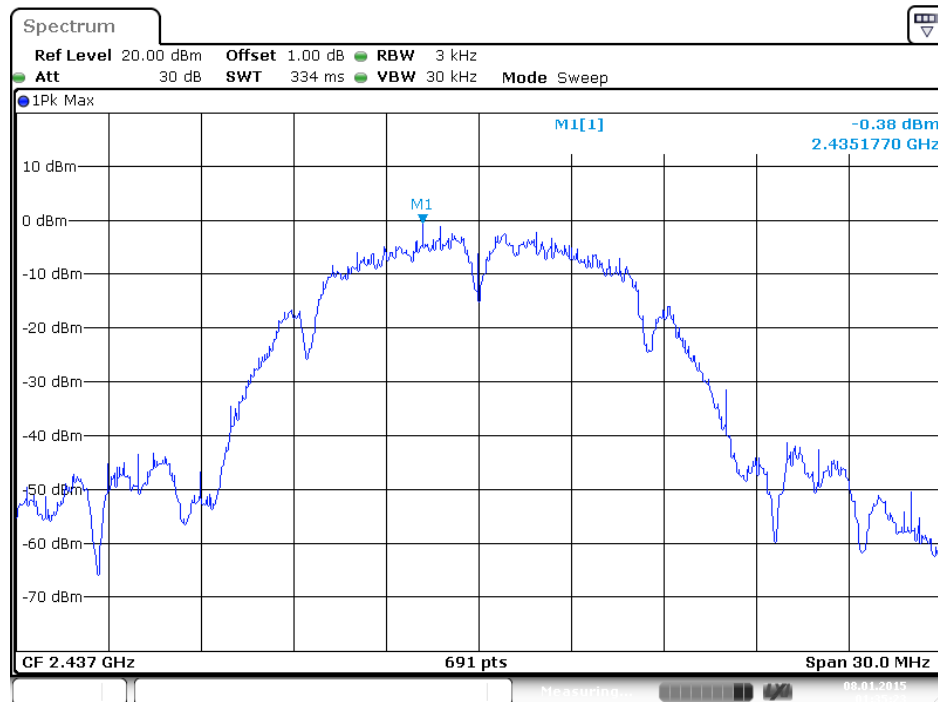

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

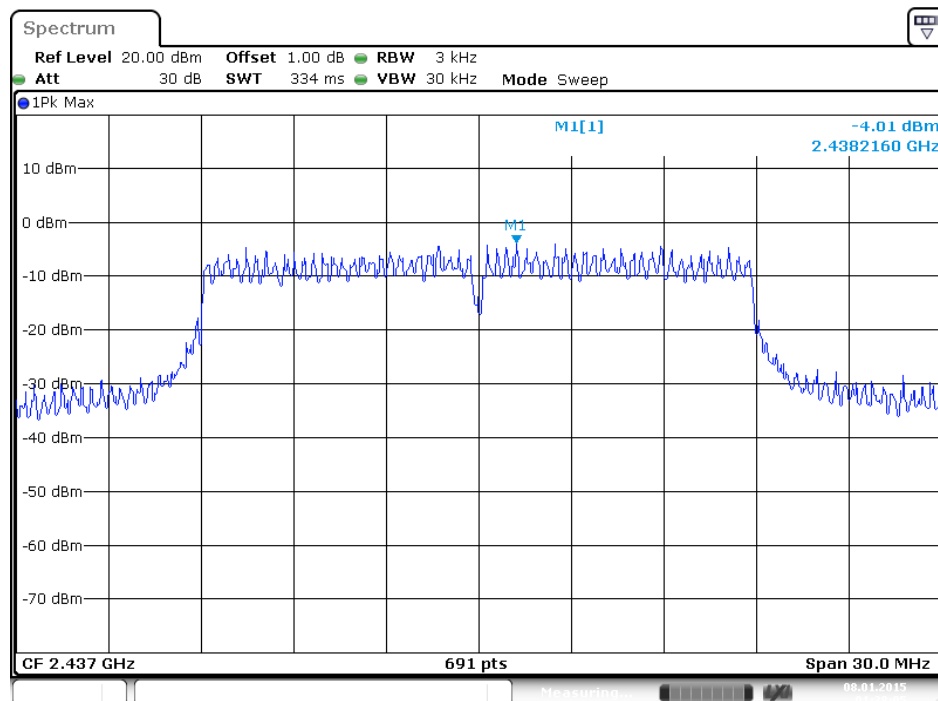


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 1

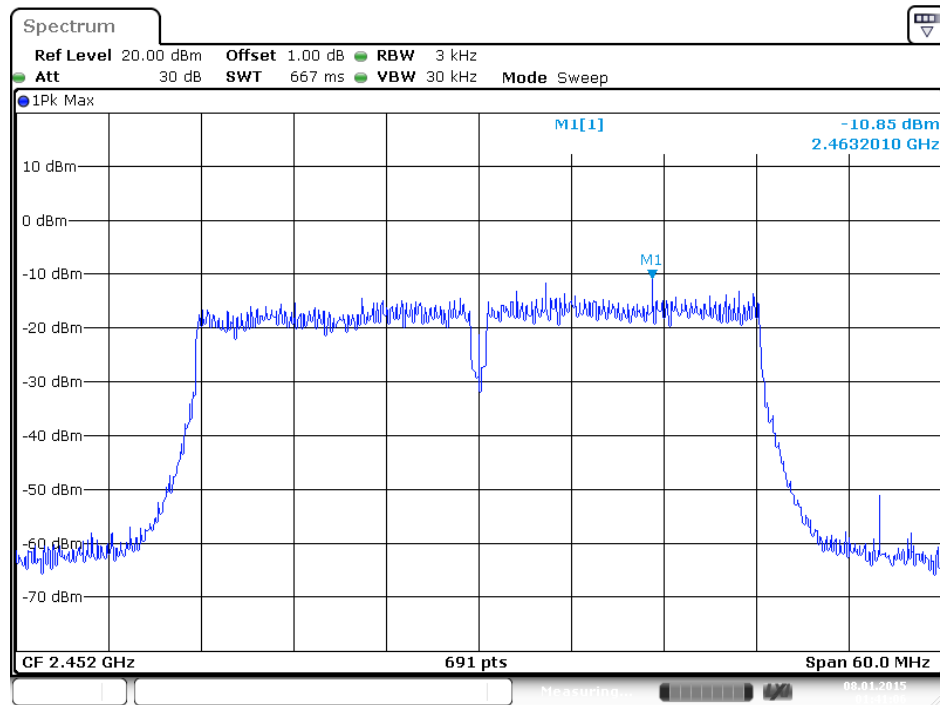

Date: 8 JAN 2015 01:41:05


Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

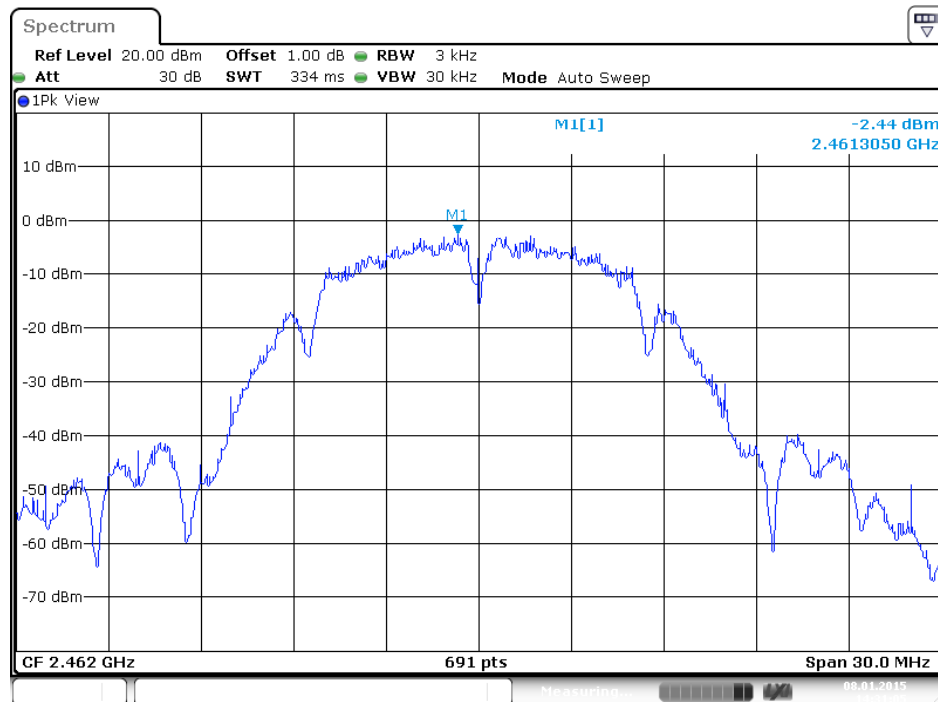

Date: 8 JAN 2015 14:31:05


Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 2

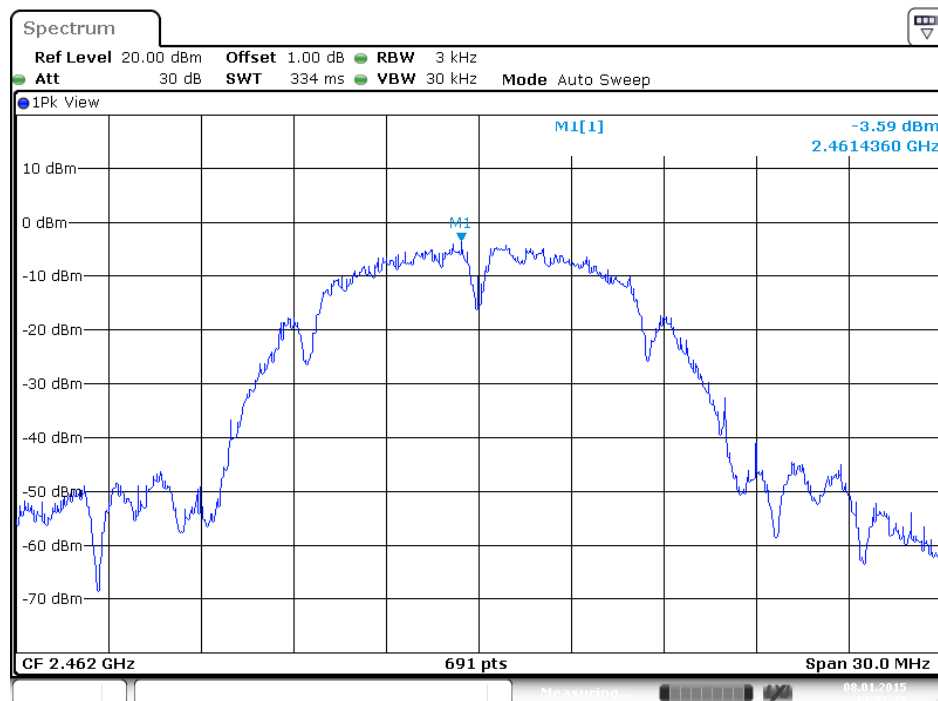

Date: 8 JAN 2015 14:31:28


Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

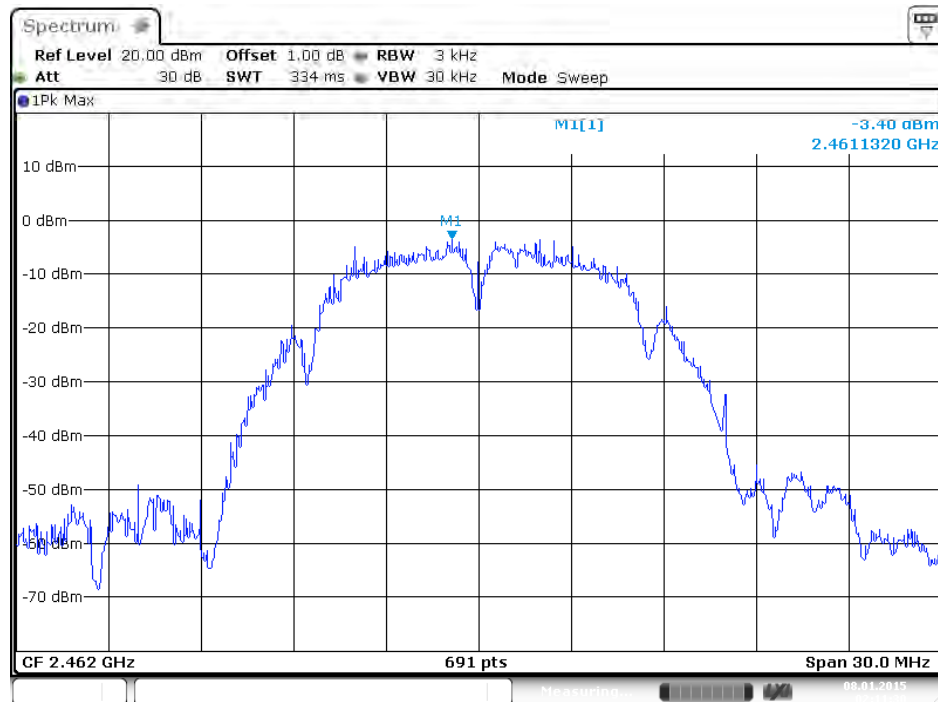


Date: 8 JAN 2015 02:11:30

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 2

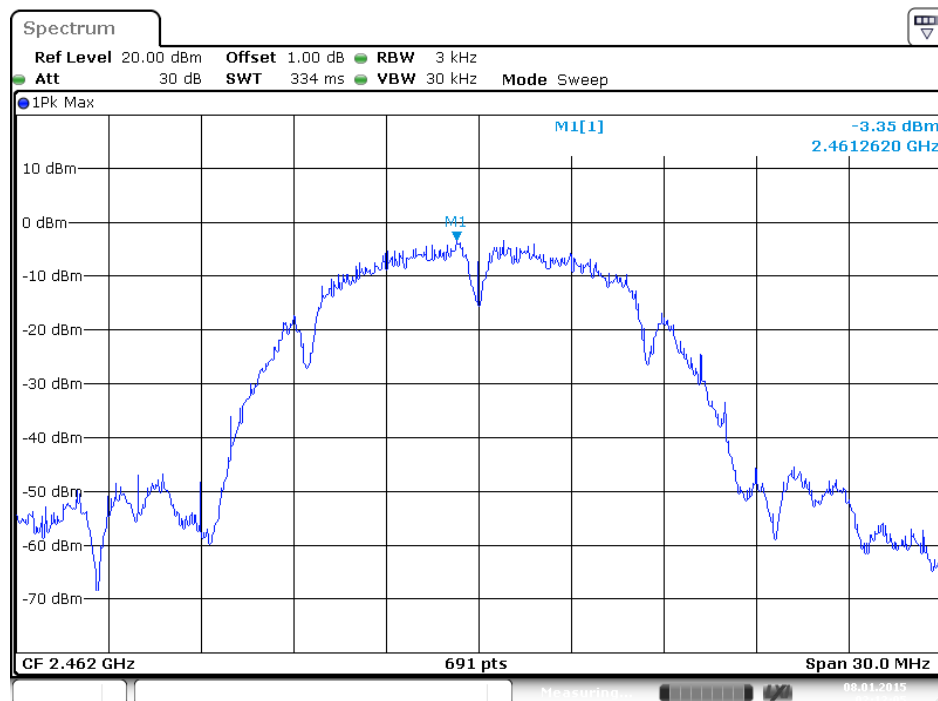

Date: 8 JAN 2015 02:12:05

### Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 3

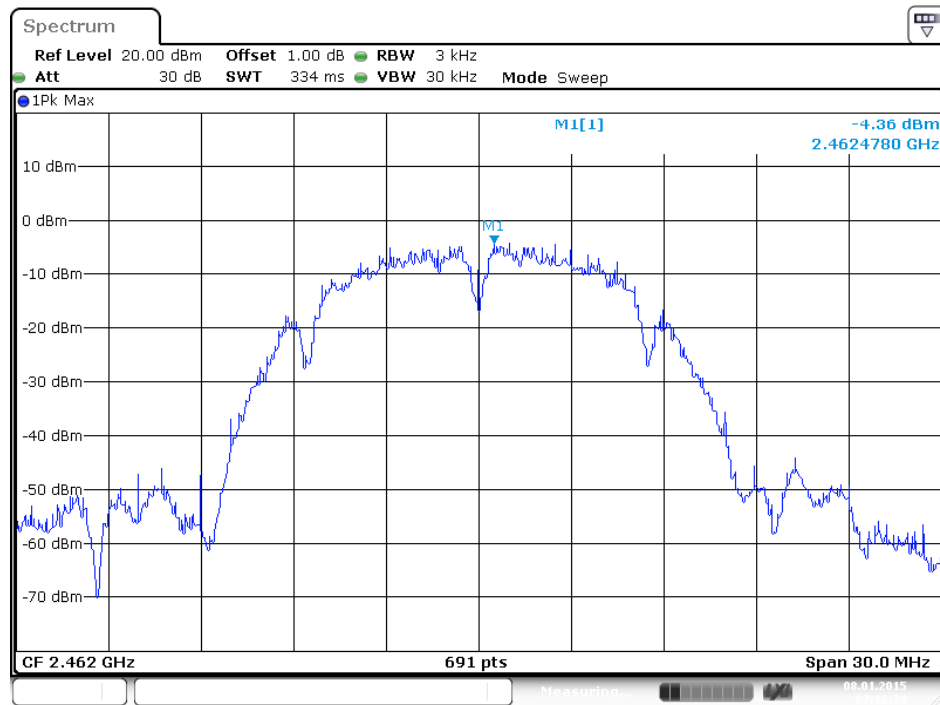


Date: 8 JAN 2015 02:12:34


<For Beamforming Mode>

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX)

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

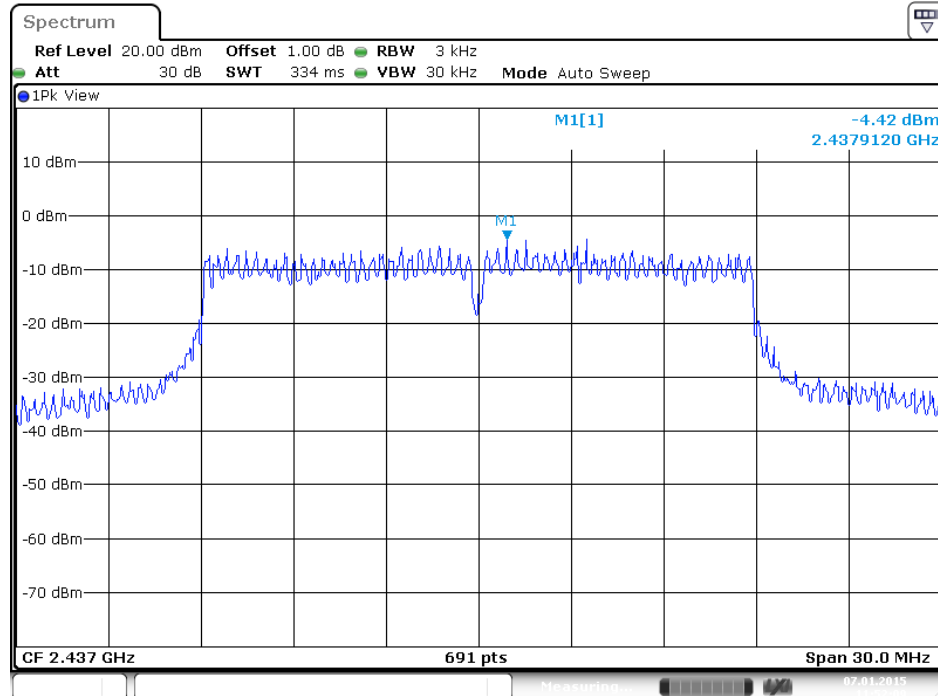


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

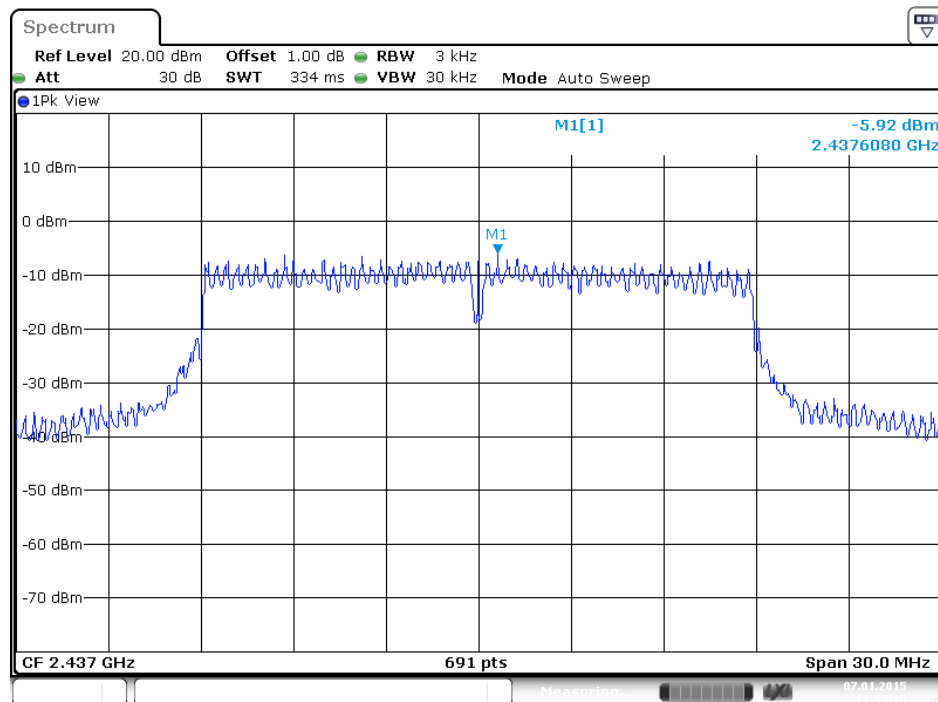




### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

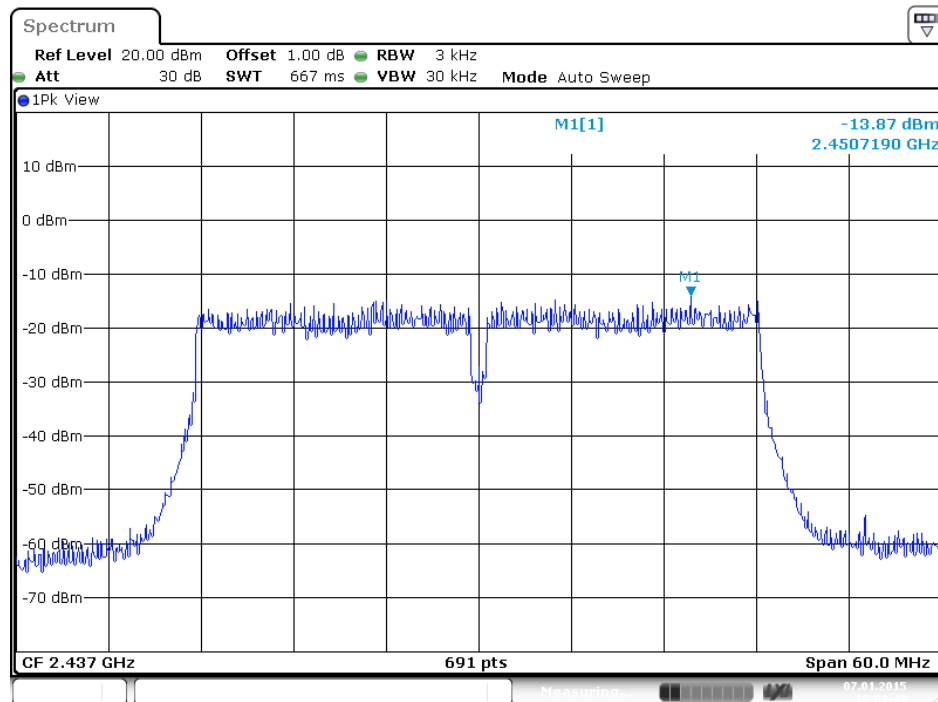


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

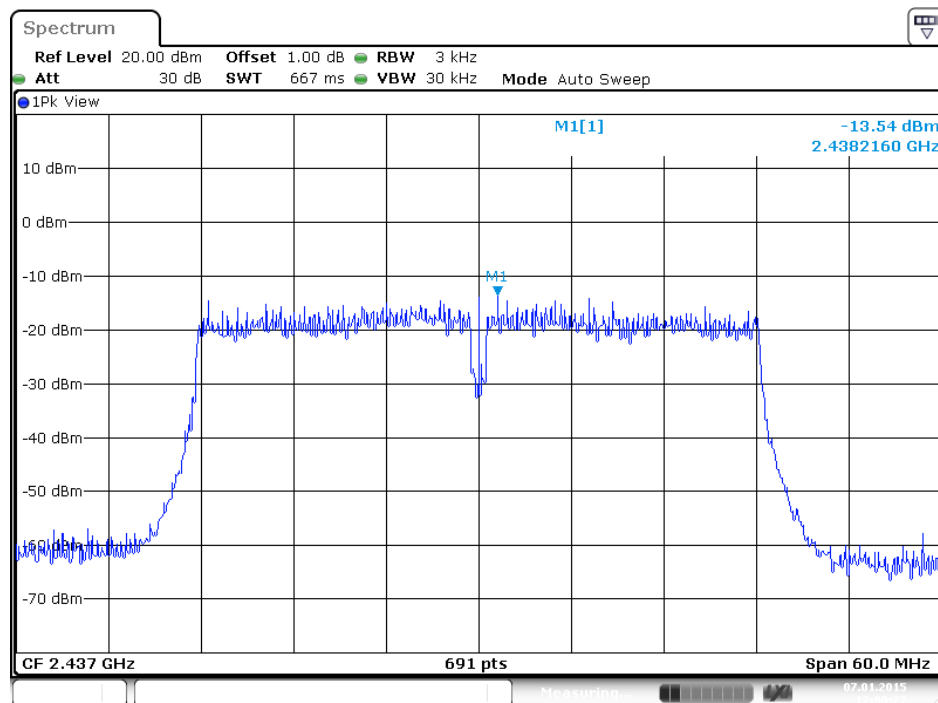


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

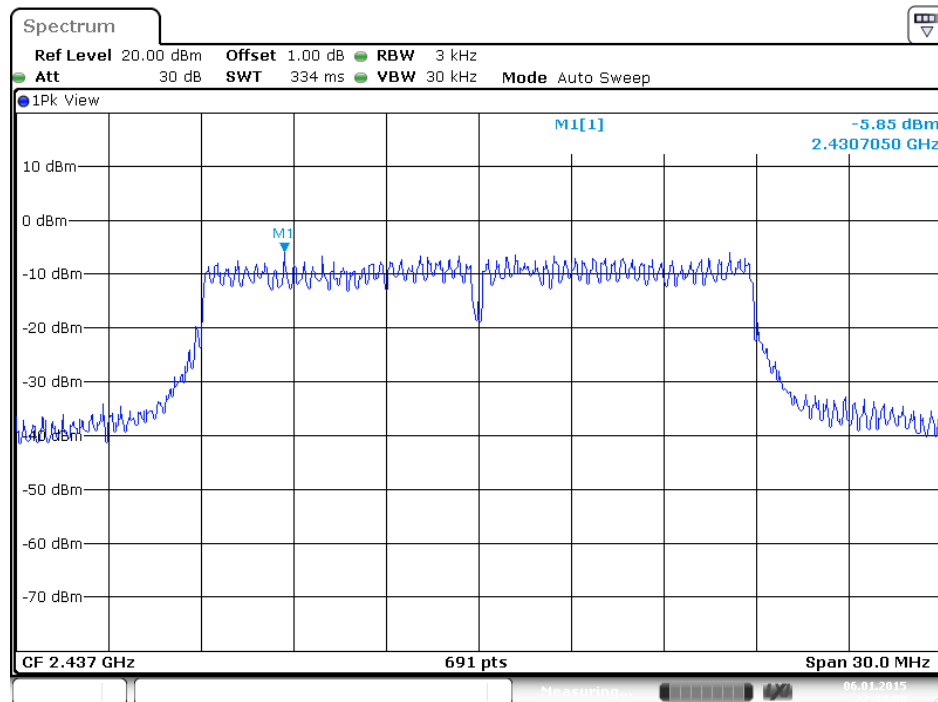


Date: 6 JAN 2015 22:44:01

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

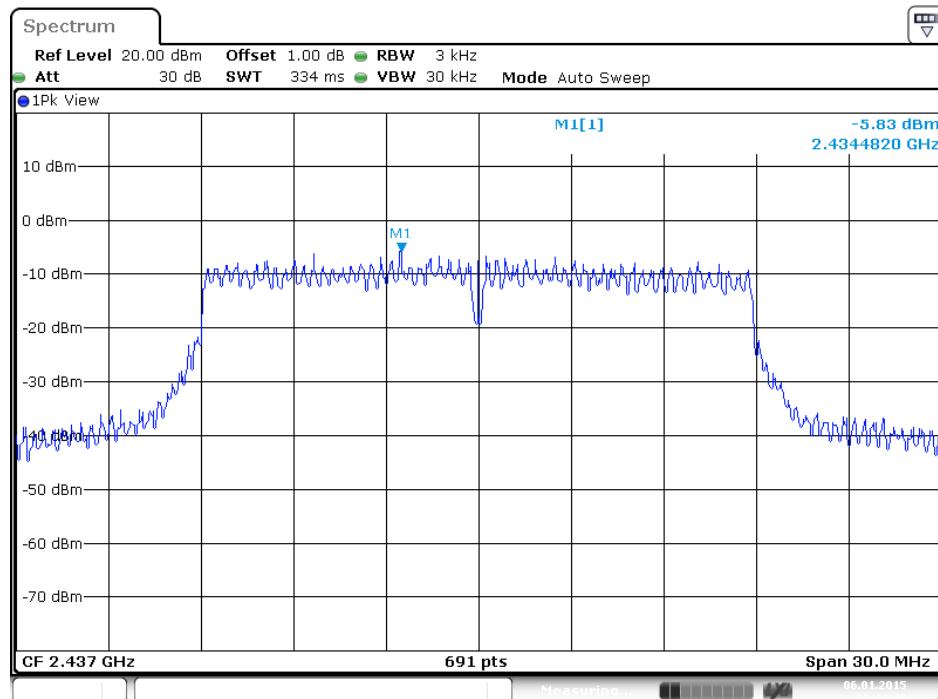


Date: 6 JAN 2015 22:44:49

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

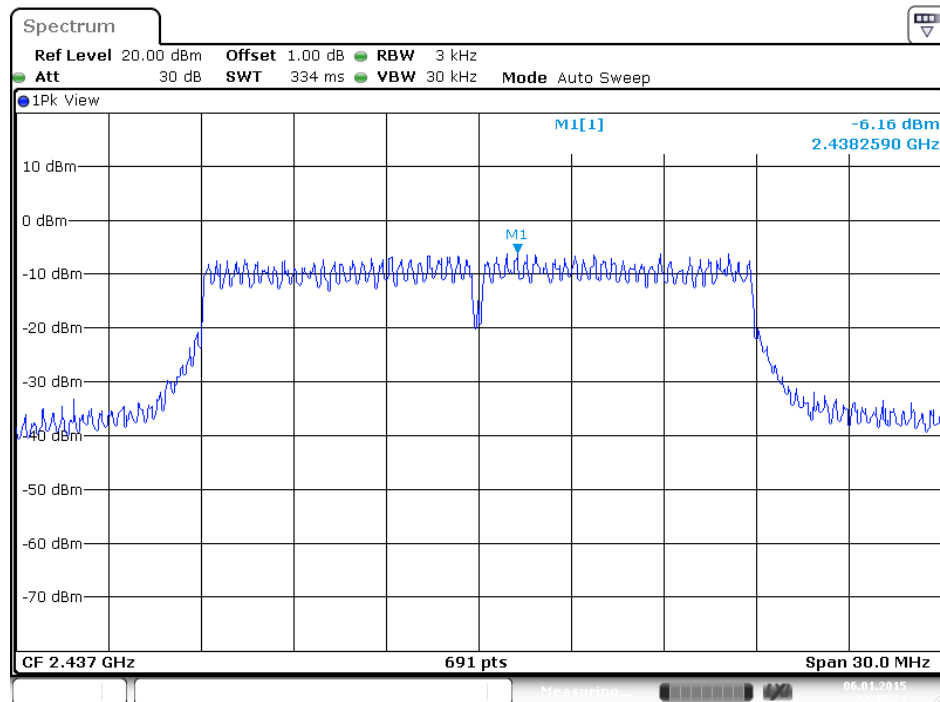


Date: 6 JAN 2015 22:45:25

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 1

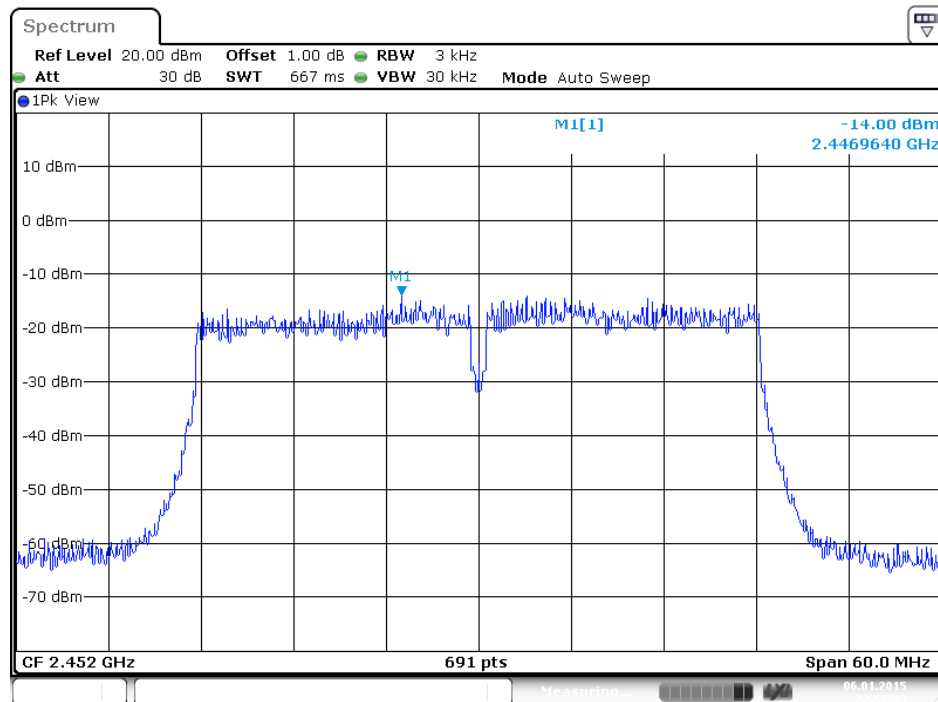


Date: 6 JAN 2015 22:57:43

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 2

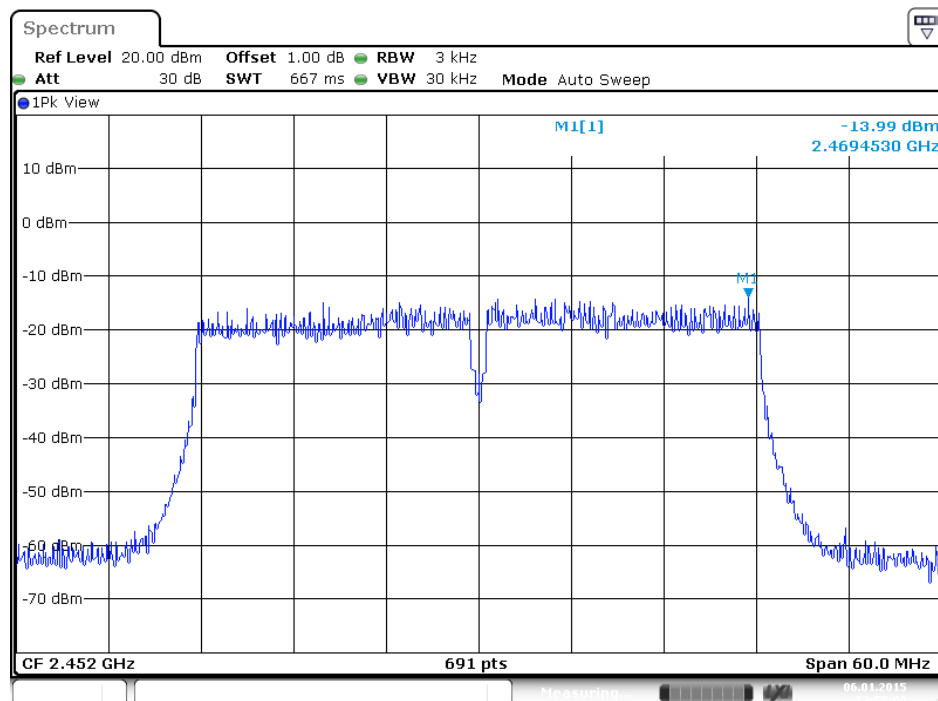

Date: 6 JAN 2015 22:58:09


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 3

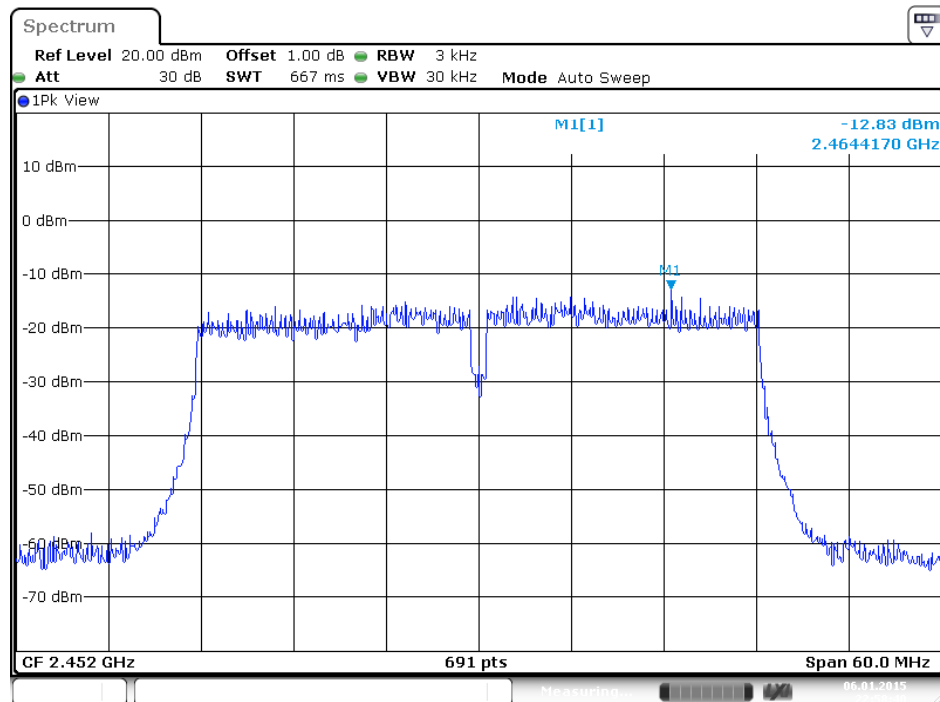

Date: 6 JAN 2015 22:58:40


## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

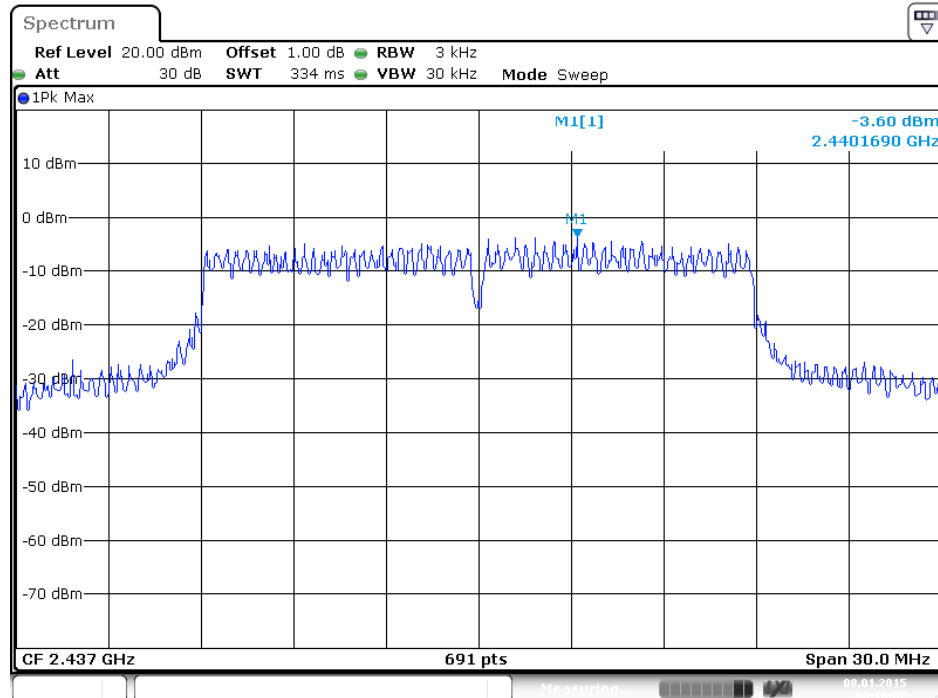


Date: 8 JAN 2015 00:16:07

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

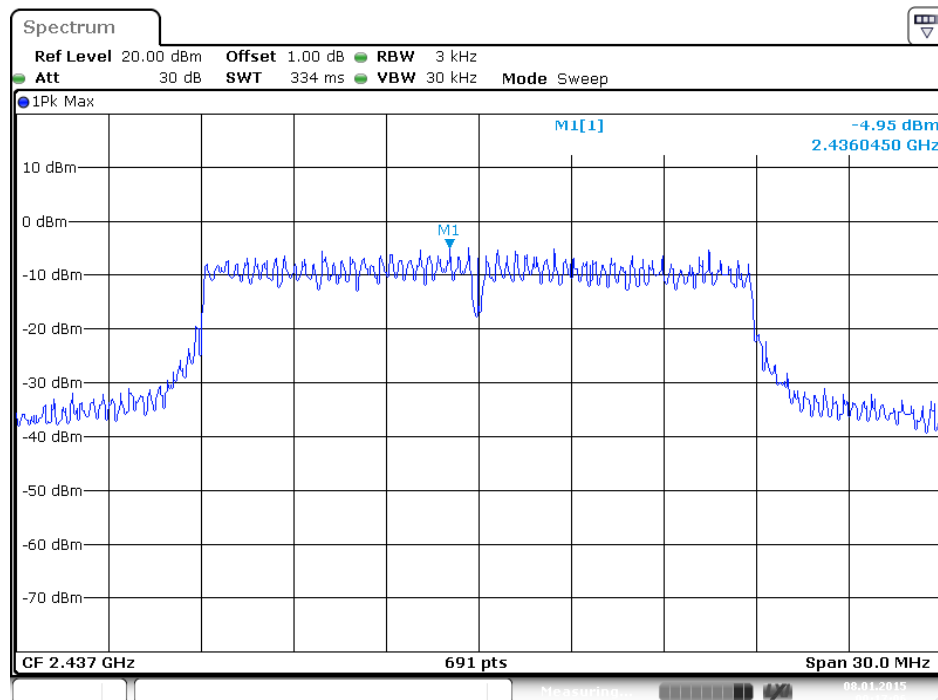


Date: 8 JAN 2015 00:17:06

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

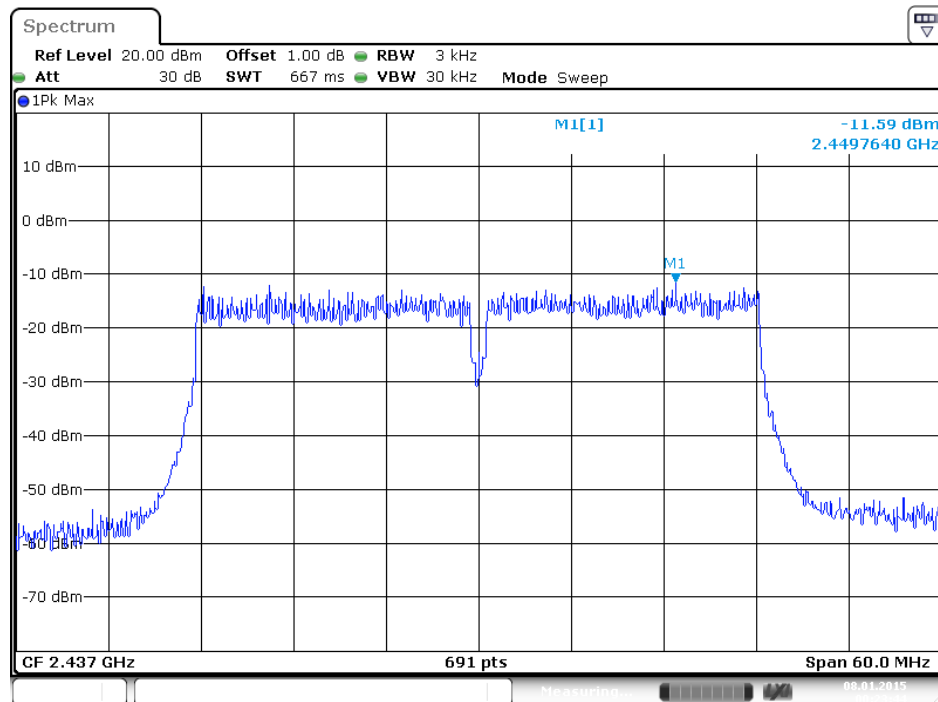

Date: 8 JAN 2015 00:23:45


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

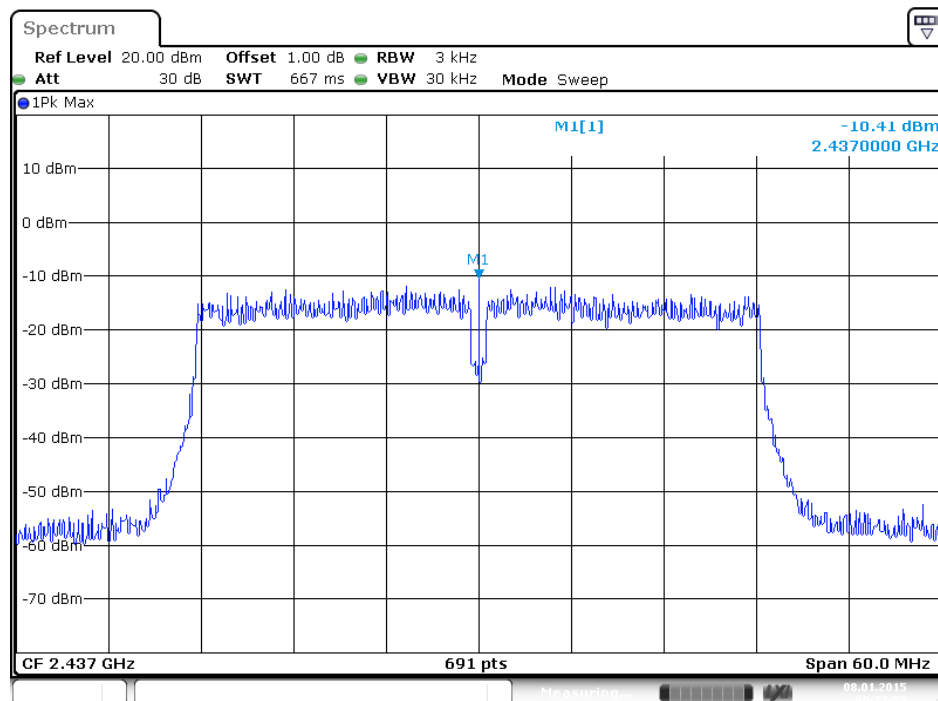


Date: 8 JAN 2015 00:22:58

## Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

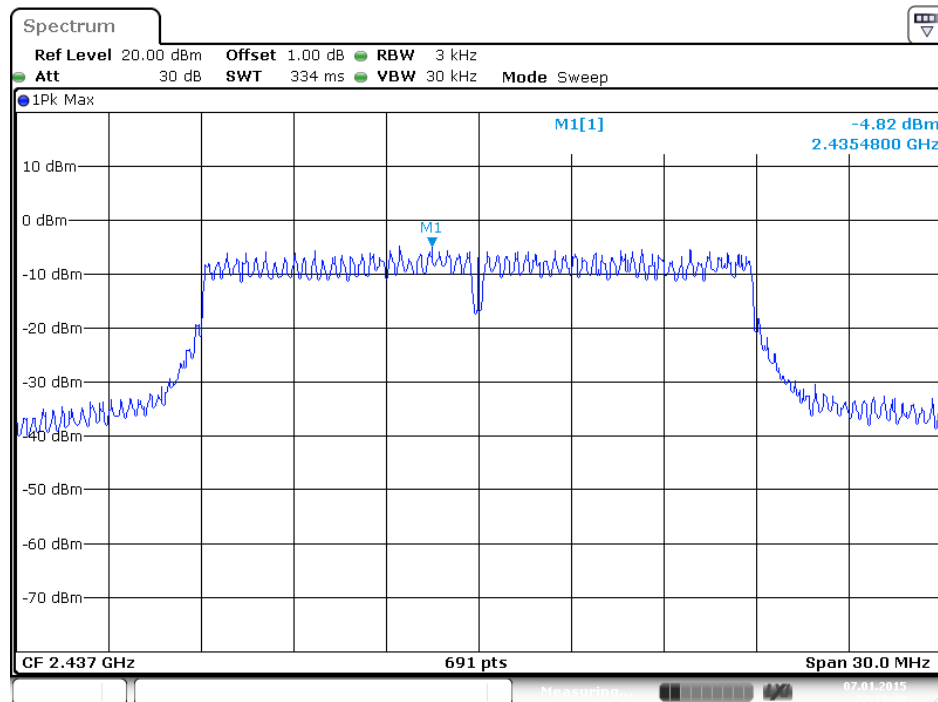


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

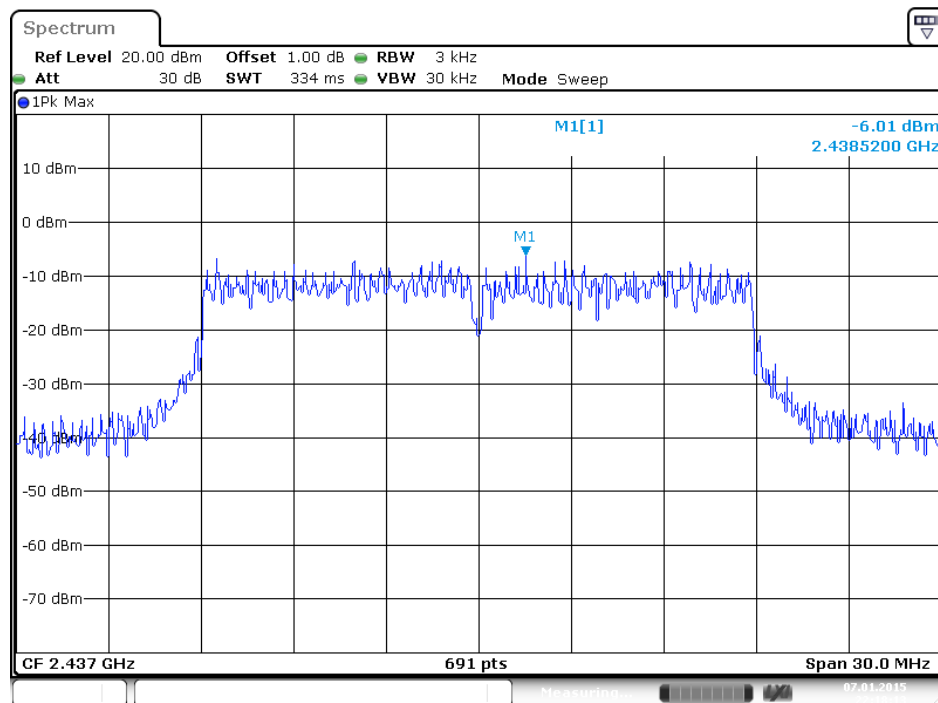




### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

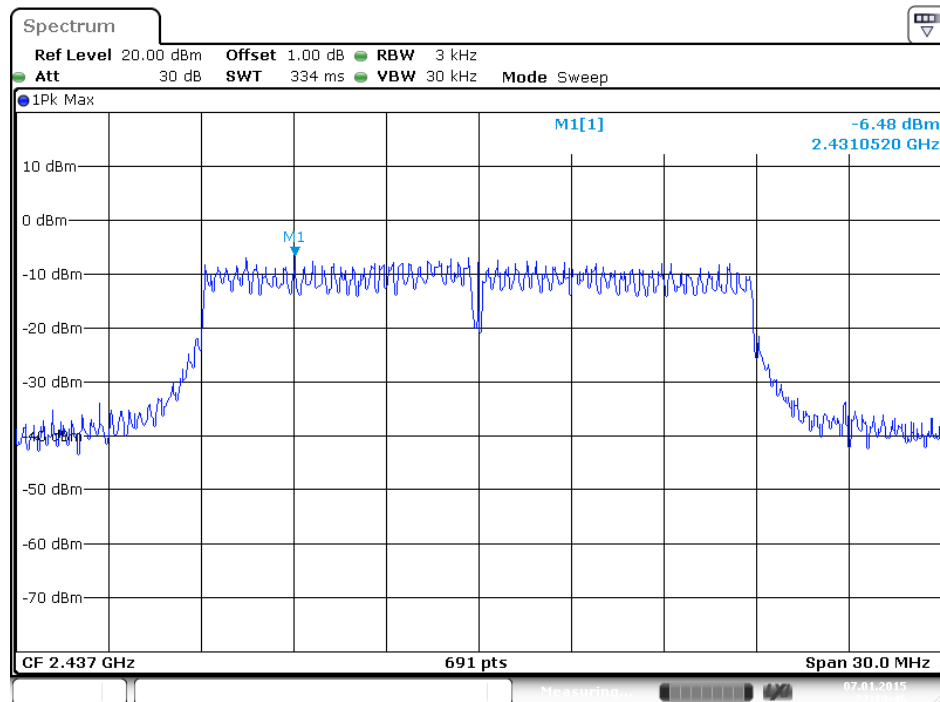


Date: 7.JAN.2015 22:18:46

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1

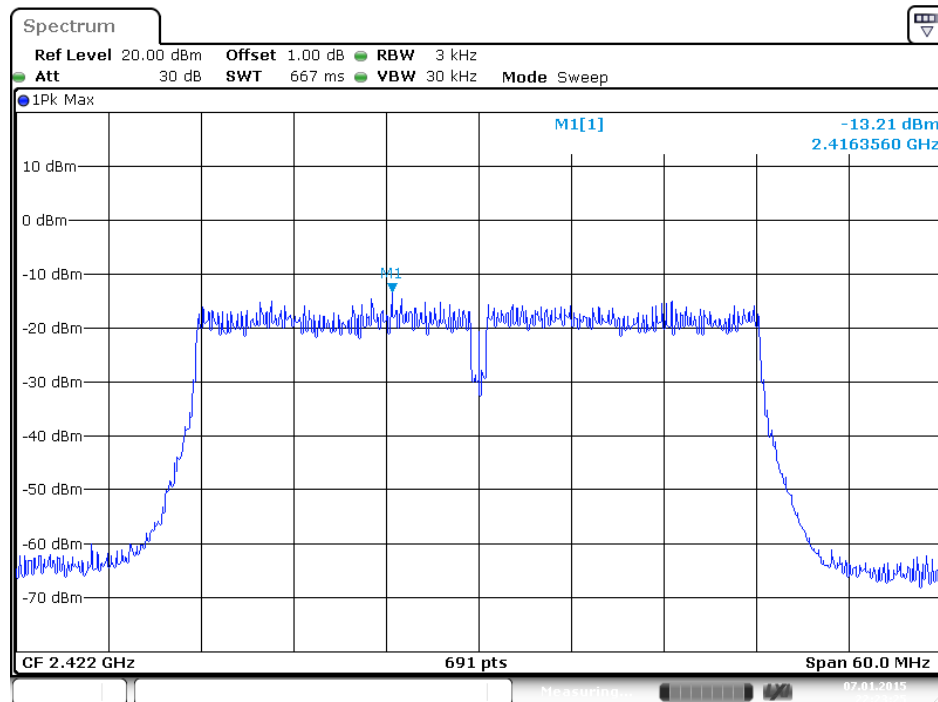


Date: 7.JAN 2015 22:23:25

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 2

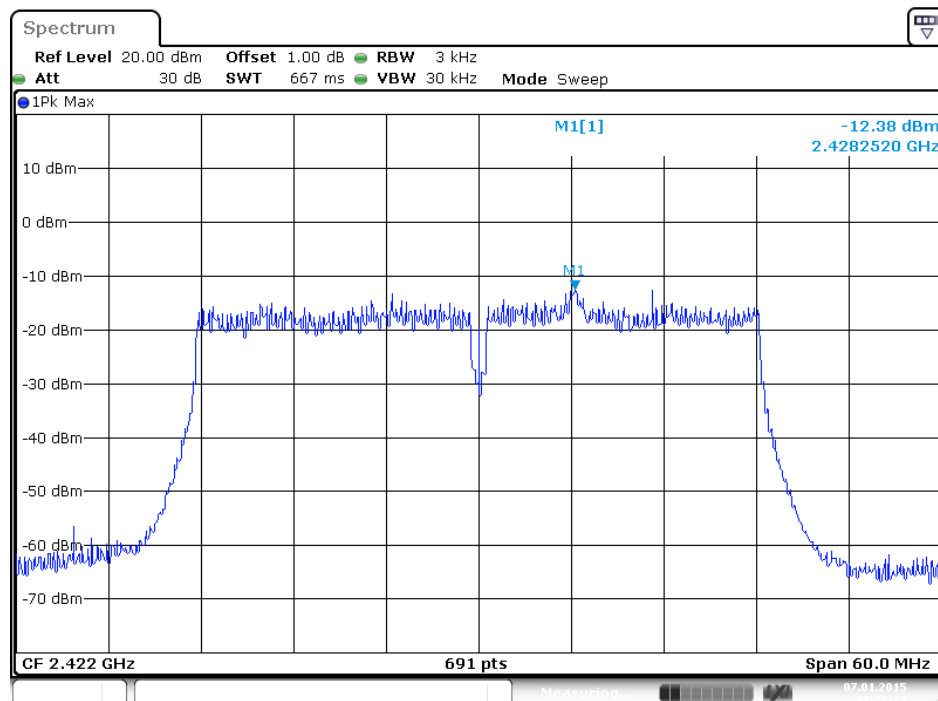

Date: 7.JAN 2015 22:27:12


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 3

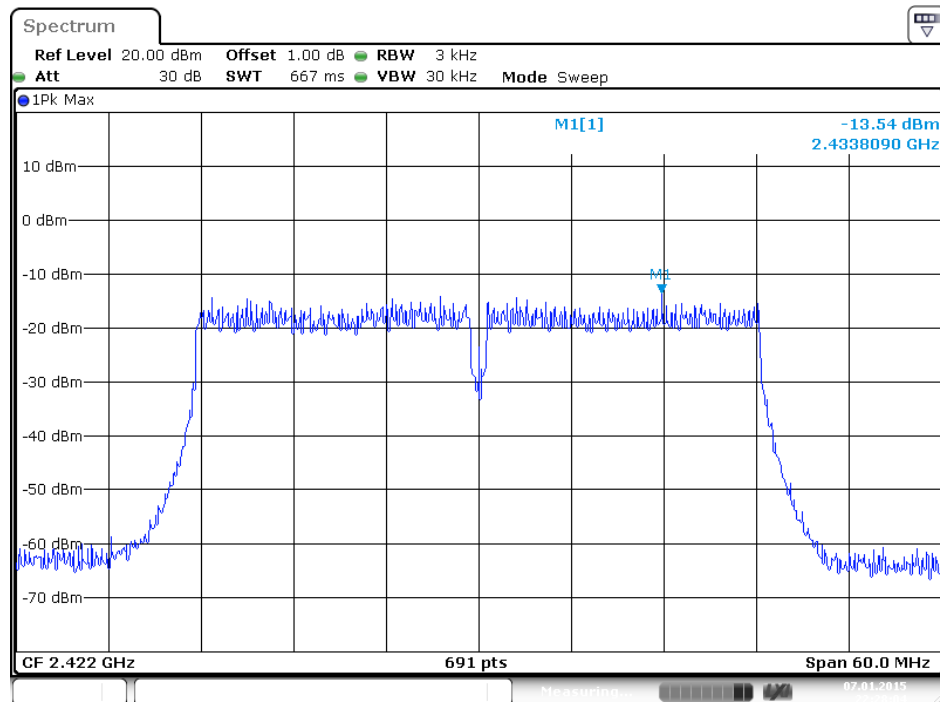


Date: 7.JAN.2015 22:28:04

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

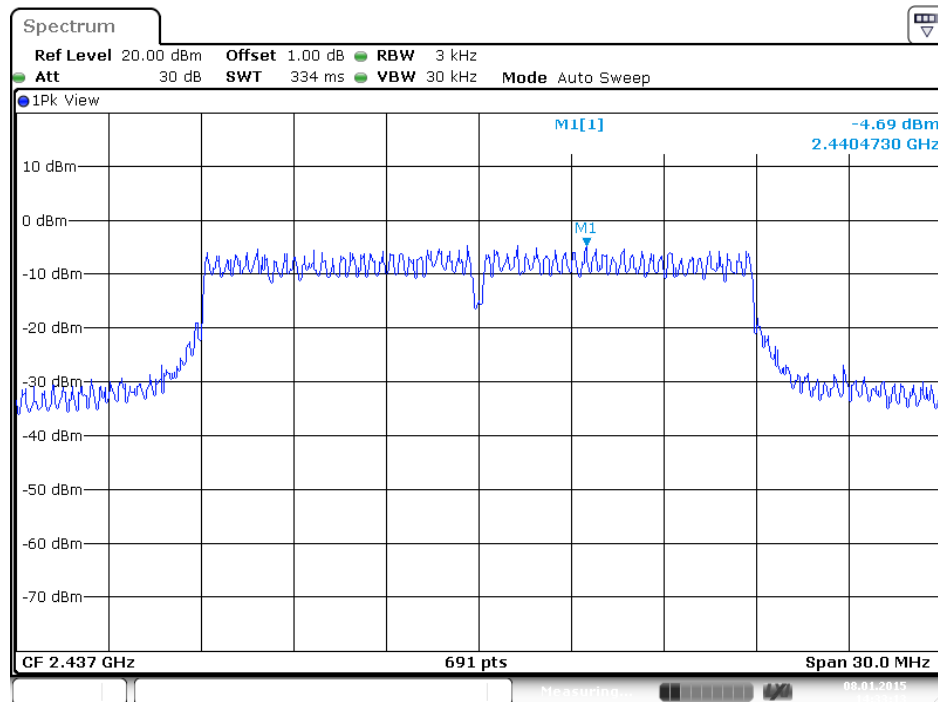

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

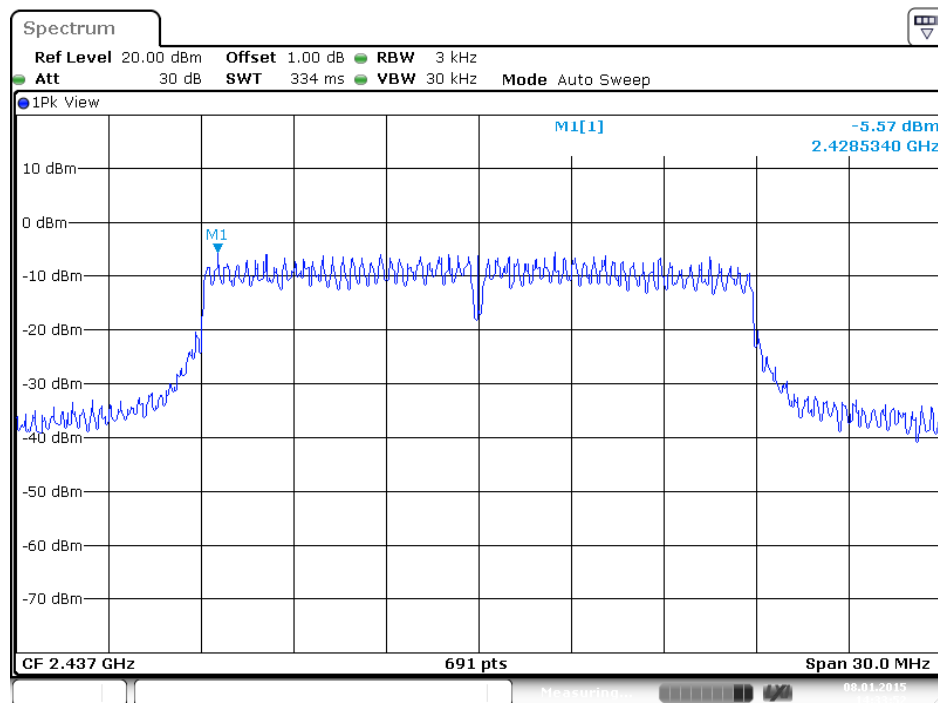


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

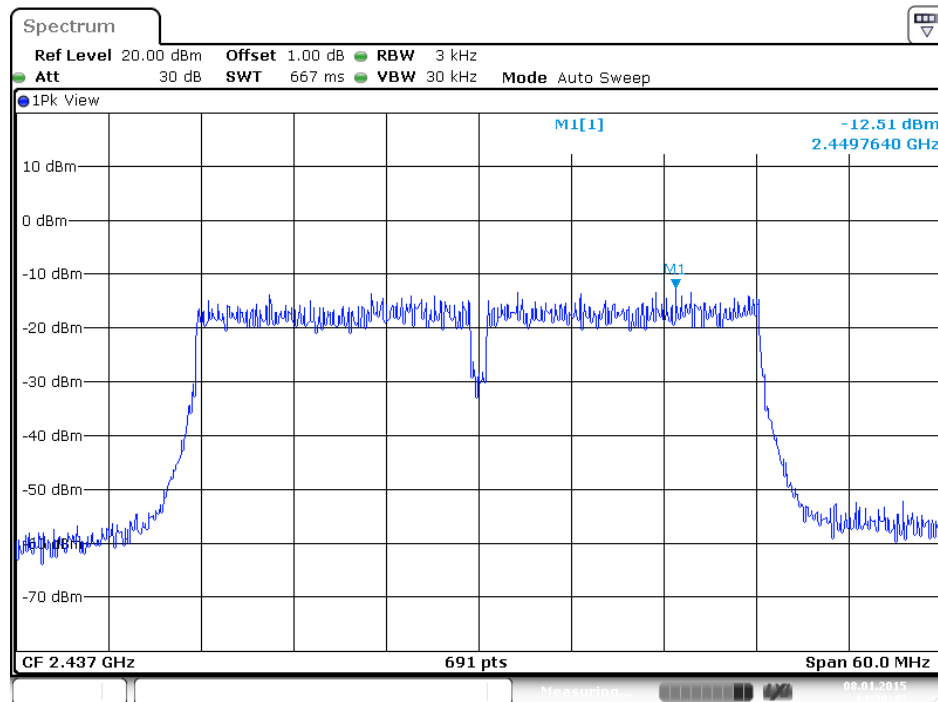

Date: 8 JAN 2015 14:36:45


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

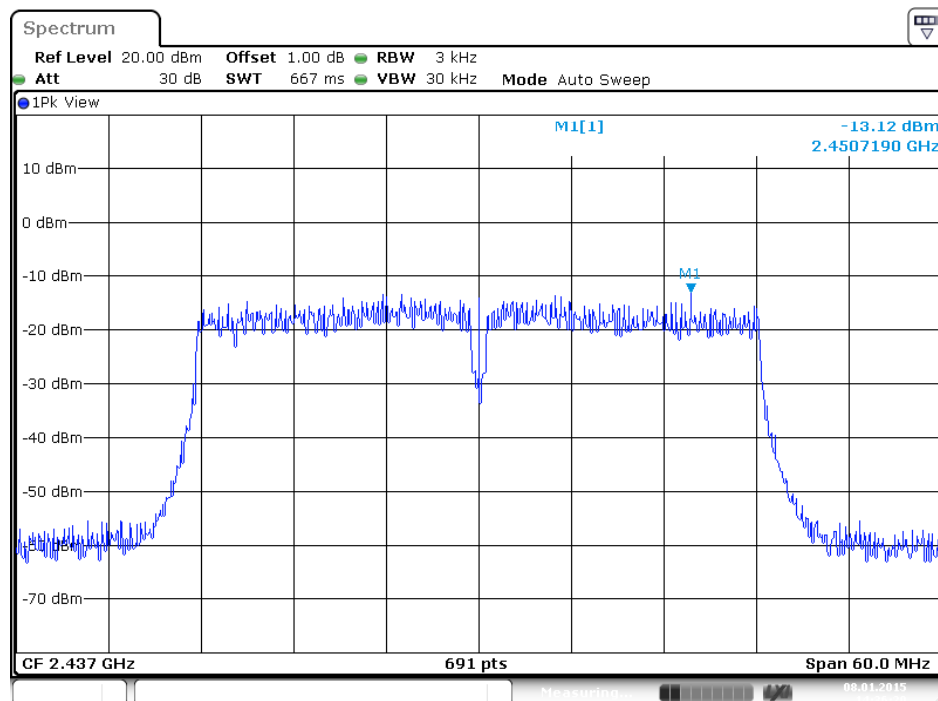

Date: 8 JAN 2015 14:36:20


Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

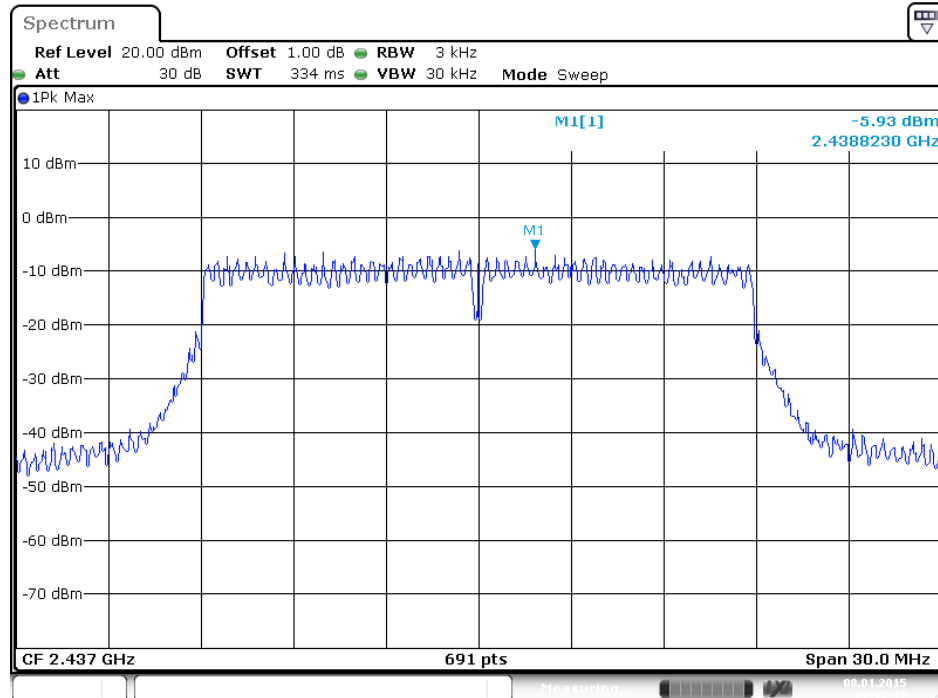


Date: 8 JAN 2015 02:17:37

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

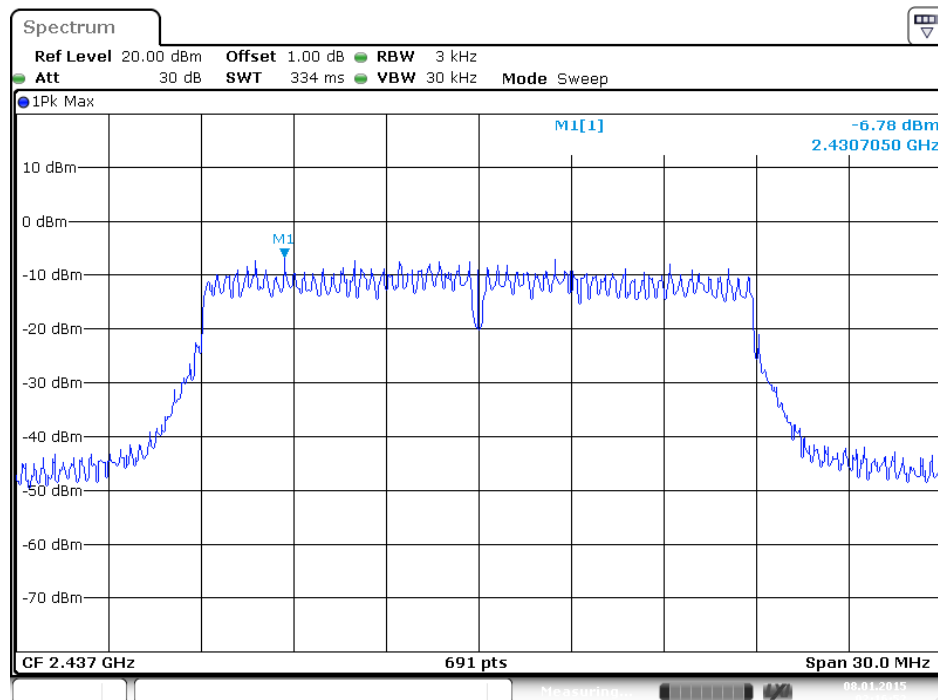


Date: 8 JAN 2015 02:16:52

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

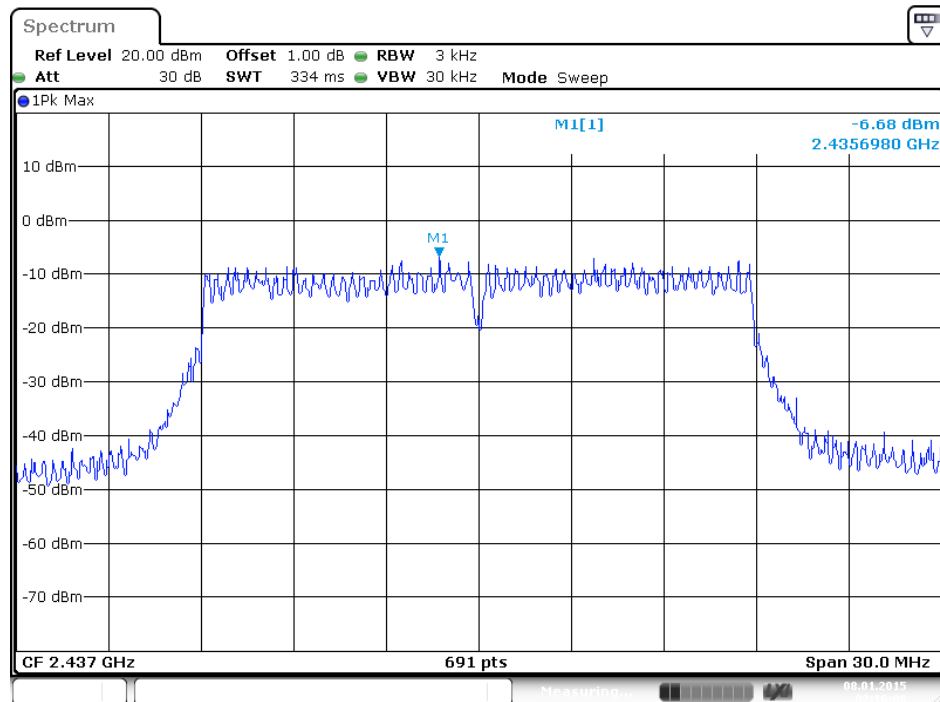


Date: 8 JAN 2015 02:16:08

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

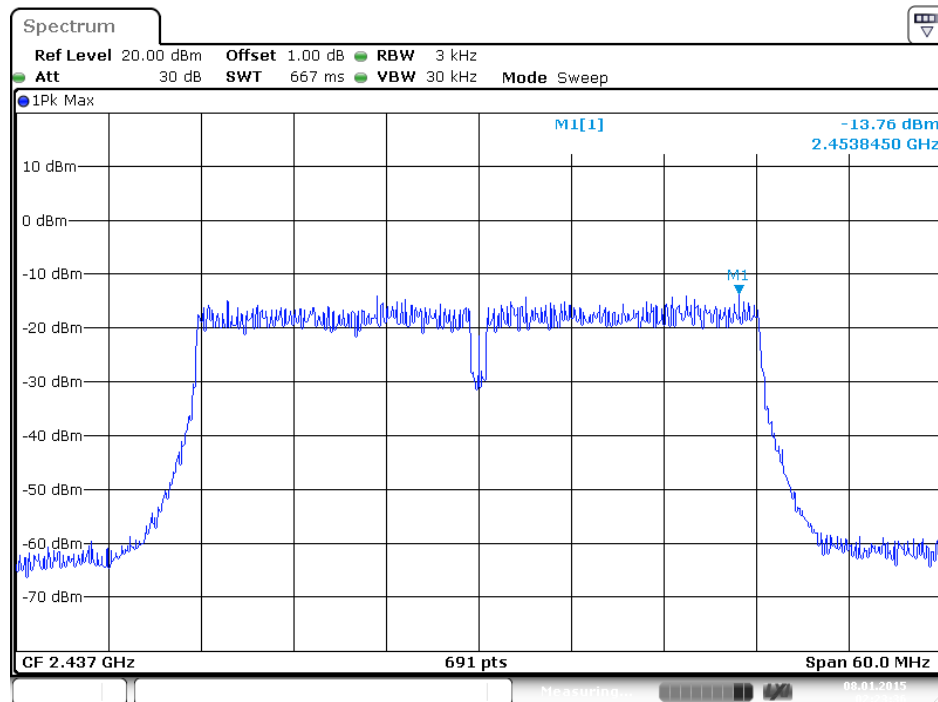

Date: 8 JAN 2015 02:23:36


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

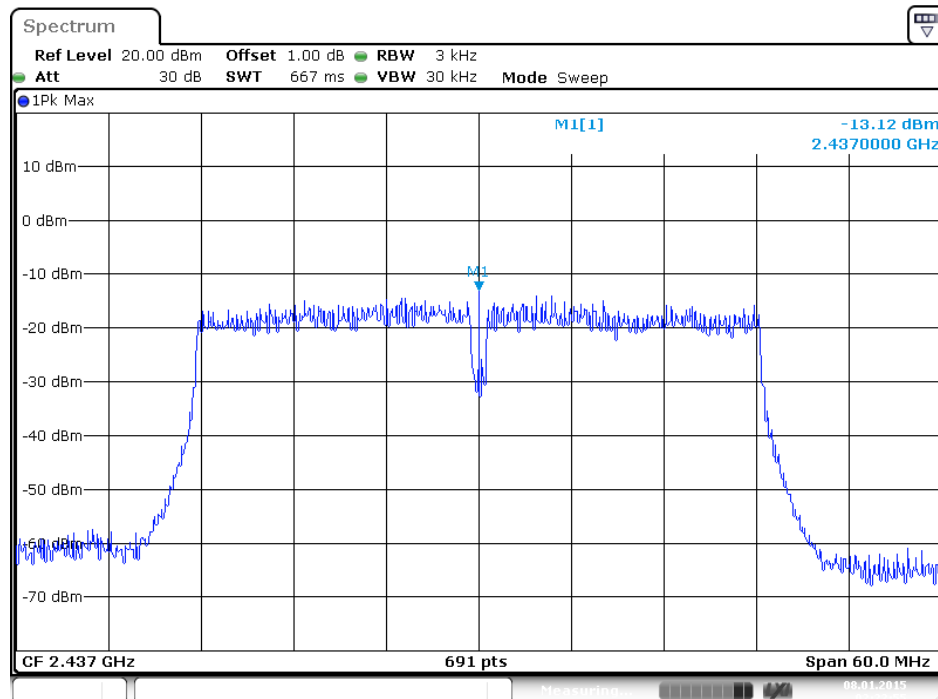

Date: 8 JAN 2015 02:22:55



### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

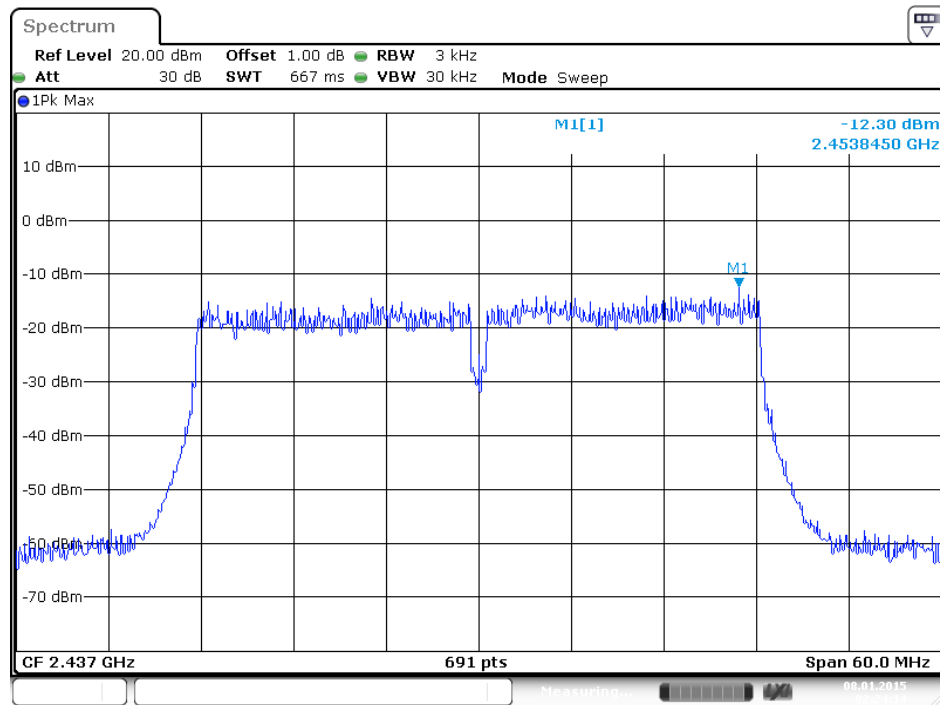

Date: 8 JAN 2015 02:24:15

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| 6dB Spectrum Bandwidth |                                |
|------------------------|--------------------------------|
| Spectrum Parameters    | Setting                        |
| Attenuation            | Auto                           |
| Span Frequency         | > 6dB Bandwidth                |
| RBW                    | 100kHz                         |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |
| Sweep Time             | Auto                           |
| 99% Occupied Bandwidth |                                |
| Spectrum Parameters    | Setting                        |
| Span                   | 1.5 times to 5.0 times the OBW |
| RBW                    | 1 % to 5 % of the OBW          |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |

##### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth => 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Non-Beamforming Mode>

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |          |     |

For Chain 2

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b                       | 2412 MHz  | 9.04                | 11.98                        | 500              | Complies    |
|                               | 2437 MHz  | 9.04                | 12.50                        | 500              | Complies    |
|                               | 2462 MHz  | 8.57                | 12.06                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.56               | 17.97                        | 500              | Complies    |
|                               | 2437 MHz  | 17.27               | 18.58                        | 500              | Complies    |
|                               | 2462 MHz  | 17.56               | 17.97                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.71               | 36.17                        | 500              | Complies    |
|                               | 2437 MHz  | 35.71               | 36.17                        | 500              | Complies    |
|                               | 2452 MHz  | 36.40               | 36.32                        | 500              | Complies    |

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |          |     |

For Chain 1 + Chain 2

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.98                | 12.06                        | 500              | Complies    |
|         | 2437 MHz  | 8.98                | 12.24                        | 500              | Complies    |
|         | 2462 MHz  | 9.04                | 11.89                        | 500              | Complies    |

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |          |     |

#### For Chain 1 + Chain 2 + Chain 3

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.98                | 11.80                        | 500              | Complies    |
|         | 2437 MHz  | 8.57                | 12.24                        | 500              | Complies    |
|         | 2462 MHz  | 8.52                | 11.80                        | 500              | Complies    |

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |          |     |

#### For Chain 2

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b                       | 2412 MHz  | 8.98                | 12.07                        | 500              | Complies    |
|                               | 2437 MHz  | 9.04                | 12.32                        | 500              | Complies    |
|                               | 2462 MHz  | 9.04                | 11.98                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.56               | 17.93                        | 500              | Complies    |
|                               | 2437 MHz  | 17.56               | 19.45                        | 500              | Complies    |
|                               | 2462 MHz  | 17.56               | 17.88                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.71               | 36.32                        | 500              | Complies    |
|                               | 2437 MHz  | 35.82               | 36.17                        | 500              | Complies    |
|                               | 2452 MHz  | 36.40               | 36.32                        | 500              | Complies    |

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |          |     |

#### For Chain 1 + Chain 2

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.52                | 12.06                        | 500              | Complies    |
|         | 2437 MHz  | 8.98                | 12.59                        | 500              | Complies    |
|         | 2462 MHz  | 8.57                | 11.98                        | 500              | Complies    |

|               |                                               |          |     |
|---------------|-----------------------------------------------|----------|-----|
| Temperature   | 22°C                                          | Humidity | 63% |
| Test Engineer | Nick Peng                                     |          |     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |          |     |

#### For Chain 1 + Chain 2 + Chain 3

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.52                | 12.15                        | 500              | Complies    |
|         | 2437 MHz  | 8.52                | 12.41                        | 500              | Complies    |
|         | 2462 MHz  | 8.05                | 11.89                        | 500              | Complies    |

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Lucas Huang                                                                                      |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |          |     |

#### For Chain 1

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b                       | 2412 MHz  | 8.52                | 11.98                        | 500              | Complies    |
|                               | 2437 MHz  | 9.04                | 11.89                        | 500              | Complies    |
|                               | 2462 MHz  | 8.05                | 11.98                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.56               | 17.88                        | 500              | Complies    |
|                               | 2437 MHz  | 17.50               | 19.71                        | 500              | Complies    |
|                               | 2462 MHz  | 17.56               | 17.97                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 36.29               | 36.90                        | 500              | Complies    |
|                               | 2437 MHz  | 36.40               | 36.90                        | 500              | Complies    |
|                               | 2452 MHz  | 36.17               | 36.75                        | 500              | Complies    |

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |          |     |

#### For Chain 1 + Chain 2

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.57                | 11.72                        | 500              | Complies    |
|         | 2437 MHz  | 8.52                | 11.89                        | 500              | Complies    |
|         | 2462 MHz  | 8.52                | 11.98                        | 500              | Complies    |

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |          |     |

For Chain 1 + Chain 2 + Chain 3

| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b | 2412 MHz  | 8.98                | 11.80                        | 500              | Complies    |
|         | 2437 MHz  | 8.52                | 11.80                        | 500              | Complies    |
|         | 2462 MHz  | 8.98                | 11.72                        | 500              | Complies    |



### <For Beamforming Mode>

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |          |     |

### For Chain 1 + Chain 2

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.27               | 17.88                        | 500              | Complies    |
|                               | 2437 MHz  | 16.28               | 18.06                        | 500              | Complies    |
|                               | 2462 MHz  | 16.69               | 17.80                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.01               | 36.32                        | 500              | Complies    |
|                               | 2437 MHz  | 36.29               | 36.17                        | 500              | Complies    |
|                               | 2452 MHz  | 36.40               | 36.17                        | 500              | Complies    |

|               |                                                |          |     |
|---------------|------------------------------------------------|----------|-----|
| Temperature   | 22°C                                           | Humidity | 63% |
| Test Engineer | Nick Peng                                      |          |     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |          |     |

### For Chain 1 + Chain 2 + Chain 3

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.73               | 17.88                        | 500              | Complies    |
|                               | 2437 MHz  | 17.62               | 17.97                        | 500              | Complies    |
|                               | 2462 MHz  | 17.62               | 17.88                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 36.40               | 36.61                        | 500              | Complies    |
|                               | 2437 MHz  | 36.40               | 36.61                        | 500              | Complies    |
|                               | 2452 MHz  | 36.40               | 36.90                        | 500              | Complies    |

|                      |                                               |                 |     |
|----------------------|-----------------------------------------------|-----------------|-----|
| <b>Temperature</b>   | 22°C                                          | <b>Humidity</b> | 63% |
| <b>Test Engineer</b> | Nick Peng                                     |                 |     |
| <b>Test Mode</b>     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                 |     |

#### For Chain 1 + Chain 2

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.33               | 17.88                        | 500              | Complies    |
|                               | 2437 MHz  | 16.63               | 18.23                        | 500              | Complies    |
|                               | 2462 MHz  | 17.56               | 17.80                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.01               | 36.46                        | 500              | Complies    |
|                               | 2437 MHz  | 35.47               | 36.61                        | 500              | Complies    |
|                               | 2452 MHz  | 35.94               | 36.61                        | 500              | Complies    |

|                      |                                               |                 |     |
|----------------------|-----------------------------------------------|-----------------|-----|
| <b>Temperature</b>   | 22°C                                          | <b>Humidity</b> | 63% |
| <b>Test Engineer</b> | Nick Peng                                     |                 |     |
| <b>Test Mode</b>     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                 |     |

#### For Chain 1 + Chain 2 + Chain 3

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.27               | 17.71                        | 500              | Complies    |
|                               | 2437 MHz  | 13.56               | 18.14                        | 500              | Complies    |
|                               | 2462 MHz  | 16.92               | 17.62                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 33.73               | 35.89                        | 500              | Complies    |
|                               | 2437 MHz  | 29.10               | 36.17                        | 500              | Complies    |
|                               | 2452 MHz  | 33.04               | 36.46                        | 500              | Complies    |

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Nick Peng                                                                                        |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |          |     |

#### For Chain 1 + Chain 2

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 17.04               | 17.88                        | 500              | Complies    |
|                               | 2437 MHz  | 16.63               | 18.23                        | 500              | Complies    |
|                               | 2462 MHz  | 16.92               | 17.80                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.01               | 36.61                        | 500              | Complies    |
|                               | 2437 MHz  | 35.71               | 36.75                        | 500              | Complies    |
|                               | 2452 MHz  | 36.05               | 36.75                        | 500              | Complies    |

|               |                                                                                                  |          |     |
|---------------|--------------------------------------------------------------------------------------------------|----------|-----|
| Temperature   | 22°C                                                                                             | Humidity | 63% |
| Test Engineer | Lucas Huang                                                                                      |          |     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |          |     |

#### For Chain 1 + Chain 2 + Chain 3

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 16.63               | 17.62                        | 500              | Complies    |
|                               | 2437 MHz  | 15.07               | 17.80                        | 500              | Complies    |
|                               | 2462 MHz  | 16.28               | 17.62                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 33.73               | 36.32                        | 500              | Complies    |
|                               | 2437 MHz  | 33.73               | 36.17                        | 500              | Complies    |
|                               | 2452 MHz  | 32.58               | 36.32                        | 500              | Complies    |


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

<For Non-Beamforming Mode>


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX)

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain

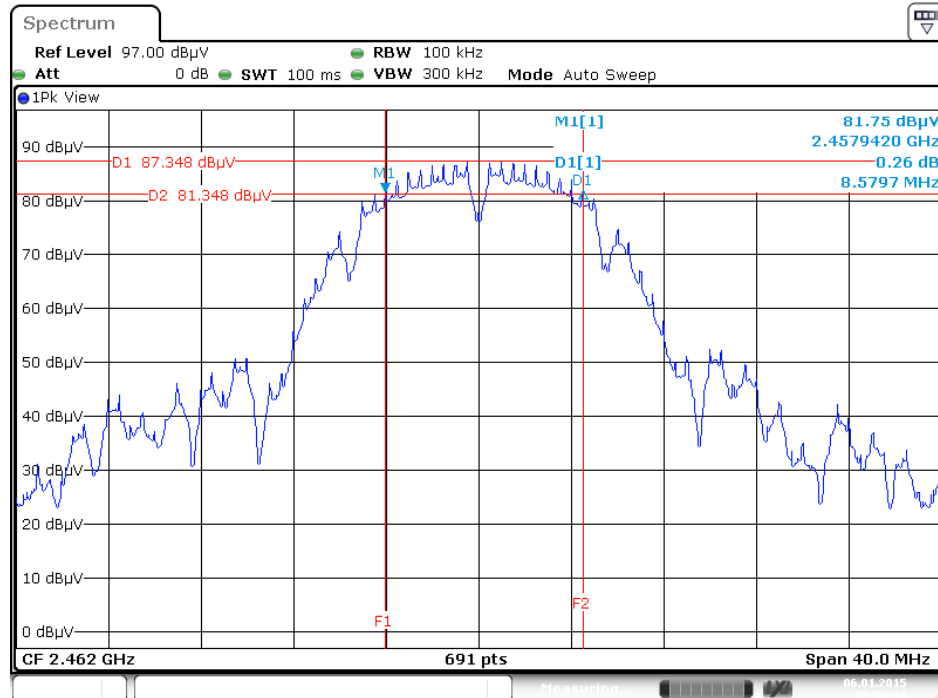


Date: 6 JAN 2015 20:59:14

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

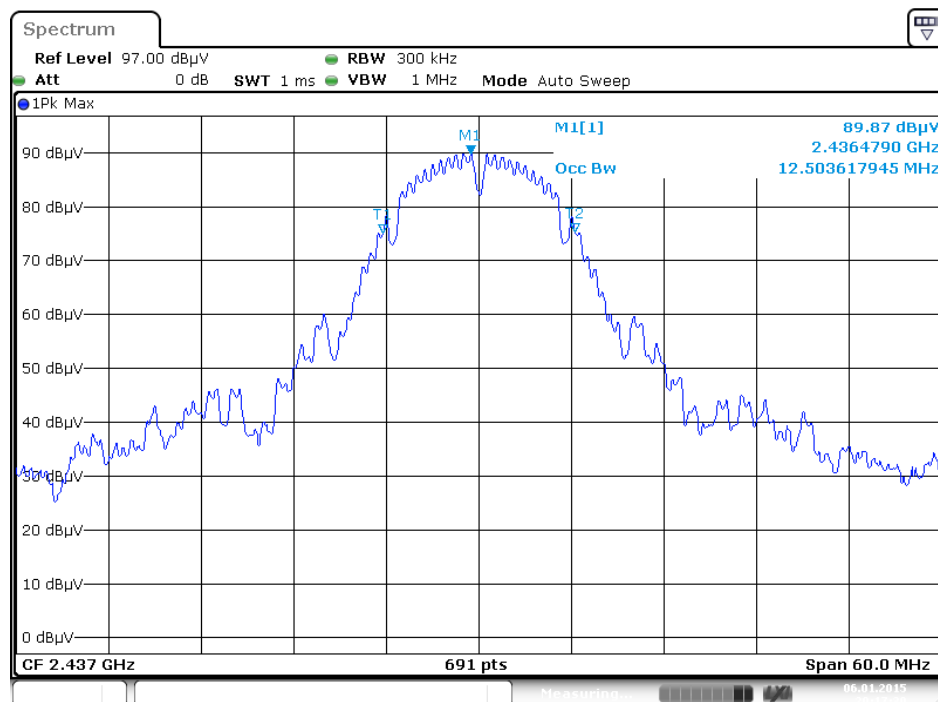


Date: 6 JAN 2015 20:17:30


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

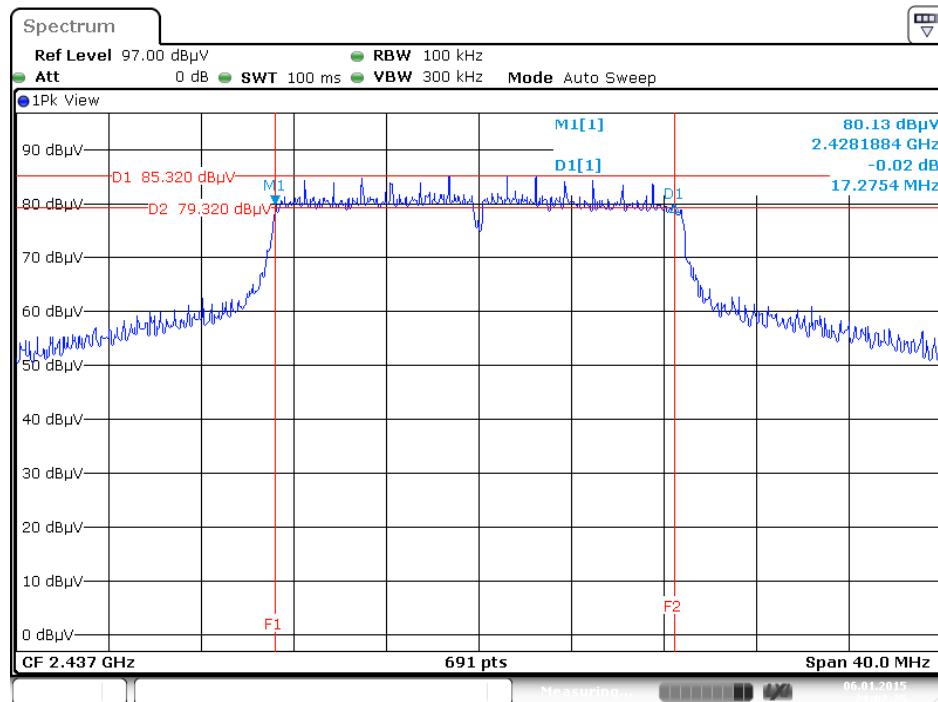

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

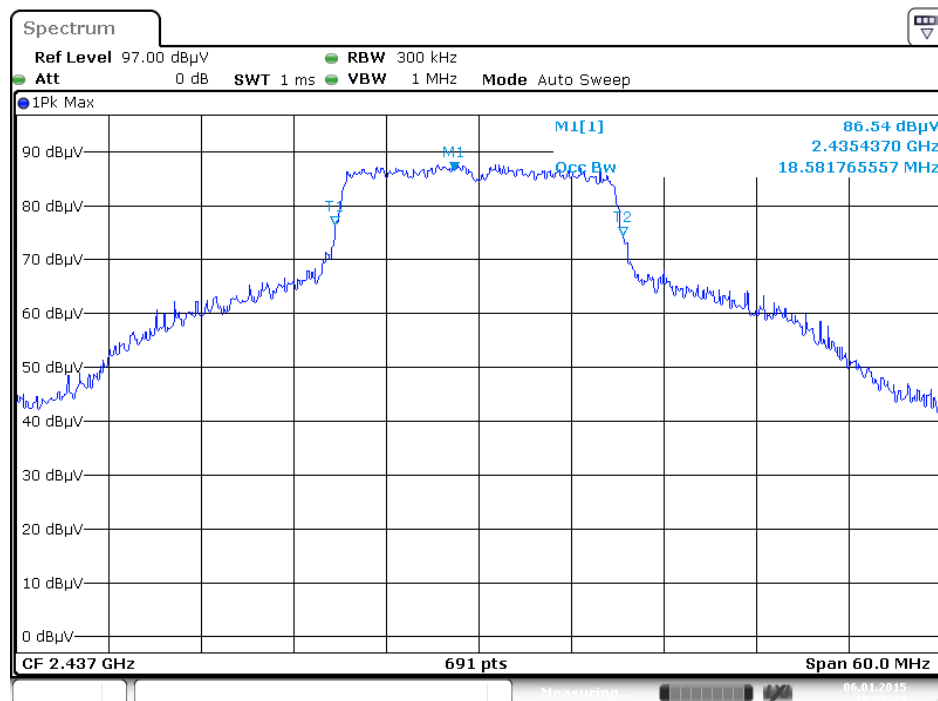


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

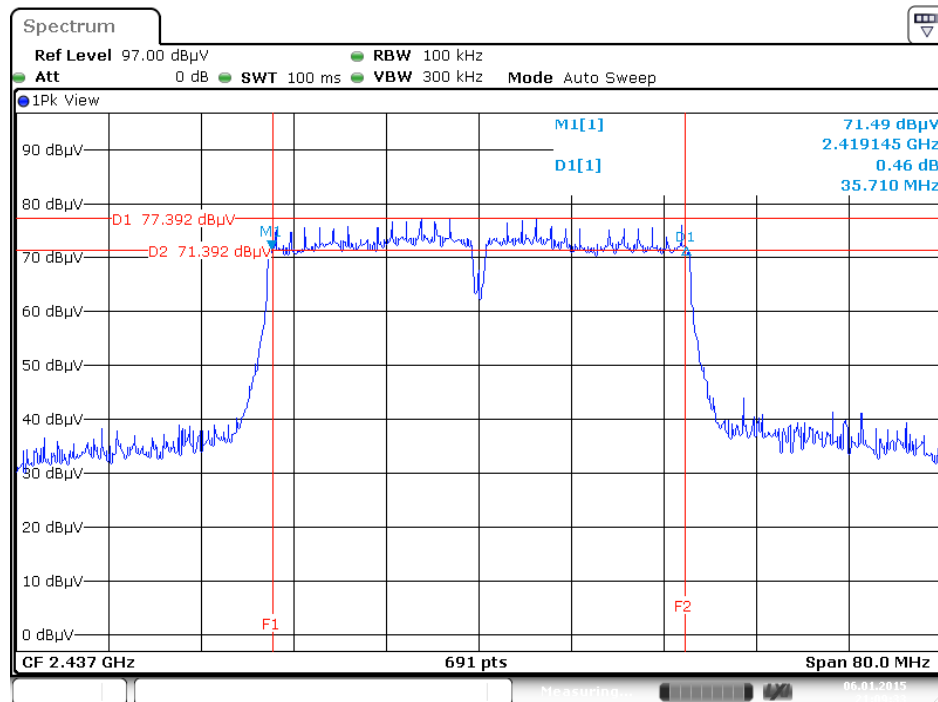

Date: 6 JAN 2015 21:09:33


### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 2

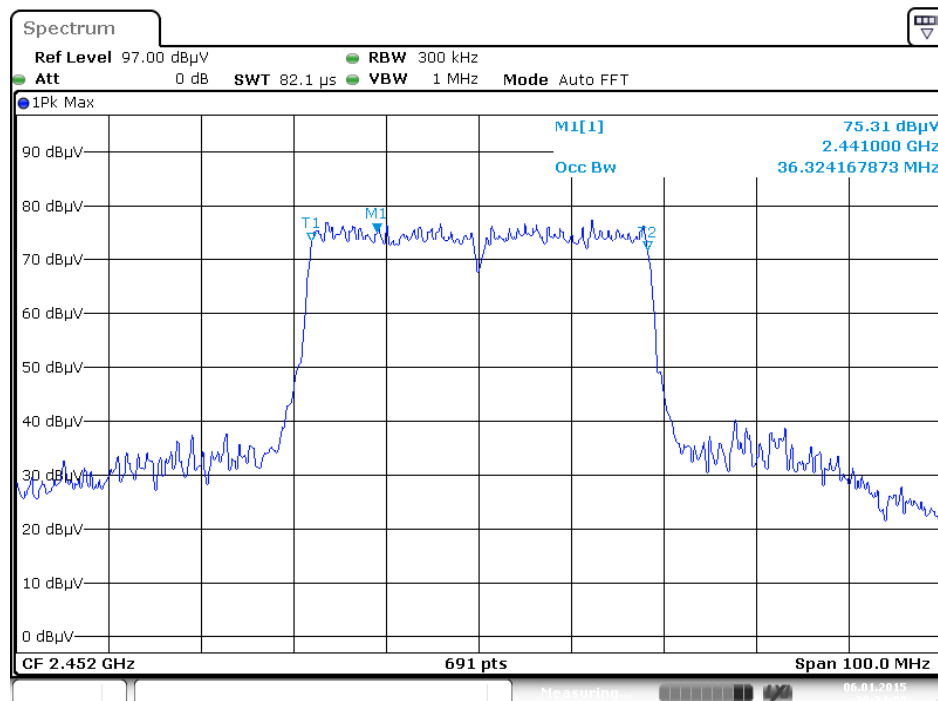

Date: 6 JAN 2015 20:35:00


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX)

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2

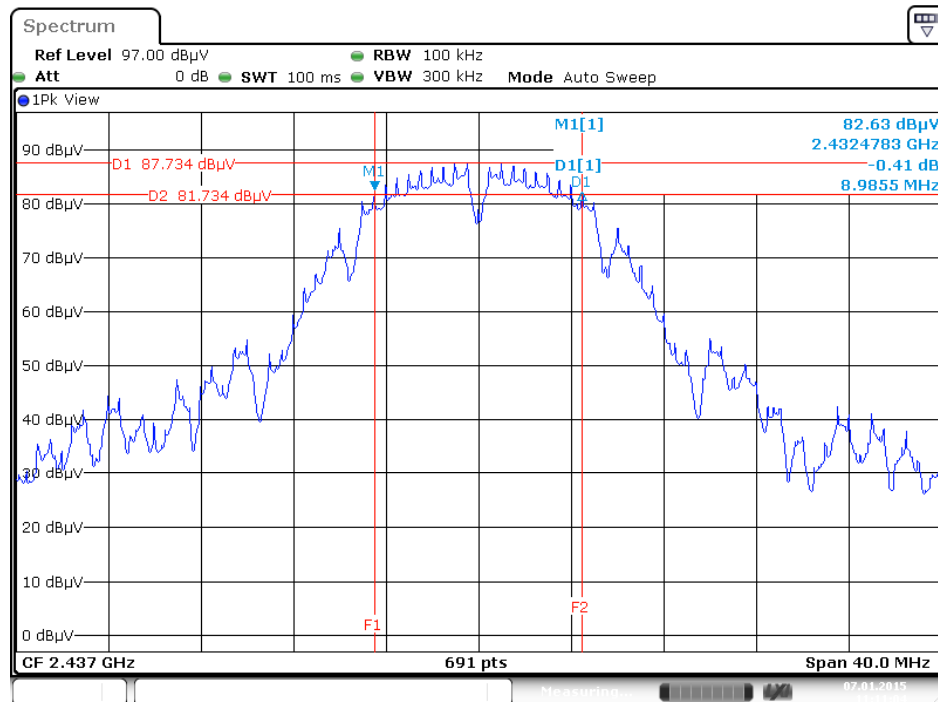

Date: 7.JAN 2015 11:11:04


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2

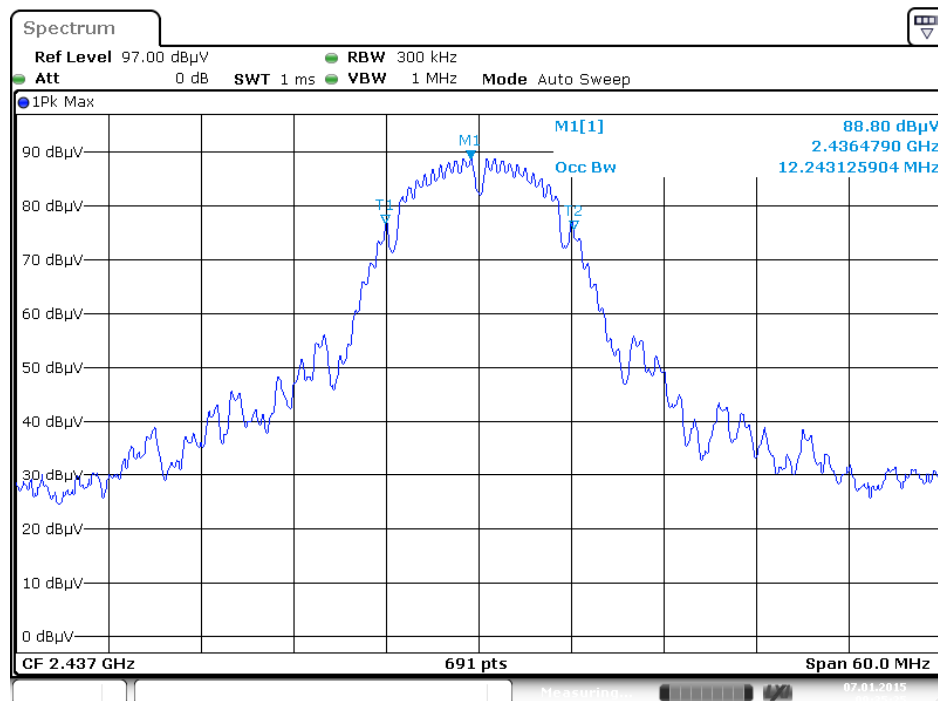


Date: 7.JAN 2015 09:35:25

Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3

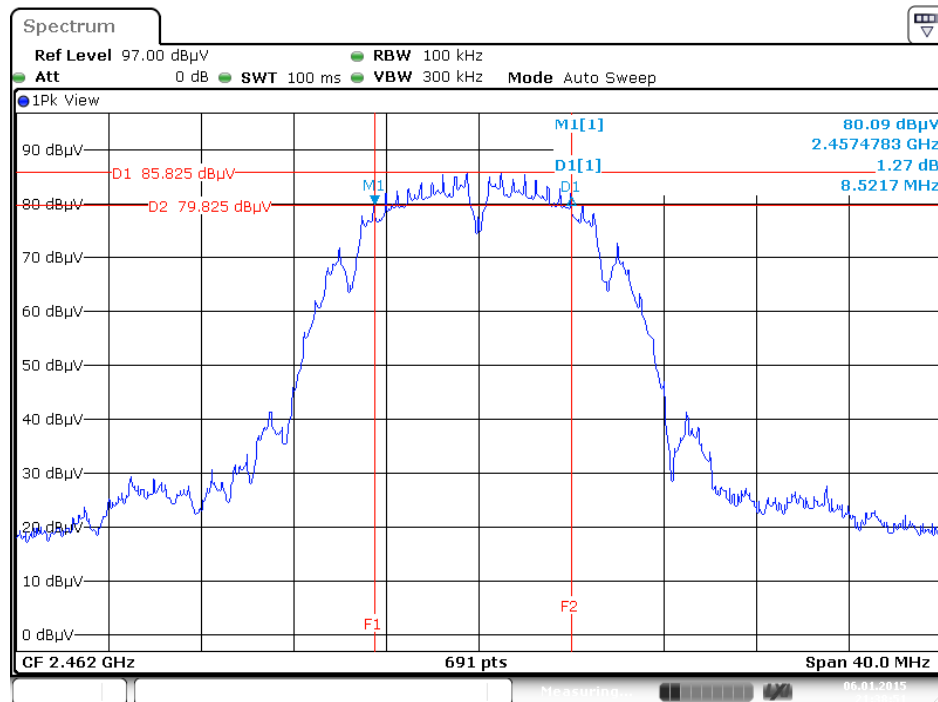


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3

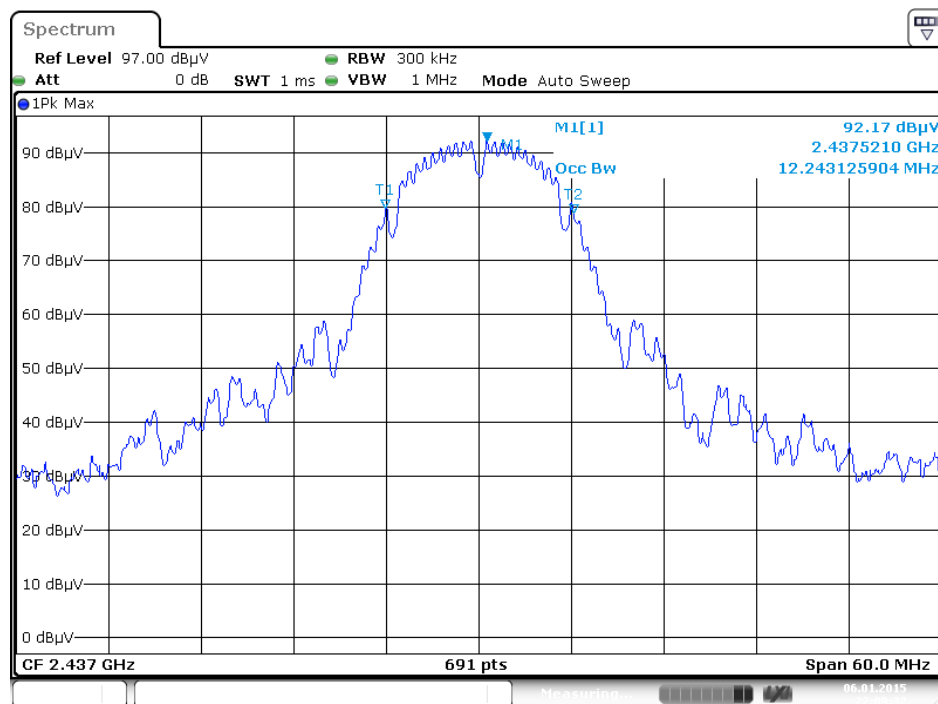




Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX)

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2

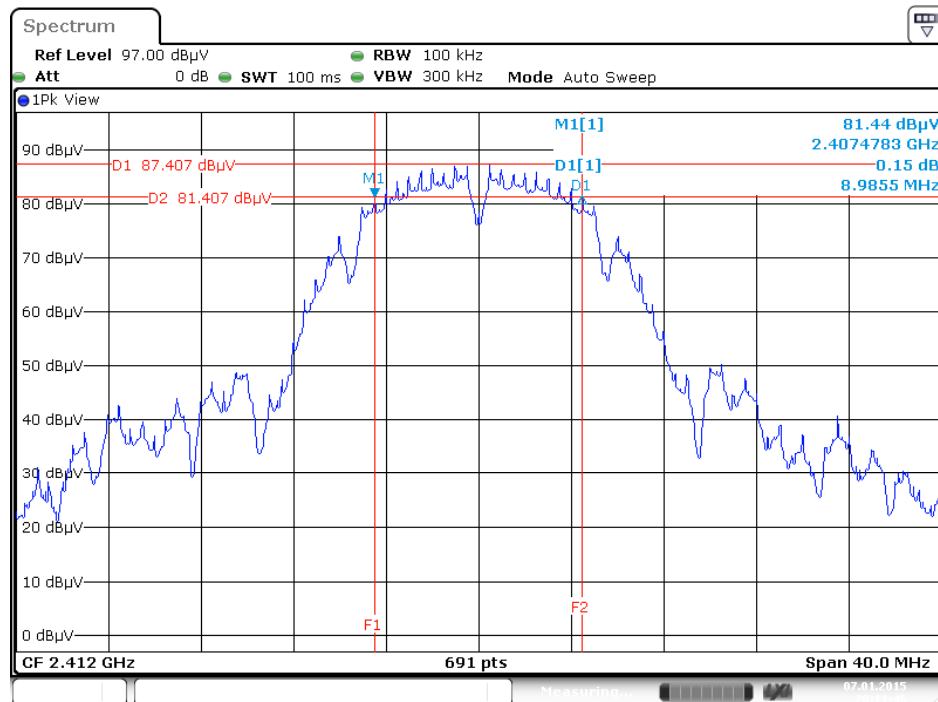


Date: 7.JAN 2015 20:11:46

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

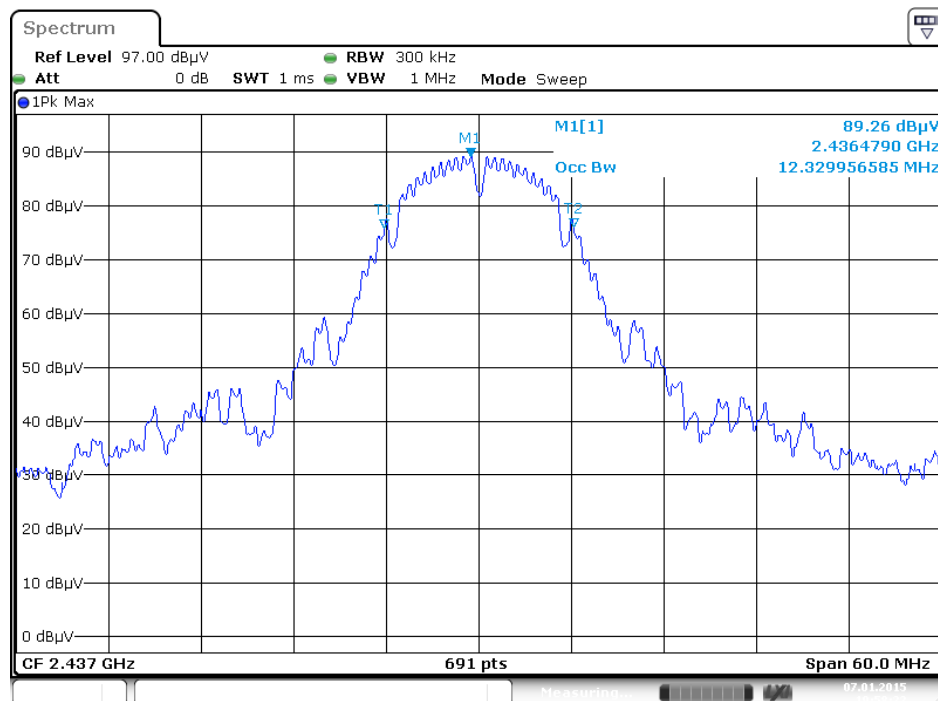


Date: 7.JAN 2015 19:58:22

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

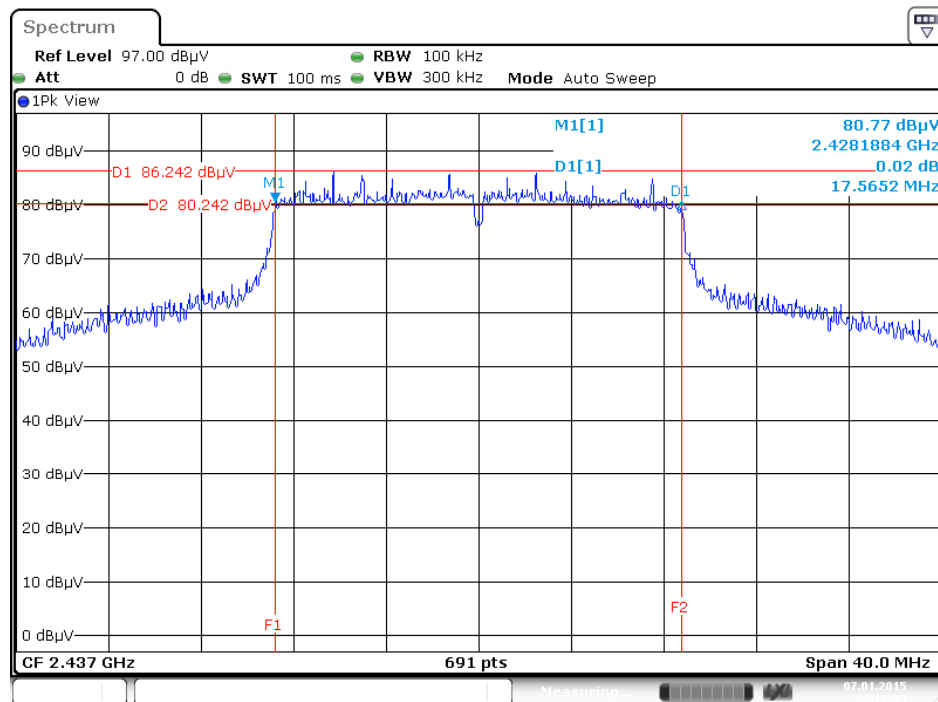


Date: 7 JAN 2015 20:16:32

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

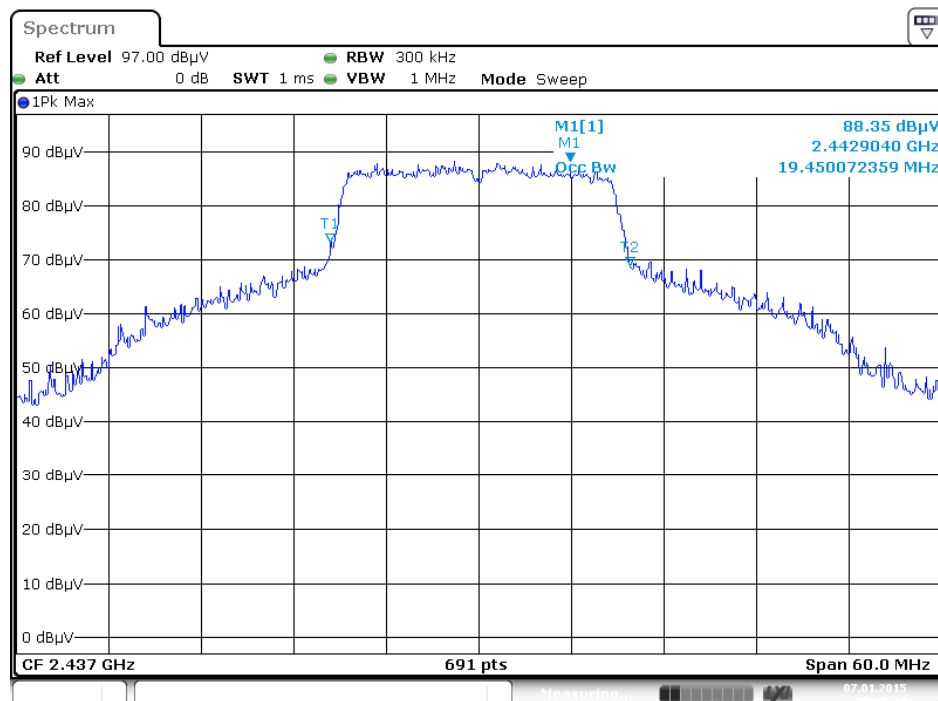


Date: 7 JAN 2015 20:02:34

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 2

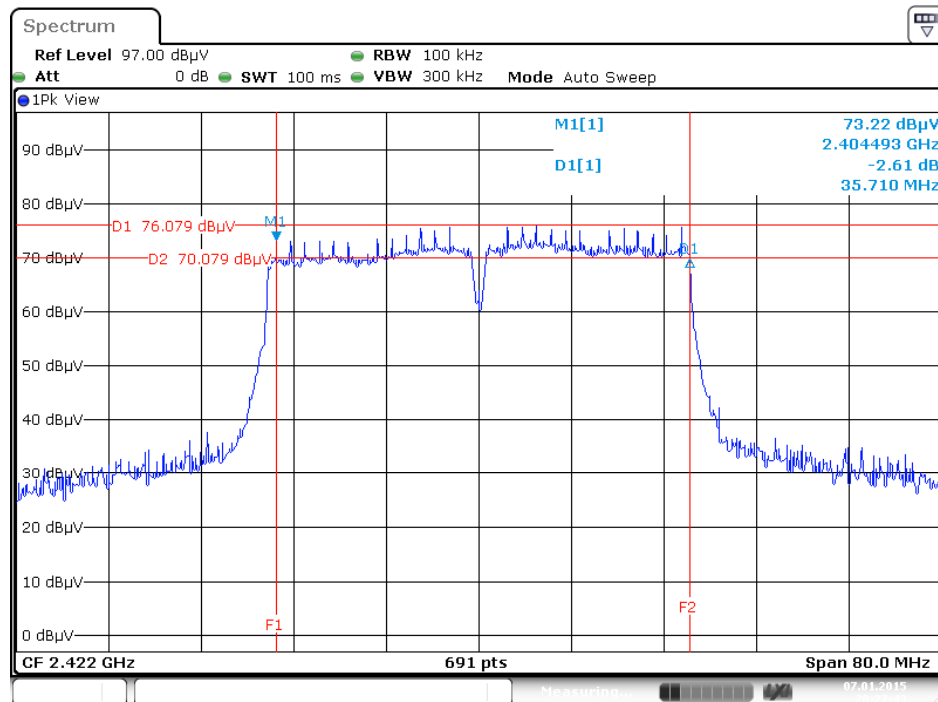

Date: 7.JAN 2015 20:27:43


### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 2

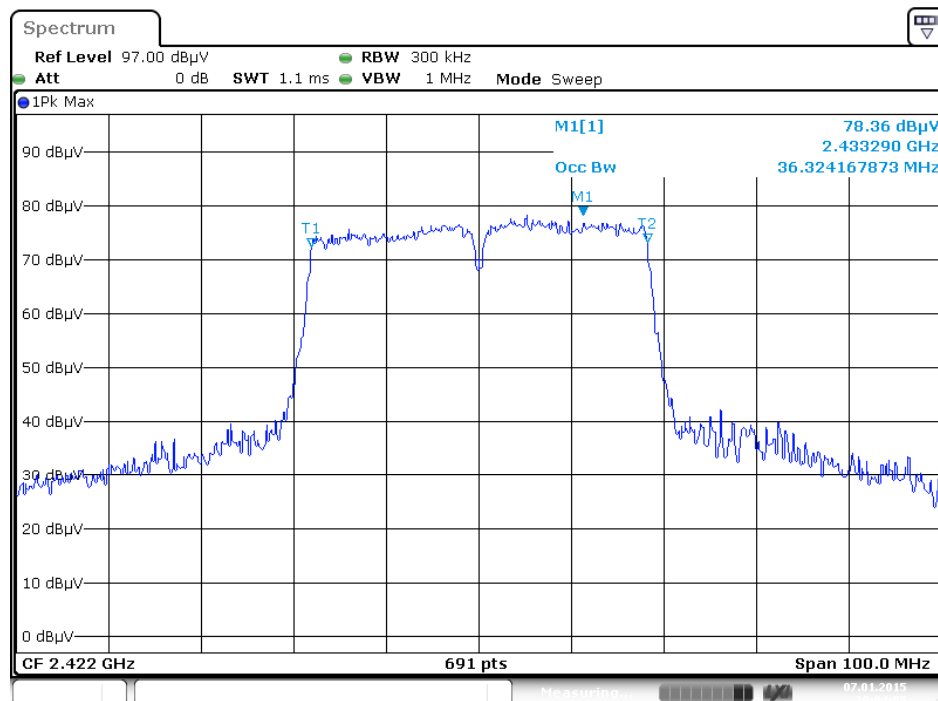

Date: 7.JAN 2015 20:34:05


Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2

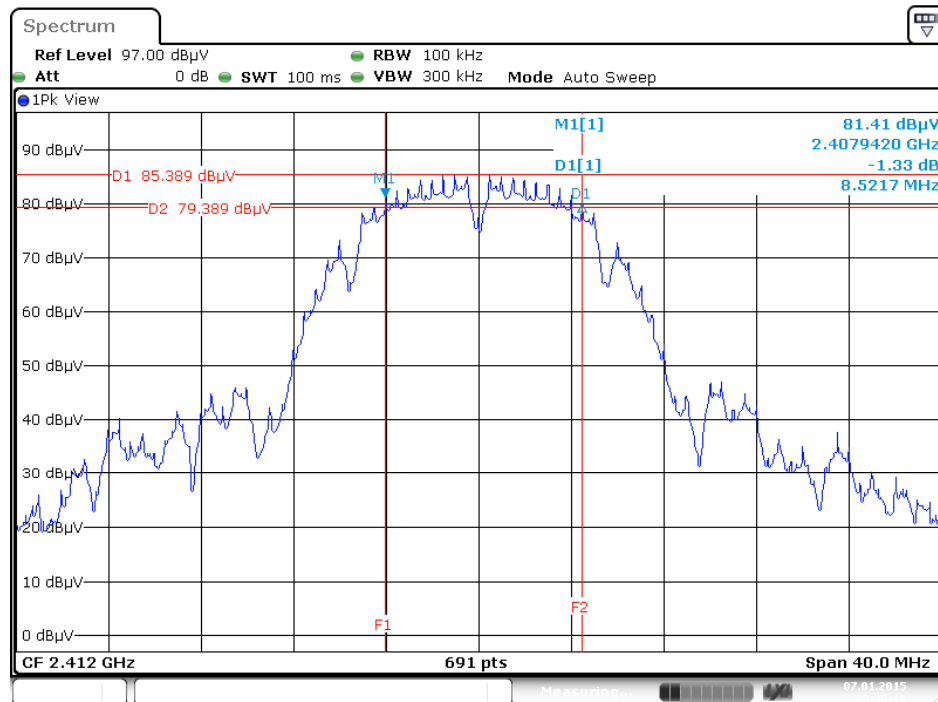

Date: 7.JAN 2015 23:36:19


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2

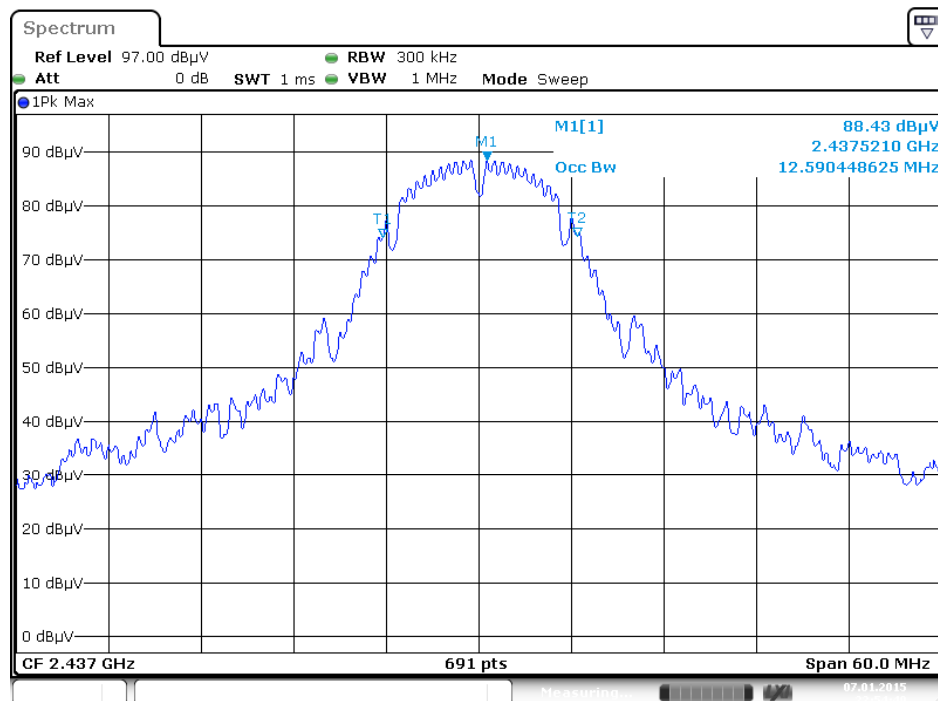


Date: 7.JAN 2015 22:54:49

Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3

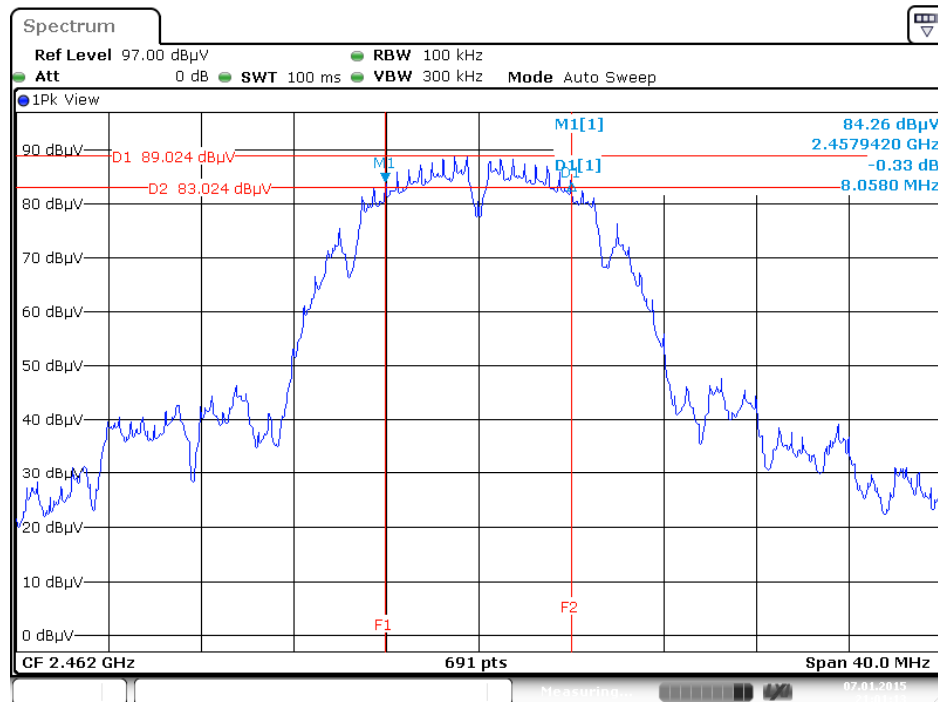

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3

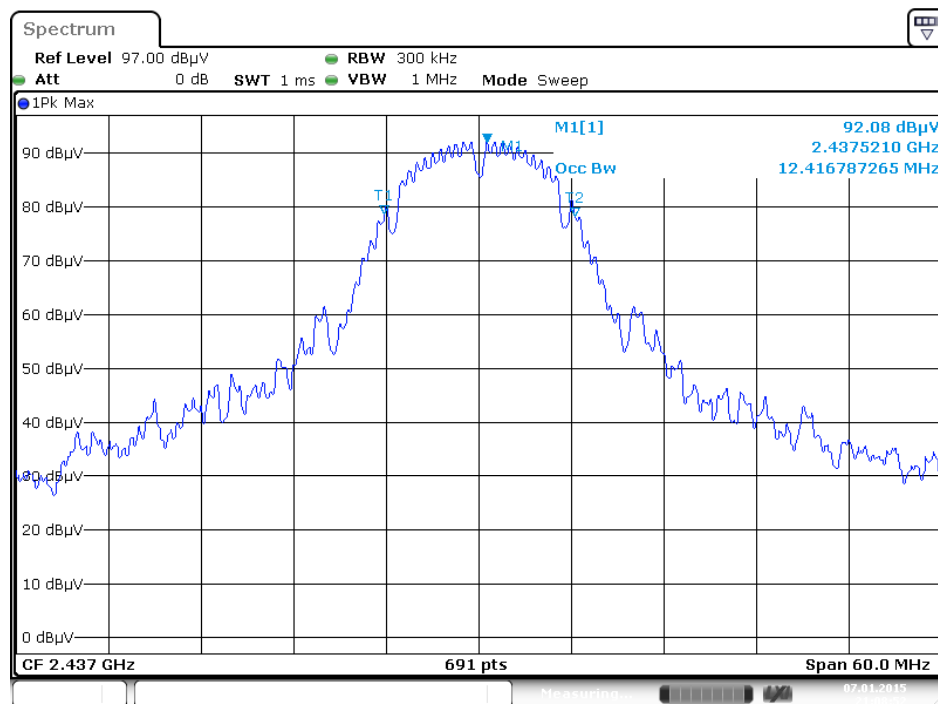


**Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX)**  
**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1**

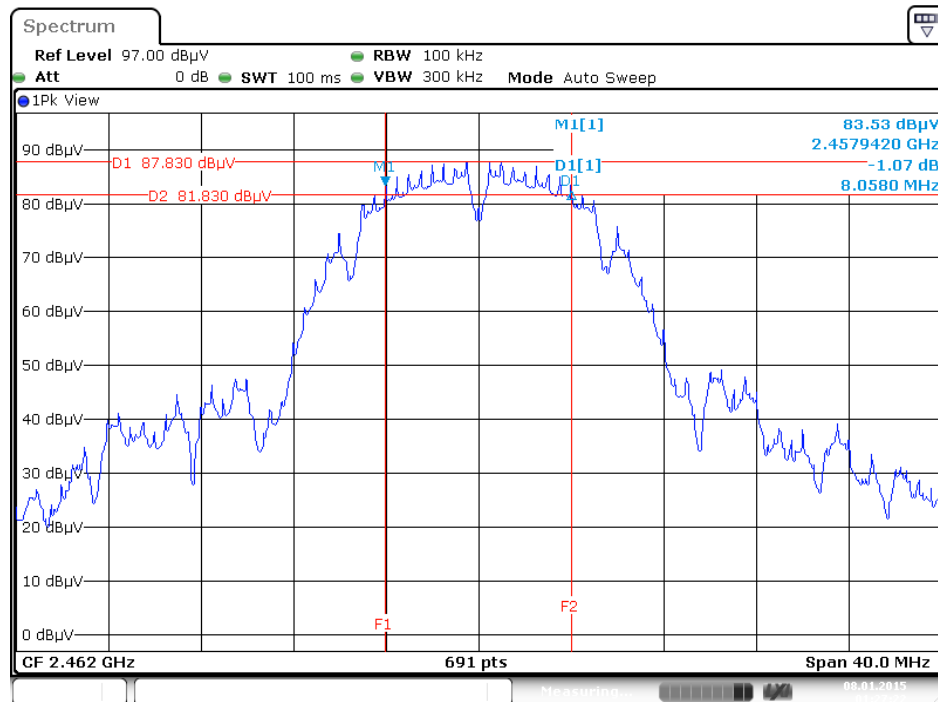


Date: 8 JAN 2015 01:27:22

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1**

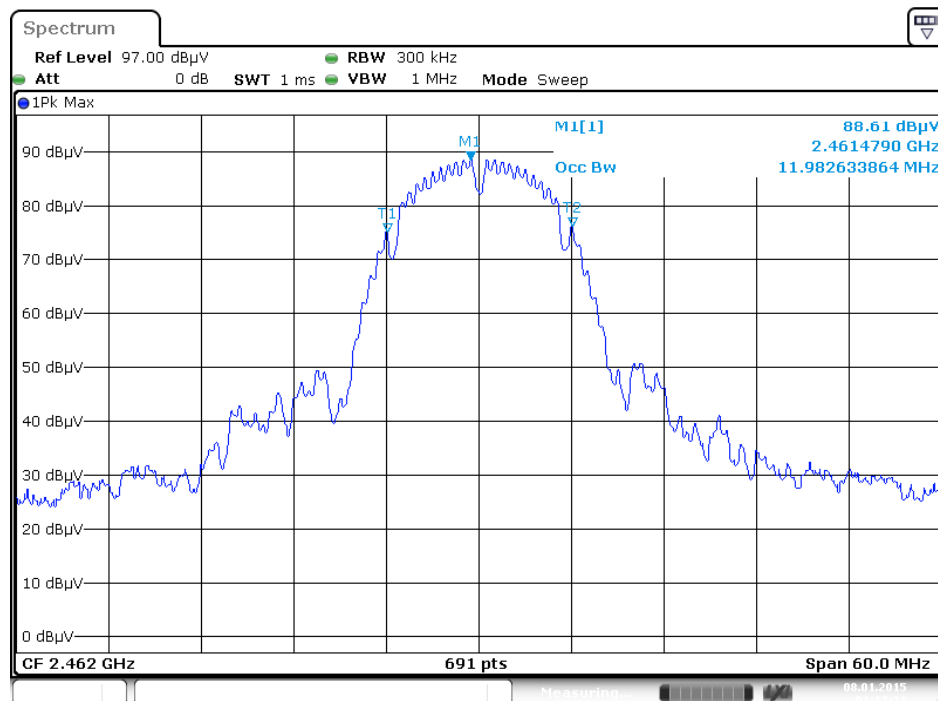


Date: 8 JAN 2015 01:12:21


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

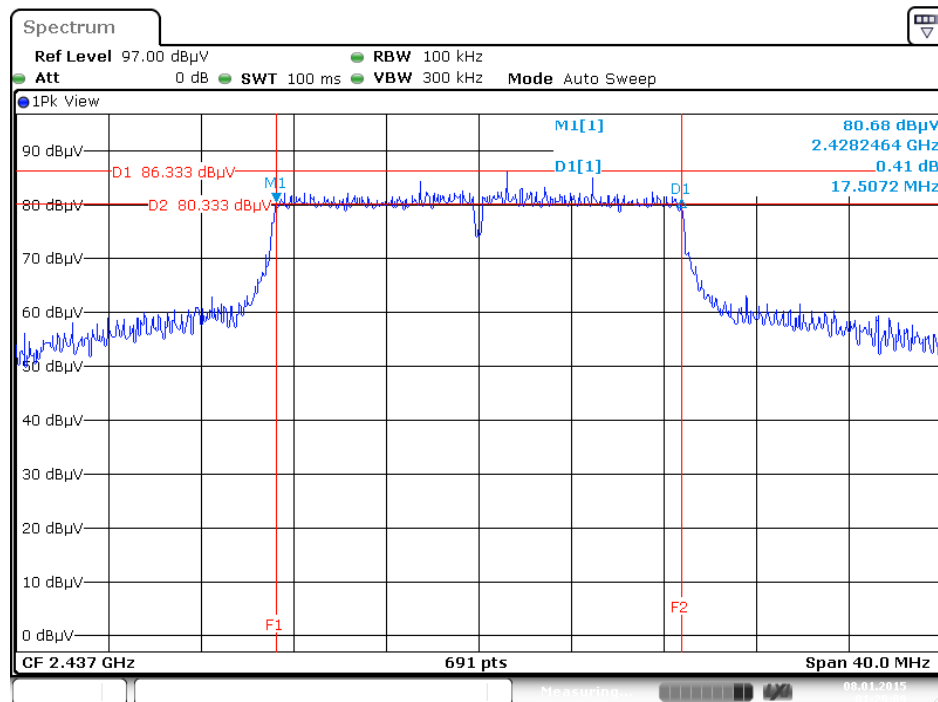

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

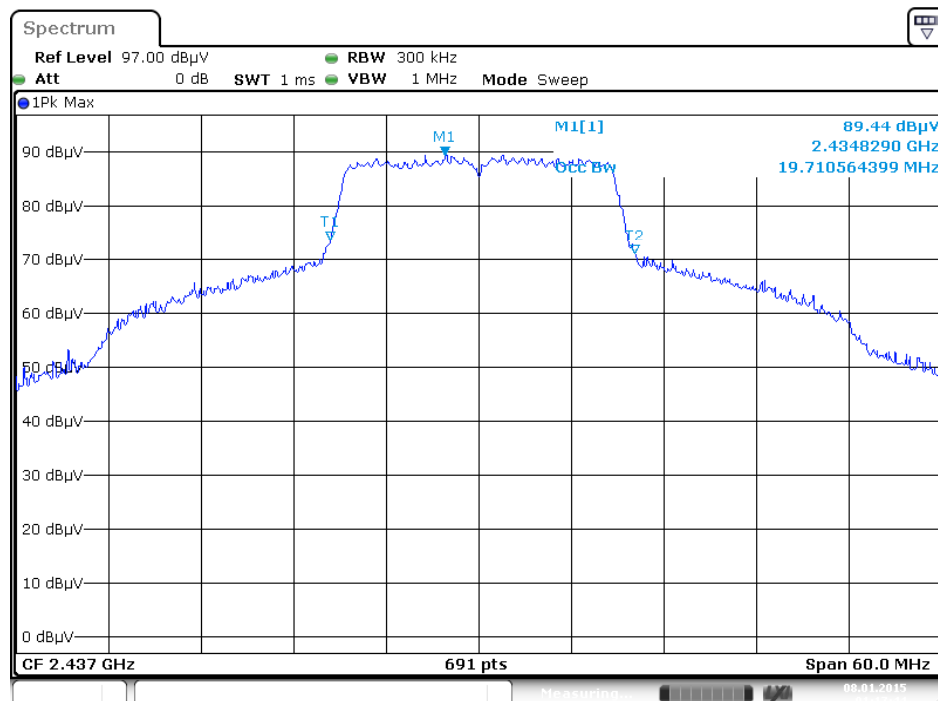


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1

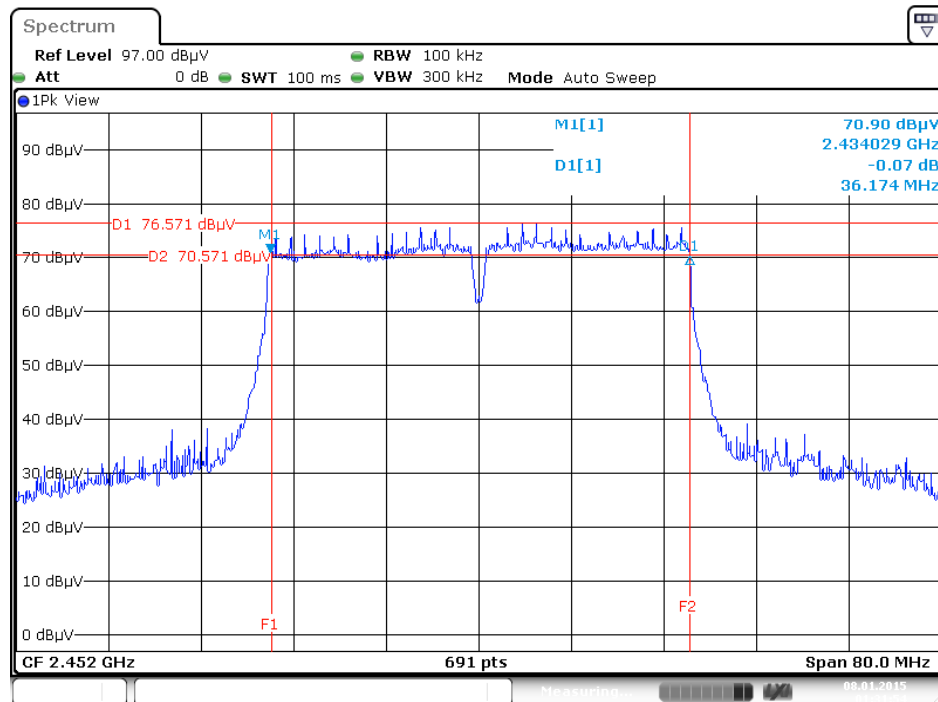

Date: 8 JAN 2015 01:31:54


### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

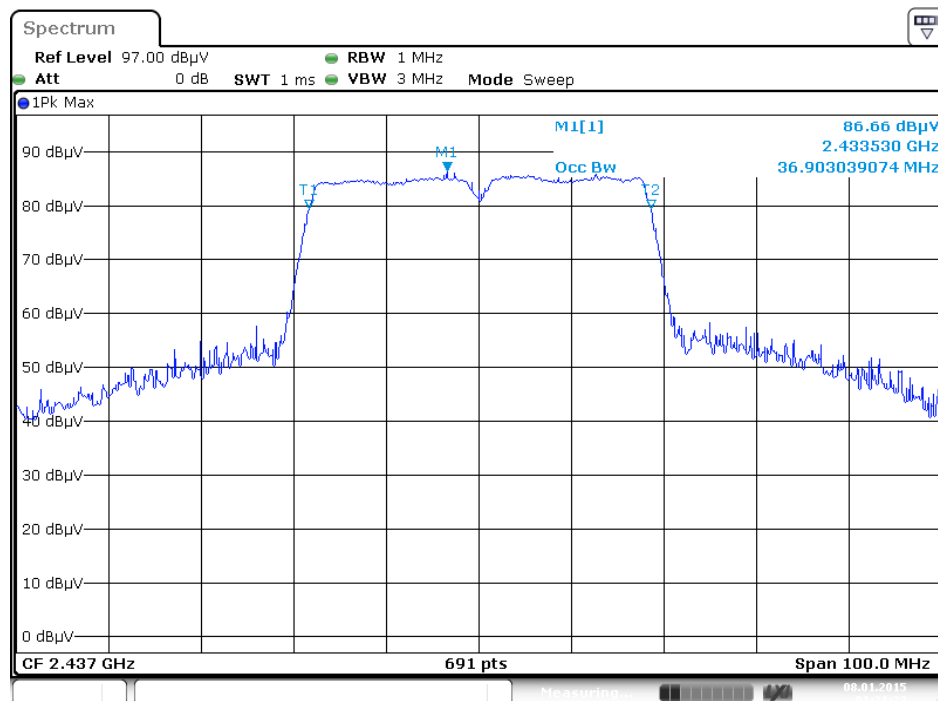

Date: 8 JAN 2015 01:21:24




**Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)**  
**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2**

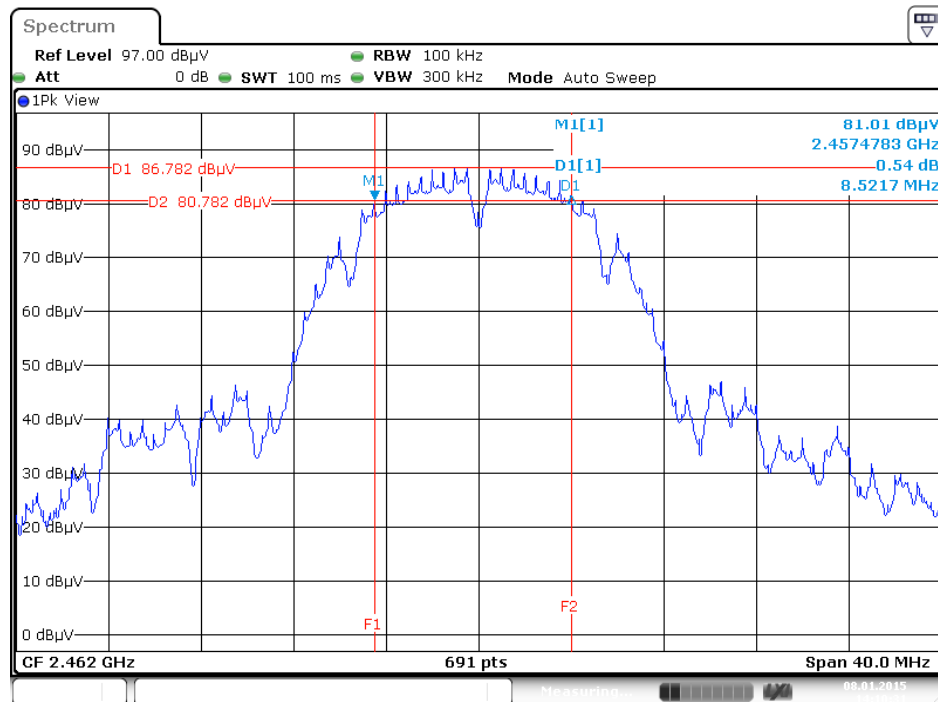


Date: 8 JAN 2015 14:10:32

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2**

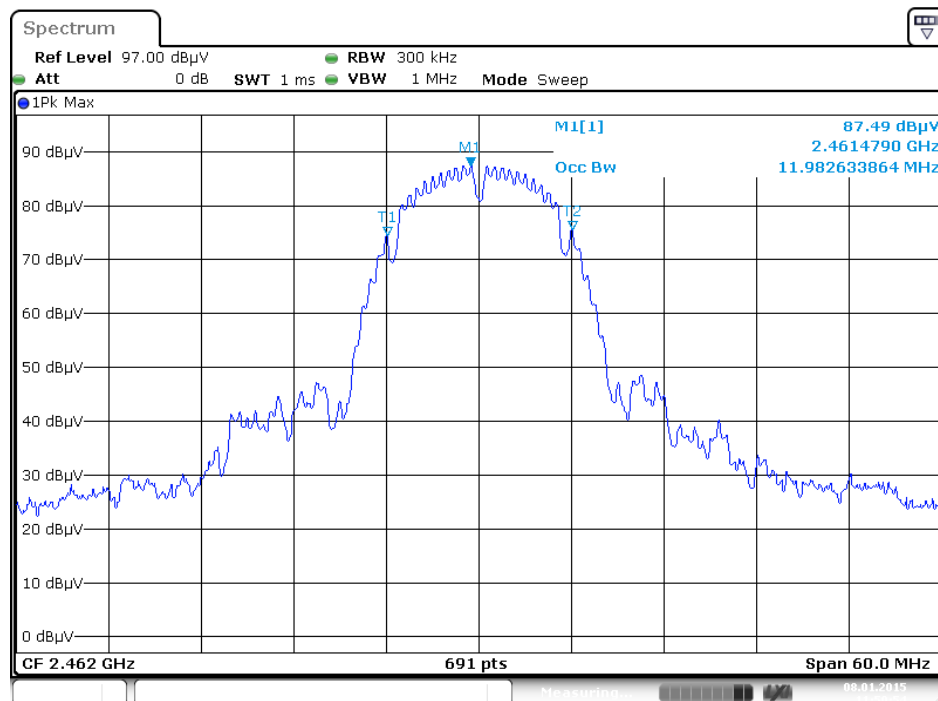


Date: 8 JAN 2015 11:50:54

**Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)**  
**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3**

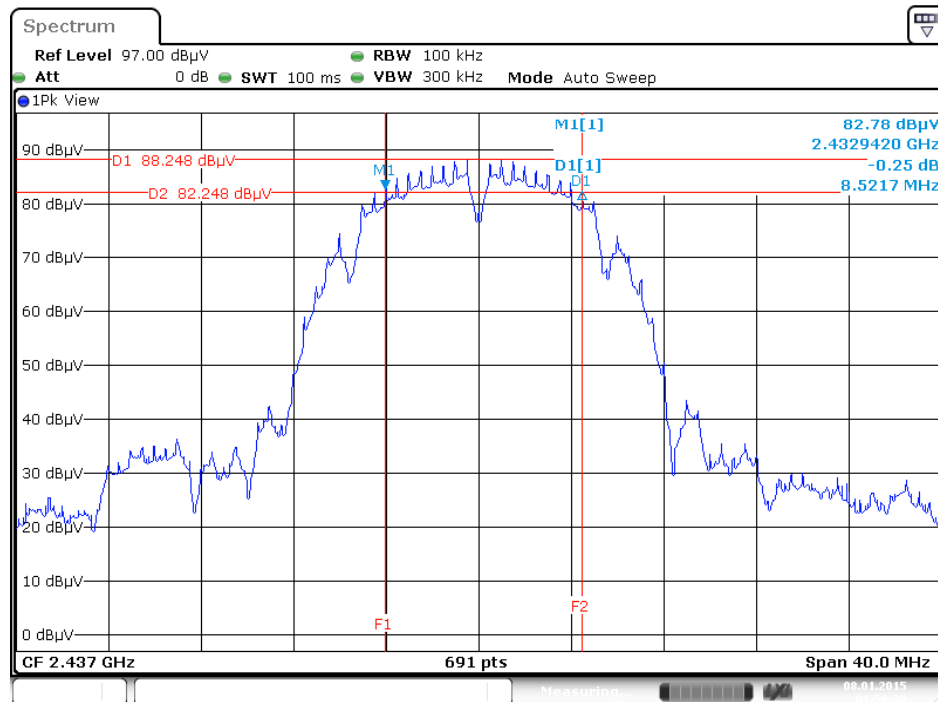

Date: 8 JAN 2015 01:56:40


**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3**

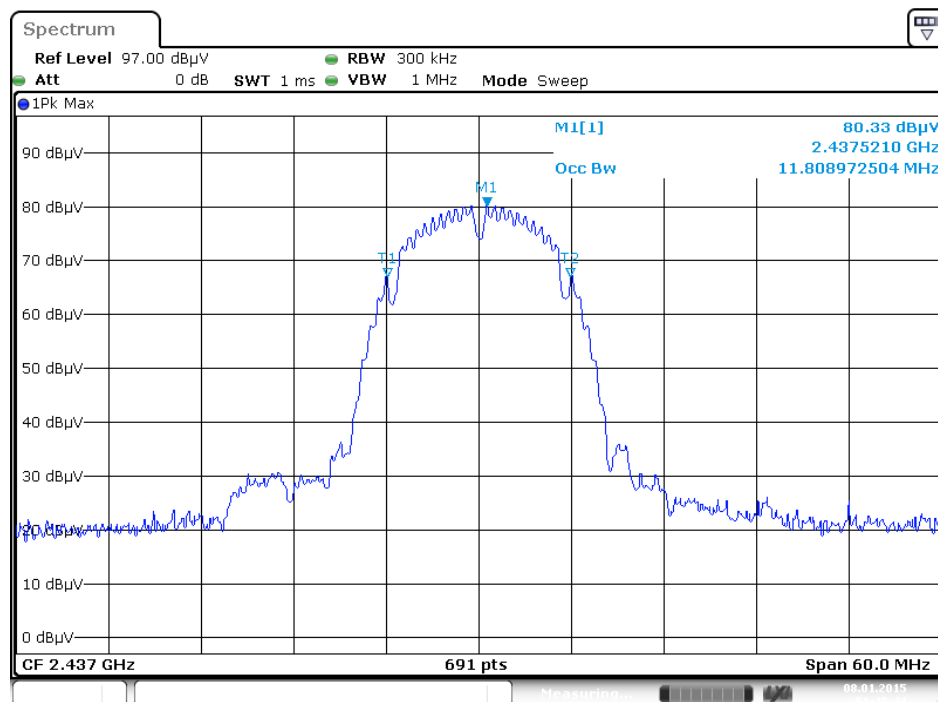

Date: 8 JAN 2015 01:48:44




6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2




Date: 7 JAN 2015 09:42:37

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

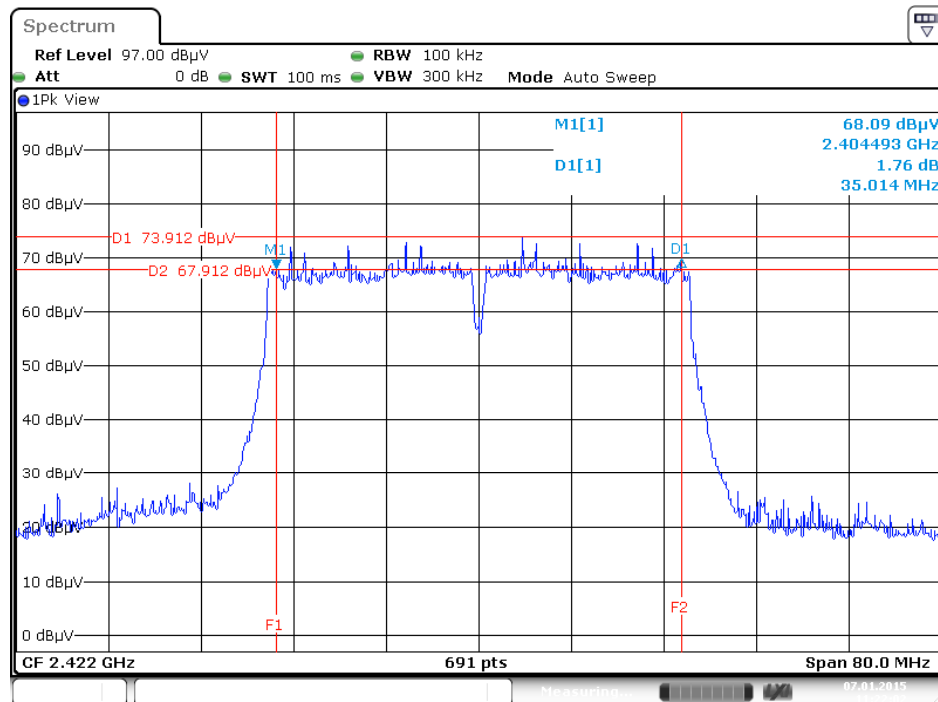


### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

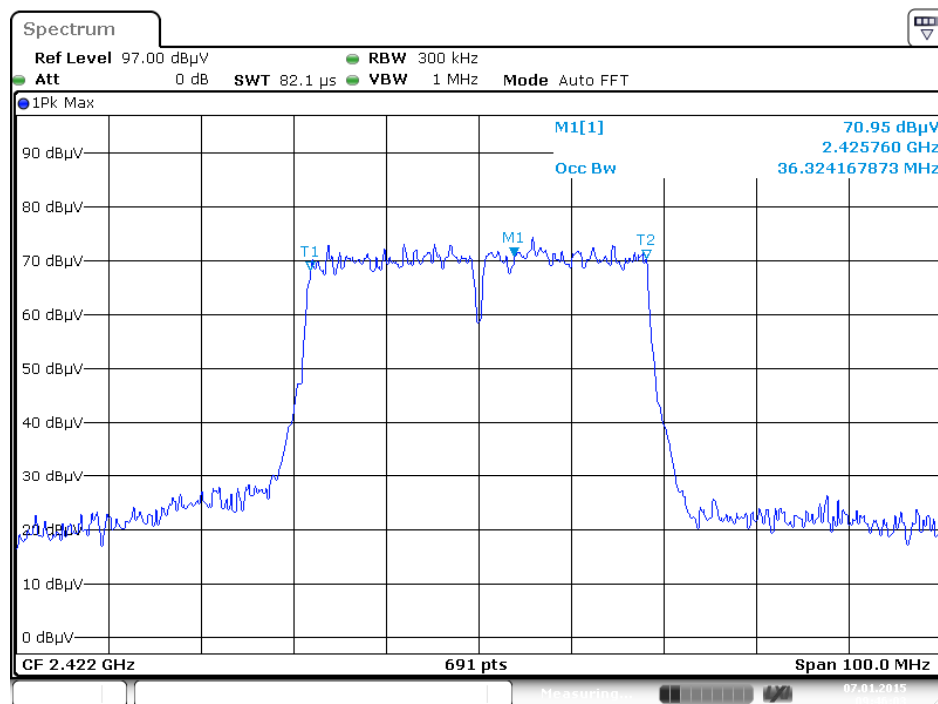


Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX)


6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3

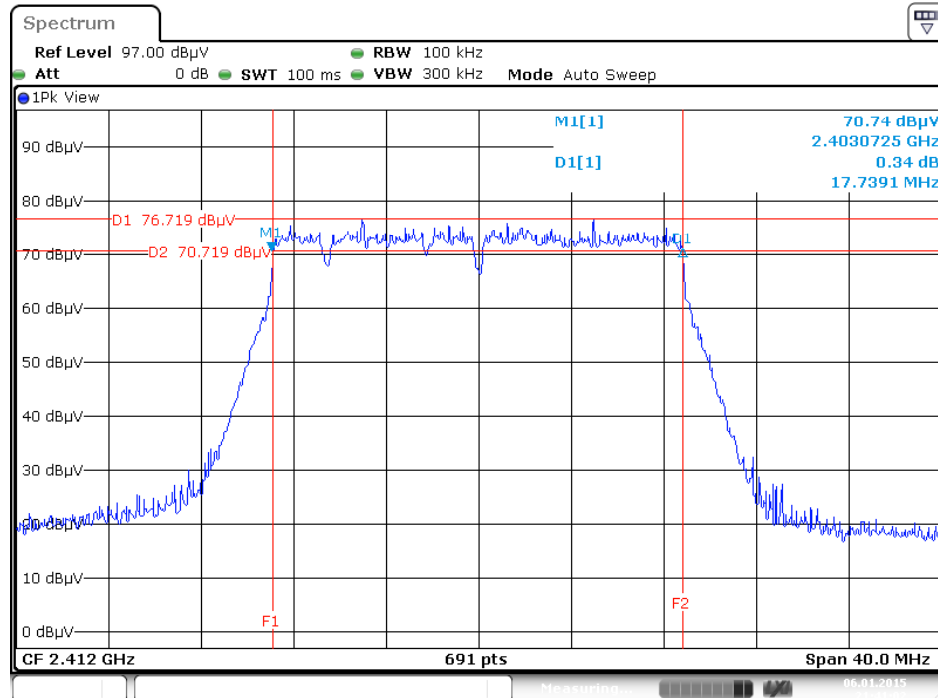

99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

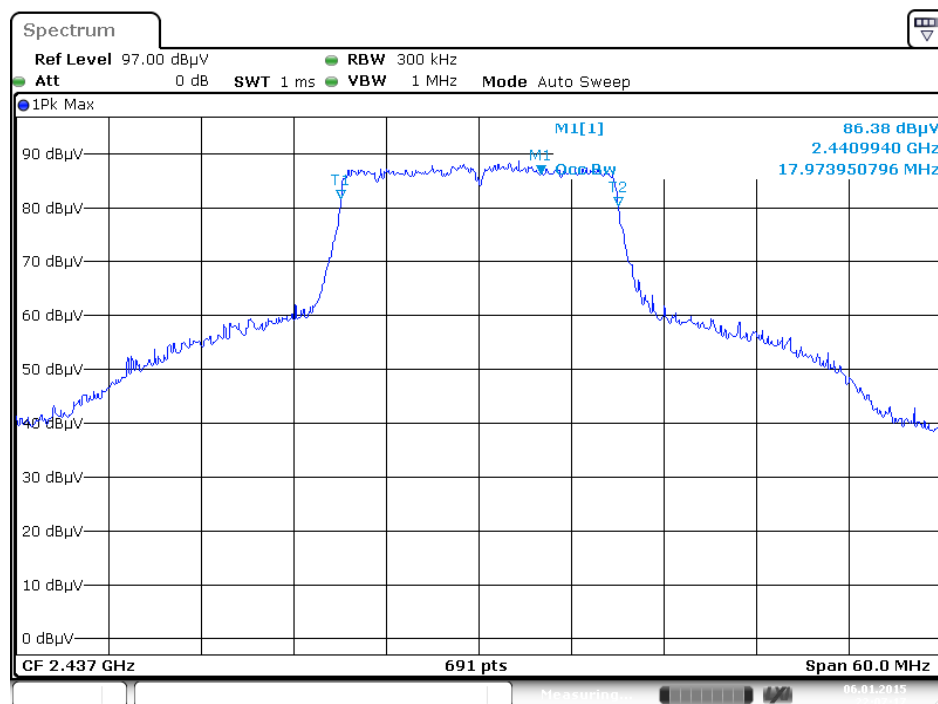


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

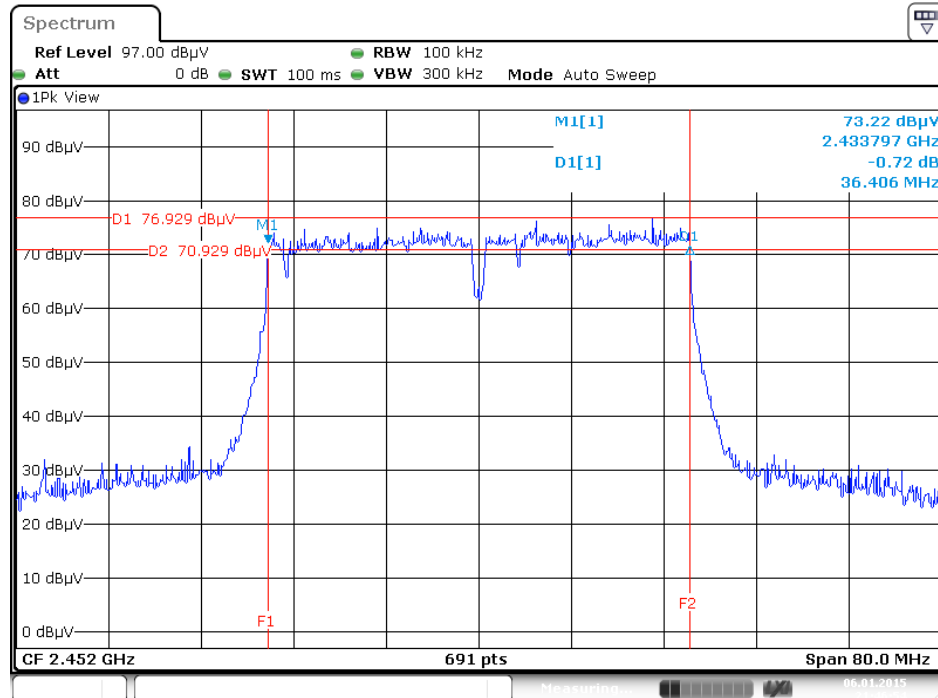

Date: 6 JAN 2015 21:46:54


### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

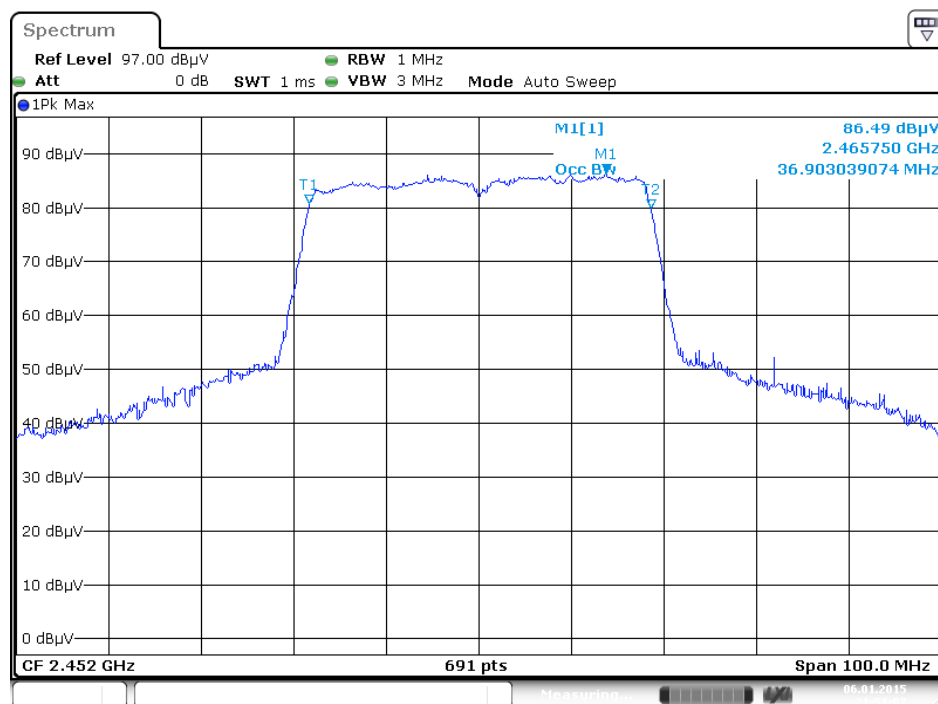

Date: 6 JAN 2015 21:51:08


Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX)

6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

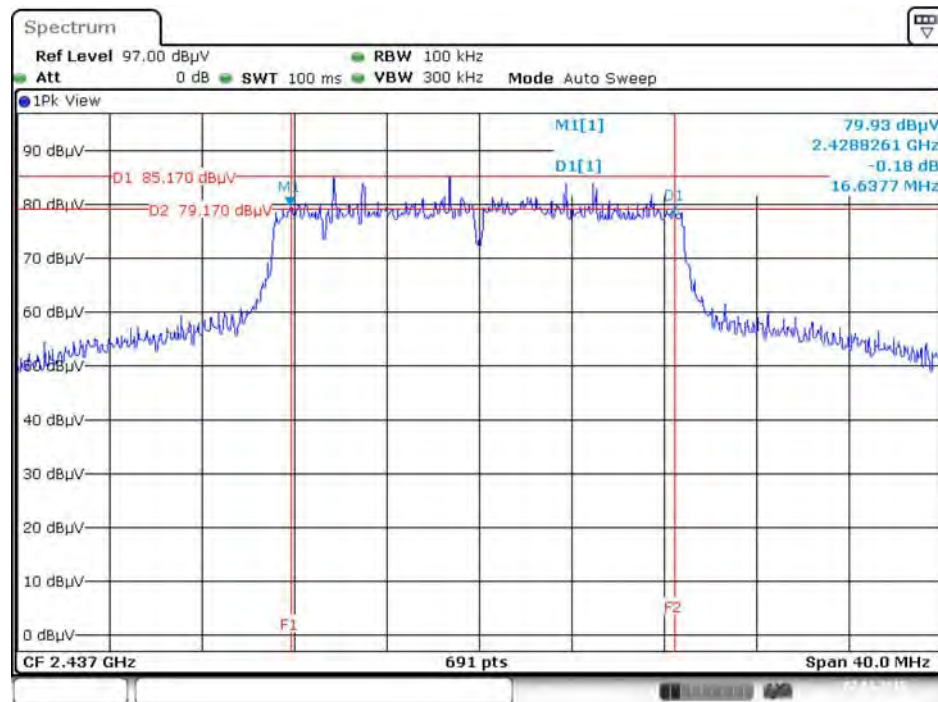


Date: 7. JAN. 2015 23:51:28

99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

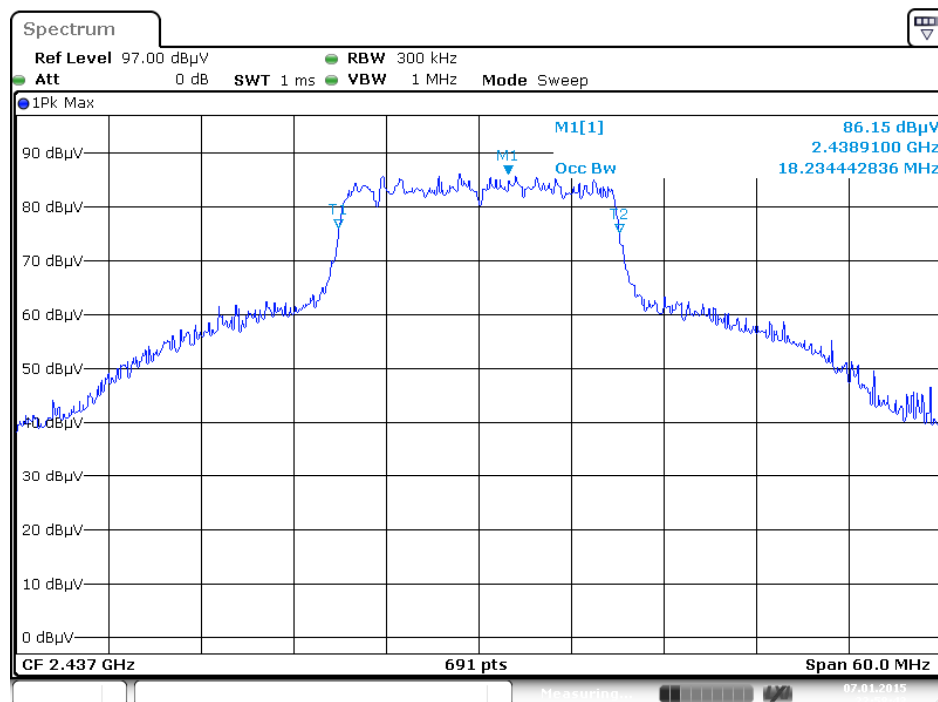


Date: 7. JAN. 2015 22:58:43

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

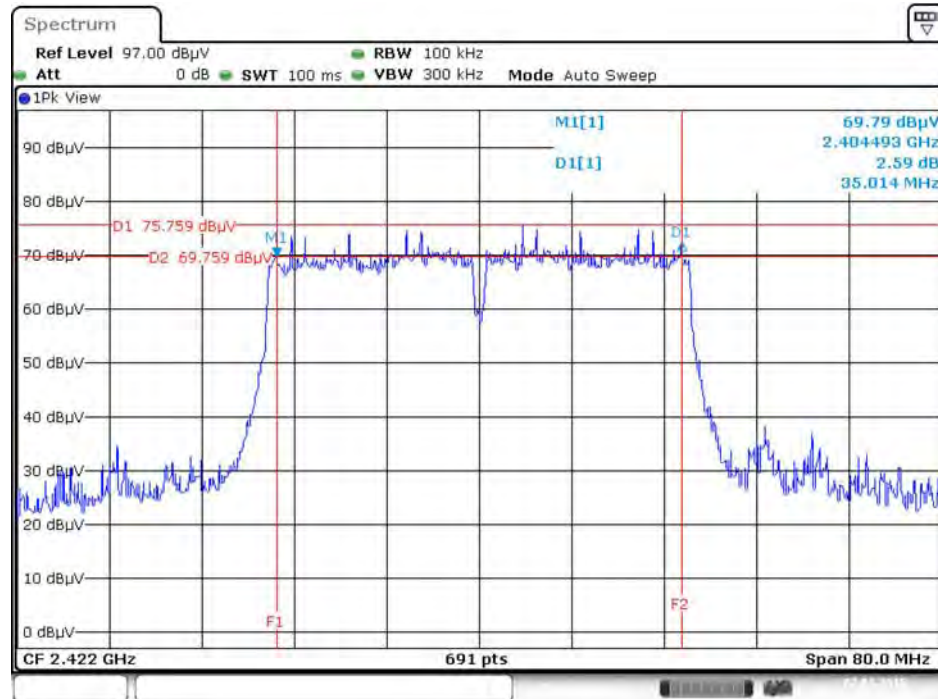

Date: 7. JAN. 2015 23:53:22

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

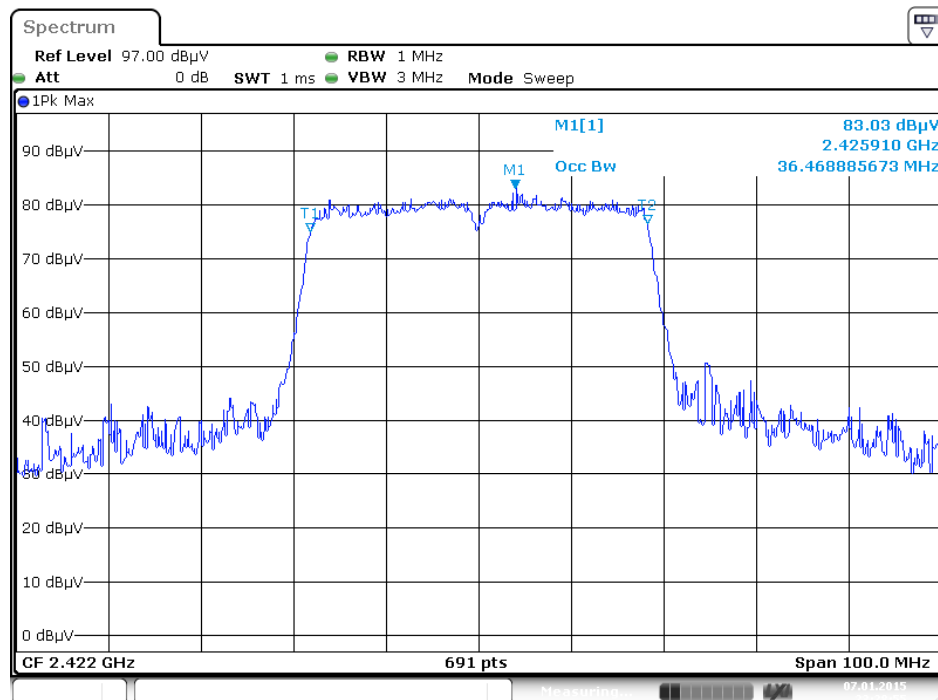


Date: 7. JAN. 2015 23:28:55




Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX)


6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

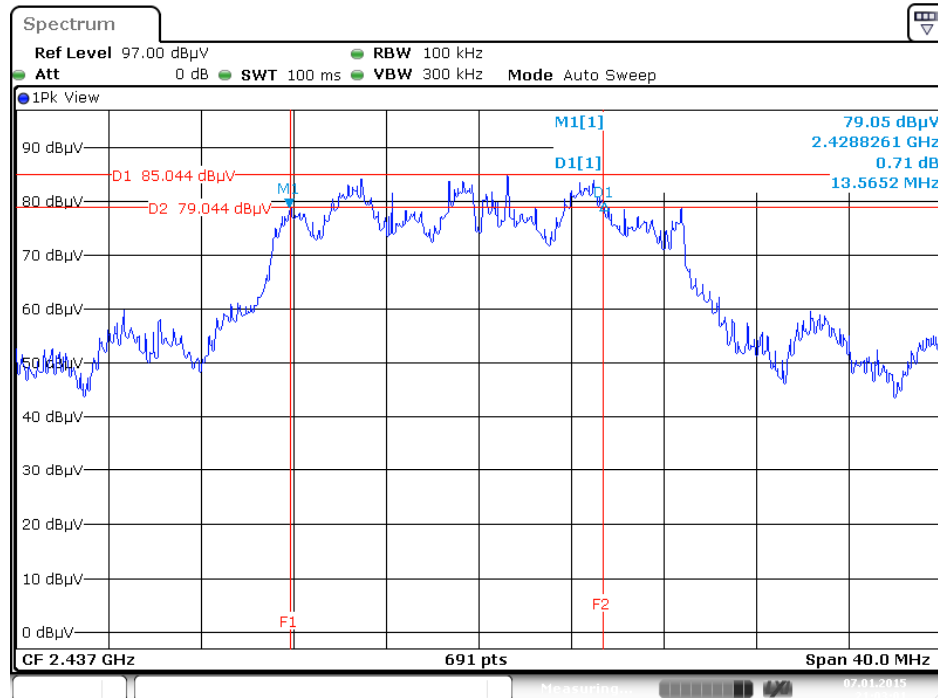

99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

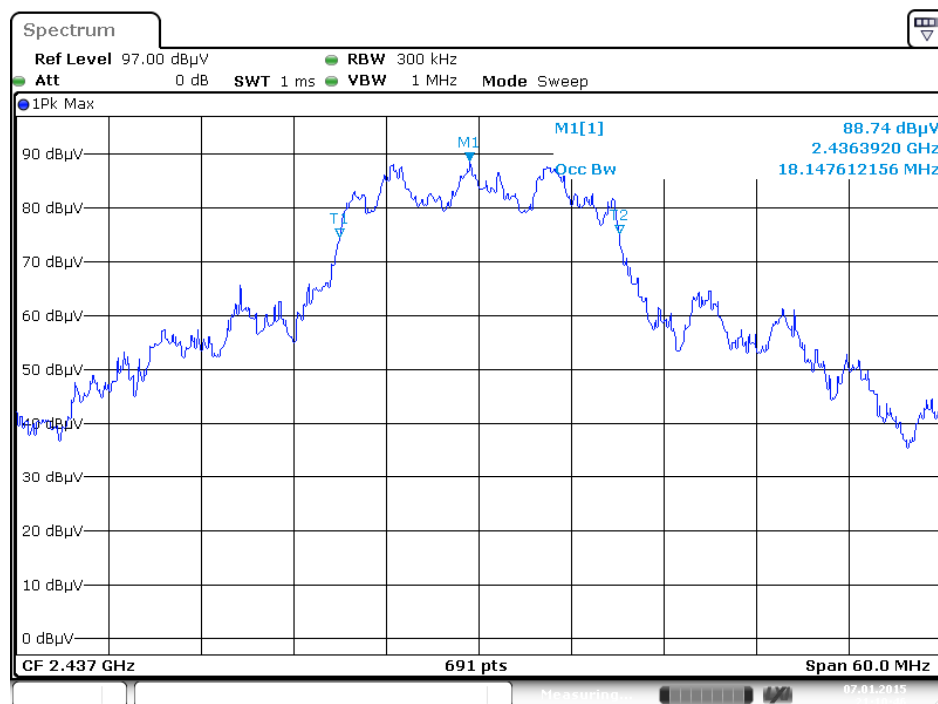


### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

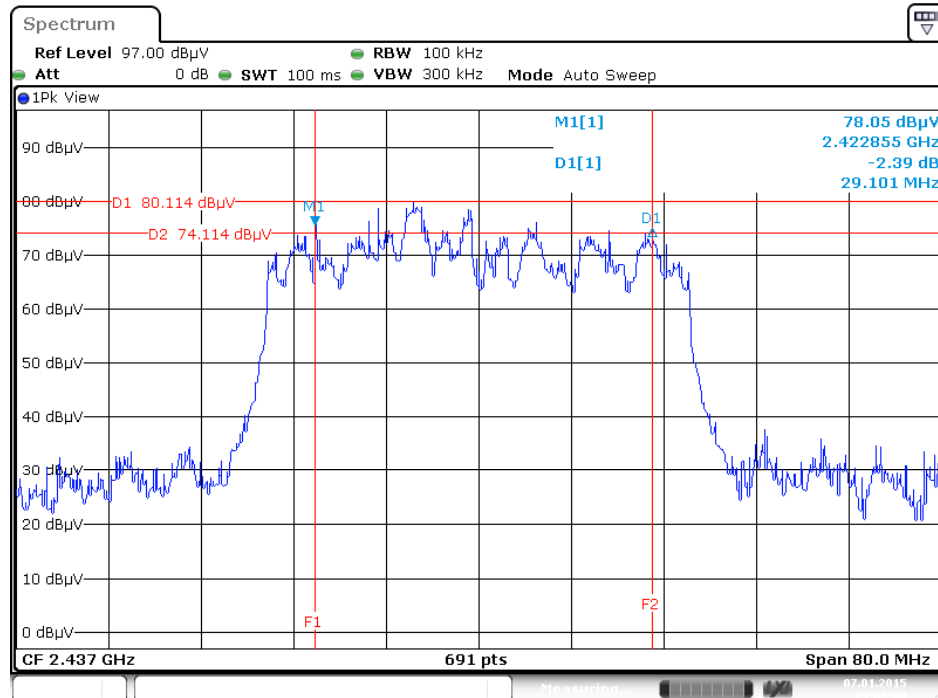


Date: 7.JAN.2015 21:06:04

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

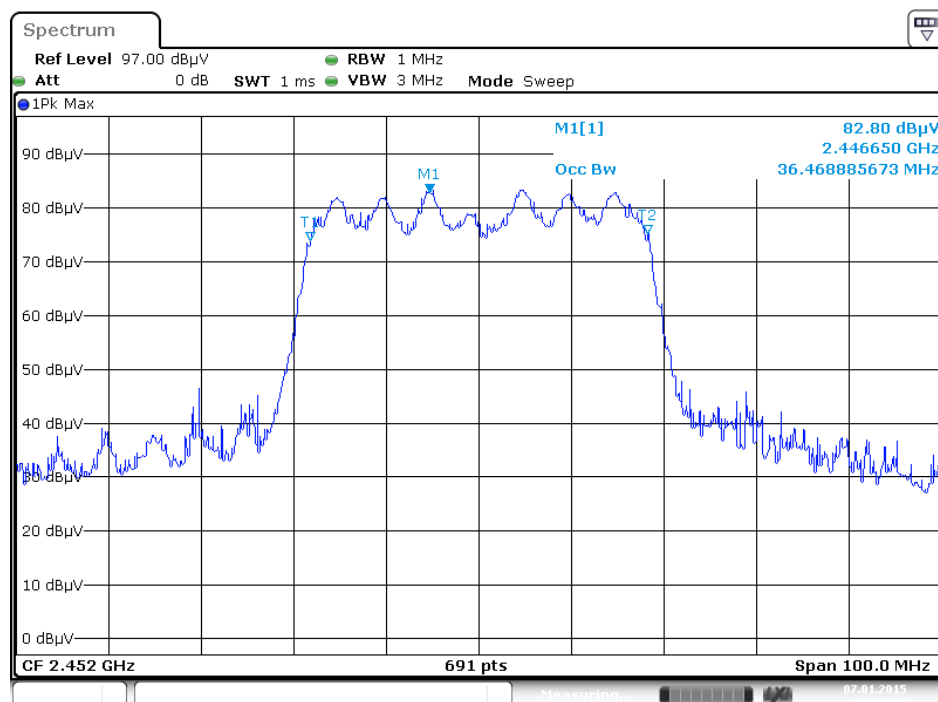


Date: 7.JAN.2015 21:23:06

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX)  
6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

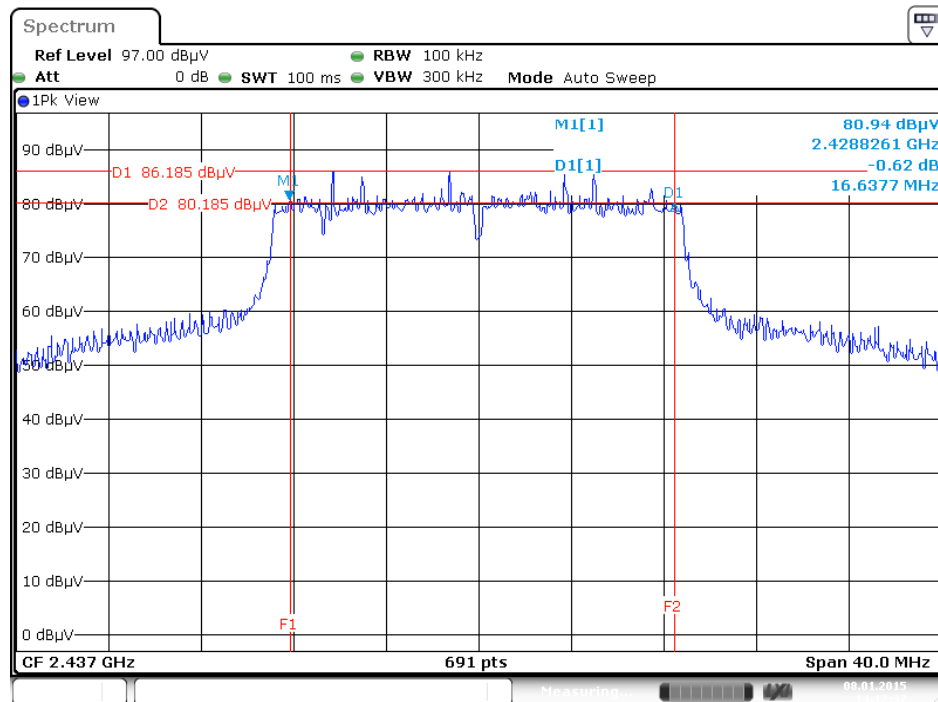


Date: 8 JAN 2015 14:12:37

99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

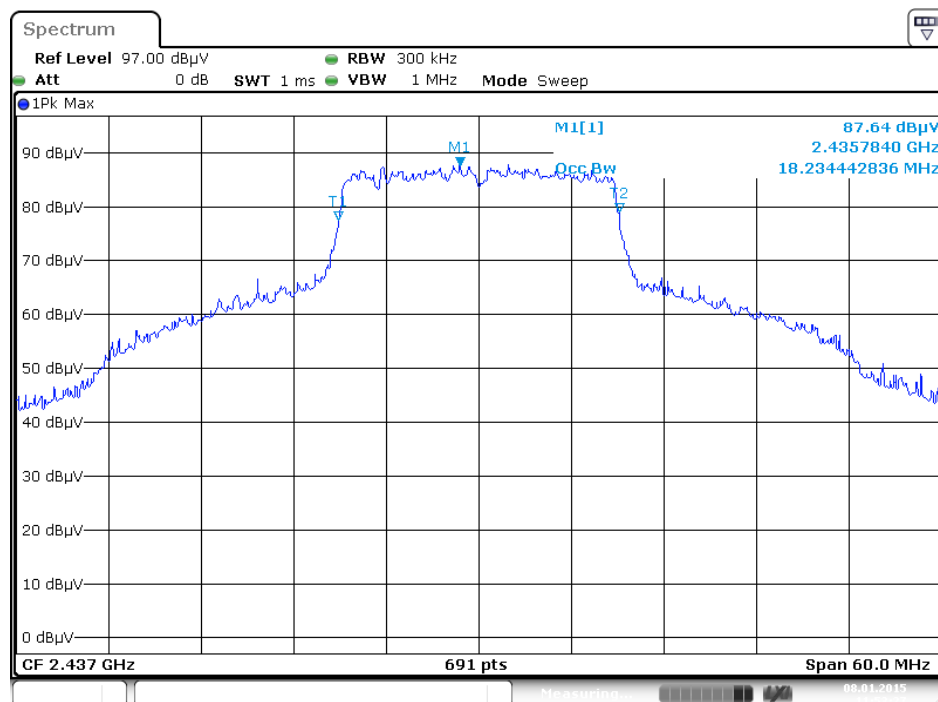


Date: 8 JAN 2015 11:53:27

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

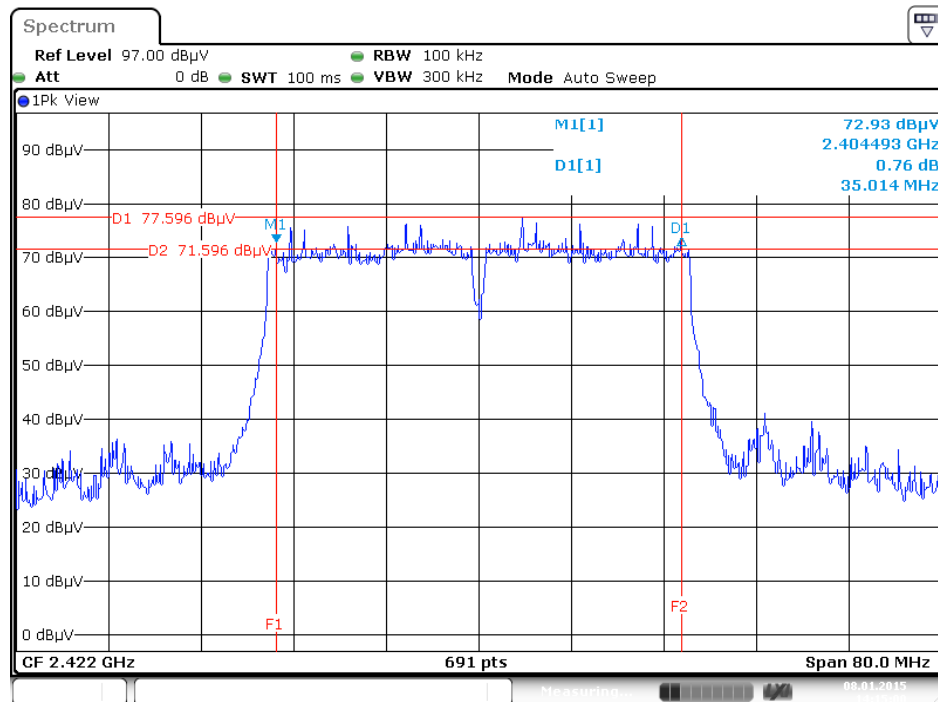


Date: 8 JAN 2015 14:15:01

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2

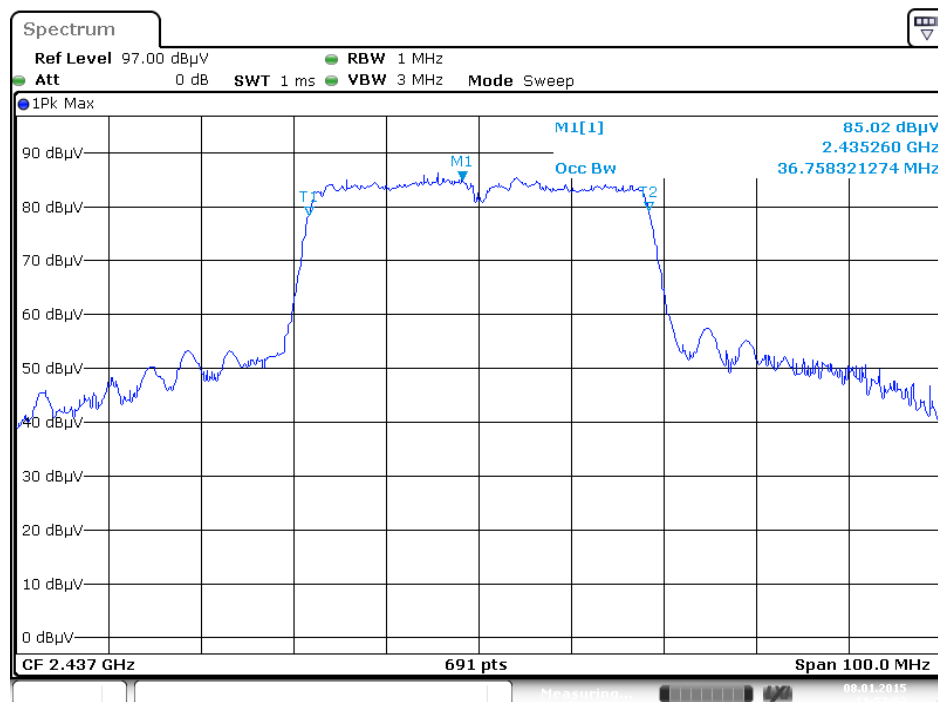


Date: 8 JAN 2015 11:57:03

Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX)  
6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 +  
Chain 3

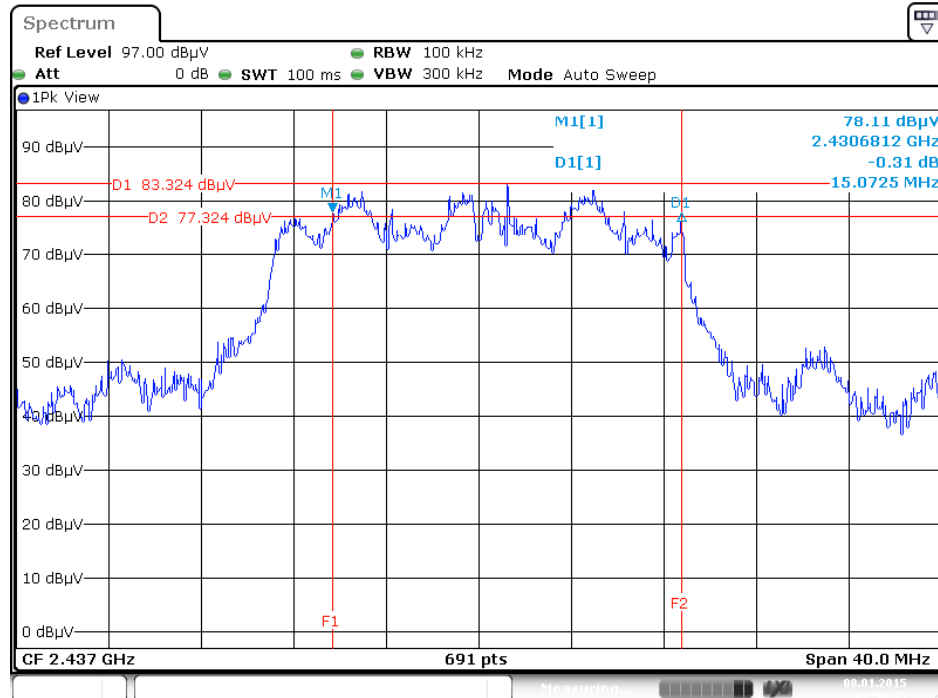


Date: 8 JAN 2015 01:58:34

99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 +  
Chain 2 + Chain 3

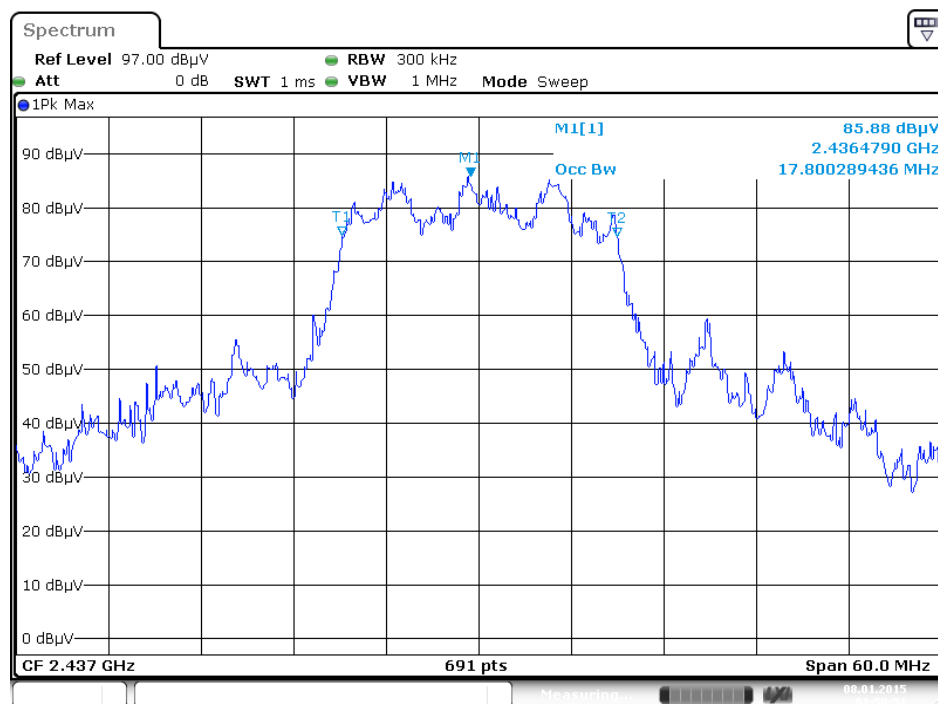


Date: 8 JAN 2015 01:50:50

### 6 dB Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

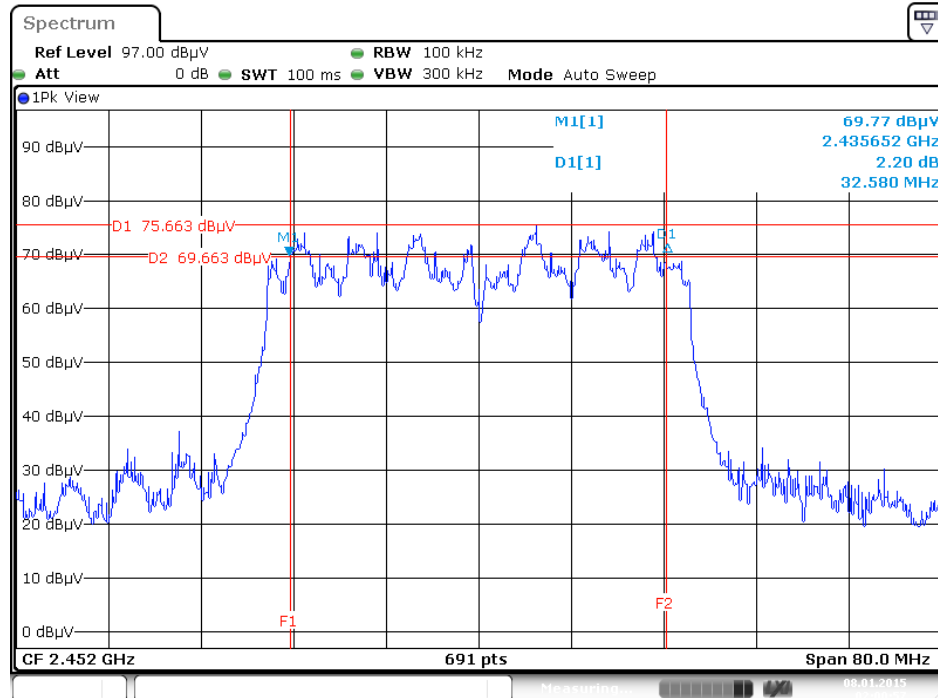

Date: 8 JAN 2015 02:00:57

### 99% Occupied Bandwidth Plot on Configuration IEEE 802. MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

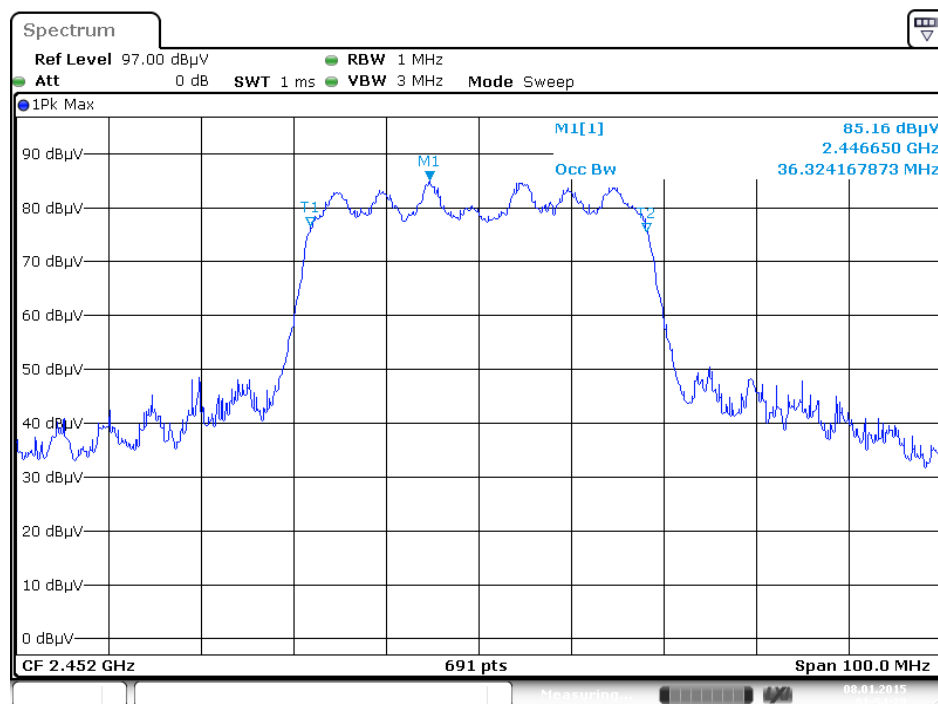

Date: 8 JAN 2015 01:54:28

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                           |
|---------------------------------------------|---------------------------------------------------|
| Attenuation                                 | Auto                                              |
| Start Frequency                             | 1 000 MHz                                         |
| Stop Frequency                              | 10th carrier harmonic                             |
| RBW / VBW (Emission in restricted band)     | 1 MHz / 3MHz for Peak,<br>1 MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak                          |

| Receiver Parameter     | Setting                        |
|------------------------|--------------------------------|
| Attenuation            | Auto                           |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1GHz / RBW 120kHz for QP |


#### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

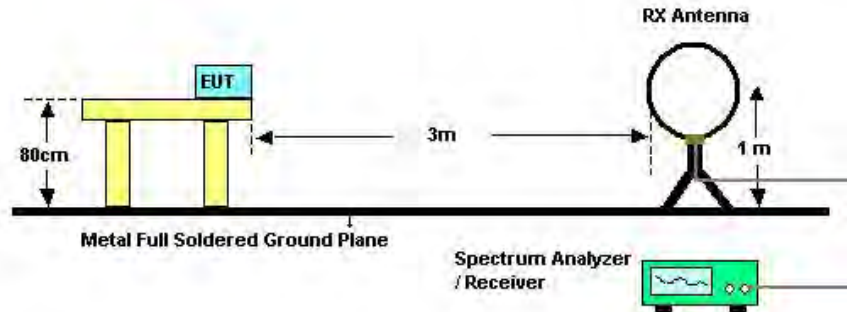

For Radiated Emissions: 30MHz~1GHz

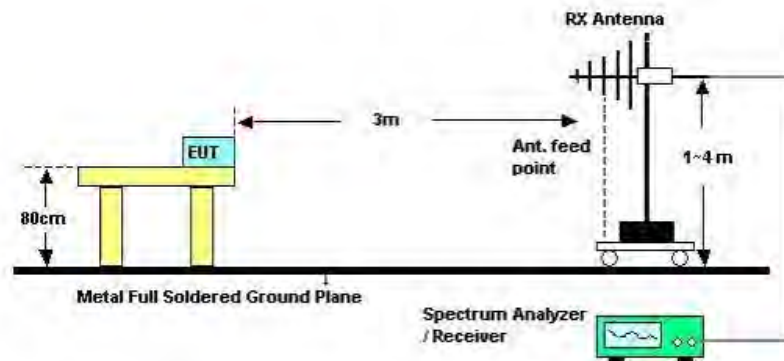

For Radiated Emissions: Above 1GHz

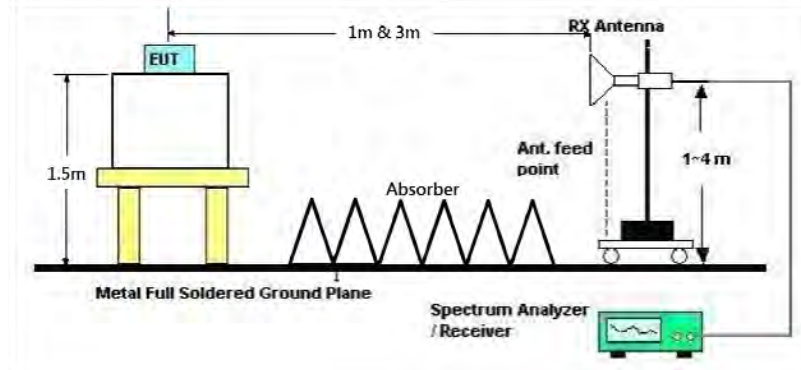

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

|               |                     |                |             |
|---------------|---------------------|----------------|-------------|
| Temperature   | 23°C                | Humidity       | 61%         |
| Test Engineer | Mars Lin, Hank Yang | Configurations | Normal Link |
| Test Date     | Jan. 14, 2015       |                |             |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)


|               |                     |                |             |
|---------------|---------------------|----------------|-------------|
| Temperature   | 23°C                | Humidity       | 61%         |
| Test Engineer | Mars Lin, Hank Yang | Configurations | Normal Link |

##### Horizontal

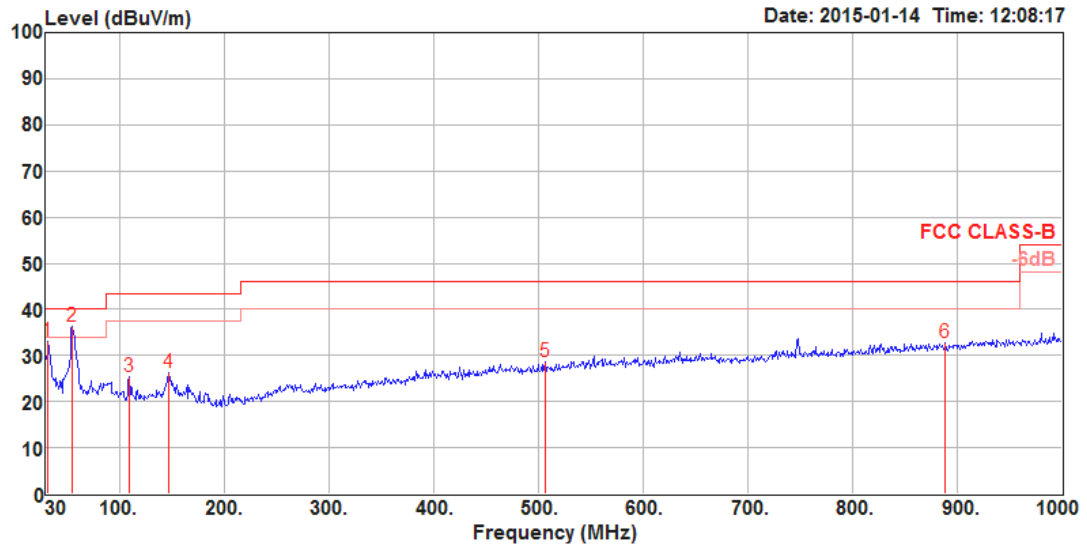

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |        | A/Pos | T/Pos |            |
|---|--------|--------|--------|--------|-------|-------|---------|--------|--------|-------|-------|------------|
|   | MHz    | dBuV/m | dBuV/m | Limit  | Level | Loss  | Factor  | Factor | Remark | cm    | deg   | Pol/Phase  |
| 1 | 31.94  | 33.12  | 40.00  | -6.88  | 46.00 | 0.46  | 18.90   | 32.24  | Peak   | 300   | 0     | HORIZONTAL |
| 2 | 55.22  | 36.16  | 40.00  | -3.84  | 59.87 | 0.64  | 7.95    | 32.30  | Peak   | 400   | 177   | HORIZONTAL |
| 3 | 109.54 | 25.44  | 43.50  | -18.06 | 44.49 | 0.91  | 12.30   | 32.26  | Peak   | 200   | 119   | HORIZONTAL |
| 4 | 147.37 | 26.26  | 43.50  | -17.24 | 45.91 | 1.06  | 11.45   | 32.16  | Peak   | 100   | 157   | HORIZONTAL |
| 5 | 506.27 | 28.49  | 46.00  | -17.51 | 40.78 | 1.97  | 17.91   | 32.17  | Peak   | 300   | 265   | HORIZONTAL |
| 6 | 888.45 | 32.66  | 46.00  | -13.34 | 40.02 | 2.61  | 21.61   | 31.58  | Peak   | 200   | 279   | HORIZONTAL |

## Vertical

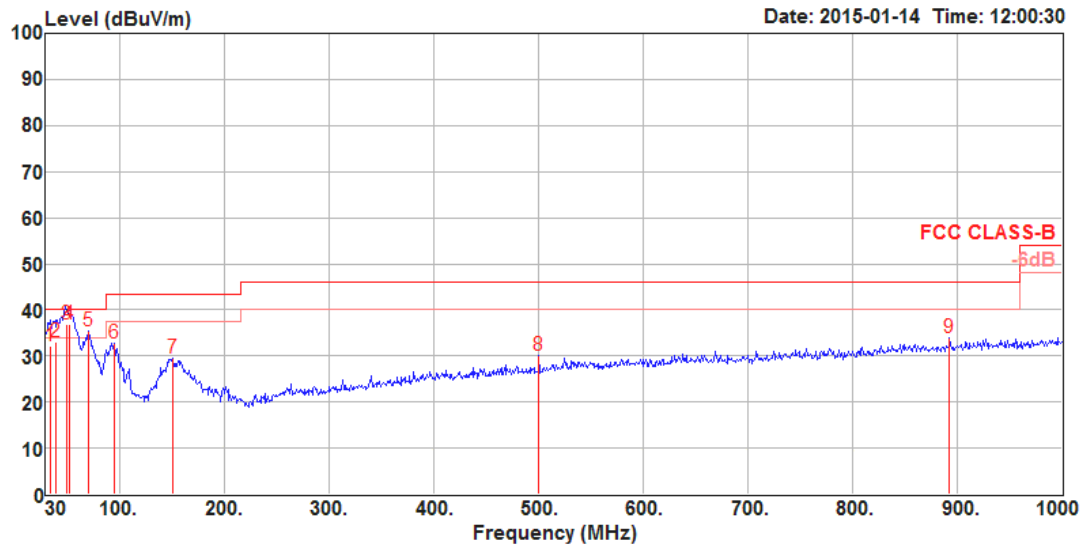

|   | Freq   | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | Remark     | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|------------|------------|------------|-------------------|---------------|------------|-------|-------|-----------|
|   | MHz    | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB         | cm    | deg   |           |
| 1 | 33.88  | 32.29  | 40.00      | -7.71      | 46.30      | 0.49              | 17.73         | 32.23 QP   | 125   | 171   | VERTICAL  |
| 2 | 38.73  | 33.18  | 40.00      | -6.82      | 50.10      | 0.55              | 14.82         | 32.29 QP   | 100   | 236   | VERTICAL  |
| 3 | 50.31  | 36.81  | 40.00      | -3.19      | 59.60      | 0.61              | 8.93          | 32.33 QP   | 125   | 245   | VERTICAL  |
| 4 | 52.43  | 36.96  | 40.00      | -3.04      | 60.21      | 0.62              | 8.45          | 32.32 QP   | 125   | 350   | VERTICAL  |
| 5 | 70.74  | 35.35  | 40.00      | -4.65      | 60.07      | 0.73              | 6.86          | 32.31 Peak | 150   | 311   | VERTICAL  |
| 6 | 94.99  | 32.87  | 43.50      | -10.63     | 54.00      | 0.85              | 10.17         | 32.15 Peak | 100   | 14    | VERTICAL  |
| 7 | 151.25 | 29.41  | 43.50      | -14.09     | 49.34      | 1.07              | 11.15         | 32.15 Peak | 100   | 0     | VERTICAL  |
| 8 | 500.45 | 30.13  | 46.00      | -15.87     | 42.51      | 1.96              | 17.81         | 32.15 Peak | 100   | 158   | VERTICAL  |
| 9 | 892.33 | 33.91  | 46.00      | -12.09     | 41.19      | 2.62              | 21.64         | 31.54 Peak | 125   | 122   | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<For Non-Beamforming Mode>

|               |                                                |                |                             |
|---------------|------------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 1 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                             |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                             |

##### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos |            |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | Remark  | cm    | deg   | Pol/Phase  |
| 1 | 4817.96 | 45.70  | 74.00  | -28.30 | 41.67 | 5.87  | 33.36   | 35.20  | Peak    | 165   | 261   | HORIZONTAL |
| 2 | 4826.96 | 32.35  | 54.00  | -21.65 | 28.29 | 5.87  | 33.39   | 35.20  | Average | 165   | 261   | HORIZONTAL |

##### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos |           |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | Remark  | cm    | deg   | Pol/Phase |
| 1 | 4820.96 | 34.71  | 54.00  | -19.29 | 30.65 | 5.87  | 33.39   | 35.20  | Average | 181   | 133   | VERTICAL  |
| 2 | 4821.12 | 46.51  | 74.00  | -27.49 | 42.45 | 5.87  | 33.39   | 35.20  | Peak    | 181   | 133   | VERTICAL  |

|               |                                                |                |                             |
|---------------|------------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 6 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                             |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                             |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4873.94 | 44.82  | 54.00      | -9.18      | 40.62      | 5.92       | 33.48          | 35.20         | Average | 165   | 259   | HORIZONTAL |
| 2 | 4873.97 | 51.37  | 74.00      | -22.63     | 47.17      | 5.92       | 33.48          | 35.20         | Peak    | 165   | 259   | HORIZONTAL |
| 3 | 7310.16 | 38.39  | 54.00      | -15.61     | 30.18      | 7.13       | 36.51          | 35.43         | Average | 117   | 177   | HORIZONTAL |
| 4 | 7312.28 | 50.53  | 74.00      | -23.47     | 42.32      | 7.13       | 36.51          | 35.43         | Peak    | 117   | 177   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4873.82 | 55.37  | 74.00      | -18.63     | 51.17      | 5.92       | 33.48          | 35.20         | Peak    | 175   | 132   | VERTICAL  |
| 2 | 4873.93 | 51.95  | 54.00      | -2.05      | 47.75      | 5.92       | 33.48          | 35.20         | Average | 175   | 132   | VERTICAL  |
| 3 | 7309.96 | 52.54  | 74.00      | -21.46     | 44.33      | 7.13       | 36.51          | 35.43         | Peak    | 117   | 183   | VERTICAL  |
| 4 | 7310.16 | 43.76  | 54.00      | -10.24     | 35.55      | 7.13       | 36.51          | 35.43         | Average | 117   | 183   | VERTICAL  |

|               |                                                |                |                              |
|---------------|------------------------------------------------|----------------|------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                          |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 11 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                              |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                              |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB                  |         | cm    | deg   |            |
| 1 | 4923.94 | 47.50  | 74.00      | -26.50     | 43.15      | 5.97       | 33.58          | 35.20               | Peak    | 165   | 257   | HORIZONTAL |
| 2 | 4923.94 | 36.48  | 54.00      | -17.52     | 32.13      | 5.97       | 33.58          | 35.20               | Average | 165   | 257   | HORIZONTAL |
| 3 | 7385.56 | 50.06  | 74.00      | -23.94     | 41.74      | 7.17       | 36.61          | 35.46               | Peak    | 126   | 92    | HORIZONTAL |
| 4 | 7394.68 | 36.67  | 54.00      | -17.33     | 28.32      | 7.17       | 36.64          | 35.46               | Average | 126   | 92    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB                  |         | cm    | deg   |           |
| 1 | 4923.96 | 42.32  | 54.00      | -11.68     | 37.97      | 5.97       | 33.58          | 35.20               | Average | 174   | 189   | VERTICAL  |
| 2 | 4924.10 | 50.05  | 74.00      | -23.95     | 45.70      | 5.97       | 33.58          | 35.20               | Peak    | 174   | 189   | VERTICAL  |
| 3 | 7386.68 | 43.77  | 54.00      | -10.23     | 35.45      | 7.17       | 36.61          | 35.46               | Average | 114   | 184   | VERTICAL  |
| 4 | 7387.00 | 53.19  | 74.00      | -20.81     | 44.87      | 7.17       | 36.61          | 35.46               | Peak    | 114   | 184   | VERTICAL  |

|               |                                                |                |                                              |
|---------------|------------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                              |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4815.00 | 31.94  | 54.00      | -22.06     | 27.93      | 5.85       | 33.36          | 35.20         | Average | 165   | 280   | HORIZONTAL |
| 2 | 4833.68 | 45.66  | 74.00      | -28.34     | 41.59      | 5.88       | 33.39          | 35.20         | Peak    | 165   | 280   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4823.36 | 45.53  | 74.00      | -28.47     | 41.47      | 5.87       | 33.39          | 35.20         | Peak    | 165   | 180   | VERTICAL  |
| 2 | 4826.80 | 32.03  | 54.00      | -21.97     | 27.97      | 5.87       | 33.39          | 35.20         | Average | 165   | 180   | VERTICAL  |



|               |                                                |                |                                               |
|---------------|------------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 6 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                               |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                               |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4865.70 | 48.31  | 74.00      | -25.69     | 44.16      | 5.90       | 33.45          | 35.20         | Peak    | 165   | 262   | HORIZONTAL |
| 2 | 4874.30 | 34.12  | 54.00      | -19.88     | 29.92      | 5.92       | 33.48          | 35.20         | Average | 165   | 262   | HORIZONTAL |
| 3 | 7291.40 | 49.81  | 74.00      | -24.19     | 41.63      | 7.12       | 36.48          | 35.42         | Peak    | 100   | 280   | HORIZONTAL |
| 4 | 7330.30 | 36.36  | 54.00      | -17.64     | 28.12      | 7.14       | 36.53          | 35.43         | Average | 100   | 280   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4869.50 | 52.81  | 74.00      | -21.19     | 48.64      | 5.92       | 33.45          | 35.20         | Peak    | 184   | 131   | VERTICAL  |
| 2 | 4875.00 | 37.81  | 54.00      | -16.19     | 33.61      | 5.92       | 33.48          | 35.20         | Average | 184   | 131   | VERTICAL  |
| 3 | 7301.70 | 50.56  | 74.00      | -23.44     | 42.37      | 7.13       | 36.48          | 35.42         | Peak    | 100   | 192   | VERTICAL  |
| 4 | 7313.00 | 37.36  | 54.00      | -16.64     | 29.15      | 7.13       | 36.51          | 35.43         | Average | 100   | 192   | VERTICAL  |

|               |                                                |                |                                               |
|---------------|------------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                               |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                               |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4928.76 | 45.64  | 74.00      | -28.36     | 41.29      | 5.97       | 33.58          | 35.20         | Peak    | 100   | 120   | HORIZONTAL |
| 2 | 4933.16 | 32.49  | 54.00      | -21.51     | 28.14      | 5.97       | 33.58          | 35.20         | Average | 100   | 120   | HORIZONTAL |
| 3 | 7394.60 | 49.92  | 74.00      | -24.08     | 41.57      | 7.17       | 36.64          | 35.46         | Peak    | 100   | 250   | HORIZONTAL |
| 4 | 7394.84 | 36.57  | 54.00      | -17.43     | 28.22      | 7.17       | 36.64          | 35.46         | Average | 100   | 250   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4924.76 | 46.60  | 74.00      | -27.40     | 42.25      | 5.97       | 33.58          | 35.20         | Peak    | 100   | 83    | VERTICAL  |
| 2 | 4945.40 | 32.81  | 54.00      | -21.19     | 28.42      | 5.98       | 33.61          | 35.20         | Average | 100   | 83    | VERTICAL  |
| 3 | 7394.72 | 36.64  | 54.00      | -17.36     | 28.29      | 7.17       | 36.64          | 35.46         | Average | 100   | 237   | VERTICAL  |
| 4 | 7395.64 | 50.26  | 74.00      | -23.74     | 41.91      | 7.17       | 36.64          | 35.46         | Peak    | 100   | 237   | VERTICAL  |

|               |                                                |                |                                              |
|---------------|------------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                              |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |            |
| 1 | 4841.92 | 33.32  | 54.00  | -20.68 | 29.22 | 5.88  | 33.42   | 35.20  | Average | 100   | 220   | HORIZONTAL |
| 2 | 4853.28 | 46.01  | 74.00  | -27.99 | 41.89 | 5.90  | 33.42   | 35.20  | Peak    | 100   | 220   | HORIZONTAL |
| 3 | 7269.80 | 49.26  | 74.00  | -24.74 | 41.13 | 7.11  | 36.43   | 35.41  | Peak    | 100   | 150   | HORIZONTAL |
| 4 | 7275.96 | 36.81  | 54.00  | -17.19 | 28.66 | 7.11  | 36.45   | 35.41  | Average | 100   | 150   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor |         | cm    | deg   |           |
| 1 | 4843.68 | 45.98  | 74.00  | -28.02 | 41.88 | 5.88  | 33.42   | 35.20  | Peak    | 100   | 232   | VERTICAL  |
| 2 | 4852.88 | 33.44  | 54.00  | -20.56 | 29.32 | 5.90  | 33.42   | 35.20  | Average | 100   | 232   | VERTICAL  |
| 3 | 7265.08 | 49.73  | 74.00  | -24.27 | 41.60 | 7.11  | 36.43   | 35.41  | Peak    | 100   | 123   | VERTICAL  |
| 4 | 7271.04 | 36.87  | 54.00  | -17.13 | 28.74 | 7.11  | 36.43   | 35.41  | Average | 100   | 123   | VERTICAL  |

|               |                                                |                |                                              |
|---------------|------------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                              |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4876.32 | 45.94  | 74.00      | -28.06     | 41.74      | 5.92       | 33.48          | 35.20         | Peak    | 100   | 221   | HORIZONTAL |
| 2 | 4883.00 | 33.06  | 54.00      | -20.94     | 28.86      | 5.92       | 33.48          | 35.20         | Average | 100   | 221   | HORIZONTAL |
| 3 | 7302.64 | 49.44  | 74.00      | -24.56     | 41.25      | 7.13       | 36.48          | 35.42         | Peak    | 100   | 175   | HORIZONTAL |
| 4 | 7311.80 | 36.86  | 54.00      | -17.14     | 28.65      | 7.13       | 36.51          | 35.43         | Average | 100   | 175   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4875.32 | 45.71  | 74.00      | -28.29     | 41.51      | 5.92       | 33.48          | 35.20         | Peak    | 100   | 247   | VERTICAL  |
| 2 | 4881.56 | 33.06  | 54.00      | -20.94     | 28.86      | 5.92       | 33.48          | 35.20         | Average | 100   | 247   | VERTICAL  |
| 3 | 7311.44 | 37.06  | 54.00      | -16.94     | 28.85      | 7.13       | 36.51          | 35.43         | Average | 100   | 150   | VERTICAL  |
| 4 | 7320.88 | 49.42  | 74.00      | -24.58     | 41.20      | 7.14       | 36.51          | 35.43         | Peak    | 100   | 150   | VERTICAL  |

|               |                                                |                |                                              |
|---------------|------------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                              |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | Remark  | cm    | deg   |            |
| 1 | 4895.56 | 46.69  | 74.00  | -27.31 | 42.45 | 5.93  | 33.51   | 35.20  | Peak    | 100   | 230   | HORIZONTAL |
| 2 | 4906.40 | 33.41  | 54.00  | -20.59 | 29.12 | 5.95  | 33.54   | 35.20  | Average | 100   | 230   | HORIZONTAL |
| 3 | 7354.40 | 36.88  | 54.00  | -17.12 | 28.60 | 7.16  | 36.56   | 35.44  | Average | 100   | 111   | HORIZONTAL |
| 4 | 7361.48 | 50.07  | 74.00  | -23.93 | 41.77 | 7.16  | 36.59   | 35.45  | Peak    | 100   | 111   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |         | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | Remark  | cm    | deg   |           |
| 1 | 4903.72 | 33.25  | 54.00  | -20.75 | 28.99 | 5.95  | 33.51   | 35.20  | Average | 100   | 244   | VERTICAL  |
| 2 | 4908.72 | 45.99  | 74.00  | -28.01 | 41.70 | 5.95  | 33.54   | 35.20  | Peak    | 100   | 244   | VERTICAL  |
| 3 | 7351.04 | 50.27  | 74.00  | -23.73 | 41.99 | 7.16  | 36.56   | 35.44  | Peak    | 100   | 120   | VERTICAL  |
| 4 | 7351.32 | 36.93  | 54.00  | -17.07 | 28.65 | 7.16  | 36.56   | 35.44  | Average | 100   | 120   | VERTICAL  |

|               |                                                |                |                                       |
|---------------|------------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 1 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                       |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                       |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4823.97 | 33.71  | 54.00      | -20.29     | 29.65      | 5.87       | 33.39          | 35.20         | Average | 165   | 200   | HORIZONTAL |
| 2 | 4824.08 | 47.39  | 74.00      | -26.61     | 43.33      | 5.87       | 33.39          | 35.20         | Peak    | 165   | 200   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4823.86 | 49.58  | 74.00      | -24.42     | 45.52      | 5.87       | 33.39          | 35.20         | Peak    | 172   | 135   | VERTICAL  |
| 2 | 4823.96 | 41.40  | 54.00      | -12.60     | 37.34      | 5.87       | 33.39          | 35.20         | Average | 172   | 135   | VERTICAL  |

|               |                                                |                |                                       |
|---------------|------------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 6 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                       |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                       |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 4873.93 | 40.00  | 54.00      | -14.00     | 35.80      | 5.92       | 33.48          | 35.20         | Average | 100   | 202   | HORIZONTAL |
| 2 | 4874.24 | 49.27  | 74.00      | -24.73     | 45.07      | 5.92       | 33.48          | 35.20         | Peak    | 100   | 202   | HORIZONTAL |
| 3 | 7310.12 | 37.97  | 54.00      | -16.03     | 29.76      | 7.13       | 36.51          | 35.43         | Average | 100   | 184   | HORIZONTAL |
| 4 | 7318.88 | 49.97  | 74.00      | -24.03     | 41.75      | 7.14       | 36.51          | 35.43         | Peak    | 100   | 184   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 4873.92 | 50.81  | 54.00      | -3.19      | 46.61      | 5.92       | 33.48          | 35.20         | Average | 165   | 148   | VERTICAL  |
| 2 | 4873.93 | 55.16  | 74.00      | -18.84     | 50.96      | 5.92       | 33.48          | 35.20         | Peak    | 165   | 148   | VERTICAL  |
| 3 | 7311.64 | 46.01  | 54.00      | -7.99      | 37.80      | 7.13       | 36.51          | 35.43         | Average | 100   | 203   | VERTICAL  |
| 4 | 7311.76 | 54.16  | 74.00      | -19.84     | 45.95      | 7.13       | 36.51          | 35.43         | Peak    | 100   | 203   | VERTICAL  |

|               |                                                |                |                                        |
|---------------|------------------------------------------------|----------------|----------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                    |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 11 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                        |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                        |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |                |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|   | MHz     | dBuV/m | Line   | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg            |
|   |         |        | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase      |
| 1 | 4923.86 | 47.31  | 74.00  | -26.69 | 42.96 | 5.97         | 33.58  | 35.20  | Peak    | 180   | 257 HORIZONTAL |
| 2 | 4923.96 | 34.91  | 54.00  | -19.09 | 30.56 | 5.97         | 33.58  | 35.20  | Average | 180   | 257 HORIZONTAL |
| 3 | 7394.12 | 50.35  | 74.00  | -23.65 | 42.00 | 7.17         | 36.64  | 35.46  | Peak    | 100   | 225 HORIZONTAL |
| 4 | 7394.84 | 36.71  | 54.00  | -17.29 | 28.36 | 7.17         | 36.64  | 35.46  | Average | 100   | 225 HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |              |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | Line   | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg          |
|   |         |        | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase    |
| 1 | 4923.94 | 43.55  | 54.00  | -10.45 | 39.20 | 5.97         | 33.58  | 35.20  | Average | 165   | 136 VERTICAL |
| 2 | 4923.95 | 50.57  | 74.00  | -23.43 | 46.22 | 5.97         | 33.58  | 35.20  | Peak    | 165   | 136 VERTICAL |
| 3 | 7385.16 | 43.81  | 54.00  | -10.19 | 35.49 | 7.17         | 36.61  | 35.46  | Average | 100   | 205 VERTICAL |
| 4 | 7385.20 | 53.77  | 74.00  | -20.23 | 45.45 | 7.17         | 36.61  | 35.46  | Peak    | 100   | 205 VERTICAL |



|               |                                                |                |                                                    |
|---------------|------------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 1 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                    |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                    |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | Remark | A/Pos   | T/Pos | Pol/Phase     |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|---------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB     | cm      | deg   |               |
| 1 | 4823.92 | 37.14  | 54.00         | -16.86        | 33.08         | 5.87                        | 33.39            | 35.20  | Average | 164   | 85 HORIZONTAL |
| 2 | 4824.01 | 47.56  | 74.00         | -26.44        | 43.50         | 5.87                        | 33.39            | 35.20  | Peak    | 164   | 85 HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | Remark | A/Pos   | T/Pos | Pol/Phase    |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|--------|---------|-------|--------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB     | cm      | deg   |              |
| 1 | 4823.87 | 53.09  | 74.00         | -20.91        | 49.03         | 5.87                        | 33.39            | 35.20  | Peak    | 161   | 136 VERTICAL |
| 2 | 4823.93 | 48.36  | 54.00         | -5.64         | 44.30         | 5.87                        | 33.39            | 35.20  | Average | 161   | 136 VERTICAL |

|               |                                                |                |                                                    |
|---------------|------------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 6 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                    |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |            |
| 1 | 4873.93 | 41.92  | 54.00         | -12.08        | 37.72         | 5.92          | 33.48             | 35.20            | Average | 167   | 201   | HORIZONTAL |
| 2 | 4873.96 | 50.06  | 74.00         | -23.94        | 45.86         | 5.92          | 33.48             | 35.20            | Peak    | 167   | 201   | HORIZONTAL |
| 3 | 7310.16 | 51.07  | 74.00         | -22.93        | 42.86         | 7.13          | 36.51             | 35.43            | Peak    | 202   | 228   | HORIZONTAL |
| 4 | 7311.60 | 39.59  | 54.00         | -14.41        | 31.38         | 7.13          | 36.51             | 35.43            | Average | 202   | 228   | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |           |
| 1 | 4873.96 | 52.80  | 54.00         | -1.20         | 48.60         | 5.92          | 33.48             | 35.20            | Average | 188   | 137   | VERTICAL  |
| 2 | 4873.97 | 56.92  | 74.00         | -17.08        | 52.72         | 5.92          | 33.48             | 35.20            | Peak    | 188   | 137   | VERTICAL  |
| 3 | 7311.64 | 48.20  | 54.00         | -5.80         | 39.99         | 7.13          | 36.51             | 35.43            | Average | 100   | 120   | VERTICAL  |
| 4 | 7311.80 | 55.80  | 74.00         | -18.20        | 47.59         | 7.13          | 36.51             | 35.43            | Peak    | 100   | 120   | VERTICAL  |

|               |                                                |                |                                                     |
|---------------|------------------------------------------------|----------------|-----------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                 |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11b CH 11 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                     |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |            |
| 1 | 4923.79 | 48.86  | 74.00         | -25.14        | 44.51         | 5.97          | 33.58             | 35.20            | Peak    | 154   | 213   | HORIZONTAL |
| 2 | 4923.94 | 38.47  | 54.00         | -15.53        | 34.12         | 5.97          | 33.58             | 35.20            | Average | 154   | 213   | HORIZONTAL |
| 3 | 7394.36 | 36.66  | 54.00         | -17.34        | 28.31         | 7.17          | 36.64             | 35.46            | Average | 100   | 272   | HORIZONTAL |
| 4 | 7395.48 | 49.98  | 74.00         | -24.02        | 41.63         | 7.17          | 36.64             | 35.46            | Peak    | 100   | 272   | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |           |
| 1 | 4923.94 | 50.30  | 54.00         | -3.70         | 45.95         | 5.97          | 33.58             | 35.20            | Average | 188   | 137   | VERTICAL  |
| 2 | 4923.96 | 54.25  | 74.00         | -19.75        | 49.90         | 5.97          | 33.58             | 35.20            | Peak    | 188   | 137   | VERTICAL  |
| 3 | 7385.20 | 40.62  | 54.00         | -13.38        | 32.30         | 7.17          | 36.61             | 35.46            | Average | 100   | 118   | VERTICAL  |
| 4 | 7387.00 | 51.32  | 74.00         | -22.68        | 43.00         | 7.17          | 36.61             | 35.46            | Peak    | 100   | 118   | VERTICAL  |

|               |                                               |                |                             |
|---------------|-----------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 1 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                             |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                             |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4823.78 | 45.89  | 74.00      | -28.11     | 42.76      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 0     | 146   | Peak    |
| 2 | 4823.86 | 34.73  | 54.00      | -19.27     | 31.60      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 0     | 146   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4823.93 | 36.70  | 54.00      | -17.30     | 33.58      | 5.74       | 33.70         | 31.08          | VERTICAL  | 308   | 186   | Average |
| 2 | 4823.93 | 46.51  | 74.00      | -27.49     | 43.39      | 5.74       | 33.70         | 31.08          | VERTICAL  | 308   | 186   | Peak    |

|               |                                               |                |                             |
|---------------|-----------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 6 / Chain 2 |
| Test Date     | Dec. 13, 2014                                 |                |                             |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                             |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.90 | 51.53  | 74.00      | -22.47     | 44.35      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 344   | 189   | Peak    |
| 2 | 4873.97 | 44.67  | 54.00      | -9.33      | 37.49      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 344   | 189   | Average |
| 3 | 7311.98 | 43.04  | 54.00      | -10.96     | 30.14      | 11.14      | 35.36         | 37.12          | HORIZONTAL | 310   | 215   | Average |
| 4 | 7311.98 | 54.29  | 74.00      | -19.71     | 41.39      | 11.14      | 35.36         | 37.12          | HORIZONTAL | 310   | 215   | Peak    |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.91 | 43.20  | 54.00      | -10.80     | 36.02      | 9.69       | 35.31         | 32.80          | VERTICAL  | 323   | 100   | Average |
| 2 | 4874.00 | 51.31  | 74.00      | -22.69     | 44.13      | 9.69       | 35.31         | 32.80          | VERTICAL  | 323   | 100   | Peak    |
| 3 | 7307.56 | 55.48  | 74.00      | -18.52     | 42.59      | 11.13      | 35.36         | 37.12          | VERTICAL  | 21    | 100   | Peak    |
| 4 | 7309.76 | 45.25  | 54.00      | -8.75      | 32.36      | 11.13      | 35.36         | 37.12          | VERTICAL  | 21    | 100   | Average |

|               |                                               |                |                              |
|---------------|-----------------------------------------------|----------------|------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                          |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 11 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                              |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                              |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |            | deg   | cm    |         |
| 1 | 4924.01 | 32.49  | 54.00  | -21.51 | 29.10 | 5.79  | 33.67  | 31.27   | HORIZONTAL | 360   | 156   | Average |
| 2 | 4924.65 | 45.10  | 74.00  | -28.90 | 41.71 | 5.79  | 33.67  | 31.27   | HORIZONTAL | 360   | 156   | Peak    |
| 3 | 7383.32 | 50.06  | 74.00  | -23.94 | 40.65 | 7.25  | 34.07  | 36.23   | HORIZONTAL | 284   | 100   | Peak    |
| 4 | 7386.90 | 38.79  | 54.00  | -15.21 | 29.37 | 7.25  | 34.07  | 36.24   | HORIZONTAL | 284   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |           | deg   | cm    |         |
| 1 | 4923.51 | 31.73  | 54.00  | -22.27 | 28.36 | 5.79  | 33.67  | 31.25   | VERTICAL  | 77    | 159   | Average |
| 2 | 4924.55 | 43.06  | 74.00  | -30.94 | 39.66 | 5.79  | 33.67  | 31.28   | VERTICAL  | 77    | 159   | Peak    |
| 3 | 7386.61 | 40.23  | 54.00  | -13.77 | 30.80 | 7.25  | 34.07  | 36.25   | VERTICAL  | 279   | 100   | Average |
| 4 | 7387.62 | 52.52  | 74.00  | -21.48 | 43.09 | 7.25  | 34.07  | 36.25   | VERTICAL  | 279   | 100   | Peak    |

|               |                                               |                |                                              |
|---------------|-----------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                              |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4821.84 | 44.98  | 74.00      | -29.02     | 41.85      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 110   | 100   | Peak    |
| 2 | 4825.81 | 31.76  | 54.00      | -22.24     | 28.62      | 5.74       | 33.70         | 31.10          | HORIZONTAL | 110   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4819.20 | 45.00  | 74.00      | -29.00     | 41.88      | 5.74       | 33.70         | 31.08          | VERTICAL  | 45    | 100   | Peak    |
| 2 | 4826.37 | 31.72  | 54.00      | -22.28     | 28.57      | 5.74       | 33.70         | 31.11          | VERTICAL  | 45    | 100   | Average |

|               |                                               |                |                                              |
|---------------|-----------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                              |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4871.57 | 30.71  | 54.00      | -23.29     | 27.45      | 5.77       | 33.69         | 31.18          | HORIZONTAL | 130   | 100   | Average |
| 2 | 4876.88 | 45.38  | 74.00      | -28.62     | 42.10      | 5.77       | 33.68         | 31.19          | HORIZONTAL | 130   | 100   | Peak    |
| 3 | 7307.93 | 51.60  | 74.00      | -22.40     | 42.36      | 7.19       | 34.00         | 36.05          | HORIZONTAL | 190   | 100   | Peak    |
| 4 | 7309.15 | 37.92  | 54.00      | -16.08     | 28.68      | 7.19       | 34.00         | 36.05          | HORIZONTAL | 190   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4872.21 | 31.64  | 54.00      | -22.36     | 28.38      | 5.77       | 33.69         | 31.18          | VERTICAL  | 258   | 100   | Average |
| 2 | 4873.52 | 43.62  | 74.00      | -30.38     | 40.35      | 5.77       | 33.68         | 31.18          | VERTICAL  | 258   | 100   | Peak    |
| 3 | 7307.24 | 51.46  | 74.00      | -22.54     | 42.22      | 7.19       | 34.00         | 36.05          | VERTICAL  | 223   | 100   | Peak    |
| 4 | 7308.21 | 38.02  | 54.00      | -15.98     | 28.78      | 7.19       | 34.00         | 36.05          | VERTICAL  | 223   | 100   | Average |



|               |                                               |                |                                               |
|---------------|-----------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                               |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                               |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4944.51 | 31.70  | 54.00      | -22.30     | 28.26      | 5.80       | 33.66         | 31.30          | HORIZONTAL | 5     | 100   | Average |
| 2 | 4948.04 | 43.28  | 74.00      | -30.72     | 39.83      | 5.80       | 33.66         | 31.31          | HORIZONTAL | 5     | 100   | Peak    |
| 3 | 7412.60 | 38.99  | 54.00      | -15.01     | 29.53      | 7.25       | 34.09         | 36.30          | HORIZONTAL | 333   | 100   | Average |
| 4 | 7418.36 | 52.37  | 74.00      | -21.63     | 42.91      | 7.25       | 34.10         | 36.31          | HORIZONTAL | 333   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4944.17 | 31.96  | 54.00      | -22.04     | 28.52      | 5.80       | 33.66         | 31.30          | VERTICAL  | 283   | 100   | Average |
| 2 | 4948.41 | 44.69  | 74.00      | -29.31     | 41.25      | 5.80       | 33.66         | 31.30          | VERTICAL  | 283   | 100   | Peak    |
| 3 | 7412.22 | 38.80  | 54.00      | -15.20     | 29.34      | 7.25       | 34.09         | 36.30          | VERTICAL  | 301   | 100   | Average |
| 4 | 7418.92 | 52.80  | 74.00      | -21.20     | 43.35      | 7.25       | 34.10         | 36.30          | VERTICAL  | 301   | 100   | Peak    |

|               |                                               |                |                                              |
|---------------|-----------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                              |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4839.24 | 44.65  | 74.00      | -29.35     | 41.48      | 5.75       | 33.70         | 31.12          | HORIZONTAL | 34    | 100   | Peak    |
| 2 | 4844.10 | 31.36  | 54.00      | -22.64     | 28.18      | 5.75       | 33.70         | 31.13          | HORIZONTAL | 34    | 100   | Average |
| 3 | 7262.48 | 38.22  | 54.00      | -15.78     | 29.07      | 7.16       | 33.95         | 35.94          | HORIZONTAL | 98    | 100   | Average |
| 4 | 7270.40 | 49.95  | 74.00      | -24.05     | 40.79      | 7.16       | 33.96         | 35.96          | HORIZONTAL | 98    | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4842.22 | 31.32  | 54.00      | -22.68     | 28.14      | 5.75       | 33.70         | 31.13          | VERTICAL  | 87    | 100   | Average |
| 2 | 4844.58 | 43.93  | 74.00      | -30.07     | 40.75      | 5.75       | 33.70         | 31.13          | VERTICAL  | 87    | 100   | Peak    |
| 3 | 7262.63 | 51.80  | 74.00      | -22.20     | 42.64      | 7.16       | 33.95         | 35.95          | VERTICAL  | 146   | 100   | Peak    |
| 4 | 7266.33 | 38.06  | 54.00      | -15.94     | 28.91      | 7.16       | 33.96         | 35.95          | VERTICAL  | 146   | 100   | Average |

|               |                                               |                |                                              |
|---------------|-----------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                              |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                              |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4870.60 | 45.67  | 74.00      | -28.33     | 42.41      | 5.77       | 33.69         | 31.18          | HORIZONTAL | 162   | 100   | Peak    |
| 2 | 4878.18 | 31.86  | 54.00      | -22.14     | 28.58      | 5.77       | 33.68         | 31.19          | HORIZONTAL | 162   | 100   | Average |
| 3 | 7310.12 | 37.87  | 54.00      | -16.13     | 28.63      | 7.19       | 34.00         | 36.05          | HORIZONTAL | 227   | 100   | Average |
| 4 | 7313.23 | 52.17  | 74.00      | -21.83     | 42.92      | 7.19       | 34.00         | 36.06          | HORIZONTAL | 227   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4871.54 | 43.21  | 74.00      | -30.79     | 39.95      | 5.77       | 33.69         | 31.18          | VERTICAL  | 198   | 100   | Peak    |
| 2 | 4878.07 | 31.83  | 54.00      | -22.17     | 28.56      | 5.77       | 33.68         | 31.18          | VERTICAL  | 198   | 100   | Average |
| 3 | 7309.83 | 38.08  | 54.00      | -15.92     | 28.84      | 7.19       | 34.00         | 36.05          | VERTICAL  | 278   | 100   | Average |
| 4 | 7311.42 | 52.05  | 74.00      | -21.95     | 42.81      | 7.19       | 34.00         | 36.05          | VERTICAL  | 278   | 100   | Peak    |

|               |                                               |                |                                               |
|---------------|-----------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT40 CH 9 / Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                               |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 1TX) |                |                                               |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4906.62 | 31.59  | 54.00      | -22.41     | 28.23      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 152   | 100   | Average |
| 2 | 4908.02 | 42.75  | 74.00      | -31.25     | 39.39      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 152   | 100   | Peak    |
| 3 | 7357.69 | 52.60  | 74.00      | -21.40     | 43.25      | 7.22       | 34.04         | 36.17          | HORIZONTAL | 237   | 100   | Peak    |
| 4 | 7357.72 | 38.94  | 54.00      | -15.06     | 29.59      | 7.22       | 34.04         | 36.17          | HORIZONTAL | 237   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4899.54 | 30.86  | 54.00      | -23.14     | 27.52      | 5.79       | 33.68         | 31.23          | VERTICAL  | 181   | 100   | Average |
| 2 | 4908.20 | 44.63  | 74.00      | -29.37     | 41.28      | 5.79       | 33.67         | 31.23          | VERTICAL  | 181   | 100   | Peak    |
| 3 | 7351.36 | 49.61  | 74.00      | -24.39     | 40.28      | 7.22       | 34.04         | 36.15          | VERTICAL  | 270   | 100   | Peak    |
| 4 | 7360.79 | 38.86  | 54.00      | -15.14     | 29.49      | 7.22       | 34.05         | 36.20          | VERTICAL  | 270   | 100   | Average |

|               |                                               |                |                                       |
|---------------|-----------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 1 / Chain 1 + Chain 2 |
| Test Date     | Dec. 13, 2014                                 |                |                                       |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                       |

#### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |            | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor | Factor  | Pol/Phase  | deg   | cm    |         |
| 1 | 4821.42 | 47.81  | 74.00  | -26.19 | 40.73 | 9.62  | 35.30  | 32.76   | HORIZONTAL | 162   | 100   | Peak    |
| 2 | 4831.18 | 34.06  | 54.00  | -19.94 | 26.96 | 9.63  | 35.30  | 32.77   | HORIZONTAL | 161   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |           | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor | Factor  | Pol/Phase | deg   | cm    |         |
| 1 | 4823.49 | 47.45  | 74.00  | -26.55 | 40.37 | 9.62  | 35.30  | 32.76   | VERTICAL  | 101   | 100   | Peak    |
| 2 | 4823.99 | 34.53  | 54.00  | -19.47 | 27.45 | 9.62  | 35.30  | 32.76   | VERTICAL  | 101   | 100   | Average |

|               |                                               |                |                                       |
|---------------|-----------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 6 / Chain 1 + Chain 2 |
| Test Date     | Dec. 13, 2014                                 |                |                                       |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                       |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.93 | 43.89  | 54.00      | -10.11     | 36.71      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 352   | 100   | Average |
| 2 | 4874.06 | 50.92  | 74.00      | -23.08     | 43.74      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 352   | 100   | Peak    |
| 3 | 7310.22 | 55.85  | 74.00      | -18.15     | 42.96      | 11.13      | 35.36         | 37.12          | HORIZONTAL | 308   | 214   | Peak    |
| 4 | 7311.70 | 46.51  | 54.00      | -7.49      | 33.61      | 11.14      | 35.36         | 37.12          | HORIZONTAL | 308   | 214   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.90 | 45.99  | 54.00      | -8.01      | 38.81      | 9.69       | 35.31         | 32.80          | VERTICAL  | 36    | 100   | Average |
| 2 | 4873.94 | 51.65  | 74.00      | -22.35     | 44.47      | 9.69       | 35.31         | 32.80          | VERTICAL  | 36    | 100   | Peak    |
| 3 | 7310.19 | 45.66  | 54.00      | -8.34      | 32.77      | 11.13      | 35.36         | 37.12          | VERTICAL  | 332   | 100   | Average |
| 4 | 7313.72 | 54.92  | 74.00      | -19.08     | 42.02      | 11.14      | 35.36         | 37.12          | VERTICAL  | 332   | 100   | Peak    |

|               |                                               |                |                                           |
|---------------|-----------------------------------------------|----------------|-------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                       |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 11 /<br>Chain 1 + Chain 2 |
| Test Date     | Dec. 13, 2014                                 |                |                                           |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                           |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4921.02 | 34.93  | 54.00      | -19.07     | 27.67      | 9.76       | 35.33         | 32.83          | HORIZONTAL | 57    | 197   | Average |
| 2 | 4921.05 | 47.36  | 74.00      | -26.64     | 40.10      | 9.76       | 35.33         | 32.83          | HORIZONTAL | 57    | 197   | Peak    |
| 3 | 7386.64 | 44.43  | 54.00      | -9.57      | 31.39      | 11.20      | 35.32         | 37.16          | HORIZONTAL | 308   | 213   | Average |
| 4 | 7386.96 | 55.18  | 74.00      | -18.82     | 42.14      | 11.20      | 35.32         | 37.16          | HORIZONTAL | 308   | 213   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4926.87 | 35.59  | 54.00      | -18.41     | 28.31      | 9.77       | 35.33         | 32.84          | VERTICAL  | 340   | 100   | Average |
| 2 | 4927.04 | 47.41  | 74.00      | -26.59     | 40.13      | 9.77       | 35.33         | 32.84          | VERTICAL  | 340   | 100   | Peak    |
| 3 | 7386.64 | 43.93  | 54.00      | -10.07     | 30.89      | 11.20      | 35.32         | 37.16          | VERTICAL  | 28    | 100   | Average |
| 4 | 7386.98 | 55.63  | 74.00      | -18.37     | 42.59      | 11.20      | 35.32         | 37.16          | VERTICAL  | 28    | 100   | Peak    |

|               |                                               |                |                                                    |
|---------------|-----------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 1 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 13, 2014                                 |                |                                                    |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                    |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4823.97 | 34.74  | 54.00         | -19.26        | 27.66         | 9.62          | 35.30            | 32.76             | HORIZONTAL | 2     | 116   | Average |
| 2 | 4827.76 | 47.52  | 74.00         | -26.48        | 40.43         | 9.62          | 35.30            | 32.77             | HORIZONTAL | 2     | 116   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4817.31 | 46.72  | 74.00         | -27.28        | 39.64         | 9.61          | 35.29            | 32.76             | VERTICAL  | 314   | 100   | Peak    |
| 2 | 4823.91 | 36.40  | 54.00         | -17.60        | 29.32         | 9.62          | 35.30            | 32.76             | VERTICAL  | 314   | 100   | Average |



|               |                                               |                |                                                    |
|---------------|-----------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 6 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 13, 2014                                 |                |                                                    |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                    |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.94 | 52.11  | 74.00      | -21.89     | 44.93      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 10    | 100   | Peak    |
| 2 | 4873.95 | 46.65  | 54.00      | -7.35      | 39.47      | 9.69       | 35.31         | 32.80          | HORIZONTAL | 10    | 100   | Average |
| 3 | 7310.13 | 46.83  | 54.00      | -7.17      | 33.94      | 11.13      | 35.36         | 37.12          | HORIZONTAL | 310   | 100   | Average |
| 4 | 7310.19 | 56.34  | 74.00      | -17.66     | 43.45      | 11.13      | 35.36         | 37.12          | HORIZONTAL | 310   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.88 | 47.18  | 54.00      | -6.82      | 40.00      | 9.69       | 35.31         | 32.80          | VERTICAL  | 35    | 100   | Average |
| 2 | 4874.00 | 52.57  | 74.00      | -21.43     | 45.39      | 9.69       | 35.31         | 32.80          | VERTICAL  | 35    | 100   | Peak    |
| 3 | 7308.95 | 55.85  | 74.00      | -18.15     | 42.96      | 11.13      | 35.36         | 37.12          | VERTICAL  | 331   | 100   | Peak    |
| 4 | 7310.05 | 47.16  | 54.00      | -6.84      | 34.27      | 11.13      | 35.36         | 37.12          | VERTICAL  | 331   | 100   | Average |

|               |                                               |                |                                                     |
|---------------|-----------------------------------------------|----------------|-----------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                 |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11b CH 11 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 13, 2014                                 |                |                                                     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                     |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4920.79 | 48.30  | 74.00      | -25.70     | 41.04      | 9.76       | 35.33         | 32.83          | HORIZONTAL | 20    | 124   | Peak    |
| 2 | 4920.87 | 35.76  | 54.00      | -18.24     | 28.50      | 9.76       | 35.33         | 32.83          | HORIZONTAL | 20    | 124   | Average |
| 3 | 7383.31 | 54.77  | 74.00      | -19.23     | 41.73      | 11.20      | 35.32         | 37.16          | HORIZONTAL | 298   | 145   | Peak    |
| 4 | 7386.91 | 41.99  | 54.00      | -12.01     | 28.95      | 11.20      | 35.32         | 37.16          | HORIZONTAL | 298   | 145   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4918.62 | 48.08  | 74.00      | -25.92     | 40.83      | 9.75       | 35.33         | 32.83          | VERTICAL  | 330   | 130   | Peak    |
| 2 | 4921.02 | 35.54  | 54.00      | -18.46     | 28.28      | 9.76       | 35.33         | 32.83          | VERTICAL  | 330   | 130   | Average |
| 3 | 7386.64 | 55.54  | 74.00      | -18.46     | 42.50      | 11.20      | 35.32         | 37.16          | VERTICAL  | 74    | 132   | Peak    |
| 4 | 7386.75 | 45.75  | 54.00      | -8.25      | 32.71      | 11.20      | 35.32         | 37.16          | VERTICAL  | 74    | 132   | Average |

|               |                                                                                                  |                |                             |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 1 / Chain 1 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                             |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                             |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4823.44  | 31.35  | 54.00      | -22.65     | 28.22      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 87    | 100   | Average |
| 2 | 4823.62  | 44.51  | 74.00      | -29.49     | 41.38      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 87    | 100   | Peak    |
| 3 | 12059.39 | 59.76  | 74.00      | -14.24     | 46.68      | 9.27       | 35.03         | 38.84          | HORIZONTAL | 54    | 194   | Peak    |
| 4 | 12060.64 | 50.48  | 54.00      | -3.52      | 37.40      | 9.27       | 35.03         | 38.84          | HORIZONTAL | 54    | 194   | Average |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4823.91  | 45.73  | 74.00      | -28.27     | 42.61      | 5.74       | 33.70         | 31.08          | VERTICAL  | 13    | 190   | Peak    |
| 2 | 4823.93  | 34.32  | 54.00      | -19.68     | 31.20      | 5.74       | 33.70         | 31.08          | VERTICAL  | 13    | 190   | Average |
| 3 | 12059.38 | 44.44  | 54.00      | -9.56      | 31.34      | 9.27       | 35.03         | 38.86          | VERTICAL  | 253   | 100   | Average |
| 4 | 12059.93 | 57.33  | 74.00      | -16.67     | 44.23      | 9.27       | 35.03         | 38.86          | VERTICAL  | 253   | 100   | Peak    |

|               |                                                                                                  |                |                             |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                         |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 6 / Chain 1 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                             |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                             |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.97  | 32.94  | 54.00      | -21.06     | 29.67      | 5.77       | 33.68         | 31.18          | HORIZONTAL | 97    | 100   | Average |
| 2 | 4874.24  | 45.48  | 74.00      | -28.52     | 42.21      | 5.77       | 33.68         | 31.18          | HORIZONTAL | 97    | 100   | Peak    |
| 3 | 7311.67  | 51.48  | 74.00      | -22.52     | 42.23      | 7.19       | 34.00         | 36.06          | HORIZONTAL | 76    | 209   | Peak    |
| 4 | 7311.71  | 39.46  | 54.00      | -14.54     | 30.21      | 7.19       | 34.00         | 36.06          | HORIZONTAL | 76    | 209   | Average |
| 5 | 12185.25 | 61.66  | 74.00      | -12.34     | 48.58      | 9.36       | 34.99         | 38.71          | HORIZONTAL | 56    | 195   | Peak    |
| 6 | 12185.59 | 52.81  | 54.00      | -1.19      | 39.73      | 9.36       | 34.99         | 38.71          | HORIZONTAL | 56    | 195   | Average |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4874.01  | 34.00  | 54.00      | -20.00     | 30.73      | 5.77       | 33.68         | 31.18          | VERTICAL  | 16    | 179   | Average |
| 2 | 4876.50  | 45.03  | 74.00      | -28.97     | 41.76      | 5.77       | 33.68         | 31.18          | VERTICAL  | 16    | 179   | Peak    |
| 3 | 7311.57  | 55.47  | 74.00      | -18.53     | 46.23      | 7.19       | 34.00         | 36.05          | VERTICAL  | 15    | 100   | Peak    |
| 4 | 7311.70  | 46.97  | 54.00      | -7.03      | 37.73      | 7.19       | 34.00         | 36.05          | VERTICAL  | 15    | 100   | Average |
| 5 | 12182.73 | 57.91  | 74.00      | -16.09     | 44.82      | 9.36       | 34.99         | 38.72          | VERTICAL  | 15    | 170   | Peak    |
| 6 | 12185.57 | 46.23  | 54.00      | -7.77      | 33.14      | 9.36       | 34.99         | 38.72          | VERTICAL  | 15    | 170   | Average |

|               |                                                                                                  |                |                              |
|---------------|--------------------------------------------------------------------------------------------------|----------------|------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                          |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 11 / Chain 1 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                              |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                              |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4923.96  | 31.45  | 54.00      | -22.55     | 28.06      | 5.79       | 33.67         | 31.27          | HORIZONTAL | 88    | 100   | Average |
| 2 | 4924.15  | 45.24  | 74.00      | -28.76     | 41.85      | 5.79       | 33.67         | 31.27          | HORIZONTAL | 88    | 100   | Peak    |
| 3 | 7385.32  | 52.51  | 74.00      | -21.49     | 43.10      | 7.25       | 34.07         | 36.23          | HORIZONTAL | 333   | 245   | Peak    |
| 4 | 7386.49  | 38.75  | 54.00      | -15.25     | 29.34      | 7.25       | 34.07         | 36.23          | HORIZONTAL | 333   | 245   | Average |
| 5 | 12309.71 | 60.30  | 74.00      | -13.70     | 47.20      | 9.46       | 34.95         | 38.59          | HORIZONTAL | 50    | 194   | Peak    |
| 6 | 12310.59 | 50.21  | 54.00      | -3.79      | 37.11      | 9.46       | 34.95         | 38.59          | HORIZONTAL | 50    | 194   | Average |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4923.88  | 49.53  | 74.00      | -24.47     | 46.13      | 5.79       | 33.67         | 31.28          | VERTICAL  | 17    | 184   | Peak    |
| 2 | 4923.94  | 43.68  | 54.00      | -10.32     | 40.28      | 5.79       | 33.67         | 31.28          | VERTICAL  | 17    | 184   | Average |
| 3 | 7386.65  | 47.41  | 54.00      | -6.59      | 37.98      | 7.25       | 34.07         | 36.25          | VERTICAL  | 10    | 118   | Average |
| 4 | 7386.84  | 56.04  | 74.00      | -17.96     | 46.61      | 7.25       | 34.07         | 36.25          | VERTICAL  | 10    | 118   | Peak    |
| 5 | 12309.66 | 57.70  | 74.00      | -16.30     | 44.61      | 9.46       | 34.95         | 38.58          | VERTICAL  | 338   | 182   | Peak    |
| 6 | 12310.51 | 44.38  | 54.00      | -9.62      | 31.29      | 9.46       | 34.95         | 38.58          | VERTICAL  | 338   | 182   | Average |

|               |                                                                                                  |                |                                               |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                               |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                               |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4827.37 | 44.65  | 74.00      | -29.35     | 41.51      | 5.74       | 33.70         | 31.10          | HORIZONTAL | 218   | 100   | Peak    |
| 2 | 4828.38 | 31.37  | 54.00      | -22.63     | 28.23      | 5.74       | 33.70         | 31.10          | HORIZONTAL | 218   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4820.15 | 45.44  | 74.00      | -28.56     | 42.32      | 5.74       | 33.70         | 31.08          | VERTICAL  | 206   | 100   | Peak    |
| 2 | 4828.09 | 31.42  | 54.00      | -22.58     | 28.27      | 5.74       | 33.70         | 31.11          | VERTICAL  | 206   | 100   | Average |

|               |                                                                                                  |                |                                              |
|---------------|--------------------------------------------------------------------------------------------------|----------------|----------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                          |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                              |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                              |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.49 | 53.69  | 74.00      | -20.31     | 50.42      | 5.77       | 33.68         | 31.18          | HORIZONTAL | 67    | 185   | Peak    |
| 2 | 4875.09 | 36.60  | 54.00      | -17.40     | 33.33      | 5.77       | 33.68         | 31.18          | HORIZONTAL | 67    | 185   | Average |
| 3 | 7309.72 | 50.47  | 74.00      | -23.53     | 41.23      | 7.19       | 34.00         | 36.05          | HORIZONTAL | 322   | 100   | Peak    |
| 4 | 7315.71 | 36.71  | 54.00      | -17.29     | 27.45      | 7.19       | 34.00         | 36.07          | HORIZONTAL | 322   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.20 | 45.86  | 74.00      | -28.14     | 42.59      | 5.77       | 33.68         | 31.18          | VERTICAL  | 187   | 100   | Peak    |
| 2 | 4880.80 | 32.03  | 54.00      | -21.97     | 28.76      | 5.77       | 33.68         | 31.18          | VERTICAL  | 187   | 100   | Average |
| 3 | 7311.58 | 50.17  | 74.00      | -23.83     | 40.93      | 7.19       | 34.00         | 36.05          | VERTICAL  | 57    | 100   | Peak    |
| 4 | 7320.23 | 36.83  | 54.00      | -17.17     | 27.55      | 7.19       | 34.01         | 36.10          | VERTICAL  | 57    | 100   | Average |



|               |                                                                                                  |                |                                               |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                               |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                               |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4929.00 | 43.81  | 74.00      | -30.19     | 40.39      | 5.80       | 33.66         | 31.28          | HORIZONTAL | 92    | 100   | Peak    |
| 2 | 4933.81 | 29.96  | 54.00      | -24.04     | 26.53      | 5.80       | 33.66         | 31.29          | HORIZONTAL | 92    | 100   | Average |
| 3 | 7386.39 | 51.24  | 74.00      | -22.76     | 41.83      | 7.25       | 34.07         | 36.23          | HORIZONTAL | 206   | 100   | Peak    |
| 4 | 7395.33 | 37.36  | 54.00      | -16.64     | 27.93      | 7.25       | 34.08         | 36.26          | HORIZONTAL | 206   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4918.01 | 44.71  | 74.00      | -29.29     | 41.34      | 5.79       | 33.67         | 31.25          | VERTICAL  | 150   | 100   | Peak    |
| 2 | 4931.85 | 29.86  | 54.00      | -24.14     | 26.44      | 5.80       | 33.66         | 31.28          | VERTICAL  | 150   | 100   | Average |
| 3 | 7383.72 | 50.36  | 74.00      | -23.64     | 40.93      | 7.25       | 34.07         | 36.25          | VERTICAL  | 307   | 100   | Peak    |
| 4 | 7391.03 | 37.30  | 54.00      | -16.70     | 27.87      | 7.25       | 34.07         | 36.25          | VERTICAL  | 307   | 100   | Average |



|               |                                                                                                  |                |                                                 |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                             |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 3 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                                 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                                 |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4841.69 | 31.76  | 54.00      | -22.24     | 28.58      | 5.75       | 33.70         | 31.13          | HORIZONTAL | 61    | 100   | Average |
| 2 | 4849.77 | 43.42  | 74.00      | -30.58     | 40.22      | 5.75       | 33.69         | 31.14          | HORIZONTAL | 61    | 100   | Peak    |
| 3 | 7259.56 | 51.33  | 74.00      | -22.67     | 42.19      | 7.16       | 33.95         | 35.93          | HORIZONTAL | 224   | 100   | Peak    |
| 4 | 7279.51 | 38.28  | 54.00      | -15.72     | 29.11      | 7.16       | 33.97         | 35.98          | HORIZONTAL | 224   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4834.61 | 44.37  | 74.00      | -29.63     | 41.22      | 5.74       | 33.70         | 31.11          | VERTICAL  | 302   | 100   | Peak    |
| 2 | 4836.72 | 31.57  | 54.00      | -22.43     | 28.41      | 5.75       | 33.70         | 31.11          | VERTICAL  | 302   | 100   | Average |
| 3 | 7260.09 | 38.26  | 54.00      | -15.74     | 29.10      | 7.16       | 33.95         | 35.95          | VERTICAL  | 149   | 100   | Average |
| 4 | 7260.33 | 50.77  | 74.00      | -23.23     | 41.61      | 7.16       | 33.95         | 35.95          | VERTICAL  | 149   | 100   | Peak    |

|               |                                                                                                  |                |                                                 |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                             |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 6 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                                 |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                                 |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4863.71 | 30.85  | 54.00      | -23.15     | 27.63      | 5.75       | 33.69         | 31.16          | HORIZONTAL | 64    | 100   | Average |
| 2 | 4871.31 | 44.21  | 74.00      | -29.79     | 40.95      | 5.77       | 33.69         | 31.18          | HORIZONTAL | 64    | 100   | Peak    |
| 3 | 7316.05 | 38.20  | 54.00      | -15.80     | 28.94      | 7.19       | 34.00         | 36.07          | HORIZONTAL | 323   | 100   | Average |
| 4 | 7321.29 | 50.99  | 74.00      | -23.01     | 41.73      | 7.19       | 34.01         | 36.08          | HORIZONTAL | 323   | 100   | Peak    |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4860.11 | 31.40  | 54.00      | -22.60     | 28.18      | 5.75       | 33.69         | 31.16          | VERTICAL  | 251   | 100   | Average |
| 2 | 4861.36 | 44.02  | 74.00      | -29.98     | 40.80      | 5.75       | 33.69         | 31.16          | VERTICAL  | 251   | 100   | Peak    |
| 3 | 7296.77 | 50.74  | 74.00      | -23.26     | 41.49      | 7.19       | 33.99         | 36.05          | VERTICAL  | 117   | 100   | Peak    |
| 4 | 7319.46 | 38.28  | 54.00      | -15.72     | 29.00      | 7.19       | 34.01         | 36.10          | VERTICAL  | 117   | 100   | Average |

|               |                                                                                                  |                |                                               |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                           |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                               |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 1TX) |                |                                               |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4903.42 | 30.96  | 54.00      | -23.04     | 27.61      | 5.79       | 33.67         | 31.23          | HORIZONTAL | 97    | 100   | Average |
| 2 | 4909.58 | 44.54  | 74.00      | -29.46     | 41.18      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 97    | 100   | Peak    |
| 3 | 7350.33 | 38.55  | 54.00      | -15.45     | 29.22      | 7.22       | 34.04         | 36.15          | HORIZONTAL | 76    | 100   | Average |
| 4 | 7364.21 | 51.61  | 74.00      | -22.39     | 42.26      | 7.22       | 34.05         | 36.18          | HORIZONTAL | 76    | 100   | Peak    |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4894.19 | 44.62  | 74.00      | -29.38     | 41.32      | 5.77       | 33.68         | 31.21          | VERTICAL  | 238   | 100   | Peak    |
| 2 | 4898.71 | 31.05  | 54.00      | -22.95     | 27.71      | 5.79       | 33.68         | 31.23          | VERTICAL  | 238   | 100   | Average |
| 3 | 7350.62 | 51.80  | 74.00      | -22.20     | 42.47      | 7.22       | 34.04         | 36.15          | VERTICAL  | 101   | 100   | Peak    |
| 4 | 7350.78 | 38.59  | 54.00      | -15.41     | 29.26      | 7.22       | 34.04         | 36.15          | VERTICAL  | 101   | 100   | Average |

|               |                                                                                                  |                |                                       |
|---------------|--------------------------------------------------------------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 1 / Chain 1 + Chain 2 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                       |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |                |                                       |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4820.96  | 39.92  | 54.00      | -14.08     | 36.79      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 69    | 177   | Average |
| 2 | 4821.10  | 46.82  | 74.00      | -27.18     | 43.69      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 69    | 177   | Peak    |
| 3 | 12059.10 | 49.20  | 54.00      | -4.80      | 36.12      | 9.27       | 35.03         | 38.84          | HORIZONTAL | 313   | 155   | Average |
| 4 | 12060.48 | 58.46  | 74.00      | -15.54     | 45.38      | 9.27       | 35.03         | 38.84          | HORIZONTAL | 313   | 155   | Peak    |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4820.62  | 45.28  | 74.00      | -28.72     | 42.16      | 5.74       | 33.70         | 31.08          | VERTICAL  | 24    | 170   | Peak    |
| 2 | 4820.94  | 36.00  | 54.00      | -18.00     | 32.88      | 5.74       | 33.70         | 31.08          | VERTICAL  | 24    | 170   | Average |
| 3 | 12059.01 | 45.28  | 54.00      | -8.72      | 32.18      | 9.27       | 35.03         | 38.86          | VERTICAL  | 344   | 142   | Average |
| 4 | 12061.15 | 57.44  | 74.00      | -16.56     | 44.34      | 9.27       | 35.03         | 38.86          | VERTICAL  | 344   | 142   | Peak    |

|               |                                                                                                  |                |                                       |
|---------------|--------------------------------------------------------------------------------------------------|----------------|---------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                   |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 6 / Chain 1 + Chain 2 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                       |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |                |                                       |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4870.83  | 47.63  | 74.00      | -26.37     | 44.37      | 5.77       | 33.69         | 31.18          | HORIZONTAL | 67    | 188   | Peak    |
| 2 | 4873.94  | 40.62  | 54.00      | -13.38     | 37.35      | 5.77       | 33.68         | 31.18          | HORIZONTAL | 67    | 188   | Average |
| 3 | 7309.83  | 52.49  | 74.00      | -21.51     | 43.25      | 7.19       | 34.00         | 36.05          | HORIZONTAL | 71    | 145   | Peak    |
| 4 | 7311.72  | 39.38  | 54.00      | -14.62     | 30.13      | 7.19       | 34.00         | 36.06          | HORIZONTAL | 71    | 145   | Average |
| 5 | 12184.44 | 60.71  | 74.00      | -13.29     | 47.63      | 9.36       | 34.99         | 38.71          | HORIZONTAL | 291   | 141   | Peak    |
| 6 | 12185.59 | 52.35  | 54.00      | -1.65      | 39.27      | 9.36       | 34.99         | 38.71          | HORIZONTAL | 291   | 141   | Average |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4870.94  | 40.66  | 54.00      | -13.34     | 37.40      | 5.77       | 33.69         | 31.18          | VERTICAL  | 26    | 171   | Average |
| 2 | 4873.98  | 46.85  | 74.00      | -27.15     | 43.58      | 5.77       | 33.68         | 31.18          | VERTICAL  | 26    | 171   | Peak    |
| 3 | 7311.67  | 49.65  | 54.00      | -4.35      | 40.41      | 7.19       | 34.00         | 36.05          | VERTICAL  | 3     | 167   | Average |
| 4 | 7311.69  | 56.88  | 74.00      | -17.12     | 47.64      | 7.19       | 34.00         | 36.05          | VERTICAL  | 3     | 167   | Peak    |
| 5 | 12185.61 | 48.03  | 54.00      | -5.97      | 34.94      | 9.36       | 34.99         | 38.72          | VERTICAL  | 347   | 116   | Average |
| 6 | 12185.61 | 58.22  | 74.00      | -15.78     | 45.13      | 9.36       | 34.99         | 38.72          | VERTICAL  | 347   | 116   | Peak    |

|               |                                                                                                  |                |                                        |
|---------------|--------------------------------------------------------------------------------------------------|----------------|----------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                    |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 11 / Chain 1 + Chain 2 |
| Test Date     | Dec. 28, 2014                                                                                    |                |                                        |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 2TX) |                |                                        |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamplifier Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB                  | dB/m           |            | deg   | cm    |         |
| 1 | 4920.70  | 45.61  | 74.00      | -28.39     | 42.23      | 5.79       | 33.67               | 31.26          | HORIZONTAL | 69    | 191   | Peak    |
| 2 | 4920.96  | 39.24  | 54.00      | -14.76     | 35.86      | 5.79       | 33.67               | 31.26          | HORIZONTAL | 69    | 191   | Average |
| 3 | 7384.61  | 51.32  | 74.00      | -22.68     | 41.91      | 7.25       | 34.07               | 36.23          | HORIZONTAL | 61    | 159   | Peak    |
| 4 | 7386.58  | 38.47  | 54.00      | -15.53     | 29.06      | 7.25       | 34.07               | 36.23          | HORIZONTAL | 61    | 159   | Average |
| 5 | 12309.70 | 59.98  | 74.00      | -14.02     | 46.88      | 9.46       | 34.95               | 38.59          | HORIZONTAL | 317   | 148   | Peak    |
| 6 | 12310.54 | 50.73  | 54.00      | -3.27      | 37.63      | 9.46       | 34.95               | 38.59          | HORIZONTAL | 317   | 148   | Average |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamplifier Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB                  | dB/m           |           | deg   | cm    |         |
| 1 | 4920.67  | 45.82  | 74.00      | -28.18     | 42.45      | 5.79       | 33.67               | 31.25          | VERTICAL  | 23    | 172   | Peak    |
| 2 | 4920.92  | 38.80  | 54.00      | -15.20     | 35.43      | 5.79       | 33.67               | 31.25          | VERTICAL  | 23    | 172   | Average |
| 3 | 7386.69  | 47.49  | 54.00      | -6.51      | 38.06      | 7.25       | 34.07               | 36.25          | VERTICAL  | 360   | 185   | Average |
| 4 | 7386.82  | 54.97  | 74.00      | -19.03     | 45.54      | 7.25       | 34.07               | 36.25          | VERTICAL  | 360   | 185   | Peak    |
| 5 | 12309.74 | 56.78  | 74.00      | -17.22     | 43.69      | 9.46       | 34.95               | 38.58          | VERTICAL  | 6     | 108   | Peak    |
| 6 | 12310.61 | 45.03  | 54.00      | -8.97      | 31.94      | 9.46       | 34.95               | 38.58          | VERTICAL  | 6     | 108   | Average |

|               |                                                                                                  |                |                                                    |
|---------------|--------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 1 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                                                    |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |                |                                                    |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |            | T/Pos | A/Pos | Remark  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase  | deg   | cm    |         |
| 1 | 4823.90  | 40.83  | 54.00  | -13.17 | 37.70 | 5.74  | 33.70  | 31.09   | HORIZONTAL | 300   | 151   | Average |
| 2 | 4823.94  | 48.07  | 74.00  | -25.93 | 44.94 | 5.74  | 33.70  | 31.09   | HORIZONTAL | 300   | 151   | Peak    |
| 3 | 12059.05 | 44.67  | 54.00  | -9.33  | 31.59 | 9.27  | 35.03  | 38.84   | HORIZONTAL | 75    | 212   | Average |
| 4 | 12059.42 | 57.99  | 74.00  | -16.01 | 44.91 | 9.27  | 35.03  | 38.84   | HORIZONTAL | 75    | 212   | Peak    |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |           | T/Pos | A/Pos | Remark  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase | deg   | cm    |         |
| 1 | 4823.87  | 52.64  | 74.00  | -21.36 | 49.52 | 5.74  | 33.70  | 31.08   | VERTICAL  | 6     | 177   | Peak    |
| 2 | 4823.94  | 48.82  | 54.00  | -5.18  | 45.70 | 5.74  | 33.70  | 31.08   | VERTICAL  | 6     | 177   | Average |
| 3 | 12059.12 | 57.31  | 74.00  | -16.69 | 44.21 | 9.27  | 35.03  | 38.86   | VERTICAL  | 333   | 100   | Peak    |
| 4 | 12059.20 | 43.94  | 54.00  | -10.06 | 30.84 | 9.27  | 35.03  | 38.86   | VERTICAL  | 333   | 100   | Average |



|               |                                                                                                  |                |                                                    |
|---------------|--------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                                |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 6 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                                                    |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |                |                                                    |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |            | deg   | cm    |         |
| 1 | 4873.94  | 43.70  | 54.00  | -10.30 | 40.43 | 5.77  | 33.68  | 31.18   | HORIZONTAL | 300   | 168   | Average |
| 2 | 4873.98  | 49.16  | 74.00  | -24.84 | 45.89 | 5.77  | 33.68  | 31.18   | HORIZONTAL | 300   | 168   | Peak    |
| 3 | 7310.69  | 52.65  | 74.00  | -21.35 | 43.40 | 7.19  | 34.00  | 36.06   | HORIZONTAL | 40    | 129   | Peak    |
| 4 | 7311.62  | 40.23  | 54.00  | -13.77 | 30.98 | 7.19  | 34.00  | 36.06   | HORIZONTAL | 40    | 129   | Average |
| 5 | 12183.96 | 61.02  | 74.00  | -12.98 | 47.94 | 9.36  | 34.99  | 38.71   | HORIZONTAL | 56    | 194   | Peak    |
| 6 | 12185.57 | 52.64  | 54.00  | -1.36  | 39.56 | 9.36  | 34.99  | 38.71   | HORIZONTAL | 56    | 194   | Average |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |           | deg   | cm    |         |
| 1 | 4873.91  | 48.61  | 74.00  | -25.39 | 45.34 | 5.77  | 33.68  | 31.18   | VERTICAL  | 74    | 181   | Peak    |
| 2 | 4873.96  | 43.35  | 54.00  | -10.65 | 40.08 | 5.77  | 33.68  | 31.18   | VERTICAL  | 74    | 181   | Average |
| 3 | 7311.44  | 59.24  | 74.00  | -14.76 | 50.00 | 7.19  | 34.00  | 36.05   | VERTICAL  | 9     | 100   | Peak    |
| 4 | 7311.65  | 50.75  | 54.00  | -3.25  | 41.51 | 7.19  | 34.00  | 36.05   | VERTICAL  | 9     | 100   | Average |
| 5 | 12184.69 | 60.21  | 74.00  | -13.79 | 47.12 | 9.36  | 34.99  | 38.72   | VERTICAL  | 4     | 158   | Peak    |
| 6 | 12185.54 | 49.02  | 54.00  | -4.98  | 35.93 | 9.36  | 34.99  | 38.72   | VERTICAL  | 4     | 158   | Average |



|               |                                                                                                  |                |                                                     |
|---------------|--------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------|
| Temperature   | 23°C                                                                                             | Humidity       | 61%                                                 |
| Test Engineer | Mars Lin, Hank Yang                                                                              | Configurations | IEEE 802.11b CH 11 /<br>Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 30, 2014                                                                                    |                |                                                     |
| Test Mode     | Mode 3: (Ant.9 CROSS-POLARIZED PANEL ANTENNA / Chain 1: 8.8, Chain 2: 5.9, Chain 3: 9 dBi / 3TX) |                |                                                     |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4923.98  | 40.17  | 54.00      | -13.83     | 36.78      | 5.79       | 33.67         | 31.27          | HORIZONTAL | 308   | 195   | Average |
| 2 | 4924.06  | 47.38  | 74.00      | -26.62     | 43.99      | 5.79       | 33.67         | 31.27          | HORIZONTAL | 308   | 195   | Peak    |
| 3 | 7386.51  | 41.54  | 54.00      | -12.46     | 32.13      | 7.25       | 34.07         | 36.23          | HORIZONTAL | 46    | 206   | Average |
| 4 | 7387.30  | 53.09  | 74.00      | -20.91     | 43.67      | 7.25       | 34.07         | 36.24          | HORIZONTAL | 46    | 206   | Peak    |
| 5 | 12308.97 | 60.51  | 74.00      | -13.49     | 47.41      | 9.46       | 34.95         | 38.59          | HORIZONTAL | 64    | 198   | Peak    |
| 6 | 12310.54 | 50.75  | 54.00      | -3.25      | 37.65      | 9.46       | 34.95         | 38.59          | HORIZONTAL | 64    | 198   | Average |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4923.92  | 44.98  | 54.00      | -9.02      | 41.58      | 5.79       | 33.67         | 31.28          | VERTICAL  | 22    | 197   | Average |
| 2 | 4923.99  | 50.00  | 74.00      | -24.00     | 46.60      | 5.79       | 33.67         | 31.28          | VERTICAL  | 22    | 197   | Peak    |
| 3 | 7386.61  | 50.79  | 54.00      | -3.21      | 41.36      | 7.25       | 34.07         | 36.25          | VERTICAL  | 9     | 100   | Average |
| 4 | 7386.67  | 58.00  | 74.00      | -16.00     | 48.57      | 7.25       | 34.07         | 36.25          | VERTICAL  | 9     | 100   | Peak    |
| 5 | 12308.75 | 59.30  | 74.00      | -14.70     | 46.21      | 9.46       | 34.95         | 38.58          | VERTICAL  | 9     | 165   | Peak    |
| 6 | 12310.54 | 48.27  | 54.00      | -5.73      | 35.18      | 9.46       | 34.95         | 38.58          | VERTICAL  | 9     | 165   | Average |

## &lt;For Beamforming Mode&gt;

|               |                                                |                |                                                           |
|---------------|------------------------------------------------|----------------|-----------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                       |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 1<br>/ Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                           |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                           |

## Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |            | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase  | deg   | cm    |         |
| 1 | 4840.92 | 31.33  | 54.00  | -22.67 | 28.16 | 5.75  | 33.70  | 31.12   | HORIZONTAL | 360   | 179   | Average |
| 2 | 4841.12 | 44.15  | 74.00  | -29.85 | 40.98 | 5.75  | 33.70  | 31.12   | HORIZONTAL | 360   | 179   | Peak    |

## Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |           | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase | deg   | cm    |         |
| 1 | 4845.83 | 31.32  | 54.00  | -22.68 | 28.13 | 5.75  | 33.69  | 31.13   | VERTICAL  | 326   | 218   | Average |
| 2 | 4850.41 | 45.12  | 74.00  | -28.88 | 41.93 | 5.75  | 33.69  | 31.13   | VERTICAL  | 326   | 218   | Peak    |

|               |                                                |                |                                                            |
|---------------|------------------------------------------------|----------------|------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                        |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20<br>CH 6 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                            |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                            |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4870.99 | 44.66  | 74.00         | -29.34        | 41.40         | 5.77          | 33.69            | 31.18             | HORIZONTAL | 234   | 149   | Peak    |
| 2 | 4881.50 | 31.20  | 54.00         | -22.80        | 27.91         | 5.77          | 33.68            | 31.20             | HORIZONTAL | 234   | 149   | Average |
| 3 | 7310.87 | 51.80  | 74.00         | -22.20        | 42.55         | 7.19          | 34.00            | 36.06             | HORIZONTAL | 164   | 182   | Peak    |
| 4 | 7319.43 | 38.38  | 54.00         | -15.62        | 29.12         | 7.19          | 34.01            | 36.08             | HORIZONTAL | 164   | 182   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4874.06 | 32.16  | 54.00         | -21.84        | 28.89         | 5.77          | 33.68            | 31.18             | VERTICAL  | 262   | 229   | Average |
| 2 | 4878.42 | 45.03  | 74.00         | -28.97        | 41.76         | 5.77          | 33.68            | 31.18             | VERTICAL  | 262   | 229   | Peak    |
| 3 | 7309.27 | 38.35  | 54.00         | -15.65        | 29.11         | 7.19          | 34.00            | 36.05             | VERTICAL  | 217   | 234   | Average |
| 4 | 7321.00 | 51.32  | 74.00         | -22.68        | 42.04         | 7.19          | 34.01            | 36.10             | VERTICAL  | 217   | 234   | Peak    |

|               |                                                |                |                                                          |
|---------------|------------------------------------------------|----------------|----------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                      |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                          |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                          |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4931.66 | 44.84  | 74.00      | -29.16     | 41.42      | 5.80       | 33.66         | 31.28          | HORIZONTAL | 182   | 198   | Peak    |
| 2 | 4933.84 | 31.16  | 54.00      | -22.84     | 27.73      | 5.80       | 33.66         | 31.29          | HORIZONTAL | 182   | 198   | Average |
| 3 | 7381.96 | 51.36  | 74.00      | -22.64     | 41.96      | 7.25       | 34.07         | 36.22          | HORIZONTAL | 127   | 235   | Peak    |
| 4 | 7389.65 | 38.59  | 54.00      | -15.41     | 29.17      | 7.25       | 34.07         | 36.24          | HORIZONTAL | 127   | 235   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4923.94 | 31.22  | 54.00      | -22.78     | 27.82      | 5.79       | 33.67         | 31.28          | VERTICAL  | 118   | 141   | Average |
| 2 | 4928.30 | 44.61  | 74.00      | -29.39     | 41.21      | 5.79       | 33.67         | 31.28          | VERTICAL  | 118   | 141   | Peak    |
| 3 | 7395.78 | 52.02  | 74.00      | -21.98     | 42.60      | 7.25       | 34.08         | 36.25          | VERTICAL  | 188   | 215   | Peak    |
| 4 | 7395.87 | 38.62  | 54.00      | -15.38     | 29.20      | 7.25       | 34.08         | 36.25          | VERTICAL  | 188   | 215   | Average |

|               |                                                |                |                                                           |
|---------------|------------------------------------------------|----------------|-----------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                       |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 3 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                           |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                           |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4835.38 | 31.35  | 54.00         | -22.65        | 28.19         | 5.75          | 33.70            | 31.11             | HORIZONTAL | 140   | 152   | Average |
| 2 | 4844.10 | 44.16  | 74.00         | -29.84        | 40.98         | 5.75          | 33.70            | 31.13             | HORIZONTAL | 140   | 152   | Peak    |
| 3 | 7266.83 | 51.30  | 74.00         | -22.70        | 42.15         | 7.16          | 33.96            | 35.95             | HORIZONTAL | 226   | 235   | Peak    |
| 4 | 7273.69 | 38.16  | 54.00         | -15.84        | 28.99         | 7.16          | 33.96            | 35.97             | HORIZONTAL | 226   | 235   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4841.12 | 31.55  | 54.00         | -22.45        | 28.37         | 5.75          | 33.70            | 31.13             | VERTICAL  | 219   | 219   | Average |
| 2 | 4844.58 | 44.89  | 74.00         | -29.11        | 41.71         | 5.75          | 33.70            | 31.13             | VERTICAL  | 219   | 219   | Peak    |
| 3 | 7267.22 | 51.16  | 74.00         | -22.84        | 42.01         | 7.16          | 33.96            | 35.95             | VERTICAL  | 174   | 167   | Peak    |
| 4 | 7275.68 | 38.25  | 54.00         | -15.75        | 29.06         | 7.16          | 33.97            | 36.00             | VERTICAL  | 174   | 167   | Average |

|               |                                                |                |                                                            |
|---------------|------------------------------------------------|----------------|------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                        |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT40<br>CH 6 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                            |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                            |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4876.76 | 44.37  | 74.00         | -29.63        | 41.09         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 162   | 166   | Peak    |
| 2 | 4878.62 | 30.80  | 54.00         | -23.20        | 27.52         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 162   | 166   | Average |
| 3 | 7313.76 | 51.28  | 74.00         | -22.72        | 42.03         | 7.19          | 34.00            | 36.06             | HORIZONTAL | 211   | 114   | Peak    |
| 4 | 7318.92 | 38.38  | 54.00         | -15.62        | 29.13         | 7.19          | 34.01            | 36.07             | HORIZONTAL | 211   | 114   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4864.58 | 43.94  | 74.00         | -30.06        | 40.72         | 5.75          | 33.69            | 31.16             | VERTICAL  | 320   | 212   | Peak    |
| 2 | 4867.05 | 31.07  | 54.00         | -22.93        | 27.81         | 5.77          | 33.69            | 31.18             | VERTICAL  | 320   | 212   | Average |
| 3 | 7313.56 | 51.03  | 74.00         | -22.97        | 41.79         | 7.19          | 34.00            | 36.05             | VERTICAL  | 266   | 162   | Peak    |
| 4 | 7320.90 | 38.45  | 54.00         | -15.55        | 29.17         | 7.19          | 34.01            | 36.10             | VERTICAL  | 266   | 162   | Average |

|               |                                                |                |                                                           |
|---------------|------------------------------------------------|----------------|-----------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                       |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 9 / Chain 1 + Chain 2 |
| Test Date     | Dec. 17, 2014                                  |                |                                                           |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 2TX) |                |                                                           |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4899.96 | 44.20  | 74.00         | -29.80        | 40.86         | 5.79          | 33.68            | 31.23             | HORIZONTAL | 313   | 245   | Peak    |
| 2 | 4910.80 | 31.24  | 54.00         | -22.76        | 27.87         | 5.79          | 33.67            | 31.25             | HORIZONTAL | 313   | 245   | Average |
| 3 | 7348.37 | 52.49  | 74.00         | -21.51        | 43.16         | 7.22          | 34.03            | 36.14             | HORIZONTAL | 220   | 152   | Peak    |
| 4 | 7348.69 | 38.99  | 54.00         | -15.01        | 29.65         | 7.22          | 34.03            | 36.15             | HORIZONTAL | 220   | 152   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4897.94 | 43.99  | 74.00         | -30.01        | 40.65         | 5.79          | 33.68            | 31.23             | VERTICAL  | 308   | 138   | Peak    |
| 2 | 4907.40 | 31.11  | 54.00         | -22.89        | 27.76         | 5.79          | 33.67            | 31.23             | VERTICAL  | 308   | 138   | Average |
| 3 | 7346.90 | 38.91  | 54.00         | -15.09        | 29.57         | 7.22          | 34.03            | 36.15             | VERTICAL  | 253   | 188   | Average |
| 4 | 7348.85 | 52.09  | 74.00         | -21.91        | 42.76         | 7.22          | 34.04            | 36.15             | VERTICAL  | 253   | 188   | Peak    |

|               |                                                |                |                                                                  |
|---------------|------------------------------------------------|----------------|------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                              |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                  |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                  |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4819.99 | 31.60  | 54.00      | -22.40     | 28.47      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 202   | 159   | Average |
| 2 | 4829.64 | 45.29  | 74.00      | -28.71     | 42.15      | 5.74       | 33.70         | 31.10          | HORIZONTAL | 202   | 159   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4844.55 | 31.54  | 54.00      | -22.46     | 28.36      | 5.75       | 33.70         | 31.13          | VERTICAL  | 268   | 126   | Average |
| 2 | 4850.12 | 44.63  | 74.00      | -29.37     | 41.44      | 5.75       | 33.69         | 31.13          | VERTICAL  | 268   | 126   | Peak    |



|               |                                                |                |                                                                      |
|---------------|------------------------------------------------|----------------|----------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                                  |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20<br>CH 6 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                      |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                      |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4882.33 | 31.02  | 54.00         | -22.98        | 27.73         | 5.77          | 33.68            | 31.20             | HORIZONTAL | 120   | 222   | Average |
| 2 | 4882.49 | 43.84  | 74.00         | -30.16        | 40.55         | 5.77          | 33.68            | 31.20             | HORIZONTAL | 120   | 222   | Peak    |
| 3 | 7305.23 | 51.29  | 74.00         | -22.71        | 42.05         | 7.19          | 33.99            | 36.04             | HORIZONTAL | 260   | 117   | Peak    |
| 4 | 7320.30 | 38.53  | 54.00         | -15.47        | 29.27         | 7.19          | 34.01            | 36.08             | HORIZONTAL | 260   | 117   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4874.83 | 31.66  | 54.00         | -22.34        | 28.39         | 5.77          | 33.68            | 31.18             | VERTICAL  | 323   | 241   | Average |
| 2 | 4877.56 | 44.89  | 74.00         | -29.11        | 41.62         | 5.77          | 33.68            | 31.18             | VERTICAL  | 323   | 241   | Peak    |
| 3 | 7301.19 | 38.31  | 54.00         | -15.69        | 29.06         | 7.19          | 33.99            | 36.05             | VERTICAL  | 284   | 203   | Average |
| 4 | 7311.83 | 50.99  | 74.00         | -23.01        | 41.75         | 7.19          | 34.00            | 36.05             | VERTICAL  | 284   | 203   | Peak    |

|               |                                                |                |                                                                    |
|---------------|------------------------------------------------|----------------|--------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                                |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                    |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                    |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4919.64 | 31.45  | 54.00      | -22.55     | 28.07      | 5.79       | 33.67         | 31.26          | HORIZONTAL | 249   | 232   | Average |
| 2 | 4923.84 | 44.74  | 74.00      | -29.26     | 41.35      | 5.79       | 33.67         | 31.27          | HORIZONTAL | 249   | 232   | Peak    |
| 3 | 7389.78 | 39.17  | 54.00      | -14.83     | 29.75      | 7.25       | 34.07         | 36.24          | HORIZONTAL | 289   | 197   | Average |
| 4 | 7393.08 | 52.11  | 74.00      | -21.89     | 42.69      | 7.25       | 34.08         | 36.25          | HORIZONTAL | 289   | 197   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4914.64 | 44.50  | 74.00      | -29.50     | 41.13      | 5.79       | 33.67         | 31.25          | VERTICAL  | 235   | 206   | Peak    |
| 2 | 4931.63 | 31.56  | 54.00      | -22.44     | 28.14      | 5.80       | 33.66         | 31.28          | VERTICAL  | 235   | 206   | Average |
| 3 | 7380.90 | 51.82  | 74.00      | -22.18     | 42.39      | 7.25       | 34.07         | 36.25          | VERTICAL  | 270   | 178   | Peak    |
| 4 | 7393.69 | 38.82  | 54.00      | -15.18     | 29.40      | 7.25       | 34.08         | 36.25          | VERTICAL  | 270   | 178   | Average |

|               |                                                |                |                                                                     |
|---------------|------------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 3 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4835.12 | 44.47  | 74.00         | -29.53        | 41.31         | 5.75          | 33.70            | 31.11             | HORIZONTAL | 213   | 202   | Peak    |
| 2 | 4845.15 | 31.68  | 54.00         | -22.32        | 28.49         | 5.75          | 33.69            | 31.13             | HORIZONTAL | 213   | 202   | Average |
| 3 | 7266.67 | 51.39  | 74.00         | -22.61        | 42.24         | 7.16          | 33.96            | 35.95             | HORIZONTAL | 177   | 166   | Peak    |
| 4 | 7274.88 | 38.62  | 54.00         | -15.38        | 29.46         | 7.16          | 33.97            | 35.97             | HORIZONTAL | 177   | 166   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4837.75 | 45.11  | 74.00         | -28.89        | 41.95         | 5.75          | 33.70            | 31.11             | VERTICAL  | 169   | 227   | Peak    |
| 2 | 4839.22 | 31.84  | 54.00         | -22.16        | 28.66         | 5.75          | 33.70            | 31.13             | VERTICAL  | 169   | 227   | Average |
| 3 | 7260.74 | 52.30  | 74.00         | -21.70        | 43.14         | 7.16          | 33.95            | 35.95             | VERTICAL  | 213   | 186   | Peak    |
| 4 | 7266.19 | 38.44  | 54.00         | -15.56        | 29.29         | 7.16          | 33.96            | 35.95             | VERTICAL  | 213   | 186   | Average |

|               |                                                |                |                                                                     |
|---------------|------------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 6 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |            | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase  | deg   | cm    |         |
| 1 | 4879.61 | 44.54  | 74.00  | -29.46 | 41.26 | 5.77  | 33.68  | 31.19   | HORIZONTAL | 262   | 240   | Peak    |
| 2 | 4880.28 | 31.25  | 54.00  | -22.75 | 27.97 | 5.77  | 33.68  | 31.19   | HORIZONTAL | 262   | 240   | Average |
| 3 | 7303.72 | 51.81  | 74.00  | -22.19 | 42.57 | 7.19  | 33.99  | 36.04   | HORIZONTAL | 160   | 188   | Peak    |
| 4 | 7317.06 | 38.94  | 54.00  | -15.06 | 29.69 | 7.19  | 34.01  | 36.07   | HORIZONTAL | 160   | 188   | Average |

#### Vertical

|   | Freq    | Level  | Limit  | Over  | Read  | Cable | Preamp | Antenna |           | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|-------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB    | dB     | dB/m    | Pol/Phase | deg   | cm    |         |
| 1 | 2460.26 | 117.22 | 74.00  | 43.22 | 85.97 | 4.05  | 0.00   | 27.20   | VERTICAL  | 36    | 194   | Peak    |
| 2 | 2460.55 | 106.39 | 54.00  | 52.39 | 75.12 | 4.05  | 0.00   | 27.22   | VERTICAL  | 36    | 194   | Average |
| 3 | 2483.50 | 72.61  | 74.00  | -1.39 | 41.27 | 4.07  | 0.00   | 27.27   | VERTICAL  | 36    | 194   | Peak    |
| 4 | 2483.79 | 51.05  | 54.00  | -2.95 | 19.71 | 4.07  | 0.00   | 27.27   | VERTICAL  | 36    | 194   | Average |

|               |                                                |                |                                                                     |
|---------------|------------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                           | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                            | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 9 / Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 17, 2014                                  |                |                                                                     |
| Test Mode     | Mode 1: (Ant.6 Dipole antenna / 5.3 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4908.68 | 31.63  | 54.00      | -22.37     | 28.27      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 156   | 166   | Average |
| 2 | 4909.55 | 44.93  | 74.00      | -29.07     | 41.57      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 156   | 166   | Peak    |
| 3 | 7346.51 | 39.46  | 54.00      | -14.54     | 30.13      | 7.22       | 34.03         | 36.14          | HORIZONTAL | 195   | 150   | Average |
| 4 | 7350.55 | 52.44  | 74.00      | -21.56     | 43.11      | 7.22       | 34.04         | 36.15          | HORIZONTAL | 195   | 150   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4900.06 | 46.29  | 74.00      | -27.71     | 42.95      | 5.79       | 33.68         | 31.23          | VERTICAL  | 271   | 196   | Peak    |
| 2 | 4910.70 | 31.90  | 54.00      | -22.10     | 28.53      | 5.79       | 33.67         | 31.25          | VERTICAL  | 271   | 196   | Average |
| 3 | 7353.15 | 39.65  | 54.00      | -14.35     | 30.32      | 7.22       | 34.04         | 36.15          | VERTICAL  | 108   | 136   | Average |
| 4 | 7360.46 | 52.26  | 74.00      | -21.74     | 42.89      | 7.22       | 34.05         | 36.20          | VERTICAL  | 108   | 136   | Peak    |

|               |                                               |                |                                                        |
|---------------|-----------------------------------------------|----------------|--------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                    |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                        |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                        |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4823.85 | 30.83  | 54.00      | -23.17     | 27.70      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 123   | 100   | Average |
| 2 | 4824.27 | 44.67  | 74.00      | -29.33     | 41.54      | 5.74       | 33.70         | 31.09          | HORIZONTAL | 123   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4824.13 | 30.82  | 54.00      | -23.18     | 27.70      | 5.74       | 33.70         | 31.08          | VERTICAL  | 108   | 100   | Average |
| 2 | 4824.69 | 44.92  | 74.00      | -29.08     | 41.80      | 5.74       | 33.70         | 31.08          | VERTICAL  | 108   | 100   | Peak    |

|               |                                               |                |                                                            |
|---------------|-----------------------------------------------|----------------|------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                        |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 6<br>/ Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                            |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                            |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4879.59 | 46.33  | 74.00         | -27.67        | 43.05         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 172   | 100   | Peak    |
| 2 | 4880.37 | 32.15  | 54.00         | -21.85        | 28.87         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 172   | 100   | Average |
| 3 | 7301.28 | 37.42  | 54.00         | -16.58        | 28.19         | 7.19          | 33.99            | 36.03             | HORIZONTAL | 239   | 100   | Average |
| 4 | 7311.58 | 51.53  | 74.00         | -22.47        | 42.28         | 7.19          | 34.00            | 36.06             | HORIZONTAL | 239   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4872.96 | 45.39  | 74.00         | -28.61        | 42.12         | 5.77          | 33.68            | 31.18             | VERTICAL  | 159   | 100   | Peak    |
| 2 | 4879.56 | 32.01  | 54.00         | -21.99        | 28.74         | 5.77          | 33.68            | 31.18             | VERTICAL  | 159   | 100   | Average |
| 3 | 7301.19 | 52.03  | 74.00         | -21.97        | 42.78         | 7.19          | 33.99            | 36.05             | VERTICAL  | 215   | 102   | Peak    |
| 4 | 7301.39 | 38.42  | 54.00         | -15.58        | 29.17         | 7.19          | 33.99            | 36.05             | VERTICAL  | 215   | 102   | Average |

|               |                                               |                |                                                            |
|---------------|-----------------------------------------------|----------------|------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                        |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 11<br>/ Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                            |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                            |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4920.41 | 31.74  | 74.00         | -42.26        | 28.36         | 5.79          | 33.67            | 31.26             | HORIZONTAL | 213   | 100   | Peak    |
| 2 | 4927.42 | 44.55  | 74.00         | -29.45        | 41.15         | 5.79          | 33.67            | 31.28             | HORIZONTAL | 213   | 100   | Peak    |
| 3 | 7384.47 | 52.86  | 74.00         | -21.14        | 43.45         | 7.25          | 34.07            | 36.23             | HORIZONTAL | 267   | 100   | Peak    |
| 4 | 7393.24 | 38.89  | 54.00         | -15.11        | 29.47         | 7.25          | 34.08            | 36.25             | HORIZONTAL | 267   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4922.50 | 43.07  | 74.00         | -30.93        | 39.70         | 5.79          | 33.67            | 31.25             | VERTICAL  | 128   | 100   | Peak    |
| 2 | 4930.74 | 31.67  | 54.00         | -22.33        | 28.25         | 5.80          | 33.66            | 31.28             | VERTICAL  | 128   | 100   | Average |
| 3 | 7382.15 | 52.51  | 74.00         | -21.49        | 43.08         | 7.25          | 34.07            | 36.25             | VERTICAL  | 244   | 100   | Peak    |
| 4 | 7391.96 | 39.10  | 54.00         | -14.90        | 29.68         | 7.25          | 34.08            | 36.25             | VERTICAL  | 244   | 100   | Average |



|               |                                               |                |                                                           |
|---------------|-----------------------------------------------|----------------|-----------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                       |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 3<br>/ Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                           |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                           |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4837.78 | 31.31  | 54.00         | -22.69        | 28.14         | 5.75          | 33.70            | 31.12             | HORIZONTAL | 236   | 100   | Average |
| 2 | 4845.56 | 44.94  | 74.00         | -29.06        | 41.75         | 5.75          | 33.69            | 31.13             | HORIZONTAL | 236   | 100   | Peak    |
| 3 | 7275.06 | 38.51  | 54.00         | -15.49        | 29.35         | 7.16          | 33.97            | 35.97             | HORIZONTAL | 164   | 100   | Average |
| 4 | 7275.06 | 53.51  | 74.00         | -20.49        | 44.35         | 7.16          | 33.97            | 35.97             | HORIZONTAL | 164   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4837.31 | 31.28  | 54.00         | -22.72        | 28.12         | 5.75          | 33.70            | 31.11             | VERTICAL  | 152   | 100   | Average |
| 2 | 4839.60 | 44.84  | 74.00         | -29.16        | 41.66         | 5.75          | 33.70            | 31.13             | VERTICAL  | 152   | 100   | Peak    |
| 3 | 7267.62 | 38.31  | 54.00         | -15.69        | 29.16         | 7.16          | 33.96            | 35.95             | VERTICAL  | 219   | 100   | Average |
| 4 | 7271.59 | 51.91  | 74.00         | -22.09        | 42.76         | 7.16          | 33.96            | 35.95             | VERTICAL  | 219   | 100   | Peak    |

|               |                                               |                |                                                            |
|---------------|-----------------------------------------------|----------------|------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                        |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT40 CH 6<br>/ Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                            |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                            |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4878.49 | 45.40  | 74.00         | -28.60        | 42.12         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 219   | 100   | Peak    |
| 2 | 4881.21 | 32.02  | 54.00         | -21.98        | 28.74         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 219   | 100   | Average |
| 3 | 7301.36 | 51.49  | 74.00         | -22.51        | 42.26         | 7.19          | 33.99            | 36.03             | HORIZONTAL | 311   | 100   | Peak    |
| 4 | 7303.39 | 38.30  | 54.00         | -15.70        | 29.06         | 7.19          | 33.99            | 36.04             | HORIZONTAL | 311   | 100   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4873.91 | 42.08  | 74.00         | -31.92        | 38.81         | 5.77          | 33.68            | 31.18             | VERTICAL  | 86    | 100   | Peak    |
| 2 | 4879.27 | 31.88  | 54.00         | -22.12        | 28.61         | 5.77          | 33.68            | 31.18             | VERTICAL  | 86    | 100   | Average |
| 3 | 7304.11 | 38.55  | 54.00         | -15.45        | 29.30         | 7.19          | 33.99            | 36.05             | VERTICAL  | 357   | 100   | Average |
| 4 | 7309.15 | 52.62  | 74.00         | -21.38        | 43.38         | 7.19          | 34.00            | 36.05             | VERTICAL  | 357   | 100   | Peak    |

|               |                                               |                |                                                           |
|---------------|-----------------------------------------------|----------------|-----------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                       |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40<br>CH 9 / Chain 1 + Chain 2 |
| Test Date     | Dec. 15, 2014                                 |                |                                                           |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 2TX) |                |                                                           |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4901.95 | 31.79  | 54.00      | -22.21     | 28.44      | 5.79       | 33.67         | 31.23          | HORIZONTAL | 198   | 100   | Average |
| 2 | 4906.87 | 45.52  | 74.00      | -28.48     | 42.16      | 5.79       | 33.67         | 31.24          | HORIZONTAL | 198   | 100   | Peak    |
| 3 | 7353.69 | 38.94  | 54.00      | -15.06     | 29.60      | 7.22       | 34.04         | 36.16          | HORIZONTAL | 143   | 100   | Average |
| 4 | 7355.19 | 52.46  | 74.00      | -21.54     | 43.12      | 7.22       | 34.04         | 36.16          | HORIZONTAL | 143   | 100   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4903.24 | 31.60  | 54.00      | -22.40     | 28.25      | 5.79       | 33.67         | 31.23          | VERTICAL  | 275   | 100   | Average |
| 2 | 4904.06 | 44.77  | 74.00      | -29.23     | 41.42      | 5.79       | 33.67         | 31.23          | VERTICAL  | 275   | 100   | Peak    |
| 3 | 7346.00 | 38.52  | 54.00      | -15.48     | 29.18      | 7.22       | 34.03         | 36.15          | VERTICAL  | 163   | 100   | Average |
| 4 | 7357.53 | 52.36  | 74.00      | -21.64     | 43.03      | 7.22       | 34.04         | 36.15          | VERTICAL  | 163   | 100   | Peak    |

|               |                                               |                |                                                                      |
|---------------|-----------------------------------------------|----------------|----------------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                                  |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802. 11ac MCS0/Nss1 VHT20 CH 1<br>/ Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 15, 2014                                 |                |                                                                      |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                                      |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4853.11 | 31.90  | 54.00         | -22.10        | 28.69         | 5.75          | 33.69            | 31.15             | HORIZONTAL | 155   | 129   | Average |
| 2 | 4855.69 | 44.76  | 74.00         | -29.24        | 41.55         | 5.75          | 33.69            | 31.15             | HORIZONTAL | 155   | 129   | Peak    |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4840.38 | 44.54  | 74.00         | -29.46        | 41.36         | 5.75          | 33.70            | 31.13             | VERTICAL  | 128   | 145   | Peak    |
| 2 | 4849.61 | 31.75  | 54.00         | -22.25        | 28.56         | 5.75          | 33.69            | 31.13             | VERTICAL  | 128   | 145   | Average |

|               |                                               |                |                                                                     |
|---------------|-----------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 6<br>/ Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 15, 2014                                 |                |                                                                     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4873.48 | 47.84  | 74.00         | -26.16        | 44.57         | 5.77          | 33.68            | 31.18             | HORIZONTAL | 122   | 147   | Peak    |
| 2 | 4876.46 | 37.47  | 54.00         | -16.53        | 34.19         | 5.77          | 33.68            | 31.19             | HORIZONTAL | 122   | 147   | Average |
| 3 | 7305.96 | 55.07  | 74.00         | -18.93        | 45.83         | 7.19          | 33.99            | 36.04             | HORIZONTAL | 313   | 247   | Peak    |
| 4 | 7311.70 | 48.95  | 54.00         | -5.05         | 39.70         | 7.19          | 34.00            | 36.06             | HORIZONTAL | 313   | 247   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4871.22 | 38.38  | 54.00         | -15.62        | 35.12         | 5.77          | 33.69            | 31.18             | VERTICAL  | 320   | 121   | Average |
| 2 | 4880.98 | 53.07  | 74.00         | -20.93        | 49.80         | 5.77          | 33.68            | 31.18             | VERTICAL  | 320   | 121   | Peak    |
| 3 | 7311.70 | 46.69  | 54.00         | -7.31         | 37.45         | 7.19          | 34.00            | 36.05             | VERTICAL  | 81    | 159   | Average |
| 4 | 7316.08 | 55.86  | 74.00         | -18.14        | 46.57         | 7.19          | 34.00            | 36.10             | VERTICAL  | 81    | 159   | Peak    |

|               |                                               |                |                                                                      |
|---------------|-----------------------------------------------|----------------|----------------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                                  |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 11<br>/ Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 15, 2014                                 |                |                                                                      |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                                      |

#### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |            | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase  | deg   | cm    |         |
| 1 | 4919.66 | 45.29  | 74.00  | -28.71 | 41.91 | 5.79  | 33.67  | 31.26   | HORIZONTAL | 177   | 174   | Peak    |
| 2 | 4931.64 | 32.54  | 54.00  | -21.46 | 29.12 | 5.80  | 33.66  | 31.28   | HORIZONTAL | 177   | 174   | Average |
| 3 | 7378.85 | 51.74  | 74.00  | -22.26 | 42.33 | 7.25  | 34.06  | 36.22   | HORIZONTAL | 198   | 185   | Peak    |
| 4 | 7379.95 | 39.41  | 54.00  | -14.59 | 30.00 | 7.25  | 34.06  | 36.22   | HORIZONTAL | 198   | 185   | Average |

#### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna |           | T/Pos | A/Pos | Remark  |
|---|---------|--------|--------|--------|-------|-------|--------|---------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | Pol/Phase | deg   | cm    |         |
| 1 | 4920.93 | 45.64  | 74.00  | -28.36 | 42.27 | 5.79  | 33.67  | 31.25   | VERTICAL  | 178   | 234   | Peak    |
| 2 | 4933.73 | 32.60  | 54.00  | -21.40 | 29.18 | 5.80  | 33.66  | 31.28   | VERTICAL  | 178   | 234   | Average |
| 3 | 7380.53 | 52.79  | 74.00  | -21.21 | 43.35 | 7.25  | 34.06  | 36.25   | VERTICAL  | 224   | 185   | Peak    |
| 4 | 7394.54 | 39.25  | 54.00  | -14.75 | 29.83 | 7.25  | 34.08  | 36.25   | VERTICAL  | 224   | 185   | Average |

|               |                                               |                |                                                                     |
|---------------|-----------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 3<br>/ Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 15, 2014                                 |                |                                                                     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4844.81 | 45.02  | 74.00      | -28.98     | 41.84      | 5.75       | 33.70         | 31.13          | HORIZONTAL | 165   | 179   | Peak    |
| 2 | 4846.14 | 31.61  | 54.00      | -22.39     | 28.42      | 5.75       | 33.69         | 31.13          | HORIZONTAL | 165   | 179   | Average |
| 3 | 7268.89 | 51.40  | 74.00      | -22.60     | 42.24      | 7.16       | 33.96         | 35.96          | HORIZONTAL | 202   | 183   | Peak    |
| 4 | 7275.18 | 38.87  | 54.00      | -15.13     | 29.71      | 7.16       | 33.97         | 35.97          | HORIZONTAL | 202   | 183   | Average |

#### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4834.30 | 45.33  | 74.00      | -28.67     | 42.18      | 5.74       | 33.70         | 31.11          | VERTICAL  | 118   | 163   | Peak    |
| 2 | 4852.28 | 32.06  | 54.00      | -21.94     | 28.87      | 5.75       | 33.69         | 31.13          | VERTICAL  | 118   | 163   | Average |
| 3 | 7265.83 | 52.70  | 74.00      | -21.30     | 43.55      | 7.16       | 33.96         | 35.95          | VERTICAL  | 175   | 198   | Peak    |
| 4 | 7275.12 | 38.60  | 54.00      | -15.40     | 29.41      | 7.16       | 33.97         | 36.00          | VERTICAL  | 175   | 198   | Average |

|               |                                               |                |                                                                     |
|---------------|-----------------------------------------------|----------------|---------------------------------------------------------------------|
| Temperature   | 23°C                                          | Humidity       | 61%                                                                 |
| Test Engineer | Mars Lin, Hank Yang                           | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 6<br>/ Chain 1 + Chain 2 + Chain 3 |
| Test Date     | Dec. 15, 2014                                 |                |                                                                     |
| Test Mode     | Mode 2: (Ant.7 Panel antenna / 6.5 dBi / 3TX) |                |                                                                     |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4869.95 | 32.69  | 54.00         | -21.31        | 29.44         | 5.77          | 33.69            | 31.17             | HORIZONTAL | 143   | 124   | Average |
| 2 | 4874.38 | 45.62  | 74.00         | -28.38        | 42.35         | 5.77          | 33.68            | 31.18             | HORIZONTAL | 143   | 124   | Peak    |
| 3 | 7316.64 | 52.64  | 74.00         | -21.36        | 43.38         | 7.19          | 34.00            | 36.07             | HORIZONTAL | 165   | 121   | Peak    |
| 4 | 7318.64 | 39.29  | 54.00         | -14.71        | 30.04         | 7.19          | 34.01            | 36.07             | HORIZONTAL | 165   | 121   | Average |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4873.16 | 46.31  | 74.00         | -27.69        | 43.04         | 5.77          | 33.68            | 31.18             | VERTICAL  | 157   | 101   | Peak    |
| 2 | 4883.03 | 32.95  | 54.00         | -21.05        | 29.65         | 5.77          | 33.68            | 31.21             | VERTICAL  | 157   | 101   | Average |
| 3 | 7315.43 | 52.11  | 74.00         | -21.89        | 42.87         | 7.19          | 34.00            | 36.05             | VERTICAL  | 141   | 110   | Peak    |
| 4 | 7315.89 | 39.46  | 54.00         | -14.54        | 30.17         | 7.19          | 34.00            | 36.10             | VERTICAL  | 141   | 110   | Average |