


FIGURE 1
TRANSMITTER FREQUENCY RESPONSE

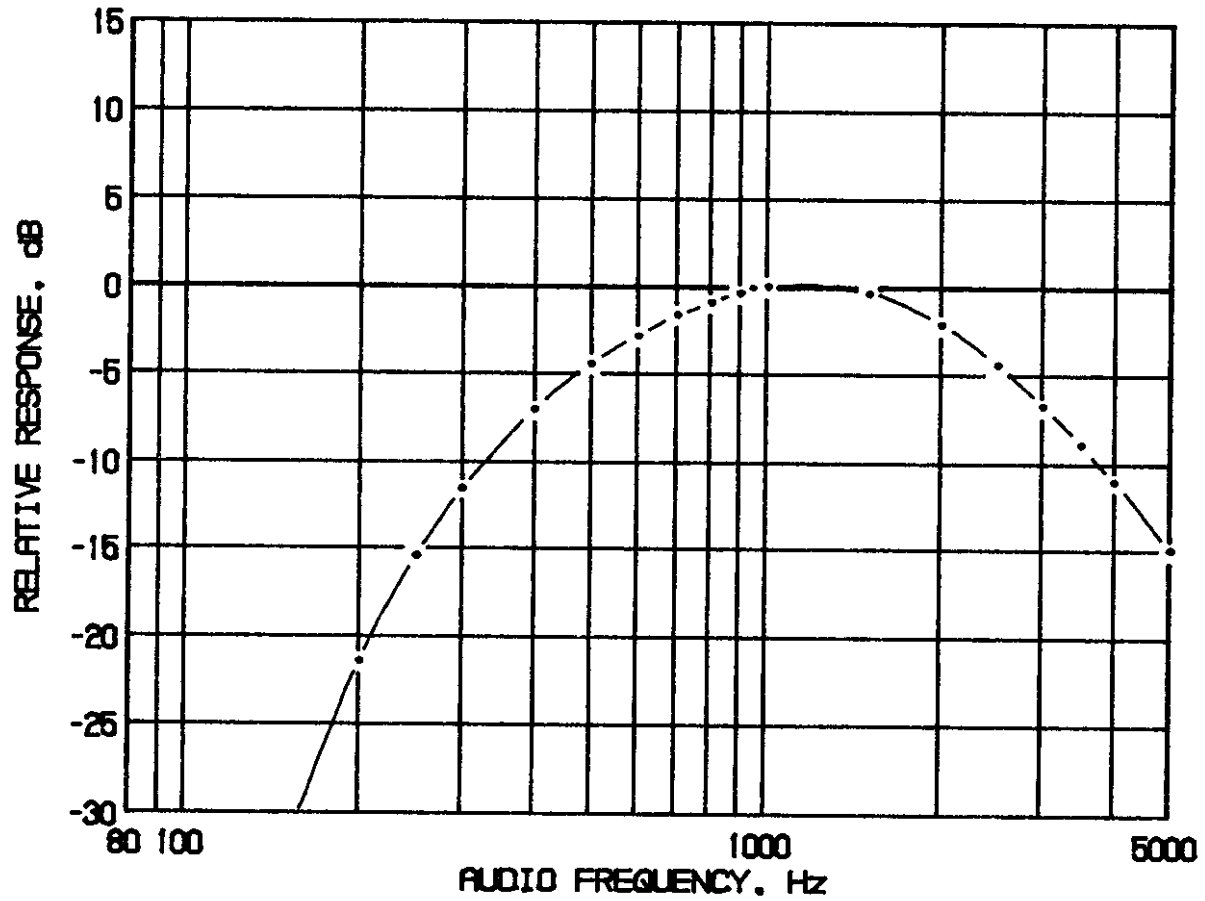


TRANSMITTER FREQUENCY RESPONSE
FCC ID: MMA77120ESP

FIGURE 1

FIGURE 2a

AM MODULATION LIMITING - POSITIVE PEAKS

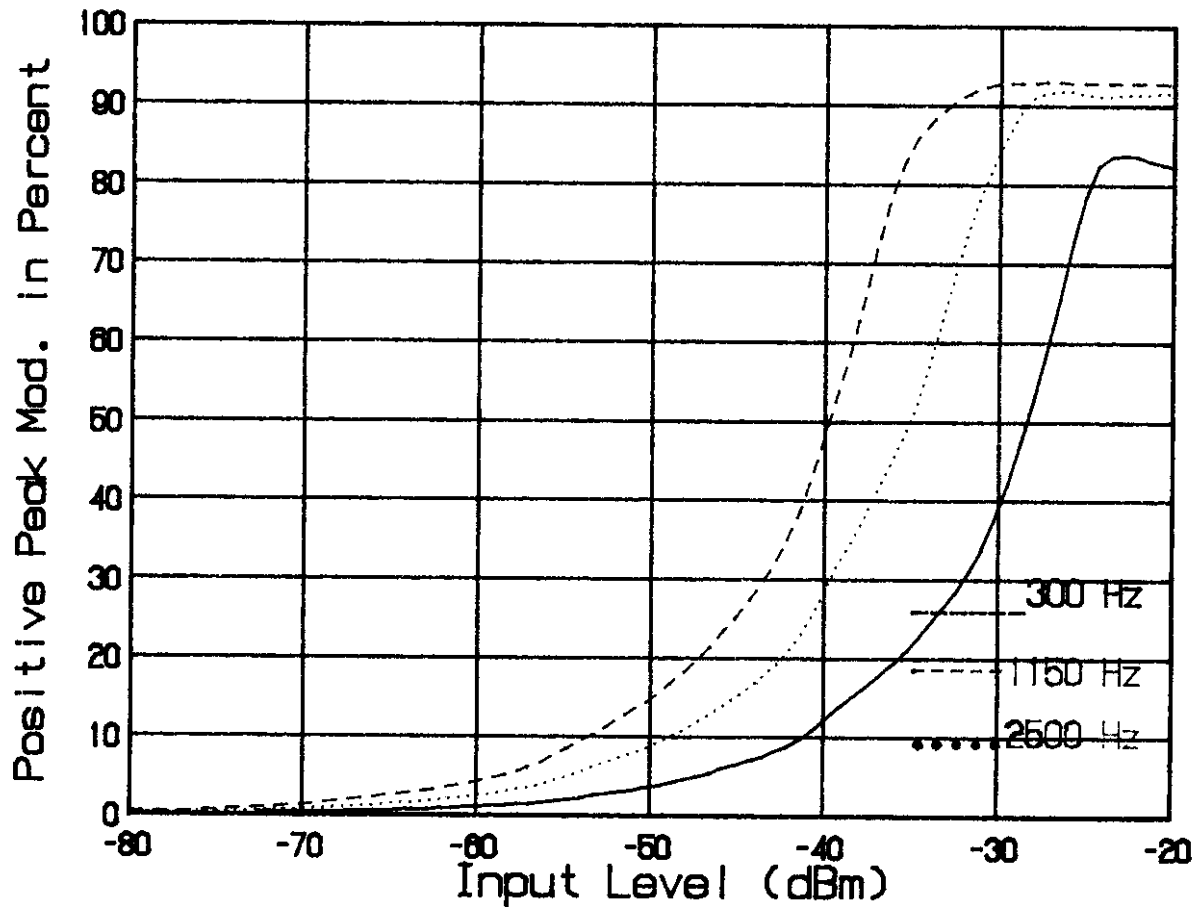

MODULATION LIMITING CHARACTERISTICS

Percent modulation as a function of input level at microphone jack in dBm for 300 Hz, 1150 Hz, and 2500 Hz tones.


MODULATION LIMITING POSITIVE PEAKS

FCC ID: MMA77120ESP

FIGURE 2a

FIGURE 2b

AM MODULATION LIMITING - NEGATIVE PEAKS

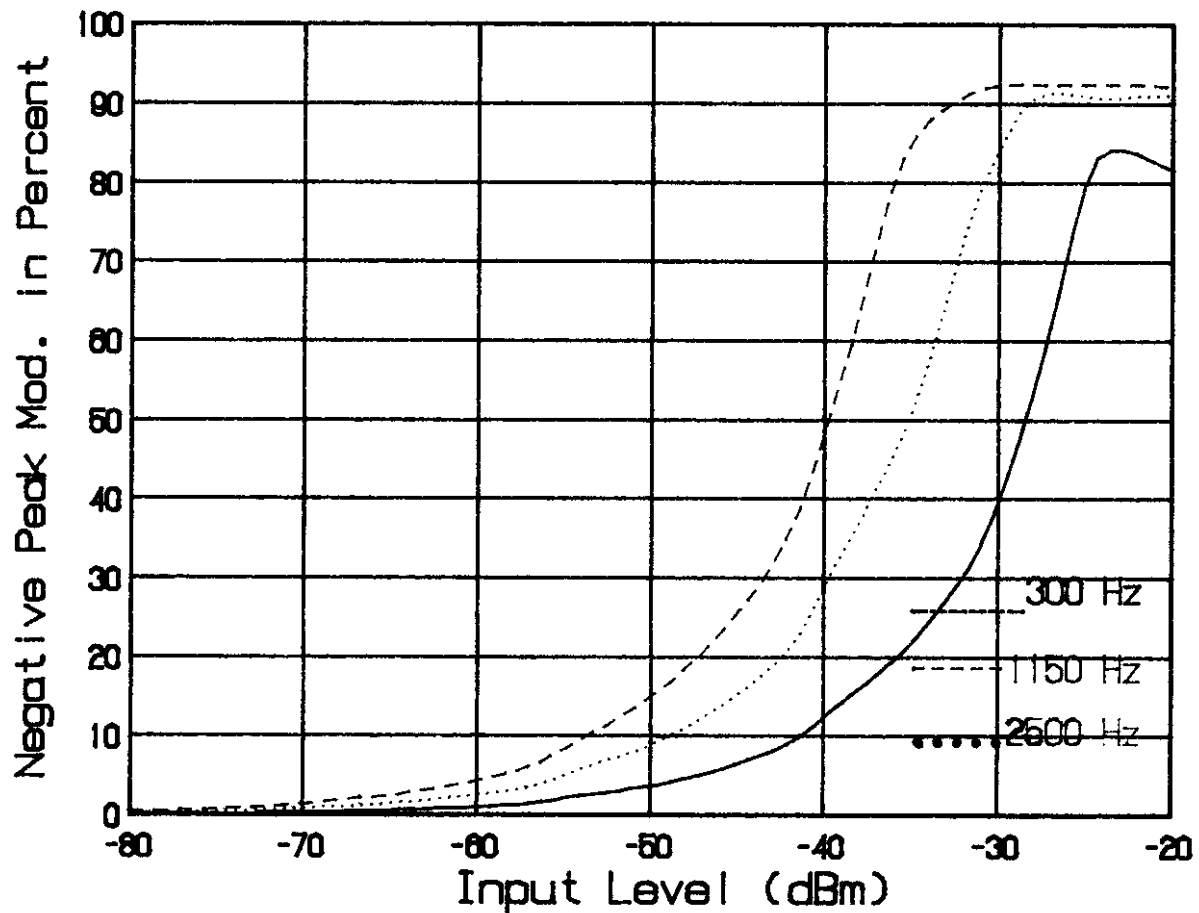

MODULATION LIMITING CHARACTERISTICS

Percent modulation as a function of input level at microphone jack in dBm for 300 Hz, 1150 Hz, and 2500 Hz tones.


MODULATION LIMITING NEGATIVE PEAKS

FCC ID: MMA77120ESP

FIGURE 2b

FIGURE 3a

MODULATION LIMITER ATTACK TIME

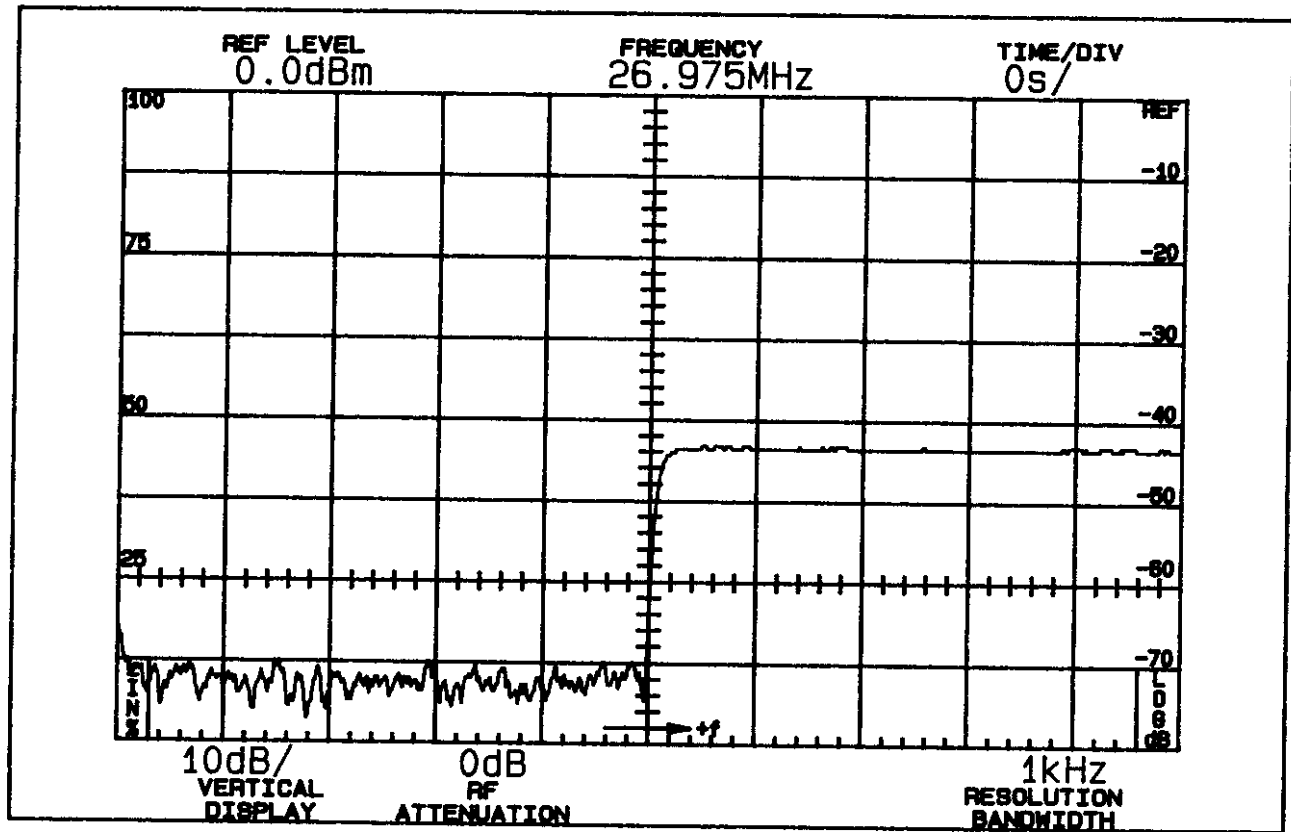


Measurement Conditions: 16 dB over 50% modulation level at 1150 Hz with 2500 Hz tone, upper fourth order sideband; horizontal scale 100 ms/div.

UPPER FOURTH-ORDER SIDEBAND
LIMITER ATTACK TIME
FCC ID: MMA77120ESP

FIGURE 3a

FIGURE 3b
MODULATION LIMITER ATTACK TIME

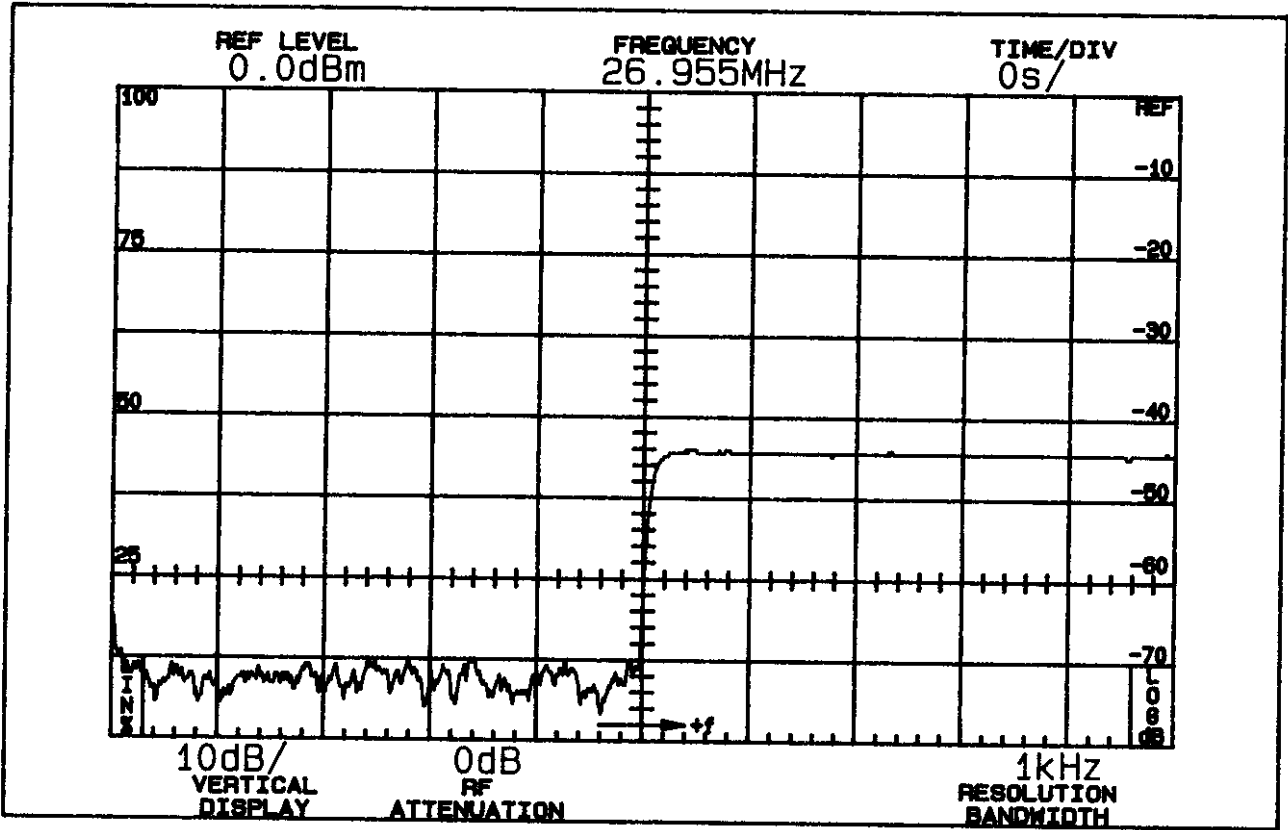

Measurement Conditions: 16 dB over 50% modulation level at 1150 Hz with 2500 Hz tone, lower fourth order sideband; horizontal scale 100 ms/div.

LOWER FOURTH-ORDER SIDEBAND
LIMITER ATTACK TIME
FCC ID: MMA77120ESP

FIGURE 3b

C. MODULATION CHARACTERISTICS (Continued)


4. Occupied Bandwidth - AM
(Paragraph 2.989(c) of the Rules)

Figure 4 is a plot of the sideband envelope of the transmitter taken from a Tektronix 494P spectrum analyzer. Modulation corresponded to conditions of 2.989(a) and consisted of 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50% modulation at 1150 Hz, the frequency of maximum response. Measured modulation at 1150 Hz was 91% positive, 90% negative.

The plot is within the limits imposed by Paragraph 95.631(b)(1,3) for double sideband AM modulation. The horizontal scale, frequency, is 10 kHz per division and the vertical scale, amplitude, is a logarithmic presentation equal to 10 dB per division.

Reference carrier was set to 0 dB.

FIGURE 4
OCCUPIED BANDWIDTH - AM

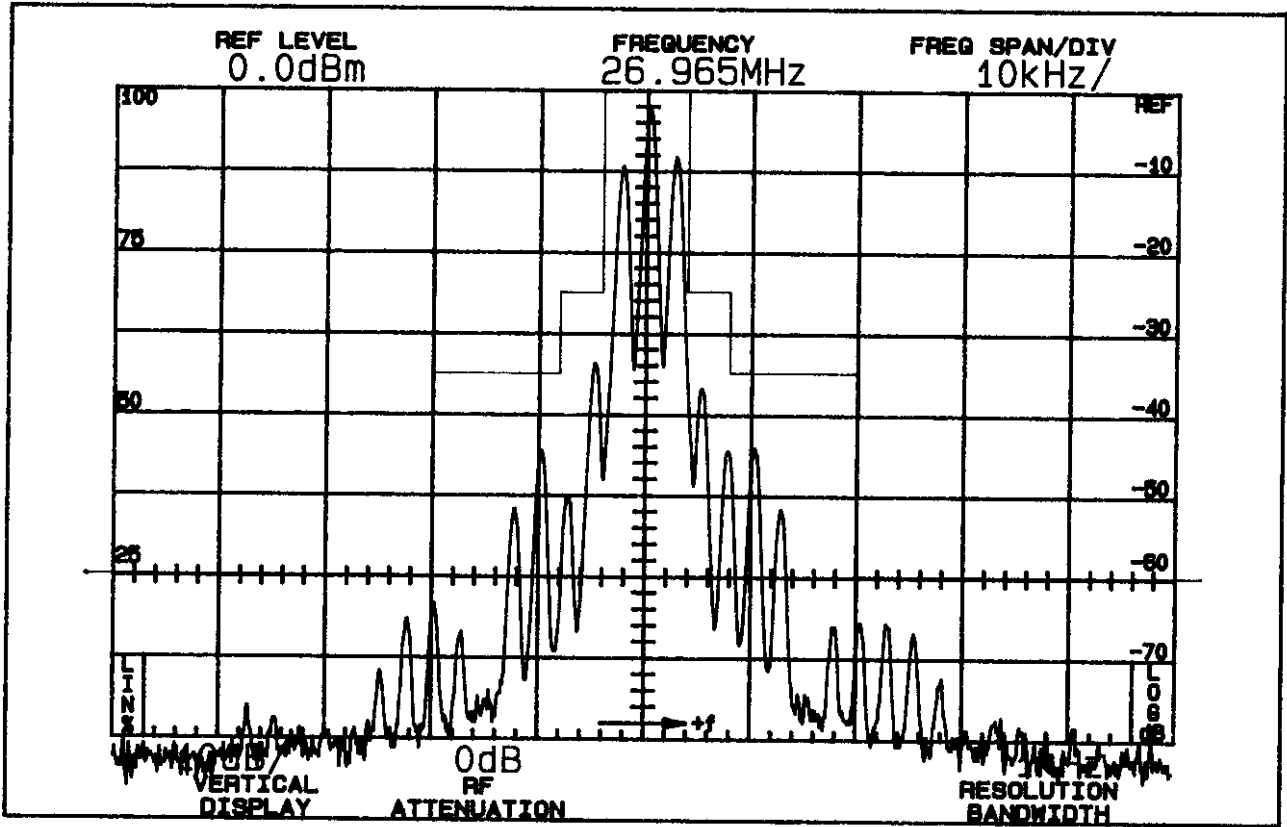

ATTENUATION IN dB BELOW
MEAN OUTPUT POWER
Required

On any frequency more than 50% up to and including 100% of the authorized bandwidth, 8kHz (4-8kHz)	25
On any frequency more than 100%, up to and including 250% of the authorized bandwidth (8-20kHz)	35
On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth	60

OCCUPIED BANDWIDTH - AM
FCC ID: MMA77120ESP

FIGURE 4

D. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS
(Paragraph 2.991 of the Rules)

The 77-120ESP transmitter was tested for spurious emissions at the antenna terminals while the equipment was modulated with a 2500 Hz signal, 16 dB above minimum input signal for 50% modulation at 1150 Hz, the frequency of highest sensitivity.

Measurements were made with Tektronix 494P spectrum analyzer coupled to the transmitter output terminal through Narda 765-20 50 ohm power attenuation.

In order to improve measurement system dynamic range, a series trap tuned to the carrier frequency was used on the Narda attenuator output. The trap, which had negligible shunt attenuation at the second harmonic and high frequencies, provided 26 dB attenuation of the fundamental. The trap was not used during close-in (within 10 MHz of the carrier) spurious measurements.

During the tests, the transmitter was terminated in the Narda 765-20 dummy load. Power was monitored on a Bird 43 Thru-Line wattmeter; supply was 13.8 Vdc throughout the tests.

Spurious emission was measured on Channels 1, 21, and 40 throughout the RF spectrum from 10 to 300 MHz. Any emissions that were between the 60 dB attenuation required and the noise floor of the spectrum analyzer were recorded. Data are shown in Table 1.

TABLE 1
TRANSMITTER CONDUCTED SPURIOUS

<u>Channel</u>	<u>Spurious Frequency MHz</u>	<u>dB Below Unmod Carrier Ref.</u>
1	53.930	74
1	80.895	80
1	107.860	91
1	134.825	87
1	161.790	83
1	188.755	88
1	215.720	82
1	242.685	77
1	269.650	81
21	54.430	76
21	81.645	80
21	108.860	92
21	136.075	87
21	163.290	82
21	190.505	88
21	217.720	82
21	244.935	78
21	272.150	82
40	54.810	77
40	82.215	80
40	109.620	96
40	137.025	86
40	164.430	80
40	191.835	88
40	219.240	83
40	246.645	81
40	274.405	82
Required:		60

All other spurious were over 20 dB below required 60 dB suppression.

E. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION
(Paragraph 2.993(a)(b,2) of the Rules)

Field intensity measurements of radiated spurious emissions from the 77-120ESP transmitter were made with a Tektronix 494P spectrum analyzer and dummy load located in an open field 3 meters from the test antenna. Output power was 3.7 watts. The supply voltage was 13.8 Vdc. The transmitter and test antennae were arranged according to OCE 42 to maximize pickup. The unit has no accessory jacks. Both vertical and horizontal test antenna polarization were employed.

Measurements were made from 10 MHz to 10 times the maximum operating frequency of 26.965 or 270 MHz.

Reference level for the spurious radiations was taken as an ideal dipole excited by 3.7 watts, the output power of the transmitter according to the following relationship:*

$$E = \frac{(49.2 \times P_t)^{1/2}}{R}$$

where E = electric-field intensity in volts/meter
 P_t = transmitter power in watts
 R = distance in meters

for this case $E = \frac{(49.2 \times 3.7)^{1/2}}{3} = 4.5 \text{ V/m}$

Since the spectrum analyzer is calibrated in decibels above one milliwatt (dBm):

$$\begin{aligned} 4.5 \text{ volts/meter} &= 4.5 \times 10^6 \text{ uV/m} \\ \text{dBu/m} &= 20 \text{ Log}_{10}(4.5 \times 10^6) \\ &= 133 \text{ dBu/m} \end{aligned}$$

Since 1 uV/m = -107 dBm, the reference becomes

$$133 - 107 = 26 \text{ dBm}$$

Representing a conversion for convenience, from dBu to dBm. The measurement system was capable of detecting signals 100 dB or more below the carrier reference level. Data, including antenna factor and line loss corrections, are shown in Table 2.

*Reference Data for Radio Engineers, International Telephone and Telegraph Corporation, Sixth Edition.

F. FIELD STRENGTH MEASUREMENTS (Continued)

TABLE 2

TRANSMITTER CABINET RADIATED SPURIOUS
Channel 1, 26.965 MHz; 3.7 watts; 13.8 Vdc

<u>Frequency, MHz</u>	<u>dB Below Carrier Reference</u>			
	<u>With Accessories</u>		<u>Without Accessories</u>	
	<u>Vertical</u>	<u>Horizontal</u>	<u>Vertical</u>	<u>Horizontal</u>
53.930	91	94	100	106
80.895	71	84	98	95
107.860	95	92	98	103
134.825	91	87	87	94
161.790	102	100	100	107
188.755	102	102	102	104
215.720	98	89	94	100
242.685	83	98	86	93
269.650	95	85	90	86
FCC Limit:	60	60	60	60

Unlisted spurious were more than 80 below carrier reference from 10 to 270 MHz.

F. FREQUENCY STABILITY
(Paragraph 2.995(a)(1) of the Rules)

Measurement of frequency stability versus temperature was made at temperatures from -30°C to $+50^{\circ}\text{C}$ in 10° increments. At each temperature, the unit was exposed to the test chamber ambient a minimum of 60 minutes after indicated chamber temperature ambient had stabilized to within $\pm 2^{\circ}$ of the desired test temperature. Following a 30 minute soak at each temperature, the unit was turned on, keyed and frequency measured within 2 minutes. Test temperature was sequenced in the order shown in Table 3, starting with -30°C .

A Thermotron S1.2 temperature chamber was used. The transmitter output stage was terminated in a dummy load. Primary supply was 13.8 Vdc. Frequency was measured with a HP 5385A digital frequency counter connected to the transmitter through a power attenuator. Measurements were made on Channel 9, 27.065 MHz. No transient keying effects were observed. Data are shown in Table 3.

G. FREQUENCY STABILITY (Continued)

TABLE 3

<u>Temperature</u>	<u>Output Frequency, MHz</u>
-30.0	27.065105
-19.6	27.065259
- 9.8	27.065320
0.3	27.065316
9.9	27.065266
19.9	27.065170
30.5	27.064052
40.4	27.064952
50.0	27.064873
Maximum frequency error:	27.065320
	<u>27.065000</u>
	+ .000320 MHz

FCC Rule 95.625(b) specifies .005% or a maximum of $\pm .001353$ MHz.

G. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with a HP 5385A digital frequency counter as supply voltage provided by Heath SP-5220 variable ac power supply was varied from $\pm 15\%$ above the nominal 13.8 Vdc. A Keithley 177 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient. (See Table 4).

TABLE 4

<u>Supply Voltage</u>	<u>Output Frequency, MHz</u>
15.87	27.065170
15.18	27.065171
14.49	27.065172
13.80	27.065170
13.11	27.065172
12.42	27.065167
11.73	27.065168
Maximum frequency error:	27.065172
	<u>27.065000</u>
	+ .000172 MHz

FCC Rule 95.625(b) specifies .005% or a maximum of $\pm .0001353$ MHz. No effects on frequency related to keying the unit were observed.

H. ADDITIONAL REQUIREMENTS FOR TYPE ACCEPTANCE
(Paragraph 95.669 of the Rules)

The 77-235ESP meets the applicable provision of 95.669(a).

External controls are limited to the following per 95.669(a):

1. Primary power connection
2. Microphone jack
3. RF output power connection
4. External speaker jacks
5. On-off switch (combined with receiver volume control)
6. Not applicable, AM only
7. Not applicable
8. Transmitting frequency selector
9. Transmit-receive switch
10. Meter for monitoring transmitter performance
11. Meter/pilot lamp for RF output indication

Other functions are described in user's manual, appendix 5, p. 7-8.

The serial number of each unit will be implemented in accordance with 95.971.

A copy of Part 95, Subpart D, of the FCC rules for the Citizens Band Radio Service, current at the time of packing of the transmitter, must be furnished with each CB transmitter marketed per 95.673.

I. PLL RESTRICTIONS (Per Public Notice of April 27, 1978)

The 77-235ESP meets the following conditions specified:

1. All frequency-determining elements, including crystals, PLL integrated circuits and channel selector switches are permanently wired and soldered in place.
2. The PLL integrated circuit division ratio selection is BCD coded. All the 40 channels are mask programmed into the CPU and can not be changed.
3. Channel selection is controlled by the masked program of the CPU and has only 40 positions for use in the US.
4. All the undedicated leads in the CPU and PLL integrated circuits are disabled and not serviceable by the user.
5. A copy of the PLL data sheet is shown in Appendix 9.

J. FINAL AMPLIFIER DATA

1. A copy of the final RF amplifier data sheet is included in Appendix 10.

APPENDIX 3

FUNCTION OF DEVICES

<u>Reference</u>	<u>Type</u>	<u>Function</u>
Q22	2SC5343MY	VCO Amp.
Q23	2SC5343MY	Buffer
Q24	2SC5343MY	Doubler
Q25	2SC5343MY	Pre-Driver
Q26	2SC2314E	Driver
Q27	KTC2078	Final RF Amplifier
IC1	LC72322	CPU/PLL
IC2	4558	Mike Amp/Limiter
IC3	TDA2003V	Modulator

FUNCTION OF DEVICES
FCC ID: MMA77120ESP

APPENDIX 3

APPENDIX 4
SCHEMATIC DIAGRAMS

TWO (2) SCHEMATIC DIAGRAMS FOLLOW THIS SHEET

SCHEMATIC DIAGRAMS
FCC ID: MMA77120ESP

APPENDIX 4