

Microtest	Test Réport
Report No.	: MTi250325007-0101E1
Date of issue	: 2025-04-03
Applicant	: RADIOSHACK WORLDWIDE CORP.
Product	: 3 in 1 Magnetic Wireless Charger
Model(s)	: 2733364
FCC ID	: 2BDUR-2733364-1



Tel:0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1Page 1 of 25





Microtest

# **Table of contents**

		Table of contents	
	ad <sup>©</sup> Da		
<b>A</b> 1	Gene	eral Description	
	1.1	Description of the EUT	
	1.2	Description of test modes	
	1.3	Environmental Conditions	5
	1.4	Description of support units	
	1.5	Measurement uncertainty	
2 3	Sum Test	mary of Test Result Facilities and accreditations	
	3.1	Test laboratory	7
4 5		of test equipment uation Results (Evaluation)	9
	5.1	Antenna requirement	9
6	Radi	o Spectrum Matter Test Results (RF)	
	6.1	Conducted Emission at AC power line	
	6.2	20dB Occupied Bandwidth	
	6.3	Emissions in frequency bands (below 30MHz)	
	6.4	Emissions in frequency bands (30MHz - 1GHz)	
Ph	notogra	aphs of the test setup	
Ph	notogra	aphs of the EUT	
		1C2	
	ic'e		
(A)	he.		
(E)		-05	



Report No.: MTi250325007-0101E1

Applicant	RADIOSHACK WORLDWIDE CORP.			
Applicant				
Applicant Address	Millennium Tower, 18th floor Paseo General Escalon Number 3675 Col. Escalon, San Salvador El Salvador			
Manufacturer	RADIOSHA	CK WORLDWIDE CORP.		
Manufacturer Address		Tower, 18th floor Paseo Gene In Salvador El Salvador	ral Escalon Number 3675 Col.	
Product description		(B) MIC		
Product name	3 in 1 Magn	etic Wireless Charger		
Trademark	Radioshack			
Model name	2733364	otest		
Series Model(s)	N/A	(PRIMIC)		
Standards	47 CFR Par	t 15C		
Test Method	ANSI C63.1	0-2013	otest	
Festing Information	n		Mici	
Date of test	2025-03-26	to 2025-04-01		
Test result	Pass	~		
Prepared by:		Letter Lan	Letter. Lan.	
Reviewed	oy:	David Lee	Dowid. Lee Lewis lion	
Approved I	by:	Lewis Lian	Lewis tion	

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1Page 3 of 25



Report No.: MTi250325007-0101E1

Microtest

# **1** General Description

1.1 Description of the	EUT	
Product name:	3 in 1 Magnetic Wireless Charger	
Model name:	2733364	
Series Model(s):	N/A	
Model difference:	N/A	
Electrical rating:	Input: 5VDC 1A Output: 2W	, otes
Accessories:	N/A	SMC
Hardware version:	V1.0	
Software version:	V1.0	
Test sample(s) number:	MTi250301001-01-R001	
RF specification	1 de la constante de la consta	
Operating frequency range:	325.6kHz	
Modulation type:	ASK	
Antenna(s) type:	Coil	
1.2 Description of test	modes	2

# No. Emission test modes Mode1 Wireless Output(2W) Mode2 Stand by

Microtest

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,ChinaQ/MTI-QP-12-FE038Ver/Rev.: A1



#### **1.3 Environmental Conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C	
Humidity:	20% RH ~ 75% RH	
Atmospheric pressure:	98 kPa ~ 101 kPa	

#### 1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment	list		ad <sup>ole</sup>		
Description	Model	Serial No.	Manufacturer		
Lenovo USB-C adapter	C65B	1SGX21B35621Z13F1D4W	Lenovo		
watch	Apple watch S7	M0JVGQG1VP	Apple		
Support cable list					
Description Length (m)		From	То		
/	1	/	/		

#### 1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	±5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: MTi250325007-0101E1

## 2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15C	47 CFR Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15C	47 CFR Part 15.207(a)	Pass
3	20dB Occupied Bandwidth	47 CFR Part 15C	47 CFR Part 15.215(c)	Pass
4	Emissions in frequency bands (below 30MHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass
5	Emissions in frequency bands (30MHz - 1GHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass

(B)Microlest





Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Ver./Rev.: A1Page 6 of 25





(B) Microtest

(B)Microtest

## **3** Test Facilities and accreditations

## 3.1 Test laboratory

()	
Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093
Pure.	Microtest

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Ver./Rev.: A1Page 7 of 25





## 4 List of test equipment

•						
No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
20	COLC.	Conducted Emiss	ion at AC power	line		
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2025-03- 13	2026-03 12
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2025-03- 18	2026-03 17
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2025-03- 18	2026-03 17
		20dB Occup	ied Bandwidth		2.0	. (O <sup>re</sup>
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2025-03- 18	2026-03 17
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB400512 40	2025-03- 14	2026-03 13
3	PXA Signal Analyzer	Agilent	N9030A	MY513502 96	2025-03- 14	2026-03 13
4	Synthesized Sweeper	Agilent	83752A	3610A019 57	2025-03- 18	2026-03 17
5	MXA Signal Analyzer	Agilent	N9020A	MY501434 83	2025-03- 18	2026-03 17
6	RF Control Unit	Tonscend	JS0806-1	19D80601 52	2025-03- 18	2026-03 17
7	Band Reject Filter Group	Tonscend	JS0806-F	19D80601 60	2025-03- 18	2026-03 17
8	ESG Vector Signal Generator	Agilent	N5182A	MY501437 62	2025-03- 14	2026-03 13
9	DC Power Supply	Agilent	E3632A	MY400276 95	2025-03- 18	2026-03 17
	Em Em	nissions in frequenc	y bands (below	30MHz)		
10	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03- 14	2026-03 13
2	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03- 23	2026-03 22
3	Amplifier	Hewlett-Packard	8447F	3113A0618 4	2025-03- 18	2026-03 17
	Em	issions in frequency	y bands (30MHz	- 1GHz)		
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03- 14	2026-03 13
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06 10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03- 23	2026-03 22
4	Amplifier	Hewlett-Packard	8447F	3113A0618 4	2025-03- 18	2026-03 17

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1Page 8 of 25





(B) Microtest

Microtest

## 5 Evaluation Results (Evaluation)

#### 5.1 Antenna requirement

#### 5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.

(B)Microtest



Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Ver./Rev.: A1Page 9 of 25



Report No.: MTi250325007-0101E1

# 6 Radio Spectrum Matter Test Results (RF)


## 6.1 Conducted Emission at AC power line

<ul> <li>Except as shown in paragraphs (b)and (c)of this section, for intentional radiator that is designed to be connected to the p (AC) power line, the radio frequency voltage that is conducted onto the AC power line on any frequency or frequencies, wit band 150 kHz to 30 MHz, shall not exceed the limits in the for table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).</li> </ul>					
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBµV)			
		Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
j.	*Decreases with the logarithm of the frequency.				
Test Method:	ANSI C63.10-2013 section 6.2				
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices				

### 6.1.1 E.U.T. Operation:


Operating Environment:						
Temperature:	25.9 °C	Humidity:	44 %	Atmospheric Pressure:	101 kPa	
Pre test mode: Mode1, Mode2						
Final test mode:All of the listed pre-test mode were tested, only the data of the wors mode (Mode1) is recorded in the report					a of the worst	

#### 6.1.2 Test Setup Diagram:

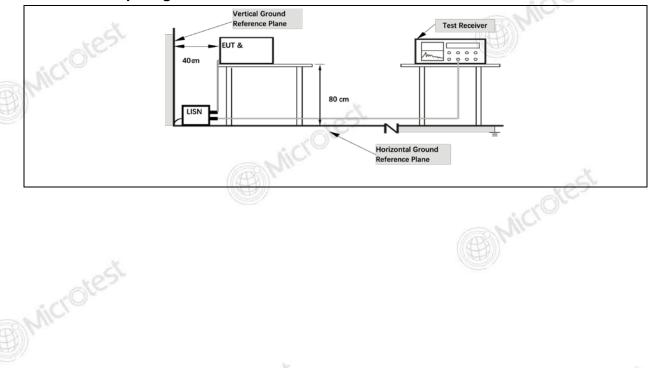





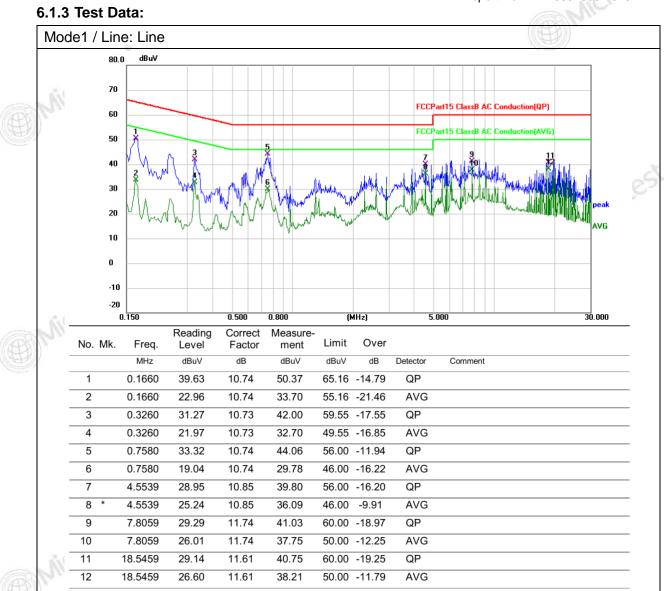

Microt

Tel: 0755-88850135-1439 Mobile: 131-4343-1439 (Wechat same number) Web: http://www.mtitest.cn Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China Q/MTI-QP-12-FE038 Ver./Rev.: A1




E-mail: mti@51mti.com

Page 11 of 25



Report No.: MTi250325007-0101E1

Microtest

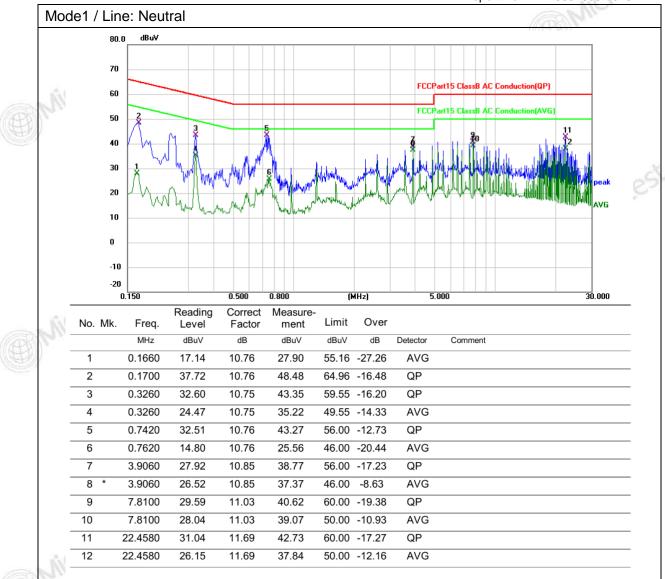

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,ChinaQ/MTI-QP-12-FE038Page 12 of 25





#### 6.2 20dB Occupied Bandwidth

6.2 20dB Occupied				
Test Requirement:	47 CFR Part 15.215(c)			
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequent band designated in the rule section under which the equipment is operated.			
Test Method:	ANSI C63.10-2013, section 6.9.2	- OF		
Procedure:	a) The spectrum analyzer center freq channel center frequency. The span r spectrum analyzer shall be between t OBW.	range for the EMI receiver or two times and five times the		
Microtest	<ul> <li>b) The nominal IF filter bandwidth (3 of 1% to 5% of the OBW and video band approximately three times RBW, unle applicable requirement.</li> <li>c) Set the reference level of the instructional from expending the maximum is</li> </ul>	dwidth (VBW) shall be ess otherwise specified by the ument as required, keeping the		
Å	<ul> <li>signal from exceeding the maximum is operation. In general, the peak of the than [10 log (OBW/RBW)] below the ris given in 4.1.5.2.</li> <li>d) Steps a) through c) might require it specified tolerances.</li> <li>e) The dynamic range of the instrume more than 10 dB below the target "-x if the requirement calls for measuring noise floor at the selected RBW shall</li> </ul>	spectral envelope shall be more reference level. Specific guidance teration to adjust within the ent at the selected RBW shall be fix dB down" requirement; that is, the $-20$ dB OBW, the instrument		
Microtest	<ul> <li>reference value.</li> <li>f) Set detection mode to peak and tra</li> <li>g) Determine the reference value: Se unmodulated carrier or modulated sig trace to stabilize. Set the spectrum ar level of the displayed trace (this is the h) Determine the "-xx dB down ampli xx]. Alternatively, this calculation may delta function of the instrument.</li> <li>i) If the reference value is determined</li> </ul>	t the EUT to transmit an gnal, as applicable. Allow the halyzer marker to the highest e reference value). itude" using [(reference value) – be made by using the marker-		
Microtest	turn the EUT modulation ON, and eith a new trace on the spectrum analyzed stabilize. Otherwise, the trace from st j) Place two markers, one at the lowed highest frequency of the envelope of each marker is at or slightly below the determined in step h). If a marker is b amplitude" value, then it shall be as c The occupied bandwidth is the freque markers. Alternatively, set a marker a envelope of the spectral display, such below the "-xx dB down amplitude" de	her clear the existing trace or star r and allow the new trace to tep g) shall be used for step j). st frequency and the other at the the spectral display, such that e "-xx dB down amplitude" below this "-xx dB down close as possible to this value. ency difference between the two t the lowest frequency of the n that the marker is at or slightly		



Report No.: MTi250325007-0101E1

BMicrotest


B MICORSI R r c a

marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

## 6.2.1 E.U.T. Operation:

Operating Envi	ronmen	nt:	(AP)	Mar.		-05	
Temperature: 19.3 °C		С	Humidity:	48.2 %	Atmospheric Pressure:	98 kPa	
Pre test mode: M			Mode1, Mode2				
Final test mode.			f the listed p e (Mode1) is		e were tested, only the dat the report	a of the worst	

## 6.2.2 Test Setup Diagram:

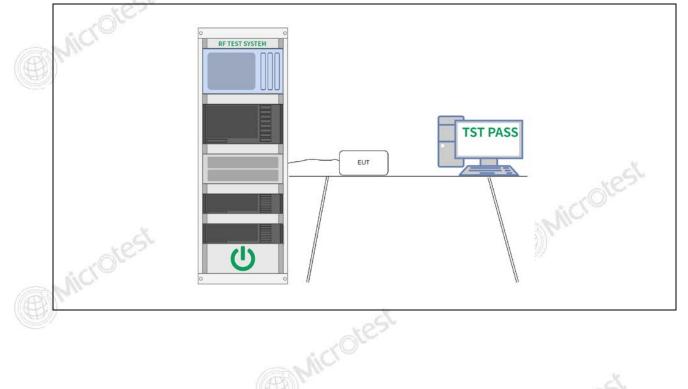

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1






Microtest

#### 6.2.3 Test Data:

**Note:** Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

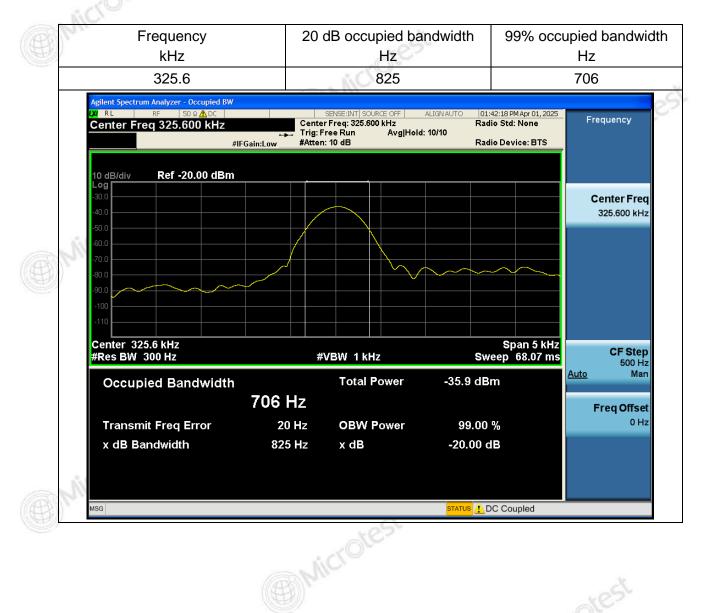




Report No.: MTi250325007-0101E1

#### 6.3 Emissions in frequency bands (below 30MHz)

Test Requirement:	47 CFR Part 15.209			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement t distance (meters)	
ME	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
Test Method:	In the emission table at The emission limits sho measurements employ frequency bands 9–90 Radiated emission limit measurements employ As shown in § 15.35(b) strength limits in parage average limits. Howeve not exceed the maximum more than 20 dB under operation under paragr	ections of this part, e.g., §§ pove, the tighter limit applies where in the above table are bain ong a CISPR quasi-peak detector. Attack, 110–490 kHz and above s in these three bands are boing an average detector. , for frequencies above 1000 raphs (a) and (b) of this section r, the peak field strength of a m permitted average limits s any condition of modulation aph (b) of this section, the permitted average and the peak any condition of modulation aph (b) of this section, the permitted average and the permitted average average and the permitted average avera	at the band edges ased on ector except for the e 1000 MHz. ased on 0 MHz, the field on are based on any emission shall specified above by . For point-to-point eak field strength	
Toot Mothod:		tion 6.4		
Test Method: Procedure:	ANSI C63.10-2013 sec ANSI C63.10-2013 sec			

Temperature: 22.5 °	C Humidity: 43 % Atmospheric Pressure: 101 kPa
Pre test mode:	Mode1, Mode2
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report


#### 6.3.2 Test Setup Diagram:

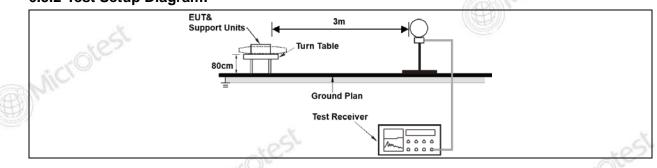

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1Page 16 of 25





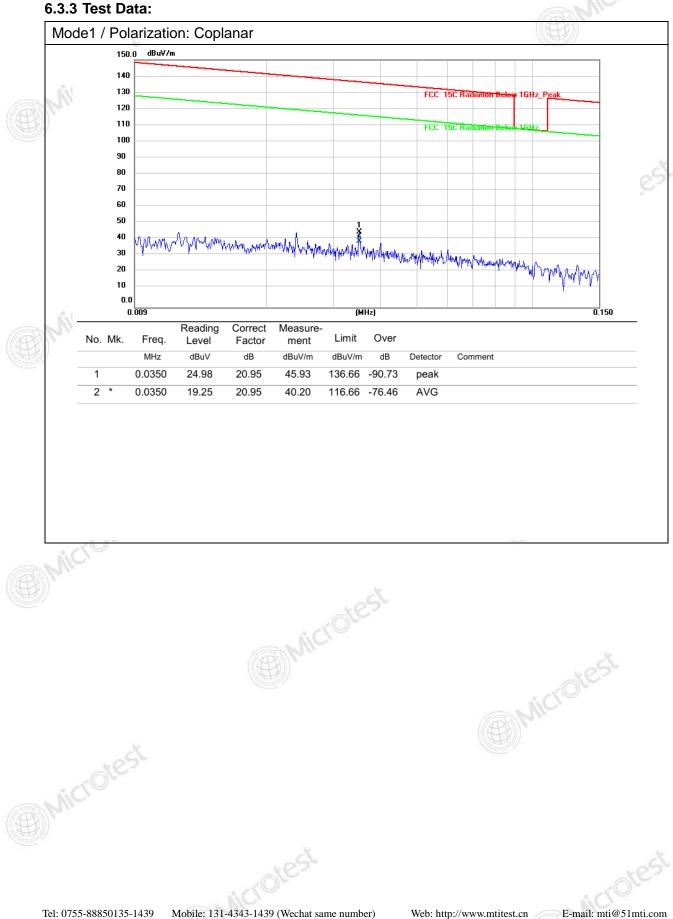


Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Page 17 of 25Page 17 of 25



Q/MTI-QP-12-FE038

**TEST REPORT** 

Report No.: MTi250325007-0101E1

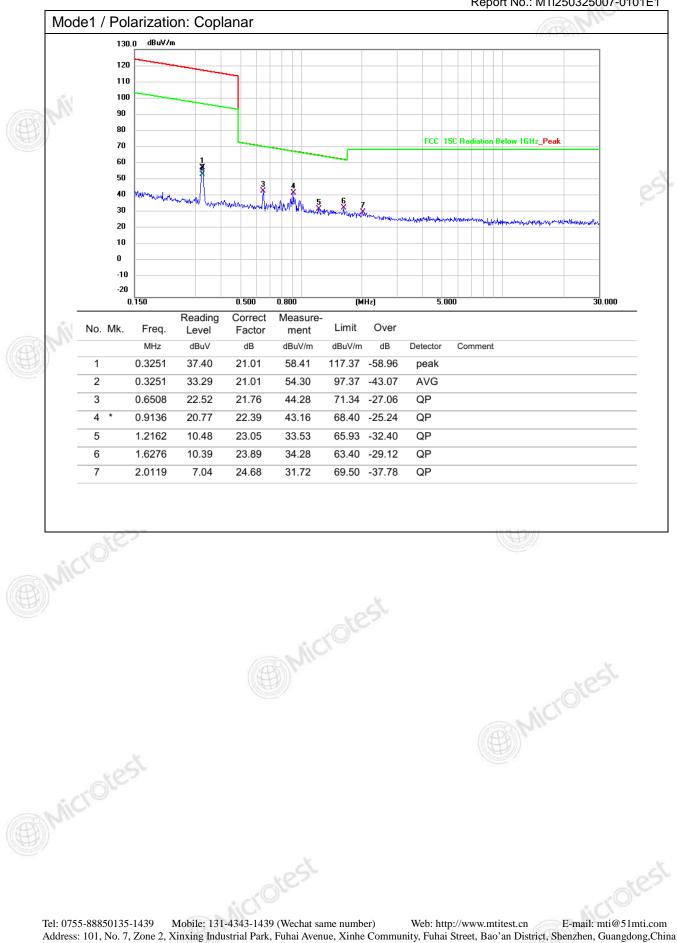

Ver./Rev.: A1

Page 18 of 25






Report No.: MTi250325007-0101E1

#### 6.4 Emissions in frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR Part 15.209			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremer t distance (meters)	
ME	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
Toot Method:	permitted under other s In the emission table al The emission limits sho measurements employ frequency bands 9–90 Radiated emission limit measurements employ As shown in § 15.35(b) strength limits in parage average limits. However not exceed the maximumore than 20 dB under operation under parage	eration within these frequence ections of this part, e.g., §§ pove, the tighter limit applies own in the above table are bar ng a CISPR quasi-peak dete kHz, 110–490 kHz and abov s in these three bands are b ng an average detector. , for frequencies above 1000 raphs (a) and (b) of this section r, the peak field strength of a m permitted average limits s any condition of modulation aph (b) of this section, the per nillivolts/meter at 3 meters a	15.231 and 15.241 at the band edges ased on ector except for the e 1000 MHz. ased on 0 MHz, the field n are based on any emission shall specified above by . For point-to-point ak field strength	
otest	azimuth.			
Test Method:				

Operating Environment:							
Temperature:	22.5 °C		Humidity:	43 %	Atmospheric Pressure:	101 kPa	
Pre test mode:		Mod	e1, Mode2			j.	
Final test mode: All of the listed pre-test mode were tested, only the data of mode (Mode1) is recorded in the report					a of the worst		
					J		

### 6.4.2 Test Setup Diagram:

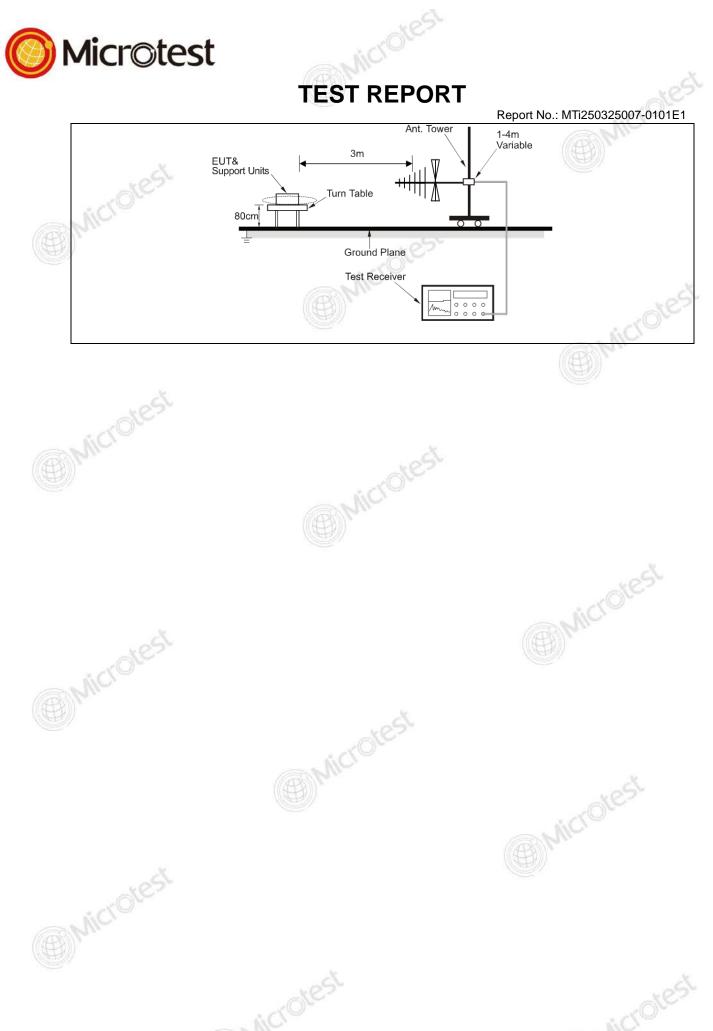


Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,ChinaQ/MTI-QP-12-FE038Page 20 of 25






Microtest

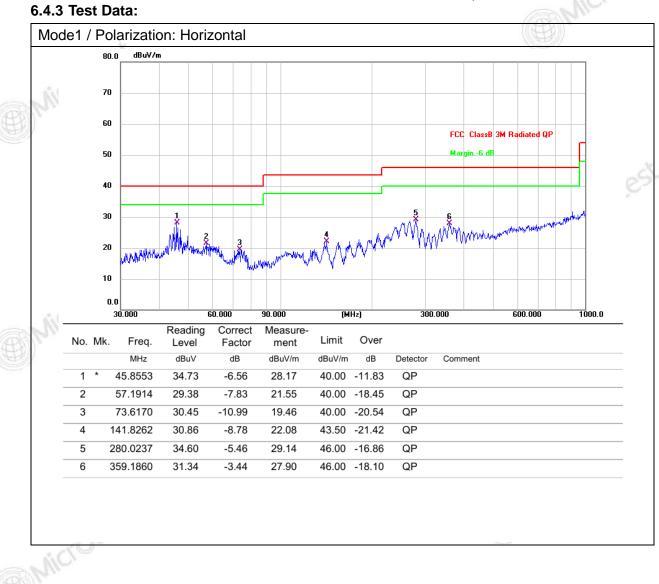

Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China<br/>Q/MTI-QP-12-FE038Ver./Rev.: A1Page 21 of 25




Report No.: MTi250325007-0101E1

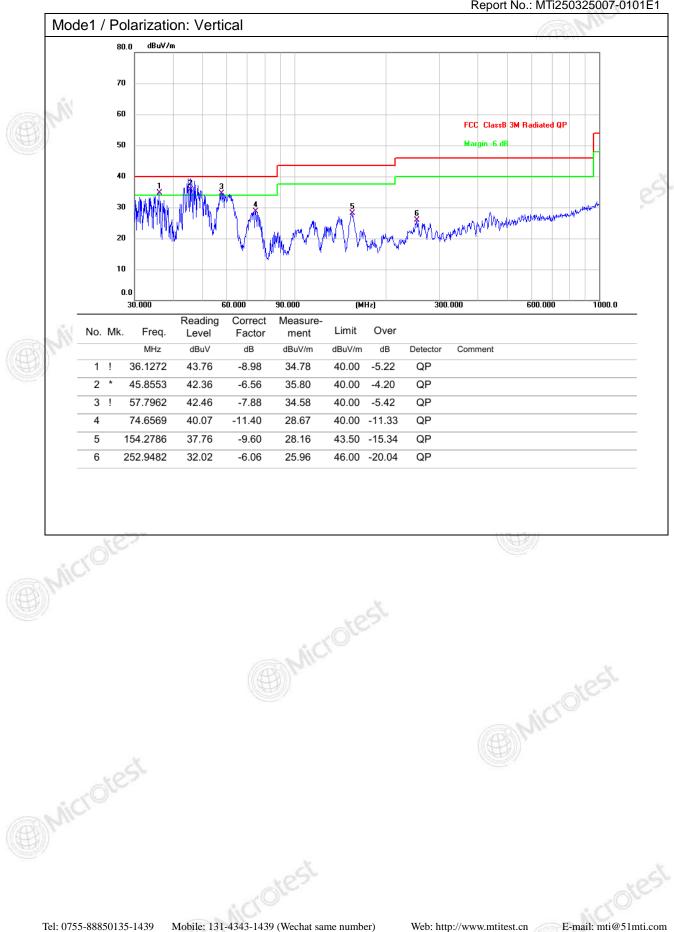

Mobile: 131-4343-1439 (Wechat same number) Web: http://www.mtitest.cn E-mail: mti@51mti.com Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China Q/MTI-QP-12-FE038 Page 22 of 25 Ver./Rev.: A1





## Photographs of the test setup

Refer to Appendix - Test Setup Photos














Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,ChinaQ/MTI-QP-12-FE038Page 23 of 25







# Photographs of the EUT

Refer to Appendix - EUT Photos













Tel: 0755-88850135-1439Mobile: 131-4343-1439 (Wechat same number)Web: http://www.mtitest.cnE-mail: mti@51mti.comAddress: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,ChinaQ/MTI-QP-12-FE038Page 24 of 25





Microtest

# Statement

- 1. This report is invalid without the seal and signature of the laboratory.
- 2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
- 3. The report shall not be partially reproduced without the written consent of the Laboratory.
- 4. This report is invalid if transferred, altered or tampered with in any form without authorization.
- 5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
- 6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Microtest

\*\*\*\*\*\* END OF REPORT \*\*\*\*\*\*

 Tel: 0755-88850135-1439
 Mobile: 131-4343-1439 (Wechat same number)
 Web: http://www.mtitest.cn
 E-mail: mti@51mti.com

 Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,China
 Q/MTI-QP-12-FE038
 Ver./Rev.: A1