


Annex A: Test setup photographs




172289_201.JPG: ProToF BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (pos. 1)

Annex A: Test setup photographs

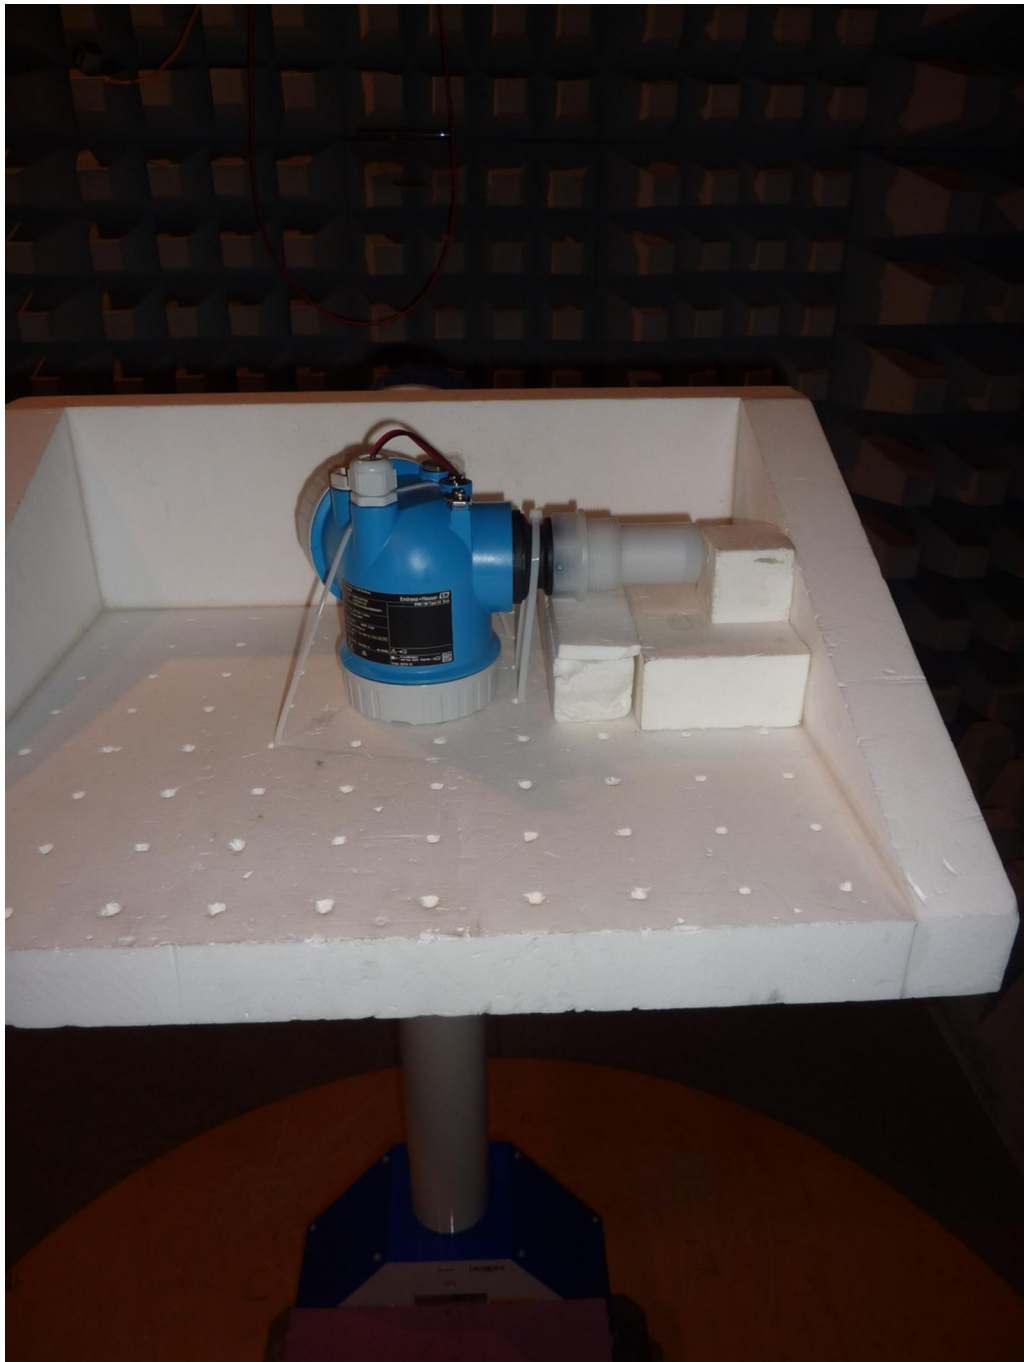


172289_202.JPG: ProToF BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (pos. 2)

Annex A: Test setup photographs

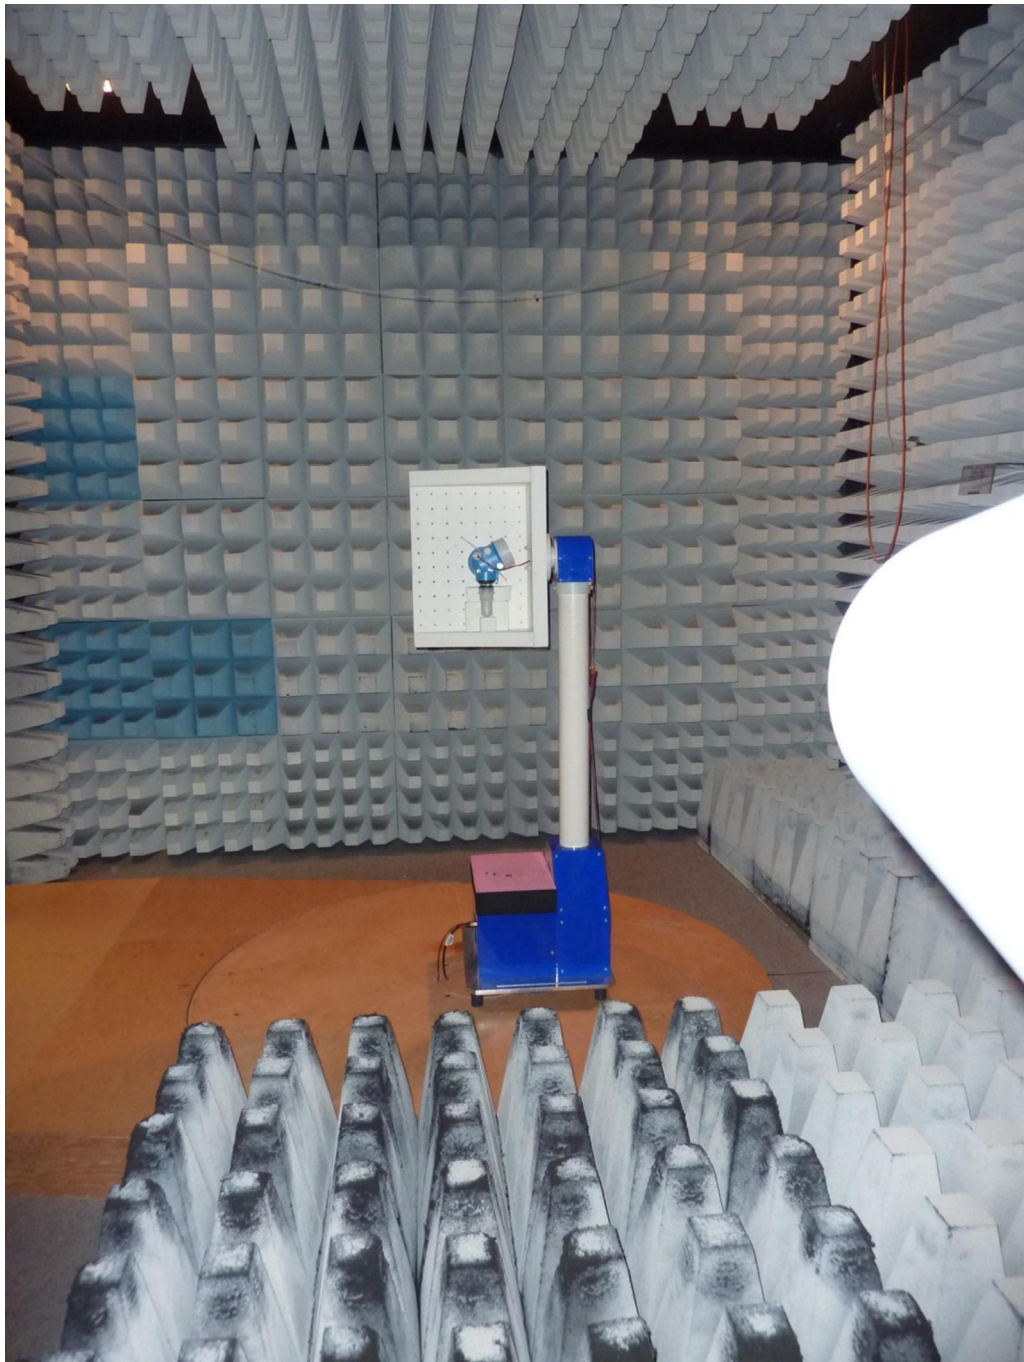

172289_203.JPG: ProTof BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (1 GHz to 12 GHz)

Annex A: Test setup photographs

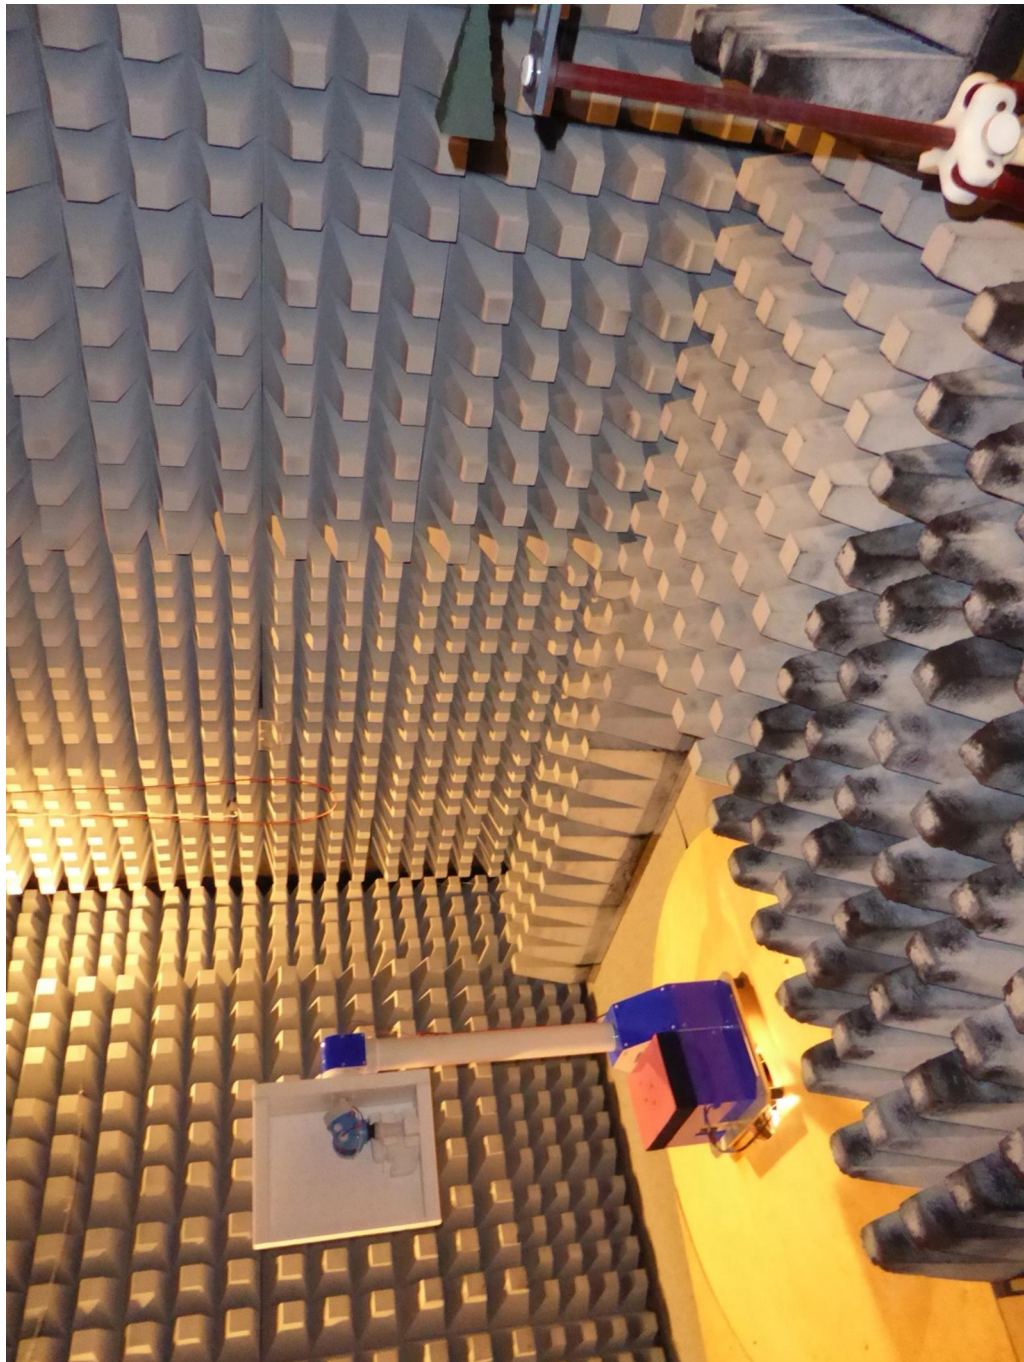

172289_204.JPG: ProTof BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (12 GHz to 26.5 GHz)

Annex A: Test setup photographs



172289_205.JPG: ProTof BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (26.5 GHz to 40 GHz)

Annex A: Test setup photographs



172289_206.JPG: ProToF BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (pos. 1, 40 GHz to 100 GHz)

Annex A: Test setup photographs



172289_207.JPG: ProToF BTLE-adaptor 2.4 GHz inside FMR50, test setup fully anechoic chamber (pos. 2, 40 GHz to 100 GHz)