

TABLE OF CONTENTS LIST

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.

FCC ID: C9NFRS-101U

TEST REPORT CONTAINING:

PAGE	1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....	TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT
PAGE	3.....	MODULATION CHARACTERISTICS AND EMISSION BW
PAGE	4.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	5.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	6.....	FREQUENCY STABILITY
PAGE	7.....	CERTIFICATION OF TECHNICAL DATA
PAGE	8.....	LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....	POWER OF ATTORNEY LETTER
EXHIBIT	2.....	FCC ID LABEL SAMPLE
EXHIBIT	3.....	SKETCH OF FCC ID LABEL LOCATION
EXHIBIT	4A.....	EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT	4B.....	EXTERNAL REAR VIEW PHOTOGRAPH
EXHIBIT	4C.....	EXTERNAL SIDE VIEW PHOTOGRAPH
EXHIBIT	4D.....	EXTERNAL SIDE VIEW PHOTOGRAPH
EXHIBIT	4E.....	EXTERNAL TOP VIEW PHOTOGRAPH
EXHIBIT	4F.....	INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT	4G.....	INTERNAL COPPER SIDE PHOTOGRAPH
EXHIBIT	4H. . . .	INTERNAL COPPER SIDE UNDERNEITH METAL CASE
EXHIBIT	4I. . . .	INTERNAL COMPONENT UNDERNEITH METAL CASE
EXHIBIT	5.....	BLOCK DIAGRAM
EXHIBIT	6A-6E.....	PARTS LIST
EXHIBIT	7.....	SCHEMATIC
EXHIBIT	8A-8I.....	USER'S MANUAL
EXHIBIT	9.....	AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	10.....	AUDIO INPUT VS DEVIATION GRAPH
EXHIBIT	11.....	AUDIO LOW PASS FILTER GRAPH
EXHIBIT	12.....	OCCUPIED BANDWIDTH CW PLOT
EXHIBIT	13.....	OCCUPIED BANDWIDTH With DEVIATION PLOT

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.

FCC ID: C9NFRS-101U

REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.983 (a,b,c) SEUNG YONG ELECTRONICS CO., LTD. will manufacture the
FCCID: C9NFRS-101U FAMILY RADIO SERVICES 14 CHANNEL
TRANSCIVER in quantity, for use under FCC RULES
PART 95.

2.983 (d) TECHNICAL DESCRIPTION

2.983 (d) (1) Type of Emission: 9K6F3E
95.629

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.9K$$

$$B_n = 2(3.0) + 2(1.9) = 9.8K$$

Authorized Bandwidth 12.5KHz

2.983 (d) (2) Frequency Range: 1. 462.5625 8. 467.5625
95.627 2. 462.5875 9. 467.5875
3. 462.6125 10. 467.6125
4. 462.6375 11. 467.6375
5. 462.6625 12. 467.6625
6. 462.6875 13. 467.6875
7. 462.7125 14. 467.7125 MHz

2.983 (d) (3) Power Output shall not exceed 0.500Watts effective
95.637 radiated power. There can be no provisions for
95.647 increasing the power.

2.983 (d) (4) Maximum Output Power Rating: 200 milliWatts
95.637 effective radiated power.

95.645 The antenna is an intergral part to the unit, it cannot
be removed without rendering the unit inoperative. In
order to remove the antenna the case must unscrewed,
then the PCB assemblies must be removed then the
antenna can be removed.

2.983 (d) (5) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

Vce = 4.5 Volts DC Ice = 0.12A.

Pin = 0.54 Watts

2.983 (d) (6) Function of each electron tube or
semiconductor device or other active circuit
device:

SEE EXHIBIT 6

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.

..

FCC ID: C9NFRS-101U

REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT

PAGE #: 1

- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 7 of this report. The block diagrams are included as EXHIBIT 5 of this report.
- 2.983(d) (8) Instruction book. A draft copy of the instruction manual is included as EXHIBIT 8.
- 2.983 (d) (9) Tune-up procedure. The tune-up procedure is INCLUDED IN USER'S MANUAL.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is given in EXHIBIT 8. The crystal specifications are included as NA.

2.983 (d) (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power will be INCLUDED IN USER'S MANUAL.


(12) Digital modulation. This unit does not use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF power output.

95.637 RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The ERP shall not exceed 0.500 Watts.

MEASURED POWER OUTPUT = 200 milliWatts ERP

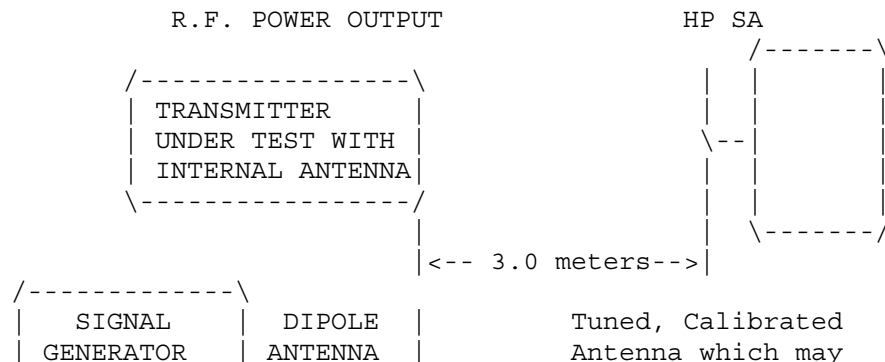

be raised from 1
to 4 meters above
ground and changed
in polarization


2.987(a) (b) Modulation characteristics:

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

95.635 (b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60 \log (f/3)$ greater than the attenuation at 1KHz. see the proceeding page.

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43 + \log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth PLOTS follow.

Radiotelephone transmitter with modulation limiter.
Test procedure diagram
OCCUPIED BANDWIDTH MEASUREMENT

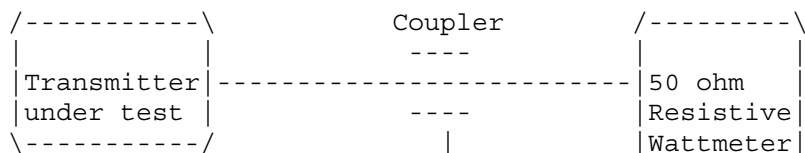

FCC ID: C9NFRS-101U
REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
PAGE #: 3

2.993 (a) (b) UNWANTED RADIATION:
95.635 (b) (7)

$$43 + 10\log(\text{TP}) = 43 + 10\log(0.5) = 40.00\text{dB}$$


EMISSION FREQ. MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRNGTH dBuV/m	ATT. dBuV/m	MARGIN dB	ANT.
462.56	98.90	1.60	18.44	118.94	0.0	0.0	V
925.12	23.00	2.90	24.10	50.00	68.94	28.94	H
1387.68	23.90	1.00	25.55	50.45	68.49	28.49	H
1850.24	24.20	1.01	27.40	52.61	66.33	26.33	V
2312.80	26.10	1.08	28.78	55.96	62.98	22.98	H
2775.36	20.20	1.15	29.94	51.28	67.28	27.28	H
3237.92	11.50	1.22	31.09	43.81	75.13	35.13	H
3700.48	14.20	1.29	32.25	47.74	71.20	31.20	V
4163.04	9.20	1.35	33.18	43.74	75.20	35.20	V
4625.60	8.90	1.42	33.70	44.03	74.91	34.91	V

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for intentional radiators. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 and RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane, Gainesville, FL. 32605.

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.
FCC ID: C9NFRS-101U
REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
PAGE #: 4

2.993 (a) (b) UNWANTED RADIATION:
95.631 (b) (8) (9)

Method of Measuring Radiated Spurious Emissions

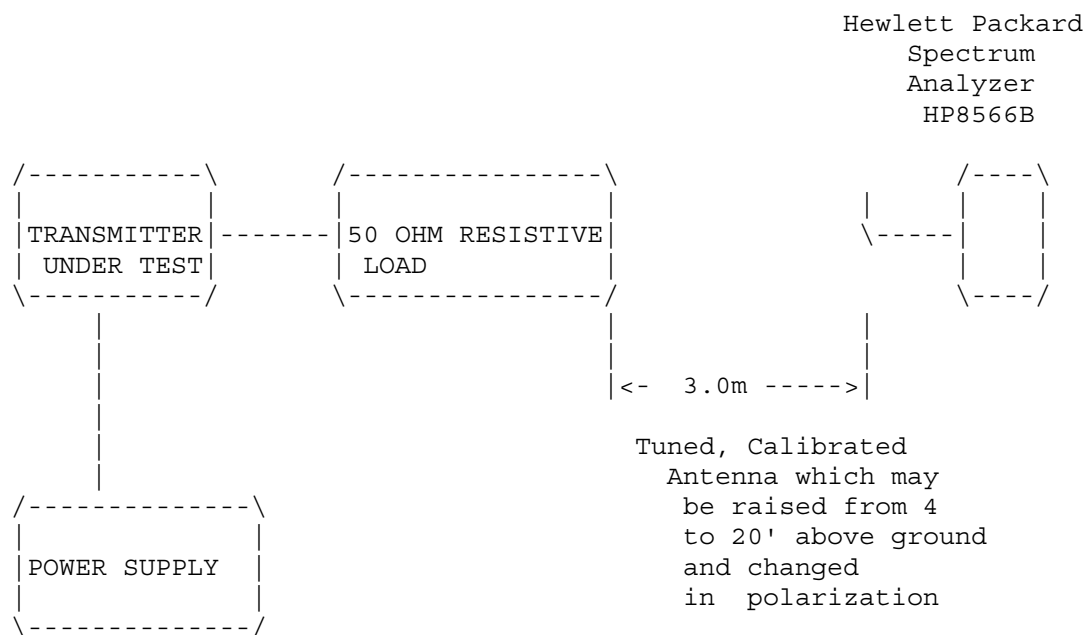

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.
 FCC ID: C9NFRS-101U
 REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
 PAGE #: 5

2.995(a)(b)(d) Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.562 500

TEMPERATURE C	FREQUENCY MHz	PPM
REFERENCE _____	462.562 500	00.00
-20 _____	462.561 570	-2.01
-10 _____	462.562 700	+0.43
0 _____	462.563 180	+1.47
+10 _____	462.563 280	+1.69
+20 _____	462.562 980	+1.04
+30 _____	462.562 110	-0.84
+40 _____	462.561 820	-1.47
+50 _____	462.561 920	-1.25

20c BATT. End-Point 4.5V/dc 462.562 800 +0.64

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was 1.69 to -2.01 ppm. The maximum frequency variation with voltage was +0.64ppm.

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.
FCC ID: C9NFRS-101U
REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
PAGE #: 6

2.983(f) Photo or Drawing of Label:
See Exhibit 2

2.983(g) Photos of Equipment:
See EXHIBIT 4.

2.999 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance
with EIA specifications and the FCC requirements.

2.909 Certification of Technical Data by Engineers

We, the undersigned, certify that the enclosed
measurements and enclosed data are true and
correct.

S.S. Sanders

Engineer

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.
FCC ID: C9NFRS-101U
REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
PAGE #: 7

LIST OF TEST EQUIPMENT

1. Frequency Counter - Hewlett Packard Model 5383A
S/N 2338A06071
2. SPECTRUM ANALYZER - HP Model 8566B
3. RF PRE-SELECTOR - HP Model 85685A
4. QUASI-PEAK ADAPTER - HP 85650A
5. RF Power Meter - Bird Model 43 Serial 81398
6. RF Attenuators - Narda MOD 766-20
7. Audio Oscillator - Hewlett Packard Model 201C
Serial 351-06107
8. Modulation meter - IFR MODEL AM/FM 500A.
9. Voltmeter - Hewlett Packard Model 427A
Serial Number 731-0751
10. HP Distortion Analyzer Model No. 334A
Serial Number 822-01817
11. Tenney Temperature Chamber
11. Eaton Biconical antenna Model 94455-1 antenna kit 20-200 MHz
12. Electro-Metric Dipole Kit 20-1000MHz, Model TDA 25
13. Electro-Metrics RGA-180 antenna kit 1- 18 GHz
14. HP broadband preamplifier model 8447D, serial no.
1644A00978, 30 - 1000 MHz.

APPLICANT: SEUNG YONG ELECTRONICS CO., LTD.
FCC ID: C9NFRS-101U
REPORT #: F:\CUS\S\SYE\98\SYE288C8.RPT
PAGE #: 8