



TEST REPORT

- : Great Talent Technology Limited APPLICANT
- PRODUCT NAME : Android device
- MODEL NAME : U2-PLUS-TE-VR
- **BRAND NAME** : UMX
- FCC ID : 2ALZM-U2-PLUS-TE-VR
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **RECEIPT DATE** : 2019-07-04
- **TEST DATE** : 2019-07-11 to 2019-08-05
- **ISSUE DATE** : 2019-08-05

Edited by:

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn





DIRECTORY

1. Te	echnical Information ····································	ŀ
1.1. /	Applicant and Manufacturer Information ······ 4	ł
1.2. E	Equipment Under Test (EUT) Description4	ŀ
1.3. 1	The channel number and frequency ······5	;
1.4. 1	Test Standards and Results ·······6	;
1.5. E	Environmental Conditions ····································	;
2. 47	CFR Part 15C Requirements ······ 7	,
2.1.	Antenna requirement ······7	,
2.2.	Duty Cycle Of Test Signal ······ 8	;
2.3. N	Maximum Peak Conducted Output Power ······ 9)
2.4. N	Maximum Average Conducted Output Power ······14	ŀ
2.5. 6	6dB Bandwidth······16	;
2.6. 0	Conducted Spurious Emissions and Band Edge······21	ł
2.7. F	Power spectral density (PSD) ······28	;
2.8. 0	Conducted Emission ····································	;
2.9. F	Restricted Frequency Bands ······37	,
2.10. F	Radiated Emission ·······44	ł
Annex	x A Test Uncertainty ······54	ł
Annex	x B Testing Laboratory Information55	;





Change History						
Version	Version Date Reason for change					
1.0	2019-08-05	First edition				



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Great Talent Technology Limited	
Applicant Address:	RM602,T3 Software Park,Nanshan,Shenzhen,China	
Manufacturer:	Great Talent Technology Limited	
Manufacturer Address:	RM602,T3 Software Park,Nanshan,Shenzhen,China	

1.2. Equipment Under Test (EUT) Description

Product Name:	Android device			
Serial No:	(N/A, marked #1 by test site	9)		
Hardware Version:	U2+_P0			
Software Version:	U2-PLUS-TE-VR-Z96K04E00V017-user_190726185443 Bluetooth LE GFSK 1Mbps, 2Mbps			
Equipment type:				
Modulation Type:				
Data Rate:				
Operating Frequency Range:	2402MHz - 2480MHz			
Antenna Type:	FPC Antenna			
Antenna Gain:	1.9 dBi			
	Battery			
	Brand Name:	Guoxia		
	Model No.:	BTE-3K01		
	Serial No.:	(N/A, marked #1 by test site)		
	Capacity:	3000mAh		
	Rated Voltage:	3.8V		
Accessory Information:	Charge Limit:	4.35 V		
	AC Adapter			
	Brand Name:	Kingfulin		
	Model No.:	TPA-23A050200UU01		
	Serial No.:	(N/A, marked #1 by test site)		
	Rated Output:	5V=2A		
	Rated Input:	100-240V ~ 50/60Hz 0.3A		





Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. The channel number and frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note: The Lowest Channel 0, Middle 19 and Highest 39 were selected for test in the report.





1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity		Document Title						
1	47 CFR Pa	rt 15	Radio Frequency Devices	5					
est d	letailed items	/sectio	on required by FCC rules a	CC rules and results are as below:					
No.	Section	Desc	cription	Test Date	Test Engineer	Result			
1	15.203	Ante	nna Requirement	N/A	N/A	PASS			
2	N/A	Duty	Cycle Of Test Signal	Jul 29, 2019	Ouyang Feng	PASS			
2	15 017/h)	Maxi	mum Peak Conducted	Jul 15&29,					
3	15.247(b)	Outp	ut Power	2019	Ouyang Feng	PASS			
4	45 047/h)	Maxi	mum Average	Jul 15&29,		DA 00			
4	15.247(b)	Cond	ducted Output Power	2019	Ouyang Feng	PASS			
-	15.247(a)	D	1	Jul 24&29,	0	54.00			
5		Band	lwidth	2019	Ouyang Feng	PASS			
<u>^</u>		Cond	ducted Spurious	Jul 24&29,		DA00			
6	15.247(d)	Emis	sion and Band Edge	2019	Ouyang Feng	PASS			
7	15.247(e)	David	en en estral densitu (DCD)	Jul 24&29,		54.00			
1		Powe	er spectral density (PSD)	2019	Ouyang Feng	PASS			
8	15.207	Cond	ducted Emission	Jul 11, 2019	Peng Xuewei	PASS			
•		Deet	rists d Ensauran av Dan da	Jul 23, 2019					
9	15.247(d)	Rest	ricted Frequency Bands	Aug 05, 2019	Peng Xuewei	PASS			
10	15.209,		atad Emissian	Jul 23, 2019	Dang Yusus!	DAGG			
10	15.247(d)	Radi	ated Emission	Aug 05, 2019	Peng Xuewei	PASS			
Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.									

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.





2.2. Duty Cycle Of Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

A. Test Set:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3. Test Result

Test Mode	Data Rate	Duty Cycle (%) (D)	Duty Factor (10*lg[1/D])
CESK	1Mbps	62.50	2.04
GFSK -	2Mbps	32.91	4.83



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.3. Maximum Peak Conducted Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency.

- b) Set the RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.





2.3.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

1Mbps

Channel	Frequency	Measured Outp	Limit		Verdict	
Channel	(MHz)	dBm	W	dBm	W	verdict
0	2402	8.04	0.006			PASS
19	2440	8.25	0.007	30	1	PASS
39	2480	10.78	0.012			PASS



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn



🎉 Agilent Spectrum Analyzer - Swept SA					
₩ RF 50 Ω DC Marker 1 2.439757000000	GH ₇	Avg Type	ALIGN AUTO E: Log-Pwr	09:01:39 PM Jul 15, 2019 TRACE 1 2 3 4 5 6	Peak Search
	PNO: Fast Trig: Free IEGain: I ow Atten: 30		:>10/10	DET P NNNN	
	Poant.cow Attent of		Mkr1 2	2.439 757 GHz	NextPeak
10 dB/div Ref 20.00 dBm				8.247 dBm	
Log					
	<u>^</u> 1				Next Pk Right
10.0					
0.00					
					Next Pk Left
-10.0					NEXT FR Len
-20.0					
					Marker Delta
-30.0					
-40.0					Mkr→Ci
-50.0					
-30.0					
-60.0					Mkr→RefLv
-70.0					
					More
Center 2.440000 GHz				Span 3.000 MHz	1 of 2
#Res BW 1.0 MHz	#VBW 3.0 MHz		#Sweep 1	.000 s (1001 pts)	
MSG			STATUS		


(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





2Mbps

Channel	Frequency	Measured Output Peak Power		Lir	nit	\/ordiat
Channel	(MHz)	dBm	W	dBm	W	Verdict
0	2402	8.85	0.008			PASS
19	2440	9.37	0.009	30	1	PASS
39	2480	11.25	0.013			PASS



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



🎉 Agilent Spectr	rum Analyzer - Swept SA					
<mark>×</mark> Marker 1 1	RF 50 Ω D		SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	06:01:45 PM Jul 29, 2019 TRACE 1 2 3 4 5 6	Peak Search
		PNO: Fast C IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Hold:>10/10		
10 dB/div Log	Ref Offset 2 dB Ref 20.00 dBn	n		Mkr	1 2.439 98 GHz 9.374 dBm	Next Pea
10.0			↓ 1			Next Pk Rigl
0.00						
-10.0						Next Pk Le
-20.0						
-30.0						Marker Del
40.0						Mkr→C
-50.0						
60.0						Mkr→RefL
-70.0						
Center 2.4	40000 GHz				Span 10.00 MHz	Mo i 1 of
Res BW 3		#VB	N 8.0 MHz	Sweep 1	.000 ms (1001 pts)	
SG				STATUS		

(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.4. Maximum Average Conducted Output Power


2.4.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.4.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.4.3. Test procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.





2.4.4. Test Result

1Mbps

Frequency	Average Power				nit	Verdict	
Channel	Frequency (MHz)	Measured Duty factor Calculated		Limit		Vertici	
	(10112)	dBm	dBm	W	dBm	W	
0	2402	5.54	7.58	0.006			PASS
19	2440	5.82	7.86	0.006	30	1	PASS
39	2480	8.35	10.39	0.011			PASS

2Mbps

Frequency		Average Power				nit	Verdict
Channel	Frequency (MHz)	Measured Duty factor Calculated			IIIL	verdict	
	(IVITZ)	dBm	dBm	W	dBm	W	
0	2402	3.60	8.43	0.007			PASS
19	2440	4.04	8.87	0.008	30	1	PASS
39	2480	6.10	10.93	0.012			PASS






2.5.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.5.2. Test Description

Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3. Test procedure

The steps for the first option are as follows:

- 1. Set analyzer center frequency to channel center frequency.
- a) Set RBW = 100 kHz.
- b) Set the VBW=300 kHz.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission.





2. The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

2.5.4. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

1Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.667	≥500	PASS
19	2440	0.670	≥500	PASS
39	2480	0.669	≥500	PASS

Test Plots



(Channel 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn











(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755

 Http://www.morlab.cn
 E-mail:
 serv.

Fax: 86-755-36698525 E-mail: service@morlab.cn



2Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	1.156	≥500	PASS
19	2440	1.163	≥500	PASS
39	2480	1.157	≥500	PASS

Test Plots

Agilent Spectrum Analyzer - Occupied BW						
RF 50 Ω DC		SENSE:INT	ALIGN AUTO	06:19:32 PM Jul 29, 2019	-	
dB -6.00 dB		r Freq: 2.402000000 GHz		Radio Std: None	- Me	eas Setup
		FreeRun Avg Ho n:40 dB	ld:>10/10	Radio Device: BTS	A.v.	g/Hold Nu
	#IFGain:Low #Atter	1: 40 00		Radio Device: B15	AV	j/Hold Nu
					On	(
0 dB/div Ref 20.00 dBm						
og						
0.0						AvgMo
.00					Exp	Rep
0.0						
0.0						
0.0						
				~~~		
0.0				um		
0.0						
60.0					0	DBWPow
70.0						99.00
enter 2.402 GHz				Span 6 MHz		
Res BW 100 kHz	#	VBW 300 kHz		Sweep 1 ms		
Occupied Bandwidt	h	Total Power	15.5	dBm		
2.0	0714 MHz					x
Transmit Freq Error	26.676 kHz	OBW Power	99	.00 %		-6.00
						_
x dB Bandwidth	1.156 MHz	x dB	-6.0	0 dB		
						Mo
						1 0
-			OTATIO			
i <mark>G</mark>			STATUS			

(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





Agilent Spectrum Analyzer - Occupied BW						_	
enter Freq 2.440000000	CHz Cent	SENSE:INT ter Freg: 2.440000000 GHz	ALIGN AUTO	06:20:03 P Radio Std	M Jul 29, 2019	M	leas Setup
enter Freq 2.44000000	Trig	: Free Run Avg Ho	old:>10/10				
	#IFGain:Low #Att	en: 40 dB		Radio Dev	vice: BTS	Av	g/Hold Nu
						On	
0 dB/div Ref 20.00 dBm							
og 0.0							AvaMo
.00		~~~~				Exp	Avg Mo Rep
						EXP	Kep
			Y.				
).0							
0.0				m n			
				- ¹ / ₂			
D.0 ~~~~					www.www.hw		
0.0							OBW Pow 99.00
D.0							99.00
enter 2.44 GHz				Sn	an 6 MHz		
Res BW 100 kHz		#VBW 300 kHz		Swe	eep 1 ms		
Occupied Bandwidt	n	Total Power	16.0	) dBm			
2.0	0703 MHz						xc
							-6.00 (
Transmit Freq Error	25.433 kHz	OBW Power	99	.00 %			
x dB Bandwidth	1.163 MHz	x dB	-6.	00 dB			
							Mo
							1 0
G			STATUS			-	

(Channel 19, 2440 MHz)



(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn






# 2.6. Conducted Spurious Emissions and Band Edge

### 2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.6.2. Test Description

### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.6.3. Test procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.






### 2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### 1Mbps

	Frequency	Measured Max. Out of	Limit	(dBm)	
Channel	(MHz)	Band Emission (dBm)	Carrier Level	Calculated -20dBc Limit	Verdict
0	2402	-52.42	6.08	-13.92	PASS
19	2440	-52.57	6.43	-13.57	PASS
39	2480	-51.68	8.78	-11.22	PASS

### **Test Plots**

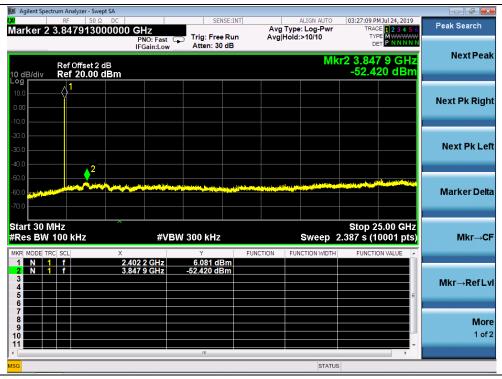


(Channel = 0, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



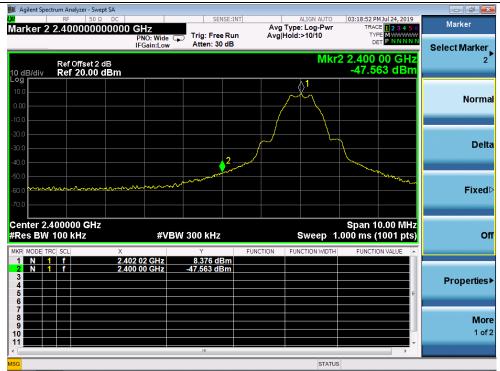

### (Band Edge, Channel = 0)

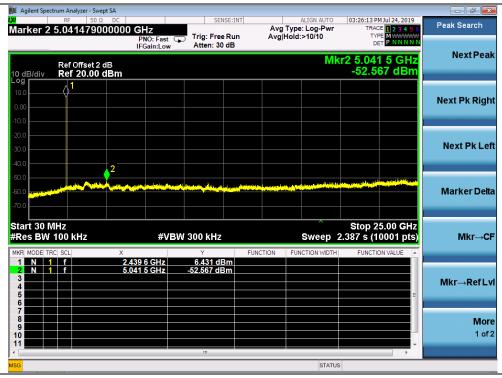

### (Channel = 19, 30MHz to 25GHz)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



💓 Agilent Spectrum Analyzer - Swept SA							
₩ RF 50 Ω DC Marker 2 3.738045000000	GH7	SENSE:	Avg	ALIGN AUTO Type: Log-Pwr	03:24:59 PM Ju TRACE	1 2 3 4 5 6	Peak Search
	PNO: Fast IFGain:Low	Trig: Free Ru Atten: 30 dB		Hold:>10/10	TYPE	M <del>WWWWW</del> P N N N N N	
Ref Offset 2 dB 10 dB/div Ref 20.00 dBm				Mk	r2 3.738 ( -51.676		Next Peak
10.0 0.00 -10.0							Next Pk Right
-20.0							Next Pk Left
-50.0 -60.0 -70.0							Marker Delta
Start 30 MHz #Res BW 100 kHz	#VBW	7 <b>300 kHz</b>	FUNCTION	Sweep 2	Stop 25.0 2.387 s (100	01 pts)	Mkr→CF
	79 6 GHz 38 0 GHz	8.781 dBm -51.676 dBm				Ξ	Mkr→RefLvl
7 8 9 10 11						-	More 1 of 2
MSG				STATUS	;		

(Channel = 39, 30MHz to 25GHz)



(Band Edge, Channel = 39)


MORLAB



#### 2Mbps

	Frequency	Measured Max. Out of	Limit	(dBm)		
Channel	(MHz)	Band Emission (dBm)	Band Emission (dBm)	Carrier Level	Calculated	Verdict
		Carrier Level	-20dBc Limit			
0	2402	-42.44	4.94	-15.06	PASS	
19	2440	-41.99	4.59	-15.41	PASS	
39	2480	-42.33	10.35	-9.65	PASS	

### **Test Plots**

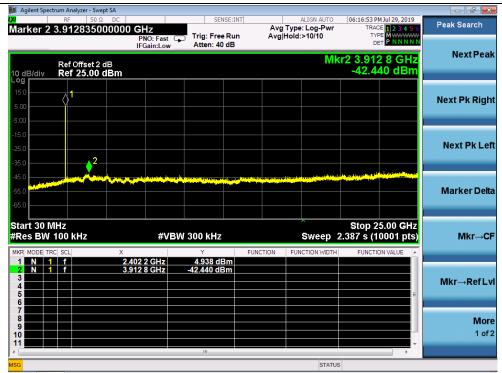


(Channel = 0, 30MHz to 25GHz)



 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



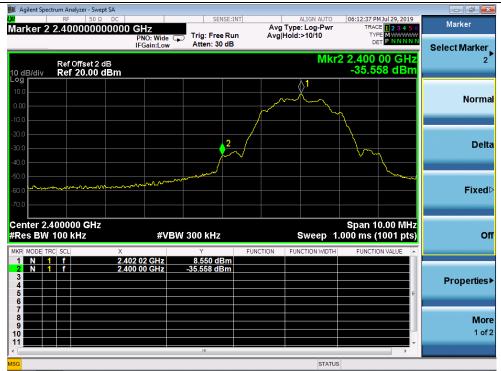

### (Band Edge, Channel = 0)



### (Channel = 19, 30MHz to 25GHz)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




🎉 Agilent Spectrum Analyzer - Swept SA							
Marker 2 3.812955000000	GHz	SENSE:II		ALIGN AUTO	06:15:58 PM Jul 29, 2 TRACE 1 2 3		Peak Search
	PNO: Fast IFGain:Low	Trig: Free Ru Atten: 40 dB		old:>10/10			NextPeak
Ref Offset 2 dB 10 dB/div Ref 25.00 dBm				Mk	r2 3.813 0 G -42.333 dE	Hz 3m	NextPeak
15.0 1 5.00							Next Pk Right
-15.0 -25.0 -35.0							Next Pk Left
-45.0 -55.0 -65.0							Marker Delta
Start 30 MHz #Res BW 100 kHz	#VBW	300 kHz	FUNCTION	Sweep 2	Stop 25.00 G 2.387 s (10001 p FUNCTION VALUE	iHz ots)	Mkr→CF
2         N         1         f         3.8           3         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -         -	179 6 GHz 113 0 GHz	<u>10.345 dBm</u> -42.333 dBm				E	Mkr→RefLvl
7 8 9 9 10 11							More 1 of 2
MSG 🐼 No Peak Found				STATUS			

(Channel = 39, 30MHz to 25GHz)



(Band Edge, Channel = 39)

MORLAB






# 2.7. Power spectral density (PSD)

## 2.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.7.2. Test Description

### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

# 2.7.3. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.





## 2.7.4. Test Result

The lowest, middle and highest channels are tested.

#### 1Mbps

	Spectral power density (dBm/3kHz)									
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict						
0	2402	-6.39	8	PASS						
19	2440	-6.09	8	PASS						
39	2480	-4.09	8	PASS						

### **Test Plots**



(Channel = 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn






(Channel = 19, 2440MHz)



(Channel = 39, 2480MHz)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





#### 2Mbps

Spectral power density (dBm/3kHz)								
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict				
0	2402	-9.69	8	PASS				
19	2440	-9.26	8	PASS				
39	2480	-7.14	8	PASS				

#### **Test Plots**



(Channel = 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn






(Channel = 19, 2440MHz)



(Channel = 39, 2480MHz)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





# 2.8. Conducted Emission

# 2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency rang	Conducted Limit (dBµV)		
(MHz)	Quai-peak	Average	
0.15 - 0.50	66 to 56	56 to 46	
0.50 - 5	56	46	
5 - 30	60	50	


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

# 2.8.2. Test Description

## A. Test Setup:

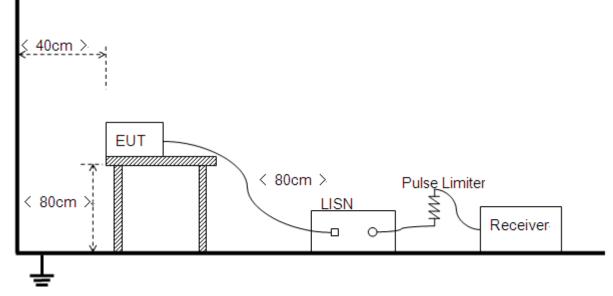

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.





### 2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


### A. Test setup:

Test Mode: <u>EUT + USB Cable + Adapter + Earphone +BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN





#### **B. Test Plots:**

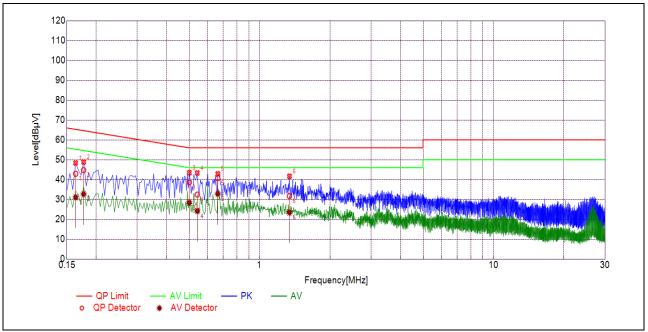


### (L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		r or allot
1	0.1636	42.93	31.09	65.28	55.28	Line	PASS
2	0.1769	44.78	32.70	64.63	54.63		PASS
3	0.5009	38.63	28.39	56.00	46.00		PASS
4	0.5414	32.46	24.18	56.00	46.00		PASS
5	0.6629	40.75	32.81	56.00	46.00		PASS
6	1.3418	31.66	23.49	56.00	46.00		PASS





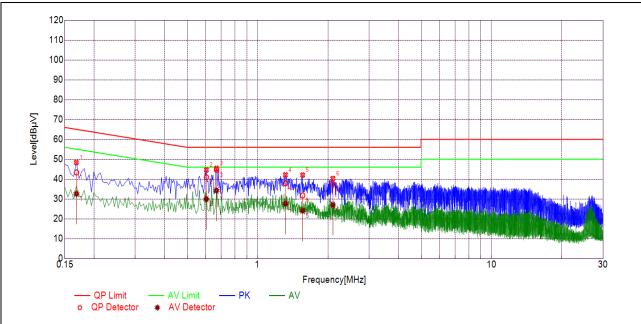


(N Phase)	
-----------	--

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1681	43.35	32.61	65.05	55.05	Neutral	PASS
2	0.6043	40.90	29.93	56.00	46.00		PASS
3	0.6672	44.69	34.28	56.00	46.00		PASS
4	1.3156	37.89	27.65	56.00	46.00		PASS
5	1.5583	31.77	24.09	56.00	46.00		PASS
6	2.0987	37.50	26.98	56.00	46.00		PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






## 2.9. Restricted Frequency Bands

## 2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

## 2.9.2. Test Description

## A. Test Setup

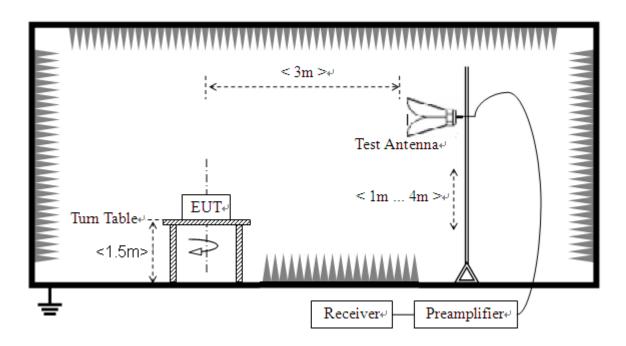

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.







## 2.9.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


#### 1Mbps

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Chamler	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voraiot
0	2388.19	PK	47.51	-29.67	32.56	50.40	74	PASS
0	2386.94	AV	34.80	-29.67	32.56	37.69	54	PASS
39	2484.23	PK	48.52	-29.67	32.56	51.41	74	PASS
39	2483.50	AV	35.37	-29.67	32.56	38.26	54	PASS






#### **Test Plots**

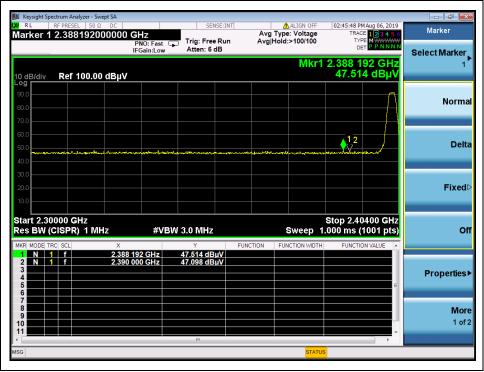

(Channel = 0, PEAK)







SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



			A 11 TON OFF	-	051/55 5			nalyzer - Swe		
Trace/Detector	MAug 06, 2019 CE 123456	TRAC		Avg	SENSE:I		00000 G	EL 50 Ω		
Select Trac		DE	ld:>100/100	n Avg	Trig: Free Ru Atten: 14 dB	PNO: Fast ( FGain:Low				
	226 GHz 21 dBµV	2.484 2 48.52	Mkr2				dBuV	109.00	Pai	3/div
								103.00		7019
Clear Wr									~	(
								$\backslash$		
										/
Trace Avera								$\langle \rangle$		
						2	$\wedge$ $\wedge$ 1	\\		
	-labor himda waa	مياسا ورواحواحوا عواجو	harder and the second second		June of Solar Solar	فغر رسوما مردالهما	"The Visals			
Max Ho										
	0000 GHz	Oton 2 5							000	2.478
Min Ho	(1001 gH2	310p 2.50 .000 ms (	Sweep 1		3.0 MHz	#VB	z	эпz R) 1 MH		
	ION VALUE	FUNCTION	UNCTION WIDTH	FUNCTION	Y		х	·	C SCL	
					47.480 dBµV 48.521 dBuV		2.483 50		f	N 1
View Blan					40.021 0004				1	
Blan	=									
Mo									+	
1 c										
	- F									
			STATUS							

#### (Channel = 39, PEAK)



#### (Channel = 39, AVG)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel:
 86-755-36698555
 Fax:
 86-755-36698555

 Http://www.morlab.cn
 E-mail:
 service


Fax: 86-755-36698525 E-mail: service@morlab.cn



#### 2Mbps

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
0	2380.91	PK	48.23	-29.67	32.56	51.12	74	PASS
0	2390.00	AV	35.79	-29.67	32.56	38.68	54	PASS
39	2485.44	PK	47.25	-29.67	32.56	50.14	74	PASS
39	2483.50	AV	36.00	-29.67	32.56	38.89	54	PASS

#### **Test Plots**

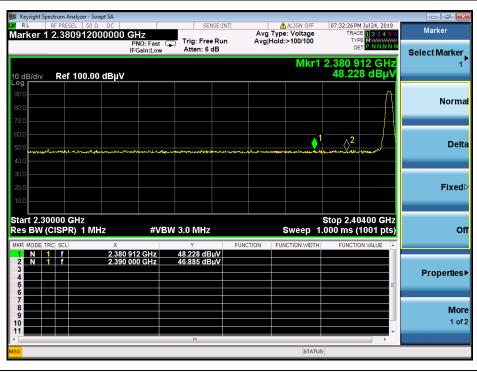

## (Channel = 0, PEAK)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



	F PRESEL 50 2.374776	000000 G	NO: Fast	Trig: Free	Run .	ALIGN OFF Avg Type: Voltage Avg Hold: >100/100	TRAC	M Jul 24, 2019 DE <b>1 2 3 4 5</b> 6 PE M WWWWWW ET A N N N N N	Marker
) dB/div	Ref 100.0		Gain:Low	Atten: 6 d	8	Mkr	1 2.374 7		Select Mark
									Nor
									D
0.0		~				¹	0 ²		
0.0 0.0									Fixe
art 2.300 es BW (C	100 GHz ISPR) 1 N	1Hz	#VB	W 3.0 MHz*		Swee		0400 GHz 1001 pts)	
KR MODE TRO	SCL f	× 2.374 7 2.390 0		Y <u>35.781 dB</u> µ 35.792 dBµ		DN FUNCTION WID	TH FUNCTION	DN VALUE	
3 4 5 6								=	Properti
7 8 9 0									<b>M</b>
1									

#### (Channel = 0, AVG)

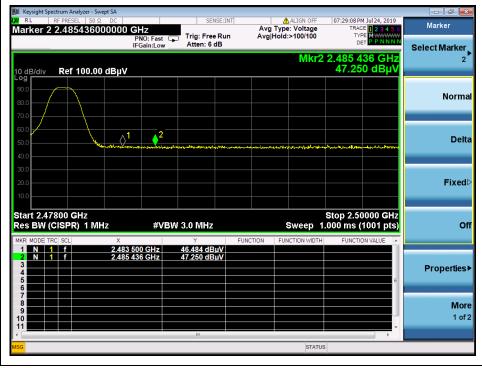

## (Channel = 39, PEAK)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



Keysight Spectrum Ar	nalyzer - Swep EL 50 Ω			SEN	SE:INT		ALIGN OFF	07:29:37 P	M Jul 24, 2019	
arker 2 2.48		0000 G	Hz NO: Fast G				Type: Voltage Hold: >100/100	TRAI	CE 1 2 3 4 5 6 PE M WWWW	Marker
			Gain:Low	Atten: 6 d				-	ET A P N N N N	Select Marke
dB/div Ref	100.00 (	dBμV					Mkr2	2.486 0 35.76	)08 GHz 64 dBµV	
										Norn
										NOTI
0.0	$\rightarrow$	1	2							De
0.0		\(\	<b></b>							
0.0										Fixe
0.0										
art 2.47800 C								Stop 2.5	0000 GHz	
RI MODE TRCI SCL	R) 1 MHz		#VBV	V 3.0 MHz*					(1001 pts)	
1 N 1 f		× 2.483 50	0 GHz	Y 36.002 dB	V	CTION	FUNCTION WIDTH	FUNCTI	ON VALUE	
2 N 1 f		2.486 00	8 GHz	35.764 dB	JV					Propertie
5										Troporde
6 7 8										
9										M(
í <b>Ele</b>										
1						_	STATU	2		

(Channel = 39, AVG)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



## 2.10. Radiated Emission

## 2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)







## 2.10.2. Test Description

#### A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

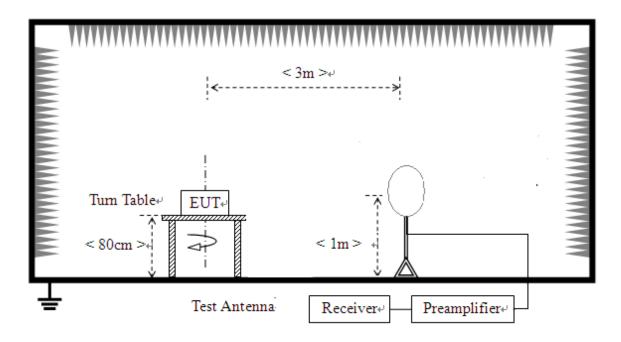

2) For radiated emissions from 30MHz to1GHz

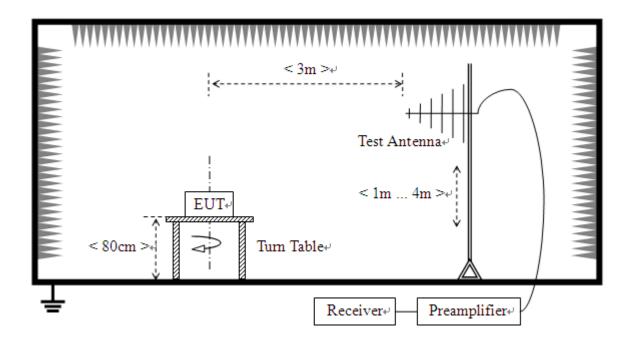




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

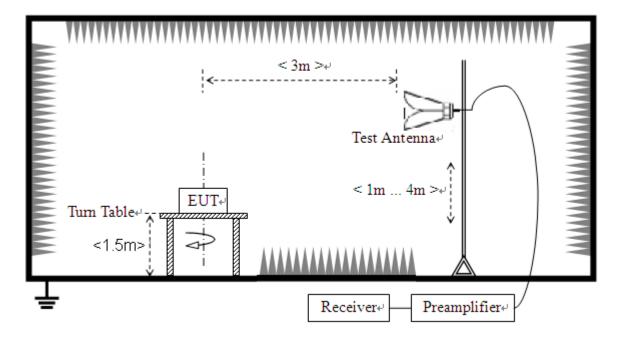

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant





emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

## 2.10.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:  $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$   $A_T$ : Total correction Factor except Antenna  $U_R$ : Receiver Reading  $G_{preamp}$ : Preamplifier Gain  $A_{Factor}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note2:** For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






## 1Mbps Plots for Channel = 0

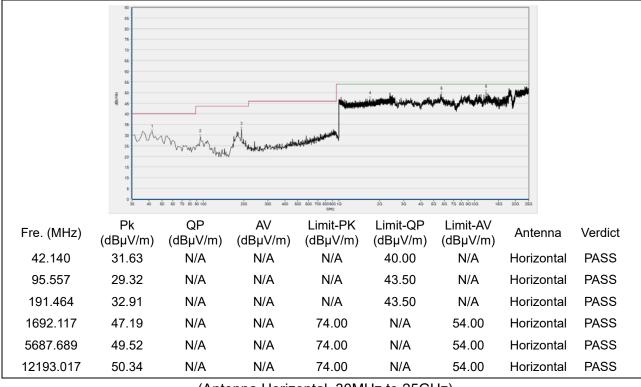

(Antenna Horizontal, 30MHz to 25GHz)

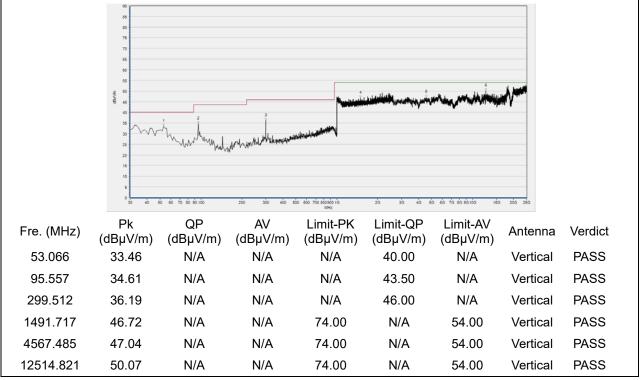

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn E-mail: service@morlab.cn

-






#### Plot for Channel = 19

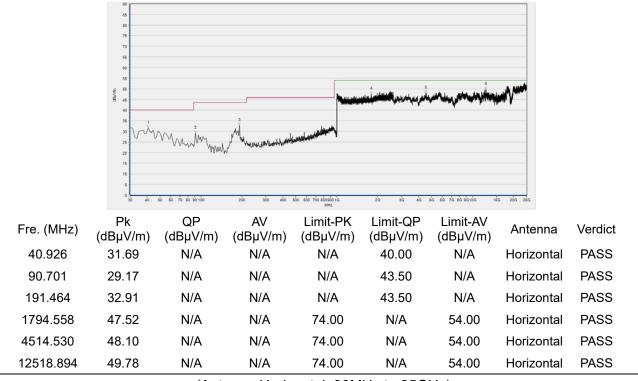


(Antenna Horizontal, 30MHz to 25GHz)

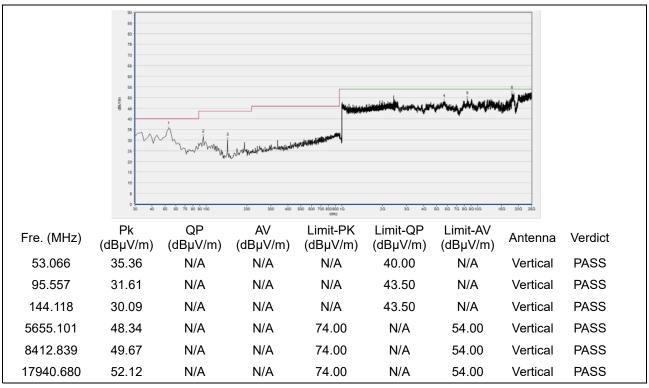

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China






#### Plot for Channel = 39

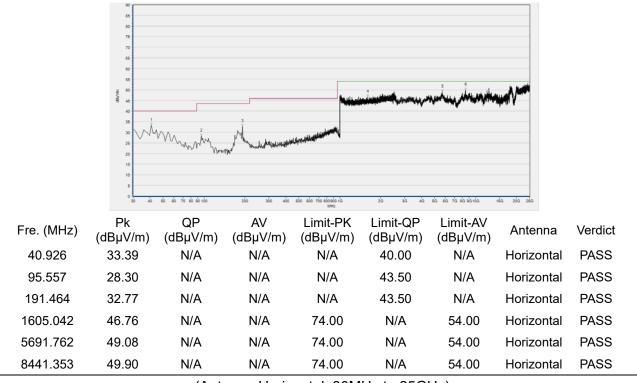

(Antenna Horizontal, 30MHz to 25GHz)

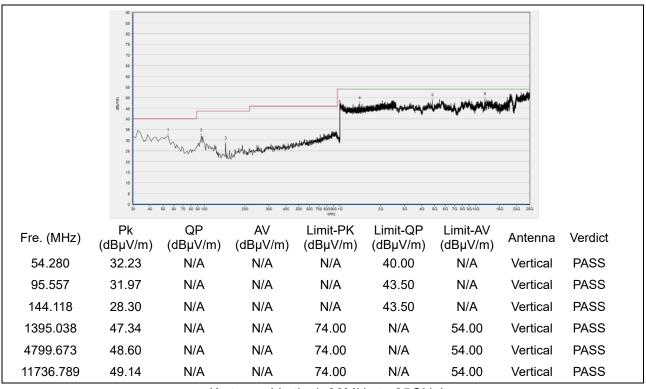

(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525




## 2Mbps



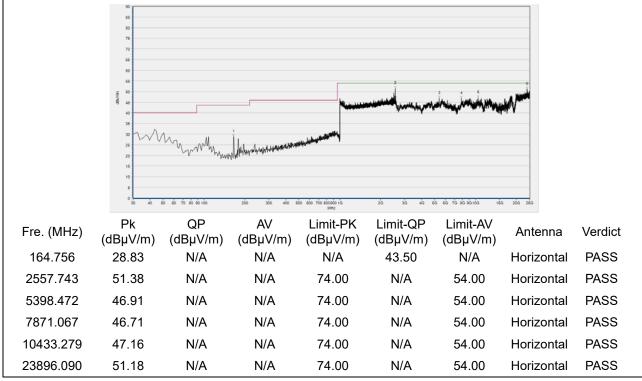

(Antenna Horizontal, 30MHz to 25GHz)

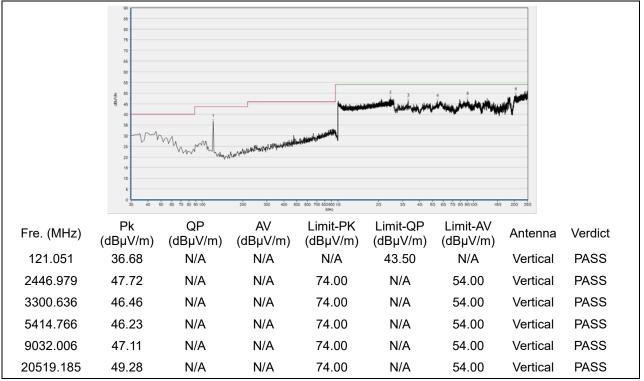


(Antenna Vertical, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn






#### Plot for Channel = 19

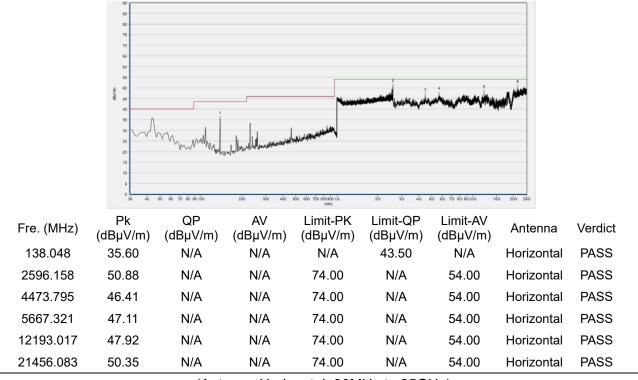

(Antenna Horizontal, 30MHz to 25GHz)

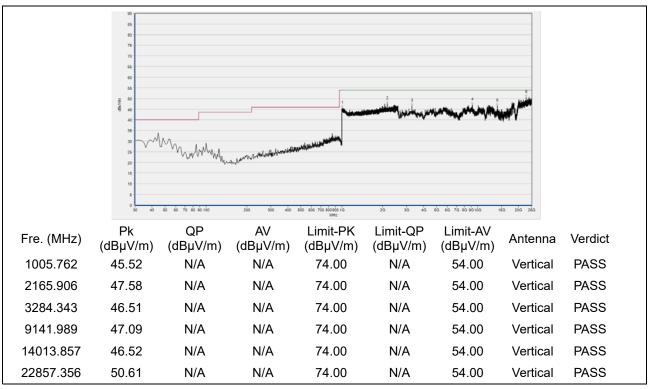


(Antenna Vertical, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



#### Plot for Channel = 39

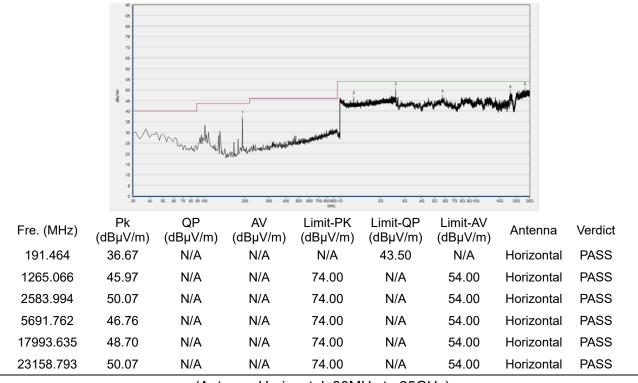

(Antenna Horizontal, 30MHz to 25GHz)

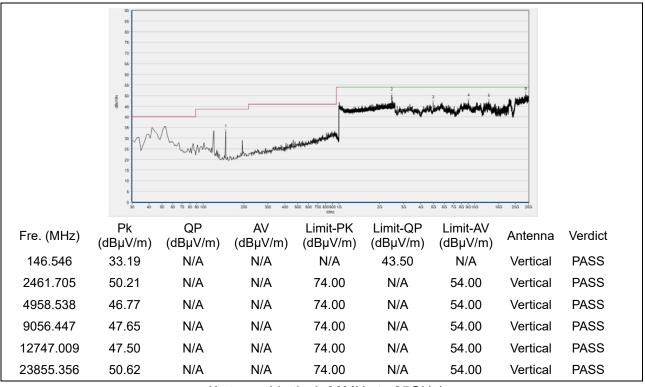

(Antenna Vertical, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# **Annex A Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# **Annex B Testing Laboratory Information**

## 1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.			
	Morlab Laboratory			
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
	Road, Block 67, BaoAn District, ShenZhen, GuangDong			
	Province, P. R. China			
Telephone:	+86 755 36698555			
Facsimile:	+86 755 36698525			

#### 2. Identification of the Responsible Testing Location

Nama	Shenzhen Morlab Communications Technology Co., Ltd.			
Name:	Morlab Laboratory			
	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong			
	Province, P. R. China			

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





## 4. Test Equipments Utilized

## 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due	
EXA Signal	MY53470836	N9010A	Agilent	2019.04.09	2020.04.08	
Analzyer			•			
RF cable	CB01	RF01	Morlab	N/A	N/A	
(30MHz-26GHz)	CBUT	NEUT	MONAD	IN/A	IN/A	
Coaxial cable	CB02	RF02	Morlab	N/A	N/A	
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A	
Computer	T430i	Think Pad	Lenovo	N/A	N/A	

## 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due	
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09	
LISN	812744	NSLK	Schwarzbeck	2019.05.08	2020.05.09	
LISIN	012744	8127	Schwarzbeck	2019.03.08		
Pulse Limiter	0201	VTSD	Cobucerzhoole	2019.05.08	2020.05.09	
(20dB)	9391	9561-D	Schwarzbeck	2019.03.08	2020.05.09	
Coaxial cable(BNC)	CB01		Marlah	N/A	N/A	
(30MHz-26GHz)	CBUT	EMC01	Morlab	IN/A	IN/A	

#### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0





## 4.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
				2019.07.26	2020.07.25
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna –	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Horn				2019.07.26	2020.07.25
Test Antenna –	BBHA9170	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Horn	#774	BBHA9170		2019.07.26	2020.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT

