



TEST REPORT

Report No. : **CTC2024240511**

FCC ID..... : **WNA-HPR3A-W5**

Applicant : **Shenzhen Skyworth Digital Technology Co.,LTD.**

Address..... : 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Manufacturer..... : Shenzhen Skyworth Digital Technology Co.,LTD.

Address..... : 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Product Name : **TBD, SET TOP BOX**

Trade Mark : SKYWORTH, STRONG, QVWI, Next

Model/Type reference..... : HPR3A

Listed Model(s) : HPR311

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Test Report Form No : CTC-TR-057_A1

Master TRF : Dated 2024-09-20

Date of receipt of test sample..... : Oct. 18, 2024

Date of testing..... : Oct. 21, 2024 ~ Oct. 31, 2024

Date of issue..... : Dec. 06, 2024

Result..... : **PASS**

Compiled by:

(Printed name+signature)

Lucy Lan

Supervised by:

(Printed name+signature)

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.

**Table of Contents****Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	3
1.4. TEST FACILITY	4
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS.....	5
2. GENERAL INFORMATION	6
2.1. CLIENT INFORMATION	6
2.2. GENERAL DESCRIPTION OF EUT	6
2.3. ACCESSORY EQUIPMENT INFORMATION	7
2.4. OPERATION STATE	8
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	11
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION.....	18
3.3. BAND EDGE EMISSIONS (RADIATED)	39
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	56
3.5. DTS BANDWIDTH.....	90
3.6. PEAK OUTPUT POWER	108
3.7. POWER SPECTRAL DENSITY	110
3.8. DUTY CYCLE	121
3.9. ANTENNA REQUIREMENT.....	132



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024240511	Dec. 06, 2024	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Alicia Liu
Conducted Emission	15.207	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	Pass	Alicia Liu
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	Pass	Alicia Liu
6dB Bandwidth	15.247(a)(2)	Pass	Alicia Liu
Conducted Max Output Power	15.247(b)(3)	Pass	Alicia Liu
Power Spectral Density	15.247(e)	Pass	Alicia Liu
Transmitter Radiated Spurious	15.209&15.247(d)	Pass	Alicia Liu

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conducted Output Power	± 0.686 dB	(1)
Maximum Power Spectral Density Level	± 0.743 dB	(1)
Band-edge Compliance	± 1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address:	14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address:	14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China
Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Factory
Address:	2-5F,Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China.

2.2. General Description of EUT

Product Name:	TBD, SET TOP BOX
Trade Mark:	SKYWORTH, STRONG, QVWI, Next
Model/Type reference:	HPR3A
Listed Model(s):	HPR311
Model Difference:	Only the models name is different
Sample ID:	CTC241012-002-S001
Power Supply:	DC12V 1A from AC/DC Adapter
Adapter Model 1	YS-SKY120100U00P ^{Note1} Input: 100-240V~ 50/60Hz 0.5A Output: 12Vdc/1A 12.0W
Adapter Model 2	RJ-SKY120100E60S ^{Note2} Input: 100-240V~ 50/60Hz 0.5A Output: 12Vdc/1A 12.0W
Adapter Model 3	BS12A-1201000US Input: 100-240V~ 50/60Hz 0.4A Output: 12Vdc/1A 12.0W
Hardware version:	/
Software version:	/

Note:

1. YS-SKY120100U0XP, (where X represents for marketing purpose with no safety impact, it can be 0-9)
2. RJ-SKY120100UXXS (XX=00-99, stands for customer code)



2.4G Wi-Fi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Operation Frequency:	802.11b/ g/ n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel Number:	802.11b/ g/ n(HT20): 11 channels 802.11n(HT40): 7 channels
Channel Separation:	5MHz
Antenna Type:	FPC Antenna
Antenna Gain:	ANT1: 1.74dBi ANT2: 0.53dBi

2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
LAN Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
SecureCRT	/	/	/

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40).

Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	NA	NA	FPC Antenna	IPEX	1.74
2	NA	NA	FPC Antenna	IPEX	0.53

For 2.4G, this EUT supports MIMO 2X2 with the unequal antenna gain, and any transmit signals are correlated with each other.

According to KDB 662911 D01, Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional Gain = $10 \log[((10^{1.74/20} + 10^{0.53/20})^2) / 2] = 4.17$ dBi.

**Data Rated:**

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
3	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
4	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 15, 2025
5	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 15, 2025
6	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 25, 2025
7	Test Software	Tonscend	JS1120-3	V2.6.88.0346	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

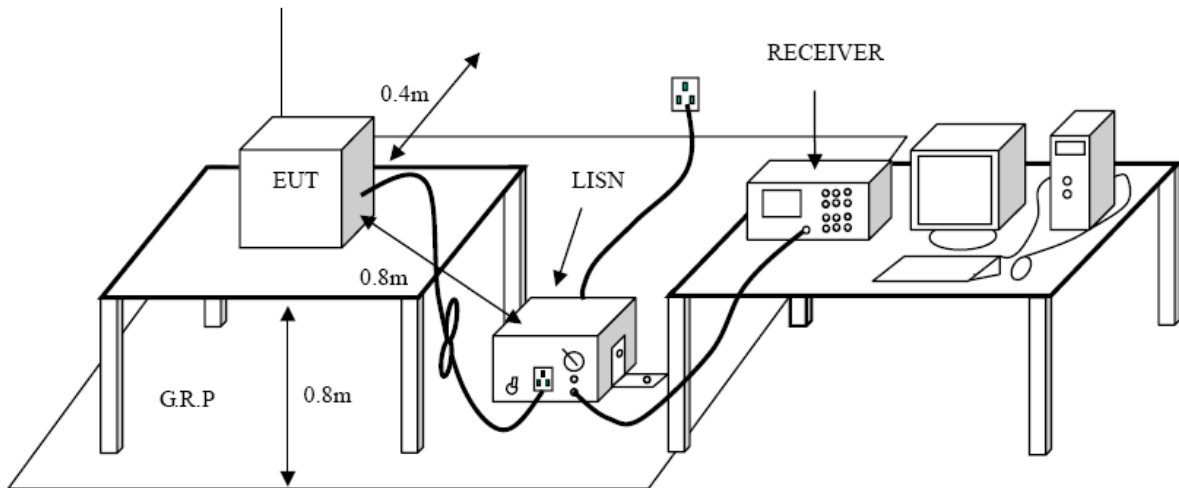

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

**Test Result**

Test Voltage:	AC 120V/60Hz
Adapter Model	YS-SKY120100U00P
Terminal:	Line
Remark:	Only worse case is reported

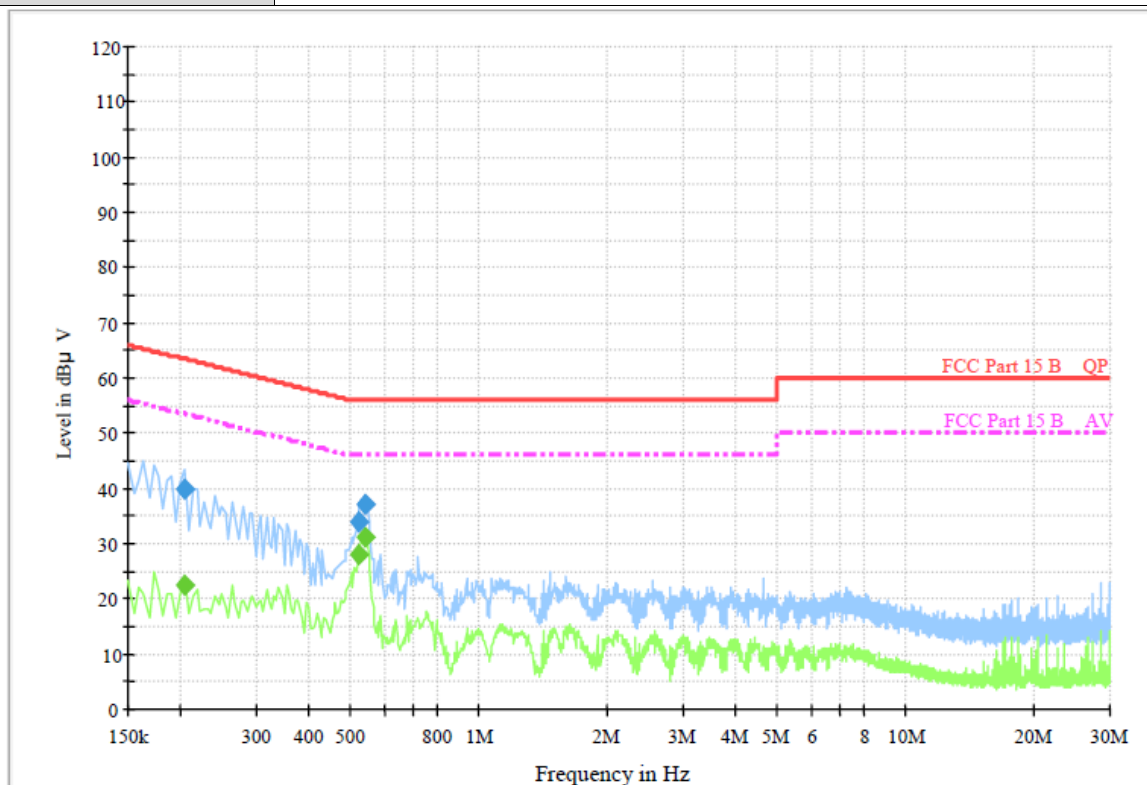**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.204000	40.0	1000.00	9.000	On	L1	9.5	23.4	63.4	
0.519000	33.9	1000.00	9.000	On	L1	9.5	22.1	56.0	
0.537000	37.0	1000.00	9.000	On	L1	9.5	19.0	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.204000	22.4	1000.00	9.000	On	L1	9.5	31.0	53.4	
0.519000	27.9	1000.00	9.000	On	L1	9.5	18.1	46.0	
0.537000	31.0	1000.00	9.000	On	L1	9.5	15.0	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Adapter Model	YS-SKY120100U00P
Terminal:	Neutral
Remark:	Only worse case is reported

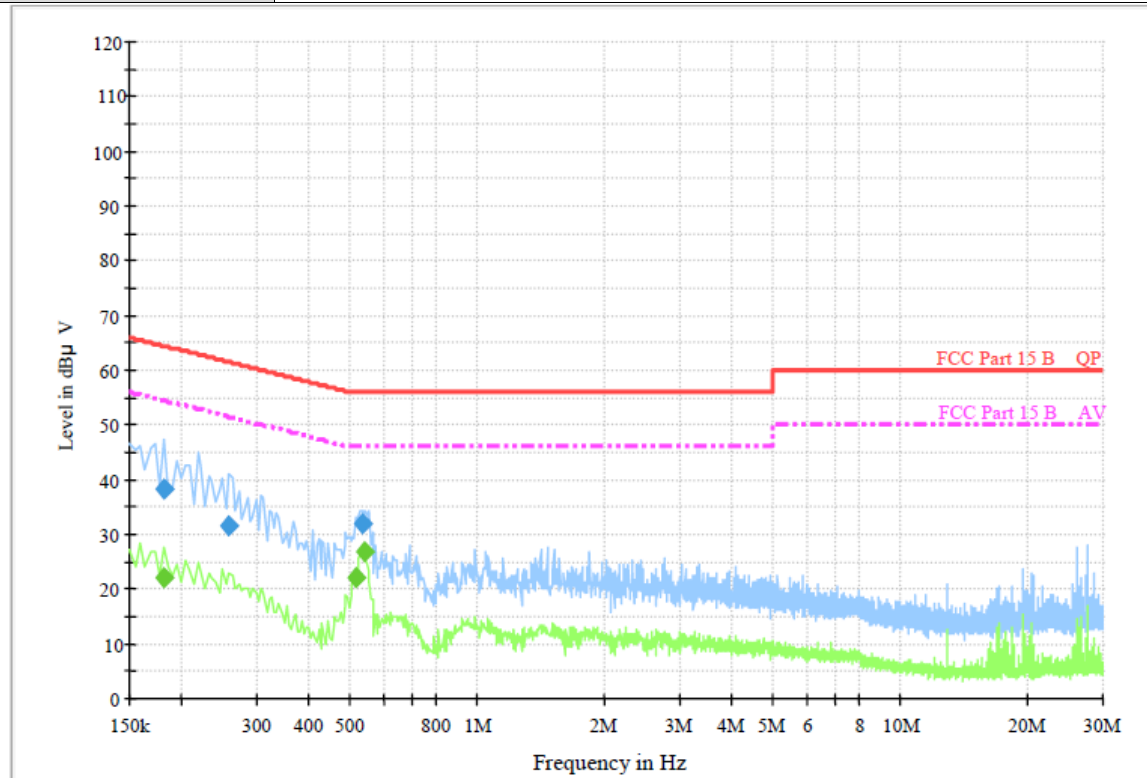

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.181500	38.3	1000.00	9.000	On	N	9.5	26.1	64.4	
0.258000	31.7	1000.00	9.000	On	N	9.4	29.8	61.5	
0.532500	31.9	1000.00	9.000	On	N	9.4	24.1	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.181500	22.2	1000.00	9.000	On	N	9.5	32.2	54.4	
0.514500	21.9	1000.00	9.000	On	N	9.4	24.1	46.0	
0.537000	26.9	1000.00	9.000	On	N	9.4	19.1	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Adapter Model	RJ-SKY120100U60S
Terminal:	Line
Remark:	Only worse case is reported

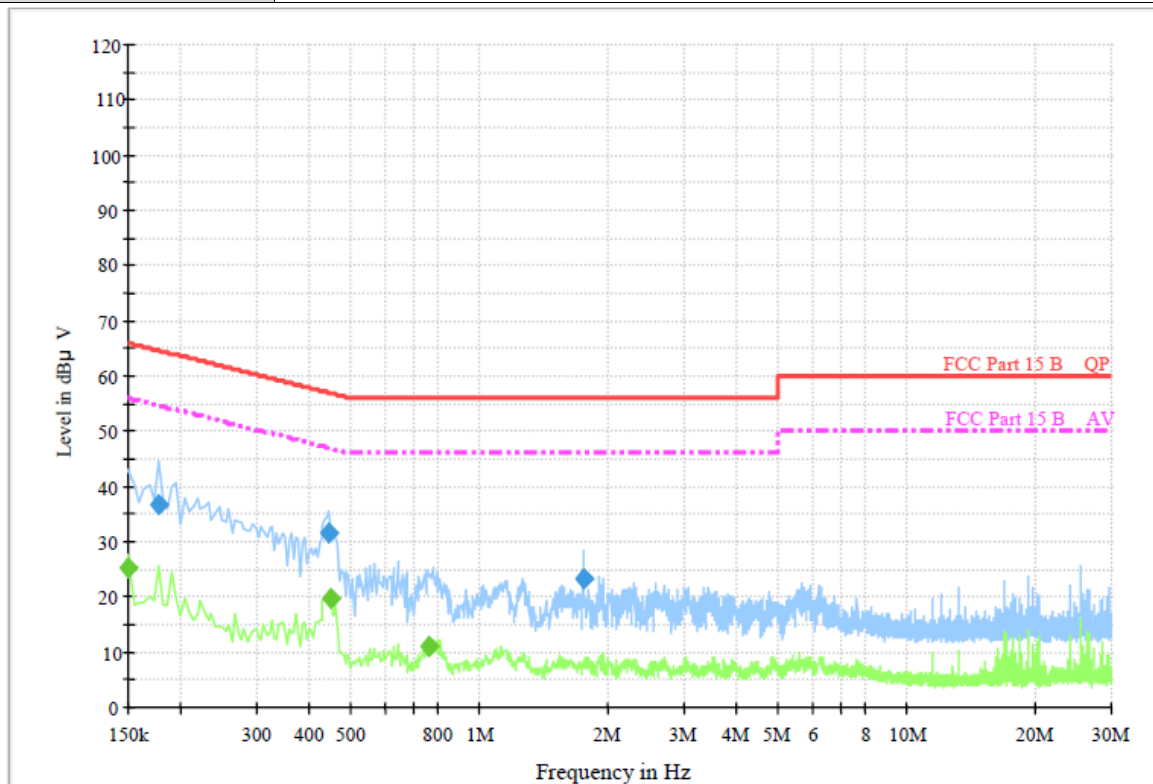

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.177000	36.9	1000.00	9.000	On	L1	9.5	27.7	64.6	
0.442500	31.8	1000.00	9.000	On	L1	9.5	25.2	57.0	
1.743000	23.2	1000.00	9.000	On	L1	9.5	32.8	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.150000	25.3	1000.00	9.000	On	L1	9.5	30.7	56.0	
0.447000	19.8	1000.00	9.000	On	L1	9.5	27.1	46.9	
0.762000	11.1	1000.00	9.000	On	L1	9.5	34.9	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Adapter Model	RJ-SKY120100U60S
Terminal:	Neutral
Remark:	Only worse case is reported

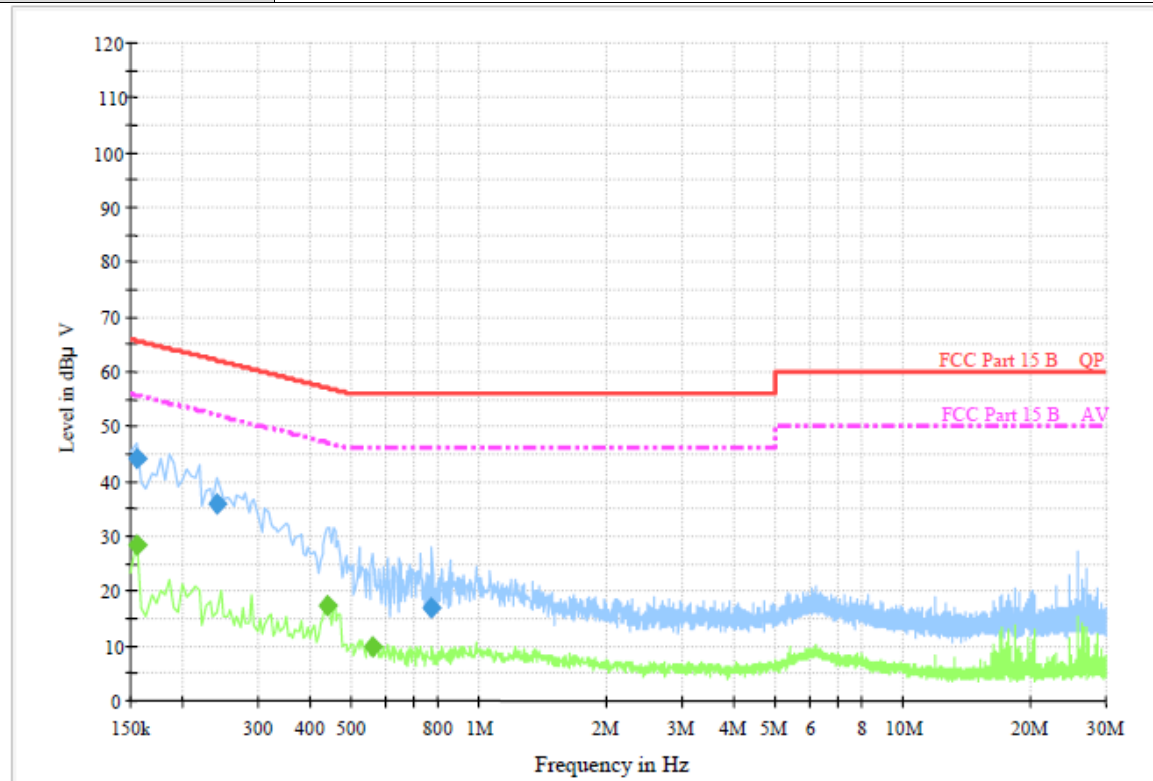

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.154500	44.3	1000.00	9.000	On	N	9.5	21.5	65.8	
0.240000	35.8	1000.00	9.000	On	N	9.4	26.3	62.1	
0.771000	17.2	1000.00	9.000	On	N	9.4	38.8	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.154500	28.3	1000.00	9.000	On	N	9.5	27.5	55.8	
0.438000	17.4	1000.00	9.000	On	N	9.4	29.7	47.1	
0.559500	9.7	1000.00	9.000	On	N	9.4	36.3	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Adapter Model	BS12A-1201000US
Terminal:	Line
Remark:	Only worse case is reported

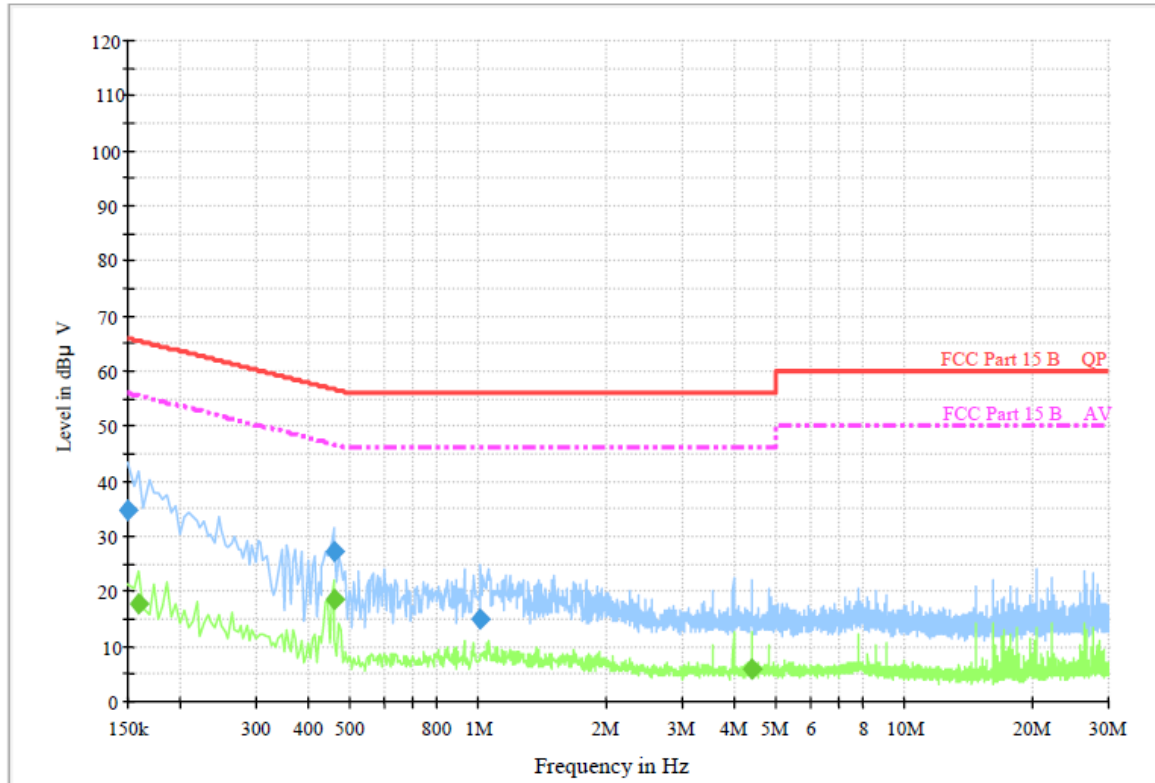

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.150000	34.7	1000.00	9.000	On	L1	9.5	31.3	66.0	
0.456000	27.2	1000.00	9.000	On	L1	9.5	29.6	56.8	
1.009500	14.9	1000.00	9.000	On	L1	9.5	41.1	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.159000	17.6	1000.00	9.000	On	L1	9.5	37.9	55.5	
0.456000	18.7	1000.00	9.000	On	L1	9.5	28.1	46.8	
4.375500	5.7	1000.00	9.000	On	L1	9.5	40.3	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Adapter Model	BS12A-1201000US
Terminal:	Neutral
Remark:	Only worse case is reported

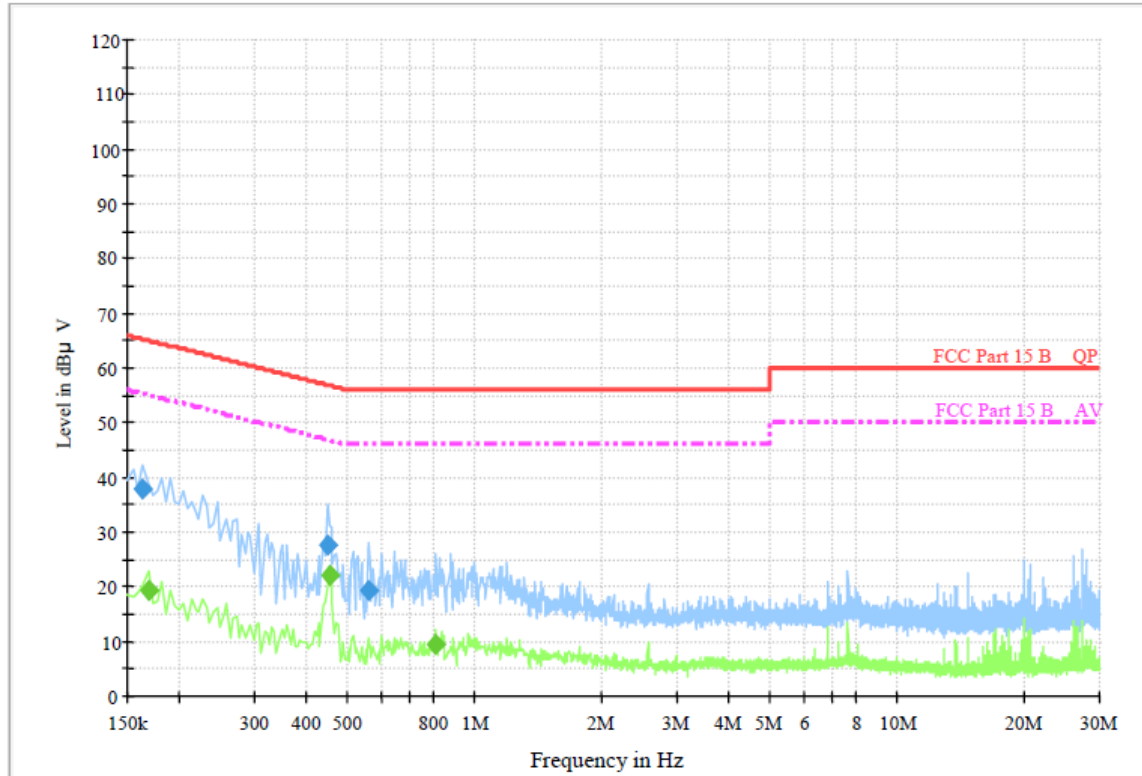

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.163500	38.1	1000.00	9.000	On	N	9.5	27.2	65.3	
0.447000	27.7	1000.00	9.000	On	N	9.4	29.2	56.9	
0.559500	19.2	1000.00	9.000	On	N	9.4	36.8	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.168000	19.2	1000.00	9.000	On	N	9.5	35.9	55.1	
0.451500	22.1	1000.00	9.000	On	N	9.4	24.7	46.8	
0.807000	9.3	1000.00	9.000	On	N	9.4	36.7	46.0	

Emission Level = Read Level + Correct Factor

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBμV/m)=20log Emission Level (μV/m).


Test Configuration

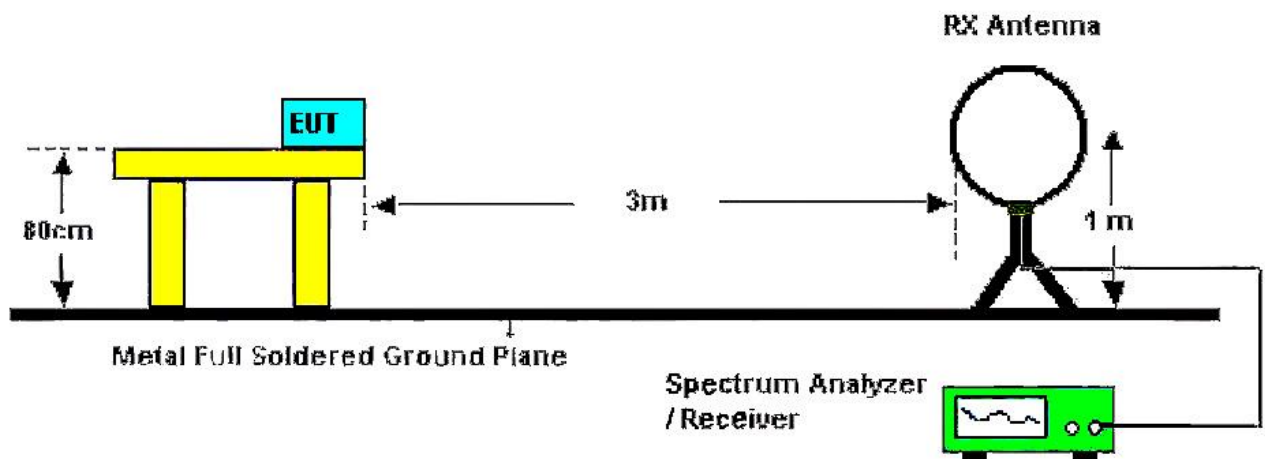

Below 30MHz Test Setup

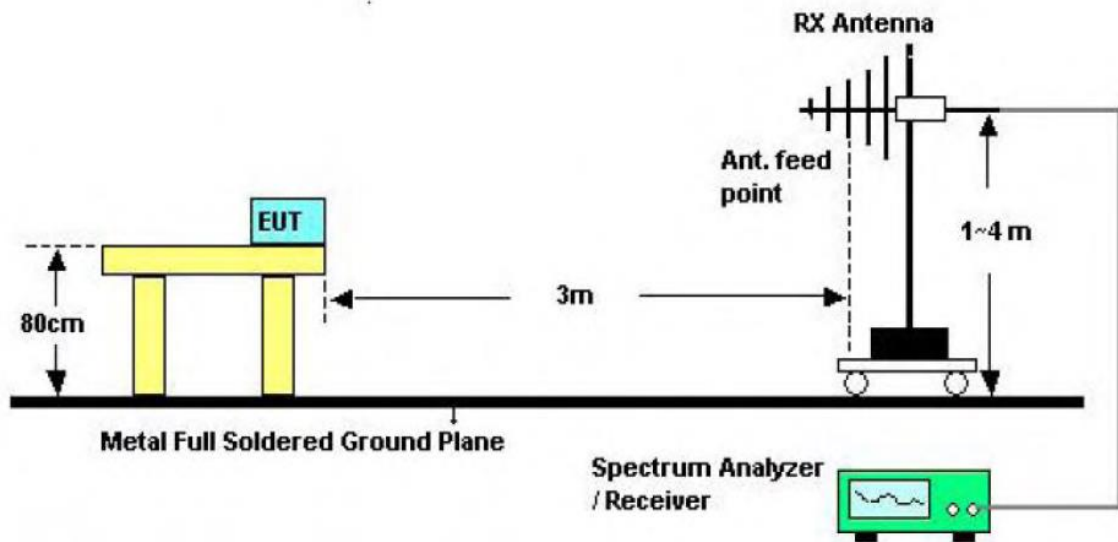

30-1000MHz Test Setup

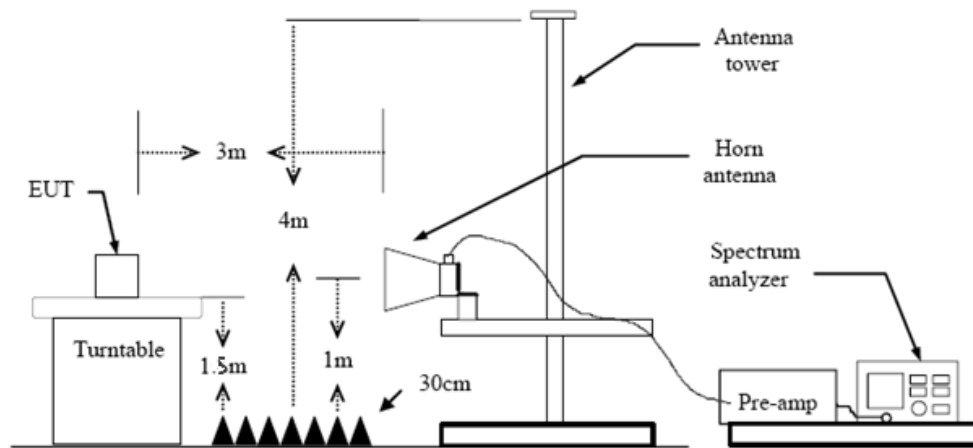

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. No.	Ant 1
Adapter Model	YS-SKY120100U00P
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

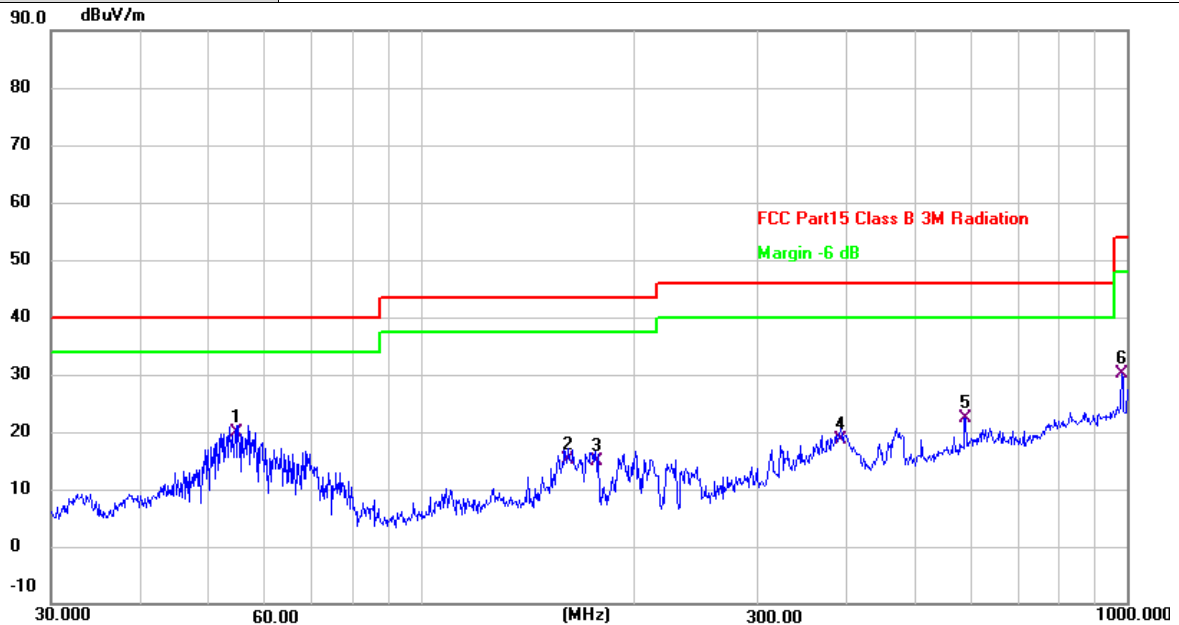


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	55.0274	38.42	-18.42	20.00	40.00	-20.00	QP
2	162.0413	34.01	-18.78	15.23	43.50	-28.27	QP
3	176.8878	34.58	-19.73	14.85	43.50	-28.65	QP
4	393.4723	33.79	-15.23	18.56	46.00	-27.44	QP
5	588.9050	32.05	-9.76	22.29	46.00	-23.71	QP
6	982.6200	33.55	-3.38	30.17	54.00	-23.83	QP

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. No.	Ant 1
Adapter Model	YS-SKY120100U00P
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

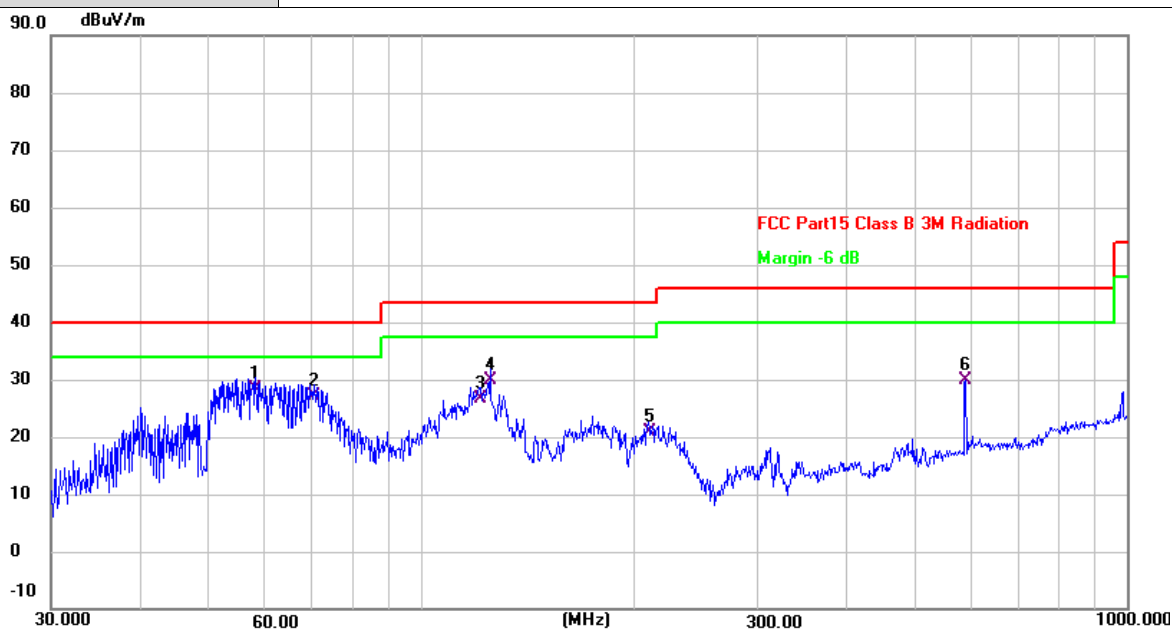


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	58.4074	47.17	-18.68	28.49	40.00	-11.51	QP
2	70.5836	47.72	-20.50	27.22	40.00	-12.78	QP
3	121.1231	47.25	-20.54	26.71	43.50	-16.79	QP
4	125.4457	50.24	-20.24	30.00	43.50	-13.50	QP
5	210.0482	41.87	-20.87	21.00	43.50	-22.50	QP
6	590.9737	39.56	-9.69	29.87	46.00	-16.13	QP

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. No.	Ant 1
Adapter Model	RJ-SKY120100U60S
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

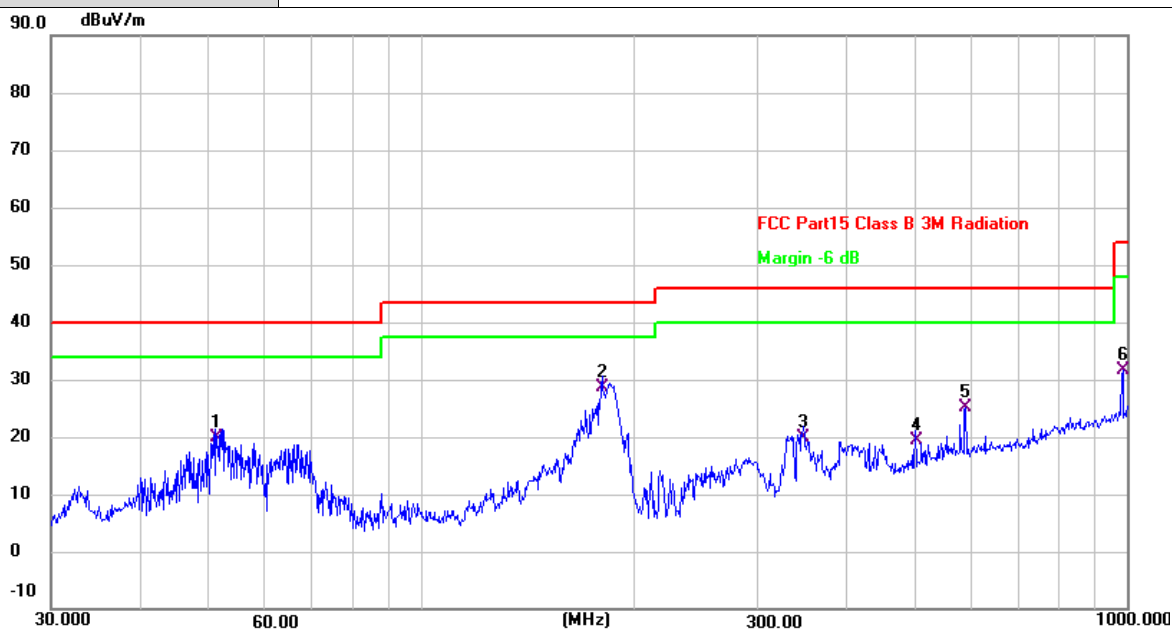


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	51.3005	38.04	-18.04	20.00	40.00	-20.00	QP
2 *	180.6488	48.63	-19.97	28.66	43.50	-14.84	QP
3	348.0274	36.29	-16.29	20.00	46.00	-26.00	QP
4	501.1790	31.49	-12.14	19.35	46.00	-26.65	QP
5	590.9737	34.71	-9.69	25.02	46.00	-20.98	QP
6	986.0717	34.83	-3.32	31.51	54.00	-22.49	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. No.	Ant 1
Adapter Model	RJ-SKY120100U60S
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

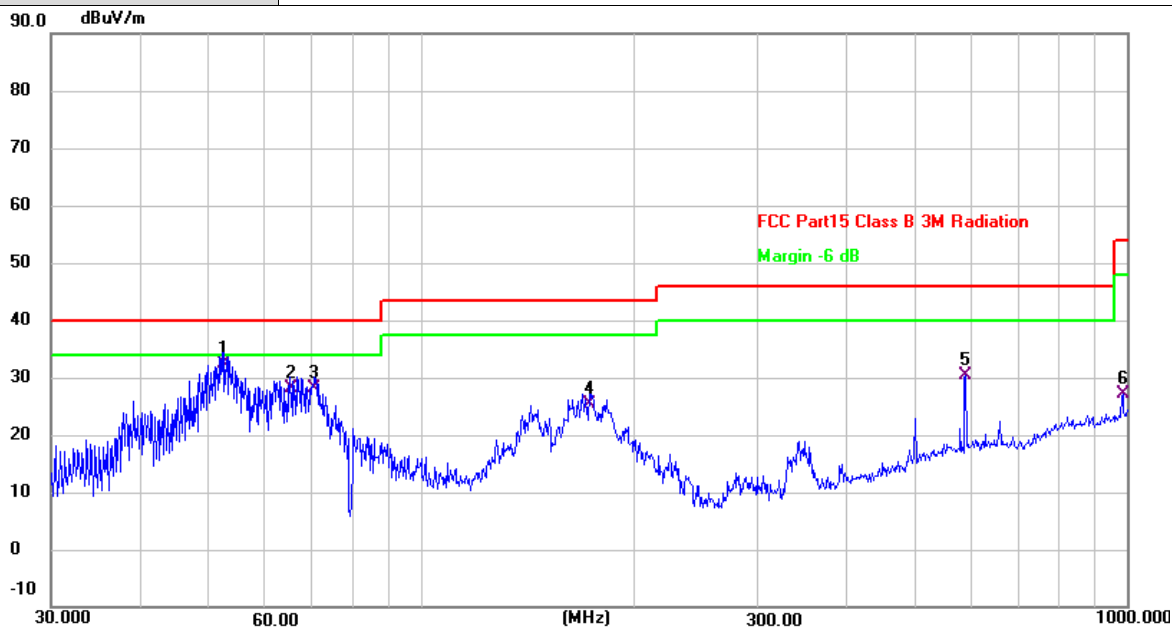


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	52.3912	50.44	-18.15	32.29	40.00	-7.71	QP
2	65.3432	47.75	-19.65	28.10	40.00	-11.90	QP
3	70.8315	48.64	-20.54	28.10	40.00	-11.90	QP
4	173.2051	44.75	-19.49	25.26	43.50	-18.24	QP
5	590.9737	40.11	-9.69	30.42	46.00	-15.58	QP
6	986.0717	30.47	-3.32	27.15	54.00	-26.85	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. No.	Ant 1
Adapter Model	BS12A-1201000US
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

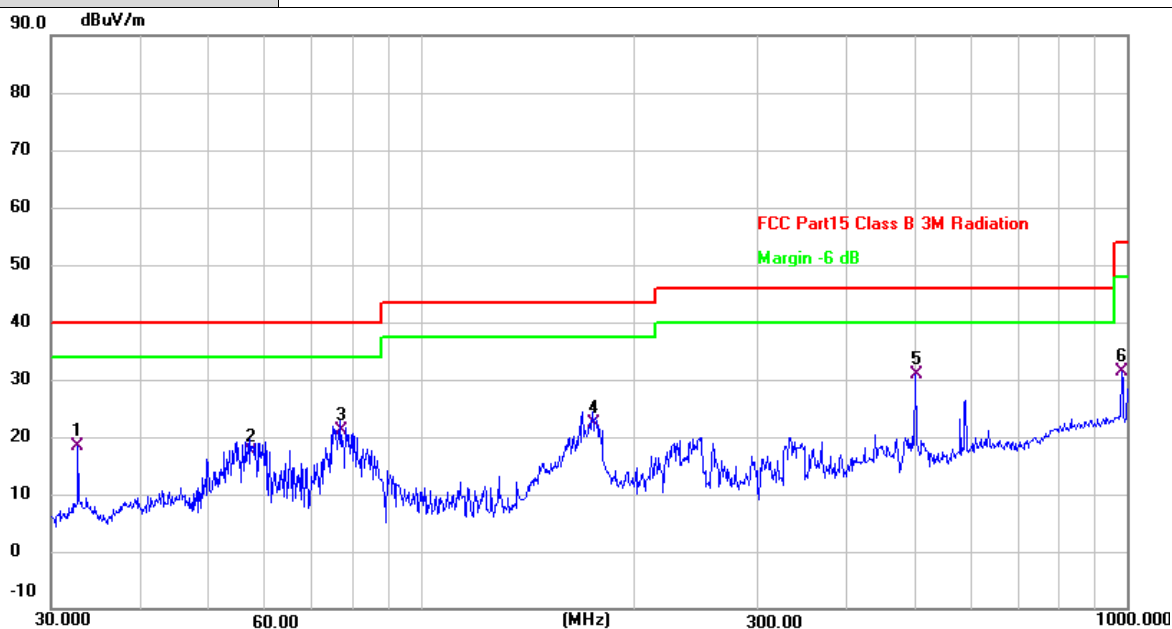


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.7486	37.23	-18.92	18.31	40.00	-21.69	QP
2	57.3923	35.98	-18.62	17.36	40.00	-22.64	QP
3	77.0505	42.69	-21.67	21.02	40.00	-18.98	QP
4	175.0367	41.94	-19.61	22.33	43.50	-21.17	QP
5 *	501.1790	43.10	-12.14	30.96	46.00	-15.04	QP
6	982.6200	34.86	-3.38	31.48	54.00	-22.52	QP

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. No.	Ant 1
Adapter Model	BS12A-1201000US
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

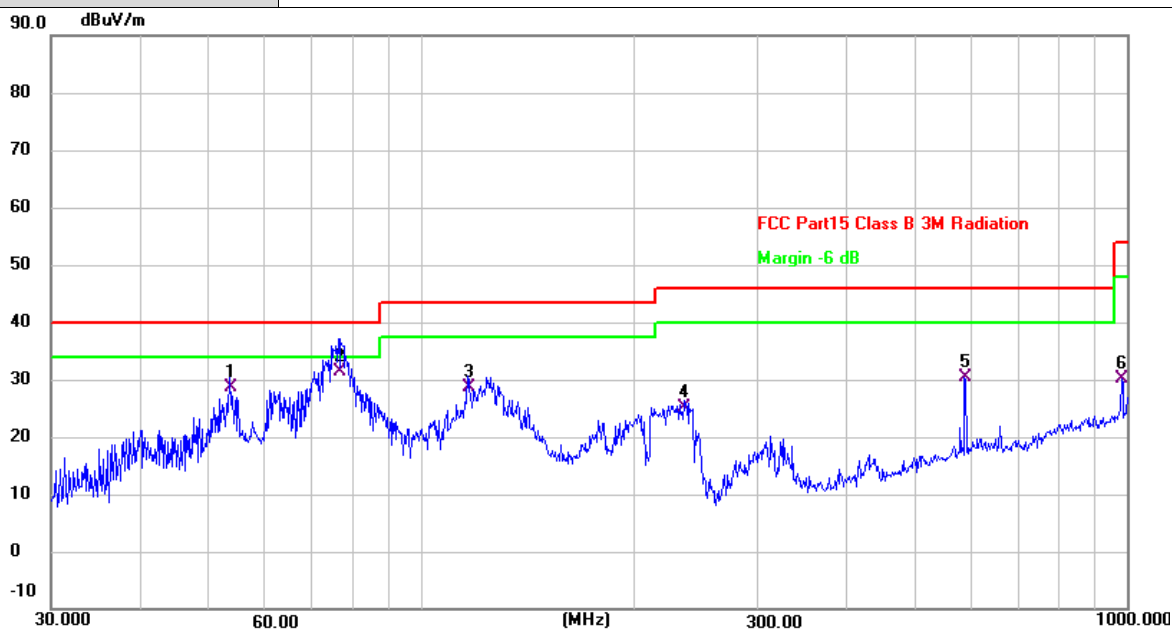

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.6932	46.98	-18.29	28.69	40.00	-11.31	QP
2 *	76.5121	53.08	-21.58	31.50	40.00	-8.50	QP
3	116.5401	49.51	-20.86	28.65	43.50	-14.85	QP
4	236.6447	44.93	-19.91	25.02	46.00	-20.98	QP
5	588.9051	40.05	-9.76	30.29	46.00	-15.71	QP
6	982.6200	33.39	-3.38	30.01	54.00	-23.99	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Above 1GHz

Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4824.063	37.37	2.02	39.39	54.00	-14.61	AVG
2	4824.138	44.76	2.02	46.78	74.00	-27.22	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4824.027	36.65	2.02	38.67	54.00	-15.33	AVG
2	4824.137	44.03	2.02	46.05	74.00	-27.95	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4873.931	43.82	2.09	45.91	74.00	-28.09	peak
2 *	4874.051	35.58	2.09	37.67	54.00	-16.33	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4873.971	44.46	2.09	46.55	74.00	-27.45	peak
2 *	4874.020	35.68	2.09	37.77	54.00	-16.23	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.305	41.41	2.15	43.56	74.00	-30.44	peak
2 *	4923.959	29.48	2.16	31.64	54.00	-22.36	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4924.029	31.78	2.16	33.94	54.00	-20.06	AVG
2	4924.185	43.14	2.16	45.30	74.00	-28.70	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4823.299	28.17	2.01	30.18	54.00	-23.82	AVG
2	4823.425	42.27	2.02	44.29	74.00	-29.71	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4823.558	28.15	2.02	30.17	54.00	-23.83	AVG
2	4824.295	41.57	2.02	43.59	74.00	-30.41	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>4873.034</td><td>40.97</td><td>2.09</td><td>43.06</td><td>74.00</td><td>-30.94</td><td>peak</td></tr><tr><td>2 *</td><td>4874.216</td><td>26.68</td><td>2.09</td><td>28.77</td><td>54.00</td><td>-25.23</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.034	40.97	2.09	43.06	74.00	-30.94	peak	2 *	4874.216	26.68	2.09	28.77	54.00	-25.23	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.034	40.97	2.09	43.06	74.00	-30.94	peak																								
2 *	4874.216	26.68	2.09	28.77	54.00	-25.23	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.291	41.03	2.09	43.12	74.00	-30.88	peak
2 *	4874.869	26.81	2.09	28.90	54.00	-25.10	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.931	40.89	2.16	43.05	74.00	-30.95	peak
2 *	4924.418	26.39	2.16	28.55	54.00	-25.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4923.237	26.15	2.15	28.30	54.00	-25.70	AVG
2	4924.395	40.73	2.16	42.89	74.00	-31.11	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4824.385	41.70	2.02	43.72	74.00	-30.28	peak
2 *	4824.553	27.43	2.02	29.45	54.00	-24.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4823.178	27.87	2.01	29.88	54.00	-24.12	AVG
2	4824.865	40.59	2.02	42.61	74.00	-31.39	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2																														
Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2437MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1 *</td><td>4873.057</td><td>27.14</td><td>2.09</td><td>29.23</td><td>54.00</td><td>-24.77</td><td>AVG</td></tr><tr><td>2</td><td>4873.341</td><td>40.46</td><td>2.09</td><td>42.55</td><td>74.00</td><td>-31.45</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4873.057	27.14	2.09	29.23	54.00	-24.77	AVG	2	4873.341	40.46	2.09	42.55	74.00	-31.45	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4873.057	27.14	2.09	29.23	54.00	-24.77	AVG																								
2	4873.341	40.46	2.09	42.55	74.00	-31.45	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4873.373	39.66	2.09	41.75	74.00	-32.25	peak
2 *	4873.837	26.62	2.09	28.71	54.00	-25.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4923.439	41.71	2.16	43.87	74.00	-30.13	peak
2 *	4923.555	26.12	2.16	28.28	54.00	-25.72	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4924.609	25.93	2.16	28.09	54.00	-25.91	AVG
2	4924.987	40.57	2.16	42.73	74.00	-31.27	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4843.070	26.79	2.04	28.83	54.00	-25.17	AVG
2	4843.991	40.76	2.05	42.81	74.00	-31.19	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4843.393	26.61	2.05	28.66	54.00	-25.34	AVG
2	4844.169	40.04	2.05	42.09	74.00	-31.91	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.455	40.69	2.09	42.78	74.00	-31.22	peak
2 *	4874.457	26.76	2.09	28.85	54.00	-25.15	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	4873.537	26.58	2.09	28.67	54.00	-25.33	AVG
2	4874.045	40.65	2.09	42.74	74.00	-31.26	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.823	26.92	2.13	29.05	54.00	-24.95	AVG
2	4904.804	40.90	2.13	43.03	74.00	-30.97	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	4903.983	41.12	2.13	43.25	74.00	-30.75	peak
2 *	4904.901	26.45	2.13	28.58	54.00	-25.42	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

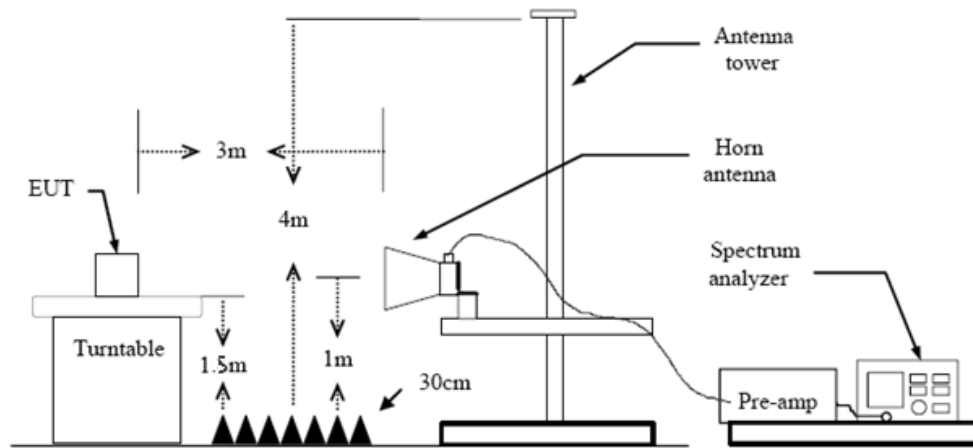


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

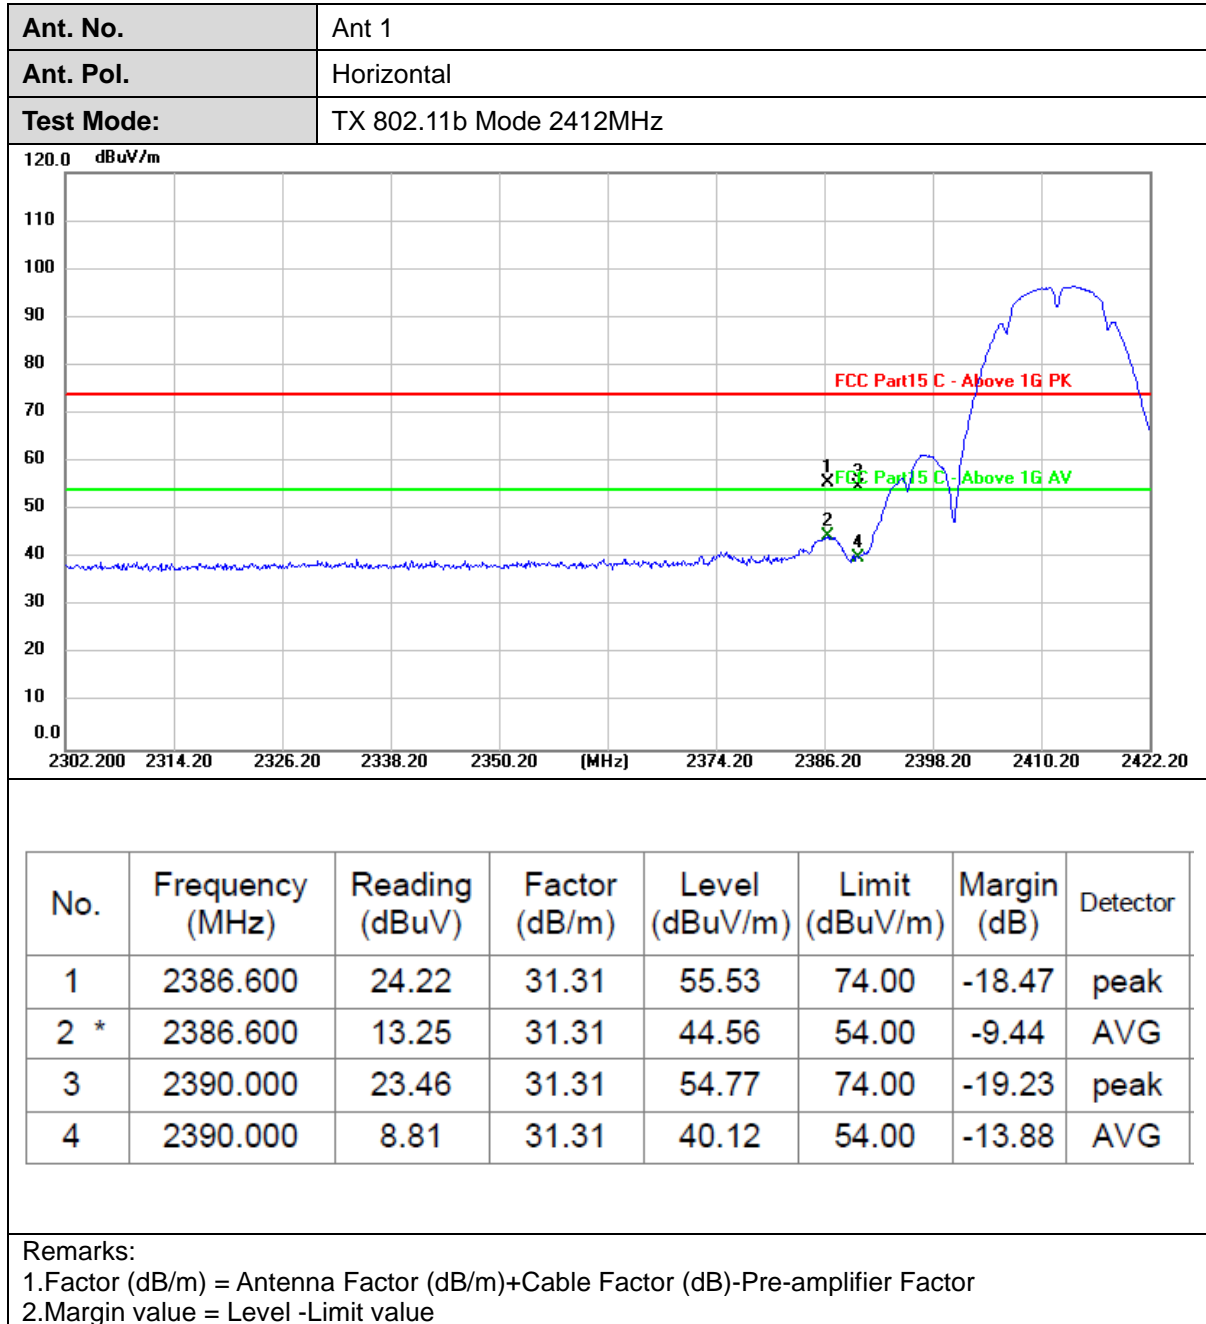
**Test Result**

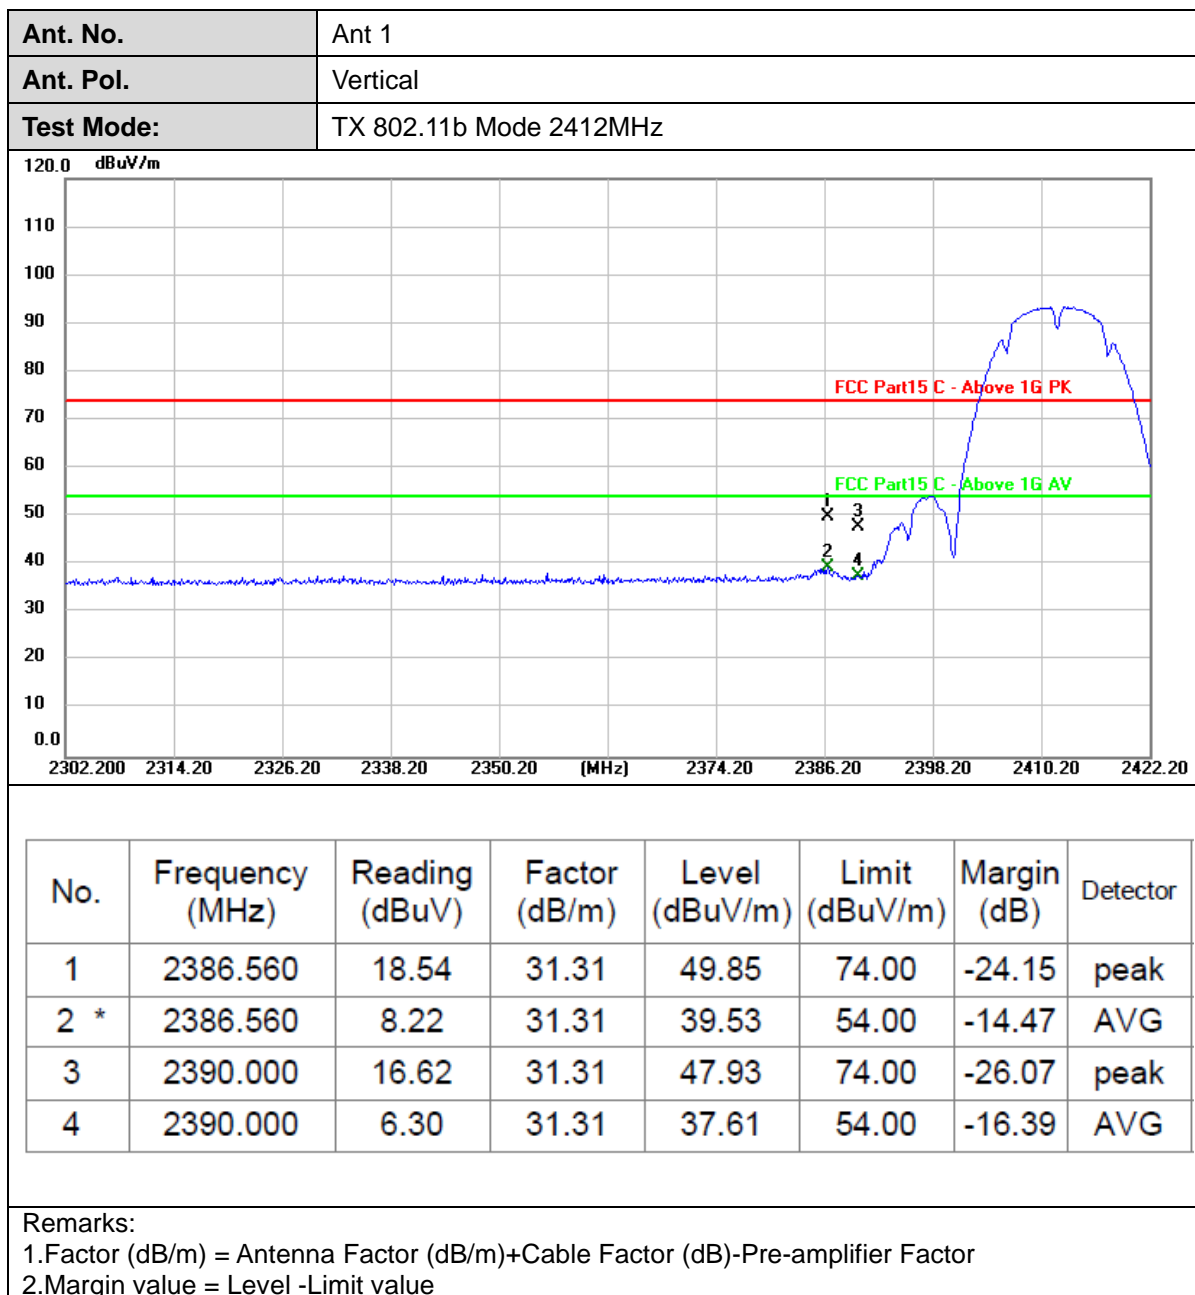


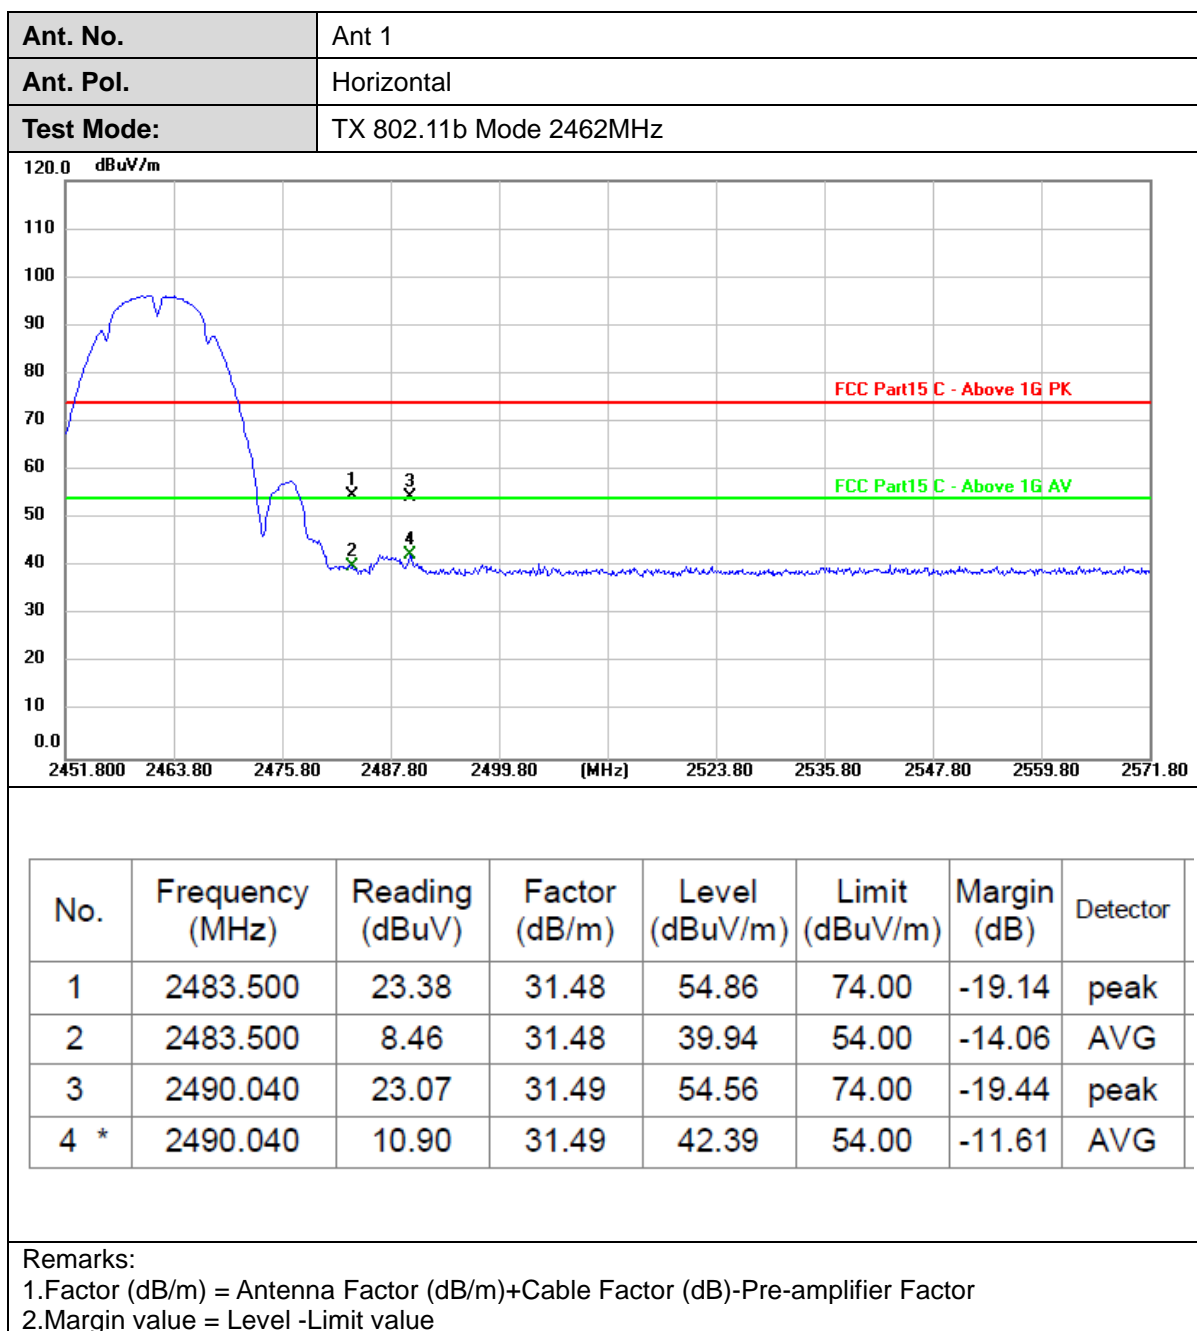


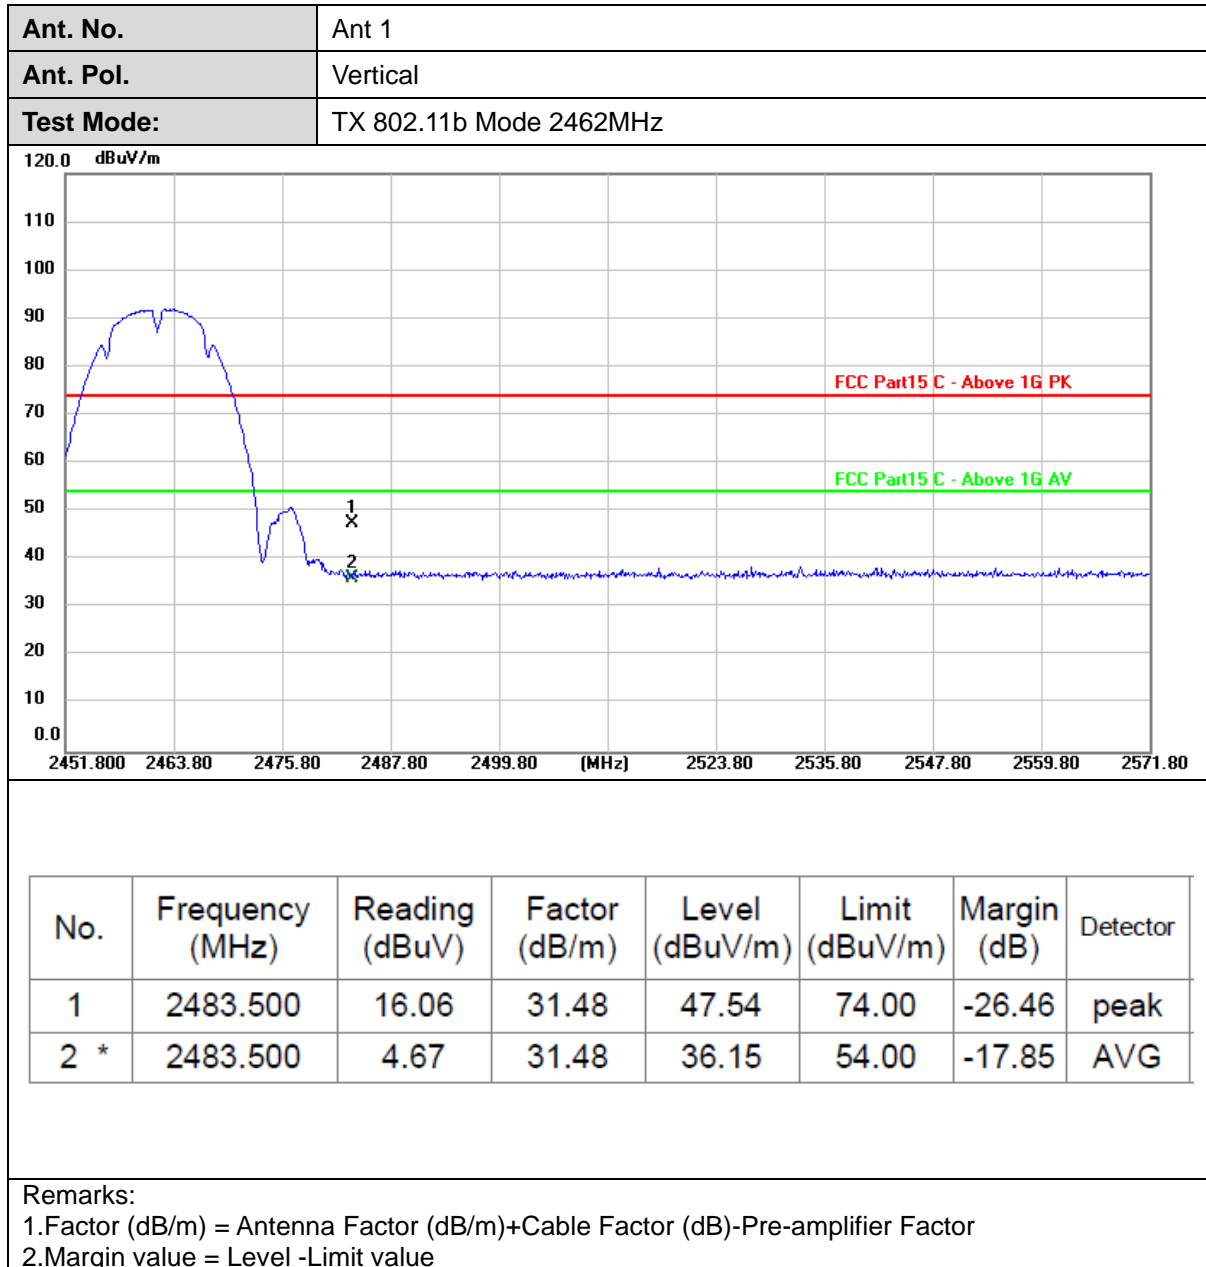


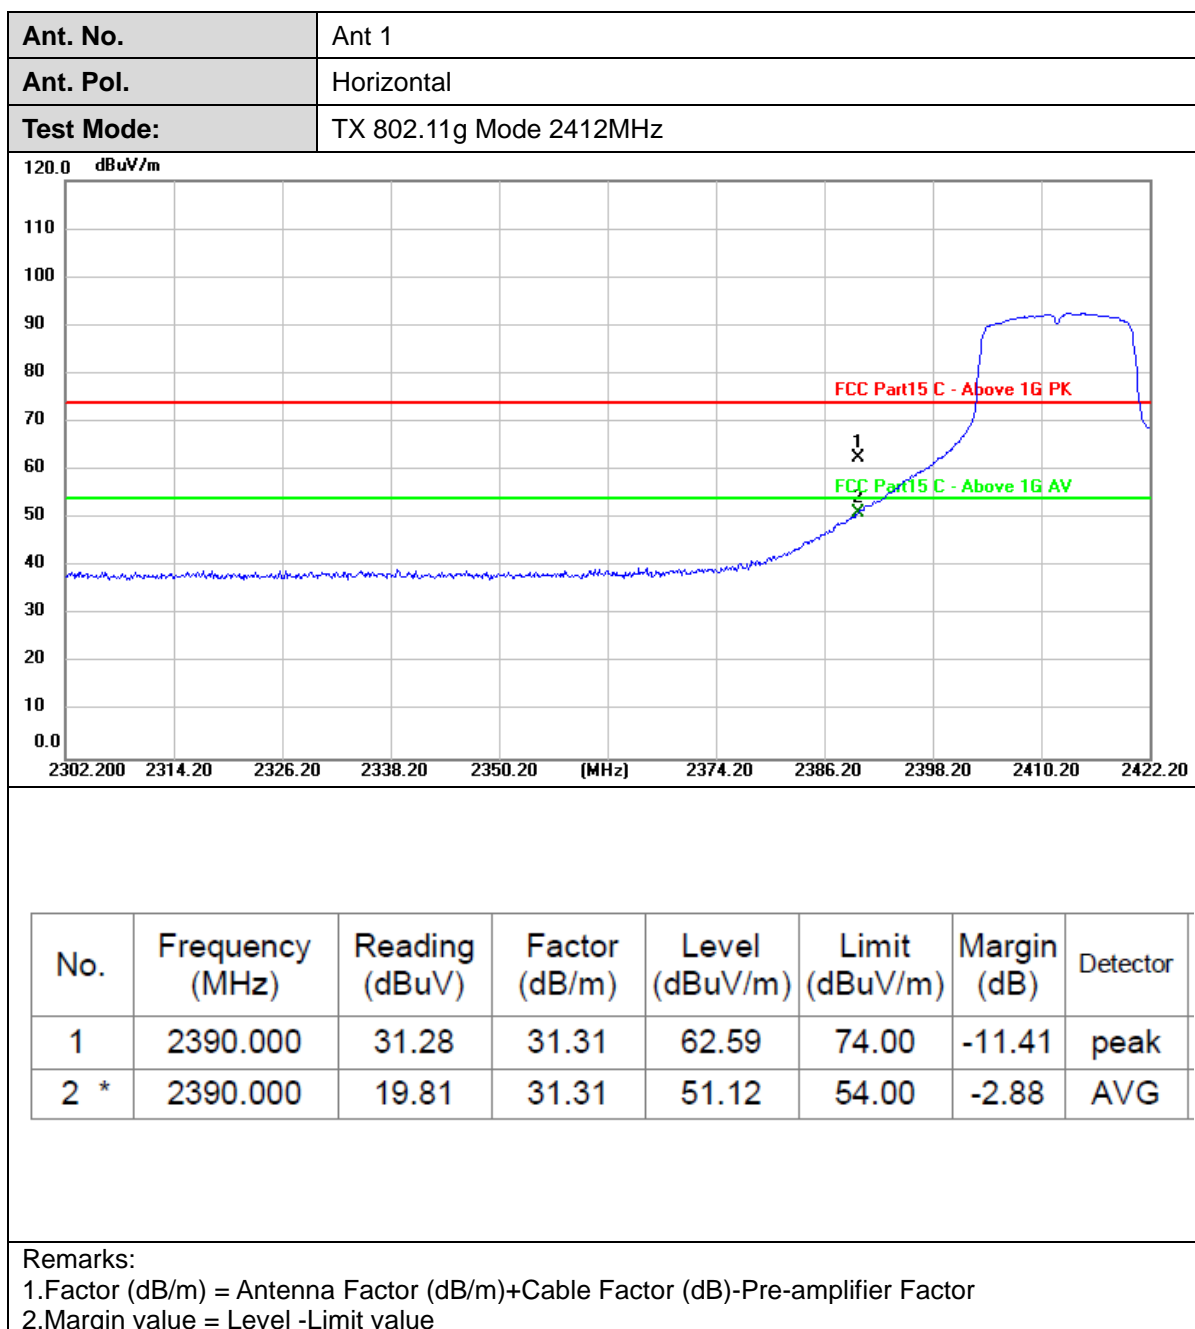


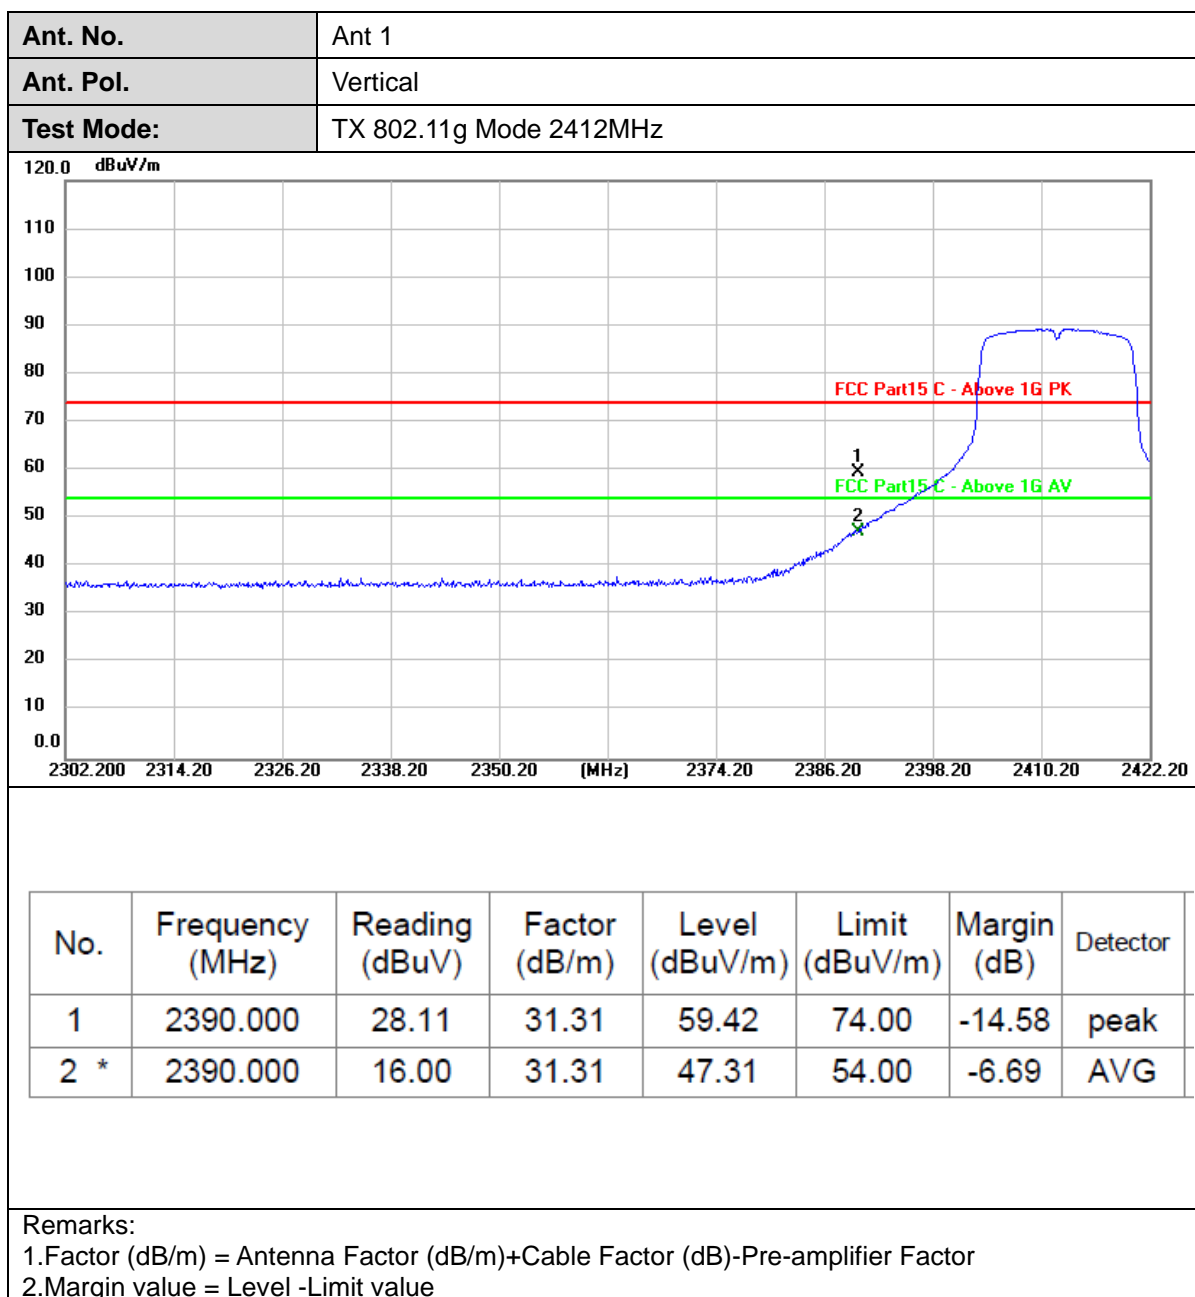


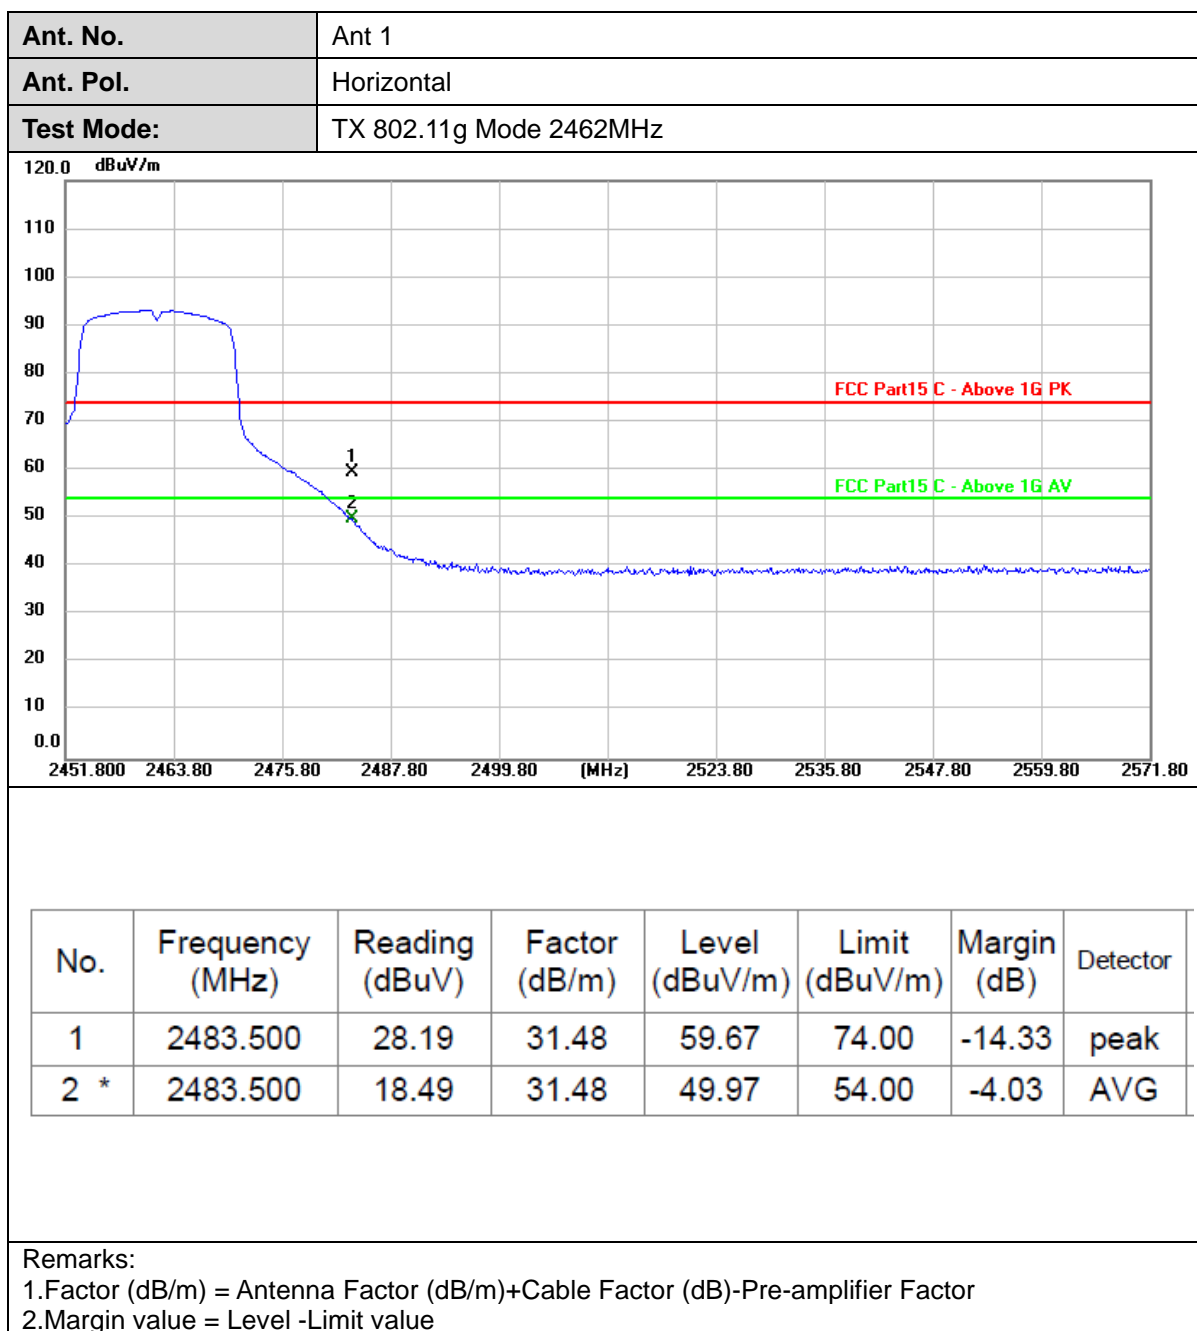


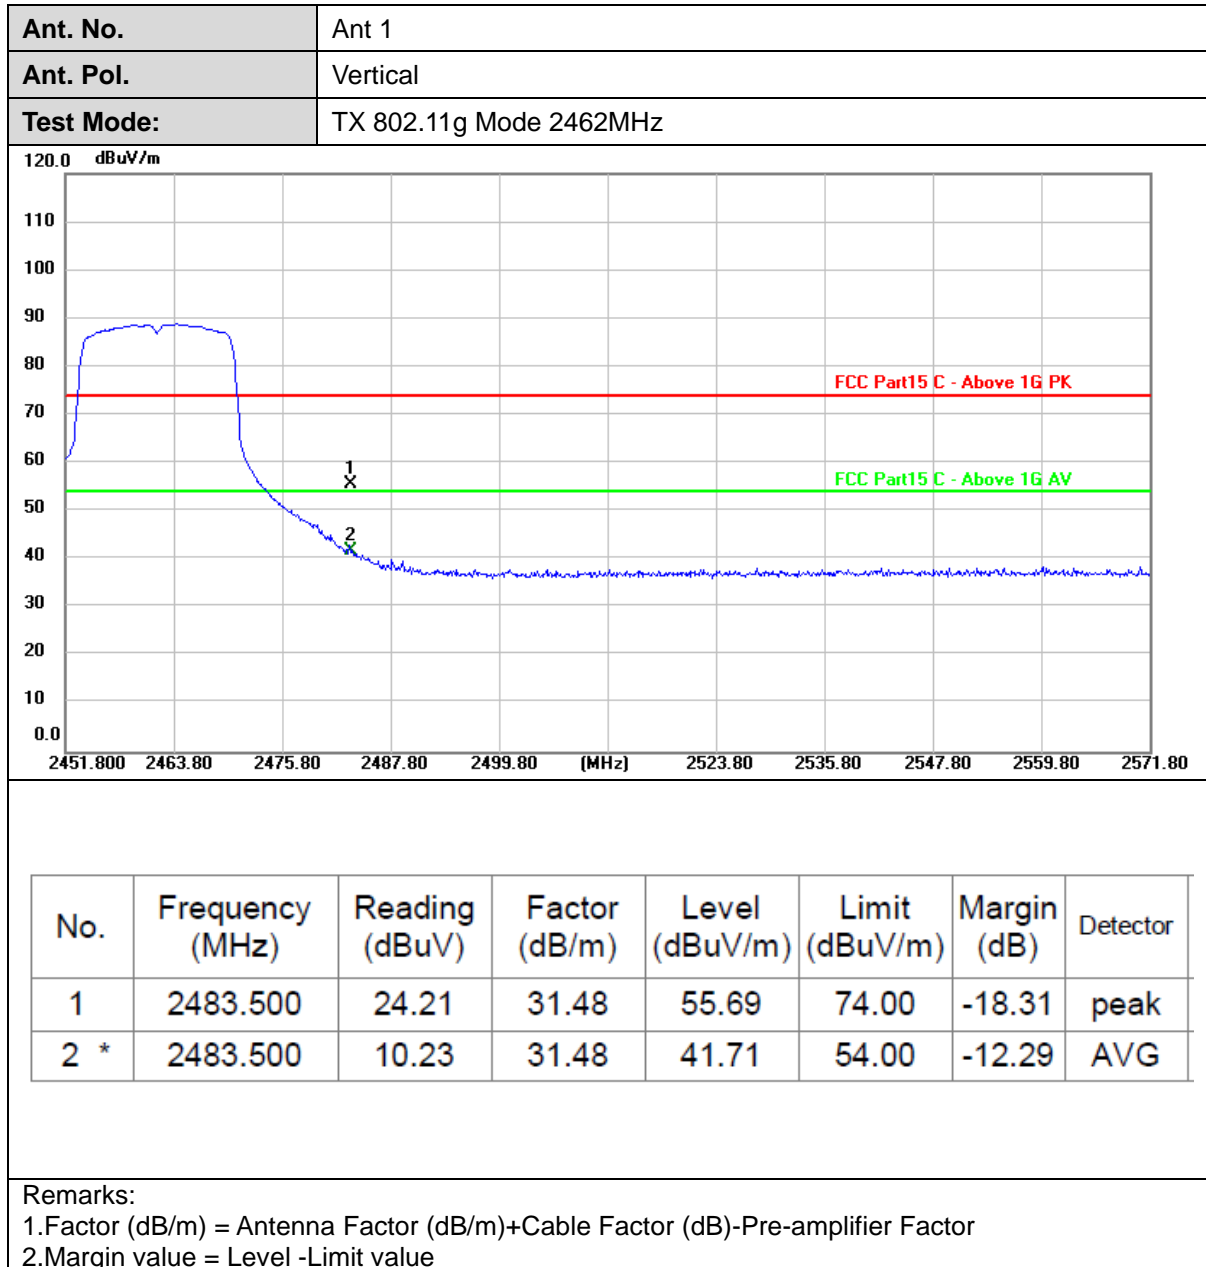

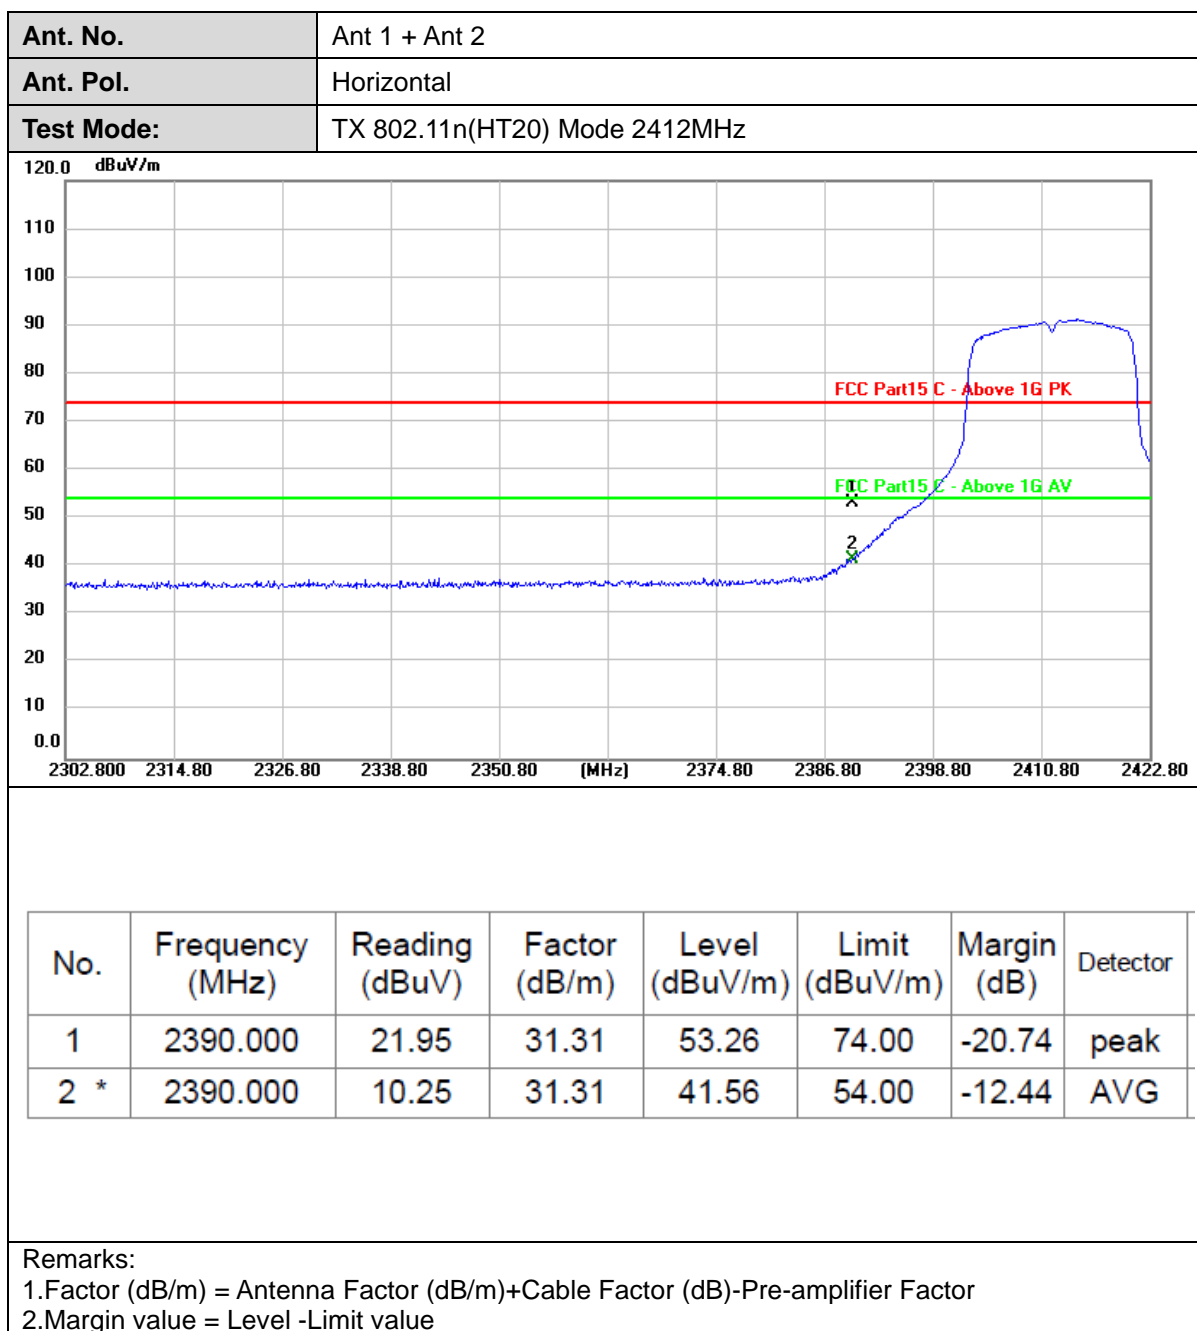

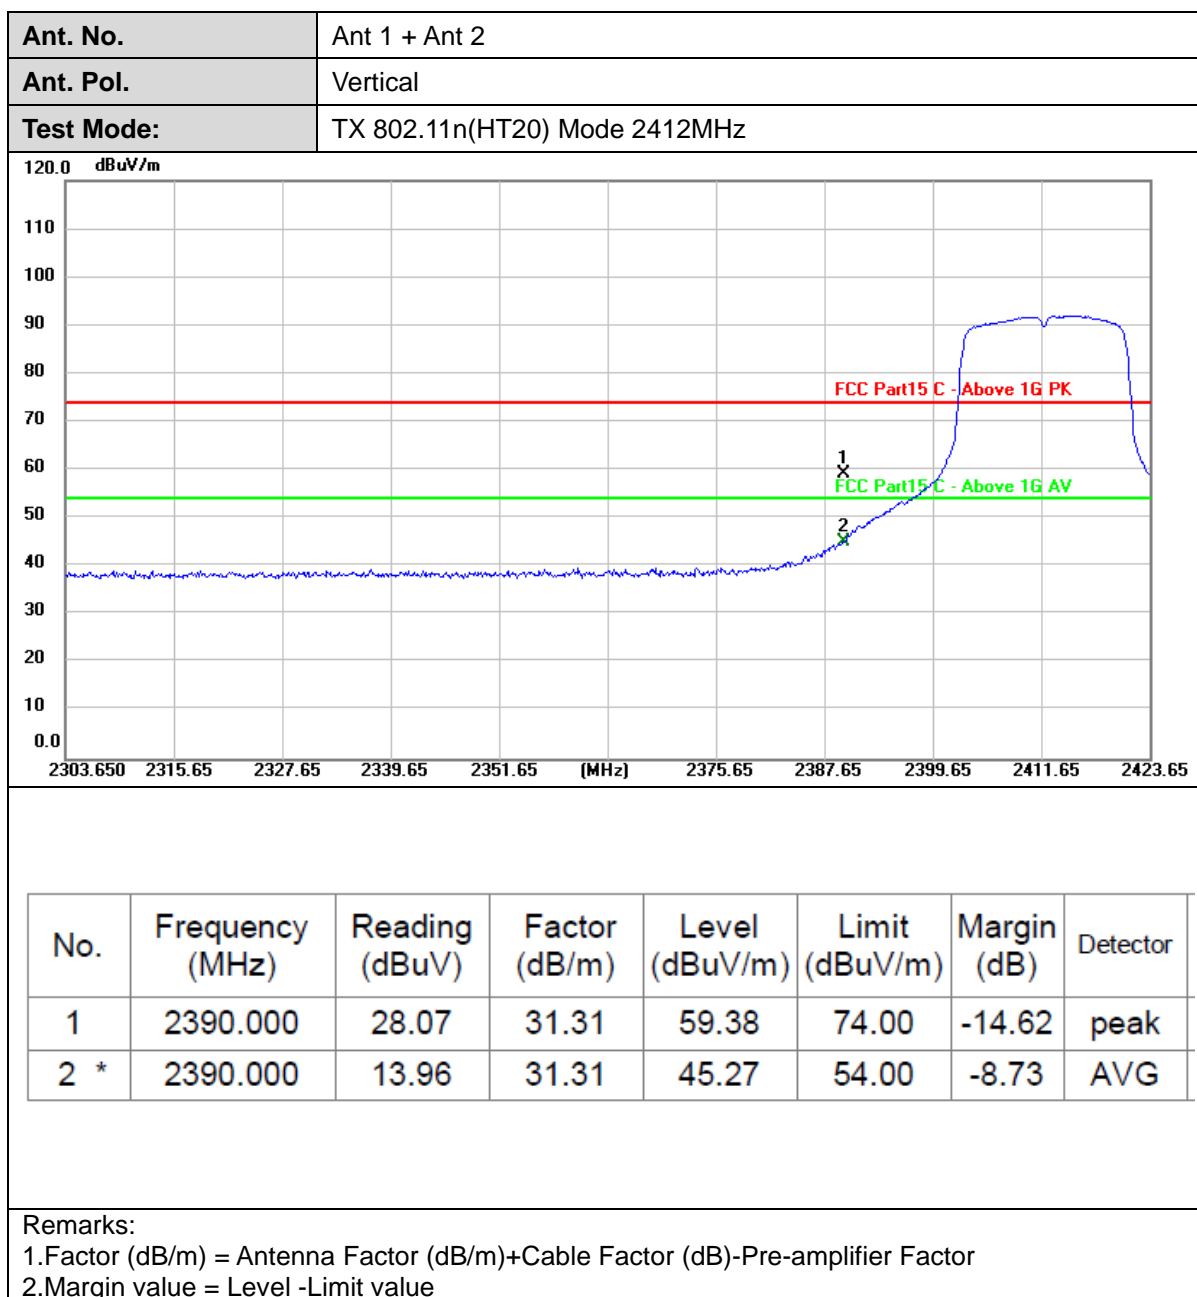


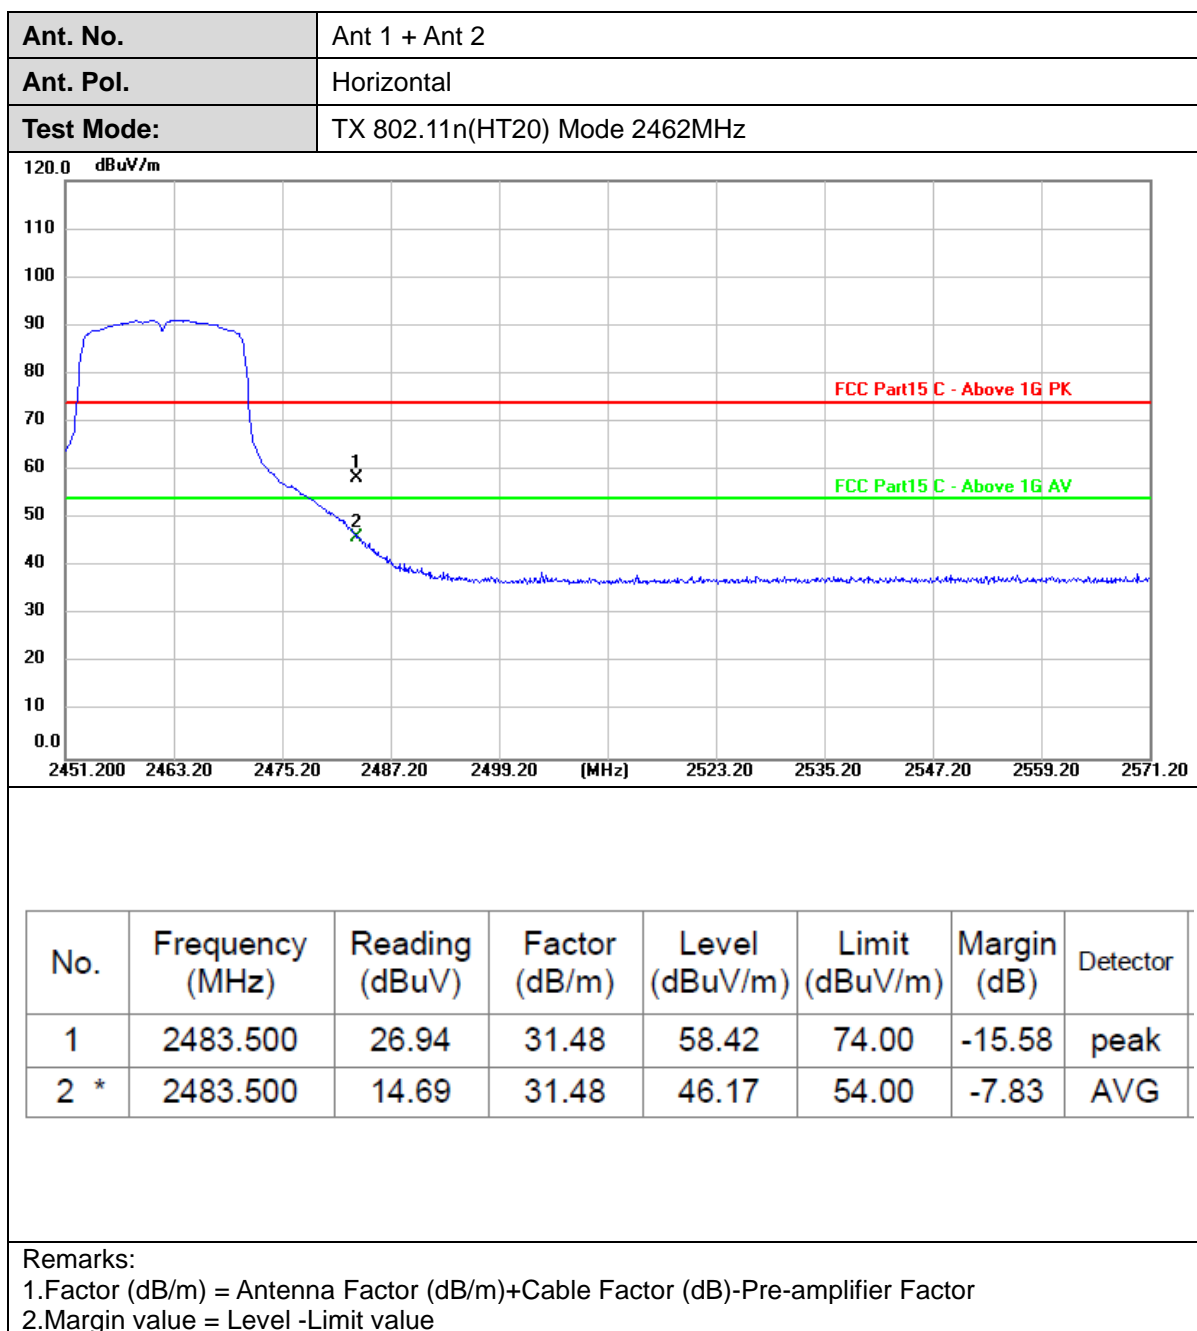

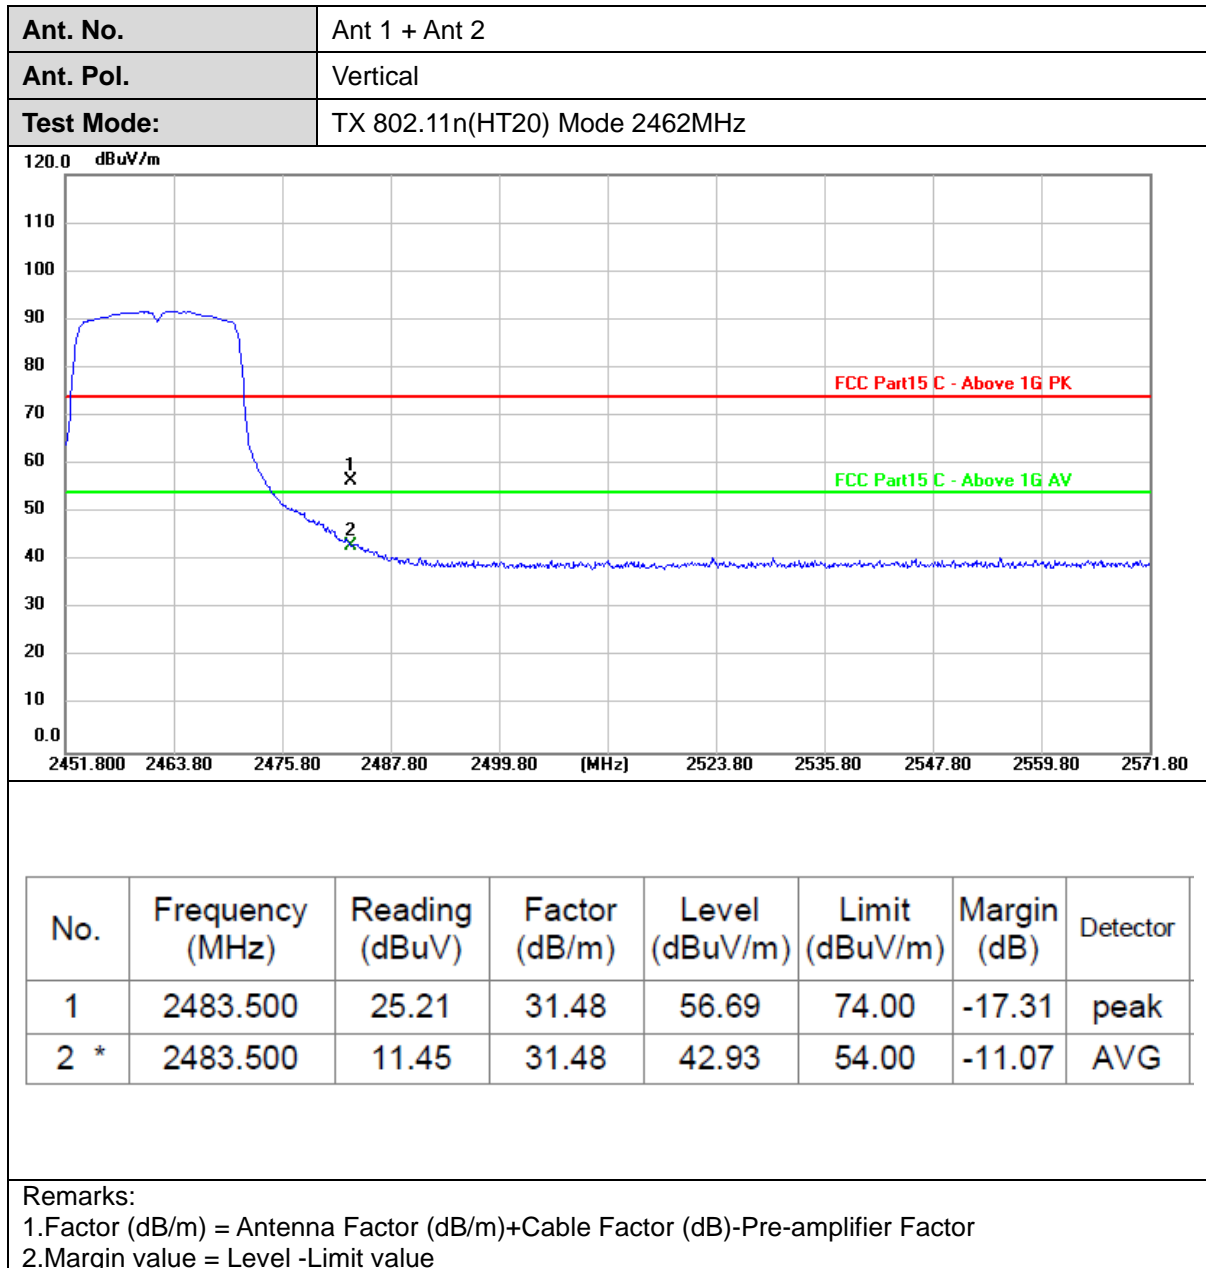



Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

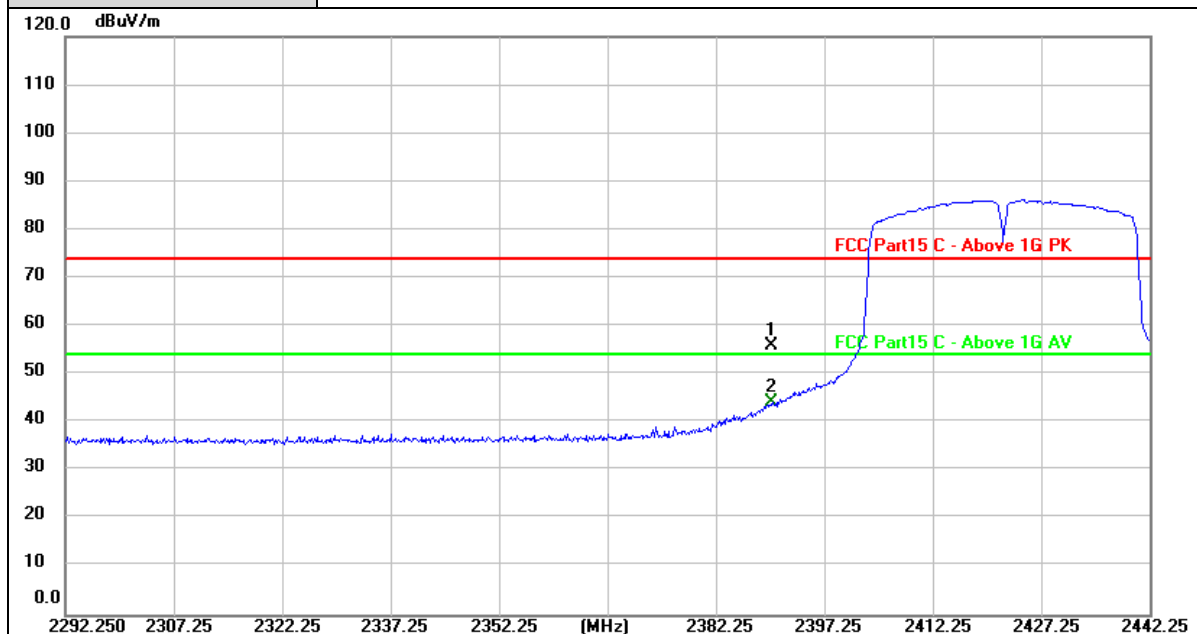



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	24.68	31.31	55.99	74.00	-18.01	peak
2 *	2390.000	12.82	31.31	44.13	54.00	-9.87	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

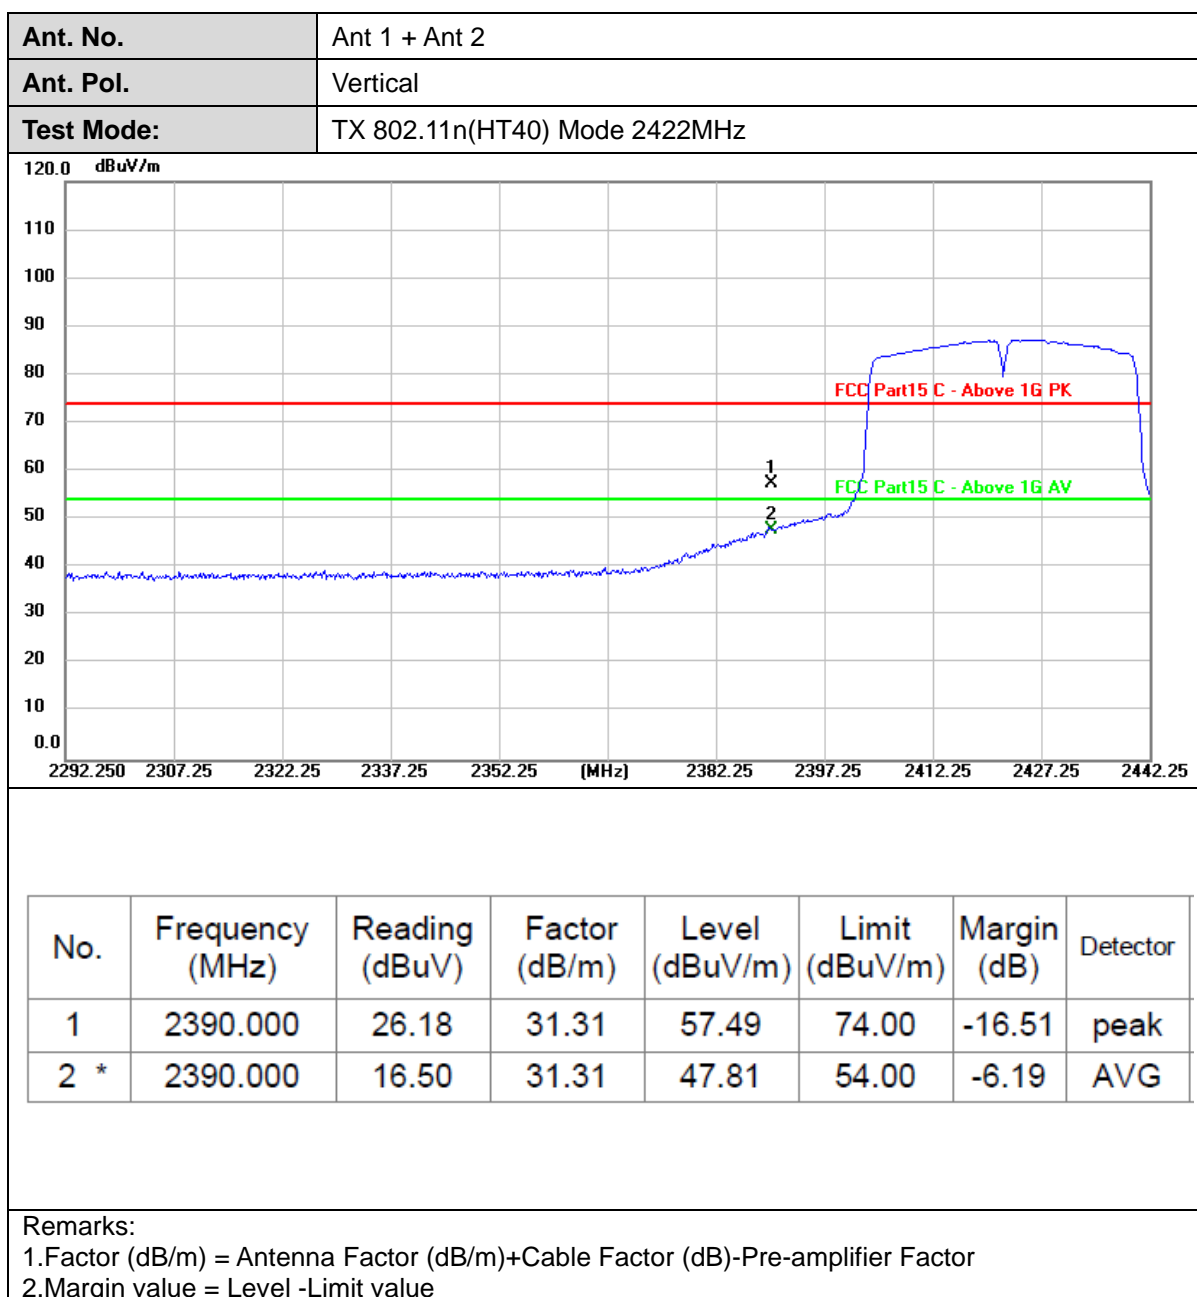

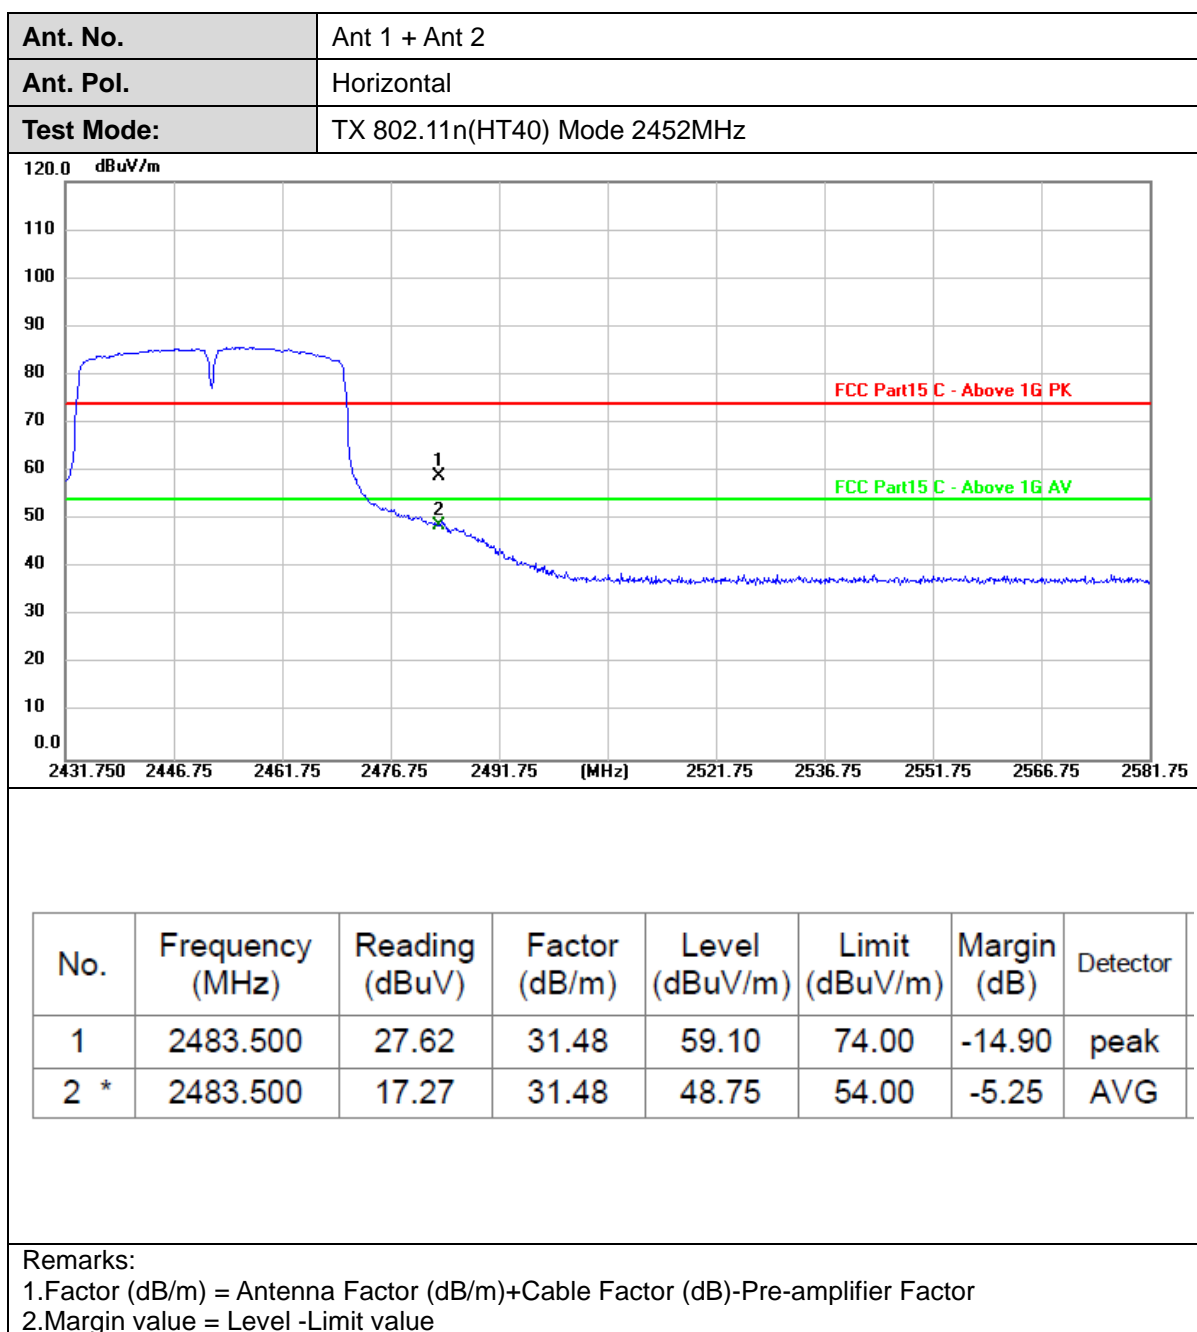

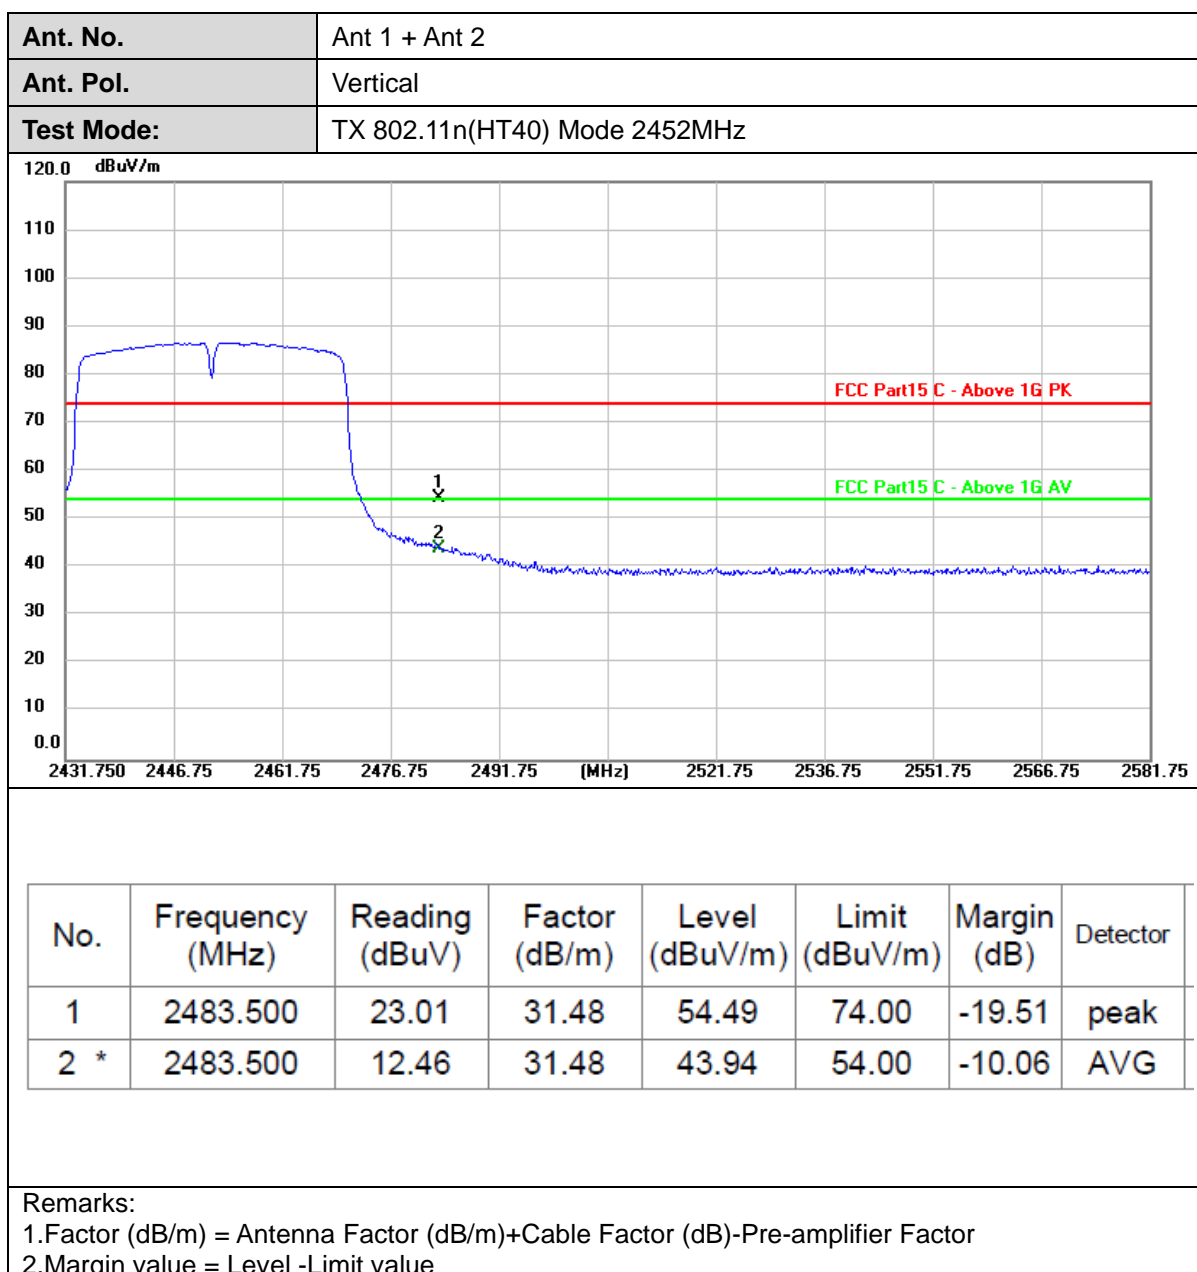




3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration

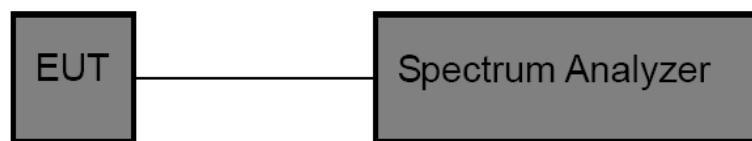

Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

**Test Result****(1) Band Edge Conducted Test**

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	7.56	-32.04	≤ -22.44	PASS
	Ant2	Low	2412	7.25	-35.04	≤ -22.75	PASS
	Ant1	High	2462	8.08	-42.59	≤ -21.92	PASS
	Ant2	High	2462	7.20	-42.22	≤ -22.8	PASS
11G	Ant1	Low	2412	5.63	-29.83	≤ -24.37	PASS
	Ant2	Low	2412	7.35	-22.81	≤ -22.65	PASS
	Ant1	High	2462	4.73	-38.36	≤ -25.27	PASS
	Ant2	High	2462	5.35	-35.89	≤ -24.65	PASS
11N20MIMO	Ant1	Low	2412	4.04	-33.02	≤ -25.97	PASS
	Ant2	Low	2412	2.25	-33.01	≤ -27.75	PASS
	Ant1	High	2462	3.06	-41.88	≤ -26.94	PASS
	Ant2	High	2462	-0.07	-41.7	≤ -30.07	PASS
11N40MIMO	Ant1	Low	2422	-1.09	-35.67	≤ -31.09	PASS
	Ant2	Low	2422	-3.54	-38.97	≤ -33.54	PASS
	Ant1	High	2452	-1.30	-40.72	≤ -31.3	PASS
	Ant2	High	2452	-3.72	-40.42	≤ -33.72	PASS

**(2) Conducted Spurious Emissions Test**

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.71	6.71	---	PASS
			30~1000	6.71	-49.12	≤-23.29	PASS
			1000~26500	6.71	-35.3	≤-23.29	PASS
	Ant2	2412	Reference	6.14	6.14	---	PASS
			30~1000	6.14	-48.8	≤-23.86	PASS
			1000~26500	6.14	-34.88	≤-23.86	PASS
	Ant1	2437	Reference	6.74	6.74	---	PASS
			30~1000	6.74	-49.3	≤-23.26	PASS
			1000~26500	6.74	-35.59	≤-23.26	PASS
	Ant2	2437	Reference	6.75	6.75	---	PASS
			30~1000	6.75	-49.17	≤-23.25	PASS
			1000~26500	6.75	-35.83	≤-23.25	PASS
	Ant1	2462	Reference	6.62	6.62	---	PASS
			30~1000	6.62	-48.57	≤-23.38	PASS
			1000~26500	6.62	-35.05	≤-23.38	PASS
	Ant2	2462	Reference	5.31	5.31	---	PASS
			30~1000	5.31	-48.94	≤-24.69	PASS
			1000~26500	5.31	-34.73	≤-24.69	PASS
11G	Ant1	2412	Reference	4.68	4.68	---	PASS
			30~1000	4.68	-48.59	≤-25.32	PASS
			1000~26500	4.68	-35.32	≤-25.32	PASS
	Ant2	2412	Reference	2.88	2.88	---	PASS
			30~1000	2.88	-49	≤-27.12	PASS
			1000~26500	2.88	-35.74	≤-27.12	PASS
	Ant1	2437	Reference	1.82	1.82	---	PASS
			30~1000	1.82	-49.17	≤-28.18	PASS
			1000~26500	1.82	-34.35	≤-28.18	PASS
	Ant2	2437	Reference	3.42	3.42	---	PASS
			30~1000	3.42	-48.97	≤-26.58	PASS
			1000~26500	3.42	-35.74	≤-26.58	PASS
	Ant1	2462	Reference	1.89	1.89	---	PASS
			30~1000	1.89	-48.61	≤-28.11	PASS
			1000~26500	1.89	-35.05	≤-28.11	PASS
	Ant2	2462	Reference	4.82	4.82	---	PASS
			30~1000	4.82	-48.09	≤-25.18	PASS
			1000~26500	4.82	-35.77	≤-25.18	PASS
11N20MIMO	Ant1	2412	Reference	3.95	3.95	---	PASS
			30~1000	3.95	-48.05	≤-26.05	PASS
			1000~26500	3.95	-34.88	≤-26.05	PASS
	Ant2	2412	Reference	-1.96	-1.96	---	PASS
			30~1000	-1.96	-48.74	≤-31.96	PASS
			1000~26500	-1.96	-35.18	≤-31.96	PASS
	Ant1	2437	Reference	-0.61	-0.61	---	PASS
			30~1000	-0.61	-48.75	≤-30.61	PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



	Ant2	2437	1000~26500	-0.61	-35.73	≤ -30.61	PASS
			Reference	-2.38	-2.38	---	PASS
			30~1000	-2.38	-48.92	≤ -32.38	PASS
			1000~26500	-2.38	-35.16	≤ -32.38	PASS
	Ant1	2462	Reference	-1.14	-1.14	---	PASS
			30~1000	-1.14	-48.9	≤ -31.14	PASS
			1000~26500	-1.14	-34.67	≤ -31.14	PASS
	Ant2	2462	Reference	-3.21	-3.21	---	PASS
			30~1000	-3.21	-49.14	≤ -33.21	PASS
			1000~26500	-3.21	-35.56	≤ -33.21	PASS
11N40MIMO	Ant1	2422	Reference	-2.15	-2.15	---	PASS
			30~1000	-2.15	-49.22	≤ -32.15	PASS
			1000~26500	-2.15	-35.29	≤ -32.15	PASS
	Ant2	2422	Reference	-4.26	-4.26	---	PASS
			30~1000	-4.26	-48.51	≤ -34.26	PASS
			1000~26500	-4.26	-35.56	≤ -34.26	PASS
	Ant1	2437	Reference	-1.50	-1.50	---	PASS
			30~1000	-1.50	-48.98	≤ -31.5	PASS
			1000~26500	-1.50	-34.44	≤ -31.5	PASS
	Ant2	2437	Reference	-3.59	-3.59	---	PASS
			30~1000	-3.59	-48.58	≤ -33.59	PASS
			1000~26500	-3.59	-35.23	≤ -33.59	PASS
	Ant1	2452	Reference	-1.73	-1.73	---	PASS
			30~1000	-1.73	-49.25	≤ -31.73	PASS
			1000~26500	-1.73	-34.89	≤ -31.73	PASS
	Ant2	2452	Reference	-4.90	-4.90	---	PASS
			30~1000	-4.90	-48.33	≤ -34.9	PASS
			1000~26500	-4.90	-35.37	≤ -34.9	PASS



Band Edge Conducted Test plot as follows:



CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




11B_Ant2_High_2462

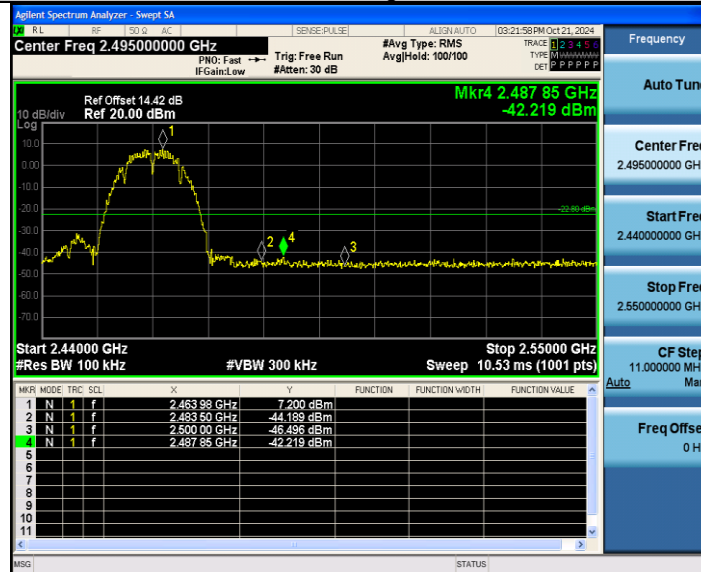


11G_Ant1_Low_2412



11G_Ant2_Low_2412

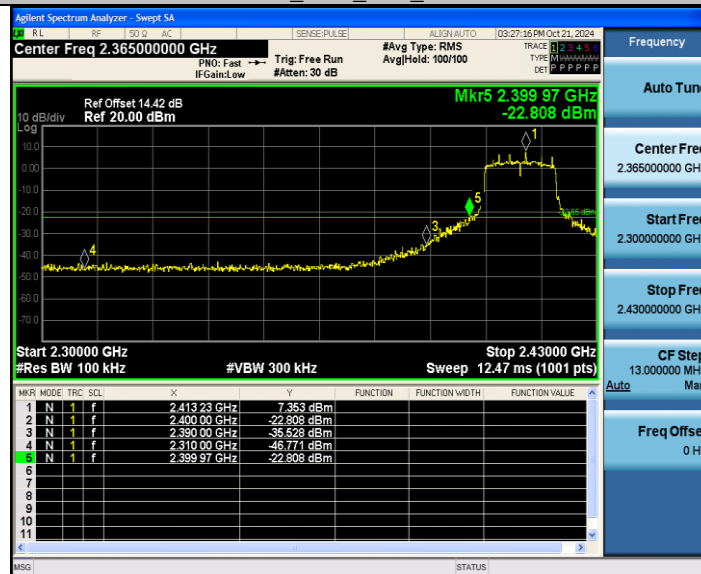

11G_Ant1_High_2462

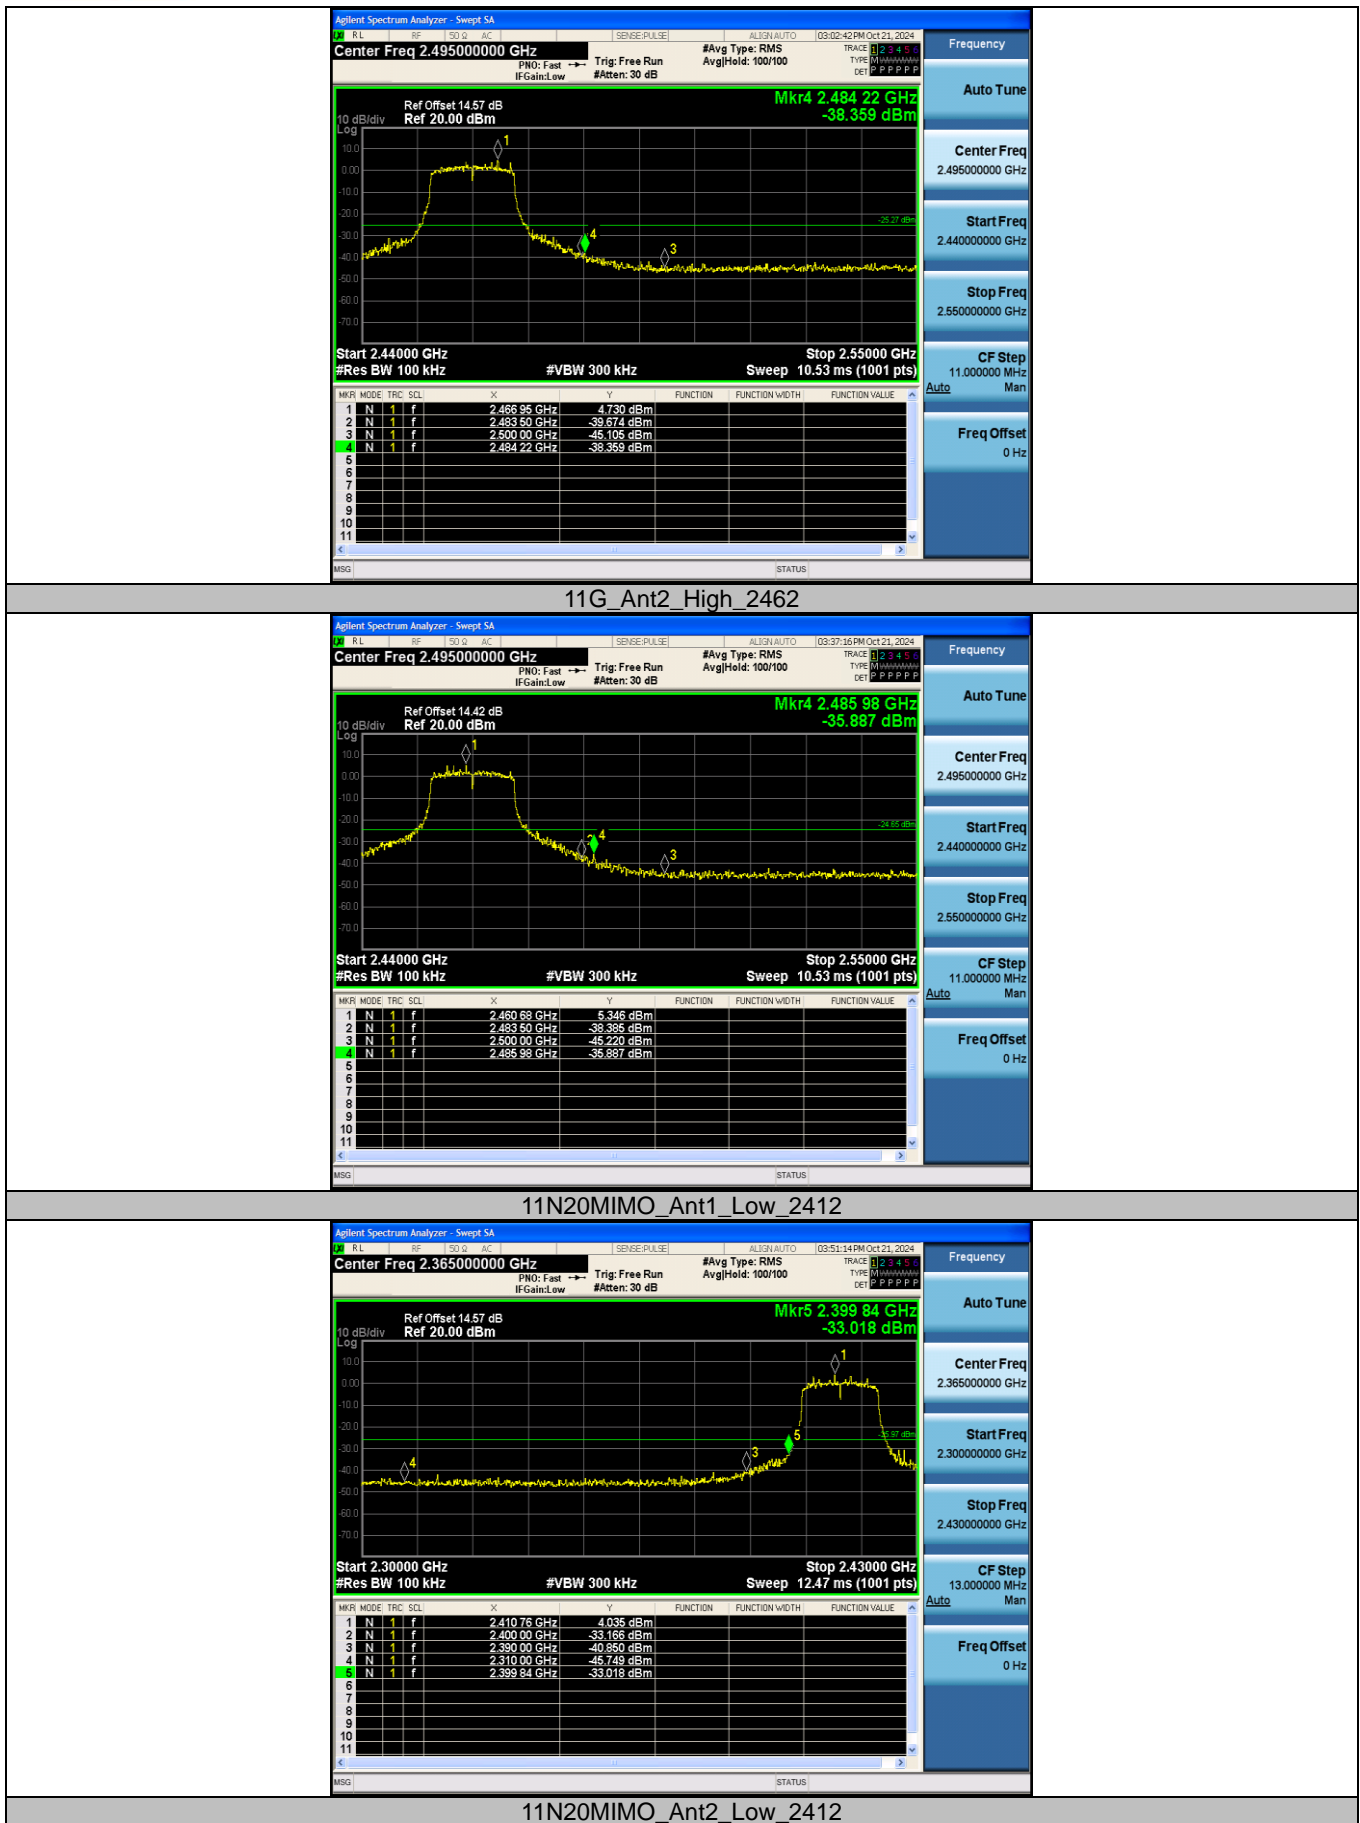


CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

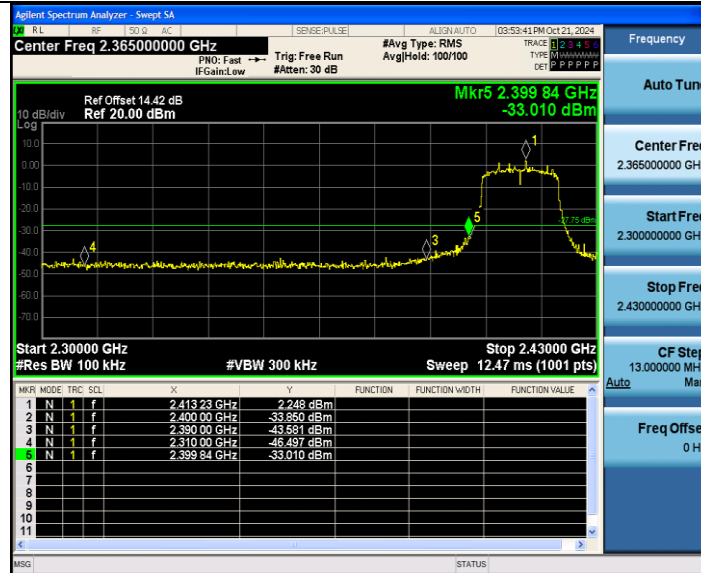

11N20MIMO_Ant1_High_2462

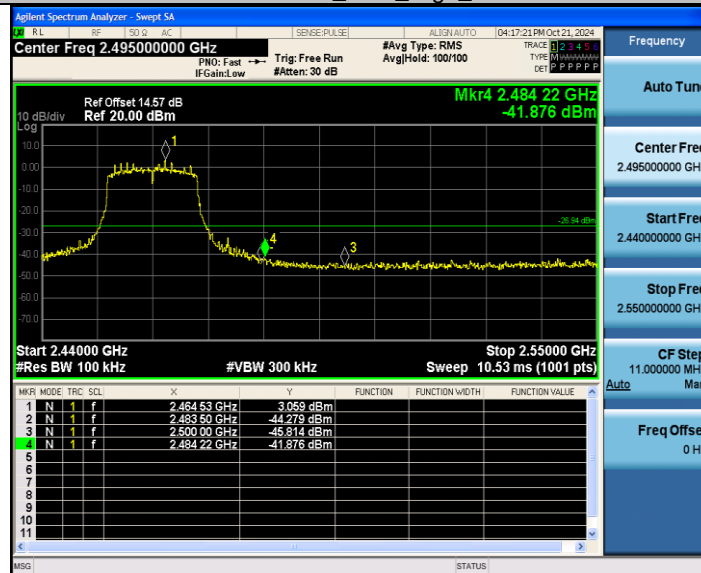

11N20MIMO_Ant2_High_2462

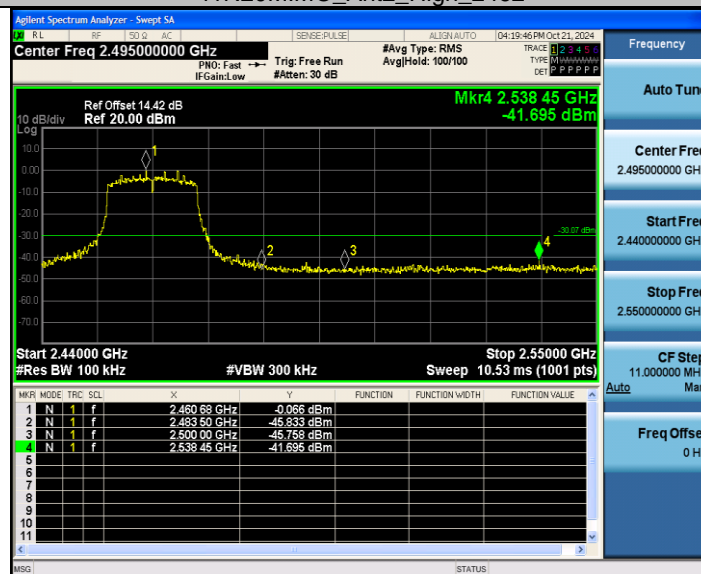

11N40MIMO_Ant1_Low_2422

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



11N40MIMO_Ant2_Low_2422

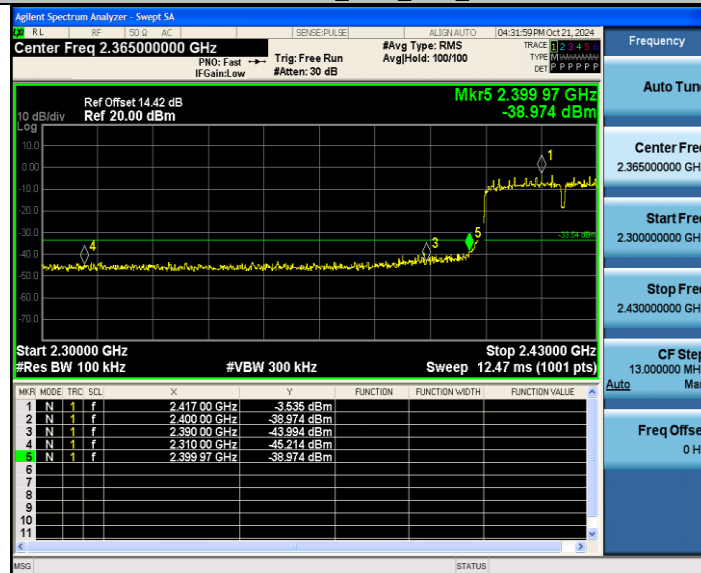

11N40MIMO_Ant1_High_2452




11N40MIMO_Ant2_High_2452

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

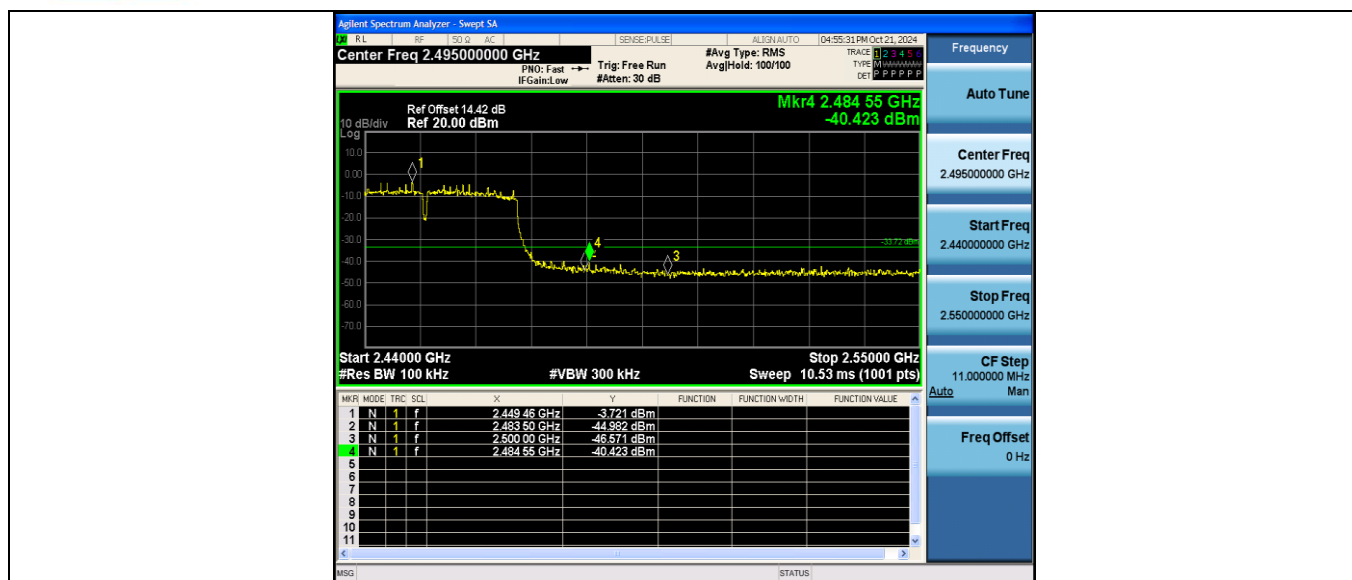

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



Conducted Spurious Emissions Test plot as follows:

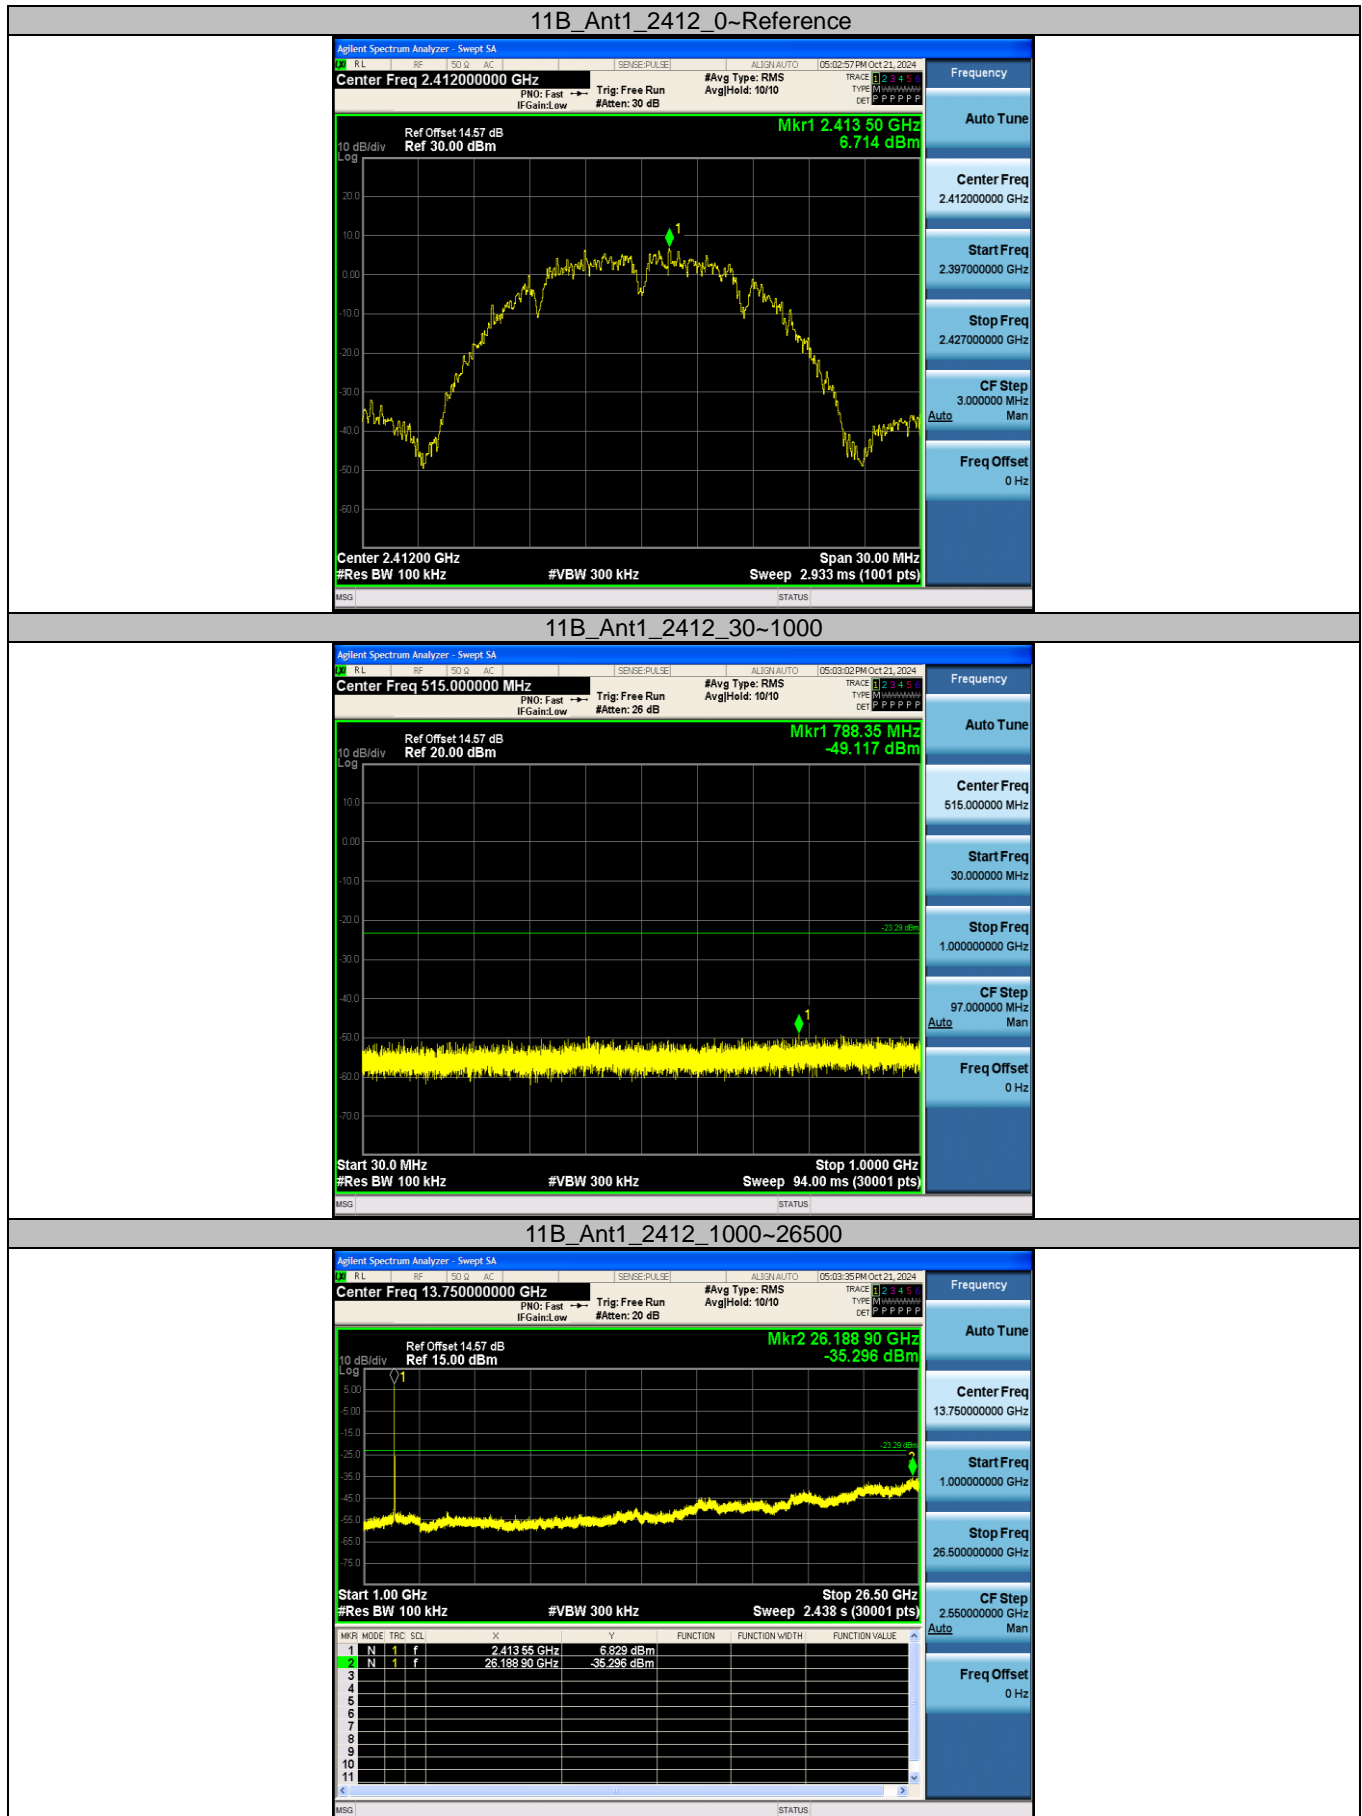


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

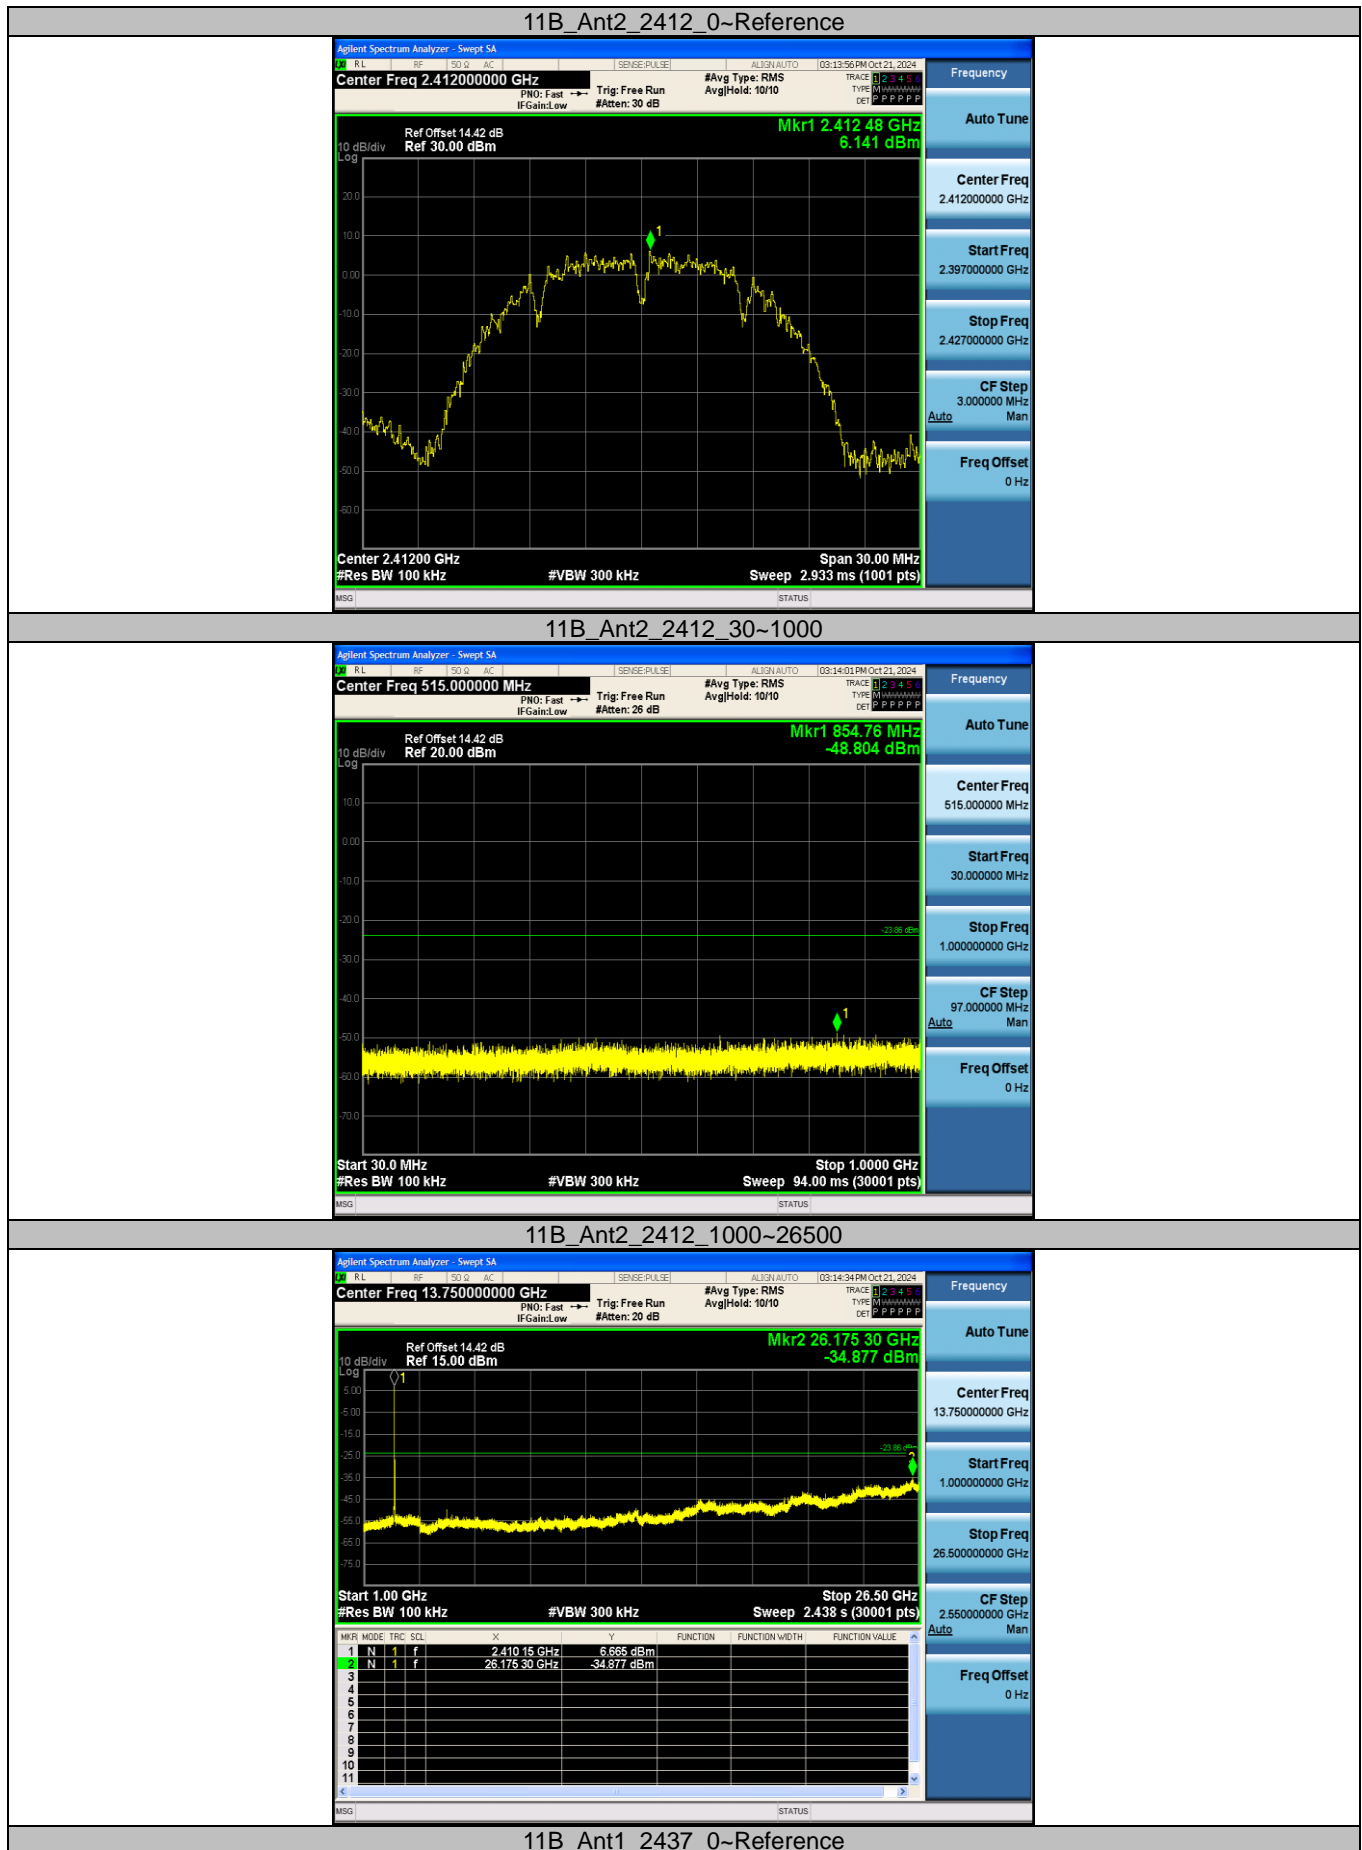


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

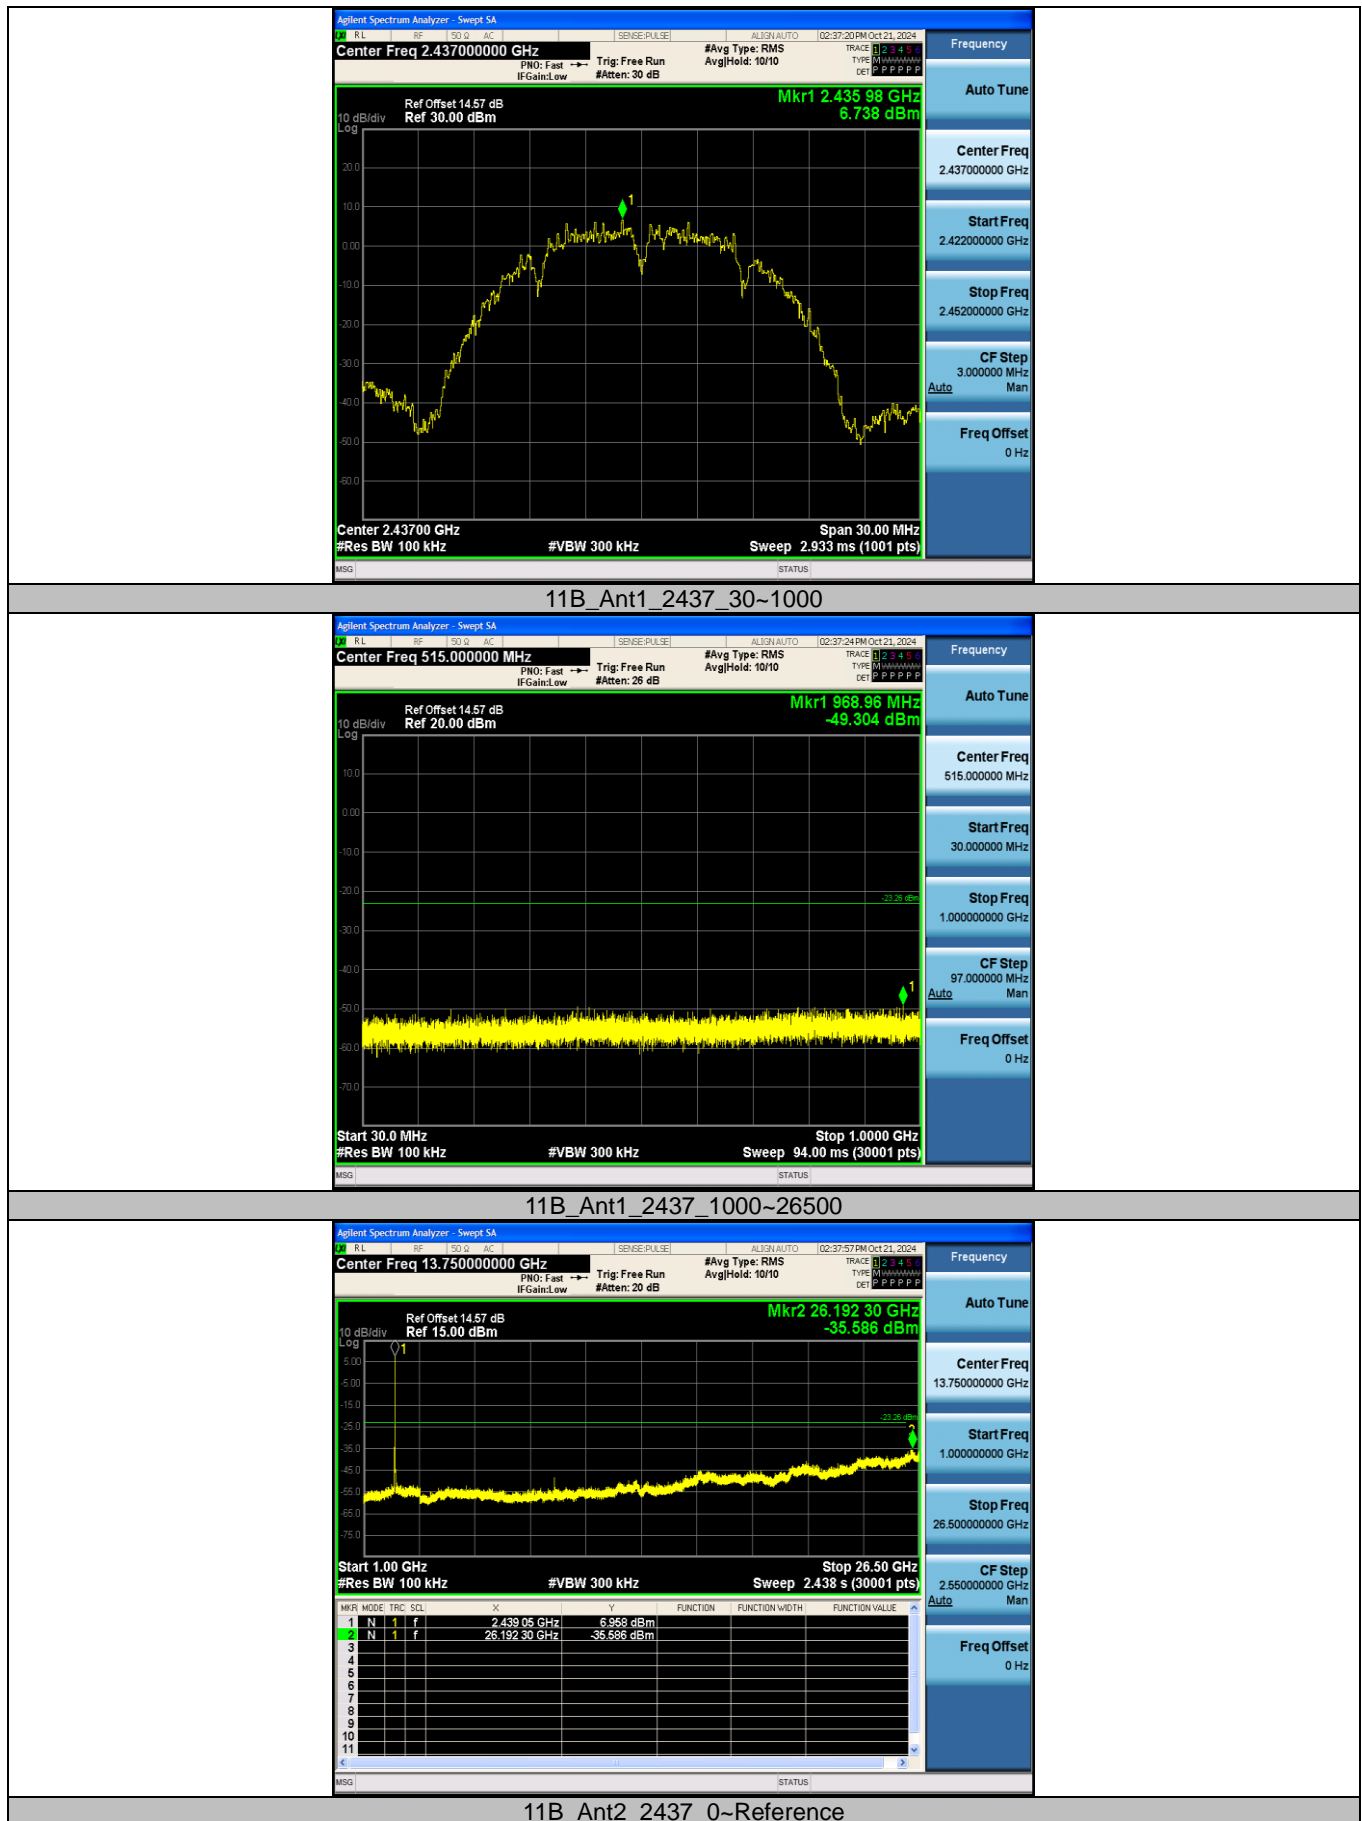

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn