



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



# FCC RF Test Report

**Product Name: Smart Phone**

**Model Number: SNE-LX1**

**Report No.: SYBH(Z-RF)20180619018002-2006**

**FCC ID: QISSNE-LX1**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

## Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
5. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C  
**Date of Receipt Test Item:** 2018-07-13  
**Start Date of Test:** 2018-07-16  
**End Date of Test:** 2018-07-27  
**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2018-07-30	He Hao	He Hao
	Date	Name	Signature

<b>Prepared by:</b>	2018-07-28	ZhouLingbo	ZhouLingbo
	Date	Name	Signature



## Contents

<b>1</b>	<b><u>General Information</u></b>	<b>5</b>
1.1	APPLIED STANDARD	5
1.2	TEST LOCATION	5
1.3	TEST ENVIRONMENTAL CONDITION	5
<b>2</b>	<b><u>Summary</u></b>	<b>6</b>
<b>3</b>	<b><u>Product Description</u></b>	<b>7</b>
3.1	PRODUCT INFORMATION	7
3.2	EUT IDENTITY	7
<b>4</b>	<b><u>Main Test Instruments</u></b>	<b>9</b>
<b>5</b>	<b><u>Test Results</u></b>	<b>10</b>
5.1	20DB BANDWIDTH MEASUREMENT	10
5.2	IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS	12
5.3	RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND	15
5.4	FREQUENCY STABILITY	18
5.5	AC POWER LINE CONDUCTED EMISSIONS	19



## 1 General Information

<b>1.1 Applied Standard</b>	
Applied Rules:	47 CFR FCC Part 02 FCC Part 15 Subpart C (15.225)
<b>1.2 Test Location</b>	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
<b>1.3 Test Environmental Condition</b>	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa



## 2 Summary

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE					
15.225 (a)	In-Band Emissions	15,848 $\mu$ V/m @ 30m 13.553 – 13.567 MHz	RADIATED	Pass	Section 5.2
2.1049	20 dB Bandwidth	N/A		Pass	Section 5.1
15.225(b)	In-Band Emissions	334 $\mu$ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		Pass	Section 5.2
15.225(c)	In-Band Emissions	106 $\mu$ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		Pass	Section 5.2
15.225(d) 15.209	Out-of-Band Emissions	Emissions outside of the specified band (13.110 – 14.010 MHz) must meet the radiated limits detailed in 15.209		Pass	Section 5.3
15.225(e)	Frequency Stability Tolerance	$\pm$ 0.01% of Operating Frequency	Temperature Chamber	Pass	Section 5.4
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	Pass	Section 5.5



## 3 Product Description

### 3.1 Product Information

#### 3.1.1 General Description

SNE-LX1 is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is B1 and B2 and B4 and B5 and B8. The LTE frequency band is B1 and B3 and B7 and B8 and B20. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS, NFC and WIFI etc. Externally it provides one micro SD card interface (it can also used as SIM card interface), earphone port (to provide voice service) and one SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices. SNE-LX1 may support single SIM or double SIM. Model SNE-LX1 is a smart phone with dual SIM or single SIM. The difference of them is only for SIM CARD. SNE-LX1 single SIM is deleted one SIM by software. So SNE-LX1 single SIM share the same report and the certification with SNE-LX1 dual SIM.

Note: Only NFC test data included in this report.

### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

#### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	HL2SNEL21M	SNE-LX1 8.2.0.110(C900)



### 3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-059200BHQ	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-059200AHQ	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-059200UHQ	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-059200EHQ	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200BH0	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200AH0	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200UH0	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200EH0	Huawei Technologies Co.,Ltd	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Rechargeable Li-ion	HB386589ECW	Huawei Technologies Co.,Ltd	Rated capacity: 3650mAh Nominal Voltage:  +3.82V Charging Voltage:  +4.40V



## 4 Main Test Instruments


Main Test Equipments					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Test receiver	R&S	ESU26	100387	2018/1/20	2019/1/19
Test receiver	R&S	ESU26	100387	2018/1/20	2019/1/19
Test receiver	R&S	ESCI	101163	2018/1/20	2019/1/19
Spectrum analyzer	R&S	FSU3	200474	2018/1/20	2019/1/19
Spectrum analyzer	R&S	FSU43	100144	2018/1/20	2019/1/19
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2017/4/25	2019/4/25
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2017/4/25	2019/4/25
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-357	2017/4/21	2019/4/20
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2017/5/27	2019/5/27
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	5140299	2017/7/20	2019/7/19
Artificial Main Network	R&S	ENV4200	100134	2018/5/8	2019/5/7
Line Impedance Stabilization Network	R&S	ENV216	100382	2018/5/8	2019/5/7
Software Information					
Test Item	Software Name		Manufacturer		Version
RE	EMC32		R&S		V9.25.0
CE	EMC32		R&S		V9.25.0

## 5 Test Results


### 5.1 20dB Bandwidth Measurement

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

#### 5.1.1 Test Setup

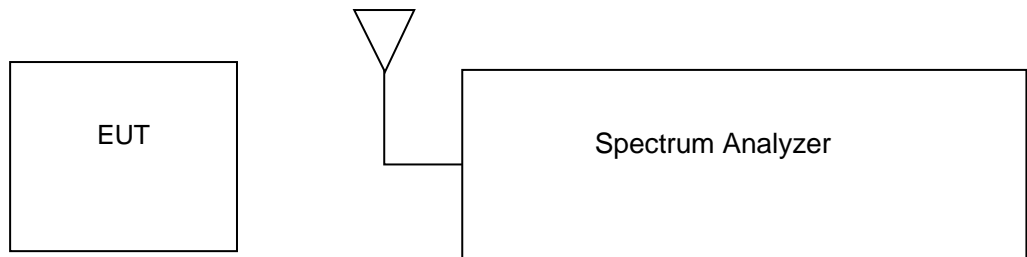

## 5.1.2 Test Result

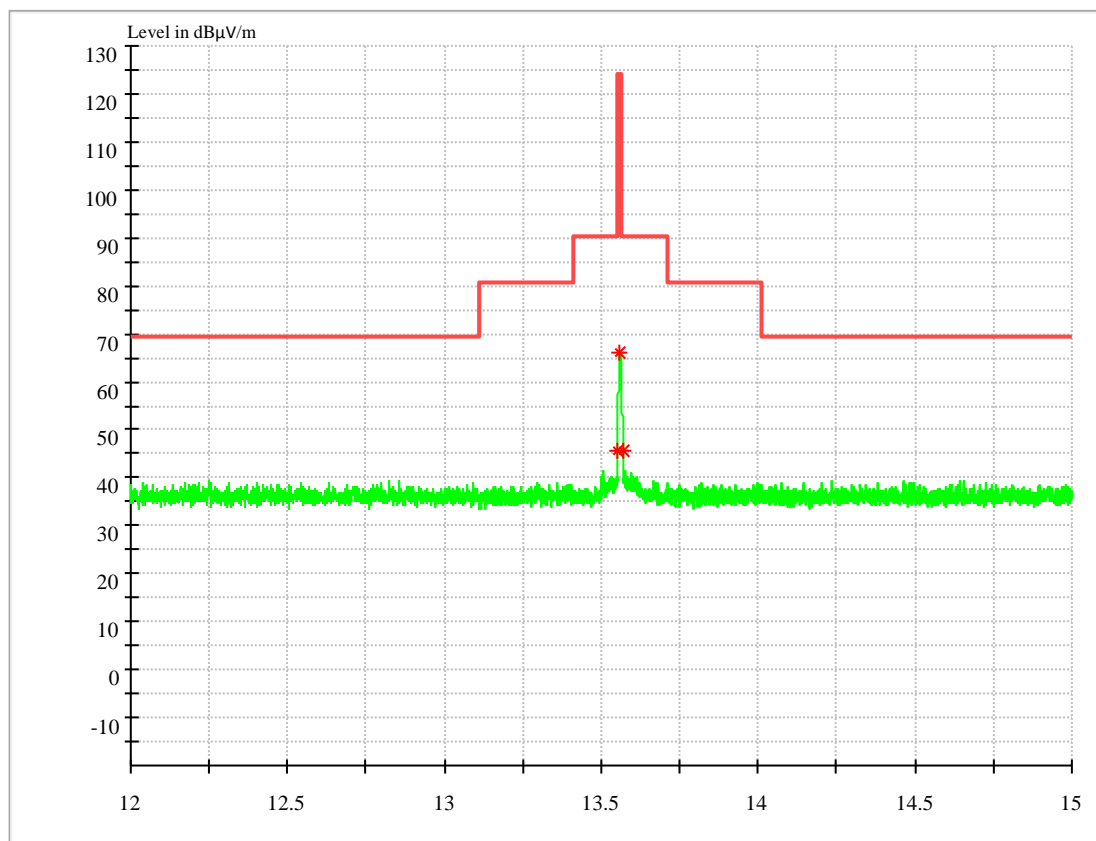


OBW (KHz)	FL@OBW (MHz)	FH@OBW (MHz)	Verdict
16.71	13.552410	13.569120	PASS

The result of the measurement is passed.


## 5.2 In-Band Radiated Spurious Emission Measurements

### 5.2.1 Test Setup

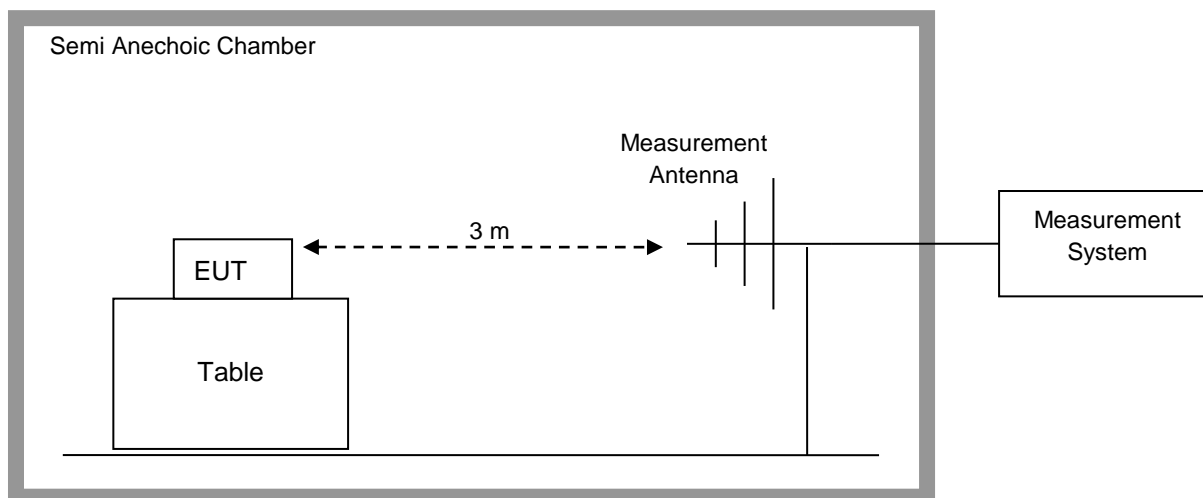

Measurement parameters	
Detector:	Quasi Peak
Sweep time:	-/-
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	-/-
Trace-Mode:	Max Hold

## 5.2.2 Test Result

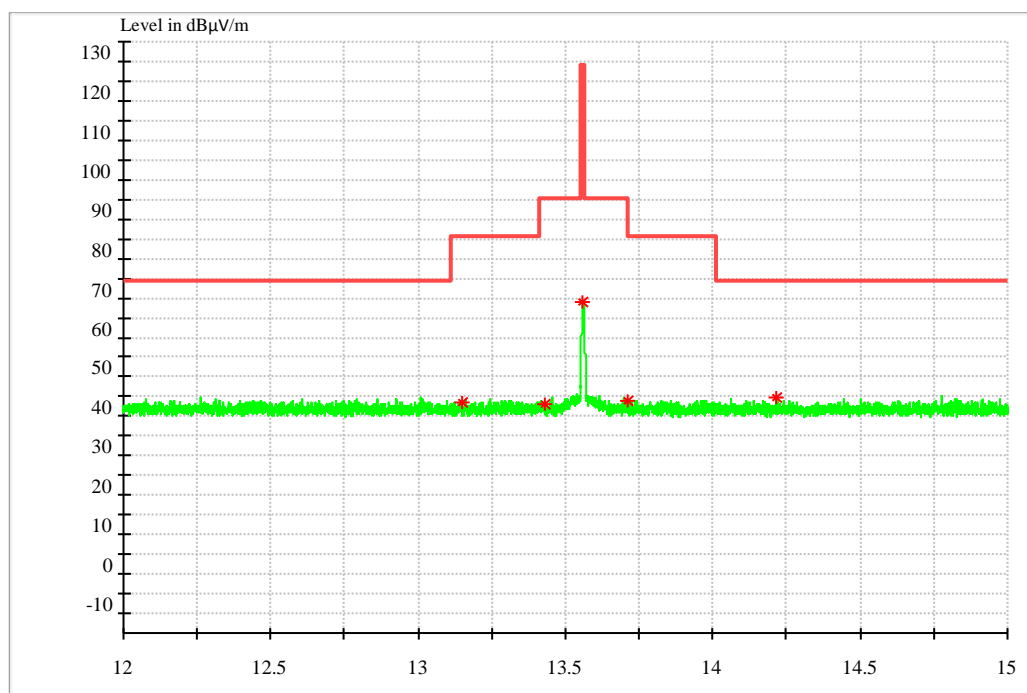

### MEASUREMENT RESULT: QP Detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Transd (dB)
13.075262	38.61	80.50	41.89	V	0.0	21.1
13.415030	38.04	90.00	51.96	V	0.0	21.1
13.558240	48.63	124.00	75.37	V	0.0	21.1
13.720200	38.79	80.50	41.71	V	90.0	21.1
14.241040	39.06	69.50	30.44	V	0.0	21.1




**NOTES:**

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2). Extrapolation Factor =  $20 \log_{10}(30/3)^2 = 40\text{dB}$
3. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.
4. Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain). The reading level is calculated by software which is not shown in the sheet.
5. Margin = Limit - Level

**The result of the measurement is passed.**

## 5.3 Radiated Spurious Emission Measurements, Out-of-Band


### 5.3.1 Test Setup

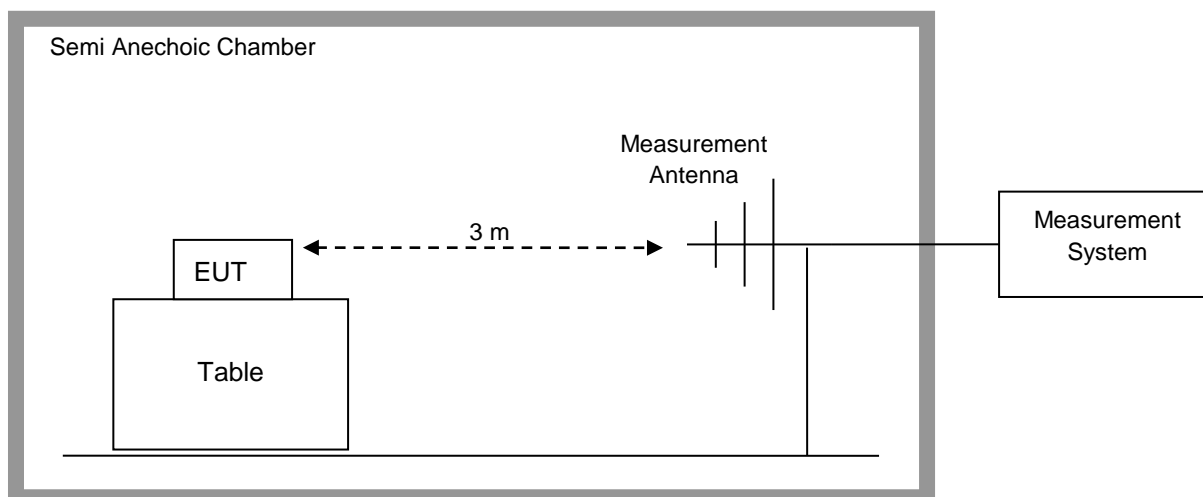

Measurement parameters	
Detector:	Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	9 kHz – 150 kHz: 200 Hz 150 kHz – 30 MHz: 9 kHz 30 MHz – 1000 MHz: 100 kHz
Video bandwidth:	9 kHz – 150 kHz: 200 Hz 150 kHz – 30 MHz: 9 kHz 30 MHz – 1000 MHz: 100 kHz
Span:	See Plots
Trace-Mode:	Max Hold


## 5.3.2 Test Result

9k~30MHz

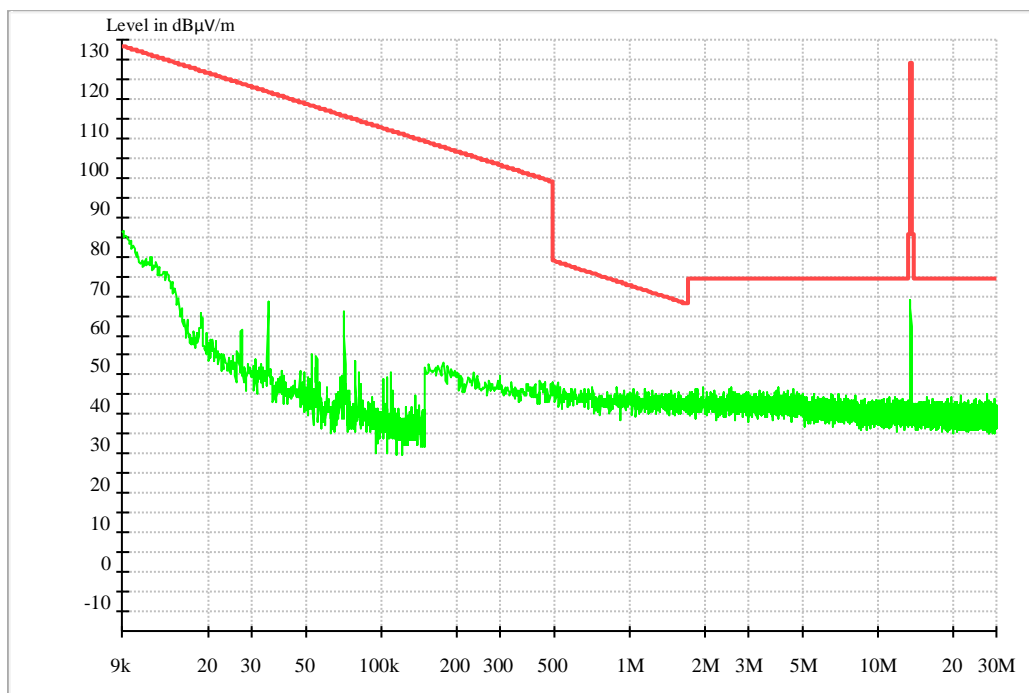



30M~1GHz

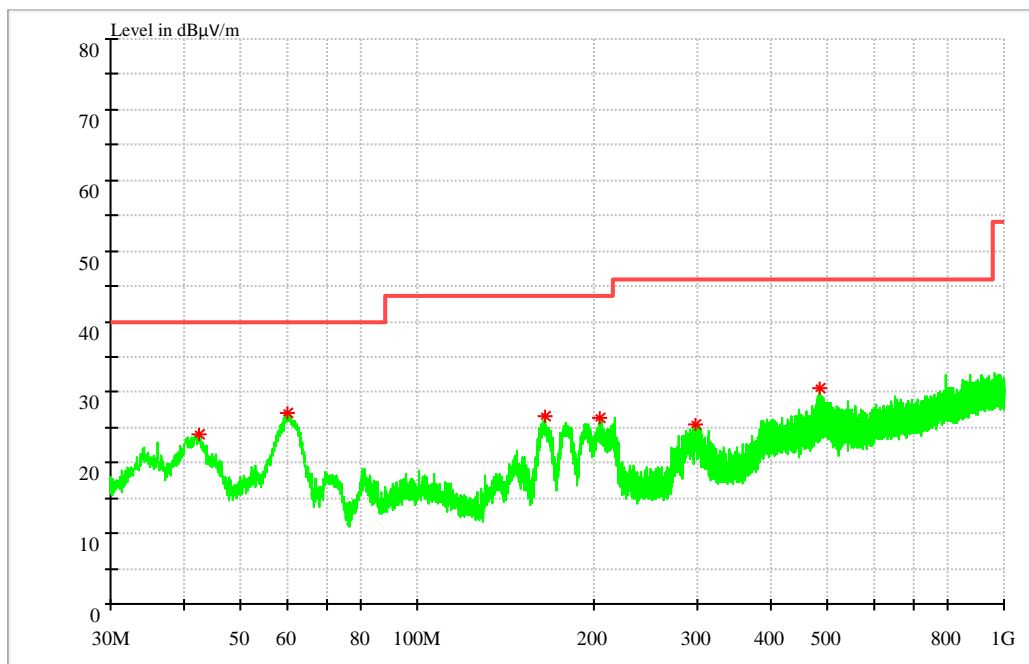

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Polarisation	Azimuth (deg)	Transd (dB)
42.367500	24.13	40.00	15.87	100.0	V	177.0	14.4
60.215500	27.12	40.00	12.88	100.0	V	193.0	13.7
164.927000	26.55	43.50	16.95	100.0	V	95.0	10.6
204.454500	26.44	43.50	17.06	100.0	V	168.0	12.6
297.574500	25.40	46.00	20.60	100.0	H	271.0	15.4
484.202500	30.55	46.00	15.45	100.0	H	35.0	19.3

#### NOTES:

1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 960MHz.
2. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30MHz the Loop antenna was positioned in 3 separate radials.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain). The reading level is calculated by software which is not shown in the sheet.
- 6, Margin=Limit - Level

**The result of the measurement is passed.**



## 5.4 Frequency Stability

### 5.4.1 Test Setup

The EUT was placed in a Climatic Chamber. A small whip antenna was placed close to the EUT, and connected to the measuring Spectrum Analyzer. Measurement performed without modulation on TX.

### 5.4.2 Test Result

VOLTAGE (%)	POWER Battery	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%		-20	13559993	-7	-0.00005162241888
100%		-10	13559984	-16	-0.00011799410029
100%		0	13560017	17	0.00012536873156
100%		10	13560011	11	0.00008112094395
100%		20	13560021	21	0.00015486725664
100%		30	13560001	1	0.00000737463127
100%		40	13560013	13	0.00009587020649
100%		50	13559975	-25	-0.00018436578171
Battery End Point	3.6	20	13560009	9	0.00006637168142
115%	4.35	20	13559997	-3	-0.00002212389381


The result of the measurement is passed.

## 5.5 AC Power Line Conducted Emissions


### 5.5.1 Test Setup

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

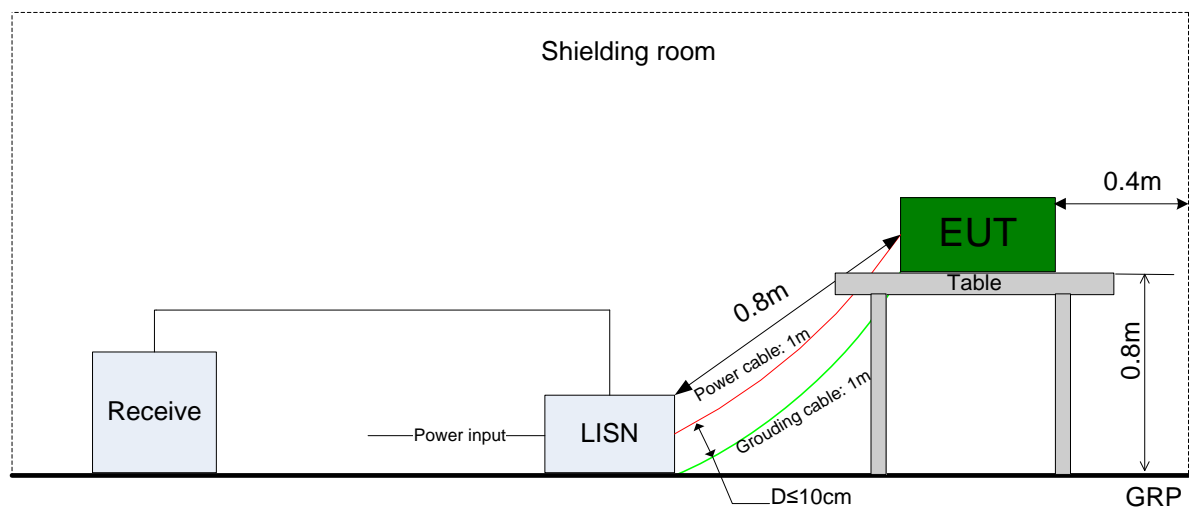

## 5.5.2 Test Result

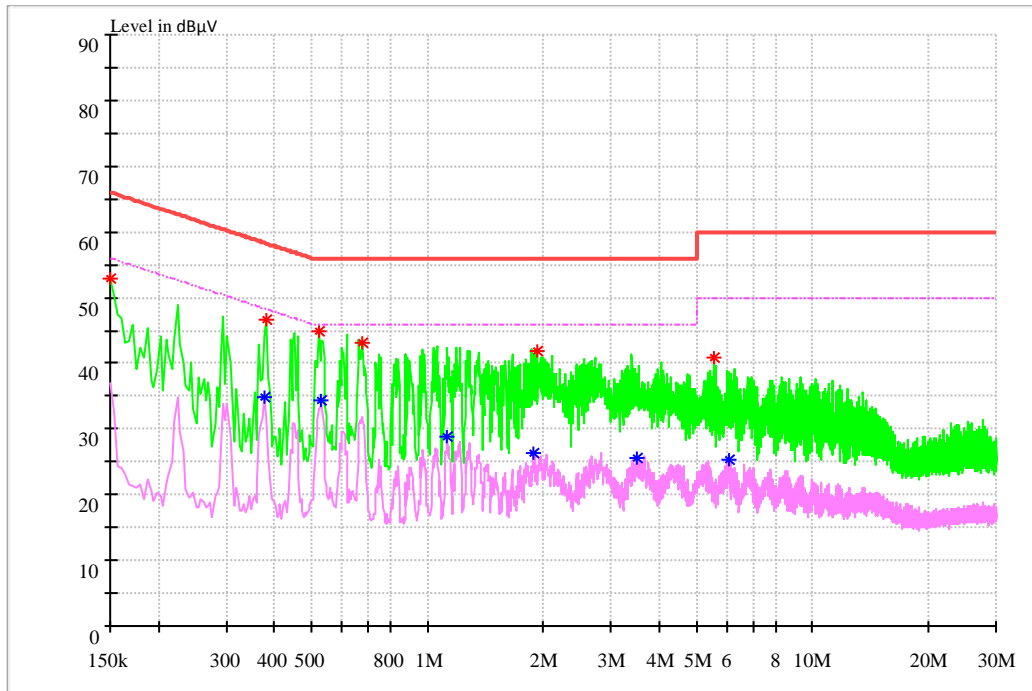

### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Limit dBμV	Transd dB	Margin dB	Line	PE
0.150000	52.95	66.00	9.7	13.05	N	FLO
0.381338	46.51	58.25	9.7	11.74	N	FLO
0.523125	44.85	56.00	9.7	11.15	N	FLO
0.679838	43.17	56.00	9.7	12.83	N	FLO
1.929806	41.84	56.00	9.7	14.16	N	FLO
5.537925	40.84	60.00	9.8	19.16	L1	FLO

### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Limit dBμV	Transd dB	Margin dB	Line dBμV	PE
0.377606	34.92	48.33	9.7	13.41	L1	FLO
0.530588	34.29	46.00	9.7	11.71	L1	FLO
1.127588	28.90	46.00	9.7	17.10	N	FLO
1.888762	26.28	46.00	9.7	19.72	N	FLO
3.489469	25.61	46.00	9.8	20.39	N	FLO
6.060300	25.44	50.00	9.9	24.56	L1	FLO

Note:



1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

**The result of the measurement is passed.**

-----The END-----