


Annex A.5 Spurious Emission at Antenna Terminals

1. GPRS_GSM850


1.1. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:128)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.012	-58.12	-13	Pass	401
0.15	30	0.01	Peak	0.17	-56.28	-13	Pass	2986
30	500	0.1	Peak	463.2	-48.58	-13	Pass	4701
500	1000	0.1	Peak	824.3	31.85	-13	N/A	5001
1000	10000	1	Peak	7583.804	-26.54	-13	Pass	9001

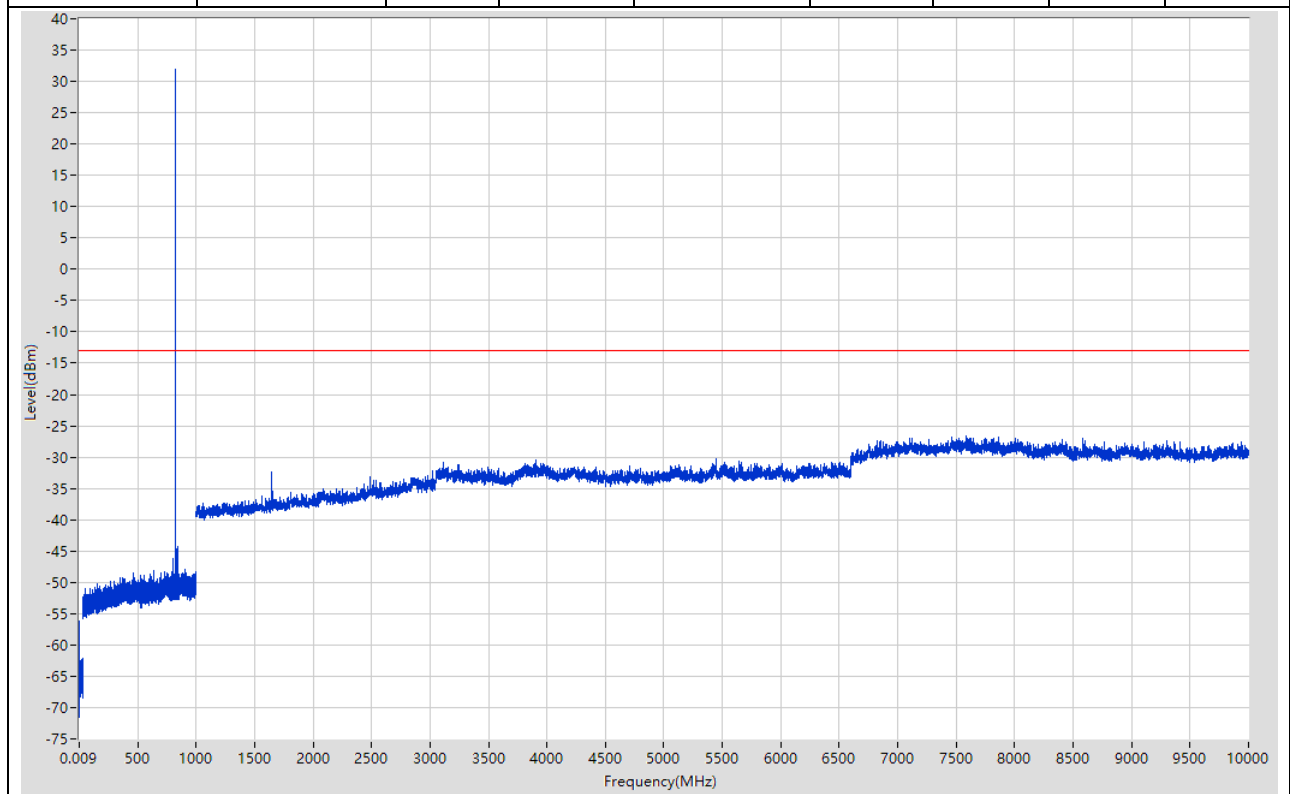


1.2. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:190)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.01	-58.89	-13	Pass	401
0.15	30	0.01	Peak	0.15	-57.21	-13	Pass	2986
30	500	0.1	Peak	455.2	-49.02	-13	Pass	4701
500	1000	0.1	Peak	836.6	33	-13	N/A	5001
1000	10000	1	Peak	7795.83	-26.06	-13	Pass	9001

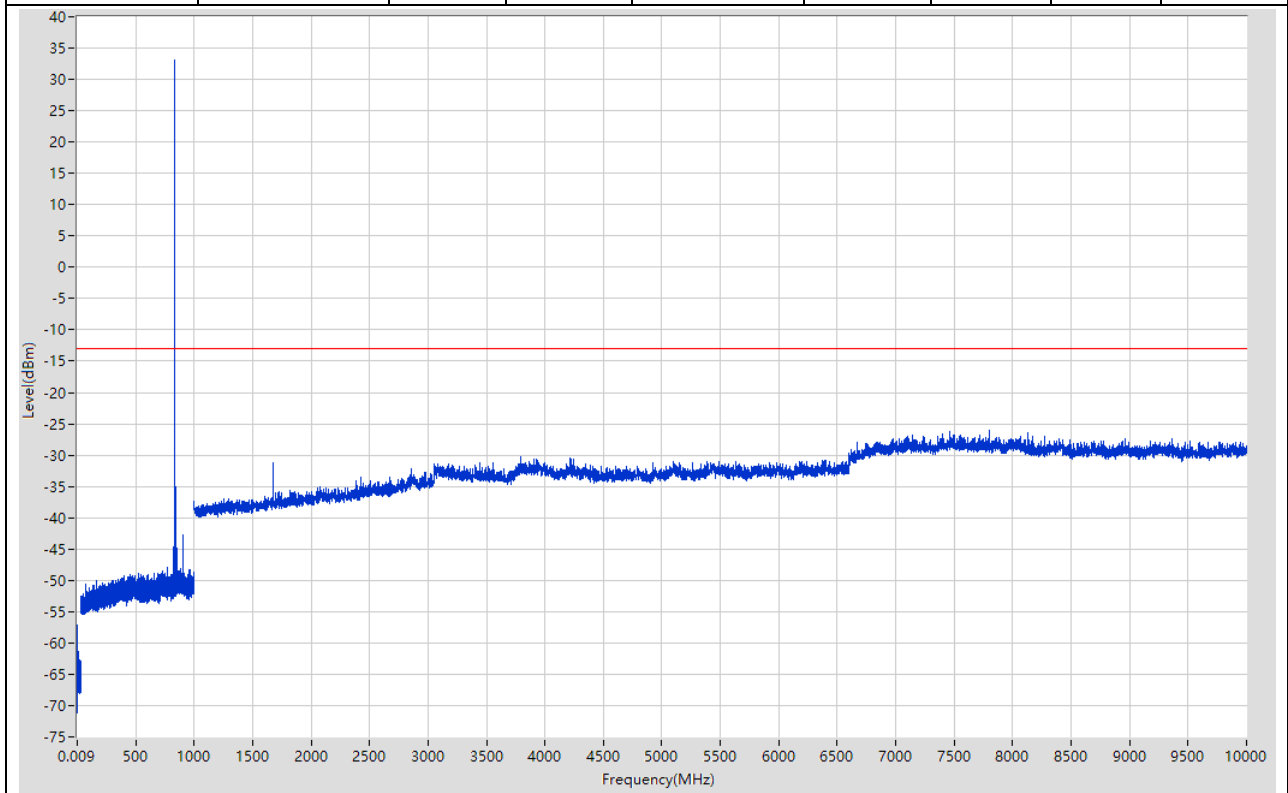

1.3. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:251)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-58.56	-13	Pass	401
0.15	30	0.01	Peak	0.16	-56.59	-13	Pass	2986
30	500	0.1	Peak	471.7	-48.79	-13	Pass	4701
500	1000	0.1	Peak	848.9	32.62	-13	N/A	5001
1000	10000	1	Peak	7523.796	-26.74	-13	Pass	9001

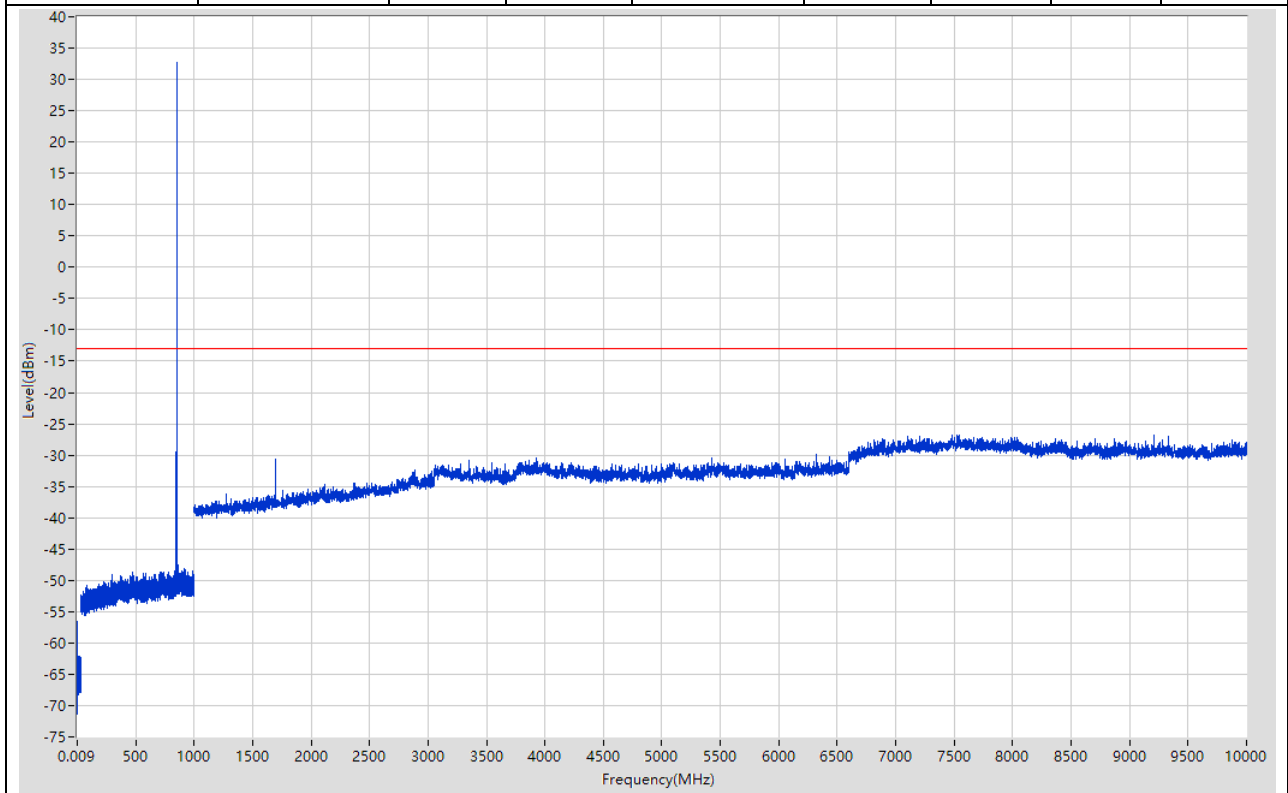

2. GPRS_PCS


2.1. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:512)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.011	-64.74	-13	Pass	401
0.15	30	0.01	Peak	0.18	-63.32	-13	Pass	2986
30	1000	0.1	Peak	877.819	-53.46	-13	Pass	9700
1000	3000	1	Peak	1850	28.37	-13	N/A	2001
3000	20000	1	Peak	5551.311	-30.4	-13	Pass	17001

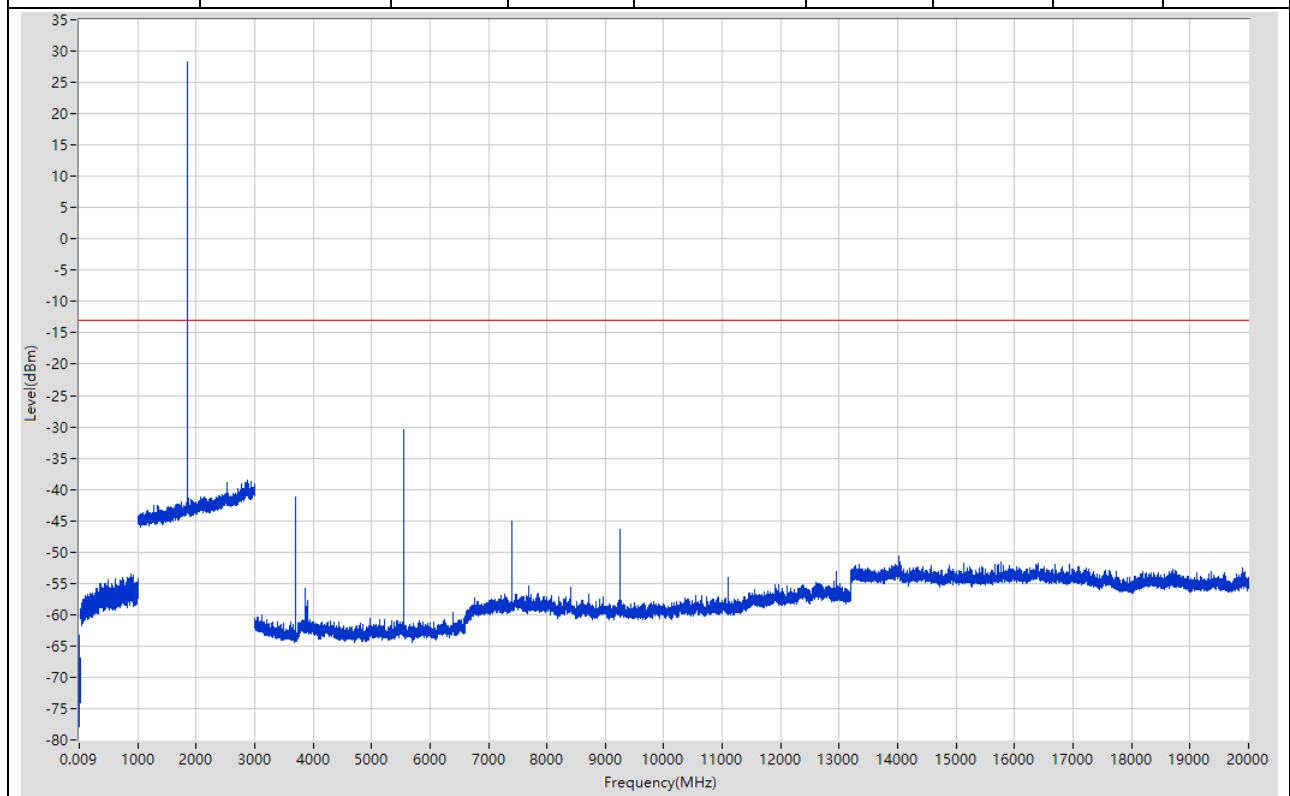


2.2. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:661)

	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-63	-13	Pass	401
0.15	30	0.01	Peak	0.24	-62.46	-13	Pass	2986
30	1000	0.1	Peak	901.034	-44.85	-13	Pass	9700
1000	3000	1	Peak	1880	29.41	-13	N/A	2001
3000	20000	1	Peak	5639.322	-47.59	-13	Pass	17001

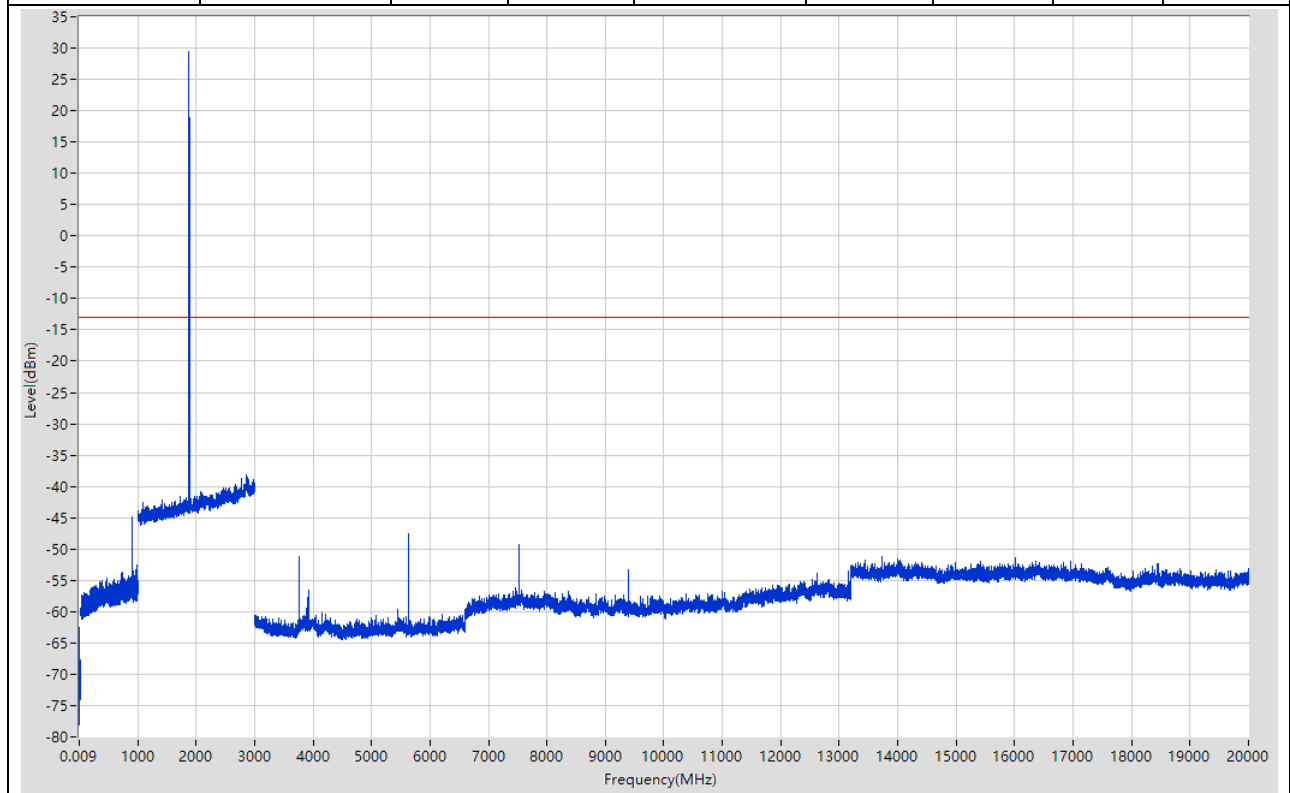

2.3. GPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:810)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-38.7	-13	Pass	401
0.15	30	0.01	Peak	0.15	-40.62	-13	Pass	2986
30	1000	0.1	Peak	967.4966	-46.24	-13	Pass	9700
1000	3000	1	Peak	1910.455	27.89	-13	N/A	2001
3000	20000	1	Peak	5730.161	-39.68	-13	Pass	17001

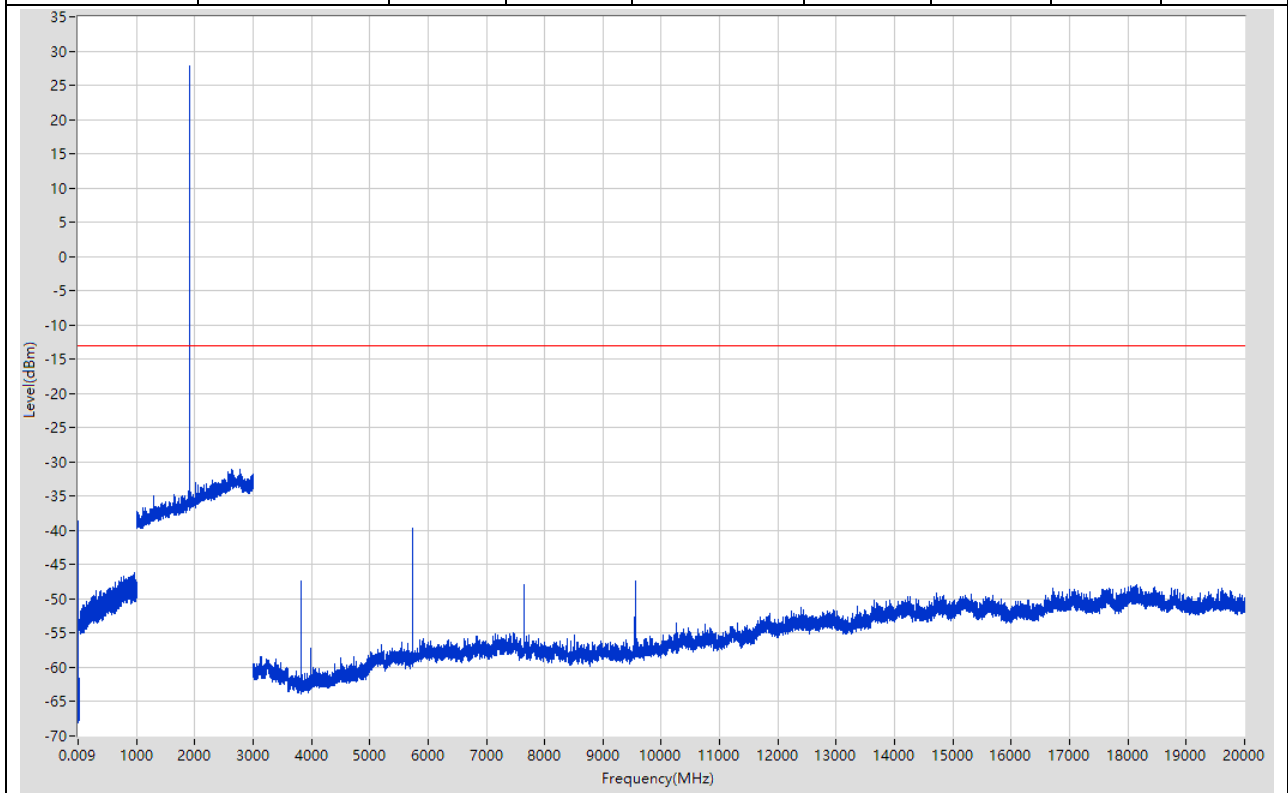

3. EGPRS_GSM850


3.1. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:128)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-56.79	-13	Pass	401
0.15	30	0.01	Peak	0.15	-55.77	-13	Pass	2986
30	500	0.1	Peak	360.9	-48.68	-13	Pass	4701
500	1000	0.1	Peak	824.2	30.44	-13	N/A	5001
1000	10000	1	Peak	7483.791	-26.09	-13	Pass	9001

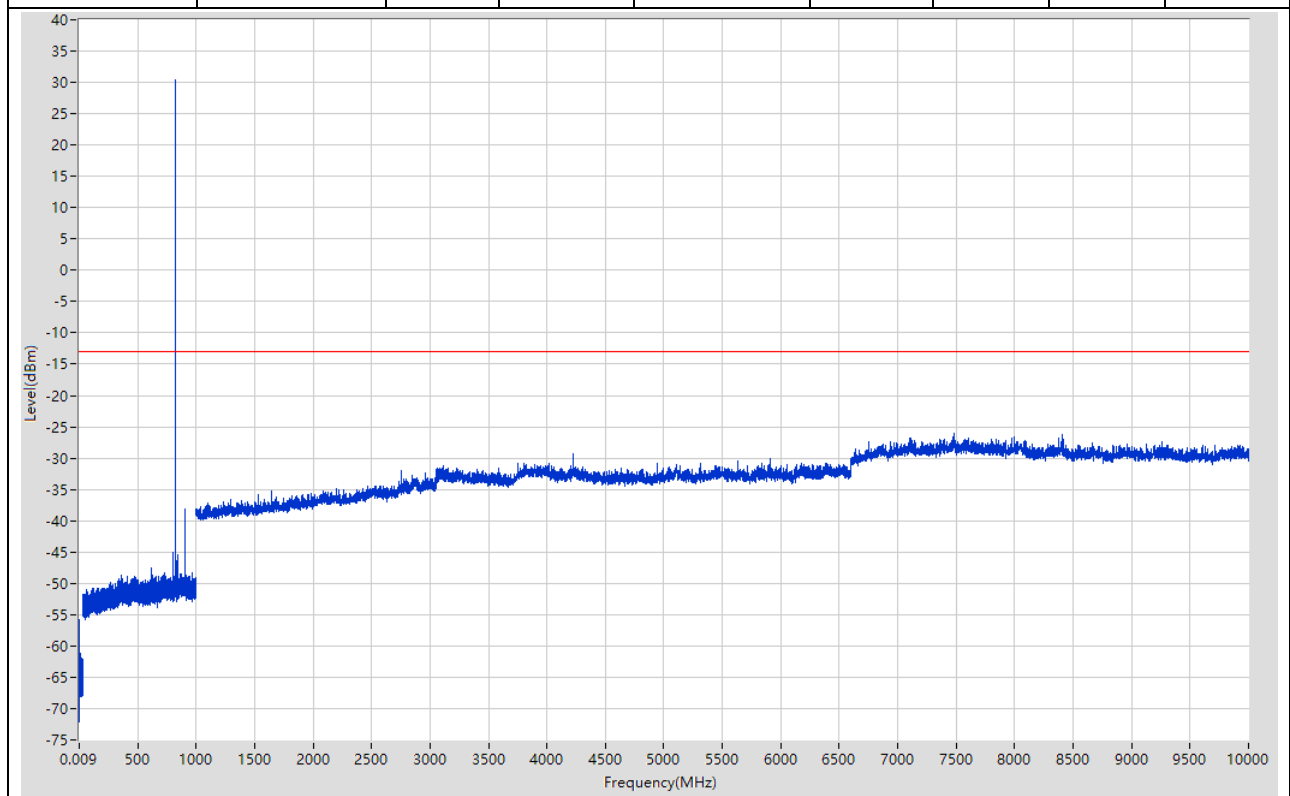


3.2. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:190)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-58.15	-13	Pass	401
0.15	30	0.01	Peak	0.22	-57.19	-13	Pass	2986
30	500	0.1	Peak	222.2	-47.69	-13	Pass	4701
500	1000	0.1	Peak	836.6	30.34	-13	N/A	5001
1000	10000	1	Peak	7885.841	-26.14	-13	Pass	9001

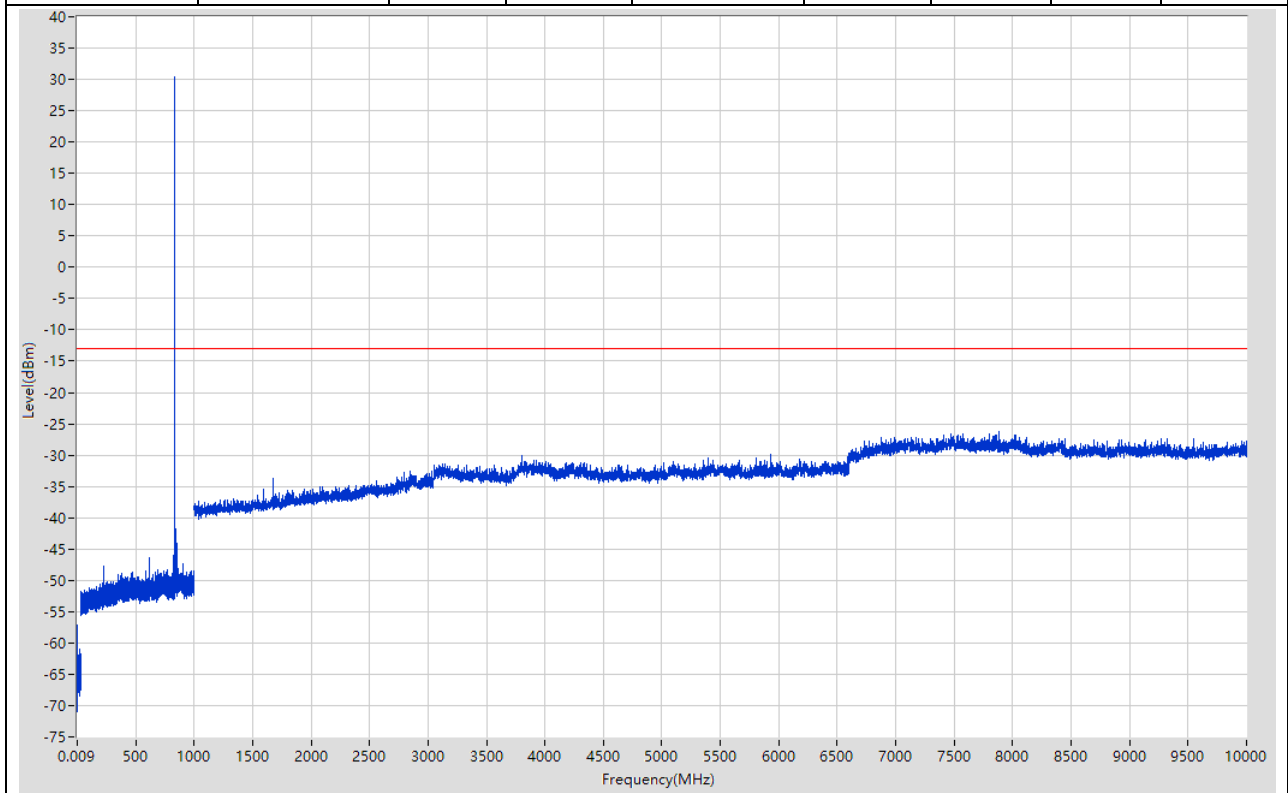

3.3. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:251)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.01	-57.93	-13	Pass	401
0.15	30	0.01	Peak	0.28	-56.78	-13	Pass	2986
30	500	0.1	Peak	234.5	-45.52	-13	Pass	4701
500	1000	0.1	Peak	848.9	28.21	-13	N/A	5001
1000	10000	1	Peak	8039.859	-26.51	-13	Pass	9001

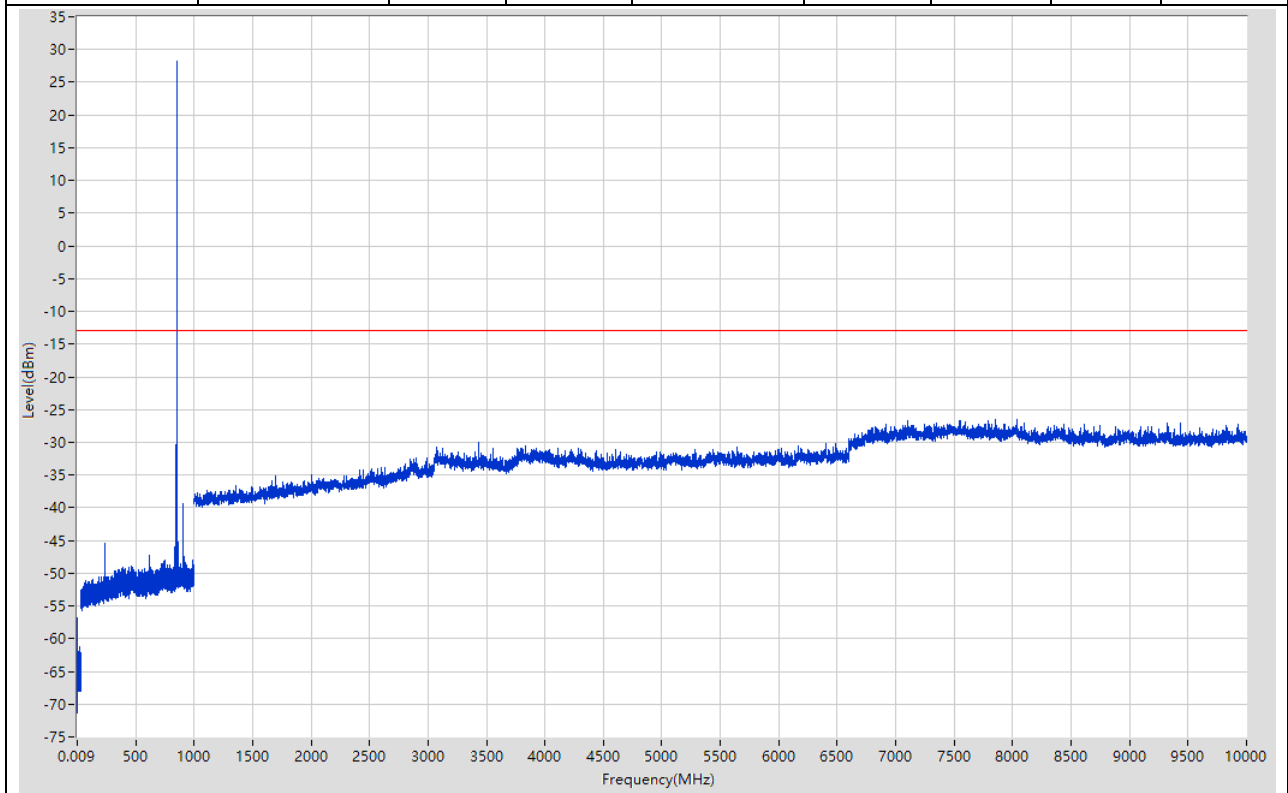

4. EGPRS_PCS


4.1. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:512)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.01	-62.32	-13	Pass	401
0.15	30	0.01	Peak	0.21	-63.14	-13	Pass	2986
30	1000	0.1	Peak	992.095	-53.82	-13	Pass	9700
1000	3000	1	Peak	1850	27.87	-13	N/A	2001
3000	20000	1	Peak	5551.311	-44.53	-13	Pass	17001

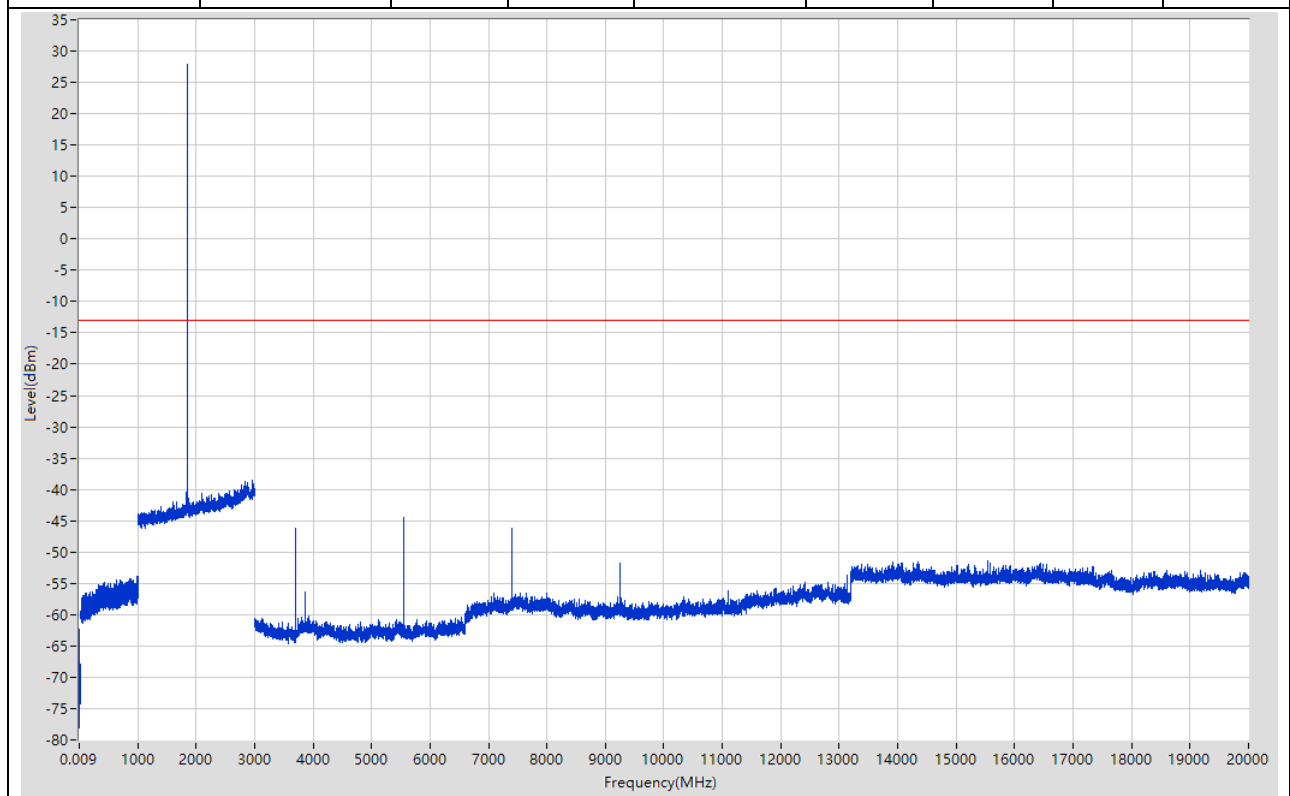


4.2. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:661)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.009	-63.46	-13	Pass	401
0.15	30	0.01	Peak	0.16	-62.55	-13	Pass	2986
30	1000	0.1	Peak	982.989	-51.59	-13	Pass	9700
1000	3000	1	Peak	1880	28.76	-13	N/A	2001
3000	20000	1	Peak	16469.644	-51.35	-13	Pass	17001

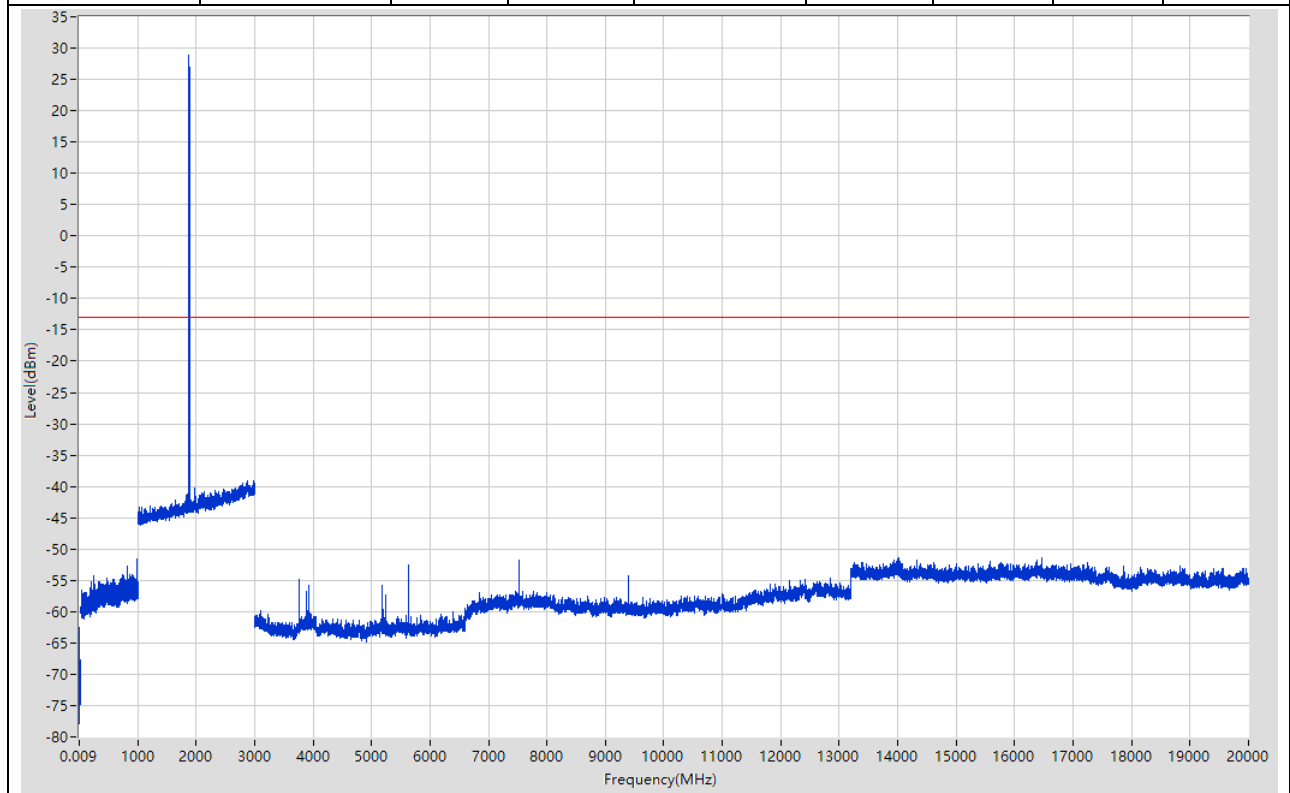

4.3. EGPRS Spurious Emission at Antenna Terminals (NTNV)(Channel:810)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	Peak	0.011	-63.71	-13	Pass	401
0.15	30	0.01	Peak	0.25	-63.18	-13	Pass	2986
30	1000	0.1	Peak	998.399	-53.49	-13	Pass	9700
1000	3000	1	Peak	1910	26.32	-13	N/A	2001
3000	20000	1	Peak	5729.333	-40.41	-13	Pass	17001

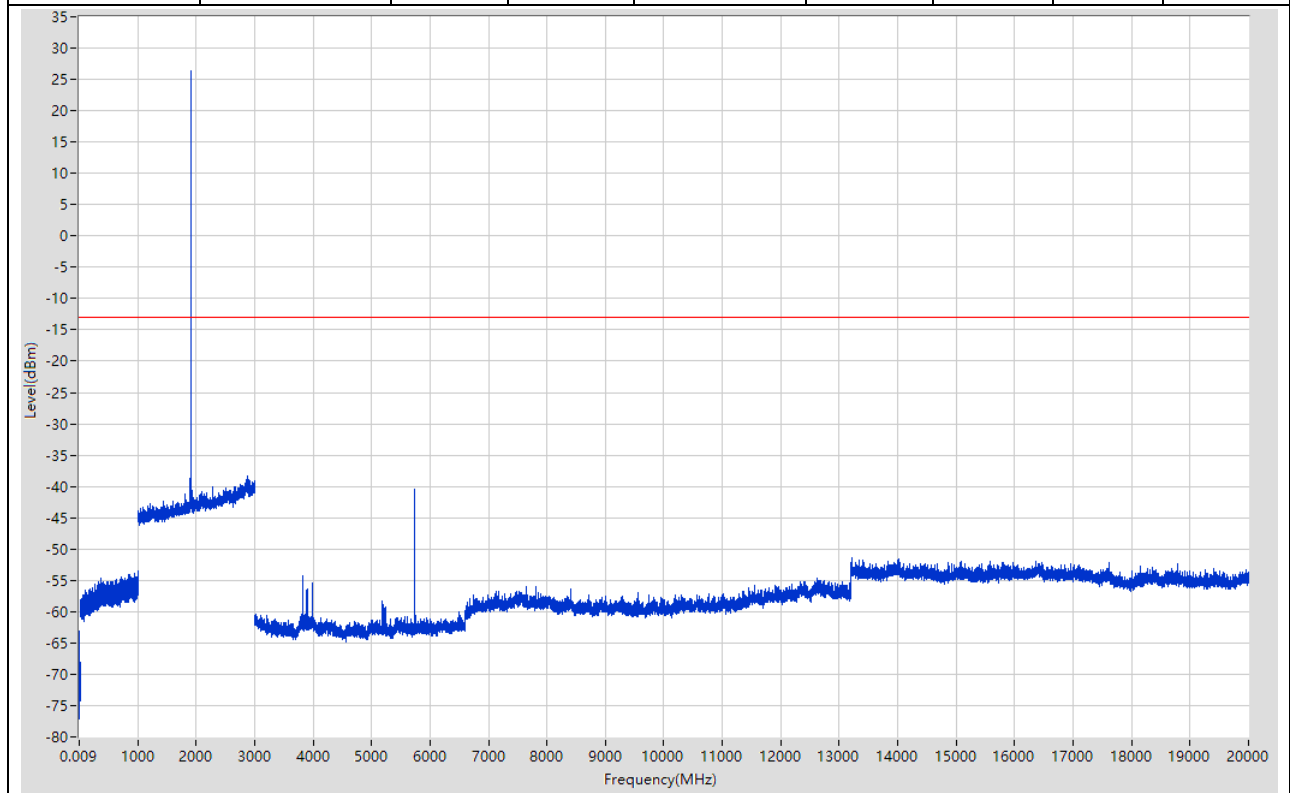

5. LTE-M1_Band2_QPSK


5.1. LTE-M1 Band2 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.26	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.69	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.45	-13	Pass	9700
1000	1840	1	RMS	1700.834	-52.7	-13	Pass	840
1840	1920	1	RMS	1880.533	11.74	60	Pass	601
1920	3000	1	RMS	2740.76	-53.2	-13	Pass	1080
3000	20000	1	RMS	3760.045	-53.96	-13	Pass	17000

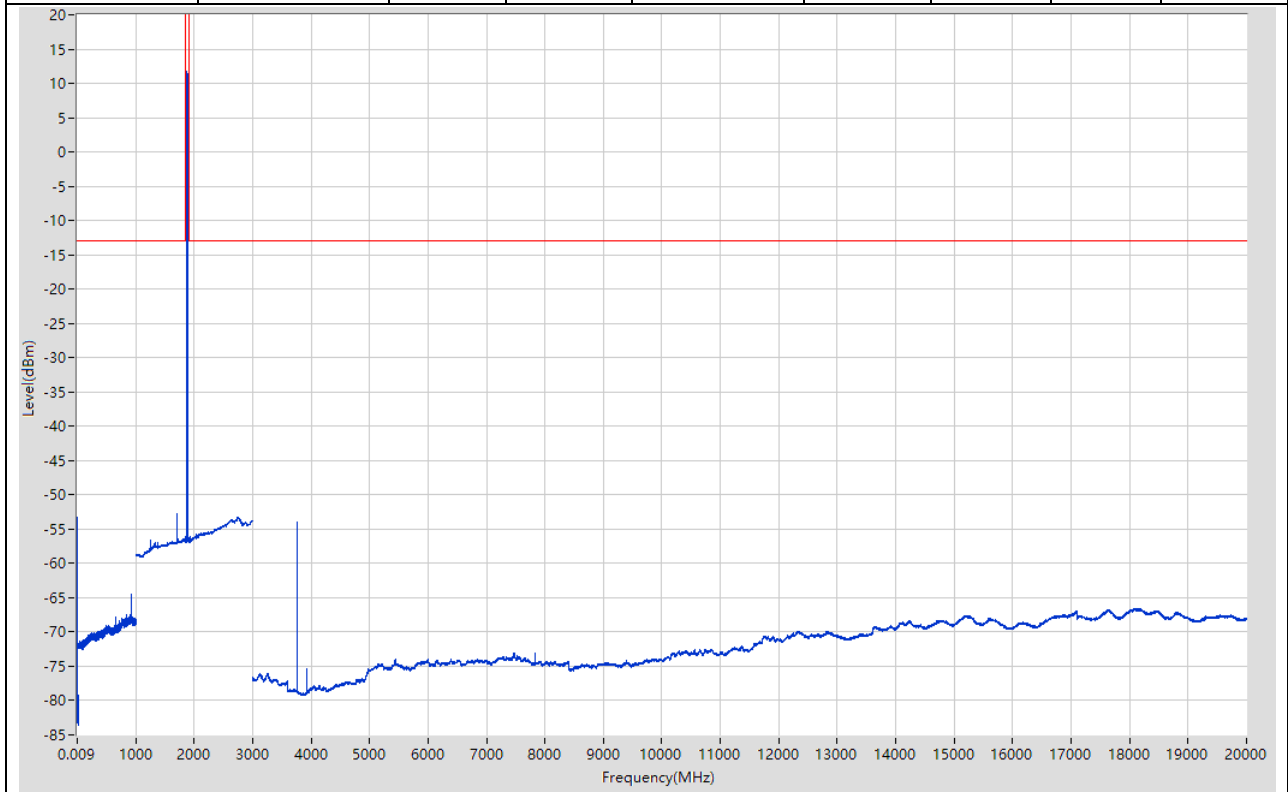


5.2. LTE-M1 Band2 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.43	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.11	-13	Pass	9700
1000	1840	1	RMS	1727.867	-48.06	-13	Pass	840
1840	1920	1	RMS	1909.6	12.03	60	Pass	601
1920	3000	1	RMS	2091.158	-52.2	-13	Pass	1080
3000	20000	1	RMS	18119.889	-66.51	-13	Pass	17000

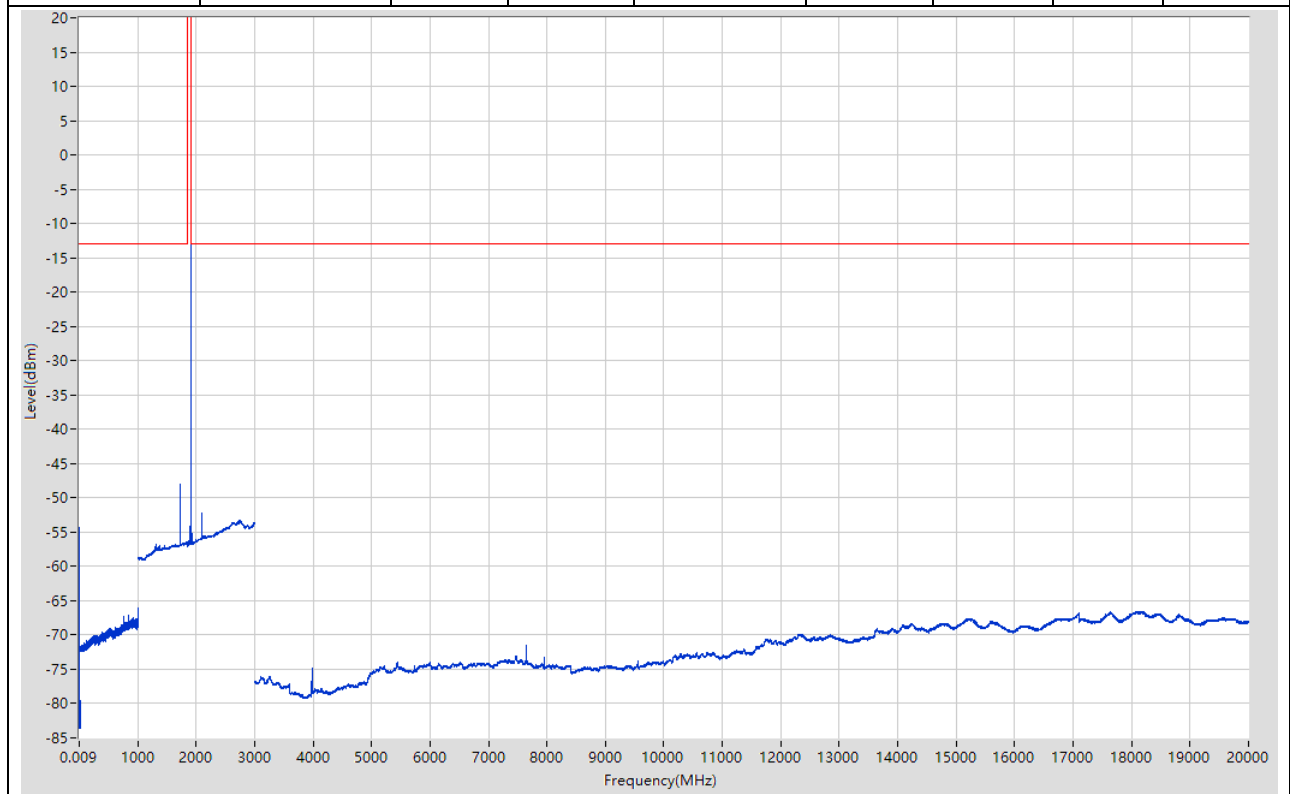


5.3. LTE-M1 Band2 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.88	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.89	-13	Pass	9700
1000	1840	1	RMS	1840	-54.76	-13	Pass	840
1840	1920	1	RMS	1852.667	11.7	60	Pass	601
1920	3000	1	RMS	2751.77	-53.24	-13	Pass	1080
3000	20000	1	RMS	3707.042	-61.65	-13	Pass	17000

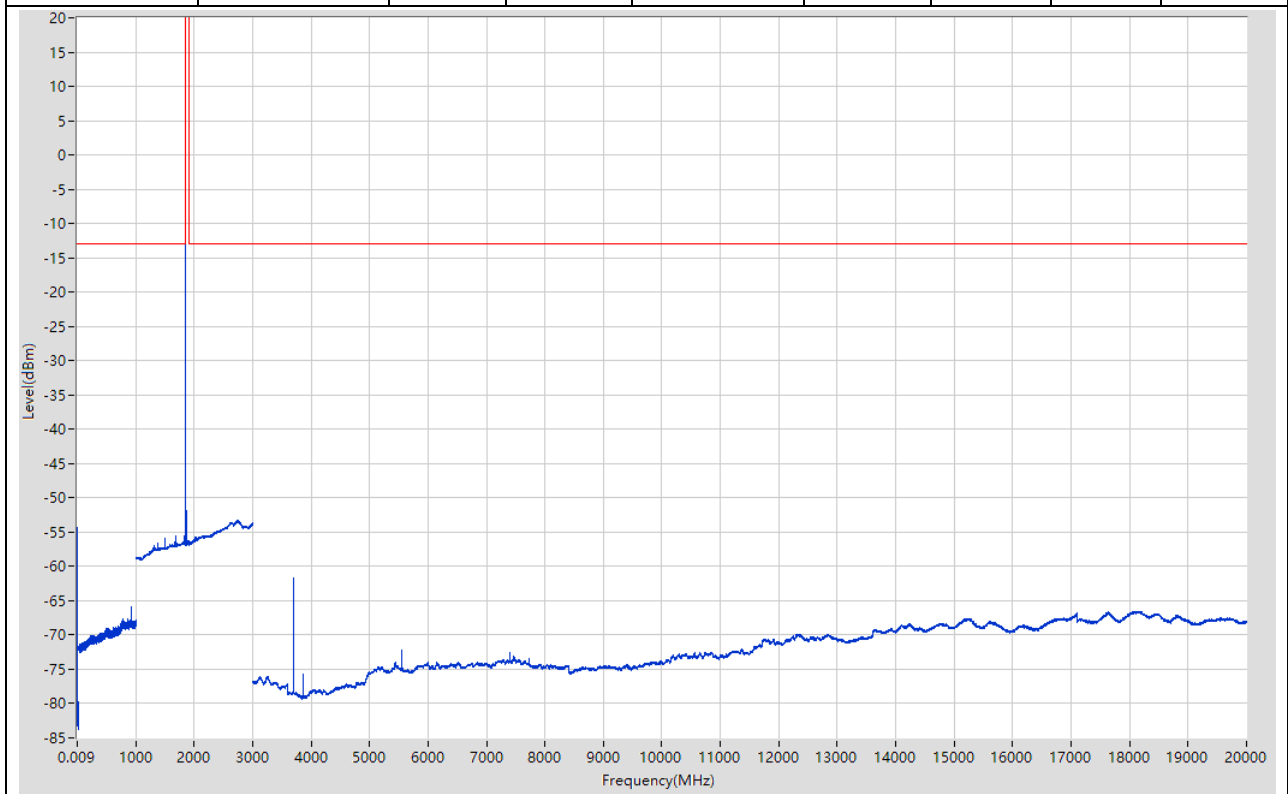


5.4. LTE-M1 Band2 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.42	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.55	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.04	-13	Pass	9700
1000	1840	1	RMS	1701.836	-51.39	-13	Pass	840
1840	1920	1	RMS	1881.333	11.61	60	Pass	601
1920	3000	1	RMS	2060.13	-52.66	-13	Pass	1080
3000	20000	1	RMS	3763.045	-49.01	-13	Pass	17000

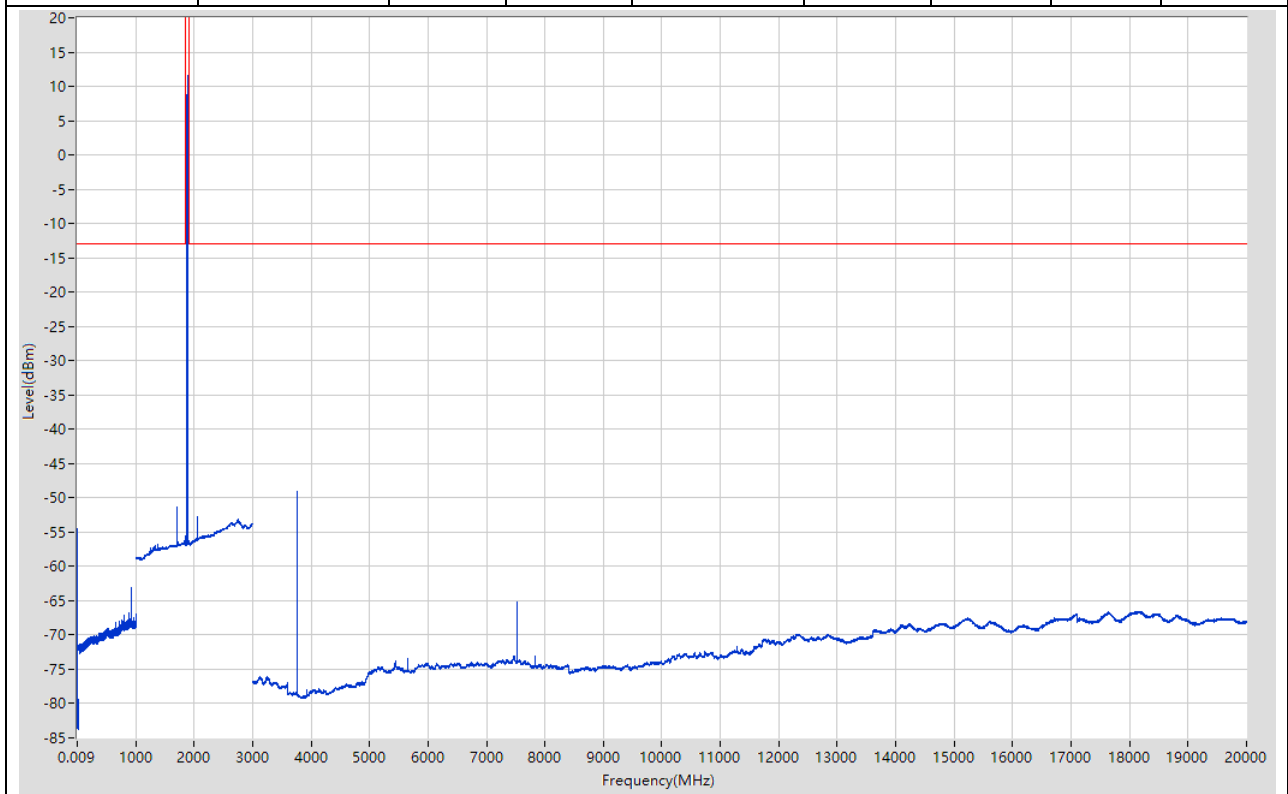


5.5. LTE-M1 Band2 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.56	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.37	-13	Pass	2985
30	1000	0.1	RMS	998.4	-65.19	-13	Pass	9700
1000	1840	1	RMS	1727.867	-49.62	-13	Pass	840
1840	1920	1	RMS	1909.867	12.24	60	Pass	601
1920	3000	1	RMS	2091.158	-50.2	-13	Pass	1080
3000	20000	1	RMS	18099.888	-66.61	-13	Pass	17000

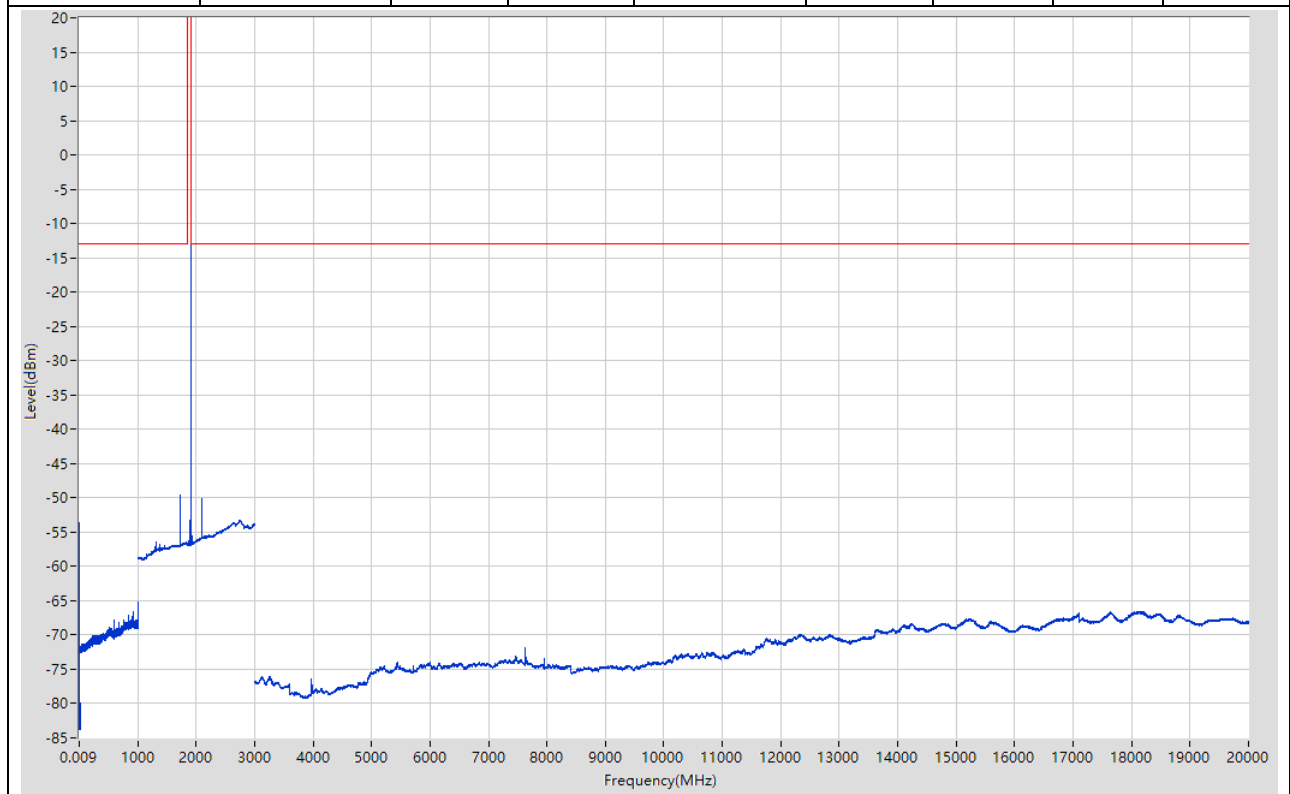


5.6. LTE-M1 Band2 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.09	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.98	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.77	-13	Pass	9700
1000	1840	1	RMS	1834.994	-54.97	-13	Pass	840
1840	1920	1	RMS	1854.533	11.6	60	Pass	601
1920	3000	1	RMS	2746.766	-53.24	-13	Pass	1080
3000	20000	1	RMS	3709.042	-51.1	-13	Pass	17000

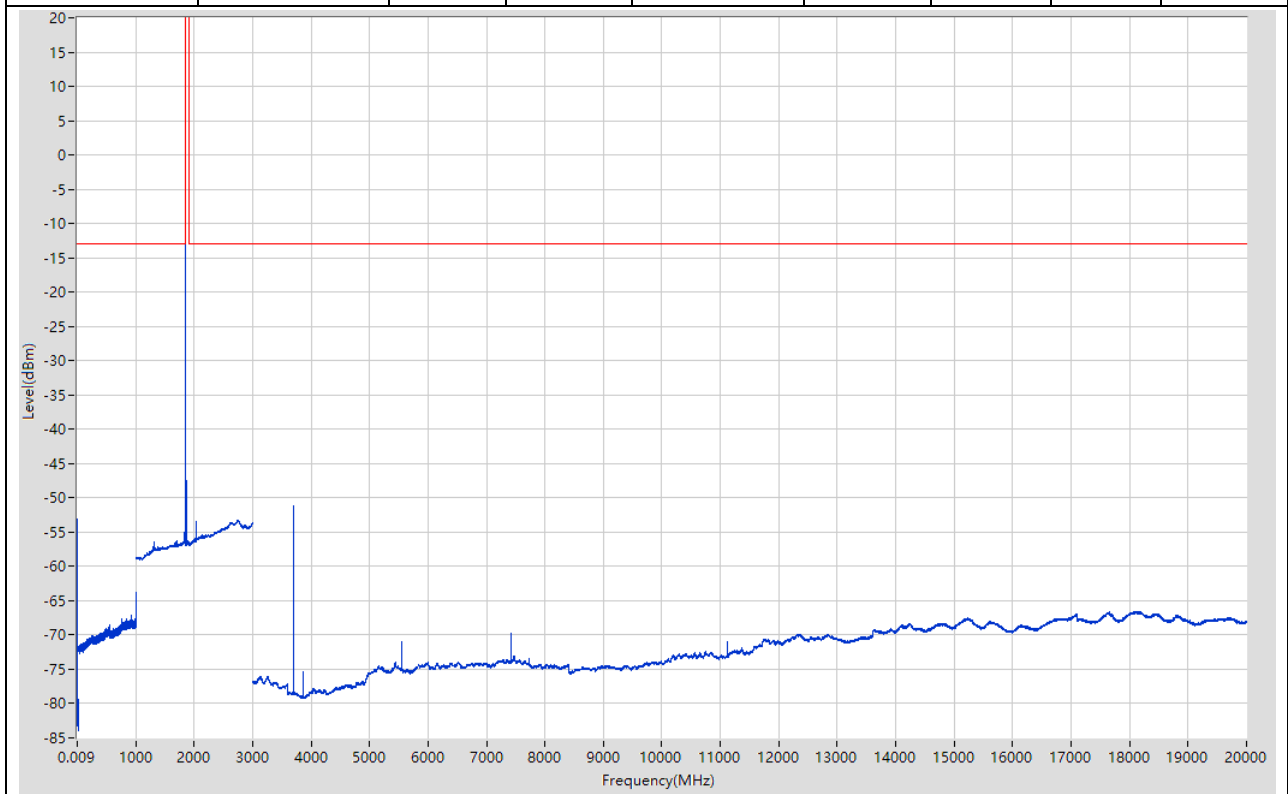


5.7. LTE-M1 Band2 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.82	-13	Pass	601
0.15	30	0.01	RMS	0.17	-57.66	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.8	-13	Pass	9700
1000	1840	1	RMS	1699.833	-53.87	-13	Pass	840
1840	1920	1	RMS	1882.267	11.8	60	Pass	601
1920	3000	1	RMS	2744.764	-53.22	-13	Pass	1080
3000	20000	1	RMS	7529.266	-64.2	-13	Pass	17000

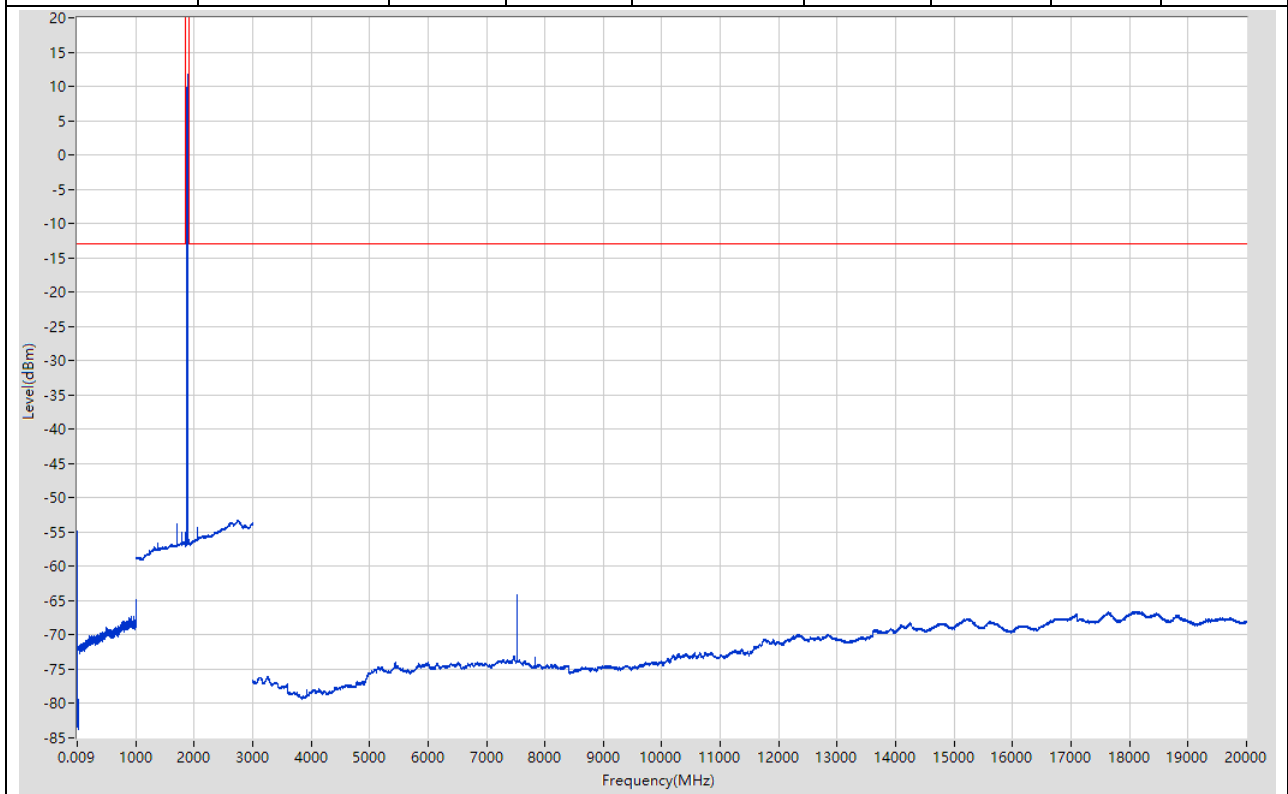


5.8. LTE-M1 Band2 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.81	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.66	-13	Pass	9700
1000	1840	1	RMS	1726.865	-50.93	-13	Pass	840
1840	1920	1	RMS	1909.6	12.21	60	Pass	601
1920	3000	1	RMS	2092.159	-51.01	-13	Pass	1080
3000	20000	1	RMS	3819.048	-50.79	-13	Pass	17000

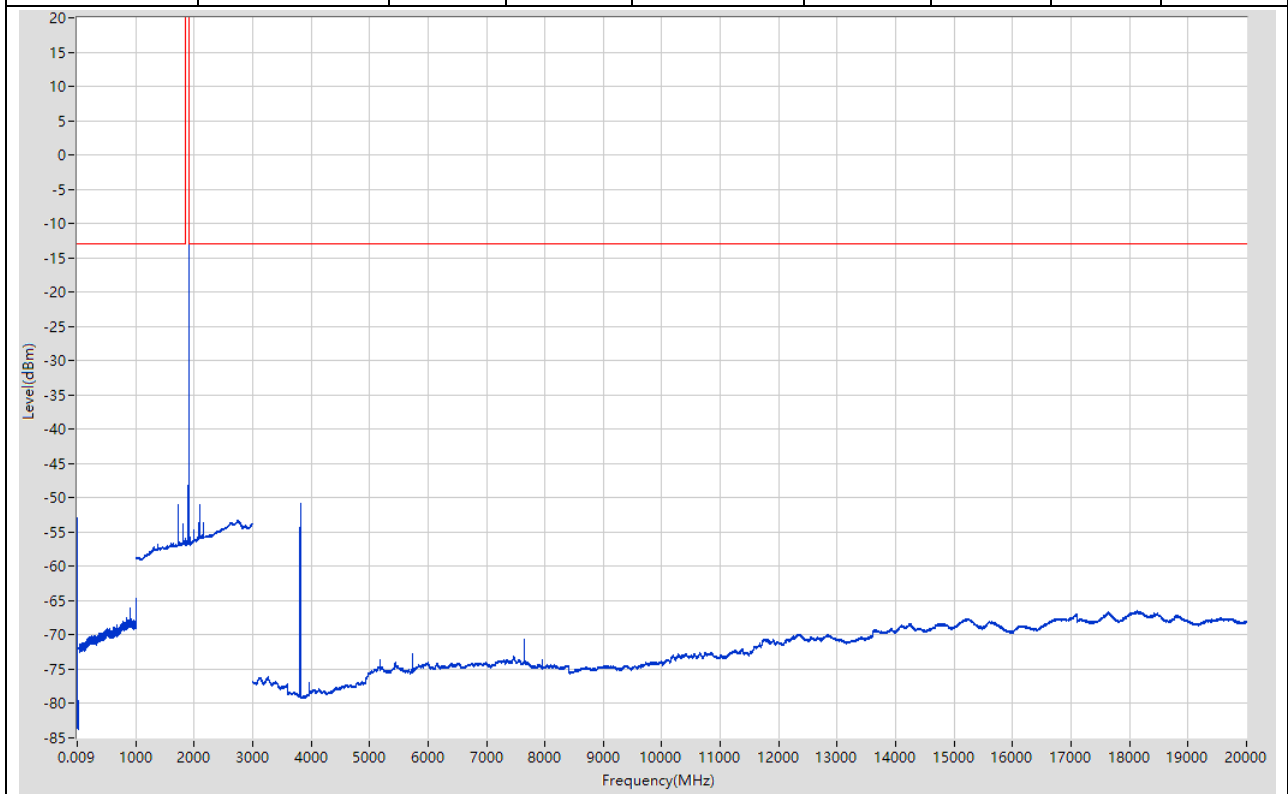


5.9. LTE-M1 Band2 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.39	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.54	-13	Pass	9700
1000	1840	1	RMS	1674.803	-53.28	-13	Pass	840
1840	1920	1	RMS	1859.333	11.58	60	Pass	601
1920	3000	1	RMS	2036.108	-50.38	-13	Pass	1080
3000	20000	1	RMS	3718.042	-60.73	-13	Pass	17000

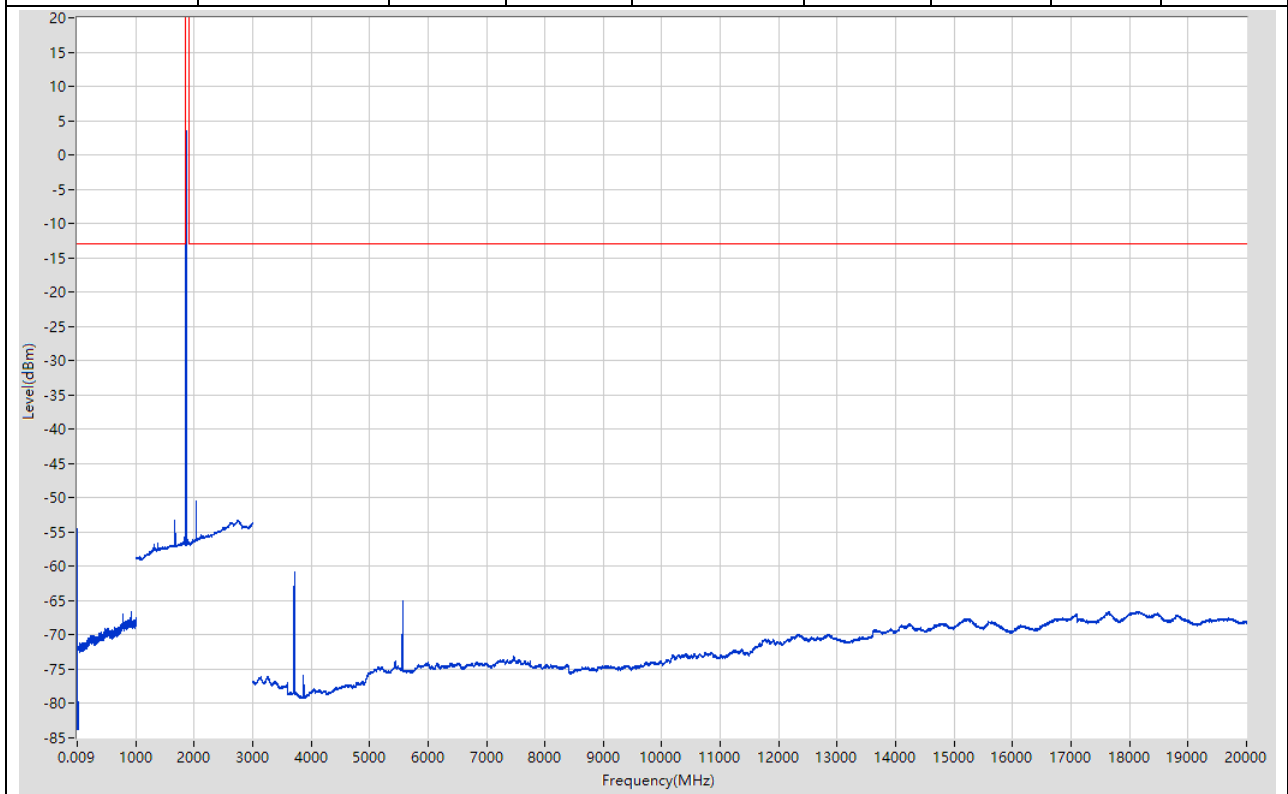


5.10. LTE-M1 Band2 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.15	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.6	-13	Pass	2985
30	1000	0.1	RMS	921.692	-66.24	-13	Pass	9700
1000	1840	1	RMS	1697.831	-52.57	-13	Pass	840
1840	1920	1	RMS	1884.4	11.95	60	Pass	601
1920	3000	1	RMS	2064.133	-51.71	-13	Pass	1080
3000	20000	1	RMS	3752.044	-50.03	-13	Pass	17000

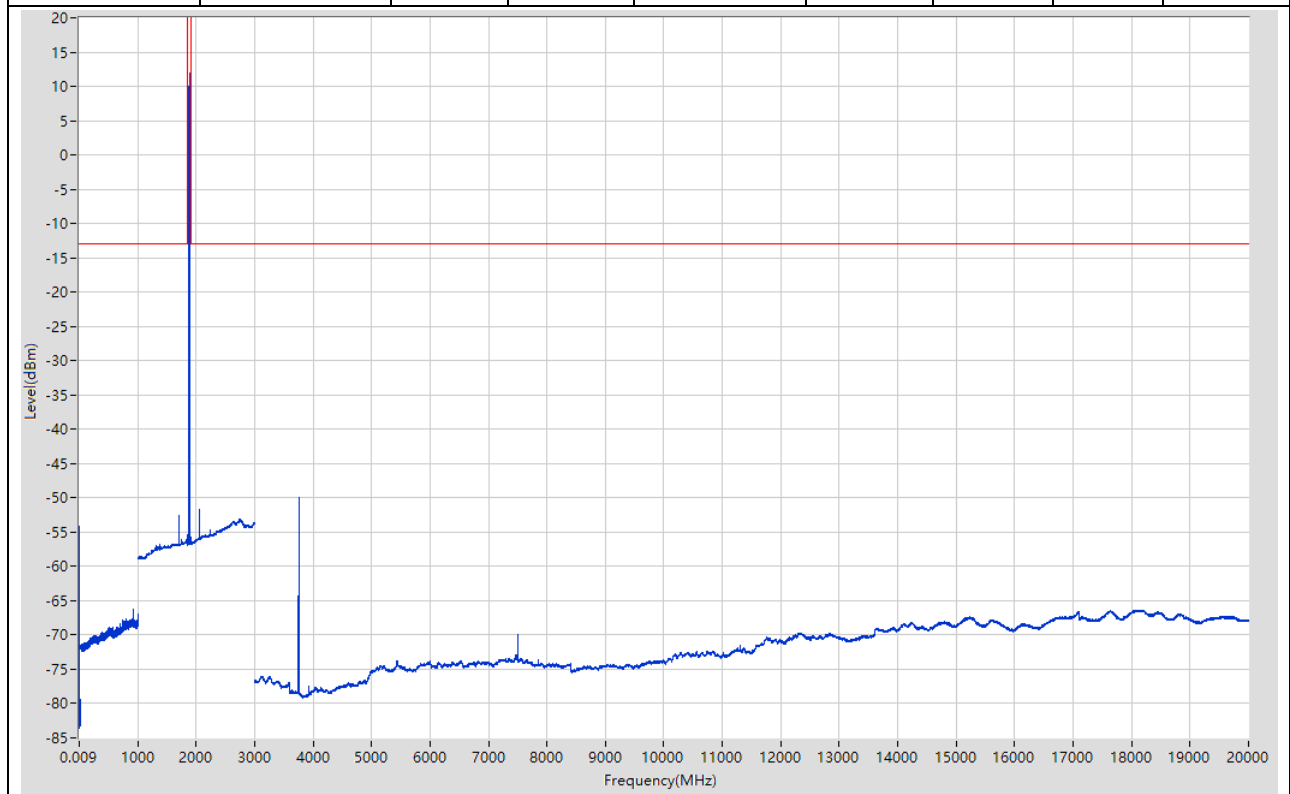


5.11. LTE-M1 Band2 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.05	-13	Pass	2985
30	1000	0.1	RMS	998.5	-67.02	-13	Pass	9700
1000	1840	1	RMS	1727.867	-48.47	-13	Pass	840
1840	1920	1	RMS	1909.467	12.12	60	Pass	601
1920	3000	1	RMS	2091.158	-50.46	-13	Pass	1080
3000	20000	1	RMS	18148.891	-66.33	-13	Pass	17000

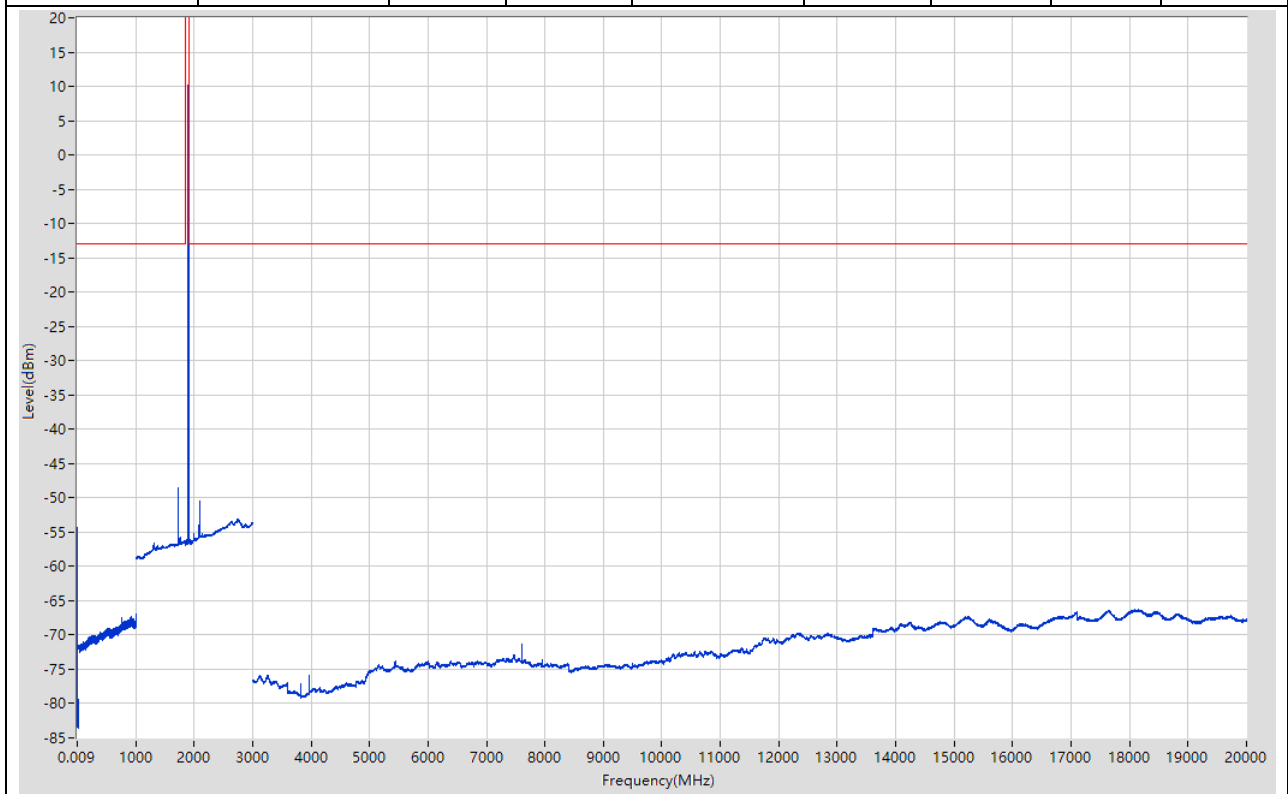


5.12. LTE-M1 Band2 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53	-13	Pass	601
0.15	30	0.01	RMS	0.17	-58.52	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.15	-13	Pass	9700
1000	1840	1	RMS	1686.818	-51.11	-13	Pass	840
1840	1920	1	RMS	1864.133	11.78	60	Pass	601
1920	3000	1	RMS	2744.764	-53.12	-13	Pass	1080
3000	20000	1	RMS	3703.041	-49.73	-13	Pass	17000

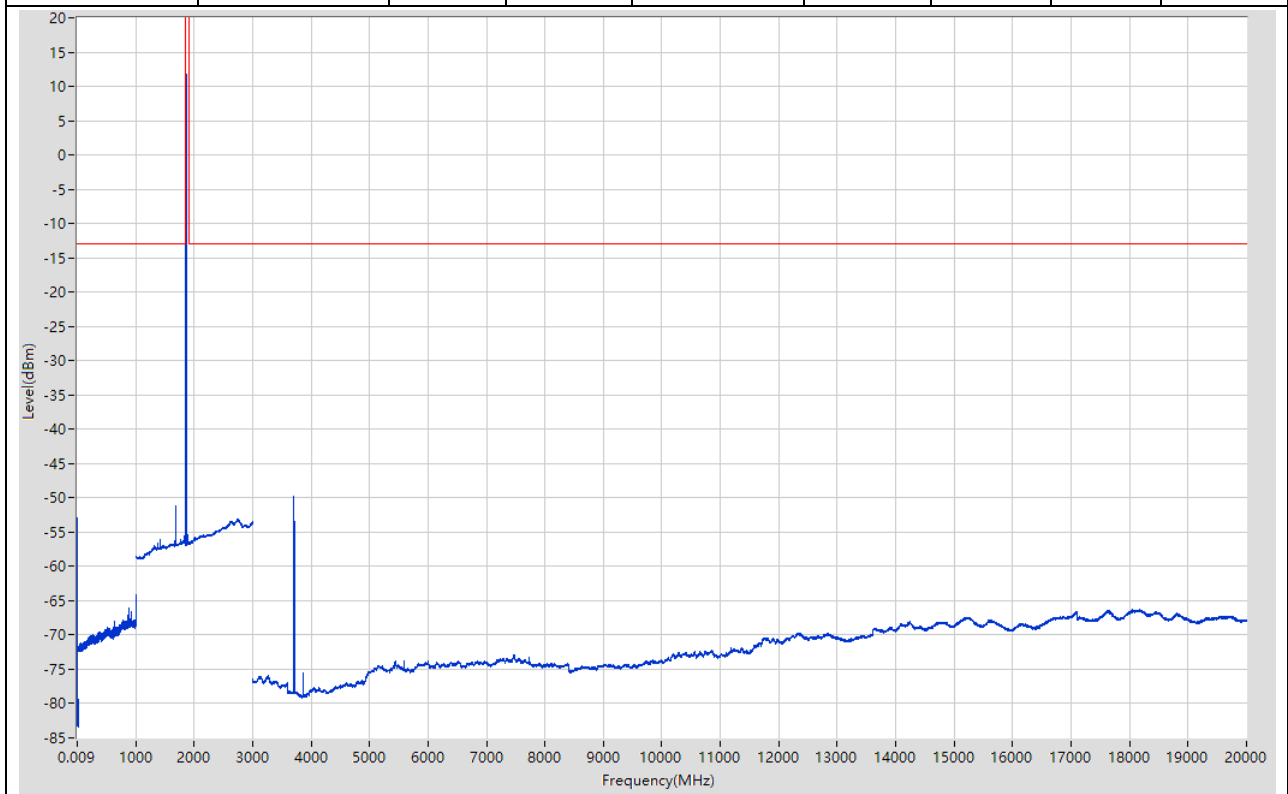


5.13. LTE-M1 Band2 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.45	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.91	-13	Pass	2985
30	1000	0.1	RMS	921.492	-66.58	-13	Pass	9700
1000	1840	1	RMS	1706.841	-50.37	-13	Pass	840
1840	1920	1	RMS	1886.533	11.92	60	Pass	601
1920	3000	1	RMS	2066.135	-52.03	-13	Pass	1080
3000	20000	1	RMS	18187.893	-66.35	-13	Pass	17000

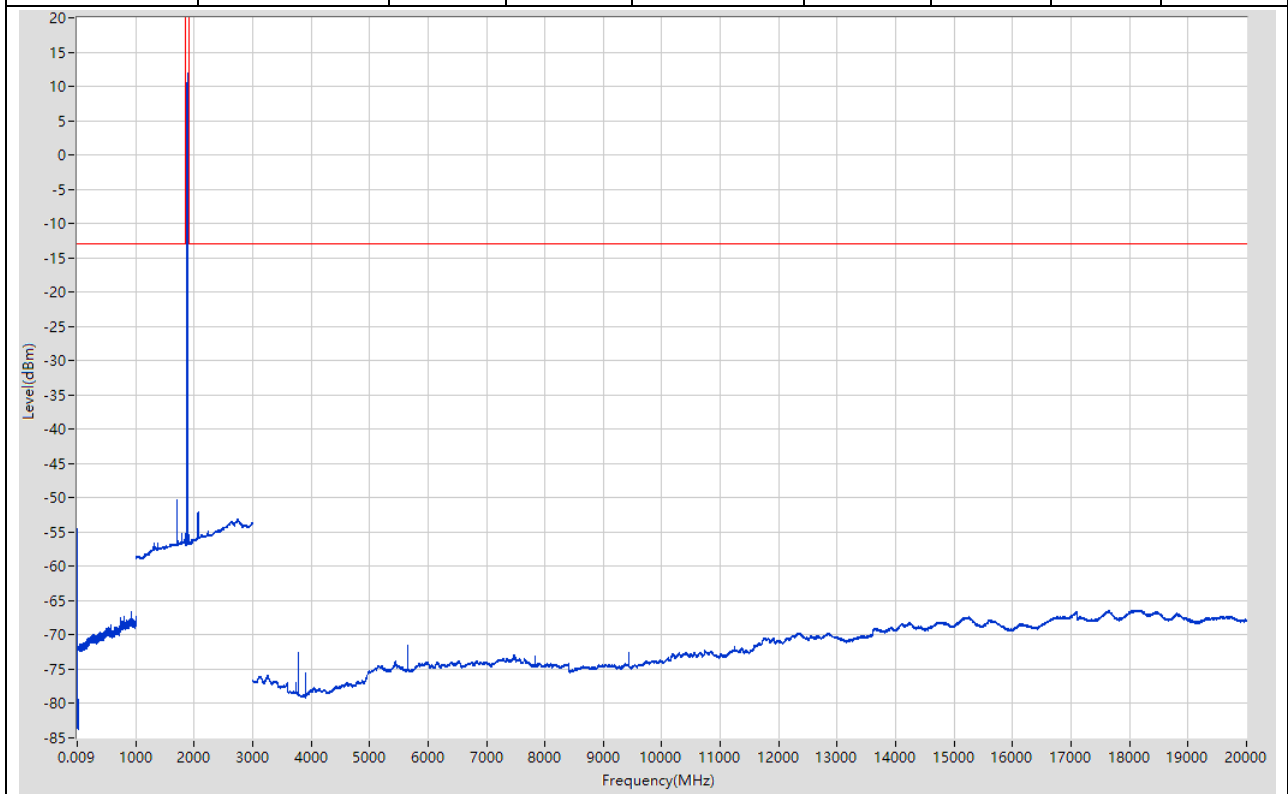


5.14. LTE-M1 Band2 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.8	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.71	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.05	-13	Pass	9700
1000	1840	1	RMS	1726.865	-50.13	-13	Pass	840
1840	1920	1	RMS	1909.2	12	60	Pass	601
1920	3000	1	RMS	2746.766	-53.16	-13	Pass	1080
3000	20000	1	RMS	5181.128	-63.11	-13	Pass	17000

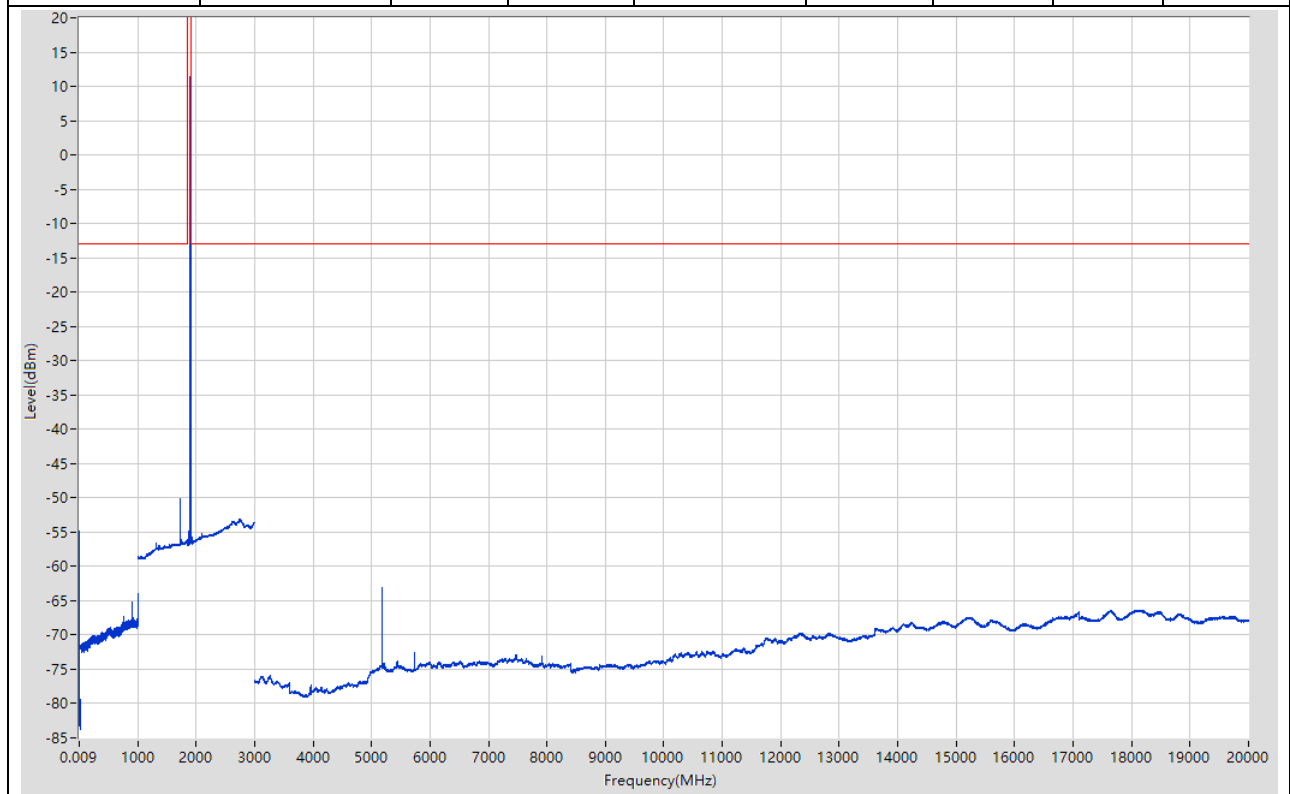


5.15. LTE-M1 Band2 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.33	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.36	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.7	-13	Pass	9700
1000	1840	1	RMS	1690.822	-50.22	-13	Pass	840
1840	1920	1	RMS	1868.8	12.03	60	Pass	601
1920	3000	1	RMS	2741.761	-53.07	-13	Pass	1080
3000	20000	1	RMS	3737.043	-57.31	-13	Pass	17000

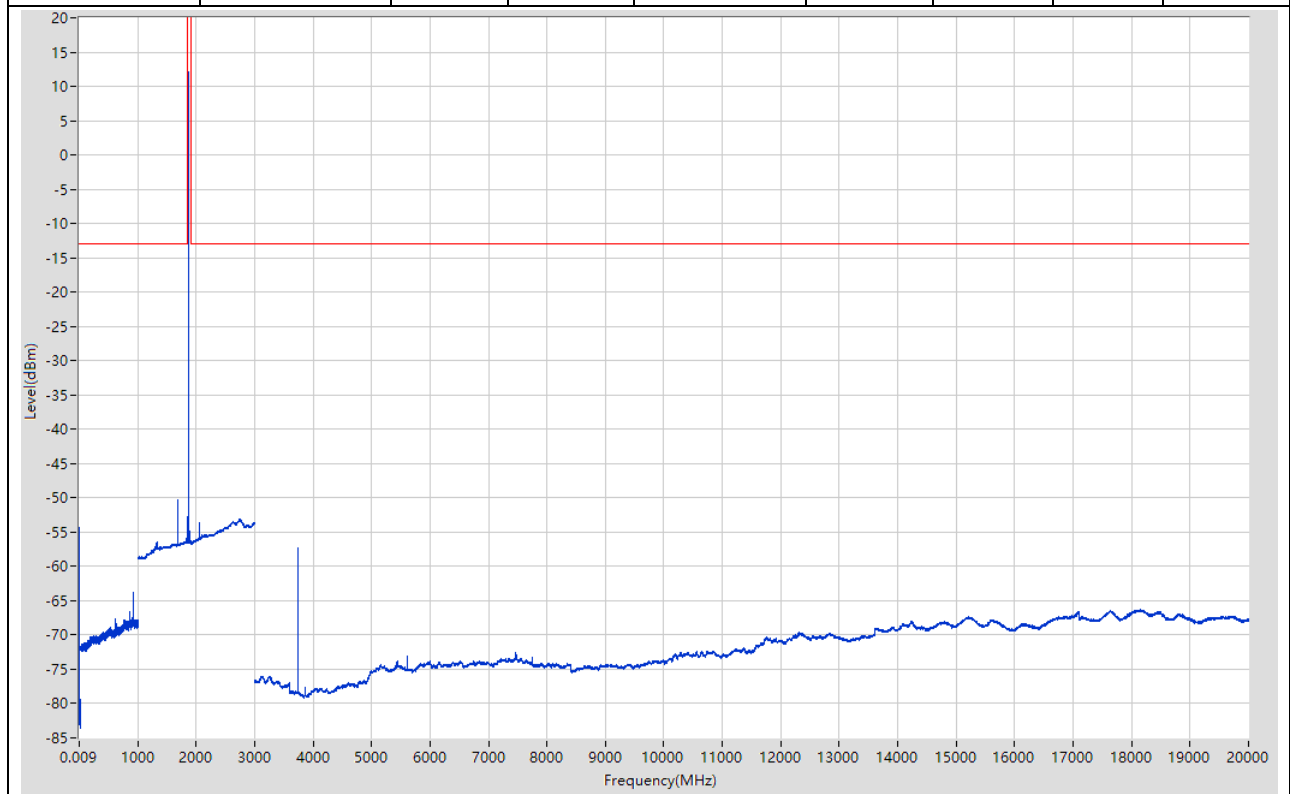


5.16. LTE-M1 Band2 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.81	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.43	-13	Pass	9700
1000	1840	1	RMS	1708.844	-49.41	-13	Pass	840
1840	1920	1	RMS	1888.8	13.4	60	Pass	601
1920	3000	1	RMS	2068.137	-51.28	-13	Pass	1080
3000	20000	1	RMS	3778.046	-49.57	-13	Pass	17000

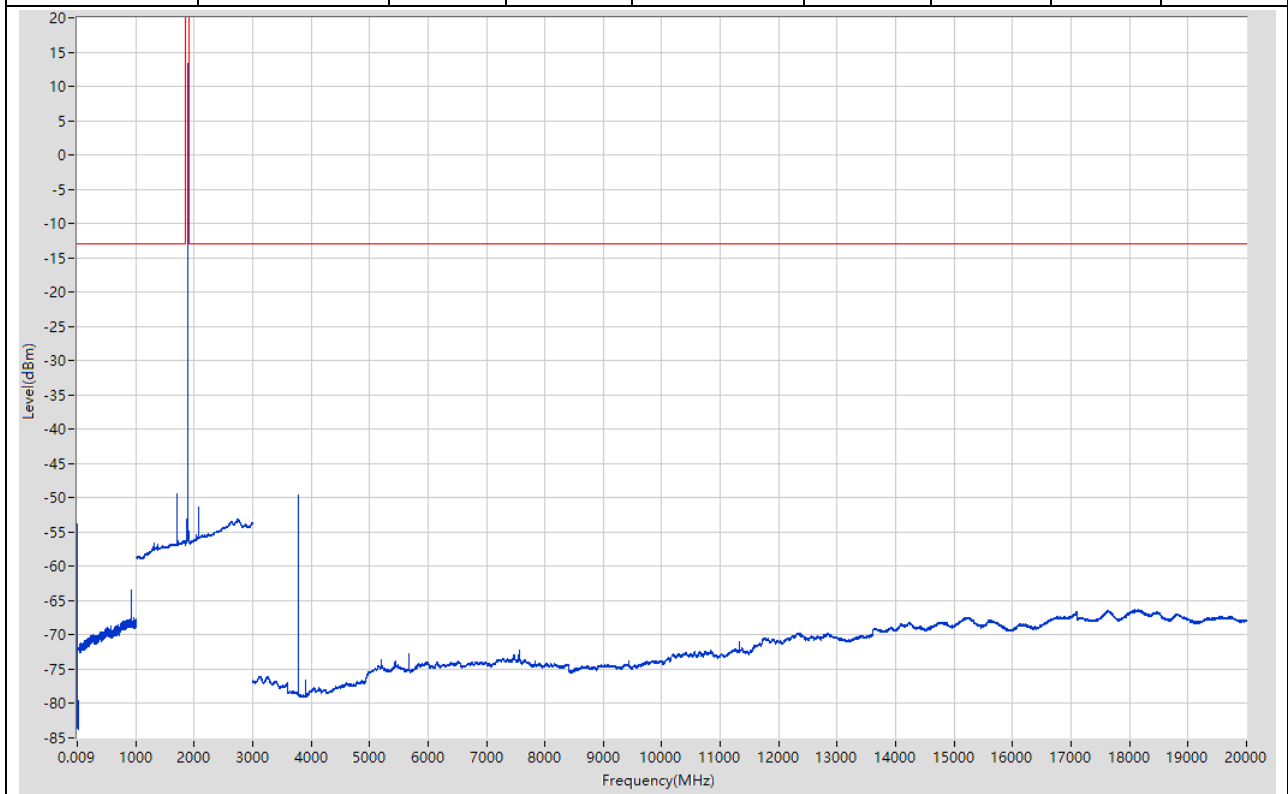


5.17. LTE-M1 Band2 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.03	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.68	-13	Pass	9700
1000	1840	1	RMS	1707.843	-51.82	-13	Pass	840
1840	1920	1	RMS	1889.067	12	60	Pass	601
1920	3000	1	RMS	2068.137	-51.23	-13	Pass	1080
3000	20000	1	RMS	3776.046	-46.88	-13	Pass	17000

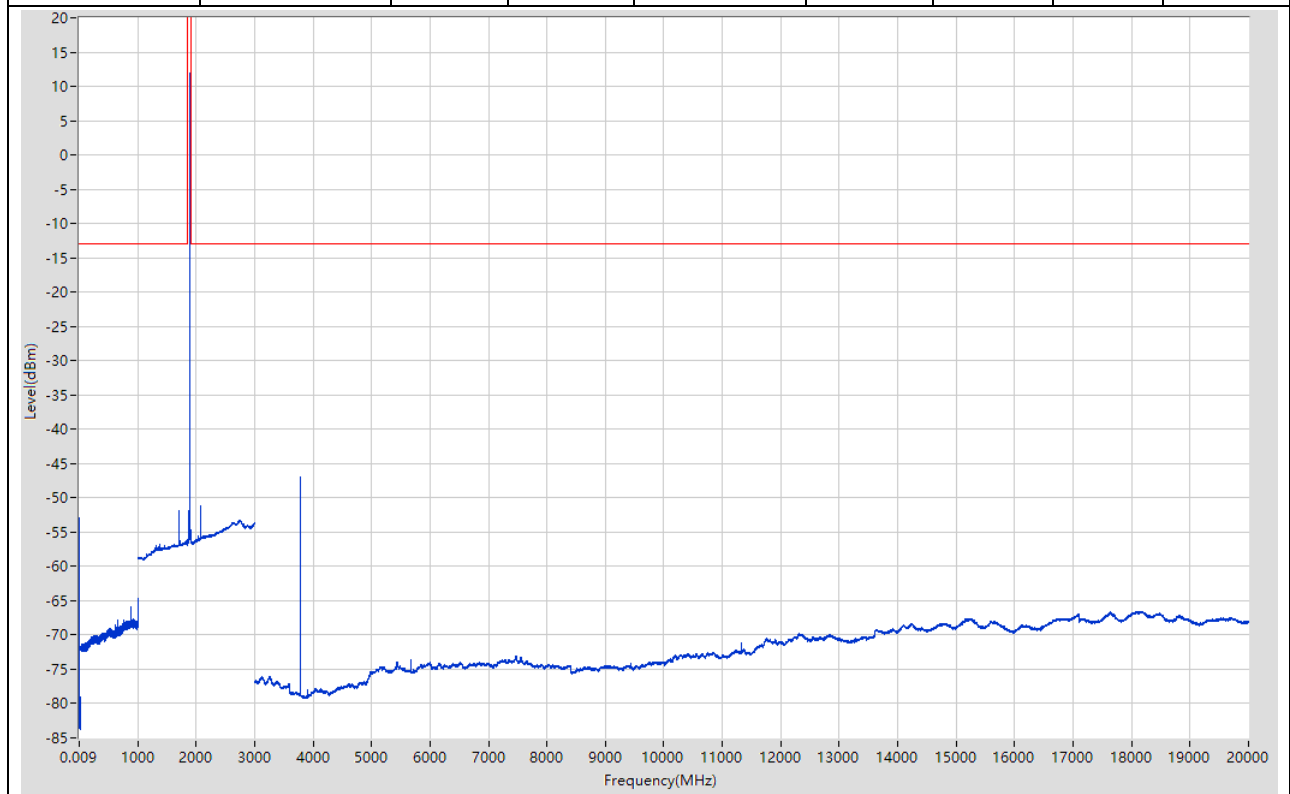

5.18. LTE-M1 Band2 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.91	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.51	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.32	-13	Pass	9700
1000	1840	1	RMS	1726.865	-48.56	-13	Pass	840
1840	1920	1	RMS	1908.533	12.73	60	Pass	601
1920	3000	1	RMS	2090.158	-52.79	-13	Pass	1080
3000	20000	1	RMS	3818.048	-52.07	-13	Pass	17000

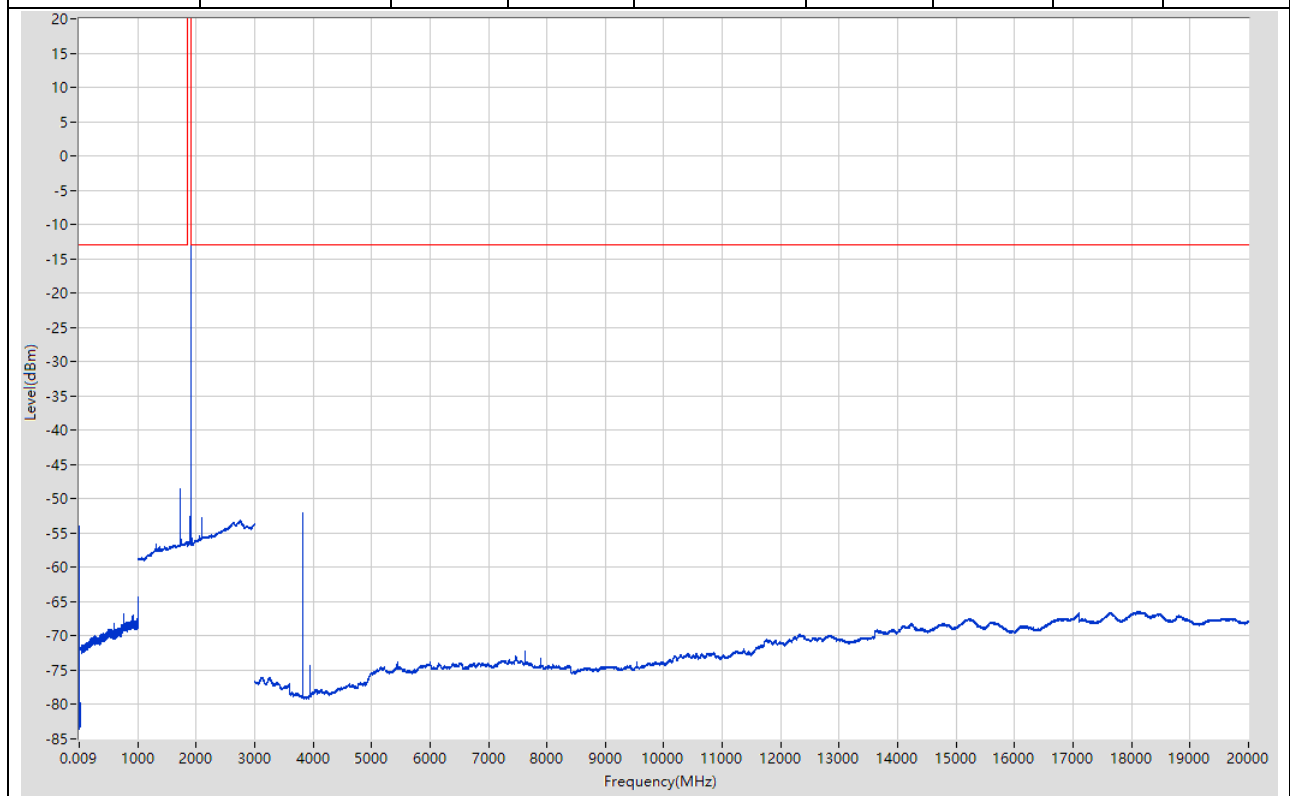

6. LTE-M1_Band2_16QAM


6.1. LTE-M1 Band2 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.44	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.83	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.87	-13	Pass	9700
1000	1840	1	RMS	1674.803	-51.41	-13	Pass	840
1840	1920	1	RMS	1851.2	11.7	60	Pass	601
1920	3000	1	RMS	2028.1	-51.47	-13	Pass	1080
3000	20000	1	RMS	3702.041	-53.45	-13	Pass	17000

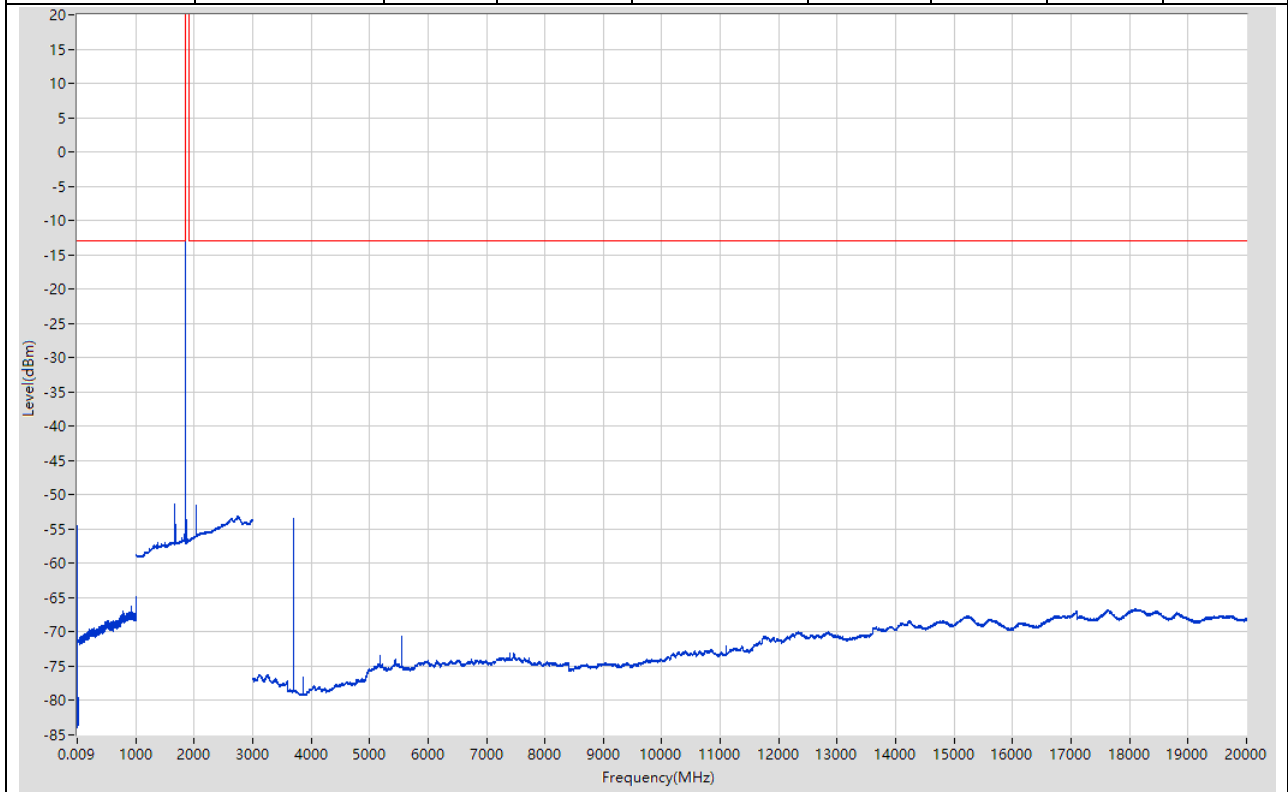


6.2. LTE-M1 Band2 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.85	-13	Pass	2985
30	1000	0.1	RMS	921.592	-62.95	-13	Pass	9700
1000	1840	1	RMS	1700.834	-52.2	-13	Pass	840
1840	1920	1	RMS	1880.533	12.32	60	Pass	601
1920	3000	1	RMS	2745.765	-53.11	-13	Pass	1080
3000	20000	1	RMS	3760.045	-54.32	-13	Pass	17000

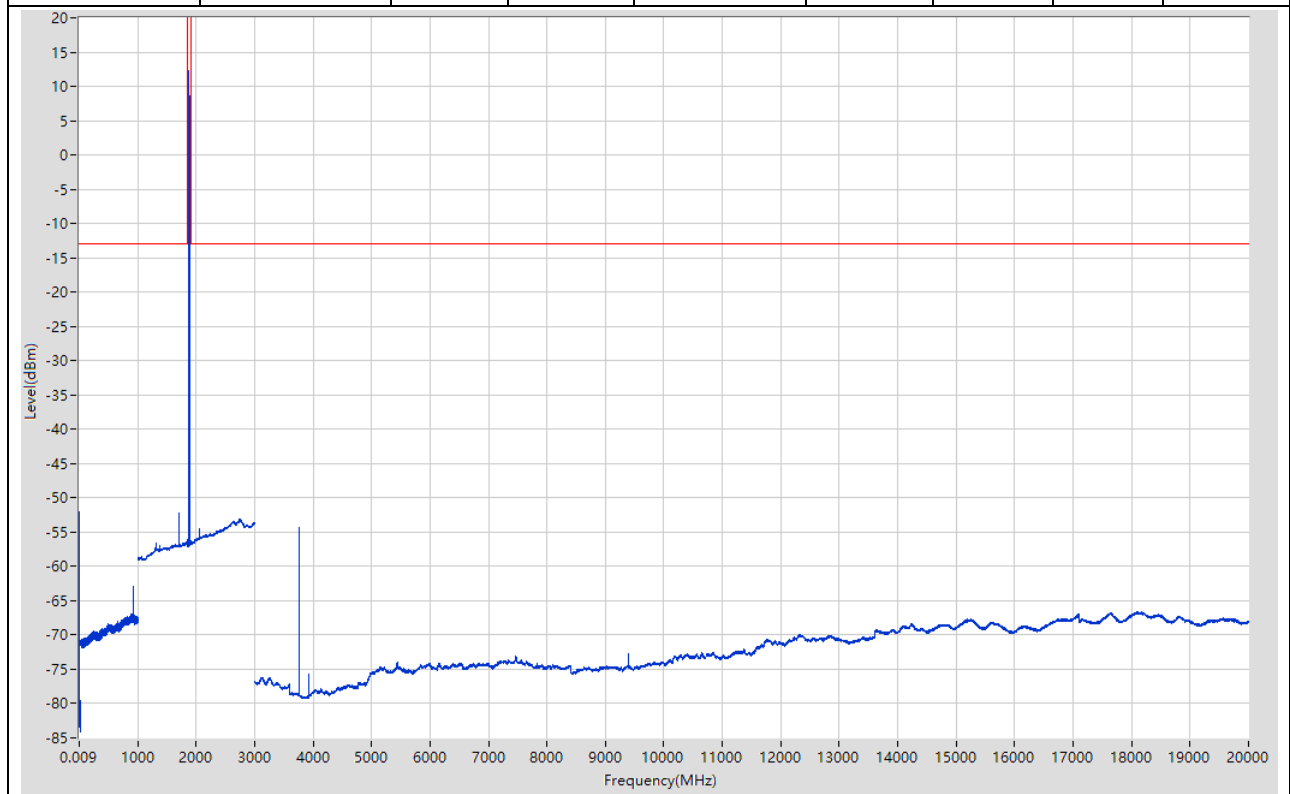


6.3. LTE-M1 Band2 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.45	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.79	-13	Pass	2985
30	1000	0.1	RMS	998.5	-66.96	-13	Pass	9700
1000	1840	1	RMS	1727.867	-53.03	-13	Pass	840
1840	1920	1	RMS	1909.6	13.06	60	Pass	601
1920	3000	1	RMS	2748.767	-53.08	-13	Pass	1080
3000	20000	1	RMS	3819.048	-64.92	-13	Pass	17000

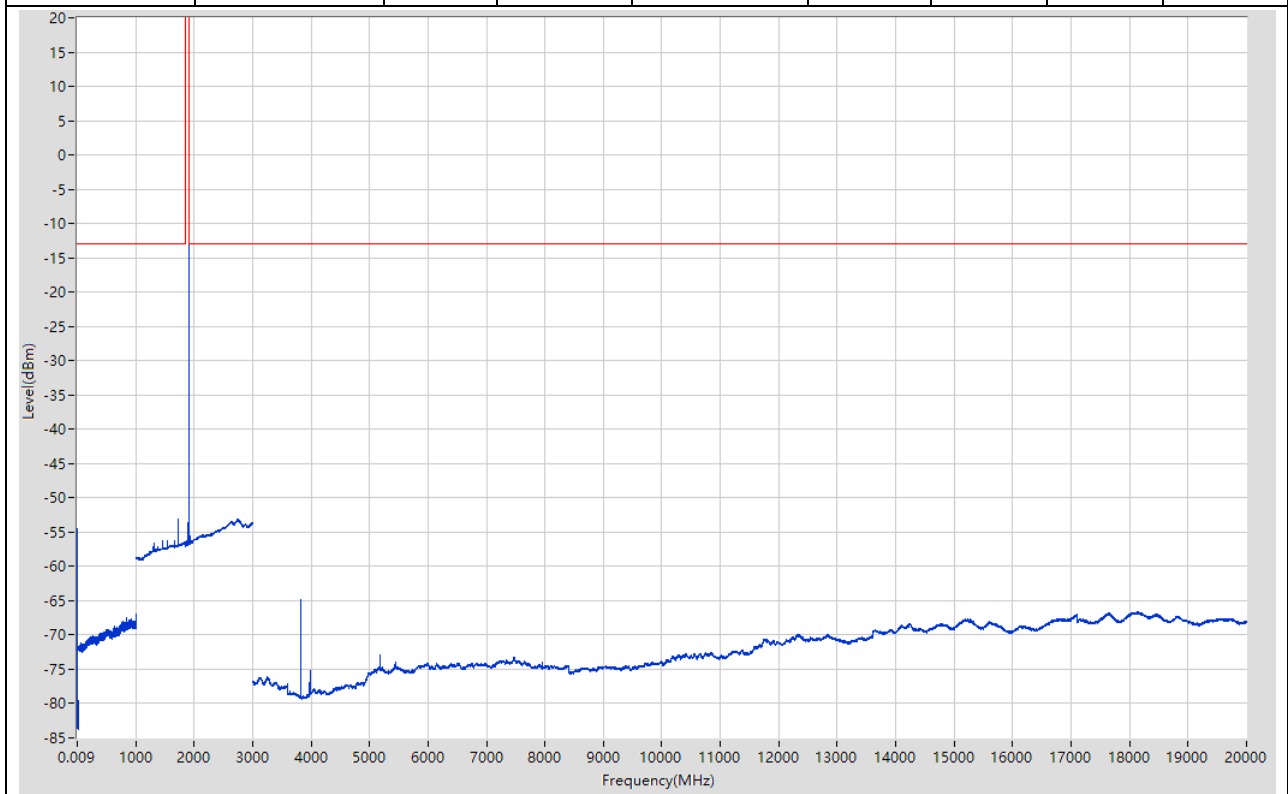


6.4. LTE-M1 Band2 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.98	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.08	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.34	-13	Pass	9700
1000	1840	1	RMS	1675.805	-51.85	-13	Pass	840
1840	1920	1	RMS	1852.933	10.98	60	Pass	601
1920	3000	1	RMS	2029.101	-50.56	-13	Pass	1080
3000	20000	1	RMS	18134.89	-66.66	-13	Pass	17000

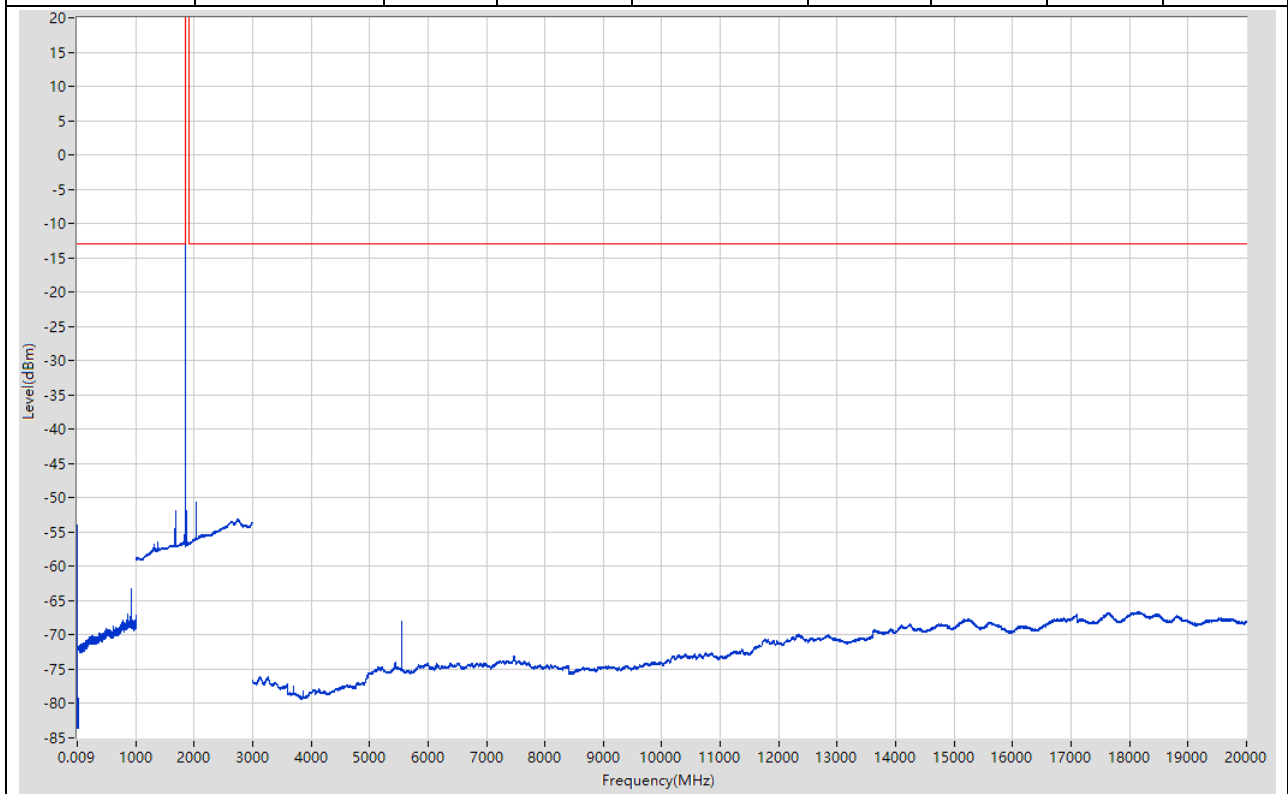


6.5. LTE-M1 Band2 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.15	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.61	-13	Pass	2985
30	1000	0.1	RMS	998.4	-65.27	-13	Pass	9700
1000	1840	1	RMS	1702.837	-51.22	-13	Pass	840
1840	1920	1	RMS	1881.067	12.08	60	Pass	601
1920	3000	1	RMS	2749.768	-53.05	-13	Pass	1080
3000	20000	1	RMS	3761.045	-54.35	-13	Pass	17000

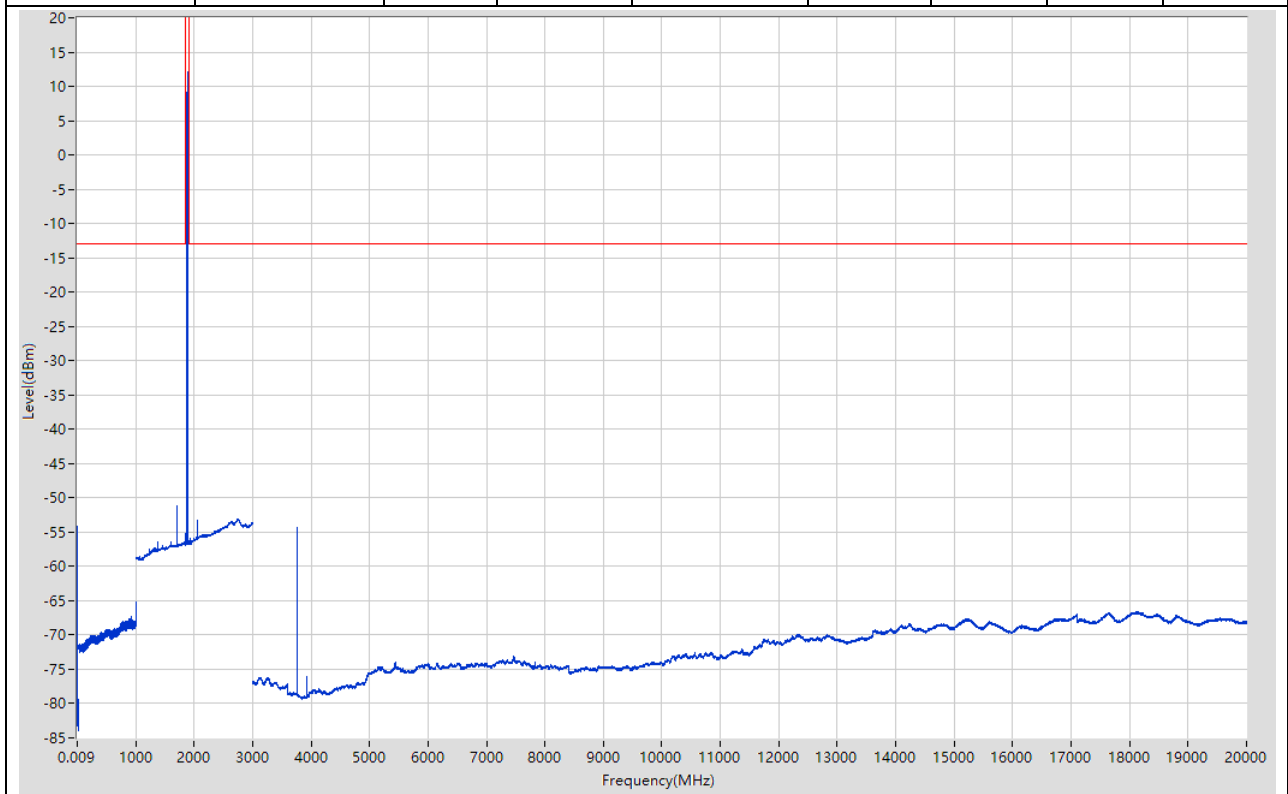


6.6. LTE-M1 Band2 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.59	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.11	-13	Pass	2985
30	1000	0.1	RMS	909.291	-67.54	-13	Pass	9700
1000	1840	1	RMS	1727.867	-48.29	-13	Pass	840
1840	1920	1	RMS	1909.867	11.95	60	Pass	601
1920	3000	1	RMS	2092.159	-50.16	-13	Pass	1080
3000	20000	1	RMS	3819.048	-52.94	-13	Pass	17000

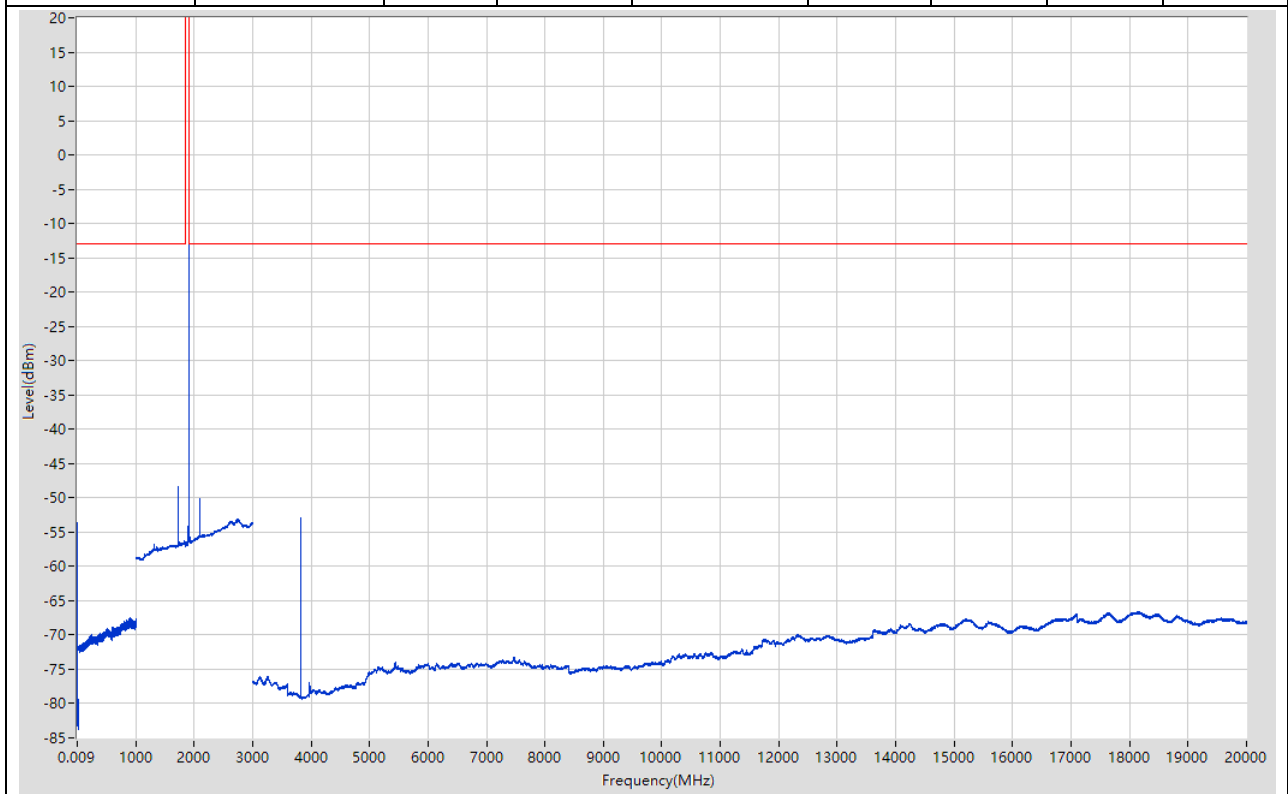


6.7. LTE-M1 Band2 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.05	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.71	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.64	-13	Pass	9700
1000	1840	1	RMS	1677.807	-53.04	-13	Pass	840
1840	1920	1	RMS	1854.533	11.42	60	Pass	601
1920	3000	1	RMS	2747.766	-53.05	-13	Pass	1080
3000	20000	1	RMS	3709.042	-52.43	-13	Pass	17000

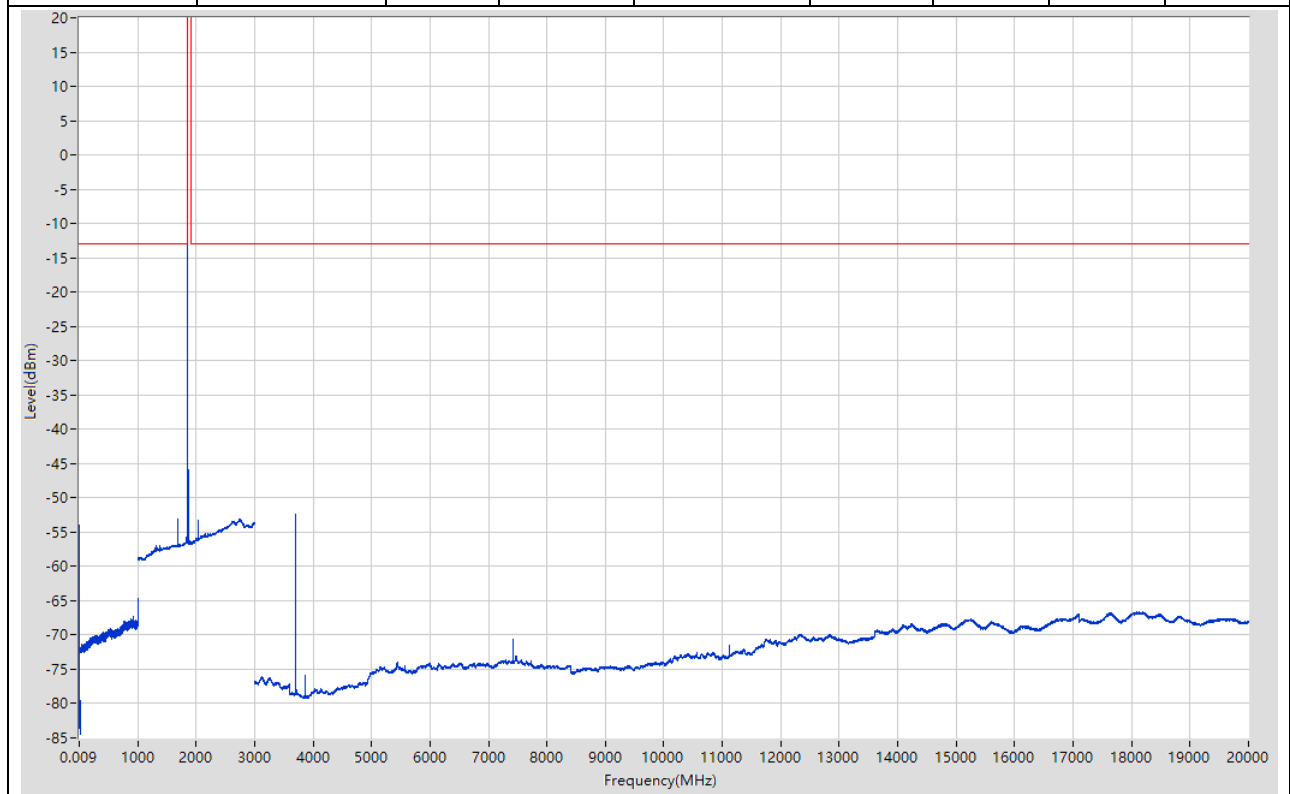


6.8. LTE-M1 Band2 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.86	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.16	-13	Pass	9700
1000	1840	1	RMS	1702.837	-52.14	-13	Pass	840
1840	1920	1	RMS	1881.867	12.64	60	Pass	601
1920	3000	1	RMS	2742.762	-53.09	-13	Pass	1080
3000	20000	1	RMS	3763.045	-58.43	-13	Pass	17000

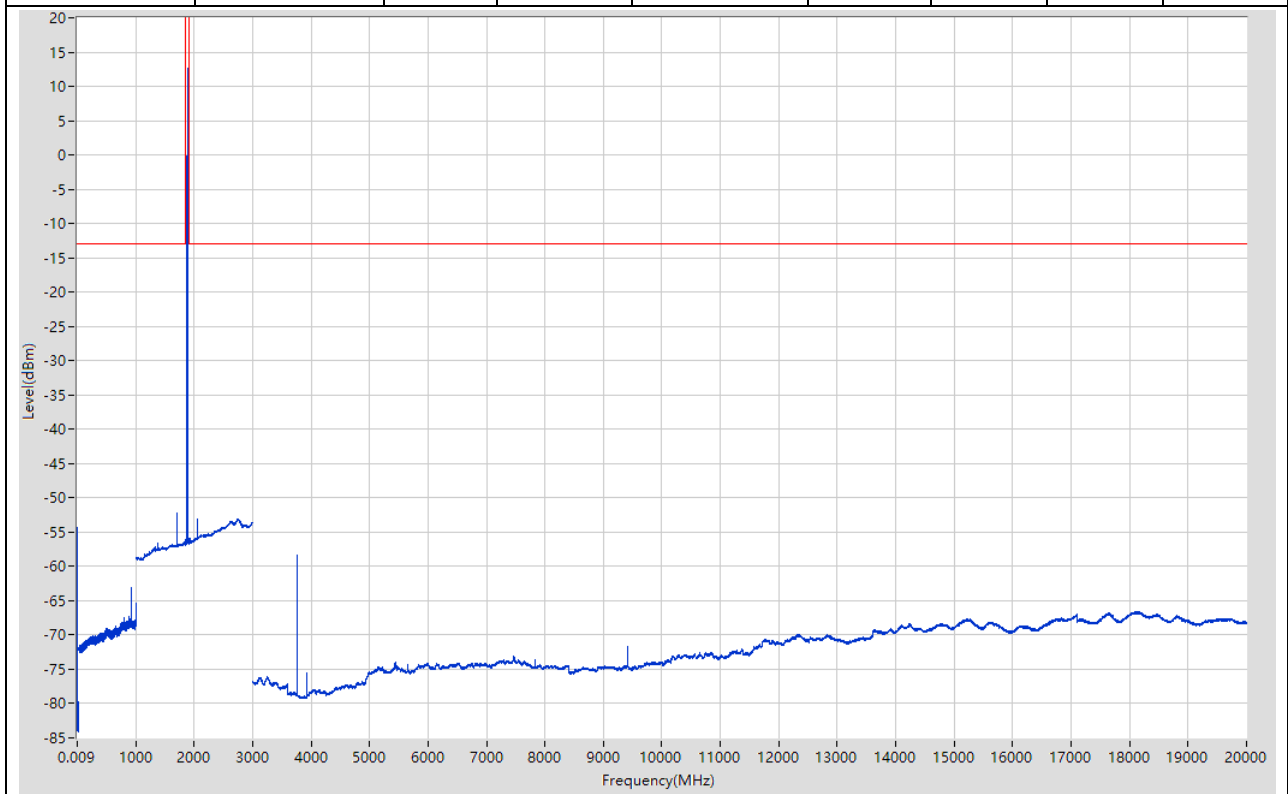


6.9. LTE-M1 Band2 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.35	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.24	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.55	-13	Pass	9700
1000	1840	1	RMS	1727.867	-48.63	-13	Pass	840
1840	1920	1	RMS	1909.733	12.06	60	Pass	601
1920	3000	1	RMS	2091.158	-52.25	-13	Pass	1080
3000	20000	1	RMS	3819.048	-57.54	-13	Pass	17000

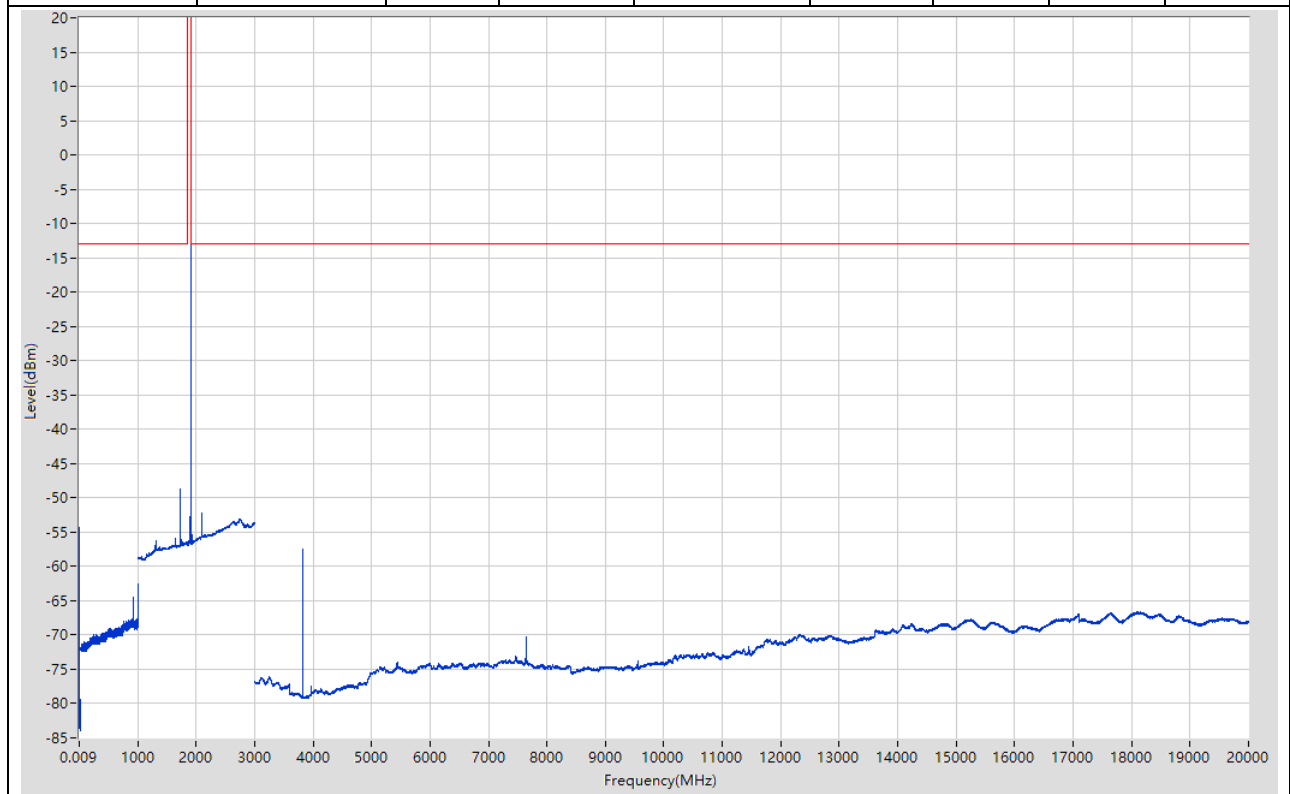


6.10. LTE-M1 Band2 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.06	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	1000	0.1	RMS	784.178	-66.87	-13	Pass	9700
1000	1840	1	RMS	1840	-54.66	-13	Pass	840
1840	1920	1	RMS	1859.333	12.31	60	Pass	601
1920	3000	1	RMS	2036.108	-51.36	-13	Pass	1080
3000	20000	1	RMS	18135.89	-66.62	-13	Pass	17000

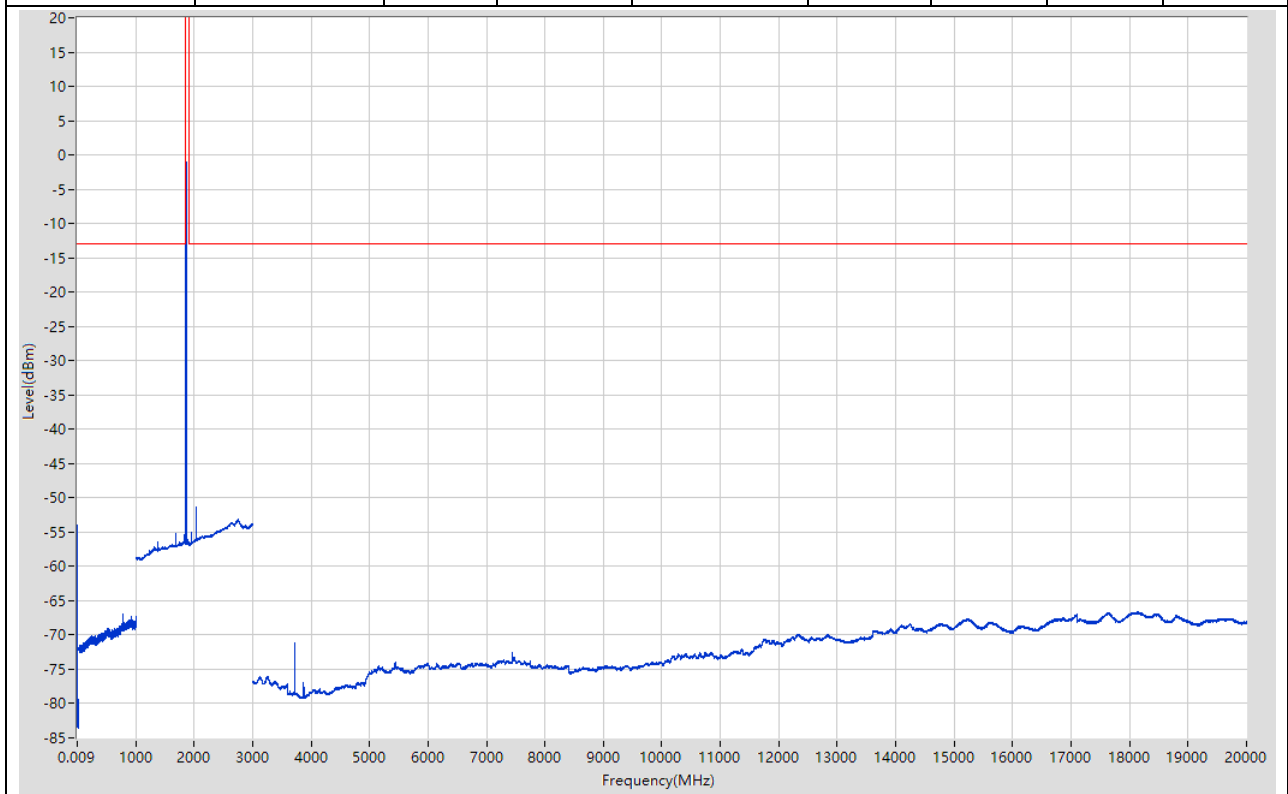


6.11. LTE-M1 Band2 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.87	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.74	-13	Pass	2985
30	1000	0.1	RMS	921.492	-67.24	-13	Pass	9700
1000	1840	1	RMS	1704.839	-50.22	-13	Pass	840
1840	1920	1	RMS	1884.4	11.92	60	Pass	601
1920	3000	1	RMS	2744.764	-53.21	-13	Pass	1080
3000	20000	1	RMS	3767.045	-50.9	-13	Pass	17000

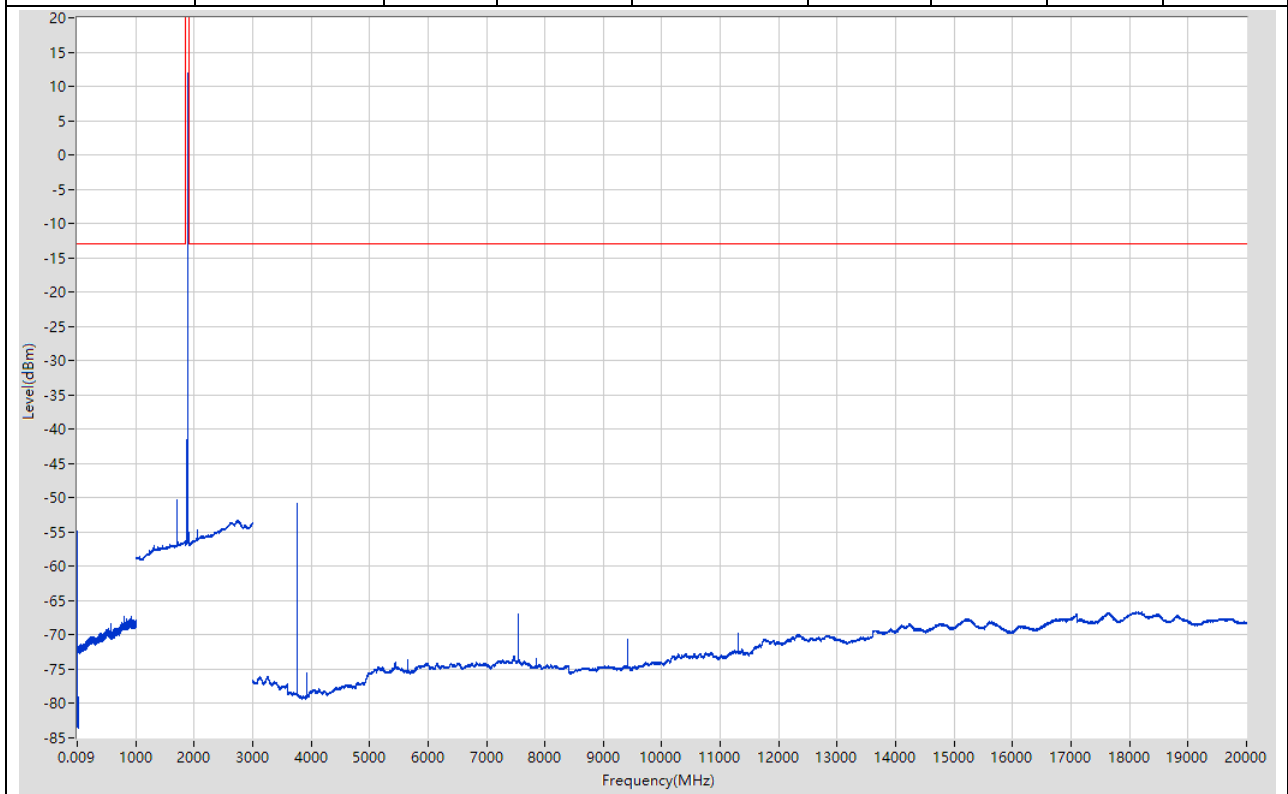


6.12. LTE-M1 Band2 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.22	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.88	-13	Pass	9700
1000	1840	1	RMS	1726.865	-50.08	-13	Pass	840
1840	1920	1	RMS	1909.067	12.66	60	Pass	601
1920	3000	1	RMS	2090.158	-53.09	-13	Pass	1080
3000	20000	1	RMS	3817.048	-54.25	-13	Pass	17000

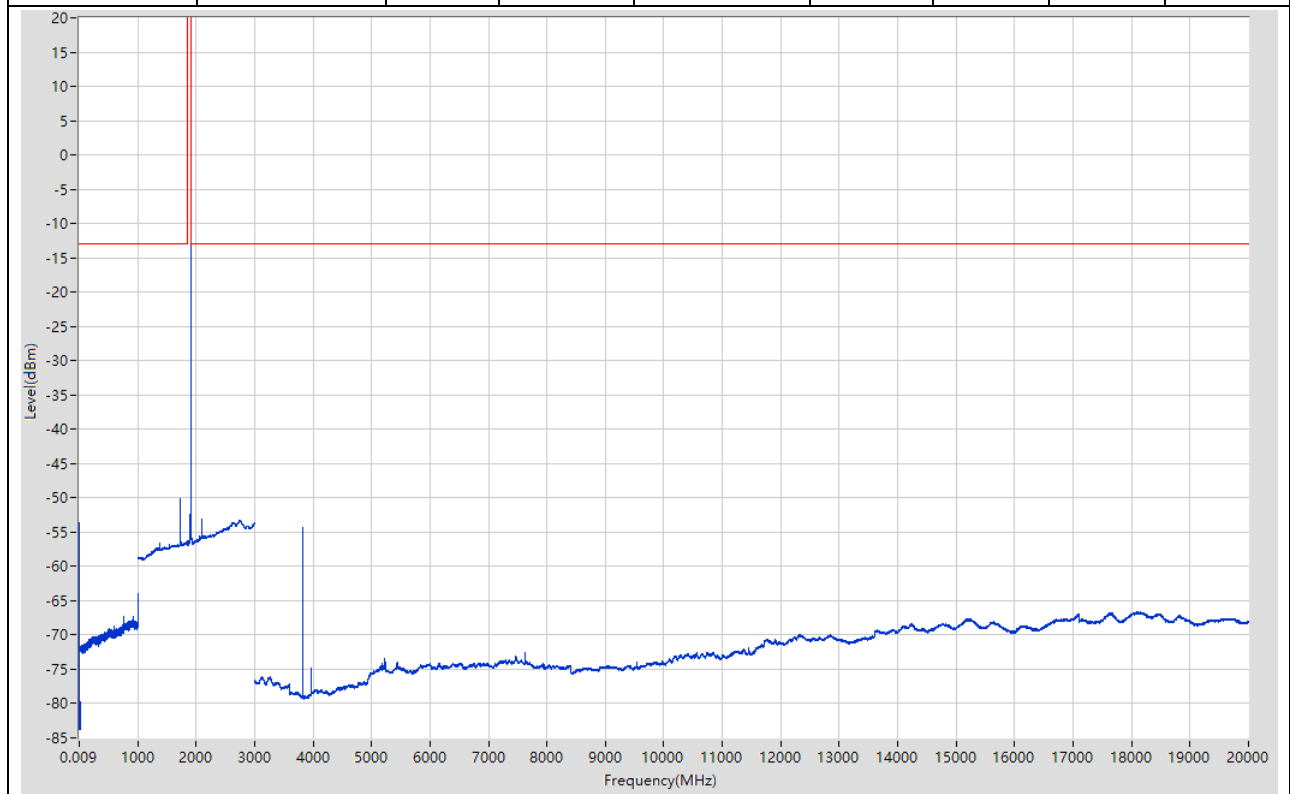


6.13. LTE-M1 Band2 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55.05	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.42	-13	Pass	2985
30	1000	0.1	RMS	998.4	-65.37	-13	Pass	9700
1000	1840	1	RMS	1685.816	-51.46	-13	Pass	840
1840	1920	1	RMS	1864.267	11.52	60	Pass	601
1920	3000	1	RMS	2749.768	-53.15	-13	Pass	1080
3000	20000	1	RMS	3727.043	-65.42	-13	Pass	17000

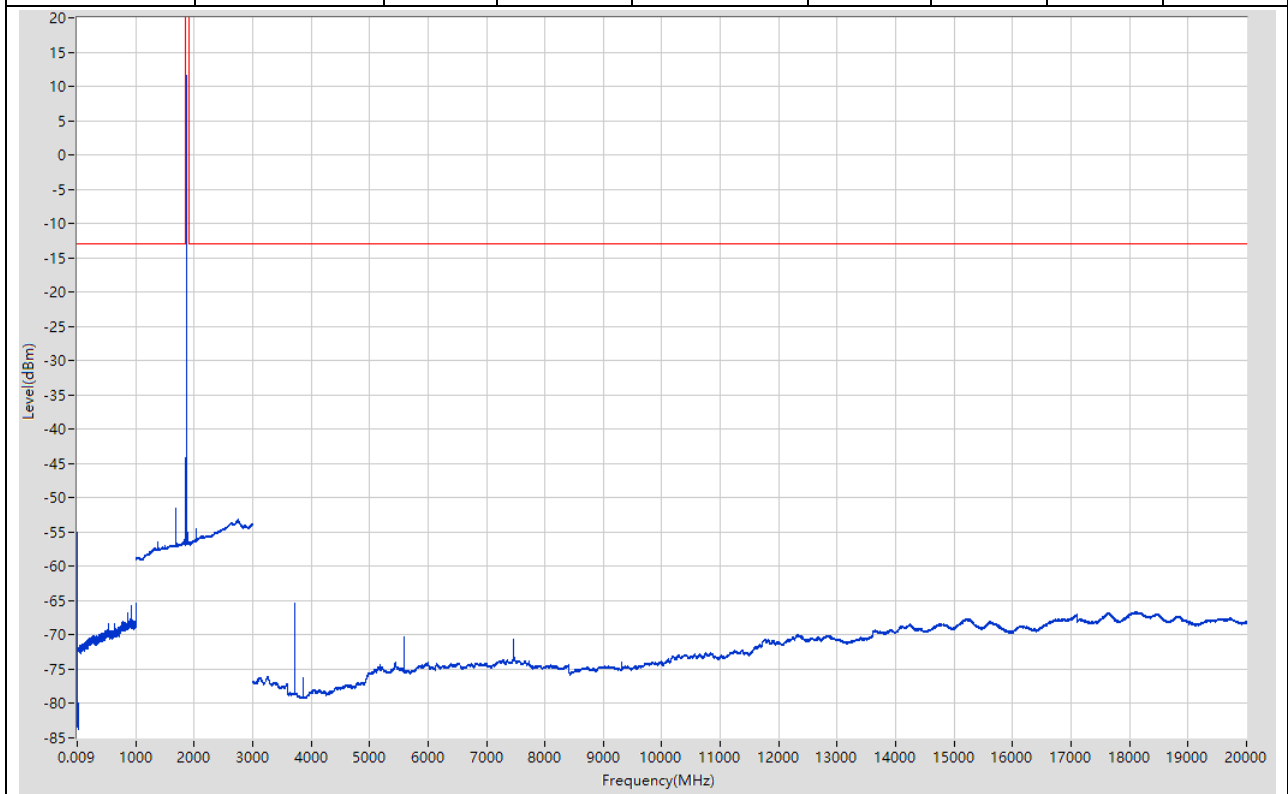


6.14. LTE-M1 Band2 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-55.37	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.98	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.27	-13	Pass	9700
1000	1840	1	RMS	1706.841	-54.27	-13	Pass	840
1840	1920	1	RMS	1886.533	13.44	60	Pass	601
1920	3000	1	RMS	2065.134	-51.08	-13	Pass	1080
3000	20000	1	RMS	3774.046	-48.18	-13	Pass	17000

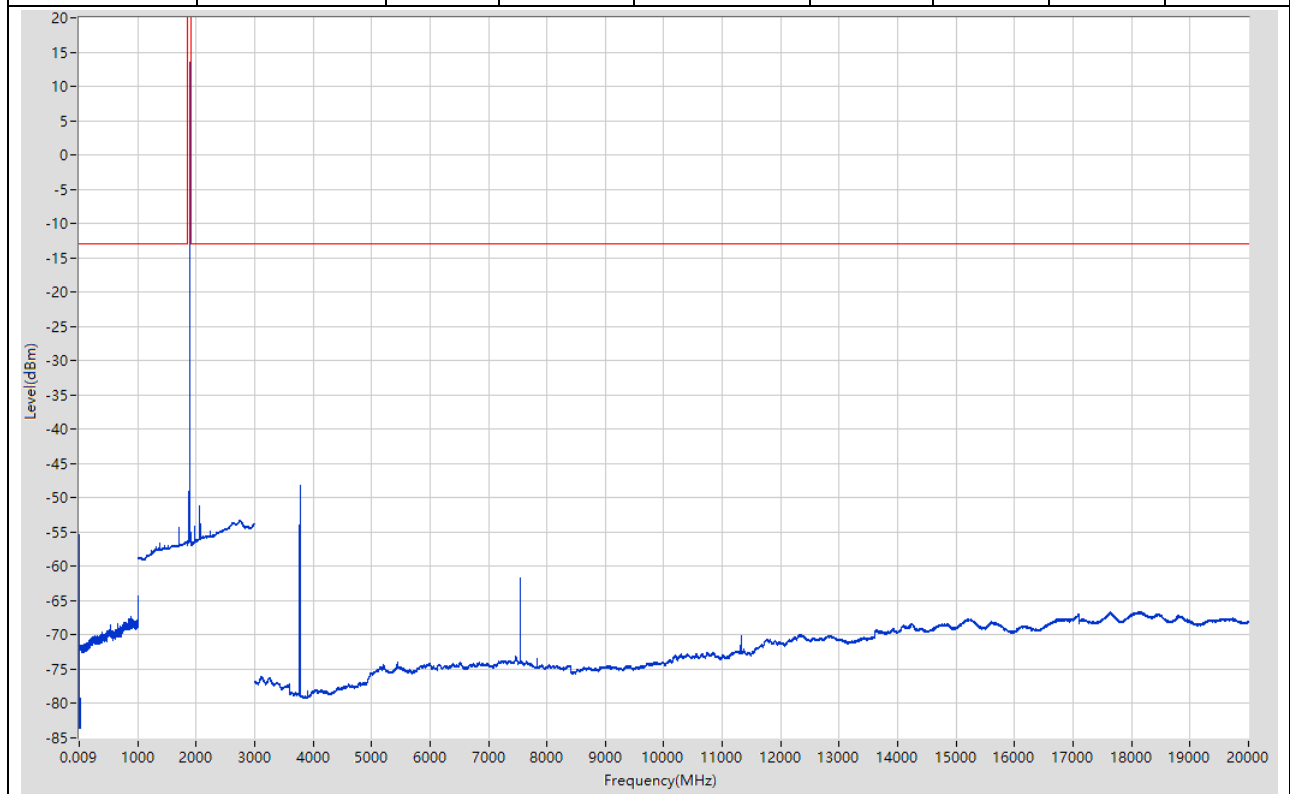


6.15. LTE-M1 Band2 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.13	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.99	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.01	-13	Pass	9700
1000	1840	1	RMS	1726.865	-51.81	-13	Pass	840
1840	1920	1	RMS	1908.933	12.72	60	Pass	601
1920	3000	1	RMS	2091.158	-52.49	-13	Pass	1080
3000	20000	1	RMS	3817.048	-57.3	-13	Pass	17000

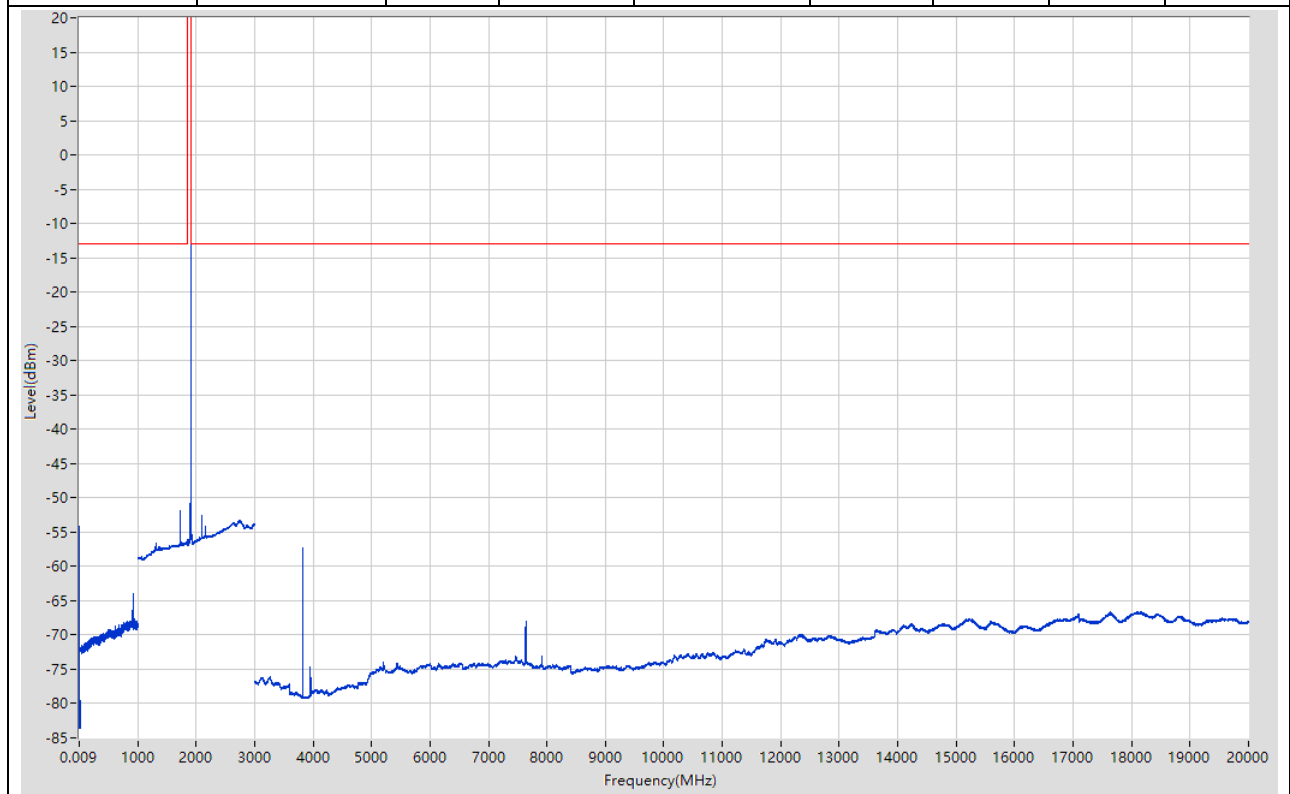


6.16. LTE-M1 Band2 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.47	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.24	-13	Pass	2985
30	1000	0.1	RMS	793.679	-66.66	-13	Pass	9700
1000	1840	1	RMS	1690.822	-50.93	-13	Pass	840
1840	1920	1	RMS	1869.067	12.11	60	Pass	601
1920	3000	1	RMS	2750.769	-53.29	-13	Pass	1080
3000	20000	1	RMS	17639.861	-66.63	-13	Pass	17000

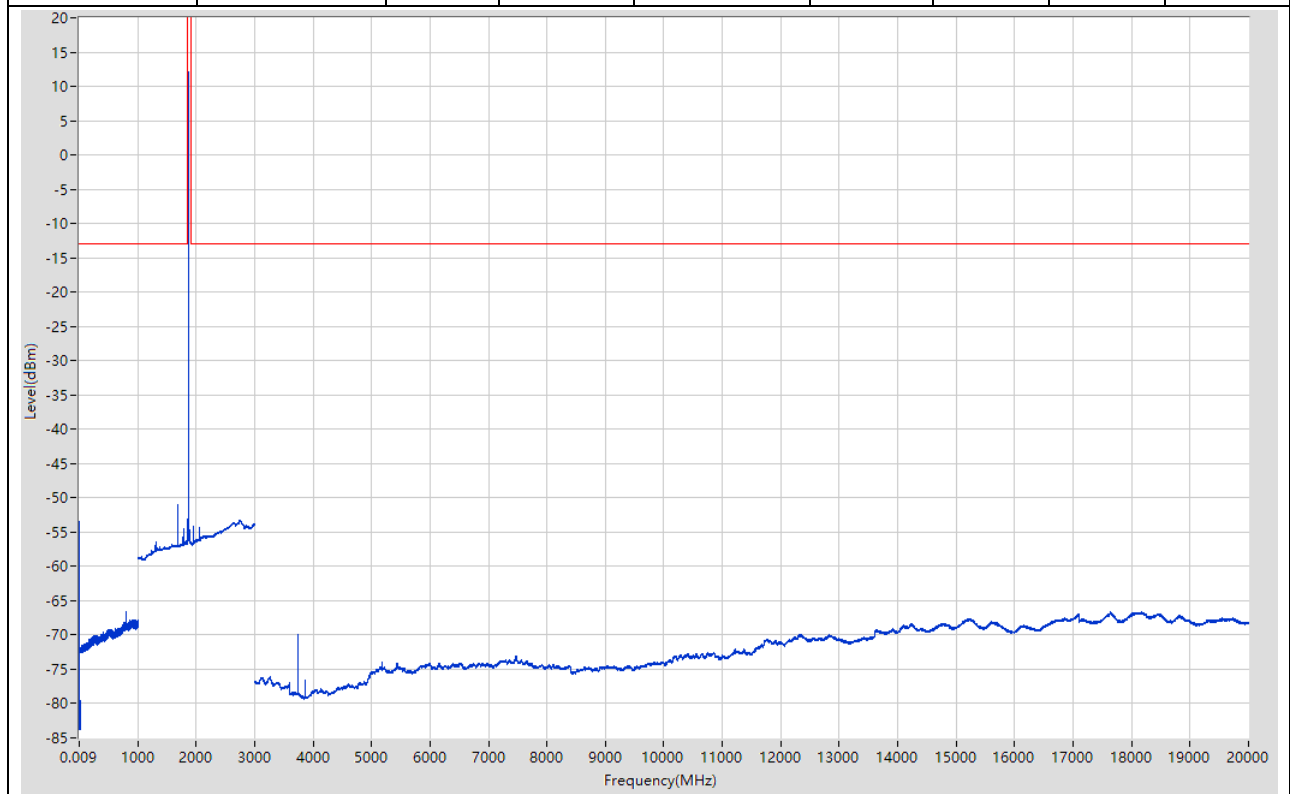


6.17. LTE-M1 Band2 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.49	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.22	-13	Pass	2985
30	1000	0.1	RMS	921.692	-66.38	-13	Pass	9700
1000	1840	1	RMS	1708.844	-51.69	-13	Pass	840
1840	1920	1	RMS	1888.8	12.45	60	Pass	601
1920	3000	1	RMS	2751.77	-53.21	-13	Pass	1080
3000	20000	1	RMS	3776.046	-46.93	-13	Pass	17000

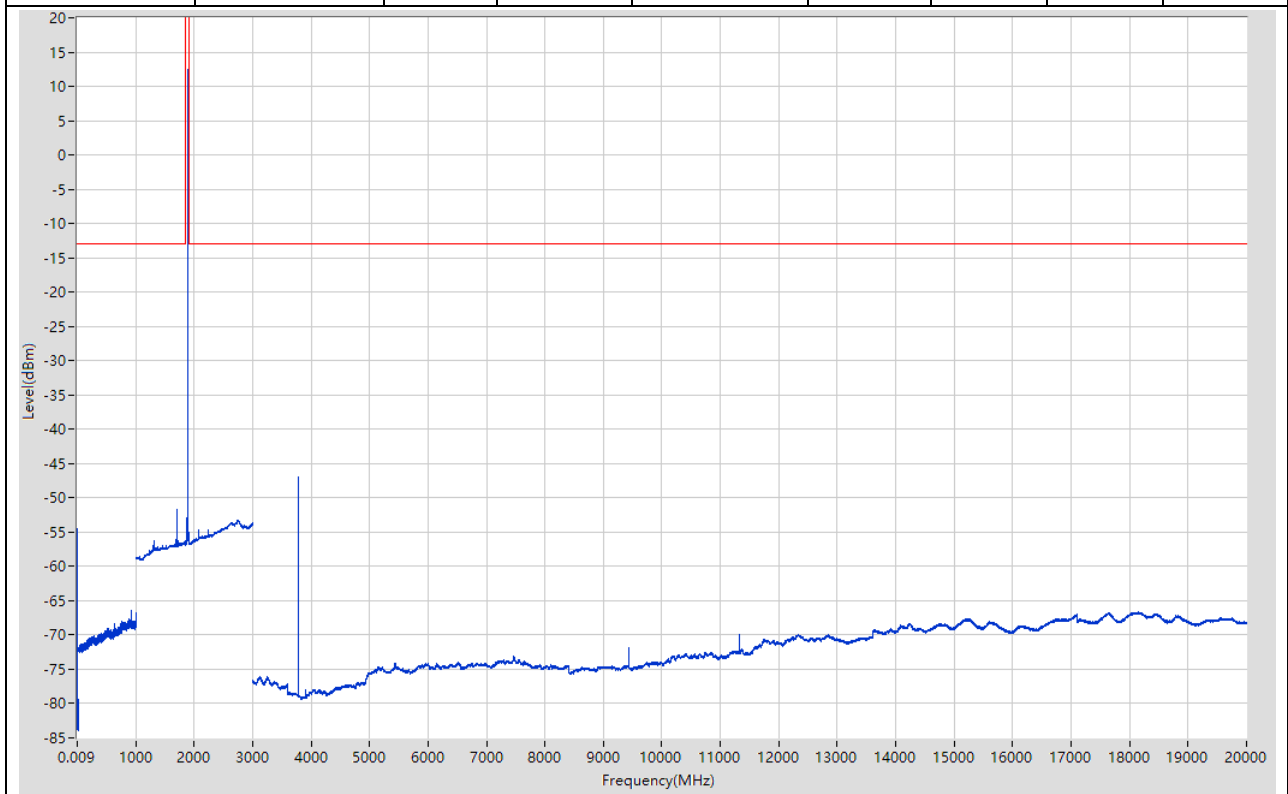

6.18. LTE-M1 Band2 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.37	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.51	-13	Pass	9700
1000	1840	1	RMS	1726.865	-50.13	-13	Pass	840
1840	1920	1	RMS	1908.8	12.67	60	Pass	601
1920	3000	1	RMS	2090.158	-52.81	-13	Pass	1080
3000	20000	1	RMS	3817.048	-65.97	-13	Pass	17000

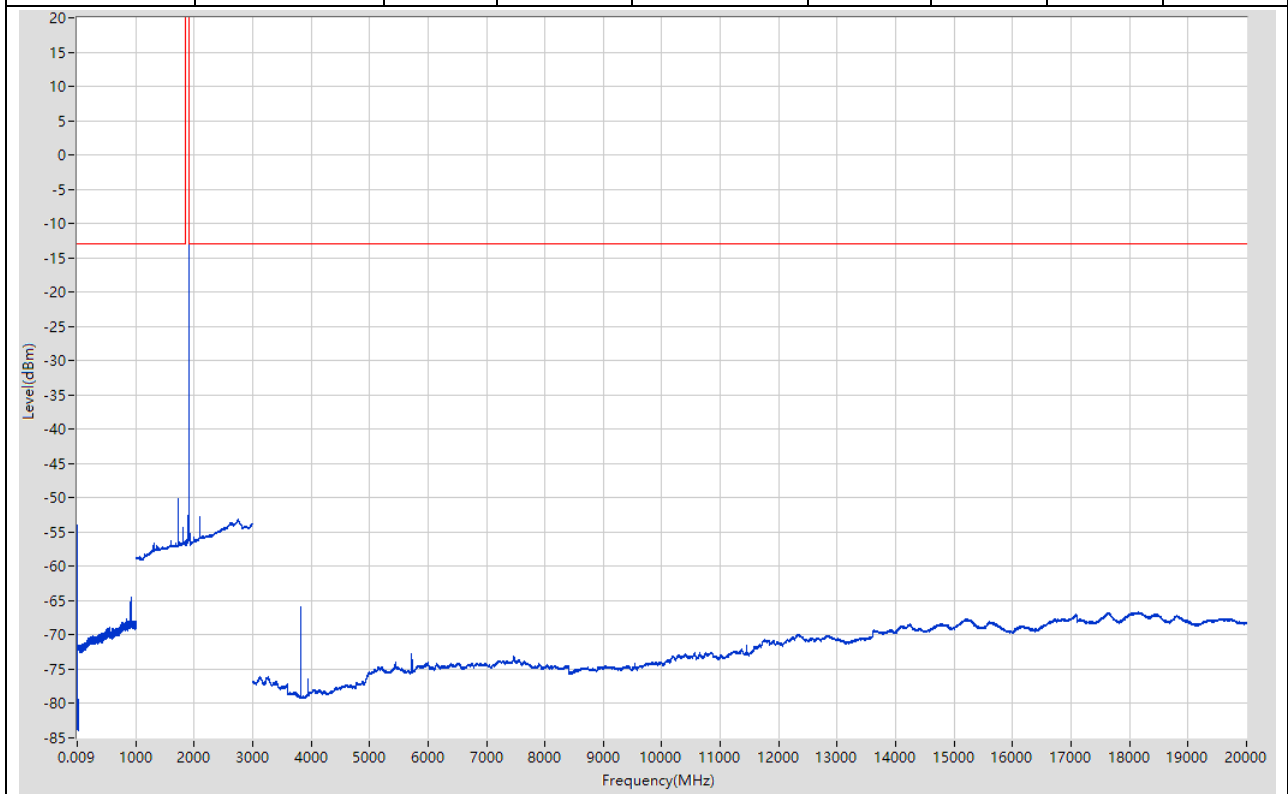

7. LTE-M1_Band4_QPSK


7.1. LTE-M1 Band4 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.88	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.09	-13	Pass	2985
30	1000	0.1	RMS	913.291	-67.63	-13	Pass	9700
1000	1700	1	RMS	1562.804	-47.66	-13	Pass	700
1700	1765	1	RMS	1711.158	12.6	60	Pass	601
1765	3000	1	RMS	1860.077	-43.61	-13	Pass	1235
3000	20000	1	RMS	3423.025	-36.74	-13	Pass	17000

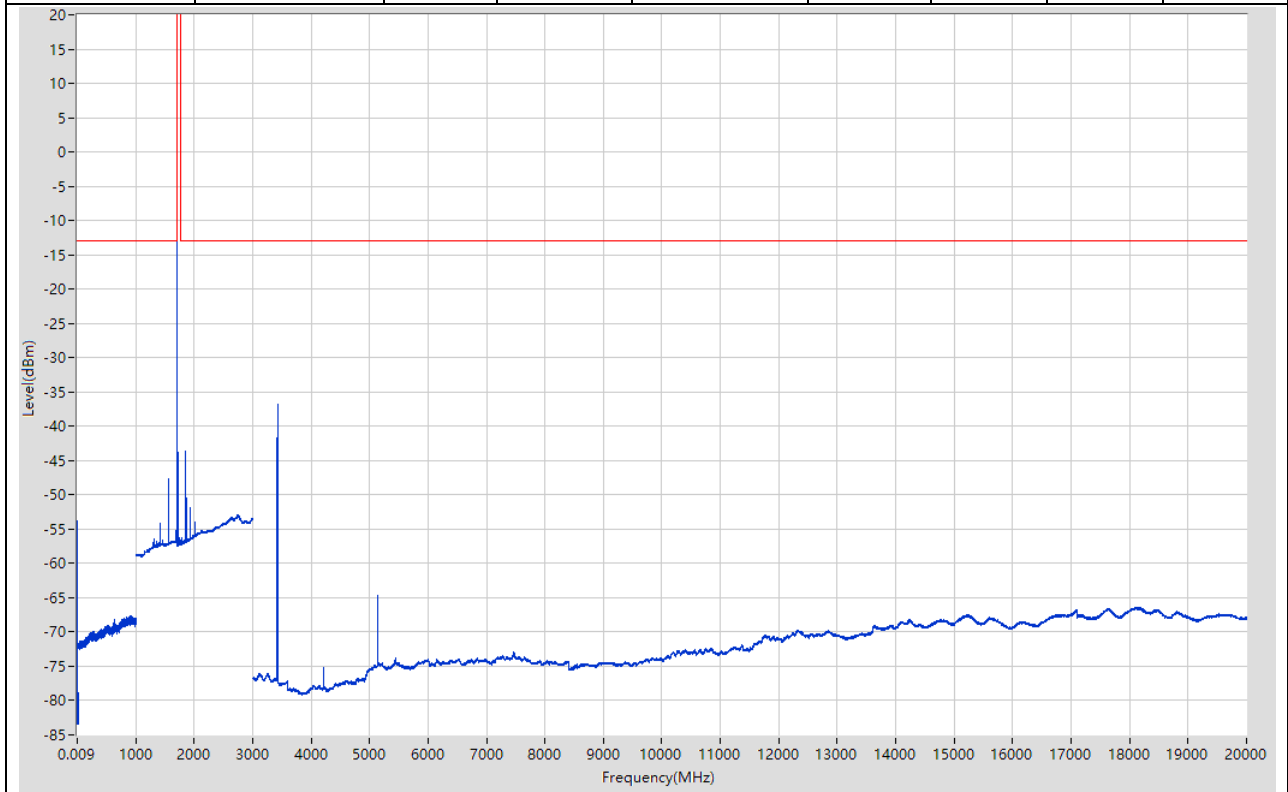


7.2. LTE-M1 Band4 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.91	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.22	-13	Pass	2985
30	1000	0.1	RMS	878.387	-67.61	-13	Pass	9700
1000	1700	1	RMS	1582.833	-48.17	-13	Pass	700
1700	1765	1	RMS	1732.933	13.4	60	Pass	601
1765	3000	1	RMS	1959.157	-48.83	-13	Pass	1235
3000	20000	1	RMS	3464.027	-35.93	-13	Pass	17000

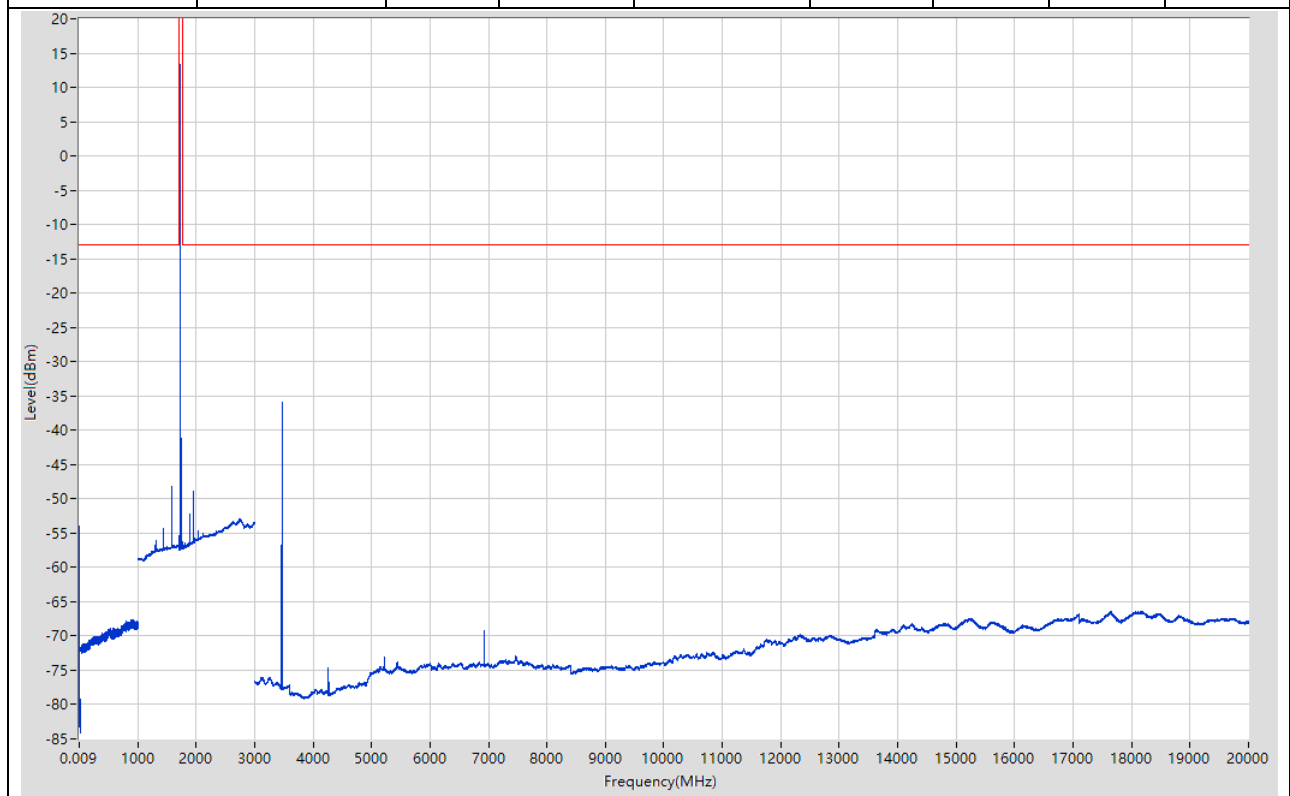


7.3. LTE-M1 Band4 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.45	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.89	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.92	-13	Pass	9700
1000	1700	1	RMS	1602.861	-54.9	-13	Pass	700
1700	1765	1	RMS	1754.817	12.17	60	Pass	601
1765	3000	1	RMS	1906.114	-50.15	-13	Pass	1235
3000	20000	1	RMS	3508.03	-37.75	-13	Pass	17000

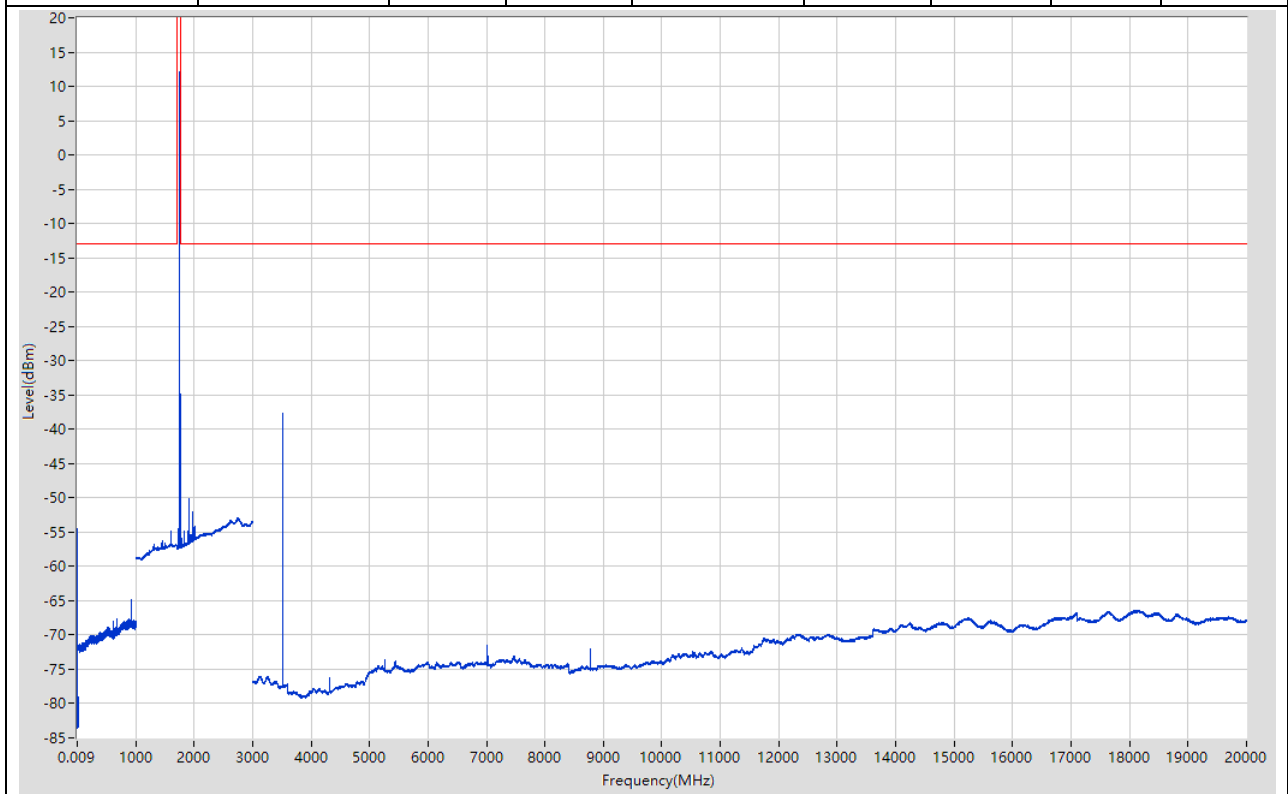


7.4. LTE-M1 Band4 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.36	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.11	-13	Pass	2985
30	1000	0.1	RMS	614.36	-66.92	-13	Pass	9700
1000	1700	1	RMS	1563.805	-48.91	-13	Pass	700
1700	1765	1	RMS	1712.783	12.74	60	Pass	601
1765	3000	1	RMS	2748.797	-52.99	-13	Pass	1235
3000	20000	1	RMS	3427.025	-54.99	-13	Pass	17000

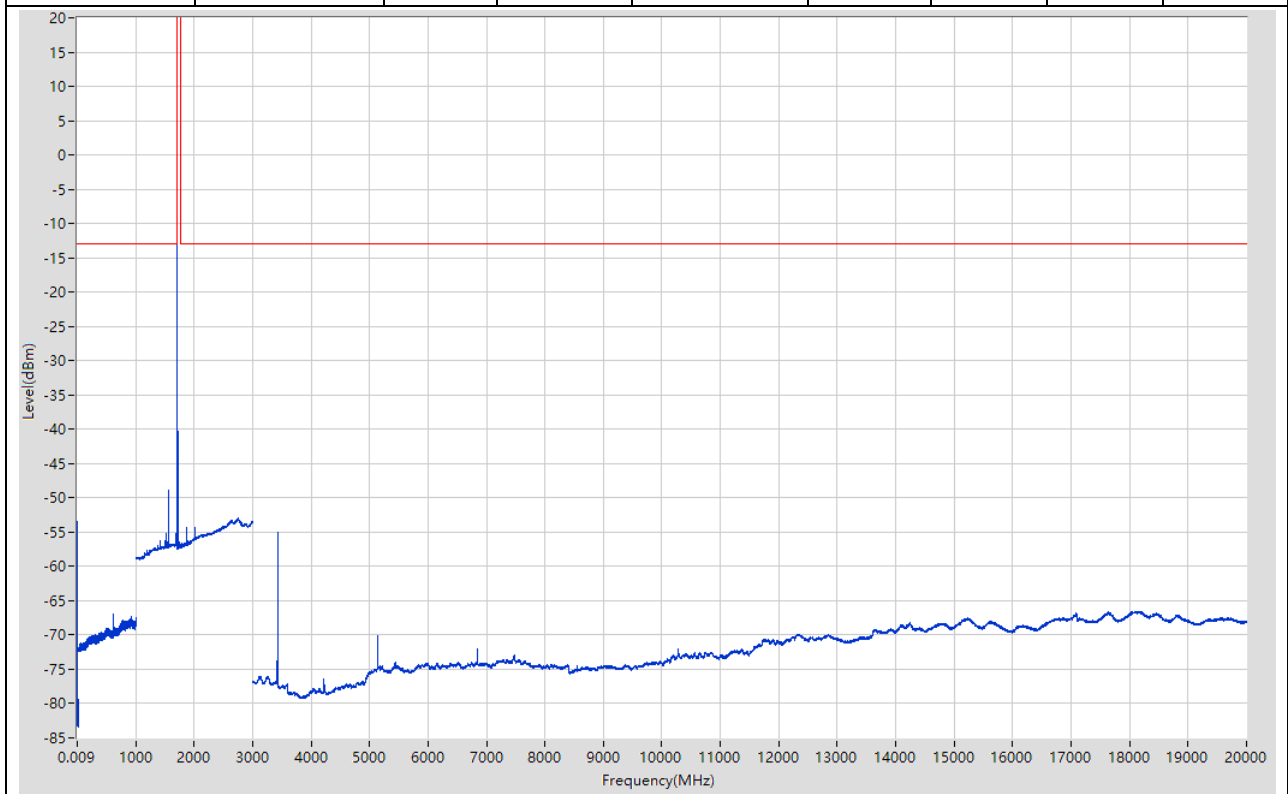


7.5. LTE-M1 Band4 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.03	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.28	-13	Pass	2985
30	1000	0.1	RMS	878.387	-67.77	-13	Pass	9700
1000	1700	1	RMS	1582.833	-49.83	-13	Pass	700
1700	1765	1	RMS	1733.8	12.83	60	Pass	601
1765	3000	1	RMS	2747.796	-53	-13	Pass	1235
3000	20000	1	RMS	3468.028	-33.1	-13	Pass	17000

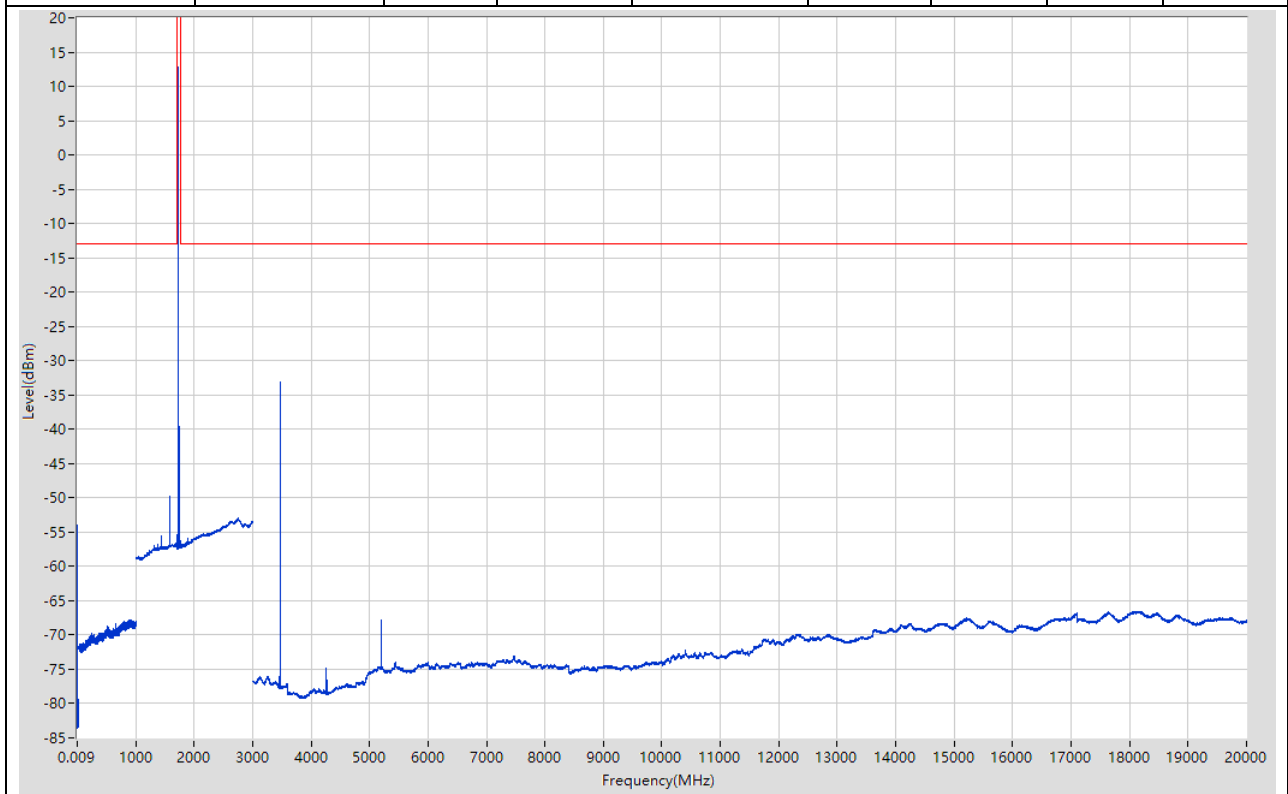


7.6. LTE-M1 Band4 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.93	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.58	-13	Pass	2985
30	1000	0.1	RMS	756.375	-66.26	-13	Pass	9700
1000	1700	1	RMS	1601.86	-51.2	-13	Pass	700
1700	1765	1	RMS	1754.708	12.19	60	Pass	601
1765	3000	1	RMS	1908.116	-49.37	-13	Pass	1235
3000	20000	1	RMS	3504.03	-49.56	-13	Pass	17000

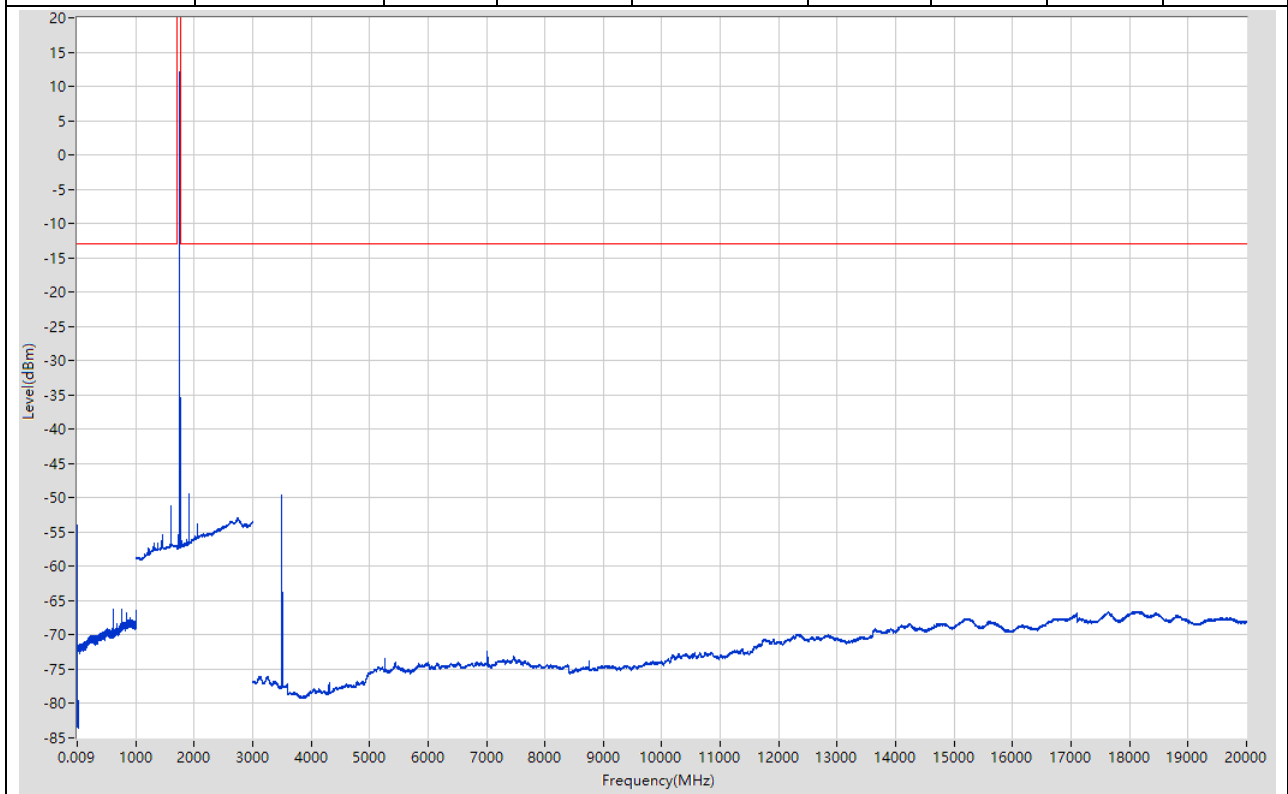


7.7. LTE-M1 Band4 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.5	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.86	-13	Pass	2985
30	1000	0.1	RMS	921.092	-67.72	-13	Pass	9700
1000	1700	1	RMS	1565.808	-50.74	-13	Pass	700
1700	1765	1	RMS	1714.3	13.66	60	Pass	601
1765	3000	1	RMS	1862.079	-48.85	-13	Pass	1235
3000	20000	1	RMS	3429.025	-35.33	-13	Pass	17000

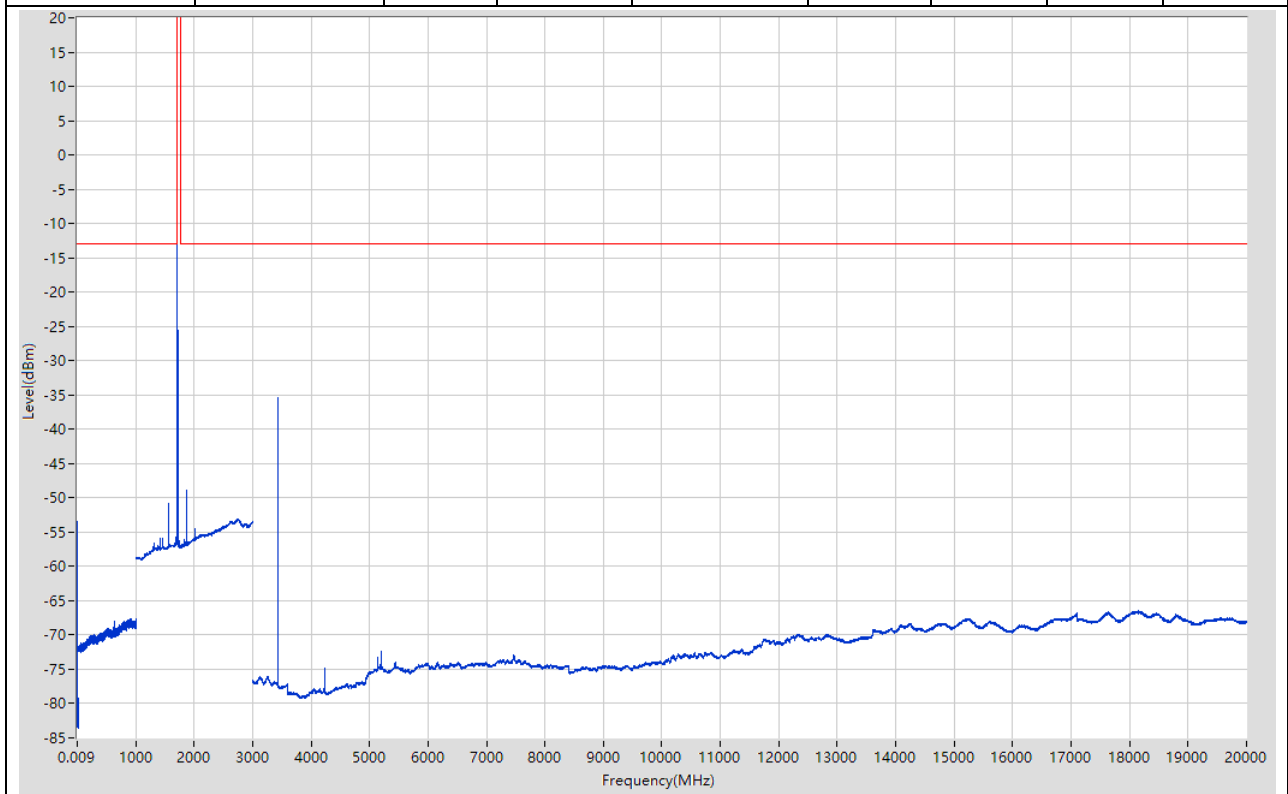


7.8. LTE-M1 Band4 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.79	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.32	-13	Pass	2985
30	1000	0.1	RMS	921.492	-66.96	-13	Pass	9700
1000	1700	1	RMS	1583.834	-50.05	-13	Pass	700
1700	1765	1	RMS	1734.45	12.63	60	Pass	601
1765	3000	1	RMS	1885.097	-42.17	-13	Pass	1235
3000	20000	1	RMS	3468.028	-33.58	-13	Pass	17000

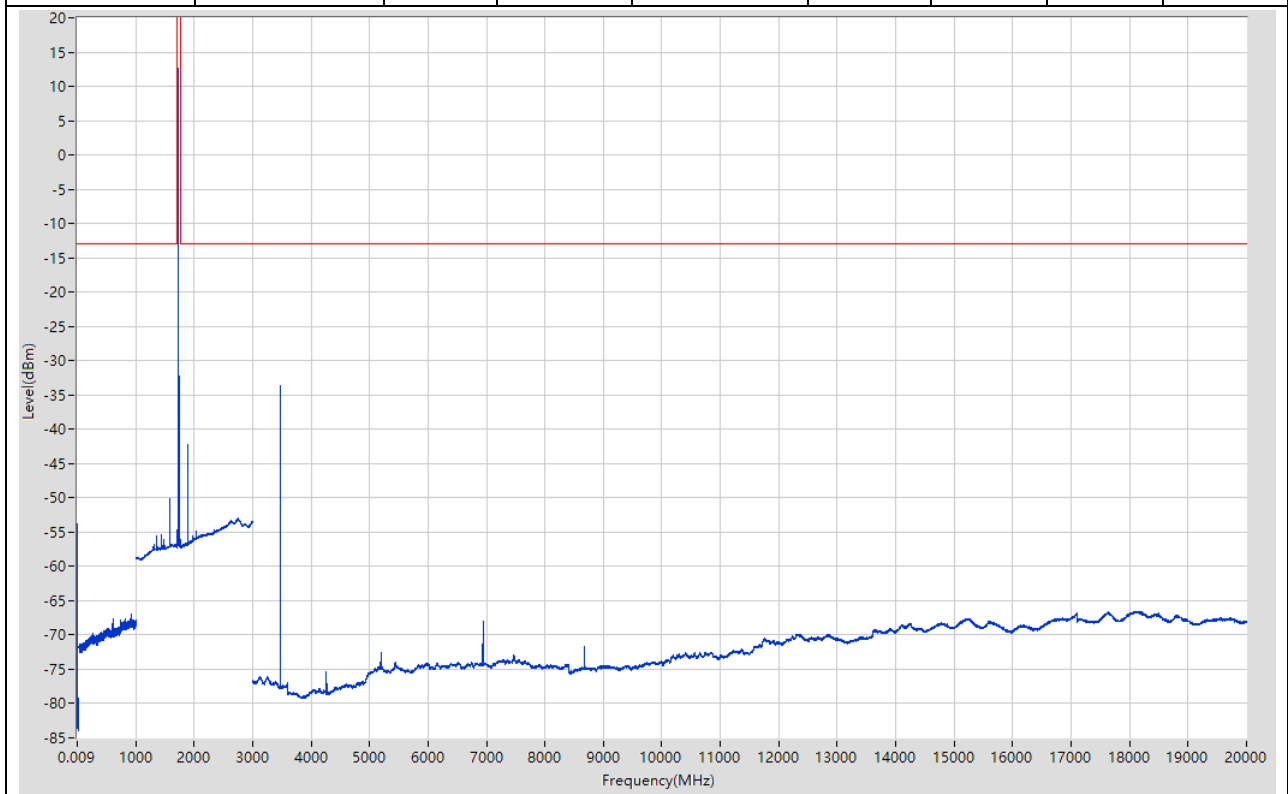


7.9. LTE-M1 Band4 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.02	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.19	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.73	-13	Pass	9700
1000	1700	1	RMS	1601.86	-50.54	-13	Pass	700
1700	1765	1	RMS	1754.383	13.56	60	Pass	601
1765	3000	1	RMS	1907.115	-43.47	-13	Pass	1235
3000	20000	1	RMS	3510.03	-44.16	-13	Pass	17000

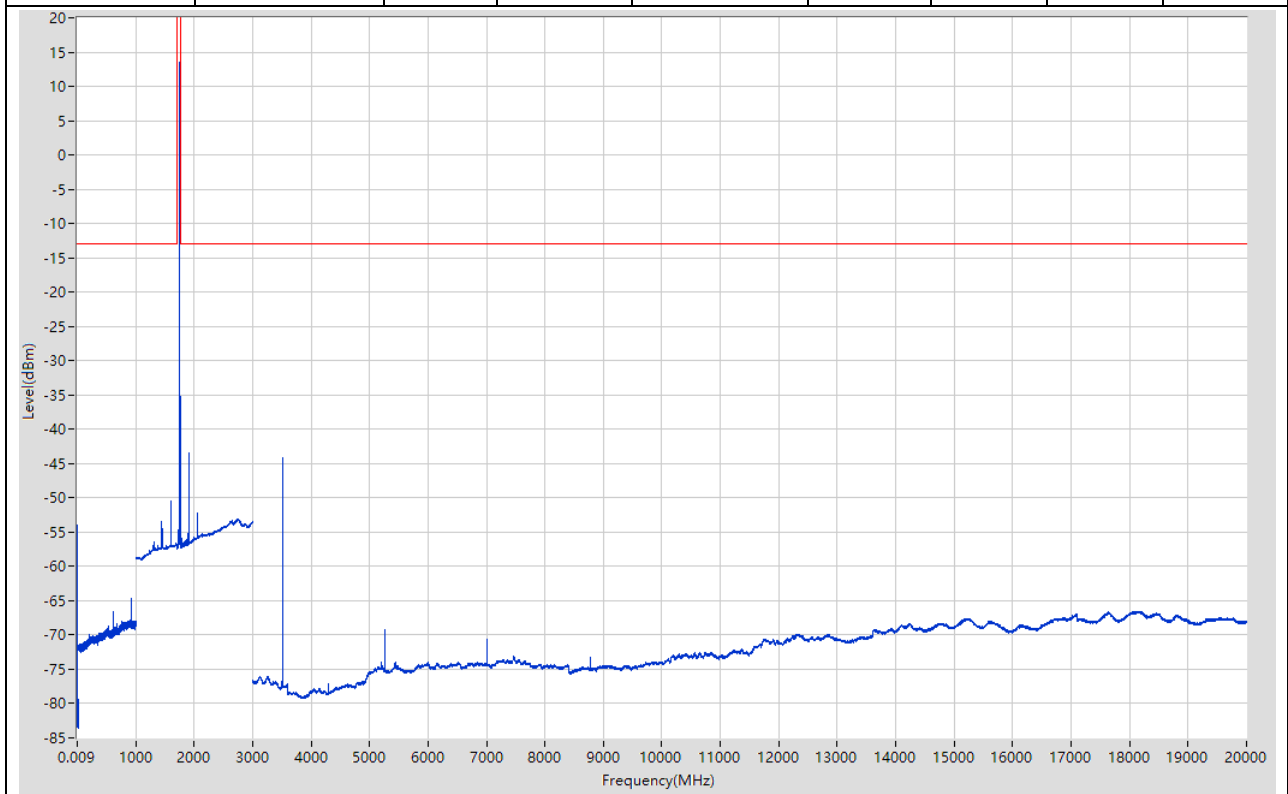


7.10. LTE-M1 Band4 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.98	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.87	-13	Pass	2985
30	1000	0.1	RMS	797.779	-66.72	-13	Pass	9700
1000	1700	1	RMS	1569.814	-48.5	-13	Pass	700
1700	1765	1	RMS	1719.392	13.39	60	Pass	601
1765	3000	1	RMS	1869.084	-44.88	-13	Pass	1235
3000	20000	1	RMS	3439.026	-41.35	-13	Pass	17000

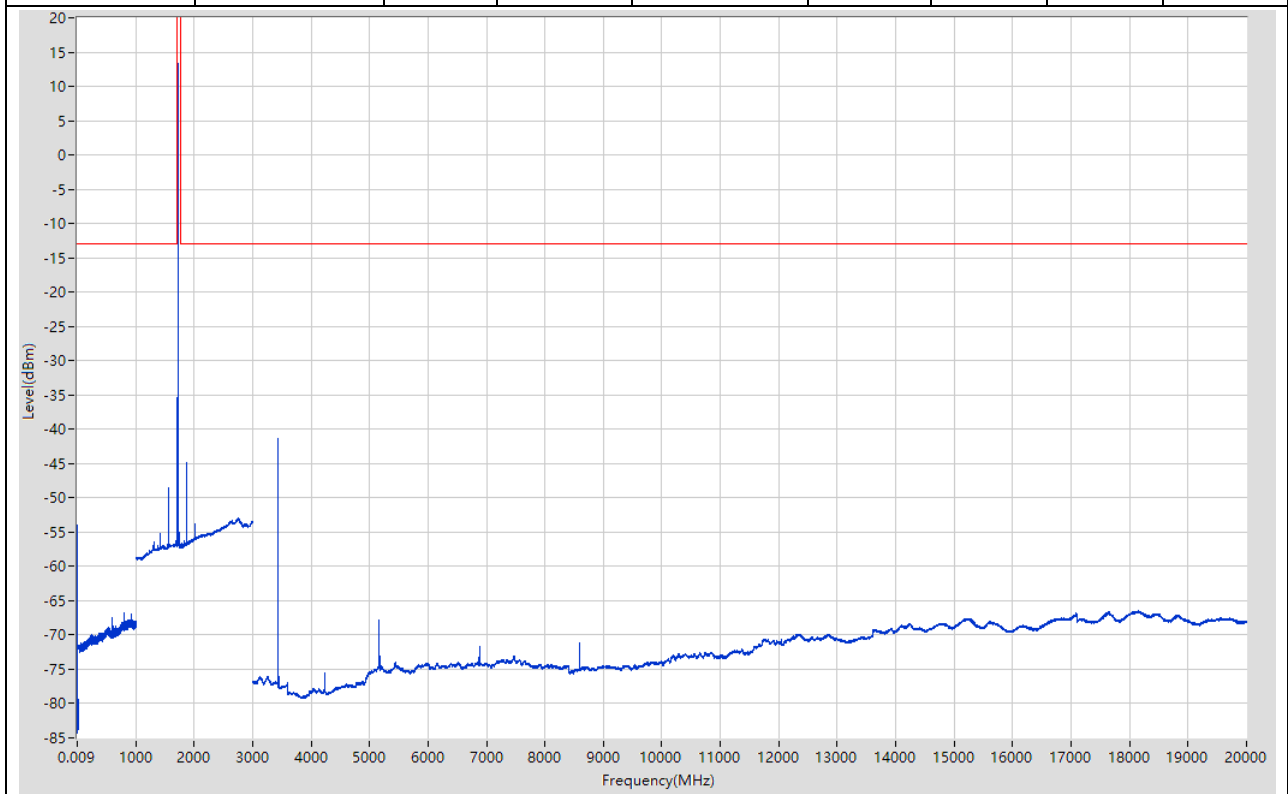


7.11. LTE-M1 Band4 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.89	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.52	-13	Pass	2985
30	1000	0.1	RMS	815.281	-66.86	-13	Pass	9700
1000	1700	1	RMS	1585.837	-49.55	-13	Pass	700
1700	1765	1	RMS	1736.725	13.78	60	Pass	601
1765	3000	1	RMS	1888.1	-42.39	-13	Pass	1235
3000	20000	1	RMS	3474.028	-48.24	-13	Pass	17000

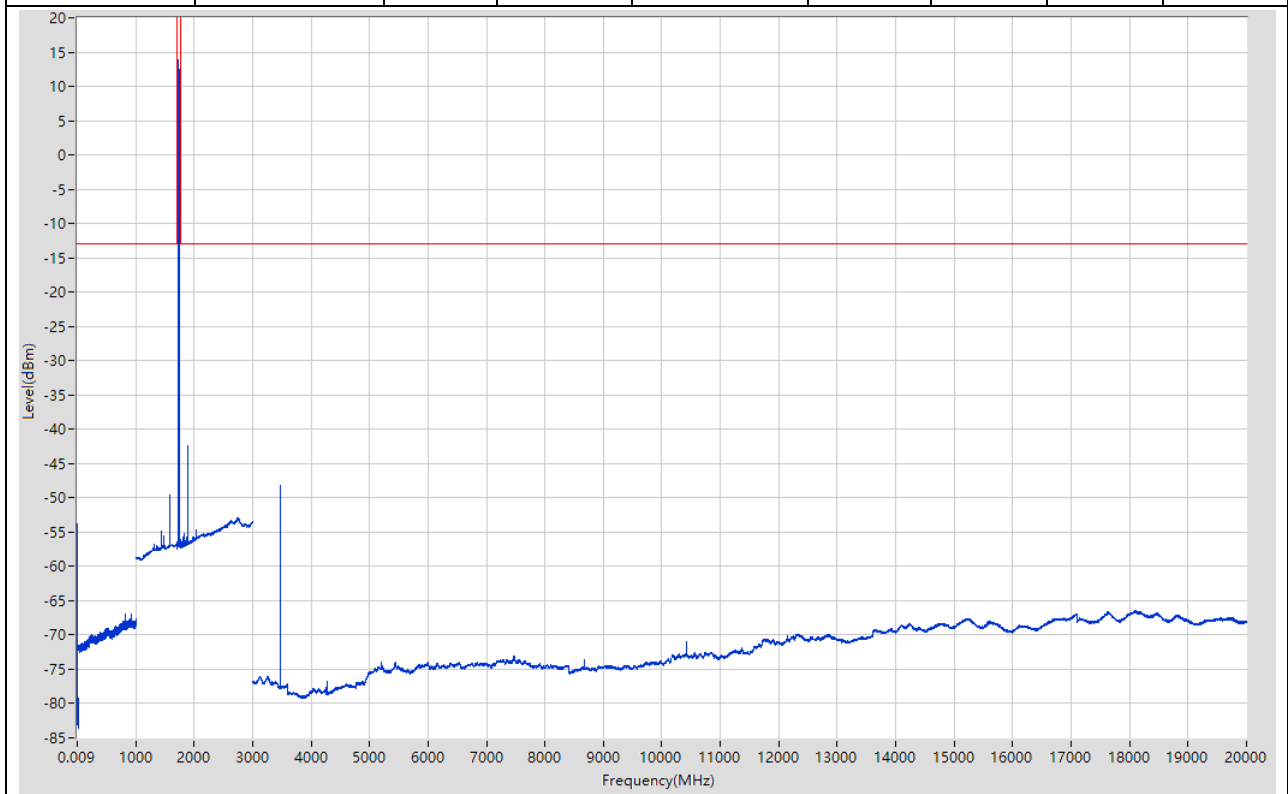


7.12. LTE-M1 Band4 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.76	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.79	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.24	-13	Pass	9700
1000	1700	1	RMS	1601.86	-51.24	-13	Pass	700
1700	1765	1	RMS	1754.058	13.07	60	Pass	601
1765	3000	1	RMS	1907.115	-50.99	-13	Pass	1235
3000	20000	1	RMS	3507.03	-35.62	-13	Pass	17000

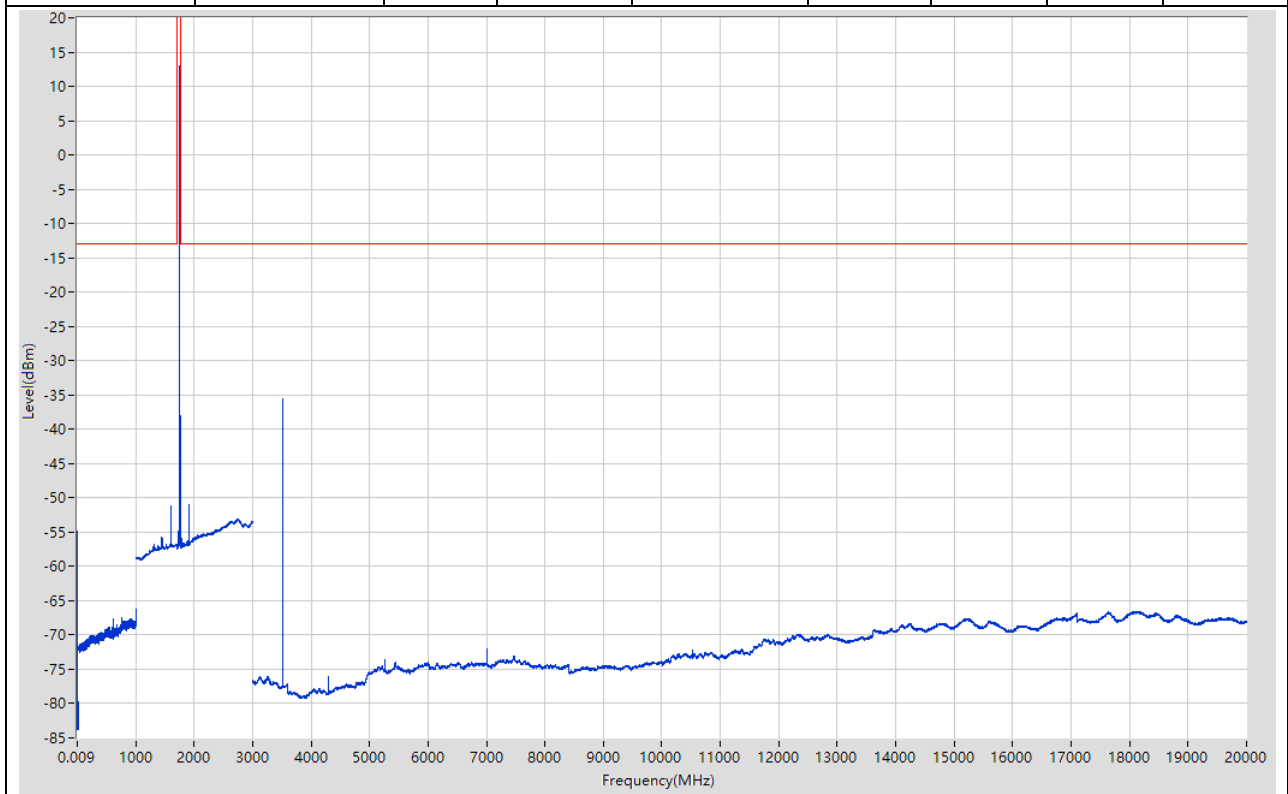


7.13. LTE-M1 Band4 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.78	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.54	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.21	-13	Pass	9700
1000	1700	1	RMS	1573.82	-48.98	-13	Pass	700
1700	1765	1	RMS	1724.05	12.51	60	Pass	601
1765	3000	1	RMS	1874.088	-41.98	-13	Pass	1235
3000	20000	1	RMS	3448.026	-34.52	-13	Pass	17000

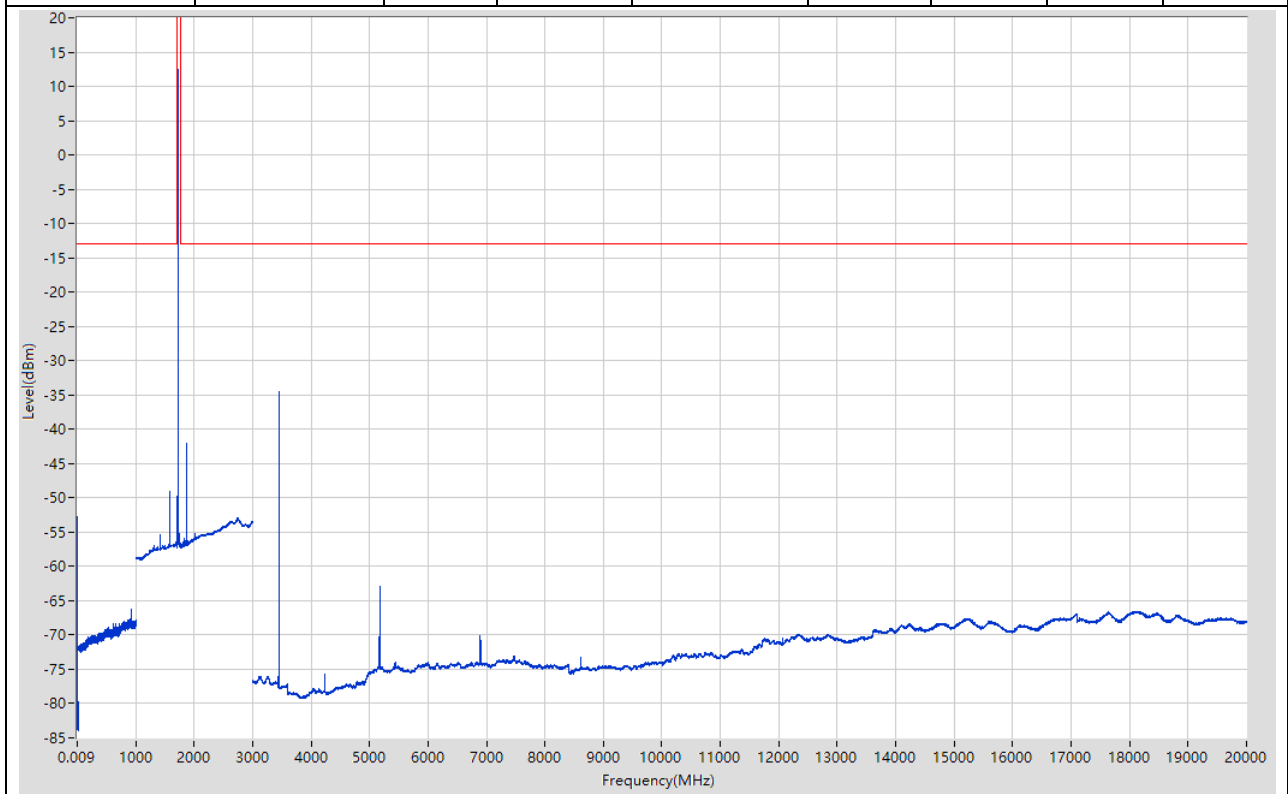


7.14. LTE-M1 Band4 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.19	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.9	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.23	-13	Pass	9700
1000	1700	1	RMS	1587.84	-48.67	-13	Pass	700
1700	1765	1	RMS	1739.108	13.47	60	Pass	601
1765	3000	1	RMS	1890.101	-43.07	-13	Pass	1235
3000	20000	1	RMS	3477.028	-32.22	-13	Pass	17000

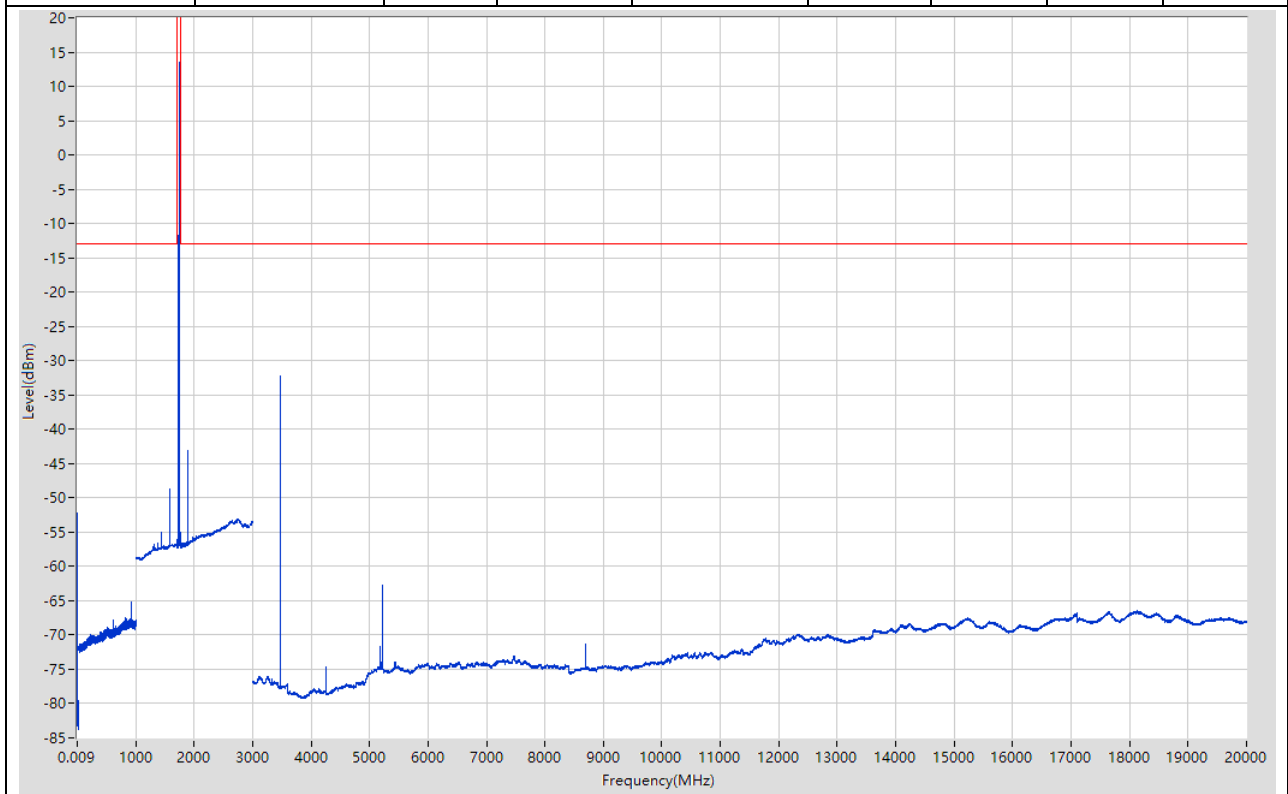


7.15. LTE-M1 Band4 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.84	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.6	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.92	-13	Pass	9700
1000	1700	1	RMS	1600.858	-50.3	-13	Pass	700
1700	1765	1	RMS	1754.058	13.71	60	Pass	601
1765	3000	1	RMS	1905.113	-46	-13	Pass	1235
3000	20000	1	RMS	3507.03	-37.02	-13	Pass	17000

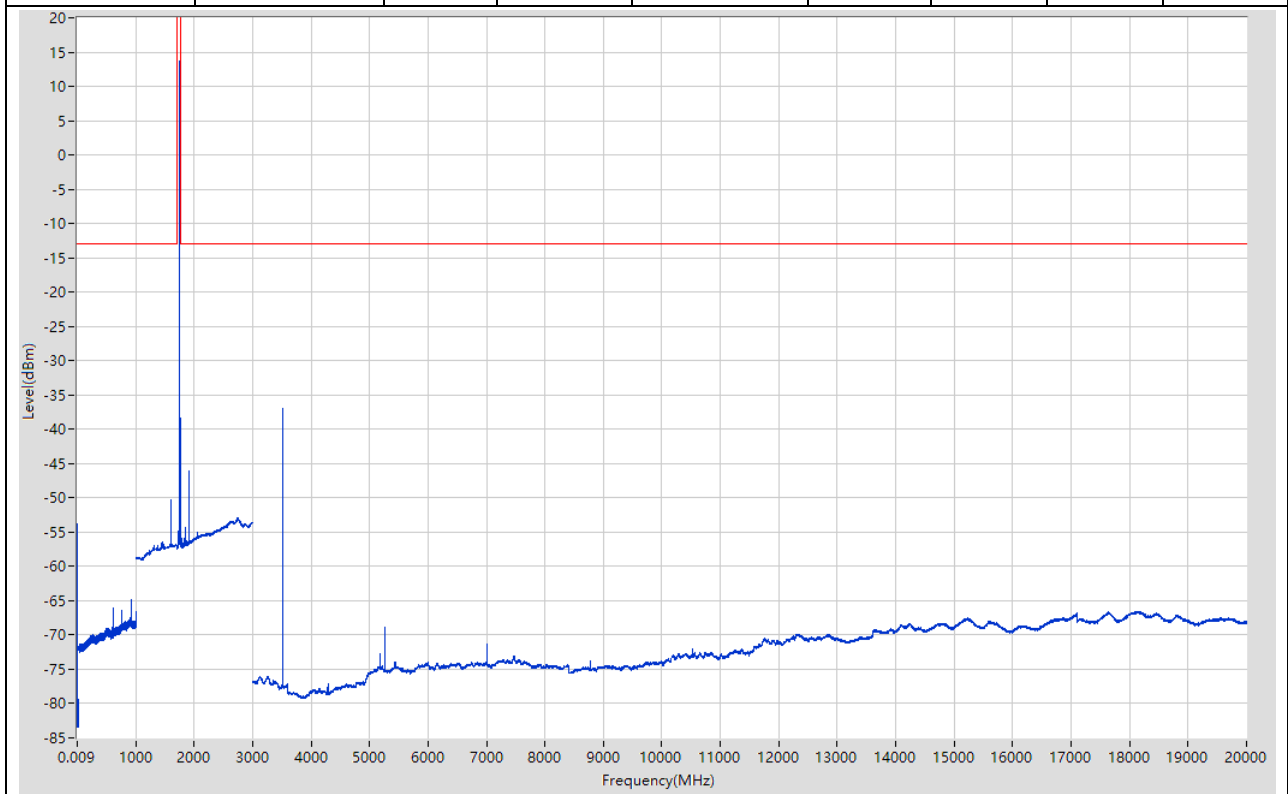


7.16. LTE-M1 Band4 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.12	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.51	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.41	-13	Pass	9700
1000	1700	1	RMS	1577.825	-52.83	-13	Pass	700
1700	1765	1	RMS	1728.6	12.57	60	Pass	601
1765	3000	1	RMS	1878.092	-50.23	-13	Pass	1235
3000	20000	1	RMS	3458.027	-47.19	-13	Pass	17000

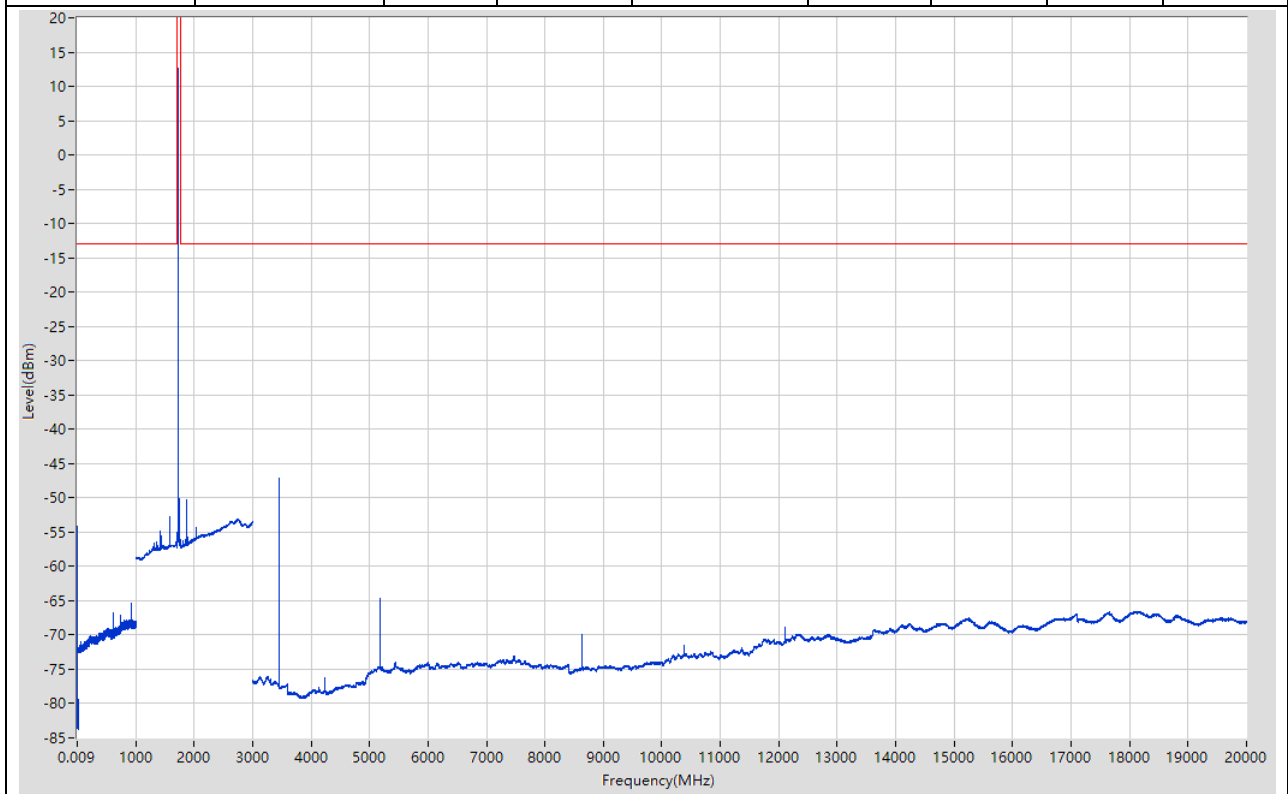


7.17. LTE-M1 Band4 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.49	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.06	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.47	-13	Pass	9700
1000	1700	1	RMS	1589.843	-50.79	-13	Pass	700
1700	1765	1	RMS	1741.167	13.32	60	Pass	601
1765	3000	1	RMS	1892.103	-43.45	-13	Pass	1235
3000	20000	1	RMS	3483.028	-30.05	-13	Pass	17000

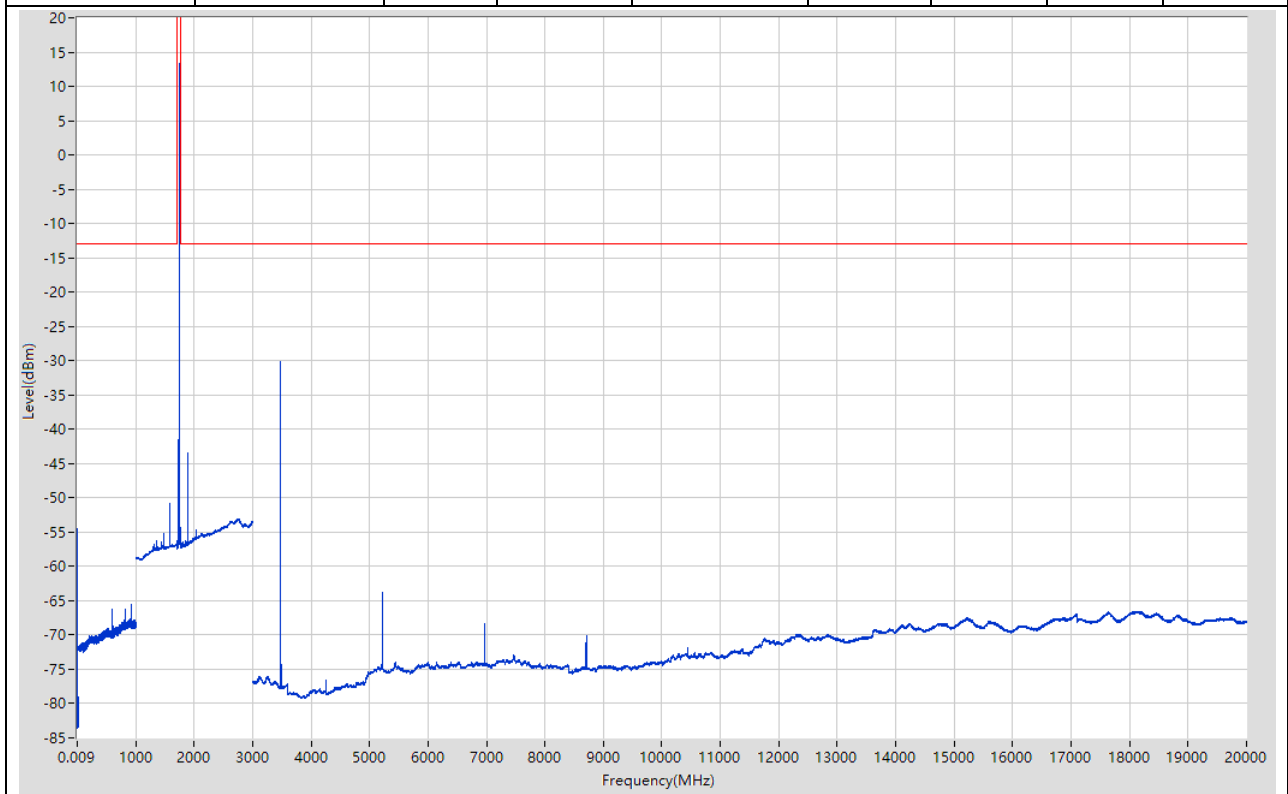

7.18. LTE-M1 Band4 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.16	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.1	-13	Pass	2985
30	1000	0.1	RMS	609.86	-66.8	-13	Pass	9700
1000	1700	1	RMS	1599.857	-50.57	-13	Pass	700
1700	1765	1	RMS	1753.95	12.93	60	Pass	601
1765	3000	1	RMS	1905.113	-44.84	-13	Pass	1235
3000	20000	1	RMS	3508.03	-38.28	-13	Pass	17000

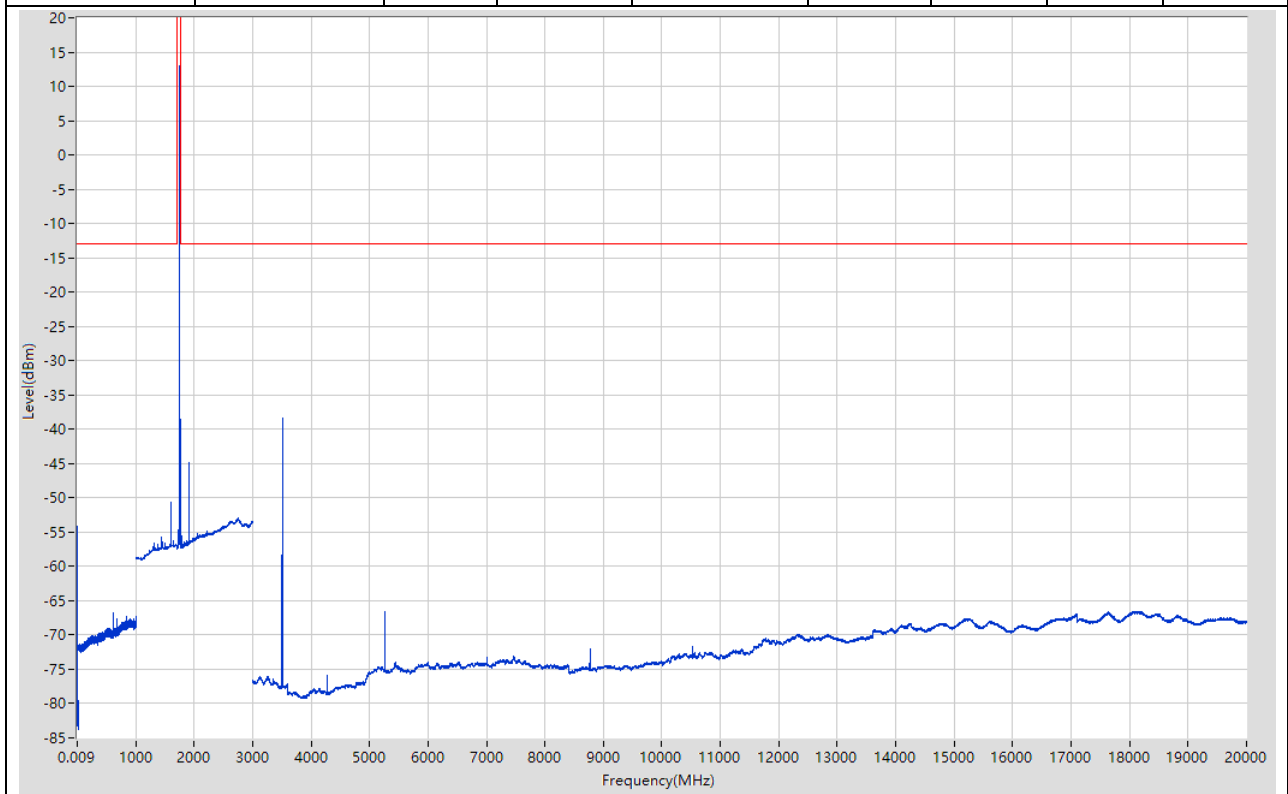

8. LTE-M1_Band4_16QAM


8.1. LTE-M1 Band4 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.24	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.03	-13	Pass	2985
30	1000	0.1	RMS	614.46	-66.9	-13	Pass	9700
1000	1700	1	RMS	1562.804	-48.94	-13	Pass	700
1700	1765	1	RMS	1711.267	13.25	60	Pass	601
1765	3000	1	RMS	1859.076	-47.78	-13	Pass	1235
3000	20000	1	RMS	3421.025	-34.24	-13	Pass	17000

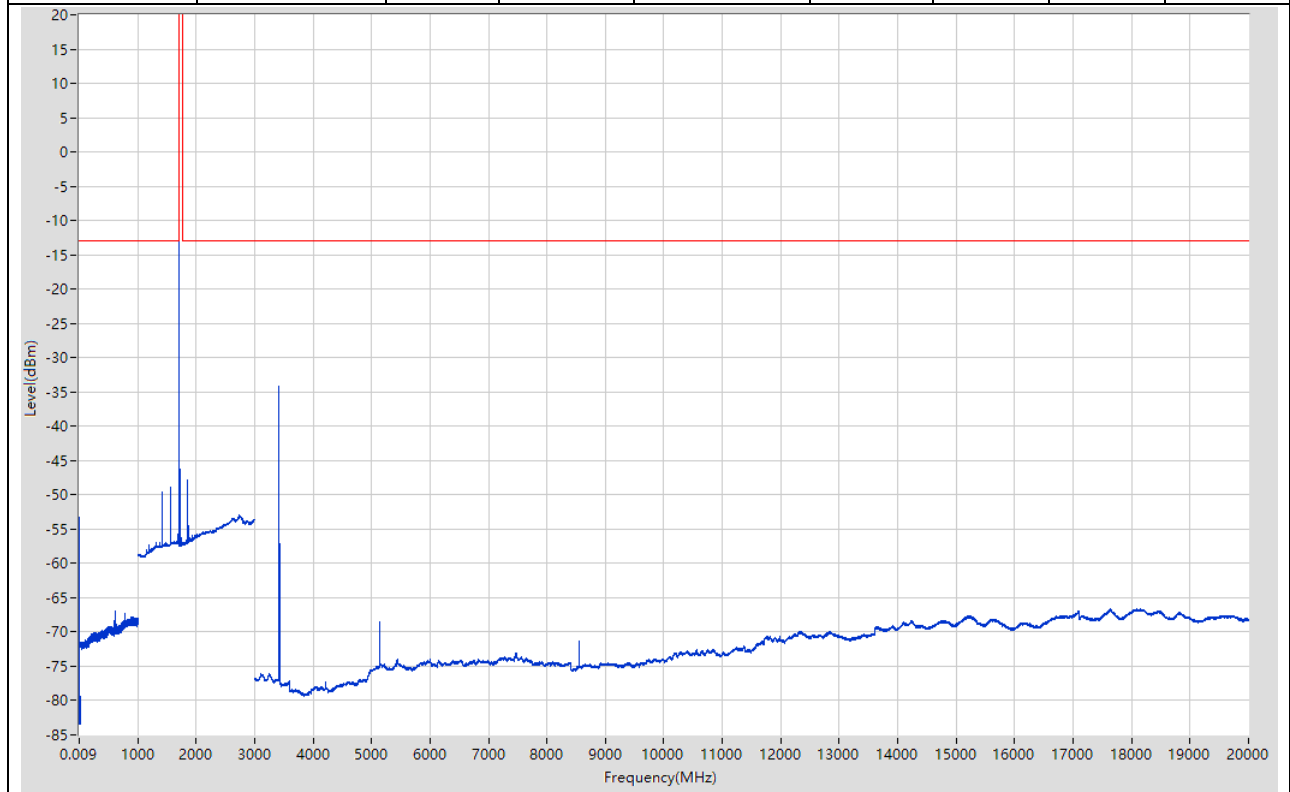


8.2. LTE-M1 Band4 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.57	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.19	-13	Pass	2985
30	1000	0.1	RMS	844.784	-67.7	-13	Pass	9700
1000	1700	1	RMS	1581.831	-49.93	-13	Pass	700
1700	1765	1	RMS	1732.933	12.82	60	Pass	601
1765	3000	1	RMS	1882.095	-52.46	-13	Pass	1235
3000	20000	1	RMS	3465.027	-40.33	-13	Pass	17000

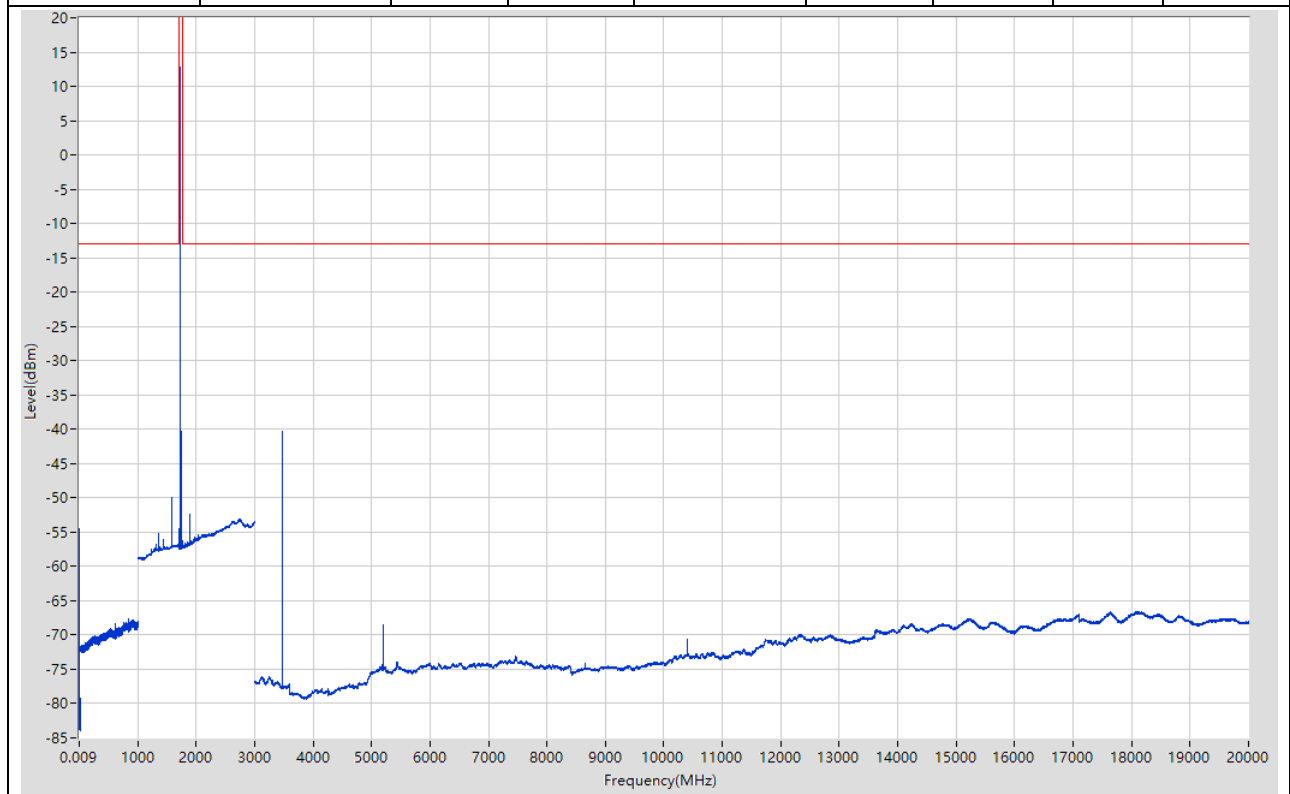


8.3. LTE-M1 Band4 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.33	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.13	-13	Pass	2985
30	1000	0.1	RMS	998.3	-67.54	-13	Pass	9700
1000	1700	1	RMS	1602.861	-49.46	-13	Pass	700
1700	1765	1	RMS	1754.492	13.19	60	Pass	601
1765	3000	1	RMS	1908.116	-47.25	-13	Pass	1235
3000	20000	1	RMS	3508.03	-48.52	-13	Pass	17000

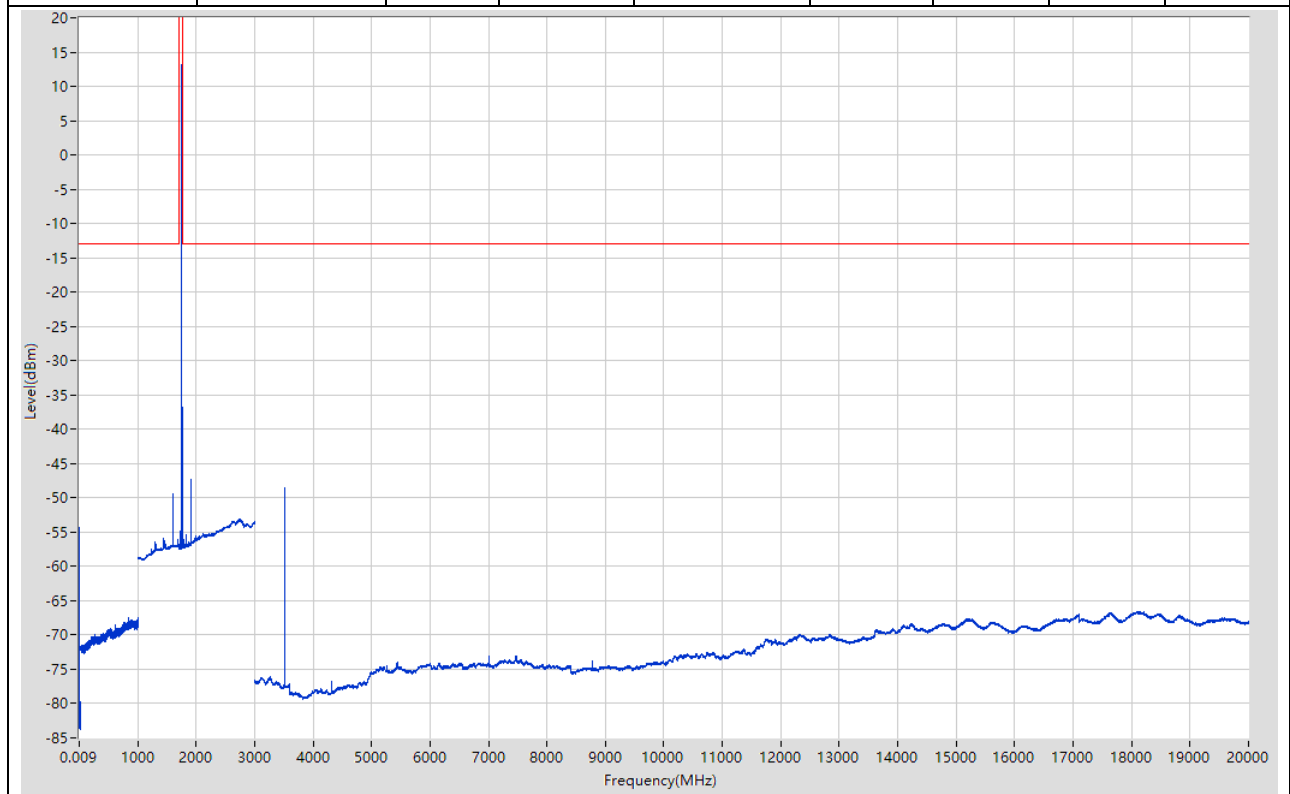


8.4. LTE-M1 Band4 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.28	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	1000	0.1	RMS	998.4	-67.08	-13	Pass	9700
1000	1700	1	RMS	1563.805	-48.16	-13	Pass	700
1700	1765	1	RMS	1712.567	13.02	60	Pass	601
1765	3000	1	RMS	1861.078	-42.61	-13	Pass	1235
3000	20000	1	RMS	3425.025	-37.15	-13	Pass	17000

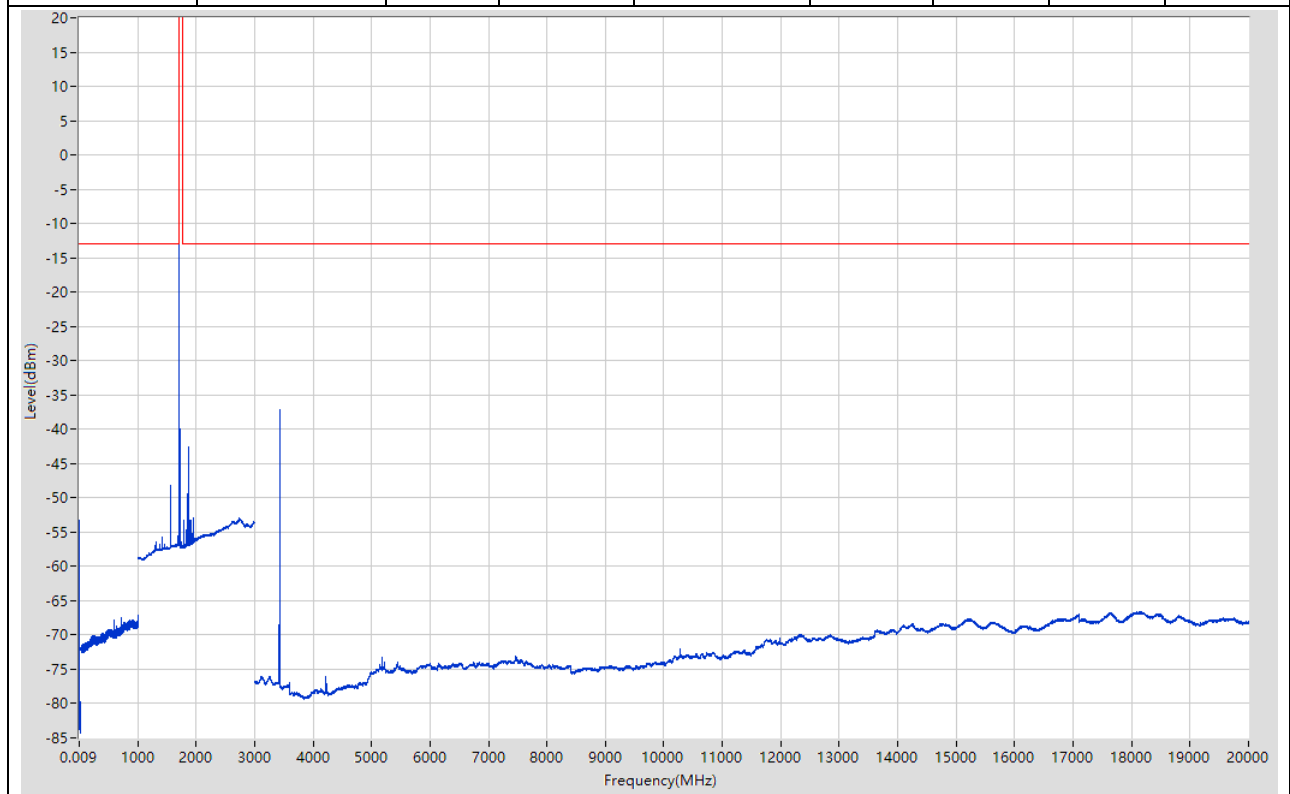


8.5. LTE-M1 Band4 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.08	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.99	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.47	-13	Pass	9700
1000	1700	1	RMS	1582.833	-50.37	-13	Pass	700
1700	1765	1	RMS	1733.583	12.77	60	Pass	601
1765	3000	1	RMS	1885.097	-45.14	-13	Pass	1235
3000	20000	1	RMS	3467.027	-49.82	-13	Pass	17000

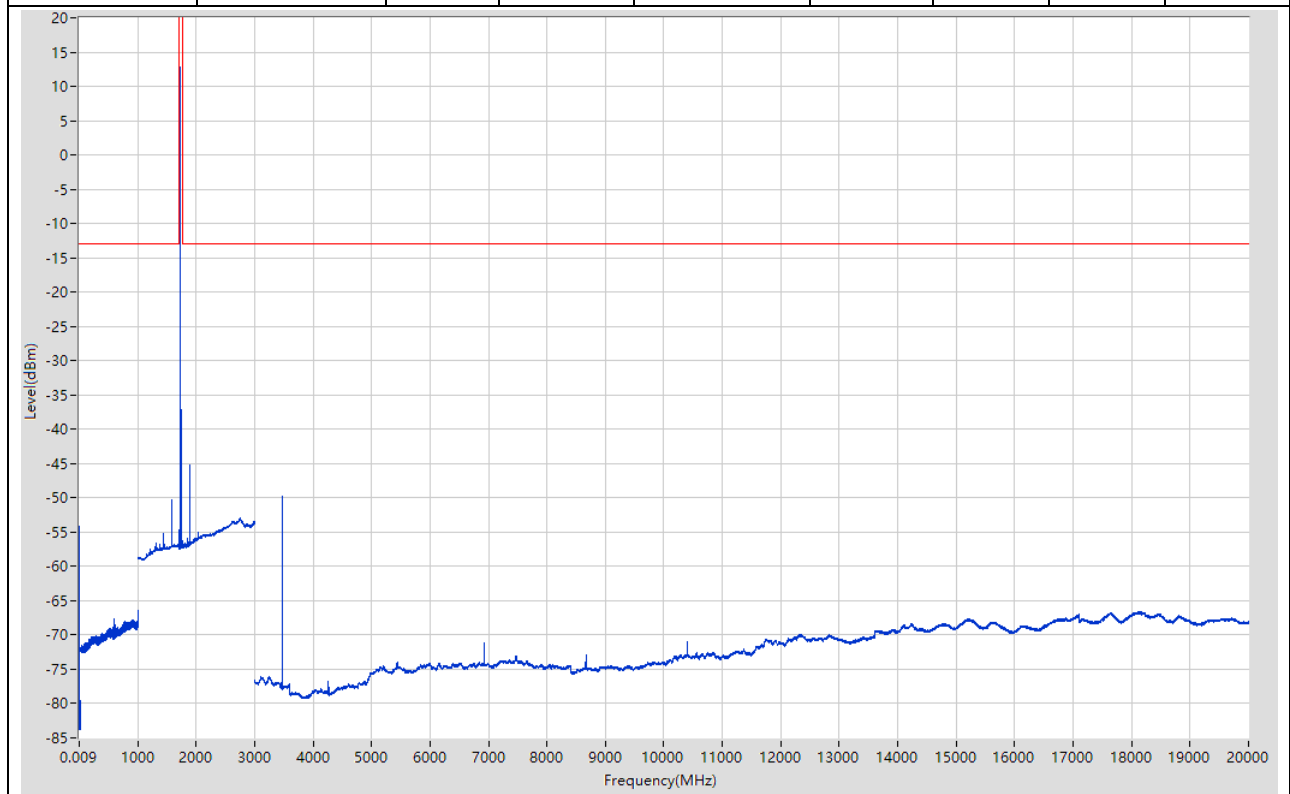


8.6. LTE-M1 Band4 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.03	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.59	-13	Pass	2985
30	1000	0.1	RMS	833.183	-66.65	-13	Pass	9700
1000	1700	1	RMS	1601.86	-53.11	-13	Pass	700
1700	1765	1	RMS	1754.383	12.42	60	Pass	601
1765	3000	1	RMS	1905.113	-45.54	-13	Pass	1235
3000	20000	1	RMS	3510.03	-34.05	-13	Pass	17000

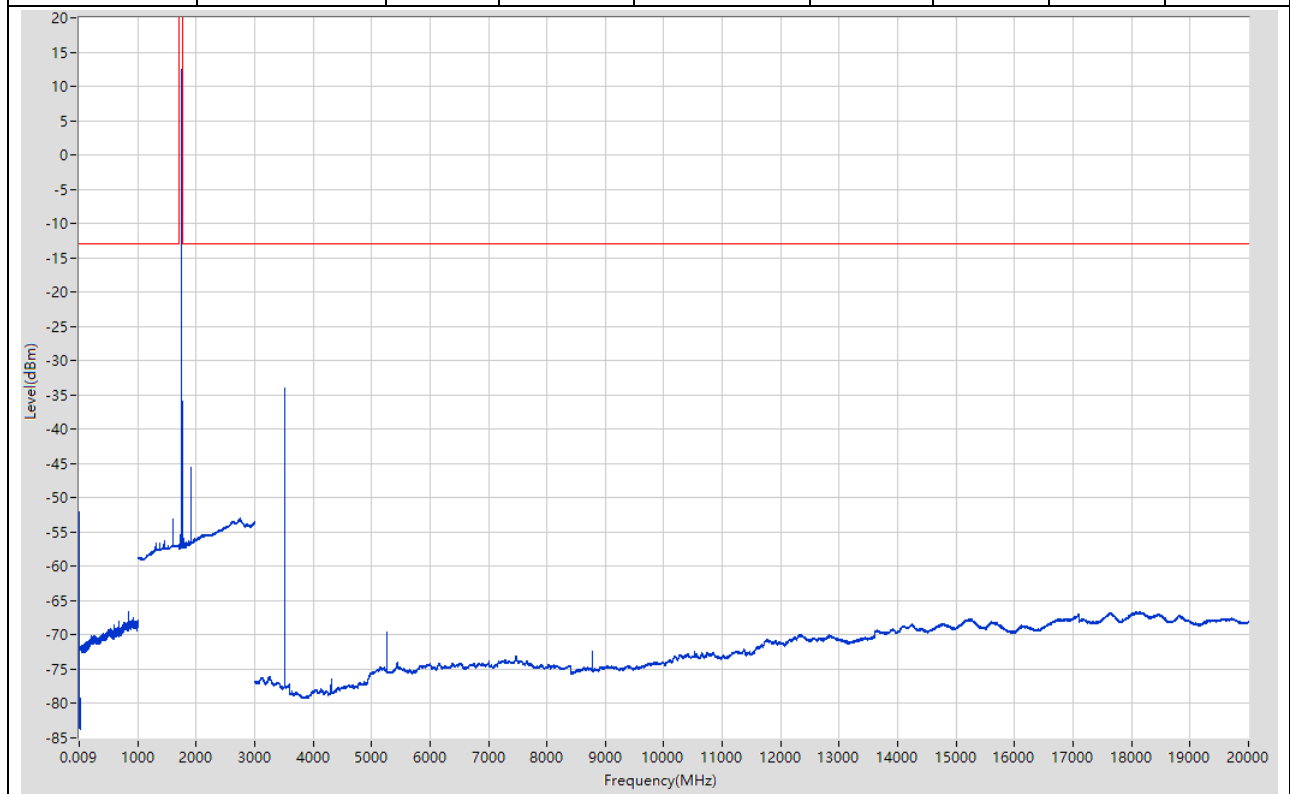


8.7. LTE-M1 Band4 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.7	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.1	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.19	-13	Pass	9700
1000	1700	1	RMS	1565.808	-47.8	-13	Pass	700
1700	1765	1	RMS	1714.517	13.77	60	Pass	601
1765	3000	1	RMS	1863.079	-44.02	-13	Pass	1235
3000	20000	1	RMS	3430.025	-33.58	-13	Pass	17000

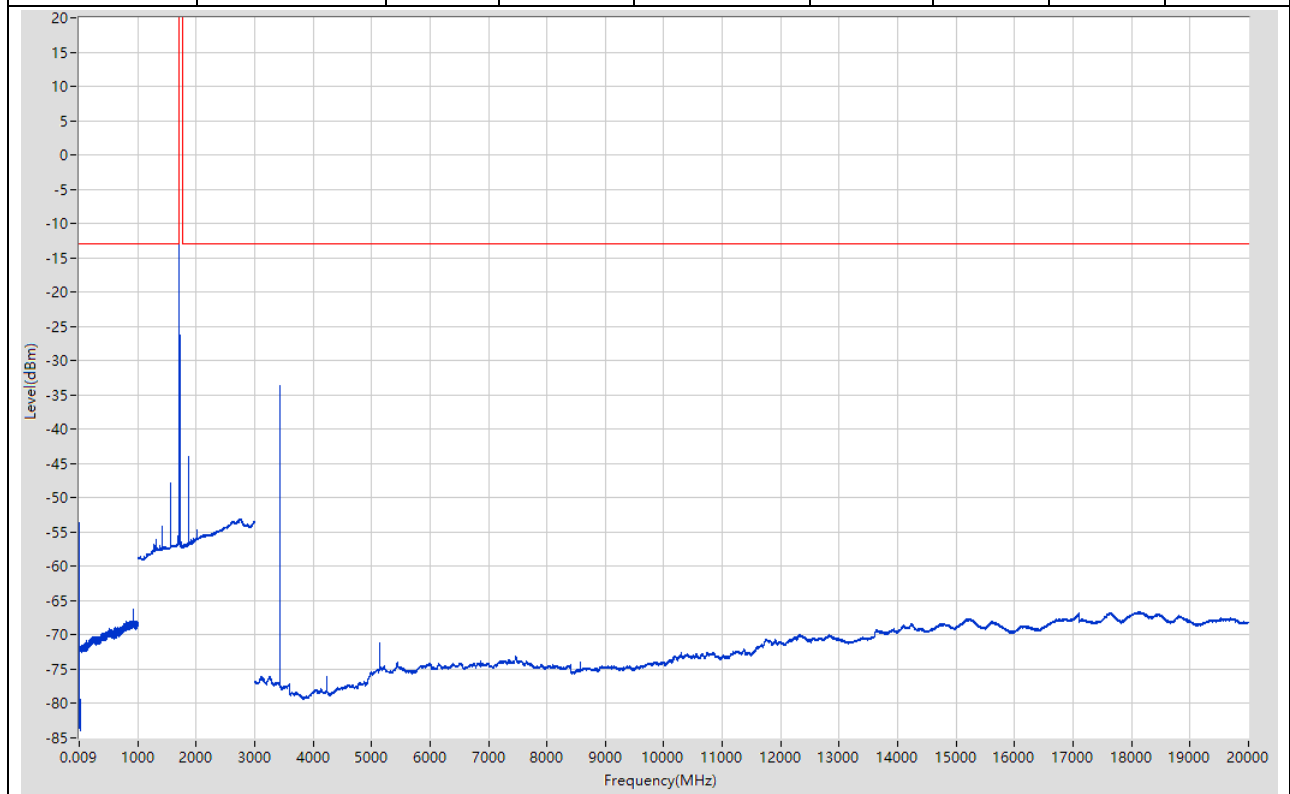


8.8. LTE-M1 Band4 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.61	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.34	-13	Pass	9700
1000	1700	1	RMS	1583.834	-50.75	-13	Pass	700
1700	1765	1	RMS	1734.558	13.48	60	Pass	601
1765	3000	1	RMS	1885.097	-42.3	-13	Pass	1235
3000	20000	1	RMS	3469.028	-33.45	-13	Pass	17000

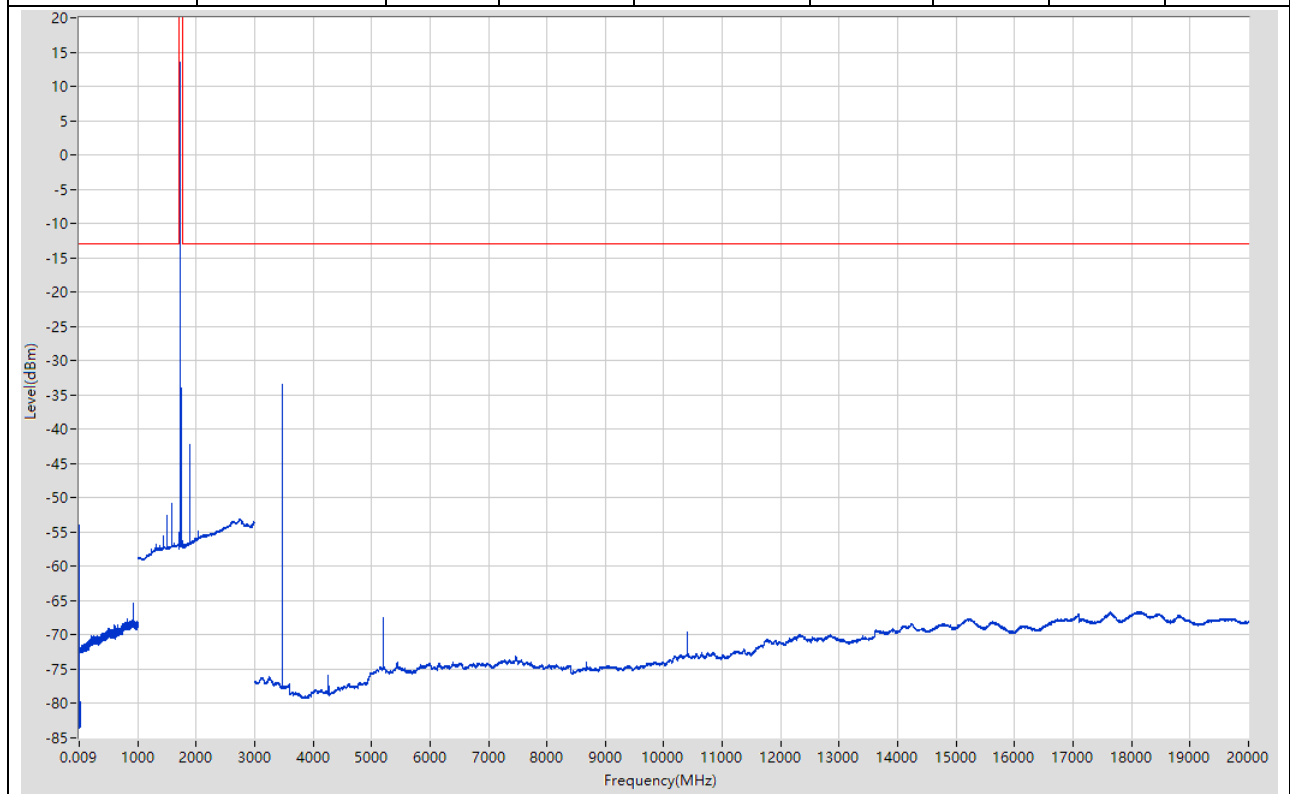


8.9. LTE-M1 Band4 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.94	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.35	-13	Pass	2985
30	1000	0.1	RMS	921.592	-67.01	-13	Pass	9700
1000	1700	1	RMS	1601.86	-51.63	-13	Pass	700
1700	1765	1	RMS	1754.492	12.78	60	Pass	601
1765	3000	1	RMS	1906.114	-46.62	-13	Pass	1235
3000	20000	1	RMS	3510.03	-50.99	-13	Pass	17000

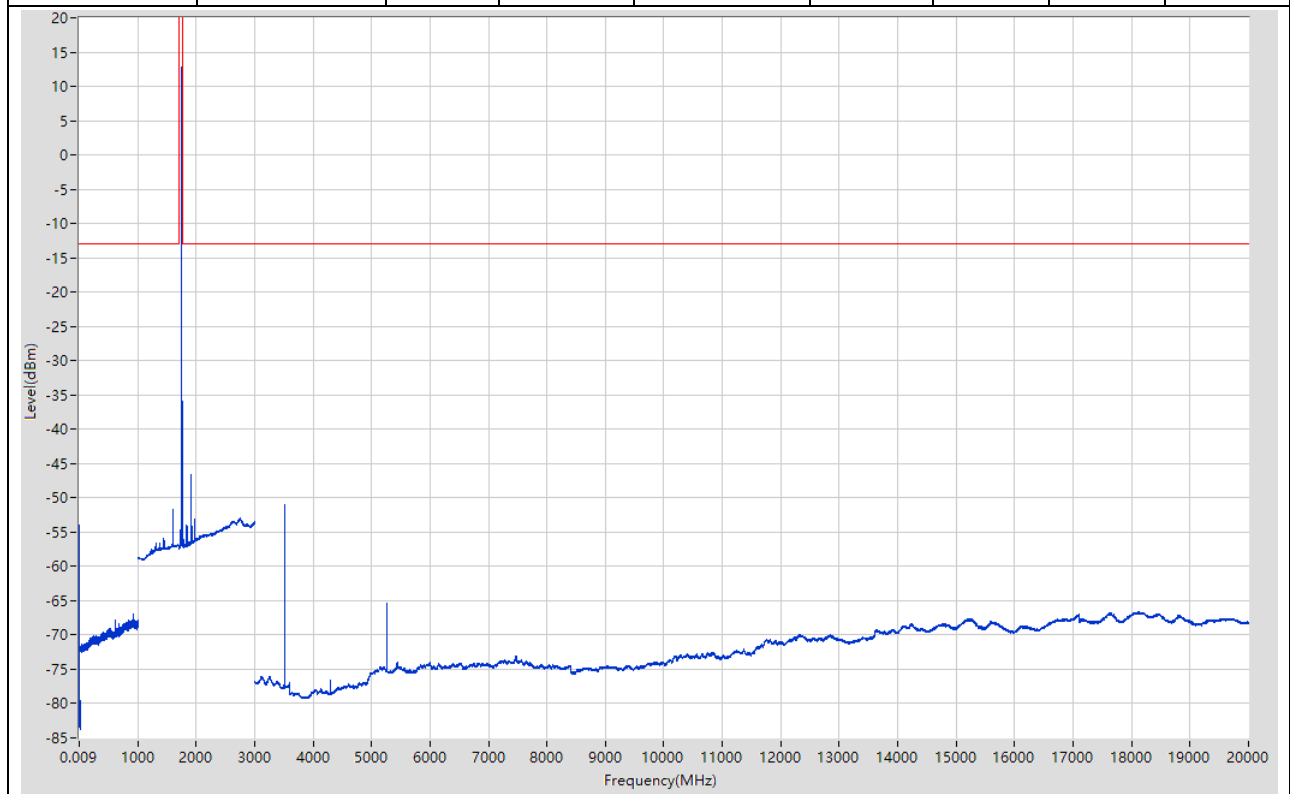


8.10. LTE-M1 Band4 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-53.7	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.18	-13	Pass	2985
30	1000	0.1	RMS	797.779	-66.81	-13	Pass	9700
1000	1700	1	RMS	1569.814	-49.98	-13	Pass	700
1700	1765	1	RMS	1719.392	13.24	60	Pass	601
1765	3000	1	RMS	1868.083	-44.77	-13	Pass	1235
3000	20000	1	RMS	3437.026	-37.44	-13	Pass	17000

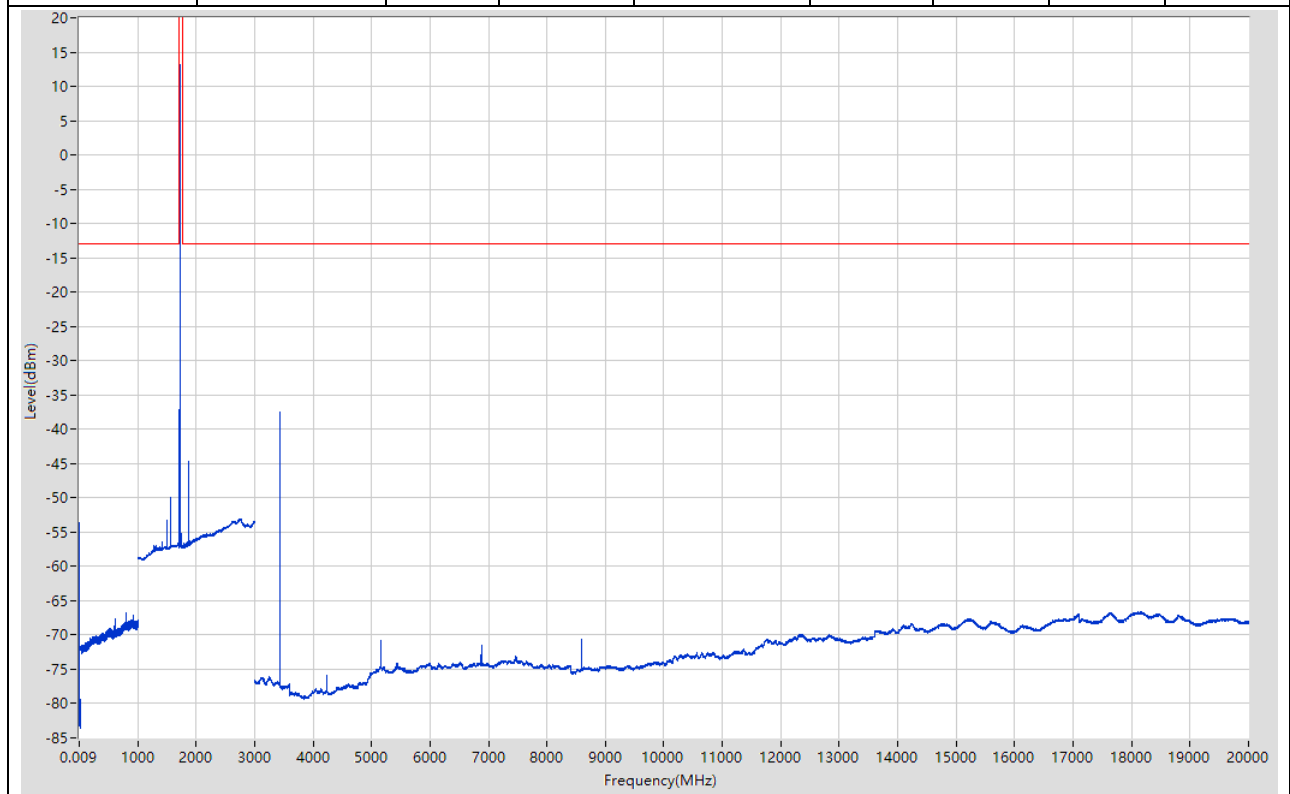


8.11. LTE-M1 Band4 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.2	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.83	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.98	-13	Pass	9700
1000	1700	1	RMS	1585.837	-51.59	-13	Pass	700
1700	1765	1	RMS	1736.942	13.37	60	Pass	601
1765	3000	1	RMS	1888.1	-42.38	-13	Pass	1235
3000	20000	1	RMS	3474.028	-30.55	-13	Pass	17000

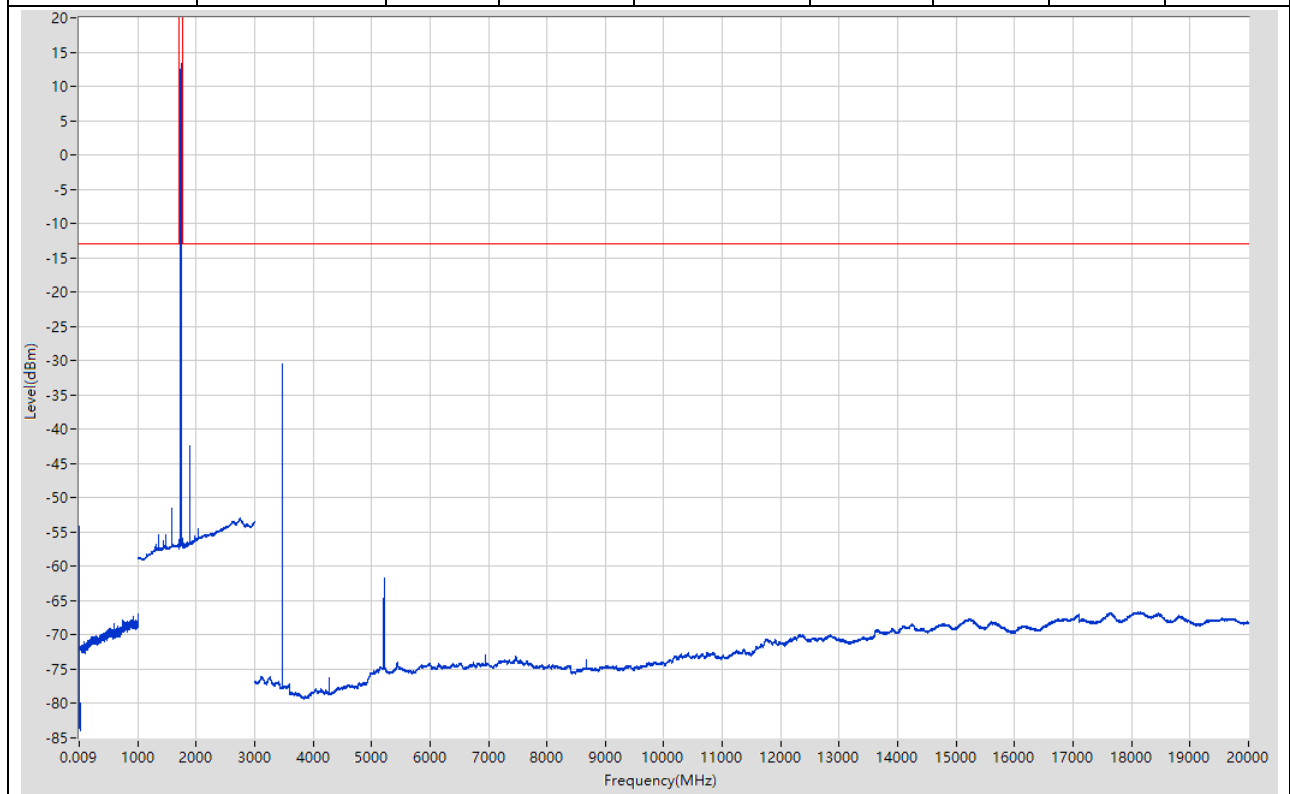


8.12. LTE-M1 Band4 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.88	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.33	-13	Pass	2985
30	1000	0.1	RMS	921.692	-66.56	-13	Pass	9700
1000	1700	1	RMS	1601.86	-52.07	-13	Pass	700
1700	1765	1	RMS	1754.275	13.01	60	Pass	601
1765	3000	1	RMS	1906.114	-51.88	-13	Pass	1235
3000	20000	1	RMS	3509.03	-46.58	-13	Pass	17000

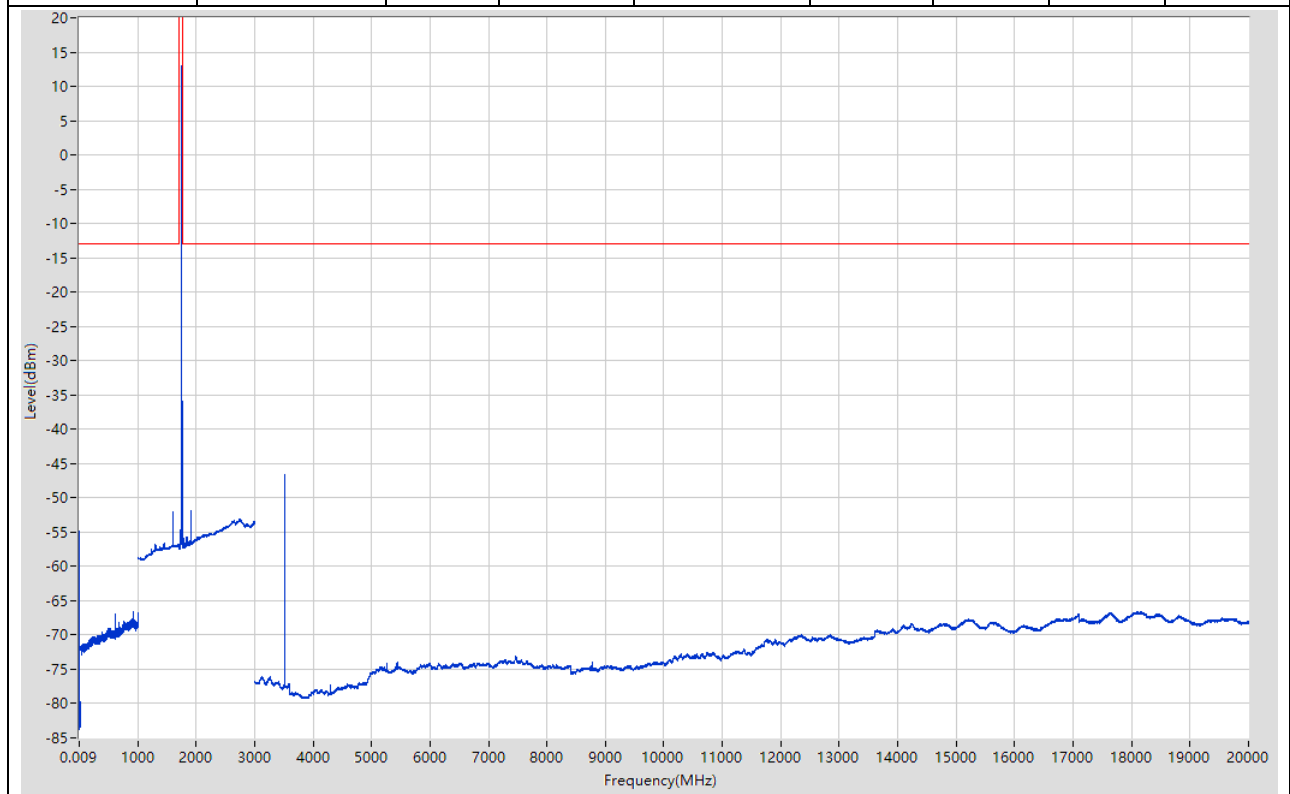


8.13. LTE-M1 Band4 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.28	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.07	-13	Pass	2985
30	1000	0.1	RMS	599.559	-66.68	-13	Pass	9700
1000	1700	1	RMS	1573.82	-52.3	-13	Pass	700
1700	1765	1	RMS	1723.725	13.29	60	Pass	601
1765	3000	1	RMS	1874.088	-44.32	-13	Pass	1235
3000	20000	1	RMS	3449.026	-32.26	-13	Pass	17000

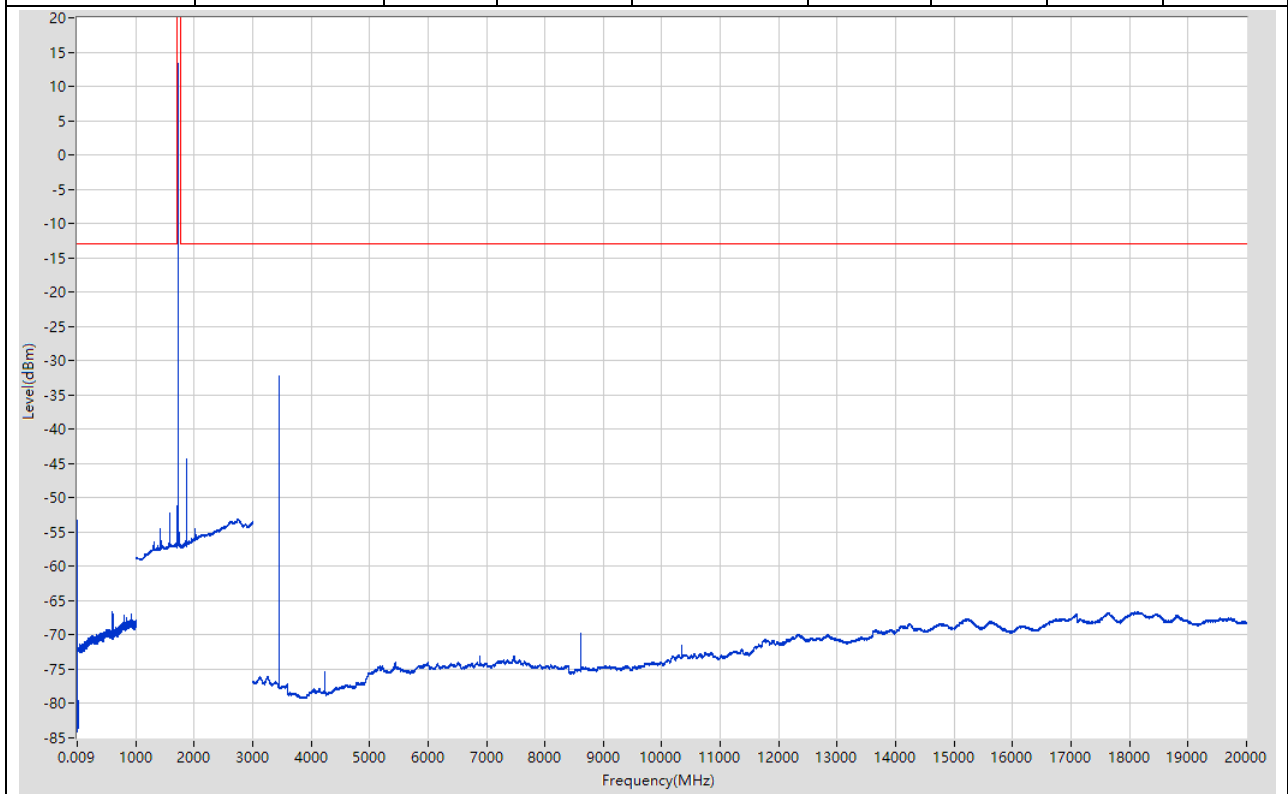


8.14. LTE-M1 Band4 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.21	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.69	-13	Pass	2985
30	1000	0.1	RMS	740.773	-66.71	-13	Pass	9700
1000	1700	1	RMS	1587.84	-50.08	-13	Pass	700
1700	1765	1	RMS	1739.108	12.38	60	Pass	601
1765	3000	1	RMS	1890.101	-44.89	-13	Pass	1235
3000	20000	1	RMS	3478.028	-43.59	-13	Pass	17000

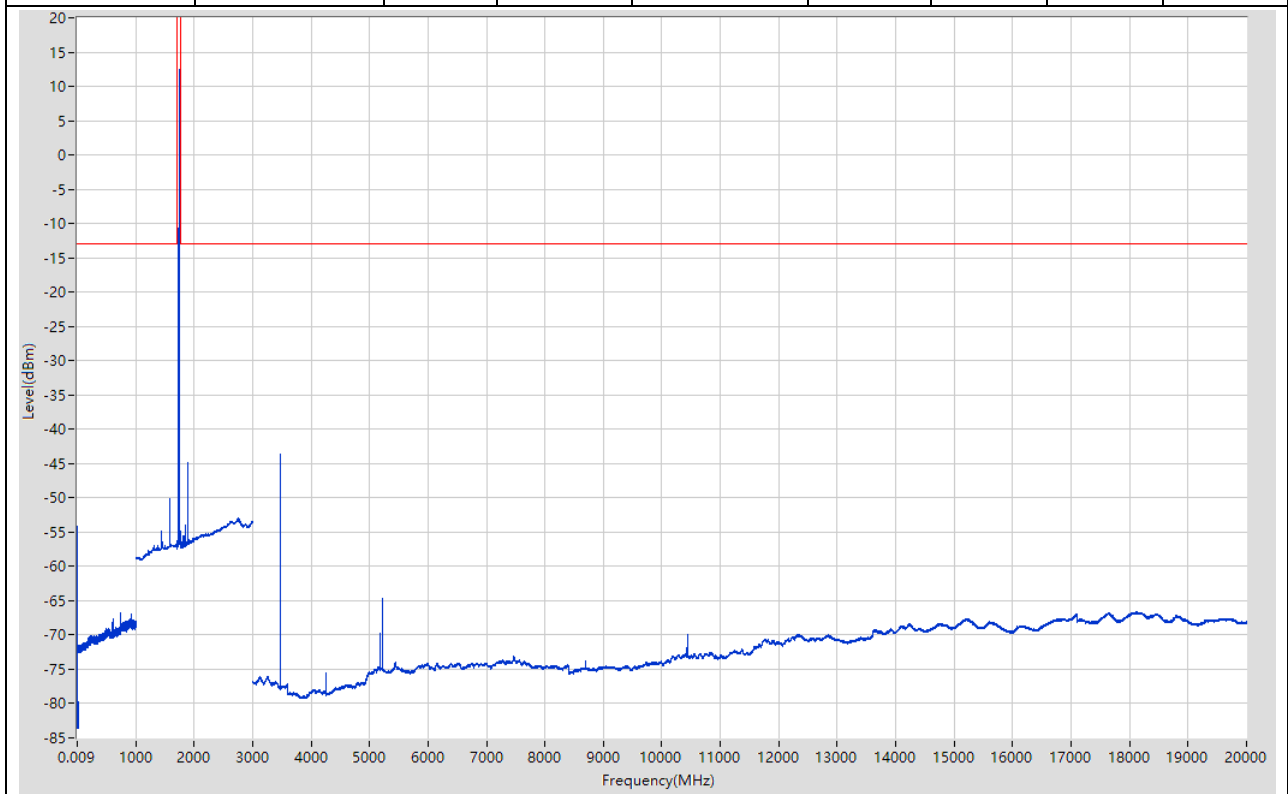


8.15. LTE-M1 Band4 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.81	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.92	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.52	-13	Pass	9700
1000	1700	1	RMS	1600.858	-50.77	-13	Pass	700
1700	1765	1	RMS	1753.842	12.72	60	Pass	601
1765	3000	1	RMS	1907.115	-50.67	-13	Pass	1235
3000	20000	1	RMS	3508.03	-35.29	-13	Pass	17000

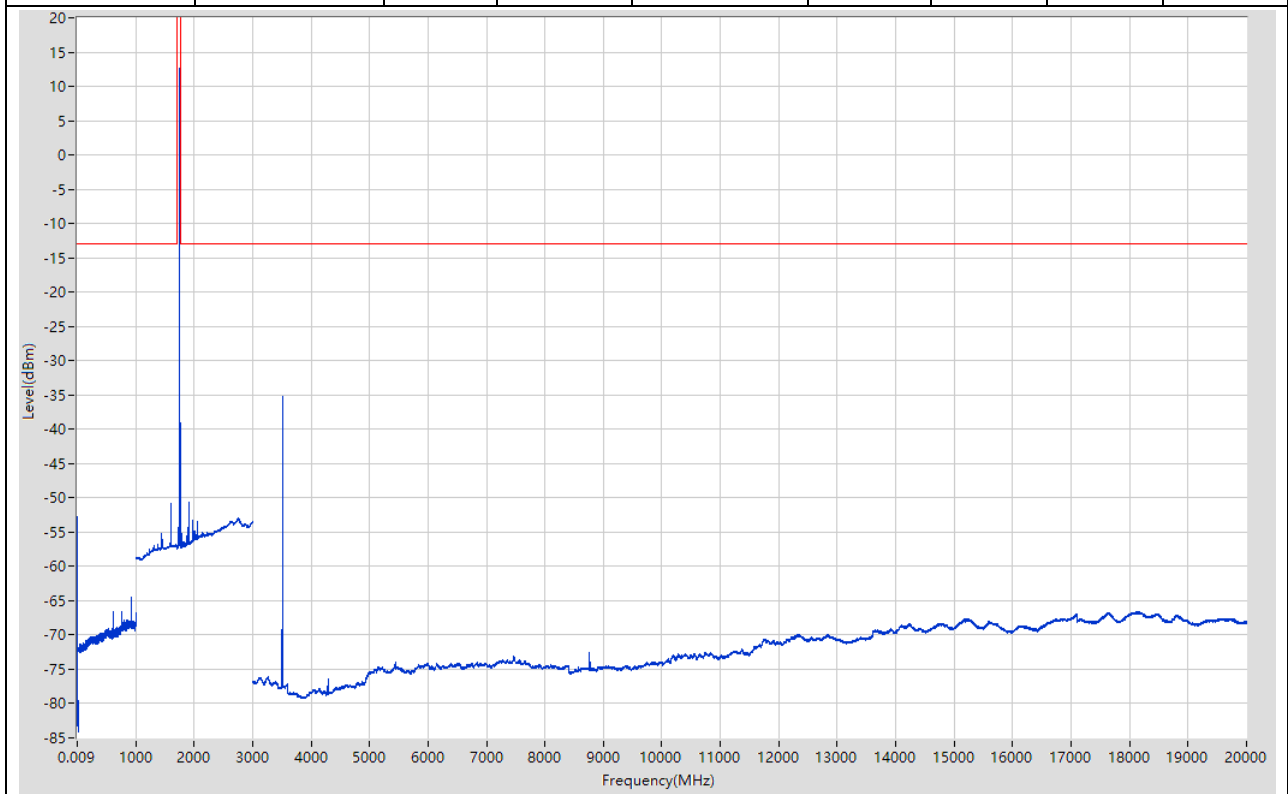


8.16. LTE-M1 Band4 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-54.68	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.02	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.44	-13	Pass	9700
1000	1700	1	RMS	1577.825	-48.45	-13	Pass	700
1700	1765	1	RMS	1728.492	12.6	60	Pass	601
1765	3000	1	RMS	1878.092	-44.97	-13	Pass	1235
3000	20000	1	RMS	3458.027	-30.59	-13	Pass	17000

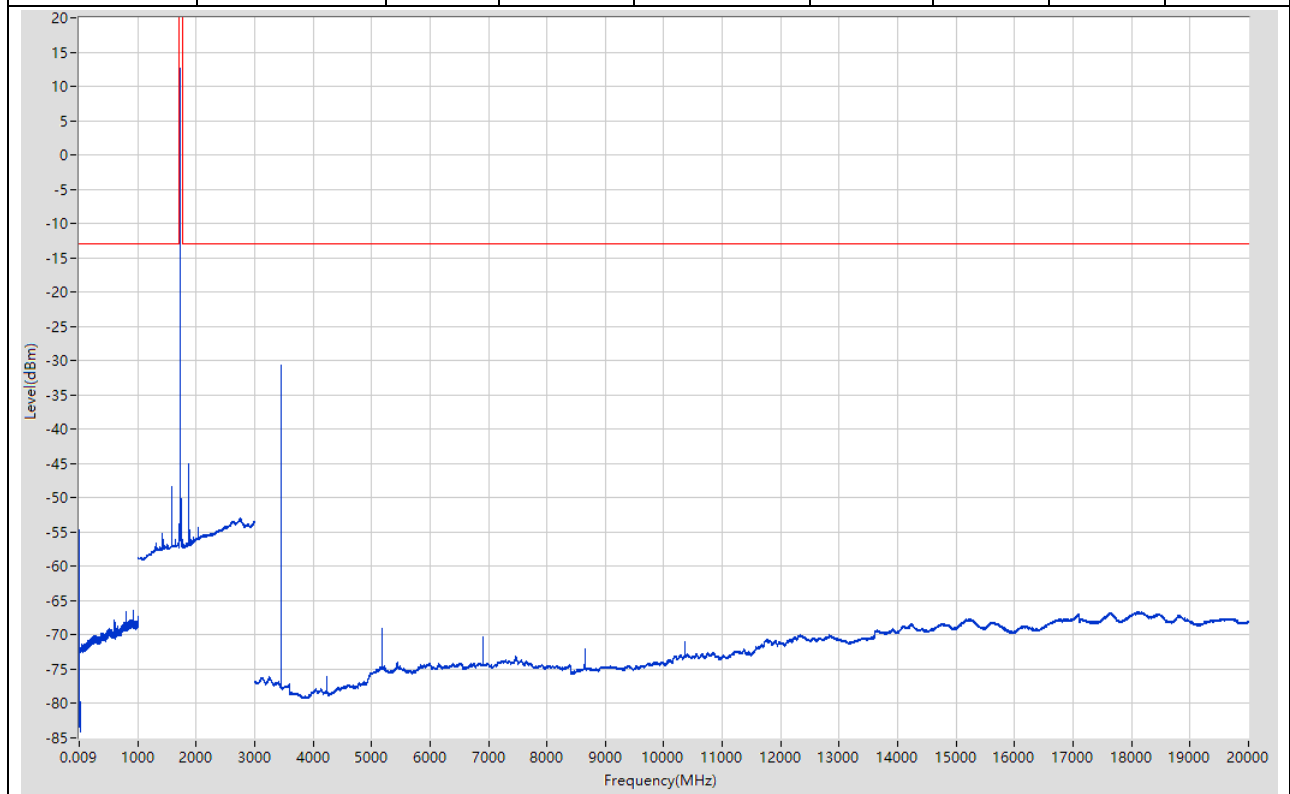


8.17. LTE-M1 Band4 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.62	-13	Pass	601
0.15	30	0.01	RMS	0.15	-59.09	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.8	-13	Pass	9700
1000	1700	1	RMS	1589.843	-50.12	-13	Pass	700
1700	1765	1	RMS	1741.383	12.48	60	Pass	601
1765	3000	1	RMS	1892.103	-47.17	-13	Pass	1235
3000	20000	1	RMS	3481.028	-32.4	-13	Pass	17000

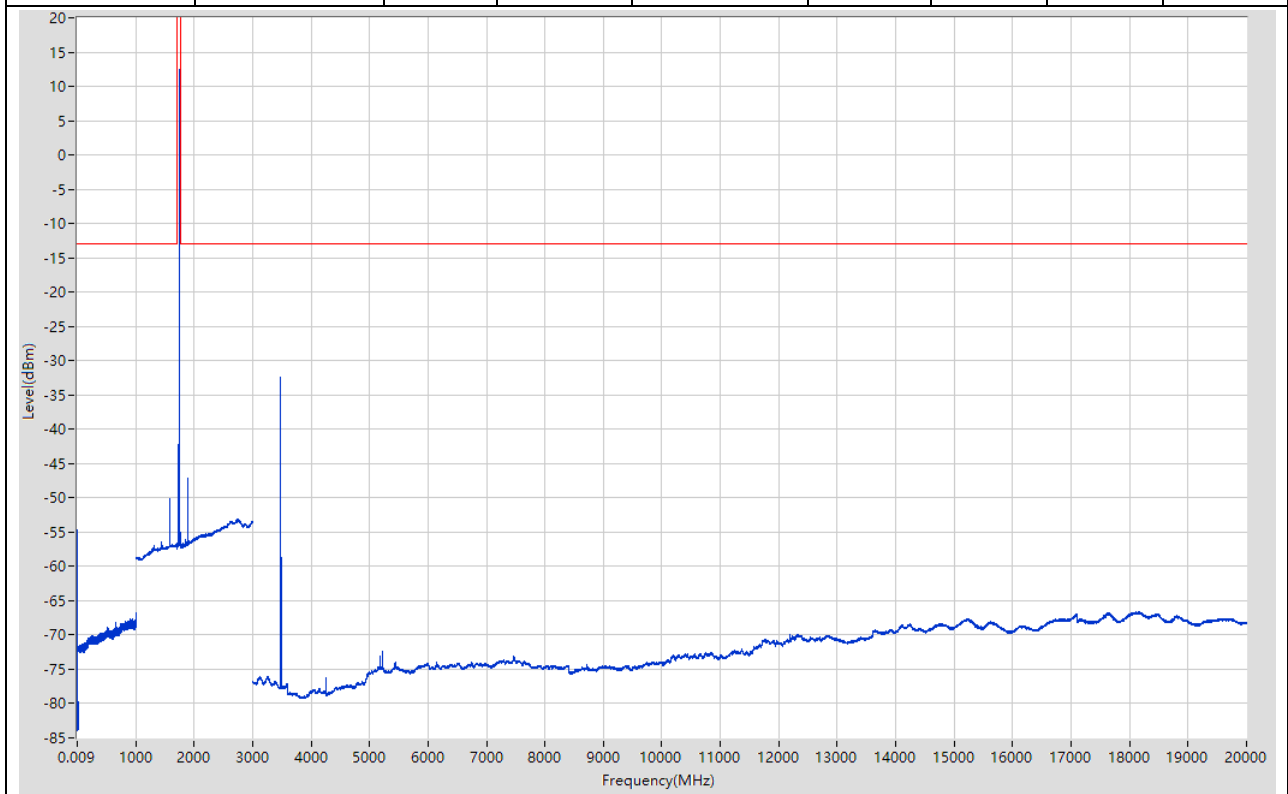

8.18. LTE-M1 Band4 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.63	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.08	-13	Pass	2985
30	1000	0.1	RMS	609.76	-67.33	-13	Pass	9700
1000	1700	1	RMS	1601.86	-49.21	-13	Pass	700
1700	1765	1	RMS	1753.842	12.08	60	Pass	601
1765	3000	1	RMS	1906.114	-46.03	-13	Pass	1235
3000	20000	1	RMS	3507.03	-36.94	-13	Pass	17000

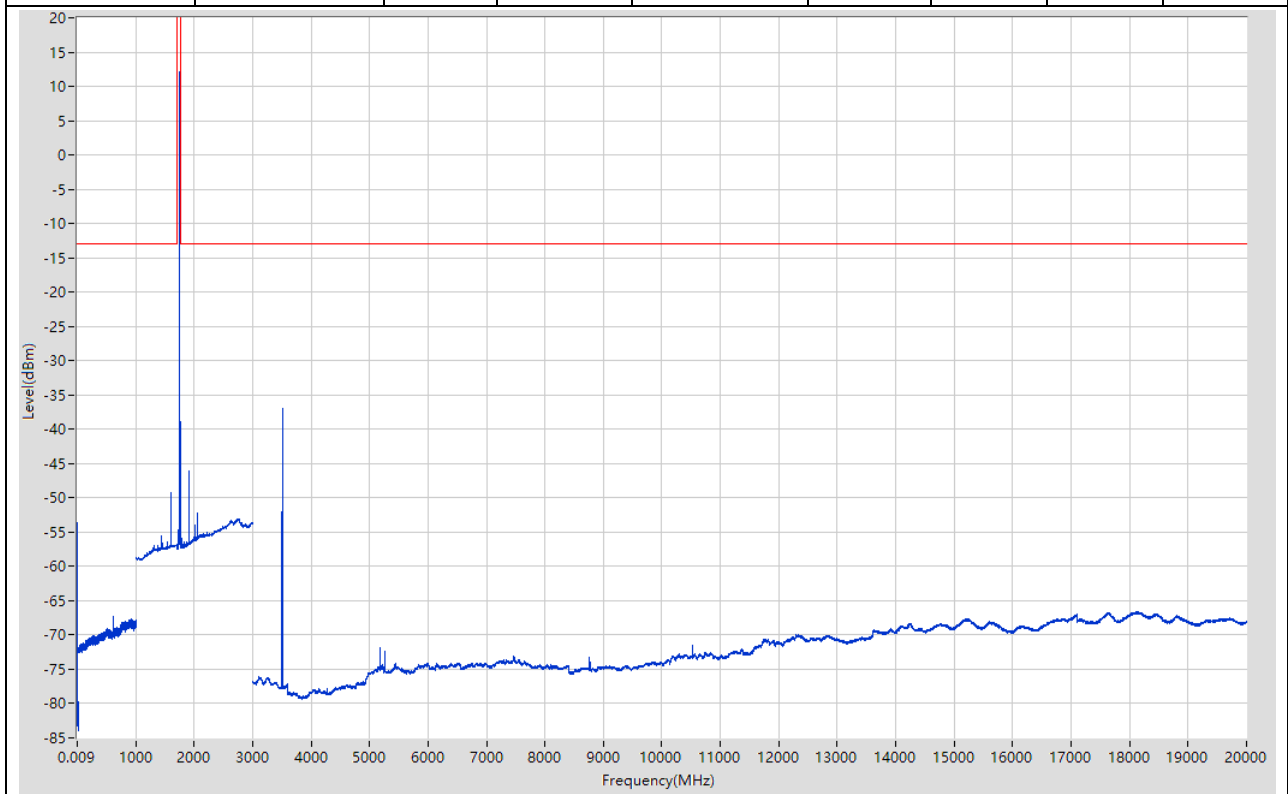

9. LTE-M1_Band5_QPSK


9.1. LTE-M1 Band5 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.65	-13	Pass	2985
30	814	0.1	RMS	813.6	-61.14	-13	Pass	7840
814	859	0.1	RMS	825.175	9.45	60	Pass	601
859	1000	0.1	RMS	921.644	-67.72	-13	Pass	1410
1000	3000	1	RMS	2475.738	-46.92	-13	Pass	2000
3000	10000	1	RMS	4126.161	-69.07	-13	Pass	7000

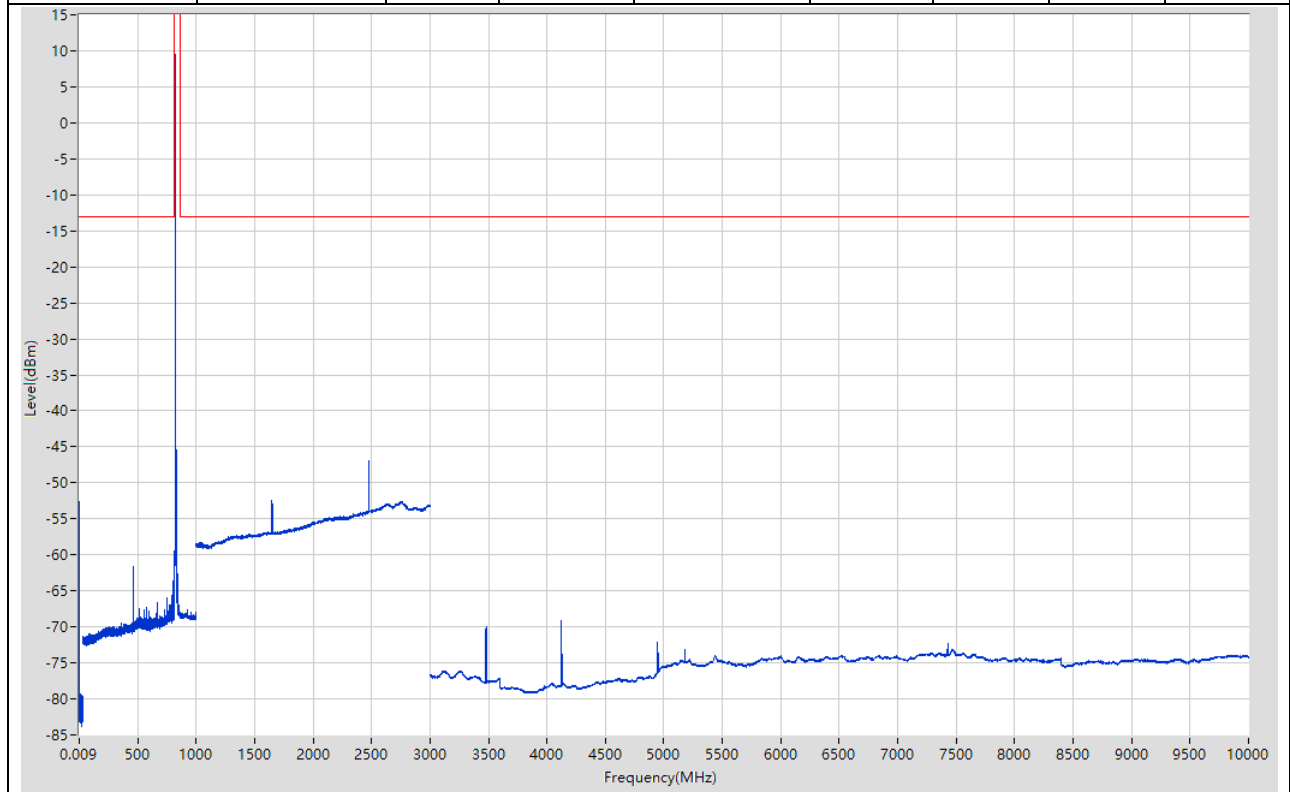


9.2. LTE-M1 Band5 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.29	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.35	-13	Pass	2985
30	814	0.1	RMS	460.855	-62.41	-13	Pass	7840
814	859	0.1	RMS	836.95	9.54	60	Pass	601
859	1000	0.1	RMS	863.103	-66.99	-13	Pass	1410
1000	3000	1	RMS	2510.755	-47.15	-13	Pass	2000
3000	10000	1	RMS	3526.075	-71.11	-13	Pass	7000

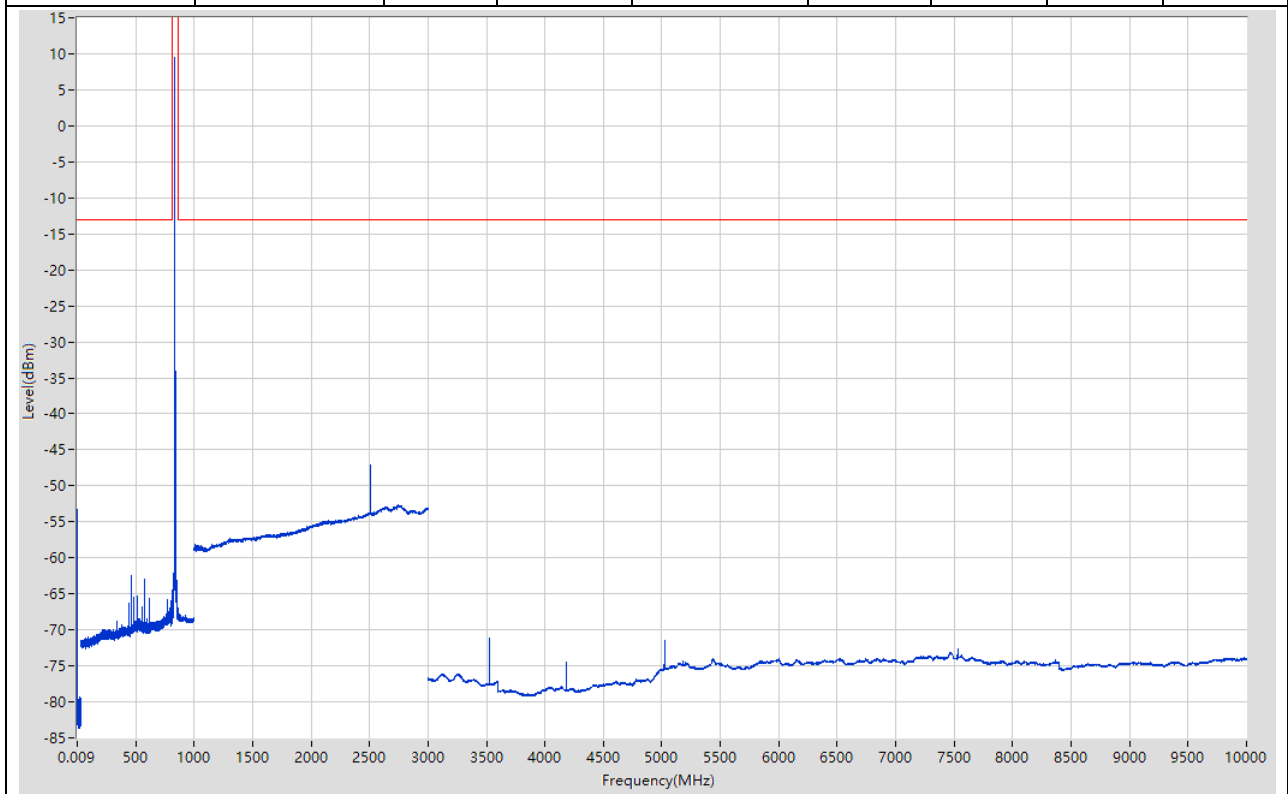


9.3. LTE-M1 Band5 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-54.67	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.24	-13	Pass	2985
30	814	0.1	RMS	587.771	-60.1	-13	Pass	7840
814	859	0.1	RMS	848.8	10.44	60	Pass	601
859	1000	0.1	RMS	867.506	-62.39	-13	Pass	1410
1000	3000	1	RMS	1697.349	-45.47	-13	Pass	2000
3000	10000	1	RMS	3573.082	-71.45	-13	Pass	7000

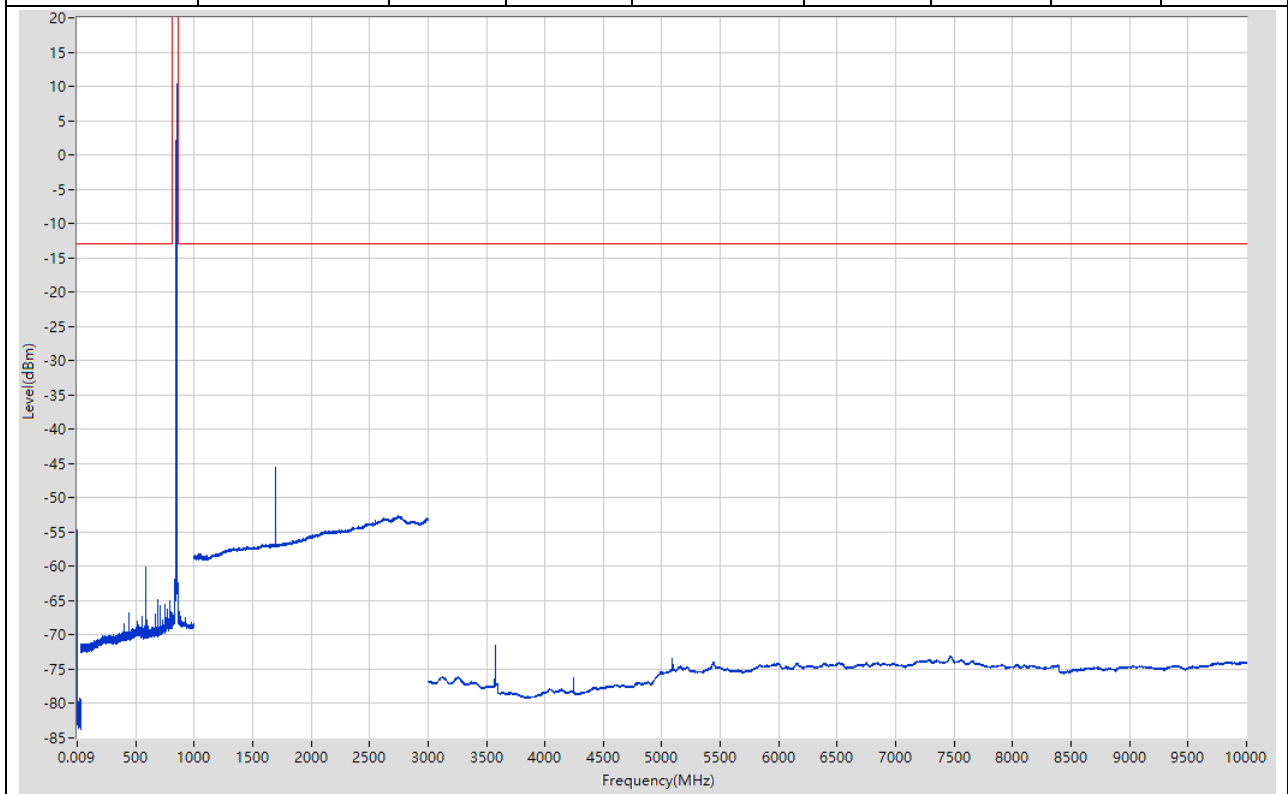


9.4. LTE-M1 Band5 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.08	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.62	-13	Pass	2985
30	814	0.1	RMS	807.099	-56.9	-13	Pass	7840
814	859	0.1	RMS	826.825	9.48	60	Pass	601
859	1000	0.1	RMS	953.867	-64.86	-13	Pass	1410
1000	3000	1	RMS	2747.874	-52.57	-13	Pass	2000
3000	10000	1	RMS	3482.069	-70.39	-13	Pass	7000

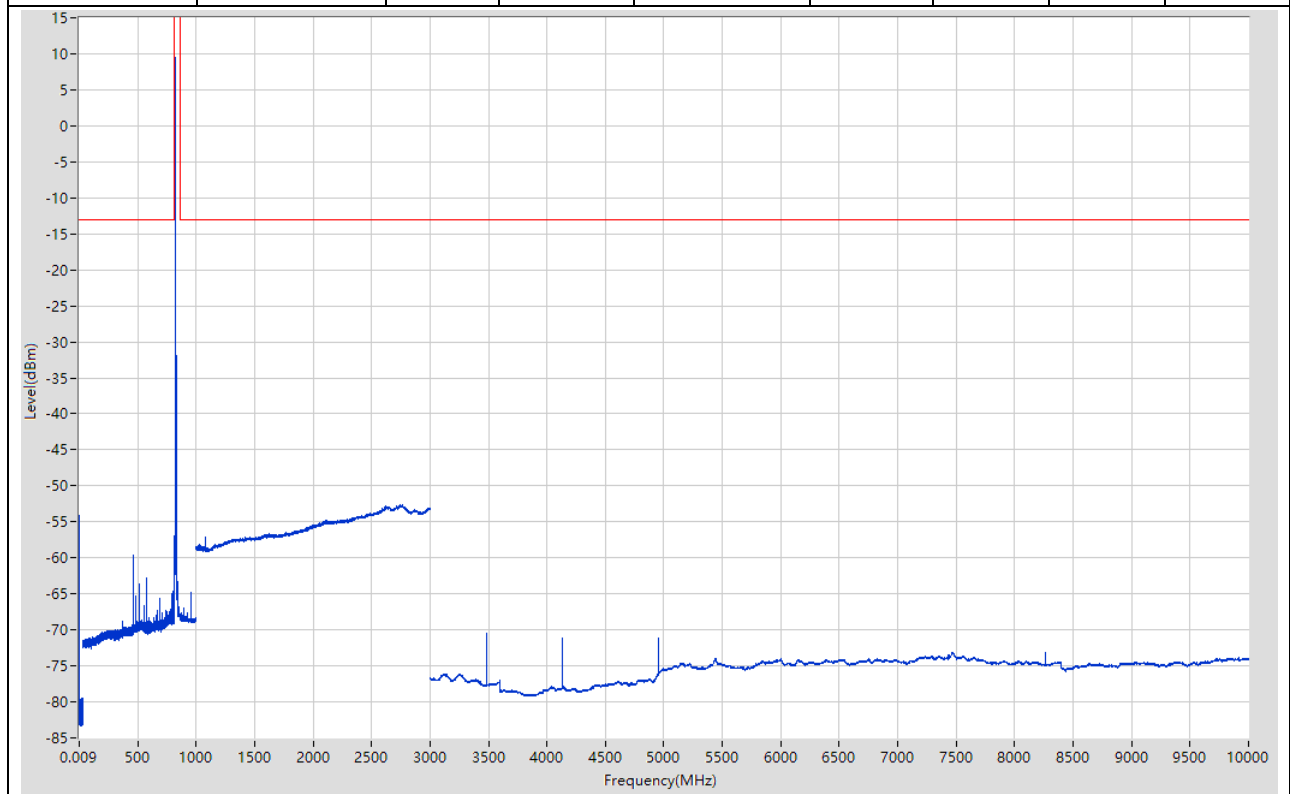


9.5. LTE-M1 Band5 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.45	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.25	-13	Pass	2985
30	814	0.1	RMS	515.262	-50.66	-13	Pass	7840
814	859	0.1	RMS	837.85	8.31	60	Pass	601
859	1000	0.1	RMS	966.576	-65.31	-13	Pass	1410
1000	3000	1	RMS	2512.756	-48.94	-13	Pass	2000
3000	10000	1	RMS	3526.075	-68.85	-13	Pass	7000

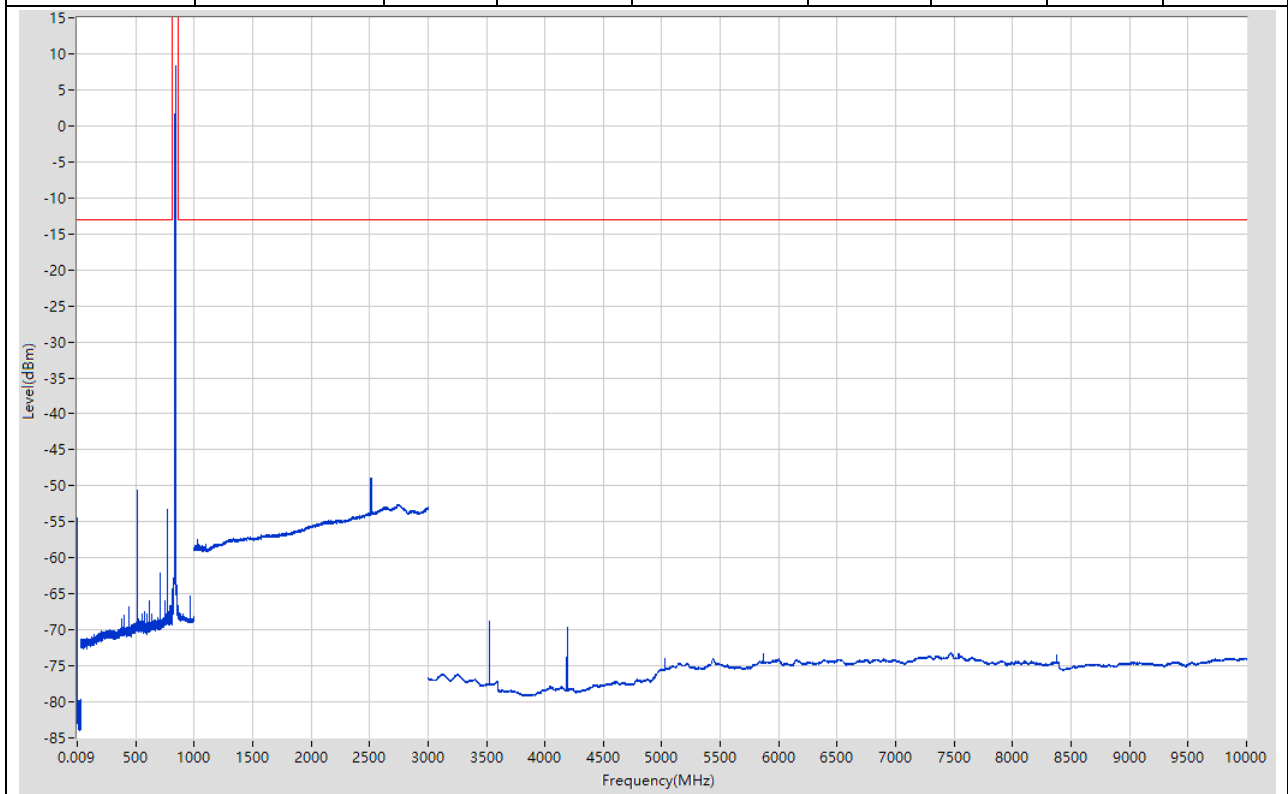


9.6. LTE-M1 Band5 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.5	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.66	-13	Pass	2985
30	814	0.1	RMS	460.755	-62.33	-13	Pass	7840
814	859	0.1	RMS	848.725	9.15	60	Pass	601
859	1000	0.1	RMS	859.1	-64.2	-13	Pass	1410
1000	3000	1	RMS	1696.348	-48.9	-13	Pass	2000
3000	10000	1	RMS	3570.081	-71.21	-13	Pass	7000

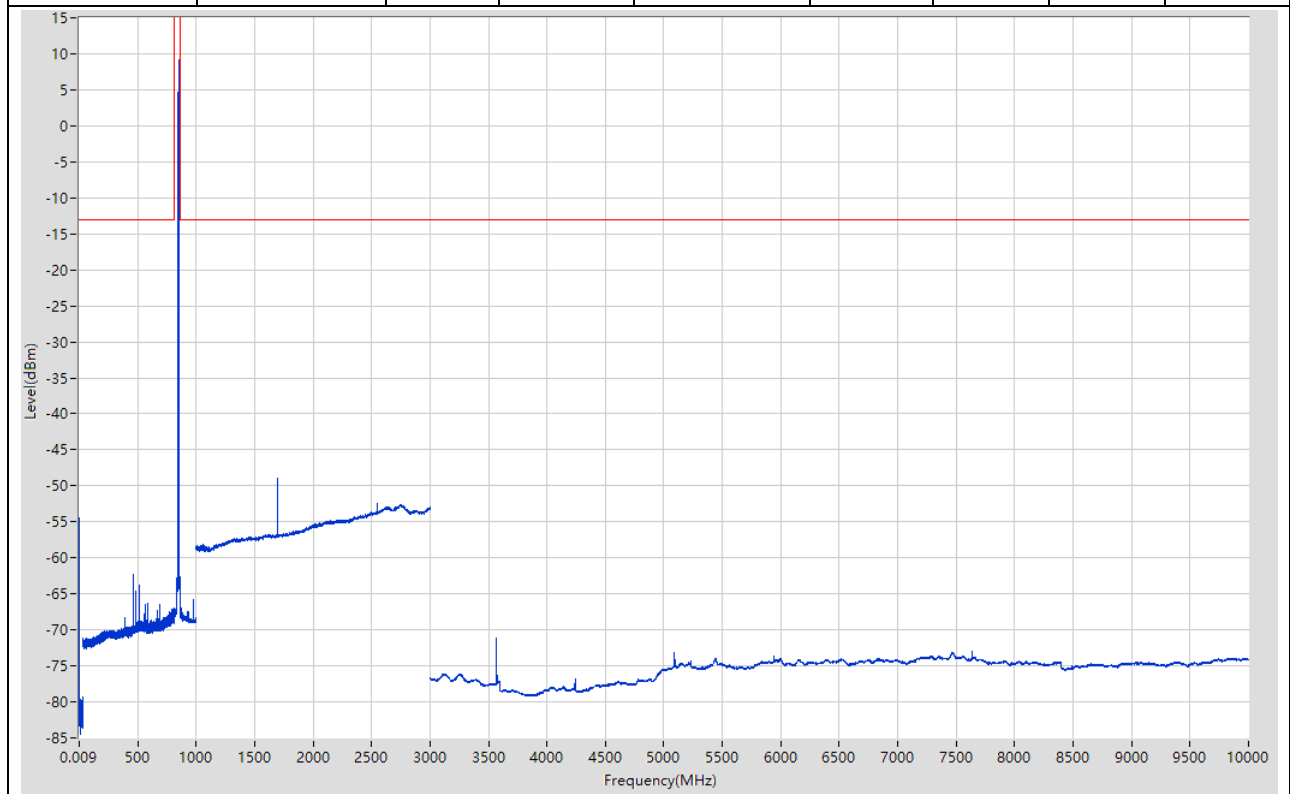


9.7. LTE-M1 Band5 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.95	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.25	-13	Pass	2985
30	814	0.1	RMS	552.167	-60.44	-13	Pass	7840
814	859	0.1	RMS	828.7	10.75	60	Pass	601
859	1000	0.1	RMS	913.539	-67.26	-13	Pass	1410
1000	3000	1	RMS	1656.328	-51.89	-13	Pass	2000
3000	10000	1	RMS	3486.069	-67.29	-13	Pass	7000

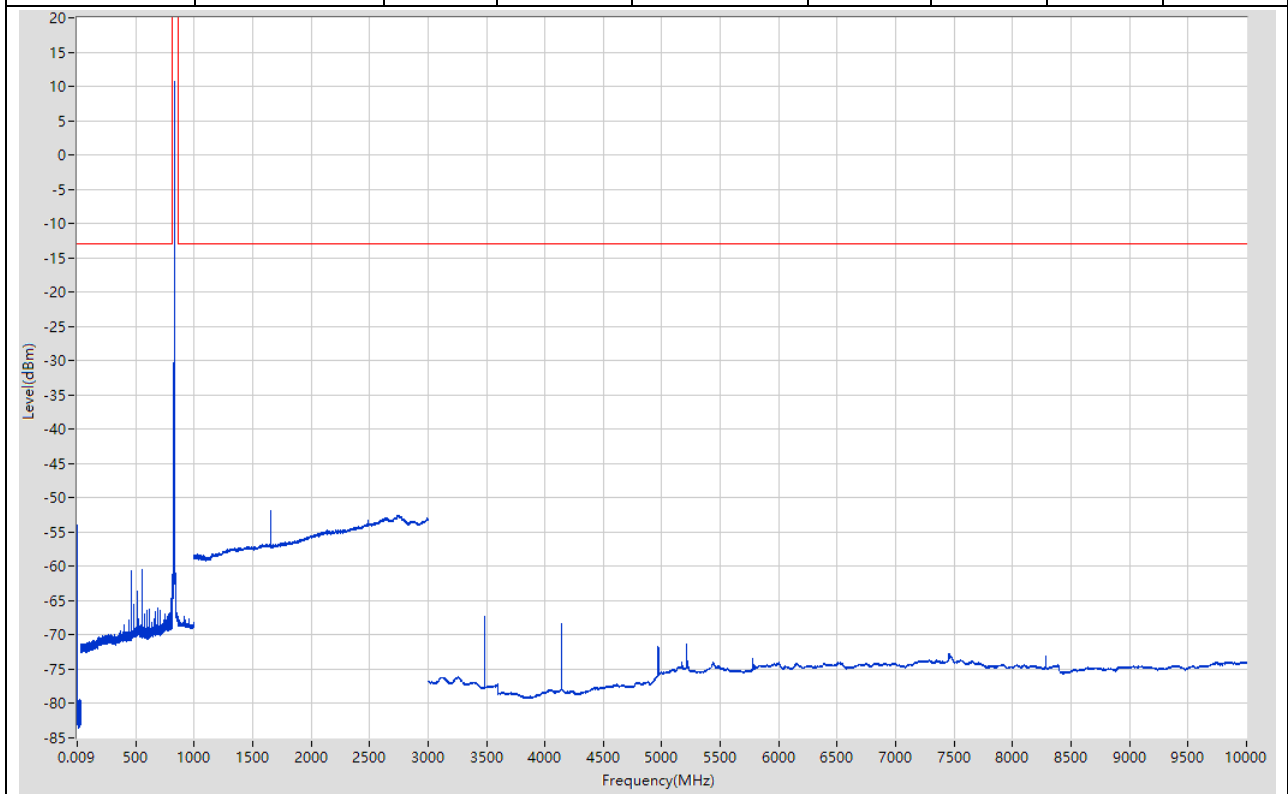


9.8. LTE-M1 Band5 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.41	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.75	-13	Pass	2985
30	814	0.1	RMS	460.855	-60.7	-13	Pass	7840
814	859	0.1	RMS	838.6	10.29	60	Pass	601
859	1000	0.1	RMS	865.204	-66.55	-13	Pass	1410
1000	3000	1	RMS	2513.757	-50.86	-13	Pass	2000
3000	10000	1	RMS	3526.075	-70.4	-13	Pass	7000

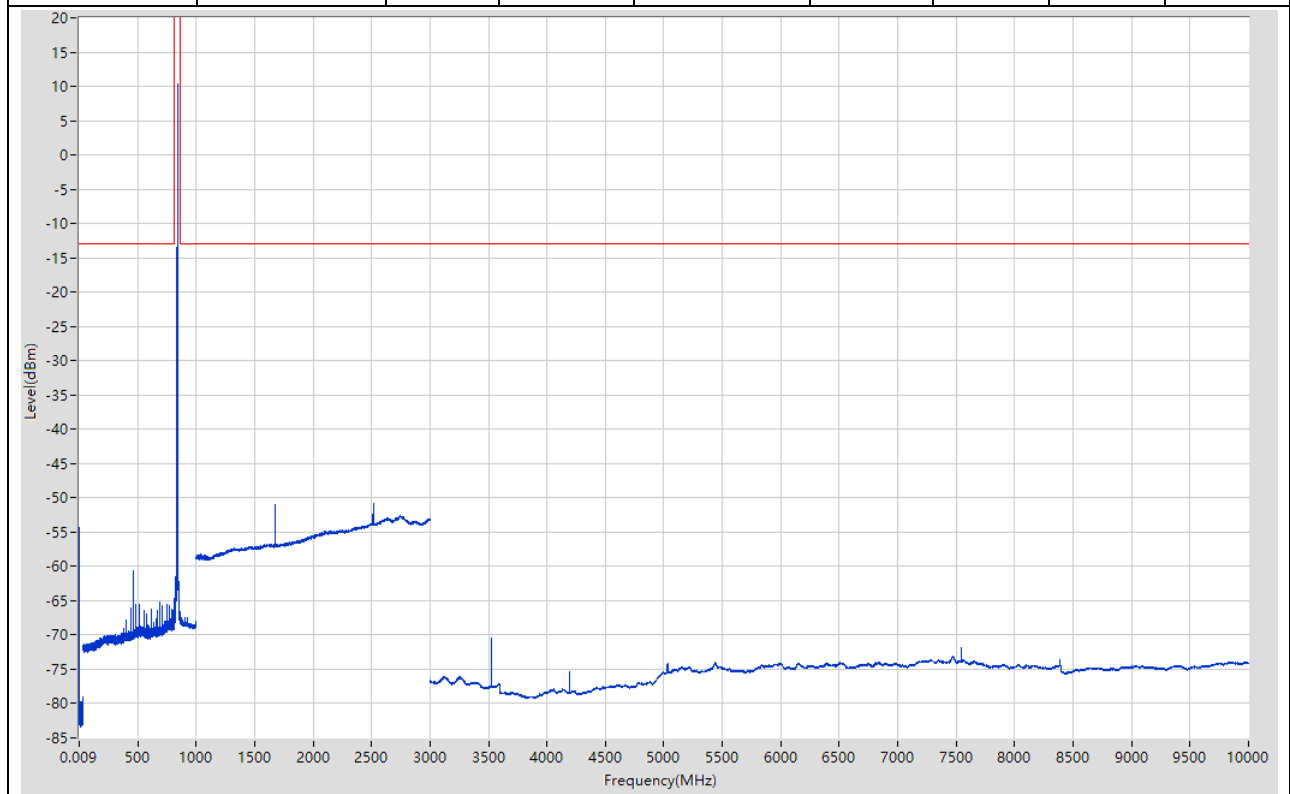


9.9. LTE-M1 Band5 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.07	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.14	-13	Pass	2985
30	814	0.1	RMS	460.855	-59.58	-13	Pass	7840
814	859	0.1	RMS	848.65	10.33	60	Pass	601
859	1000	0.1	RMS	867.406	-62.34	-13	Pass	1410
1000	3000	1	RMS	1696.348	-50.25	-13	Pass	2000
3000	10000	1	RMS	3566.081	-70.95	-13	Pass	7000

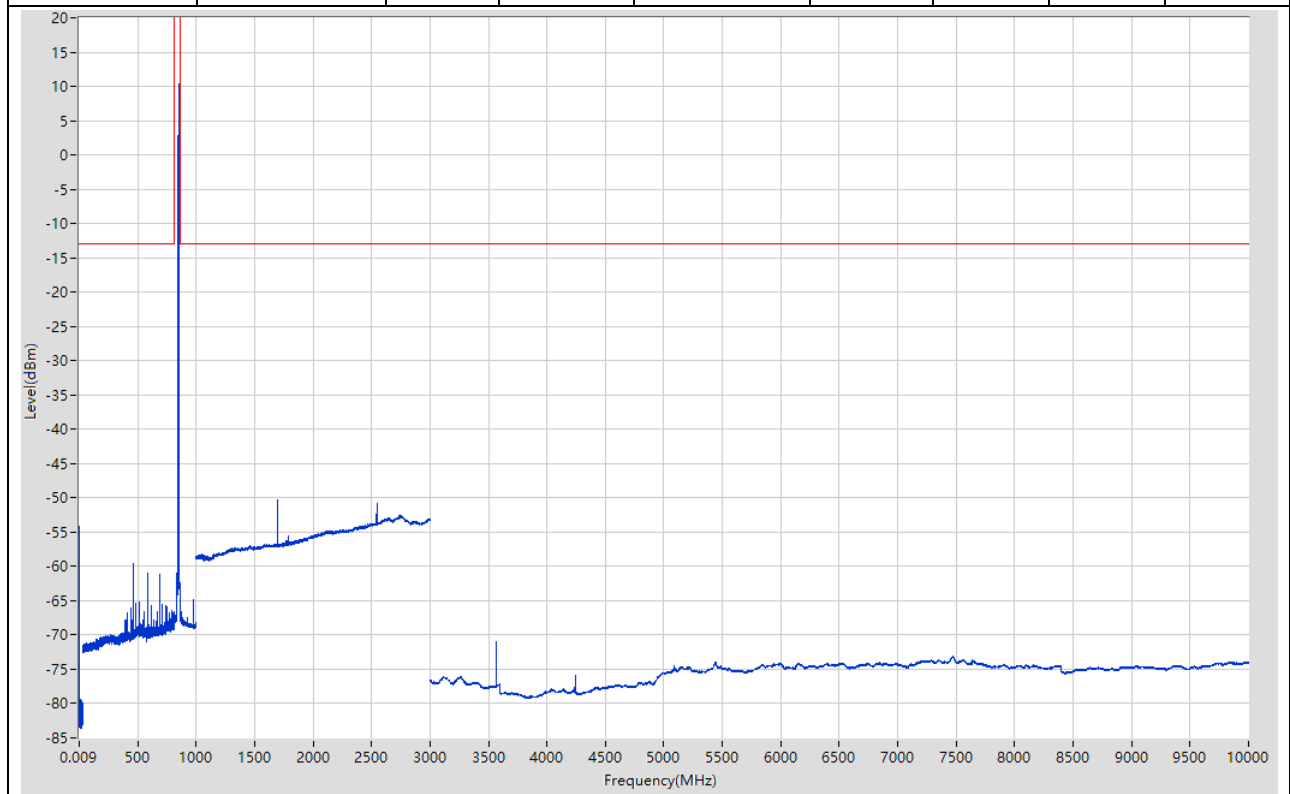


9.10. LTE-M1 Band5 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.27	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.27	-13	Pass	2985
30	814	0.1	RMS	812.7	-61.84	-13	Pass	7840
814	859	0.1	RMS	833.425	9.19	60	Pass	601
859	1000	0.1	RMS	861.202	-67.03	-13	Pass	1410
1000	3000	1	RMS	1656.328	-50.67	-13	Pass	2000
3000	10000	1	RMS	5001.286	-68.4	-13	Pass	7000

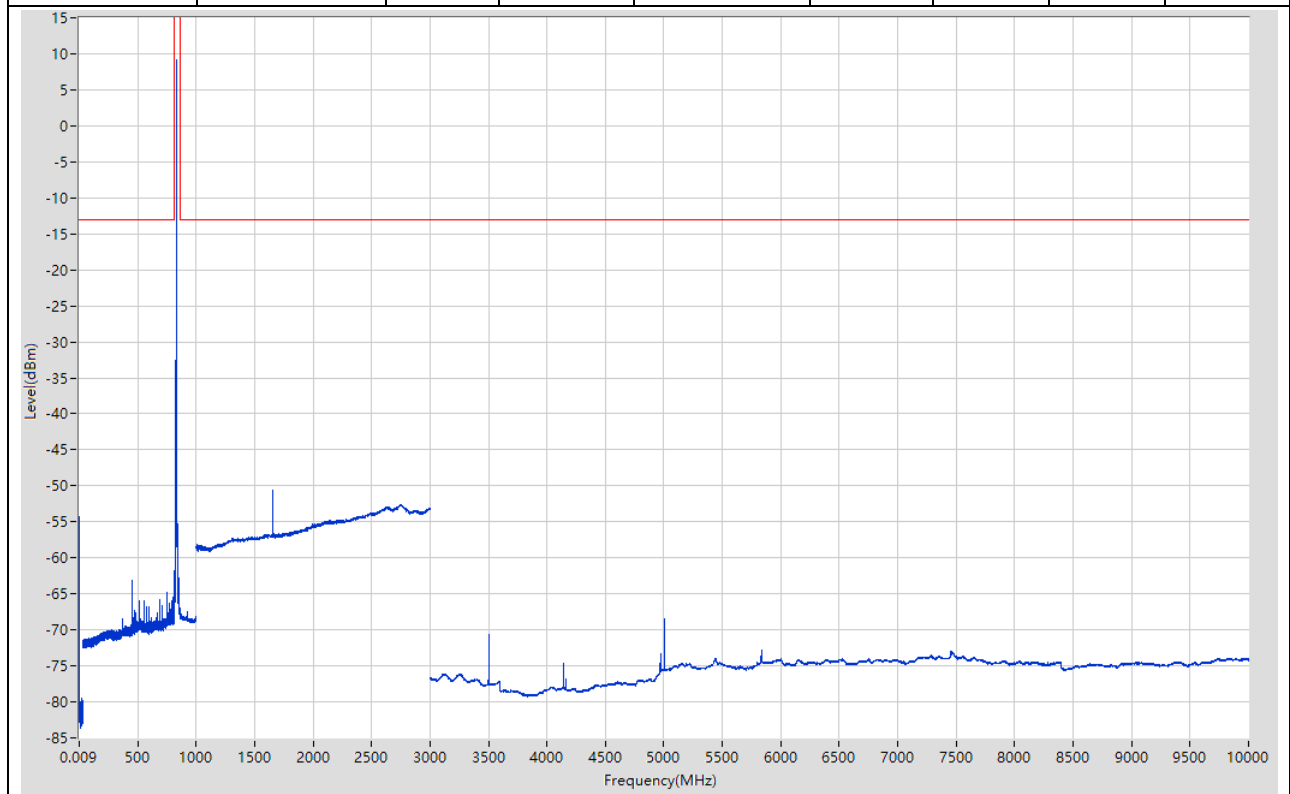


9.11. LTE-M1 Band5 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.98	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.66	-13	Pass	2985
30	814	0.1	RMS	711.687	-57.48	-13	Pass	7840
814	859	0.1	RMS	840.925	9.33	60	Pass	601
859	1000	0.1	RMS	859.6	-63.31	-13	Pass	1410
1000	3000	1	RMS	1682.341	-46.16	-13	Pass	2000
3000	10000	1	RMS	3535.076	-71.61	-13	Pass	7000

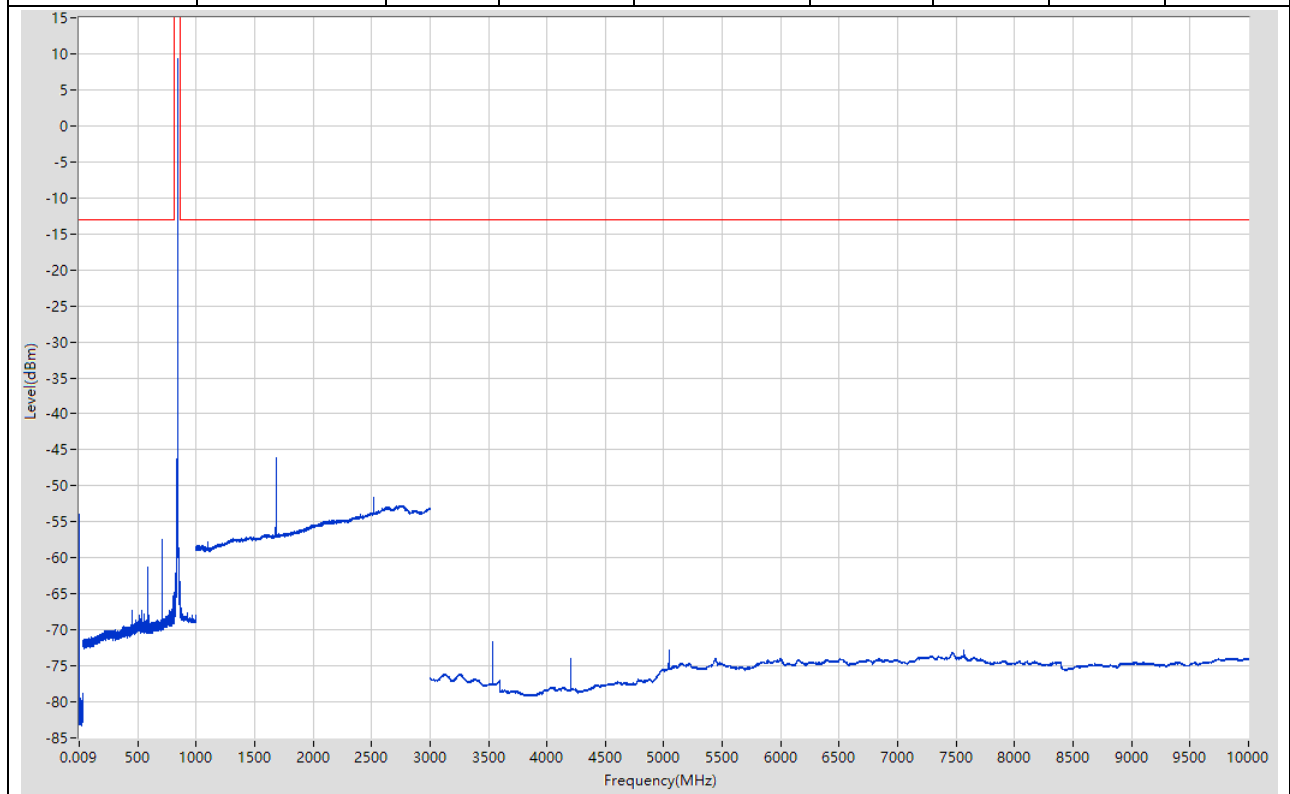

9.12. LTE-M1 Band5 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.93	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.89	-13	Pass	2985
30	814	0.1	RMS	717.988	-56.5	-13	Pass	7840
814	859	0.1	RMS	848.35	10.33	60	Pass	601
859	1000	0.1	RMS	867.006	-63.9	-13	Pass	1410
1000	3000	1	RMS	1695.348	-50	-13	Pass	2000
3000	10000	1	RMS	3565.081	-70.7	-13	Pass	7000

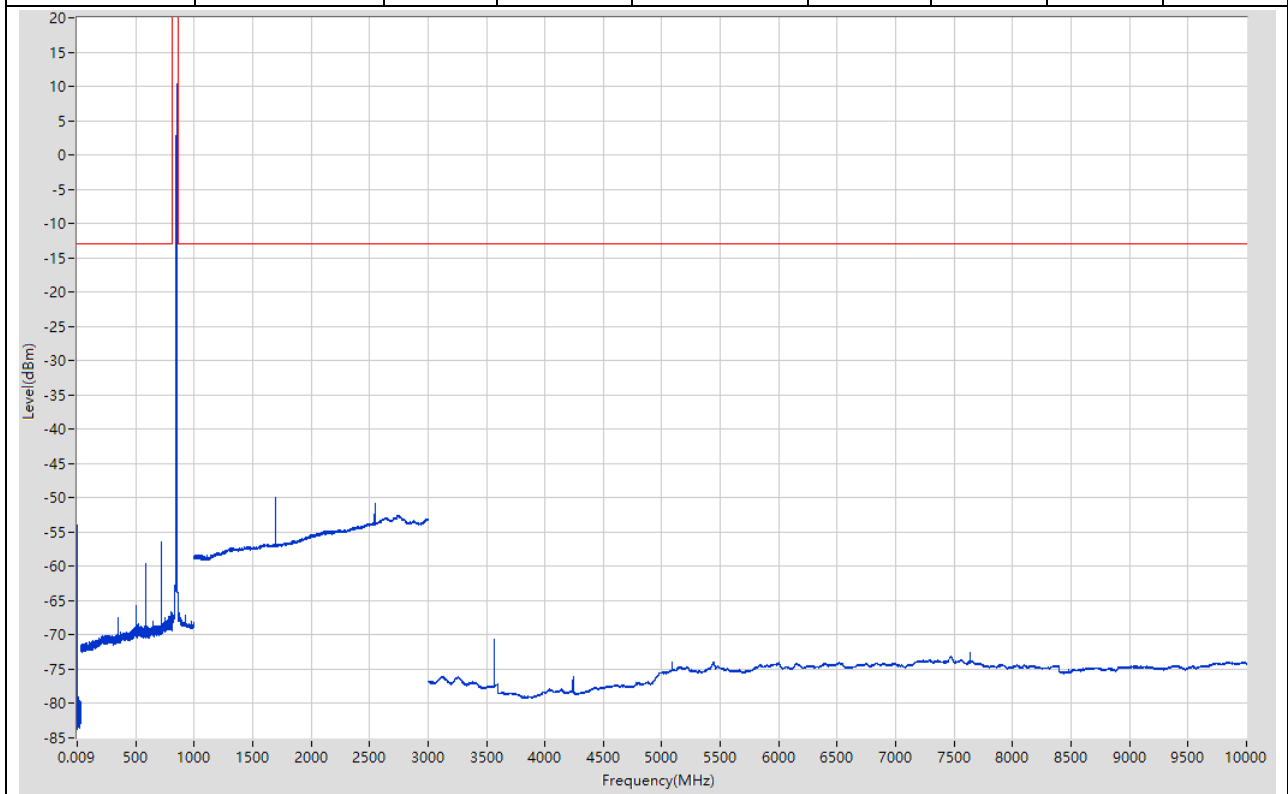

10. LTE-M1_Band5_16QAM


10.1. LTE-M1 Band5 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.29	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.06	-13	Pass	2985
30	814	0.1	RMS	380.545	-57.54	-13	Pass	7840
814	859	0.1	RMS	825.175	10.56	60	Pass	601
859	1000	0.1	RMS	921.644	-67.88	-13	Pass	1410
1000	3000	1	RMS	2742.871	-52.56	-13	Pass	2000
3000	10000	1	RMS	3479.068	-68.25	-13	Pass	7000

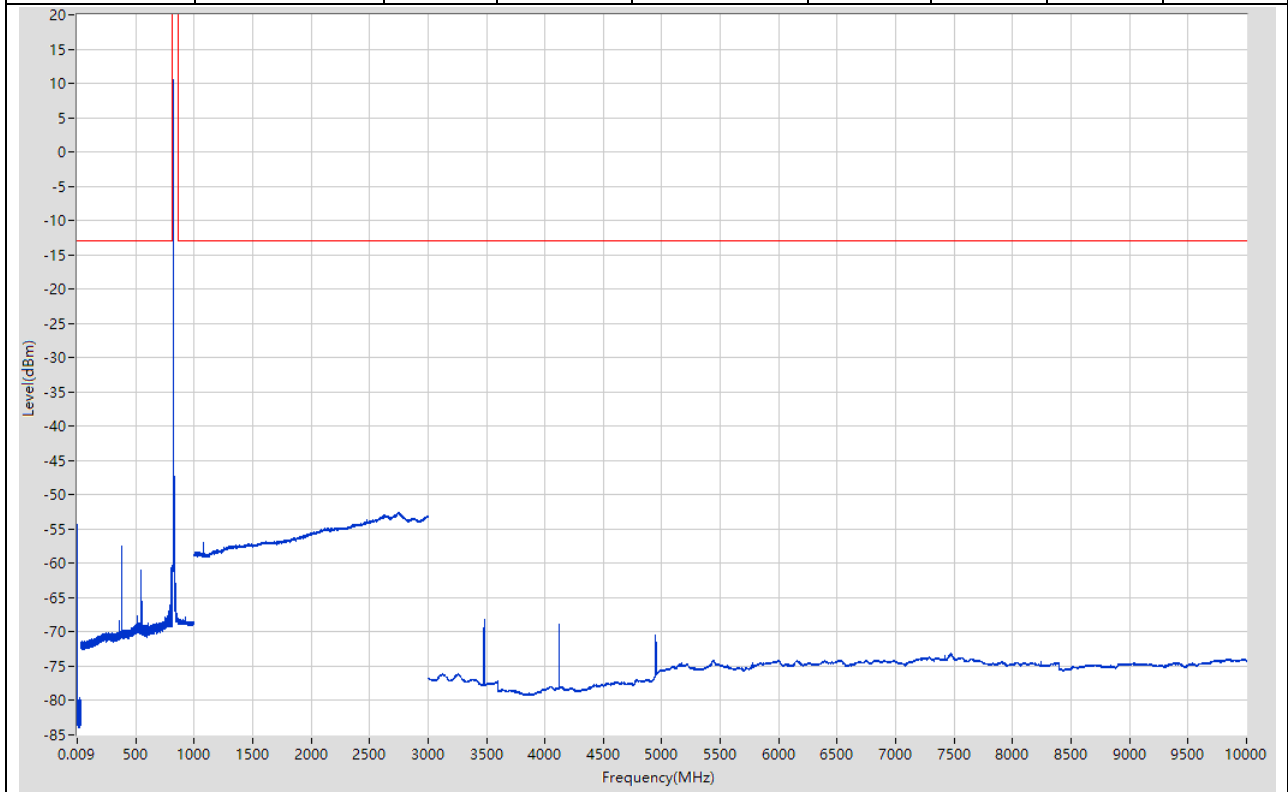


10.2. LTE-M1 Band5 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.94	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.97	-13	Pass	2985
30	814	0.1	RMS	707.486	-63.51	-13	Pass	7840
814	859	0.1	RMS	836.95	8.97	60	Pass	601
859	1000	0.1	RMS	862.302	-67.06	-13	Pass	1410
1000	3000	1	RMS	2511.756	-50.83	-13	Pass	2000
3000	10000	1	RMS	3526.075	-69.5	-13	Pass	7000

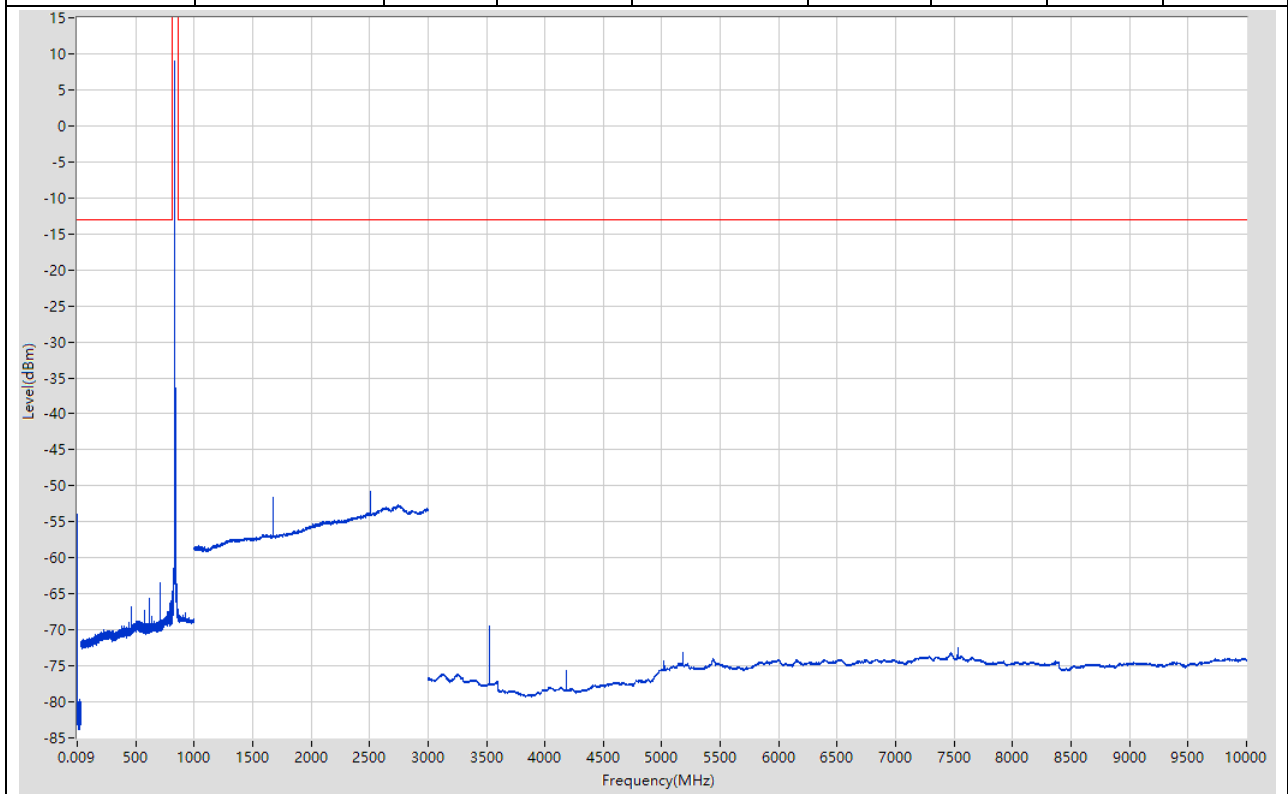


10.3. LTE-M1 Band5 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.5	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.38	-13	Pass	2985
30	814	0.1	RMS	587.071	-66.07	-13	Pass	7840
814	859	0.1	RMS	848.8	9.95	60	Pass	601
859	1000	0.1	RMS	867.506	-62.45	-13	Pass	1410
1000	3000	1	RMS	1697.349	-45.54	-13	Pass	2000
3000	10000	1	RMS	3573.082	-68.51	-13	Pass	7000

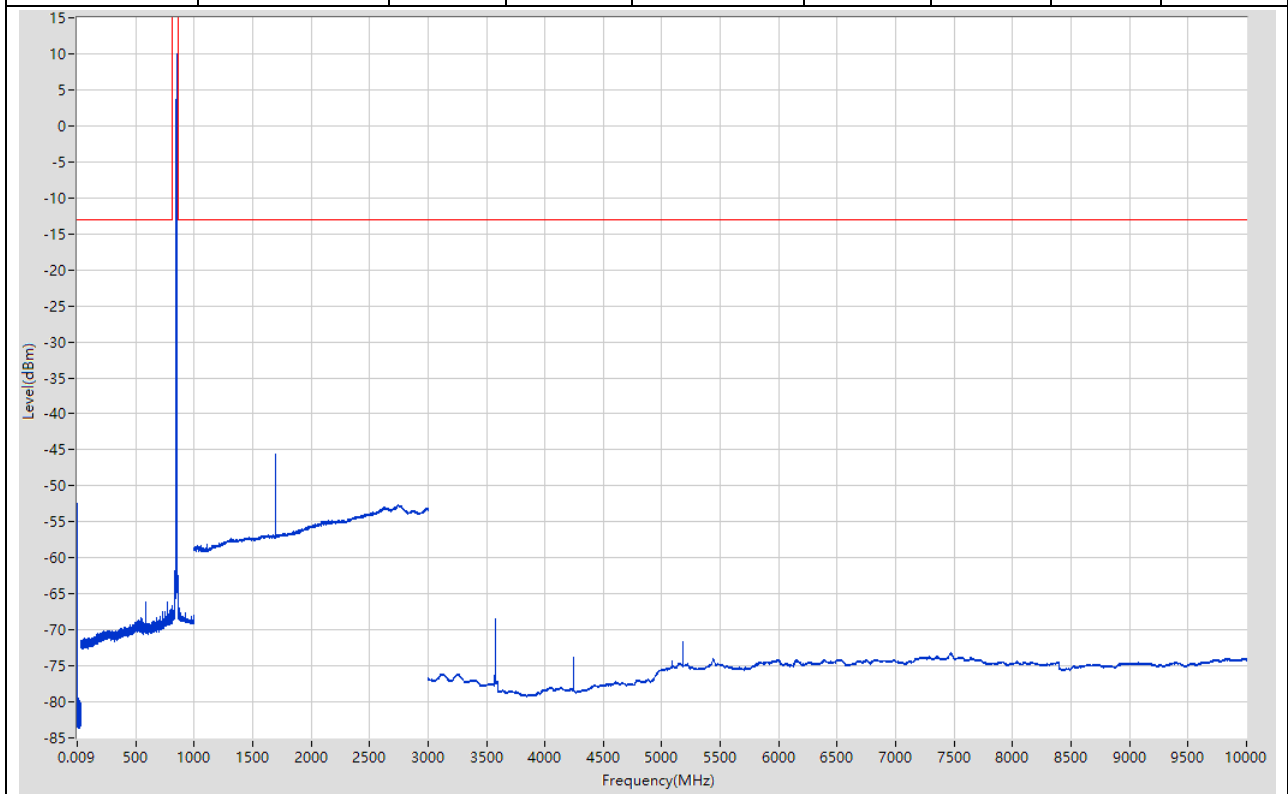


10.4. LTE-M1 Band5 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.02	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.52	-13	Pass	2985
30	814	0.1	RMS	810.4	-61.47	-13	Pass	7840
814	859	0.1	RMS	826.75	9.02	60	Pass	601
859	1000	0.1	RMS	859	-67.9	-13	Pass	1410
1000	3000	1	RMS	1653.327	-48.1	-13	Pass	2000
3000	10000	1	RMS	3482.069	-66.93	-13	Pass	7000

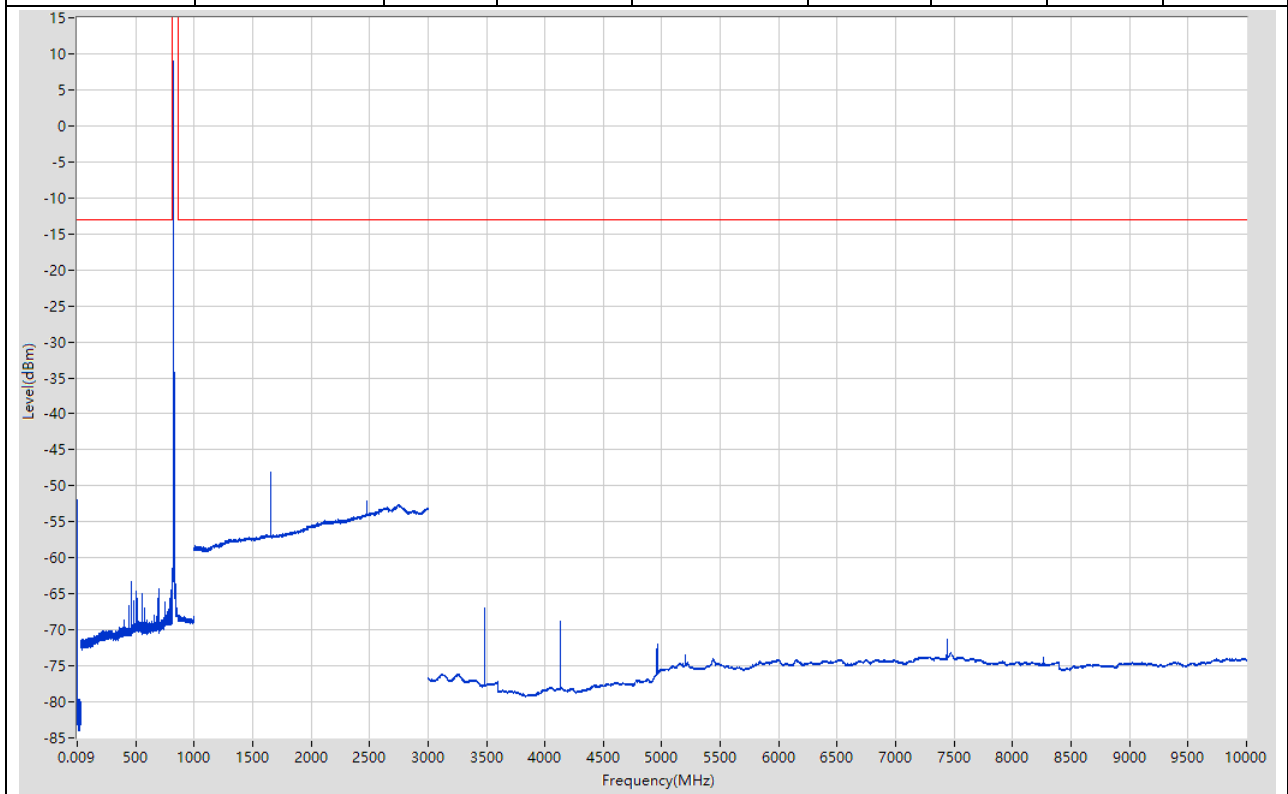


10.5. LTE-M1 Band5 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.13	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.91	-13	Pass	2985
30	814	0.1	RMS	708.887	-57.48	-13	Pass	7840
814	859	0.1	RMS	837.775	10.54	60	Pass	601
859	1000	0.1	RMS	863.603	-66.76	-13	Pass	1410
1000	3000	1	RMS	2512.756	-48.26	-13	Pass	2000
3000	10000	1	RMS	3526.075	-67.95	-13	Pass	7000

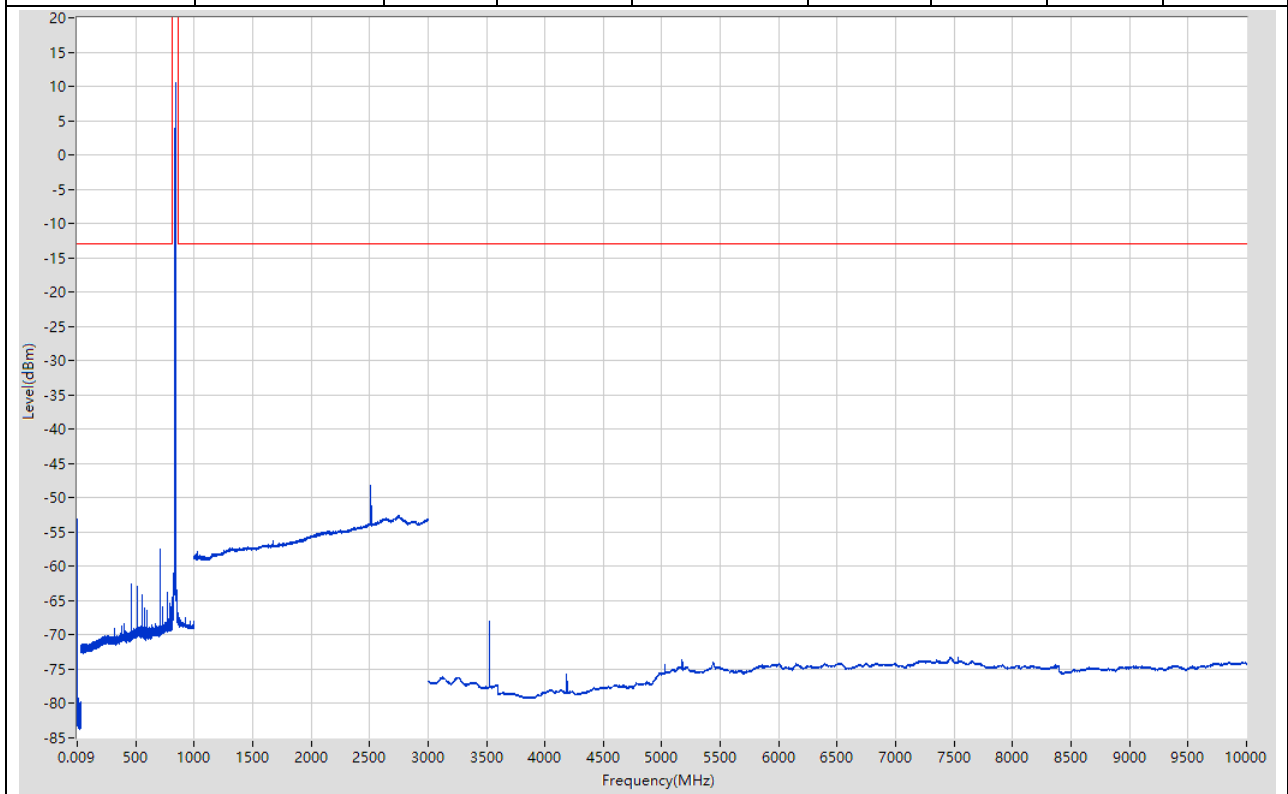


10.6. LTE-M1 Band5 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.19	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.91	-13	Pass	2985
30	814	0.1	RMS	652.579	-50.76	-13	Pass	7840
814	859	0.1	RMS	848.725	9.81	60	Pass	601
859	1000	0.1	RMS	867.506	-63.18	-13	Pass	1410
1000	3000	1	RMS	2746.873	-52.63	-13	Pass	2000
3000	10000	1	RMS	3570.081	-71.01	-13	Pass	7000

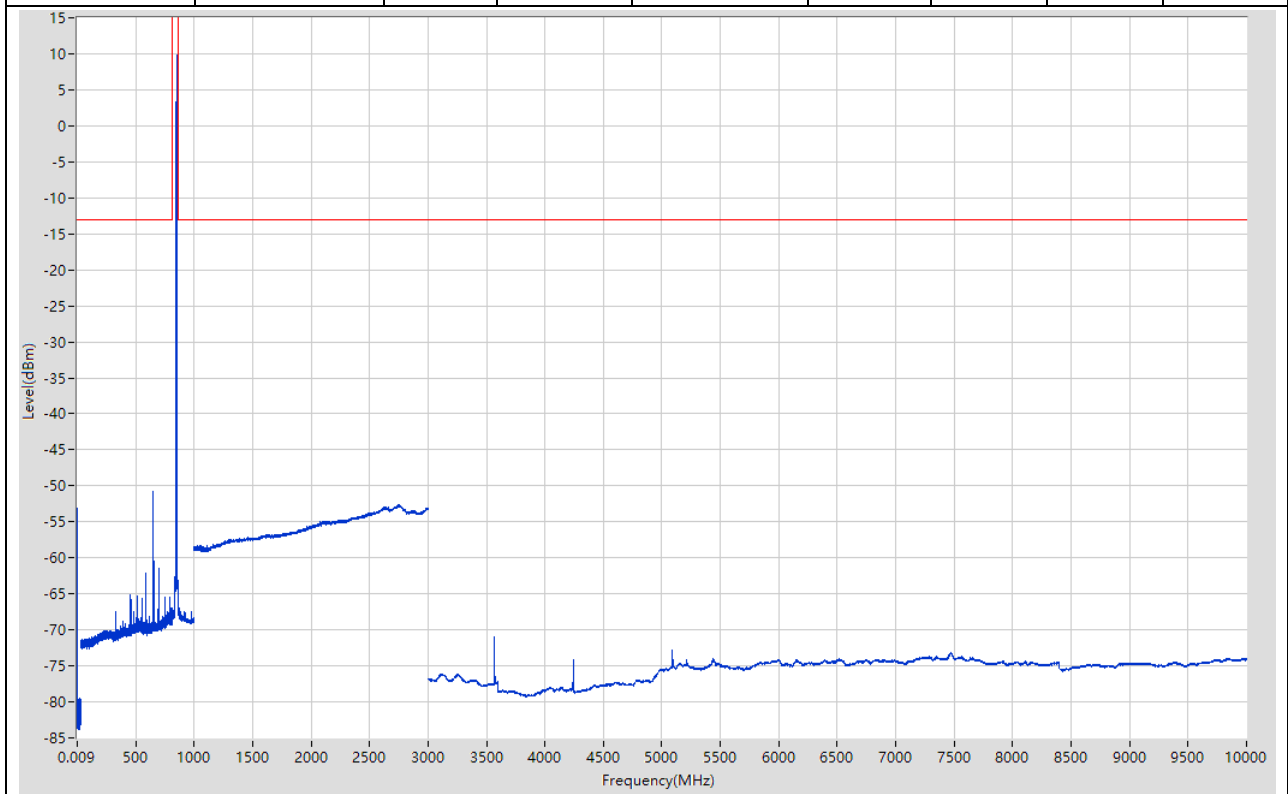


10.7. LTE-M1 Band5 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.08	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.59	-13	Pass	2985
30	814	0.1	RMS	811.8	-60.48	-13	Pass	7840
814	859	0.1	RMS	828.625	10.52	60	Pass	601
859	1000	0.1	RMS	867.206	-67.55	-13	Pass	1410
1000	3000	1	RMS	2750.875	-52.63	-13	Pass	2000
3000	10000	1	RMS	4143.163	-68.28	-13	Pass	7000

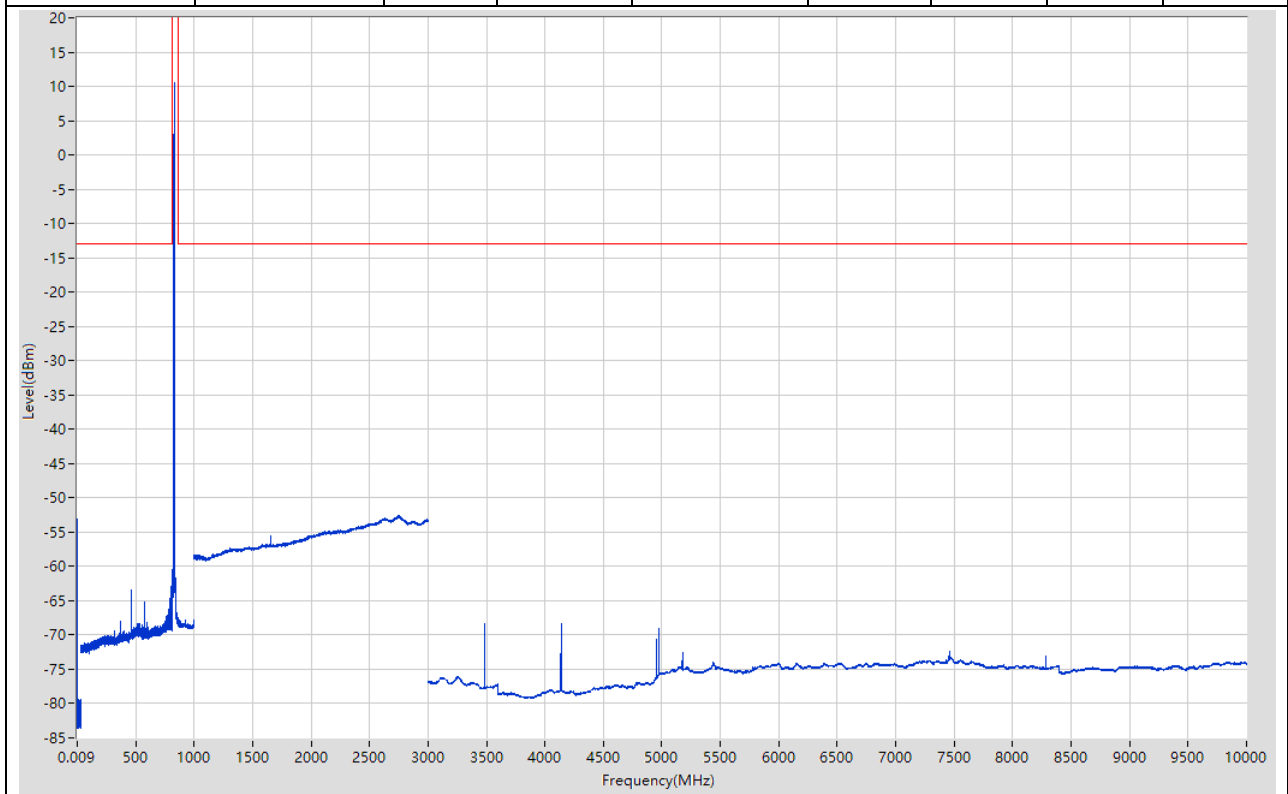


10.8. LTE-M1 Band5 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.34	-13	Pass	2985
30	814	0.1	RMS	460.855	-64.02	-13	Pass	7840
814	859	0.1	RMS	838.6	9.7	60	Pass	601
859	1000	0.1	RMS	863.503	-67.13	-13	Pass	1410
1000	3000	1	RMS	1671.336	-50.96	-13	Pass	2000
3000	10000	1	RMS	3526.075	-69.89	-13	Pass	7000

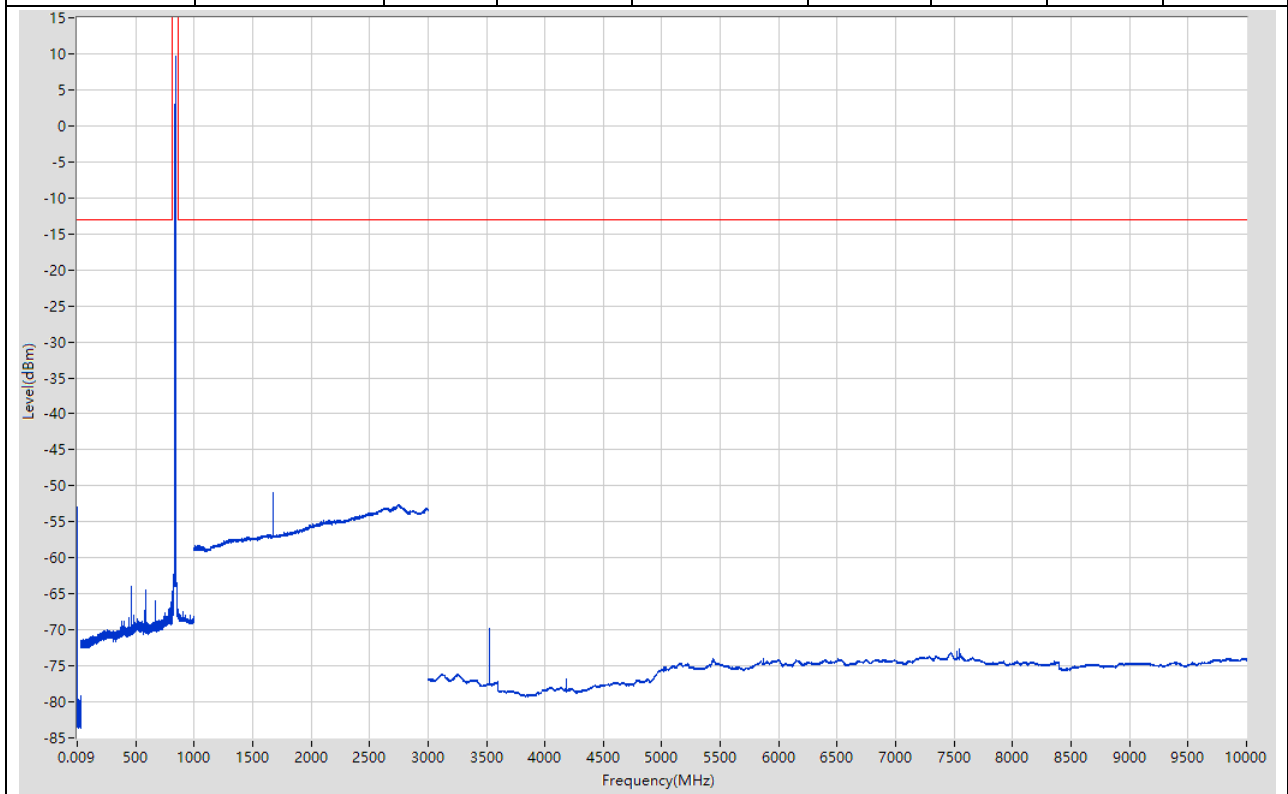


10.9. LTE-M1 Band5 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.65	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.51	-13	Pass	2985
30	814	0.1	RMS	460.755	-62.73	-13	Pass	7840
814	859	0.1	RMS	848.725	9.82	60	Pass	601
859	1000	0.1	RMS	859.2	-64.08	-13	Pass	1410
1000	3000	1	RMS	1692.346	-50.3	-13	Pass	2000
3000	10000	1	RMS	3566.081	-67.86	-13	Pass	7000

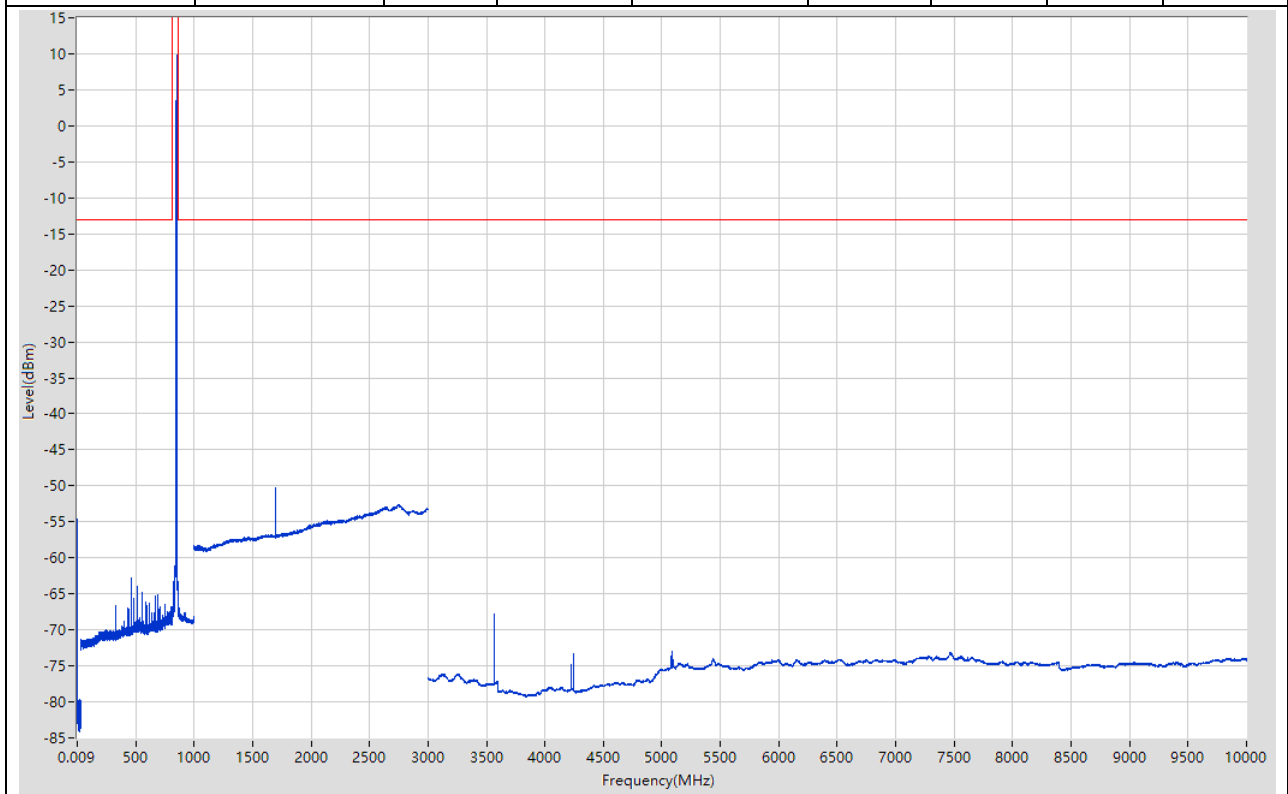


10.10. LTE-M1 Band5 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.23	-13	Pass	2985
30	814	0.1	RMS	767.994	-60.66	-13	Pass	7840
814	859	0.1	RMS	833.35	9.89	60	Pass	601
859	1000	0.1	RMS	859	-66.7	-13	Pass	1410
1000	3000	1	RMS	2500.75	-50.57	-13	Pass	2000
3000	10000	1	RMS	3505.072	-69.49	-13	Pass	7000

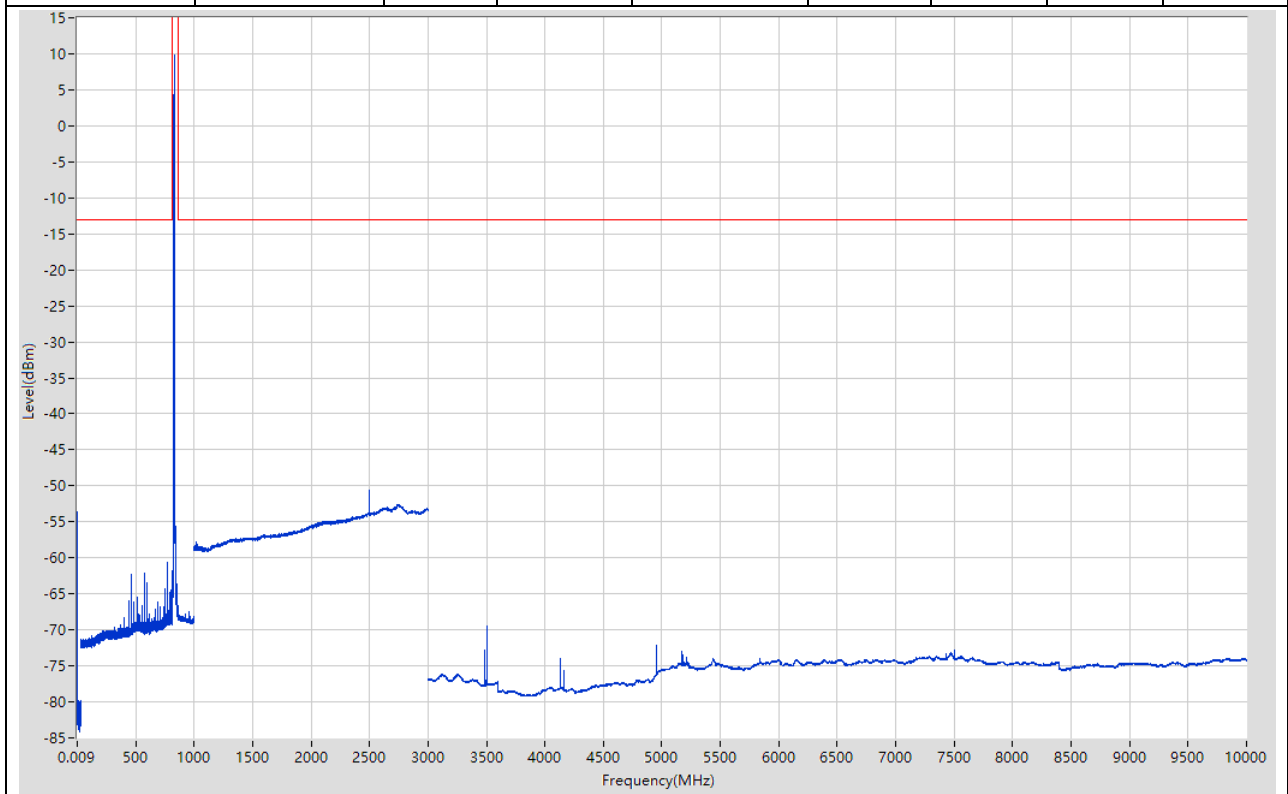


10.11. LTE-M1 Band5 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-55.13	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.4	-13	Pass	2985
30	814	0.1	RMS	460.855	-62.26	-13	Pass	7840
814	859	0.1	RMS	840.925	10.53	60	Pass	601
859	1000	0.1	RMS	859.7	-63.9	-13	Pass	1410
1000	3000	1	RMS	1682.341	-48.12	-13	Pass	2000
3000	10000	1	RMS	3535.076	-70.19	-13	Pass	7000

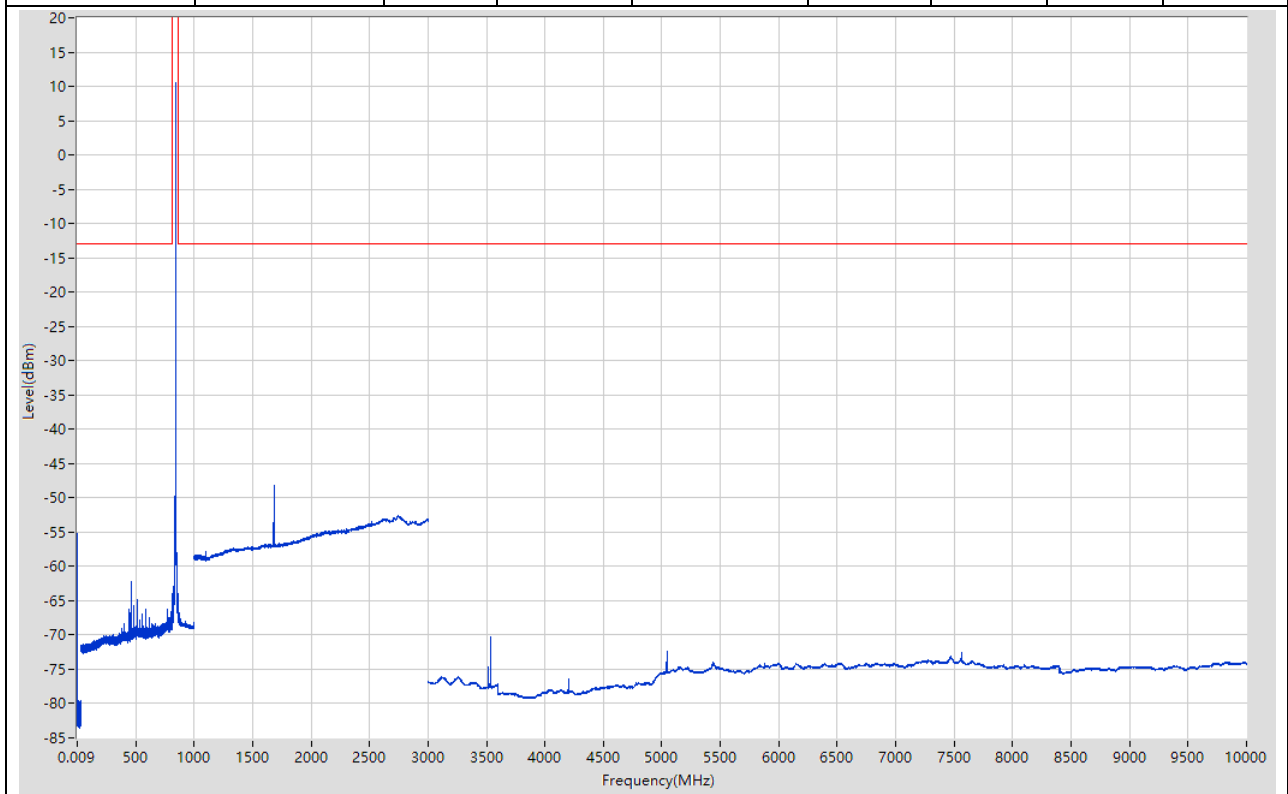

10.12. LTE-M1 Band5 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.93	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.64	-13	Pass	2985
30	814	0.1	RMS	782.796	-53.59	-13	Pass	7840
814	859	0.1	RMS	848.425	10.91	60	Pass	601
859	1000	0.1	RMS	867.206	-63.96	-13	Pass	1410
1000	3000	1	RMS	2742.871	-52.6	-13	Pass	2000
3000	10000	1	RMS	3565.081	-71.02	-13	Pass	7000

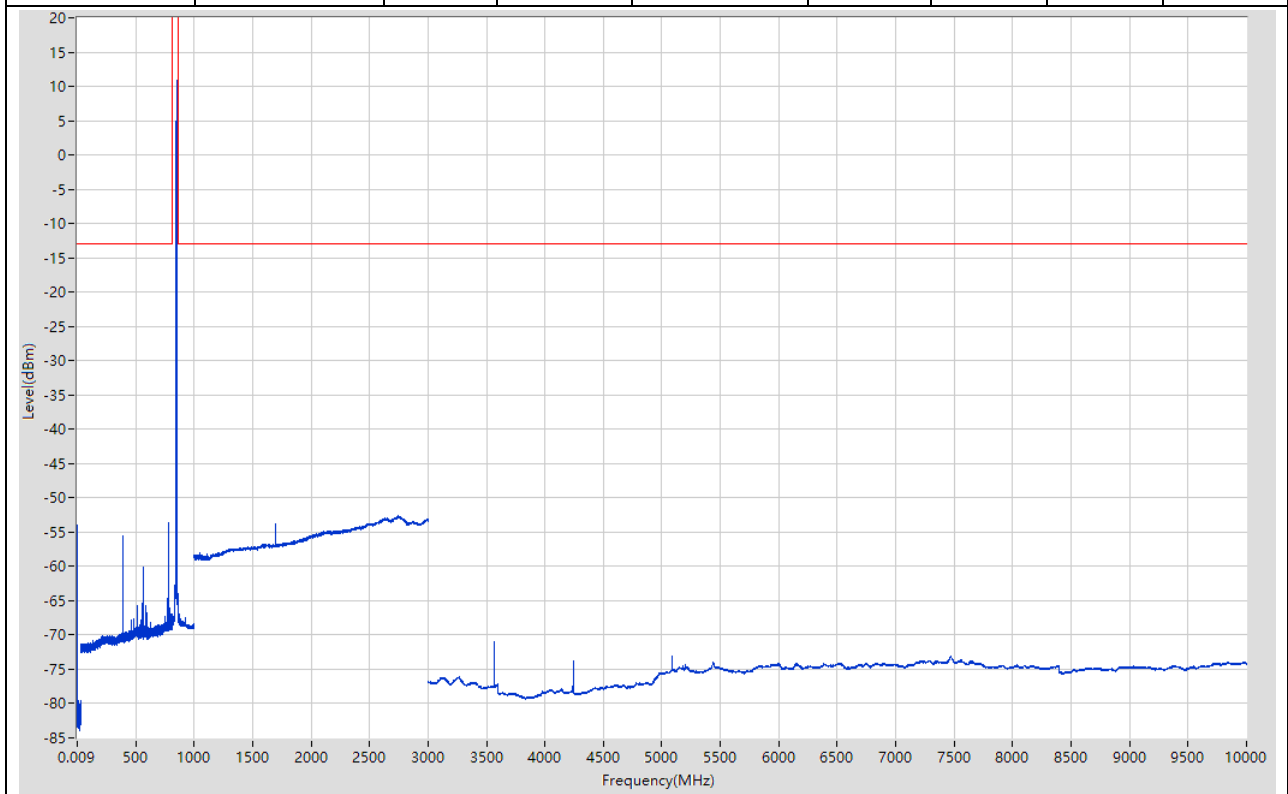

11. LTE-M1_Band12_QPSK


11.1. LTE-M1 Ban12 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.32	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58	-13	Pass	2985
30	689	0.1	RMS	689	-60.37	-13	Pass	6590
689	726	0.1	RMS	700.162	9.74	60	Pass	601
726	1000	0.1	RMS	727.901	-66.06	-13	Pass	2740
1000	3000	1	RMS	2747.874	-52.54	-13	Pass	2000
3000	10000	1	RMS	4901.272	-64.46	-13	Pass	7000

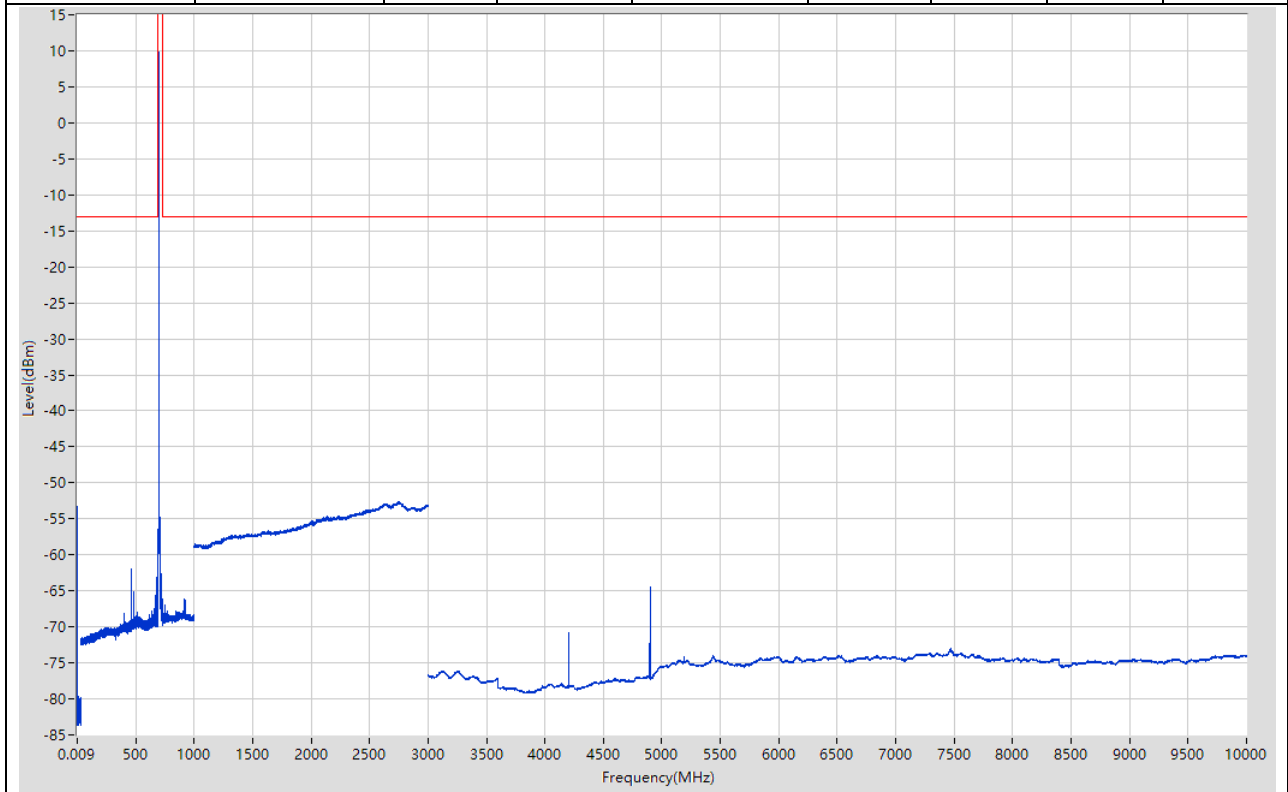


11.2. LTE-M1 Ban12 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.91	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.58	-13	Pass	2985
30	689	0.1	RMS	688.3	-58.93	-13	Pass	6590
689	726	0.1	RMS	707.87	9.7	60	Pass	601
726	1000	0.1	RMS	726.7	-60.9	-13	Pass	2740
1000	3000	1	RMS	2744.872	-52.55	-13	Pass	2000
3000	10000	1	RMS	4955.279	-72.41	-13	Pass	7000

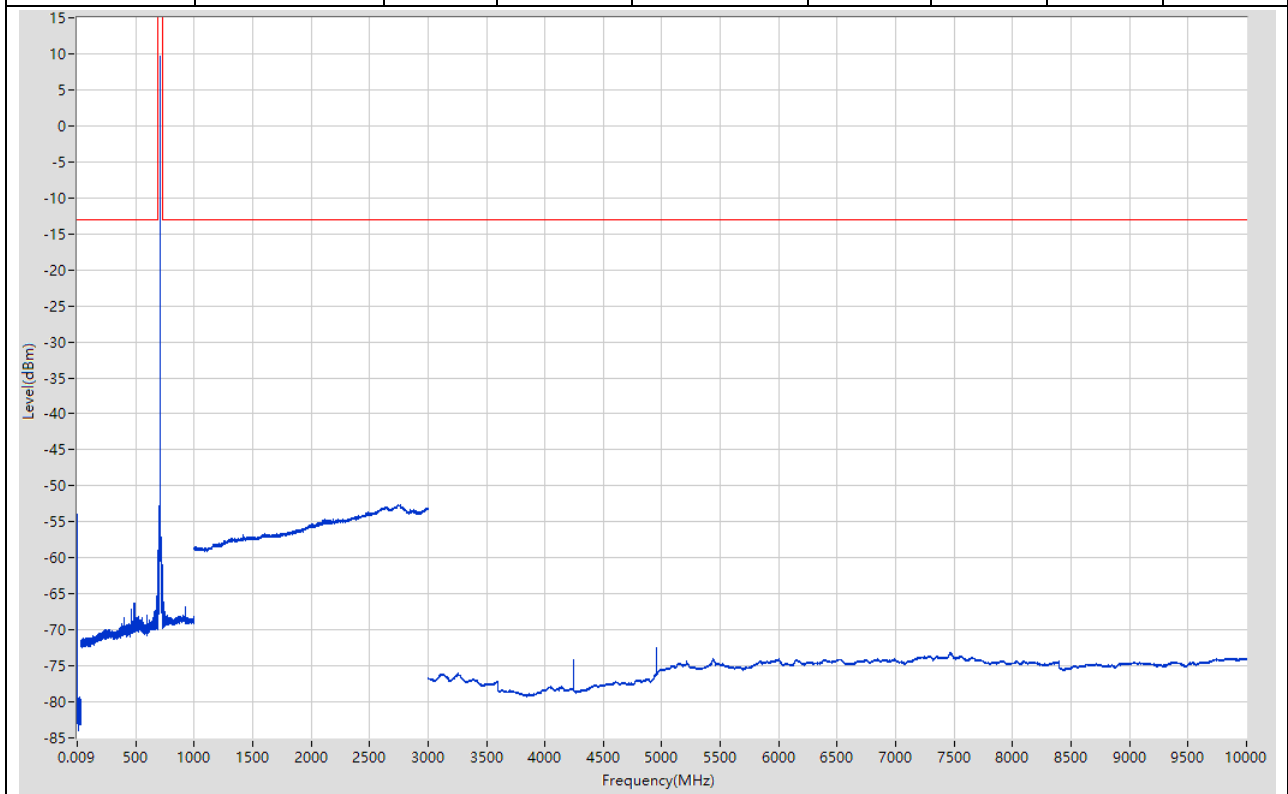


11.3. LTE-M1 Ban12 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.14	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.8	-13	Pass	2985
30	689	0.1	RMS	511.673	-69.04	-13	Pass	6590
689	726	0.1	RMS	715.763	9.98	60	Pass	601
726	1000	0.1	RMS	734.503	-60.87	-13	Pass	2740
1000	3000	1	RMS	1431.216	-36.73	-13	Pass	2000
3000	10000	1	RMS	5174.311	-71.74	-13	Pass	7000

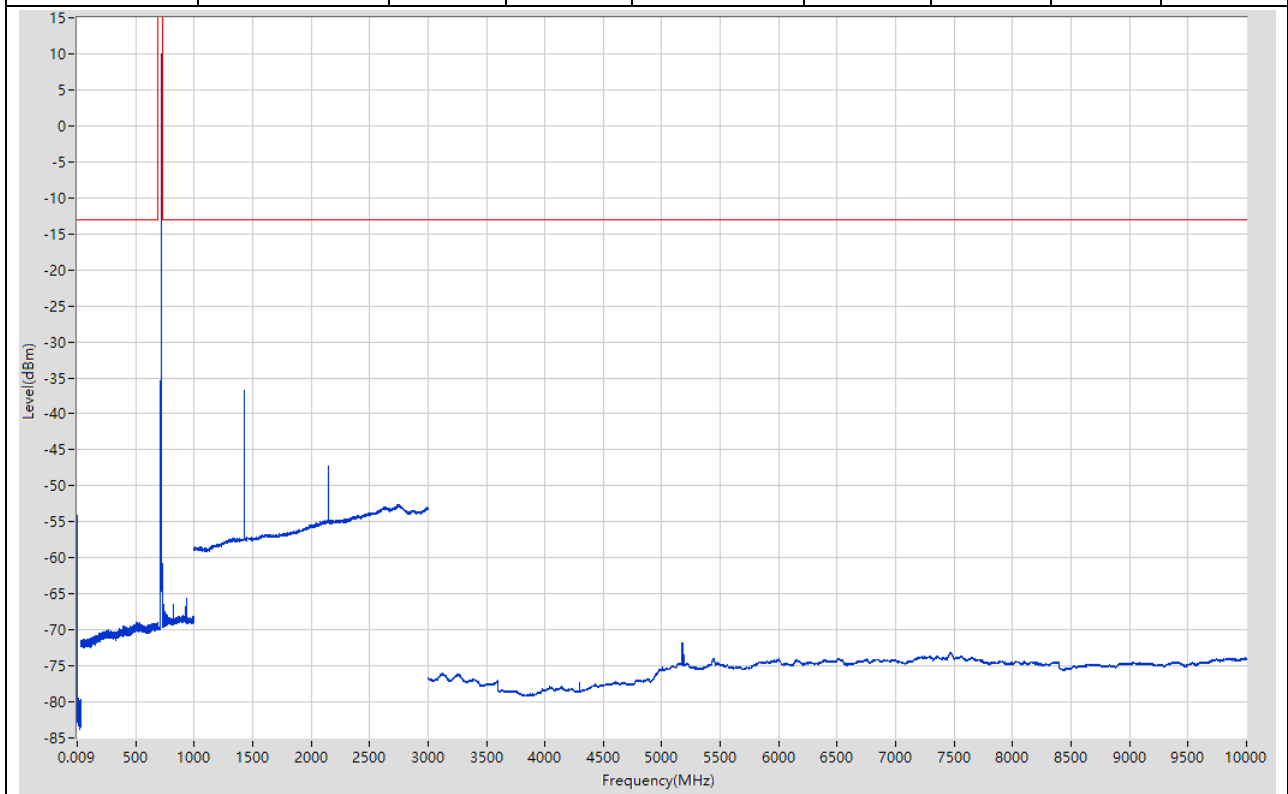


11.4. LTE-M1 Ban12 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.46	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.97	-13	Pass	2985
30	689	0.1	RMS	688.9	-61.4	-13	Pass	6590
689	726	0.1	RMS	701.765	9.53	60	Pass	601
726	1000	0.1	RMS	917.57	-64.18	-13	Pass	2740
1000	3000	1	RMS	1403.202	-33.04	-13	Pass	2000
3000	10000	1	RMS	4913.273	-69.73	-13	Pass	7000

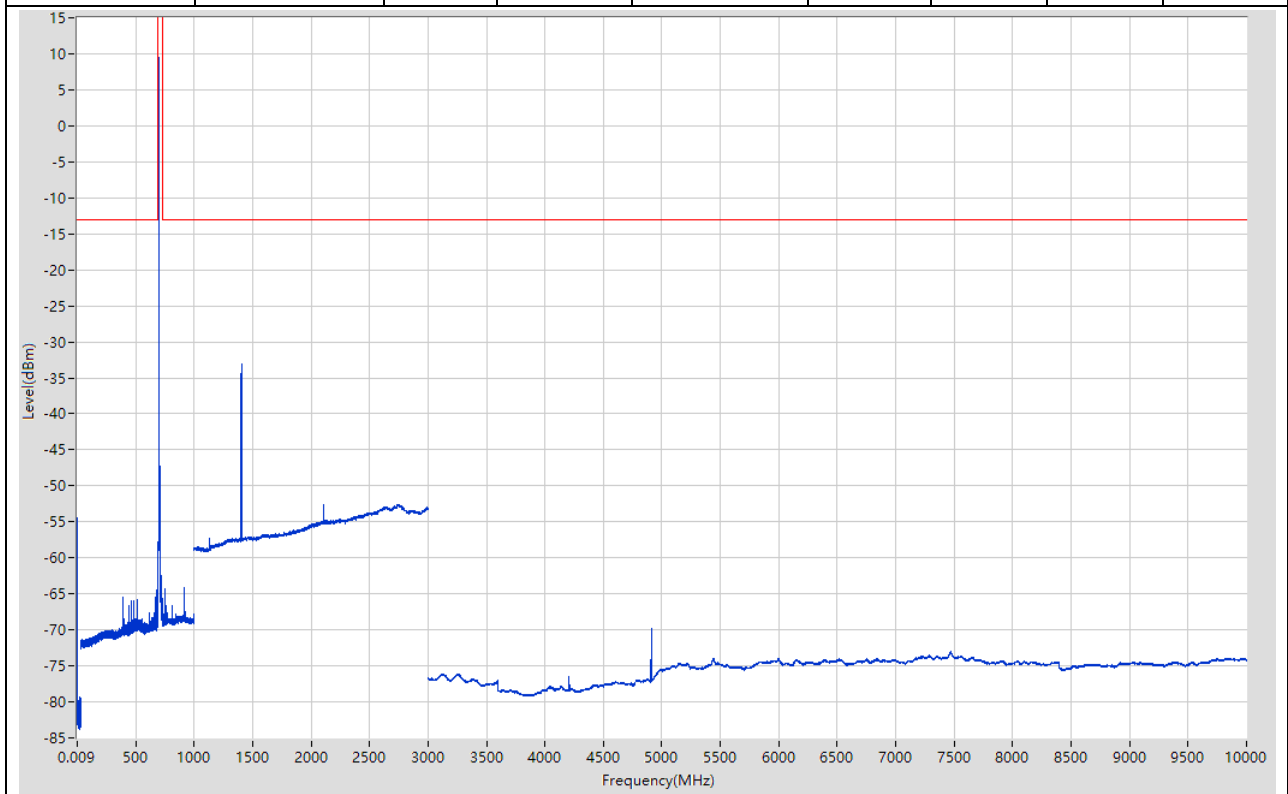


11.5. LTE-M1 Ban12 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.34	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.73	-13	Pass	2985
30	689	0.1	RMS	460.865	-61.78	-13	Pass	6590
689	726	0.1	RMS	708.733	9.6	60	Pass	601
726	1000	0.1	RMS	727.601	-63.46	-13	Pass	2740
1000	3000	1	RMS	1417.209	-44.33	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.11	-13	Pass	7000

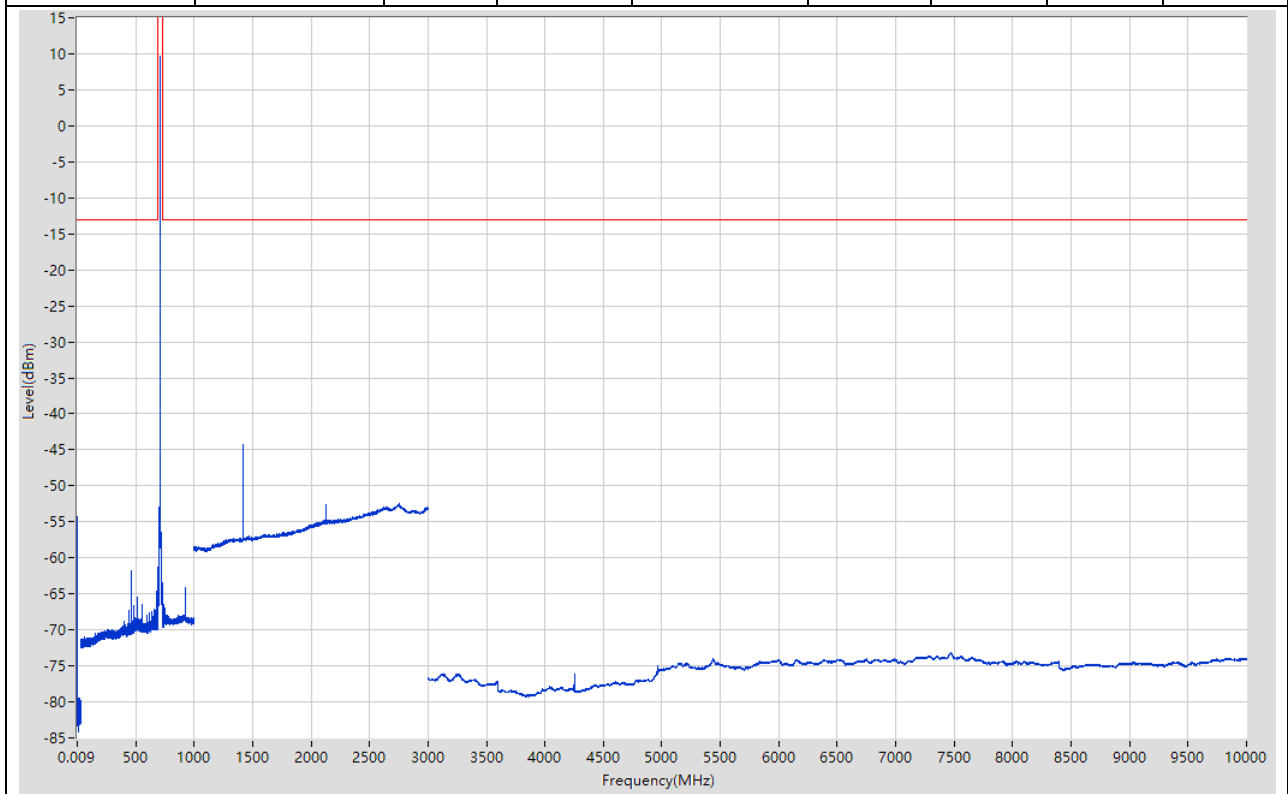


11.6. LTE-M1 Ban12 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.38	-13	Pass	2985
30	689	0.1	RMS	440.262	-60.71	-13	Pass	6590
689	726	0.1	RMS	715.702	10.29	60	Pass	601
726	1000	0.1	RMS	734.503	-60.97	-13	Pass	2740
1000	3000	1	RMS	1430.215	-32.35	-13	Pass	2000
3000	10000	1	RMS	7469.639	-73.05	-13	Pass	7000

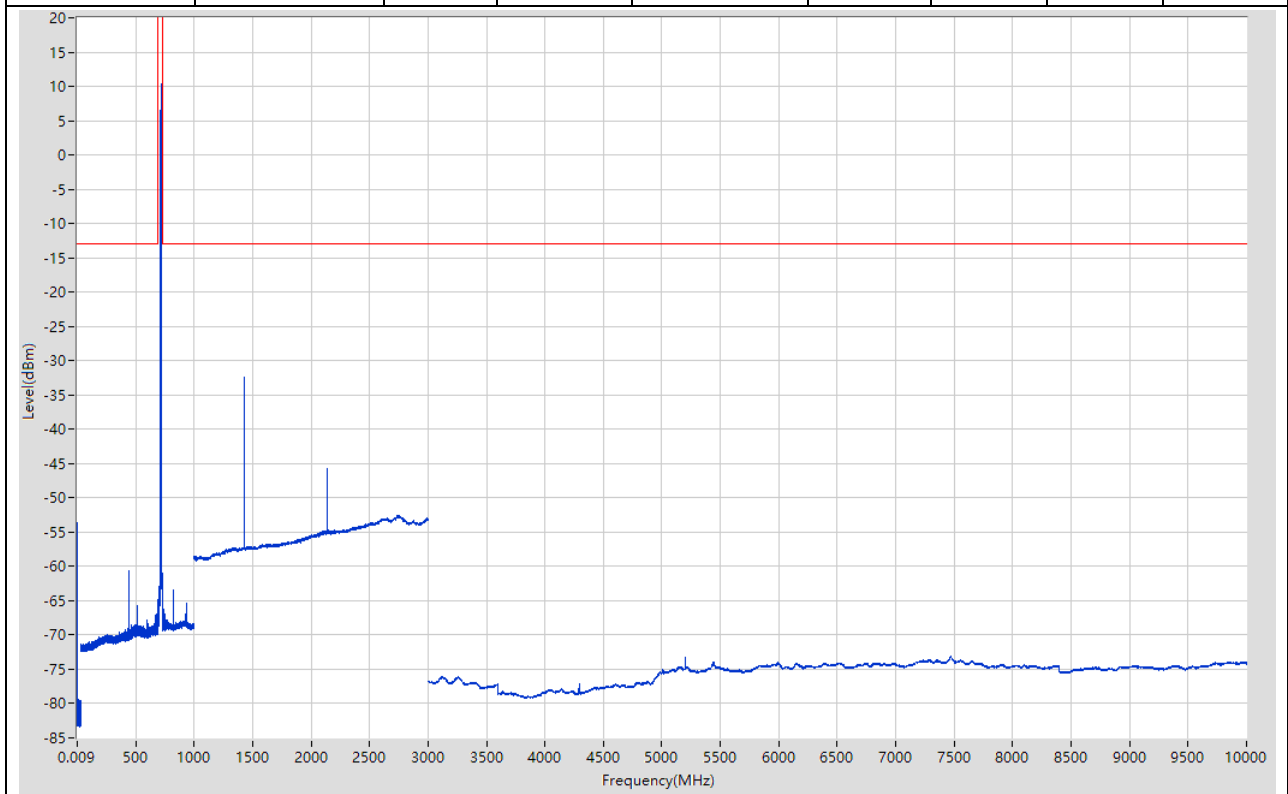


11.7. LTE-M1 Ban12 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.27	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.43	-13	Pass	2985
30	689	0.1	RMS	540.878	-53.17	-13	Pass	6590
689	726	0.1	RMS	703.677	10.99	60	Pass	601
726	1000	0.1	RMS	919.971	-65.16	-13	Pass	2740
1000	3000	1	RMS	1406.203	-40.75	-13	Pass	2000
3000	10000	1	RMS	4922.275	-71.22	-13	Pass	7000

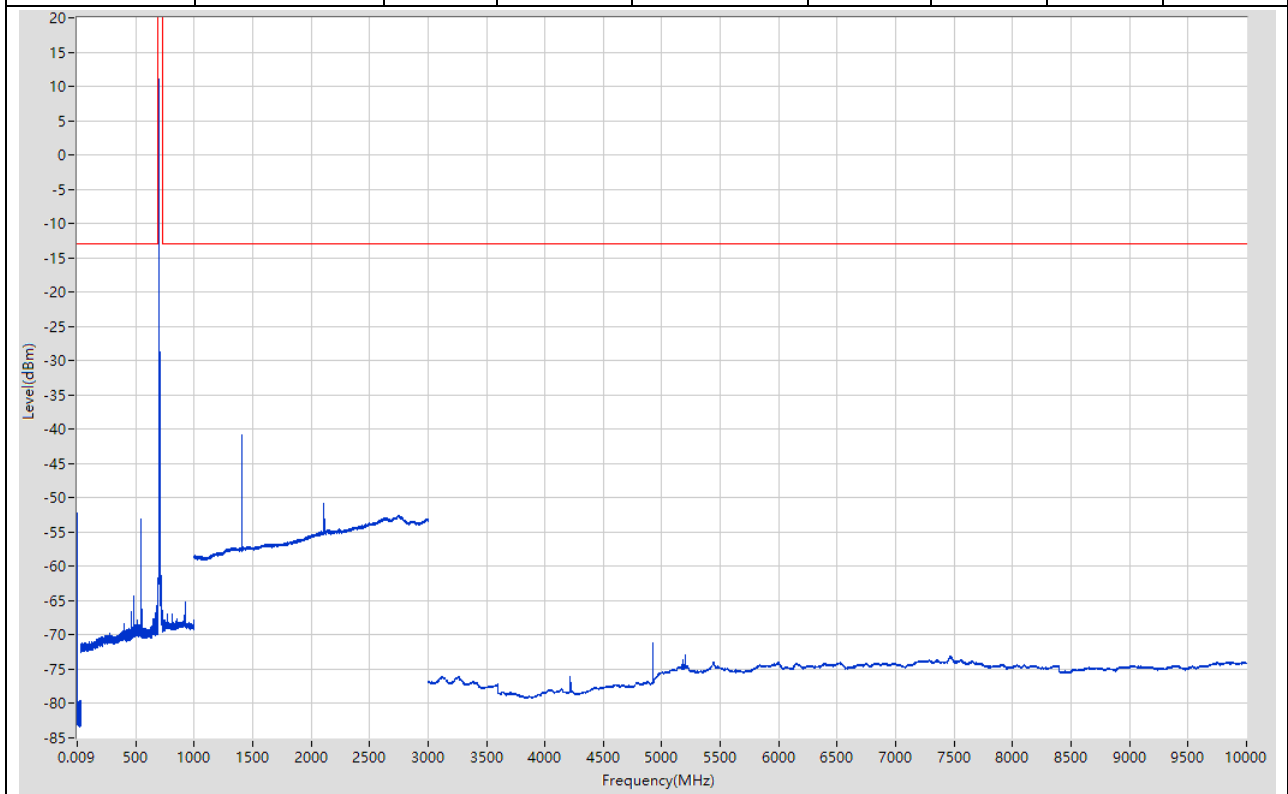


11.8. LTE-M1 Ban12 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.88	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.13	-13	Pass	2985
30	689	0.1	RMS	518.374	-63.35	-13	Pass	6590
689	726	0.1	RMS	709.658	11.83	60	Pass	601
726	1000	0.1	RMS	728.401	-61.99	-13	Pass	2740
1000	3000	1	RMS	1419.21	-33.83	-13	Pass	2000
3000	10000	1	RMS	4967.281	-72.8	-13	Pass	7000

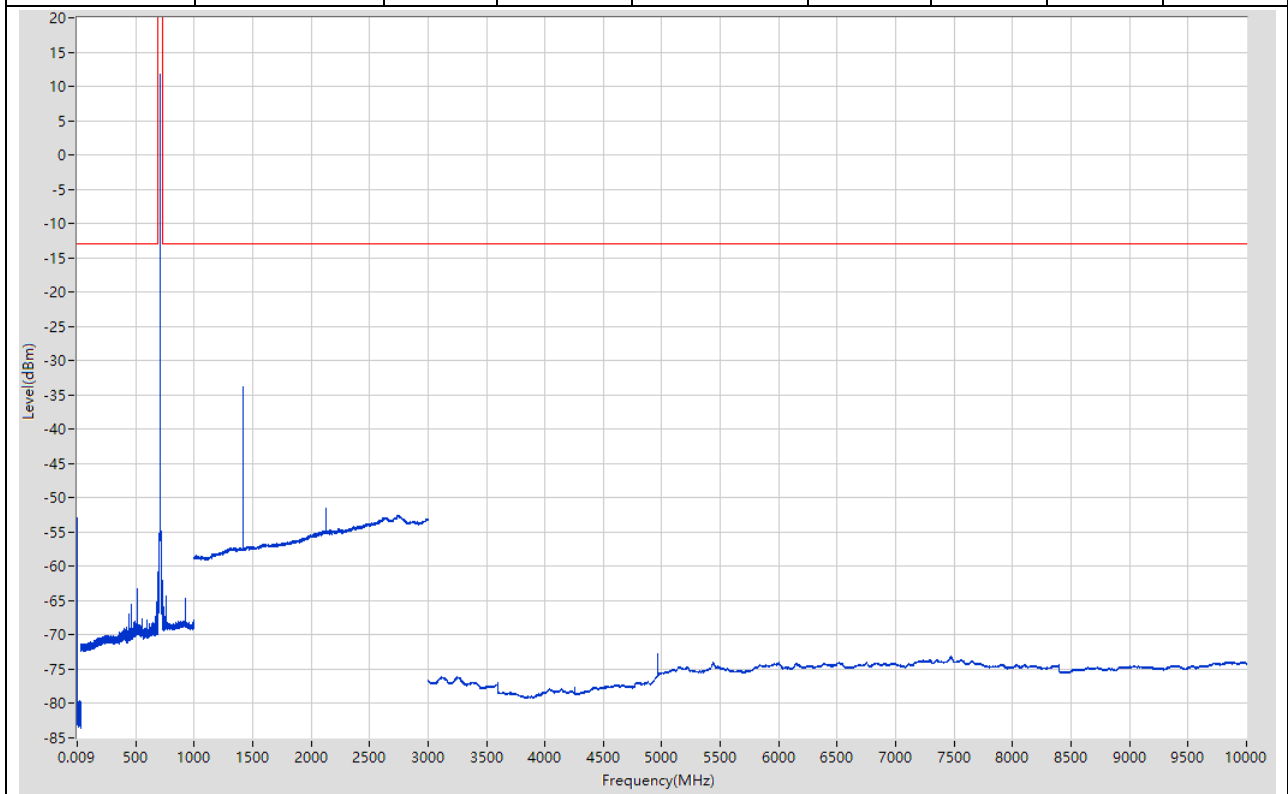


11.9. LTE-M1 Ban12 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.68	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.35	-13	Pass	2985
30	689	0.1	RMS	460.765	-62	-13	Pass	6590
689	726	0.1	RMS	715.702	11.23	60	Pass	601
726	1000	0.1	RMS	734.403	-61.39	-13	Pass	2740
1000	3000	1	RMS	1429.215	-35.99	-13	Pass	2000
3000	10000	1	RMS	7471.639	-73.08	-13	Pass	7000

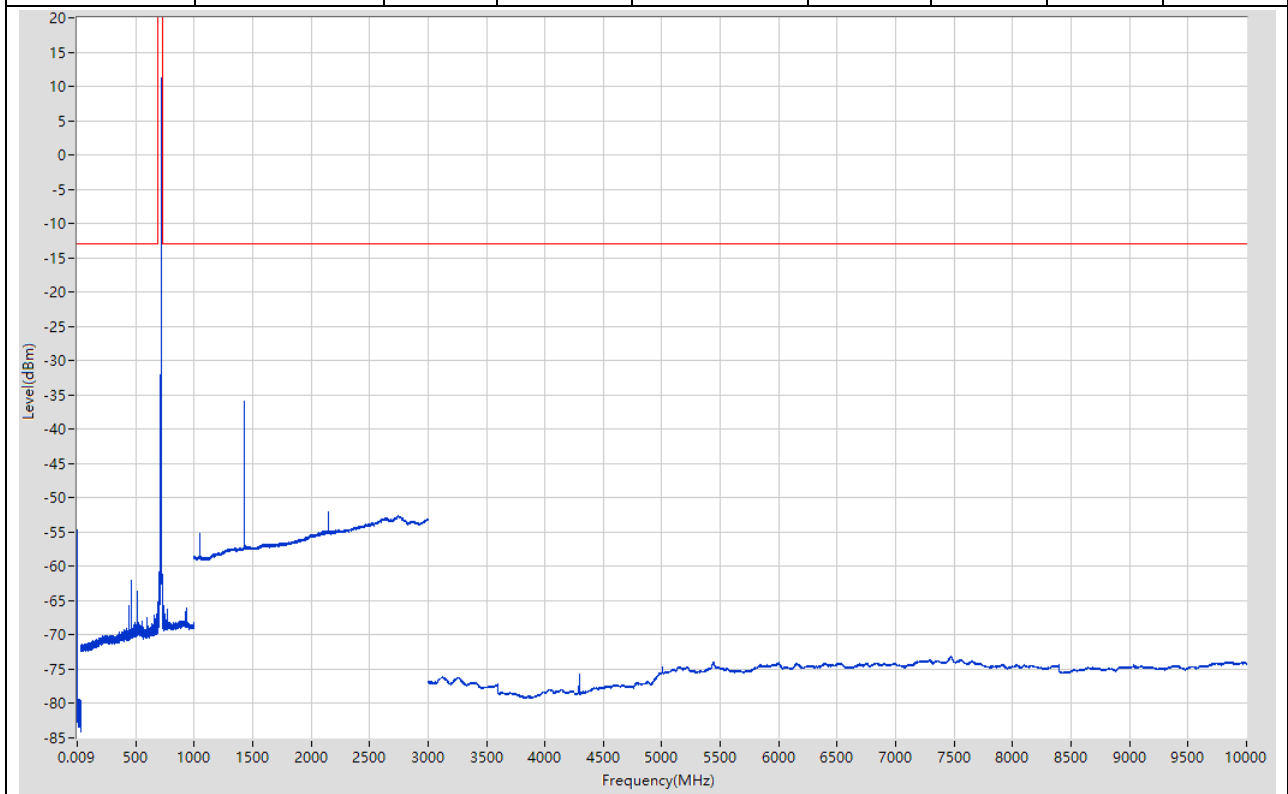


11.10. LTE-M1 Ban12 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.28	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.95	-13	Pass	2985
30	689	0.1	RMS	460.865	-60.73	-13	Pass	6590
689	726	0.1	RMS	708.425	11.17	60	Pass	601
726	1000	0.1	RMS	726.9	-62.07	-13	Pass	2740
1000	3000	1	RMS	1416.208	-34.13	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.08	-13	Pass	7000

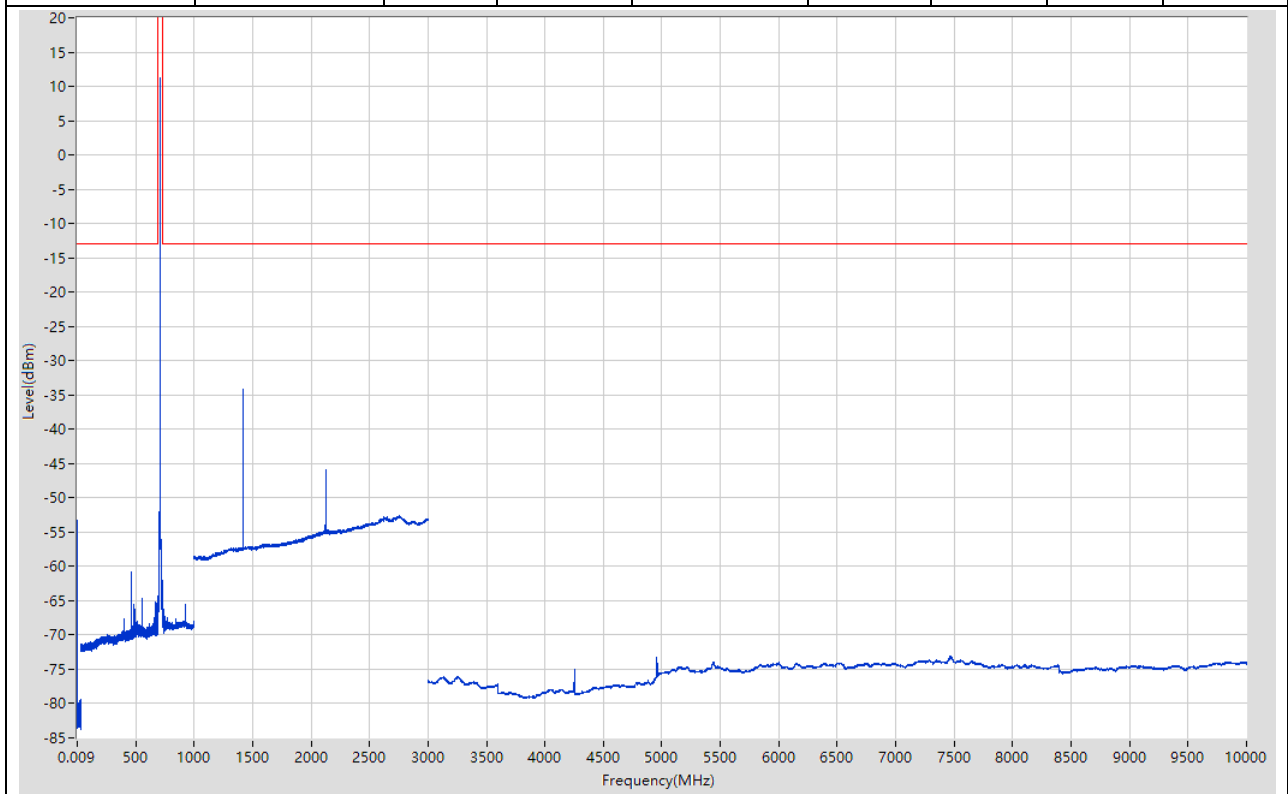


11.11. LTE-M1 Ban12 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.33	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.57	-13	Pass	2985
30	689	0.1	RMS	460.865	-62.9	-13	Pass	6590
689	726	0.1	RMS	711.878	10.97	60	Pass	601
726	1000	0.1	RMS	730.402	-61.81	-13	Pass	2740
1000	3000	1	RMS	1424.212	-28.73	-13	Pass	2000
3000	10000	1	RMS	4983.283	-72.49	-13	Pass	7000

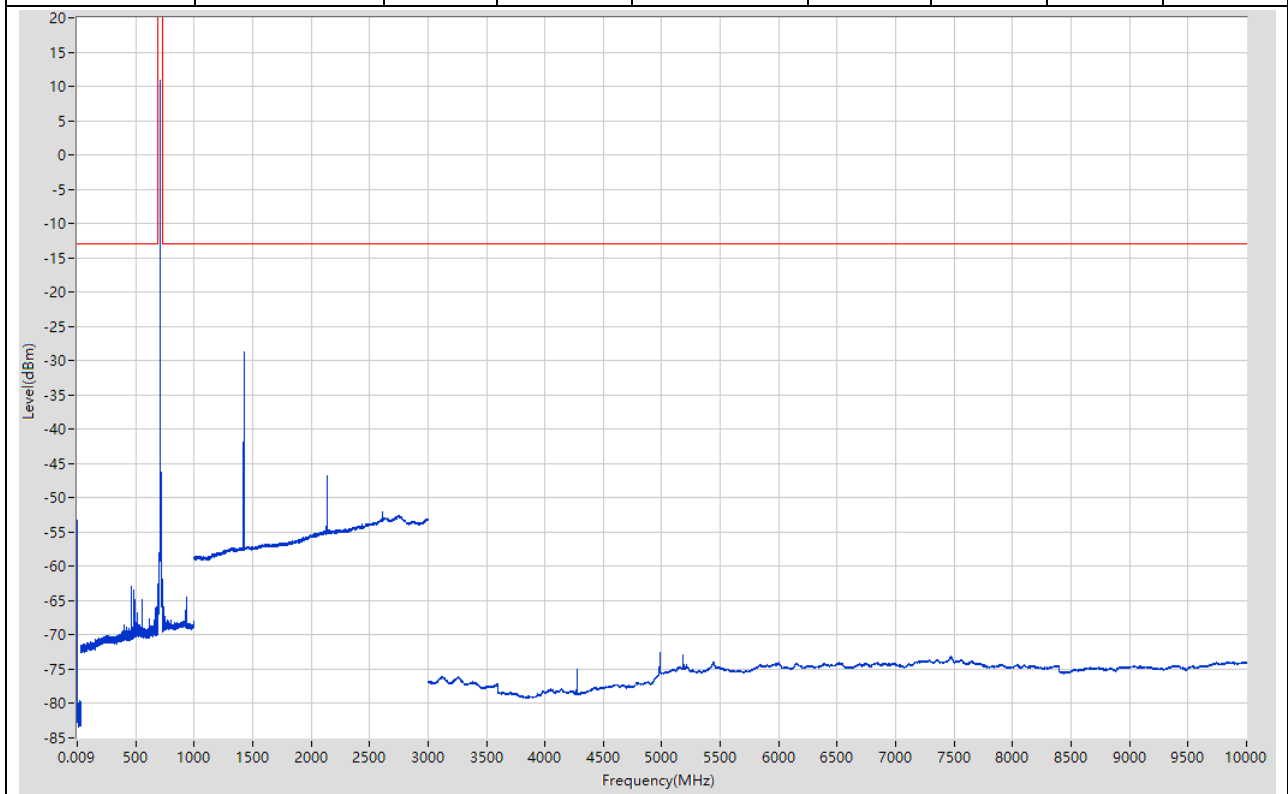

11.12. LTE-M1 Ban12 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55.35	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.19	-13	Pass	2985
30	689	0.1	RMS	660.096	-57.59	-13	Pass	6590
689	726	0.1	RMS	715.455	10.67	60	Pass	601
726	1000	0.1	RMS	734.203	-60.62	-13	Pass	2740
1000	3000	1	RMS	1430.215	-34.96	-13	Pass	2000
3000	10000	1	RMS	7468.638	-73.04	-13	Pass	7000

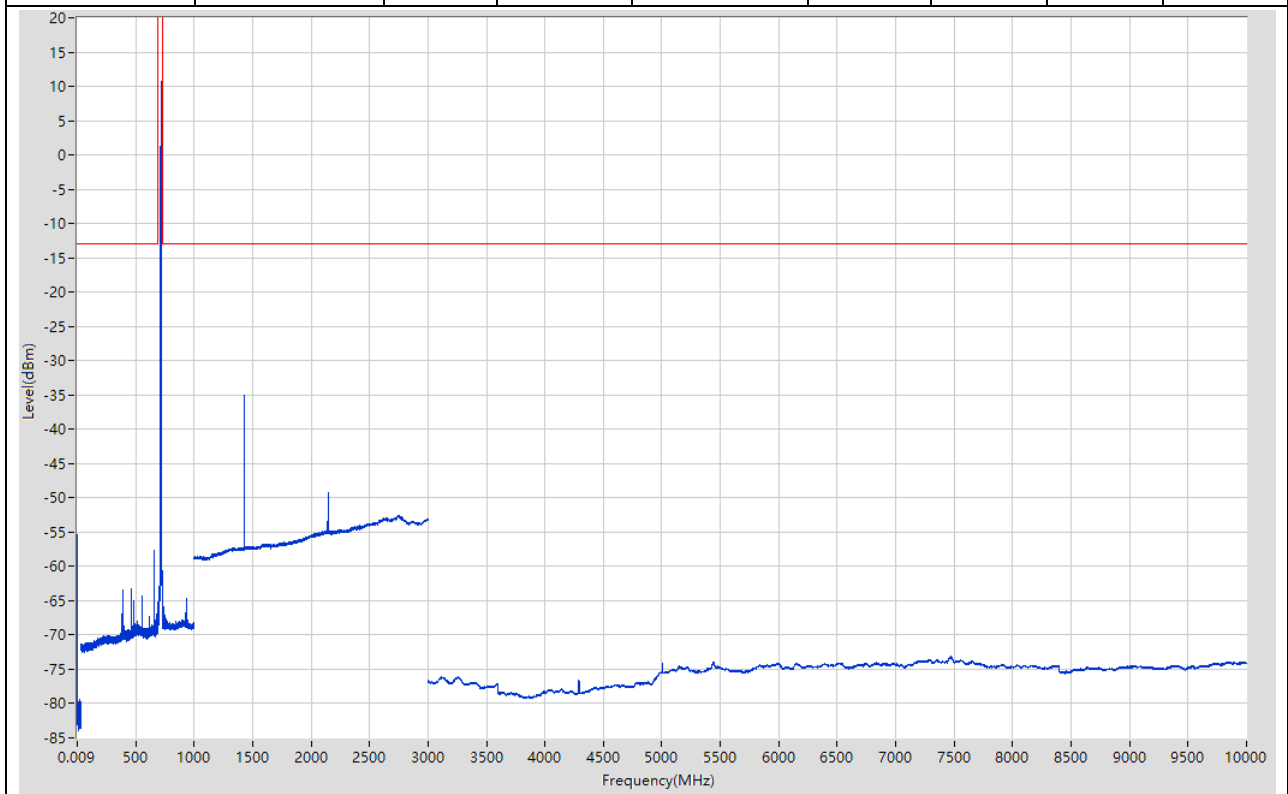

12. LTE-M1_Band12_16QAM


12.1. LTE-M1 Band12 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.014	-54.86	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.45	-13	Pass	2985
30	689	0.1	RMS	645.893	-49.94	-13	Pass	6590
689	726	0.1	RMS	700.162	9.87	60	Pass	601
726	1000	0.1	RMS	915.469	-63.77	-13	Pass	2740
1000	3000	1	RMS	1399.2	-30.23	-13	Pass	2000
3000	10000	1	RMS	4901.272	-65.43	-13	Pass	7000

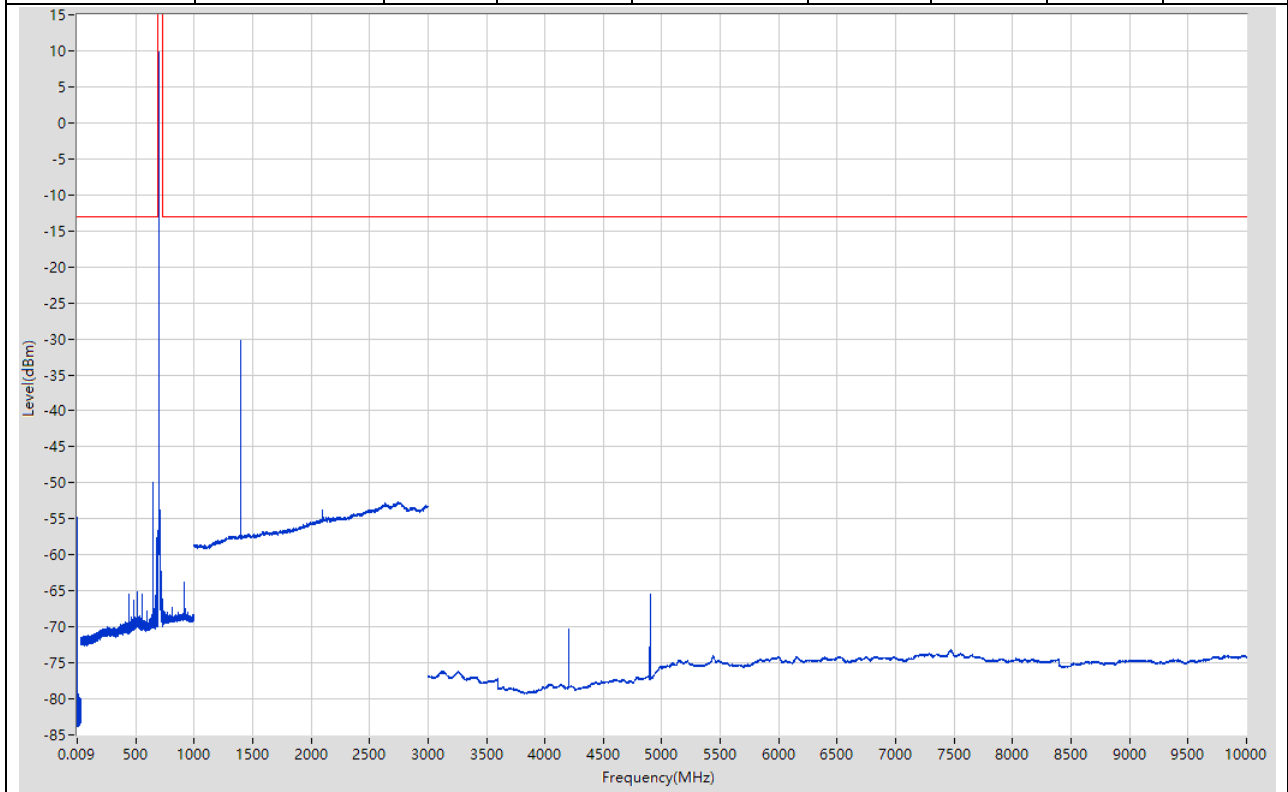


12.2. LTE-M1 Band12 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.11	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.43	-13	Pass	2985
30	689	0.1	RMS	688.4	-63.16	-13	Pass	6590
689	726	0.1	RMS	707.993	10.67	60	Pass	601
726	1000	0.1	RMS	726.7	-61.41	-13	Pass	2740
1000	3000	1	RMS	1413.207	-43.54	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.13	-13	Pass	7000

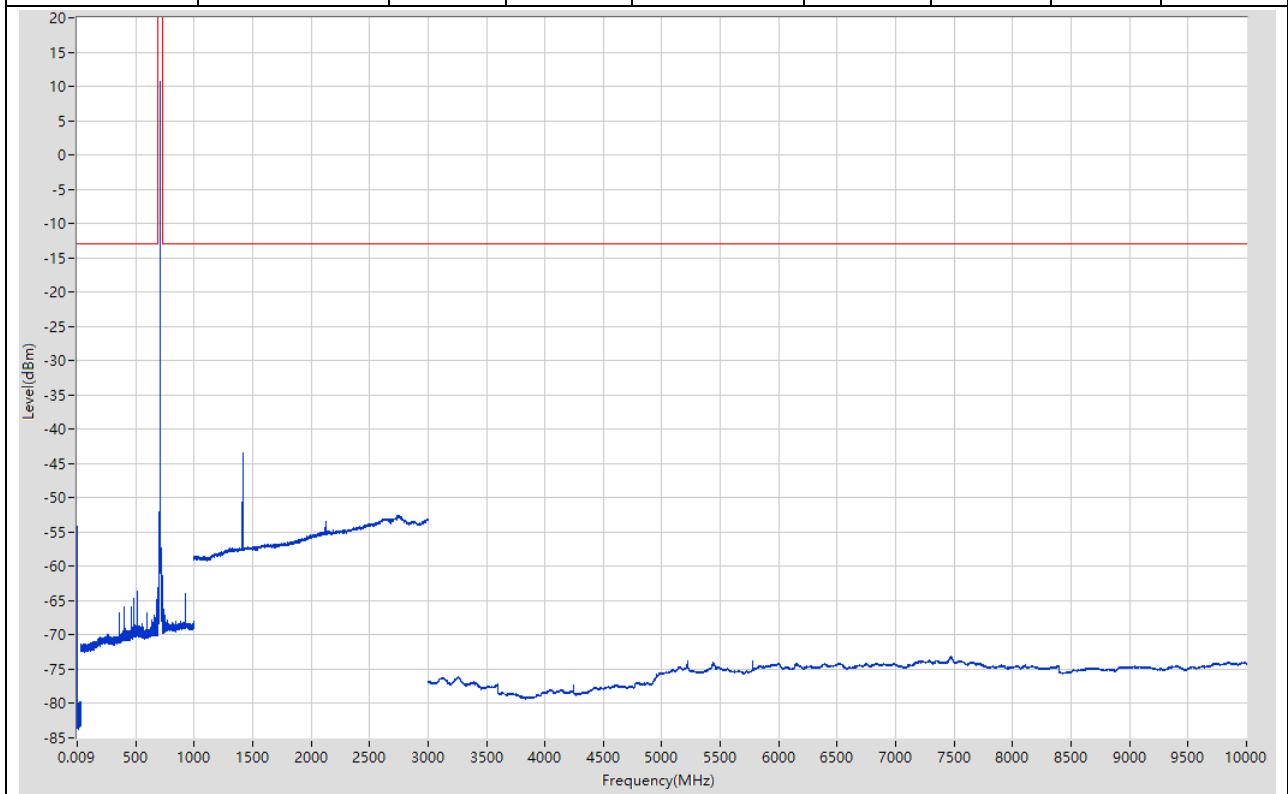


12.3. LTE-M1 Band12 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.42	-13	Pass	2985
30	689	0.1	RMS	660.396	-61.23	-13	Pass	6590
689	726	0.1	RMS	715.702	9.6	60	Pass	601
726	1000	0.1	RMS	734.503	-62.6	-13	Pass	2740
1000	3000	1	RMS	1430.215	-33.31	-13	Pass	2000
3000	10000	1	RMS	7468.638	-73.12	-13	Pass	7000

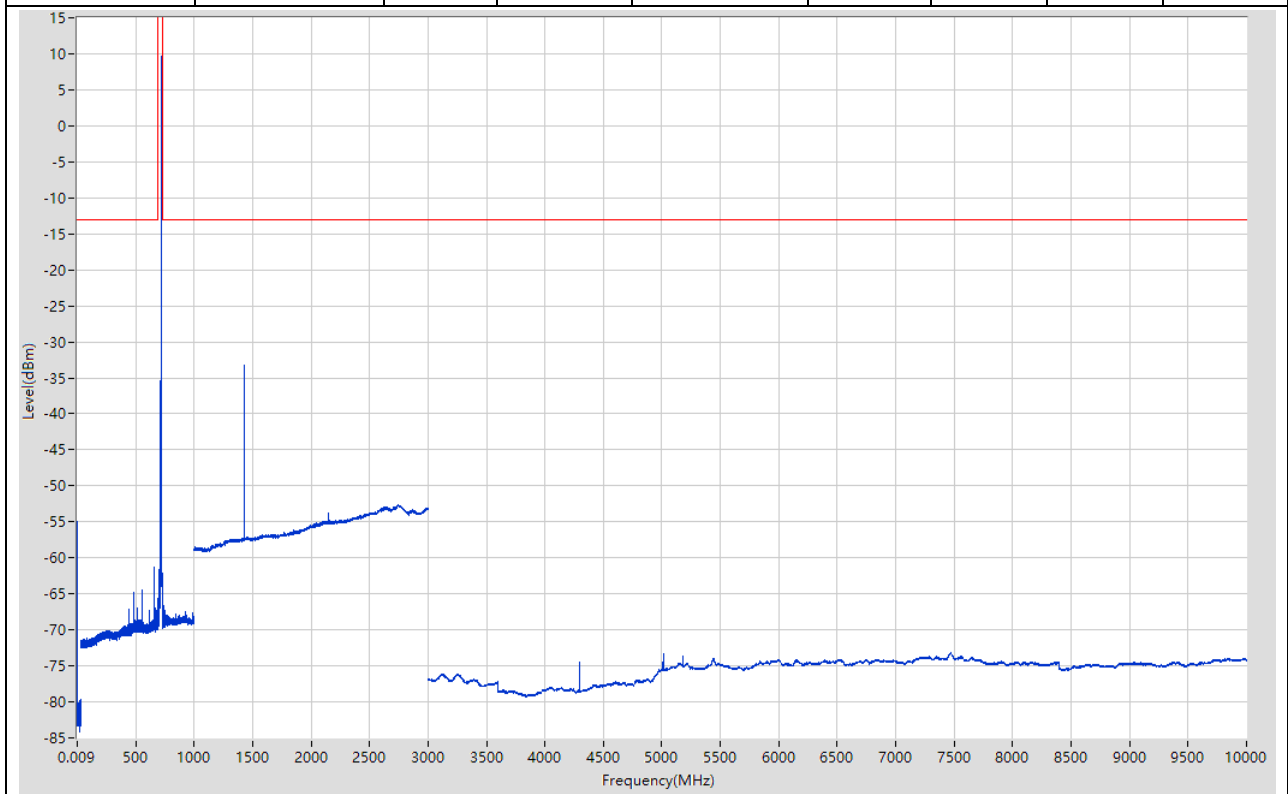


12.4. LTE-M1 Band12 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.18	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	689	0.1	RMS	685.699	-61.36	-13	Pass	6590
689	726	0.1	RMS	701.765	10.03	60	Pass	601
726	1000	0.1	RMS	917.47	-64.4	-13	Pass	2740
1000	3000	1	RMS	1401.201	-32.8	-13	Pass	2000
3000	10000	1	RMS	4912.273	-65.16	-13	Pass	7000

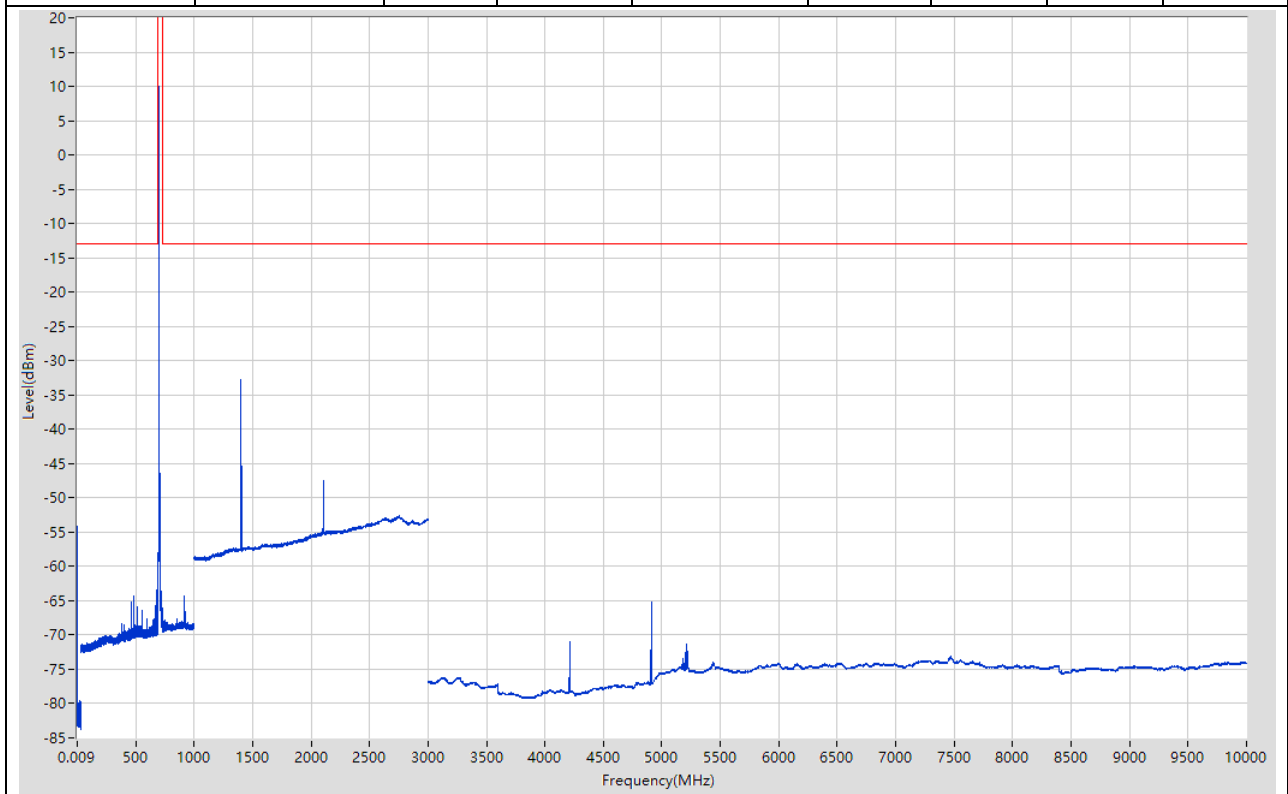


12.5. LTE-M1 Band12 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.86	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.24	-13	Pass	2985
30	689	0.1	RMS	460.765	-62.33	-13	Pass	6590
689	726	0.1	RMS	708.795	9.34	60	Pass	601
726	1000	0.1	RMS	727.601	-63.51	-13	Pass	2740
1000	3000	1	RMS	1418.209	-51.22	-13	Pass	2000
3000	10000	1	RMS	7469.639	-73.12	-13	Pass	7000

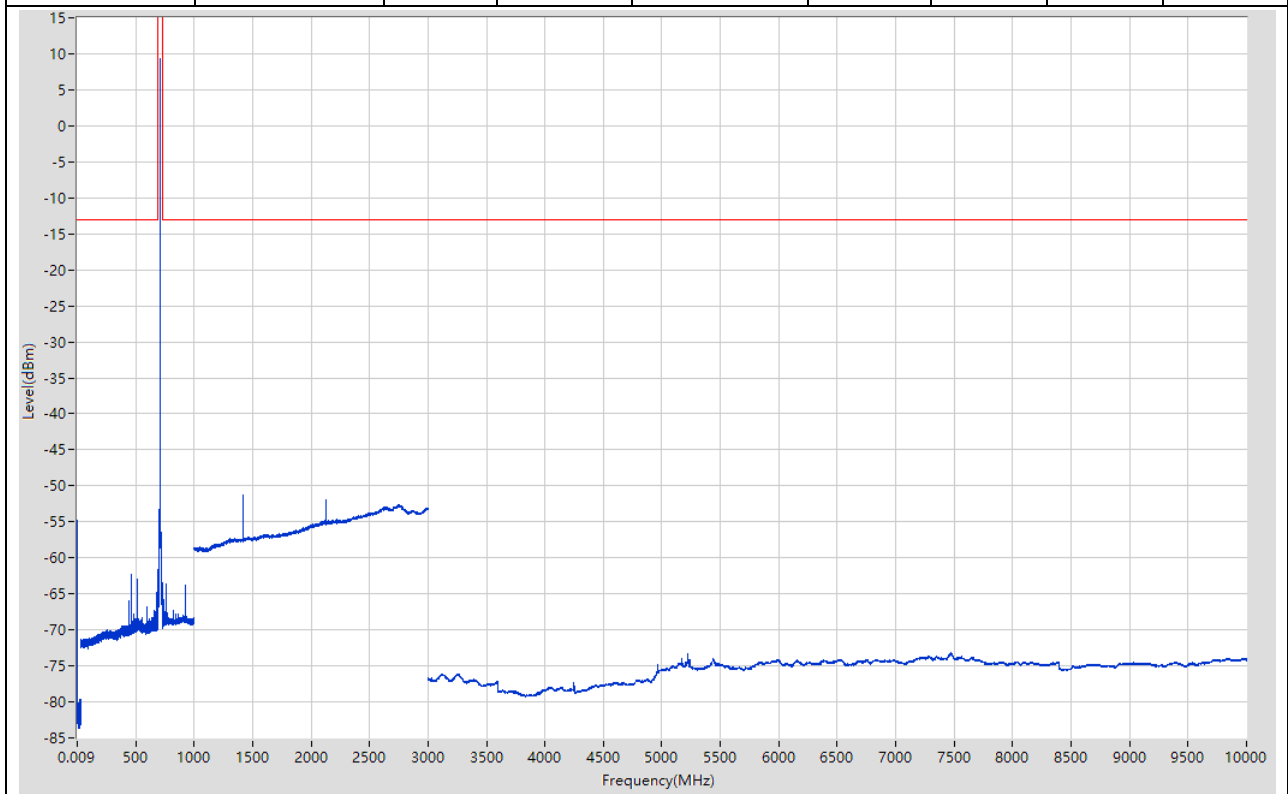


12.6. LTE-M1 Band12 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.22	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.58	-13	Pass	2985
30	689	0.1	RMS	476.768	-62.49	-13	Pass	6590
689	726	0.1	RMS	715.825	10.12	60	Pass	601
726	1000	0.1	RMS	734.503	-61.14	-13	Pass	2740
1000	3000	1	RMS	2147.574	-47.07	-13	Pass	2000
3000	10000	1	RMS	5184.312	-73.04	-13	Pass	7000

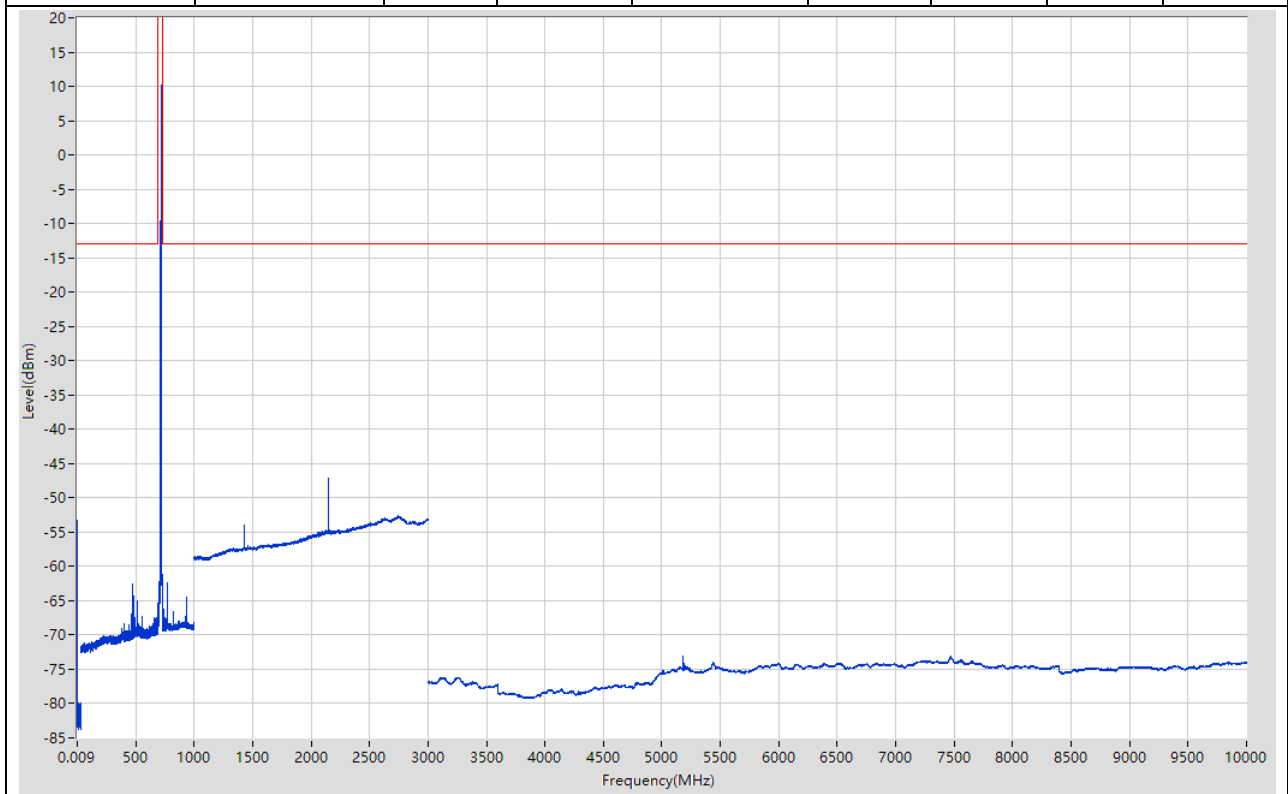


12.7. LTE-M1 Band12 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.5	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.95	-13	Pass	2985
30	689	0.1	RMS	689	-60.82	-13	Pass	6590
689	726	0.1	RMS	703.677	11.54	60	Pass	601
726	1000	0.1	RMS	919.971	-64.24	-13	Pass	2740
1000	3000	1	RMS	1408.204	-39.92	-13	Pass	2000
3000	10000	1	RMS	4926.275	-69.32	-13	Pass	7000

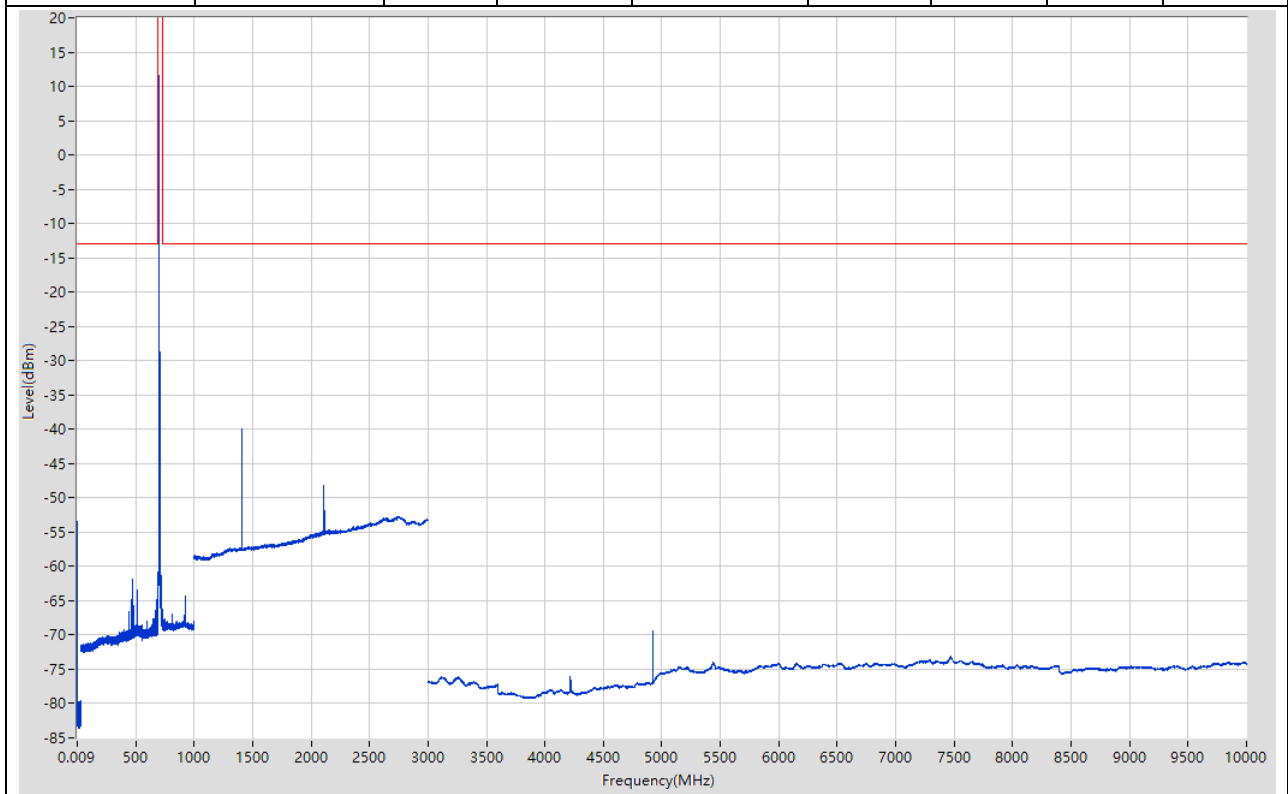


12.8. LTE-M1 Band12 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.23	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	689	0.1	RMS	460.765	-59.33	-13	Pass	6590
689	726	0.1	RMS	709.597	10.65	60	Pass	601
726	1000	0.1	RMS	728.401	-62.96	-13	Pass	2740
1000	3000	1	RMS	1419.21	-31.78	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.11	-13	Pass	7000

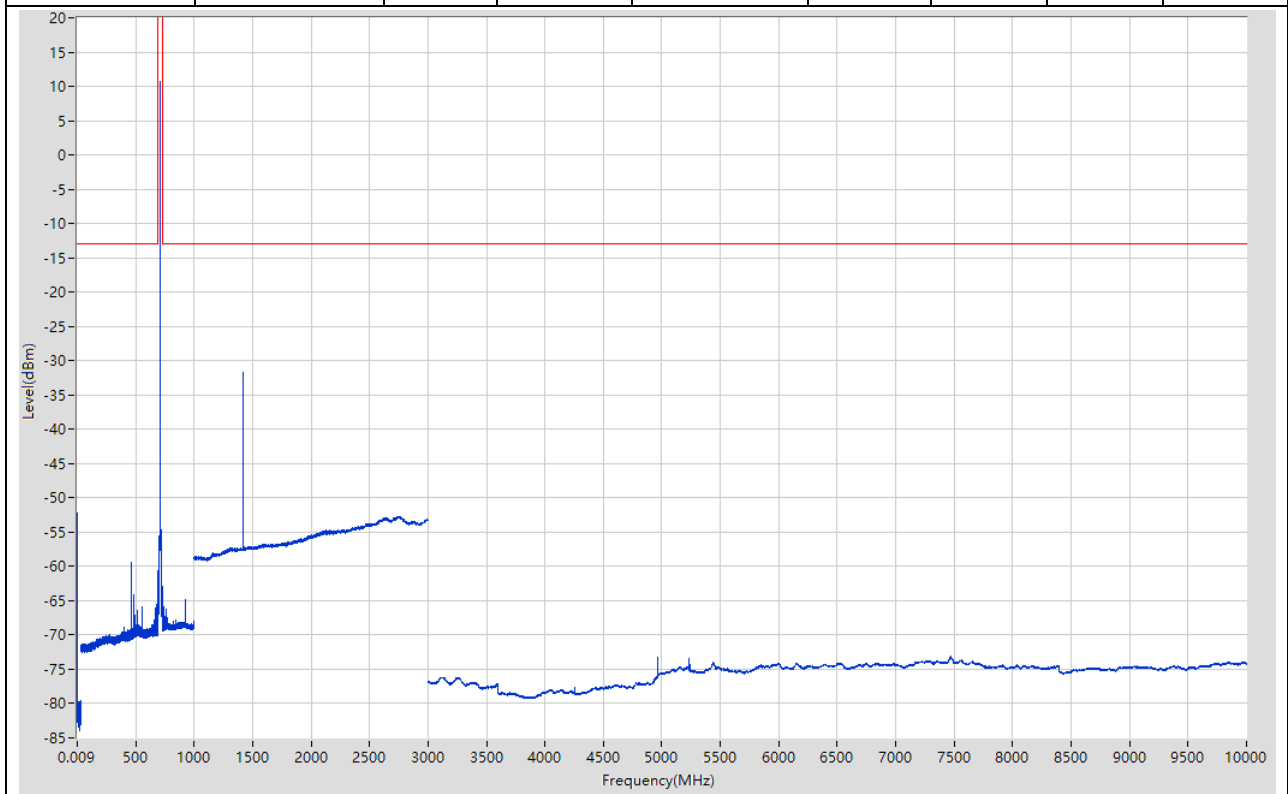


12.9. LTE-M1 Band12 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.46	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.36	-13	Pass	2985
30	689	0.1	RMS	550.179	-50.77	-13	Pass	6590
689	726	0.1	RMS	715.64	10.3	60	Pass	601
726	1000	0.1	RMS	734.403	-61.22	-13	Pass	2740
1000	3000	1	RMS	1431.216	-36.19	-13	Pass	2000
3000	10000	1	RMS	5009.287	-73.07	-13	Pass	7000

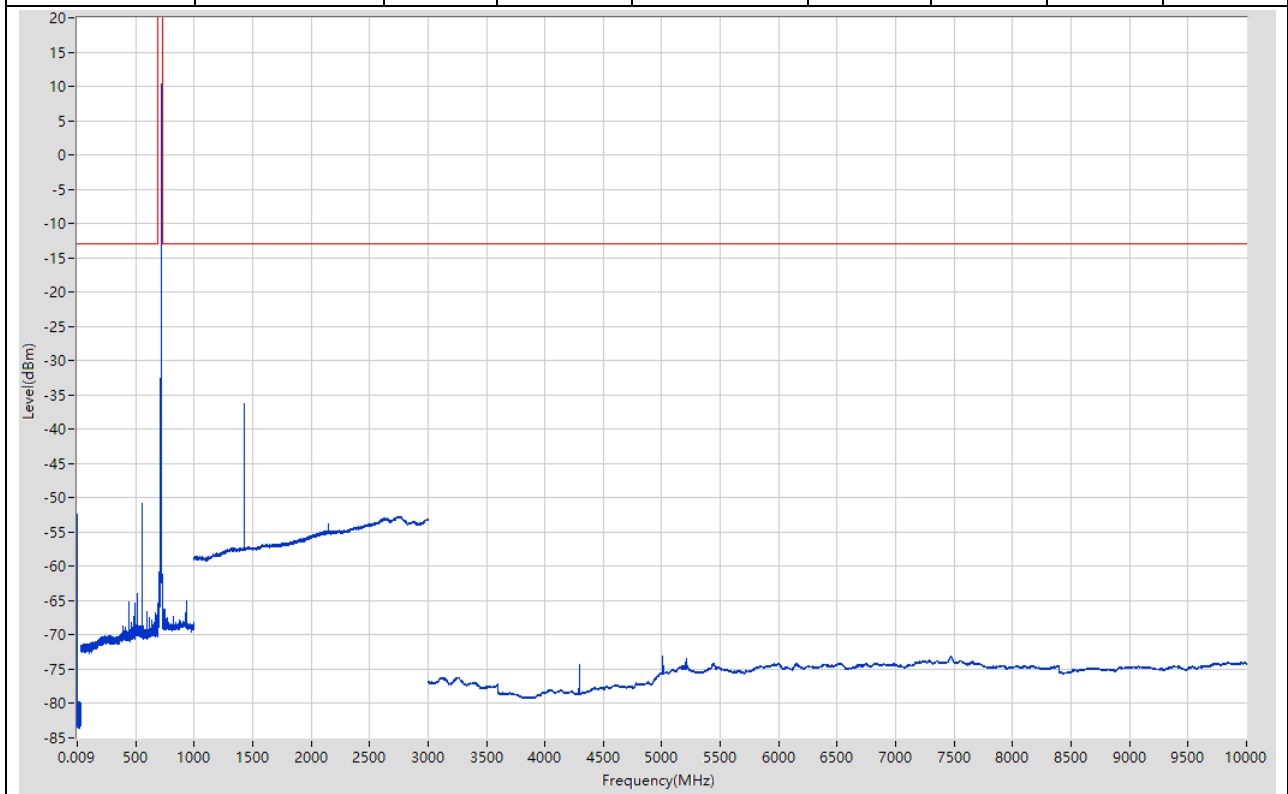


12.10. LTE-M1 Band12 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.97	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.74	-13	Pass	2985
30	689	0.1	RMS	460.865	-62.06	-13	Pass	6590
689	726	0.1	RMS	708.363	10.42	60	Pass	601
726	1000	0.1	RMS	727.2	-60.59	-13	Pass	2740
1000	3000	1	RMS	1416.208	-31.07	-13	Pass	2000
3000	10000	1	RMS	5173.31	-61.85	-13	Pass	7000

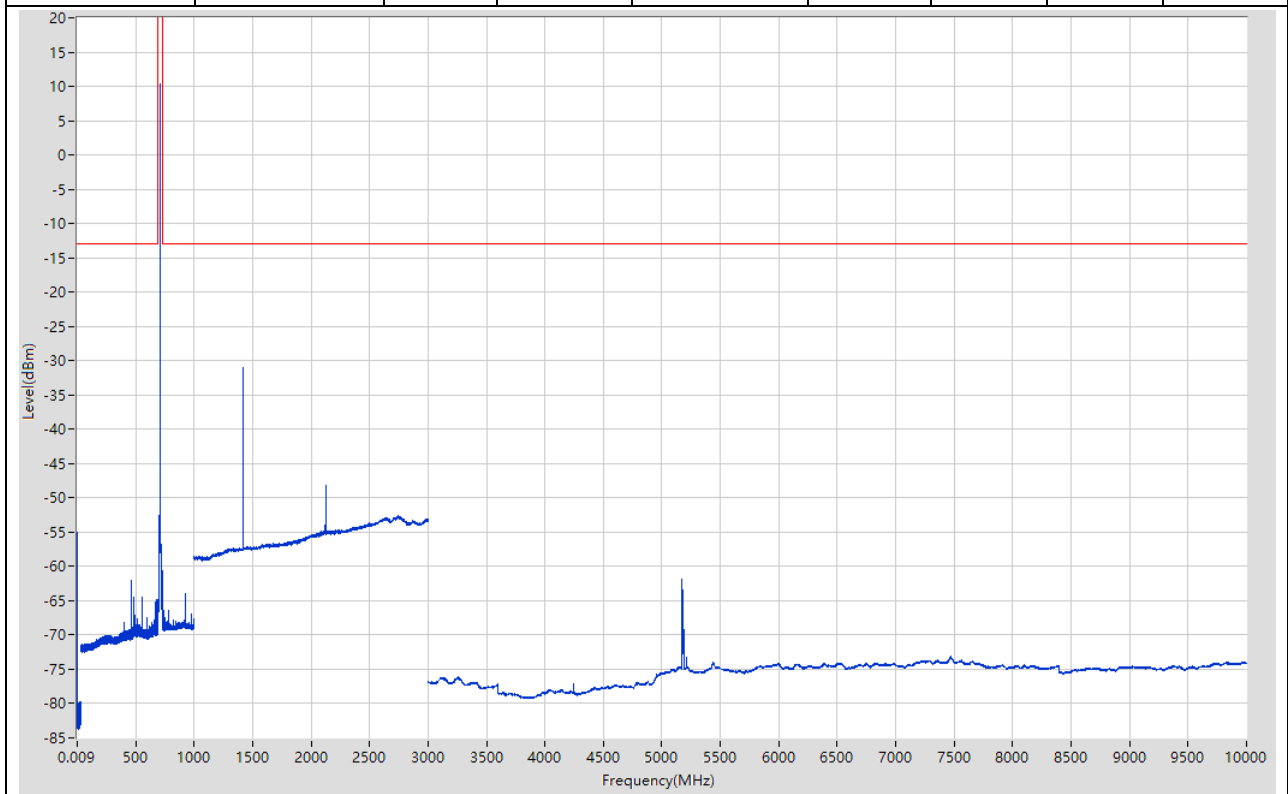


12.11. LTE-M1 Band12 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.6	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.24	-13	Pass	2985
30	689	0.1	RMS	547.078	-53.36	-13	Pass	6590
689	726	0.1	RMS	711.878	10.99	60	Pass	601
726	1000	0.1	RMS	730.502	-61.75	-13	Pass	2740
1000	3000	1	RMS	1422.211	-30.5	-13	Pass	2000
3000	10000	1	RMS	5202.315	-64.68	-13	Pass	7000

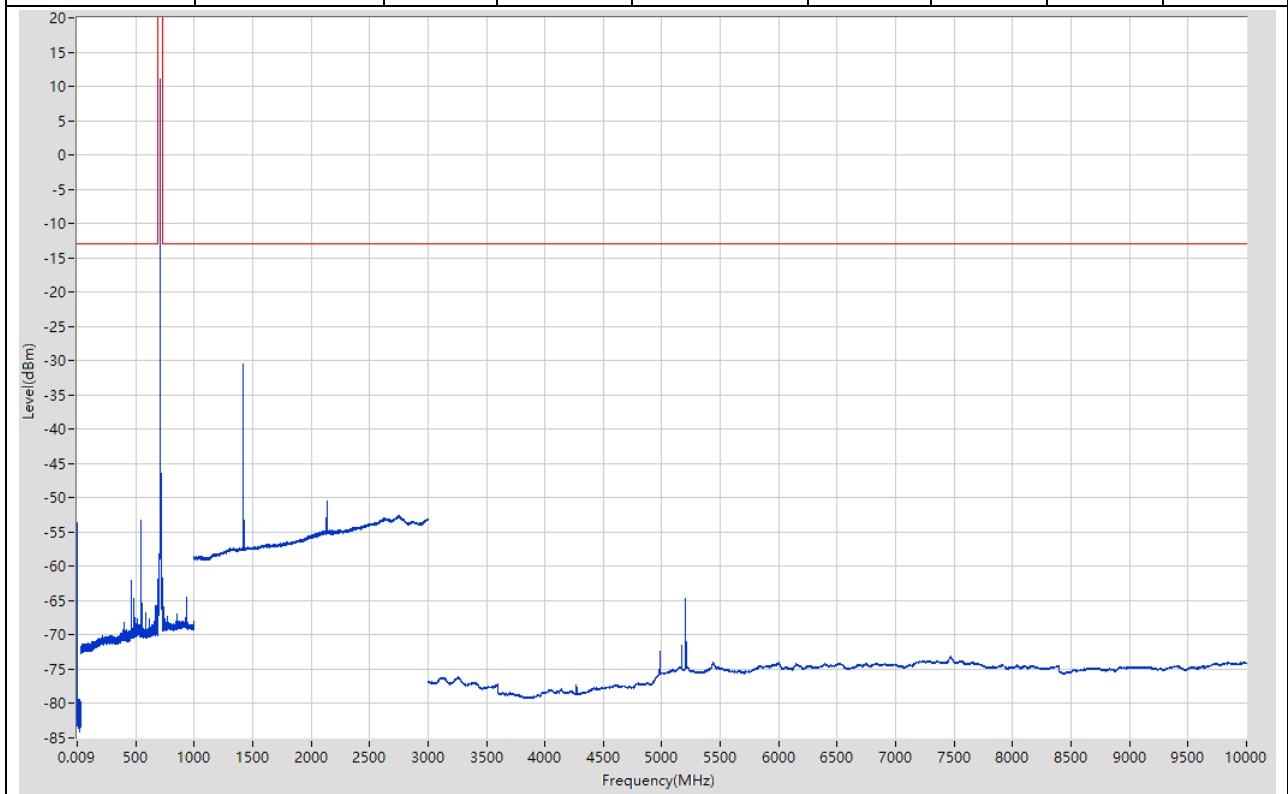

12.12. LTE-M1 Band12 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.05	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.37	-13	Pass	2985
30	689	0.1	RMS	586.584	-63.38	-13	Pass	6590
689	726	0.1	RMS	715.455	10.72	60	Pass	601
726	1000	0.1	RMS	734.003	-63.19	-13	Pass	2740
1000	3000	1	RMS	1430.215	-38.88	-13	Pass	2000
3000	10000	1	RMS	5201.314	-64.1	-13	Pass	7000

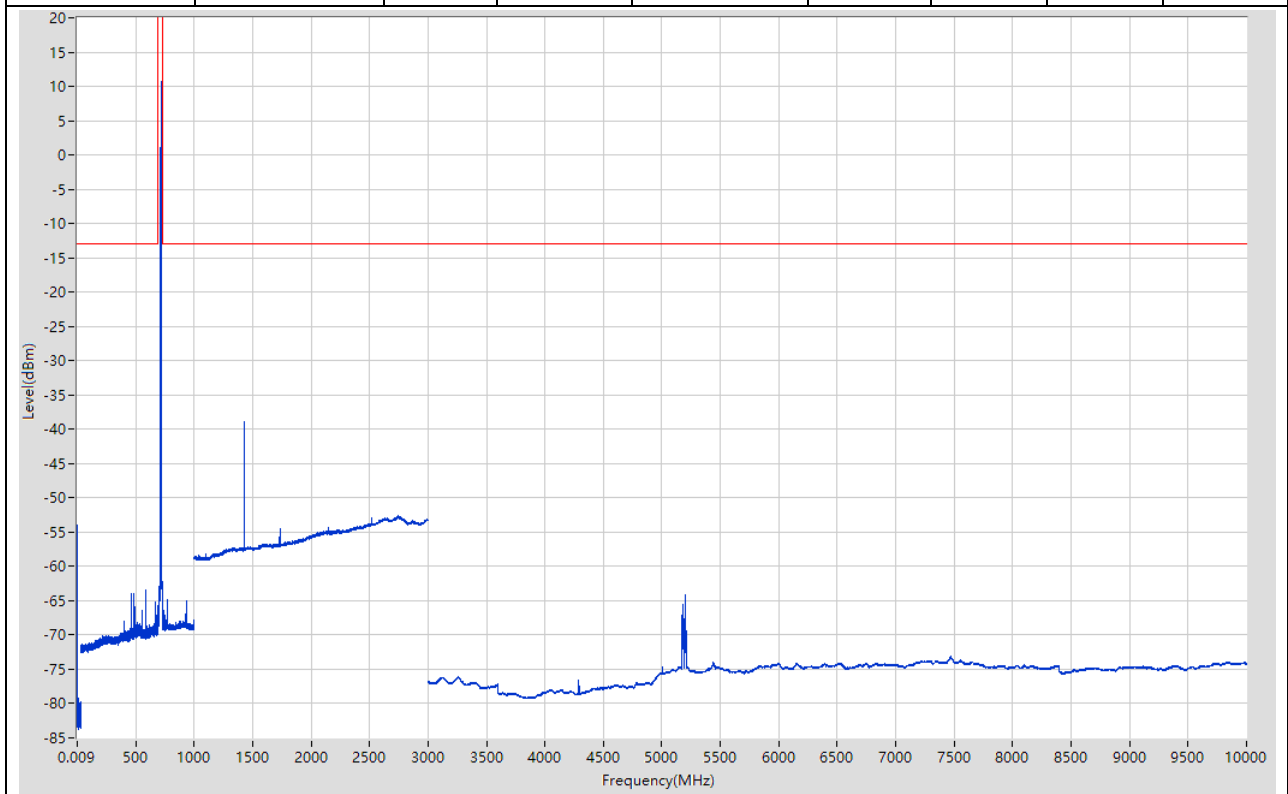

13. LTE-M1_Band13_QPSK


13.1. LTE-M1 Band13 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.36	-13	Pass	2985
30	767	0.1	RMS	480.661	-52.47	-13	Pass	7370
767	797	0.1	RMS	781.7	10.83	60	Pass	601
797	1000	0.1	RMS	800.402	-63.1	-13	Pass	2030
1000	3000	1	RMS	2745.873	-52.67	-13	Pass	2000
3000	10000	1	RMS	4686.241	-70.22	-13	Pass	7000

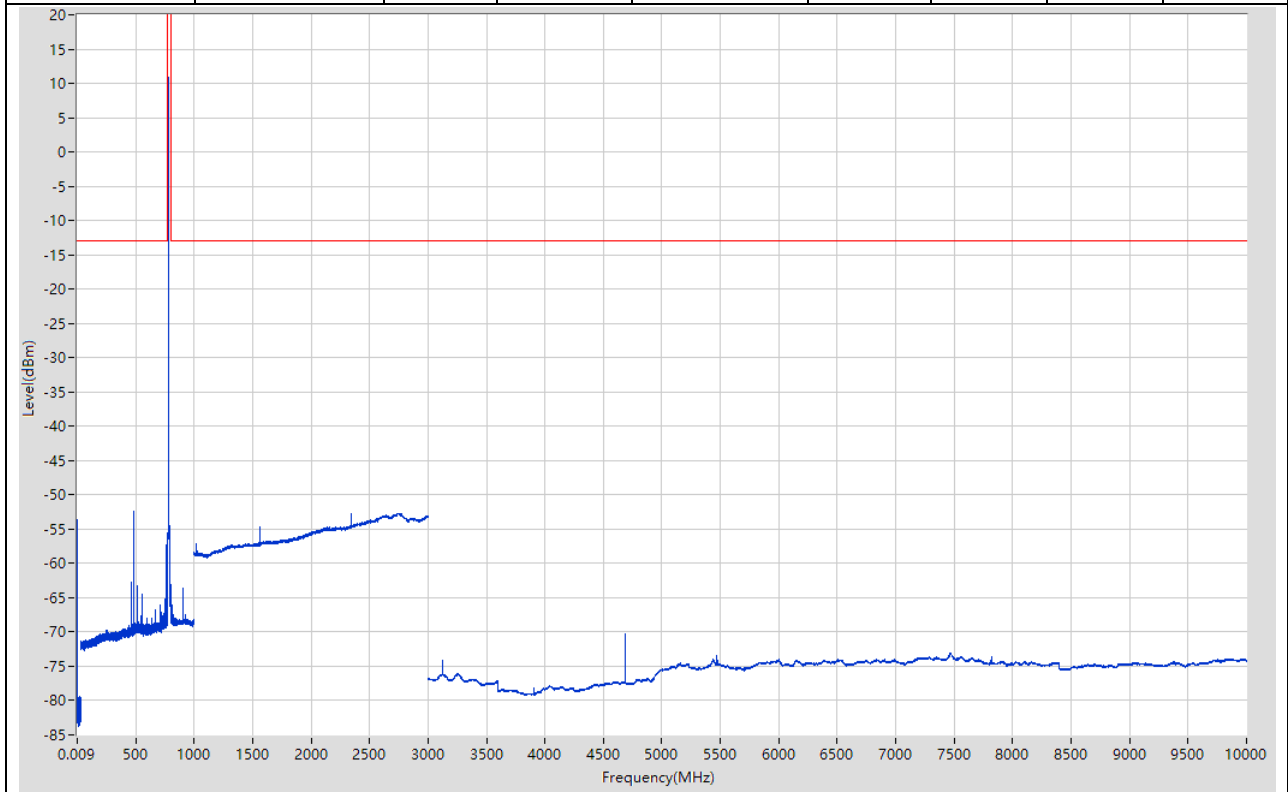


13.2. LTE-M1 Band13 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.89	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.16	-13	Pass	2985
30	767	0.1	RMS	361.645	-61.9	-13	Pass	7370
767	797	0.1	RMS	784.1	10.43	60	Pass	601
797	1000	0.1	RMS	802.903	-61.09	-13	Pass	2030
1000	3000	1	RMS	1568.284	-52.26	-13	Pass	2000
3000	10000	1	RMS	4705.244	-64.82	-13	Pass	7000

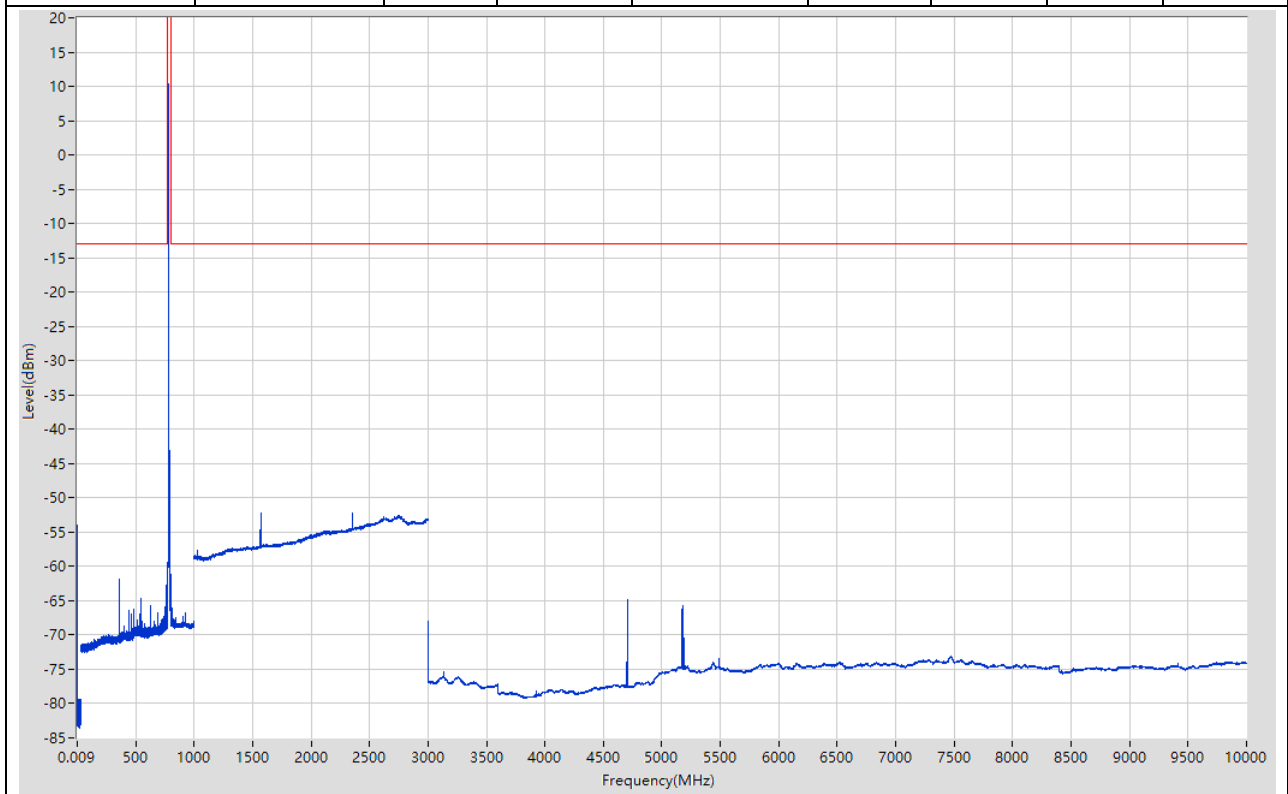


13.3. LTE-M1 Band13 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-53.92	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.2	-13	Pass	2985
30	767	0.1	RMS	460.758	-58.09	-13	Pass	7370
767	797	0.1	RMS	786.7	10.77	60	Pass	601
797	1000	0.1	RMS	805.404	-63.16	-13	Pass	2030
1000	3000	1	RMS	2357.679	-52.13	-13	Pass	2000
3000	10000	1	RMS	5176.311	-66.73	-13	Pass	7000

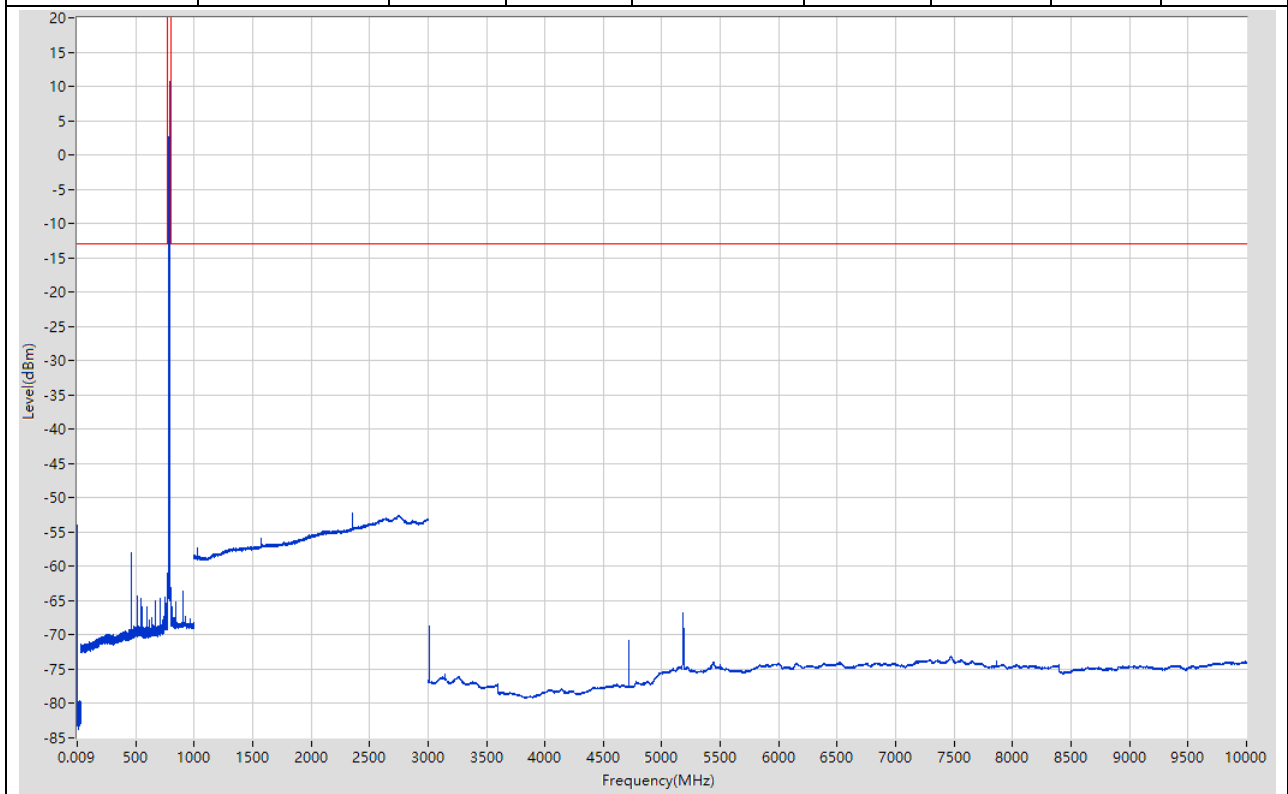

13.4. LTE-M1 Band13 10M RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.37	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.08	-13	Pass	2985
30	767	0.1	RMS	766.6	-60.04	-13	Pass	7370
767	797	0.1	RMS	786.45	10.27	60	Pass	601
797	1000	0.1	RMS	805.104	-61.83	-13	Pass	2030
1000	3000	1	RMS	2749.875	-52.64	-13	Pass	2000
3000	10000	1	RMS	3013.002	-69.77	-13	Pass	7000

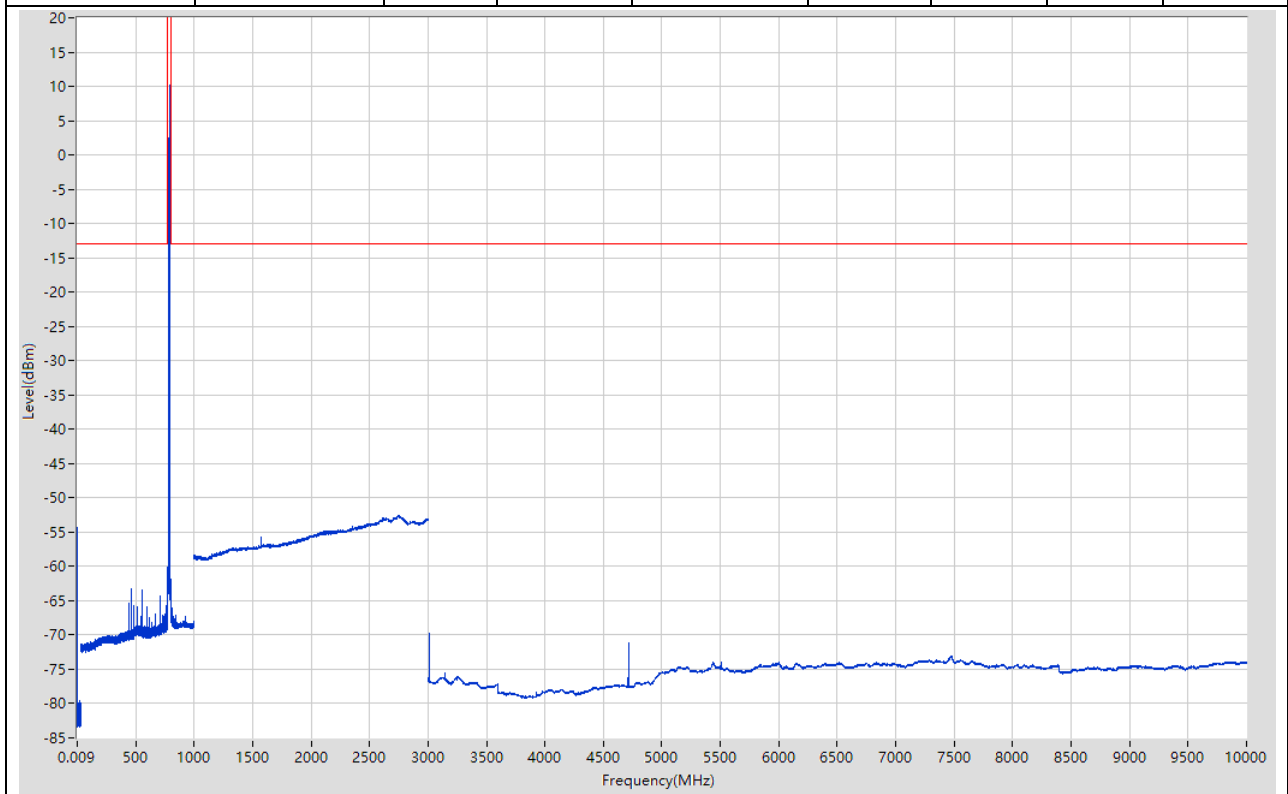

14. LTE-M1_Band13_16QAM


14.1. LTE-M1 Band13 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-55.12	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.23	-13	Pass	2985
30	767	0.1	RMS	480.661	-51.96	-13	Pass	7370
767	797	0.1	RMS	781.7	9.64	60	Pass	601
797	1000	0.1	RMS	800.402	-60.32	-13	Pass	2030
1000	3000	1	RMS	2751.876	-52.87	-13	Pass	2000
3000	10000	1	RMS	7807.687	-73.18	-13	Pass	7000

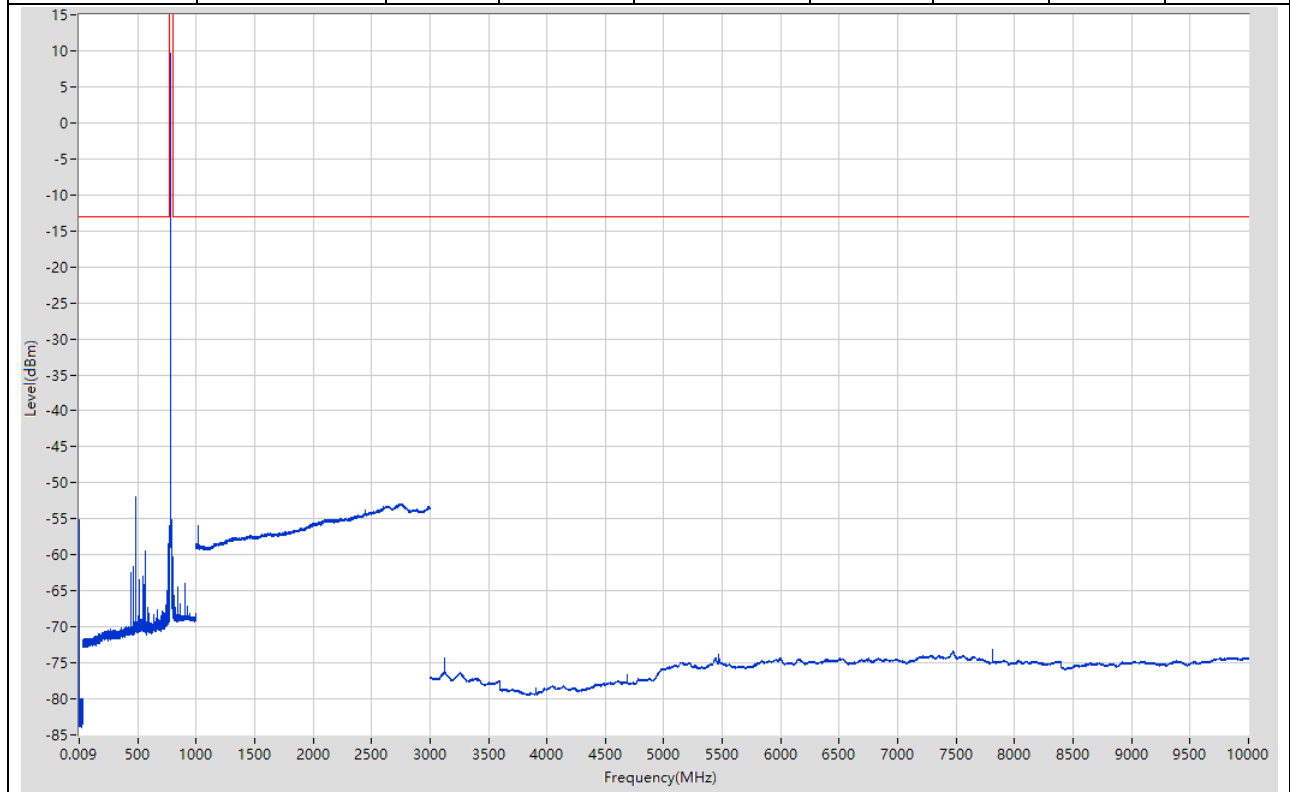


14.2. LTE-M1 Band13 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.72	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.21	-13	Pass	2985
30	767	0.1	RMS	764.5	-56.67	-13	Pass	7370
767	797	0.1	RMS	784.15	10.78	60	Pass	601
797	1000	0.1	RMS	802.903	-61.6	-13	Pass	2030
1000	3000	1	RMS	1566.283	-50.14	-13	Pass	2000
3000	10000	1	RMS	3004.001	-69.26	-13	Pass	7000

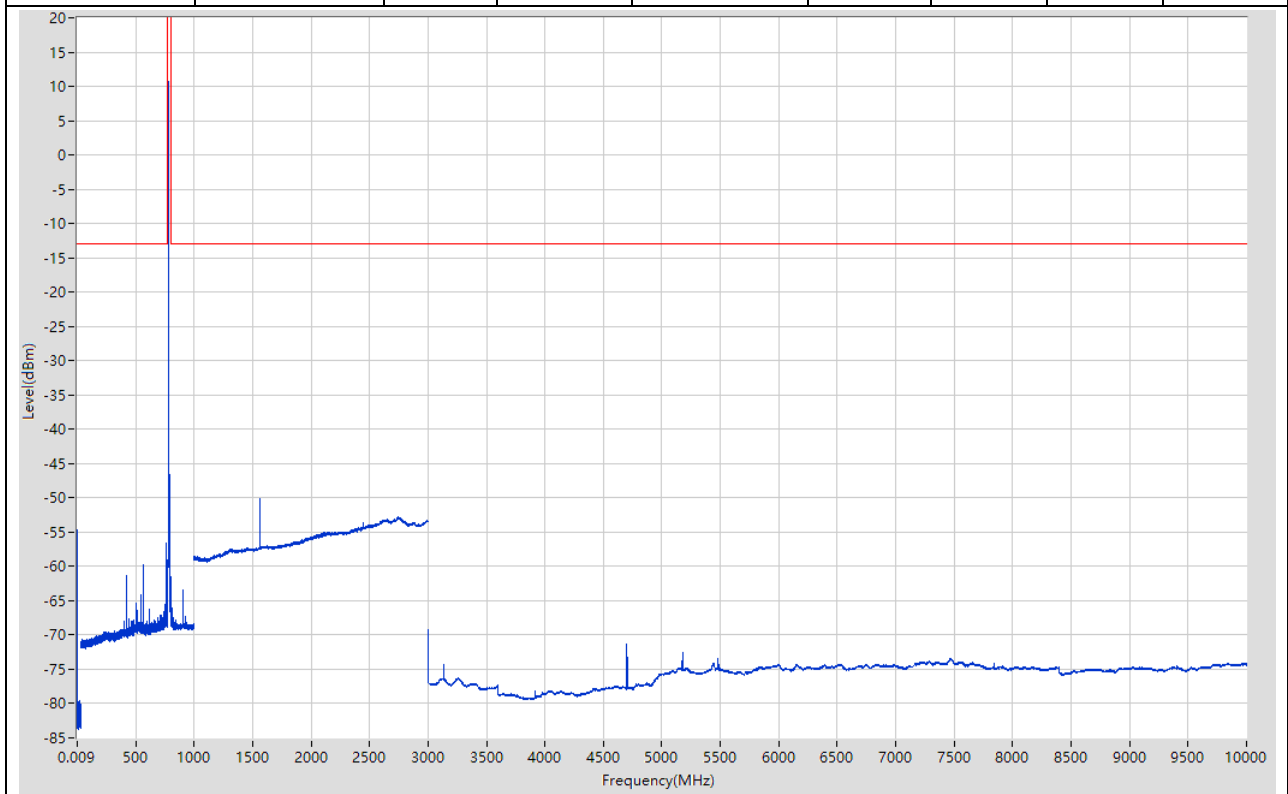


14.3. LTE-M1 Band13 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.82	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.55	-13	Pass	2985
30	767	0.1	RMS	766.9	-61.58	-13	Pass	7370
767	797	0.1	RMS	786.65	10.84	60	Pass	601
797	1000	0.1	RMS	805.404	-61.06	-13	Pass	2030
1000	3000	1	RMS	2745.873	-52.8	-13	Pass	2000
3000	10000	1	RMS	4720.246	-65.42	-13	Pass	7000

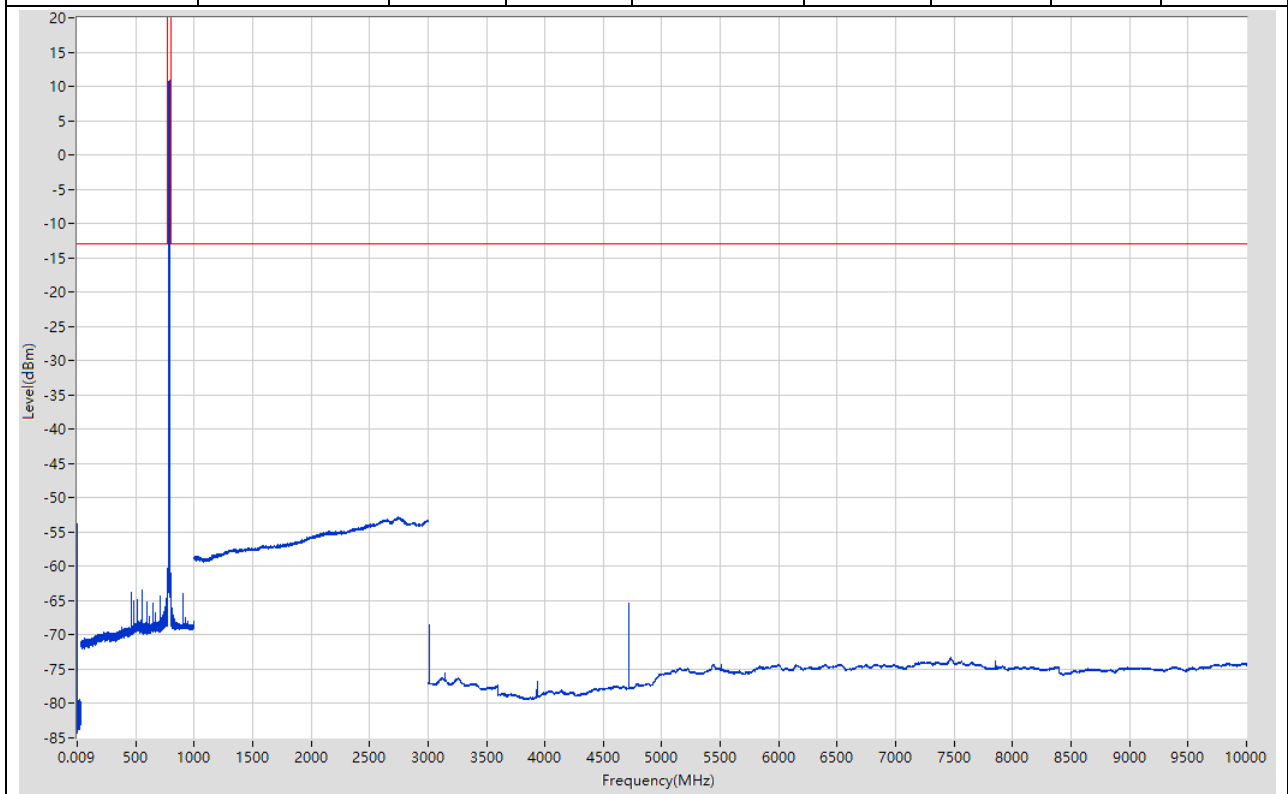

14.4. LTE-M1 Band13 10M RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.71	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.75	-13	Pass	2985
30	767	0.1	RMS	564.272	-58.62	-13	Pass	7370
767	797	0.1	RMS	785.3	10.56	60	Pass	601
797	1000	0.1	RMS	805.004	-62.82	-13	Pass	2030
1000	3000	1	RMS	1570.285	-51.41	-13	Pass	2000
3000	10000	1	RMS	4712.245	-65	-13	Pass	7000

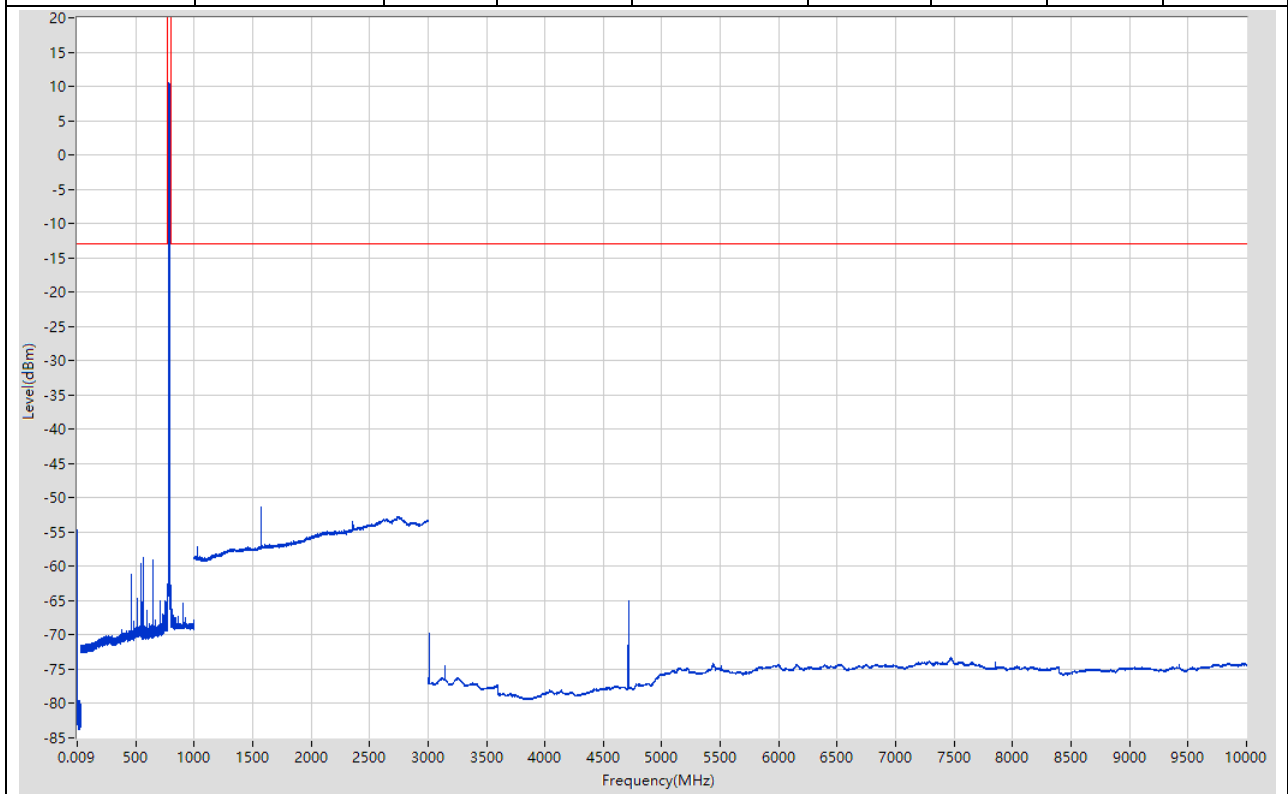

21. LTE-M1_Band25_QPSK


21.1. LTE-M1 Band25 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.13	-13	Pass	601
0.15	30	0.01	RMS	0.16	-517.09	-13	Pass	2985
30	1000	0.1	RMS	921.492	-67.06	-13	Pass	9700
1000	1840	1	RMS	1831.99	-55.18	-13	Pass	840
1840	1925	1	RMS	1851.333	12.15	60	Pass	601
1925	3000	1	RMS	2745.764	-53.18	-13	Pass	1075
3000	20000	1	RMS	3702.041	-51.16	-13	Pass	17000

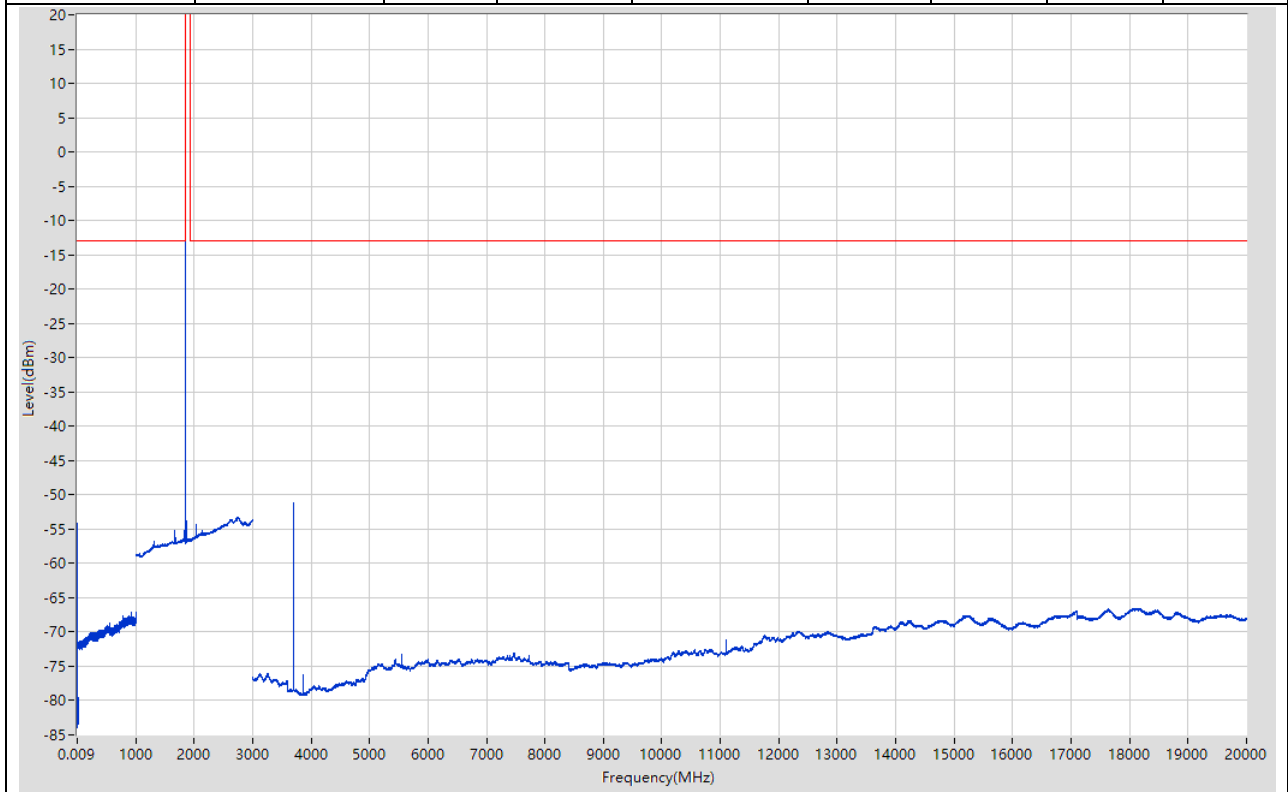


21.2. LTE-M1 Band25 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.06	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.07	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.77	-13	Pass	9700
1000	1840	1	RMS	1703.838	-53.21	-13	Pass	840
1840	1925	1	RMS	1882.783	11.31	60	Pass	601
1925	3000	1	RMS	2745.764	-53.24	-13	Pass	1075
3000	20000	1	RMS	3766.045	-46.93	-13	Pass	17000

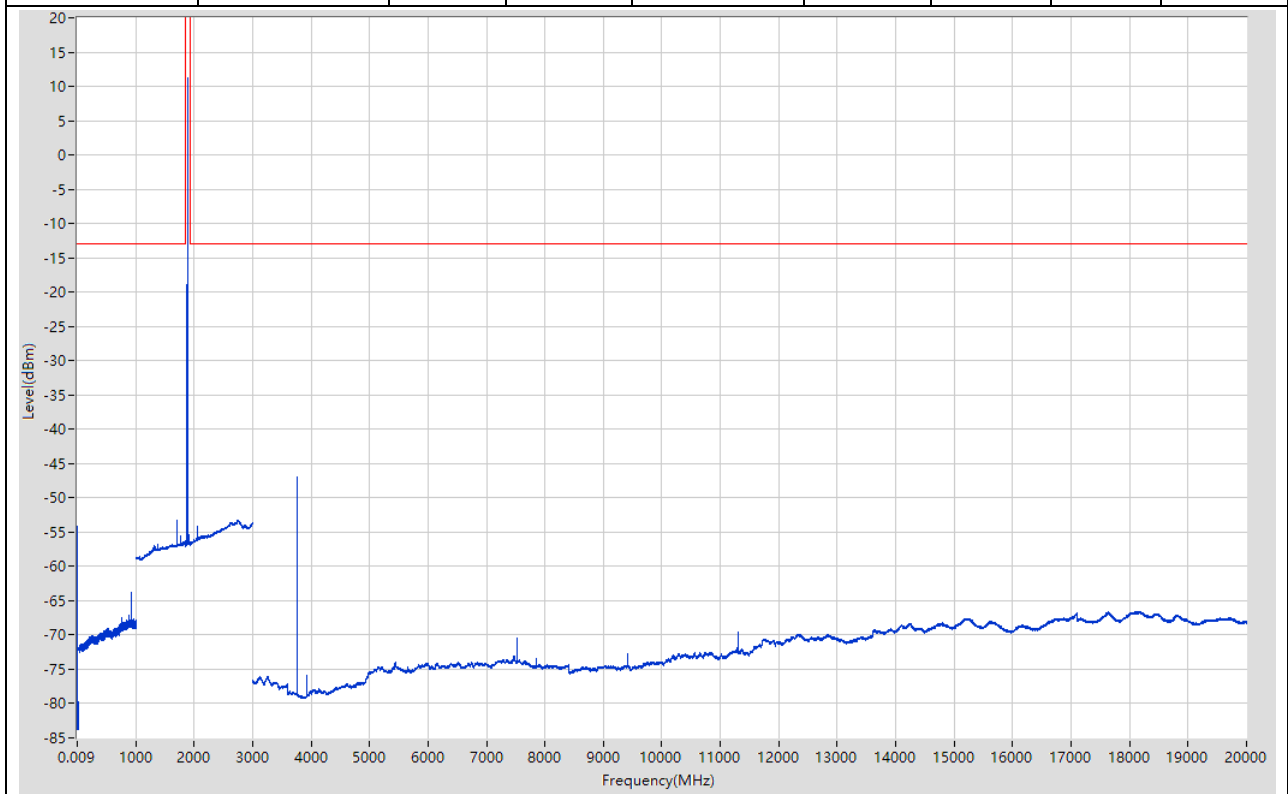


21.3. LTE-M1 Band25 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.33	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.34	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.68	-13	Pass	9700
1000	1840	1	RMS	1732.872	-52.71	-13	Pass	840
1840	1925	1	RMS	1914.375	12.02	60	Pass	601
1925	3000	1	RMS	2188.245	-52.22	-13	Pass	1075
3000	20000	1	RMS	38217.049	-57.56	-13	Pass	17000

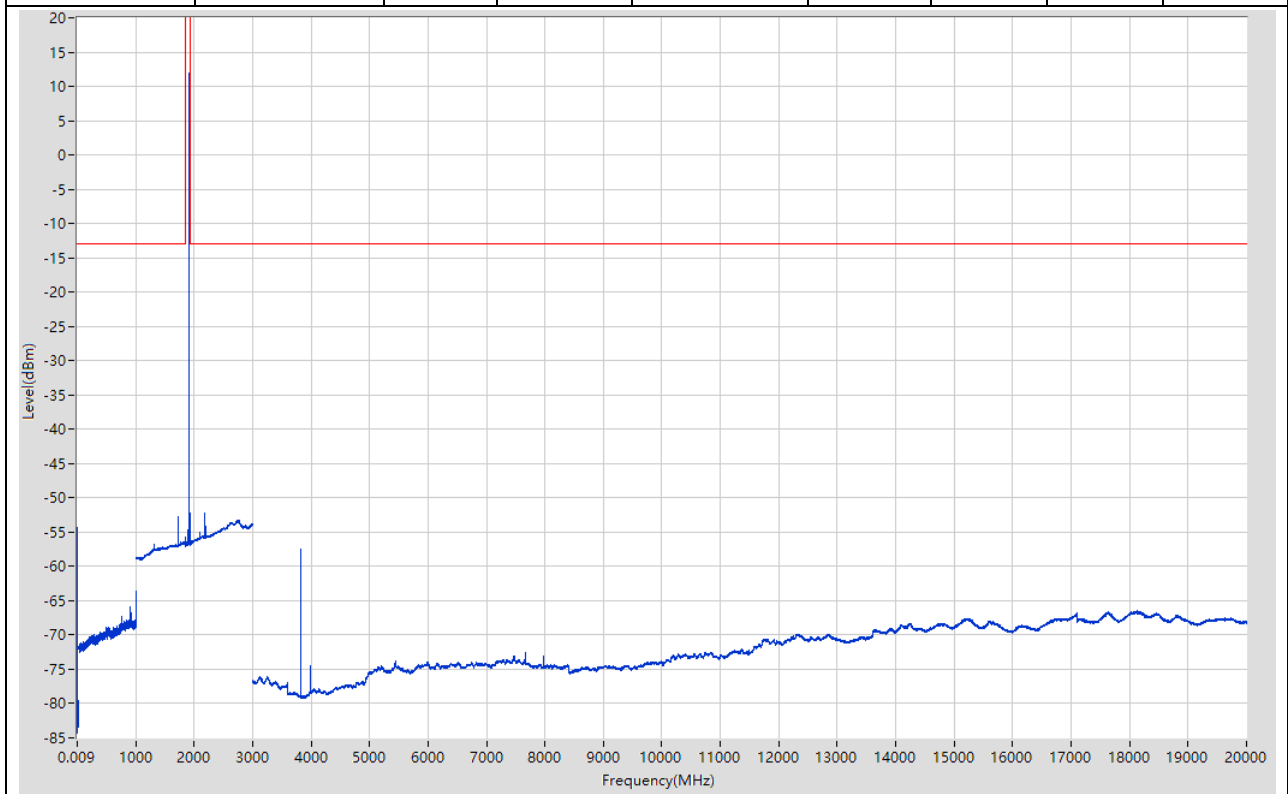


21.4. LTE-M1 Band25 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.57	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.65	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.1	-13	Pass	9700
1000	1840	1	RMS	1832.992	-55.09	-13	Pass	840
1840	1925	1	RMS	1852.75	12.16	60	Pass	601
1925	3000	1	RMS	2741.76	-53.18	-13	Pass	1075
3000	20000	1	RMS	3701.041	-53.32	-13	Pass	17000

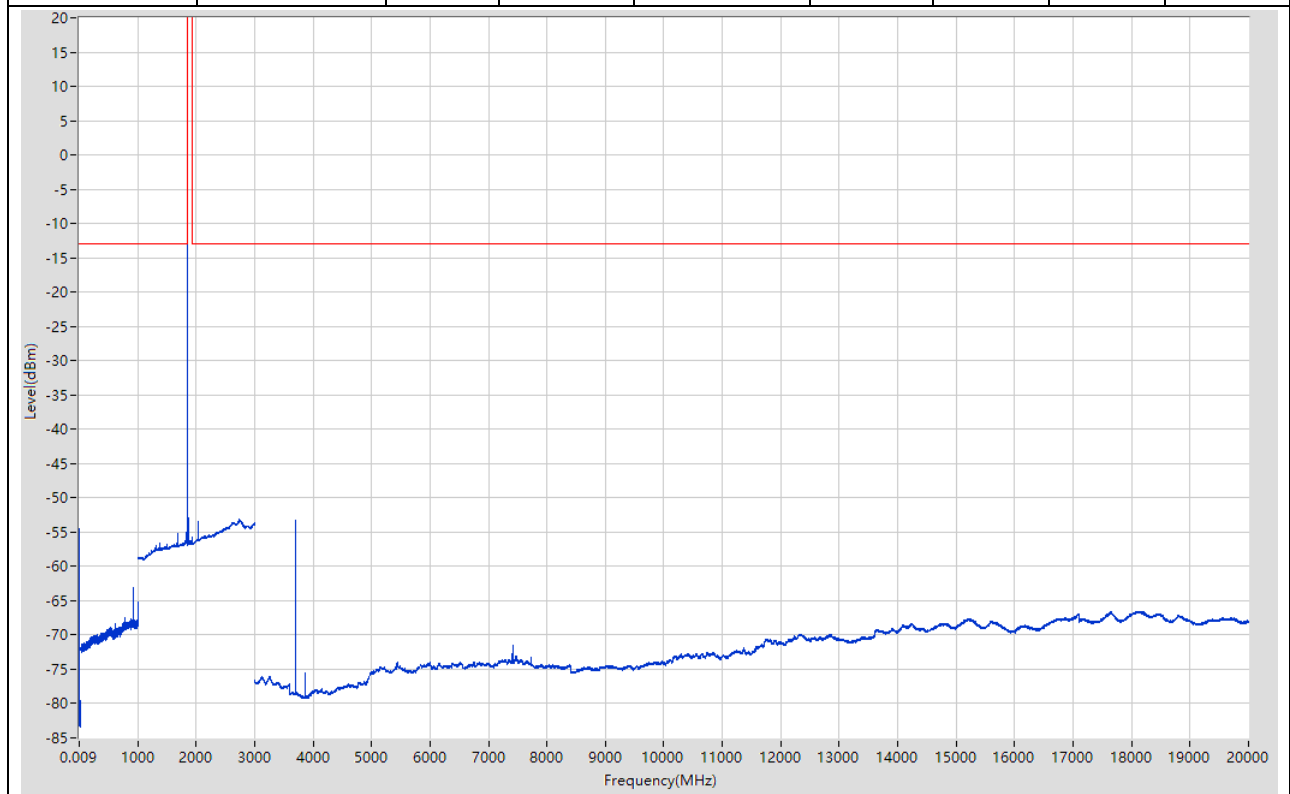


21.5. LTE-M1 Band25 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.89	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.3	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.93	-13	Pass	9700
1000	1840	1	RMS	1703.838	-52.55	-13	Pass	840
1840	1925	1	RMS	1883.633	11.61	60	Pass	601
1925	3000	1	RMS	2754.772	-53.22	-13	Pass	1075
3000	20000	1	RMS	3766.045	-62.24	-13	Pass	17000

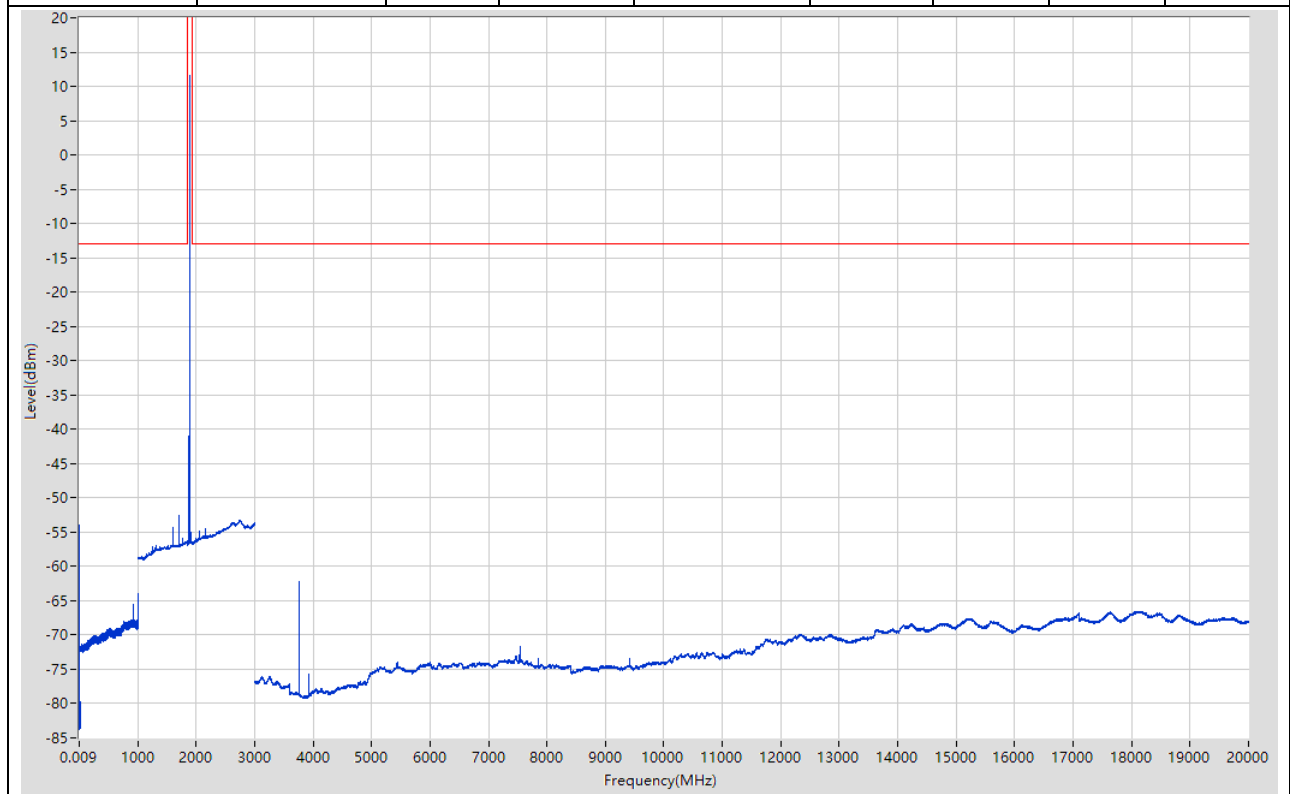


21.6. LTE-M1 Band25 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-53.13	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.34	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.01	-13	Pass	9700
1000	1840	1	RMS	1731.871	-50.28	-13	Pass	840
1840	1925	1	RMS	1914.942	11.84	60	Pass	601
1925	3000	1	RMS	2741.76	-53.22	-13	Pass	1075
3000	20000	1	RMS	3828.049	-58.76	-13	Pass	17000

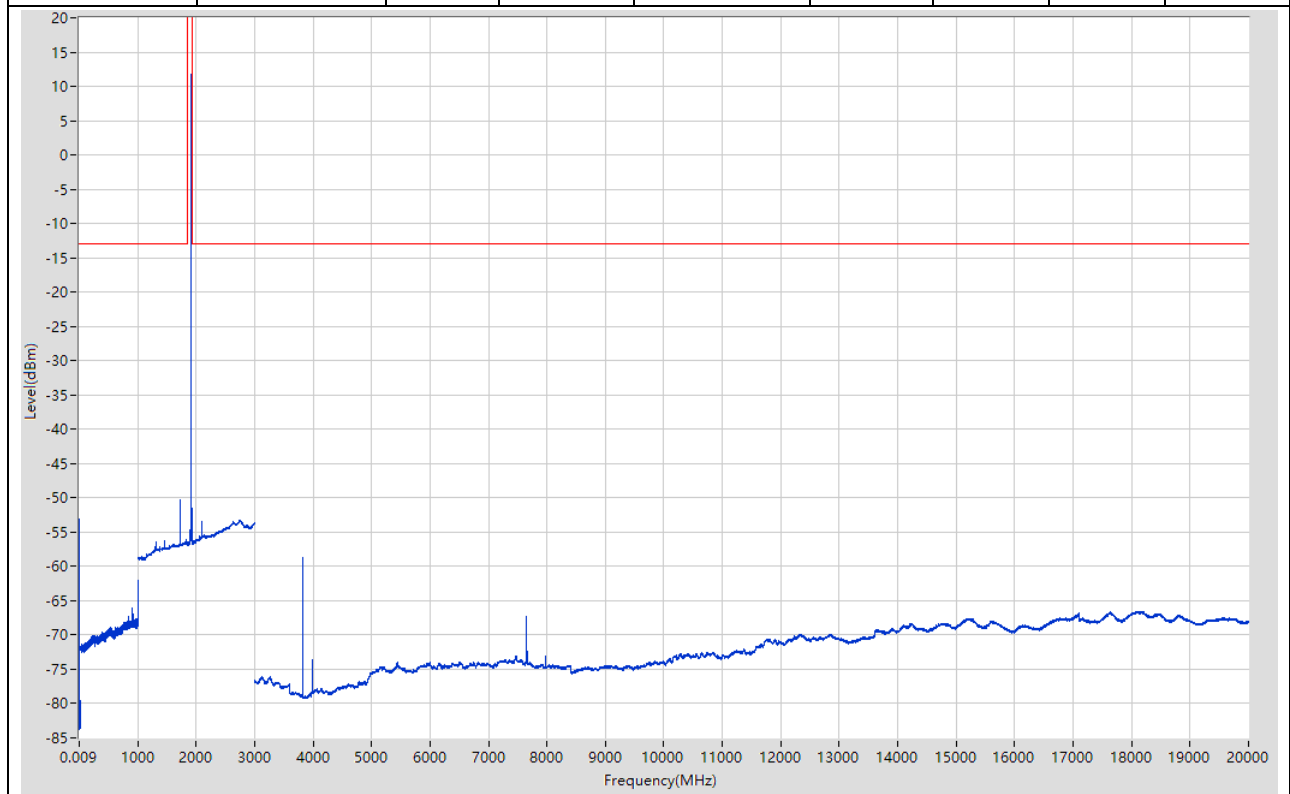

21.7. LTE-M1 Band25 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-54.99	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.74	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.8	-13	Pass	9700
1000	1840	1	RMS	1677.807	-51.82	-13	Pass	840
1840	1925	1	RMS	1854.733	12.19	60	Pass	601
1925	3000	1	RMS	2030.098	-52.47	-13	Pass	1075
3000	20000	1	RMS	37017.042	-46.11	-13	Pass	17000

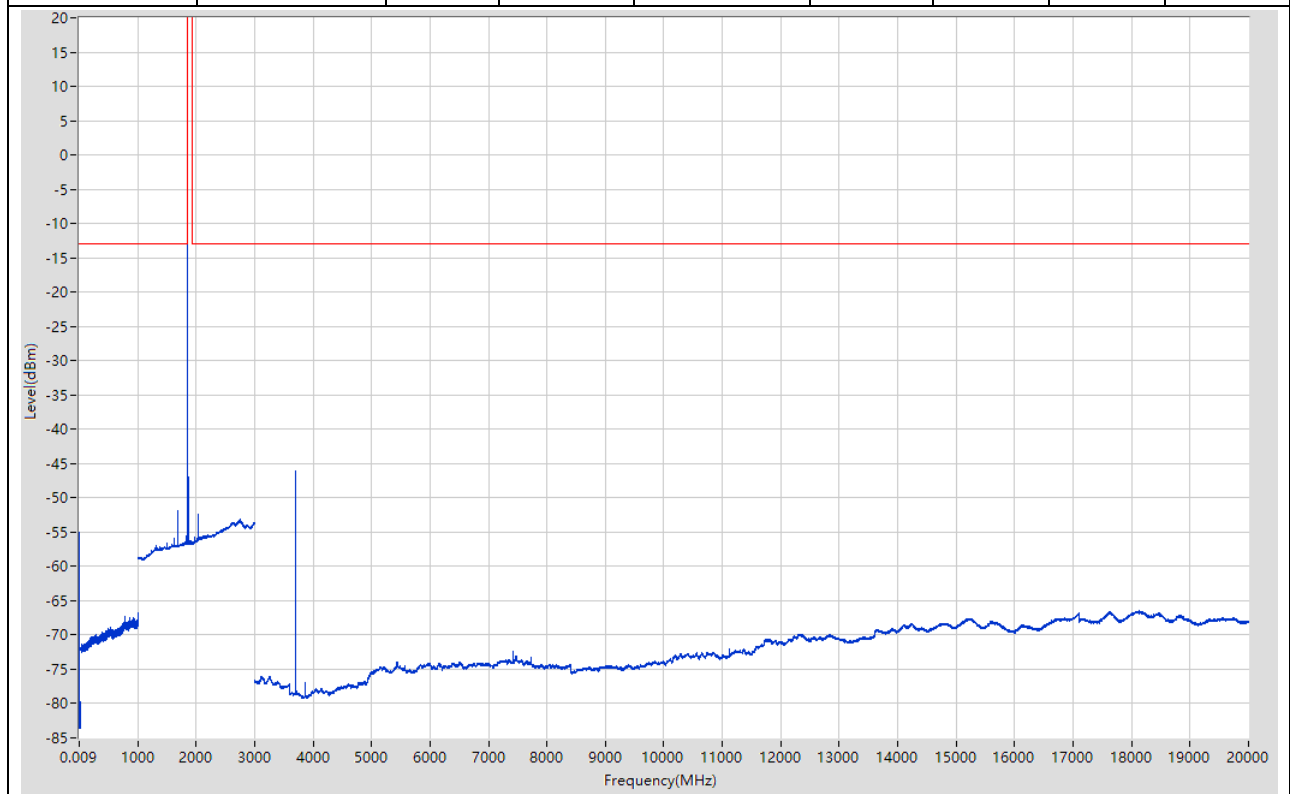


21.8. LTE-M1 Band25 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.83	-13	Pass	2985
30	1000	0.1	RMS	998.2998	-65.67	-13	Pass	9700
1000	1840	1	RMS	1815.971	-52.46	-13	Pass	840
1840	1925	1	RMS	1907.292	11.71	60	Pass	601
1925	3000	1	RMS	20817.153	-51.2	-13	Pass	1075
3000	20000	1	RMS	3813.048	-55.35	-13	Pass	17000




21.17. LTE-M1 Band25 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.69	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.11	-13	Pass	2985
30	1000	0.1	RMS	998.5	-66.74	-13	Pass	9700
1000	1840	1	RMS	1731.871	-50.05	-13	Pass	840
1840	1925	1	RMS	1914.233	12.22	60	Pass	601
1925	3000	1	RMS	2096.159	-52.51	-13	Pass	1075
3000	20000	1	RMS	38217.049	-52.37	-13	Pass	17000

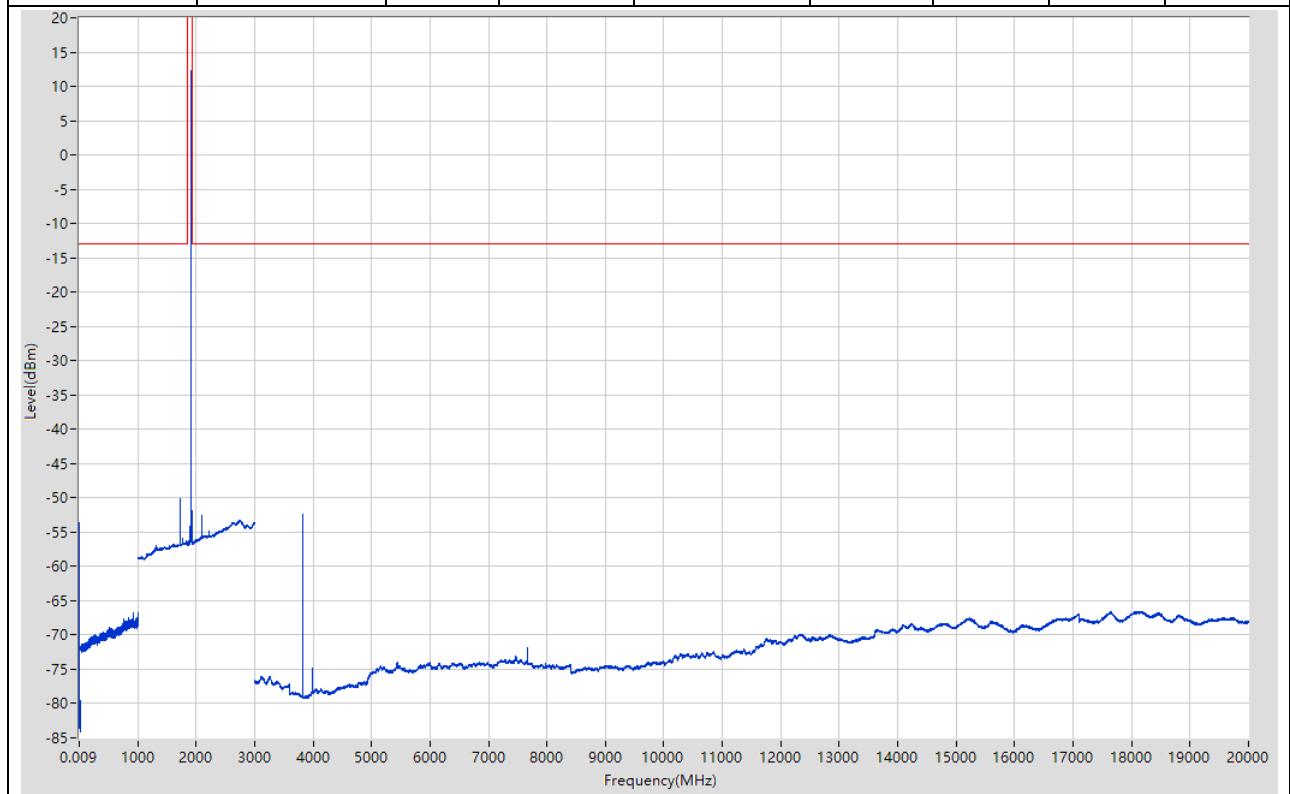


21.10. LTE-M1 Band25 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.77	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.3	-13	Pass	2985
30	1000	0.1	RMS	998.4	-65.47	-13	Pass	9700
1000	1840	1	RMS	1681.812	-52.17	-13	Pass	840
1840	1925	1	RMS	18517.408	11.65	60	Pass	601
1925	3000	1	RMS	2036.103	-52.12	-13	Pass	1075
3000	20000	1	RMS	3717.042	-51.09	-13	Pass	17000

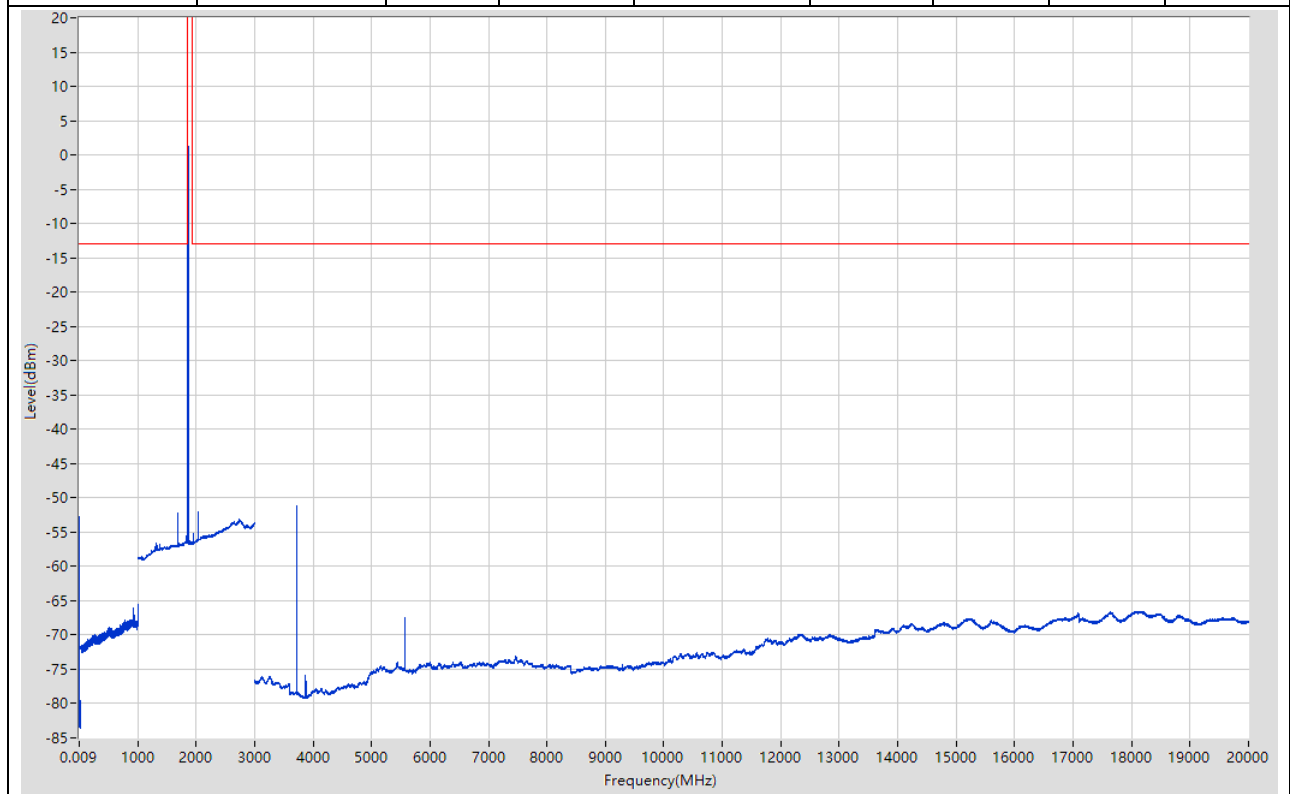


21.11. LTE-M1 Band25 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.14	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.31	-13	Pass	9700
1000	1840	1	RMS	1707.843	-50.77	-13	Pass	840
1840	1925	1	RMS	1886.892	12.02	60	Pass	601
1925	3000	1	RMS	2065.13	-52.93	-13	Pass	1075
3000	20000	1	RMS	3773.045	-51.23	-13	Pass	17000

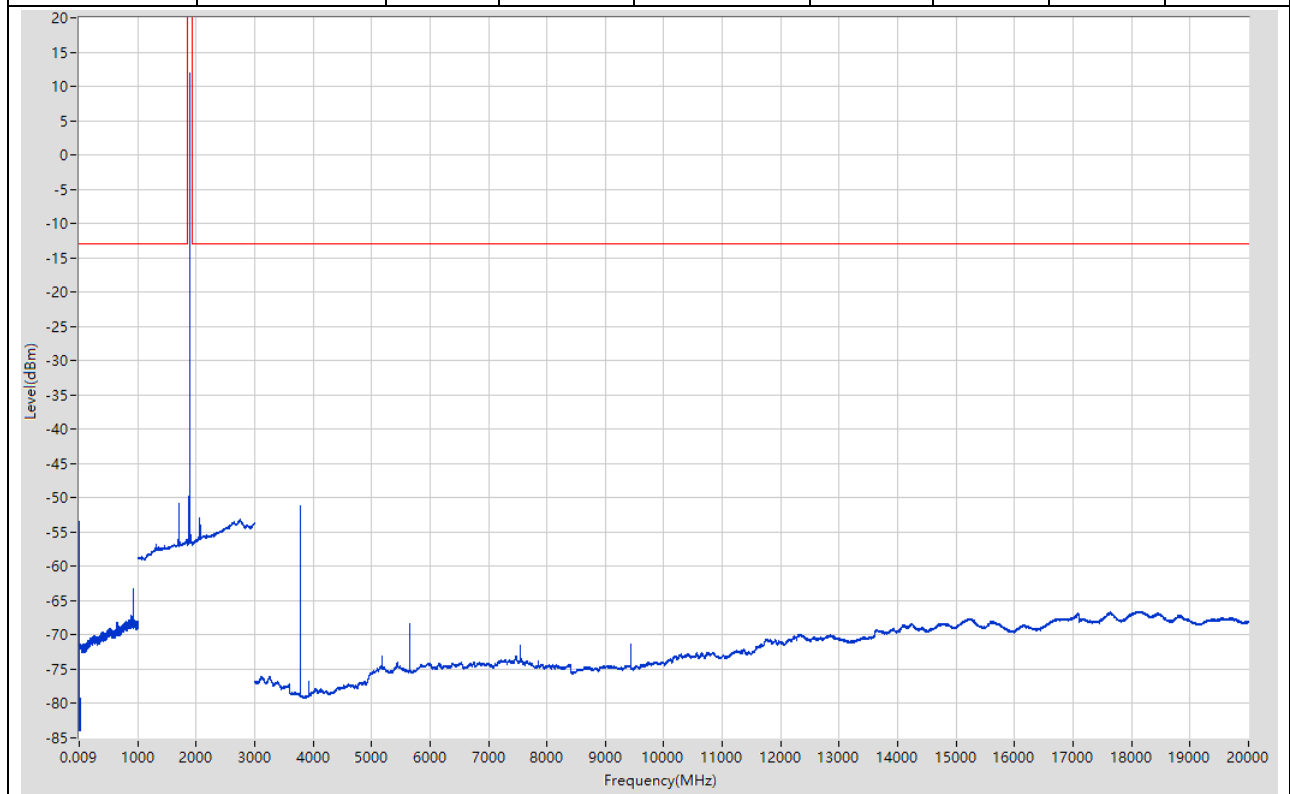


21.12. LTE-M1 Band25 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.71	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.89	-13	Pass	9700
1000	1840	1	RMS	1732.872	-417.82	-13	Pass	840
1840	1925	1	RMS	1914.375	12.67	60	Pass	601
1925	3000	1	RMS	2096.159	-52.25	-13	Pass	1075
3000	20000	1	RMS	3827.049	-55.18	-13	Pass	17000

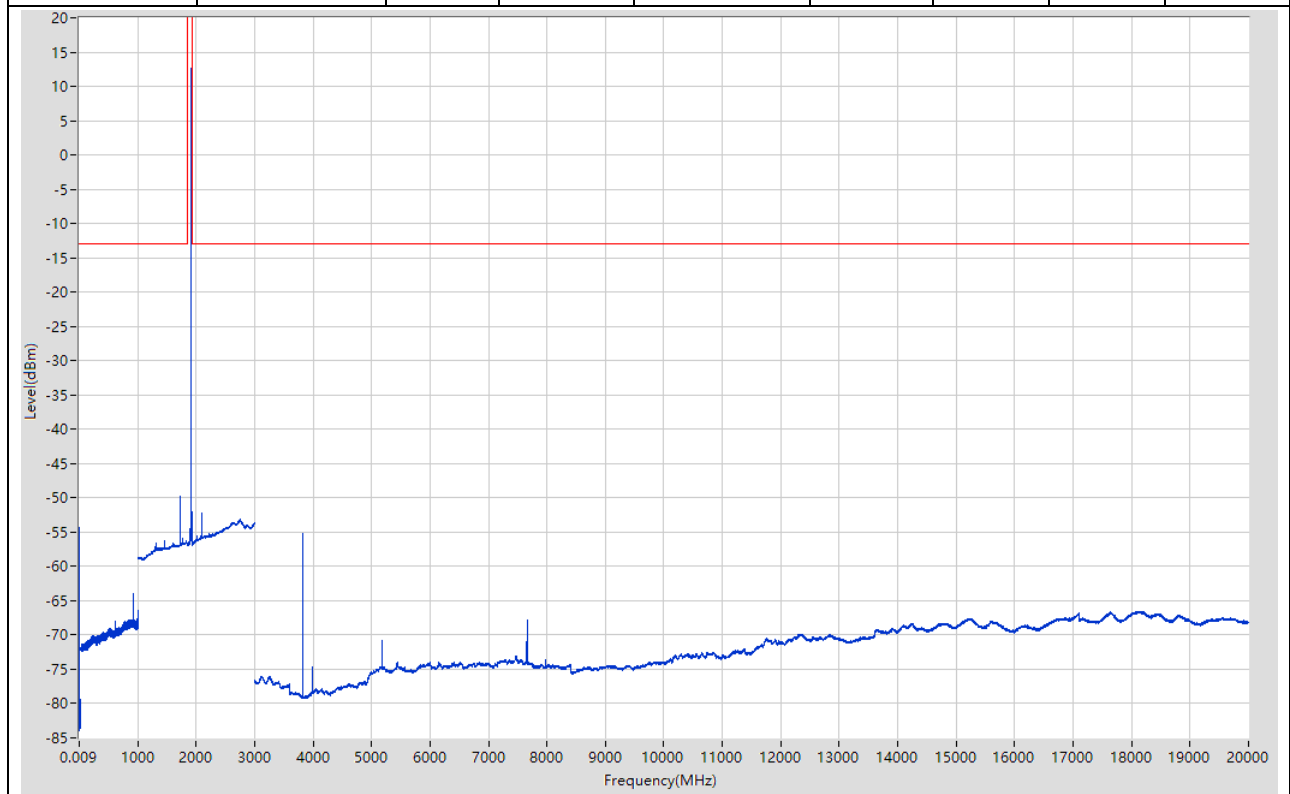


21.13. LTE-M1 Band25 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.82	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.03	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.94	-13	Pass	9700
1000	1840	1	RMS	1686.818	-53.83	-13	Pass	840
1840	1925	1	RMS	1863.658	12.21	60	Pass	601
1925	3000	1	RMS	2041.108	-52.57	-13	Pass	1075
3000	20000	1	RMS	18101.888	-66.53	-13	Pass	17000

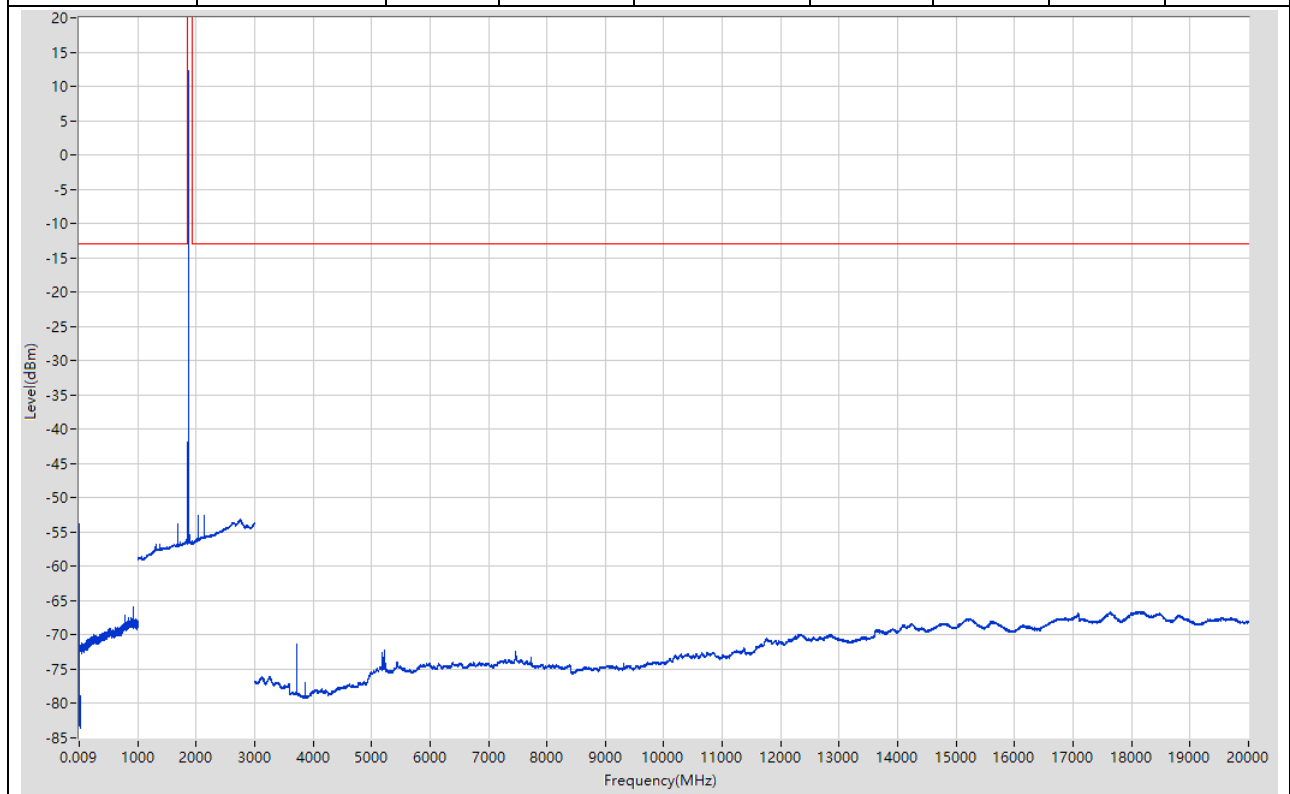


21.14. LTE-M1 Band25 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.21	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.44	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.32	-13	Pass	9700
1000	1840	1	RMS	17017.845	-50.19	-13	Pass	840
1840	1925	1	RMS	18817.3	12.99	60	Pass	601
1925	3000	1	RMS	20617.134	-50.92	-13	Pass	1075
3000	20000	1	RMS	3777.046	-47.27	-13	Pass	17000

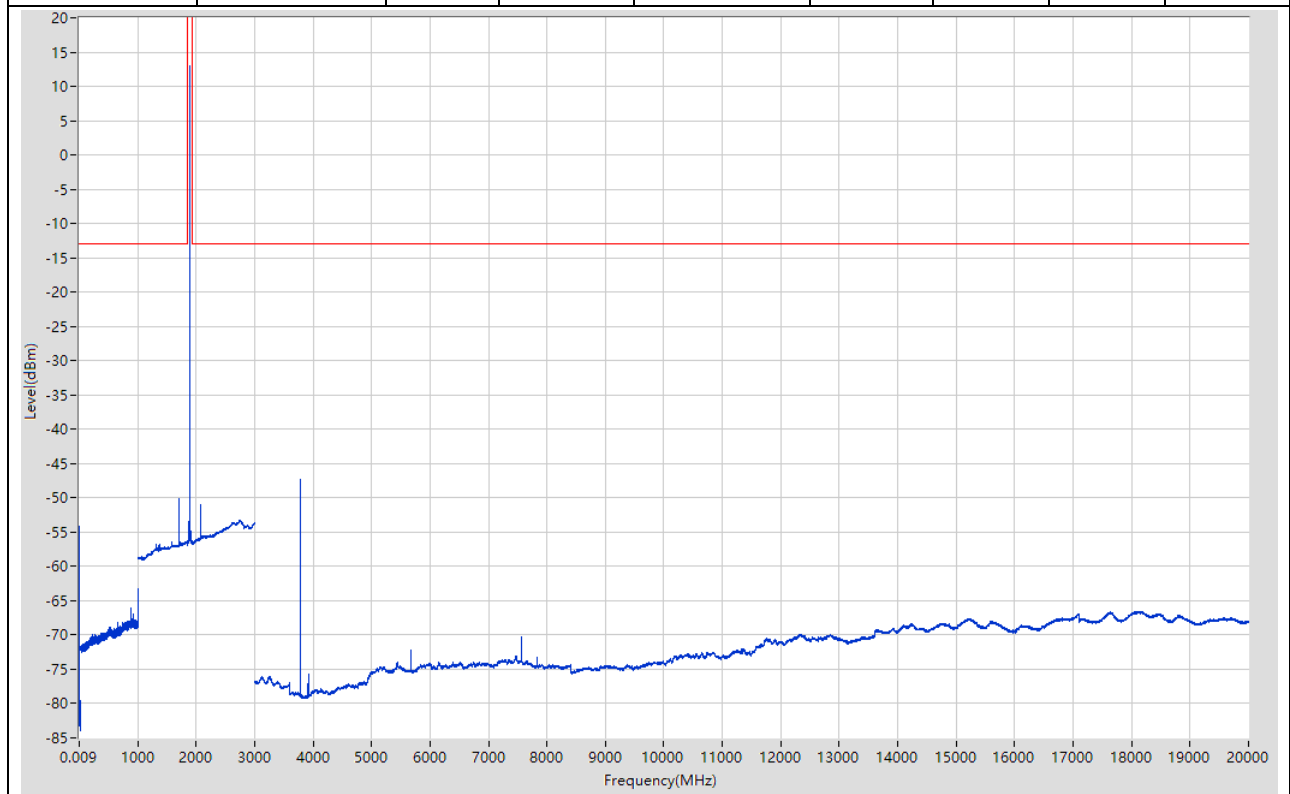


21.15. LTE-M1 Band25 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.91	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.92	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.53	-13	Pass	9700
1000	1840	1	RMS	1731.871	-50.73	-13	Pass	840
1840	1925	1	RMS	1914.233	11.95	60	Pass	601
1925	3000	1	RMS	2096.159	-52.45	-13	Pass	1075
3000	20000	1	RMS	3826.049	-56.75	-13	Pass	17000

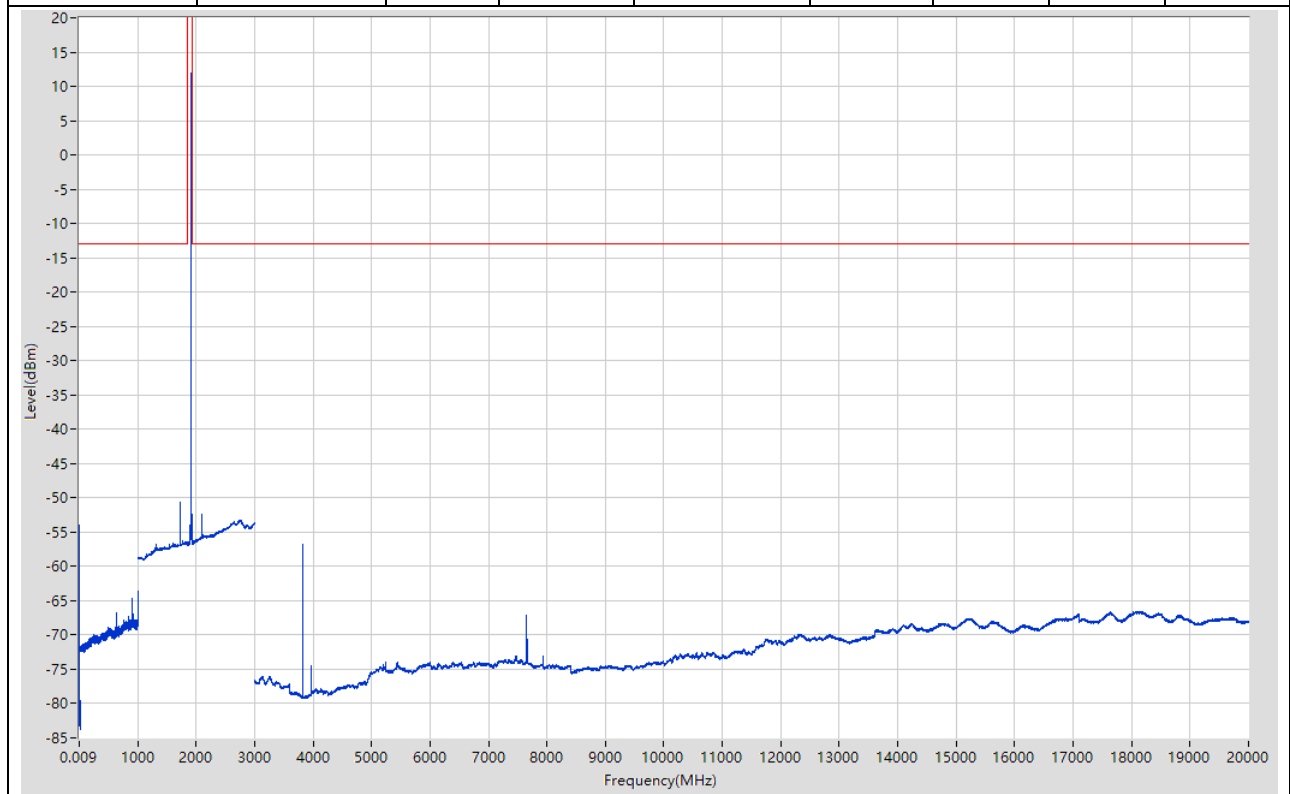


21.16. LTE-M1 Band25 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.99	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.51	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.5	-13	Pass	9700
1000	1840	1	RMS	1690.822	-53.05	-13	Pass	840
1840	1925	1	RMS	18617.042	12.08	60	Pass	601
1925	3000	1	RMS	2046.113	-52.28	-13	Pass	1075
3000	20000	1	RMS	18170.892	-66.52	-13	Pass	17000

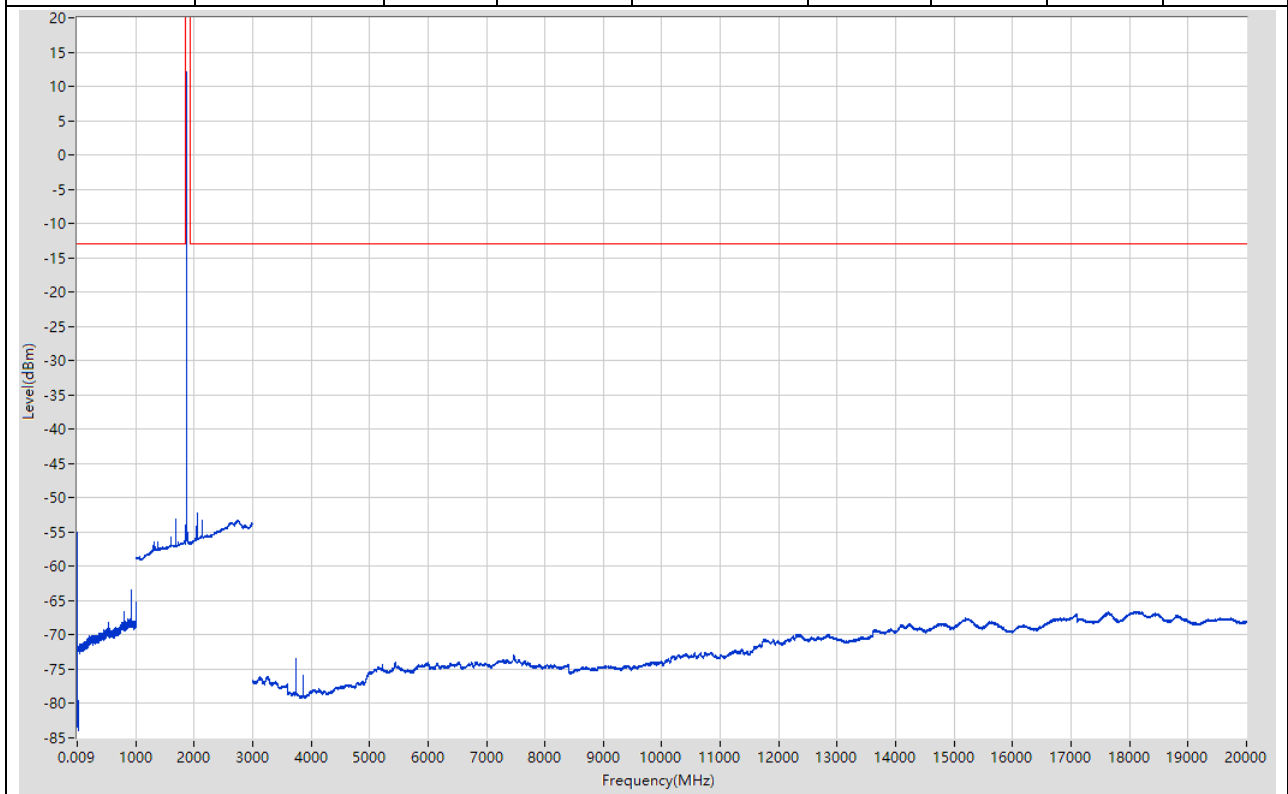


21.17. LTE-M1 Band25 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.83	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.24	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.26	-13	Pass	9700
1000	1840	1	RMS	1710.846	-51.94	-13	Pass	840
1840	1925	1	RMS	1891.142	12.78	60	Pass	601
1925	3000	1	RMS	2071.136	-51.72	-13	Pass	1075
3000	20000	1	RMS	3783.046	-517.97	-13	Pass	17000

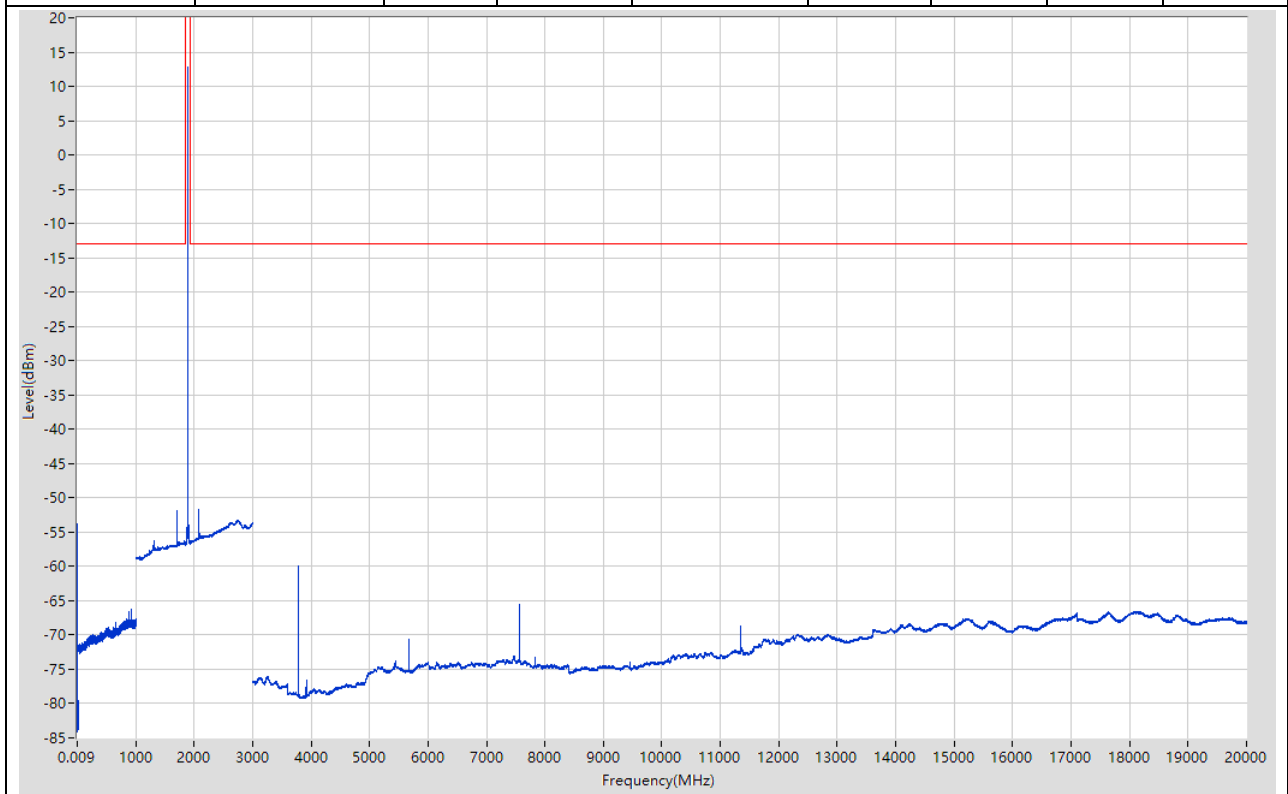

21.18. LTE-M1 Band25 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.85	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.98	-13	Pass	2985
30	1000	0.1	RMS	921.492	-66.46	-13	Pass	9700
1000	1840	1	RMS	1730.87	-417.45	-13	Pass	840
1840	1925	1	RMS	1913.95	11.43	60	Pass	601
1925	3000	1	RMS	2096.159	-50.94	-13	Pass	1075
3000	20000	1	RMS	3826.049	-53.58	-13	Pass	17000

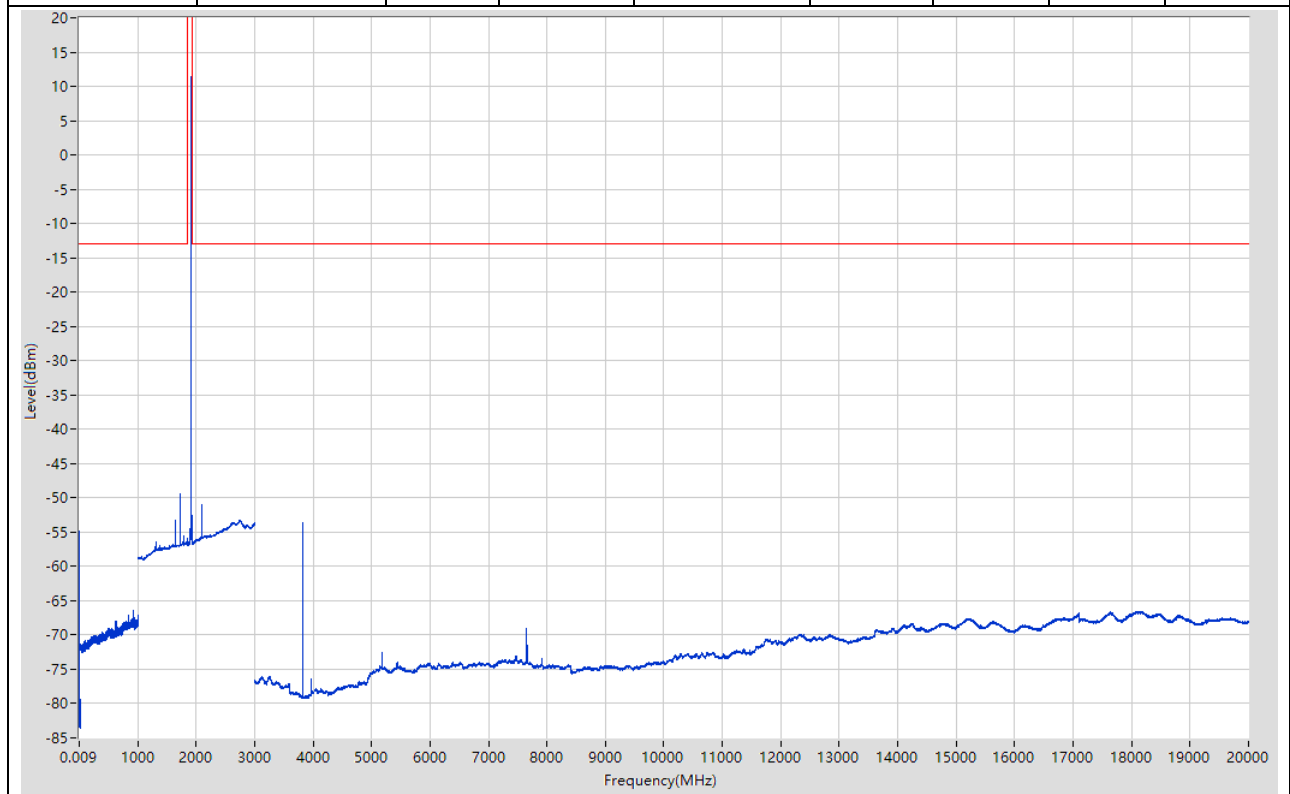

22. LTE-M1_Band25_16QAM


22.1. LTE-M1 Band25 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.43	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.45	-13	Pass	2985
30	1000	0.1	RMS	940.794	-67.44	-13	Pass	9700
1000	1840	1	RMS	1673.802	-52.63	-13	Pass	840
1840	1925	1	RMS	1851.192	11.04	60	Pass	601
1925	3000	1	RMS	2753.771	-53.28	-13	Pass	1075
3000	20000	1	RMS	18187.893	-66.78	-13	Pass	17000

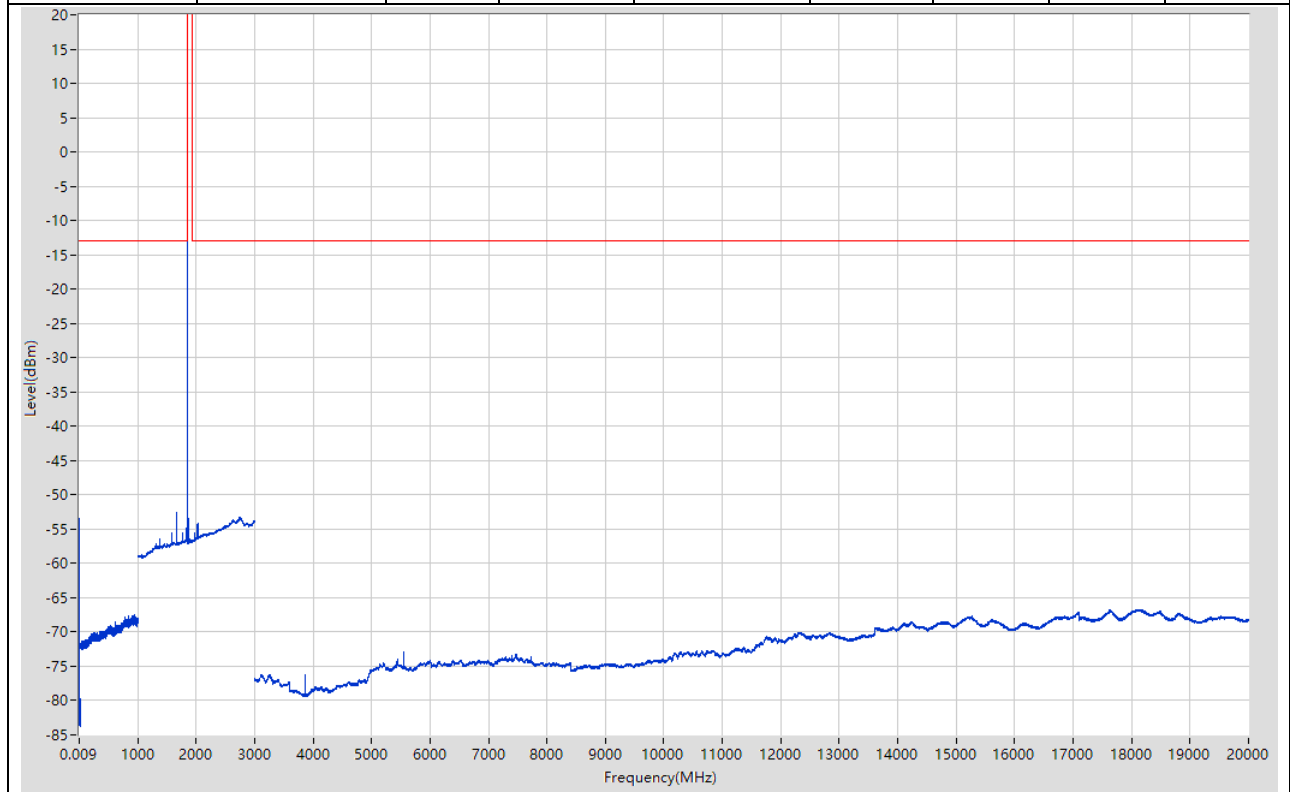


22.2. LTE-M1 Band25 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.82	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.37	-13	Pass	9700
1000	1840	1	RMS	1702.837	-53.2	-13	Pass	840
1840	1925	1	RMS	1882.925	11.21	60	Pass	601
1925	3000	1	RMS	2744.763	-53.3	-13	Pass	1075
3000	20000	1	RMS	3766.045	-49.27	-13	Pass	17000

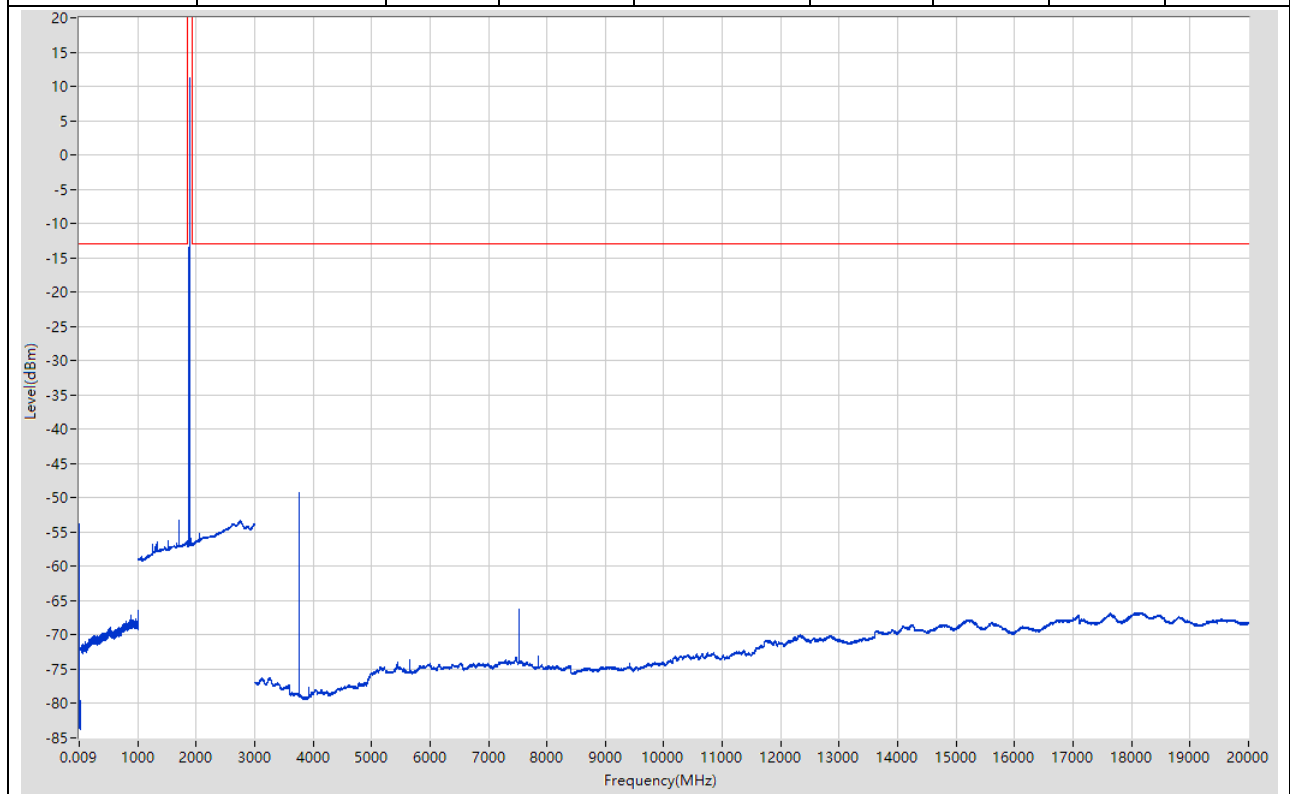


22.3. LTE-M1 Band25 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.74	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.32	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.92	-13	Pass	9700
1000	1840	1	RMS	1732.872	-49.05	-13	Pass	840
1840	1925	1	RMS	1914.942	10.45	60	Pass	601
1925	3000	1	RMS	2097.16	-50.46	-13	Pass	1075
3000	20000	1	RMS	18111.889	-66.75	-13	Pass	17000

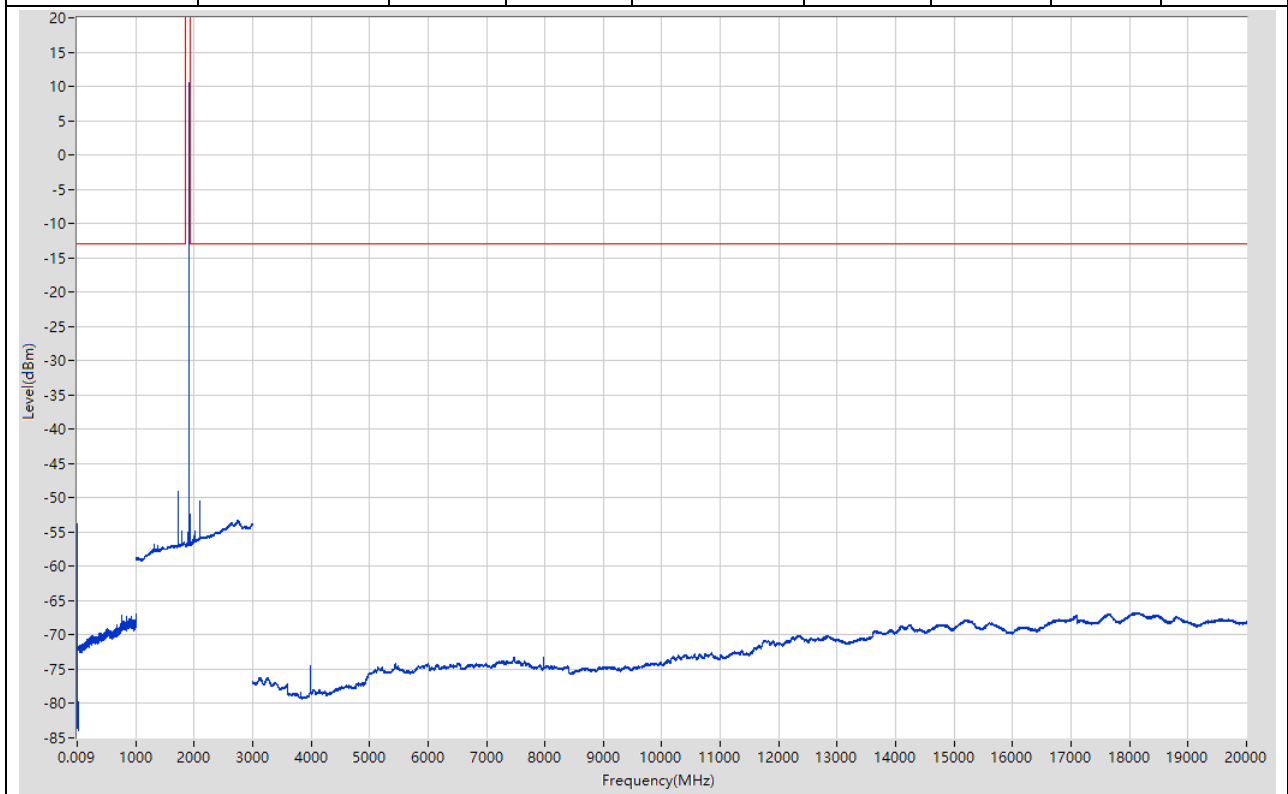


22.4. LTE-M1 Band25 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.38	-13	Pass	2985
30	1000	0.1	RMS	921.692	-67.56	-13	Pass	9700
1000	1840	1	RMS	1832.992	-54.88	-13	Pass	840
1840	1925	1	RMS	1852.75	11.06	60	Pass	601
1925	3000	1	RMS	2029.097	-51.26	-13	Pass	1075
3000	20000	1	RMS	18184.893	-66.75	-13	Pass	17000

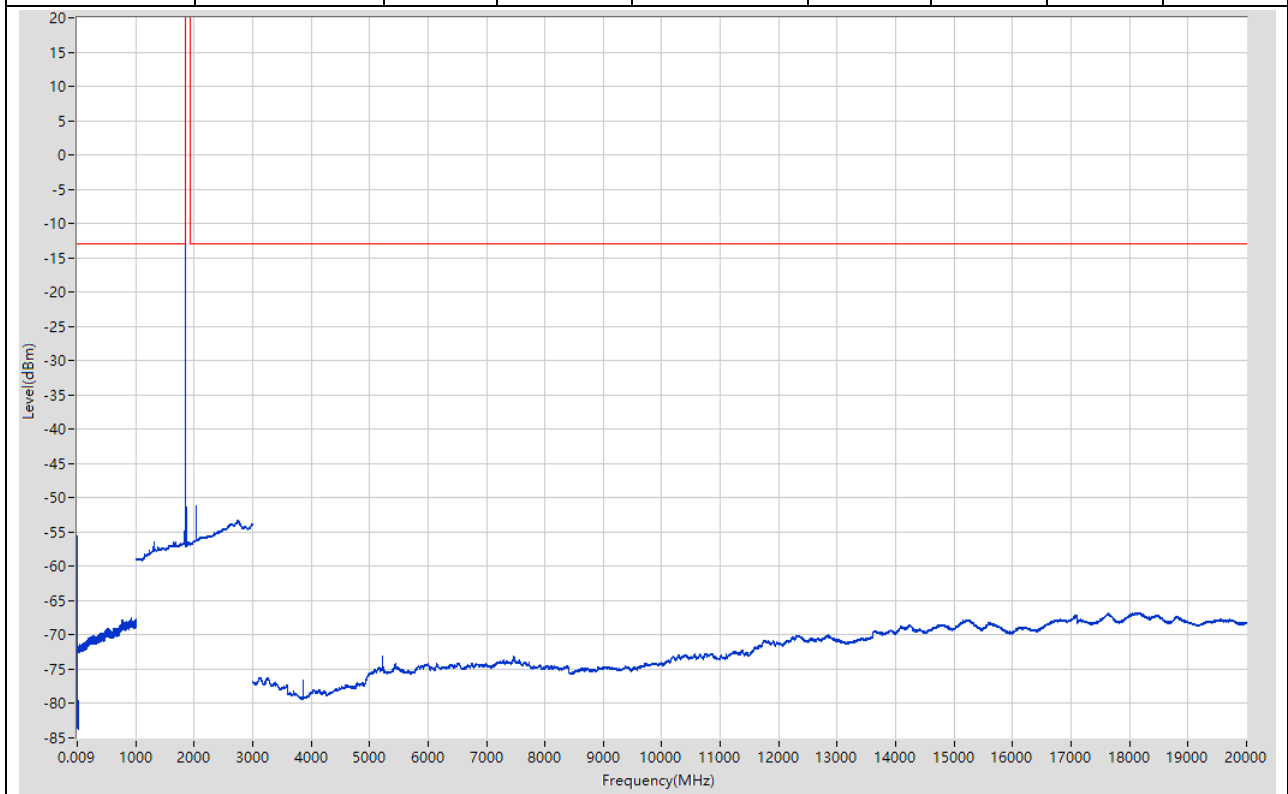


22.5. LTE-M1 Band25 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.16	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.11	-13	Pass	2985
30	1000	0.1	RMS	921.692	-66.34	-13	Pass	9700
1000	1840	1	RMS	1703.838	-53.01	-13	Pass	840
1840	1925	1	RMS	1883.775	11.43	60	Pass	601
1925	3000	1	RMS	2062.128	-52.01	-13	Pass	1075
3000	20000	1	RMS	3765.045	-48.46	-13	Pass	17000

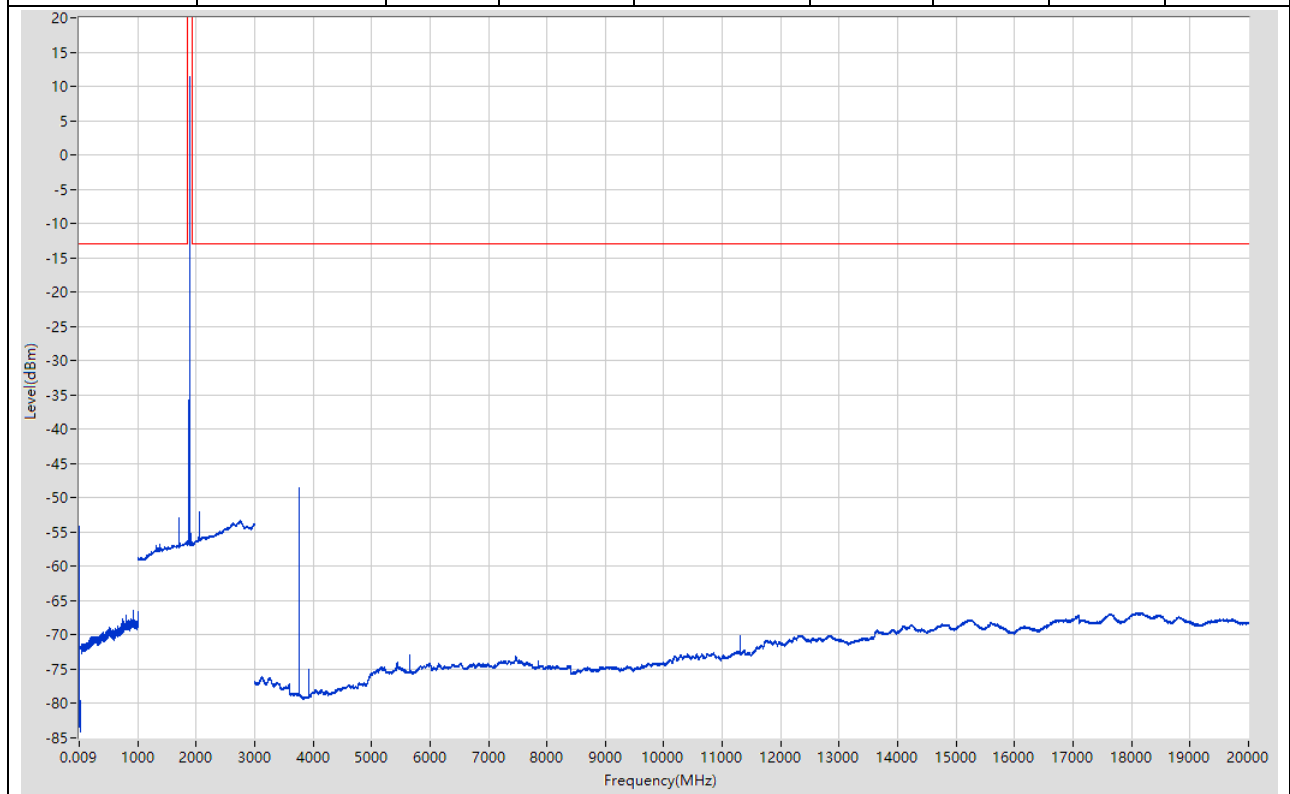


22.6. LTE-M1 Band25 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.99	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.58	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.29	-13	Pass	9700
1000	1840	1	RMS	1731.871	-55.6	-13	Pass	840
1840	1925	1	RMS	1914.8	11.14	60	Pass	601
1925	3000	1	RMS	2750.768	-53.31	-13	Pass	1075
3000	20000	1	RMS	3827.049	-52.93	-13	Pass	17000

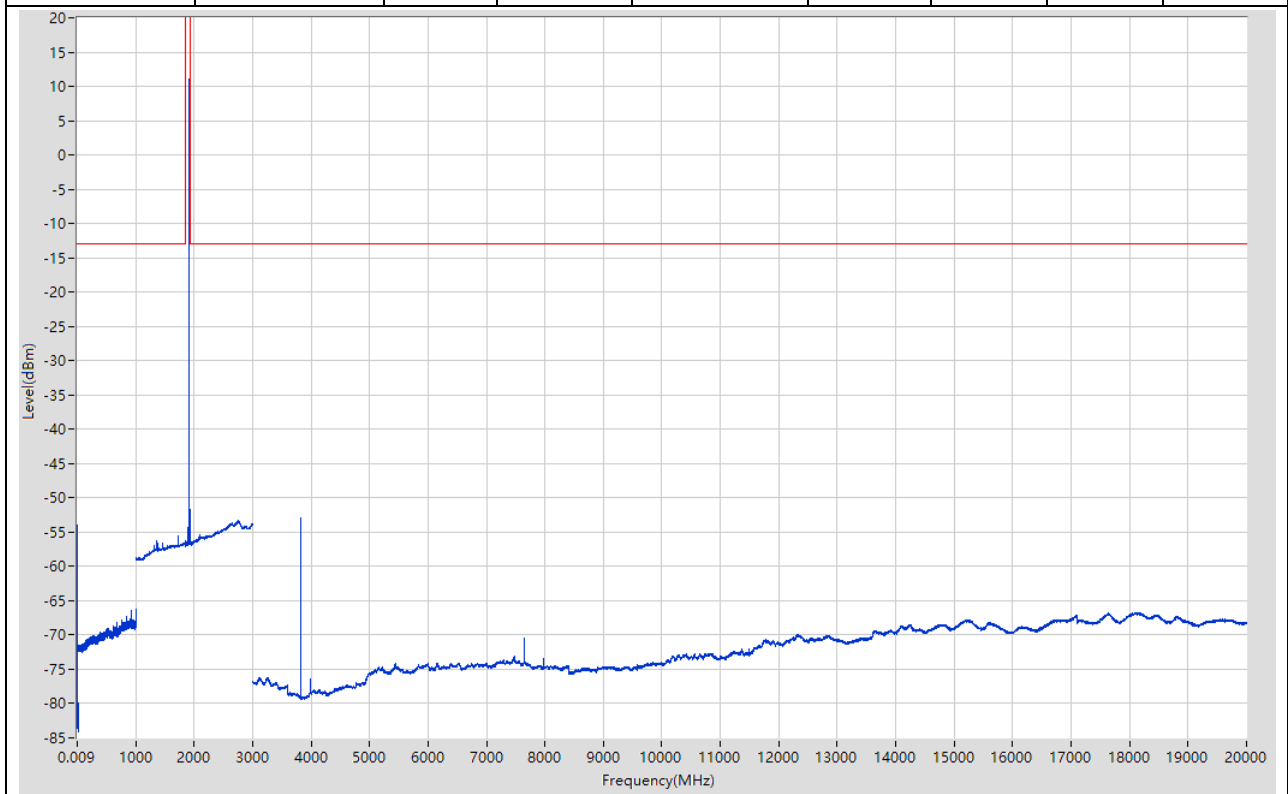


22.7. LTE-M1 Band25 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.61	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.5	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.41	-13	Pass	9700
1000	1840	1	RMS	1834.994	-55.15	-13	Pass	840
1840	1925	1	RMS	1854.45	11.22	60	Pass	601
1925	3000	1	RMS	2748.766	-53.33	-13	Pass	1075
3000	20000	1	RMS	3708.042	-58.16	-13	Pass	17000

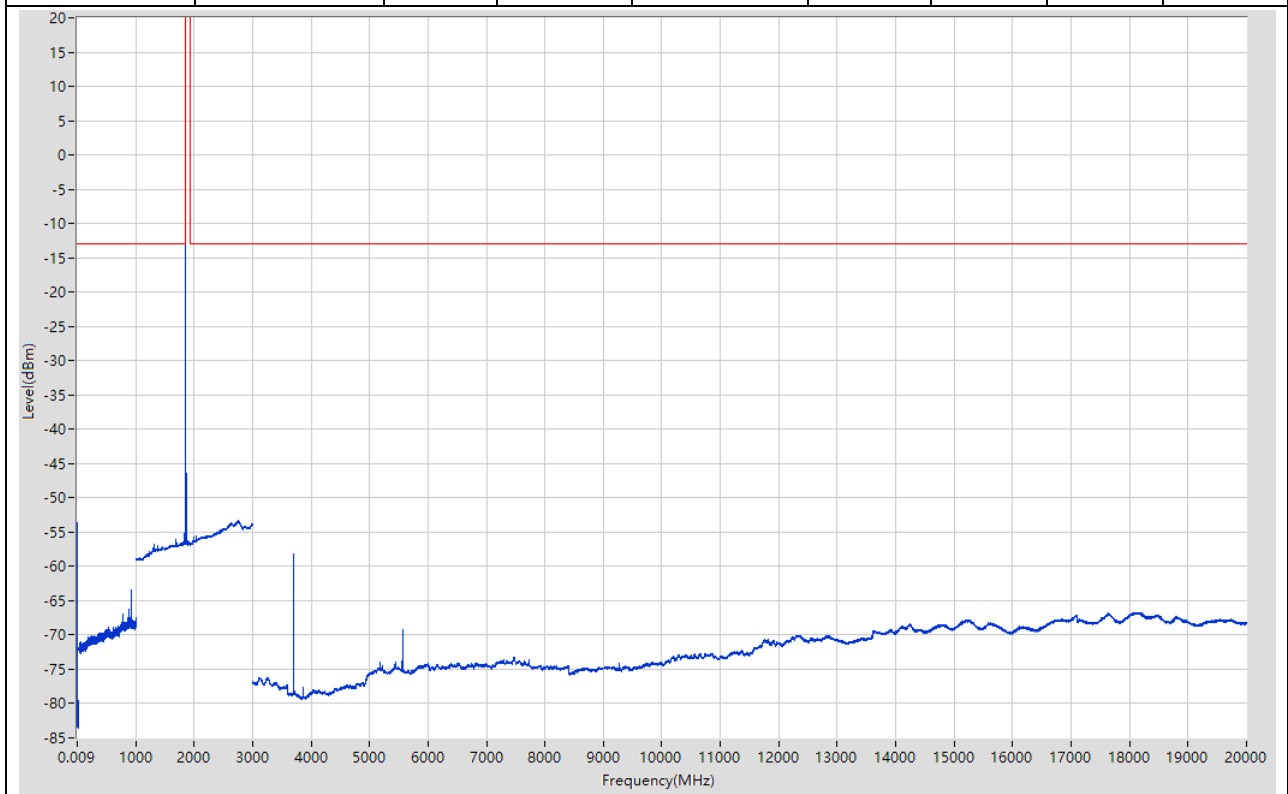


22.8. LTE-M1 Band25 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.65	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.28	-13	Pass	9700
1000	1840	1	RMS	1703.838	-50.76	-13	Pass	840
1840	1925	1	RMS	1884.342	11.84	60	Pass	601
1925	3000	1	RMS	2746.764	-53.34	-13	Pass	1075
3000	20000	1	RMS	3768.045	-48.62	-13	Pass	17000

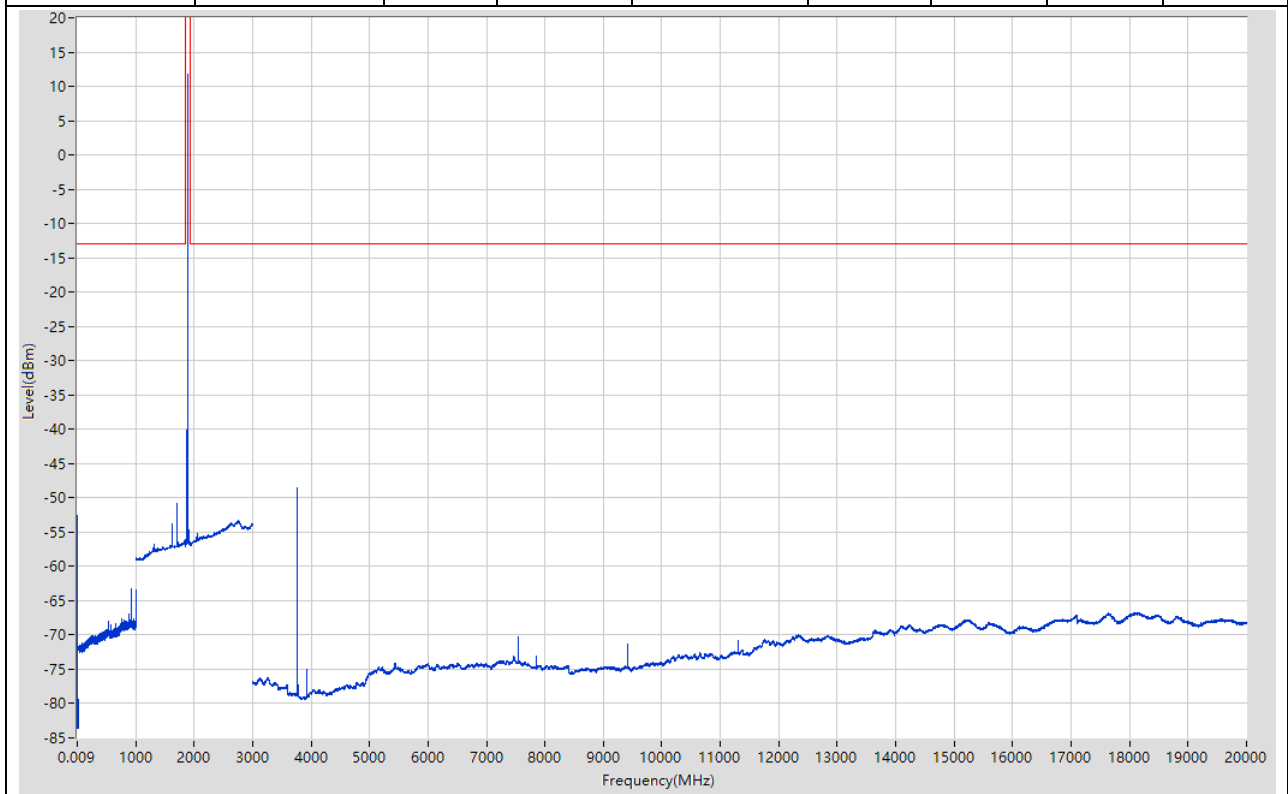


22.9. LTE-M1 Band25 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.35	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.39	-13	Pass	2985
30	1000	0.1	RMS	998.3	-65.81	-13	Pass	9700
1000	1840	1	RMS	1731.871	-53.58	-13	Pass	840
1840	1925	1	RMS	1914.233	11.57	60	Pass	601
1925	3000	1	RMS	2097.16	-50.03	-13	Pass	1075
3000	20000	1	RMS	3828.049	-65.67	-13	Pass	17000

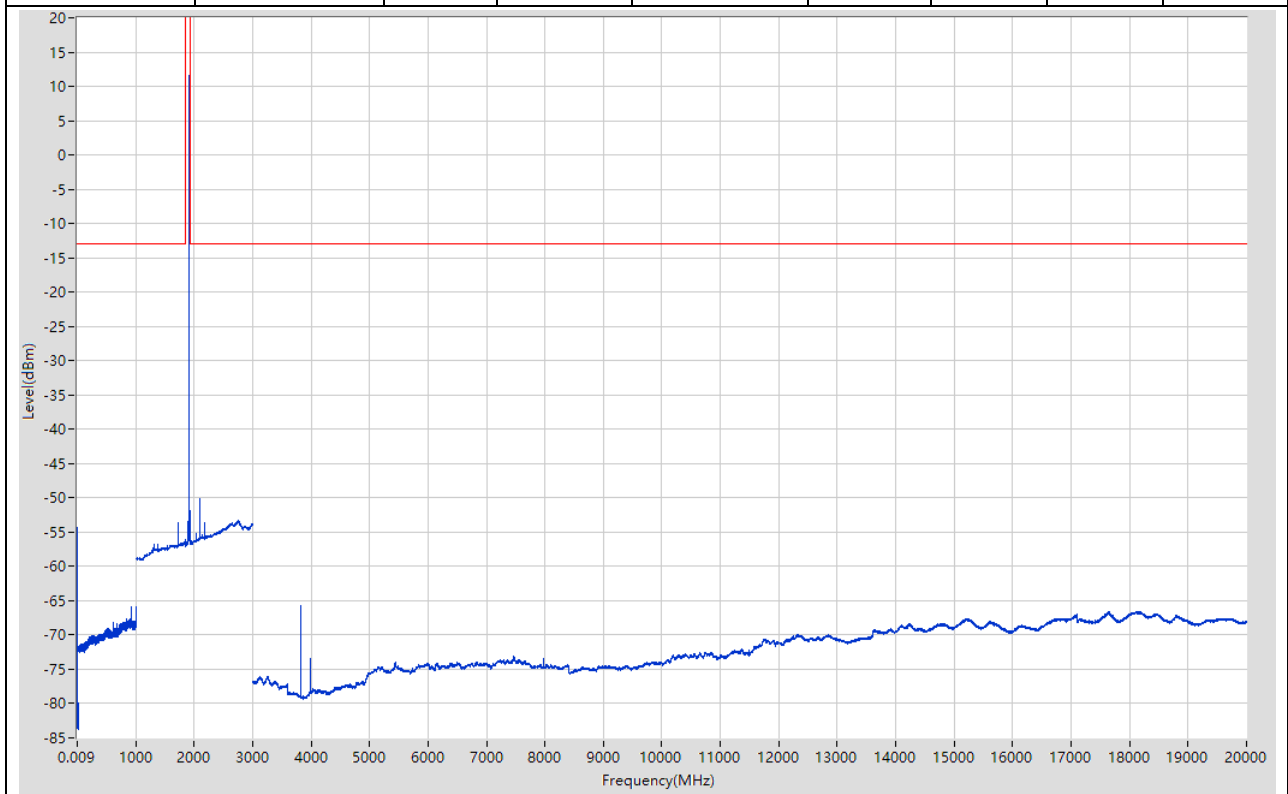


22.10. LTE-M1 Band25 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.74	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.64	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.12	-13	Pass	9700
1000	1840	1	RMS	1681.812	-52.57	-13	Pass	840
1840	1925	1	RMS	1859.408	11.1	60	Pass	601
1925	3000	1	RMS	2036.103	-50.89	-13	Pass	1075
3000	20000	1	RMS	18113.889	-66.59	-13	Pass	17000

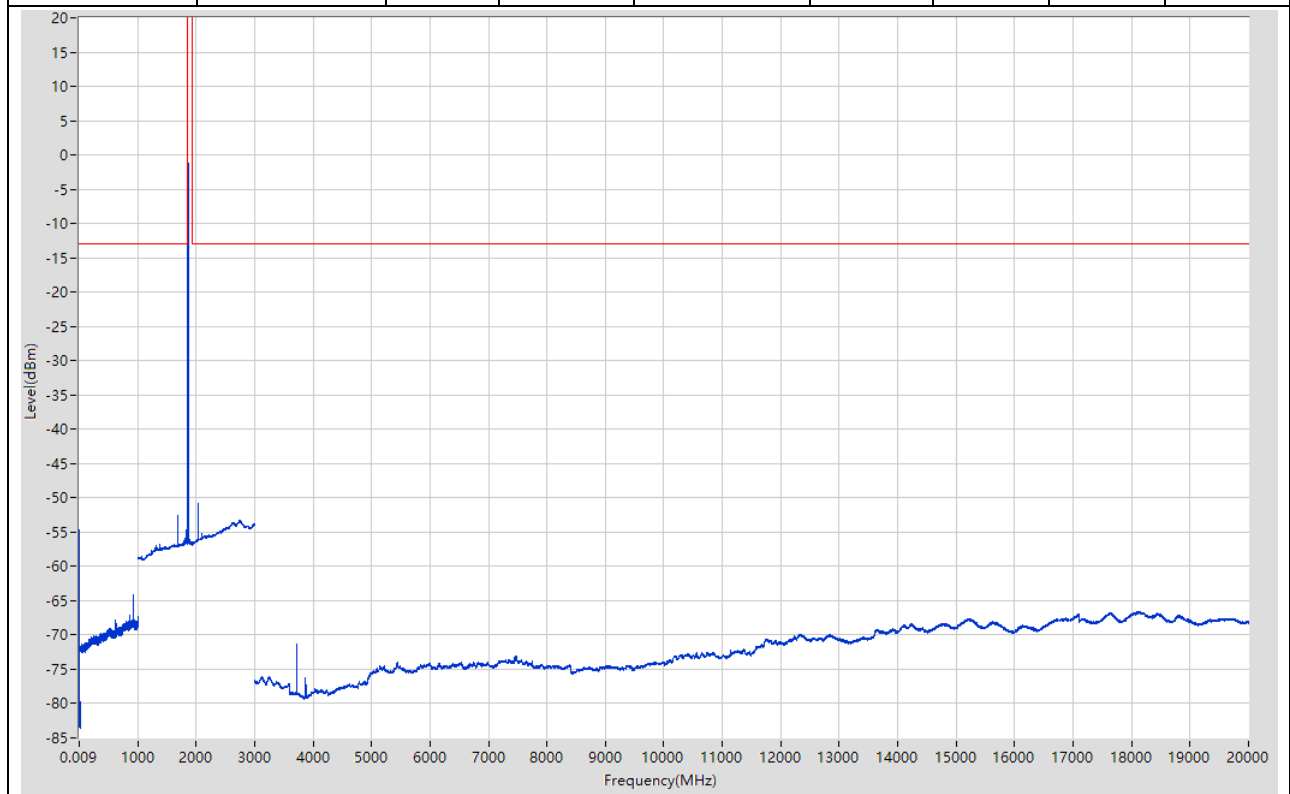


22.11. LTE-M1 Band25 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.68	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.65	-13	Pass	2985
30	1000	0.1	RMS	921.492	-67.34	-13	Pass	9700
1000	1840	1	RMS	1707.843	-51.88	-13	Pass	840
1840	1925	1	RMS	1885.9	11.62	60	Pass	601
1925	3000	1	RMS	2065.13	-50.93	-13	Pass	1075
3000	20000	1	RMS	3772.045	-59.22	-13	Pass	17000

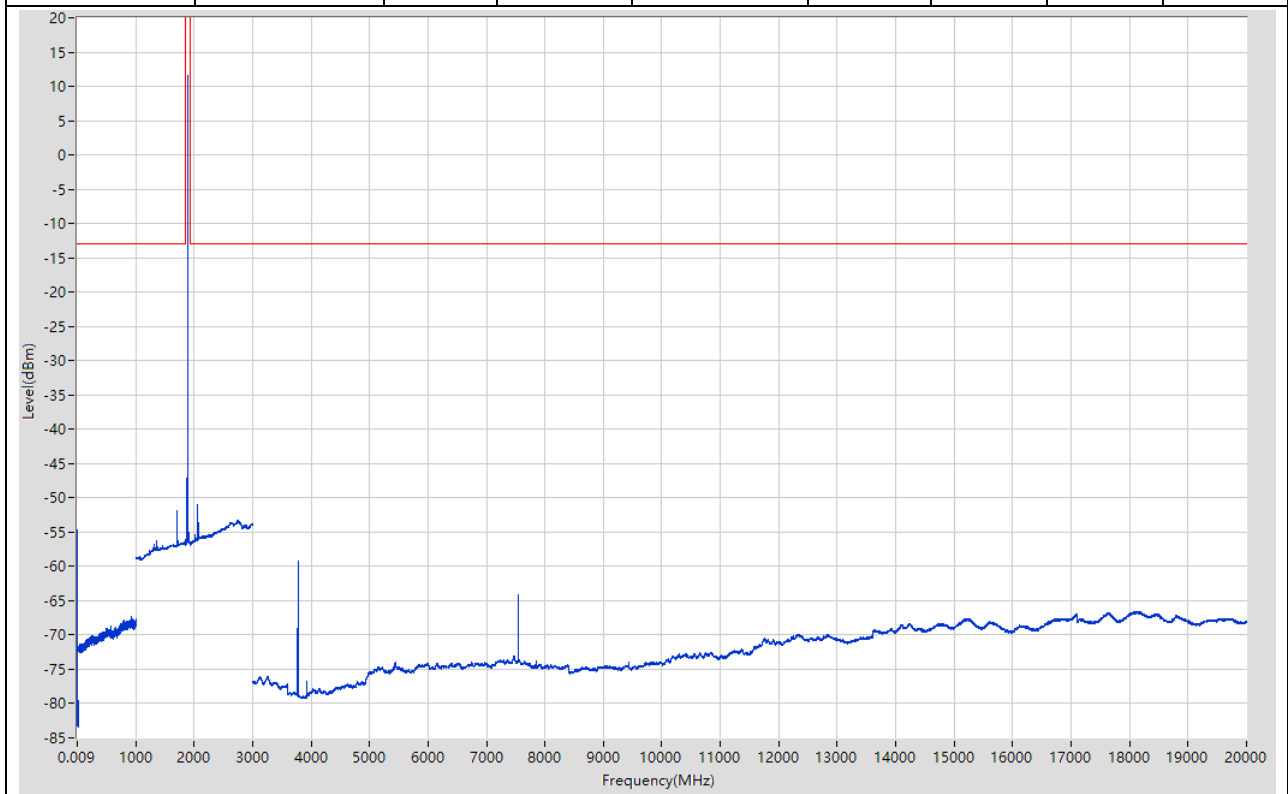


22.12. LTE-M1 Band25 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.72	-13	Pass	2985
30	1000	0.1	RMS	998.4	-63.94	-13	Pass	9700
1000	1840	1	RMS	1730.87	-48.29	-13	Pass	840
1840	1925	1	RMS	1913.383	11.59	60	Pass	601
1925	3000	1	RMS	2095.158	-51.33	-13	Pass	1075
3000	20000	1	RMS	18092.888	-66.6	-13	Pass	17000

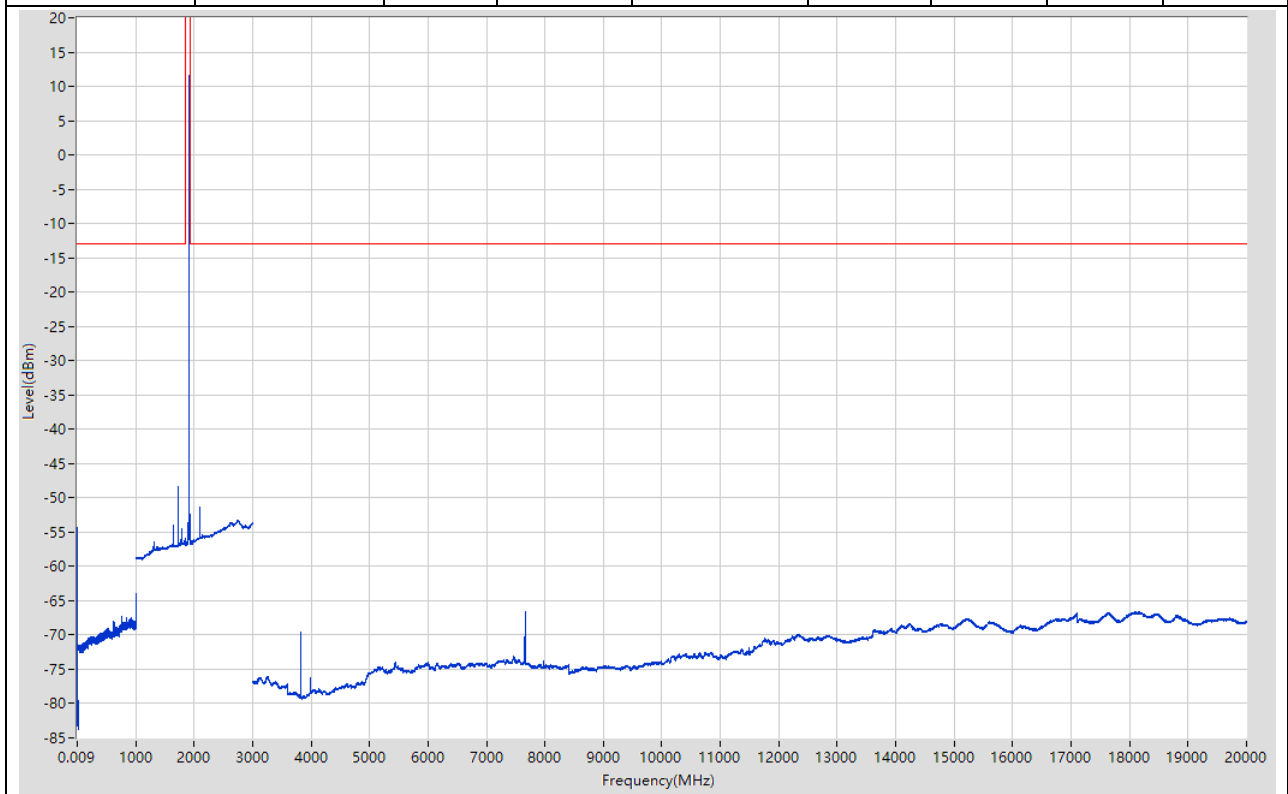


22.13. LTE-M1 Band25 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.51	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.76	-13	Pass	9700
1000	1840	1	RMS	1686.818	-55.57	-13	Pass	840
1840	1925	1	RMS	1864.083	11.35	60	Pass	601
1925	3000	1	RMS	2041.108	-51.81	-13	Pass	1075
3000	20000	1	RMS	3726.043	-49.63	-13	Pass	17000

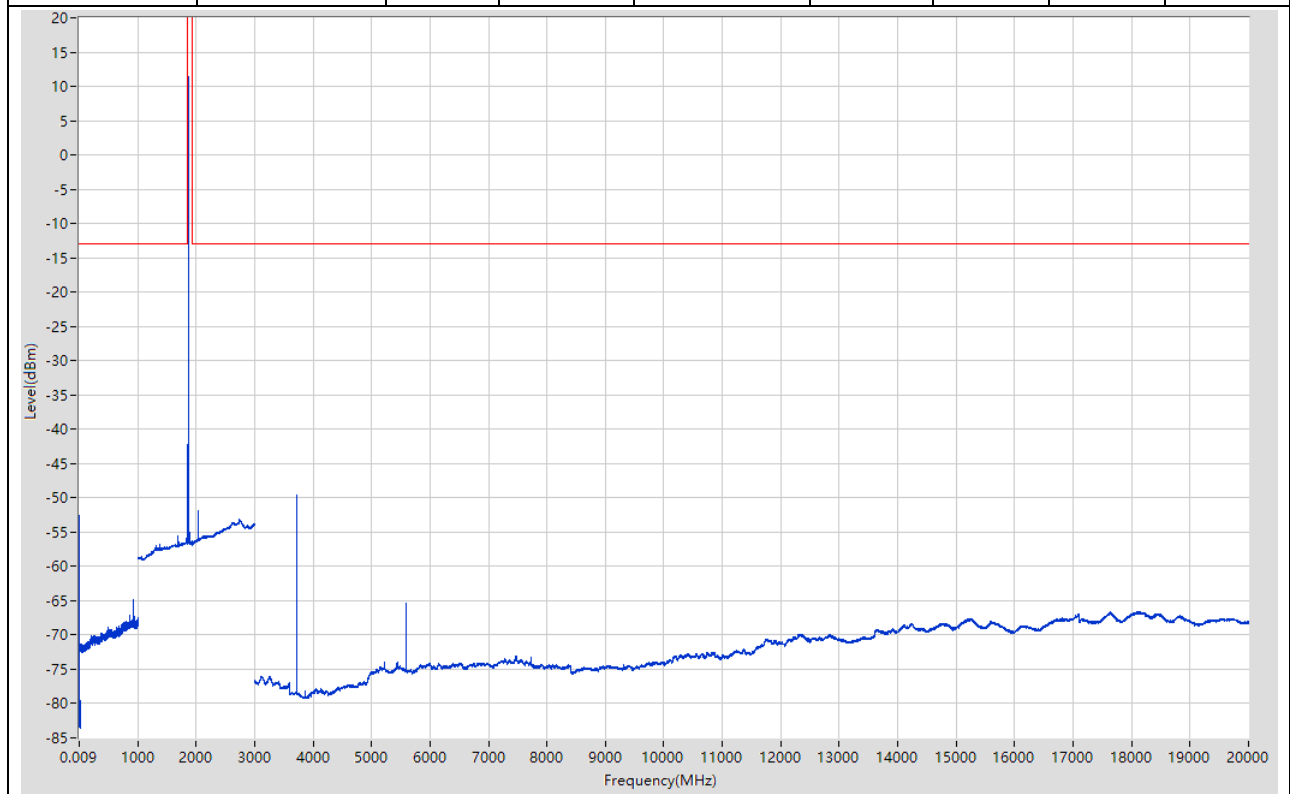


22.14. LTE-M1 Band25 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.32	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.3	-13	Pass	2985
30	1000	0.1	RMS	998.4	-64.74	-13	Pass	9700
1000	1840	1	RMS	1708.844	-51.21	-13	Pass	840
1840	1925	1	RMS	1888.167	11.95	60	Pass	601
1925	3000	1	RMS	2068.133	-50.8	-13	Pass	1075
3000	20000	1	RMS	7552.268	-61.18	-13	Pass	17000

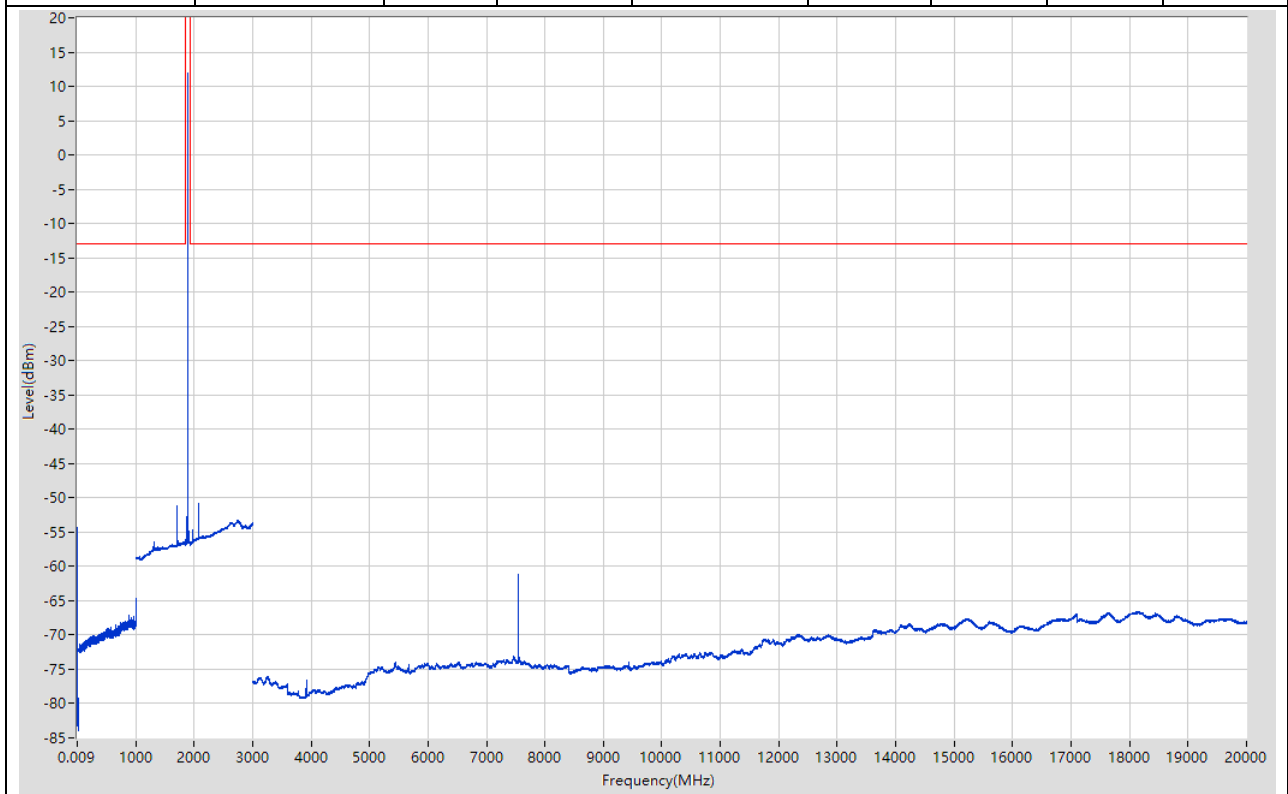


22.15. LTE-M1 Band25 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.22	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.64	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.32	-13	Pass	9700
1000	1840	1	RMS	1730.87	-54.34	-13	Pass	840
1840	1925	1	RMS	1913.1	11.63	60	Pass	601
1925	3000	1	RMS	2095.158	-52.24	-13	Pass	1075
3000	20000	1	RMS	18101.888	-66.59	-13	Pass	17000

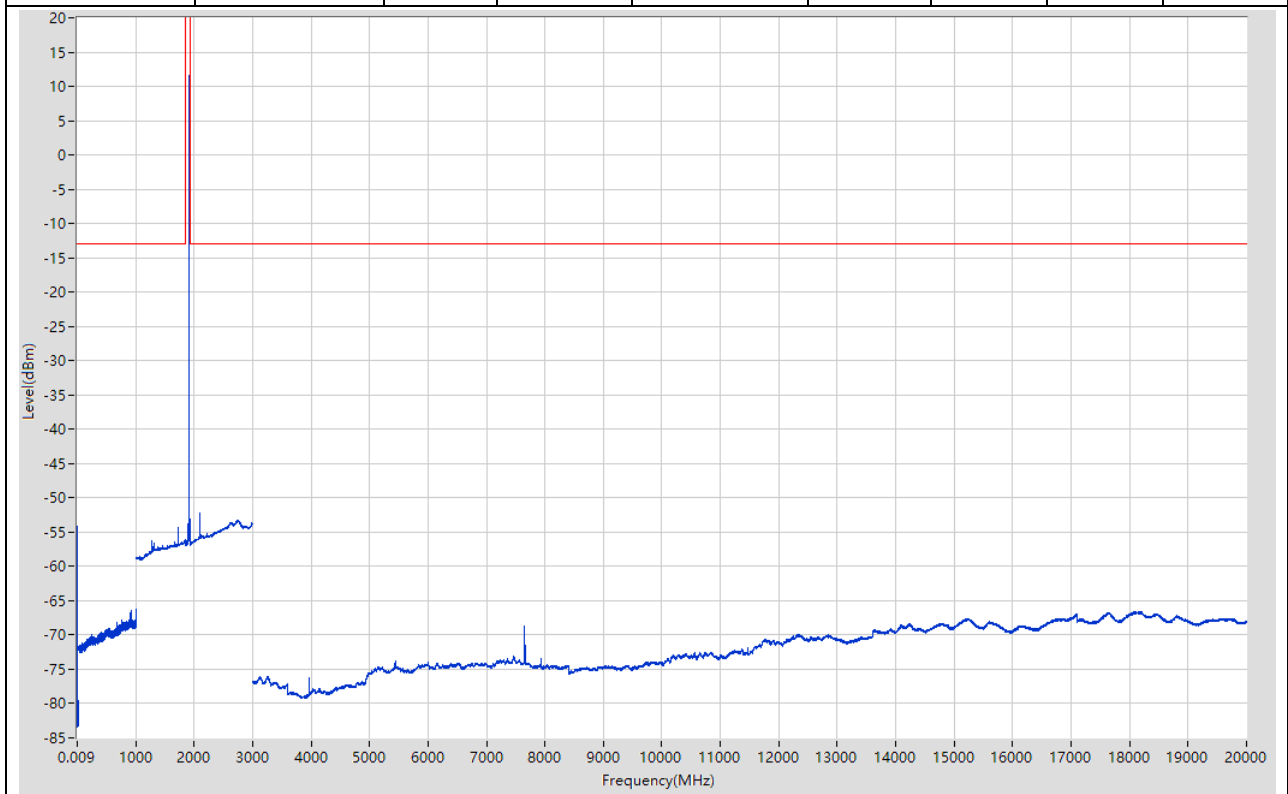


22.16. LTE-M1 Band25 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.19	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.65	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.94	-13	Pass	9700
1000	1840	1	RMS	1690.822	-50.95	-13	Pass	840
1840	1925	1	RMS	1863.375	11.53	60	Pass	601
1925	3000	1	RMS	2040.107	-51.94	-13	Pass	1075
3000	20000	1	RMS	3727.043	-48.99	-13	Pass	17000

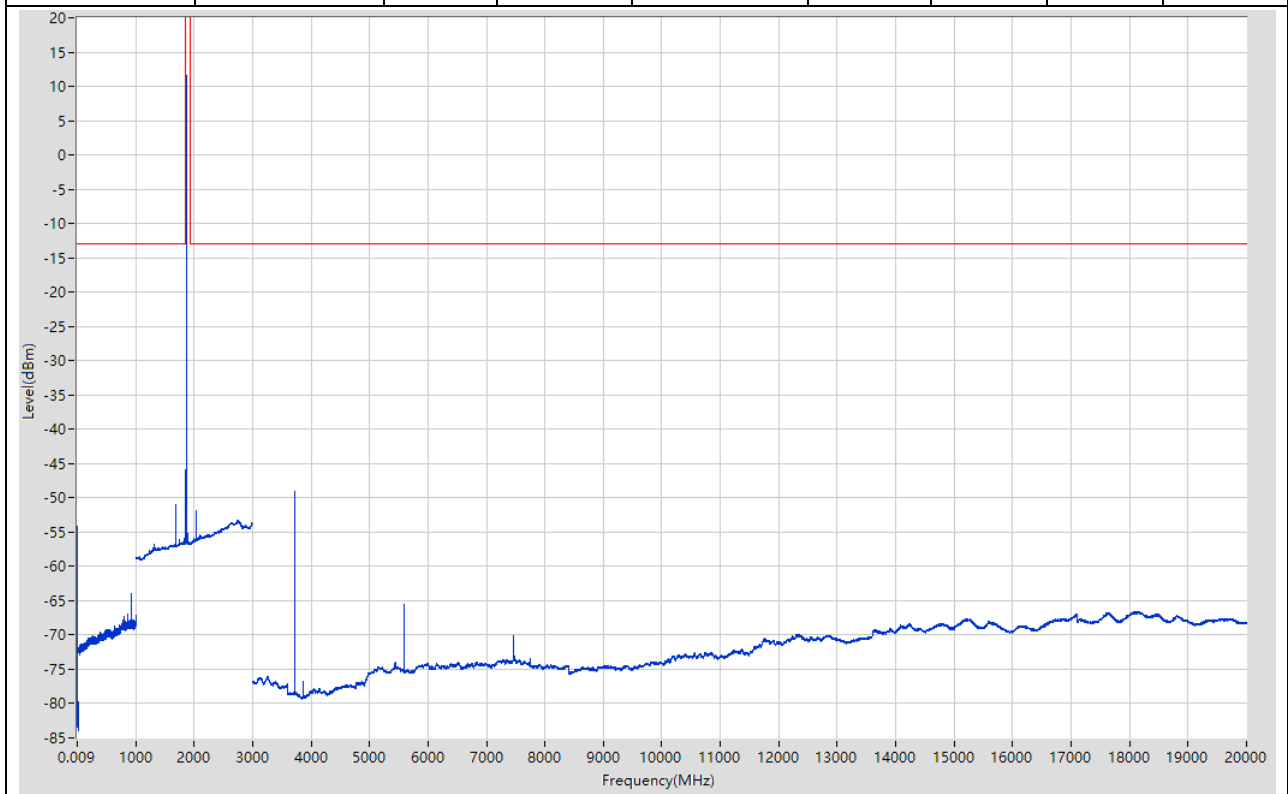


22.17. LTE-M1 Band25 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-53.66	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.2	-13	Pass	2985
30	1000	0.1	RMS	998.3	-66.15	-13	Pass	9700
1000	1840	1	RMS	1711.847	-50.2	-13	Pass	840
1840	1925	1	RMS	1885.9	11.72	60	Pass	601
1925	3000	1	RMS	2072.137	-51.49	-13	Pass	1075
3000	20000	1	RMS	3771.045	-49.68	-13	Pass	17000

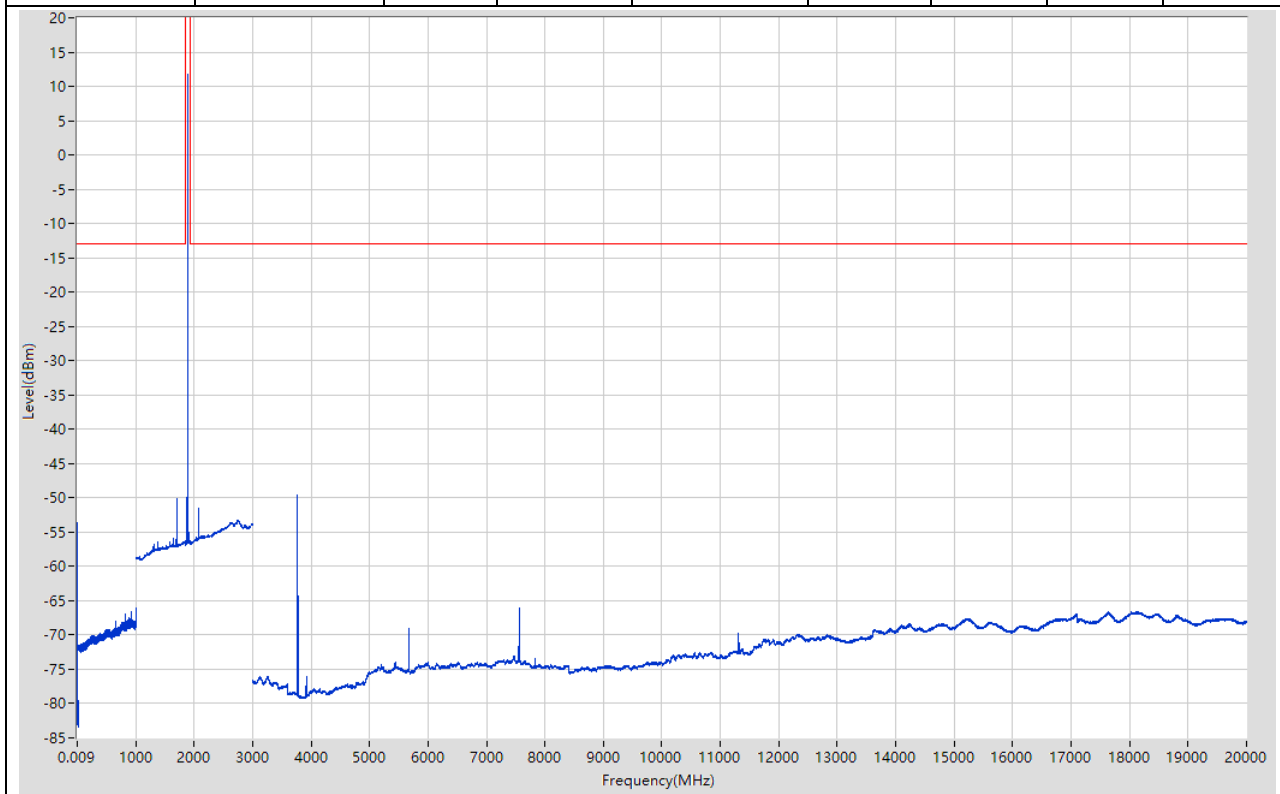

22.18. LTE-M1 Band25 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	1000	0.1	RMS	914.291	-65.87	-13	Pass	9700
1000	1840	1	RMS	1729.869	-50.06	-13	Pass	840
1840	1925	1	RMS	1912.533	11.42	60	Pass	601
1925	3000	1	RMS	2095.158	-51.83	-13	Pass	1075
3000	20000	1	RMS	18099.888	-66.58	-13	Pass	17000

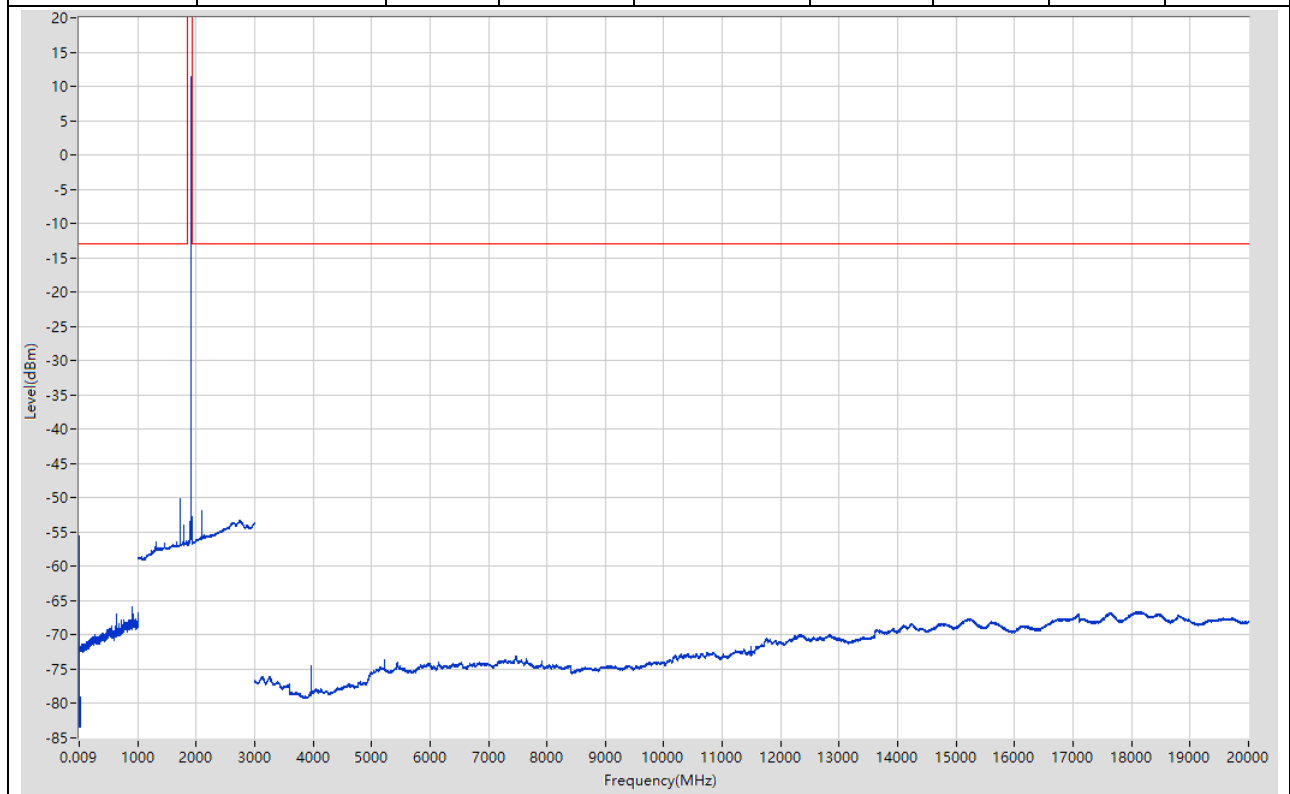

25. LTE-M1_Band66_QPSK


25.1. LTE-M1 Band66 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.5	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.87	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.17	-13	Pass	9700
1000	1700	1	RMS	1561.803	-50.65	-13	Pass	700
1700	1790	1	RMS	1711.4	12.82	60	Pass	601
1790	3000	1	RMS	1859.057	-47.29	-13	Pass	1210
3000	20000	1	RMS	3422.025	-33.94	-13	Pass	17000

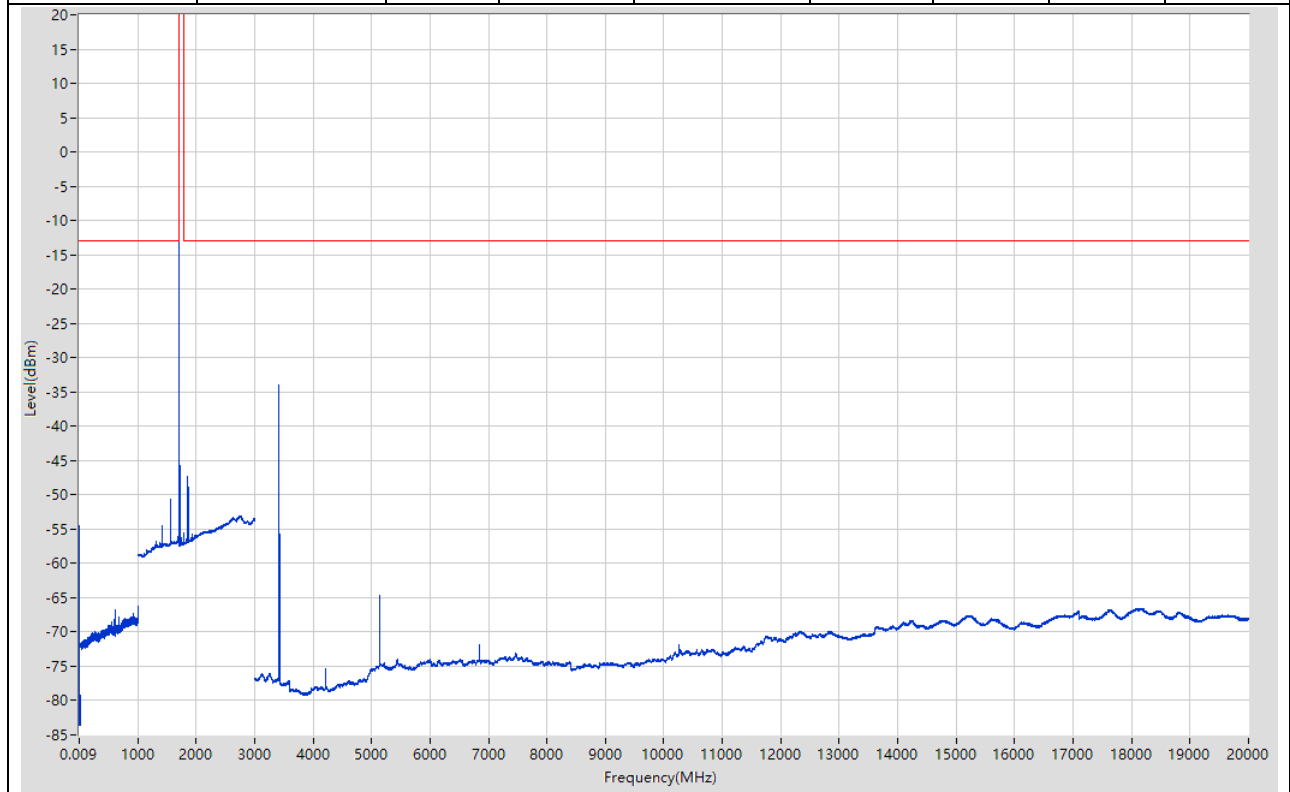


25.2. LTE-M1 Band66 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.14	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.49	-13	Pass	2985
30	1000	0.1	RMS	998.4	-67.16	-13	Pass	9700
1000	1700	1	RMS	1593.848	-51.41	-13	Pass	700
1700	1790	1	RMS	1745.3	13.24	60	Pass	601
1790	3000	1	RMS	1896.088	-46.98	-13	Pass	1210
3000	20000	1	RMS	3490.029	-36.6	-13	Pass	17000

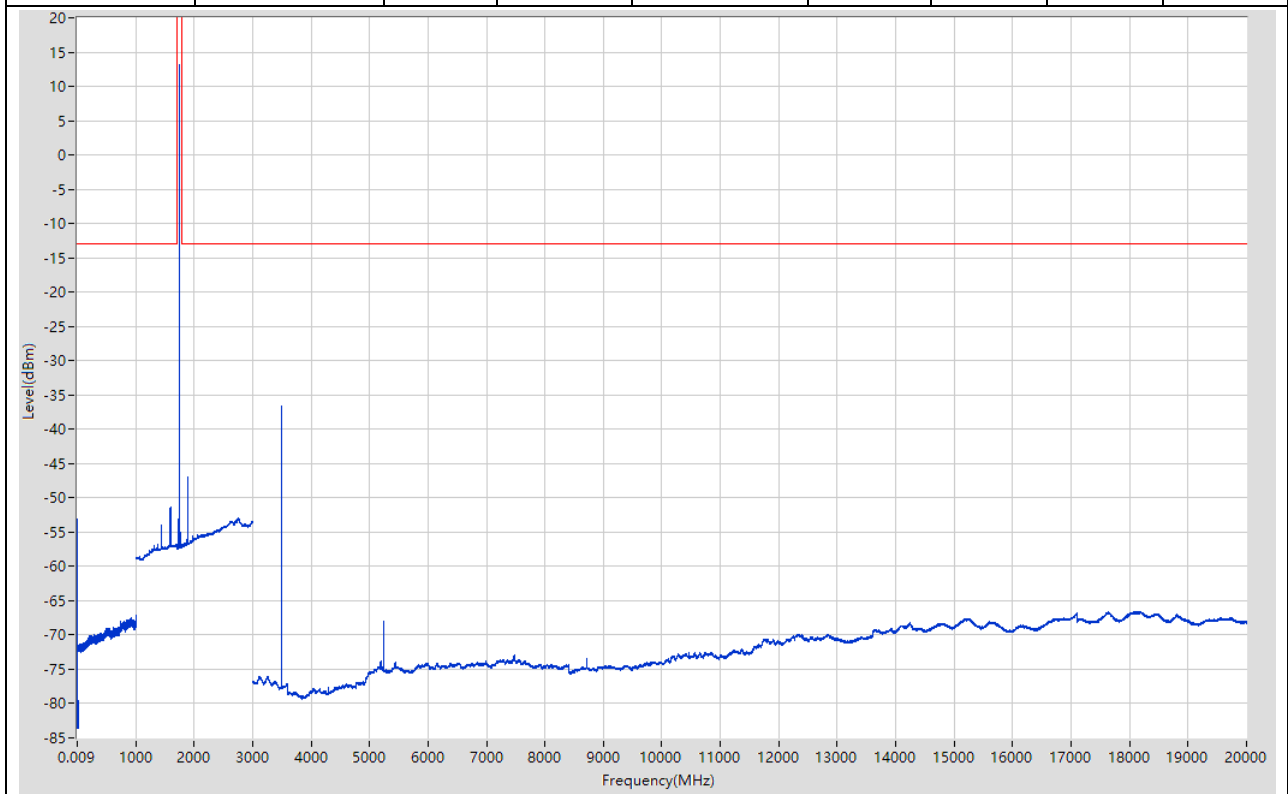


25.3. LTE-M1 Band66 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.88	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.22	-13	Pass	2985
30	1000	0.1	RMS	954.995	-67.8	-13	Pass	9700
1000	1700	1	RMS	1683.977	-56.89	-13	Pass	700
1700	1790	1	RMS	1766.3	-57.09	60	Pass	601
1790	3000	1	RMS	2749.793	-53.03	-13	Pass	1210
3000	20000	1	RMS	18113.889	-66.55	-13	Pass	17000

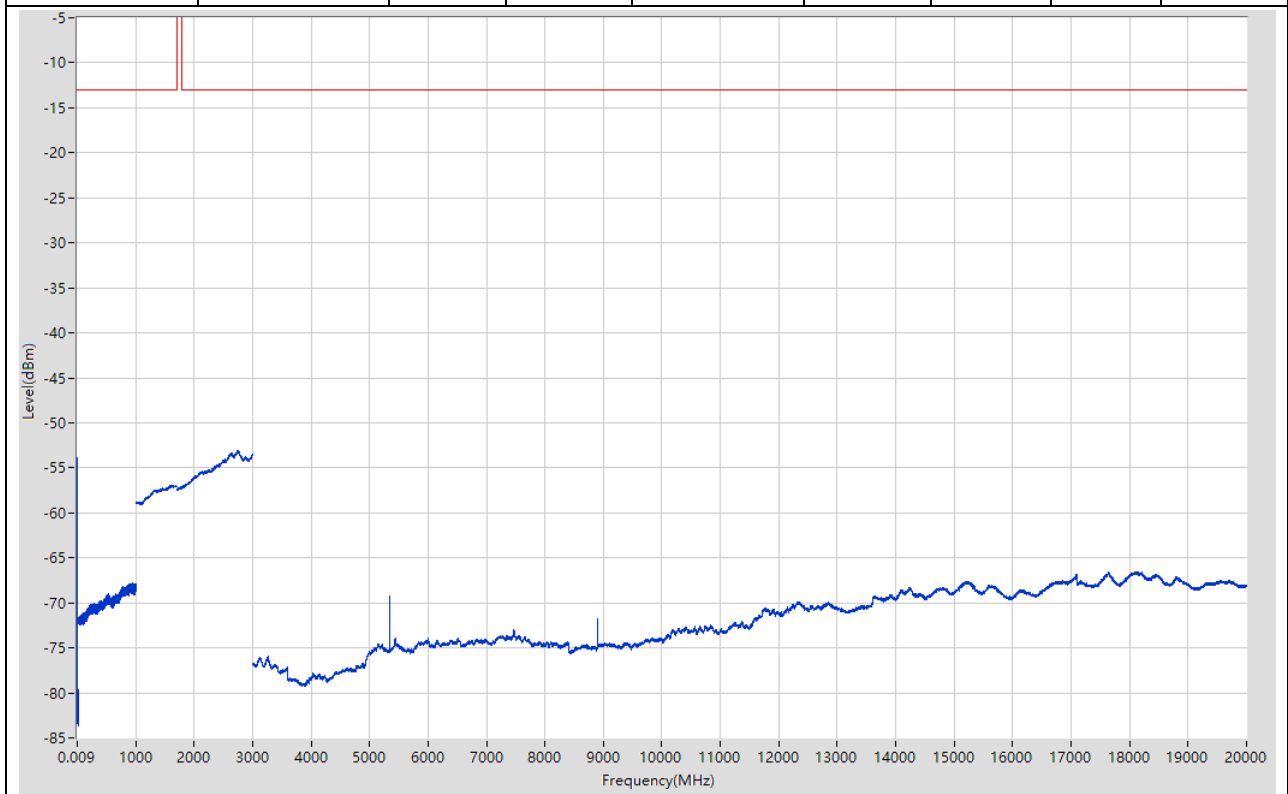


25.4. LTE-M1 Band66 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.98	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.14	-13	Pass	2985
30	1000	0.1	RMS	791.178	-66.19	-13	Pass	9700
1000	1700	1	RMS	1560.801	-49.1	-13	Pass	700
1700	1790	1	RMS	1712.9	12.68	60	Pass	601
1790	3000	1	RMS	1861.059	-42.87	-13	Pass	1210
3000	20000	1	RMS	3426.025	-53.58	-13	Pass	17000

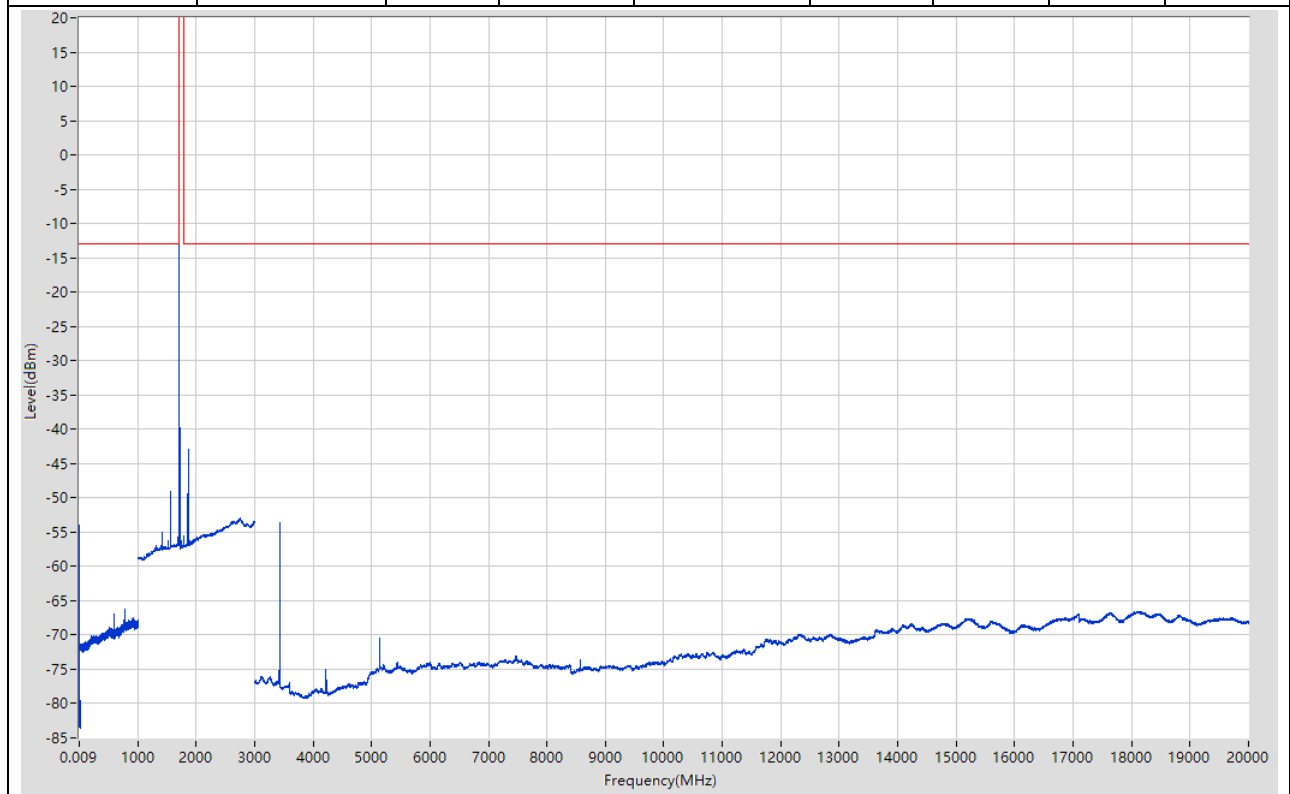


25.5. LTE-M1 Band66 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.4	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.16	-13	Pass	2985
30	1000	0.1	RMS	824.682	-66.44	-13	Pass	9700
1000	1700	1	RMS	1594.85	-51.19	-13	Pass	700
1700	1790	1	RMS	1746.2	12.81	60	Pass	601
1790	3000	1	RMS	1897.089	-50.45	-13	Pass	1210
3000	20000	1	RMS	3492.029	-37.31	-13	Pass	17000

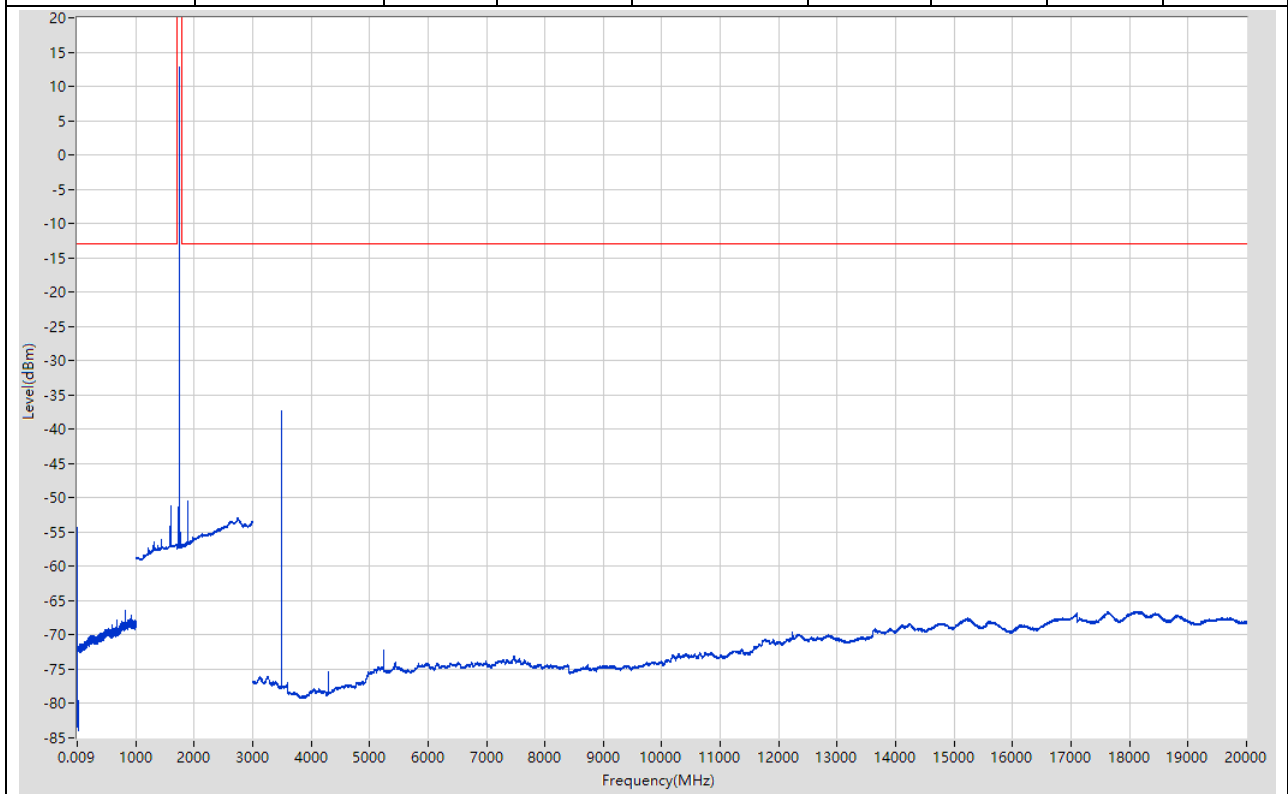


25.6. LTE-M1 Band66 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-54.98	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.15	-13	Pass	2985
30	1000	0.1	RMS	781.377	-66.65	-13	Pass	9700
1000	1700	1	RMS	1525.751	-49.03	-13	Pass	700
1700	1790	1	RMS	1779.5	12.78	60	Pass	601
1790	3000	1	RMS	2744.789	-53.02	-13	Pass	1210
3000	20000	1	RMS	3558.033	-38.2	-13	Pass	17000

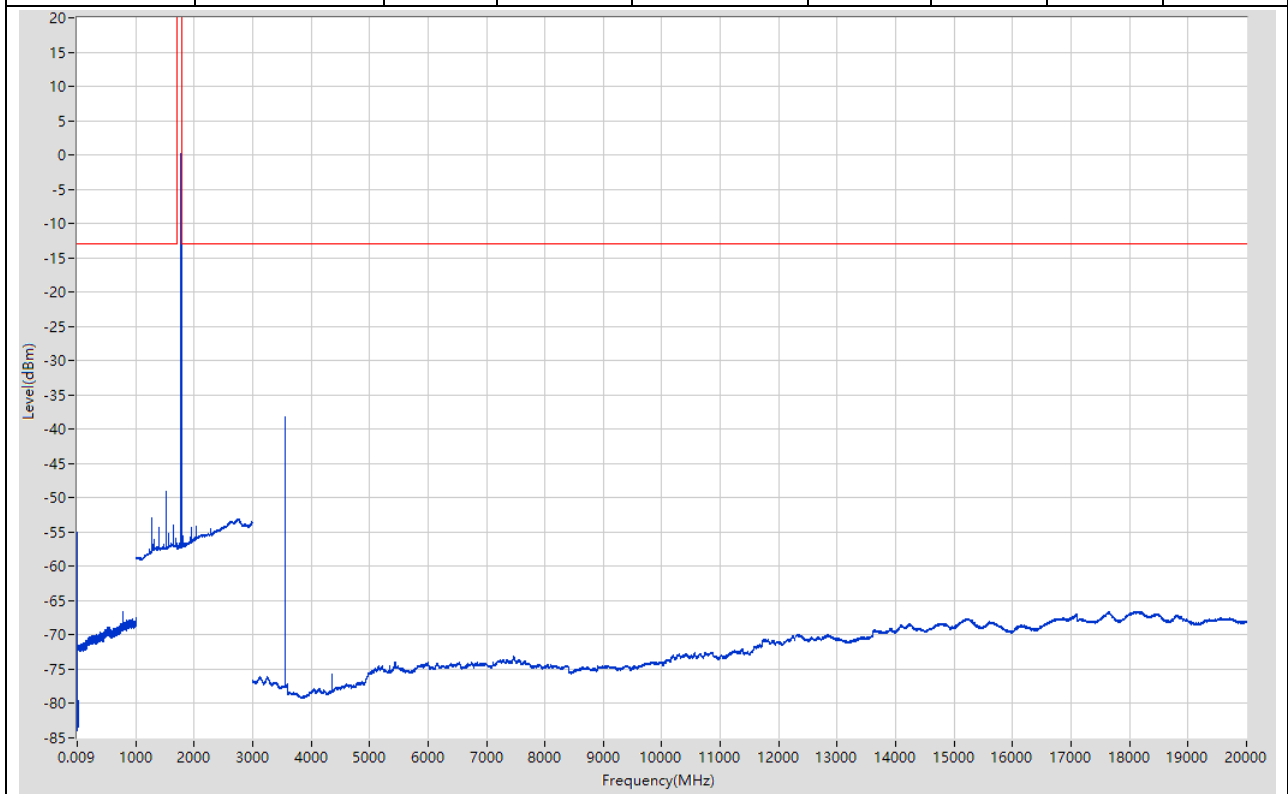


25.7. LTE-M1 Band66 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.32	-13	Pass	2985
30	1000	0.1	RMS	998.4	-66.98	-13	Pass	9700
1000	1700	1	RMS	1565.808	-49.32	-13	Pass	700
1700	1790	1	RMS	1714.7	14.07	60	Pass	601
1790	3000	1	RMS	1863.06	-43.91	-13	Pass	1210
3000	20000	1	RMS	3429.025	-39.37	-13	Pass	17000

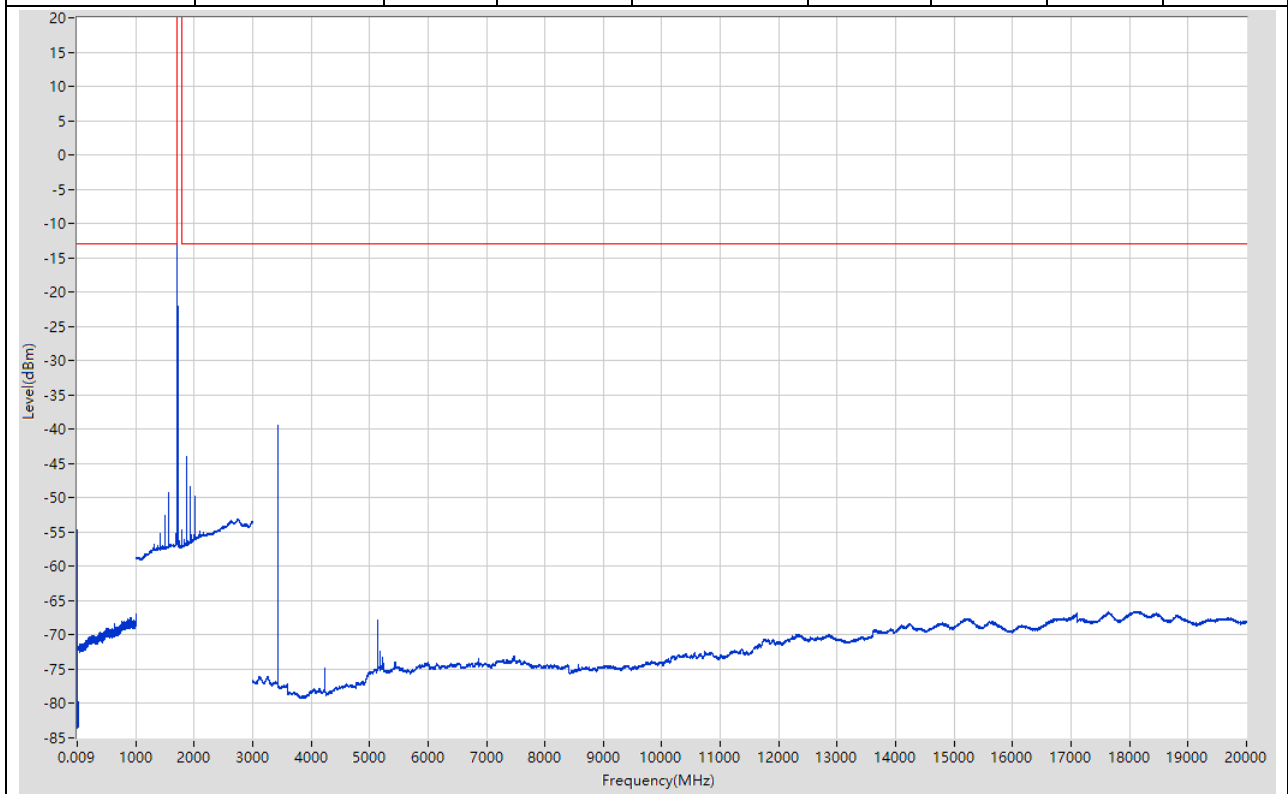


25.8. LTE-M1 Band66 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.35	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.78	-13	Pass	2985
30	1000	0.1	RMS	825.582	-66.6	-13	Pass	9700
1000	1700	1	RMS	1594.85	-50.93	-13	Pass	700
1700	1790	1	RMS	1746.8	12.39	60	Pass	601
1790	3000	1	RMS	1898.089	-46.65	-13	Pass	1210
3000	20000	1	RMS	3494.029	-39.66	-13	Pass	17000

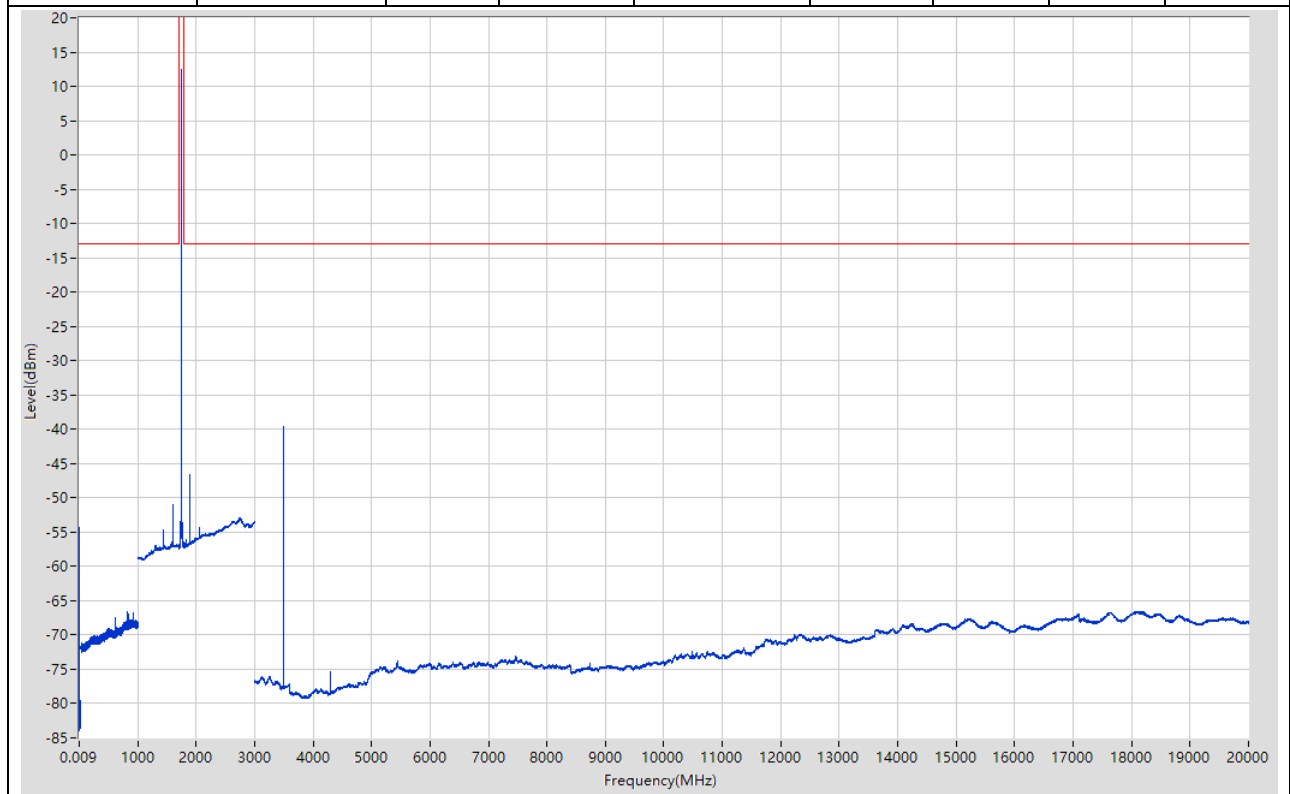


25.9. LTE-M1 Band66 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.44	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.29	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.46	-13	Pass	9700
1000	1700	1	RMS	1270.386	-53.04	-13	Pass	700
1700	1790	1	RMS	1779.95	12.45	60	Pass	601
1790	3000	1	RMS	2740.786	-52.98	-13	Pass	1210
3000	20000	1	RMS	3558.033	-38.35	-13	Pass	17000

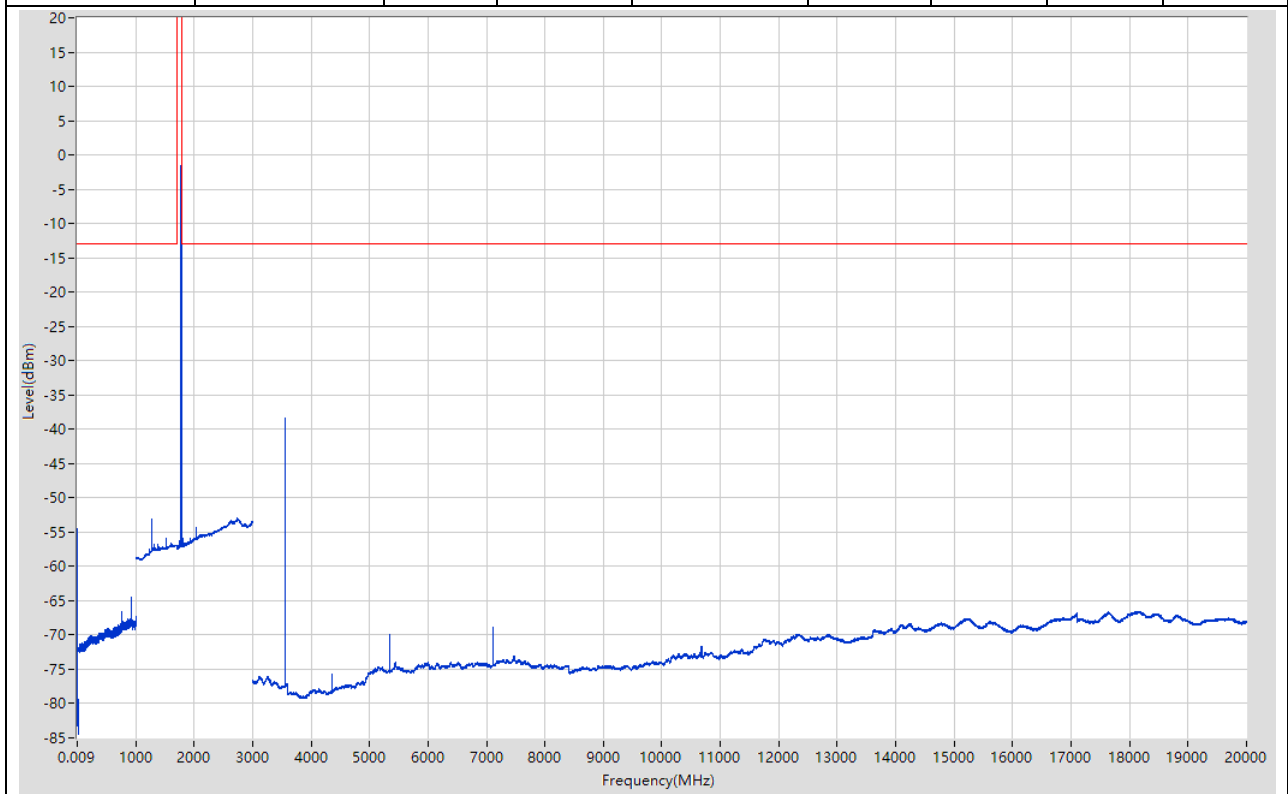


25.10. LTE-M1 Band66 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.03	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.45	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.55	-13	Pass	9700
1000	1700	1	RMS	1569.814	-48.36	-13	Pass	700
1700	1790	1	RMS	1719.05	13.33	60	Pass	601
1790	3000	1	RMS	1868.065	-43.68	-13	Pass	1210
3000	20000	1	RMS	3437.026	-36.53	-13	Pass	17000

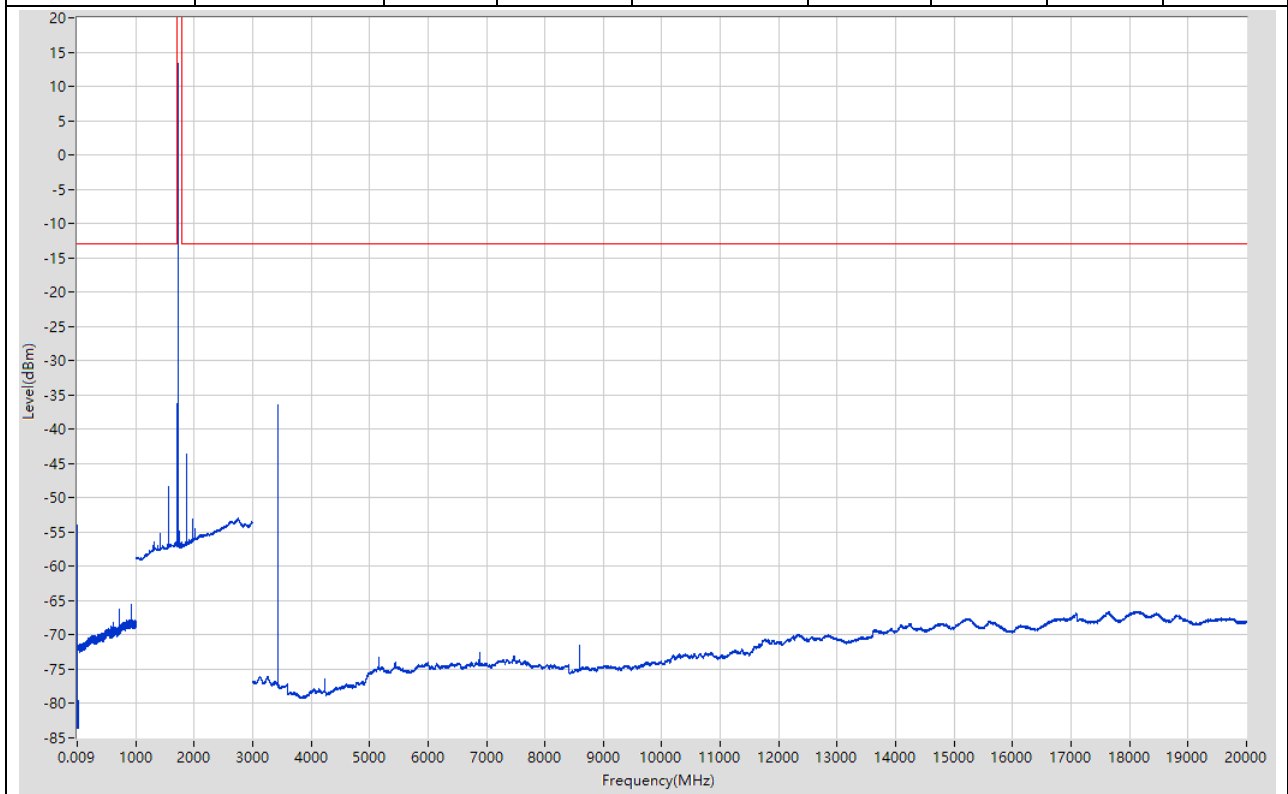


25.11. LTE-M1 Band66 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.03	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.51	-13	Pass	2985
30	1000	0.1	RMS	921.492	-66.93	-13	Pass	9700
1000	1700	1	RMS	1596.853	-50.99	-13	Pass	700
1700	1790	1	RMS	1748.9	12.11	60	Pass	601
1790	3000	1	RMS	1901.092	-43.96	-13	Pass	1210
3000	20000	1	RMS	3498.029	-39.44	-13	Pass	17000

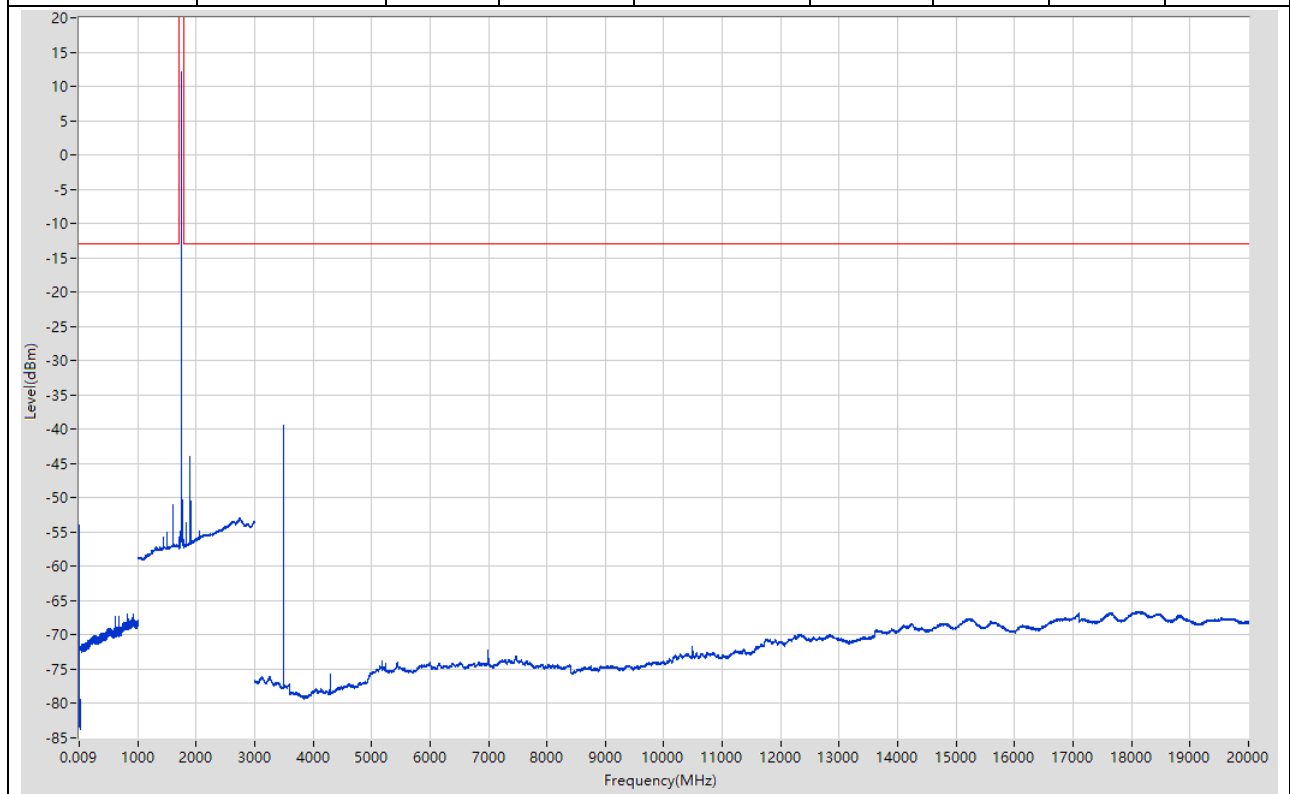


25.12. LTE-M1 Band66 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.47	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.37	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.07	-13	Pass	9700
1000	1700	1	RMS	1525.751	-47.26	-13	Pass	700
1700	1790	1	RMS	1779.35	12.27	60	Pass	601
1790	3000	1	RMS	2749.793	-52.99	-13	Pass	1210
3000	20000	1	RMS	3558.033	-38.66	-13	Pass	17000

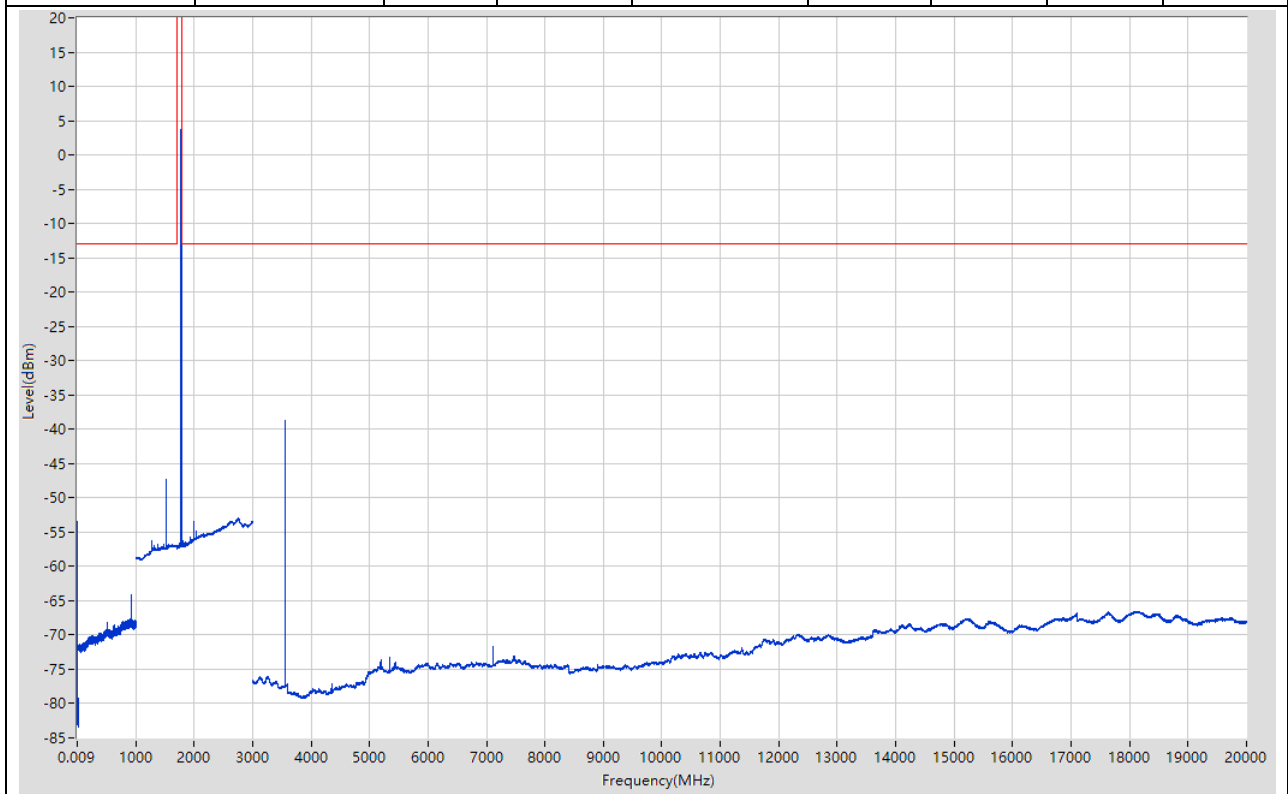


25.13. LTE-M1 Band66 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.57	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.27	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.6	-13	Pass	9700
1000	1700	1	RMS	1573.82	-49.51	-13	Pass	700
1700	1790	1	RMS	1723.85	13.7	60	Pass	601
1790	3000	1	RMS	1873.069	-45.65	-13	Pass	1210
3000	20000	1	RMS	3449.026	-32.46	-13	Pass	17000

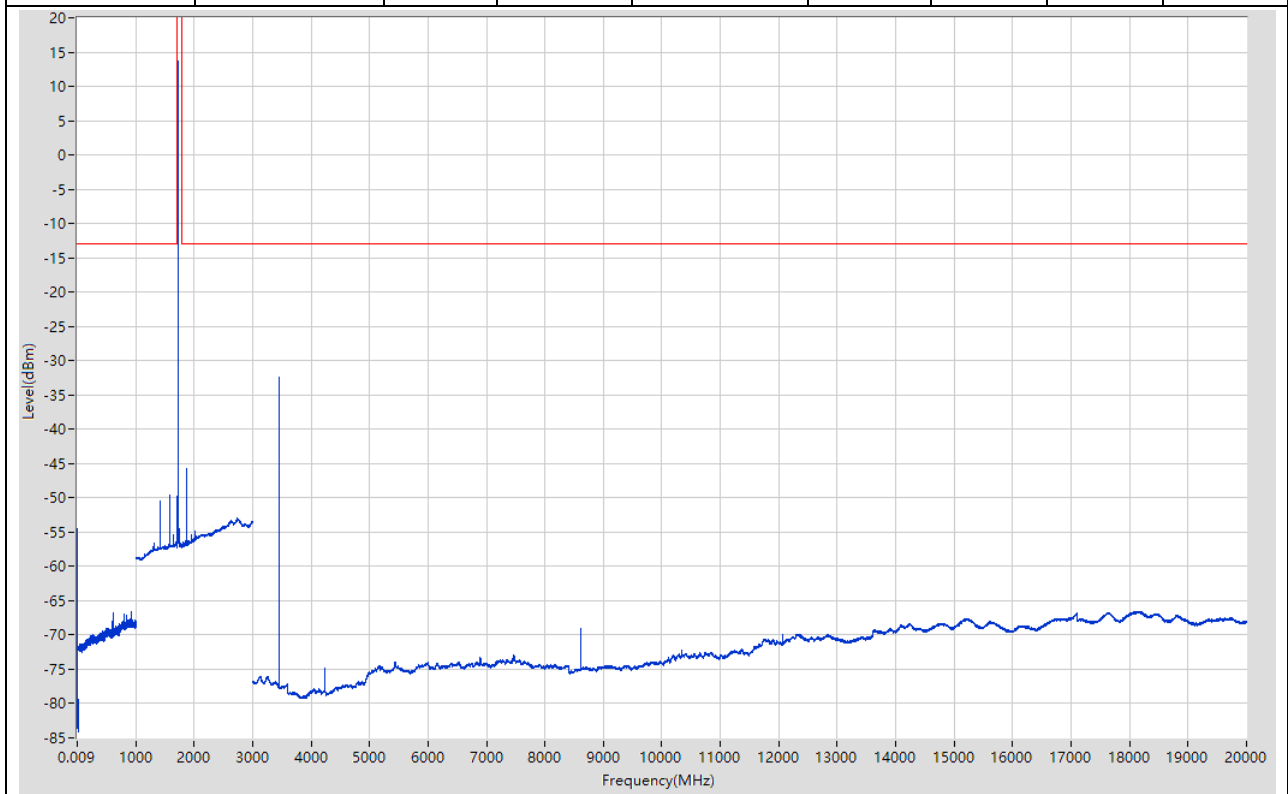


25.14. LTE-M1 Band66 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.81	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.24	-13	Pass	2985
30	1000	0.1	RMS	998.4	-67.26	-13	Pass	9700
1000	1700	1	RMS	1598.856	-50.06	-13	Pass	700
1700	1790	1	RMS	1751.15	12.67	60	Pass	601
1790	3000	1	RMS	1903.093	-46.28	-13	Pass	1210
3000	20000	1	RMS	3502.03	-34.2	-13	Pass	17000

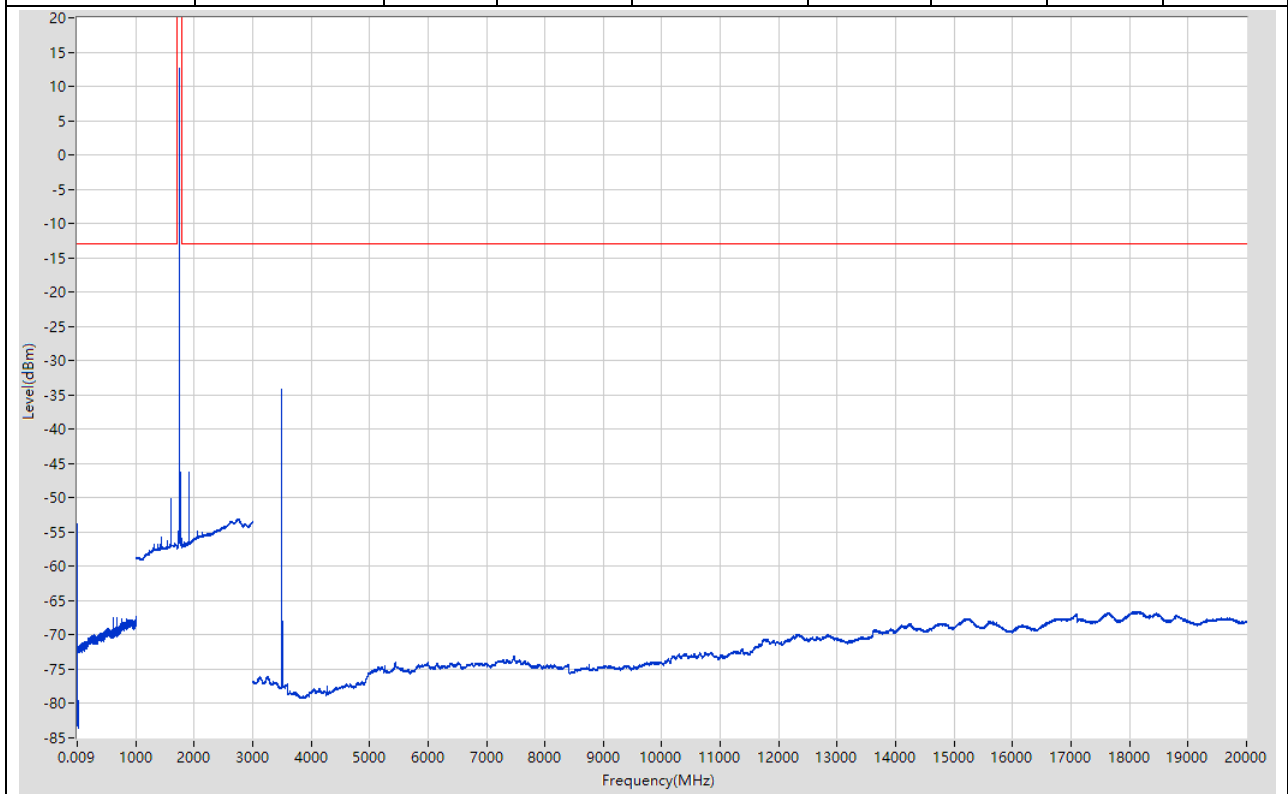


25.15. LTE-M1 Band66 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.67	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.49	-13	Pass	2985
30	1000	0.1	RMS	901.09	-64.62	-13	Pass	9700
1000	1700	1	RMS	1524.75	-54.59	-13	Pass	700
1700	1790	1	RMS	1779.2	12.14	60	Pass	601
1790	3000	1	RMS	2034.202	-52.8	-13	Pass	1210
3000	20000	1	RMS	3558.033	-34.99	-13	Pass	17000

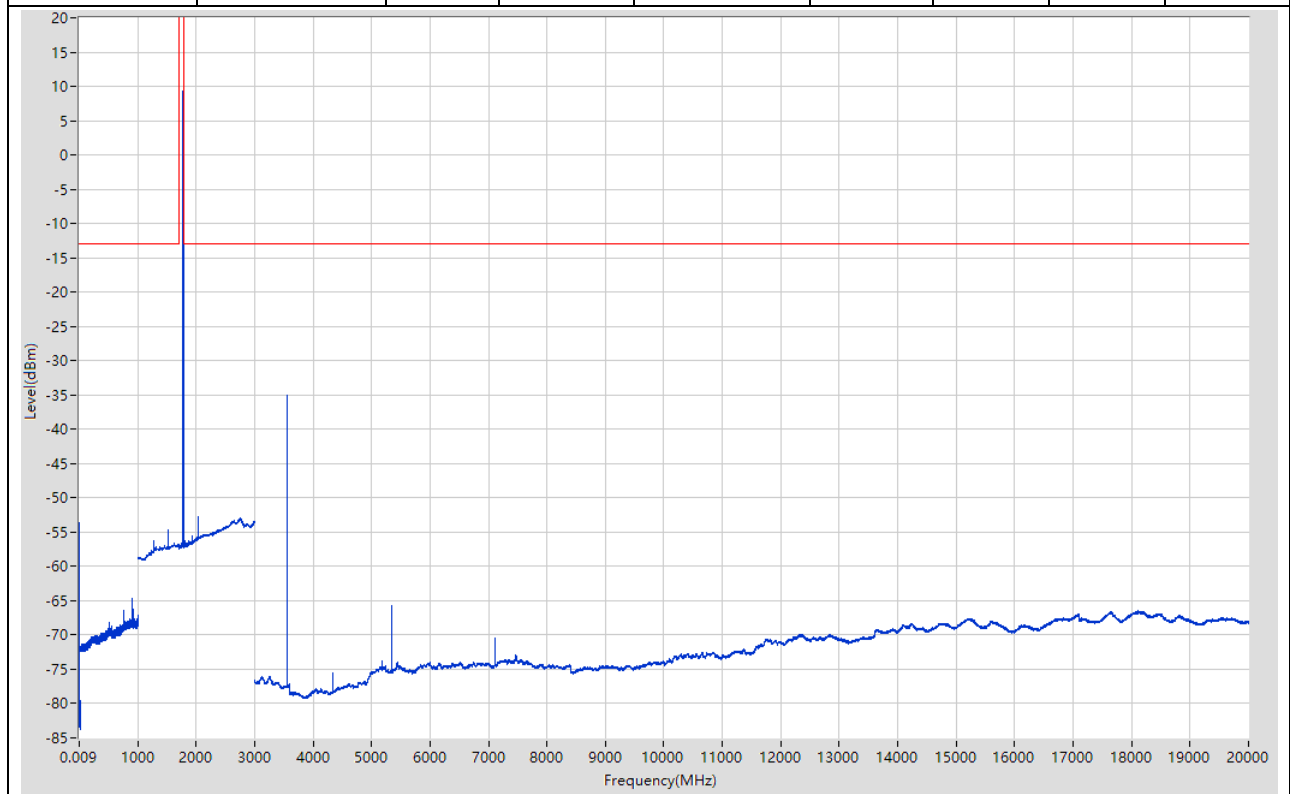


25.16. LTE-M1 Band66 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.8	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.68	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.1	-13	Pass	9700
1000	1700	1	RMS	1577.825	-49.22	-13	Pass	700
1700	1790	1	RMS	1728.5	13.25	60	Pass	601
1790	3000	1	RMS	1879.074	-44.4	-13	Pass	1210
3000	20000	1	RMS	3456.027	-30.86	-13	Pass	17000

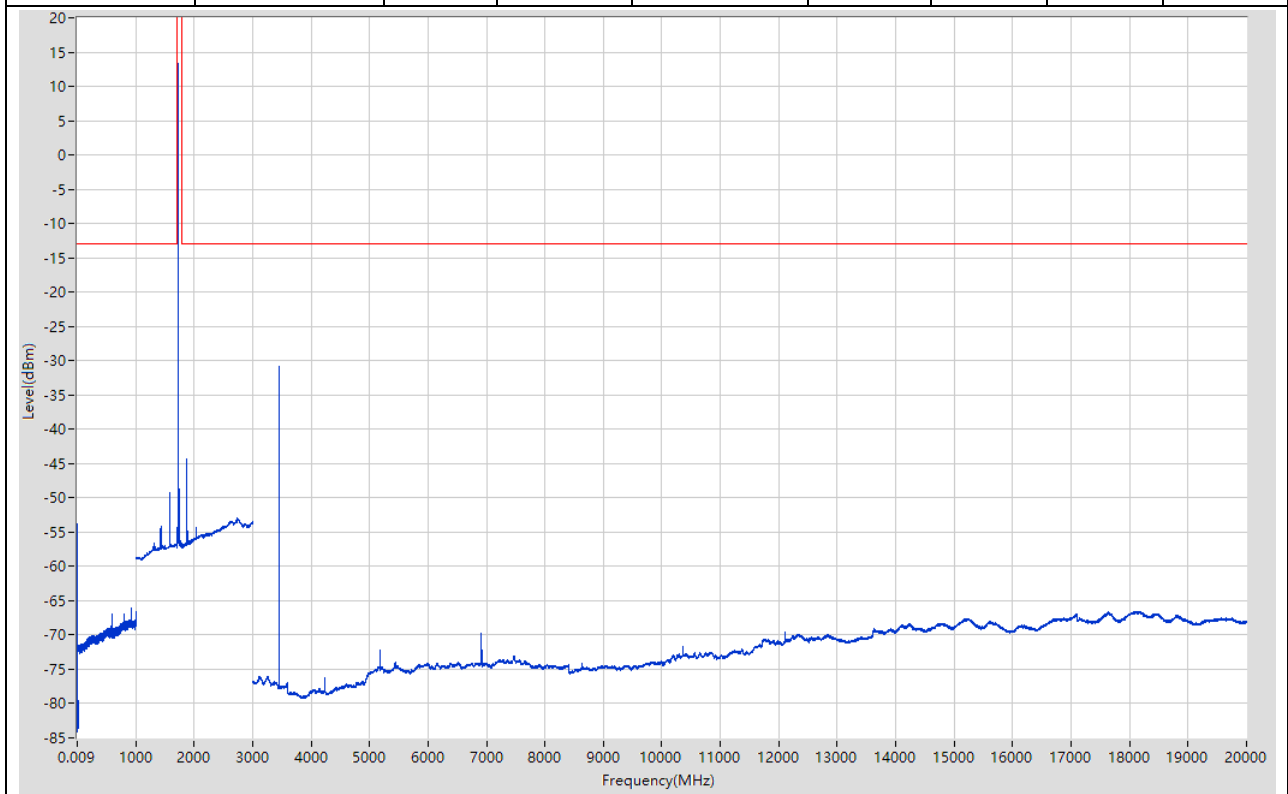


25.17. LTE-M1 Band66 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.76	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.02	-13	Pass	2985
30	1000	0.1	RMS	921.592	-66.81	-13	Pass	9700
1000	1700	1	RMS	1601.86	-49.14	-13	Pass	700
1700	1790	1	RMS	1754	11.92	60	Pass	601
1790	3000	1	RMS	2750.794	-53	-13	Pass	1210
3000	20000	1	RMS	3508.03	-53.12	-13	Pass	17000

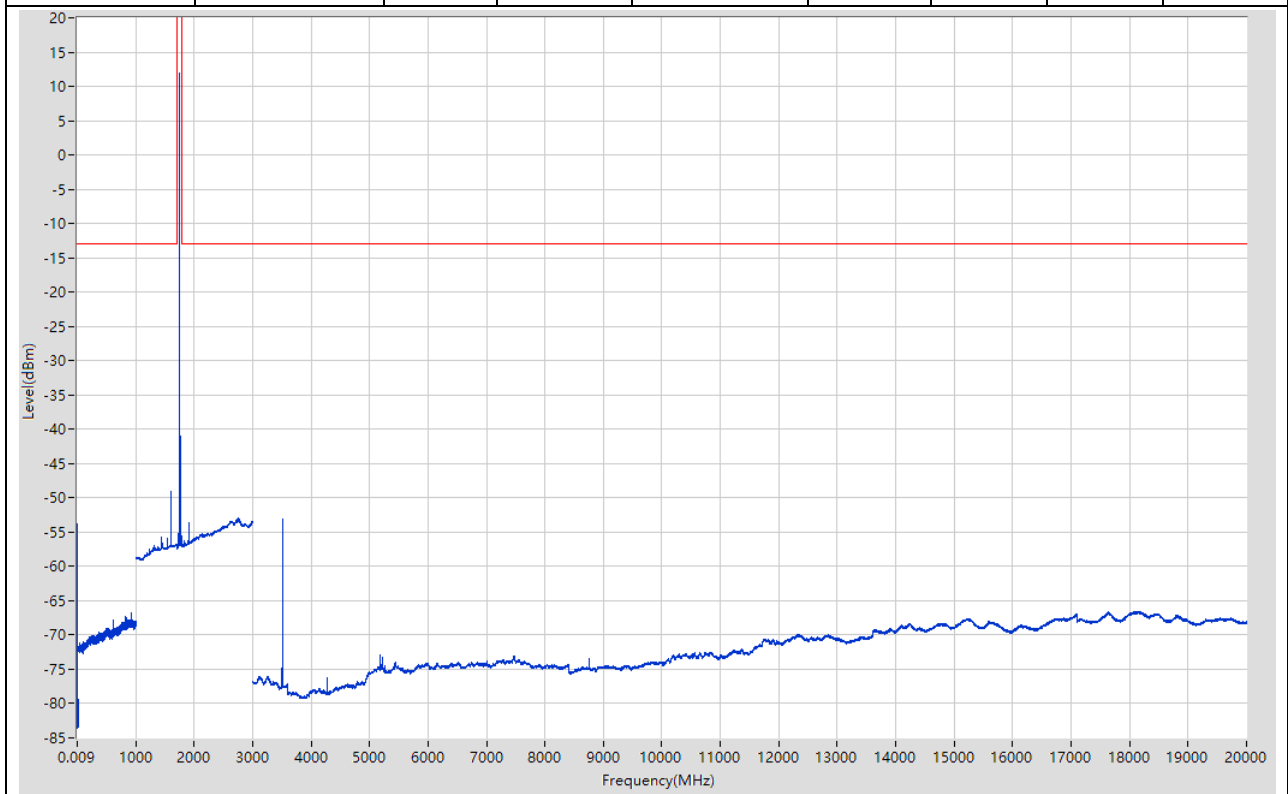

25.18. LTE-M1 Band66 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.42	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.3	-13	Pass	2985
30	1000	0.1	RMS	780.577	-67.42	-13	Pass	9700
1000	1700	1	RMS	1524.75	-54.48	-13	Pass	700
1700	1790	1	RMS	1778.75	12.04	60	Pass	601
1790	3000	1	RMS	2745.79	-53	-13	Pass	1210
3000	20000	1	RMS	3558.033	-34.76	-13	Pass	17000

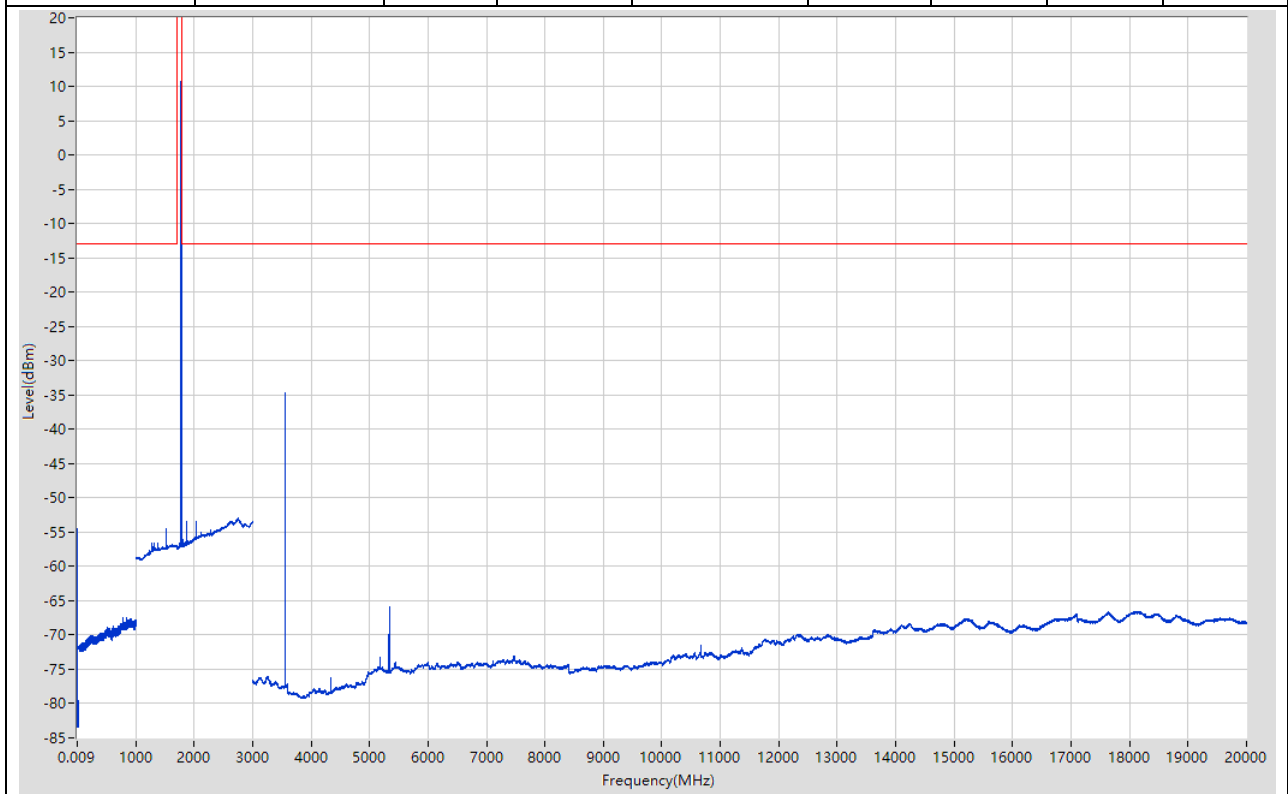

26. LTE-M1_Band66_16QAM


26.1. LTE-M1 Band66 1.4M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.05	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.7	-13	Pass	2985
30	1000	0.1	RMS	712.67	-67.84	-13	Pass	9700
1000	1700	1	RMS	1561.803	-51.04	-13	Pass	700
1700	1790	1	RMS	1711.1	12.51	60	Pass	601
1790	3000	1	RMS	2740.786	-53.01	-13	Pass	1210
3000	20000	1	RMS	3422.025	-38.28	-13	Pass	17000

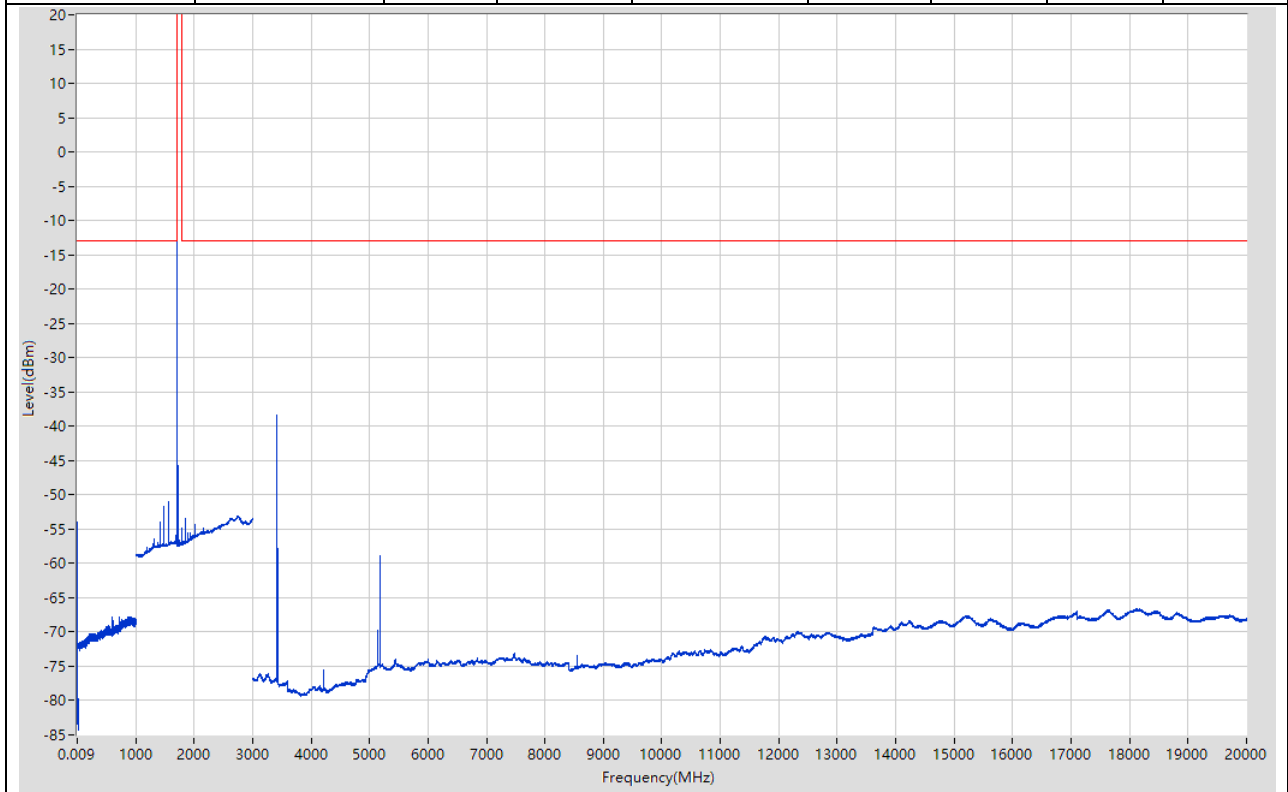


26.2. LTE-M1 Band66 1.4M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.87	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.24	-13	Pass	2985
30	1000	0.1	RMS	747.074	-67.22	-13	Pass	9700
1000	1700	1	RMS	1593.848	-50.13	-13	Pass	700
1700	1790	1	RMS	1745.45	12.09	60	Pass	601
1790	3000	1	RMS	1897.089	-47.26	-13	Pass	1210
3000	20000	1	RMS	3490.029	-34.87	-13	Pass	17000

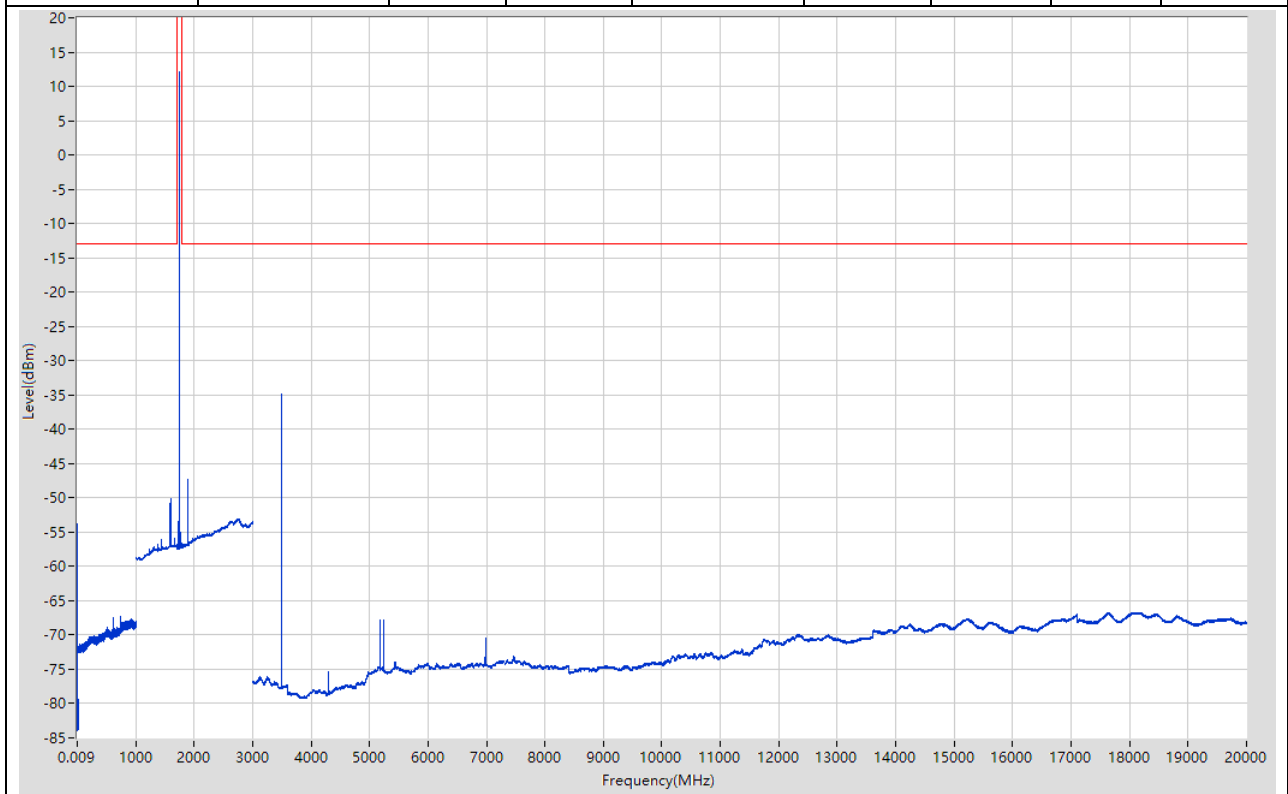


26.3. LTE-M1 Band66 1.4M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.66	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.14	-13	Pass	2985
30	1000	0.1	RMS	921.692	-66.54	-13	Pass	9700
1000	1700	1	RMS	1567.811	-54.96	-13	Pass	700
1700	1790	1	RMS	1779.65	11.89	60	Pass	601
1790	3000	1	RMS	1907.097	-52.51	-13	Pass	1210
3000	20000	1	RMS	3559.033	-39.69	-13	Pass	17000

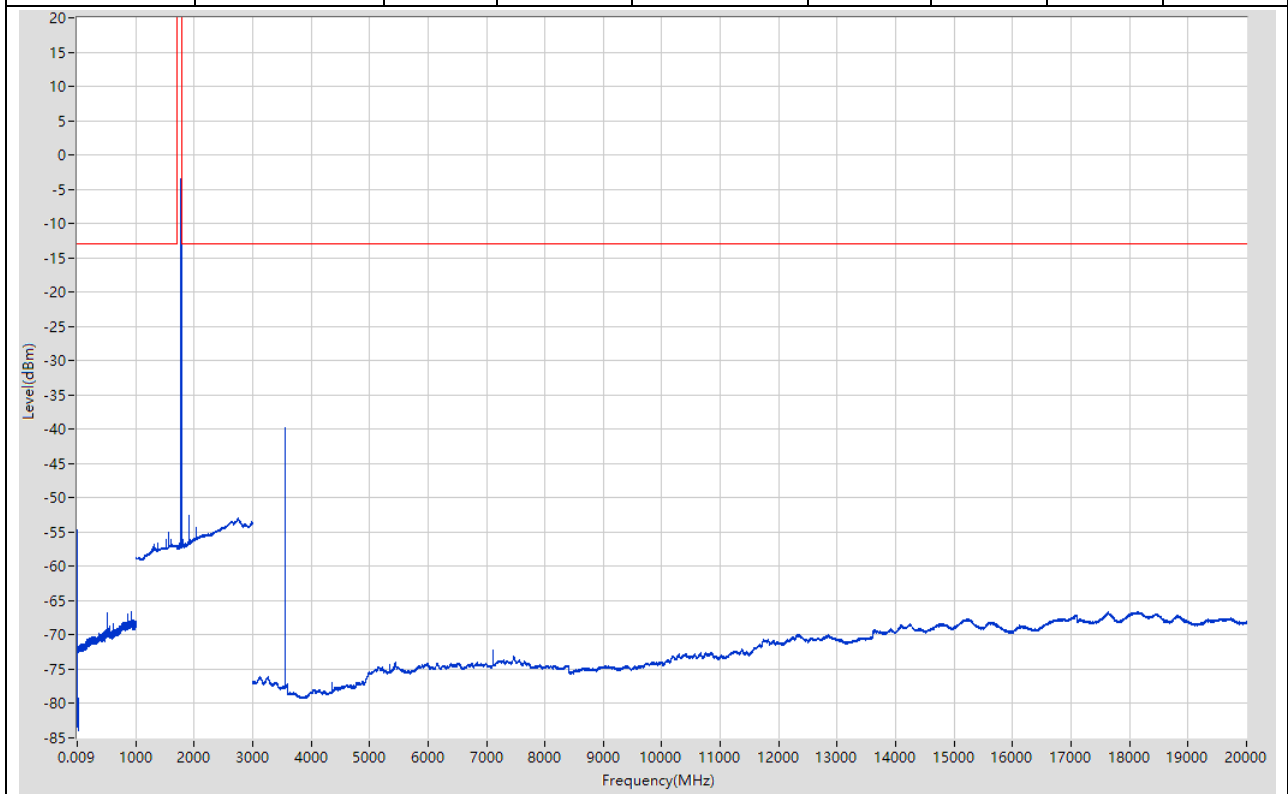


26.4. LTE-M1 Band66 3M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.45	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.69	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.89	-13	Pass	9700
1000	1700	1	RMS	1563.805	-48.17	-13	Pass	700
1700	1790	1	RMS	1712.75	12.47	60	Pass	601
1790	3000	1	RMS	1862.06	-43.64	-13	Pass	1210
3000	20000	1	RMS	3428.025	-33.73	-13	Pass	17000

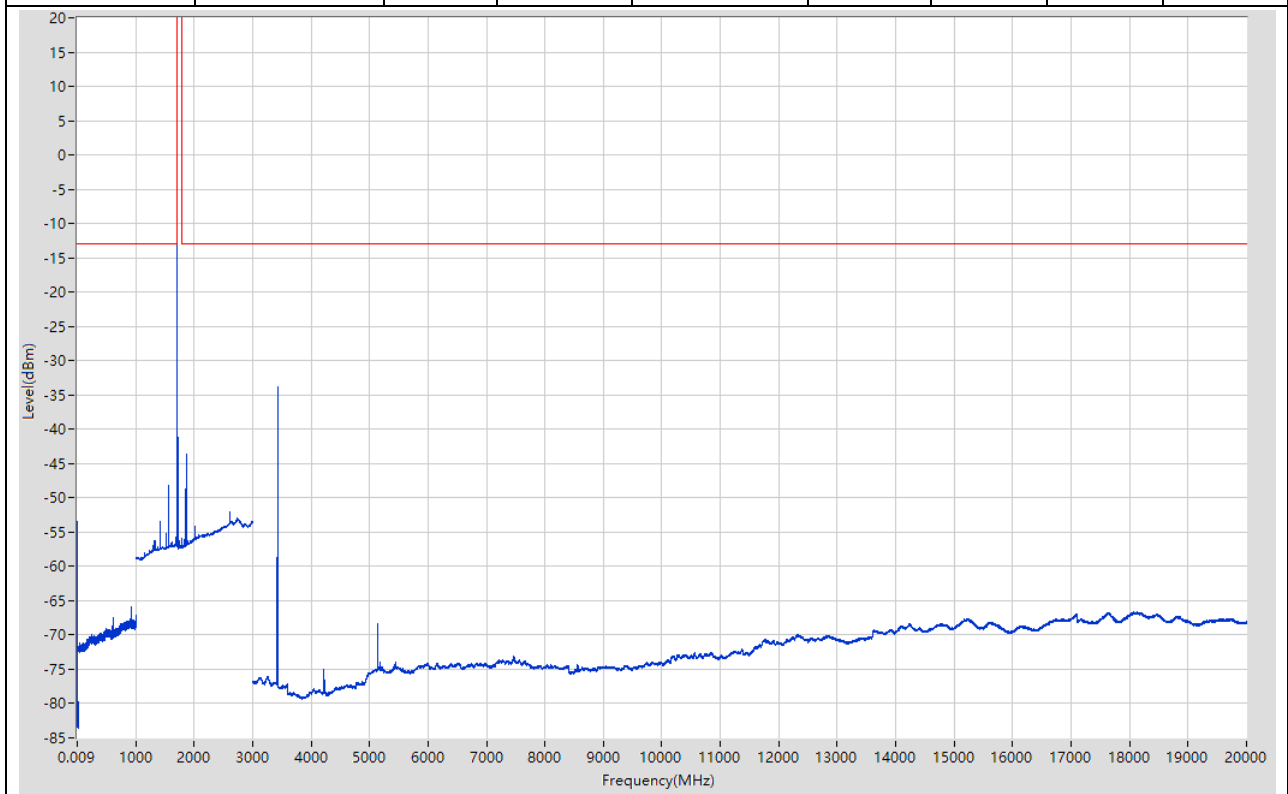


26.5. LTE-M1 Band66 3M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.47	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.27	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.34	-13	Pass	9700
1000	1700	1	RMS	1441.631	-53.05	-13	Pass	700
1700	1790	1	RMS	1746.2	12.71	60	Pass	601
1790	3000	1	RMS	1898.089	-50.09	-13	Pass	1210
3000	20000	1	RMS	5182.128	-62.6	-13	Pass	17000

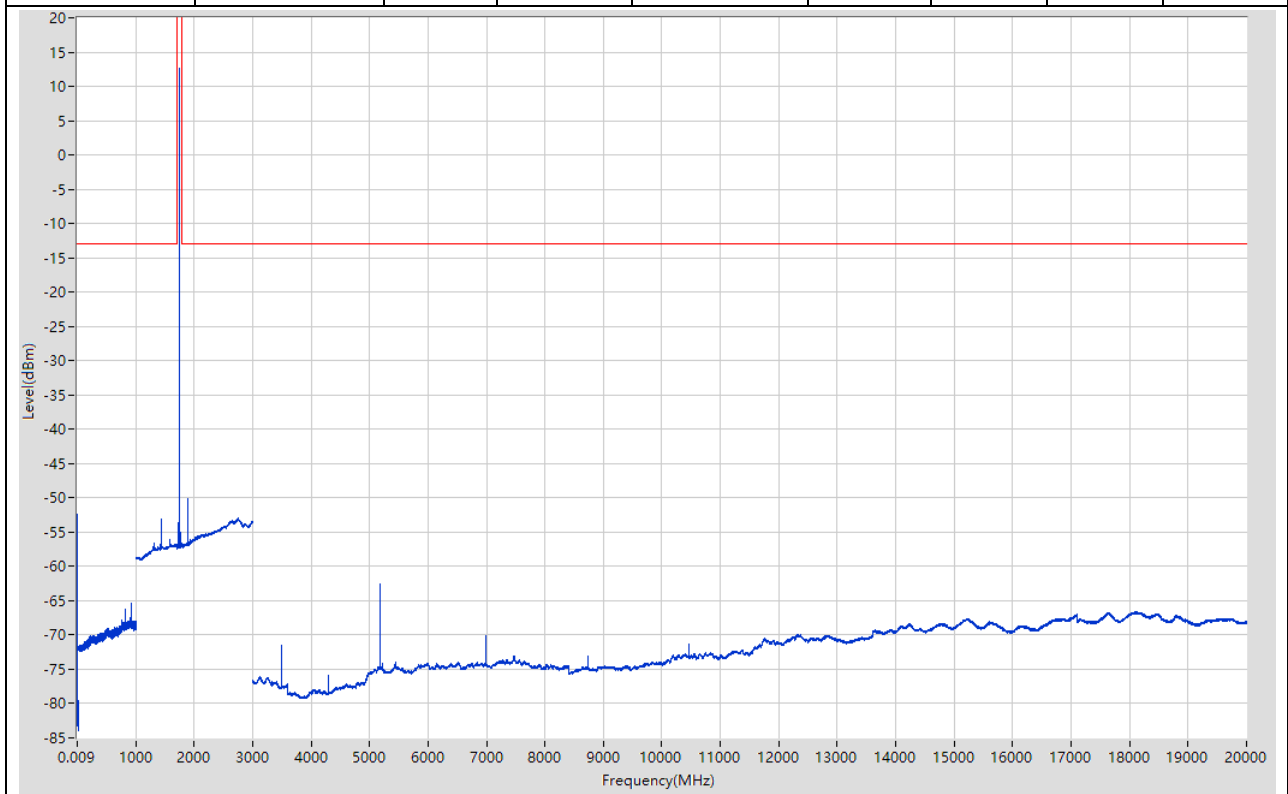


26.6. LTE-M1 Band66 3M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.72	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.8	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.06	-13	Pass	9700
1000	1700	1	RMS	1271.388	-55.36	-13	Pass	700
1700	1790	1	RMS	1779.5	12.7	60	Pass	601
1790	3000	1	RMS	2746.791	-53.04	-13	Pass	1210
3000	20000	1	RMS	3558.033	-60.72	-13	Pass	17000

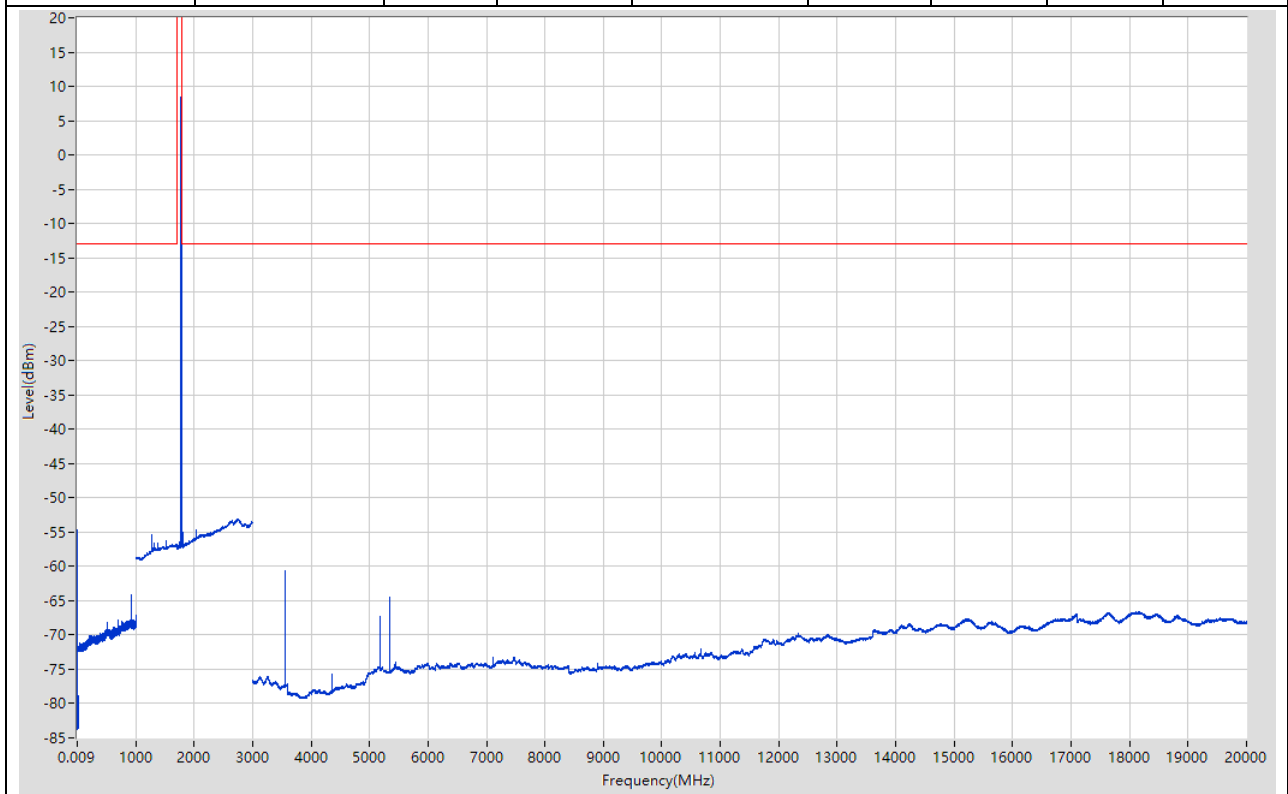


26.7. LTE-M1 Band66 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-55.02	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.2	-13	Pass	2985
30	1000	0.1	RMS	793.079	-66.88	-13	Pass	9700
1000	1700	1	RMS	1565.808	-48.82	-13	Pass	700
1700	1790	1	RMS	1714.85	13.09	60	Pass	601
1790	3000	1	RMS	1864.061	-50.59	-13	Pass	1210
3000	20000	1	RMS	3430.025	-34.03	-13	Pass	17000

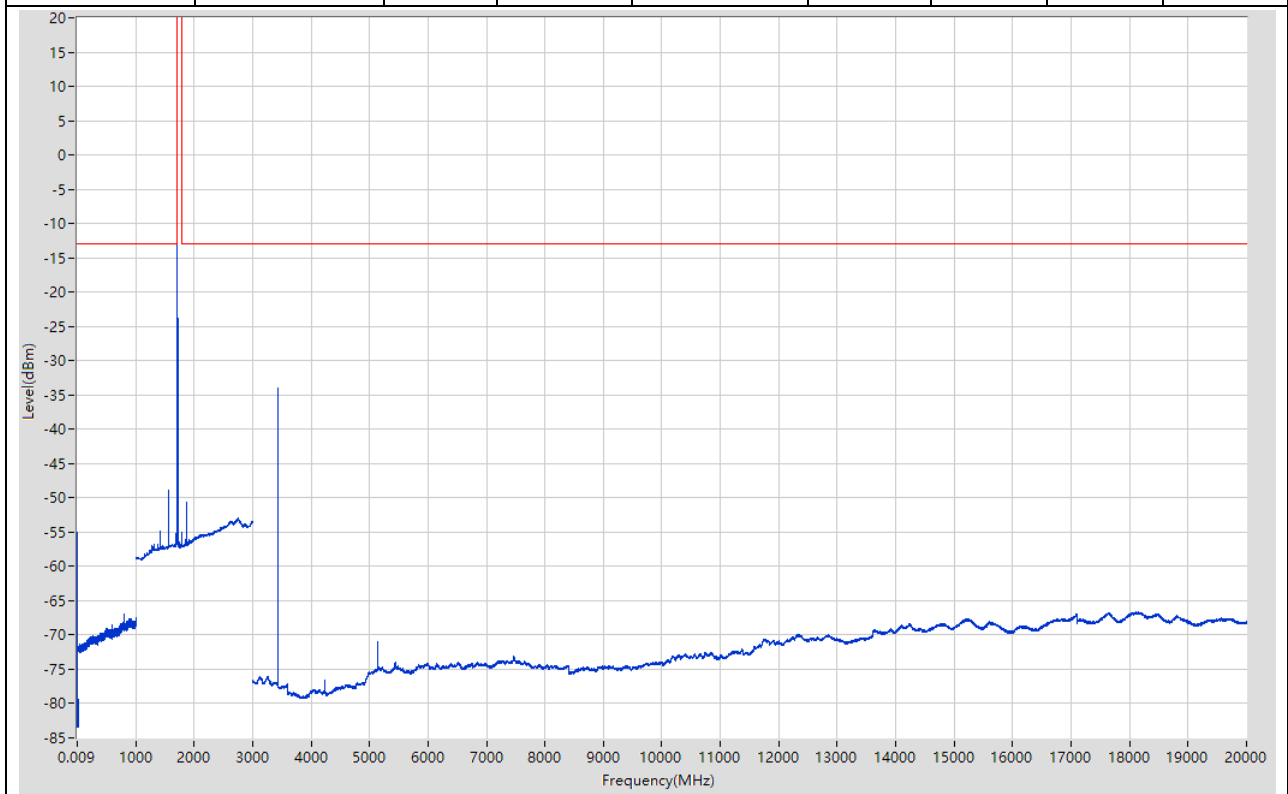


26.8. LTE-M1 Band66 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.09	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.02	-13	Pass	2985
30	1000	0.1	RMS	921.492	-67.11	-13	Pass	9700
1000	1700	1	RMS	1594.85	-51.85	-13	Pass	700
1700	1790	1	RMS	1746.8	12.61	60	Pass	601
1790	3000	1	RMS	1898.089	-48.17	-13	Pass	1210
3000	20000	1	RMS	3493.029	-56.74	-13	Pass	17000

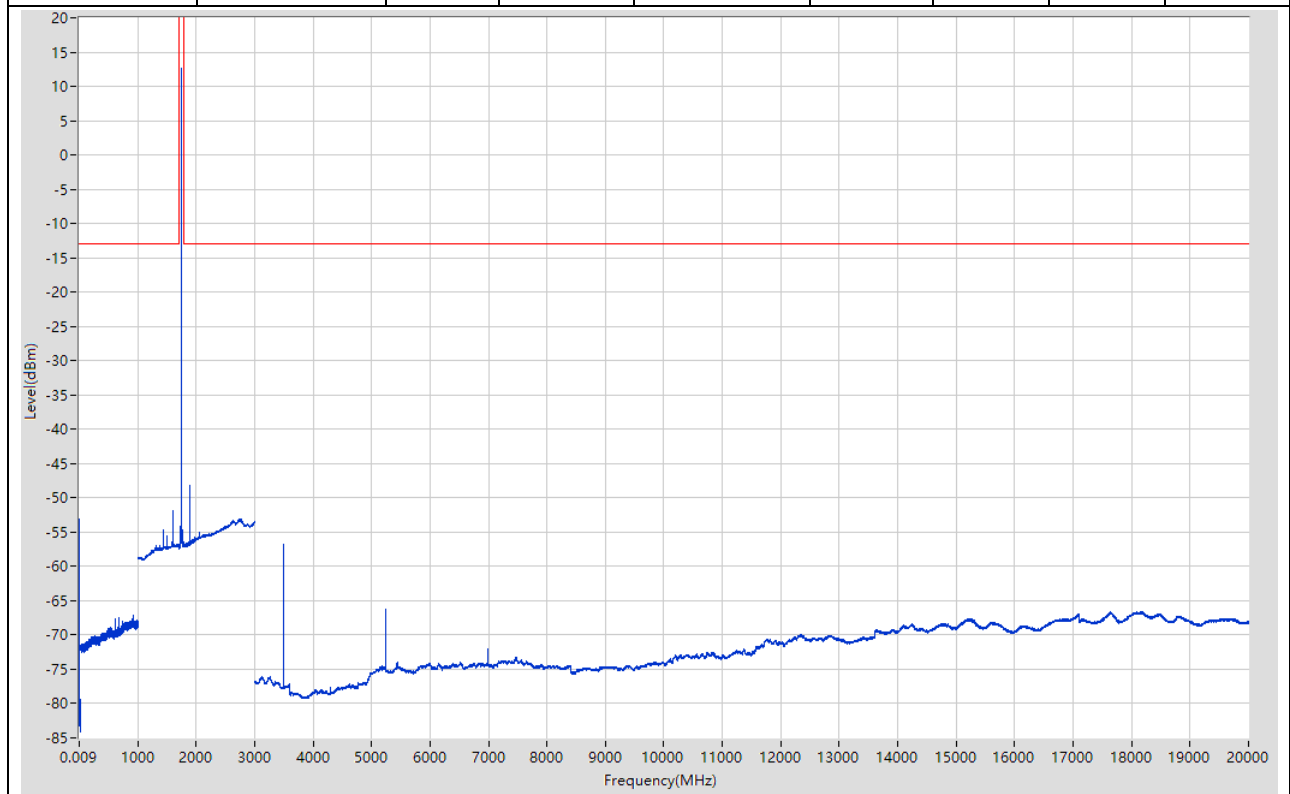


26.9. LTE-M1 Band66 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.14	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.84	-13	Pass	2985
30	1000	0.1	RMS	921.592	-64.61	-13	Pass	9700
1000	1700	1	RMS	1525.751	-54.09	-13	Pass	700
1700	1790	1	RMS	1779.5	12.38	60	Pass	601
1790	3000	1	RMS	2033.201	-46.37	-13	Pass	1210
3000	20000	1	RMS	3559.033	-37.75	-13	Pass	17000

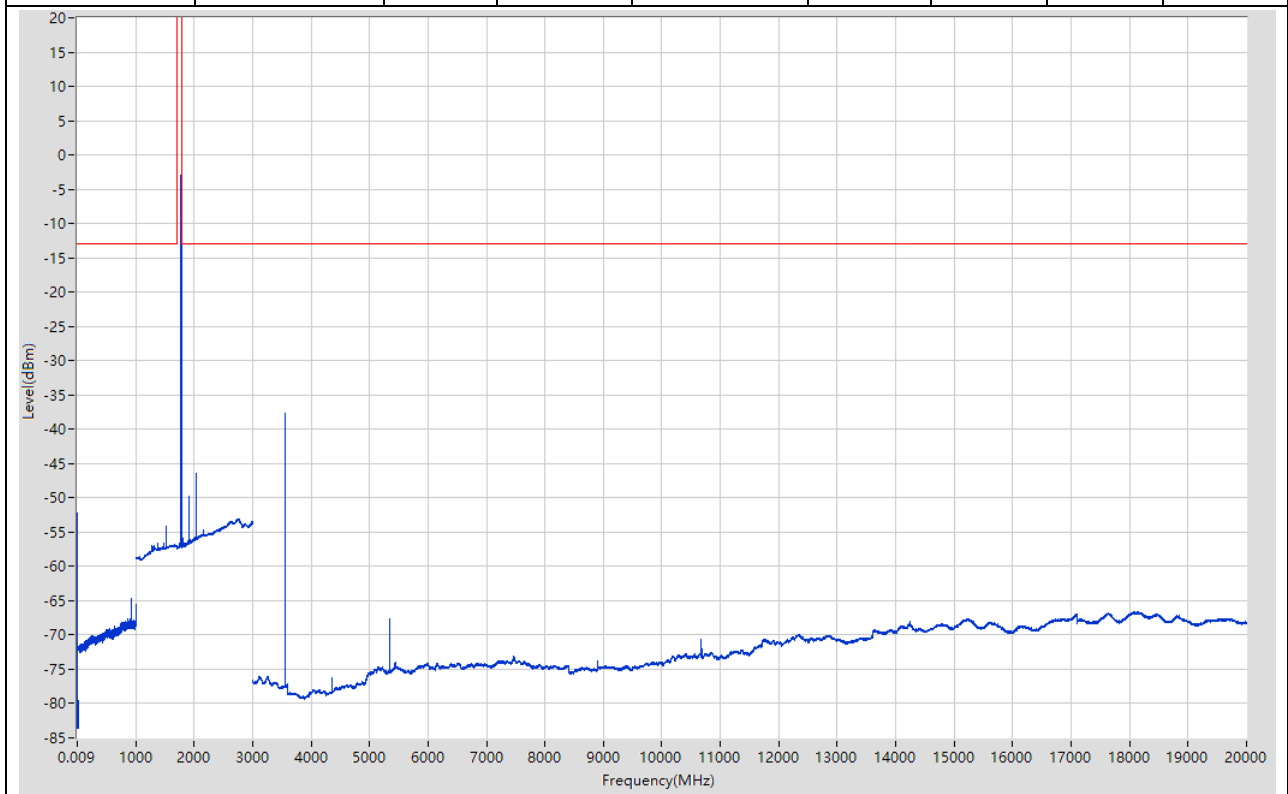


26.10. LTE-M1 Band66 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.96	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.6	-13	Pass	2985
30	1000	0.1	RMS	921.592	-65.91	-13	Pass	9700
1000	1700	1	RMS	1569.814	-48.49	-13	Pass	700
1700	1790	1	RMS	1719.2	12.49	60	Pass	601
1790	3000	1	RMS	1868.065	-51.09	-13	Pass	1210
3000	20000	1	RMS	3437.026	-33.72	-13	Pass	17000

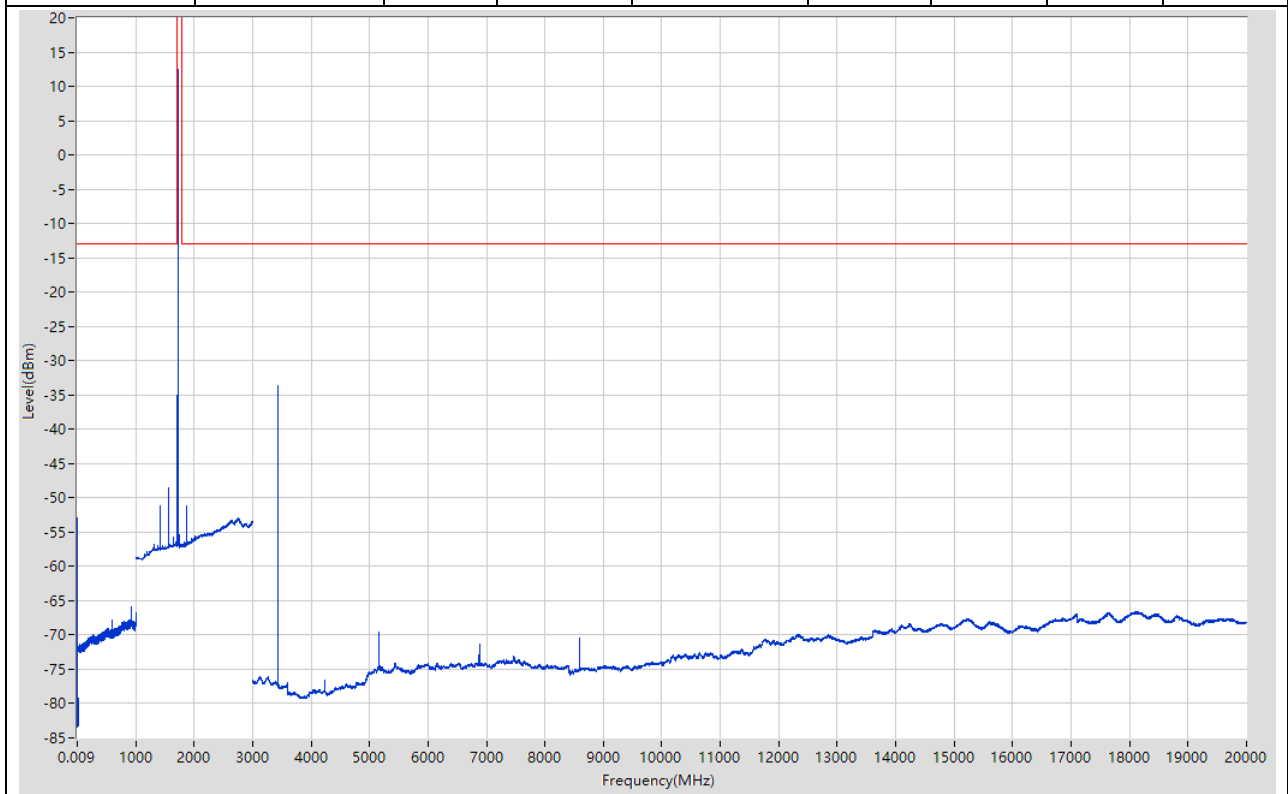


26.11. LTE-M1 Band66 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.6	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.48	-13	Pass	2985
30	1000	0.1	RMS	827.782	-66.15	-13	Pass	9700
1000	1700	1	RMS	1596.853	-50.87	-13	Pass	700
1700	1790	1	RMS	1749.2	12.78	60	Pass	601
1790	3000	1	RMS	1901.092	-45.04	-13	Pass	1210
3000	20000	1	RMS	3498.029	-36.53	-13	Pass	17000

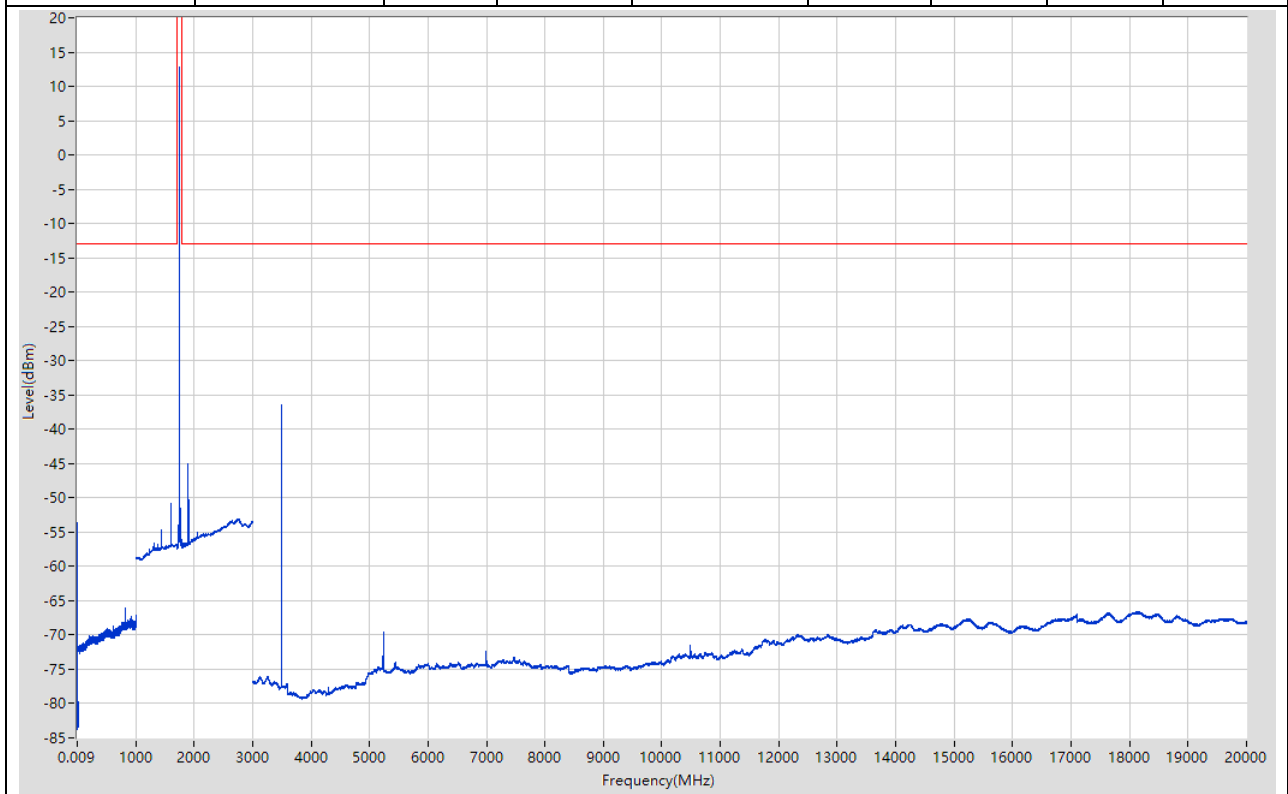


26.12. LTE-M1 Band66 10M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.25	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.96	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.95	-13	Pass	9700
1000	1700	1	RMS	1398.569	-54.46	-13	Pass	700
1700	1790	1	RMS	1779.2	12.82	60	Pass	601
1790	3000	1	RMS	2745.79	-52.96	-13	Pass	1210
3000	20000	1	RMS	3559.033	-36.36	-13	Pass	17000

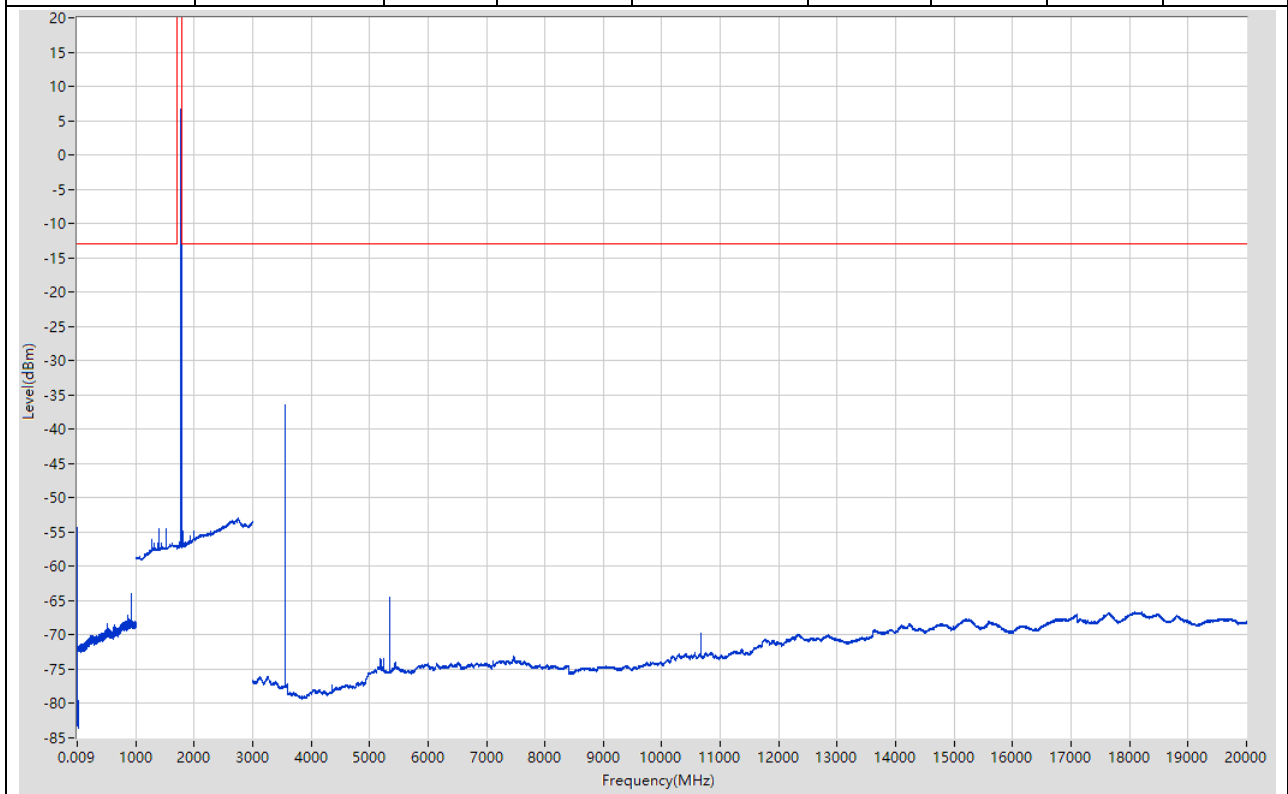


26.13. LTE-M1 Band66 15M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.65	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.23	-13	Pass	2985
30	1000	0.1	RMS	725.772	-66.48	-13	Pass	9700
1000	1700	1	RMS	1573.82	-51.52	-13	Pass	700
1700	1790	1	RMS	1724	13.73	60	Pass	601
1790	3000	1	RMS	1874.069	-42.78	-13	Pass	1210
3000	20000	1	RMS	3448.026	-35.87	-13	Pass	17000

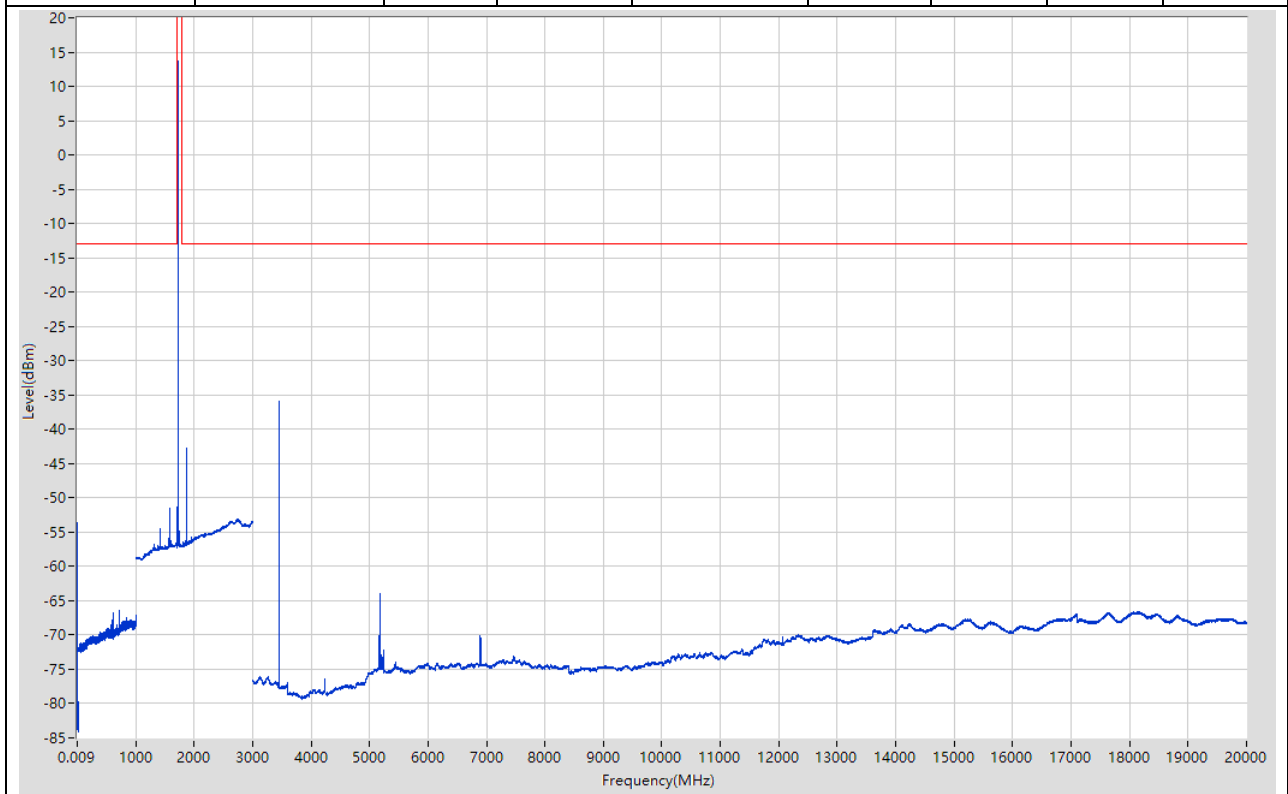


26.14. LTE-M1 Band66 15M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.6	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.47	-13	Pass	2985
30	1000	0.1	RMS	921.792	-67.68	-13	Pass	9700
1000	1700	1	RMS	1598.856	-49.71	-13	Pass	700
1700	1790	1	RMS	1751.6	11.82	60	Pass	601
1790	3000	1	RMS	1903.093	-45.84	-13	Pass	1210
3000	20000	1	RMS	3502.03	-34.06	-13	Pass	17000

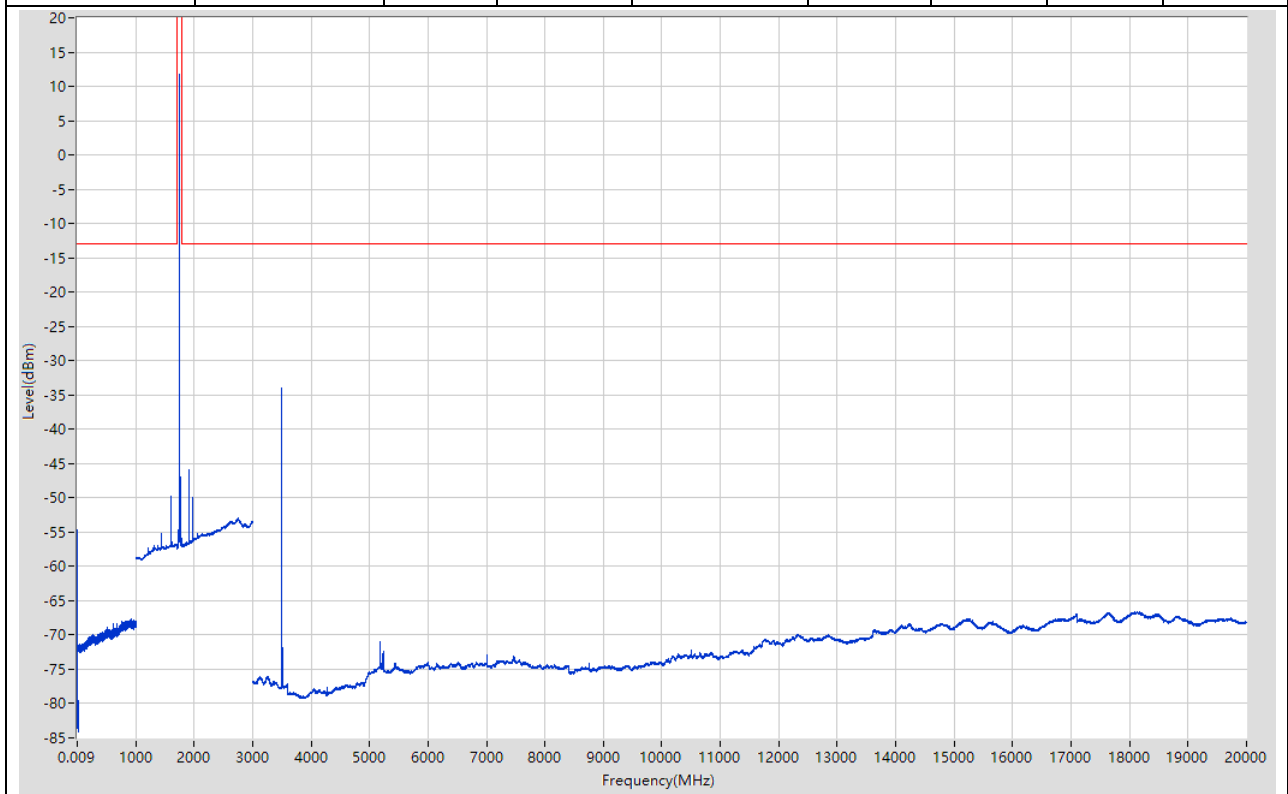


26.15. LTE-M1 Band66 15M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.27	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.06	-13	Pass	2985
30	1000	0.1	RMS	780.777	-67.44	-13	Pass	9700
1000	1700	1	RMS	1524.75	-54.45	-13	Pass	700
1700	1790	1	RMS	1779.05	13.2	60	Pass	601
1790	3000	1	RMS	2749.793	-53.03	-13	Pass	1210
3000	20000	1	RMS	3558.033	-40.21	-13	Pass	17000

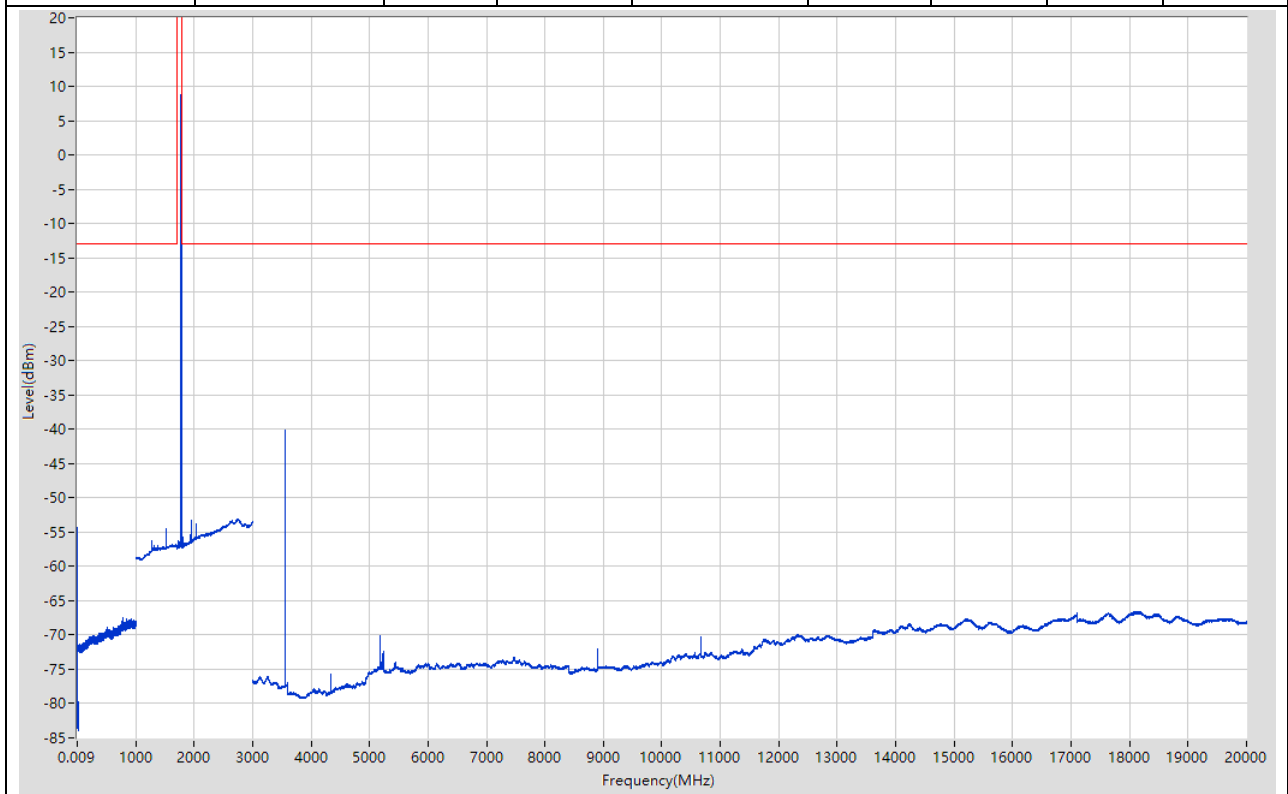


26.16. LTE-M1 Band66 20M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.06	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.96	-13	Pass	2985
30	1000	0.1	RMS	921.492	-66.96	-13	Pass	9700
1000	1700	1	RMS	1577.825	-52.23	-13	Pass	700
1700	1790	1	RMS	1726.8	12.57	60	Pass	601
1790	3000	1	RMS	1879.074	-42.26	-13	Pass	1210
3000	20000	1	RMS	3458.027	-29.45	-13	Pass	17000

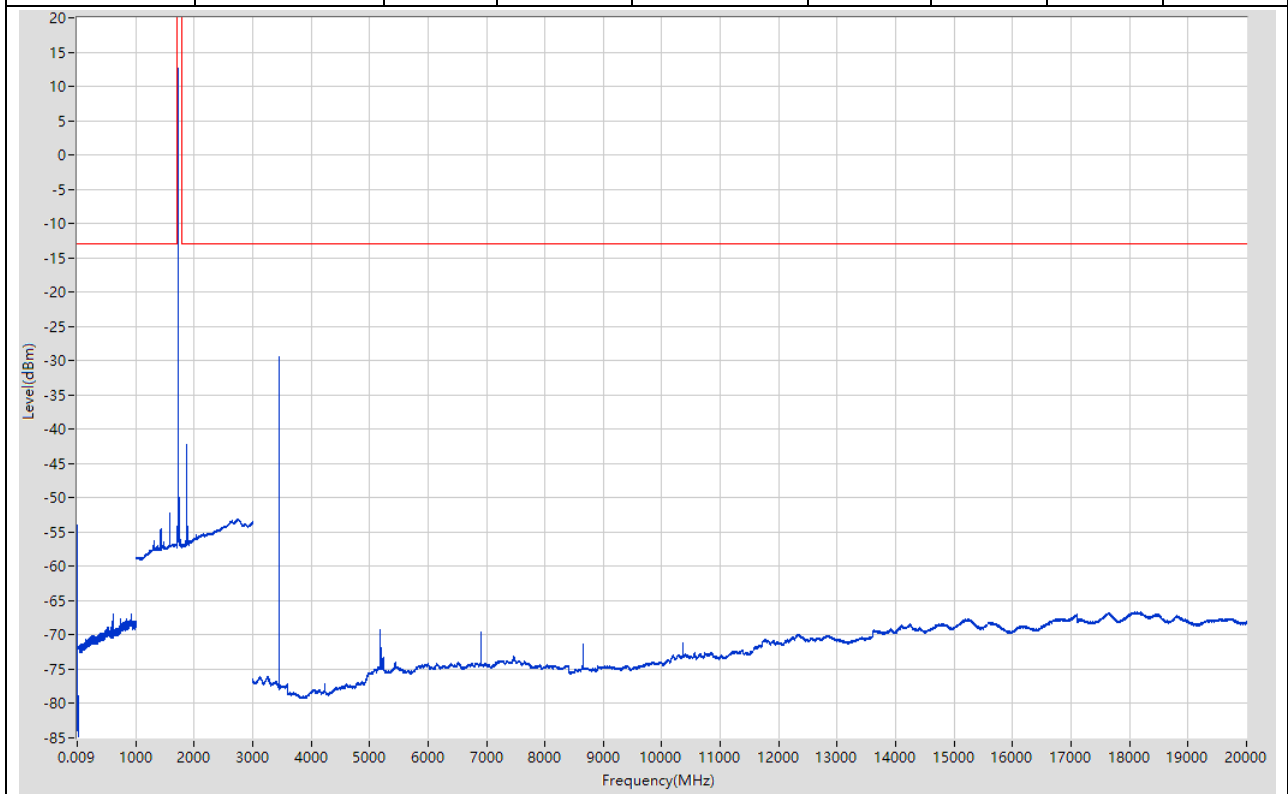


26.17. LTE-M1 Band66 20M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.15	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.15	-13	Pass	2985
30	1000	0.1	RMS	832.283	-66.39	-13	Pass	9700
1000	1700	1	RMS	1600.858	-52.12	-13	Pass	700
1700	1790	1	RMS	1754	12.04	60	Pass	601
1790	3000	1	RMS	1906.096	-43.6	-13	Pass	1210
3000	20000	1	RMS	3508.03	-52.38	-13	Pass	17000

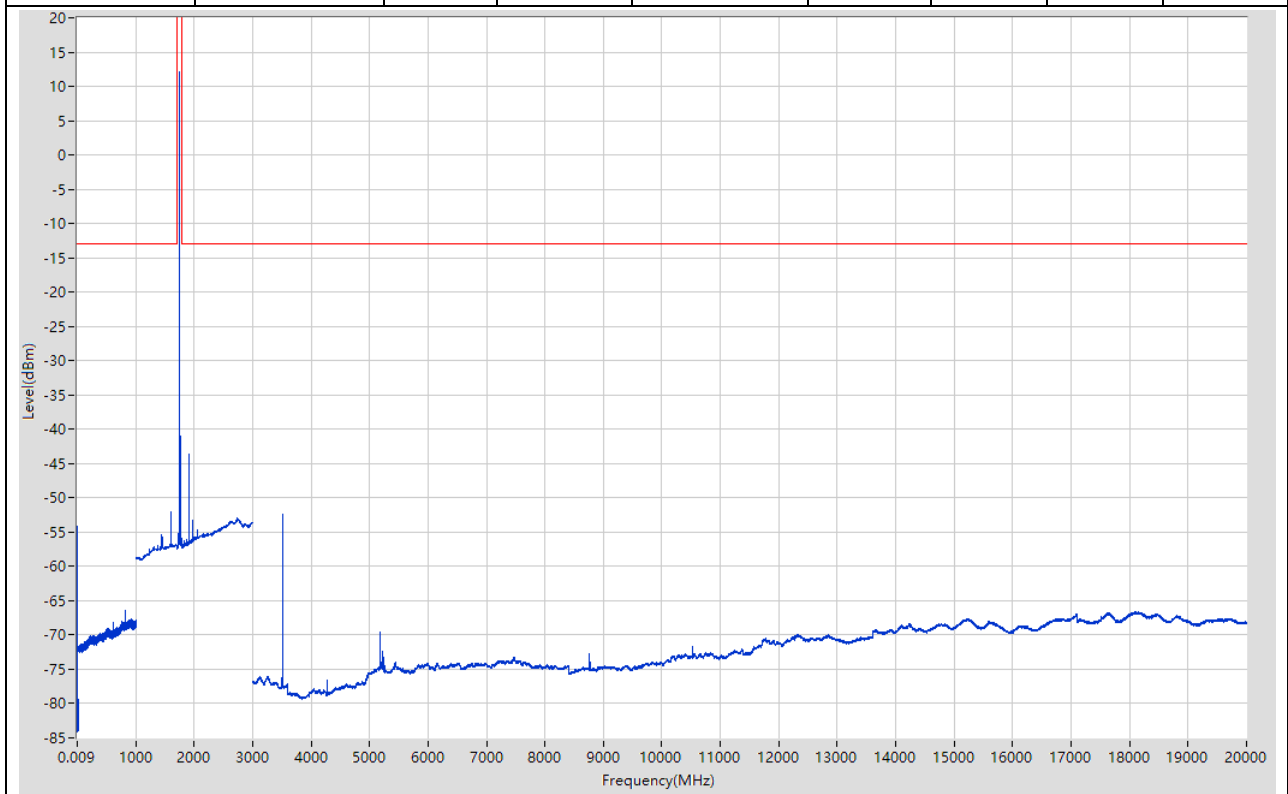

26.18. LTE-M1 Band66 20M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.84	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.27	-13	Pass	2985
30	1000	0.1	RMS	508.049	-66.04	-13	Pass	9700
1000	1700	1	RMS	1270.386	-53.15	-13	Pass	700
1700	1790	1	RMS	1778.45	12.1	60	Pass	601
1790	3000	1	RMS	2747.792	-52.99	-13	Pass	1210
3000	20000	1	RMS	3557.033	-41.37	-13	Pass	17000

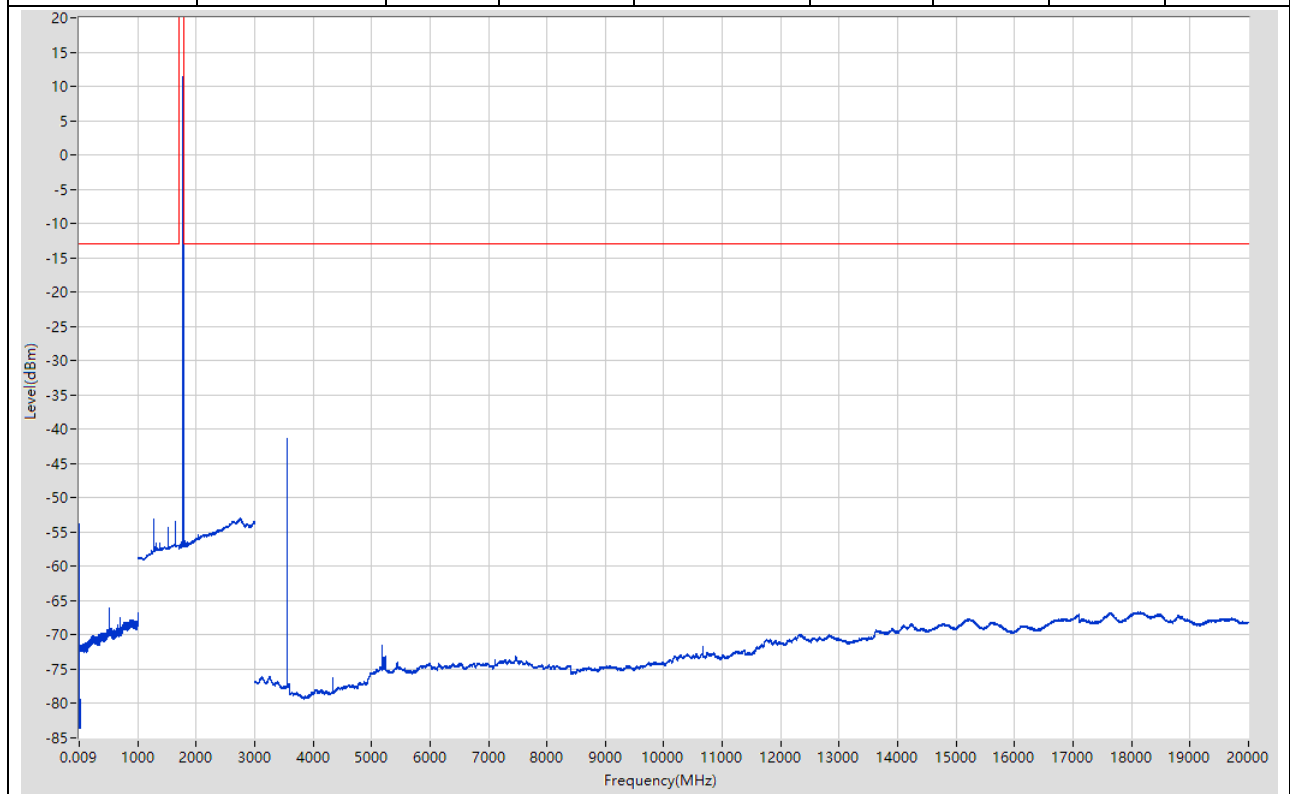

27. LTE-M1_Band85_QPSK


27.1. LTE-M1 Band85 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.79	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.89	-13	Pass	2985
30	688	0.1	RMS	682.999	-60.07	-13	Pass	6580
688	726	0.1	RMS	702.63	12.08	60	Pass	601
726	1000	0.1	RMS	918.77	-62.71	-13	Pass	2740
1000	3000	1	RMS	1406.203	-41.42	-13	Pass	2000
3000	10000	1	RMS	4918.274	-65.44	-13	Pass	7000

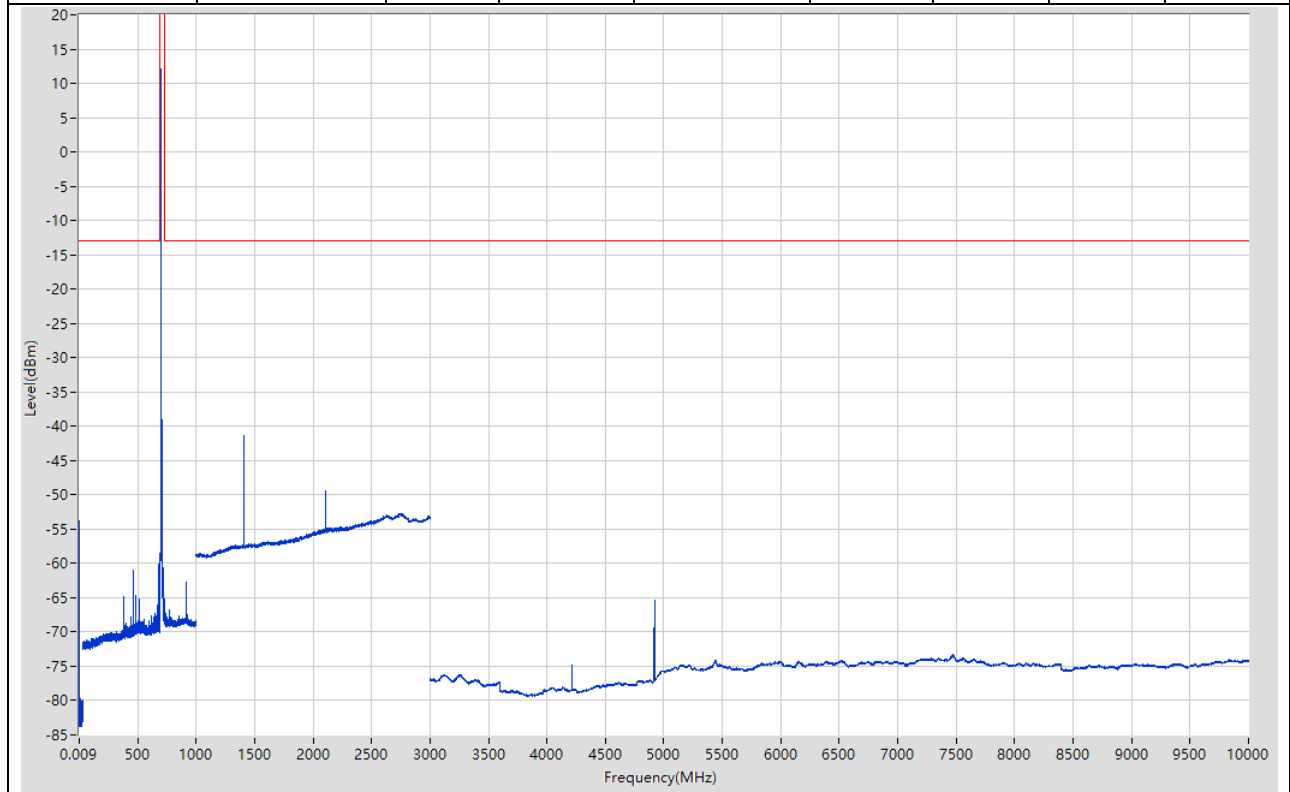


27.2. LTE-M1 Band85 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.77	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.1	-13	Pass	2985
30	688	0.1	RMS	460.765	-60.83	-13	Pass	6580
688	726	0.1	RMS	709.153	12.04	60	Pass	601
726	1000	0.1	RMS	727.901	-58.79	-13	Pass	2740
1000	3000	1	RMS	1416.208	-32.36	-13	Pass	2000
3000	10000	1	RMS	7466.638	-73.27	-13	Pass	7000

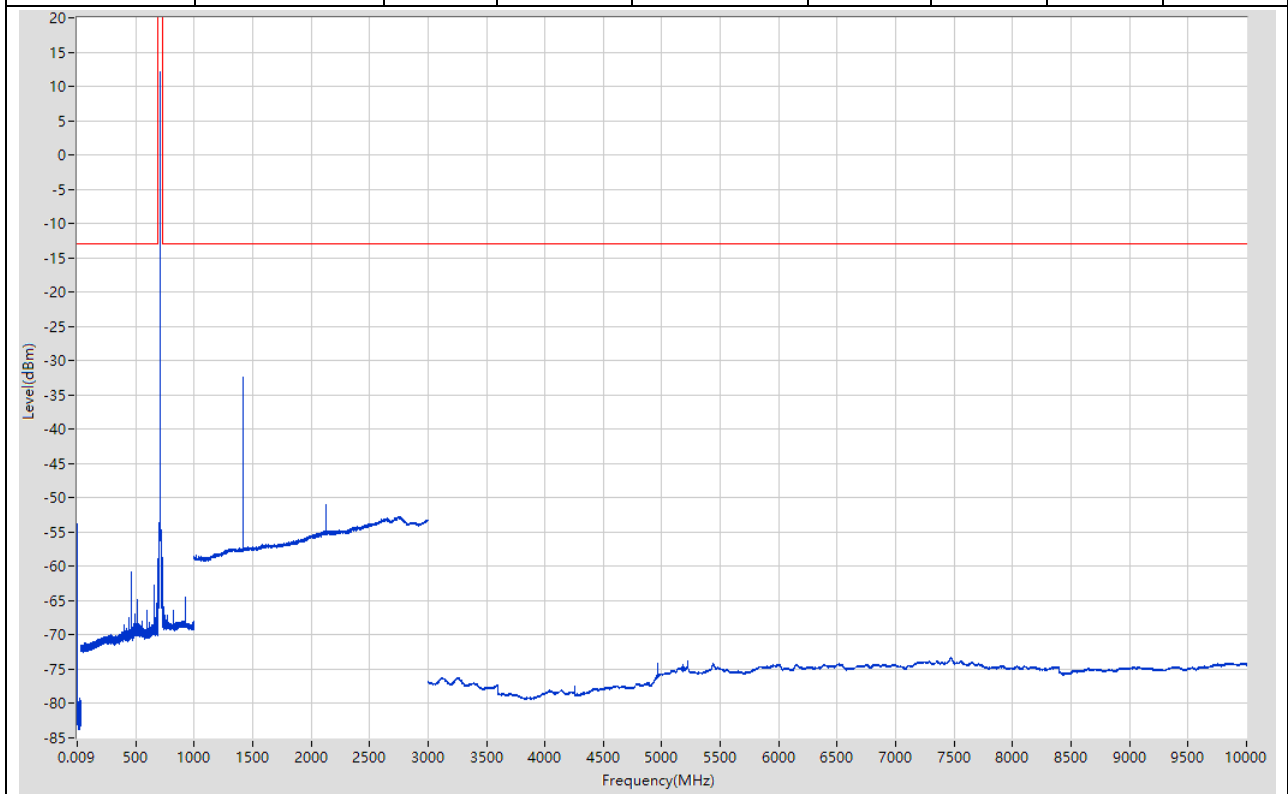


27.3. LTE-M1 Band85 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.52	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.37	-13	Pass	2985
30	688	0.1	RMS	550.079	-55.52	-13	Pass	6580
688	726	0.1	RMS	715.677	11.8	60	Pass	601
726	1000	0.1	RMS	734.403	-62.48	-13	Pass	2740
1000	3000	1	RMS	1431.216	-38.77	-13	Pass	2000
3000	10000	1	RMS	7468.638	-73.21	-13	Pass	7000

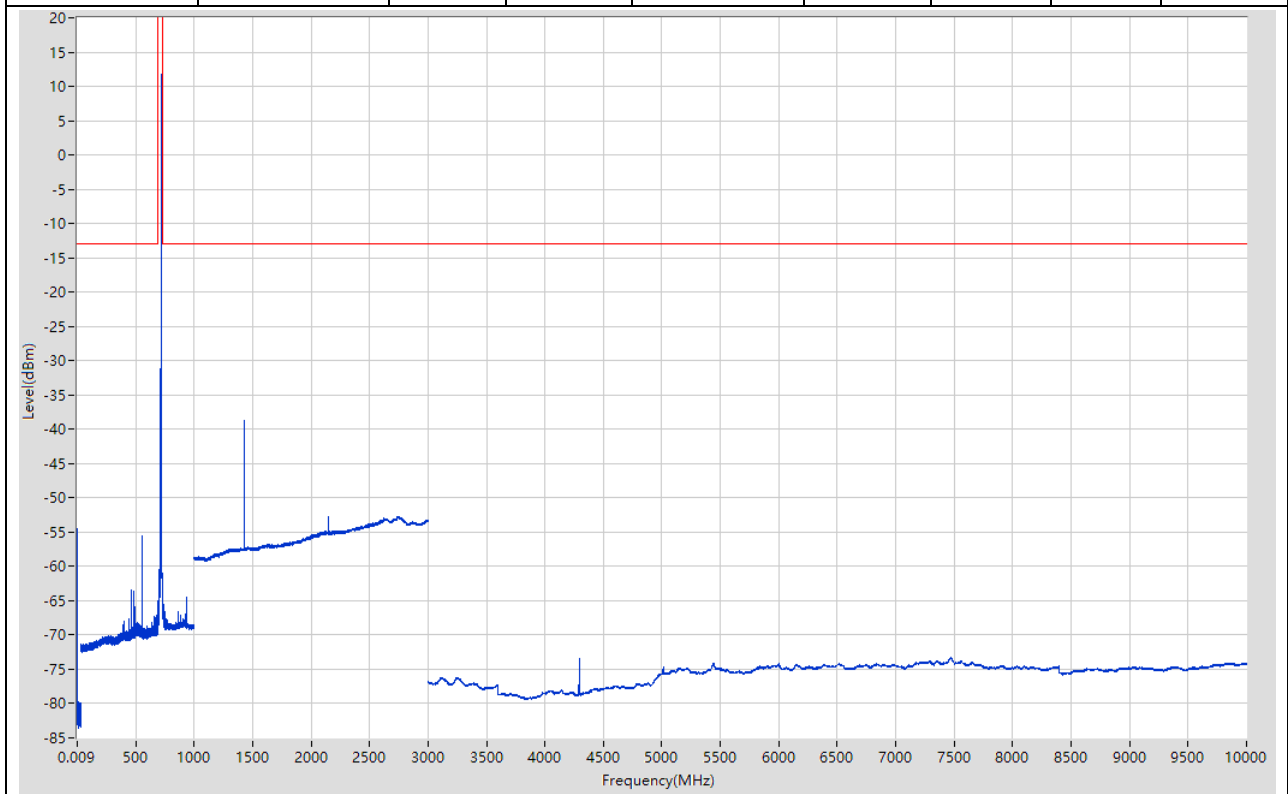


27.4. LTE-M1 Band85 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.7	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.76	-13	Pass	2985
30	688	0.1	RMS	460.765	-59.85	-13	Pass	6580
688	726	0.1	RMS	707.443	11.5	60	Pass	601
726	1000	0.1	RMS	726.2	-59.89	-13	Pass	2740
1000	3000	1	RMS	1414.207	-29.58	-13	Pass	2000
3000	10000	1	RMS	7467.638	-73.26	-13	Pass	7000

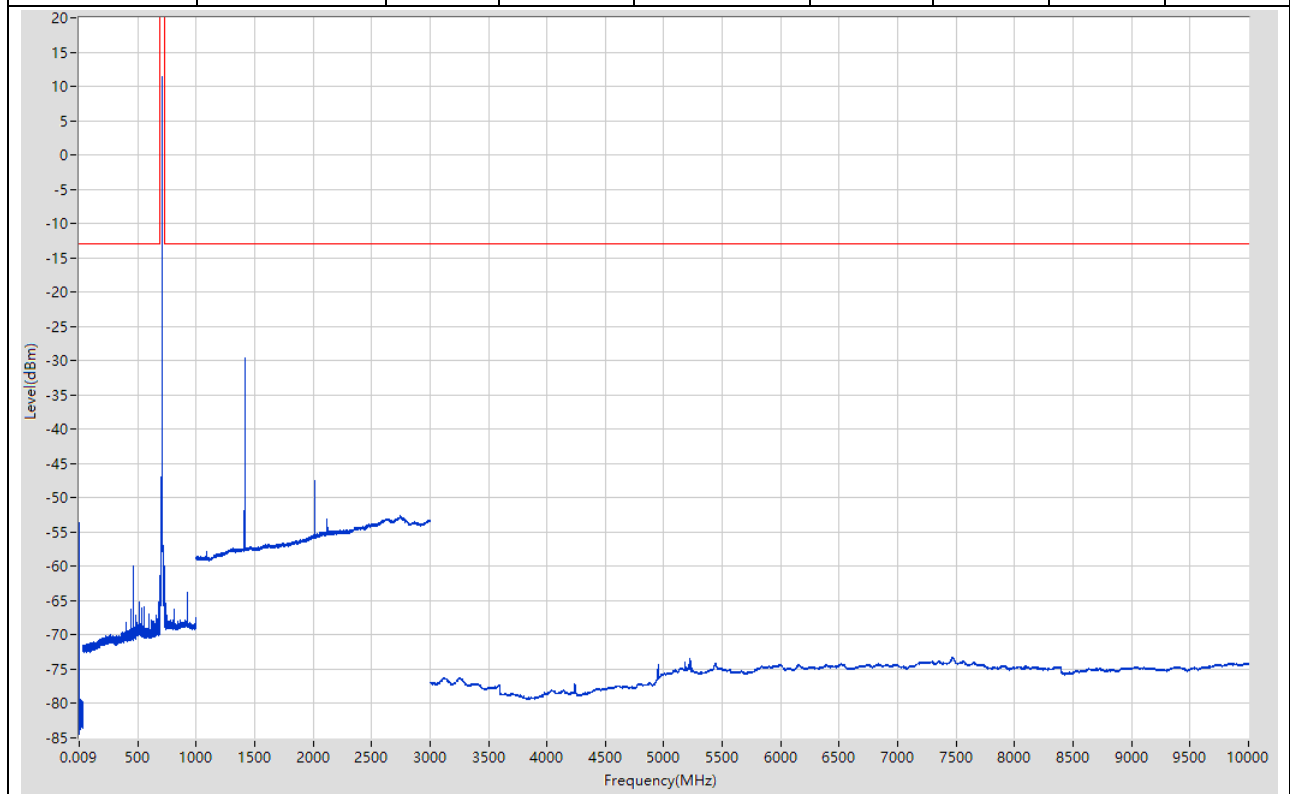


27.5. LTE-M1 Band85 10M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.4	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.84	-13	Pass	2985
30	688	0.1	RMS	683.899	-58.28	-13	Pass	6580
688	726	0.1	RMS	702.567	11.61	60	Pass	601
726	1000	0.1	RMS	810.731	-61.89	-13	Pass	2740
1000	3000	1	RMS	1416.21	-34.56	-13	Pass	2000
3000	10000	1	RMS	7468.638	-73.25	-13	Pass	7000

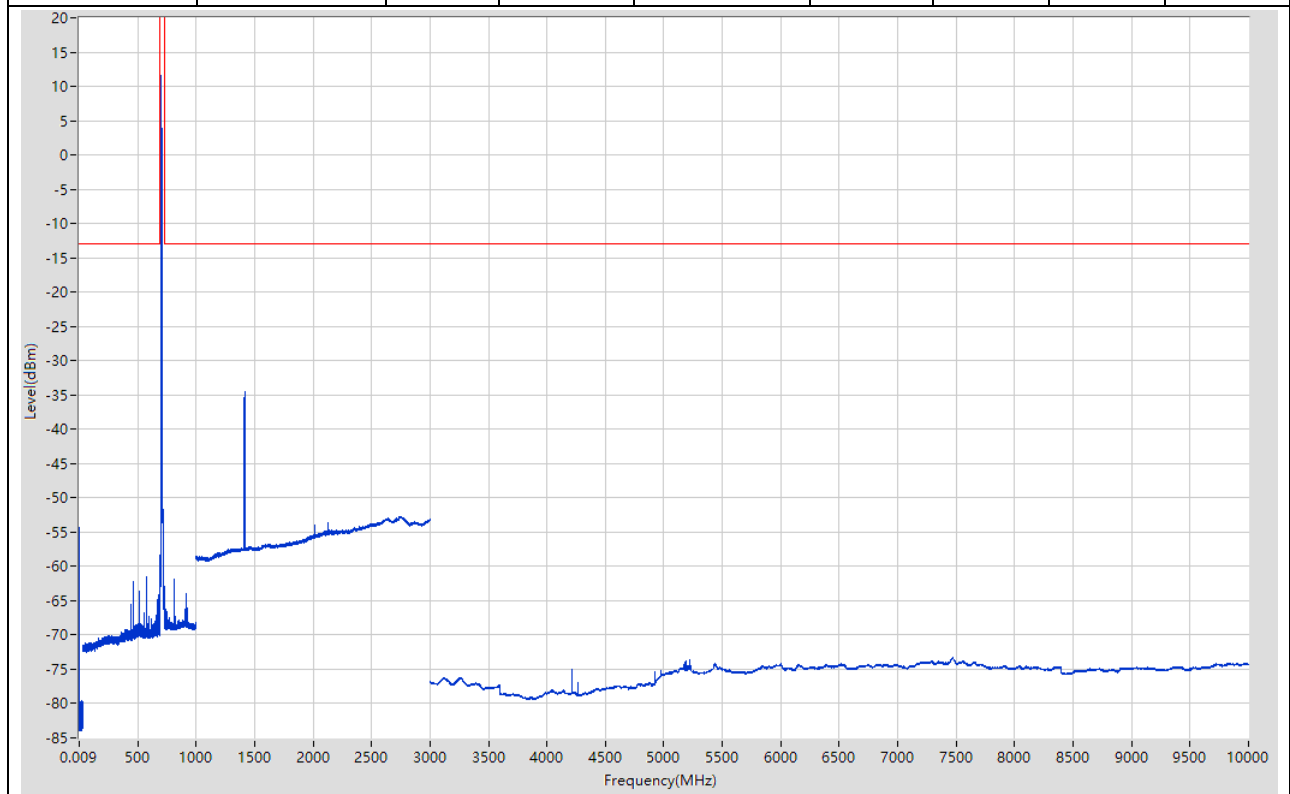

27.6. LTE-M1 Band85 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.51	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.04	-13	Pass	2985
30	688	0.1	RMS	659.796	-50.93	-13	Pass	6580
688	726	0.1	RMS	715.423	11.44	60	Pass	601
726	1000	0.1	RMS	734.003	-62.53	-13	Pass	2740
1000	3000	1	RMS	1431.216	-41.99	-13	Pass	2000
3000	10000	1	RMS	7469.639	-73.21	-13	Pass	7000

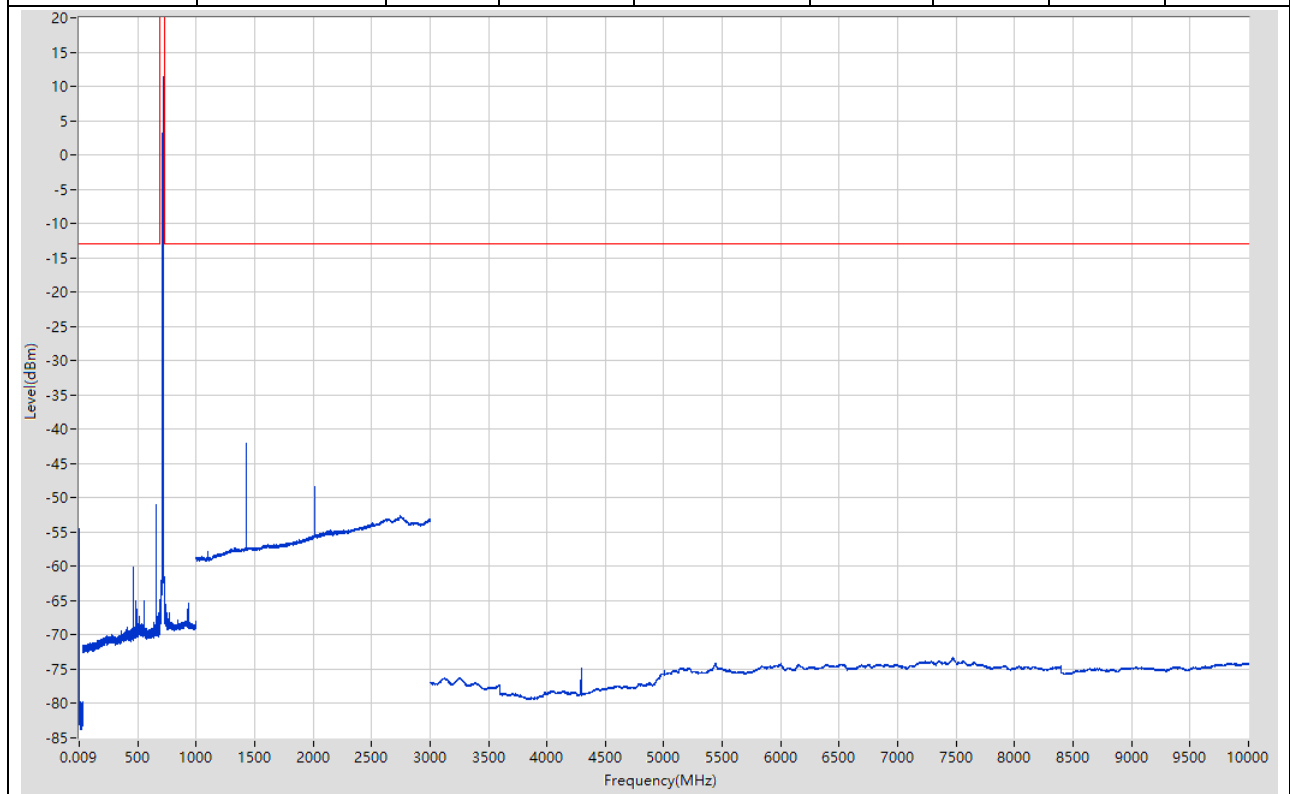

28. LTE-M1_Band85_16QAM


28.1. CAT -M1 Band85 5M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.91	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.64	-13	Pass	2985
30	688	0.1	RMS	682.999	-59.49	-13	Pass	6580
688	726	0.1	RMS	701.743	11.63	60	Pass	601
726	1000	0.1	RMS	917.77	-62.8	-13	Pass	2740
1000	3000	1	RMS	1405.203	-27.35	-13	Pass	2000
3000	10000	1	RMS	4918.274	-68.33	-13	Pass	7000

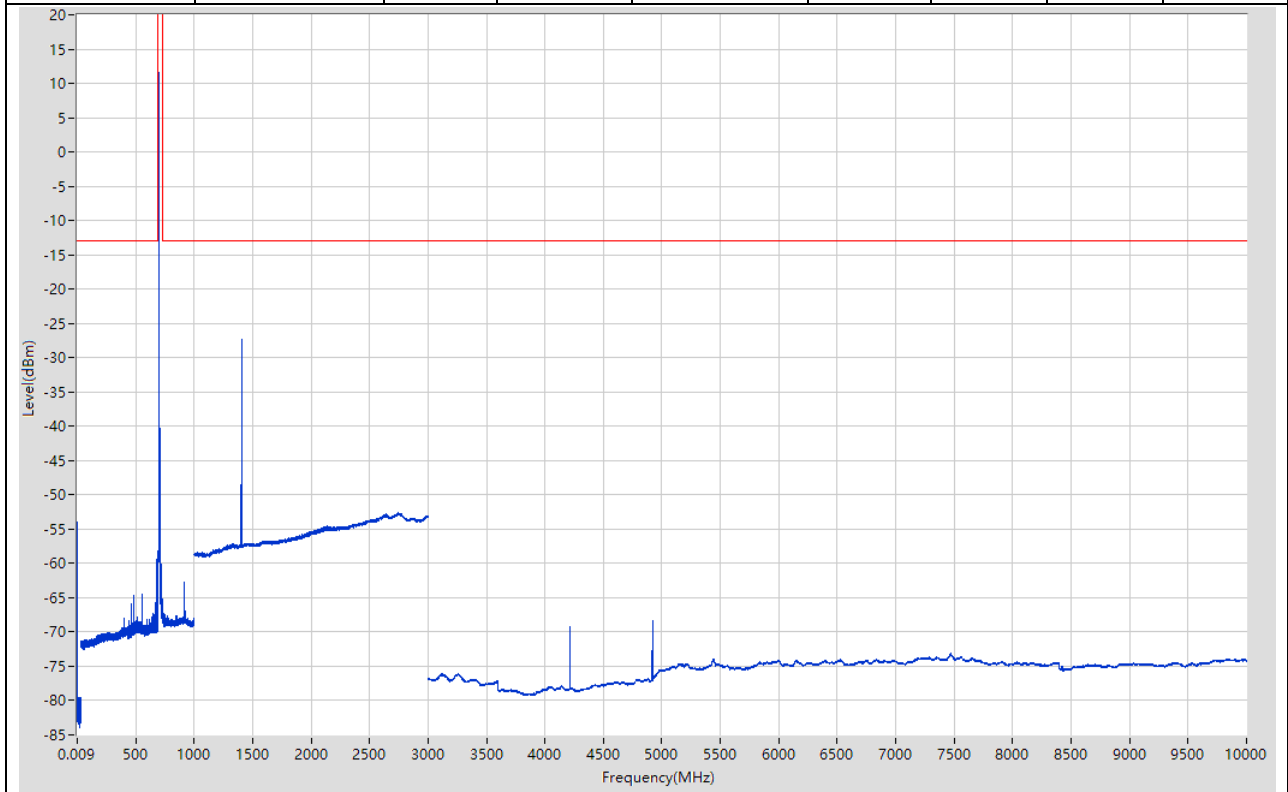


28.2. CAT -M1 Band85 5M Middle RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.08	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.16	-13	Pass	2985
30	688	0.1	RMS	460.765	-59.76	-13	Pass	6580
688	726	0.1	RMS	709.153	11.53	60	Pass	601
726	1000	0.1	RMS	727.901	-59.67	-13	Pass	2740
1000	3000	1	RMS	1417.209	-33.68	-13	Pass	2000
3000	10000	1	RMS	4957.28	-71.92	-13	Pass	7000

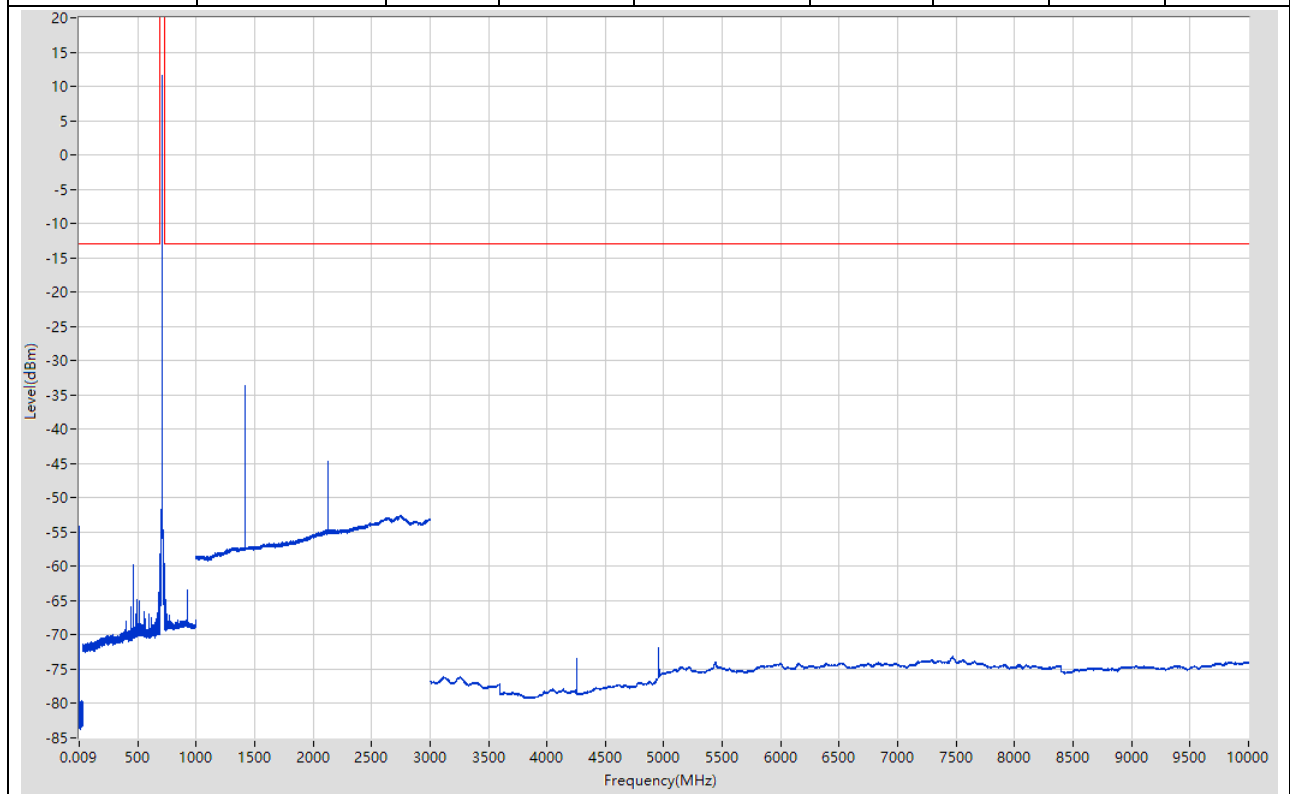


28.3. CAT -M1 Band85 5M High RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.24	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.56	-13	Pass	2985
30	688	0.1	RMS	460.865	-61.65	-13	Pass	6580
688	726	0.1	RMS	715.677	11.33	60	Pass	601
726	1000	0.1	RMS	734.403	-60.55	-13	Pass	2740
1000	3000	1	RMS	1430.215	-37.36	-13	Pass	2000
3000	10000	1	RMS	5180.311	-71.7	-13	Pass	7000

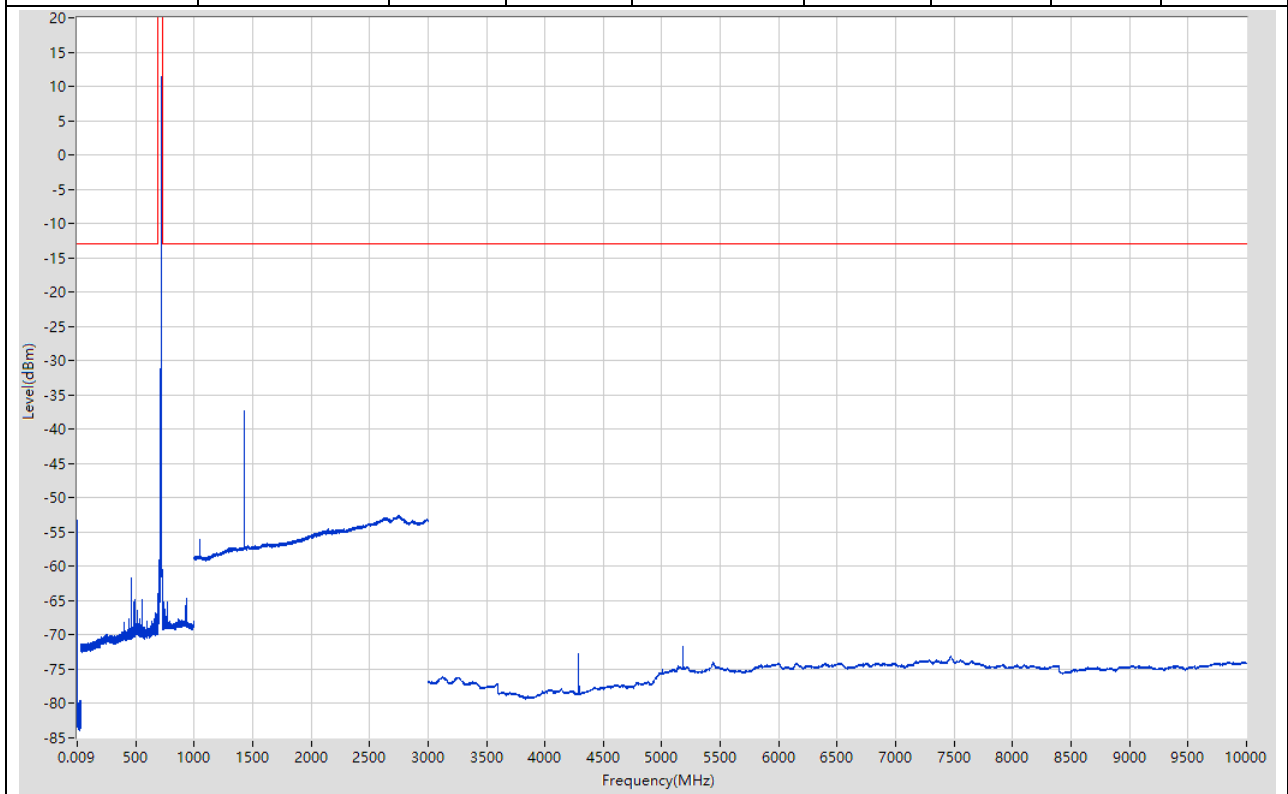


28.4. CAT -M1 Band85 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.73	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.68	-13	Pass	2985
30	688	0.1	RMS	687.2	-60.04	-13	Pass	6580
688	726	0.1	RMS	701.997	11.63	60	Pass	601
726	1000	0.1	RMS	913.668	-63.29	-13	Pass	2740
1000	3000	1	RMS	1405.203	-34.42	-13	Pass	2000
3000	10000	1	RMS	4914.273	-62.47	-13	Pass	7000

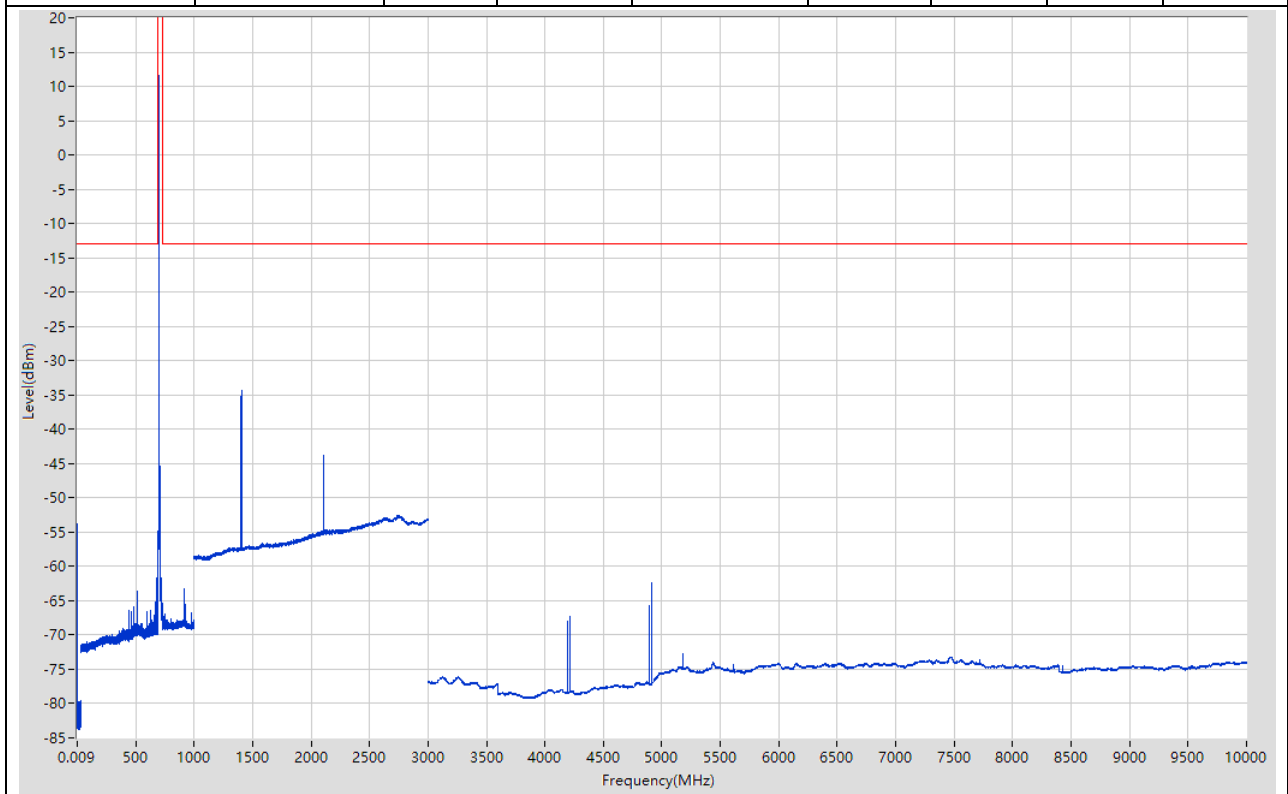


28.5. CAT -M1 Band85 10M Low RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.13	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.12	-13	Pass	2985
30	688	0.1	RMS	687.3	-58.36	-13	Pass	6580
688	726	0.1	RMS	711.433	11.36	60	Pass	601
726	1000	0.1	RMS	727	-63.36	-13	Pass	2740
1000	3000	1	RMS	1422.211	-29.37	-13	Pass	2000
3000	10000	1	RMS	4236.177	-71.19	-13	Pass	7000

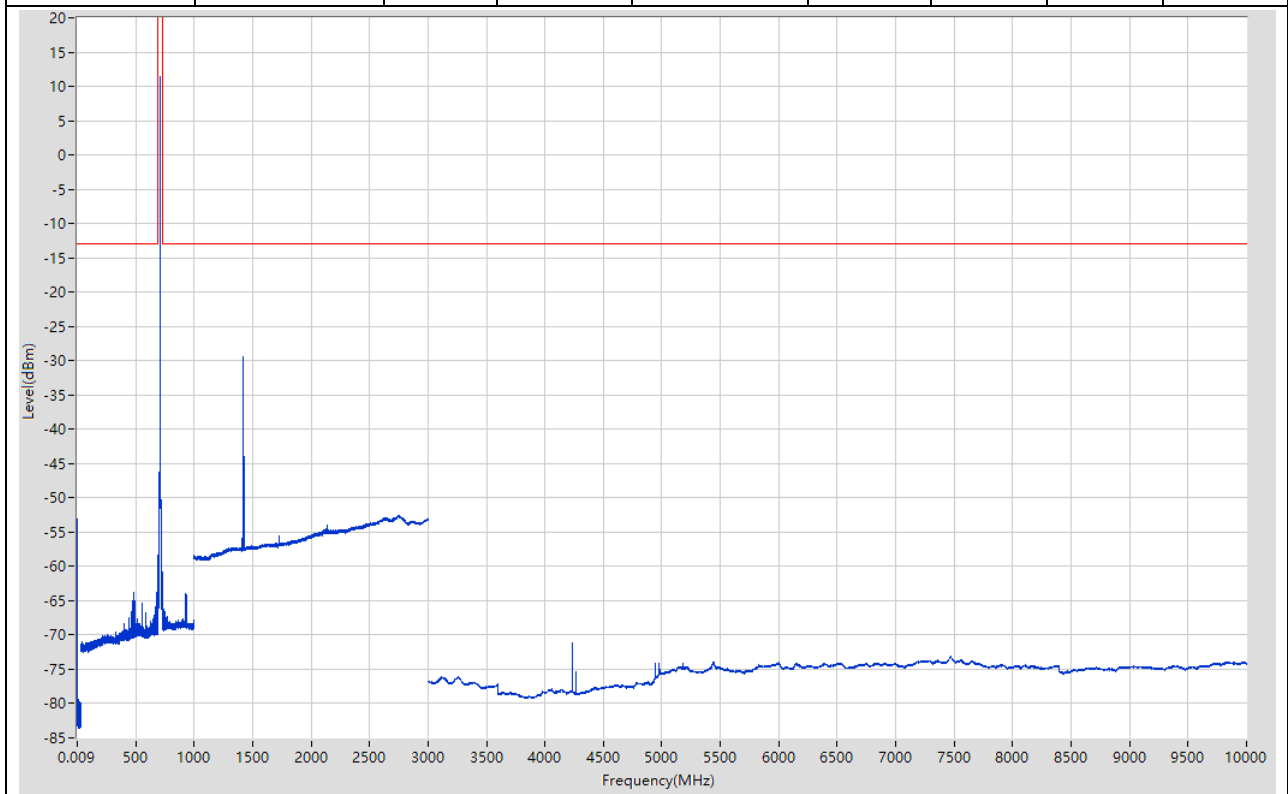

28.6. LTE-M1 Band85 10M High RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.55	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.68	-13	Pass	2985
30	688	0.1	RMS	460.865	-62.82	-13	Pass	6580
688	726	0.1	RMS	706.62	11.58	60	Pass	601
726	1000	0.1	RMS	726.3	-60.64	-13	Pass	2740
1000	3000	1	RMS	2741.871	-52.63	-13	Pass	2000
3000	10000	1	RMS	7472.639	-73.17	-13	Pass	7000

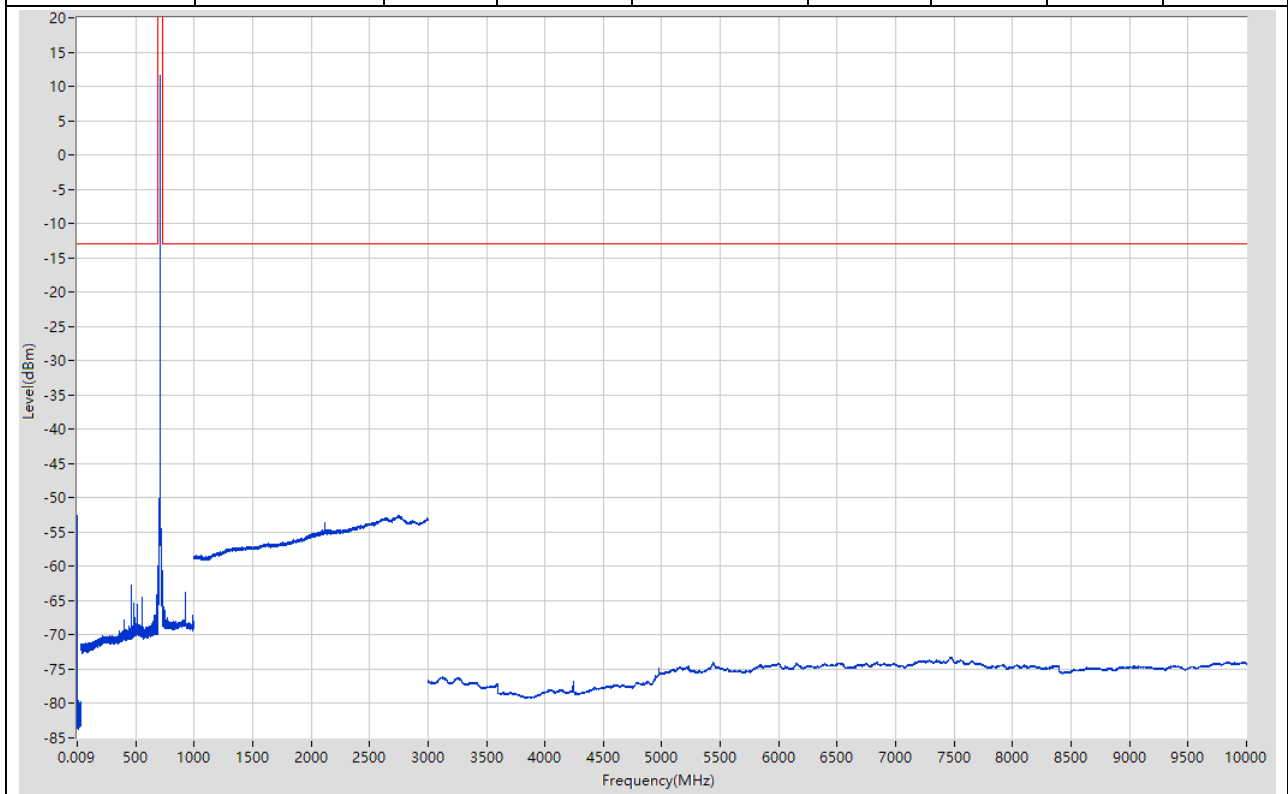

29. NB-IOT_Band2


29.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.44	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.9	-13	Pass	2985
30	1000	0.1	RMS	616.66	-58.73	-13	Pass	9700
1000	1840	1	RMS	1830.989	-48.21	-13	Pass	840
1840	1920	1	RMS	1850	21.79	60	Pass	601
1920	3000	1	RMS	2026.098	-45.75	-13	Pass	1080
3000	20000	1	RMS	3700.041	-42.59	-13	Pass	17000

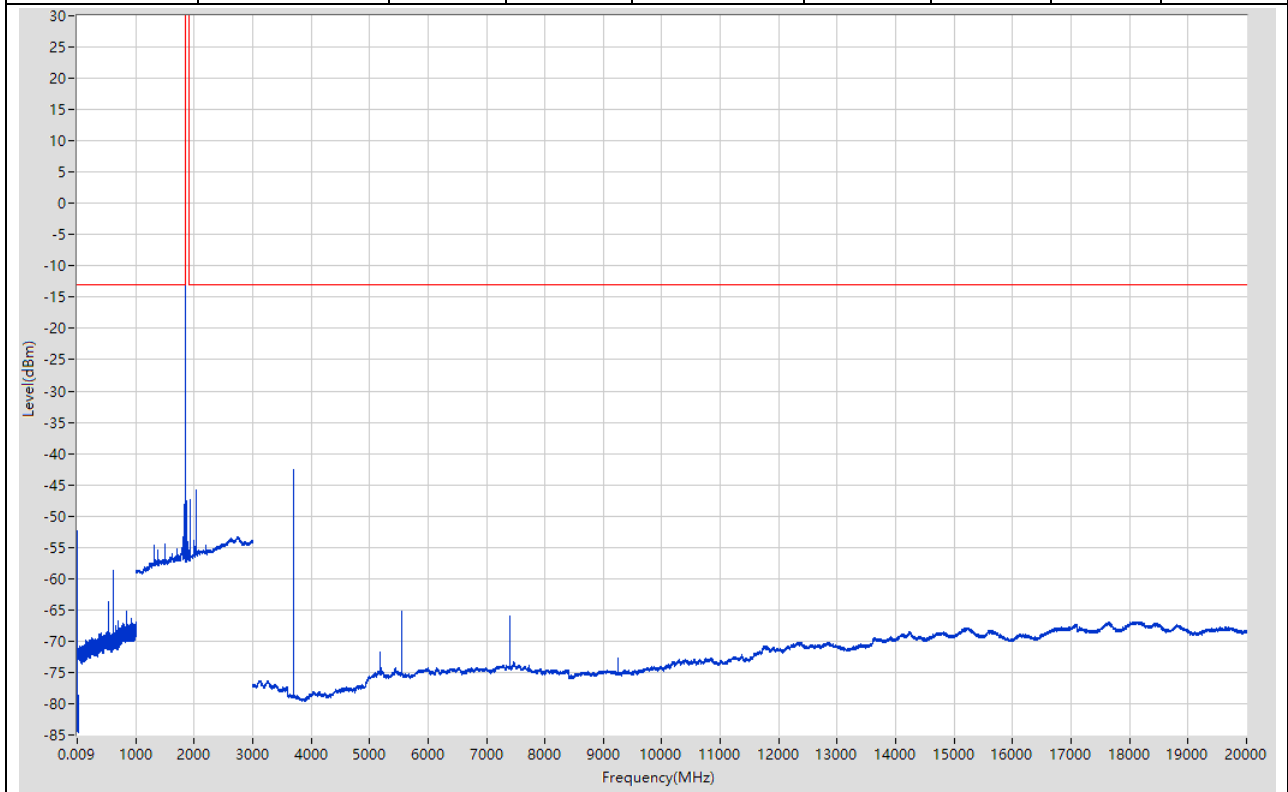


29.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.52	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.87	-13	Pass	2985
30	1000	0.1	RMS	697.969	-63.3	-13	Pass	9700
1000	1840	1	RMS	1673.802	-44.95	-13	Pass	840
1840	1920	1	RMS	1850	21.87	60	Pass	601
1920	3000	1	RMS	2026.098	-45.97	-13	Pass	1080
3000	20000	1	RMS	5550.15	-63.35	-13	Pass	17000

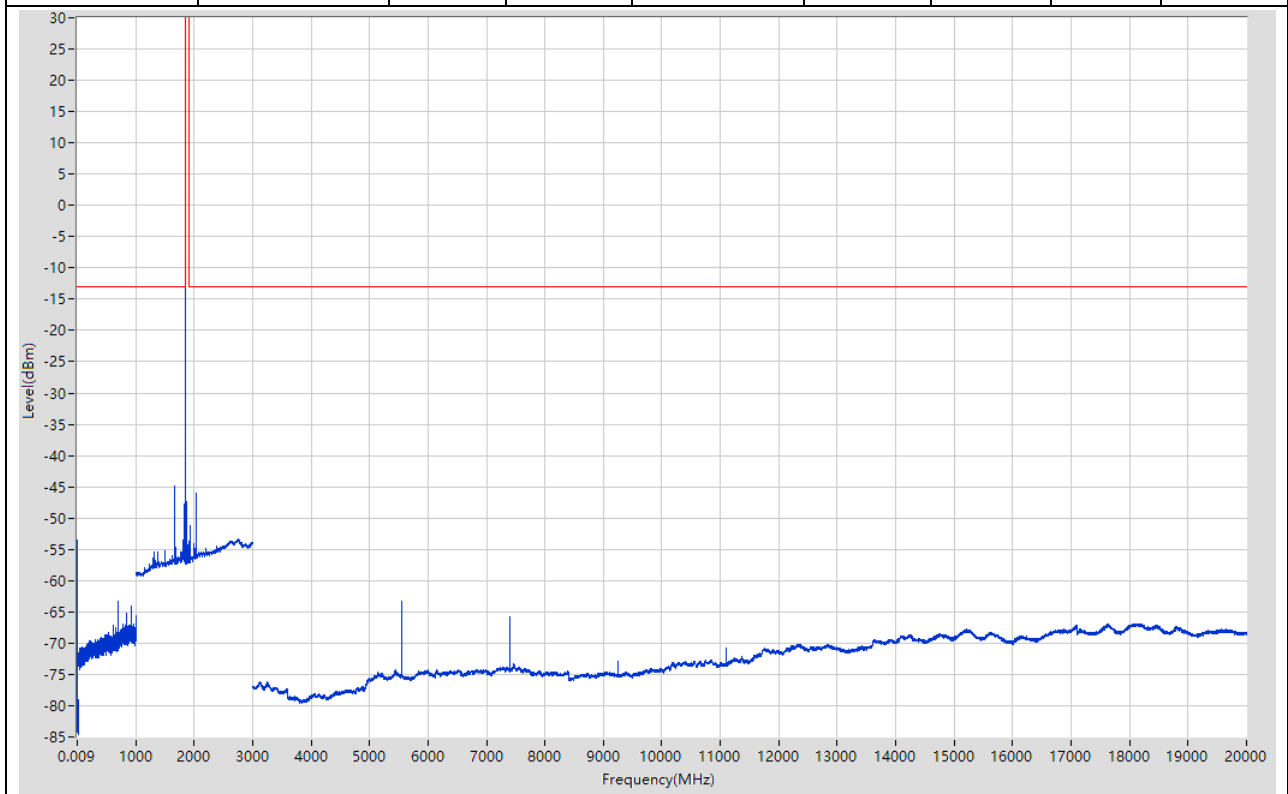


29.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.03	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.37	-13	Pass	2985
30	1000	0.1	RMS	881.488	-62.92	-13	Pass	9700
1000	1840	1	RMS	1700.834	-43.5	-13	Pass	840
1840	1920	1	RMS	1880.133	21.11	60	Pass	601
1920	3000	1	RMS	2059.129	-46.43	-13	Pass	1080
3000	20000	1	RMS	3760.045	-43.38	-13	Pass	17000

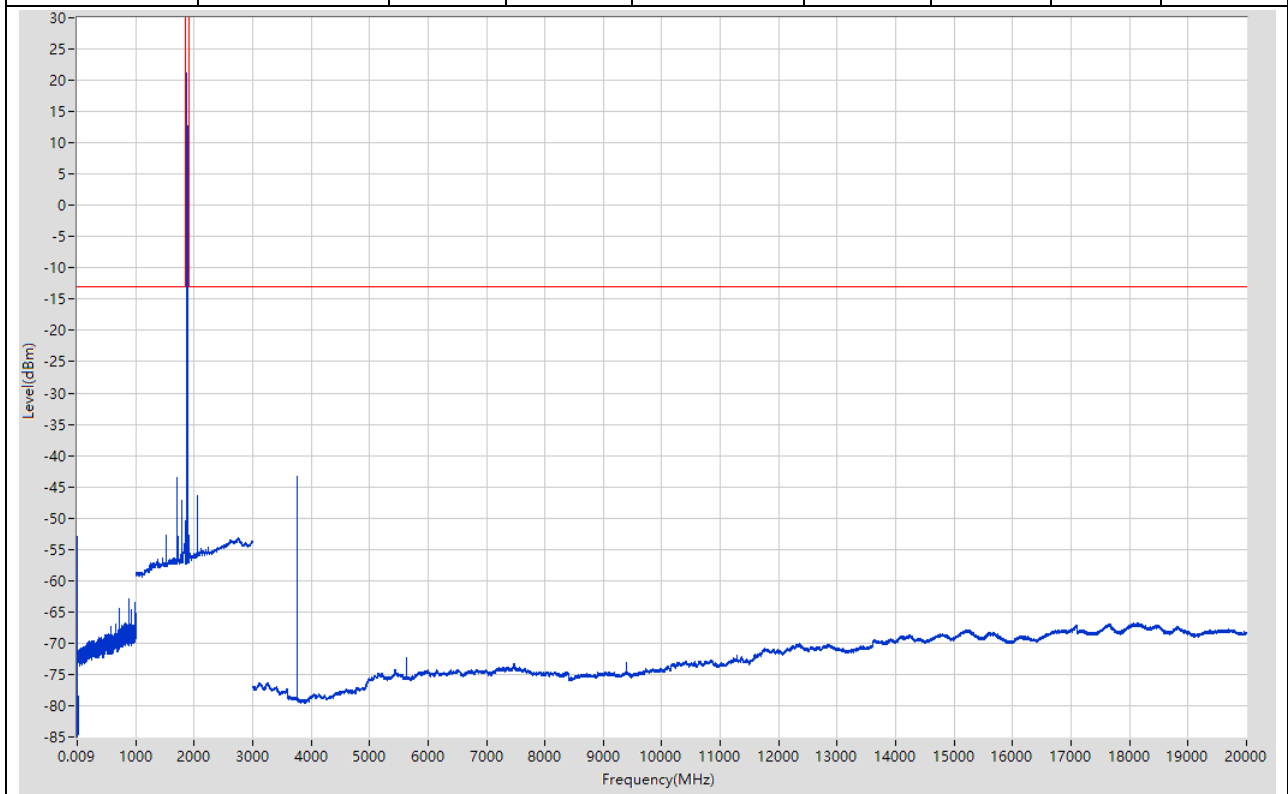


29.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.49	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.41	-13	Pass	2985
30	1000	0.1	RMS	921.592	-62.96	-13	Pass	9700
1000	1840	1	RMS	1700.834	-43.34	-13	Pass	840
1840	1920	1	RMS	1879.867	21.35	60	Pass	601
1920	3000	1	RMS	2059.129	-45.7	-13	Pass	1080
3000	20000	1	RMS	3760.045	-46.09	-13	Pass	17000

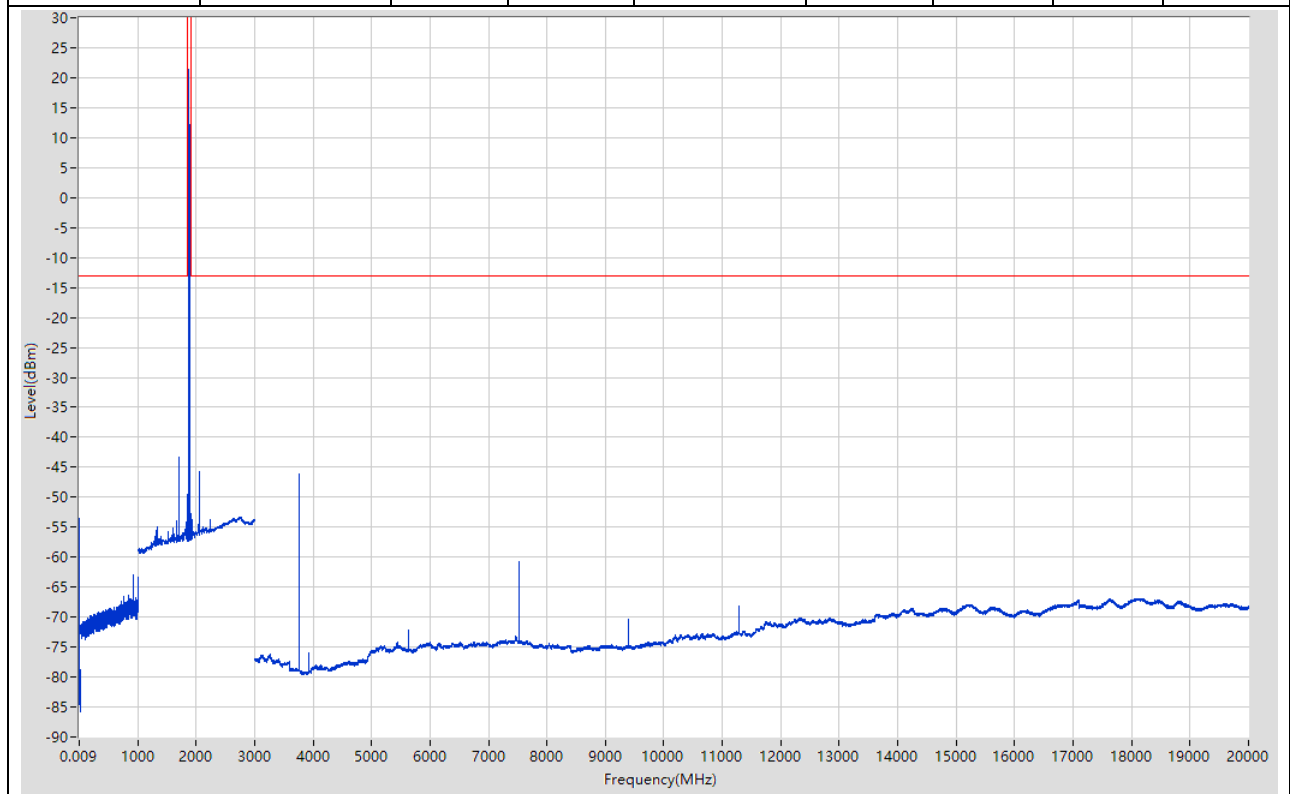


29.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.9	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.75	-13	Pass	2985
30	1000	0.1	RMS	909.491	-60.93	-13	Pass	9700
1000	1840	1	RMS	1546.651	-52.51	-13	Pass	840
1840	1920	1	RMS	1909.867	22.29	60	Pass	601
1920	3000	1	RMS	2092.159	-44.87	-13	Pass	1080
3000	20000	1	RMS	3820.048	-49.67	-13	Pass	17000

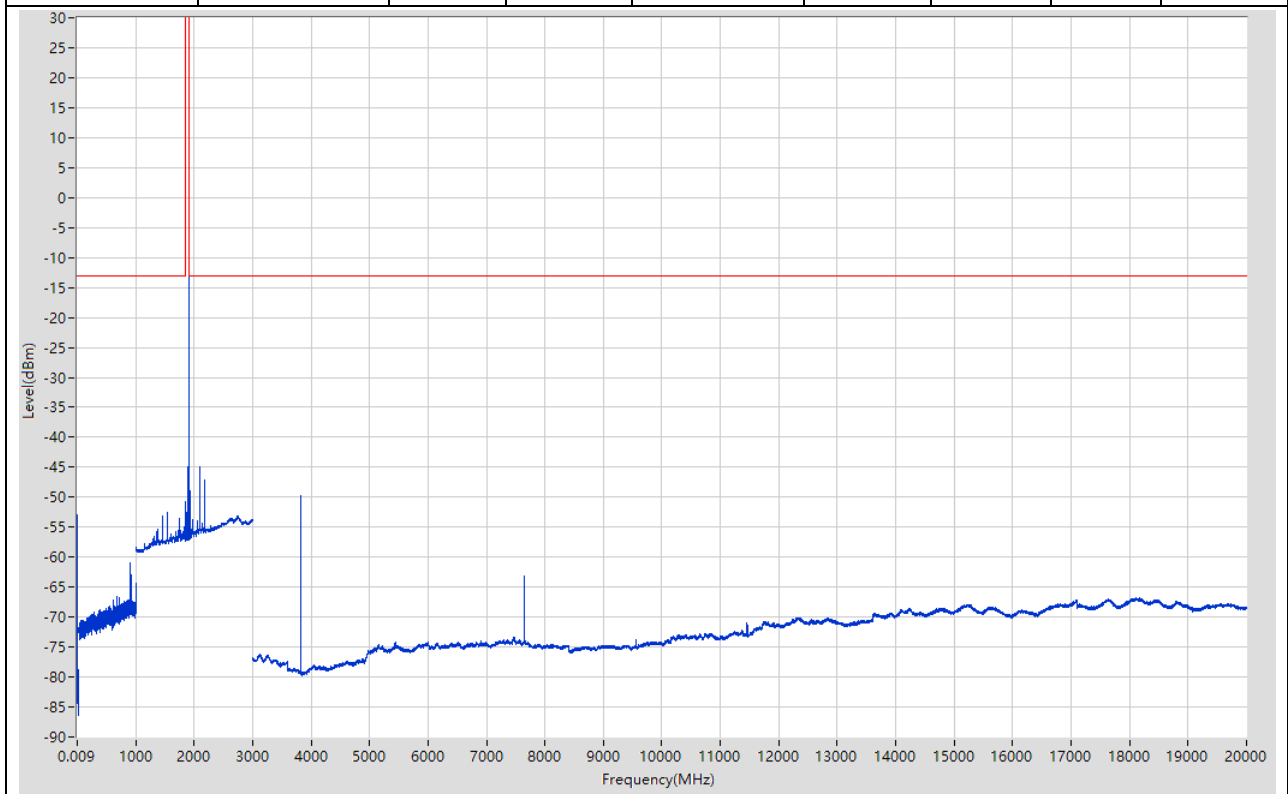


29.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.24	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.99	-13	Pass	2985
30	1000	0.1	RMS	911.391	-63.22	-13	Pass	9700
1000	1840	1	RMS	1727.867	-40.87	-13	Pass	840
1840	1920	1	RMS	1909.6	21.3	60	Pass	601
1920	3000	1	RMS	2092.159	-44.99	-13	Pass	1080
3000	20000	1	RMS	3820.048	-47.71	-13	Pass	17000

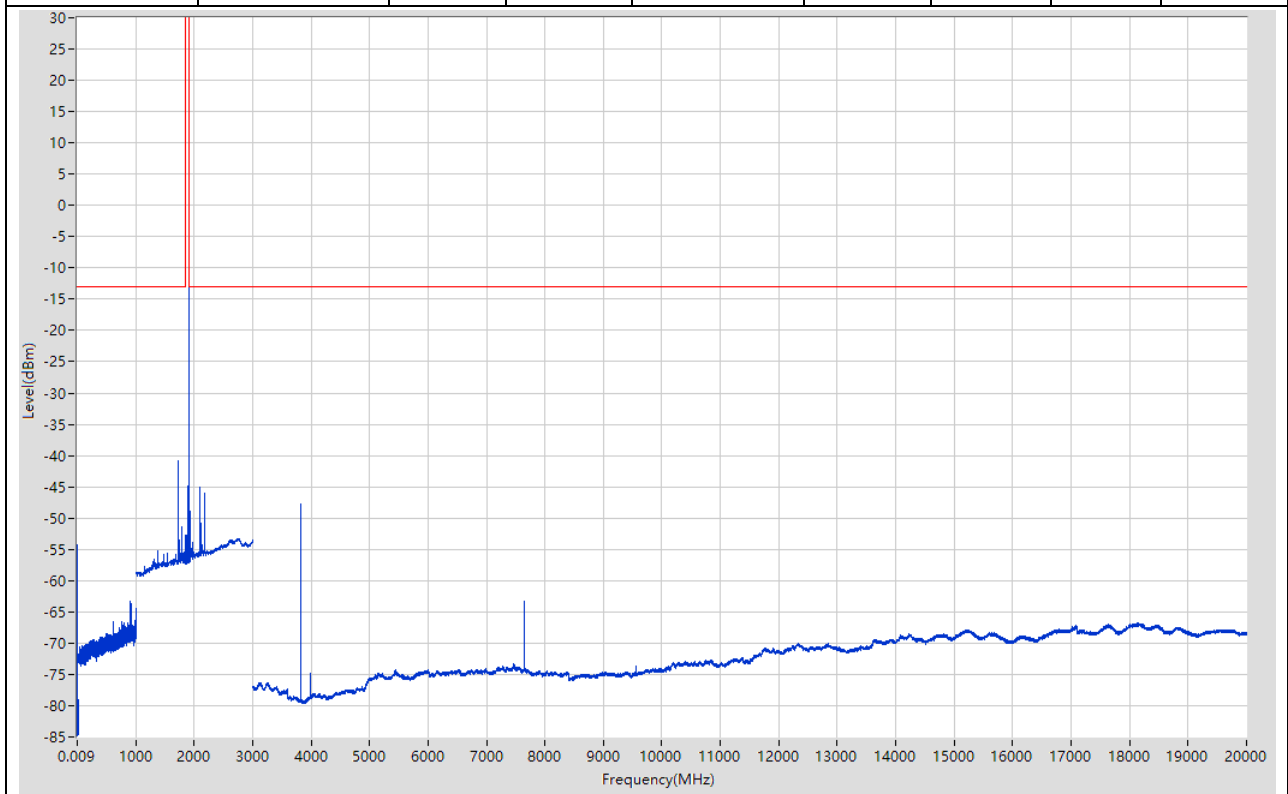


29.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.59	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.24	-13	Pass	2985
30	1000	0.1	RMS	847.284	-67.11	-13	Pass	9700
1000	1840	1	RMS	1829.988	-55.08	-13	Pass	840
1840	1920	1	RMS	1849.867	14.87	60	Pass	601
1920	3000	1	RMS	2026.098	-47.75	-13	Pass	1080
3000	20000	1	RMS	18114.889	-66.86	-13	Pass	17000

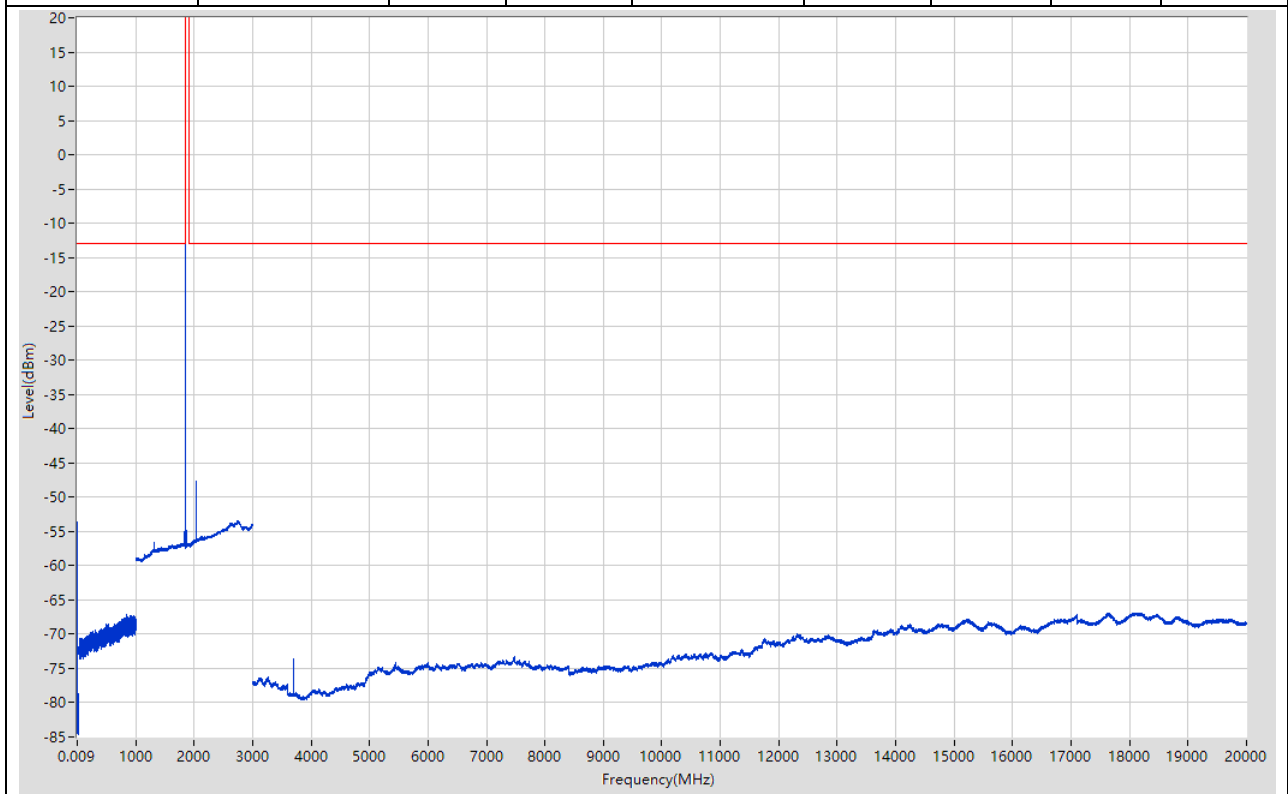


29.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.6	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.16	-13	Pass	2985
30	1000	0.1	RMS	851.685	-65.4	-13	Pass	9700
1000	1840	1	RMS	1672.801	-53.85	-13	Pass	840
1840	1920	1	RMS	1850.4	12.11	60	Pass	601
1920	3000	1	RMS	2743.763	-53.48	-13	Pass	1080
3000	20000	1	RMS	5550.15	-60.49	-13	Pass	17000

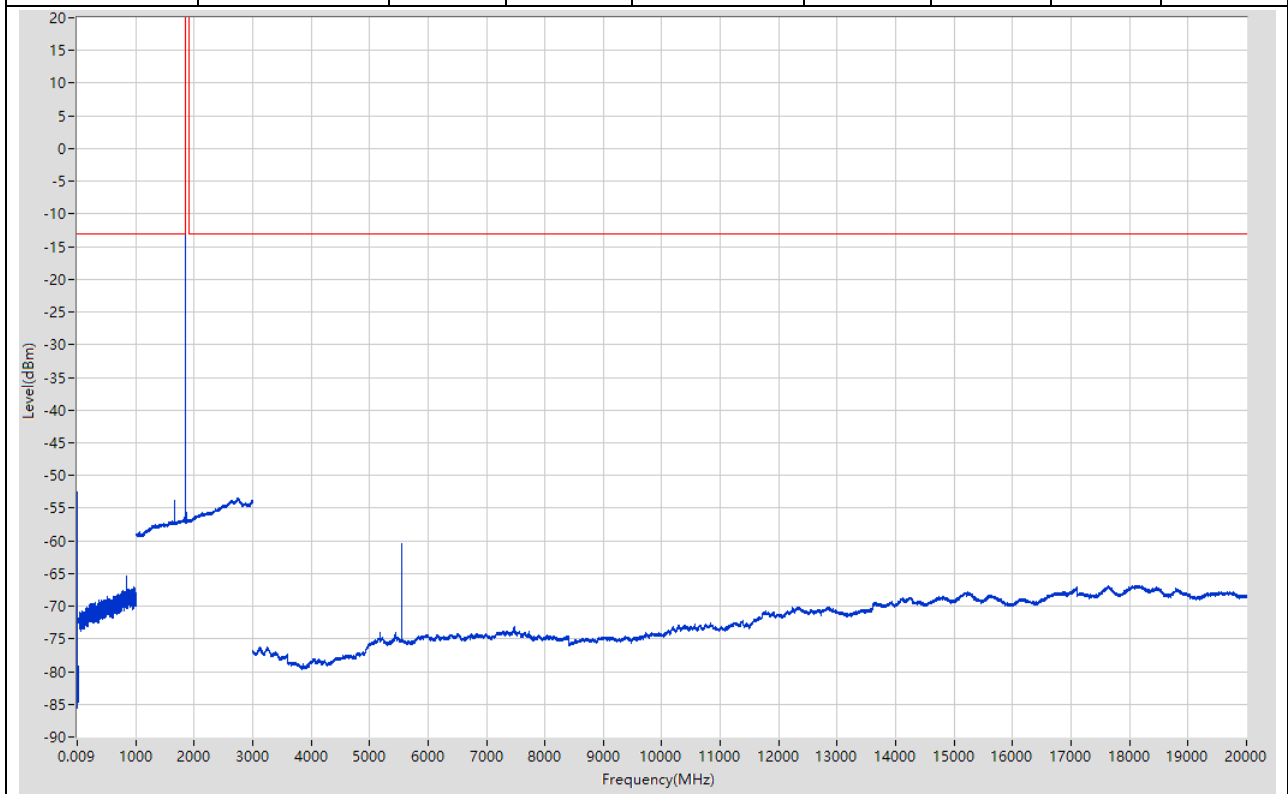


29.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.84	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.14	-13	Pass	2985
30	1000	0.1	RMS	823.982	-67.29	-13	Pass	9700
1000	1840	1	RMS	1838.999	-56.52	-13	Pass	840
1840	1920	1	RMS	1879.733	14.97	60	Pass	601
1920	3000	1	RMS	2743.763	-53.36	-13	Pass	1080
3000	20000	1	RMS	3760.045	-46.57	-13	Pass	17000

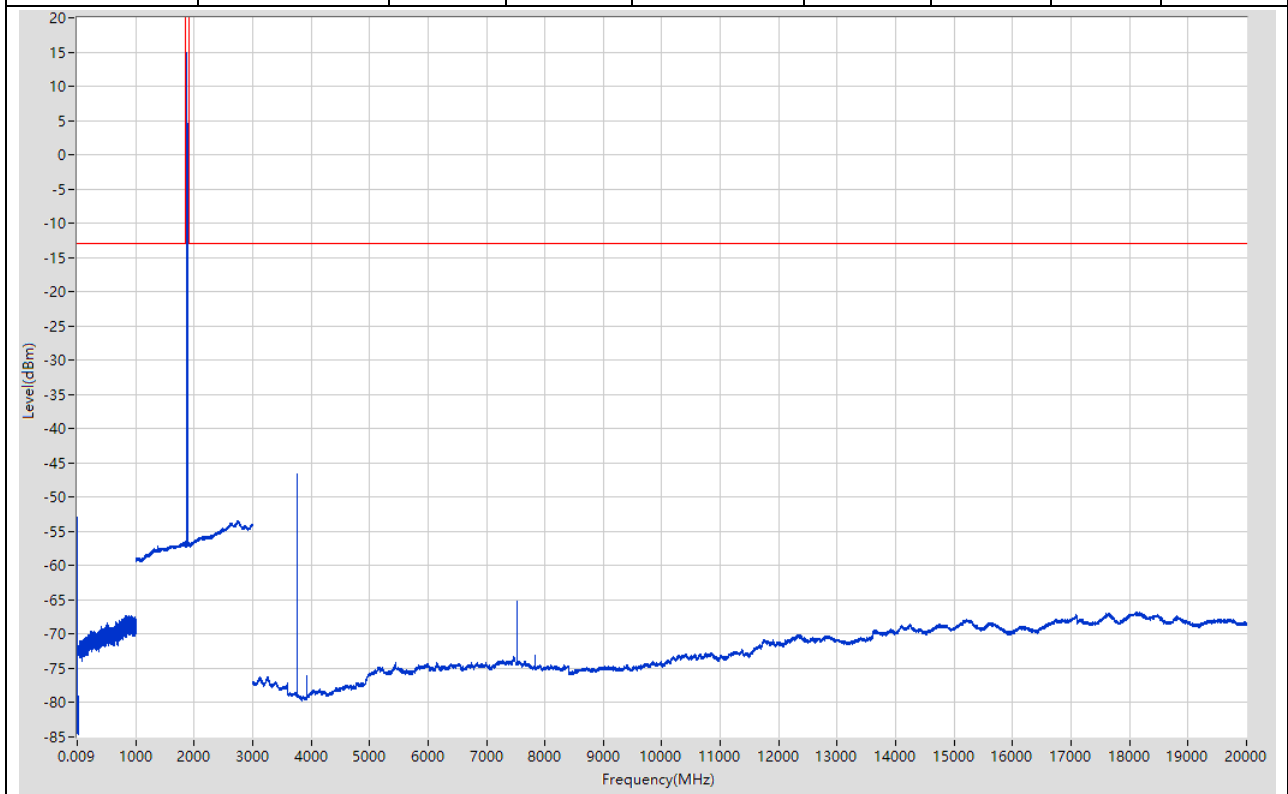


29.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.75	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.77	-13	Pass	2985
30	1000	0.1	RMS	916.391	-67.19	-13	Pass	9700
1000	1840	1	RMS	1382.455	-56.39	-13	Pass	840
1840	1920	1	RMS	1880.133	14.29	60	Pass	601
1920	3000	1	RMS	2748.767	-53.38	-13	Pass	1080
3000	20000	1	RMS	18128.89	-66.72	-13	Pass	17000

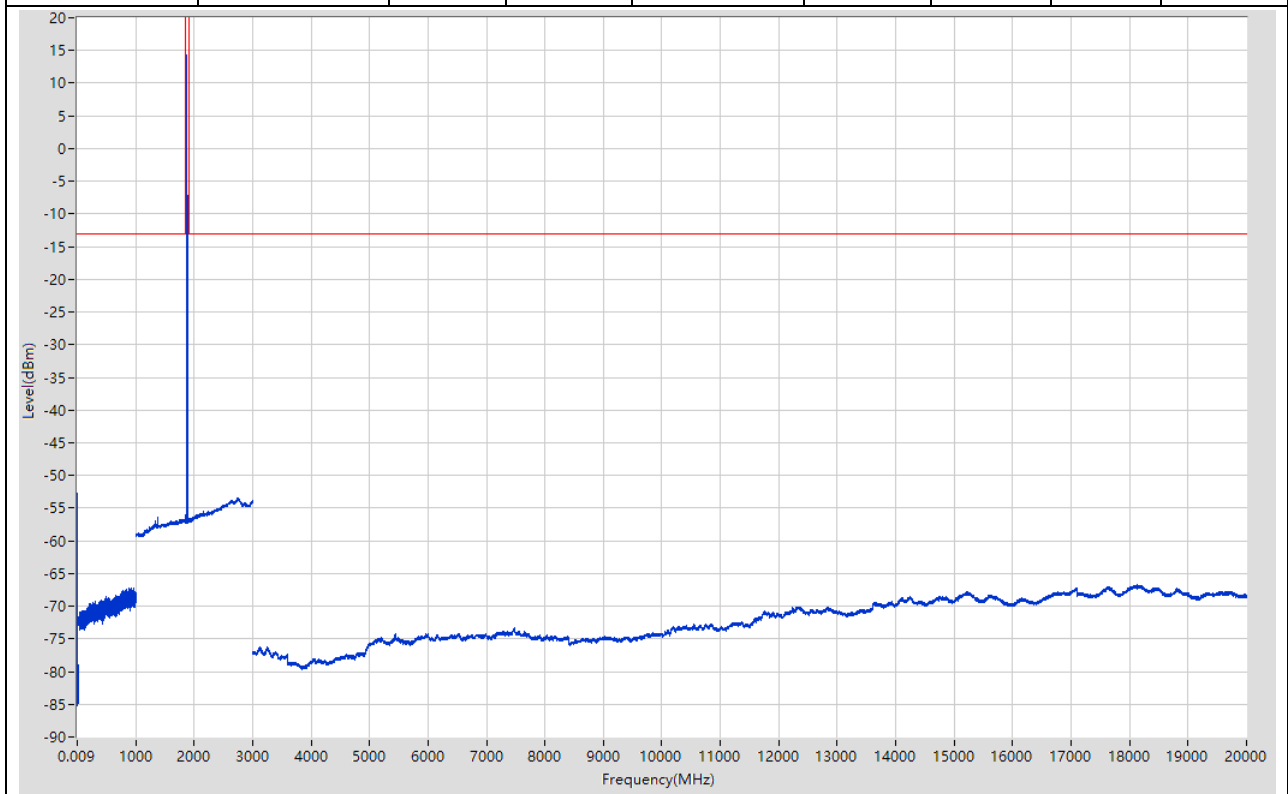


29.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-55.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.09	-13	Pass	2985
30	1000	0.1	RMS	912.991	-67.06	-13	Pass	9700
1000	1840	1	RMS	1832.992	-56.25	-13	Pass	840
1840	1920	1	RMS	1909.6	15.03	60	Pass	601
1920	3000	1	RMS	2743.763	-53.47	-13	Pass	1080
3000	20000	1	RMS	7639.273	-64.87	-13	Pass	17000

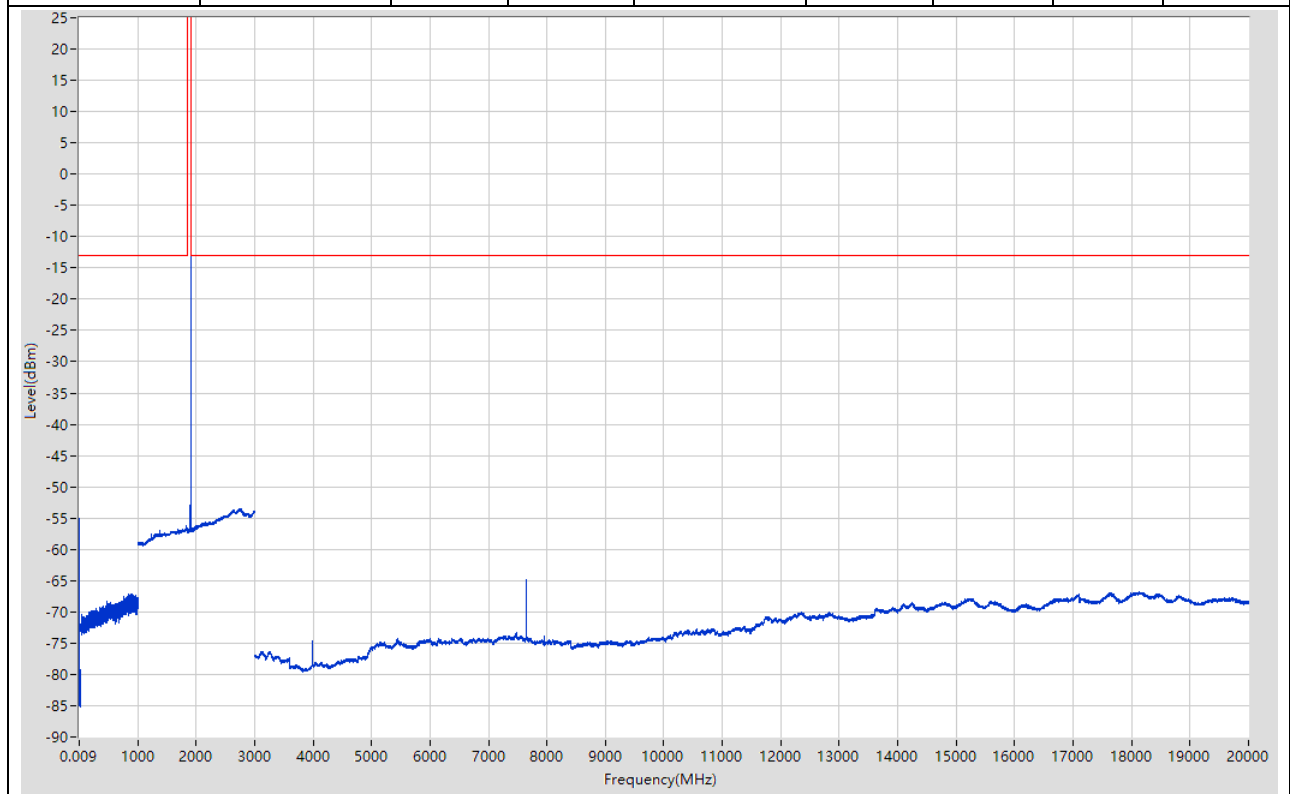

29.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.41	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.82	-13	Pass	2985
30	1000	0.1	RMS	767.976	-66.74	-13	Pass	9700
1000	1840	1	RMS	1728.868	-53.24	-13	Pass	840
1840	1920	1	RMS	1910.133	14.06	60	Pass	601
1920	3000	1	RMS	2746.766	-53.42	-13	Pass	1080
3000	20000	1	RMS	18096.888	-66.84	-13	Pass	17000

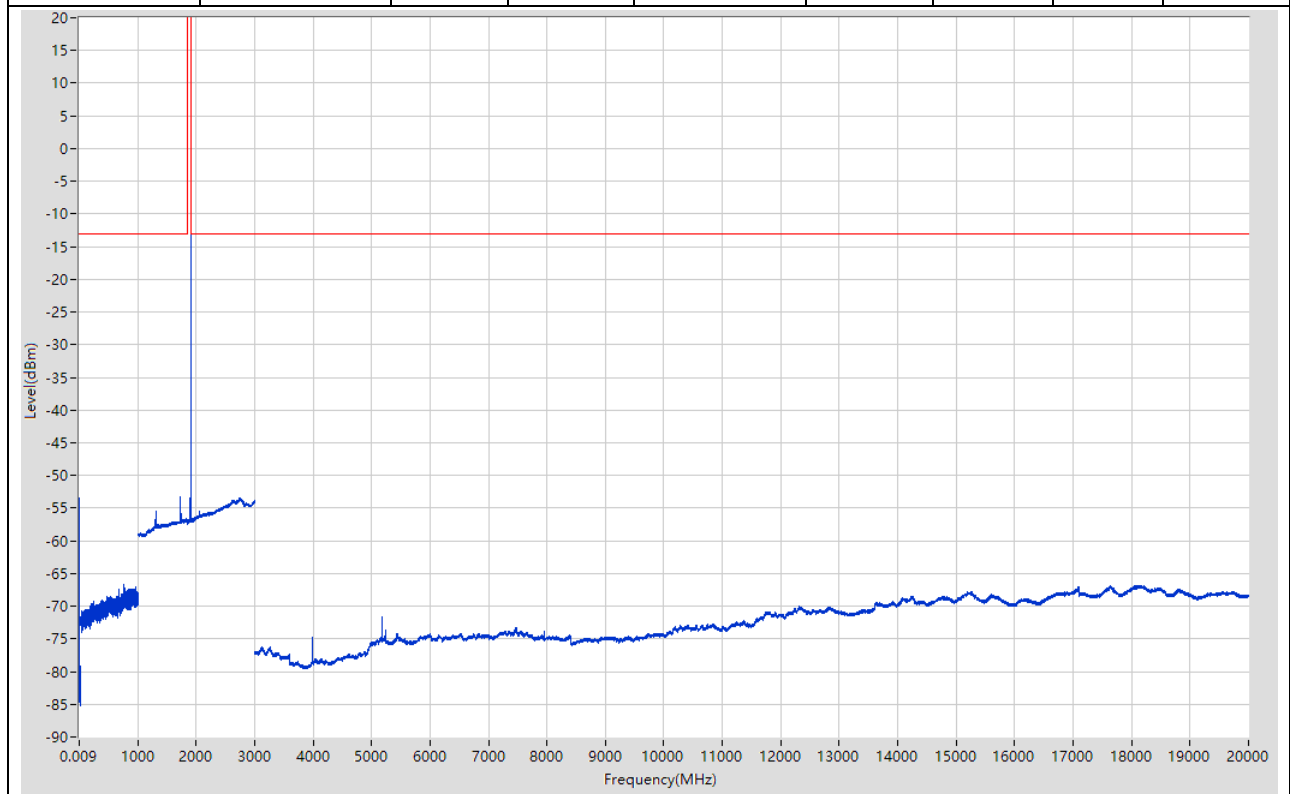

30. NB-IOT_Band4


30.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.92	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.16	-13	Pass	2985
30	1000	0.1	RMS	614.36	-66.36	-13	Pass	9700
1000	1700	1	RMS	1561.803	-43.61	-13	Pass	700
1700	1765	1	RMS	1709.967	20.61	60	Pass	601
1765	3000	1	RMS	2753.801	-53.16	-13	Pass	1235
3000	20000	1	RMS	3420.025	-26.46	-13	Pass	17000

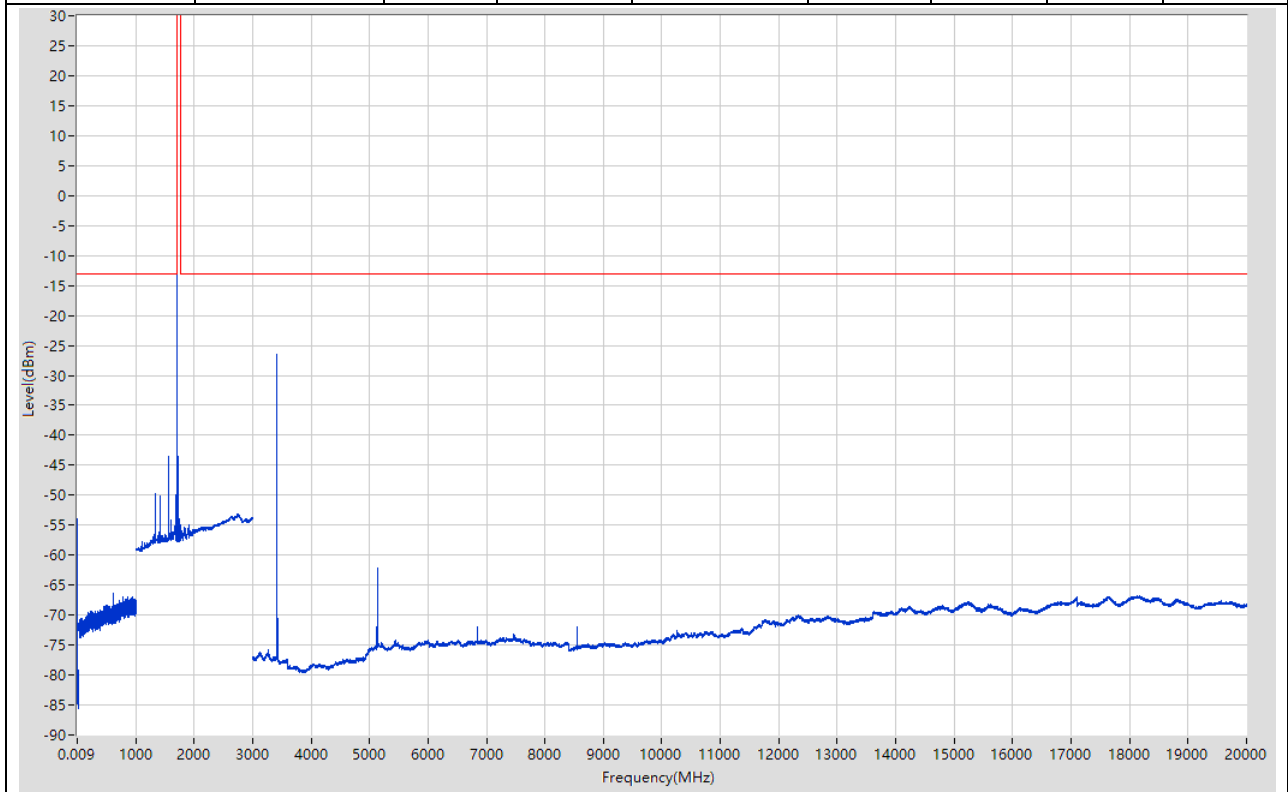


30.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.58	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.11	-13	Pass	2985
30	1000	0.1	RMS	743.474	-65.67	-13	Pass	9700
1000	1700	1	RMS	1486.695	-46.98	-13	Pass	700
1700	1765	1	RMS	1709.967	20.4	60	Pass	601
1765	3000	1	RMS	1864.08	-52.24	-13	Pass	1235
3000	20000	1	RMS	18125.89	-66.79	-13	Pass	17000

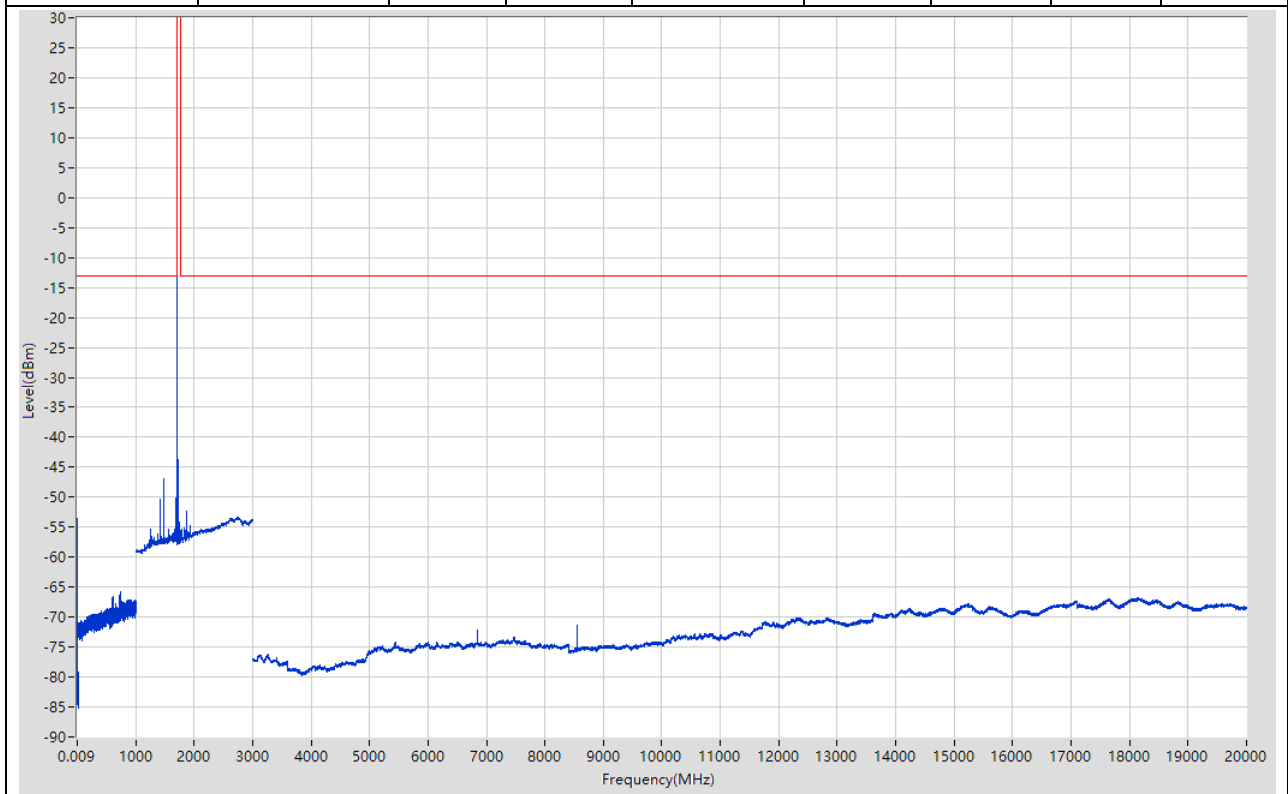


30.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.04	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.18	-13	Pass	2985
30	1000	0.1	RMS	614.36	-65.45	-13	Pass	9700
1000	1700	1	RMS	1581.831	-42.08	-13	Pass	700
1700	1765	1	RMS	1732.392	20.96	60	Pass	601
1765	3000	1	RMS	1883.096	-38.3	-13	Pass	1235
3000	20000	1	RMS	3465.027	-29.21	-13	Pass	17000

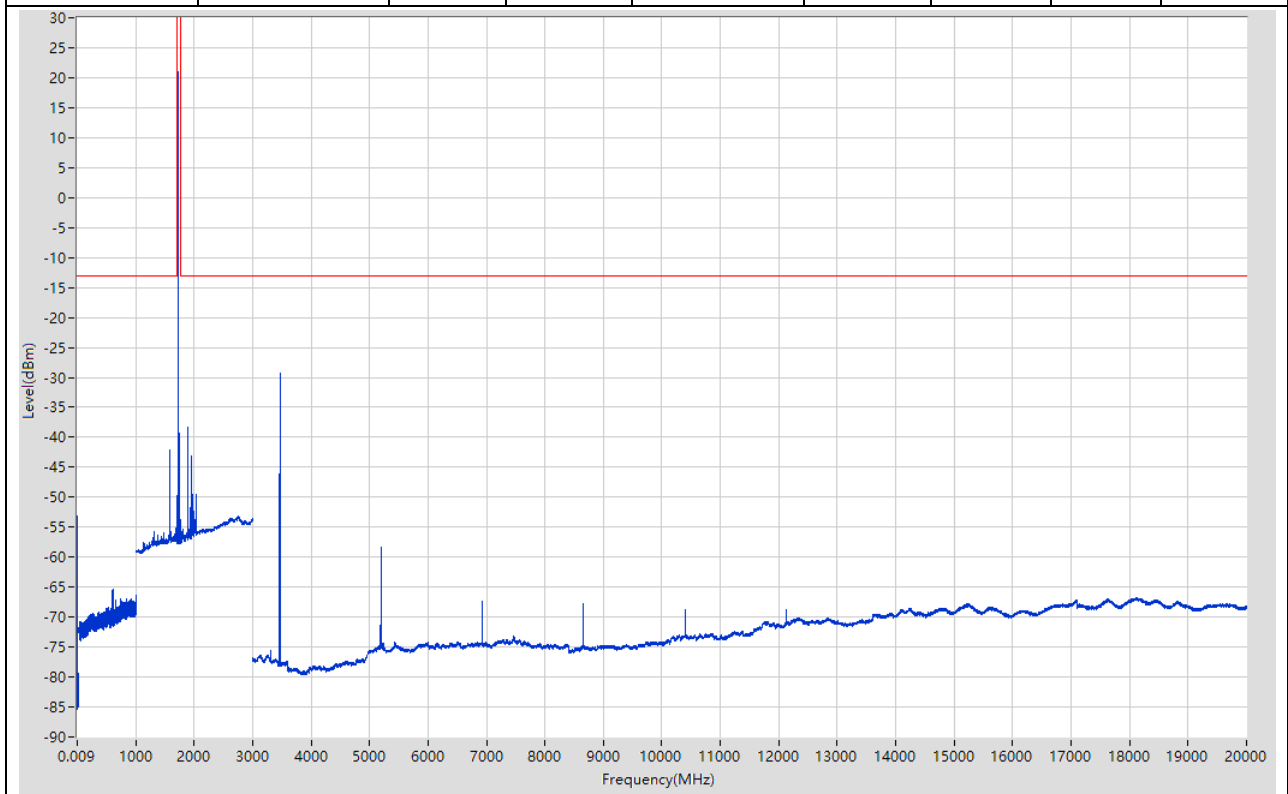


30.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.55	-13	Pass	2985
30	1000	0.1	RMS	527.251	-64.66	-13	Pass	9700
1000	1700	1	RMS	1581.831	-41.91	-13	Pass	700
1700	1765	1	RMS	1732.5	20.85	60	Pass	601
1765	3000	1	RMS	1883.096	-38.39	-13	Pass	1235
3000	20000	1	RMS	3465.027	-29.21	-13	Pass	17000

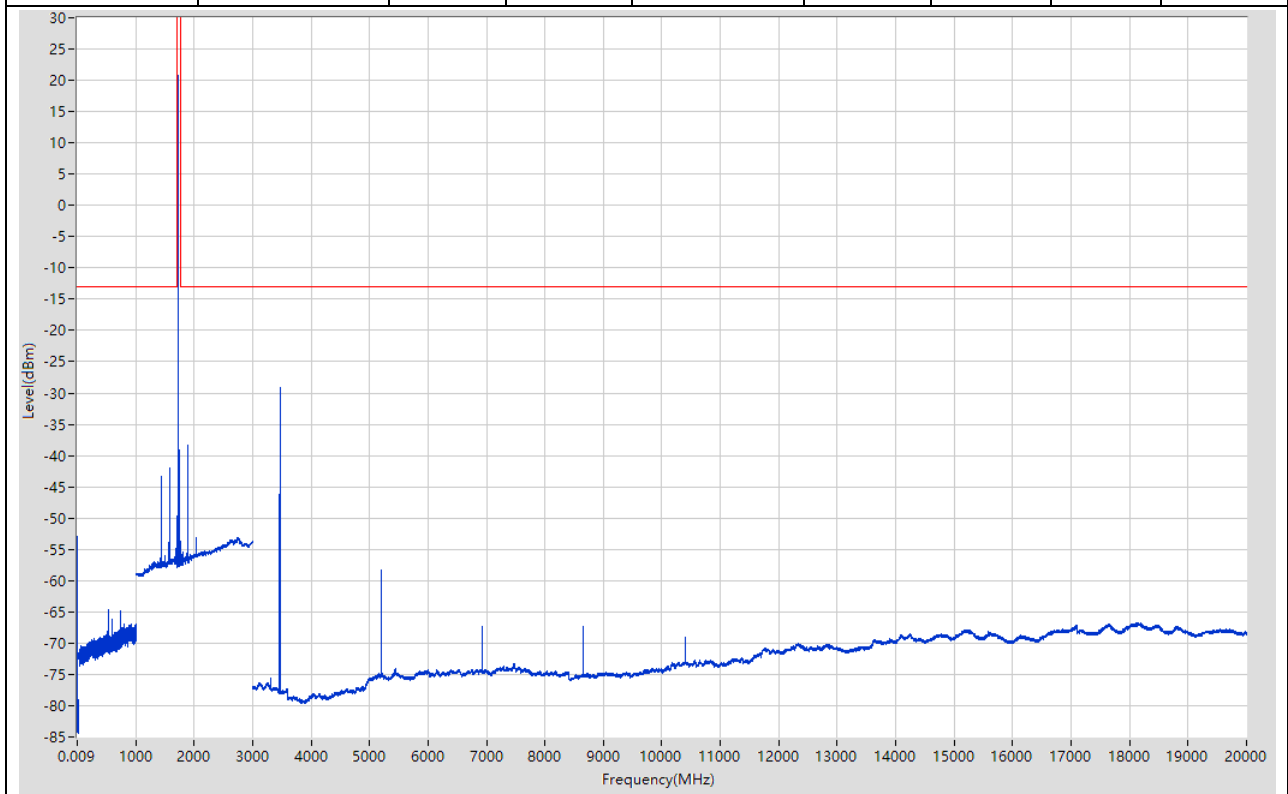


30.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.25	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.58	-13	Pass	2985
30	1000	0.1	RMS	610.36	-65.91	-13	Pass	9700
1000	1700	1	RMS	1601.86	-44.14	-13	Pass	700
1700	1765	1	RMS	1754.925	20.82	60	Pass	601
1765	3000	1	RMS	1907.115	-39.88	-13	Pass	1235
3000	20000	1	RMS	3510.03	-31.49	-13	Pass	17000

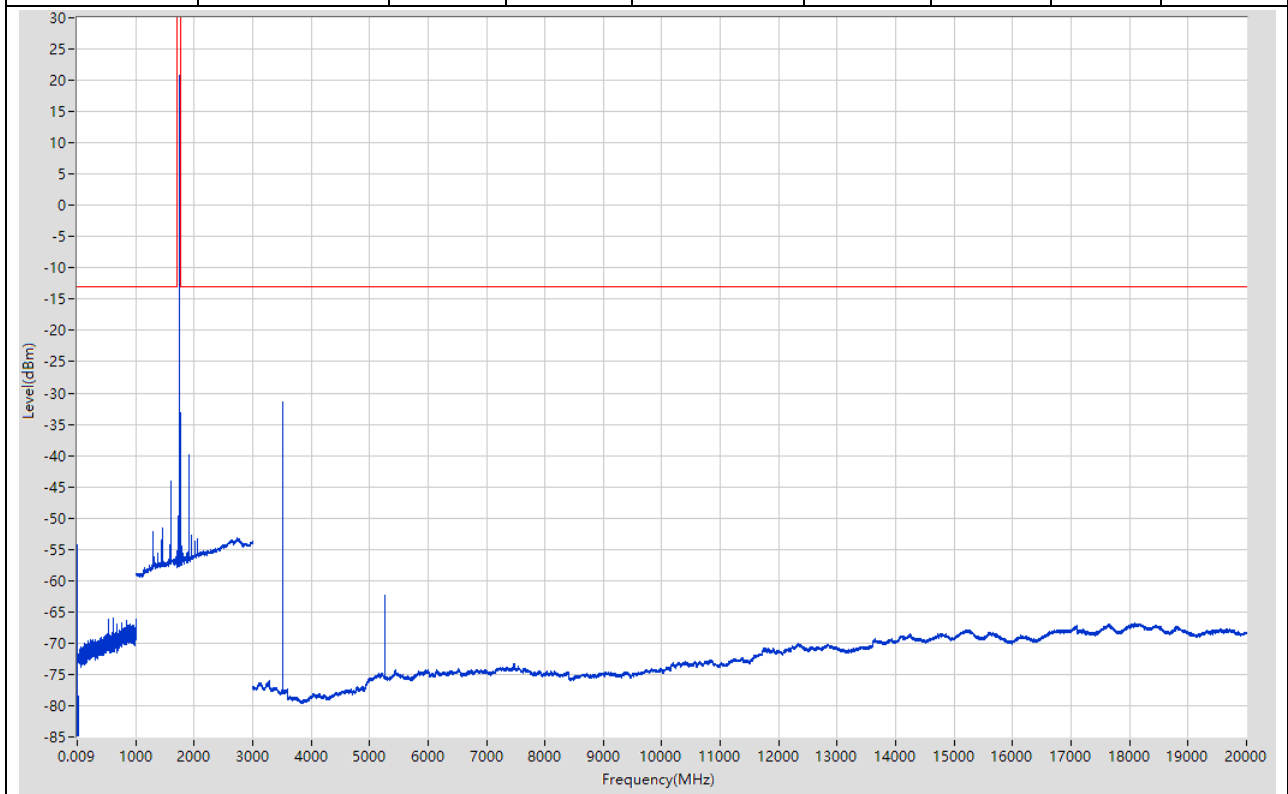


30.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-51.25	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.76	-13	Pass	2985
30	1000	0.1	RMS	756.375	-65.39	-13	Pass	9700
1000	1700	1	RMS	1601.86	-43.85	-13	Pass	700
1700	1765	1	RMS	1755.033	20.68	60	Pass	601
1765	3000	1	RMS	1765	-47.82	-13	Pass	1235
3000	20000	1	RMS	5264.133	-62.74	-13	Pass	17000

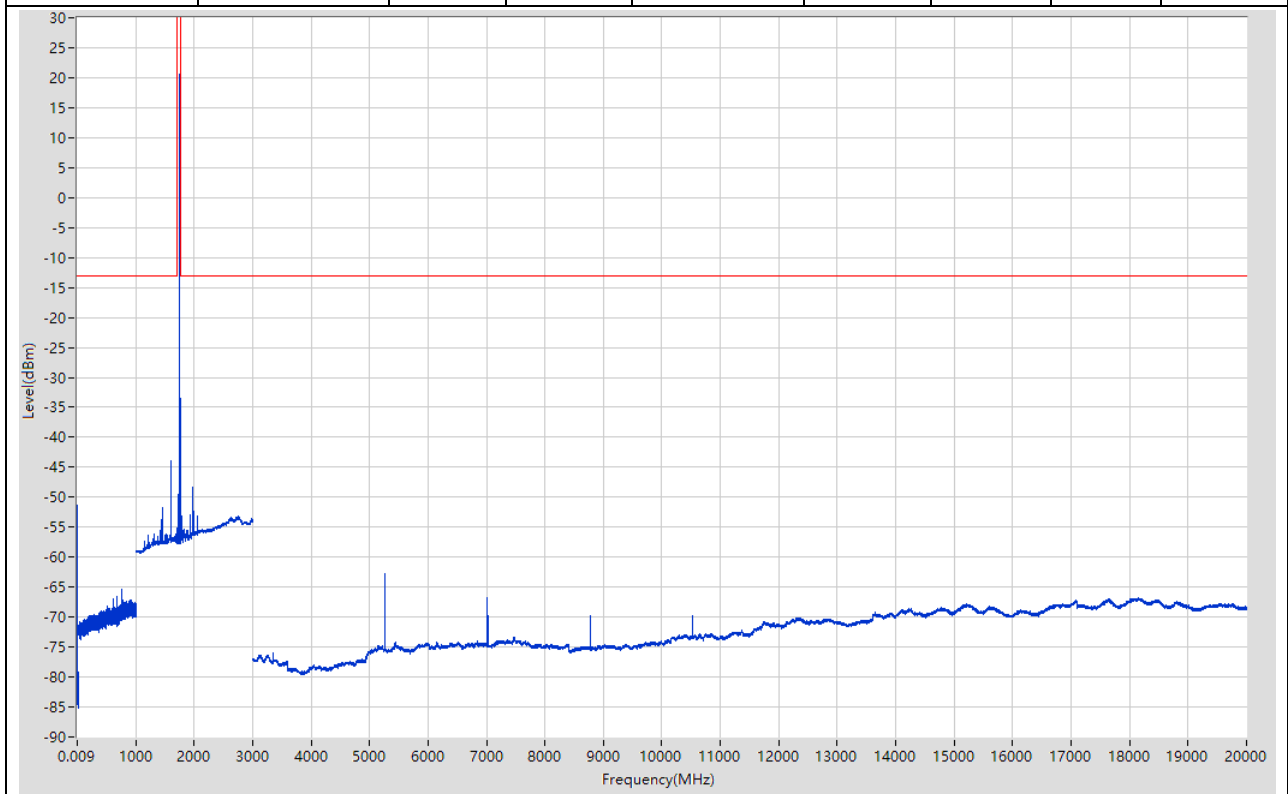


30.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.57	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.98	-13	Pass	2985
30	1000	0.1	RMS	889.389	-67.15	-13	Pass	9700
1000	1700	1	RMS	1411.588	-56.25	-13	Pass	700
1700	1765	1	RMS	1709.858	13.88	60	Pass	601
1765	3000	1	RMS	2748.797	-53.21	-13	Pass	1235
3000	20000	1	RMS	18155.892	-66.82	-13	Pass	17000

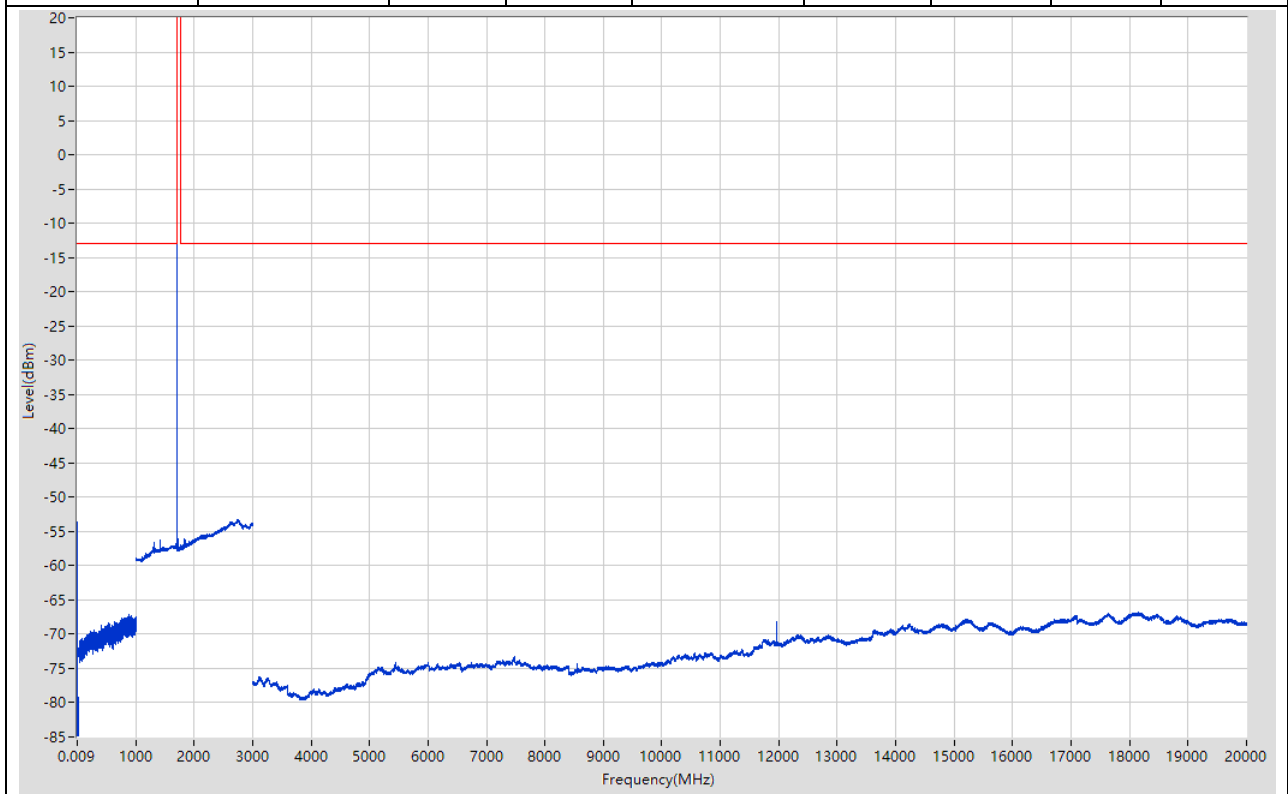


30.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.16	-13	Pass	601
0.15	30	0.01	RMS	0.17	-57.11	-13	Pass	2985
30	1000	0.1	RMS	919.692	-67.08	-13	Pass	9700
1000	1700	1	RMS	1560.801	-51.98	-13	Pass	700
1700	1765	1	RMS	1709.858	14.23	60	Pass	601
1765	3000	1	RMS	1859.076	-44.51	-13	Pass	1235
3000	20000	1	RMS	18124.89	-66.78	-13	Pass	17000

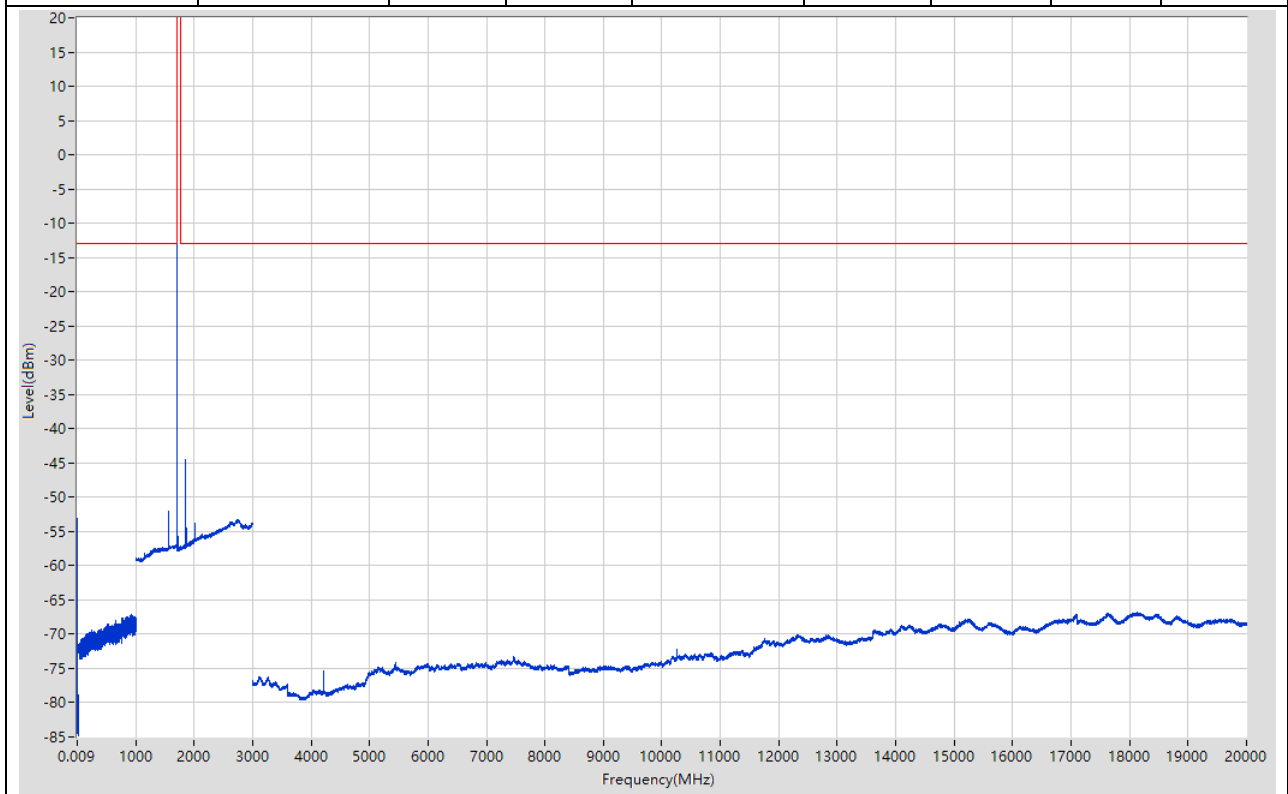


30.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.82	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.78	-13	Pass	2985
30	1000	0.1	RMS	810.881	-66.39	-13	Pass	9700
1000	1700	1	RMS	1581.831	-46.6	-13	Pass	700
1700	1765	1	RMS	1732.608	14.27	60	Pass	601
1765	3000	1	RMS	2747.796	-53.23	-13	Pass	1235
3000	20000	1	RMS	3466.027	-48.57	-13	Pass	17000

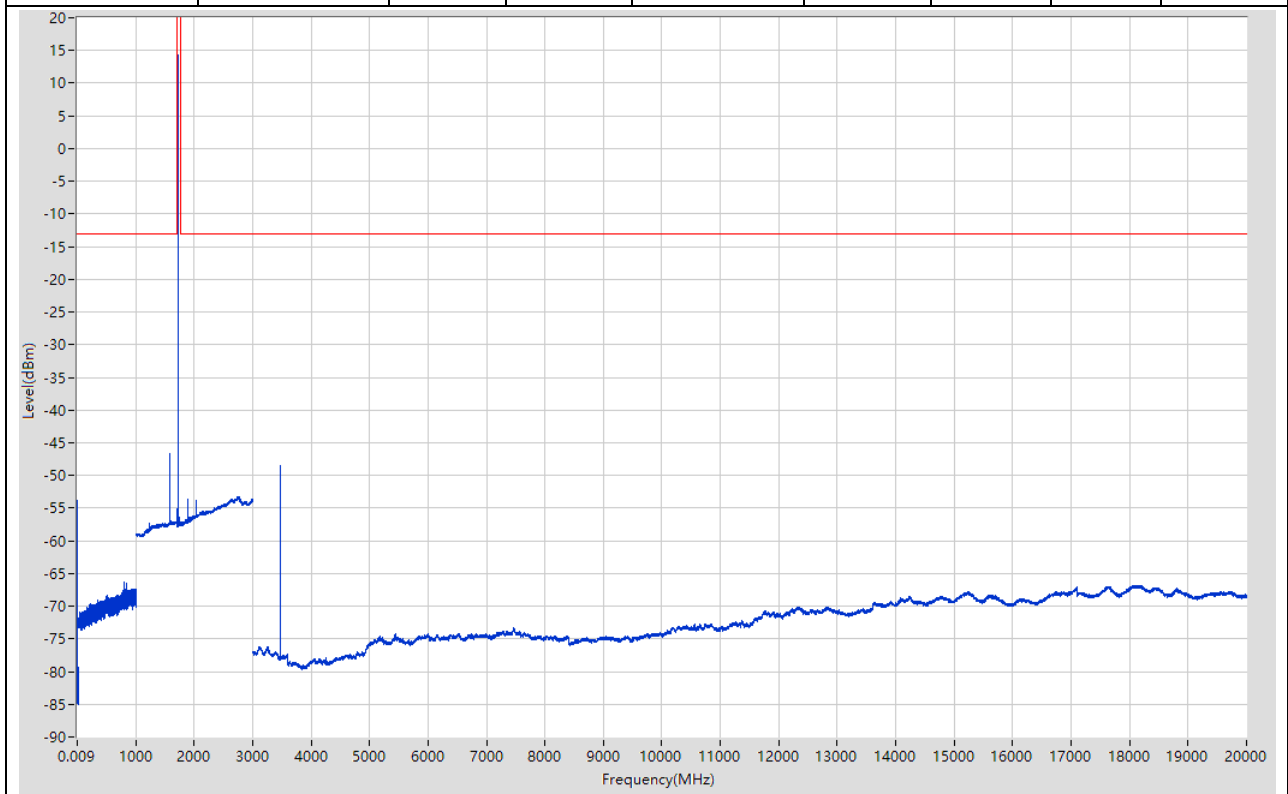


30.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.51	-13	Pass	601
0.15	30	0.01	RMS	0.16	-59.1	-13	Pass	2985
30	1000	0.1	RMS	907.59	-67.18	-13	Pass	9700
1000	1700	1	RMS	1581.831	-50.23	-13	Pass	700
1700	1765	1	RMS	1732.175	13.6	60	Pass	601
1765	3000	1	RMS	2745.794	-53.15	-13	Pass	1235
3000	20000	1	RMS	18188.893	-66.81	-13	Pass	17000

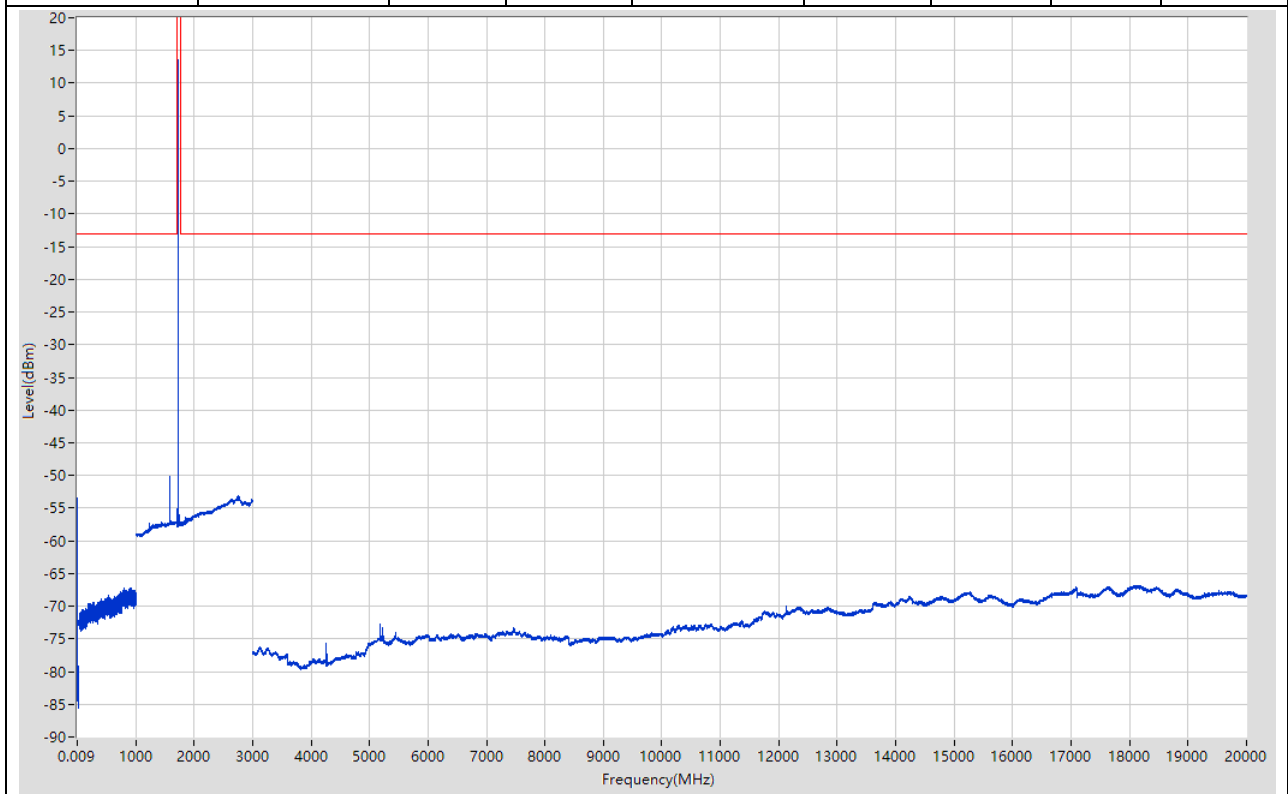


30.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.02	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.75	-13	Pass	2985
30	1000	0.1	RMS	881.088	-67.28	-13	Pass	9700
1000	1700	1	RMS	1601.86	-51.01	-13	Pass	700
1700	1765	1	RMS	1754.925	14.67	60	Pass	601
1765	3000	1	RMS	2746.795	-53.22	-13	Pass	1235
3000	20000	1	RMS	18108.889	-66.78	-13	Pass	17000

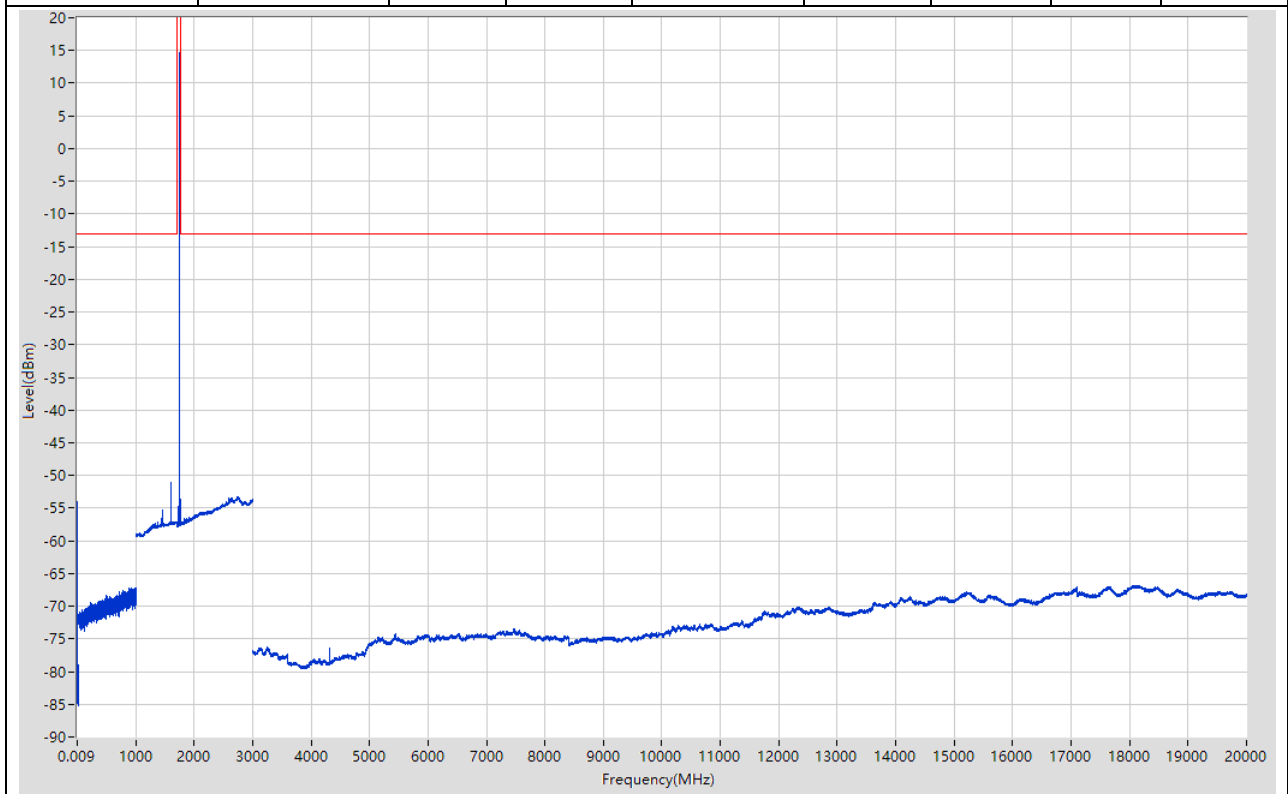

30.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.06	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.19	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.59	-13	Pass	9700
1000	1700	1	RMS	1450.644	-56.26	-13	Pass	700
1700	1765	1	RMS	1754.817	14.59	60	Pass	601
1765	3000	1	RMS	2739.789	-53.23	-13	Pass	1235
3000	20000	1	RMS	18130.89	-66.83	-13	Pass	17000

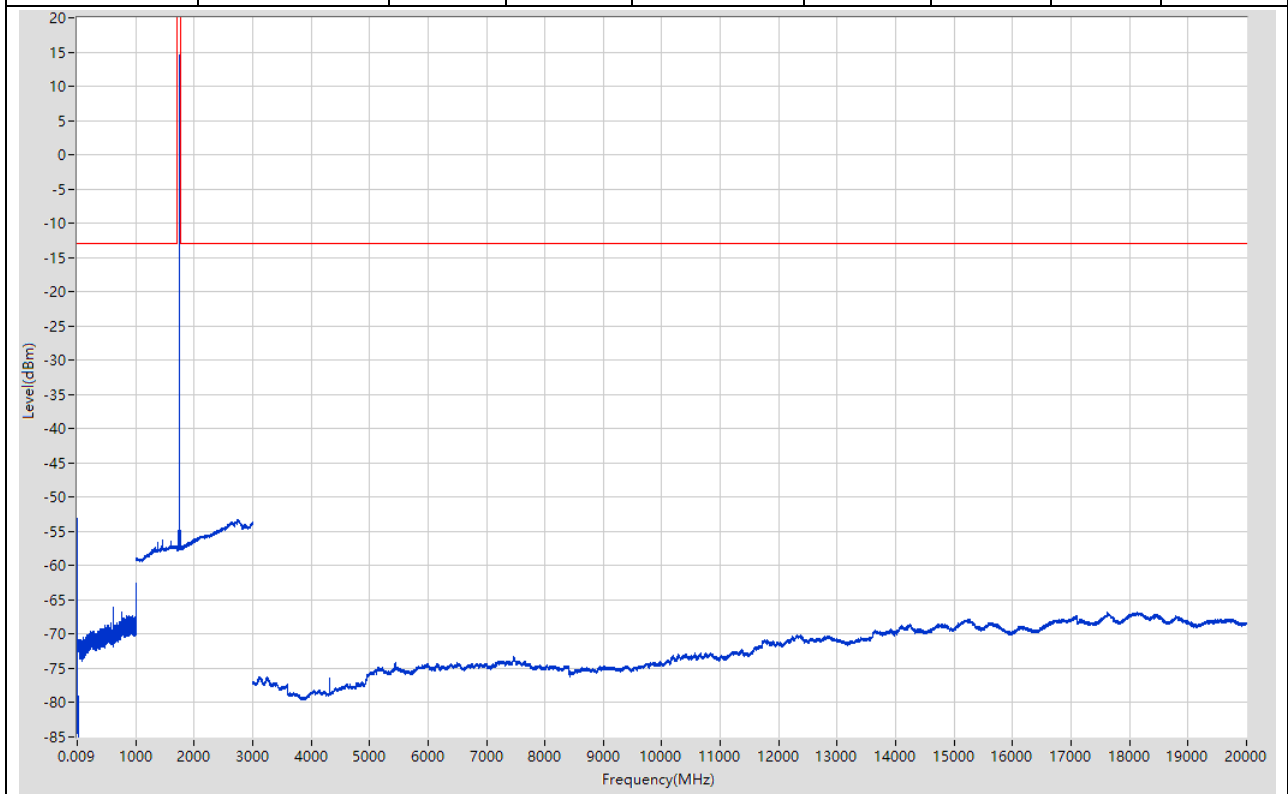

31. NB-IOT_Band5


31.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.22	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.8	-13	Pass	2985
30	814	0.1	RMS	813.9	-54.78	-13	Pass	7840
814	859	0.1	RMS	824.05	9.44	60	Pass	601
859	1000	0.1	RMS	887.42	-61.56	-13	Pass	1410
1000	3000	1	RMS	1648.324	-50.89	-13	Pass	2000
3000	10000	1	RMS	4944.278	-67.58	-13	Pass	7000

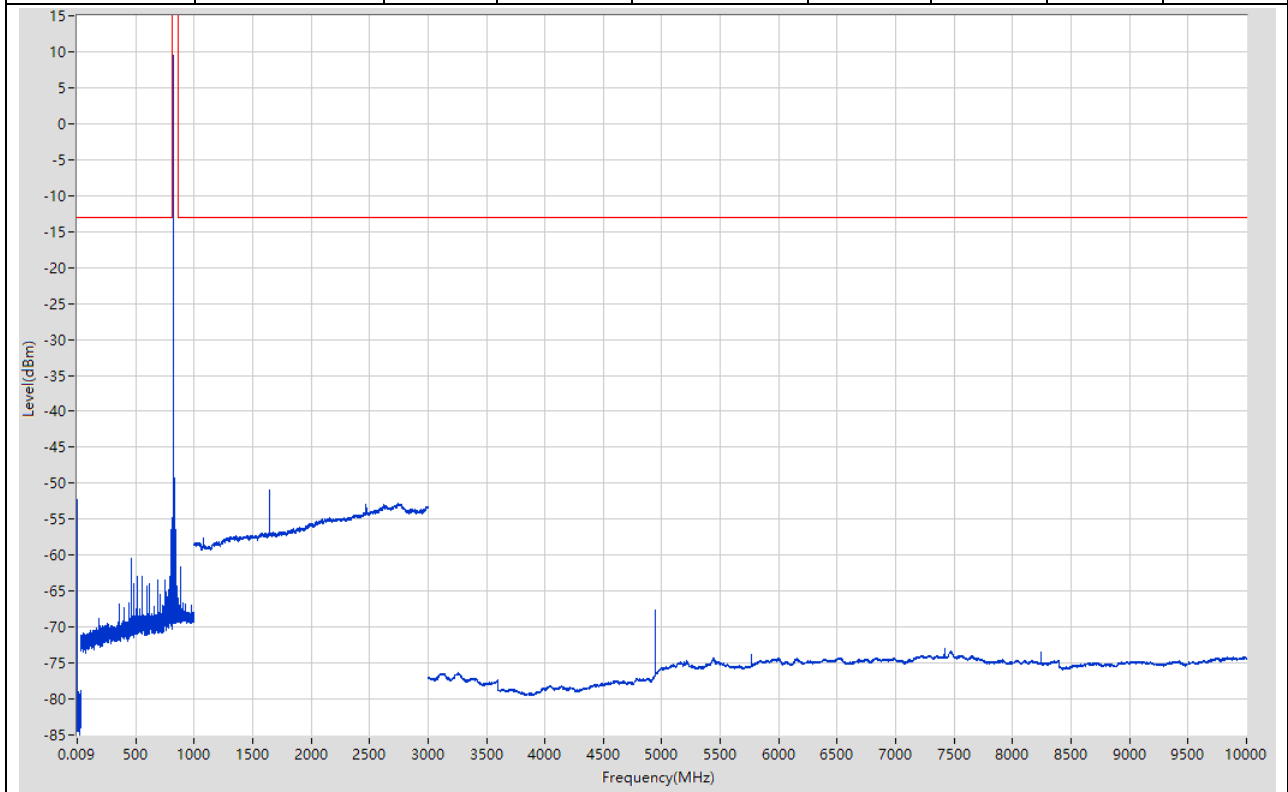


31.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.27	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.04	-13	Pass	2985
30	814	0.1	RMS	814	-54.65	-13	Pass	7840
814	859	0.1	RMS	823.975	18.53	60	Pass	601
859	1000	0.1	RMS	887.42	-61.18	-13	Pass	1410
1000	3000	1	RMS	1648.324	-52.49	-13	Pass	2000
3000	10000	1	RMS	4944.278	-66.76	-13	Pass	7000

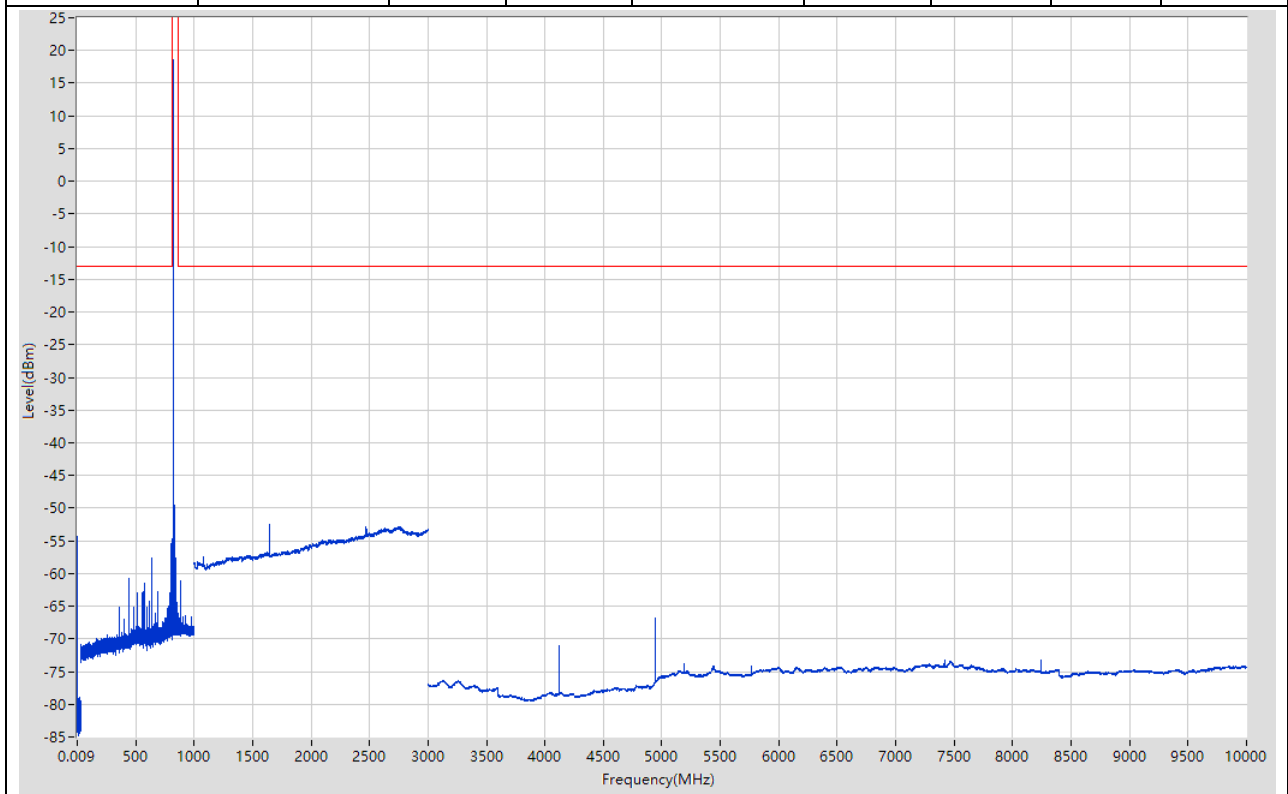


31.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-54.36	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.31	-13	Pass	2985
30	814	0.1	RMS	600.573	-50.11	-13	Pass	7840
814	859	0.1	RMS	836.425	19.9	60	Pass	601
859	1000	0.1	RMS	859.801	-64.39	-13	Pass	1410
1000	3000	1	RMS	2750.875	-52.76	-13	Pass	2000
3000	10000	1	RMS	4182.169	-66.64	-13	Pass	7000

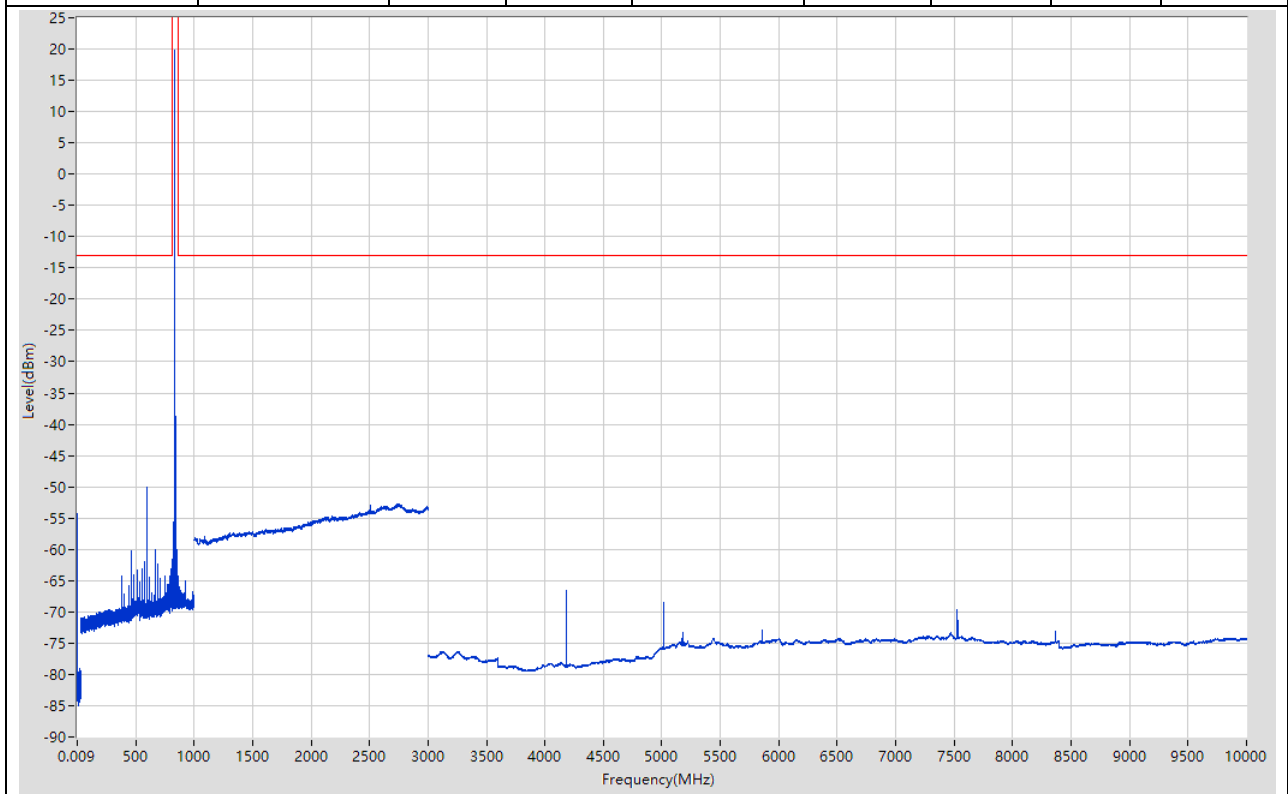


31.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.42	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.1	-13	Pass	2985
30	814	0.1	RMS	643.378	-58.56	-13	Pass	7840
814	859	0.1	RMS	836.425	19.78	60	Pass	601
859	1000	0.1	RMS	965.175	-55.91	-13	Pass	1410
1000	3000	1	RMS	2745.873	-52.81	-13	Pass	2000
3000	10000	1	RMS	4182.169	-66.7	-13	Pass	7000

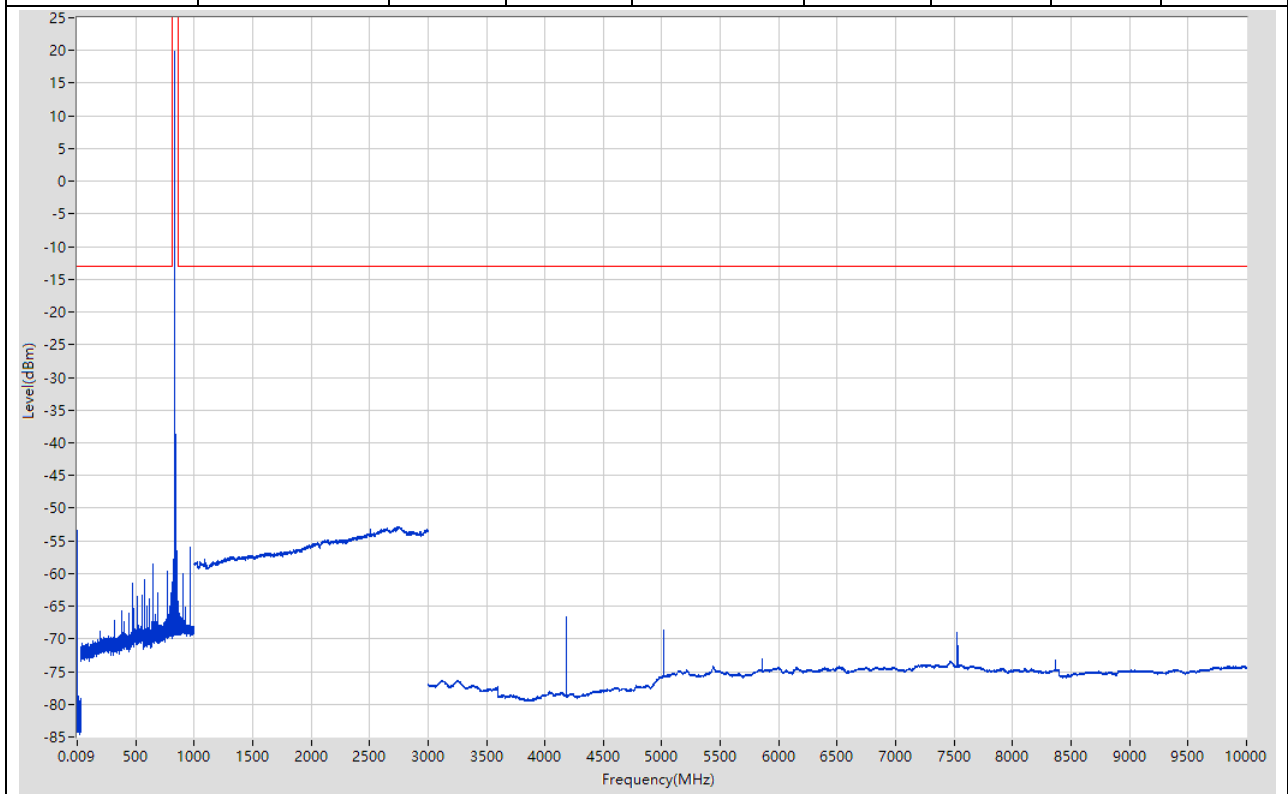


31.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.93	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.68	-13	Pass	2985
30	814	0.1	RMS	587.571	-59.3	-13	Pass	7840
814	859	0.1	RMS	848.8	20.13	60	Pass	601
859	1000	0.1	RMS	868.106	-56.16	-13	Pass	1410
1000	3000	1	RMS	1697.349	-47.16	-13	Pass	2000
3000	10000	1	RMS	4244.178	-72.5	-13	Pass	7000

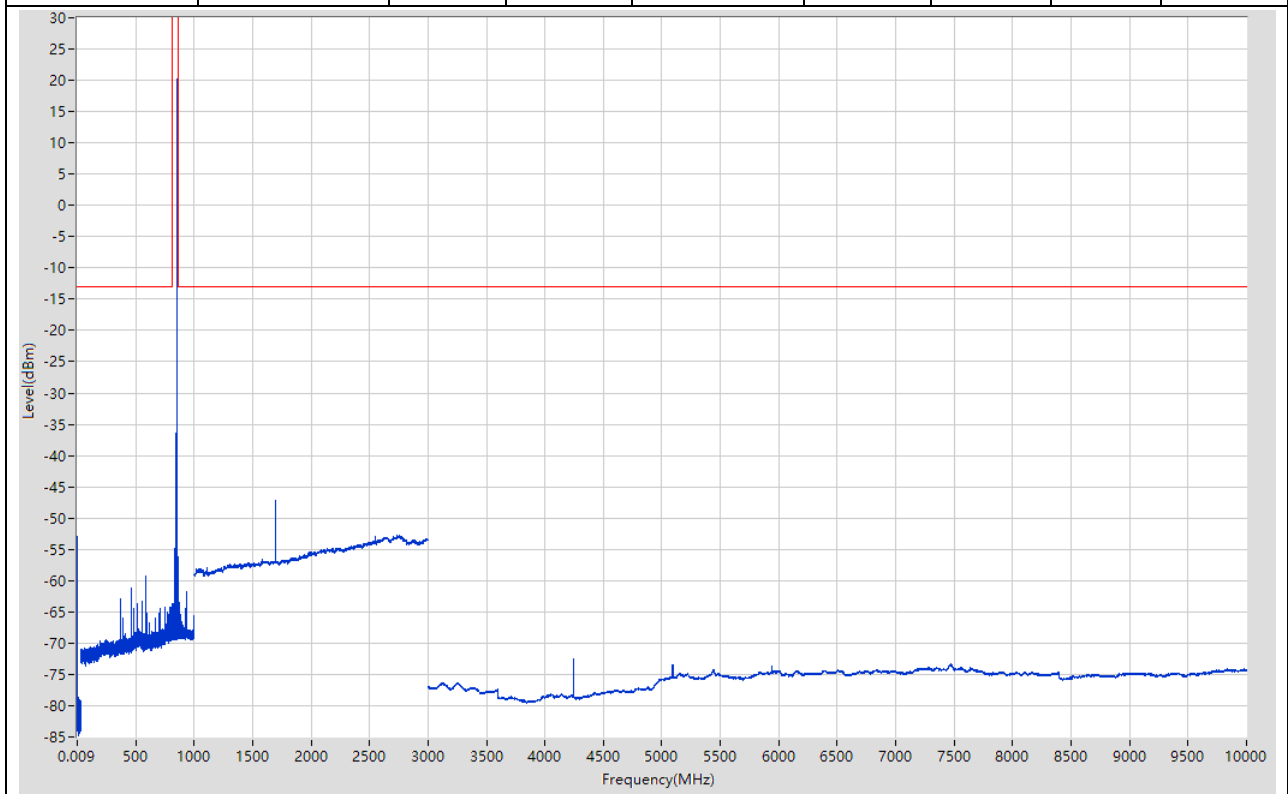


31.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-54.66	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.8	-13	Pass	2985
30	814	0.1	RMS	435.352	-58.49	-13	Pass	7840
814	859	0.1	RMS	848.875	16.67	60	Pass	601
859	1000	0.1	RMS	859.5	-59.24	-13	Pass	1410
1000	3000	1	RMS	1697.349	-46.7	-13	Pass	2000
3000	10000	1	RMS	5093.299	-72.77	-13	Pass	7000

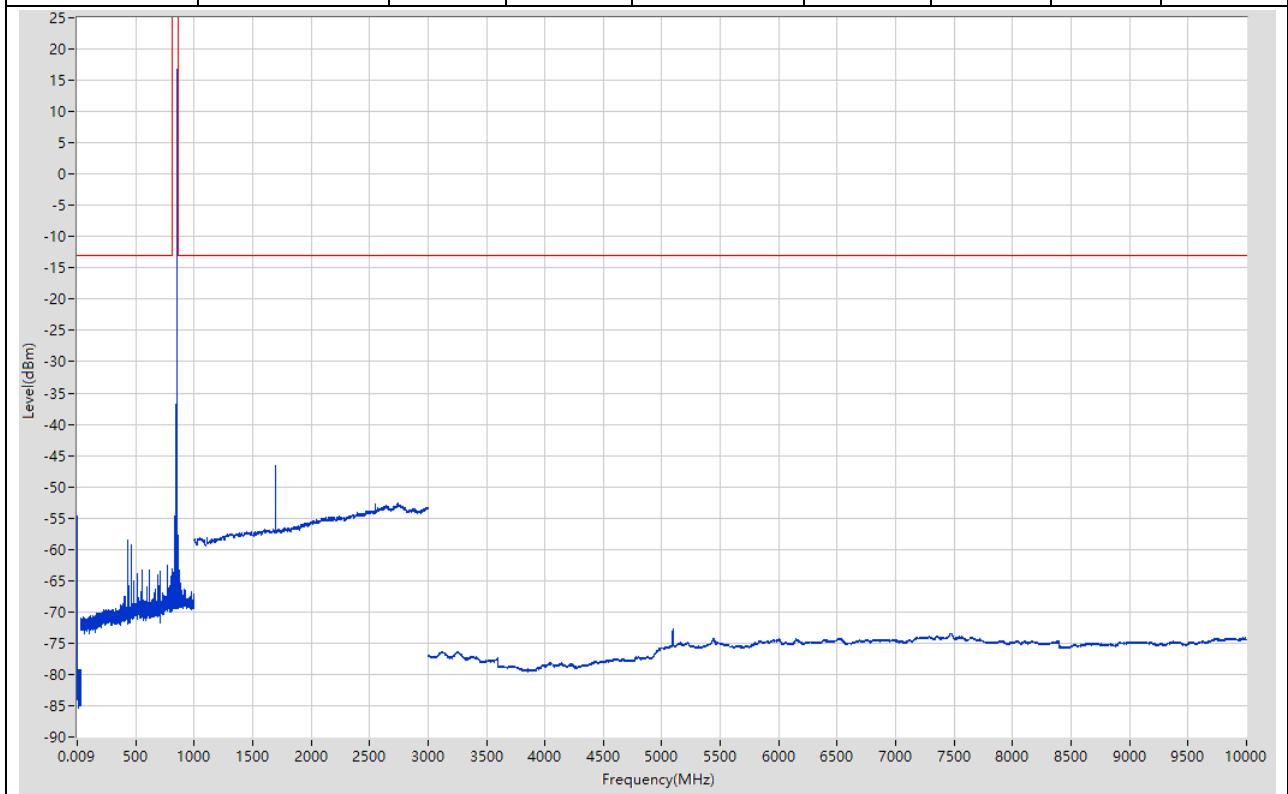


31.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-54.26	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.55	-13	Pass	2985
30	814	0.1	RMS	516.962	-66.8	-13	Pass	7840
814	859	0.1	RMS	824.05	8.06	60	Pass	601
859	1000	0.1	RMS	881.716	-68.24	-13	Pass	1410
1000	3000	1	RMS	2741.871	-52.9	-13	Pass	2000
3000	10000	1	RMS	3475.068	-70.76	-13	Pass	7000

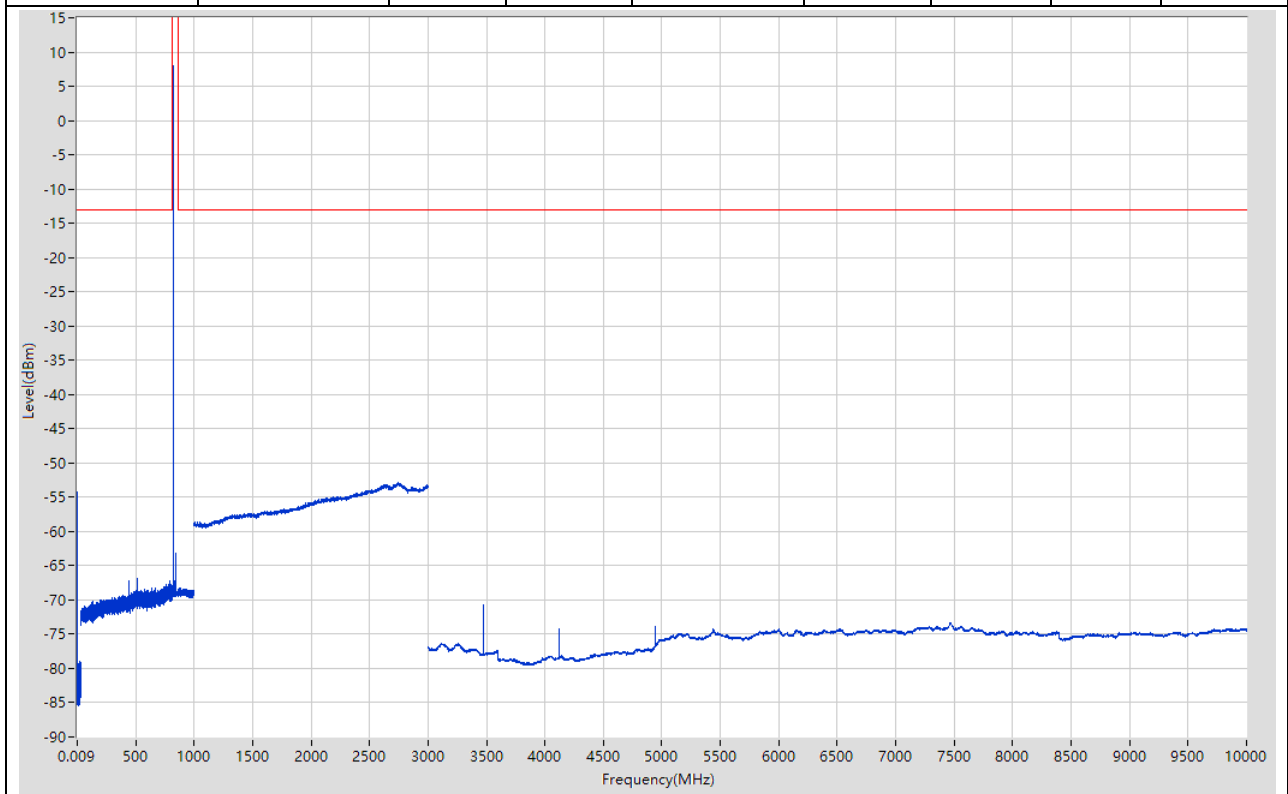


31.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.36	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.29	-13	Pass	2985
30	814	0.1	RMS	556.767	-63.95	-13	Pass	7840
814	859	0.1	RMS	824.125	9.27	60	Pass	601
859	1000	0.1	RMS	881.716	-68.3	-13	Pass	1410
1000	3000	1	RMS	2749.875	-52.93	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.34	-13	Pass	7000

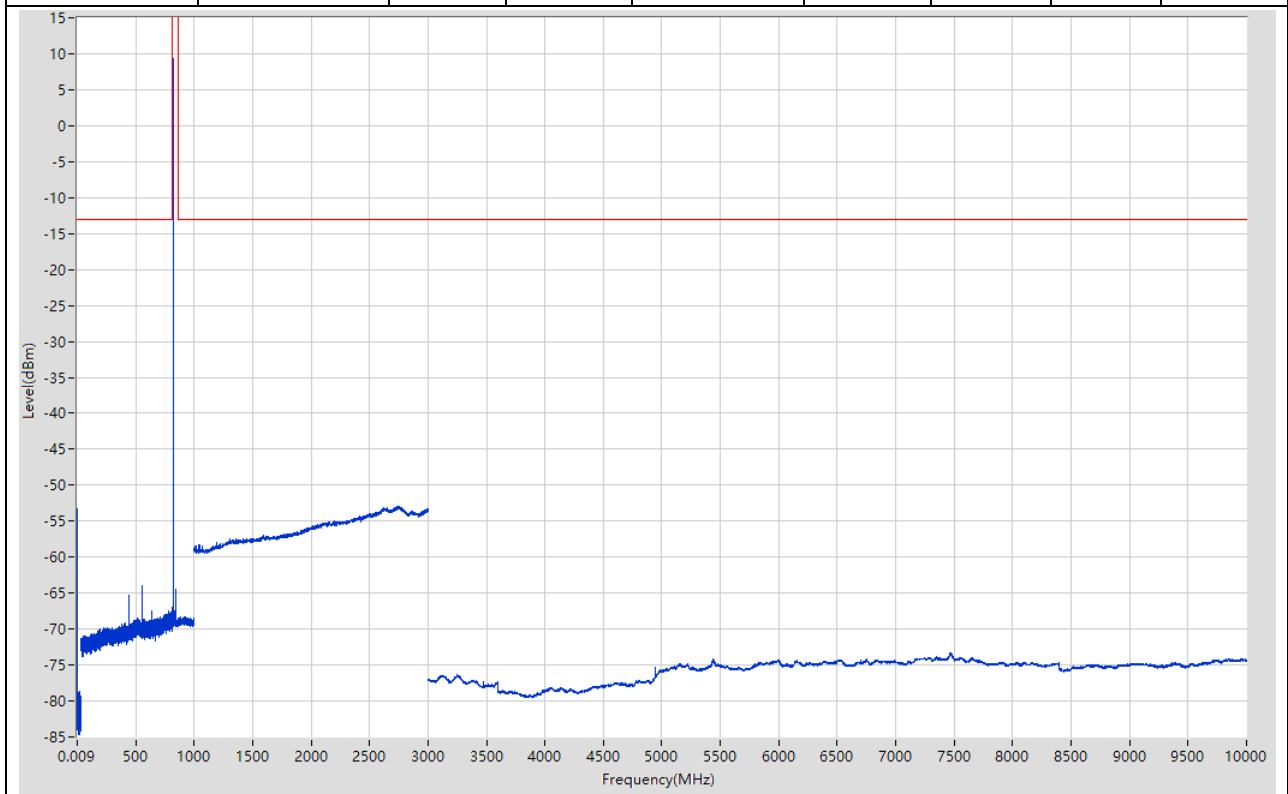


31.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.25	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.53	-13	Pass	2985
30	814	0.1	RMS	787.197	-63.87	-13	Pass	7840
814	859	0.1	RMS	836.5	9.82	60	Pass	601
859	1000	0.1	RMS	998.399	-67.91	-13	Pass	1410
1000	3000	1	RMS	2749.875	-52.83	-13	Pass	2000
3000	10000	1	RMS	3526.075	-71.49	-13	Pass	7000

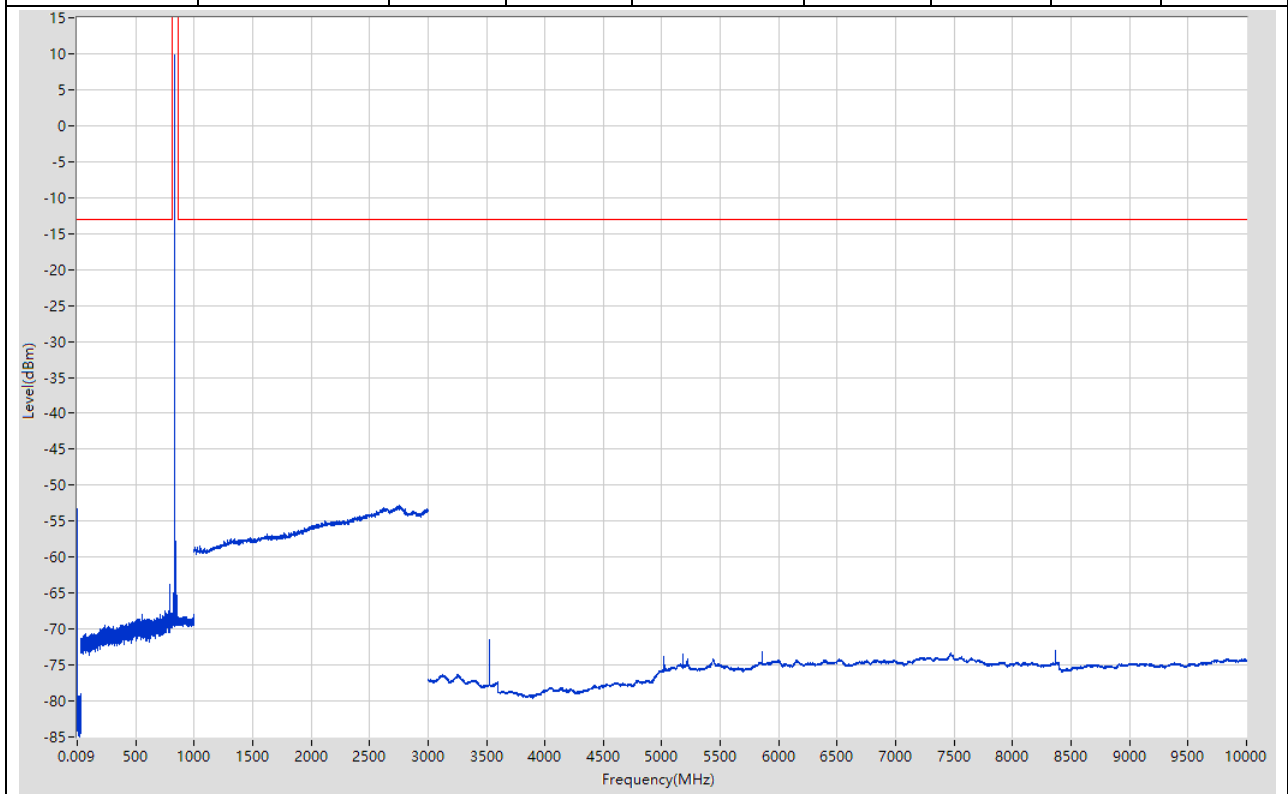


31.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-52.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.16	-13	Pass	2985
30	814	0.1	RMS	614.375	-62.97	-13	Pass	7840
814	859	0.1	RMS	836.425	8.38	60	Pass	601
859	1000	0.1	RMS	912.938	-68.24	-13	Pass	1410
1000	3000	1	RMS	2746.873	-52.89	-13	Pass	2000
3000	10000	1	RMS	3525.075	-68.68	-13	Pass	7000

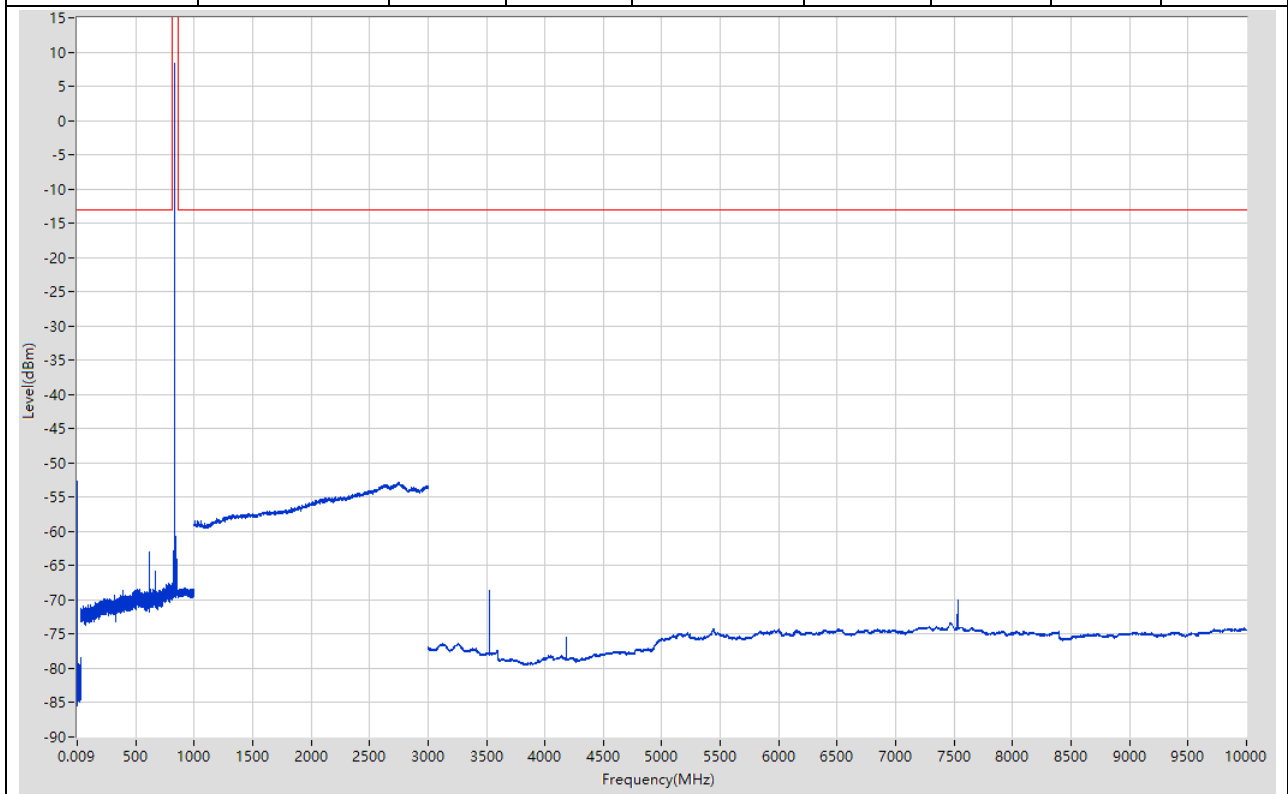


31.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.71	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.34	-13	Pass	2985
30	814	0.1	RMS	460.755	-57.53	-13	Pass	7840
814	859	0.1	RMS	848.95	8.93	60	Pass	601
859	1000	0.1	RMS	868.207	-68.36	-13	Pass	1410
1000	3000	1	RMS	1697.349	-48.81	-13	Pass	2000
3000	10000	1	RMS	7640.663	-72.47	-13	Pass	7000

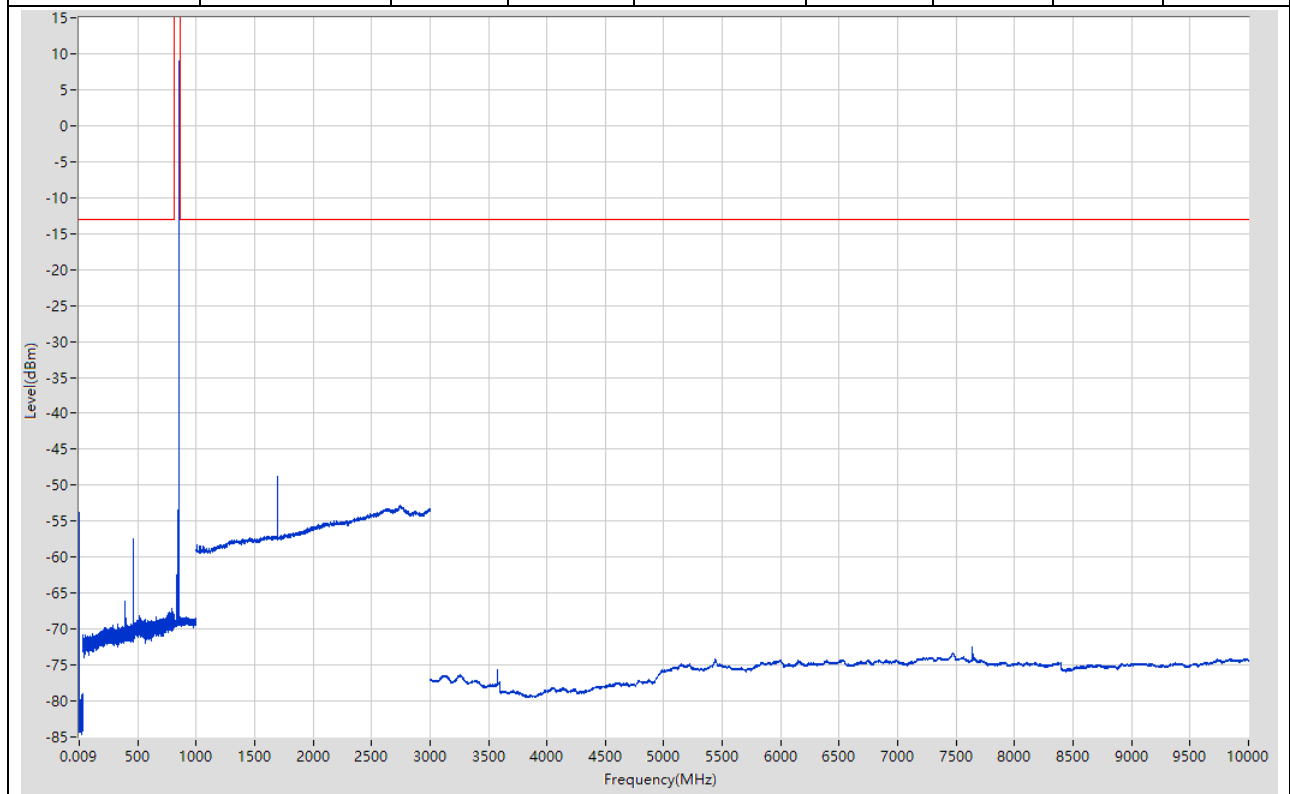

31.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-55.21	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.91	-13	Pass	2985
30	814	0.1	RMS	787.197	-63.09	-13	Pass	7840
814	859	0.1	RMS	848.875	9.03	60	Pass	601
859	1000	0.1	RMS	921.544	-67.93	-13	Pass	1410
1000	3000	1	RMS	2739.87	-52.77	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.36	-13	Pass	7000

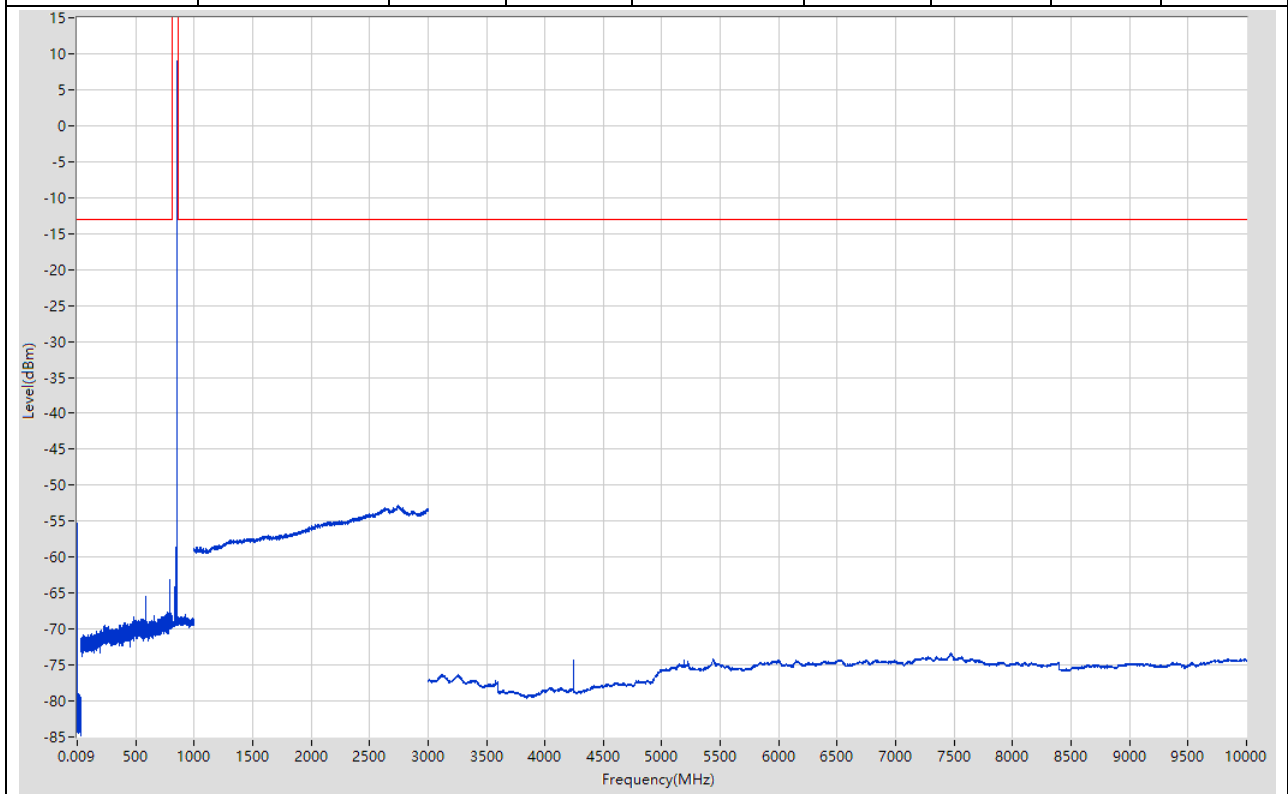

32. NB-IOT_Band12


32.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.98	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.52	-13	Pass	2985
30	689	0.1	RMS	537.877	-42.29	-13	Pass	6590
689	726	0.1	RMS	699.113	21.03	60	Pass	601
726	1000	0.1	RMS	985.995	-63.02	-13	Pass	2740
1000	3000	1	RMS	1398.199	-25.94	-13	Pass	2000
3000	10000	1	RMS	4894.271	-62.38	-13	Pass	7000

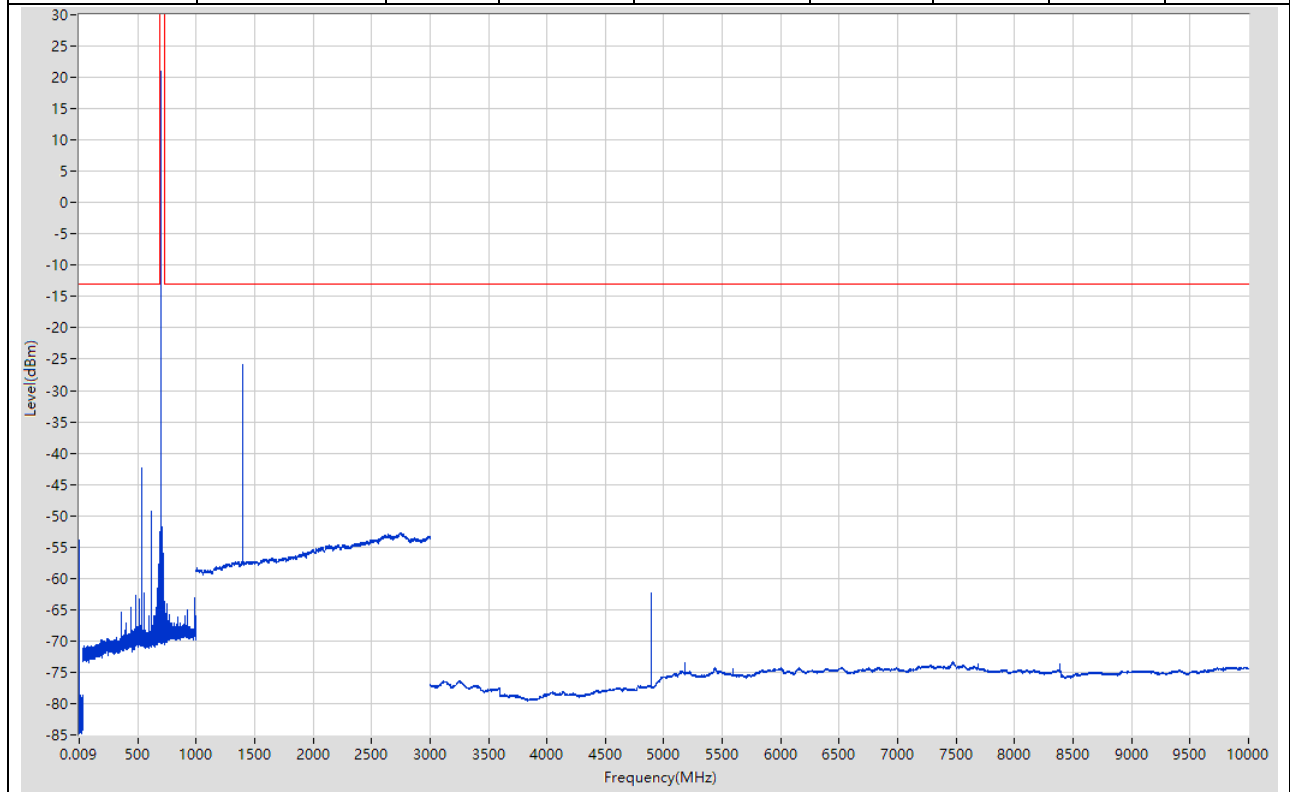


32.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.57	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.62	-13	Pass	2985
30	689	0.1	RMS	679.999	-53.39	-13	Pass	6590
689	726	0.1	RMS	699.113	21.04	60	Pass	601
726	1000	0.1	RMS	806.629	-56.78	-13	Pass	2740
1000	3000	1	RMS	1022.011	-50.42	-13	Pass	2000
3000	10000	1	RMS	4894.271	-63.27	-13	Pass	7000

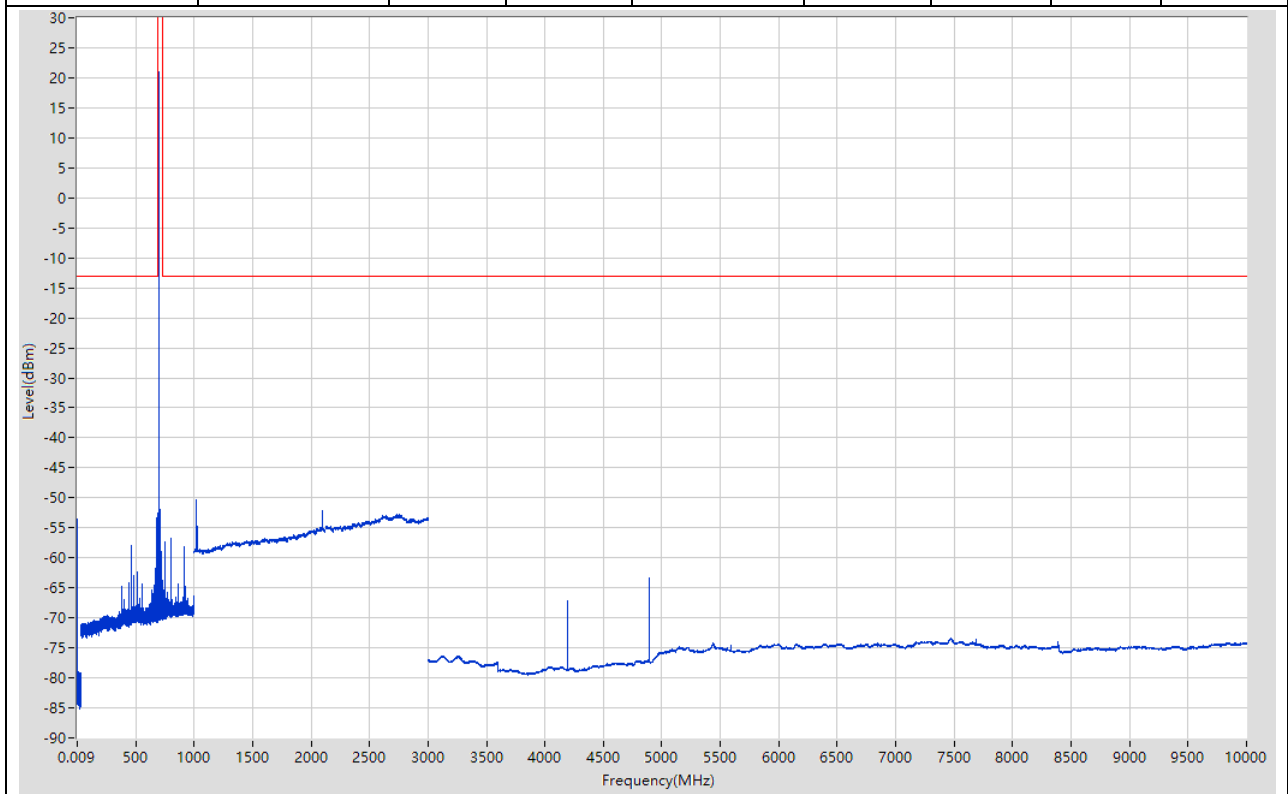


32.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.4	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.52	-13	Pass	2985
30	689	0.1	RMS	688.3	-53.62	-13	Pass	6590
689	726	0.1	RMS	707.438	21.28	60	Pass	601
726	1000	0.1	RMS	726.7	-53.92	-13	Pass	2740
1000	3000	1	RMS	1415.208	-28.36	-13	Pass	2000
3000	10000	1	RMS	7469.639	-73.36	-13	Pass	7000

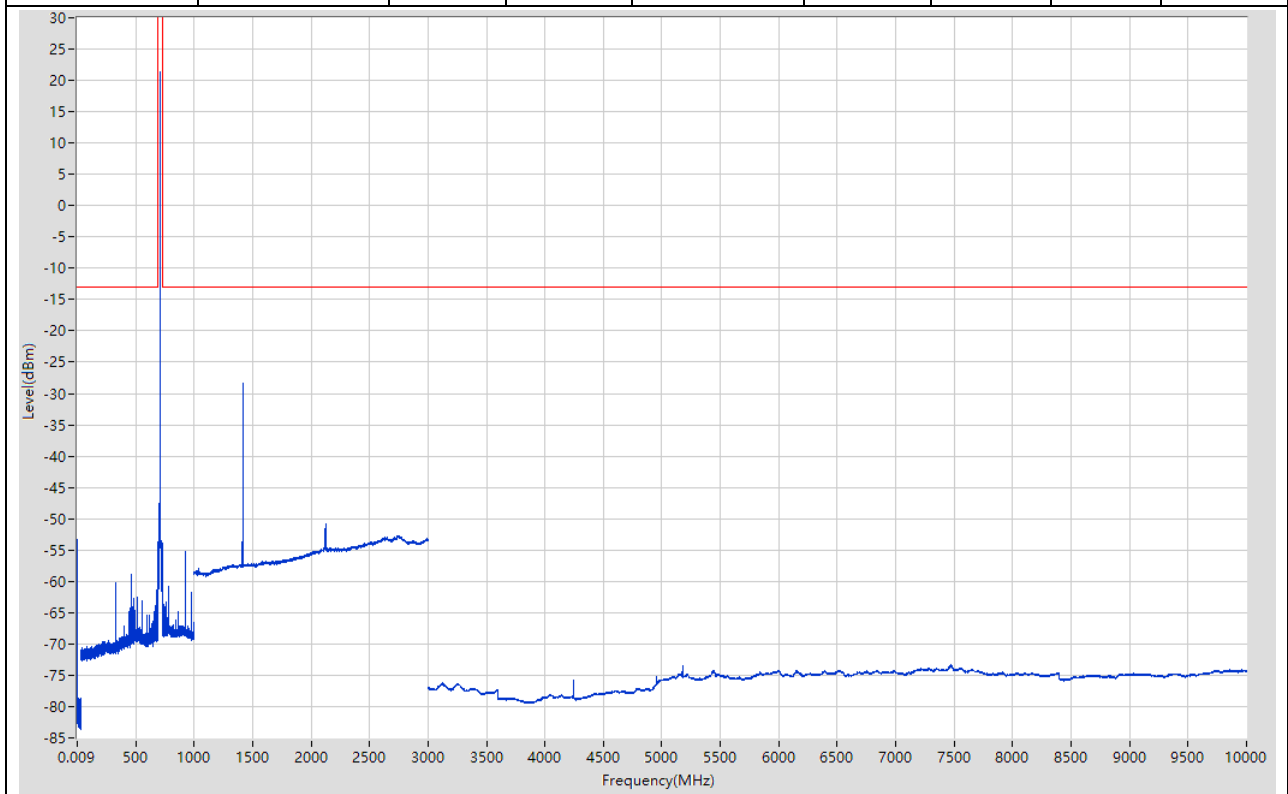


32.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.12	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.74	-13	Pass	2985
30	689	0.1	RMS	653.095	-38.42	-13	Pass	6590
689	726	0.1	RMS	707.438	21.14	60	Pass	601
726	1000	0.1	RMS	726.7	-54.3	-13	Pass	2740
1000	3000	1	RMS	1415.208	-26.72	-13	Pass	2000
3000	10000	1	RMS	7471.639	-73.31	-13	Pass	7000

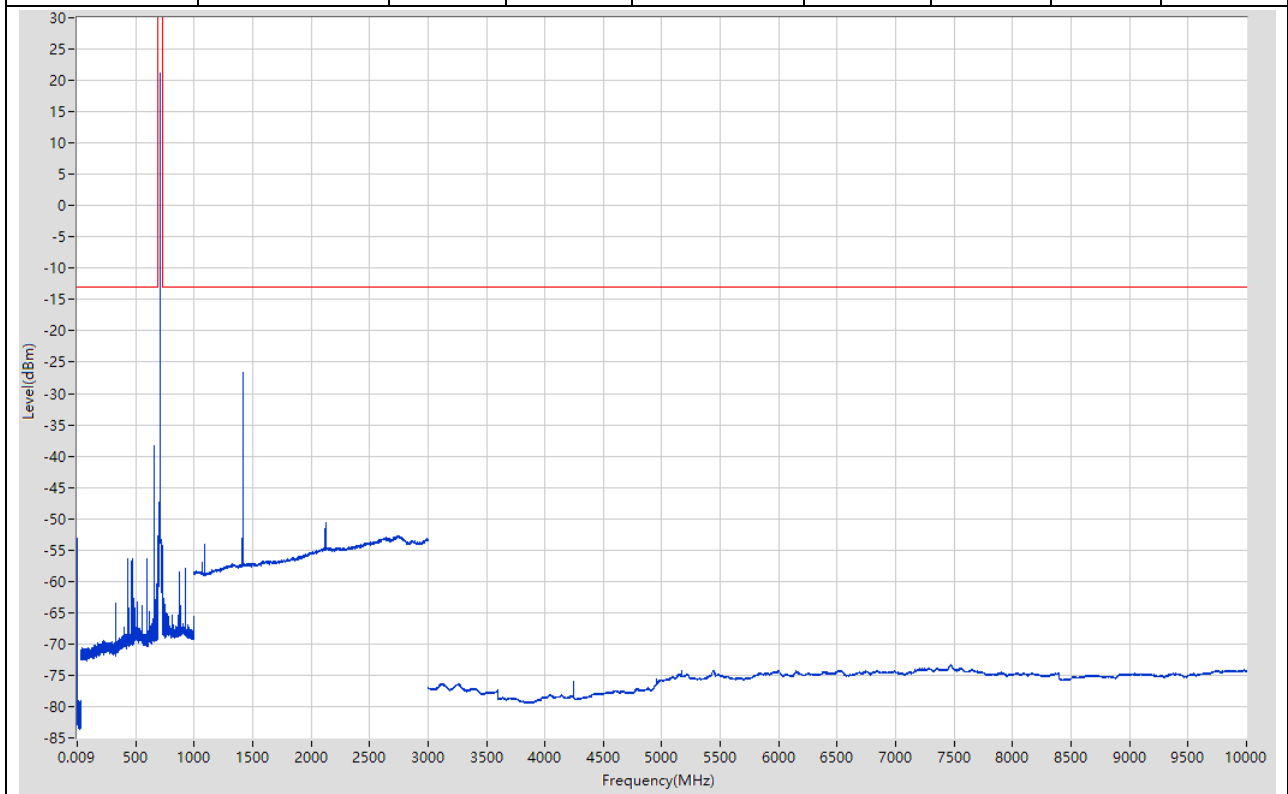


32.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.49	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.97	-13	Pass	2985
30	689	0.1	RMS	460.765	-59.12	-13	Pass	6590
689	726	0.1	RMS	715.702	21.78	60	Pass	601
726	1000	0.1	RMS	735.003	-54.34	-13	Pass	2740
1000	3000	1	RMS	1431.216	-27.69	-13	Pass	2000
3000	10000	1	RMS	5172.31	-72.6	-13	Pass	7000

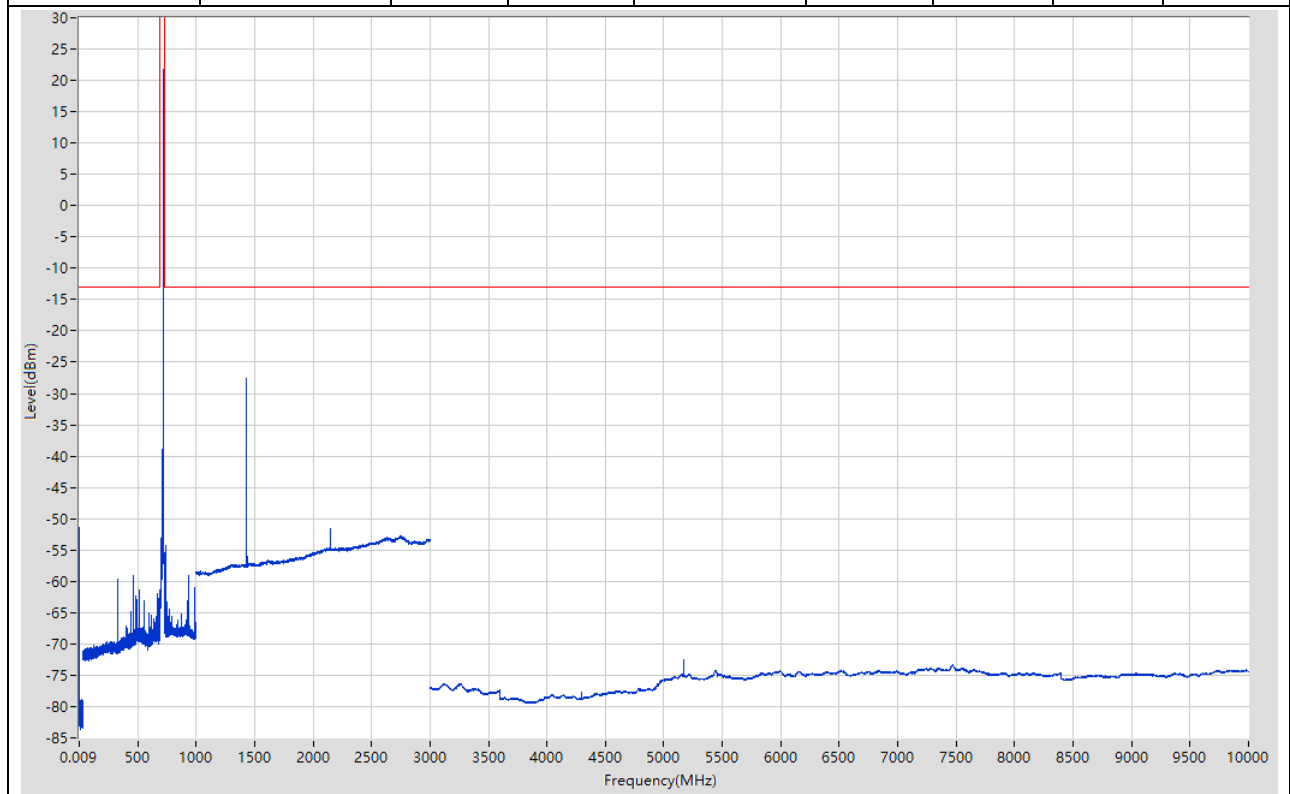


32.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.41	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.87	-13	Pass	2985
30	689	0.1	RMS	660.696	-40.02	-13	Pass	6590
689	726	0.1	RMS	715.702	21.75	60	Pass	601
726	1000	0.1	RMS	770.816	-53.04	-13	Pass	2740
1000	3000	1	RMS	1431.216	-27.72	-13	Pass	2000
3000	10000	1	RMS	7467.638	-73.32	-13	Pass	7000

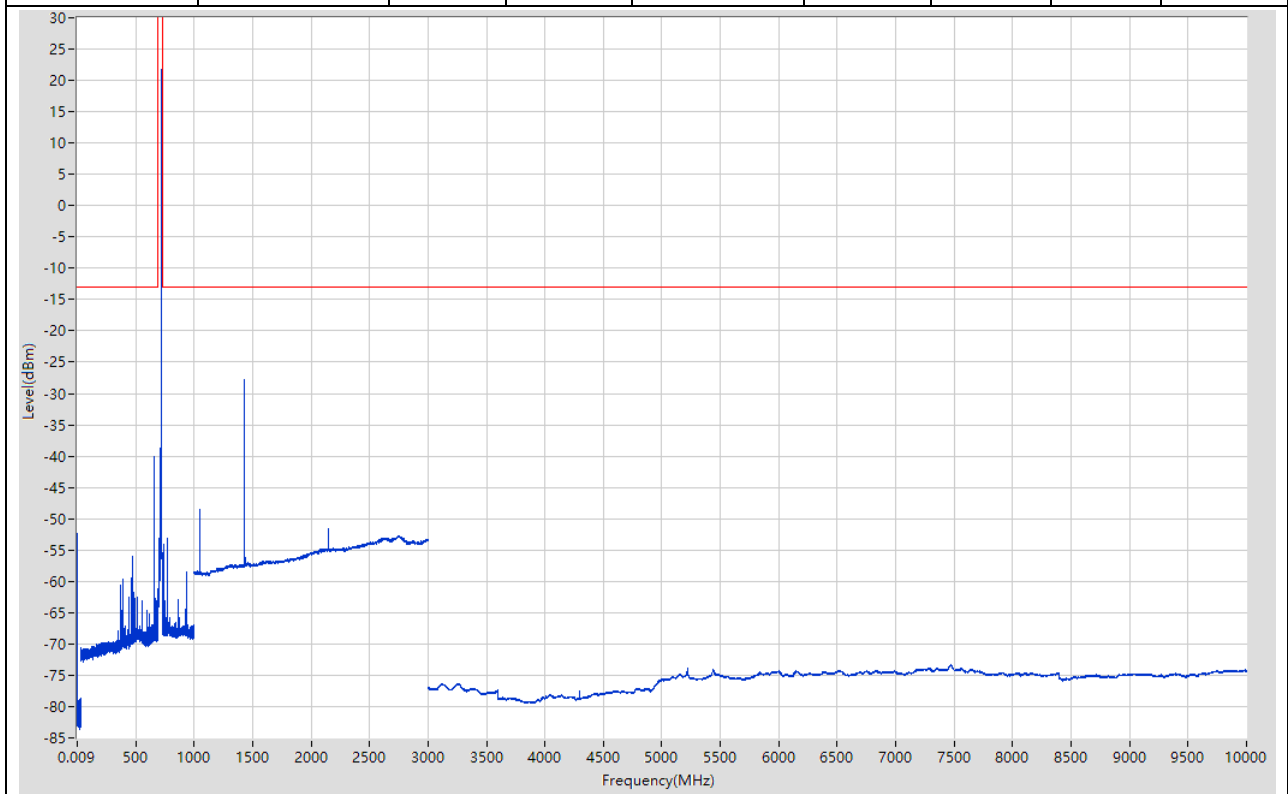


32.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-51.87	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.89	-13	Pass	2985
30	689	0.1	RMS	687.9	-66.74	-13	Pass	6590
689	726	0.1	RMS	699.113	11.03	60	Pass	601
726	1000	0.1	RMS	900.964	-58.81	-13	Pass	2740
1000	3000	1	RMS	2097.549	-49.28	-13	Pass	2000
3000	10000	1	RMS	4893.27	-67.14	-13	Pass	7000

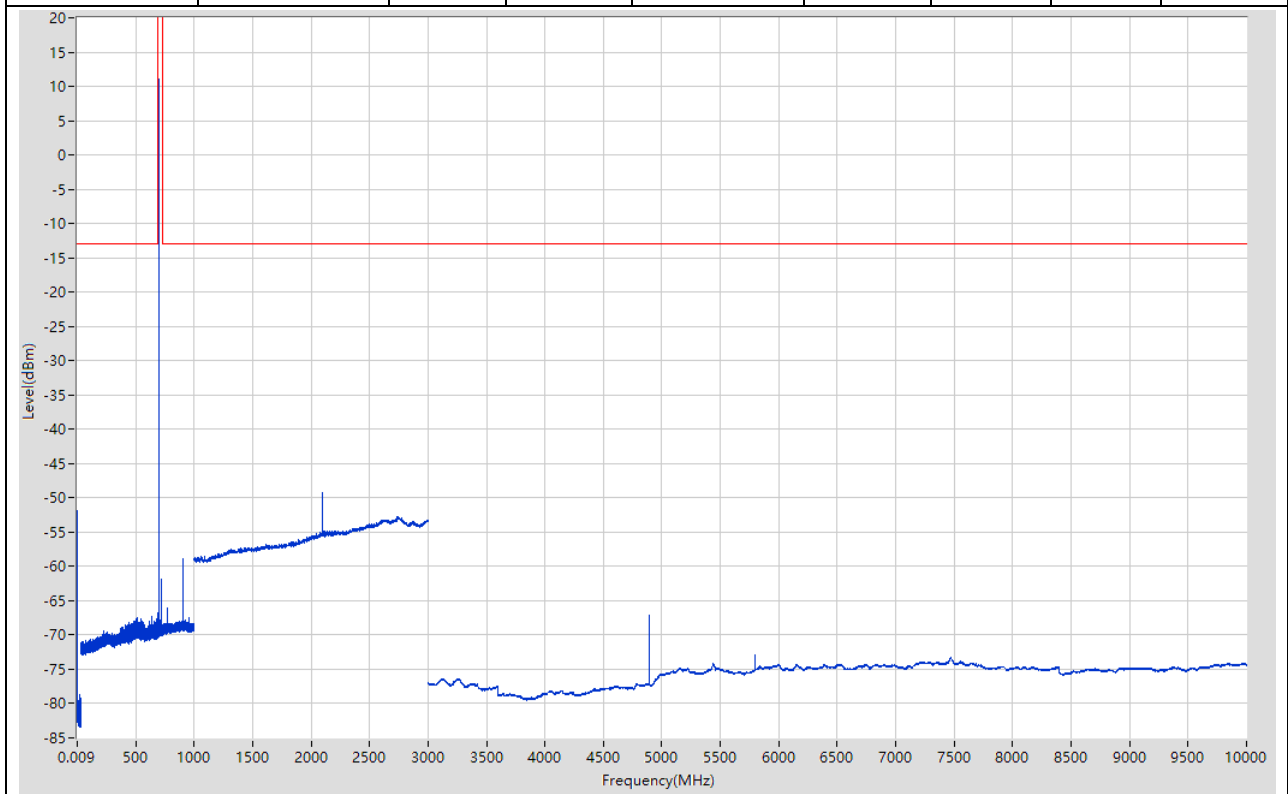


32.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.33	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.54	-13	Pass	2985
30	689	0.1	RMS	518.374	-61.42	-13	Pass	6590
689	726	0.1	RMS	699.052	10.89	60	Pass	601
726	1000	0.1	RMS	863.95	-67.59	-13	Pass	2740
1000	3000	1	RMS	1397.199	-31.81	-13	Pass	2000
3000	10000	1	RMS	5180.311	-69.18	-13	Pass	7000

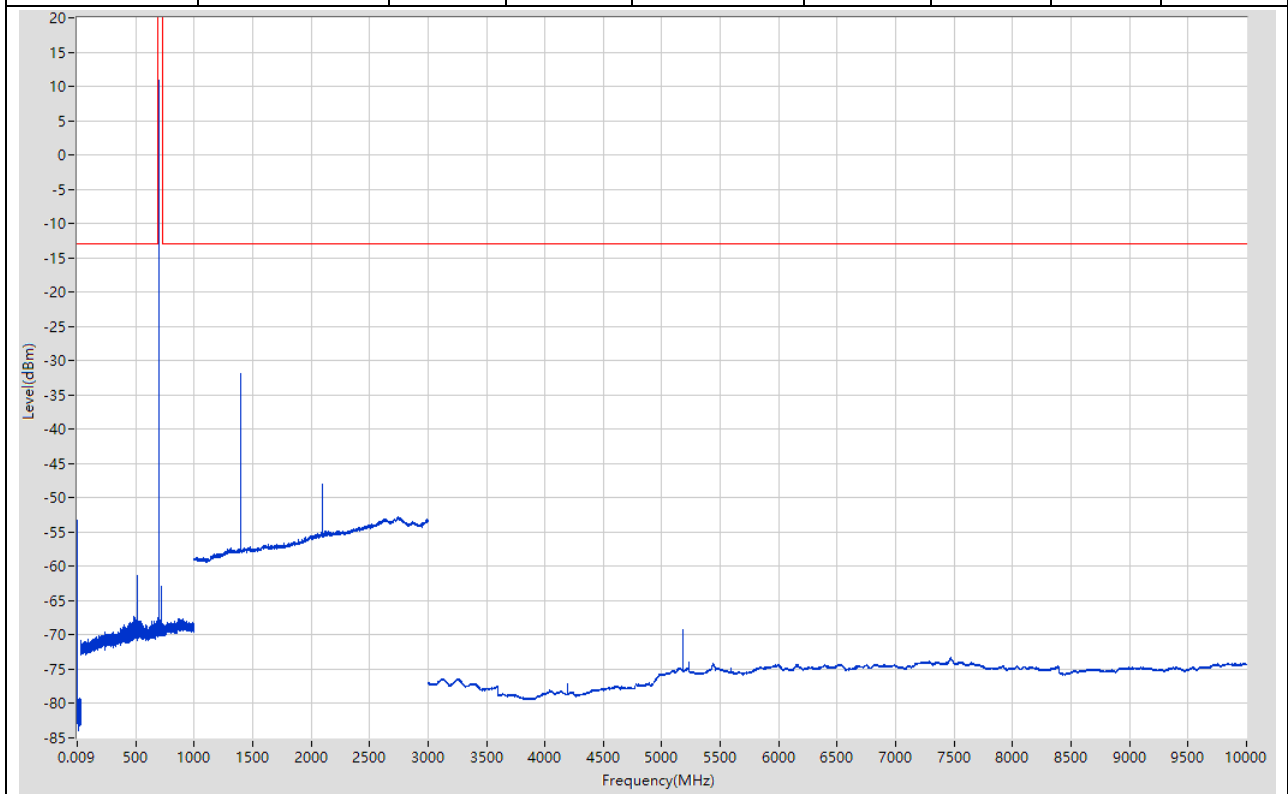


32.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.86	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.45	-13	Pass	2985
30	689	0.1	RMS	614.389	-62.36	-13	Pass	6590
689	726	0.1	RMS	707.5	11.12	60	Pass	601
726	1000	0.1	RMS	726.7	-57.16	-13	Pass	2740
1000	3000	1	RMS	2754.877	-52.79	-13	Pass	2000
3000	10000	1	RMS	4245.178	-72.05	-13	Pass	7000

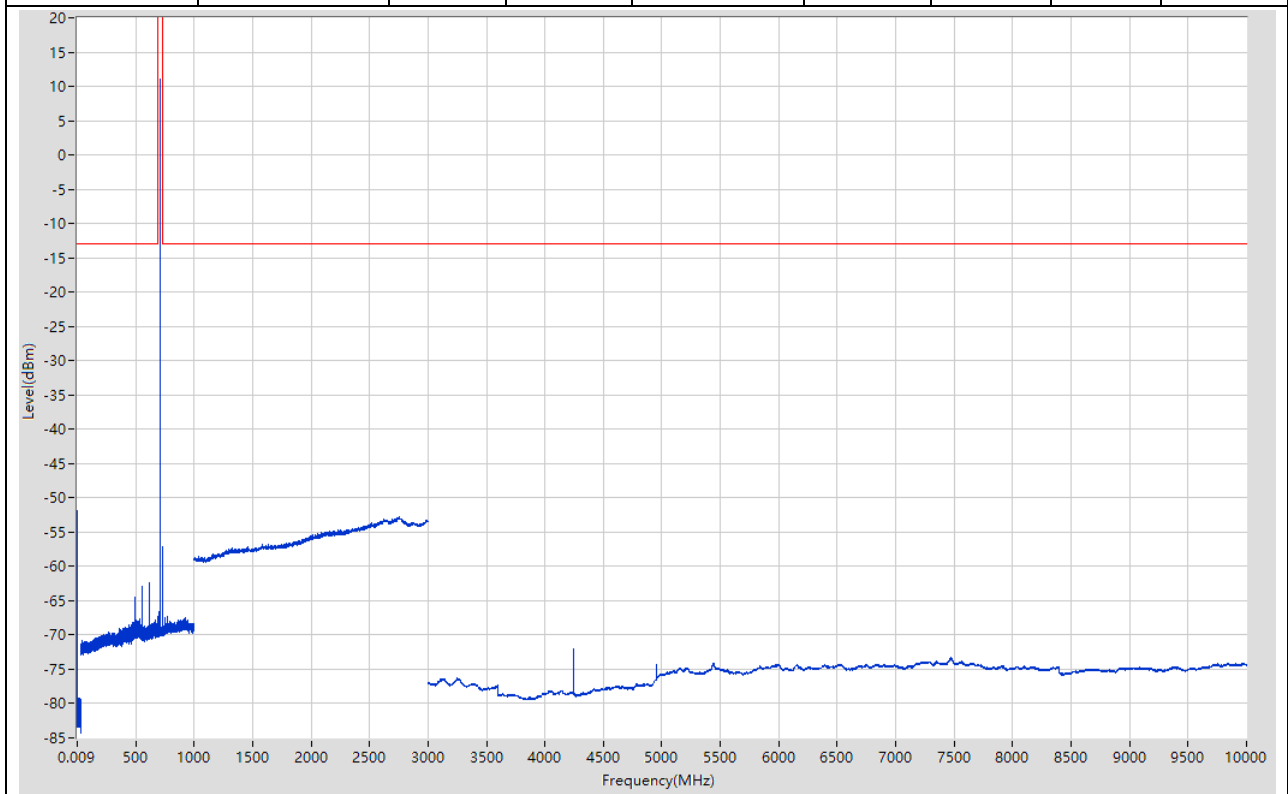


32.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.18	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.07	-13	Pass	2985
30	689	0.1	RMS	460.765	-58.38	-13	Pass	6590
689	726	0.1	RMS	707.5	11.16	60	Pass	601
726	1000	0.1	RMS	925.173	-60.74	-13	Pass	2740
1000	3000	1	RMS	1414.207	-34.31	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.34	-13	Pass	7000

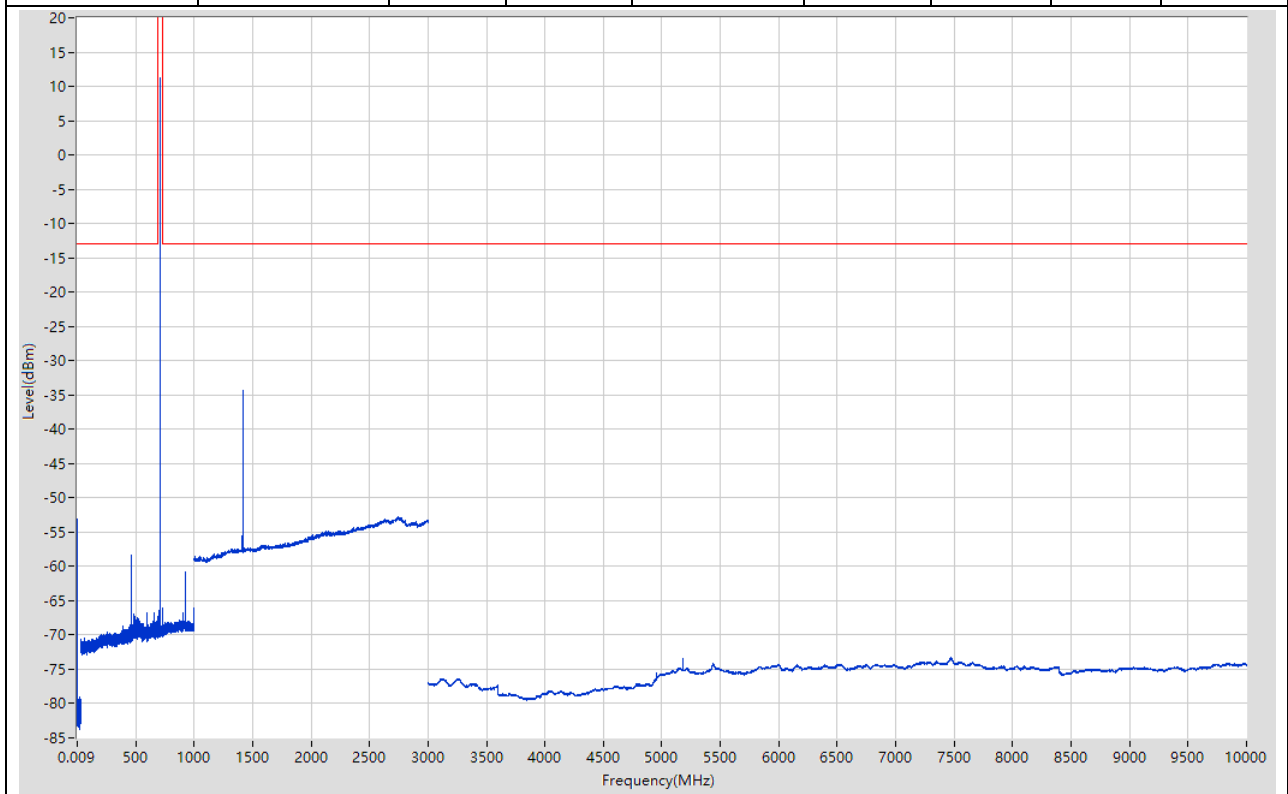


32.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.28	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	689	0.1	RMS	479.968	-61.38	-13	Pass	6590
689	726	0.1	RMS	715.825	9.65	60	Pass	601
726	1000	0.1	RMS	735.103	-55.85	-13	Pass	2740
1000	3000	1	RMS	2744.872	-52.82	-13	Pass	2000
3000	10000	1	RMS	5187.312	-71.78	-13	Pass	7000

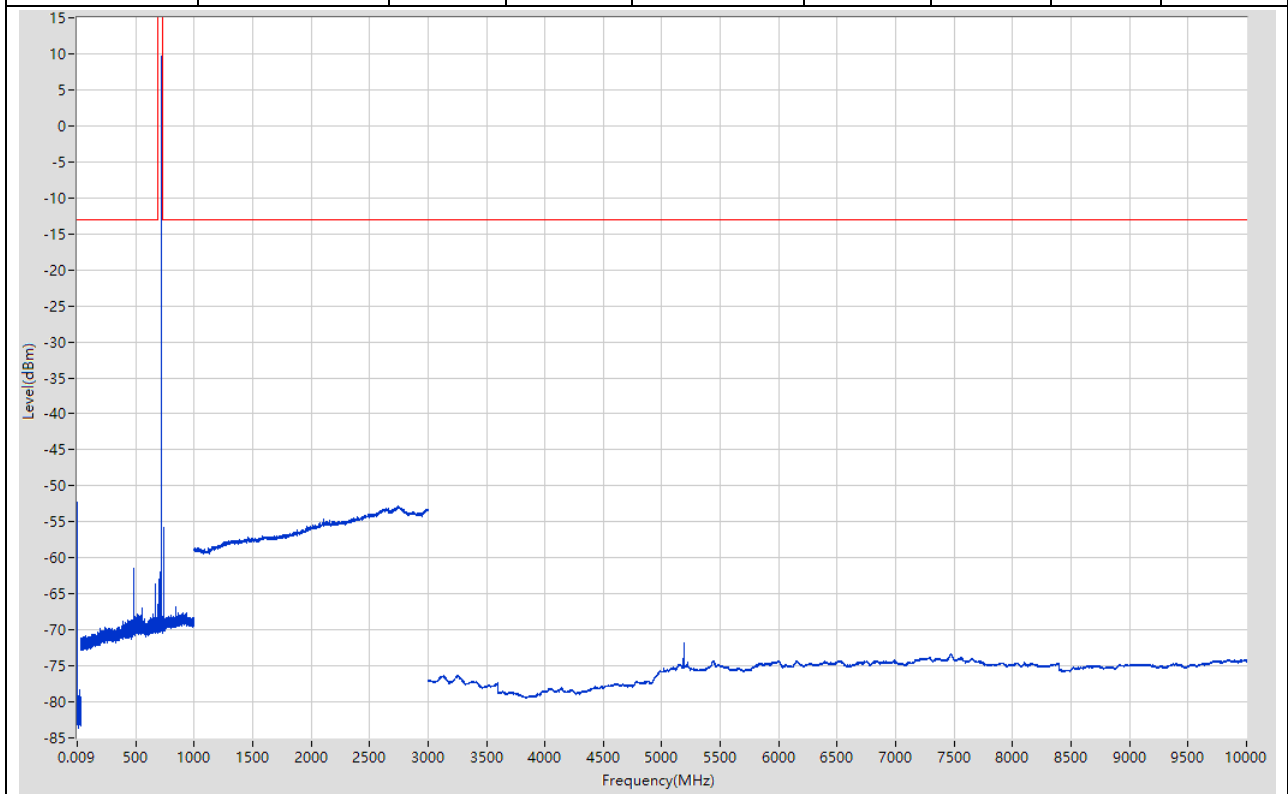

32.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.69	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.5	-13	Pass	2985
30	689	0.1	RMS	595.186	-67.55	-13	Pass	6590
689	726	0.1	RMS	715.887	10.94	60	Pass	601
726	1000	0.1	RMS	748.808	-65.16	-13	Pass	2740
1000	3000	1	RMS	1433.217	-49.42	-13	Pass	2000
3000	10000	1	RMS	5172.31	-69.94	-13	Pass	7000

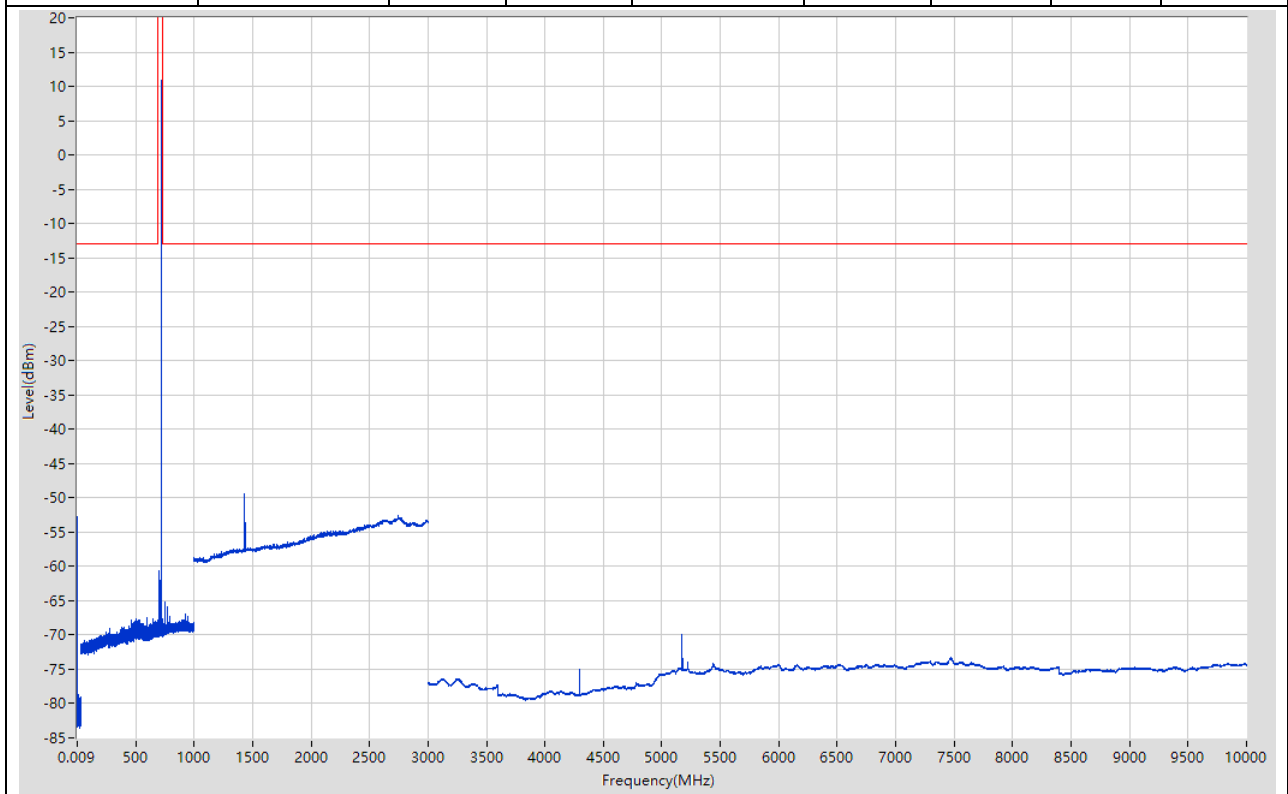

33. NB-IOT_Band13


33.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.64	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.42	-13	Pass	2985
30	767	0.1	RMS	418.353	-53.67	-13	Pass	7370
767	797	0.1	RMS	777	20.46	60	Pass	601
797	1000	0.1	RMS	896.549	-50.63	-13	Pass	2030
1000	3000	1	RMS	1554.277	-49.96	-13	Pass	2000
3000	10000	1	RMS	4662.237	-72.62	-13	Pass	7000

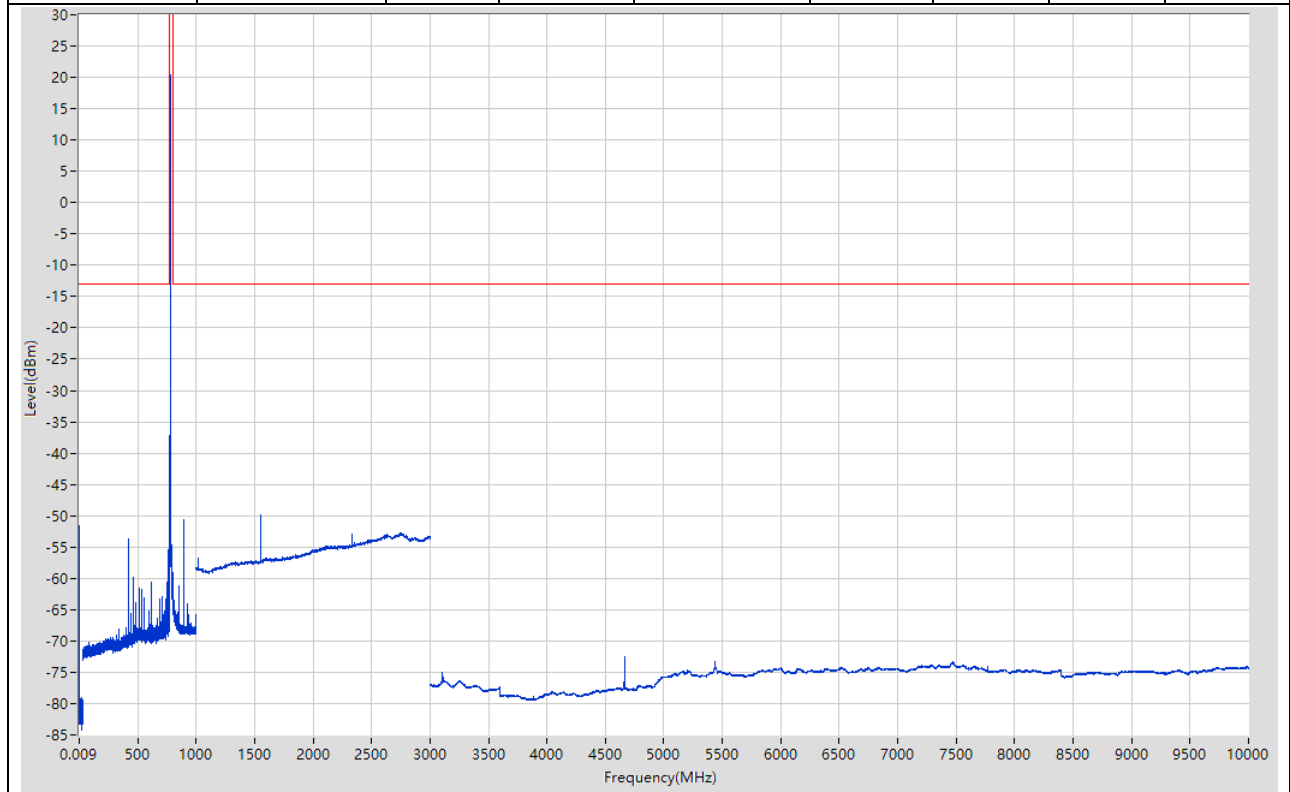


33.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.7	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.84	-13	Pass	2985
30	767	0.1	RMS	597.777	-39.95	-13	Pass	7370
767	797	0.1	RMS	777	19.92	60	Pass	601
797	1000	0.1	RMS	836.92	-59.69	-13	Pass	2030
1000	3000	1	RMS	1554.277	-50.56	-13	Pass	2000
3000	10000	1	RMS	4662.237	-72.79	-13	Pass	7000

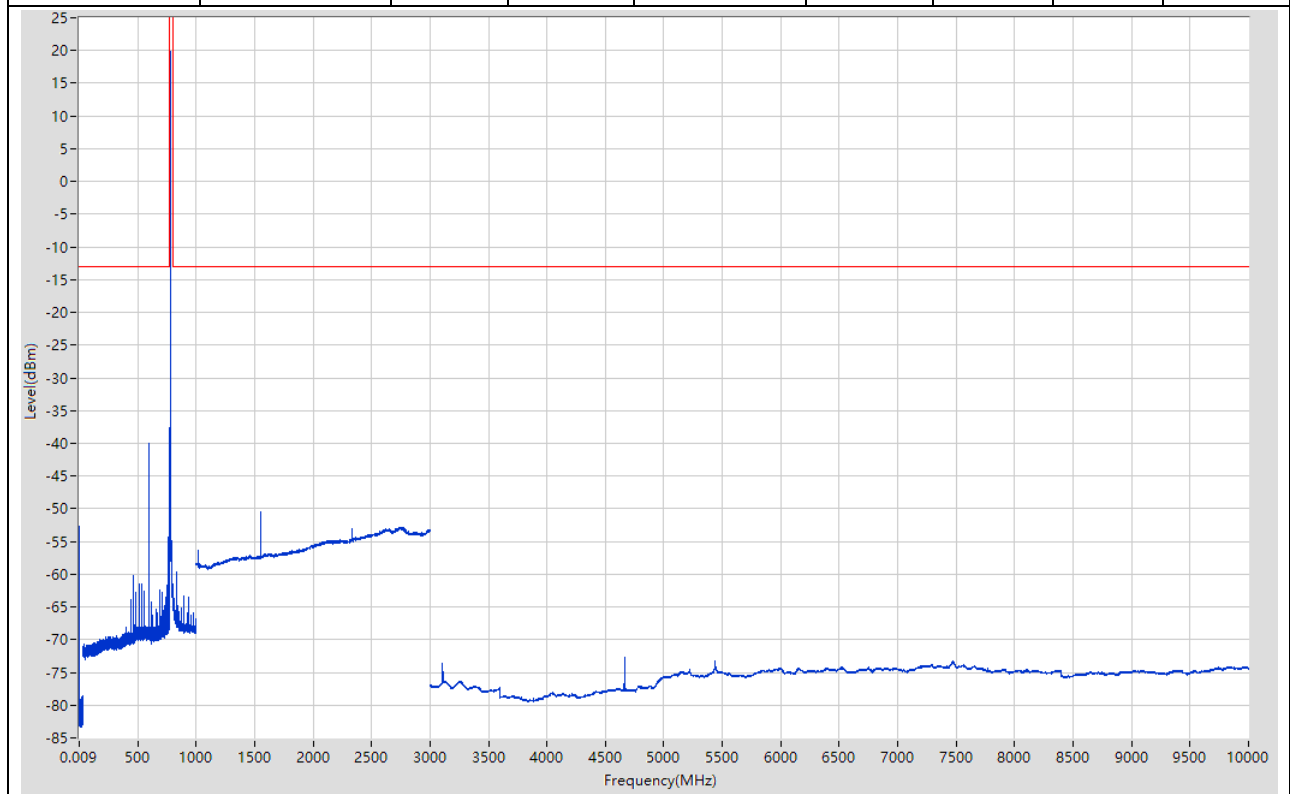


33.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.018	-54.3	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.12	-13	Pass	2985
30	767	0.1	RMS	481.261	-42.8	-13	Pass	7370
767	797	0.1	RMS	781.9	20.64	60	Pass	601
797	1000	0.1	RMS	801.202	-55.54	-13	Pass	2030
1000	3000	1	RMS	2345.673	-52.42	-13	Pass	2000
3000	10000	1	RMS	4691.242	-67.59	-13	Pass	7000

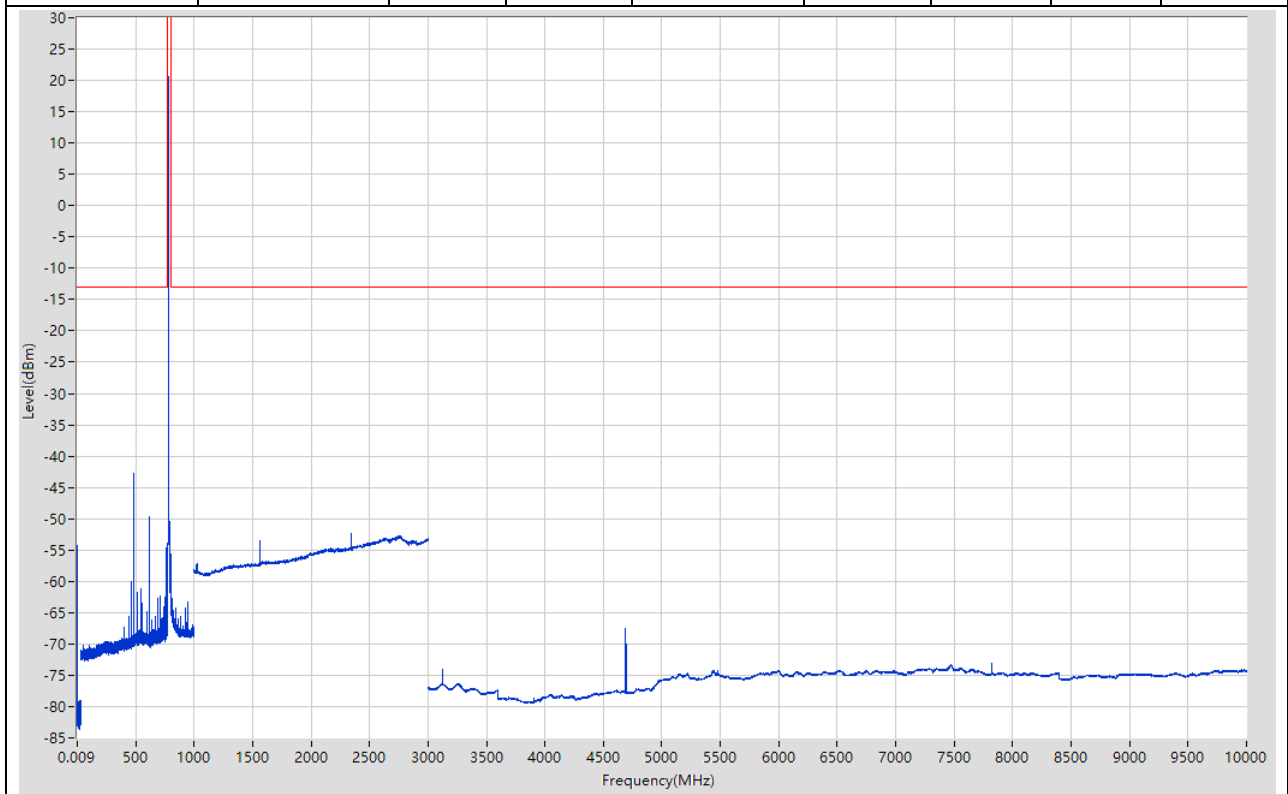


33.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.36	-13	Pass	601
0.15	30	0.01	RMS	0.16	-58.11	-13	Pass	2985
30	767	0.1	RMS	762.799	-55.33	-13	Pass	7370
767	797	0.1	RMS	781.9	20.77	60	Pass	601
797	1000	0.1	RMS	902.252	-51.09	-13	Pass	2030
1000	3000	1	RMS	2345.673	-52.52	-13	Pass	2000
3000	10000	1	RMS	4691.242	-68.73	-13	Pass	7000

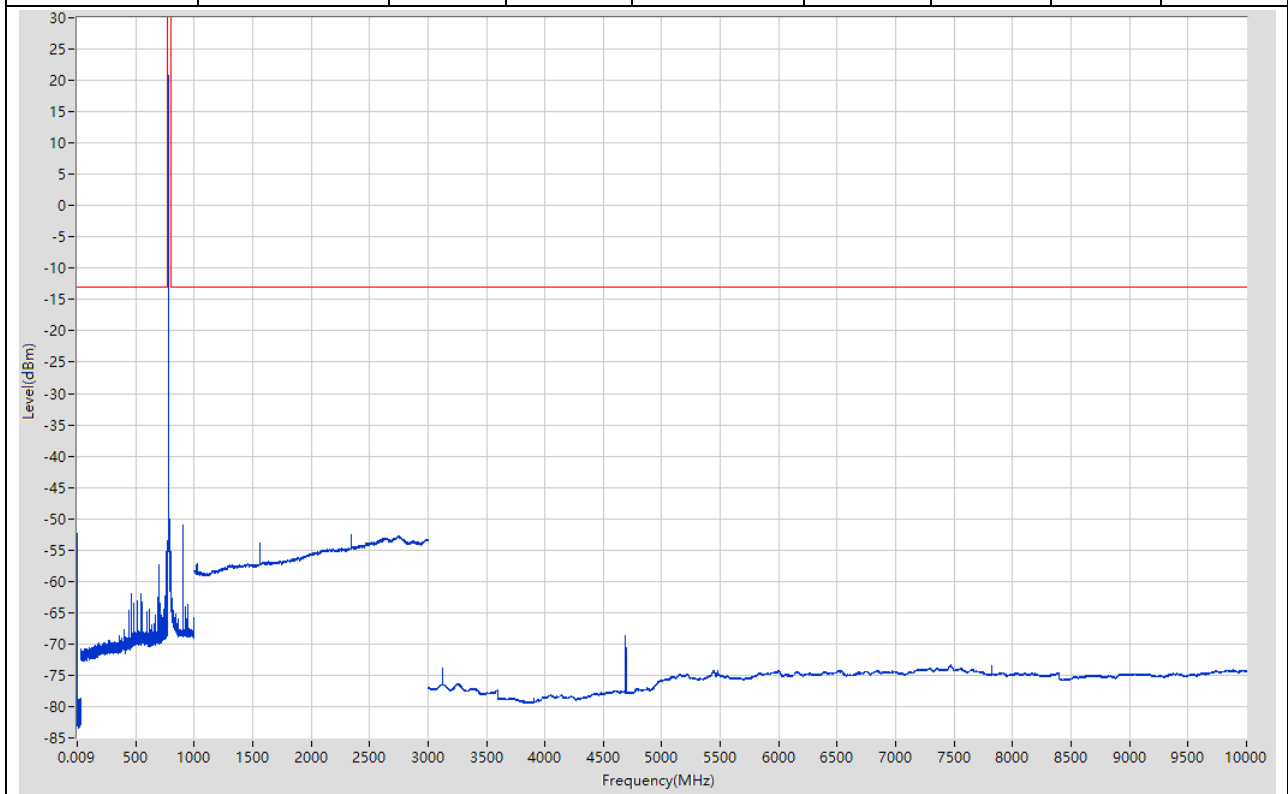


33.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.7	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.59	-13	Pass	2985
30	767	0.1	RMS	726.394	-41.26	-13	Pass	7370
767	797	0.1	RMS	786.8	20.6	60	Pass	601
797	1000	0.1	RMS	806.104	-55.18	-13	Pass	2030
1000	3000	1	RMS	2360.68	-52.48	-13	Pass	2000
3000	10000	1	RMS	4721.246	-64.83	-13	Pass	7000

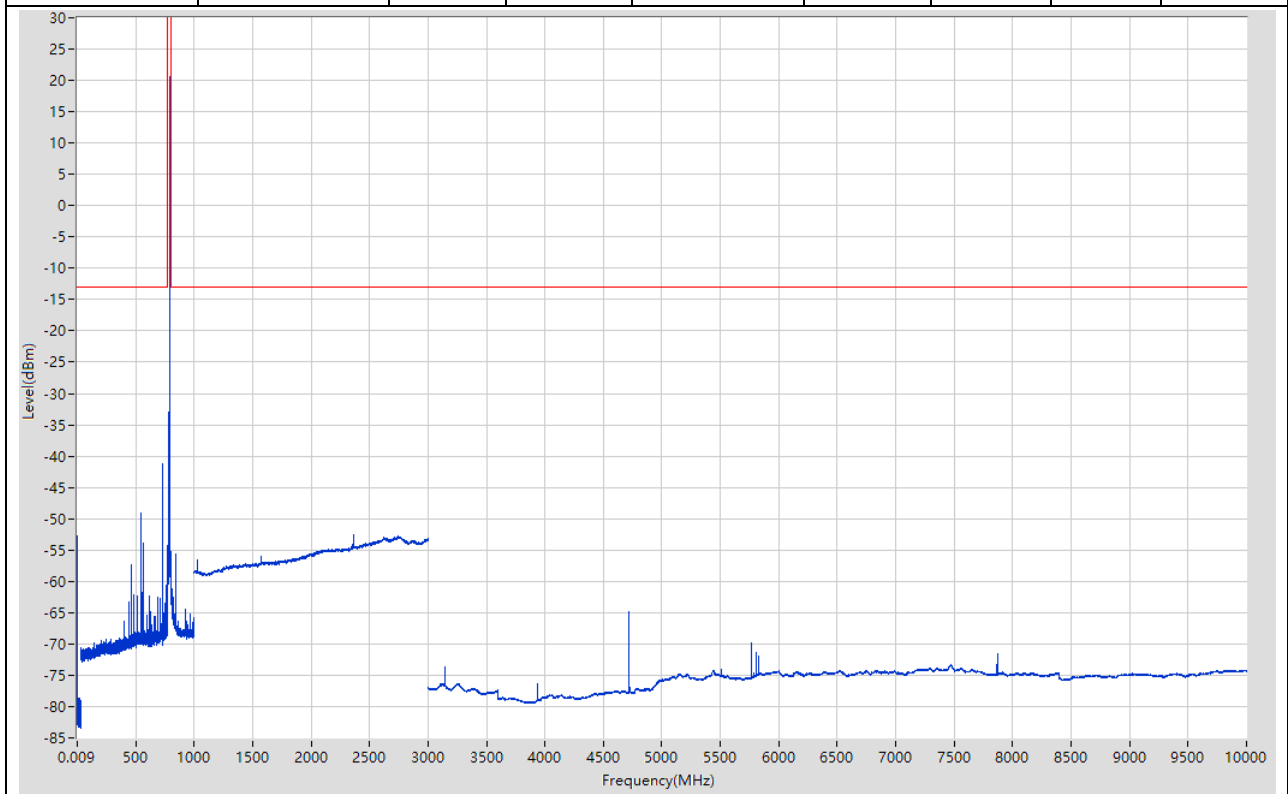


33.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.01	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.27	-13	Pass	2985
30	767	0.1	RMS	484.262	-42.14	-13	Pass	7370
767	797	0.1	RMS	786.8	20.58	60	Pass	601
797	1000	0.1	RMS	806.104	-55.43	-13	Pass	2030
1000	3000	1	RMS	2360.68	-52.55	-13	Pass	2000
3000	10000	1	RMS	4721.246	-64.97	-13	Pass	7000

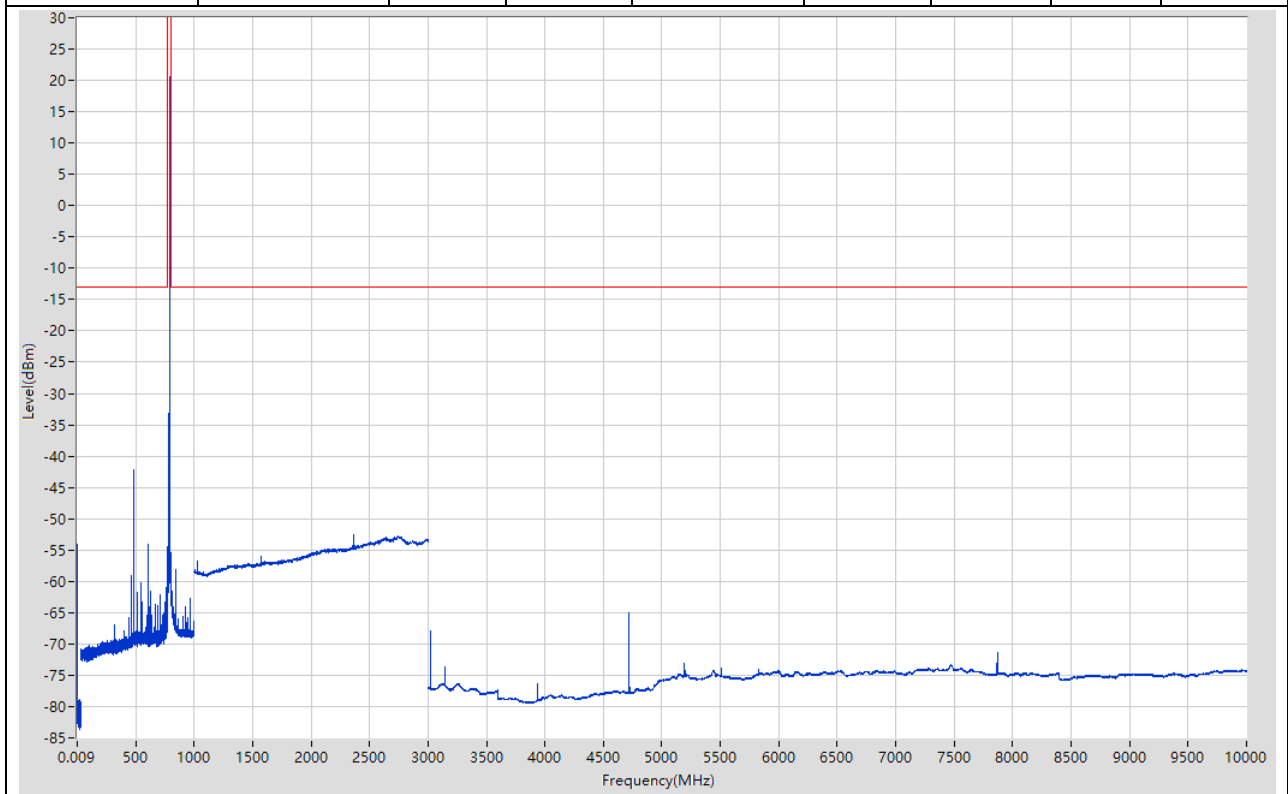


33.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.012	-53.58	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.04	-13	Pass	2985
30	767	0.1	RMS	556.771	-62.67	-13	Pass	7370
767	797	0.1	RMS	777.1	9.36	60	Pass	601
797	1000	0.1	RMS	921.661	-67.99	-13	Pass	2030
1000	3000	1	RMS	2740.87	-52.78	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.24	-13	Pass	7000

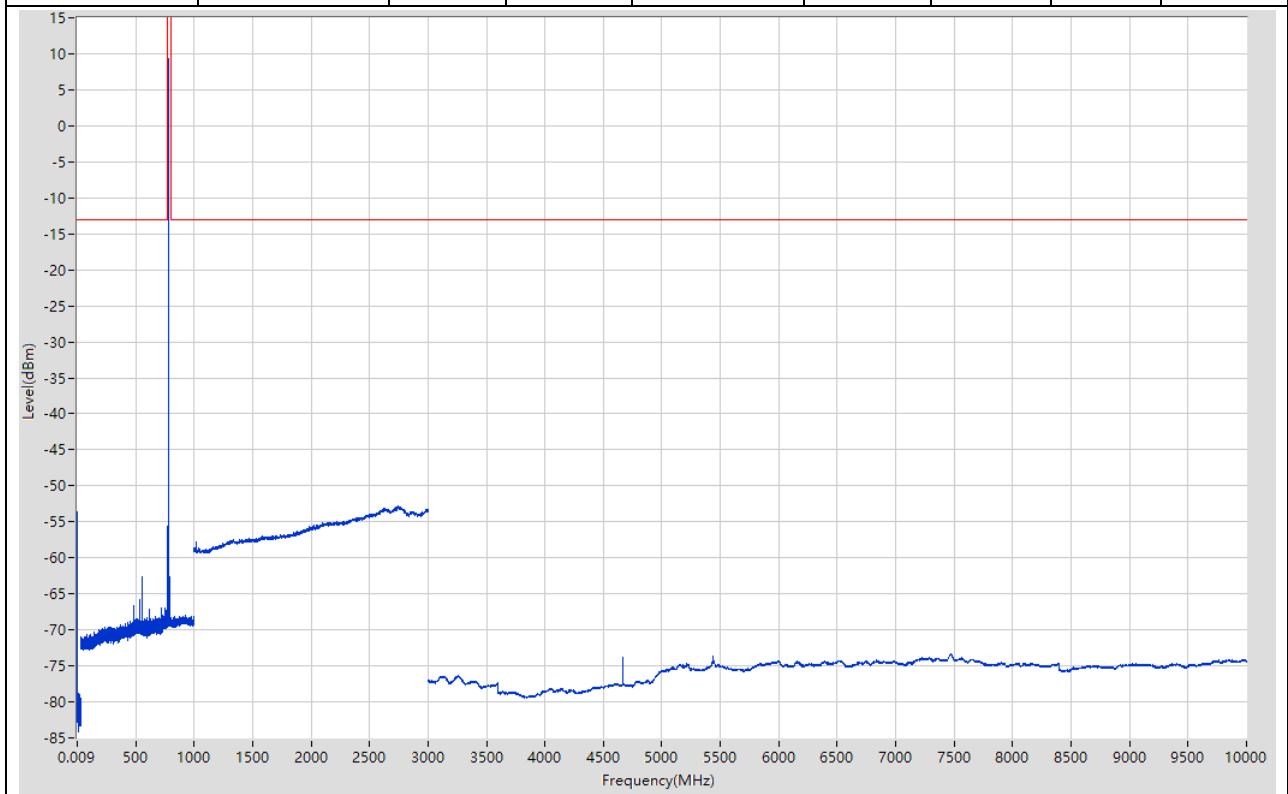


33.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54.18	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.59	-13	Pass	2985
30	767	0.1	RMS	710.392	-64.15	-13	Pass	7370
767	797	0.1	RMS	777.1	9.34	60	Pass	601
797	1000	0.1	RMS	844.824	-66.18	-13	Pass	2030
1000	3000	1	RMS	1554.277	-49.2	-13	Pass	2000
3000	10000	1	RMS	5182.312	-72.9	-13	Pass	7000

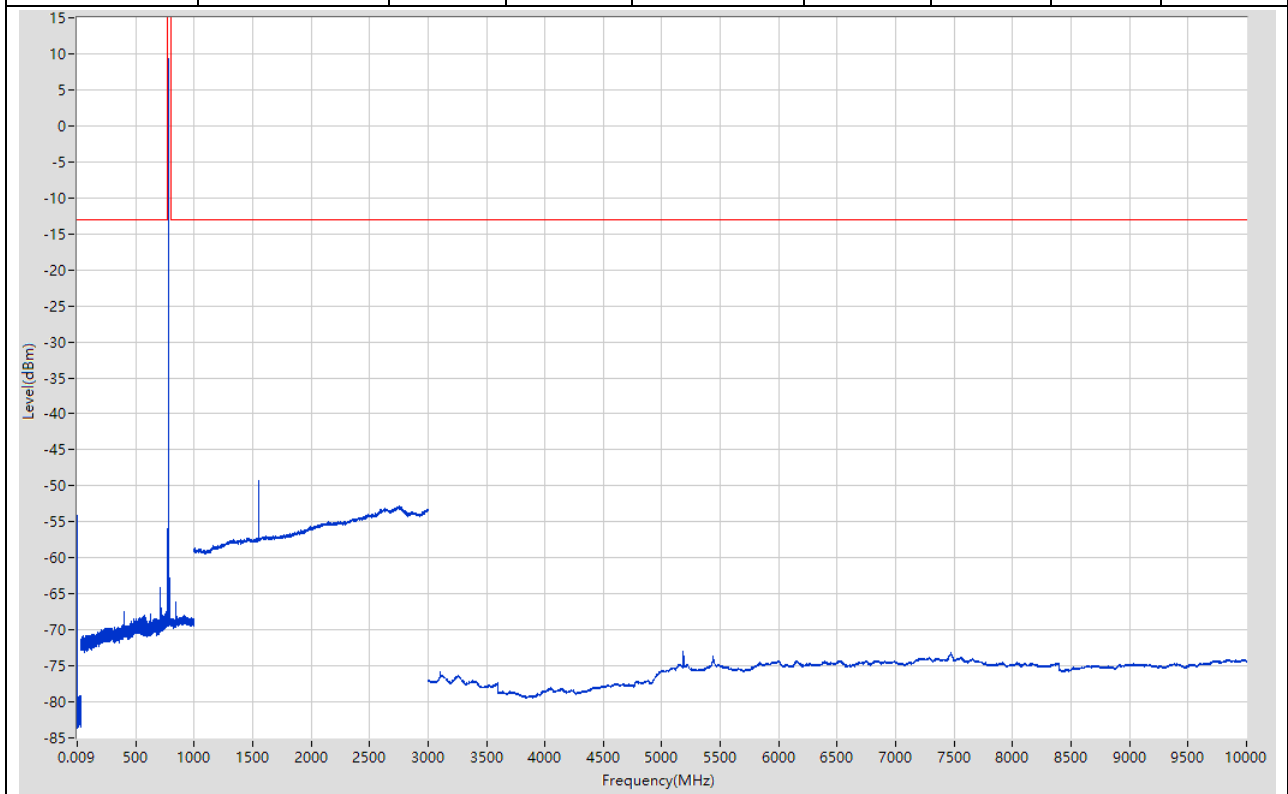


33.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.81	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.21	-13	Pass	2985
30	767	0.1	RMS	762.799	-58.53	-13	Pass	7370
767	797	0.1	RMS	782.05	10.55	60	Pass	601
797	1000	0.1	RMS	801.302	-62.83	-13	Pass	2030
1000	3000	1	RMS	2753.877	-52.85	-13	Pass	2000
3000	10000	1	RMS	3003	-68.76	-13	Pass	7000

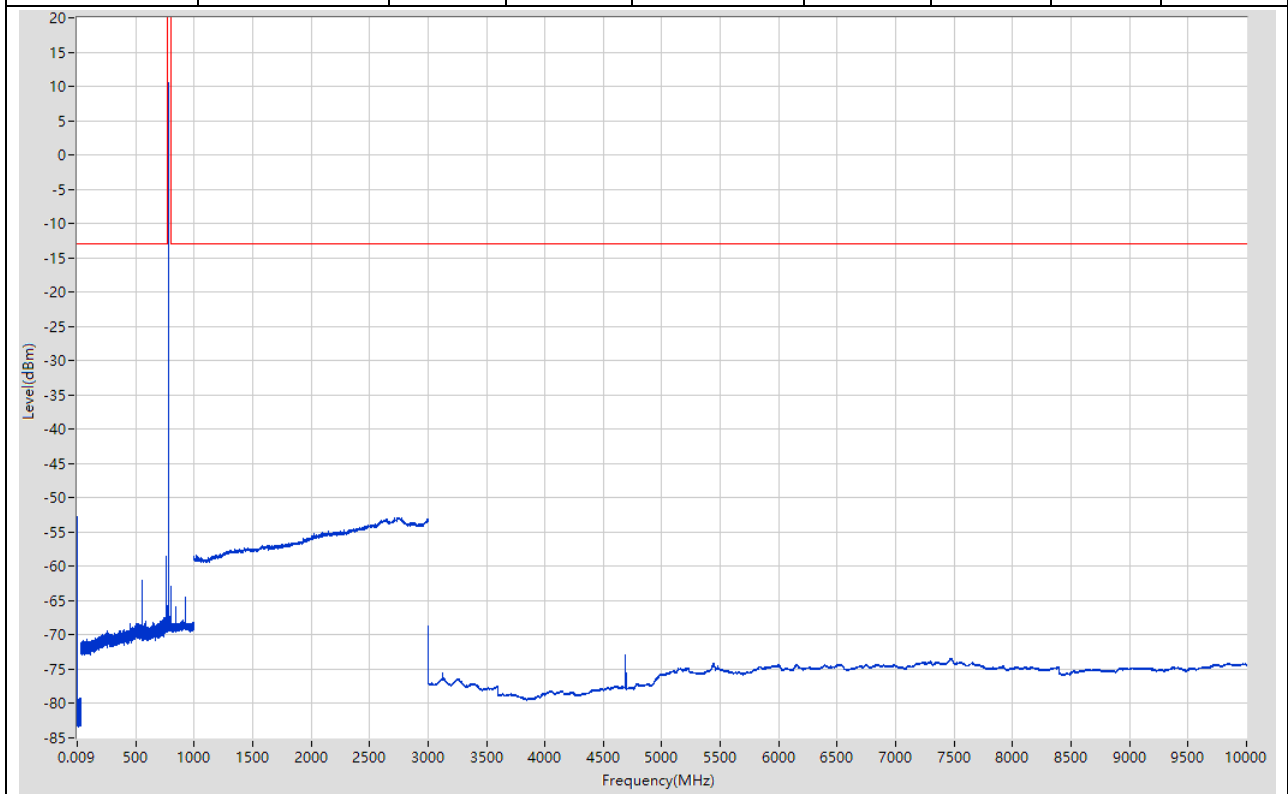


33.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.39	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.26	-13	Pass	2985
30	767	0.1	RMS	556.771	-62.7	-13	Pass	7370
767	797	0.1	RMS	782	10.91	60	Pass	601
797	1000	0.1	RMS	873.738	-67.95	-13	Pass	2030
1000	3000	1	RMS	2748.874	-52.81	-13	Pass	2000
3000	10000	1	RMS	3003	-68.68	-13	Pass	7000

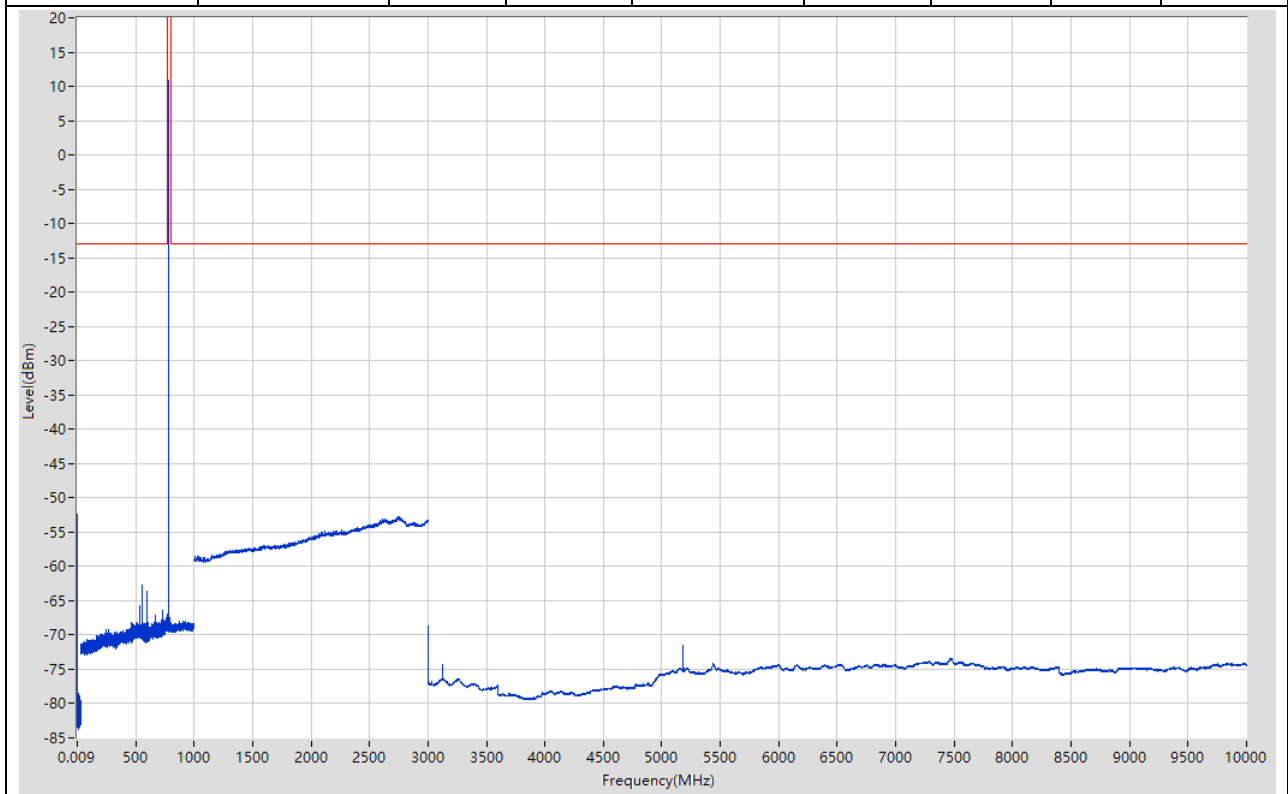


33.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.67	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.89	-13	Pass	2985
30	767	0.1	RMS	460.758	-56.17	-13	Pass	7370
767	797	0.1	RMS	786.9	10.59	60	Pass	601
797	1000	0.1	RMS	806.104	-58.13	-13	Pass	2030
1000	3000	1	RMS	2360.68	-52.09	-13	Pass	2000
3000	10000	1	RMS	3023.003	-67.72	-13	Pass	7000

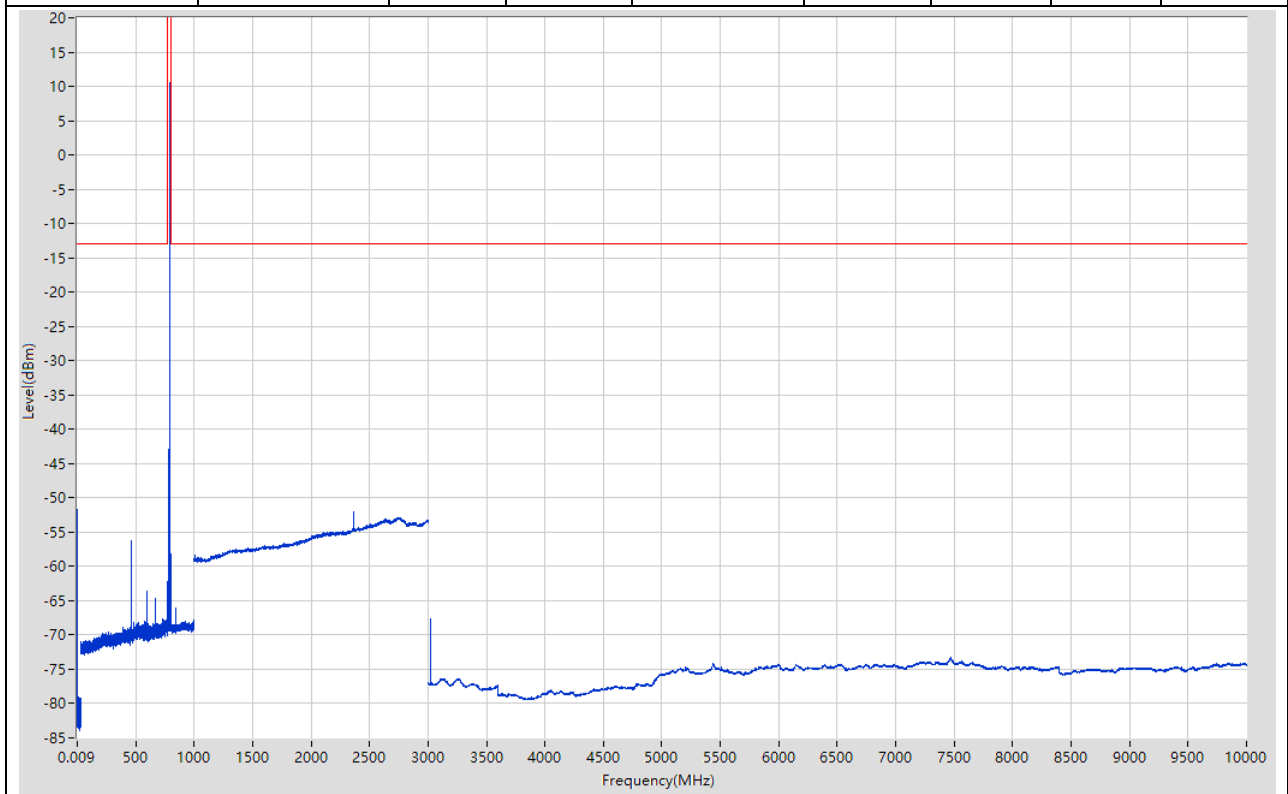

33.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.69	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.52	-13	Pass	2985
30	767	0.1	RMS	518.366	-62	-13	Pass	7370
767	797	0.1	RMS	786.9	10.6	60	Pass	601
797	1000	0.1	RMS	799.301	-67.42	-13	Pass	2030
1000	3000	1	RMS	2753.877	-52.74	-13	Pass	2000
3000	10000	1	RMS	3023.003	-67.65	-13	Pass	7000

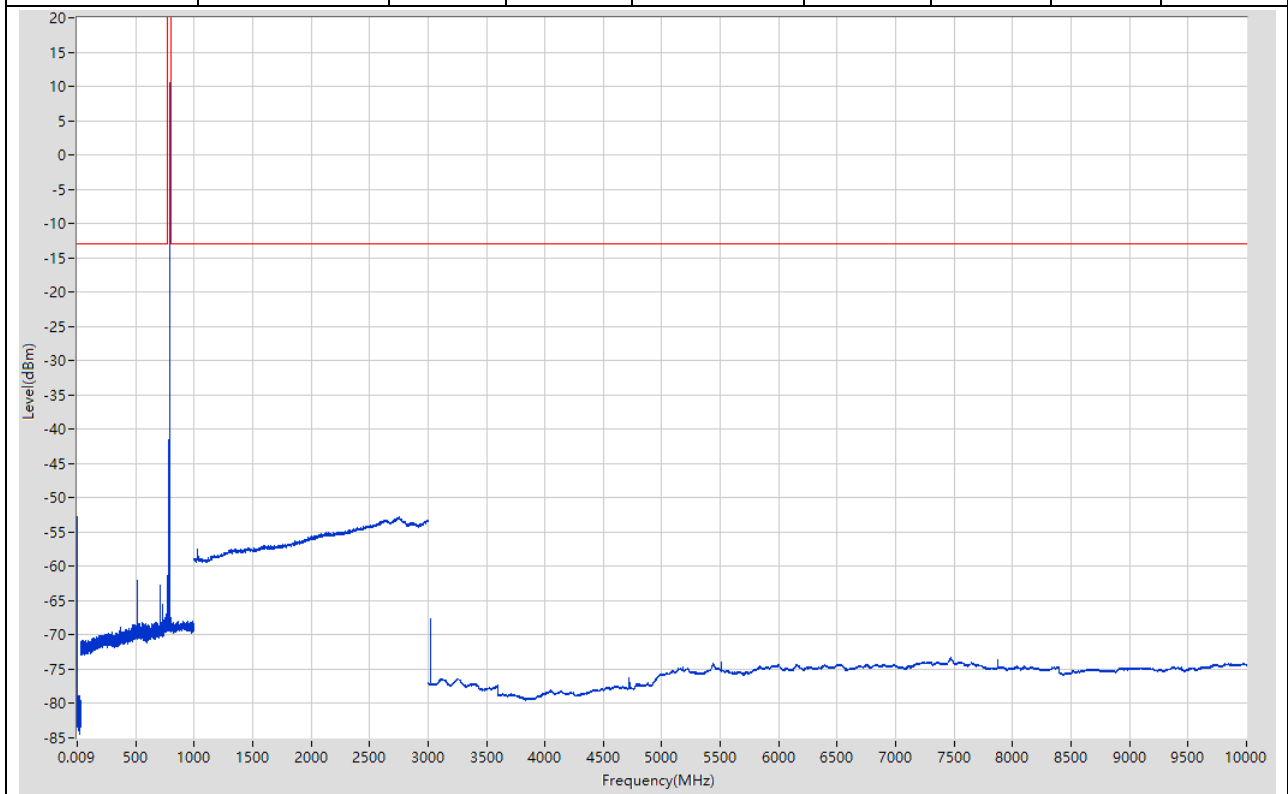

37. NB-IOT_Band25


37.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.31	-13	Pass	601
0.15	30	0.01	RMS	0.15	-55.89	-13	Pass	2985
30	1000	0.1	RMS	851.585	-63.59	-13	Pass	9700
1000	1840	1	RMS	1673.802	-44.79	-13	Pass	840
1840	1925	1	RMS	1849.917	21.6	60	Pass	601
1925	3000	1	RMS	2026.094	-45.99	-13	Pass	1075
3000	20000	1	RMS	3700.041	-42.08	-13	Pass	17000

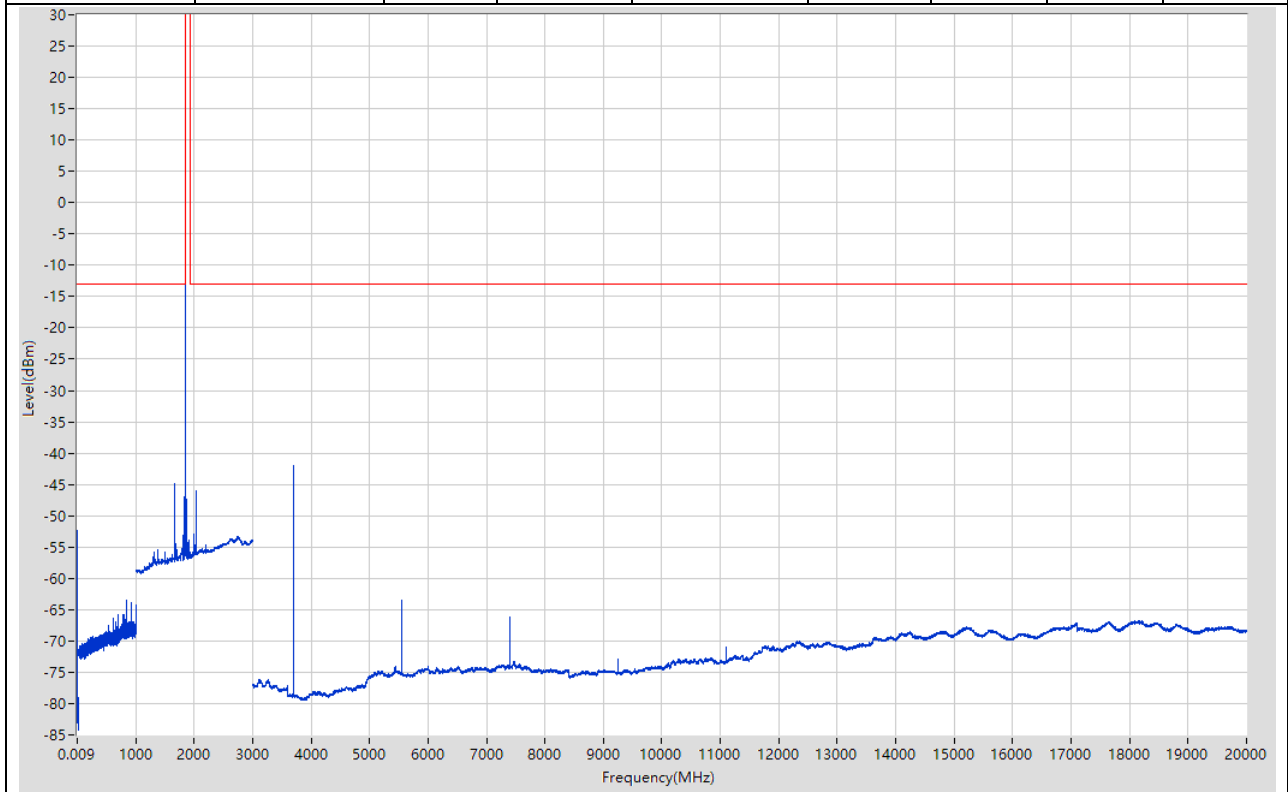


37.2. NB-IoT 3.75K Low BPSK Spurious RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.23	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.79	-13	Pass	2985
30	1000	0.1	RMS	880.988	-59.2	-13	Pass	9700
1000	1840	1	RMS	1673.802	-45.34	-13	Pass	840
1840	1925	1	RMS	1849.917	21.46	60	Pass	601
1925	3000	1	RMS	2114.176	-44.72	-13	Pass	1075
3000	20000	1	RMS	3700.041	-41.34	-13	Pass	17000

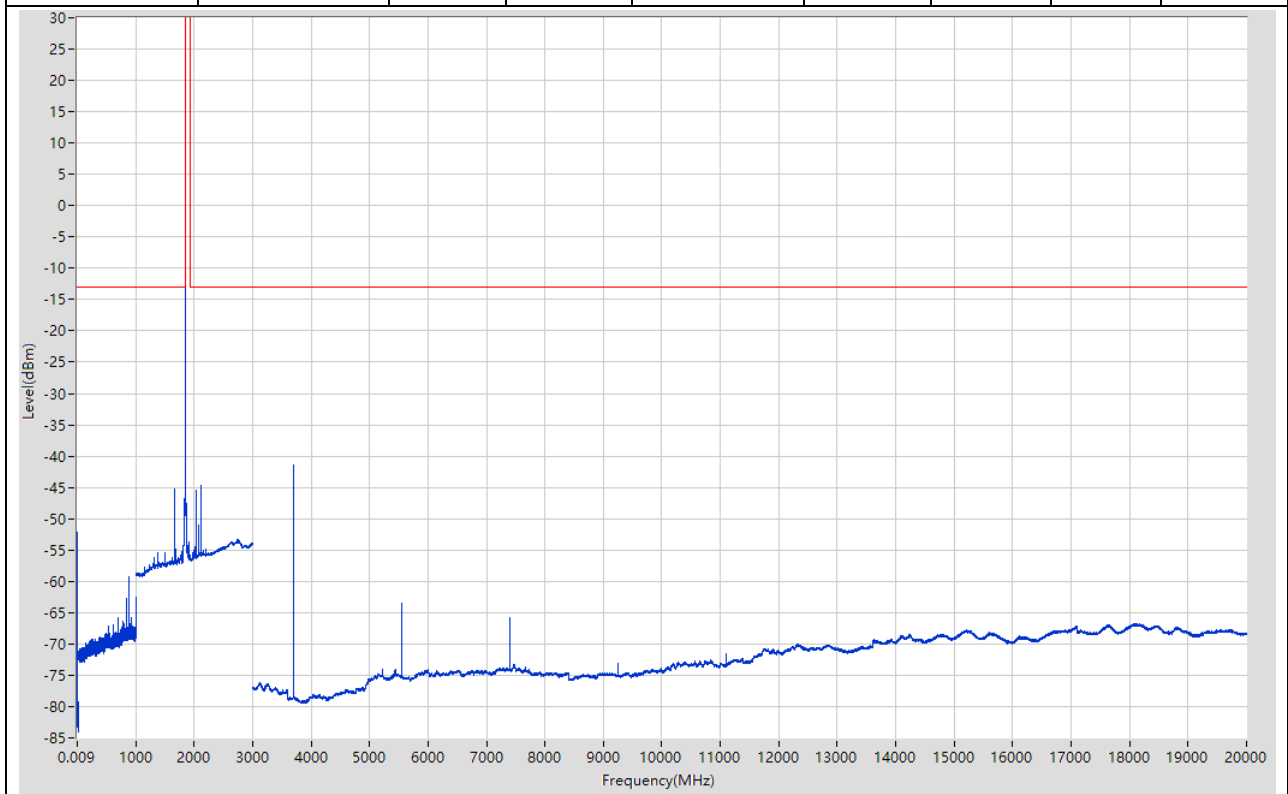


37.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.18	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.21	-13	Pass	2985
30	1000	0.1	RMS	921.592	-62.68	-13	Pass	9700
1000	1840	1	RMS	1702.837	-43.91	-13	Pass	840
1840	1925	1	RMS	1882.5	21.53	60	Pass	601
1925	3000	1	RMS	2062.128	-46.63	-13	Pass	1075
3000	20000	1	RMS	3765.045	-42.98	-13	Pass	17000

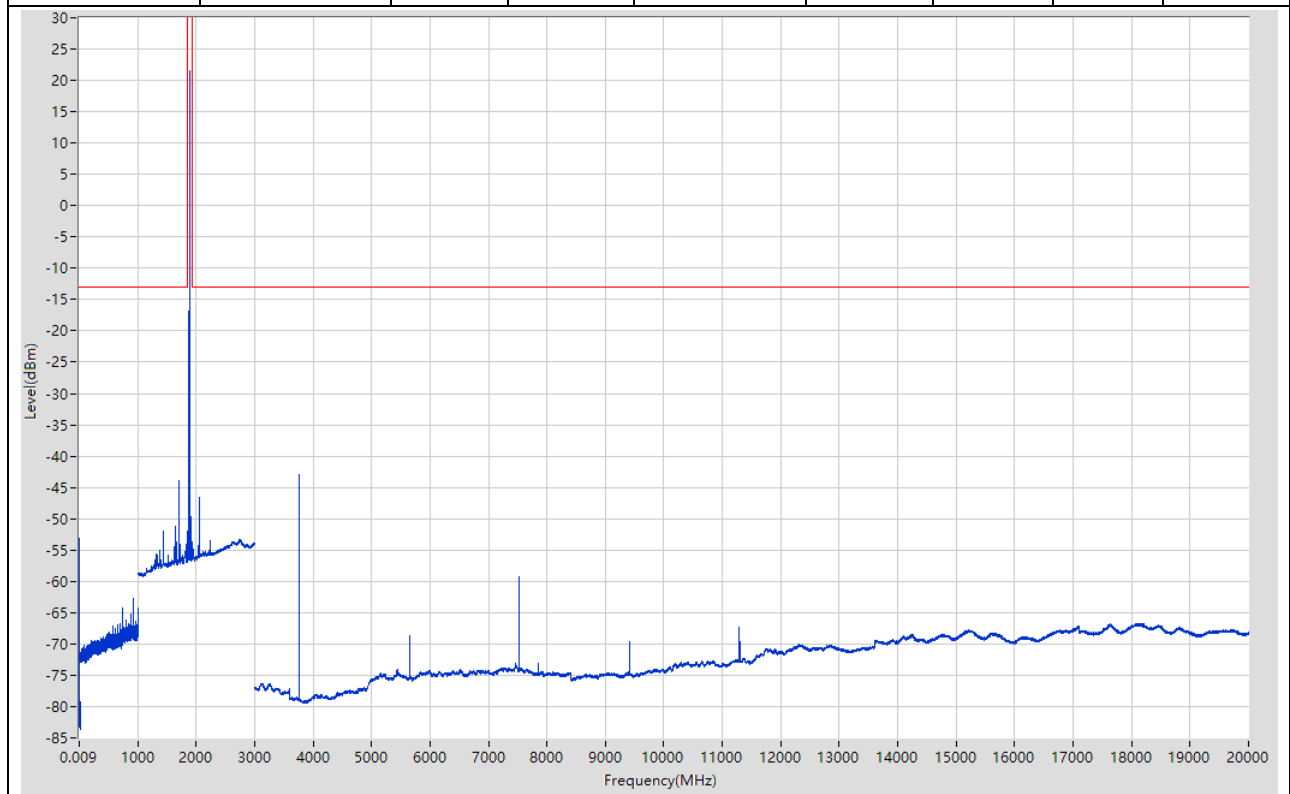


37.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-53.06	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.83	-13	Pass	2985
30	1000	0.1	RMS	627.362	-59.18	-13	Pass	9700
1000	1840	1	RMS	1702.837	-43.96	-13	Pass	840
1840	1925	1	RMS	1882.358	21.6	60	Pass	601
1925	3000	1	RMS	2062.128	-46.82	-13	Pass	1075
3000	20000	1	RMS	3765.045	-43.07	-13	Pass	17000

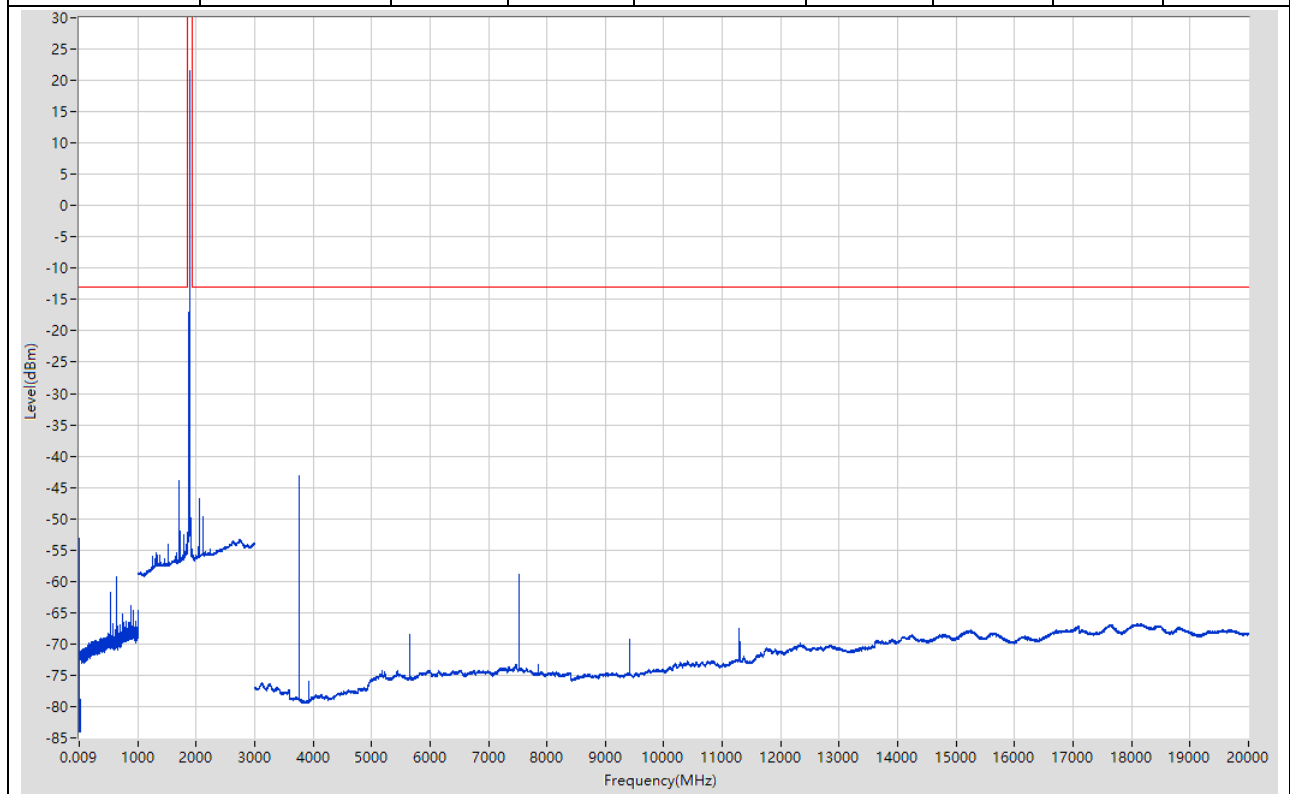


37.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.83	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.88	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.41	-13	Pass	9700
1000	1840	1	RMS	1732.872	-41.78	-13	Pass	840
1840	1925	1	RMS	1914.942	21.78	60	Pass	601
1925	3000	1	RMS	2188.245	-43.02	-13	Pass	1075
3000	20000	1	RMS	3830.049	-54.04	-13	Pass	17000

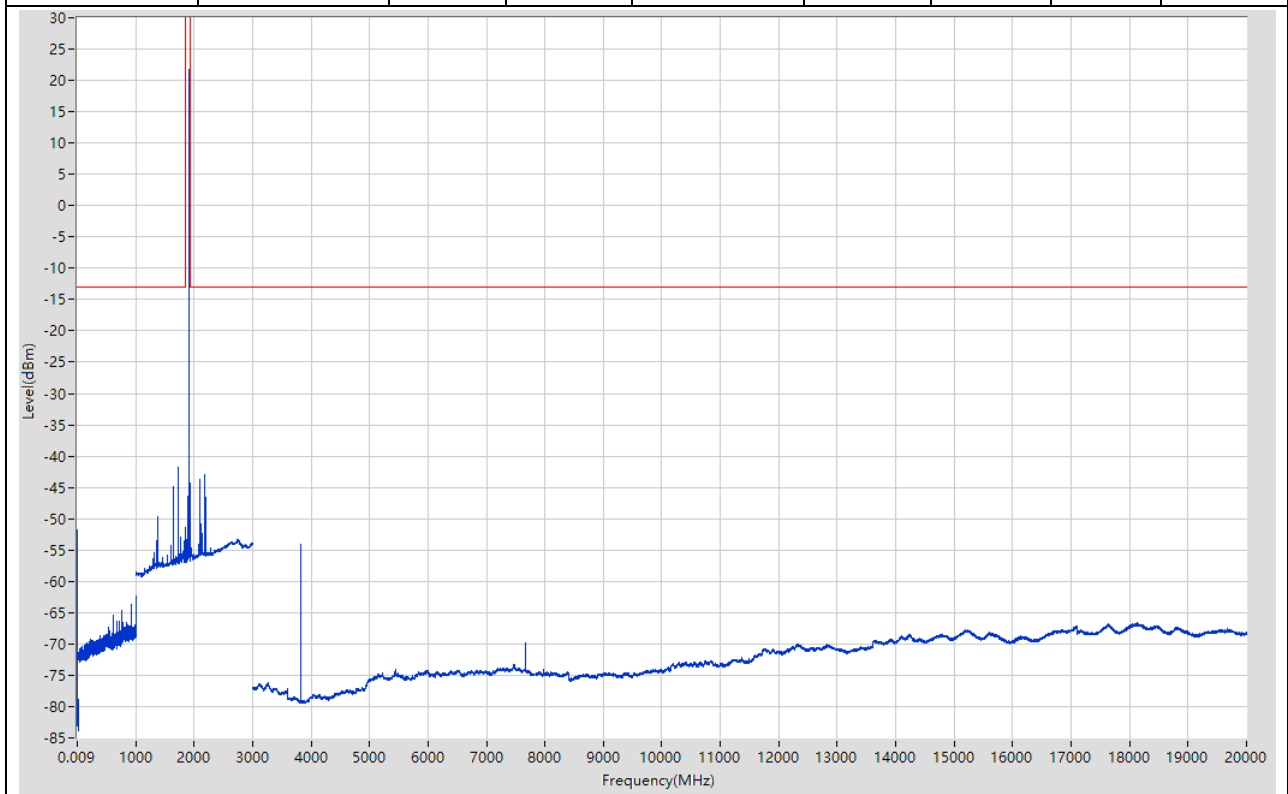


37.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.44	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.7	-13	Pass	2985
30	1000	0.1	RMS	547.053	-63.03	-13	Pass	9700
1000	1840	1	RMS	1732.872	-41.9	-13	Pass	840
1840	1925	1	RMS	1914.8	21.83	60	Pass	601
1925	3000	1	RMS	2097.16	-46	-13	Pass	1075
3000	20000	1	RMS	3830.049	-56.27	-13	Pass	17000

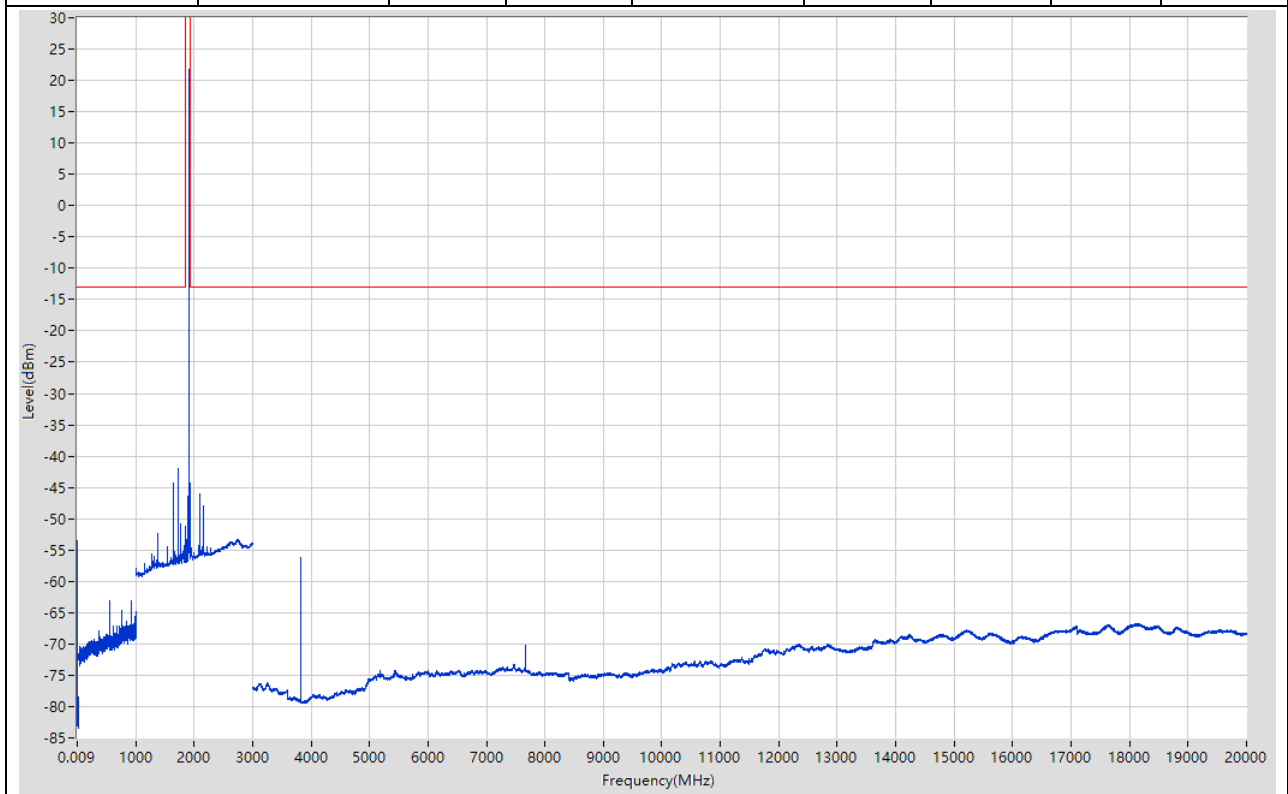


37.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.65	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.27	-13	Pass	2985
30	1000	0.1	RMS	998.4	-60.26	-13	Pass	9700
1000	1840	1	RMS	1673.802	-53.63	-13	Pass	840
1840	1925	1	RMS	1849.917	11.03	60	Pass	601
1925	3000	1	RMS	2026.094	-53.37	-13	Pass	1075
3000	20000	1	RMS	3700.041	-63.02	-13	Pass	17000

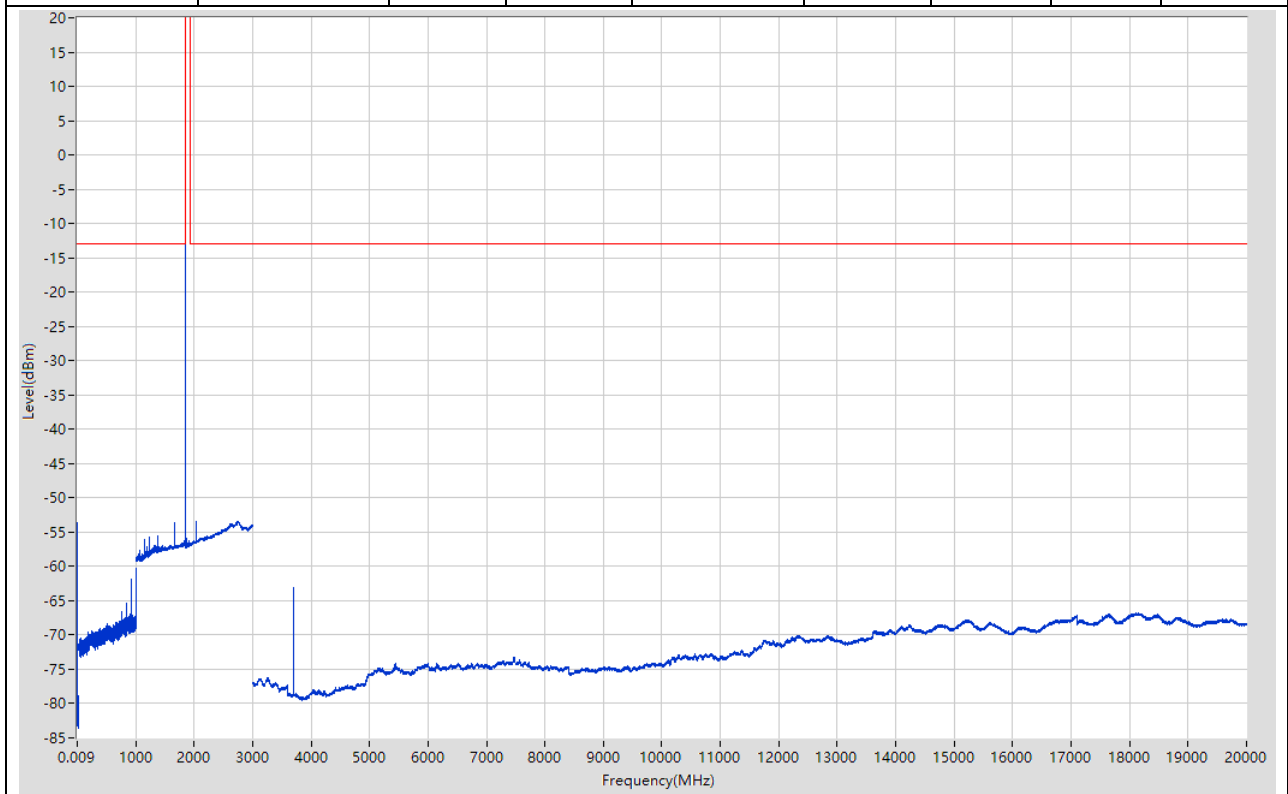


37.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.94	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.44	-13	Pass	2985
30	1000	0.1	RMS	998.4	-61.09	-13	Pass	9700
1000	1840	1	RMS	1673.802	-53.52	-13	Pass	840
1840	1925	1	RMS	1850.058	11.12	60	Pass	601
1925	3000	1	RMS	2745.764	-53.45	-13	Pass	1075
3000	20000	1	RMS	18095.888	-66.76	-13	Pass	17000

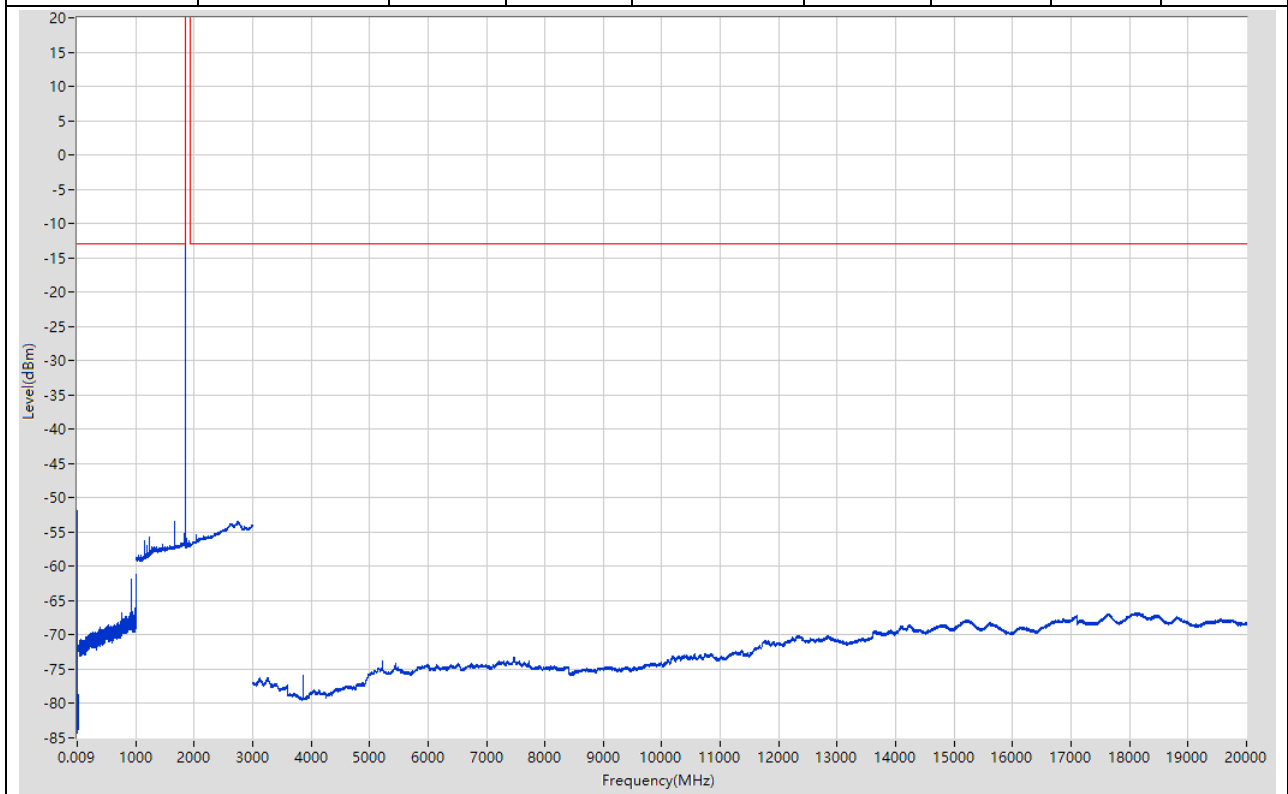


37.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.03	-13	Pass	601
0.15	30	0.01	RMS	0.16	-56.87	-13	Pass	2985
30	1000	0.1	RMS	921.592	-60.95	-13	Pass	9700
1000	1840	1	RMS	1305.364	-53	-13	Pass	840
1840	1925	1	RMS	1882.358	11.04	60	Pass	601
1925	3000	1	RMS	2748.766	-53.46	-13	Pass	1075
3000	20000	1	RMS	18142.891	-66.77	-13	Pass	17000

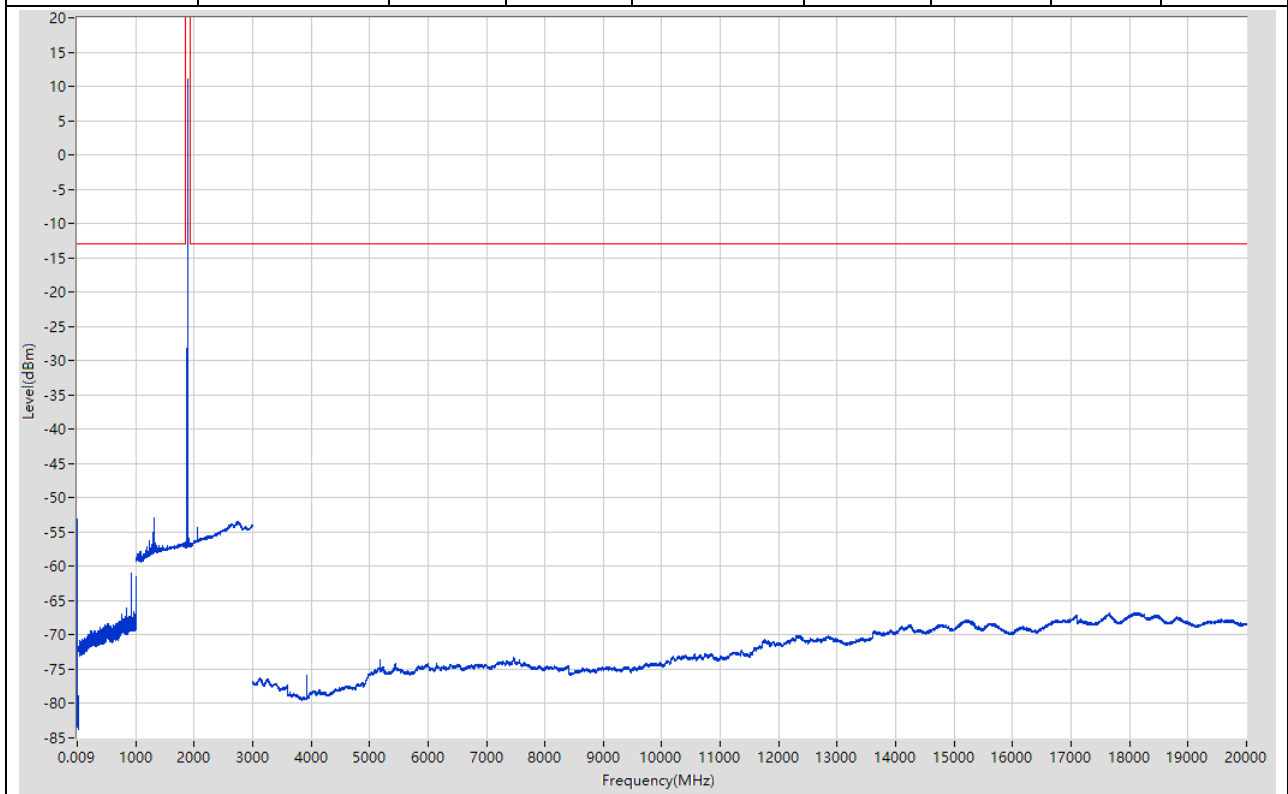


37.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.02	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.98	-13	Pass	2985
30	1000	0.1	RMS	921.592	-60.92	-13	Pass	9700
1000	1840	1	RMS	1702.837	-55.57	-13	Pass	840
1840	1925	1	RMS	1882.5	11.22	60	Pass	601
1925	3000	1	RMS	2742.761	-53.38	-13	Pass	1075
3000	20000	1	RMS	18176.893	-66.76	-13	Pass	17000

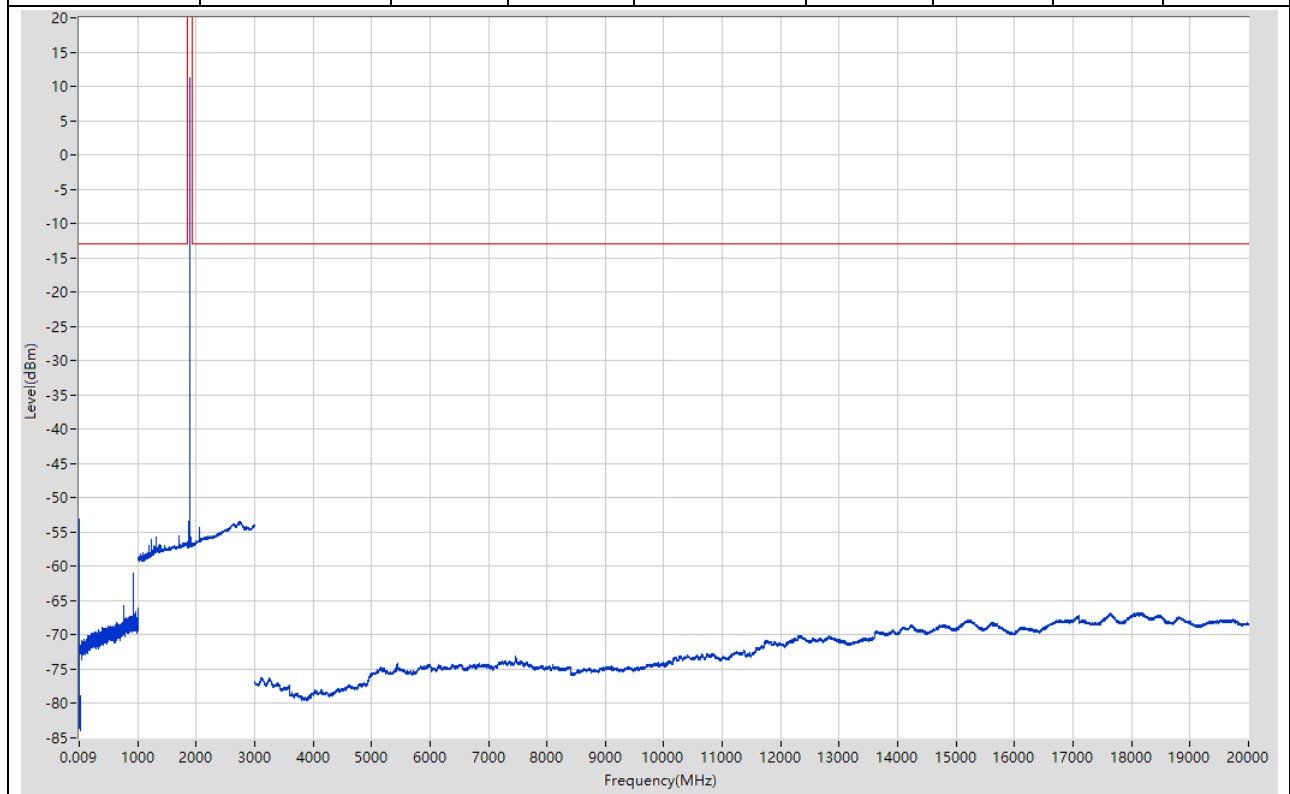


37.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.39	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.99	-13	Pass	2985
30	1000	0.1	RMS	921.592	-60.67	-13	Pass	9700
1000	1840	1	RMS	1305.364	-54.07	-13	Pass	840
1840	1925	1	RMS	1915.225	8.9	60	Pass	601
1925	3000	1	RMS	2097.16	-53.12	-13	Pass	1075
3000	20000	1	RMS	18204.894	-66.71	-13	Pass	17000

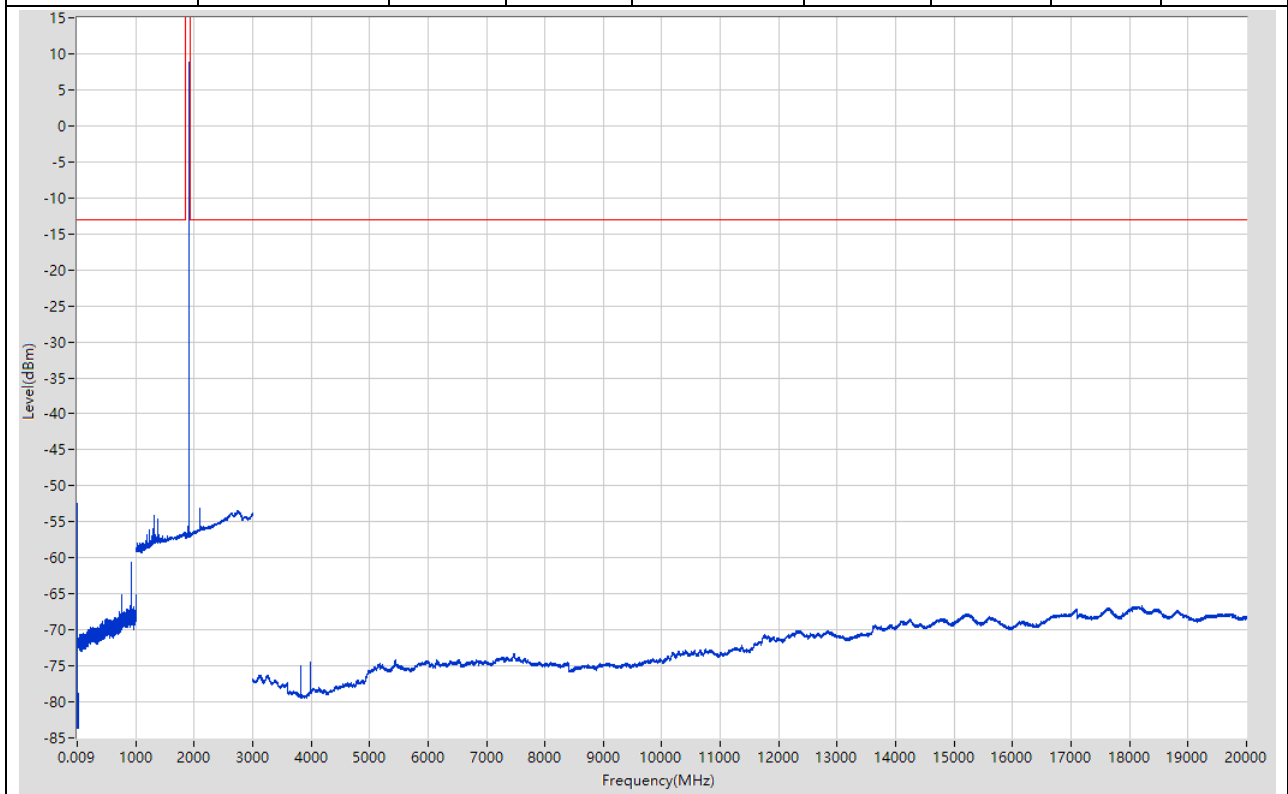

37.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.13	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.72	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.33	-13	Pass	9700
1000	1840	1	RMS	1732.872	-51.2	-13	Pass	840
1840	1925	1	RMS	1914.658	10.44	60	Pass	601
1925	3000	1	RMS	2097.16	-53.07	-13	Pass	1075
3000	20000	1	RMS	18175.893	-66.74	-13	Pass	17000

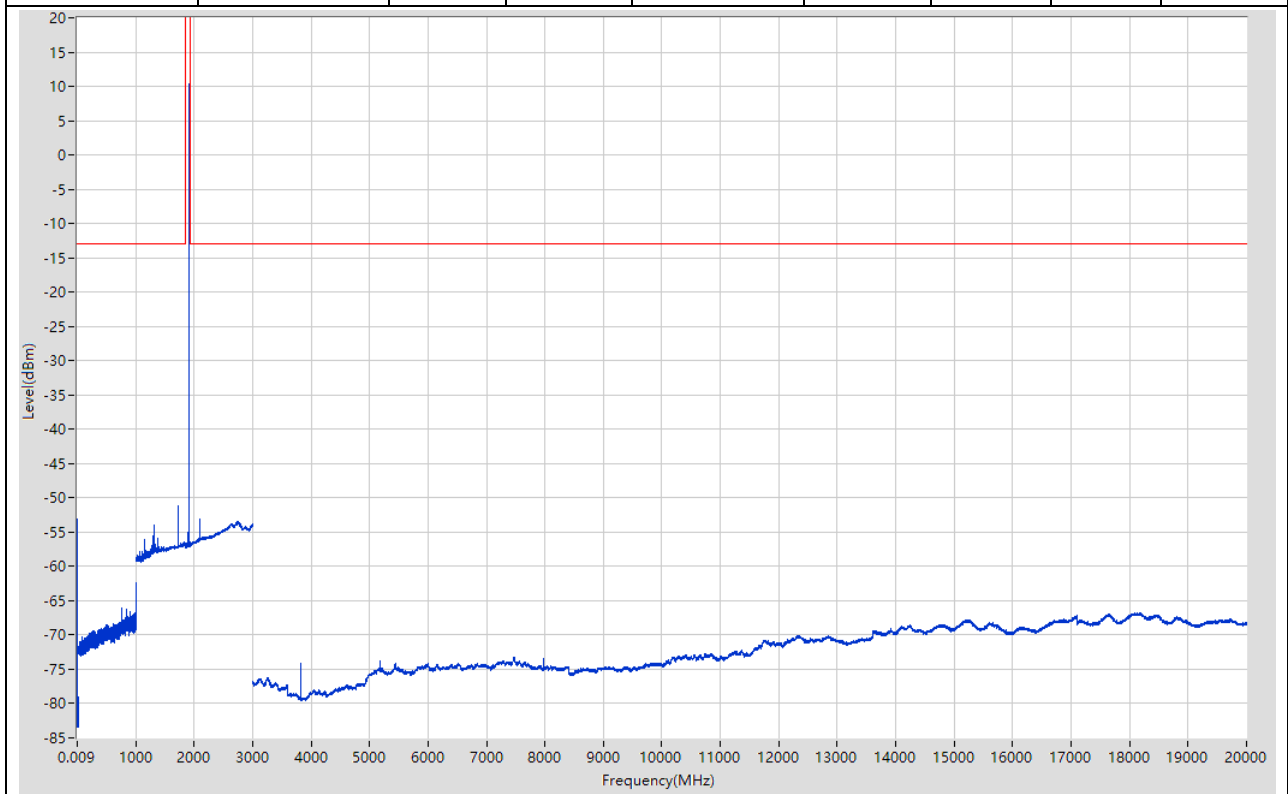

38. NB-IOT_Band66


38.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-51.95	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.39	-13	Pass	2985
30	1000	0.1	RMS	594.858	-61.63	-13	Pass	9700
1000	1700	1	RMS	1560.801	-43.41	-13	Pass	700
1700	1790	1	RMS	1710.05	20.61	60	Pass	601
1790	3000	1	RMS	1859.057	-37.35	-13	Pass	1210
3000	20000	1	RMS	3420.025	-27.49	-13	Pass	17000

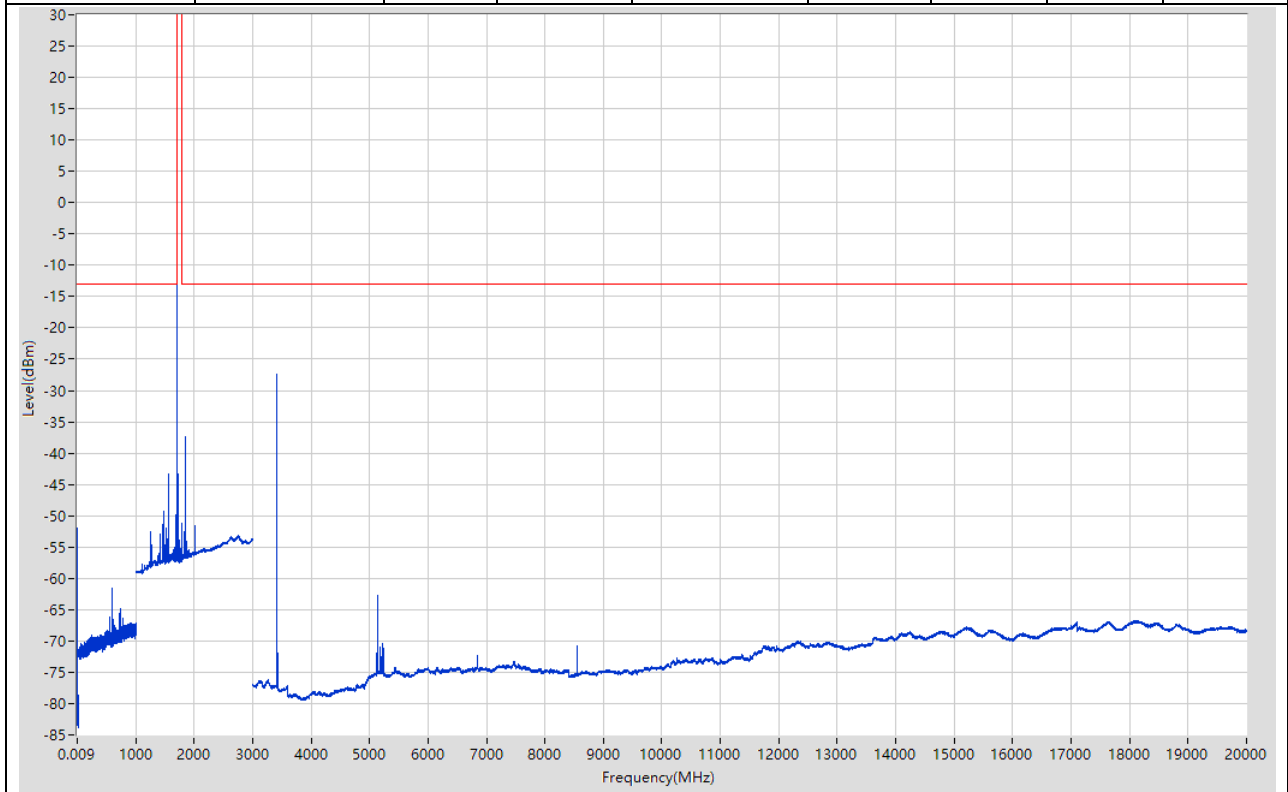


38.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.65	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.45	-13	Pass	2985
30	1000	0.1	RMS	711.57	-65.32	-13	Pass	9700
1000	1700	1	RMS	1560.801	-43.27	-13	Pass	700
1700	1790	1	RMS	1710.05	20.47	60	Pass	601
1790	3000	1	RMS	1859.057	-41.54	-13	Pass	1210
3000	20000	1	RMS	3420.025	-26.86	-13	Pass	17000

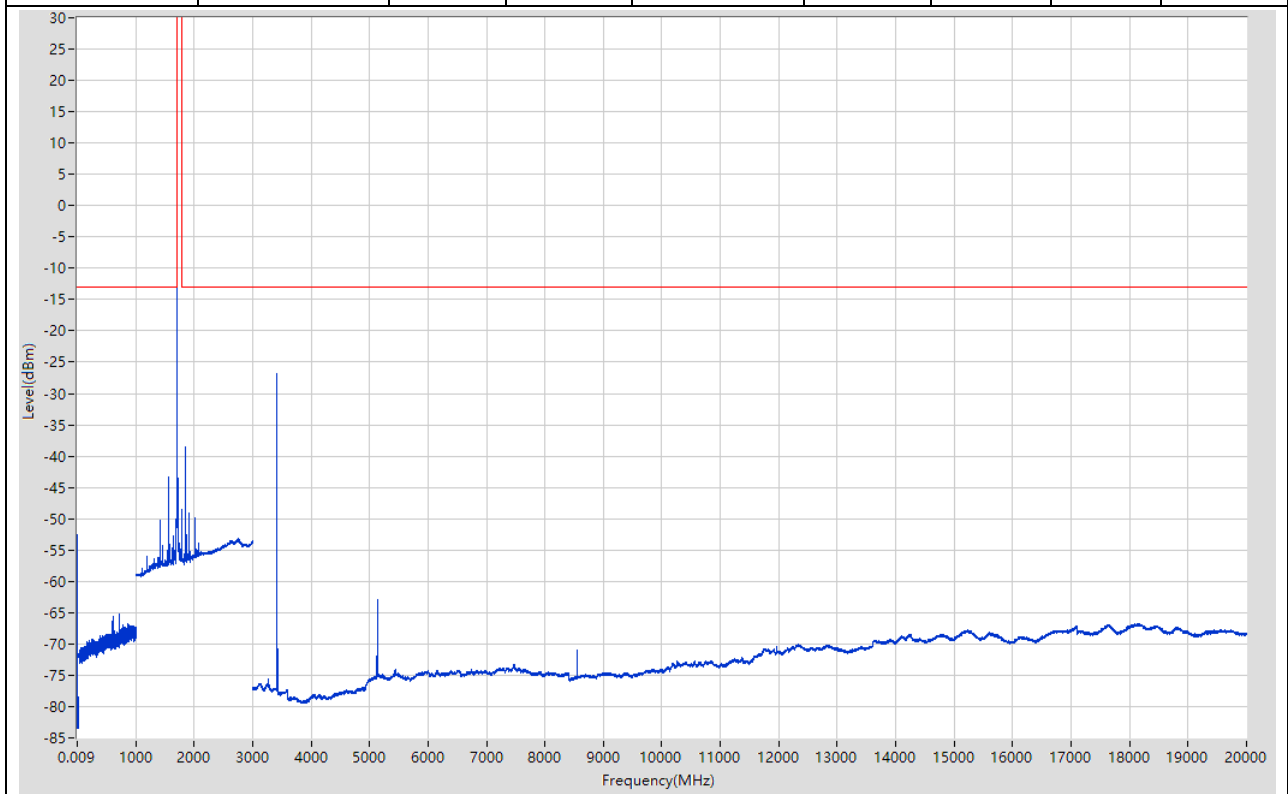


38.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.88	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.97	-13	Pass	2985
30	1000	0.1	RMS	746.474	-64.11	-13	Pass	9700
1000	1700	1	RMS	1592.847	-44.06	-13	Pass	700
1700	1790	1	RMS	1744.85	20.31	60	Pass	601
1790	3000	1	RMS	1897.089	-44.61	-13	Pass	1210
3000	20000	1	RMS	3490.029	-28.9	-13	Pass	17000

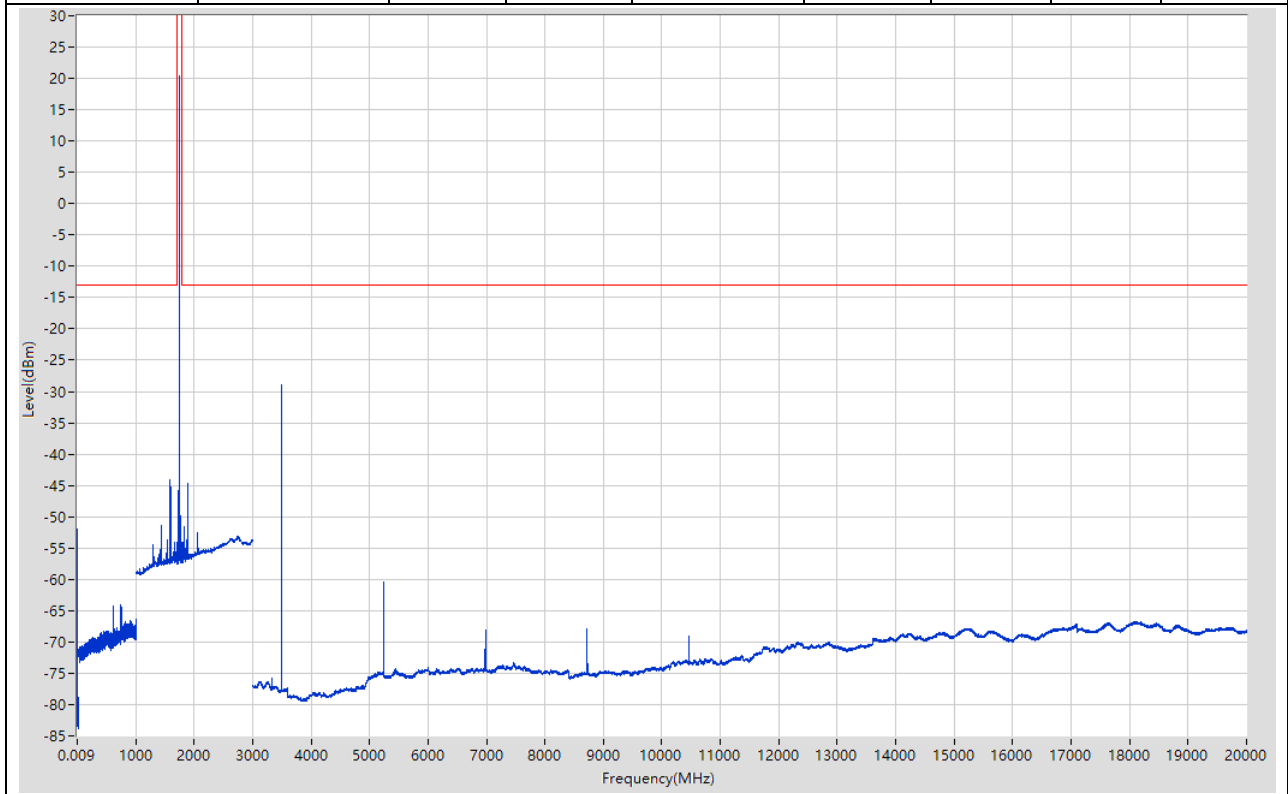


38.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.96	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.01	-13	Pass	2985
30	1000	0.1	RMS	746.474	-64.07	-13	Pass	9700
1000	1700	1	RMS	1592.847	-43.9	-13	Pass	700
1700	1790	1	RMS	1744.85	20.23	60	Pass	601
1790	3000	1	RMS	1897.089	-40.05	-13	Pass	1210
3000	20000	1	RMS	3490.029	-28.9	-13	Pass	17000

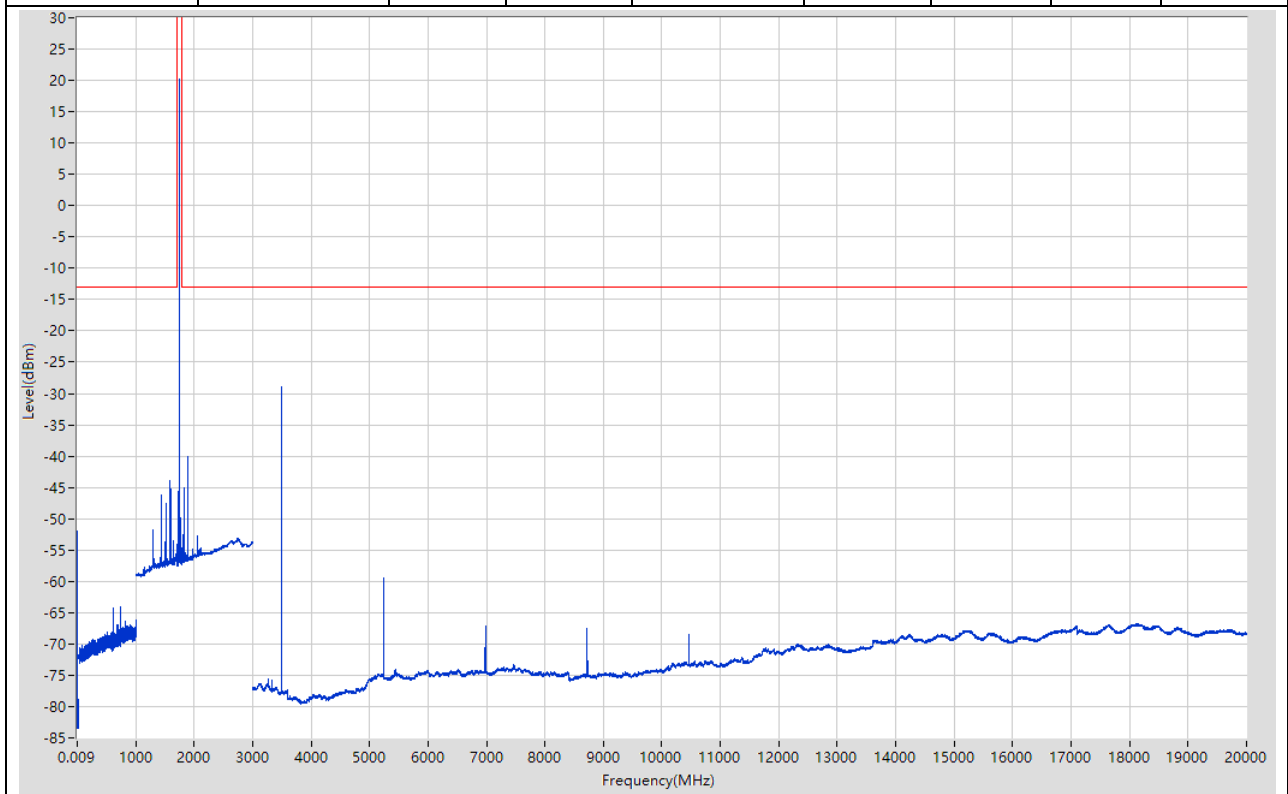


38.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.71	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.21	-13	Pass	2985
30	1000	0.1	RMS	781.377	-63.31	-13	Pass	9700
1000	1700	1	RMS	1525.751	-38.47	-13	Pass	700
1700	1790	1	RMS	1779.8	20.81	60	Pass	601
1790	3000	1	RMS	1790	-48.25	-13	Pass	1210
3000	20000	1	RMS	3560.033	-32.81	-13	Pass	17000

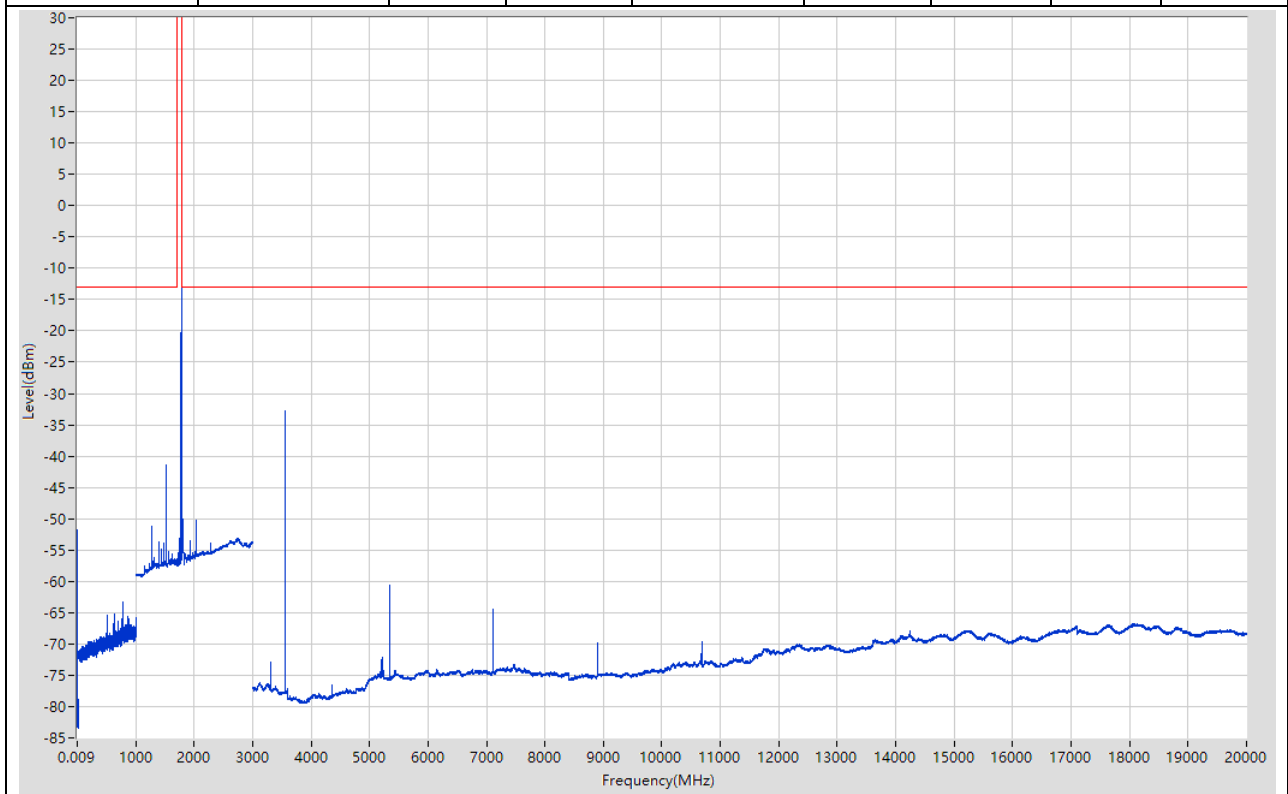


38.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.36	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.67	-13	Pass	2985
30	1000	0.1	RMS	627.762	-65.09	-13	Pass	9700
1000	1700	1	RMS	1525.751	-44.09	-13	Pass	700
1700	1790	1	RMS	1779.8	20.92	60	Pass	601
1790	3000	1	RMS	1790	-47.72	-13	Pass	1210
3000	20000	1	RMS	3560.033	-32.55	-13	Pass	17000

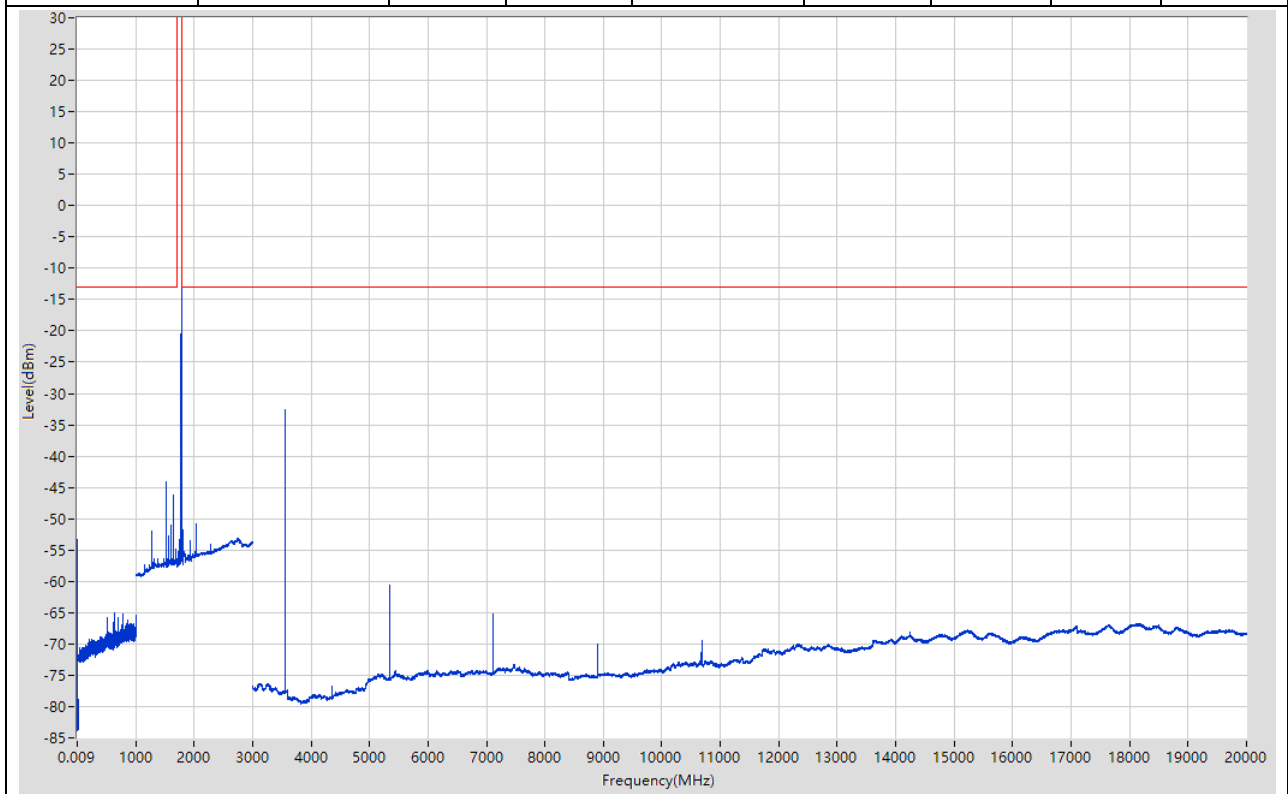


38.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.37	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.14	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.1	-13	Pass	9700
1000	1700	1	RMS	1561.803	-52.63	-13	Pass	700
1700	1790	1	RMS	1710.5	7.66	60	Pass	601
1790	3000	1	RMS	2751.795	-53.23	-13	Pass	1210
3000	20000	1	RMS	18164.892	-66.83	-13	Pass	17000

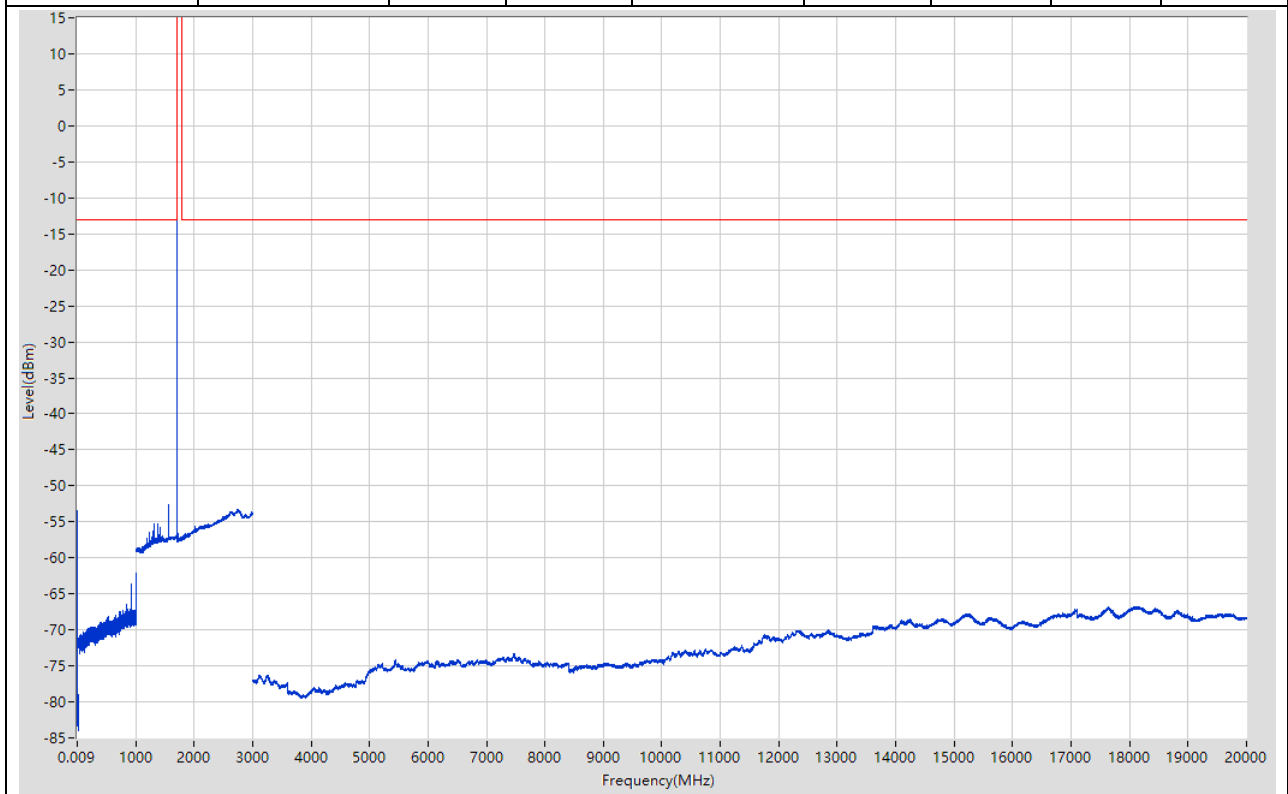


38.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.92	-13	Pass	2985
30	1000	0.1	RMS	921.592	-63.38	-13	Pass	9700
1000	1700	1	RMS	1561.803	-52.51	-13	Pass	700
1700	1790	1	RMS	1710.05	10.23	60	Pass	601
1790	3000	1	RMS	1859.057	-48.03	-13	Pass	1210
3000	20000	1	RMS	3420.025	-45.7	-13	Pass	17000

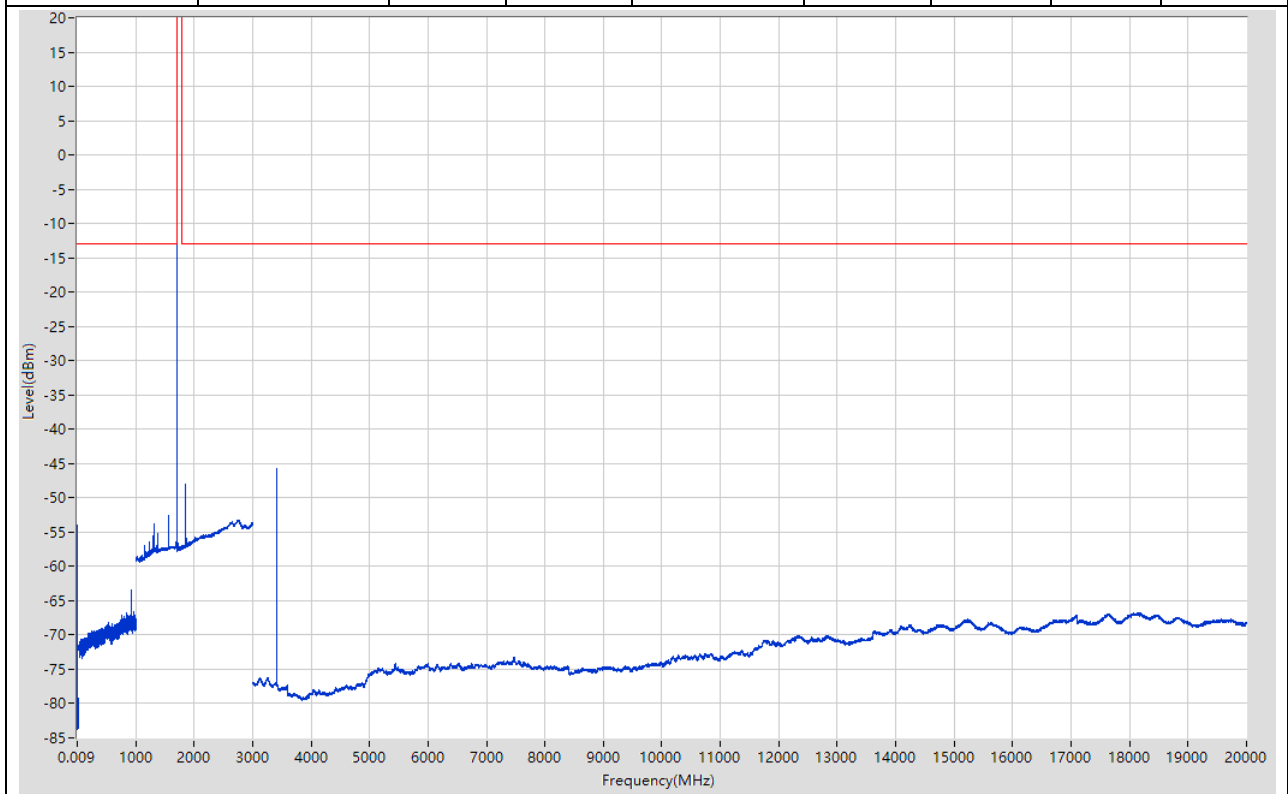


38.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-52.92	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.02	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.61	-13	Pass	9700
1000	1700	1	RMS	1592.847	-52.12	-13	Pass	700
1700	1790	1	RMS	1744.85	10.83	60	Pass	601
1790	3000	1	RMS	1897.089	-48.69	-13	Pass	1210
3000	20000	1	RMS	3490.029	-34.83	-13	Pass	17000

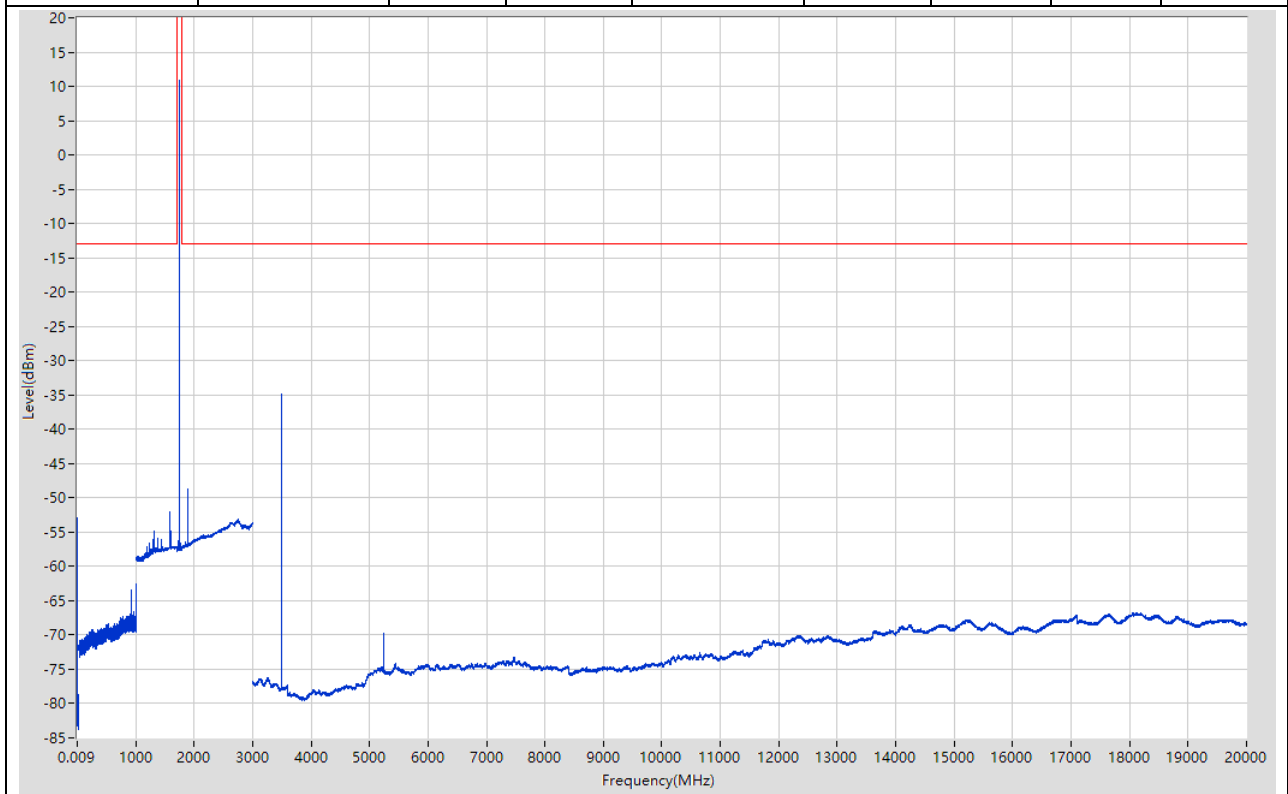


38.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.64	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.55	-13	Pass	2985
30	1000	0.1	RMS	998.4	-62.89	-13	Pass	9700
1000	1700	1	RMS	1592.847	-52.15	-13	Pass	700
1700	1790	1	RMS	1744.85	10.94	60	Pass	601
1790	3000	1	RMS	1897.089	-48.82	-13	Pass	1210
3000	20000	1	RMS	18125.89	-66.7	-13	Pass	17000

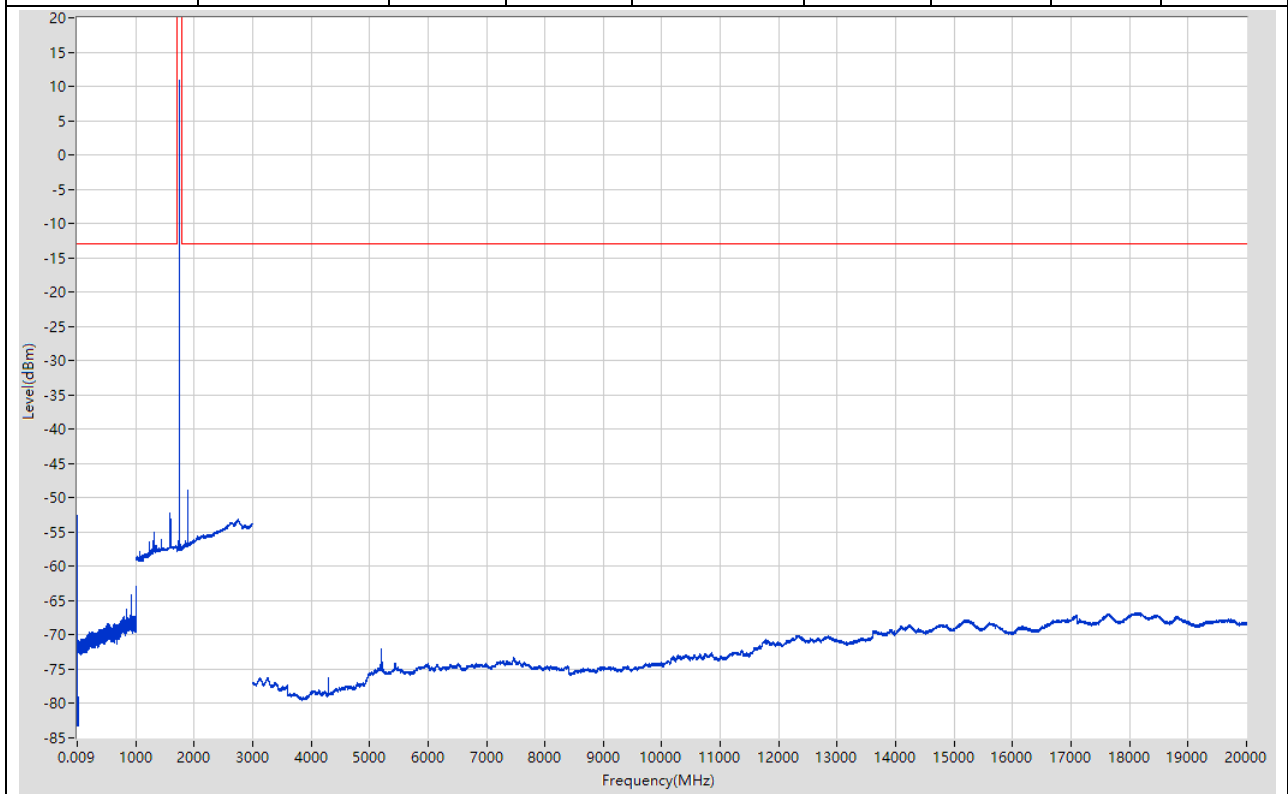


38.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.39	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.37	-13	Pass	2985
30	1000	0.1	RMS	940.794	-66.78	-13	Pass	9700
1000	1700	1	RMS	1152.217	-55.26	-13	Pass	700
1700	1790	1	RMS	1779.8	11.39	60	Pass	601
1790	3000	1	RMS	2744.789	-53.23	-13	Pass	1210
3000	20000	1	RMS	3559.033	-55.89	-13	Pass	17000

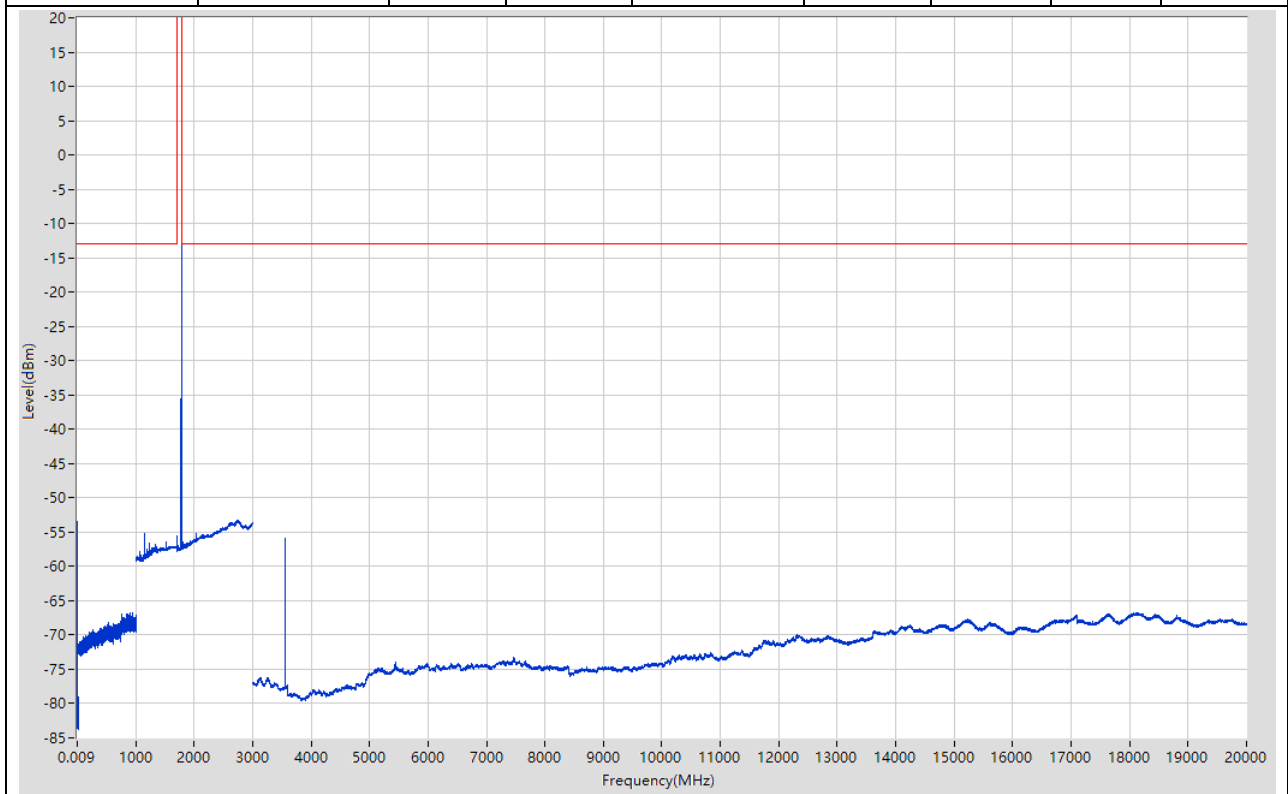

38.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.33	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.3	-13	Pass	2985
30	1000	0.1	RMS	998.4	-60.08	-13	Pass	9700
1000	1700	1	RMS	1228.326	-56.08	-13	Pass	700
1700	1790	1	RMS	1780.1	10.55	60	Pass	601
1790	3000	1	RMS	2743.788	-53.25	-13	Pass	1210
3000	20000	1	RMS	18145.891	-66.74	-13	Pass	17000

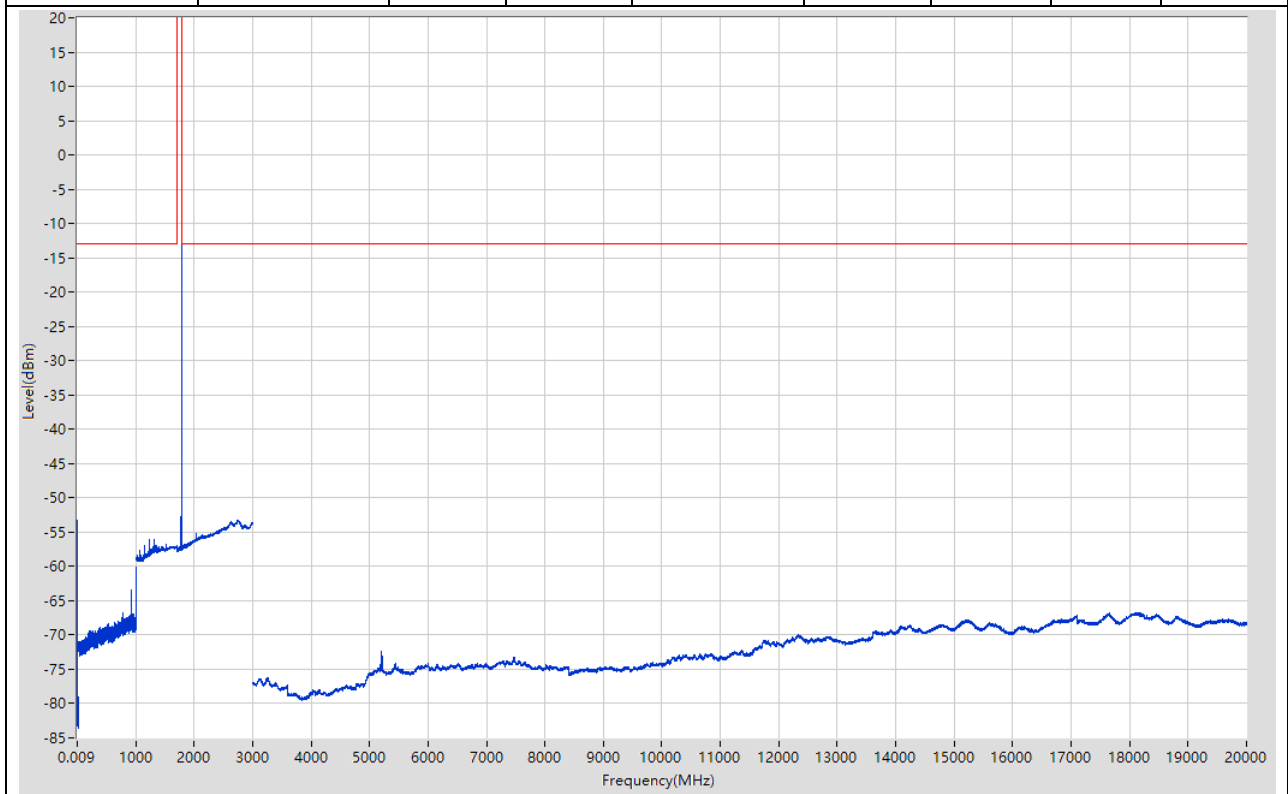

39. NB-IOT_Band71


39.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-46.25	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.07	-13	Pass	2985
30	653	0.1	RMS	614.394	-49.85	-13	Pass	6230
653	708	0.1	RMS	662.992	17.58	60	Pass	601
708	1000	0.1	RMS	802.632	-53.52	-13	Pass	2920
1000	3000	1	RMS	1326.163	-24.28	-13	Pass	2000
3000	10000	1	RMS	4641.234	-66.09	-13	Pass	7000

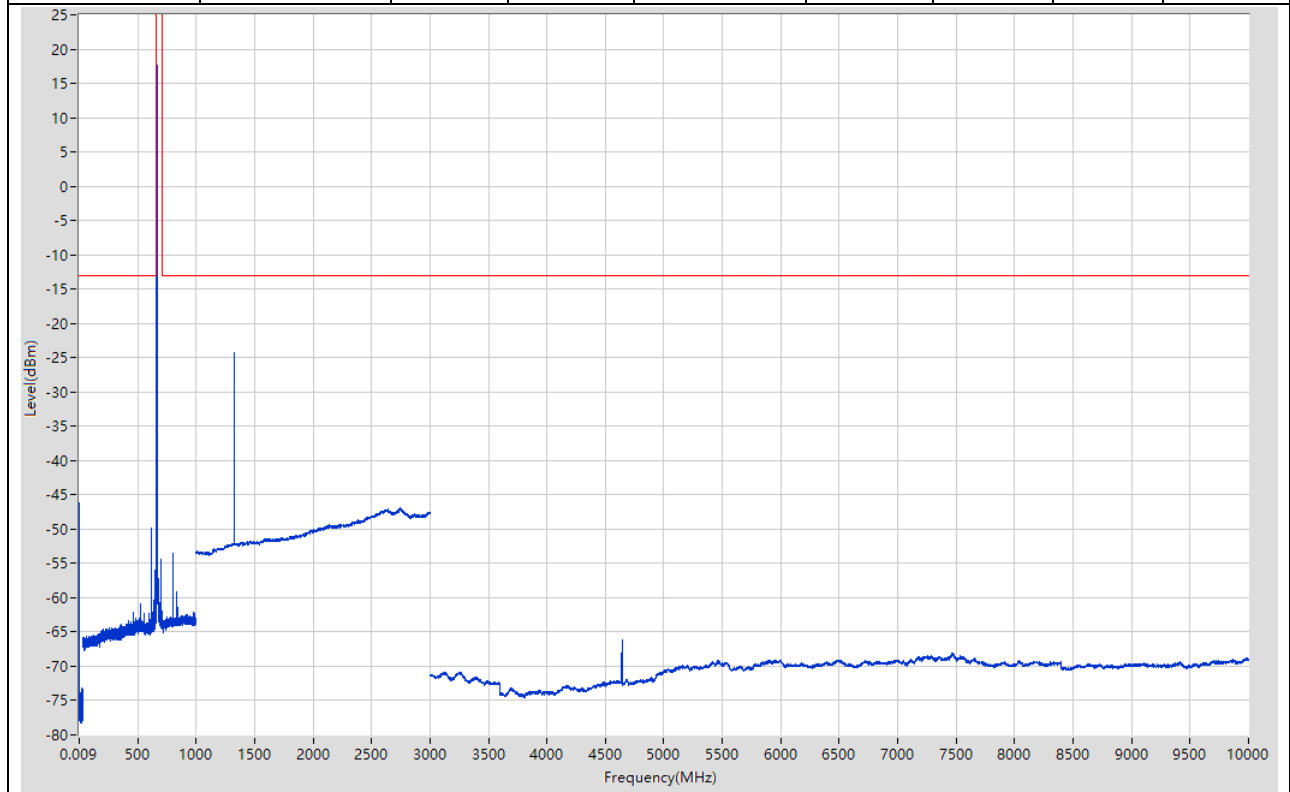


39.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-47.04	-13	Pass	601
0.15	30	0.01	RMS	0.15	-51.48	-13	Pass	2985
30	653	0.1	RMS	614.394	-49.4	-13	Pass	6230
653	708	0.1	RMS	680.408	18.71	60	Pass	601
708	1000	0.1	RMS	823.64	-54.44	-13	Pass	2920
1000	3000	1	RMS	1361.181	-34.58	-13	Pass	2000
3000	10000	1	RMS	7470.639	-68.1	-13	Pass	7000

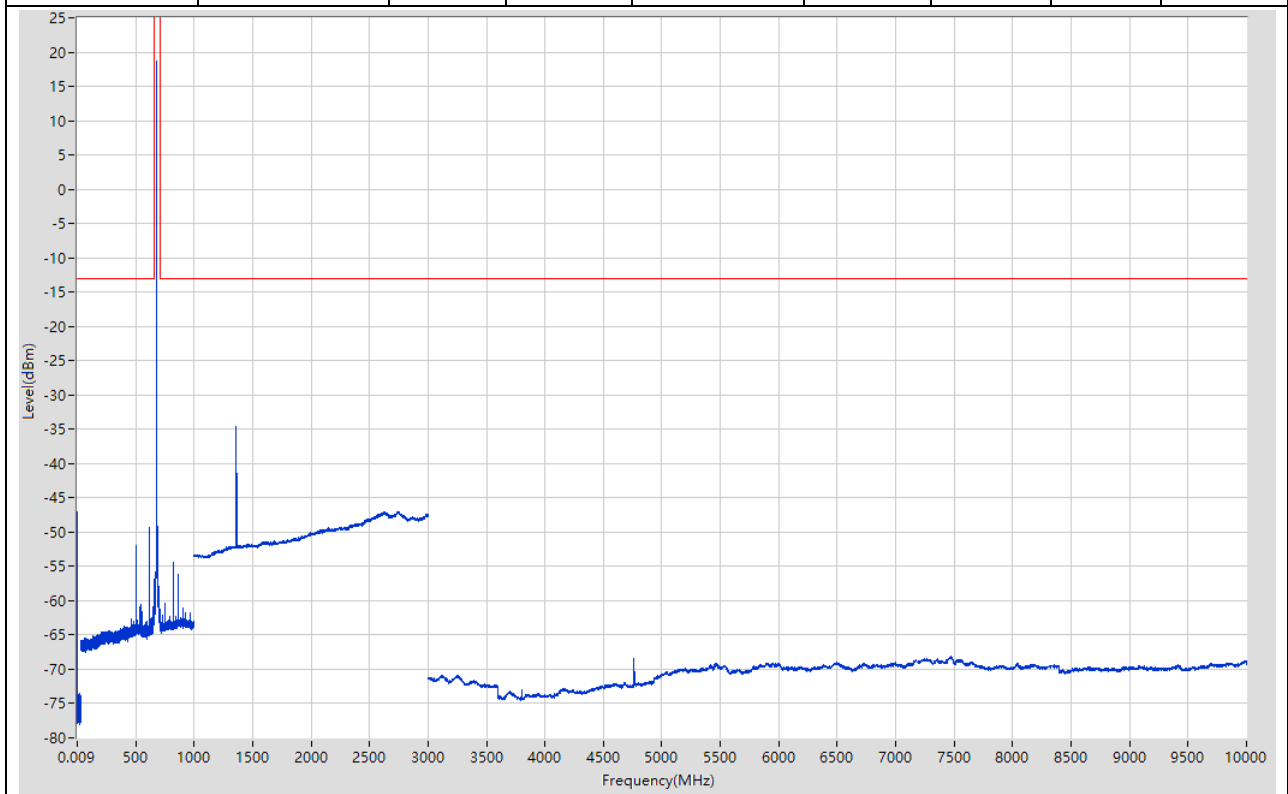


39.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-46.78	-13	Pass	601
0.15	30	0.01	RMS	0.15	-51.89	-13	Pass	2985
30	653	0.1	RMS	614.394	-51.12	-13	Pass	6230
653	708	0.1	RMS	697.825	14.95	60	Pass	601
708	1000	0.1	RMS	844.747	-56.68	-13	Pass	2920
1000	3000	1	RMS	2737.869	-47.03	-13	Pass	2000
3000	10000	1	RMS	7472.639	-68.01	-13	Pass	7000

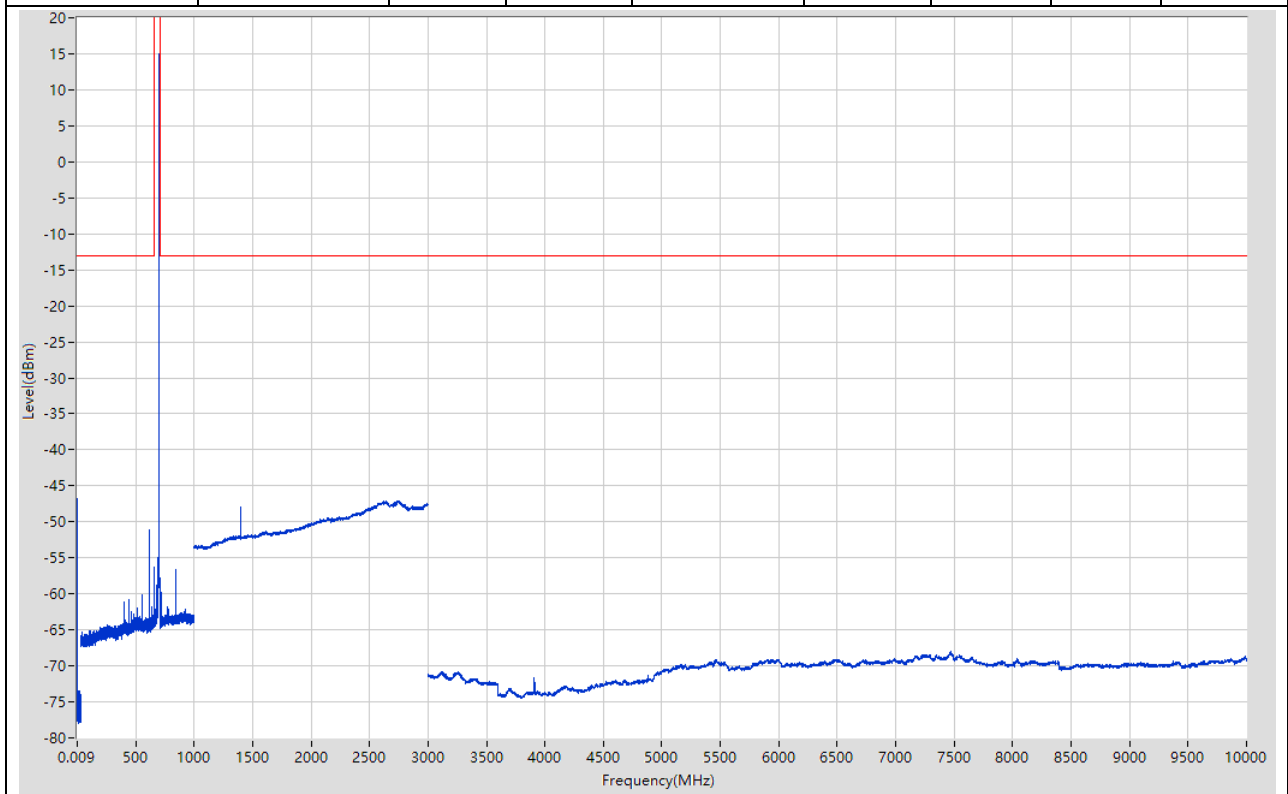


39.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-47.49	-13	Pass	601
0.15	30	0.01	RMS	0.15	-51.65	-13	Pass	2985
30	653	0.1	RMS	652.8	-55.64	-13	Pass	6230
653	708	0.1	RMS	662.992	18.01	60	Pass	601
708	1000	0.1	RMS	802.632	-53.22	-13	Pass	2920
1000	3000	1	RMS	1326.163	-24.36	-13	Pass	2000
3000	10000	1	RMS	4641.234	-66.41	-13	Pass	7000

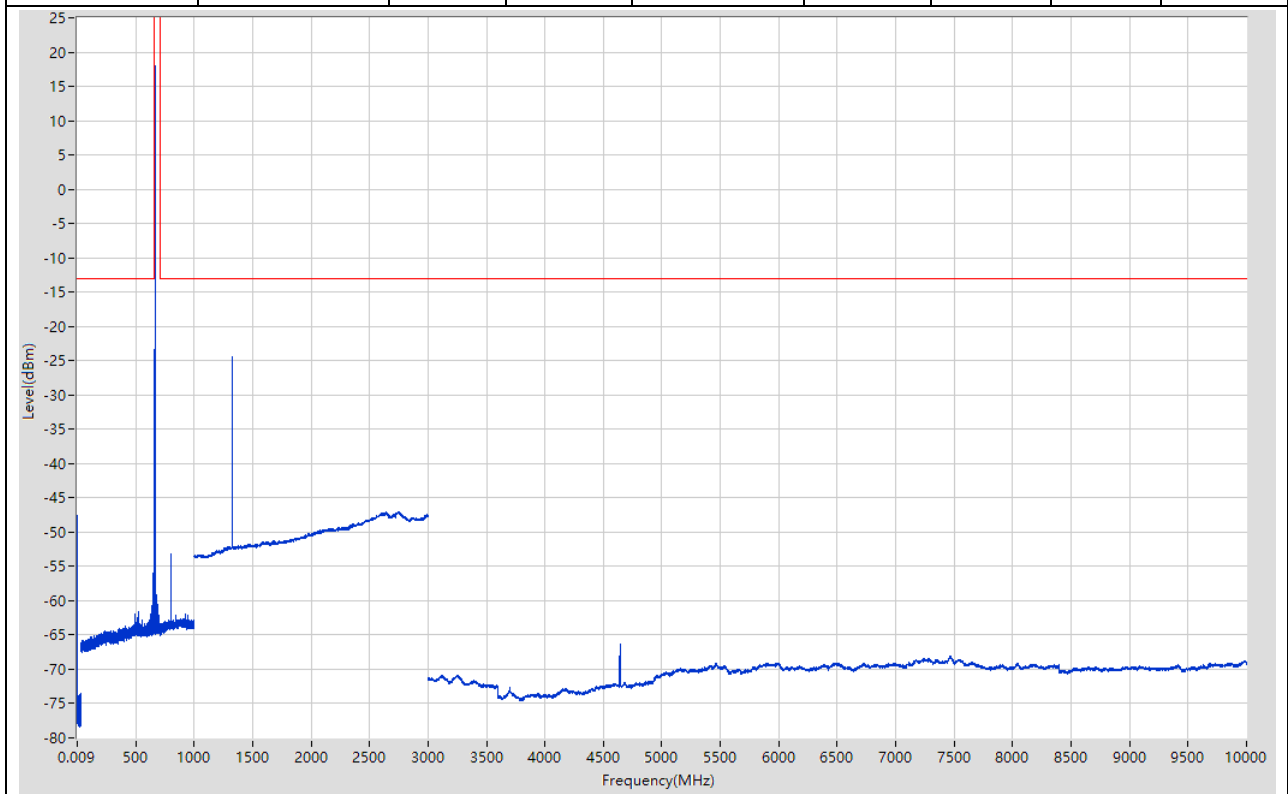


39.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-47.22	-13	Pass	601
0.15	30	0.01	RMS	0.15	-51.72	-13	Pass	2985
30	653	0.1	RMS	537.181	-60.28	-13	Pass	6230
653	708	0.1	RMS	680.408	18.77	60	Pass	601
708	1000	0.1	RMS	823.64	-54.29	-13	Pass	2920
1000	3000	1	RMS	1361.181	-34.21	-13	Pass	2000
3000	10000	1	RMS	4763.252	-66.02	-13	Pass	7000

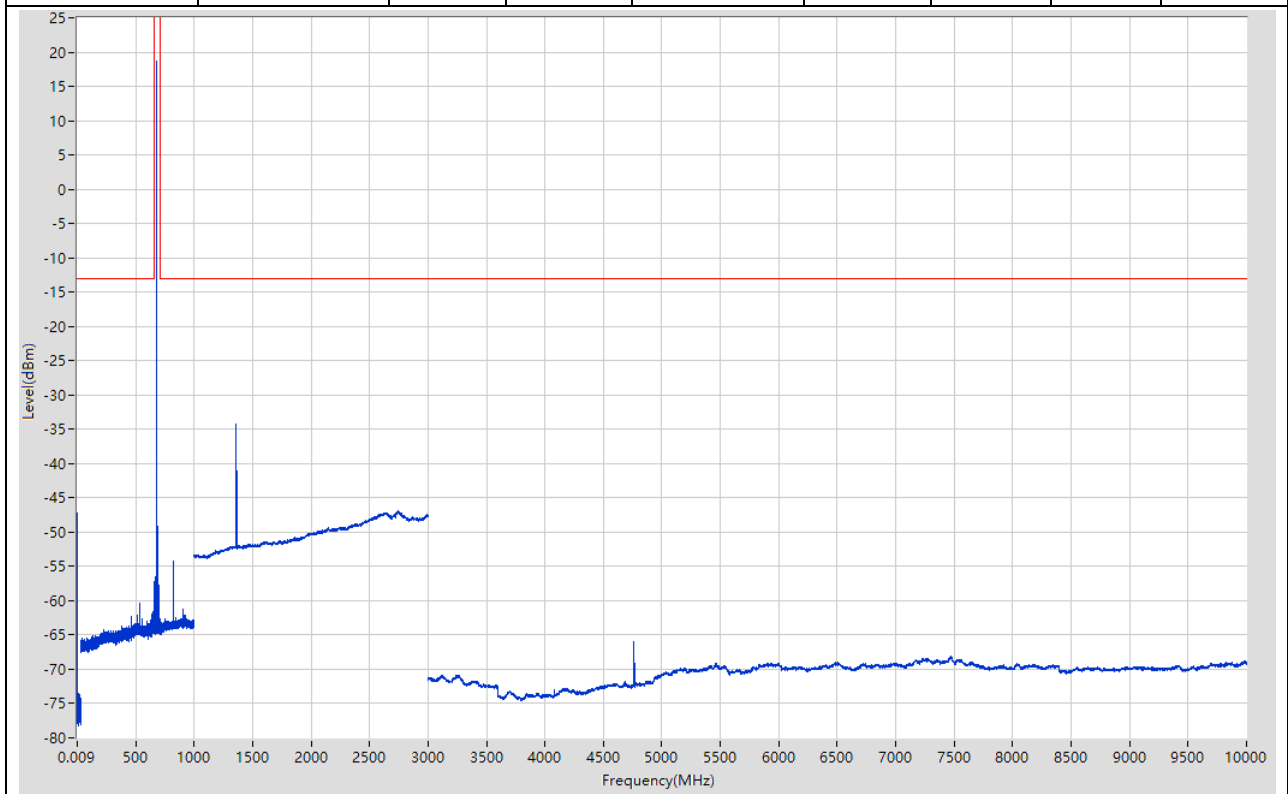


39.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-48.31	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.61	-13	Pass	2985
30	653	0.1	RMS	614.394	-50.3	-13	Pass	6230
653	708	0.1	RMS	697.825	19.96	60	Pass	601
708	1000	0.1	RMS	717.103	-55.08	-13	Pass	2920
1000	3000	1	RMS	1395.198	-40.69	-13	Pass	2000
3000	10000	1	RMS	4884.269	-60.1	-13	Pass	7000

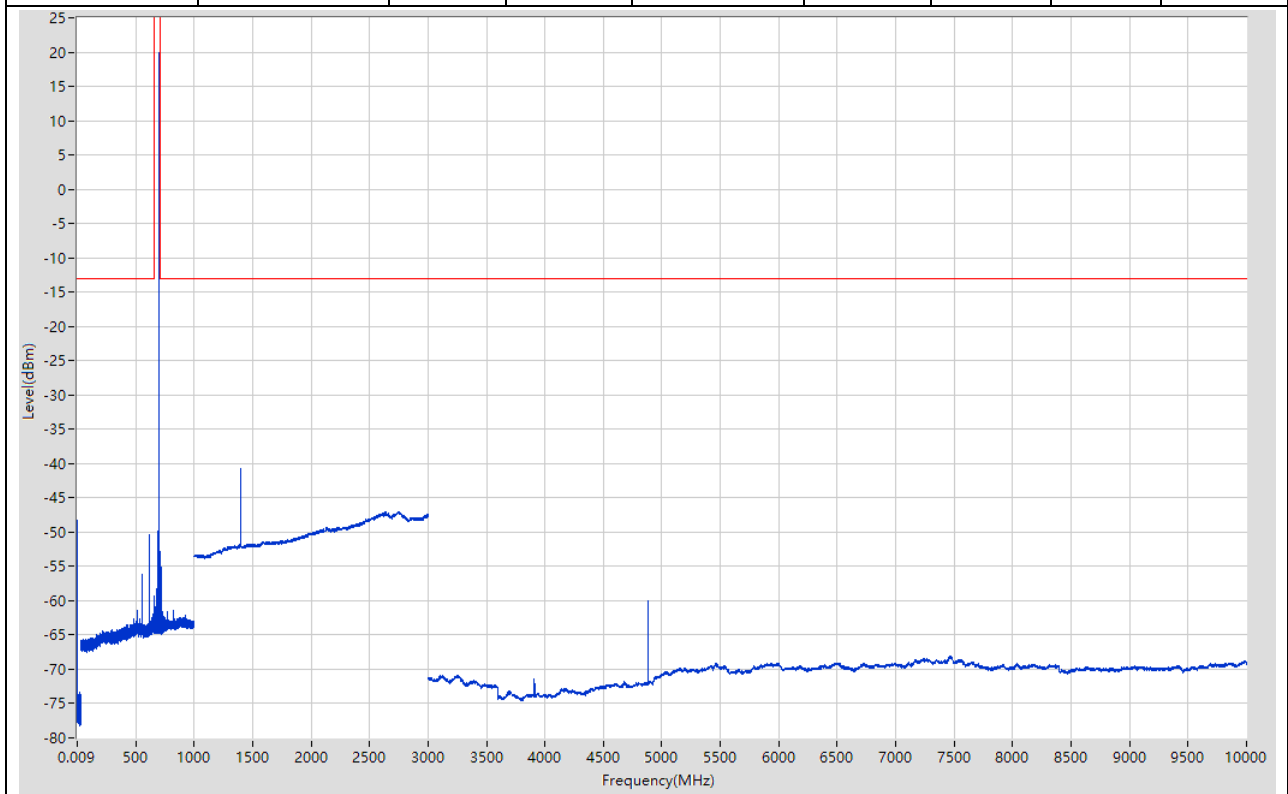


39.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.013	-48.9	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.17	-13	Pass	2985
30	653	0.1	RMS	614.394	-51.64	-13	Pass	6230
653	708	0.1	RMS	663.083	4.98	60	Pass	601
708	1000	0.1	RMS	802.632	-61.12	-13	Pass	2920
1000	3000	1	RMS	1326.163	-45.28	-13	Pass	2000
3000	10000	1	RMS	7469.639	-68.02	-13	Pass	7000

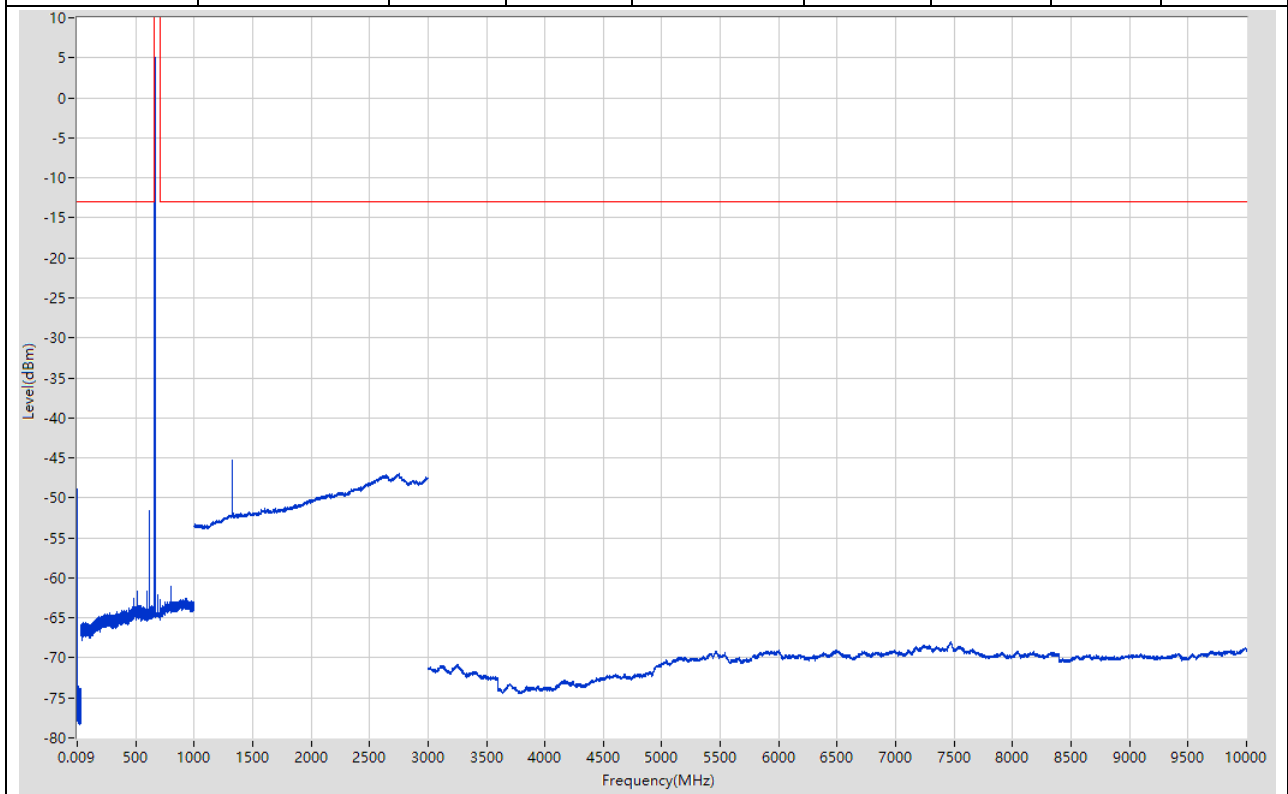


39.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-47.89	-13	Pass	601
0.15	30	0.01	RMS	0.15	-51.11	-13	Pass	2985
30	653	0.1	RMS	614.394	-51.32	-13	Pass	6230
653	708	0.1	RMS	680.408	8.37	60	Pass	601
708	1000	0.1	RMS	900.866	-61.18	-13	Pass	2920
1000	3000	1	RMS	2744.872	-46.9	-13	Pass	2000
3000	10000	1	RMS	7469.639	-67.94	-13	Pass	7000

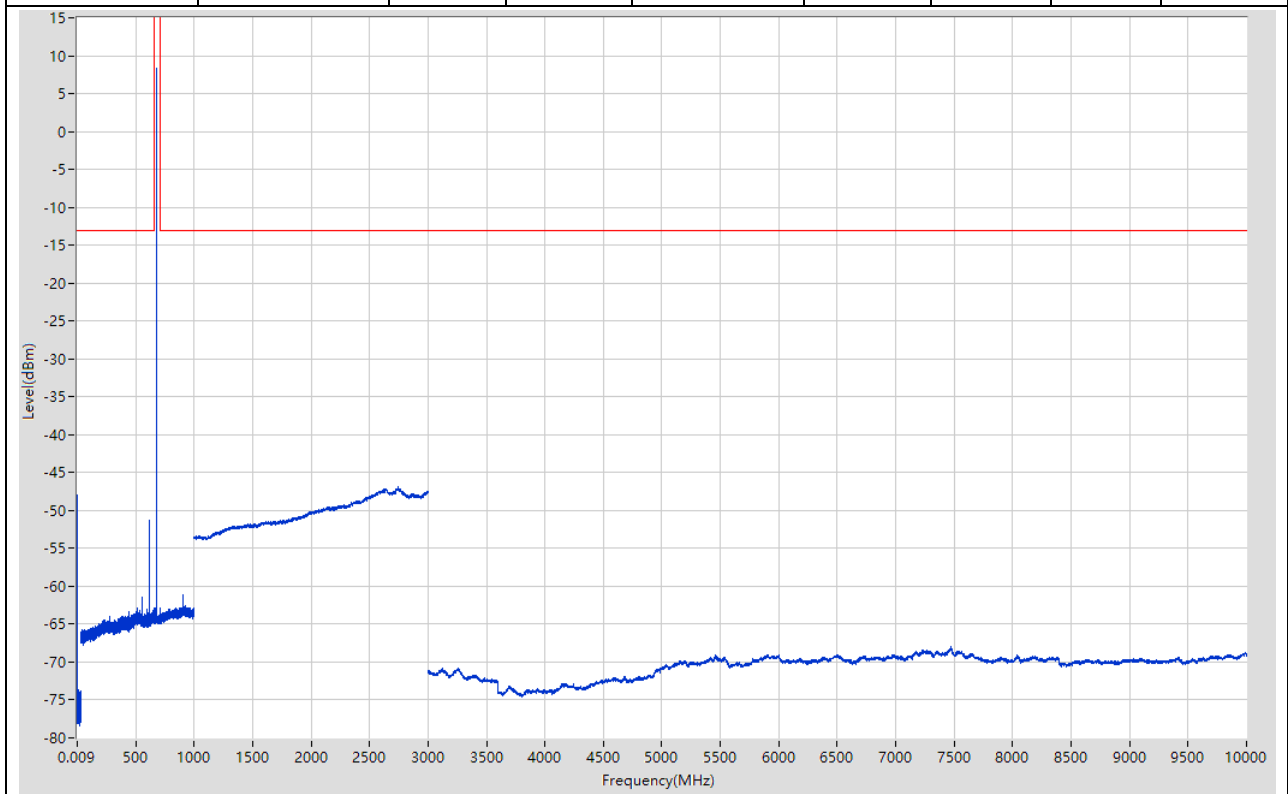


39.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-46.46	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.99	-13	Pass	2985
30	653	0.1	RMS	614.394	-49.97	-13	Pass	6230
653	708	0.1	RMS	697.825	8.75	60	Pass	601
708	1000	0.1	RMS	844.747	-59.3	-13	Pass	2920
1000	3000	1	RMS	2746.873	-46.98	-13	Pass	2000
3000	10000	1	RMS	7465.638	-68.1	-13	Pass	7000

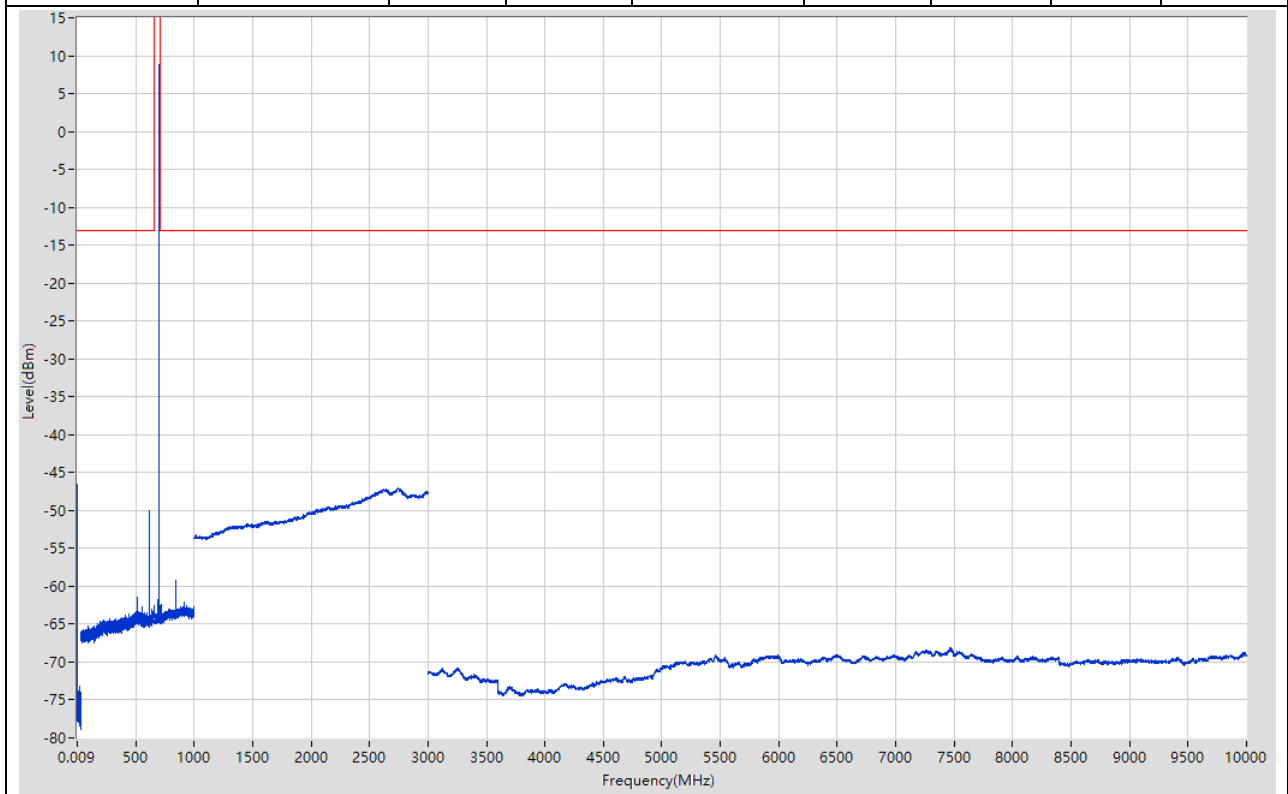


39.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-46.86	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.62	-13	Pass	2985
30	653	0.1	RMS	614.394	-50.06	-13	Pass	6230
653	708	0.1	RMS	662.992	-1.33	60	Pass	601
708	1000	0.1	RMS	802.632	-60.56	-13	Pass	2920
1000	3000	1	RMS	1326.163	-44.06	-13	Pass	2000
3000	10000	1	RMS	7469.639	-68.05	-13	Pass	7000

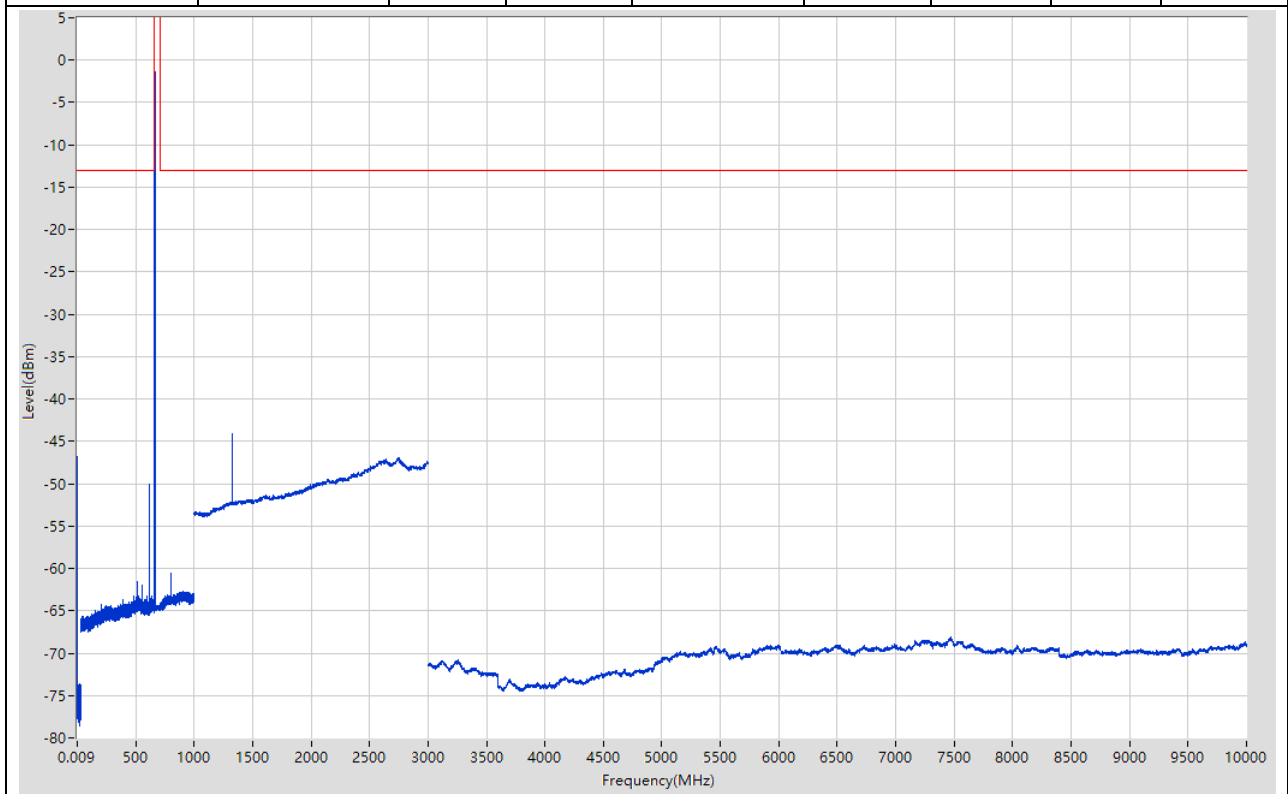


39.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-48.25	-13	Pass	601
0.15	30	0.01	RMS	0.15	-52.21	-13	Pass	2985
30	653	0.1	RMS	460.769	-61.86	-13	Pass	6230
653	708	0.1	RMS	680.408	7.39	60	Pass	601
708	1000	0.1	RMS	823.64	-60.55	-13	Pass	2920
1000	3000	1	RMS	2748.874	-46.96	-13	Pass	2000
3000	10000	1	RMS	7469.639	-68	-13	Pass	7000

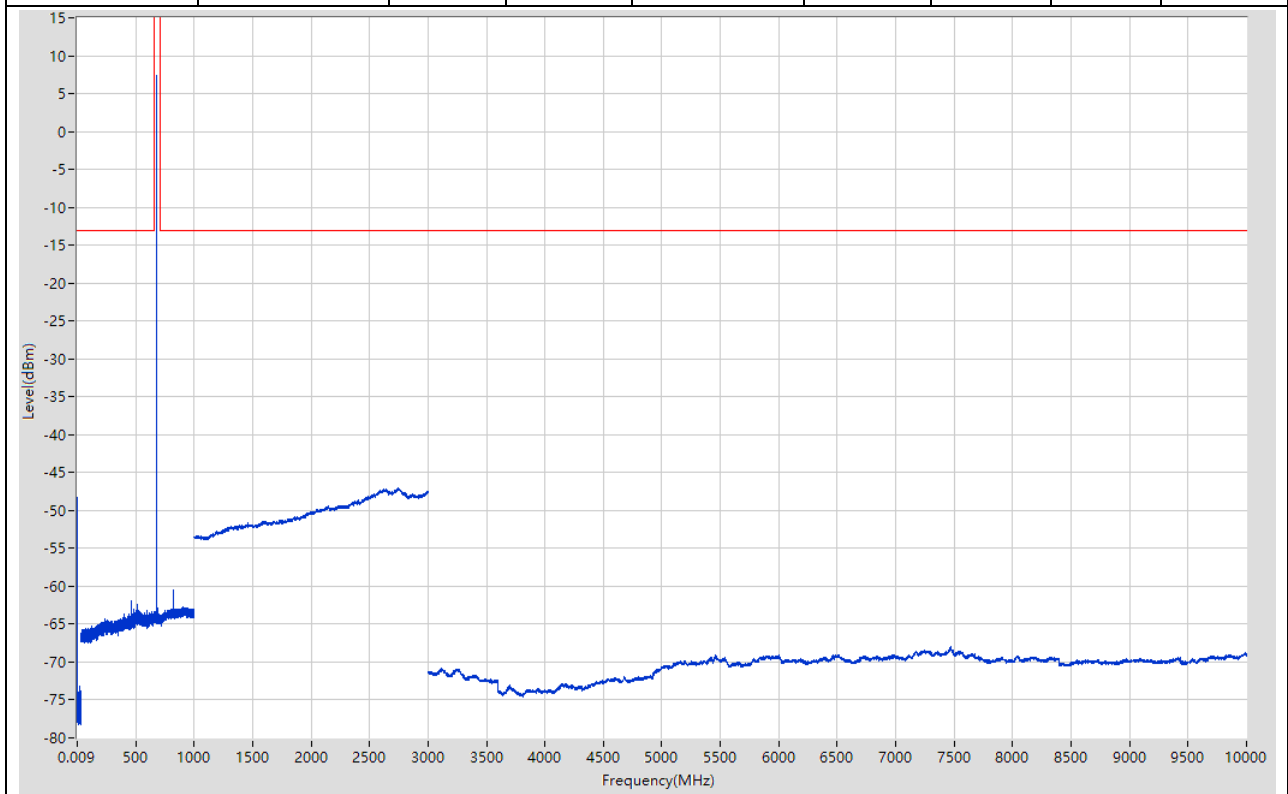

39.12. NB-IoT 15K High BPSK RB1@0(NTNV)


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-46.11	-13	Pass	601
0.15	30	0.01	RMS	0.16	-51.67	-13	Pass	2985
30	653	0.1	RMS	460.769	-59.91	-13	Pass	6230
653	708	0.1	RMS	697.825	5.13	60	Pass	601
708	1000	0.1	RMS	844.747	-59.41	-13	Pass	2920
1000	3000	1	RMS	2750.875	-46.97	-13	Pass	2000
3000	10000	1	RMS	7470.639	-68.08	-13	Pass	7000

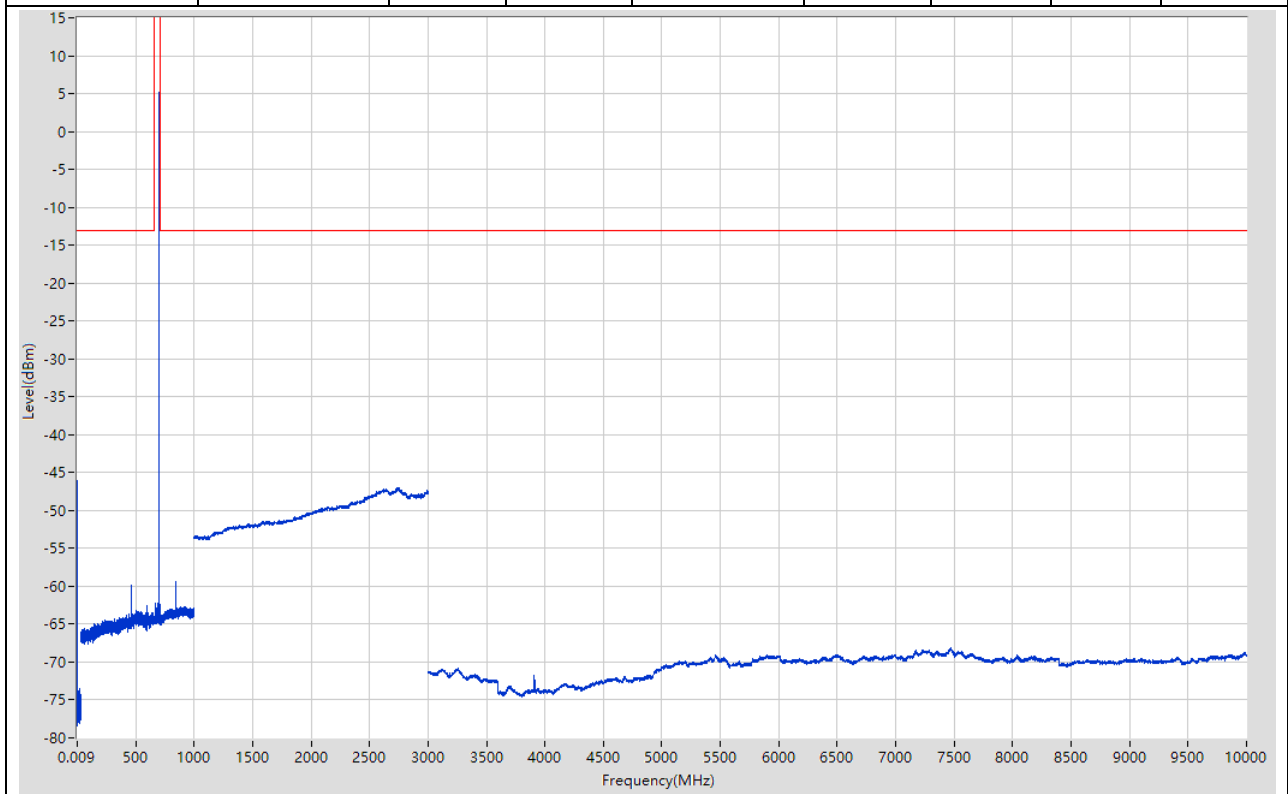

40. NB-IOT_Band85


40.1. NB-IoT 3.75K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.96	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.01	-13	Pass	2985
30	688	0.1	RMS	688	-53.58	-13	Pass	6580
688	726	0.1	RMS	698.007	21.39	60	Pass	601
726	1000	0.1	RMS	751.809	-50.17	-13	Pass	2740
1000	3000	1	RMS	1396.198	-25.53	-13	Pass	2000
3000	10000	1	RMS	4886.269	-61.81	-13	Pass	7000

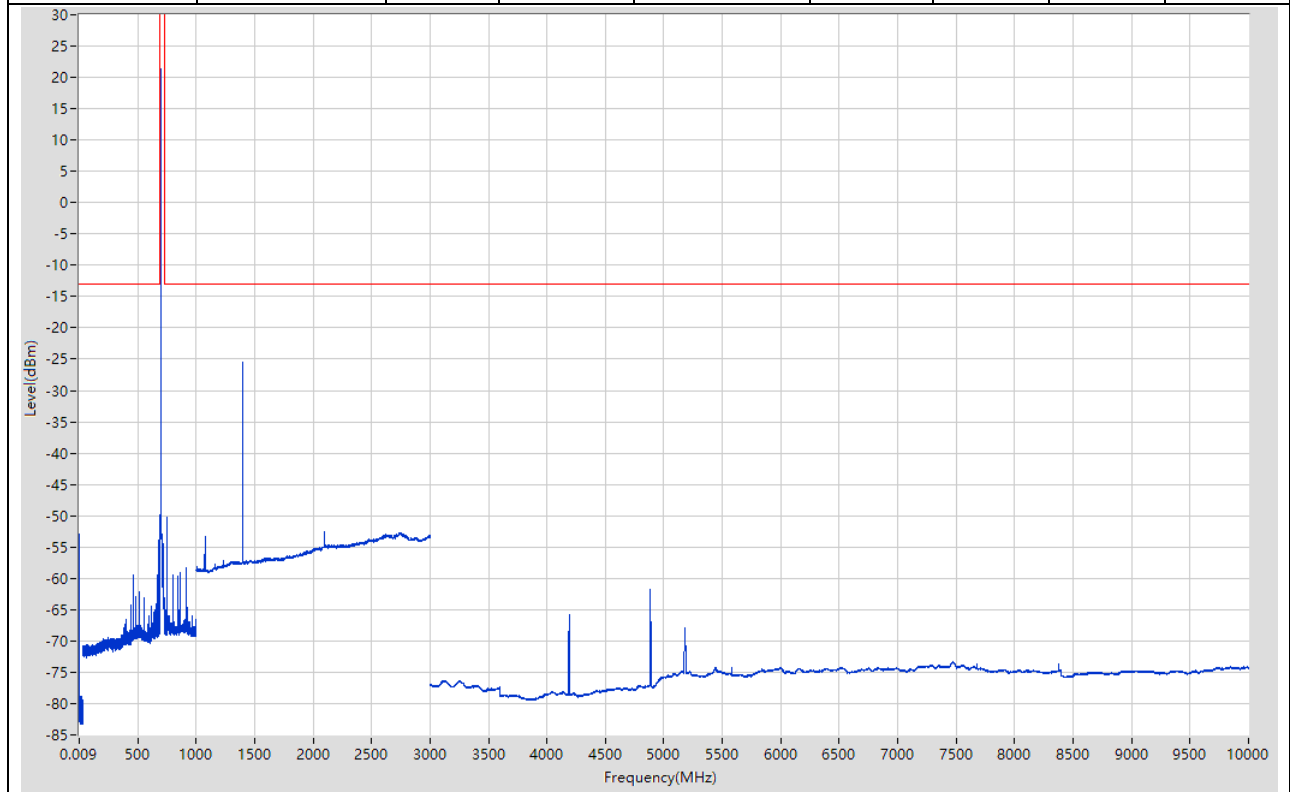


40.2. NB-IoT 3.75K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.43	-13	Pass	601
0.15	30	0.01	RMS	0.17	-57.96	-13	Pass	2985
30	688	0.1	RMS	688	-53.61	-13	Pass	6580
688	726	0.1	RMS	698.007	21.37	60	Pass	601
726	1000	0.1	RMS	841.242	-58.19	-13	Pass	2740
1000	3000	1	RMS	2739.87	-52.78	-13	Pass	2000
3000	10000	1	RMS	5742.392	-72.55	-13	Pass	7000

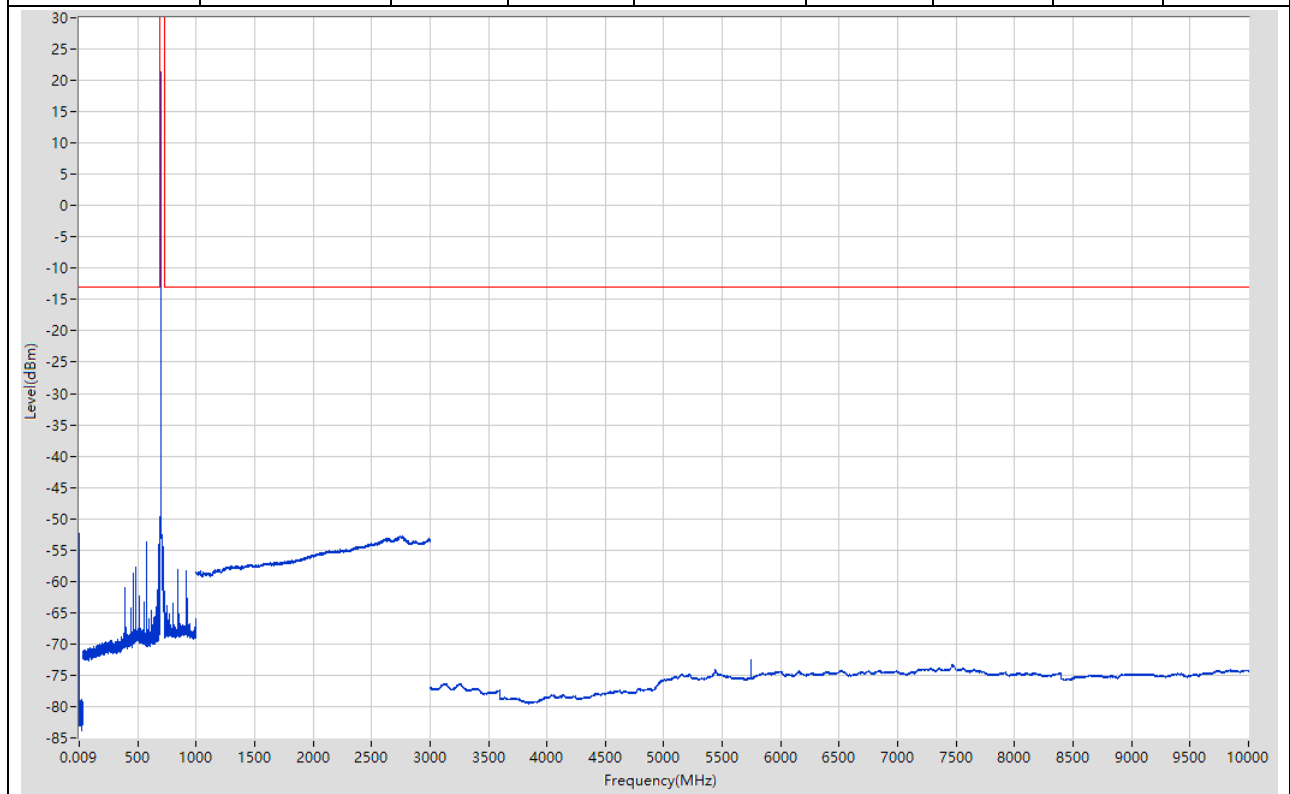


40.3. NB-IoT 3.75K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-51.87	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.06	-13	Pass	2985
30	688	0.1	RMS	460.765	-59.76	-13	Pass	6580
688	726	0.1	RMS	706.873	7.36	60	Pass	601
726	1000	0.1	RMS	726.2	-63.33	-13	Pass	2740
1000	3000	1	RMS	1414.207	-47.54	-13	Pass	2000
3000	10000	1	RMS	5215.316	-70.06	-13	Pass	7000

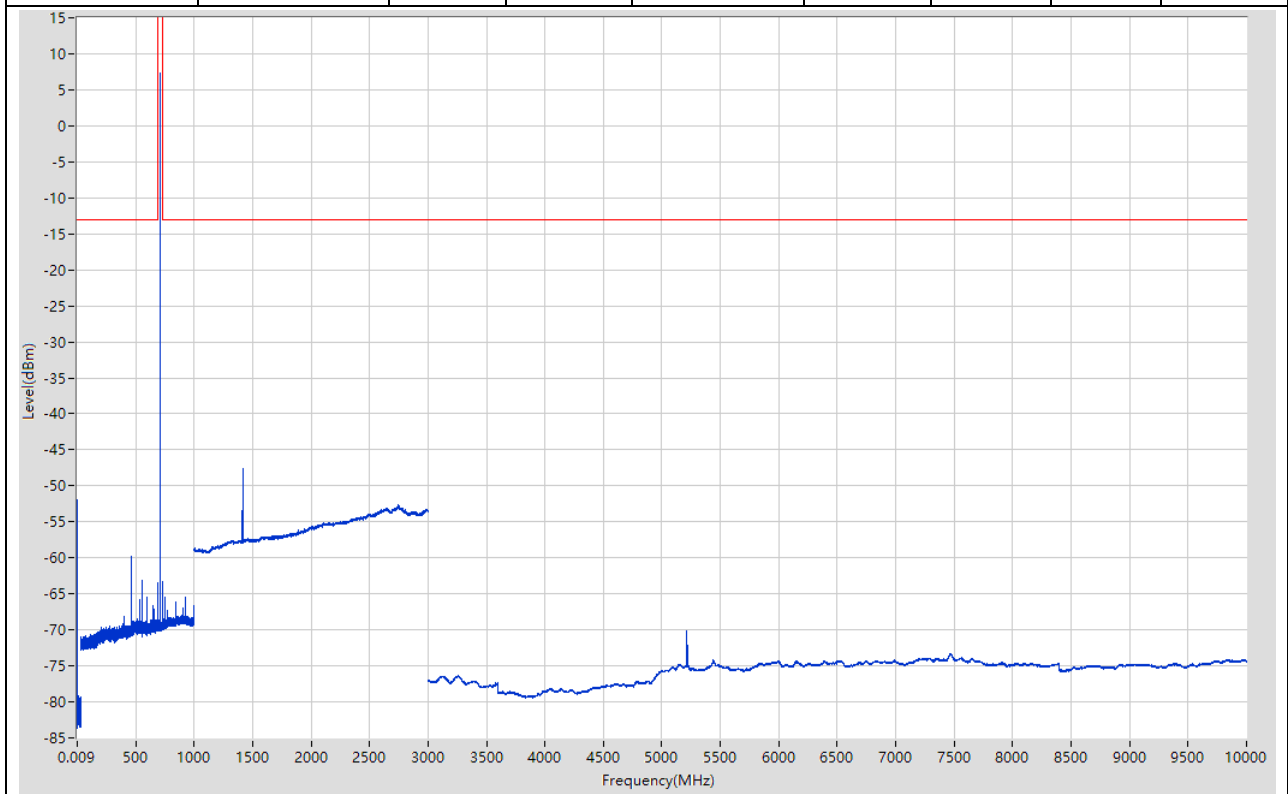


40.4. NB-IoT 3.75K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-53.31	-13	Pass	601
0.15	30	0.01	RMS	0.16	-57.19	-13	Pass	2985
30	688	0.1	RMS	556.78	-63.2	-13	Pass	6580
688	726	0.1	RMS	706.873	8.62	60	Pass	601
726	1000	0.1	RMS	921.571	-62.17	-13	Pass	2740
1000	3000	1	RMS	1414.207	-47.49	-13	Pass	2000
3000	10000	1	RMS	7471.639	-73.33	-13	Pass	7000

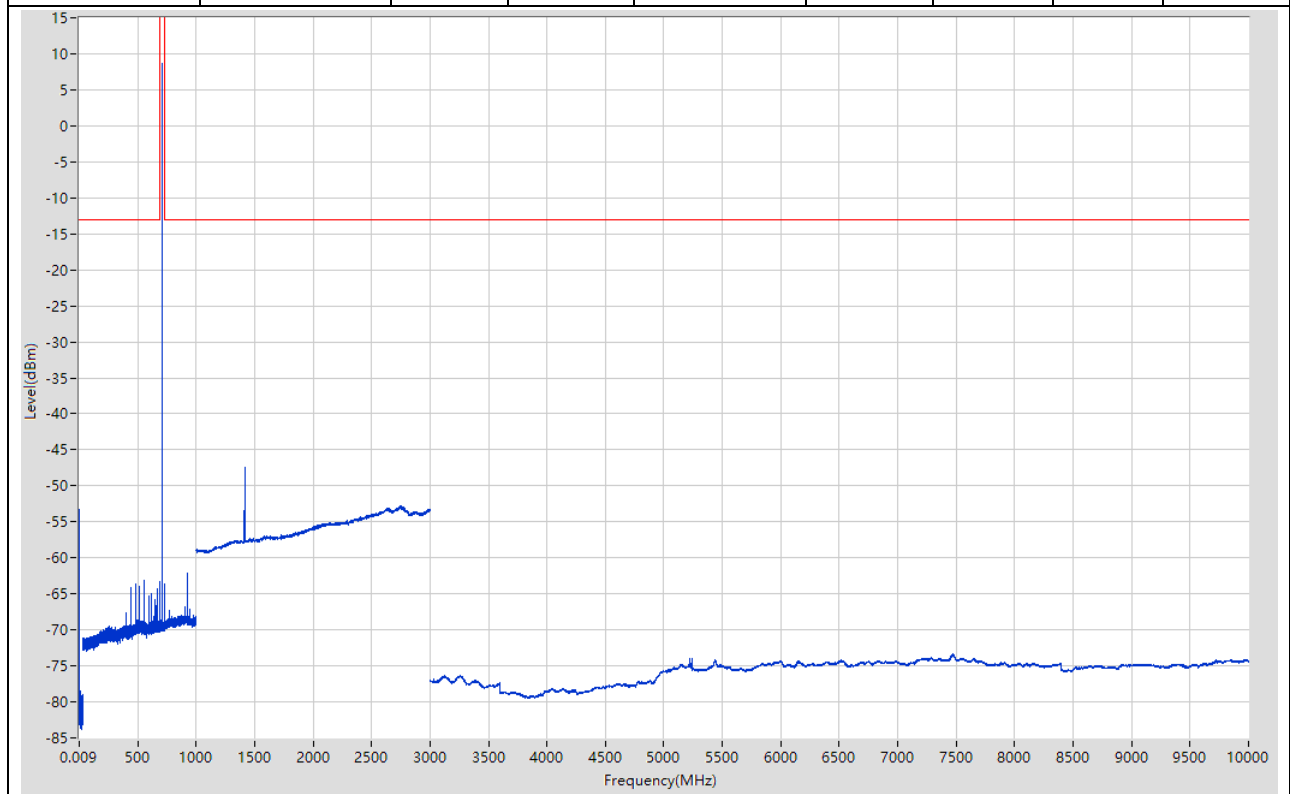


40.5. NB-IoT 3.75K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.24	-13	Pass	2985
30	688	0.1	RMS	460.765	-58.96	-13	Pass	6580
688	726	0.1	RMS	715.74	7.96	60	Pass	601
726	1000	0.1	RMS	735.103	-62.58	-13	Pass	2740
1000	3000	1	RMS	2749.875	-52.71	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.3	-13	Pass	7000

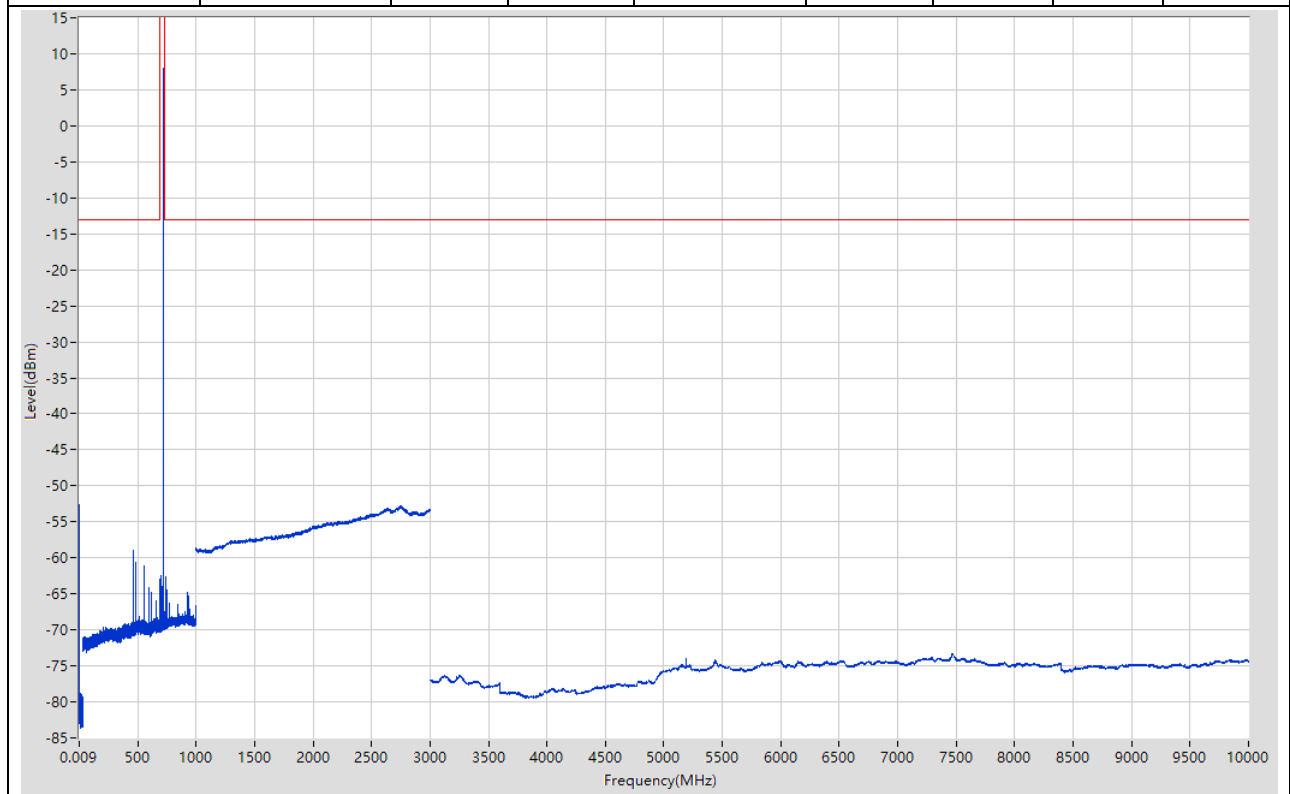


40.6. NB-IoT 3.75K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.74	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.33	-13	Pass	2985
30	688	0.1	RMS	479.968	-60.26	-13	Pass	6580
688	726	0.1	RMS	715.867	6.9	60	Pass	601
726	1000	0.1	RMS	735.103	-62.17	-13	Pass	2740
1000	3000	1	RMS	274.872	-52.88	-13	Pass	2000
3000	10000	1	RMS	5186.312	-71.95	-13	Pass	7000

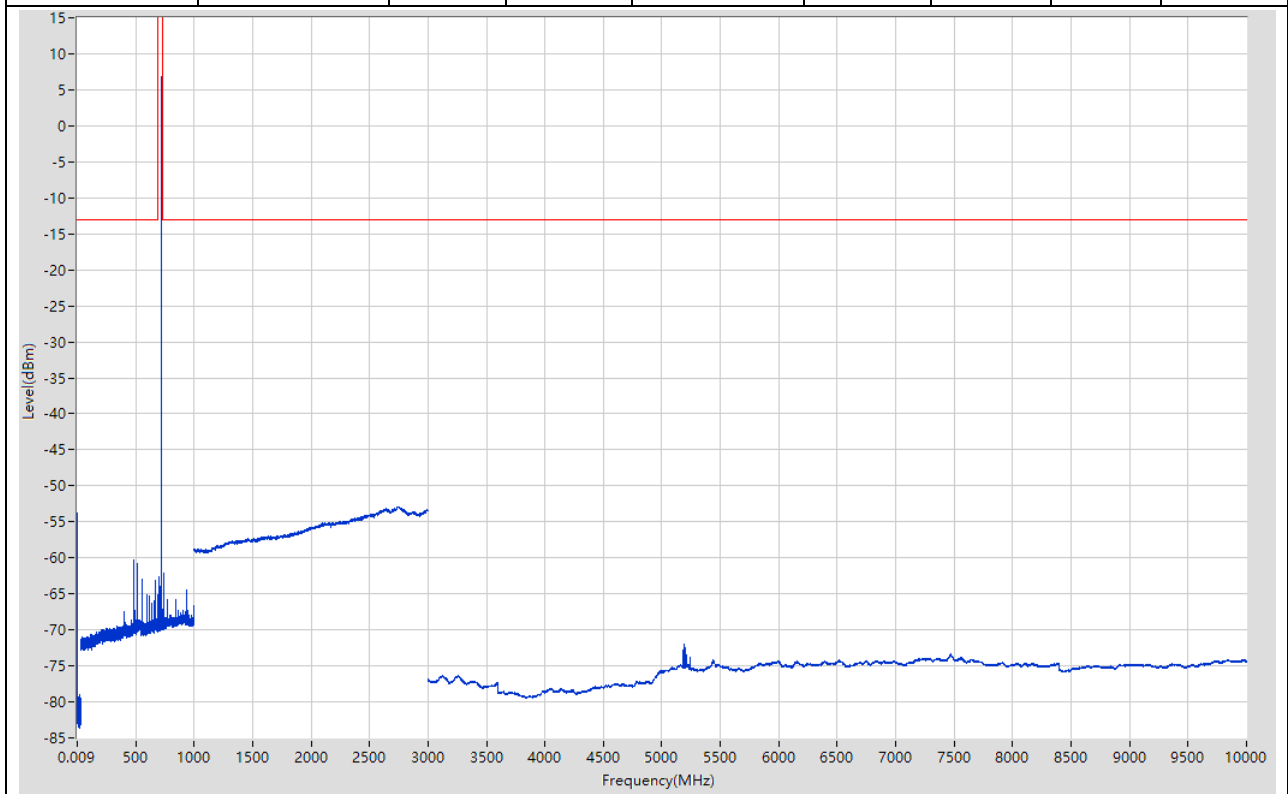


40.7. NB-IoT 15K Low QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-51.85	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.99	-13	Pass	2985
30	688	0.1	RMS	460.765	-60.89	-13	Pass	6580
688	726	0.1	RMS	698.007	11.26	60	Pass	601
726	1000	0.1	RMS	748.808	-65.09	-13	Pass	2740
1000	3000	1	RMS	2760.88	-52.82	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.3	-13	Pass	7000

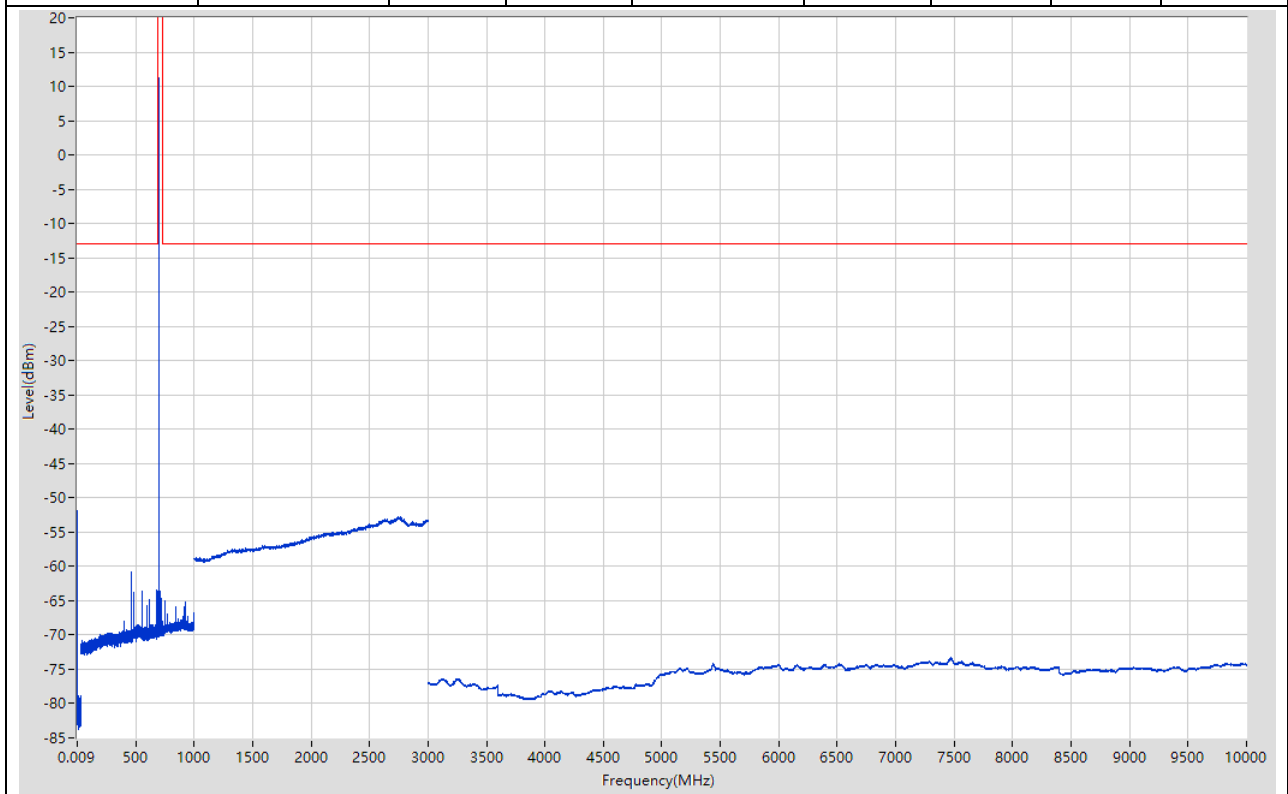


40.8. NB-IoT 15K Low BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-52.84	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.85	-13	Pass	2985
30	688	0.1	RMS	460.765	-60.97	-13	Pass	6580
688	726	0.1	RMS	698.07	8.78	60	Pass	601
726	1000	0.1	RMS	921.571	-62.64	-13	Pass	2740
1000	3000	1	RMS	1396.198	-43.85	-13	Pass	2000
3000	10000	1	RMS	7469.639	-73.33	-13	Pass	7000

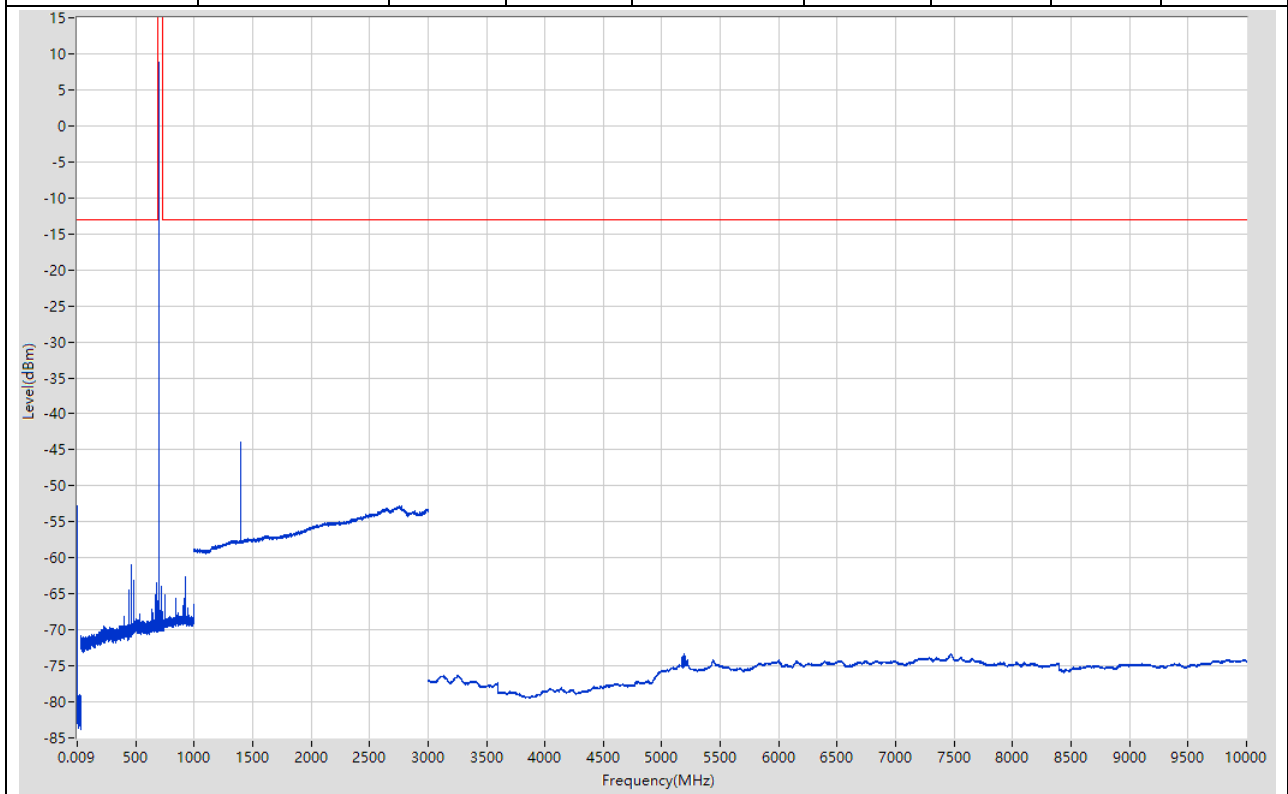


40.9. NB-IoT 15K Middle QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-51.26	-13	Pass	601
0.15	30	0.01	RMS	0.15	-56.53	-13	Pass	2985
30	688	0.1	RMS	460.765	-58.48	-13	Pass	6580
688	726	0.1	RMS	706.873	8.5	60	Pass	601
726	1000	0.1	RMS	921.571	-62.24	-13	Pass	2740
1000	3000	1	RMS	1414.207	-47.99	-13	Pass	2000
3000	10000	1	RMS	7470.639	-73.31	-13	Pass	7000

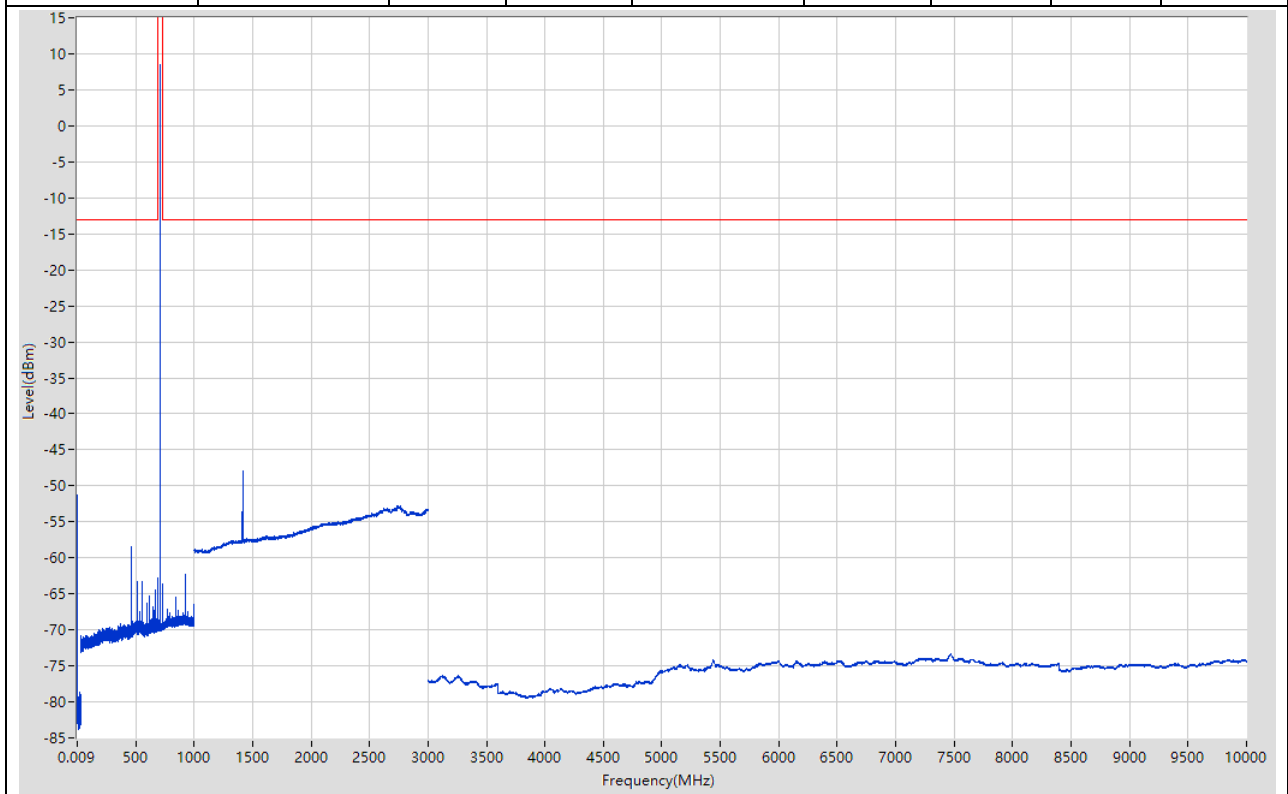


40.10. NB-IoT 15K Middle BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.01	-52.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.08	-13	Pass	2985
30	688	0.1	RMS	460.765	-58.68	-13	Pass	6580
688	726	0.1	RMS	706.873	7.58	60	Pass	601
726	1000	0.1	RMS	921.571	-62.33	-13	Pass	2740
1000	3000	1	RMS	2755.878	-52.88	-13	Pass	2000
3000	10000	1	RMS	5244.321	-73.06	-13	Pass	7000

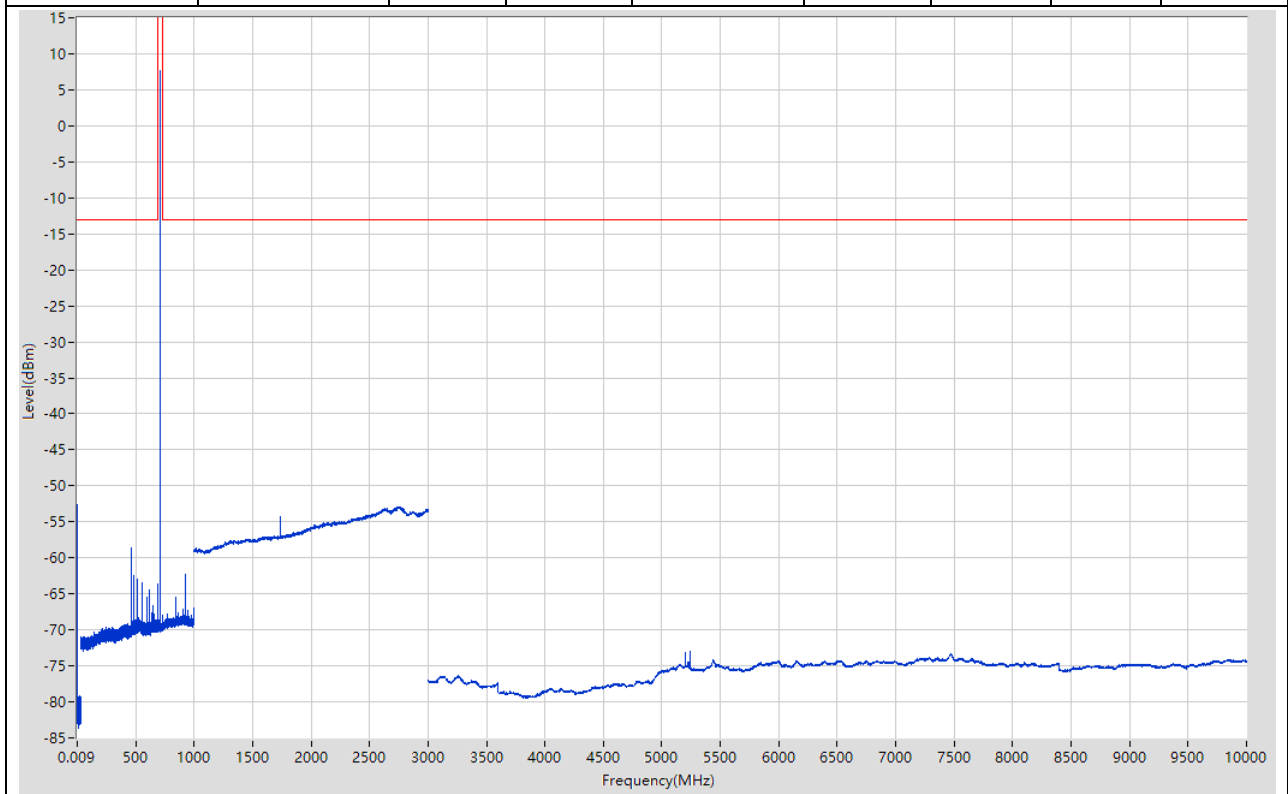


40.11. NB-IoT 15K High QPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.009	-53.32	-13	Pass	601
0.15	30	0.01	RMS	0.15	-58.41	-13	Pass	2985
30	688	0.1	RMS	460.765	-58.83	-13	Pass	6580
688	726	0.1	RMS	715.867	10.43	60	Pass	601
726	1000	0.1	RMS	921.571	-62.28	-13	Pass	2740
1000	3000	1	RMS	1431.216	-41.63	-13	Pass	2000
3000	10000	1	RMS	7473.639	-73.37	-13	Pass	7000

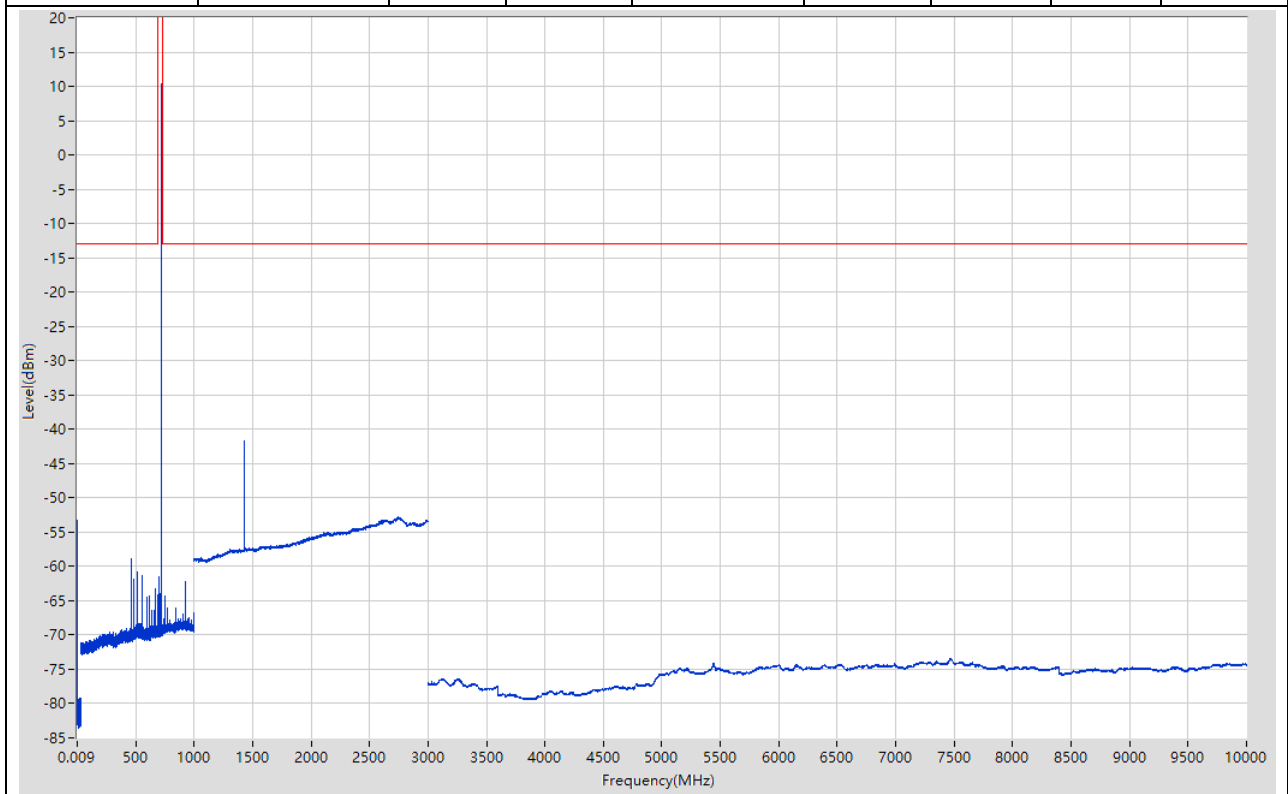

40.12. NB-IoT 15K High BPSK RB1@0(NTNV)

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Detector	Frequency (MHz)	Power (dBm)	Limit (dBm)	Verdict	Sweep Point
0.009	0.15	0.001	RMS	0.011	-52.54	-13	Pass	601
0.15	30	0.01	RMS	0.15	-57.17	-13	Pass	2985
30	688	0.1	RMS	460.765	-56.63	-13	Pass	6580
688	726	0.1	RMS	715.867	11.81	60	Pass	601
726	1000	0.1	RMS	921.571	-62.32	-13	Pass	2740
1000	3000	1	RMS	2741.871	-52.69	-13	Pass	2000
3000	10000	1	RMS	7466.638	-73.34	-13	Pass	7000

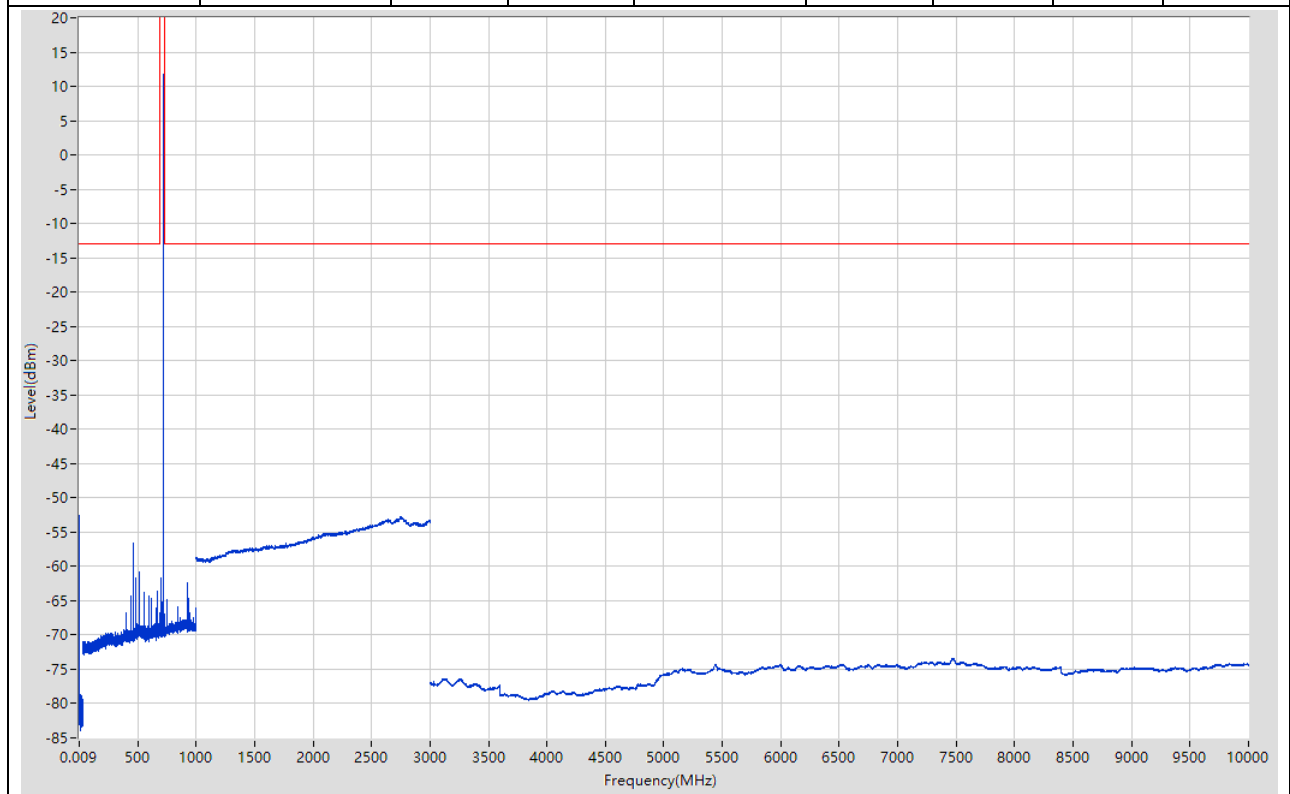

END