





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

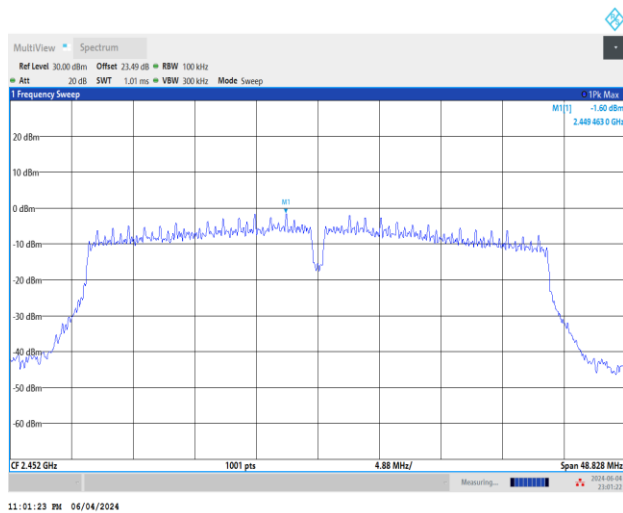


High Channel Plot

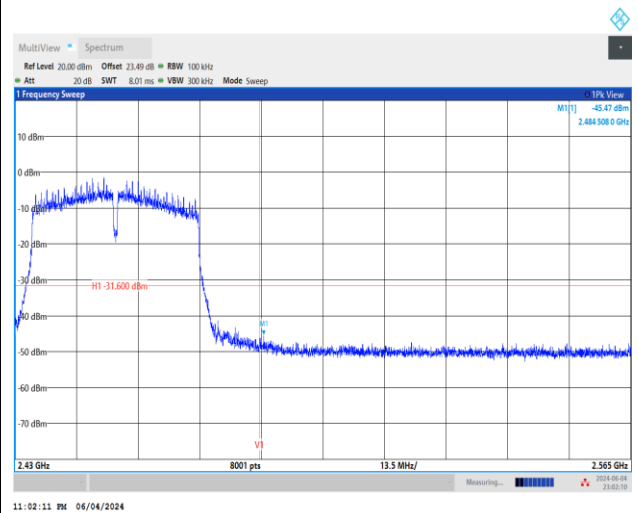

Spurious Emission 30MHz~1GHz

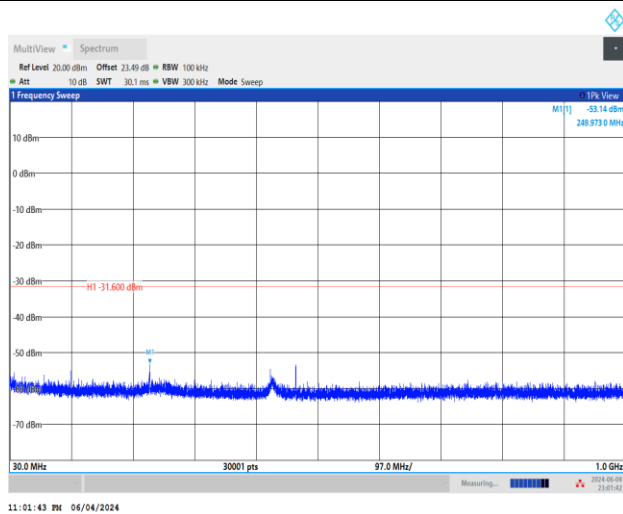

Spurious Emission 1GHz~26.5GHz

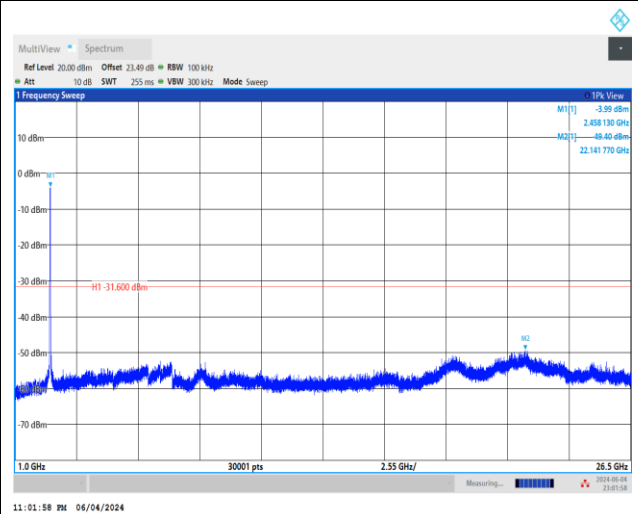




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.7~25.6℃
		Relative Humidity :	43.6~51.8%

EUT Information

Report NO : 441123
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

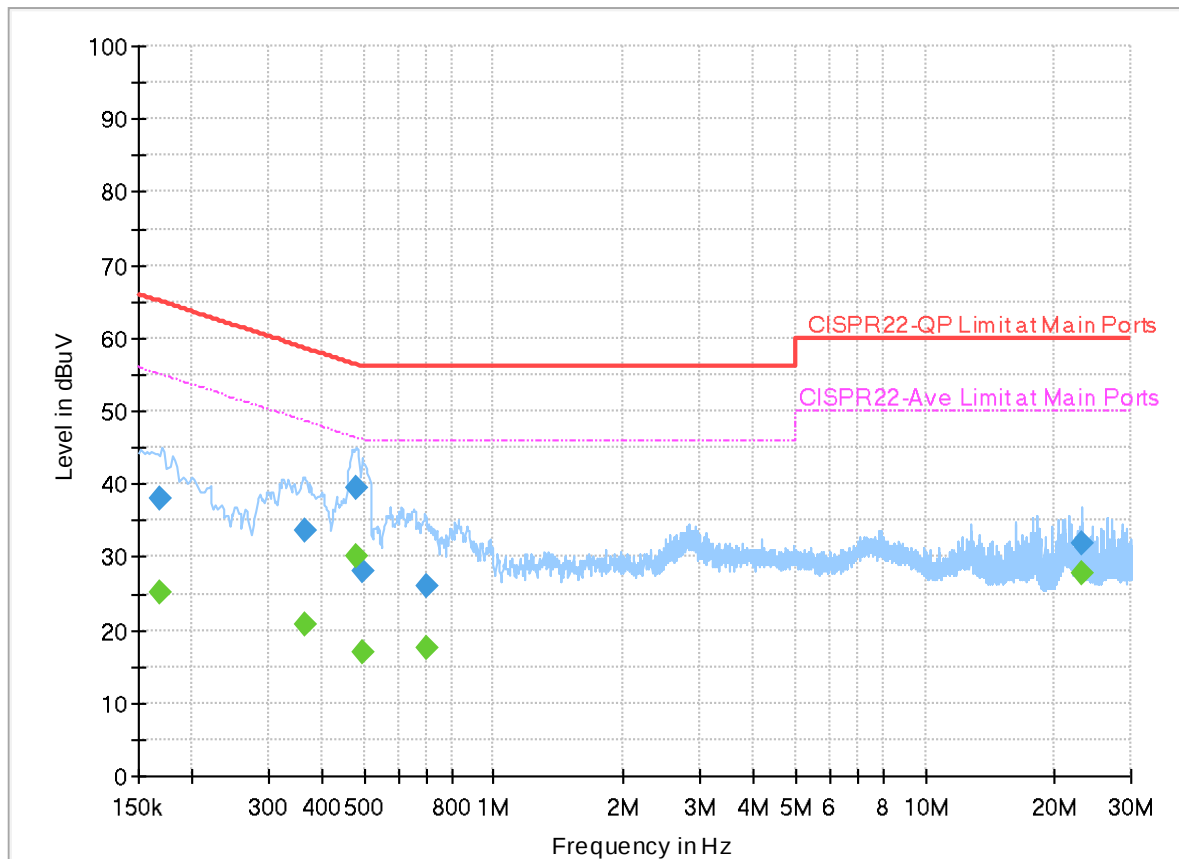


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.168180	---	25.04	55.05	30.01	L1	OFF	19.9
0.168180	37.91	---	65.05	27.14	L1	OFF	19.9
0.364560	---	20.78	48.62	27.84	L1	OFF	19.9
0.364560	33.68	---	58.62	24.94	L1	OFF	19.9
0.478860	---	30.09	46.36	16.27	L1	OFF	19.9
0.478860	39.41	---	56.36	16.95	L1	OFF	19.9
0.493620	---	16.81	46.11	29.30	L1	OFF	19.9
0.493620	28.00	---	56.11	28.11	L1	OFF	19.9
0.694500	---	17.62	46.00	28.38	L1	OFF	19.9
0.694500	26.14	---	56.00	29.86	L1	OFF	19.9
23.126640	---	27.86	50.00	22.14	L1	OFF	20.1
23.126640	31.98	---	60.00	28.02	L1	OFF	20.1

EUT Information

Report NO : 441123
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

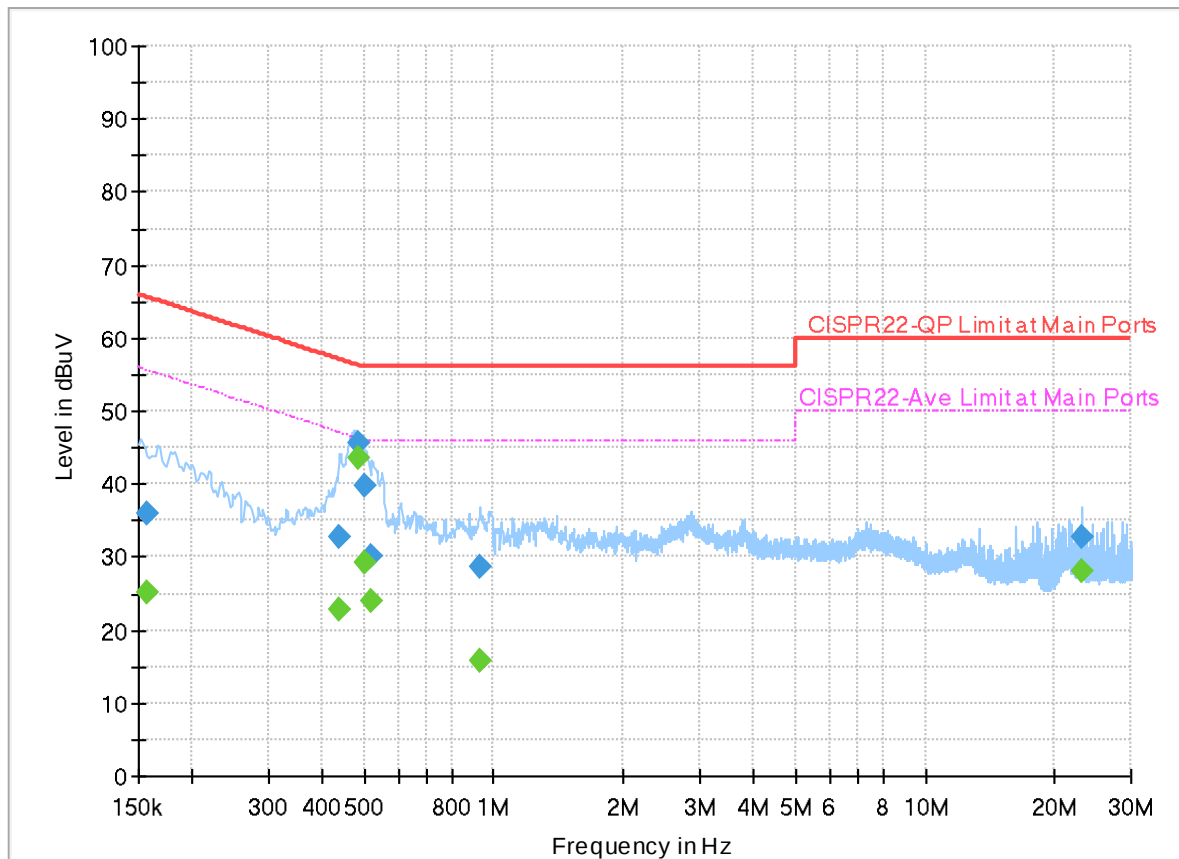

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	25.02	55.63	30.61	N	OFF	19.9
0.156750	36.04	---	65.63	29.59	N	OFF	19.9
0.435750	---	22.78	47.14	24.36	N	OFF	19.9
0.435750	32.80	---	57.14	24.34	N	OFF	19.9
0.483000	---	43.60	46.29	2.69	N	OFF	19.9
0.483000	45.56	---	56.29	10.73	N	OFF	19.9
0.503250	---	29.23	46.00	16.77	N	OFF	19.9
0.503250	39.67	---	56.00	16.33	N	OFF	19.9
0.516750	---	23.88	46.00	22.12	N	OFF	19.9
0.516750	30.26	---	56.00	25.74	N	OFF	19.9
0.927780	---	15.69	46.00	30.31	N	OFF	19.9
0.927780	28.75	---	56.00	27.25	N	OFF	19.9
23.128080	---	28.07	50.00	21.93	N	OFF	20.2
23.128080	32.78	---	60.00	27.22	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li and Lucifer Jiang	Temperature :	21.7~22.5℃
		Relative Humidity :	51~57%

Note symbol

-L	Low channel location
-R	High channel location

**C1. Radiated Spurious Emission Test Modes**

<Ant. 1>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 13	2400-2483.5	1	802.11g	6	2437	6Mbps	-	LF
Mode 14	2400-2483.5	1	802.11g	6	2437	6Mbps	-	SHF

<Ant. 2>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	2	802.11b	01	2412	1Mbps	-	-
Mode 8	2400-2483.5	2	802.11b	06	2437	1Mbps	-	-
Mode 9	2400-2483.5	2	802.11b	11	2462	1Mbps	-	-
Mode 10	2400-2483.5	2	802.11g	01	2412	6Mbps	-	-
Mode 11	2400-2483.5	2	802.11g	06	2437	6Mbps	-	-
Mode 12	2400-2483.5	2	802.11g	11	2462	6Mbps	-	-

MIMO <Ant. 1+2>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 15	2400-2483.5	1+2	802.11n HT20	01	2412	MCS0	-	-
Mode 16	2400-2483.5	1+2	802.11n HT20	06	2437	MCS0	-	-
Mode 17	2400-2483.5	1+2	802.11n HT20	11	2462	MCS0	-	-
Mode 18	2400-2483.5	1+2	802.11n HT40	03	2422	MCS0	-	-
Mode 19	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	-
Mode 20	2400-2483.5	1+2	802.11n HT40	09	2452	MCS0	-	-
Mode 21	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	LF
Mode 22	2400-2483.5	1+2	802.11n HT40	06	2437	MCS0	-	SHF



C2. Summary of each worse mode

<Ant. 1>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2387.87	41.88	54.00	-12.12	V	Avg.	Pass	-	Band Edge
1	802.11b	01	1206.00	53.42	54.00	-0.58	V	Avg.	Pass	-	Harmonic
2	802.11b	06	2388.61	41.60	54.00	-12.40	V	Avg.	Pass	-	Band Edge
2	802.11b	06	1218.50	53.48	54.00	-0.52	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2489.78	44.17	54.00	-9.83	V	Avg.	Pass	-	Band Edge
3	802.11b	11	1231.00	53.45	54.00	-0.55	V	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.95	52.59	54.00	-1.41	V	Avg.	Pass	-	Band Edge
4	802.11g	01	1206.00	44.67	54.00	-7.73	V	Avg.	Pass	-	Harmonic
5	802.11g	06	2389.25	52.77	54.00	-1.23	V	Avg.	Pass	-	Band Edge
5	802.11g	06	7311.00	51.72	54.00	-2.28	V	Avg.	Pass	-	Harmonic
6	802.11g	11	2484.12	53.18	54.00	-0.82	V	Avg.	Pass	-	Band Edge
6	802.11g	11	7386.00	48.36	54.00	-5.64	H	Avg.	Pass	-	Harmonic
13	WLAN Tx LF	6	214.30	32.66	43.50	-10.84	V	Peak	Pass	-	LF
14	WLAN Tx SHF	6	24754.00	41.90	74.00	-32.10	V	Peak	Pass	-	SHF

<Ant. 2>





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
7	802.11b	01	2389.95	41.43	54.00	-12.57	V	Avg.	Pass	-	Band Edge
7	802.11b	01	1206.00	51.97	54.00	-2.03	H	Peak	Pass	-	Harmonic
8	802.11b	06	2388.36	41.03	54.00	-12.97	V	Avg.	Pass	-	Band Edge
8	802.11b	06	1218.50	52.19	54.00	-1.81	V	Avg.	Pass	-	Harmonic
9	802.11b	11	2491.75	63.75	74.00	-10.25	V	Peak	Pass	-	Band Edge
9	802.11b	11	1231.00	49.16	54.00	-4.84	H	Avg.	Pass	-	Harmonic
10	802.11g	01	2389.95	53.12	54.00	-0.88	V	Avg.	Pass	-	Band Edge
10	802.11g	01	1206.00	44.11	54.00	-9.89	H	Avg.	Pass	-	Harmonic
11	802.11g	06	2485.83	50.42	54.00	-3.58	V	Avg.	Pass	-	Band Edge
11	802.11g	06	7311.00	53.20	54.00	-0.80	H	Avg.	Pass	-	Harmonic
12	802.11g	11	2483.51	52.89	54.00	-1.11	V	Avg.	Pass	-	Band Edge
12	802.11g	11	7386.00	42.08	54.00	-11.92	V	Avg.	Pass	-	Harmonic

**MIMO <Ant. 1+2>**




Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
15	802.11n HT20	01	2389.95	52.09	54.00	-1.91	V	Avg.	Pass	-	Band Edge
15	802.11n HT20	01	1208.00	46.73	54.00	-7.27	H	Avg.	Pass	-	Harmonic
16	802.11n HT20	06	2487.53	47.75	54.00	-6.25	V	Avg.	Pass	-	Band Edge
16	802.11n HT20	06	1220.00	53.45	54.00	-0.55	H	Avg.	Pass	-	Harmonic
17	802.11n HT20	11	2483.55	52.41	54.00	-1.59	V	Avg.	Pass	-	Band Edge
17	802.11n HT20	11	1231.00	47.74	54.00	-6.53	H	Avg.	Pass	-	Harmonic
18	802.11n HT40	03	2389.41	52.04	54.00	-1.96	V	Avg.	Pass	-	Band Edge
18	802.11n HT40	03	1211.00	41.87	54.00	-12.13	H	Avg.	Pass	-	Harmonic
19	802.11n HT40	06	2389.88	53.32	54.00	-0.68	V	Avg.	Pass	-	Band Edge
19	802.11n HT40	06	1218.00	46.79	54.00	-7.21	H	Avg.	Pass	-	Harmonic
20	802.11n HT40	09	2484.40	53.30	54.00	-0.70	V	Avg.	Pass	-	Band Edge
20	802.11n HT40	09	1226.00	42.79	54.00	-11.21	H	Avg.	Pass	-	Harmonic
21	WLAN Tx LF	06	718.70	38.38	46.00	-7.62	V	Peak	Pass	-	LF
22	WLAN Tx SHF	06	24754.00	42.09	74.00	-31.91	V	Peak	Pass	-	SHF





<Ant. 1>

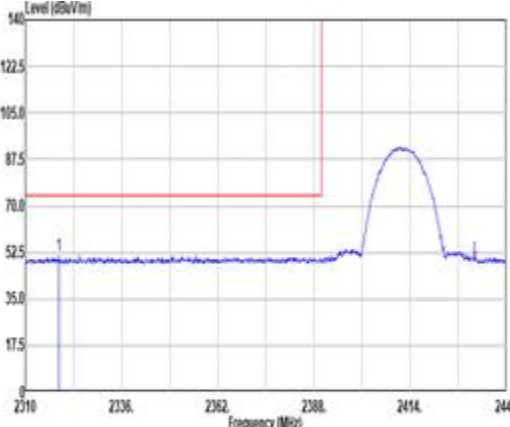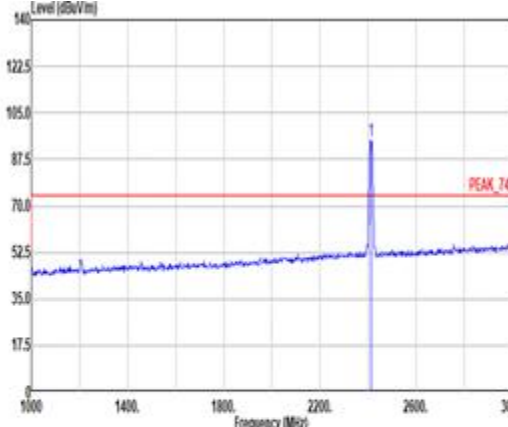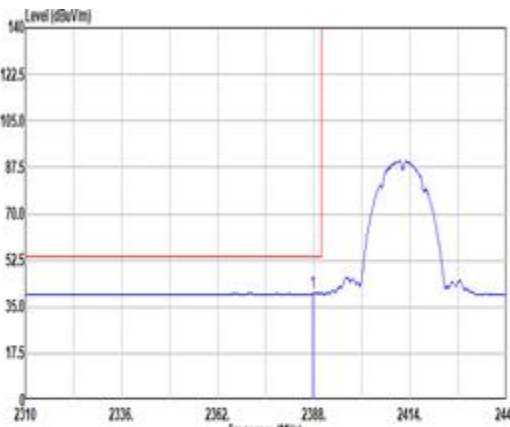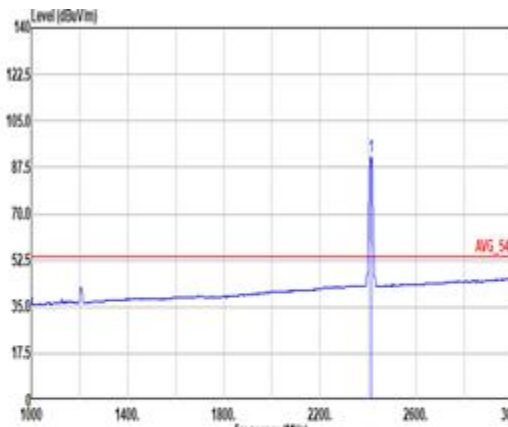Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2319.18</td><td>51.48</td><td>74.00</td><td>-22.60</td><td>30.27</td><td>17.19</td><td>7.21</td><td>31.69</td><td>18.42</td><td>102 200 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2319.18	51.48	74.00	-22.60	30.27	17.19	7.21	31.69	18.42	102 200 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>94.56</td><td>-----</td><td>-----</td><td>81.52</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>102 200 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	94.56	-----	-----	81.52	26.96	7.38	31.75	18.45	102 200 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2319.18	51.48	74.00	-22.60	30.27	17.19	7.21	31.69	18.42	102 200 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2412.00	94.56	-----	-----	81.52	26.96	7.38	31.75	18.45	102 200 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2387.74</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>26.91</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>102 200 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2387.74	39.96	54.00	-14.04	26.91	27.00	7.34	31.73	18.44	102 200 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>91.38</td><td>-----</td><td>-----</td><td>78.23</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>102 200 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2412.00	91.38	-----	-----	78.23	27.00	7.37	31.74	18.44	102 200 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2387.74	39.96	54.00	-14.04	26.91	27.00	7.34	31.73	18.44	102 200 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 2412.00	91.38	-----	-----	78.23	27.00	7.37	31.74	18.44	102 200 AVERAGE																																																																									

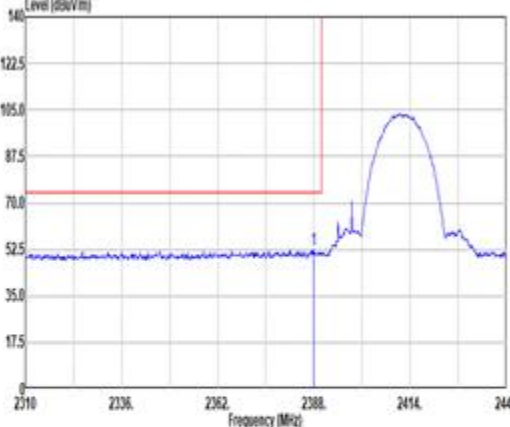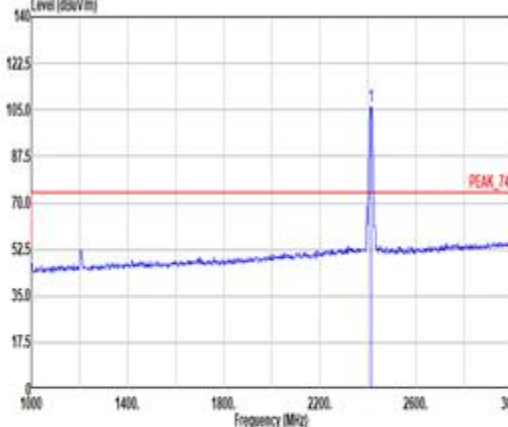
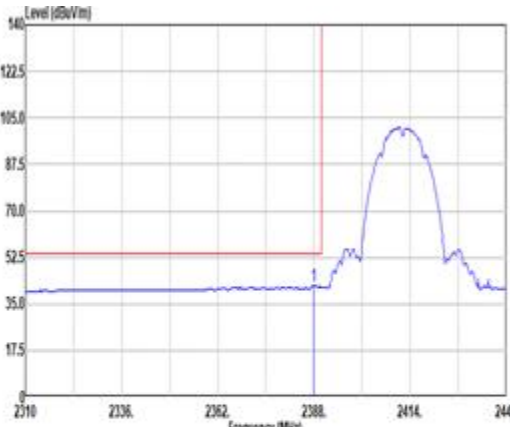


Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2307.07</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>39.42</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>151 121 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2307.07	52.47	74.00	-21.53	39.42	27.00	7.34	31.73	18.44	151 121 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>106.21</td><td>-----</td><td>-----</td><td>93.17</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>151 121 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	106.21	-----	-----	93.17	26.96	7.38	31.75	18.45	151 121 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2307.07	52.47	74.00	-21.53	39.42	27.00	7.34	31.73	18.44	151 121 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2412.00	106.21	-----	-----	93.17	26.96	7.38	31.75	18.45	151 121 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2307.07</td><td>41.00</td><td>54.00</td><td>-12.12</td><td>20.83</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>151 121 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2307.07	41.00	54.00	-12.12	20.83	27.00	7.34	31.73	18.44	151 121 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>103.12</td><td>-----</td><td>-----</td><td>90.65</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>151 121 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	103.12	-----	-----	90.65	27.00	7.37	31.74	18.44	151 121 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2307.07	41.00	54.00	-12.12	20.83	27.00	7.34	31.73	18.44	151 121 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2412.00	103.12	-----	-----	90.65	27.00	7.37	31.74	18.44	151 121 AVERAGE																																																																									



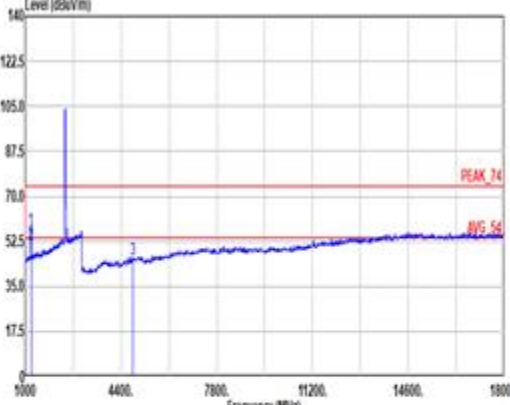
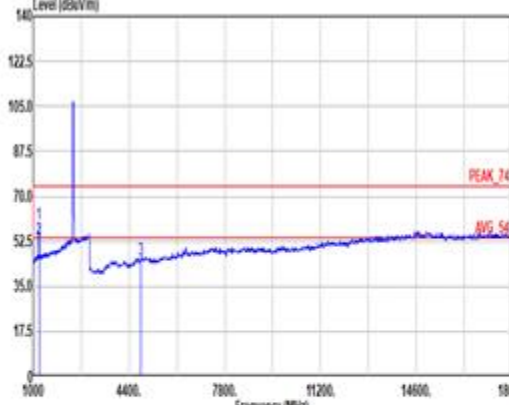


Mode	1																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2CH5418EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1206.00</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>49.84</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 253 Peak</td></tr><tr><td>2 1206.00</td><td>51.37</td><td>54.00</td><td>-2.63</td><td>43.18</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 253 Average</td></tr><tr><td>3 4824.00</td><td>45.57</td><td>74.00</td><td>-28.43</td><td>33.79</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1206.00	57.31	74.00	-16.69	49.84	23.64	5.48	31.81	10.16	100 253 Peak	2 1206.00	51.37	54.00	-2.63	43.18	23.64	5.48	31.81	10.16	100 253 Average	3 4824.00	45.57	74.00	-28.43	33.79	32.40	10.55	32.98	1.81	-- -- PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2CH5418EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1206.00</td><td>59.28</td><td>74.00</td><td>-14.72</td><td>51.81</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 168 Peak</td></tr><tr><td>2 1206.00</td><td>53.42</td><td>54.00</td><td>-0.58</td><td>45.25</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 168 Average</td></tr><tr><td>3 4824.00</td><td>45.28</td><td>74.00</td><td>-28.80</td><td>33.42</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1206.00	59.28	74.00	-14.72	51.81	23.64	5.48	31.81	10.16	100 168 Peak	2 1206.00	53.42	54.00	-0.58	45.25	23.64	5.48	31.81	10.16	100 168 Average	3 4824.00	45.28	74.00	-28.80	33.42	32.40	10.55	32.98	1.81	-- -- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 1206.00	57.31	74.00	-16.69	49.84	23.64	5.48	31.81	10.16	100 253 Peak																																																																																																																	
2 1206.00	51.37	54.00	-2.63	43.18	23.64	5.48	31.81	10.16	100 253 Average																																																																																																																	
3 4824.00	45.57	74.00	-28.43	33.79	32.40	10.55	32.98	1.81	-- -- PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 1206.00	59.28	74.00	-14.72	51.81	23.64	5.48	31.81	10.16	100 168 Peak																																																																																																																	
2 1206.00	53.42	54.00	-0.58	45.25	23.64	5.48	31.81	10.16	100 168 Average																																																																																																																	
3 4824.00	45.28	74.00	-28.80	33.42	32.40	10.55	32.98	1.81	-- -- PEAK																																																																																																																	
Avg																																																																																																																										

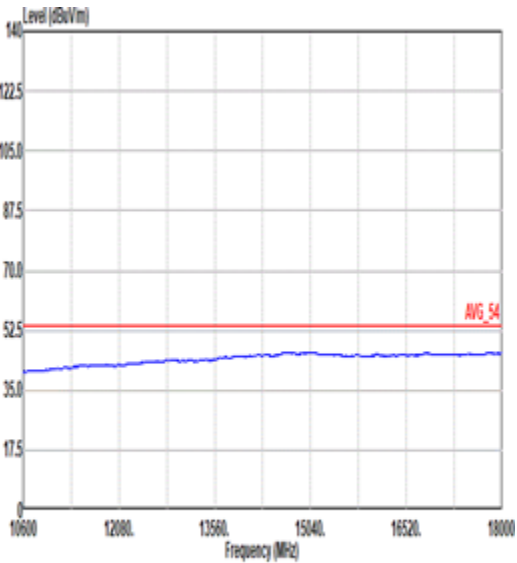
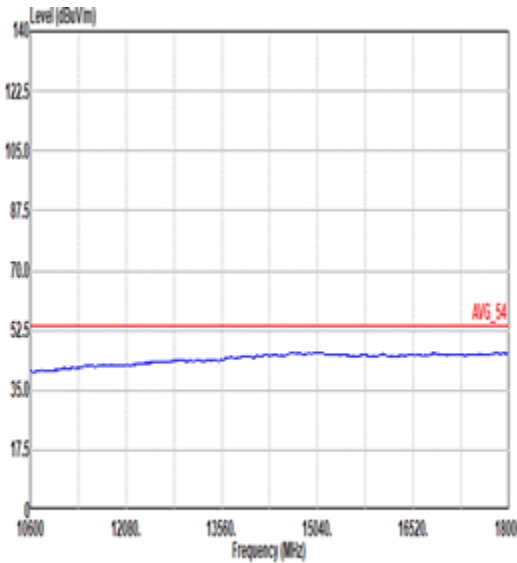


Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20H5418EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20H5418EN_238712 VERTICAL

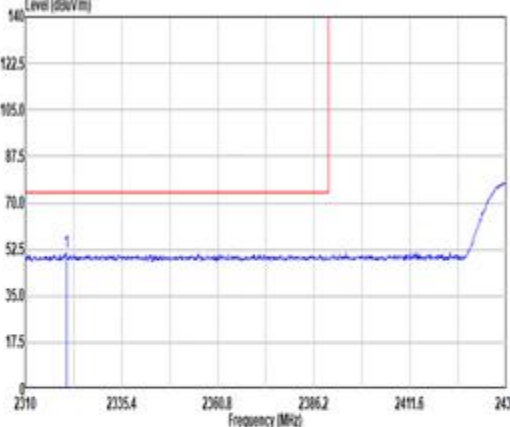
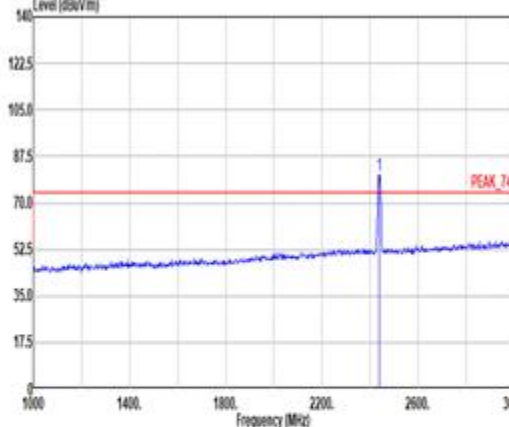
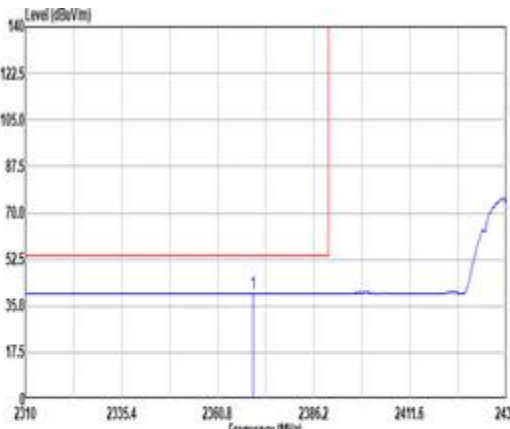
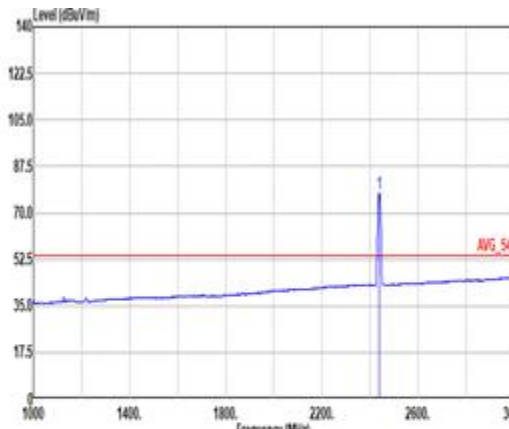


Mode	2																																																																											
	Band Edge - L																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2328.00</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>37.99</td><td>27.28</td><td>7.21</td><td>31.69</td><td>18.42</td><td>200</td><td>72 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2328.00	51.13	74.00	-22.87	37.99	27.28	7.21	31.69	18.42	200	72 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>88.43</td><td>-----</td><td>-----</td><td>67.44</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>200</td><td>72 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	88.43	-----	-----	67.44	26.88	7.41	31.76	18.46	200	72 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2328.00	51.13	74.00	-22.87	37.99	27.28	7.21	31.69	18.42	200	72 PEAK																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2437.00	88.43	-----	-----	67.44	26.88	7.41	31.76	18.46	200	72 PEAK																																																																		
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2370.07</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>26.72</td><td>27.18</td><td>7.30</td><td>31.72</td><td>18.43</td><td>200</td><td>72 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2370.07	39.83	54.00	-14.17	26.72	27.18	7.30	31.72	18.43	200	72 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>77.37</td><td>-----</td><td>-----</td><td>64.38</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>200</td><td>72 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	77.37	-----	-----	64.38	26.88	7.41	31.76	18.46	200	72 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2370.07	39.83	54.00	-14.17	26.72	27.18	7.30	31.72	18.43	200	72 AVERAGE																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2437.00	77.37	-----	-----	64.38	26.88	7.41	31.76	18.46	200	72 AVERAGE																																																																		

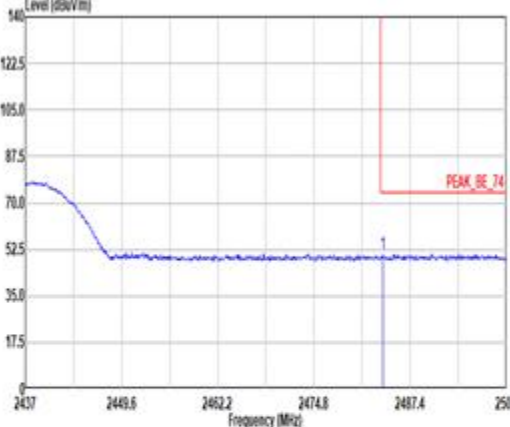
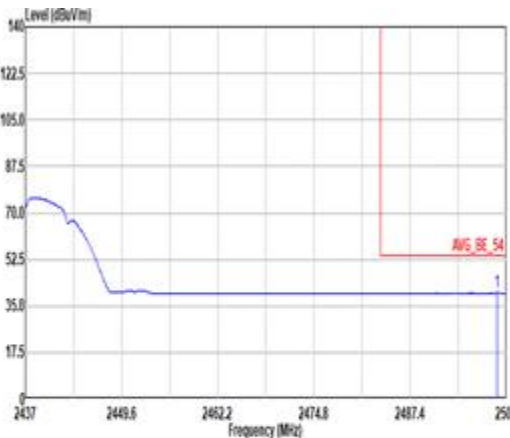


Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_802.11b_CH06_2437MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.52</td><td>58.74</td><td>74.00</td><td>-23.26</td><td>37.74</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>200</td><td>72 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg		1 2483.52	58.74	74.00	-23.26	37.74	26.84	7.47	31.79	18.48	200	72 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																	
1 2483.52	58.74	74.00	-23.26	37.74	26.84	7.47	31.79	18.48	200	72 PEAK																																
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2480.74</td><td>39.92</td><td>54.00</td><td>-14.08</td><td>26.85</td><td>26.90</td><td>7.49</td><td>31.80</td><td>18.48</td><td>200</td><td>72 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg		1 2480.74	39.92	54.00	-14.08	26.85	26.90	7.49	31.80	18.48	200	72 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																	
1 2480.74	39.92	54.00	-14.08	26.85	26.90	7.49	31.80	18.48	200	72 AVERAGE																																

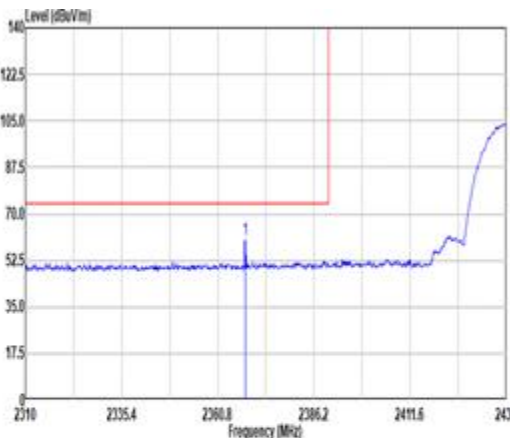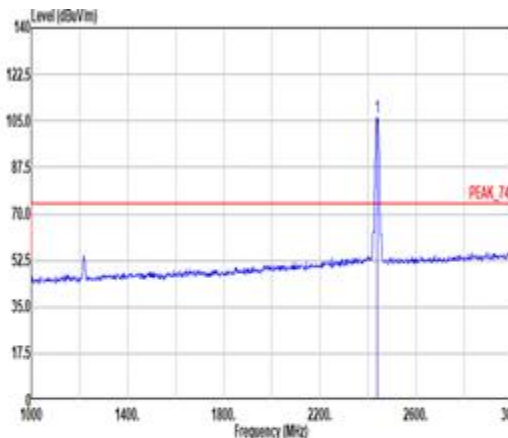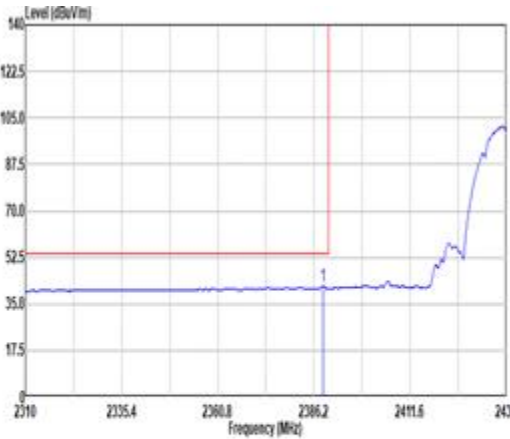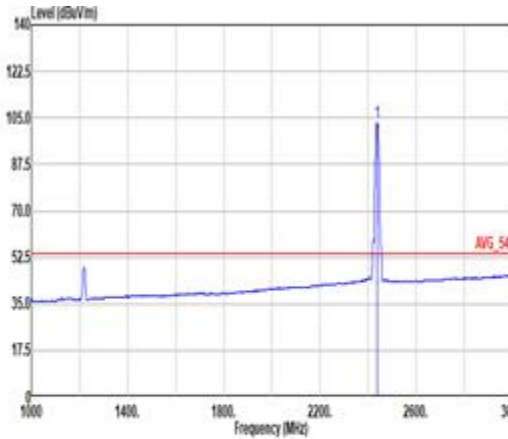

Mode	2																																																																																							
	Band Edge - L																																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.04</td><td>68.81</td><td>74.00</td><td>-13.99</td><td>46.90</td><td>27.18</td><td>7.30</td><td>31.72</td><td>18.43</td><td>113</td><td>135</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.04	68.81	74.00	-13.99	46.90	27.18	7.30	31.72	18.43	113	135	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>186.34</td><td>-----</td><td>-----</td><td>93.37</td><td>26.86</td><td>7.41</td><td>31.76</td><td>18.46</td><td>113</td><td>135</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	186.34	-----	-----	93.37	26.86	7.41	31.76	18.46	113	135	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2386.04	68.81	74.00	-13.99	46.90	27.18	7.30	31.72	18.43	113	135	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	186.34	-----	-----	93.37	26.86	7.41	31.76	18.46	113	135	PEAK																																																																												
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.01</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>28.55</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>113</td><td>135</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.01	41.60	54.00	-12.40	28.55	27.00	7.34	31.73	18.44	113	135	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>183.22</td><td>-----</td><td>-----</td><td>90.23</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>113</td><td>135</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	183.22	-----	-----	90.23	26.88	7.41	31.76	18.46	113	135	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2386.01	41.60	54.00	-12.40	28.55	27.00	7.34	31.73	18.44	113	135	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	183.22	-----	-----	90.23	26.88	7.41	31.76	18.46	113	135	AVERAGE																																																																												

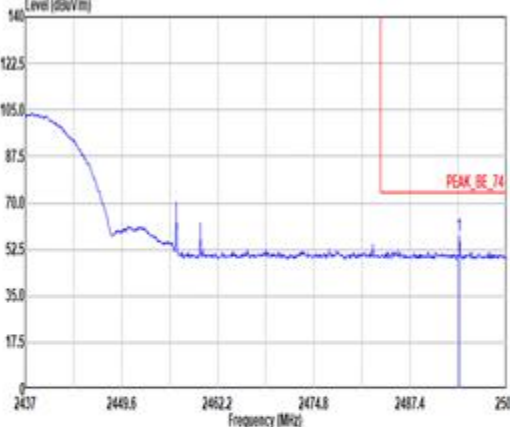
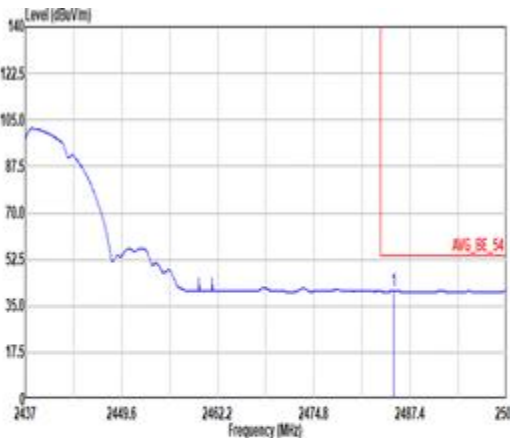


Mode	2																																										
	Band Edge - R																																										
	2400-2483.5_802.11b_CH06_2437MHz																																										
ANT	1																																										
Pol.	Vertical	Fundamental																																									
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2489.83</td><td>57.79</td><td>74.00</td><td>-16.21</td><td>44.72</td><td>26.90</td><td>7.40</td><td>31.80</td><td>18.40</td><td>113</td><td>135</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 2489.83	57.79	74.00	-16.21	44.72	26.90	7.40	31.80	18.40	113	135	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1 2489.83	57.79	74.00	-16.21	44.72	26.90	7.40	31.80	18.40	113	135	PEAK																																
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2485.26</td><td>48.74</td><td>54.00</td><td>-13.26</td><td>27.72</td><td>26.85</td><td>7.48</td><td>31.79</td><td>18.48</td><td>113</td><td>135</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 2485.26	48.74	54.00	-13.26	27.72	26.85	7.48	31.79	18.48	113	135	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1 2485.26	48.74	54.00	-13.26	27.72	26.85	7.48	31.79	18.48	113	135	AVERAGE																																







Mode	2																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																	
ANT	1																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	Site : 83CH23-MY Condition: PEAK_74 3m DRH18-E_LEXORSA18EN_238712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.58</td><td>57.83</td><td>74.00</td><td>-16.97</td><td>48.79</td><td>23.68</td><td>5.49</td><td>31.81</td><td>18.16</td><td>100 259 Peak</td></tr><tr><td>2 1218.58</td><td>58.13</td><td>54.00</td><td>-3.81</td><td>41.95</td><td>23.68</td><td>5.49</td><td>31.81</td><td>18.16</td><td>100 259 Average</td></tr><tr><td>3 4874.00</td><td>45.77</td><td>74.00</td><td>-28.23</td><td>33.84</td><td>32.68</td><td>10.52</td><td>32.98</td><td>1.79</td><td>-- -- PEAK</td></tr><tr><td>4 7311.00</td><td>49.66</td><td>74.00</td><td>-24.34</td><td>33.36</td><td>37.28</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- PEAK</td></tr><tr><td>5 7311.00</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>23.36</td><td>37.28</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					Hz	dBuV/m	dB	dB	dB	dB	dB	dB	cm	deg	1 1218.58	57.83	74.00	-16.97	48.79	23.68	5.49	31.81	18.16	100 259 Peak	2 1218.58	58.13	54.00	-3.81	41.95	23.68	5.49	31.81	18.16	100 259 Average	3 4874.00	45.77	74.00	-28.23	33.84	32.68	10.52	32.98	1.79	-- -- PEAK	4 7311.00	49.66	74.00	-24.34	33.36	37.28	12.62	35.54	2.82	-- -- PEAK	5 7311.00	39.66	54.00	-14.34	23.36	37.28	12.62	35.54	2.82	-- -- AVERAGE	Site : 83CH23-MY Condition: PEAK_74 3m DRH18-E_LEXORSA18EN_238712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.58</td><td>68.14</td><td>74.00</td><td>-13.86</td><td>51.98</td><td>23.68</td><td>5.49</td><td>31.81</td><td>18.16</td><td>111 156 Peak</td></tr><tr><td>2 1218.58</td><td>53.48</td><td>54.00</td><td>-9.52</td><td>45.24</td><td>23.68</td><td>5.49</td><td>31.81</td><td>18.16</td><td>111 156 Average</td></tr><tr><td>3 4874.00</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>33.78</td><td>32.68</td><td>10.52</td><td>32.98</td><td>1.79</td><td>-- -- PEAK</td></tr><tr><td>4 7311.00</td><td>48.28</td><td>74.00</td><td>-25.72</td><td>31.98</td><td>37.28</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- PEAK</td></tr><tr><td>5 7311.00</td><td>39.74</td><td>54.00</td><td>-14.26</td><td>23.44</td><td>37.28</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					Hz	dBuV/m	dB	dB	dB	dB	dB	dB	cm	deg	1 1218.58	68.14	74.00	-13.86	51.98	23.68	5.49	31.81	18.16	111 156 Peak	2 1218.58	53.48	54.00	-9.52	45.24	23.68	5.49	31.81	18.16	111 156 Average	3 4874.00	45.63	74.00	-28.37	33.78	32.68	10.52	32.98	1.79	-- -- PEAK	4 7311.00	48.28	74.00	-25.72	31.98	37.28	12.62	35.54	2.82	-- -- PEAK	5 7311.00	39.74	54.00	-14.26	23.44	37.28	12.62	35.54	2.82	-- -- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																													
Hz	dBuV/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																									
1 1218.58	57.83	74.00	-16.97	48.79	23.68	5.49	31.81	18.16	100 259 Peak																																																																																																																																																									
2 1218.58	58.13	54.00	-3.81	41.95	23.68	5.49	31.81	18.16	100 259 Average																																																																																																																																																									
3 4874.00	45.77	74.00	-28.23	33.84	32.68	10.52	32.98	1.79	-- -- PEAK																																																																																																																																																									
4 7311.00	49.66	74.00	-24.34	33.36	37.28	12.62	35.54	2.82	-- -- PEAK																																																																																																																																																									
5 7311.00	39.66	54.00	-14.34	23.36	37.28	12.62	35.54	2.82	-- -- AVERAGE																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																													
Hz	dBuV/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																									
1 1218.58	68.14	74.00	-13.86	51.98	23.68	5.49	31.81	18.16	111 156 Peak																																																																																																																																																									
2 1218.58	53.48	54.00	-9.52	45.24	23.68	5.49	31.81	18.16	111 156 Average																																																																																																																																																									
3 4874.00	45.63	74.00	-28.37	33.78	32.68	10.52	32.98	1.79	-- -- PEAK																																																																																																																																																									
4 7311.00	48.28	74.00	-25.72	31.98	37.28	12.62	35.54	2.82	-- -- PEAK																																																																																																																																																									
5 7311.00	39.74	54.00	-14.26	23.44	37.28	12.62	35.54	2.82	-- -- AVERAGE																																																																																																																																																									


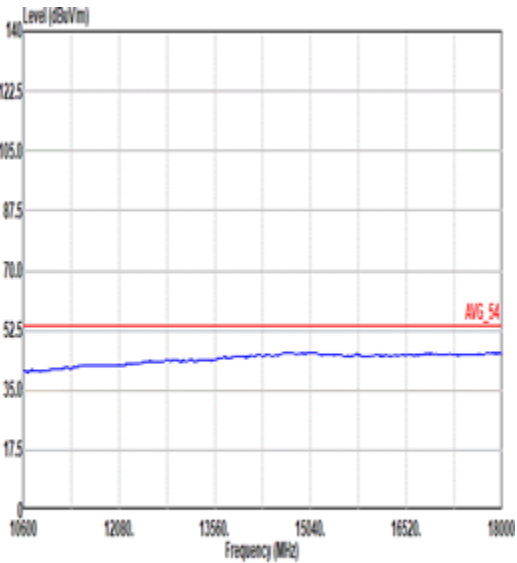
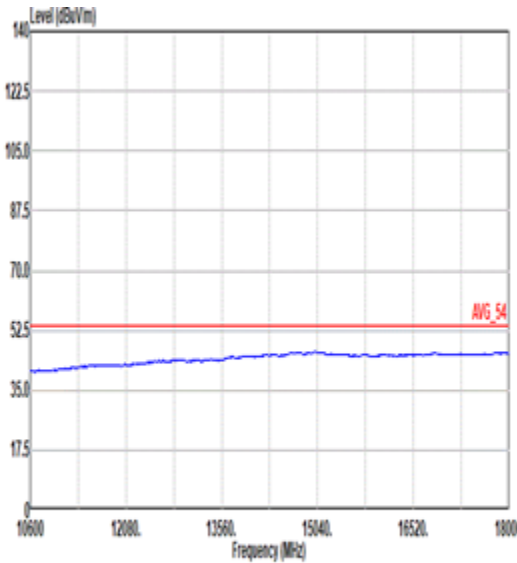


Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

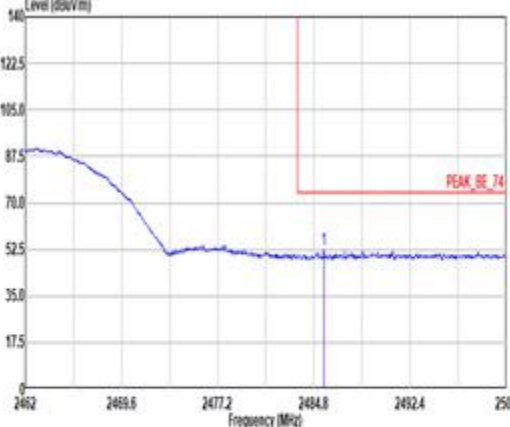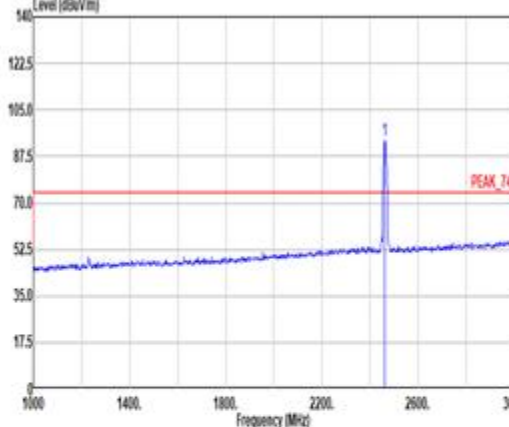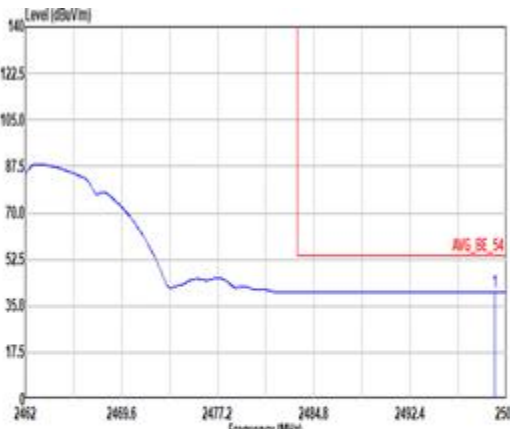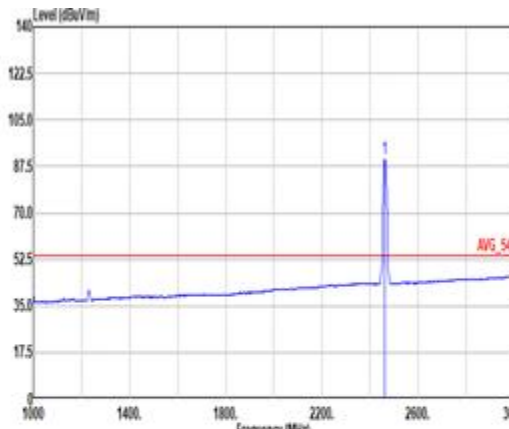

Mode	3																																																			
	Band Edge																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak																																																				
	Site : 83CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto						Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto																																													
Avg																																																				
	Site : 83CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto						Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto																																													
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.56</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>39.13</td><td>26.06</td><td>7.48</td><td>31.79</td><td>18.48</td><td>170</td><td>213</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2485.56	52.16	74.00	-21.84	39.13	26.06	7.48	31.79	18.48	170	213	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																											
1	2485.56	52.16	74.00	-21.84	39.13	26.06	7.48	31.79	18.48	170	213	PEAK																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.38</td><td>-----</td><td>-----</td><td>88.37</td><td>26.00</td><td>7.44</td><td>31.78</td><td>18.47</td><td>170</td><td>213</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2462.00	93.38	-----	-----	88.37	26.00	7.44	31.78	18.47	170	213	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																											
1	2462.00	93.38	-----	-----	88.37	26.00	7.44	31.78	18.47	170	213	PEAK																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.09</td><td>48.33</td><td>54.00</td><td>-13.67</td><td>27.26</td><td>26.00</td><td>7.49</td><td>31.80</td><td>18.48</td><td>170</td><td>213</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2489.09	48.33	54.00	-13.67	27.26	26.00	7.49	31.80	18.48	170	213	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																											
1	2489.09	48.33	54.00	-13.67	27.26	26.00	7.49	31.80	18.48	170	213	AVERAGE																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>90.12</td><td>-----</td><td>-----</td><td>77.19</td><td>26.00</td><td>7.44</td><td>31.78</td><td>18.47</td><td>170</td><td>213</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2462.00	90.12	-----	-----	77.19	26.00	7.44	31.78	18.47	170	213	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																											
1	2462.00	90.12	-----	-----	77.19	26.00	7.44	31.78	18.47	170	213	AVERAGE																																								

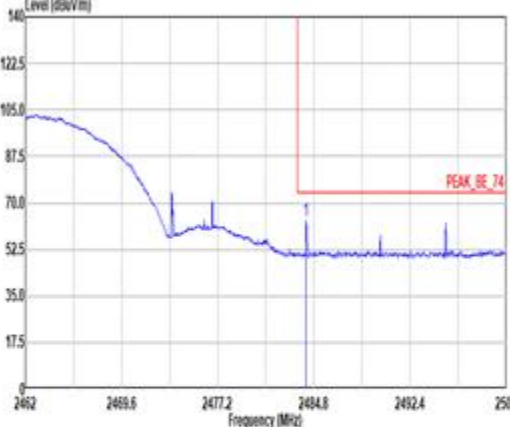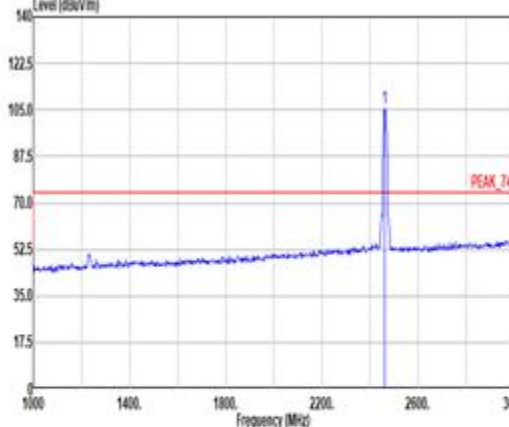
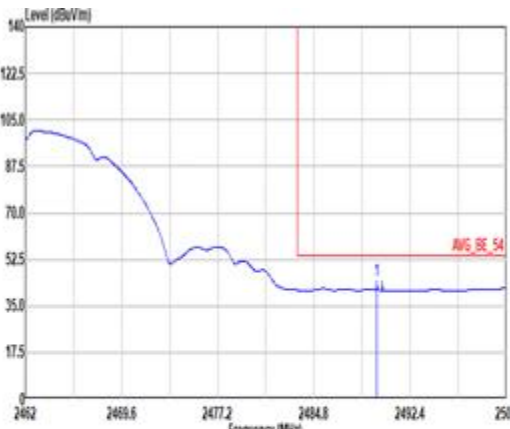


Mode	3																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2484.19</td><td>63.17</td><td>74.00</td><td>-10.83</td><td>50.17</td><td>26.84</td><td>7.47</td><td>31.79</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2484.19	63.17	74.00	-10.83	50.17	26.84	7.47	31.79	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>185.77</td><td>-----</td><td>-----</td><td>92.84</td><td>26.80</td><td>7.44</td><td>31.78</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	185.77	-----	-----	92.84	26.80	7.44	31.78
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2484.19	63.17	74.00	-10.83	50.17	26.84	7.47	31.79																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	185.77	-----	-----	92.84	26.80	7.44	31.78																																																											
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2489.70</td><td>44.17</td><td>54.00</td><td>-9.83</td><td>31.10</td><td>26.90</td><td>7.48</td><td>31.79</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2489.70	44.17	54.00	-9.83	31.10	26.90	7.48	31.79	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>182.66</td><td>-----</td><td>-----</td><td>89.73</td><td>26.80</td><td>7.44</td><td>31.78</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	182.66	-----	-----	89.73	26.80	7.44	31.78
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2489.70	44.17	54.00	-9.83	31.10	26.90	7.48	31.79																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	182.66	-----	-----	89.73	26.80	7.44	31.78																																																											







Mode	3																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																
ANT	1																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																															
Peak Avg	Site : 83CH23-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1231.00</td><td>56.97</td><td>74.00</td><td>-17.83</td><td>48.71</td><td>23.60</td><td>5.50</td><td>31.81</td><td>18.17</td><td>113</td><td>272</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>49.96</td><td>54.00</td><td>-4.04</td><td>41.79</td><td>23.60</td><td>5.50</td><td>31.81</td><td>18.17</td><td>113</td><td>272</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>45.81</td><td>74.00</td><td>-28.39</td><td>33.57</td><td>32.75</td><td>10.50</td><td>32.98</td><td>1.77</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7306.00</td><td>49.81</td><td>74.00</td><td>-24.19</td><td>33.48</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>7306.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>23.15</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table> Site : 83CH23-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1231.00</td><td>60.52</td><td>74.00</td><td>-13.48</td><td>52.26</td><td>23.60</td><td>5.50</td><td>31.81</td><td>18.17</td><td>164</td><td>239</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>53.45</td><td>54.00</td><td>-9.55</td><td>45.19</td><td>23.60</td><td>5.50</td><td>31.81</td><td>18.17</td><td>164</td><td>239</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>44.85</td><td>74.00</td><td>-29.15</td><td>32.81</td><td>32.75</td><td>10.50</td><td>32.98</td><td>1.77</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7306.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>32.79</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>7306.00</td><td>39.50</td><td>54.00</td><td>-14.50</td><td>23.17</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Hz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg	1	1231.00	56.97	74.00	-17.83	48.71	23.60	5.50	31.81	18.17	113	272	Peak	2	1231.00	49.96	54.00	-4.04	41.79	23.60	5.50	31.81	18.17	113	272	Average	3	4924.00	45.81	74.00	-28.39	33.57	32.75	10.50	32.98	1.77	--	--	PEAK	4	7306.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK	5	7306.00	39.48	54.00	-14.52	23.15	37.13	12.81	35.60	1.99	--	--	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Hz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg	1	1231.00	60.52	74.00	-13.48	52.26	23.60	5.50	31.81	18.17	164	239	Peak	2	1231.00	53.45	54.00	-9.55	45.19	23.60	5.50	31.81	18.17	164	239	Average	3	4924.00	44.85	74.00	-29.15	32.81	32.75	10.50	32.98	1.77	--	--	PEAK	4	7306.00	49.12	74.00	-24.88	32.79	37.13	12.81	35.60	1.99	--	--	PEAK	5	7306.00	39.50	54.00	-14.50	23.17	37.13	12.81	35.60	1.99	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																																											
Hz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	1231.00	56.97	74.00	-17.83	48.71	23.60	5.50	31.81	18.17	113	272	Peak																																																																																																																																																																																					
2	1231.00	49.96	54.00	-4.04	41.79	23.60	5.50	31.81	18.17	113	272	Average																																																																																																																																																																																					
3	4924.00	45.81	74.00	-28.39	33.57	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																																					
4	7306.00	49.81	74.00	-24.19	33.48	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																																					
5	7306.00	39.48	54.00	-14.52	23.15	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																																											
Hz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	1231.00	60.52	74.00	-13.48	52.26	23.60	5.50	31.81	18.17	164	239	Peak																																																																																																																																																																																					
2	1231.00	53.45	54.00	-9.55	45.19	23.60	5.50	31.81	18.17	164	239	Average																																																																																																																																																																																					
3	4924.00	44.85	74.00	-29.15	32.81	32.75	10.50	32.98	1.77	--	--	PEAK																																																																																																																																																																																					
4	7306.00	49.12	74.00	-24.88	32.79	37.13	12.81	35.60	1.99	--	--	PEAK																																																																																																																																																																																					
5	7306.00	39.50	54.00	-14.50	23.17	37.13	12.81	35.60	1.99	--	--	AVERAGE																																																																																																																																																																																					



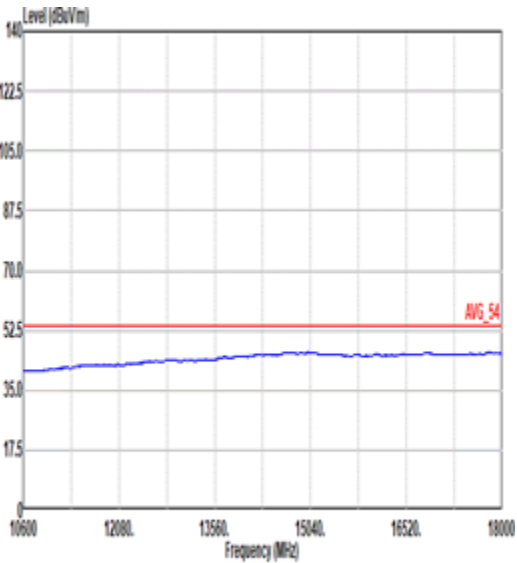
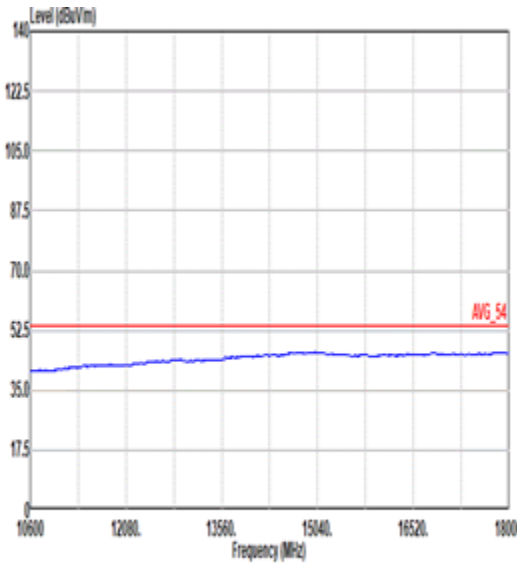


Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 VERTICAL

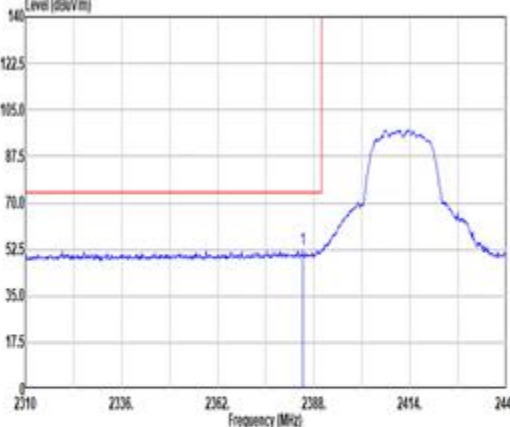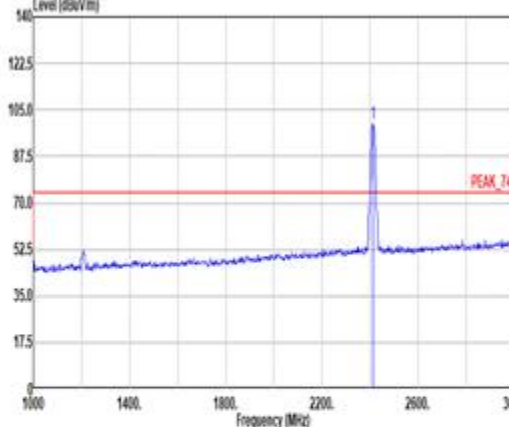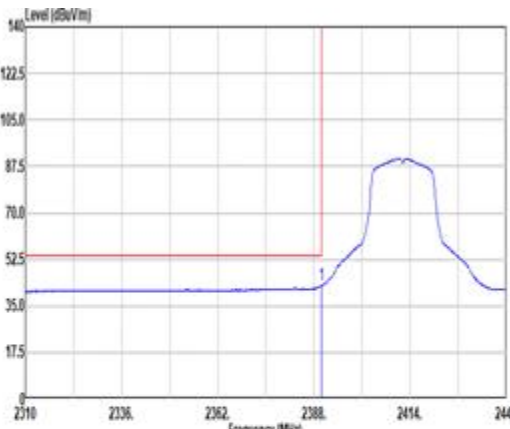
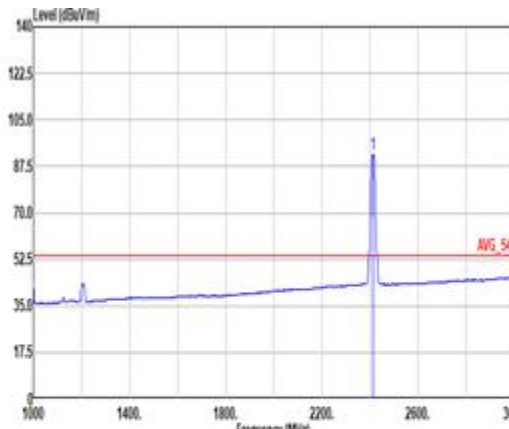


Mode	4																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	 Site : 83CH3-HY Condition: PEAK_74 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2385.01</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>39.18</td><td>27.00</td><td>7.33</td><td>31.73</td><td>18.44</td><td>100</td><td>270 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	1	2385.01	52.32	74.00	-21.68	39.18	27.00	7.33	31.73	18.44	100	270 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.01</td><td>-----</td><td>-----</td><td>86.97</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>270 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	1	2412.00	100.01	-----	-----	86.97	26.96	7.38	31.75	18.45	100	270 PEAK
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm																																																																																		
1	2385.01	52.32	74.00	-21.68	39.18	27.00	7.33	31.73	18.44	100	270 PEAK																																																																															
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm																																																																																		
1	2412.00	100.01	-----	-----	86.97	26.96	7.38	31.75	18.45	100	270 PEAK																																																																															
Avg	 Site : 83CH3-HY Condition: AVG_54 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>29.56</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>270 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	1	2389.95	42.61	54.00	-11.39	29.56	27.00	7.34	31.73	18.44	100	270 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>92.03</td><td>-----</td><td>-----</td><td>70.96</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>100</td><td>270 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	1	2412.00	92.03	-----	-----	70.96	27.00	7.37	31.74	18.44	100	270 AVERAGE
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm																																																																																		
1	2389.95	42.61	54.00	-11.39	29.56	27.00	7.34	31.73	18.44	100	270 AVERAGE																																																																															
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm																																																																																		
1	2412.00	92.03	-----	-----	70.96	27.00	7.37	31.74	18.44	100	270 AVERAGE																																																																															

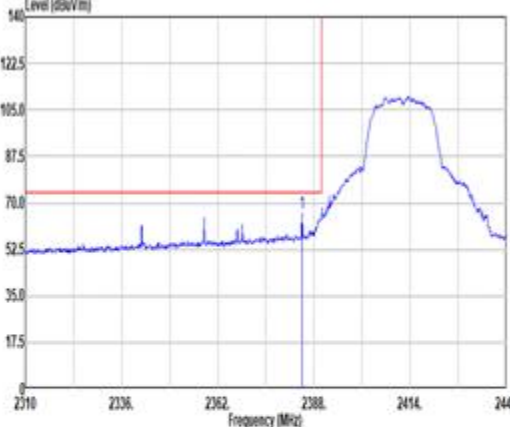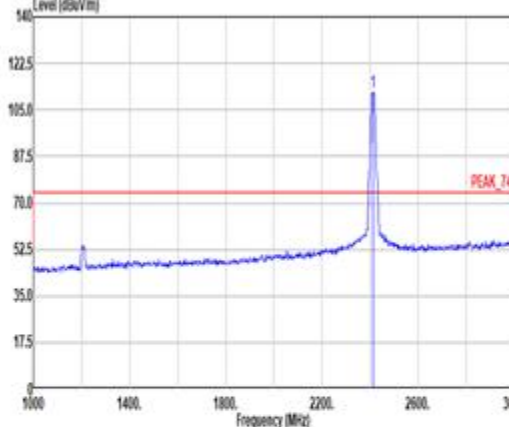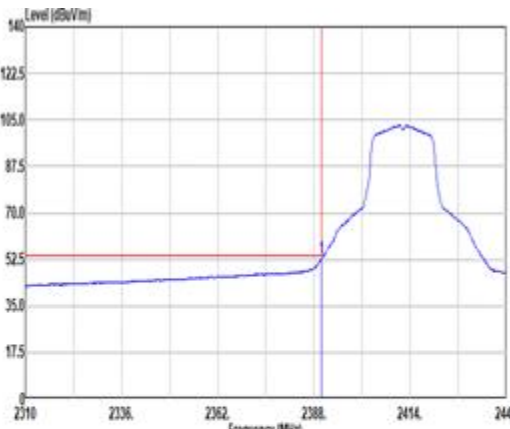
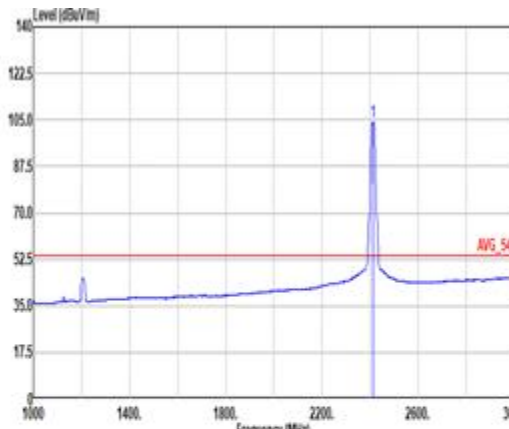


Mode	4																																																																
	Band Edge																																																																
	2400-2483.5_802.11g_CH01_2412MHz																																																																
ANT	1																																																																
Pol.	Vertical	Fundamental																																																															
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2384.75</td><td>66.00</td><td>74.00</td><td>-8.00</td><td>52.96</td><td>27.00</td><td>7.33 31.73 18.44 100 154 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2384.75	66.00	74.00	-8.00	52.96	27.00	7.33 31.73 18.44 100 154 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>111.68</td><td>-----</td><td>90.68</td><td>26.92</td><td>7.38 31.75 18.45 100 154 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	111.68	-----	90.68	26.92	7.38 31.75 18.45 100 154 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																										
1	2384.75	66.00	74.00	-8.00	52.96	27.00	7.33 31.73 18.44 100 154 PEAK																																																										
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																										
1	2412.00	111.68	-----	90.68	26.92	7.38 31.75 18.45 100 154 PEAK																																																											
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>52.59</td><td>54.00</td><td>-1.41</td><td>39.54</td><td>27.00</td><td>7.34 31.73 18.44 100 154 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.95	52.59	54.00	-1.41	39.54	27.00	7.34 31.73 18.44 100 154 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.33</td><td>-----</td><td>90.26</td><td>27.00</td><td>7.37 31.74 18.44 100 154 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	104.33	-----	90.26	27.00	7.37 31.74 18.44 100 154 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																										
1	2389.95	52.59	54.00	-1.41	39.54	27.00	7.34 31.73 18.44 100 154 AVERAGE																																																										
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																										
1	2412.00	104.33	-----	90.26	27.00	7.37 31.74 18.44 100 154 AVERAGE																																																											



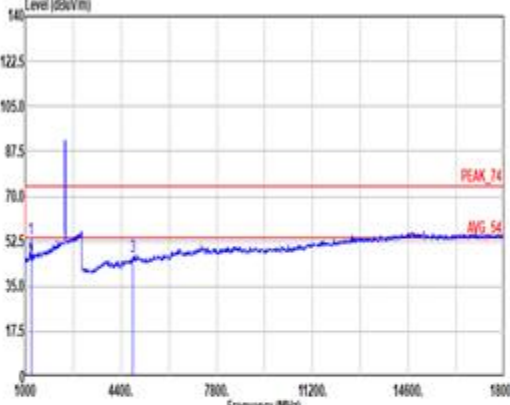
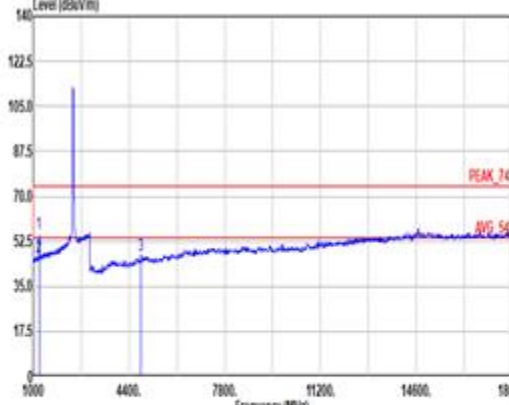


Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	 Site : 830K3-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1206.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>45.28</td><td>23.64</td><td>5.48</td><td>31.81</td><td>18.16</td><td>100</td><td>257 Peak</td></tr><tr><td>2 1206.00</td><td>44.67</td><td>54.00</td><td>-9.33</td><td>36.40</td><td>23.64</td><td>5.48</td><td>31.81</td><td>18.16</td><td>100</td><td>257 Average</td></tr><tr><td>3 4824.00</td><td>46.53</td><td>74.00</td><td>-27.47</td><td>34.75</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>--</td><td>-- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1206.00	53.55	74.00	-20.45	45.28	23.64	5.48	31.81	18.16	100	257 Peak	2 1206.00	44.67	54.00	-9.33	36.40	23.64	5.48	31.81	18.16	100	257 Average	3 4824.00	46.53	74.00	-27.47	34.75	32.40	10.55	32.98	1.81	--	-- PEAK	 Site : 830K3-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1206.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>47.19</td><td>23.64</td><td>5.48</td><td>31.81</td><td>18.16</td><td>100</td><td>162 Peak</td></tr><tr><td>2 1206.00</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>38.00</td><td>23.64</td><td>5.48</td><td>31.81</td><td>18.16</td><td>100</td><td>162 Average</td></tr><tr><td>3 4824.00</td><td>47.15</td><td>74.00</td><td>-26.85</td><td>35.37</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>--</td><td>-- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1206.00	55.46	74.00	-18.54	47.19	23.64	5.48	31.81	18.16	100	162 Peak	2 1206.00	46.27	54.00	-7.73	38.00	23.64	5.48	31.81	18.16	100	162 Average	3 4824.00	47.15	74.00	-26.85	35.37	32.40	10.55	32.98	1.81	--	-- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 1206.00	53.55	74.00	-20.45	45.28	23.64	5.48	31.81	18.16	100	257 Peak																																																																																																																								
2 1206.00	44.67	54.00	-9.33	36.40	23.64	5.48	31.81	18.16	100	257 Average																																																																																																																								
3 4824.00	46.53	74.00	-27.47	34.75	32.40	10.55	32.98	1.81	--	-- PEAK																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1 1206.00	55.46	74.00	-18.54	47.19	23.64	5.48	31.81	18.16	100	162 Peak																																																																																																																								
2 1206.00	46.27	54.00	-7.73	38.00	23.64	5.48	31.81	18.16	100	162 Average																																																																																																																								
3 4824.00	47.15	74.00	-26.85	35.37	32.40	10.55	32.98	1.81	--	-- PEAK																																																																																																																								

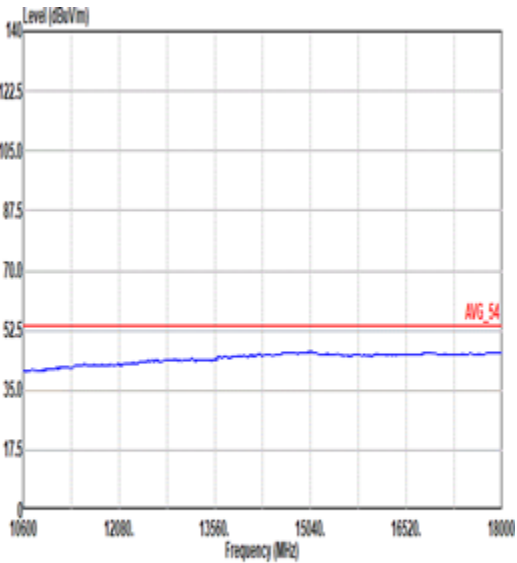
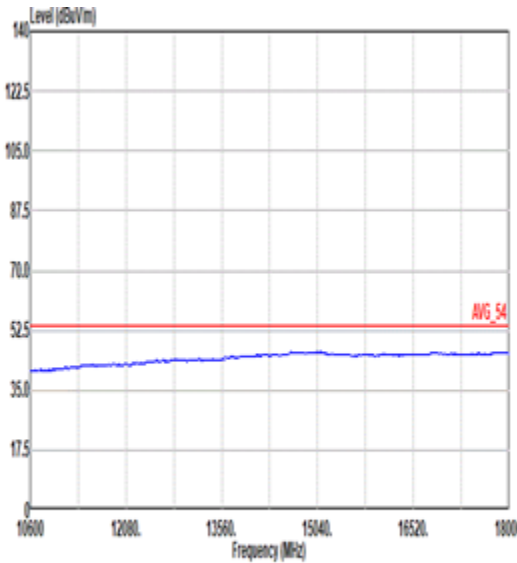


Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 VERTICAL

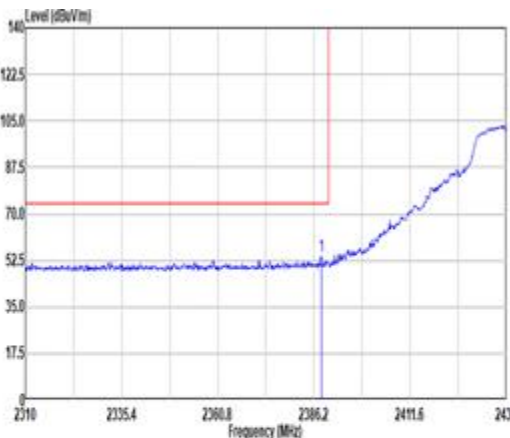
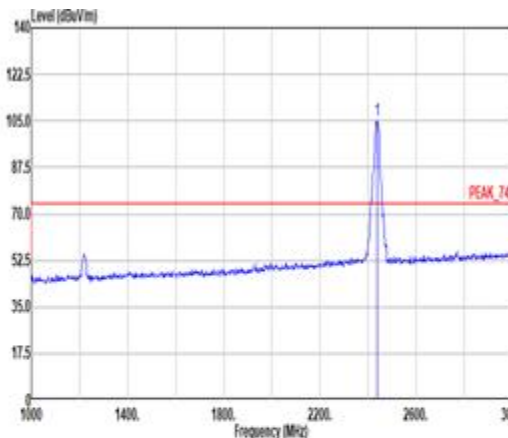
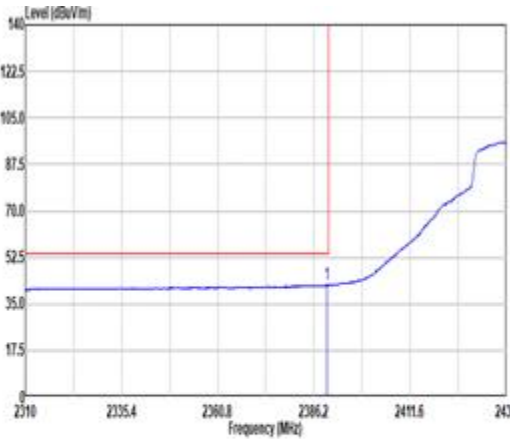
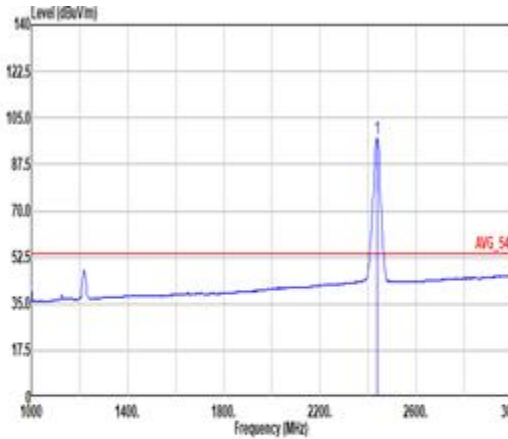


Mode	5																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.11</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>40.89</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44 300 270 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.11	53.94	74.00	-20.06	40.89	17.00	7.34	31.73	18.44 300 270 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>185.28</td><td>-----</td><td>-----</td><td>92.21</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46 300 270 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	185.28	-----	-----	92.21	26.88	7.41	31.76	18.46 300 270 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2386.11	53.94	74.00	-20.06	40.89	17.00	7.34	31.73	18.44 300 270 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	185.28	-----	-----	92.21	26.88	7.41	31.76	18.46 300 270 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>29.00</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44 300 270 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	42.13	54.00	-11.87	29.00	17.00	7.34	31.73	18.44 300 270 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>97.36</td><td>-----</td><td>-----</td><td>84.39</td><td>26.86</td><td>7.41</td><td>31.76</td><td>18.46 300 270 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.36	-----	-----	84.39	26.86	7.41	31.76	18.46 300 270 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.63	42.13	54.00	-11.87	29.00	17.00	7.34	31.73	18.44 300 270 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	97.36	-----	-----	84.39	26.86	7.41	31.76	18.46 300 270 AVERAGE																																																																									

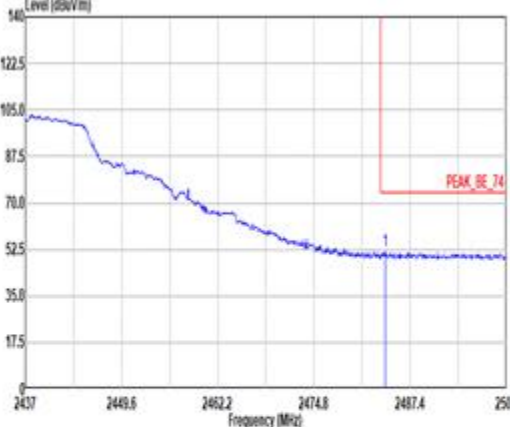
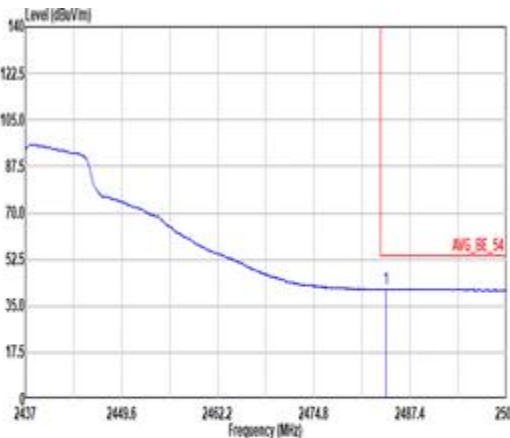


Mode	5																																											
	Band Edge - R																																											
	2400-2483.5_802.11g_CH06_2437MHz																																											
ANT	1																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>16.92</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>300</td><td>270 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg	1	2484.12	51.92	74.00	-22.08	16.92	26.84	7.47	31.79	18.48	300	270 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																		
1	2484.12	51.92	74.00	-22.08	16.92	26.84	7.47	31.79	18.48	300	270 PEAK																																	
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.19</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>16.45</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>300</td><td>270 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg	1	2484.19	41.45	54.00	-12.55	16.45	26.84	7.47	31.79	18.48	300	270 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																		
1	2484.19	41.45	54.00	-12.55	16.45	26.84	7.47	31.79	18.48	300	270 AVERAGE																																	

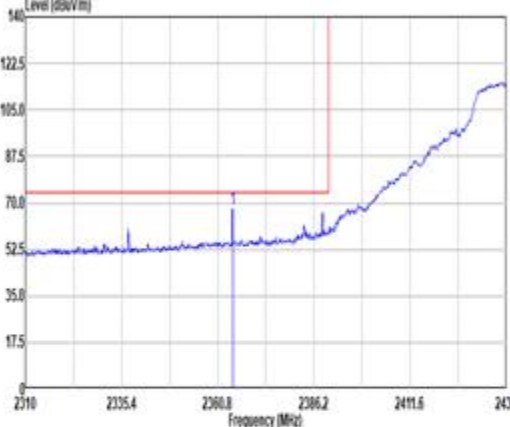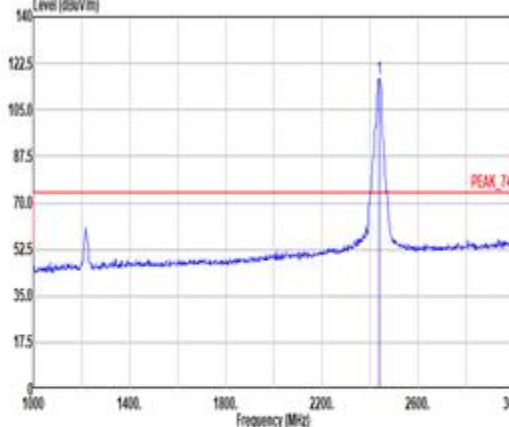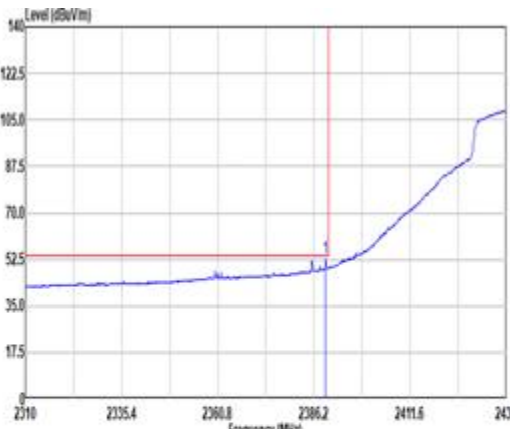
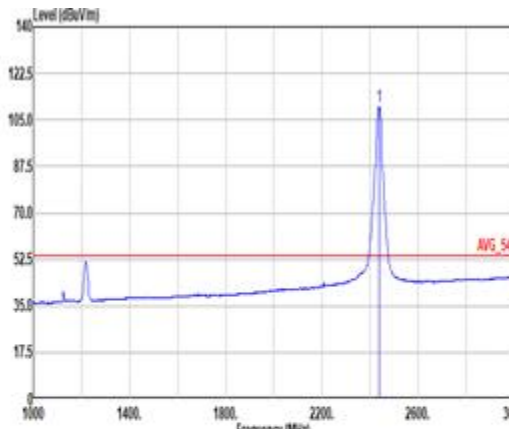


Mode	5																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11g_CH06_2437MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2364.74</td><td>67.66</td><td>74.00</td><td>-6.34</td><td>54.56</td><td>27.18</td><td>7.29</td><td>31.72</td><td>18.43 151 142 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2364.74	67.66	74.00	-6.34	54.56	27.18	7.29	31.72	18.43 151 142 PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>116.79</td><td>-----</td><td>-----</td><td>103.84</td><td>26.84</td><td>7.41</td><td>31.76</td><td>18.46 151 142 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2437.00	116.79	-----	-----	103.84	26.84	7.41	31.76
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																		
1	2364.74	67.66	74.00	-6.34	54.56	27.18	7.29	31.72	18.43 151 142 PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																		
1	2437.00	116.79	-----	-----	103.84	26.84	7.41	31.76	18.46 151 142 PEAK																																																																																		
Avg																																																																																											
	Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.25</td><td>52.77</td><td>54.00</td><td>-1.23</td><td>39.72</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44 151 142 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2389.25	52.77	54.00	-1.23	39.72	27.00	7.34	31.73	18.44 151 142 AVERAGE	Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>109.67</td><td>-----</td><td>-----</td><td>96.70</td><td>26.86</td><td>7.41</td><td>31.76</td><td>18.46 151 142 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2437.00	109.67	-----	-----	96.70	26.86	7.41	31.76
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.25	52.77	54.00	-1.23	39.72	27.00	7.34	31.73	18.44 151 142 AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																		
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																		
1	2437.00	109.67	-----	-----	96.70	26.86	7.41	31.76	18.46 151 142 AVERAGE																																																																																		

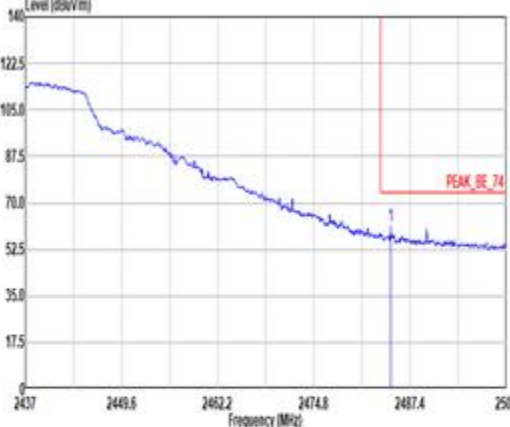
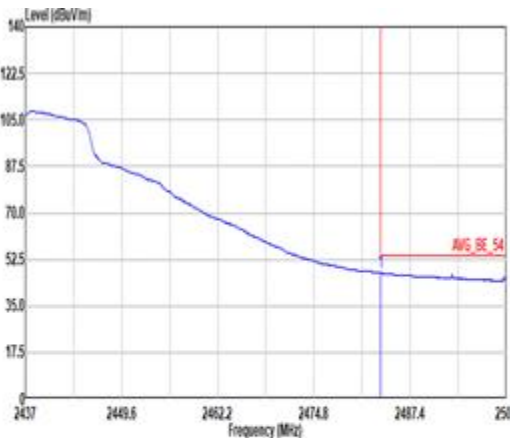


Mode	5																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11g_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.00</td><td>61.30</td><td>74.00</td><td>-12.62</td><td>48.37</td><td>26.05</td><td>7.47</td><td>31.79</td><td>18.48</td><td>151</td><td>142 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.00	61.30	74.00	-12.62	48.37	26.05	7.47	31.79	18.48	151	142 PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2484.00	61.30	74.00	-12.62	48.37	26.05	7.47	31.79	18.48	151	142 PEAK																																												
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.56</td><td>47.41</td><td>54.00</td><td>-6.59</td><td>34.41</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>151</td><td>142 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.56	47.41	54.00	-6.59	34.41	26.84	7.47	31.79	18.48	151	142 AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.56	47.41	54.00	-6.59	34.41	26.84	7.47	31.79	18.48	151	142 AVERAGE																																												



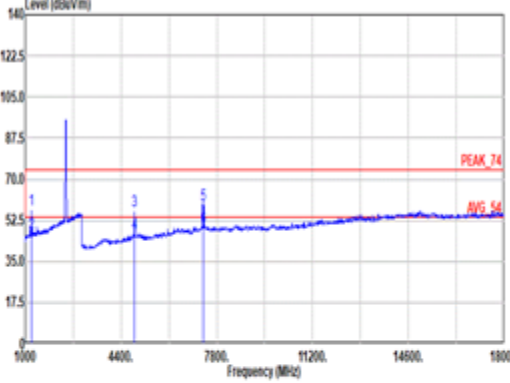
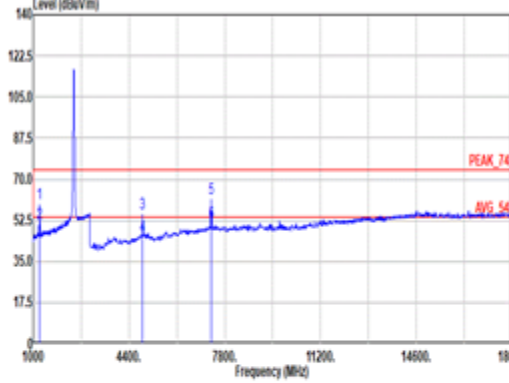


Mode	5										
	Harmonic										
	2400-2483.5_802.11g_CH06_2437MHz										
ANT	1										
Pol.	Horizontal						Vertical				
Peak											
Avg	Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_1E2C05A180N_230712 HORIZONTAL						Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_1E2C05A180N_230712 VERTICAL				
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	1218.50	57.26	74.00	-16.74	49.82	23.60	5.49	31.81	10.16	100	259 Peak
2	1218.50	47.14	54.00	-6.86	38.90	23.60	5.49	31.81	10.16	100	259 Average
3	4874.00	56.71	74.00	-17.29	44.78	32.60	10.52	32.90	1.79	300	228 PEAK
4	4874.00	46.97	54.00	-7.03	35.84	32.60	10.52	32.90	1.79	300	228 AVERAGE
5	7311.00	59.28	74.00	-14.72	42.98	37.20	12.62	35.54	2.82	250	215 PEAK
6	7311.00	49.51	54.00	-4.49	33.21	37.20	12.62	35.54	2.82	250	215 AVERAGE
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	1218.50	59.83	74.00	-14.17	51.59	23.60	5.49	31.81	10.16	100	156 Peak
2	1218.50	51.08	54.00	-2.90	42.06	23.60	5.49	31.81	10.16	100	156 Average
3	4874.00	55.68	74.00	-18.32	43.75	32.60	10.52	32.90	1.79	400	312 PEAK
4	4874.00	45.90	54.00	-8.10	33.97	32.60	10.52	32.90	1.79	400	312 AVERAGE
5	7311.00	61.85	74.00	-12.15	45.55	37.20	12.62	35.54	2.82	274	217 PEAK
6	7311.00	51.72	54.00	-2.28	35.42	37.20	12.62	35.54	2.82	274	217 AVERAGE

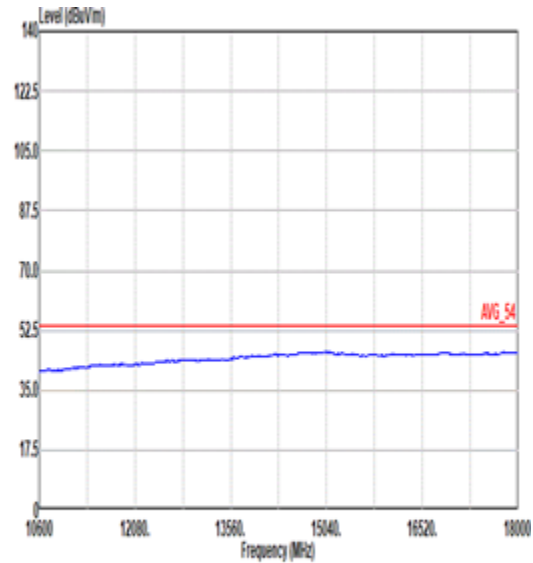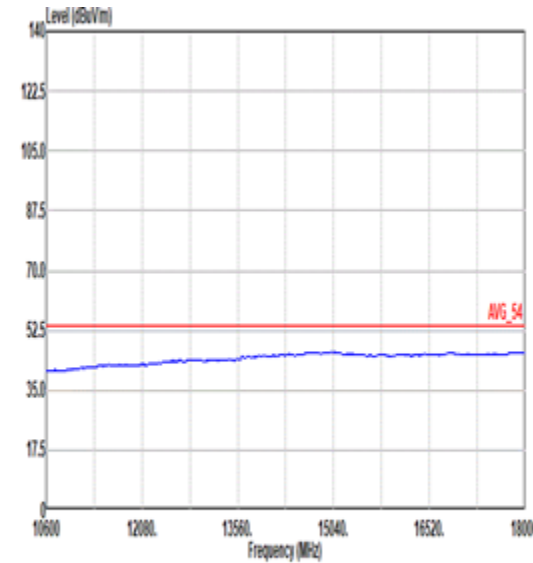

Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

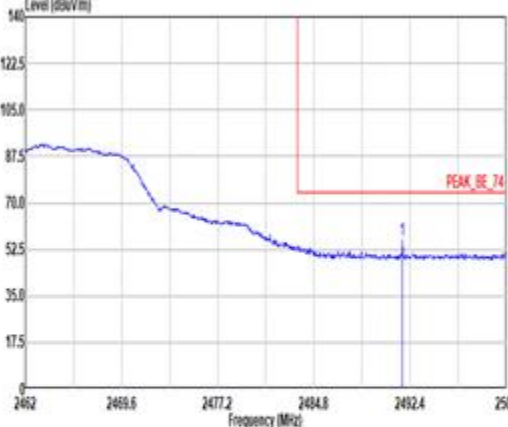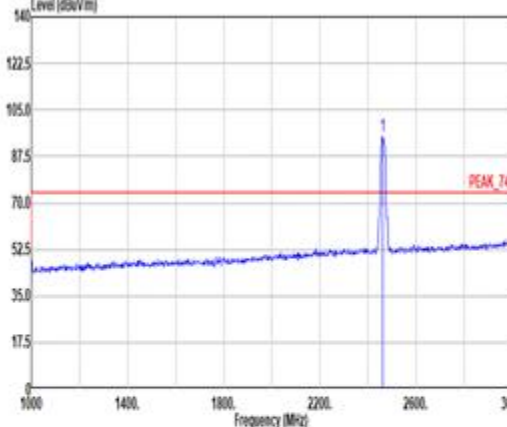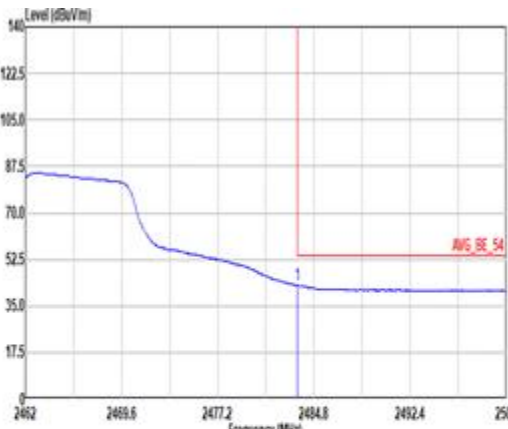
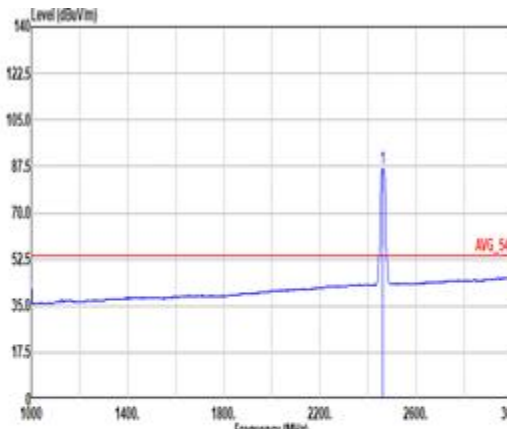


Mode	6																																																																																
	Band Edge																																																																																
	2400-2483.5_802.11g_CH11_2462MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal					Fundamental																																																																											
Peak																																																																																	
	Site : 83CH03-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2491.79</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>43.09</td><td>26.90</td><td>7.48</td><td>31.79</td><td>18.48 300 30 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2491.79	56.16	74.00	-17.84	43.09	26.90	7.48	31.79	18.48 300 30 PEAK	Site : 83CH03-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>95.11</td><td>-----</td><td>-----</td><td>82.15</td><td>26.82</td><td>7.44</td><td>31.77</td><td>18.47 300 30 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																										
1 2491.79	56.16	74.00	-17.84	43.09	26.90	7.48	31.79	18.48 300 30 PEAK																																																																									
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																										
1 2462.00	95.11	-----	-----	82.15	26.82	7.44	31.77	18.47 300 30 PEAK																																																																									
Avg																																																																																	
	Site : 83CH03-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2483.51</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>29.77</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48 300 30 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2483.51	42.77	54.00	-11.23	29.77	26.84	7.47	31.79	18.48 300 30 AVERAGE	Site : 83CH03-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>86.74</td><td>-----</td><td>-----</td><td>73.81</td><td>26.80</td><td>7.44</td><td>31.78</td><td>18.47 300 30 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2462.00	86.74	-----	-----	73.81	26.80	7.44	31.78
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																										
1 2483.51	42.77	54.00	-11.23	29.77	26.84	7.47	31.79	18.48 300 30 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																										
1 2462.00	86.74	-----	-----	73.81	26.80	7.44	31.78	18.47 300 30 AVERAGE																																																																									





Mode	6																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Site : 83CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2484.15</td><td>63.60</td><td>74.00</td><td>-10.40</td><td>50.60</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.40</td><td>100</td><td>152 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2484.15	63.60	74.00	-10.40	50.60	26.84	7.47	31.79	18.40	100	152 PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>118.18</td><td>-----</td><td>-----</td><td>97.17</td><td>26.00</td><td>7.44</td><td>31.78</td><td>18.47</td><td>100</td><td>152 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2462.00	118.18	-----	-----	97.17	26.00	7.44	31.78	18.47	100	152 PEAK
		Limit	Read	Ant	Cable	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 2484.15	63.60	74.00	-10.40	50.60	26.84	7.47	31.79	18.40	100	152 PEAK																																																																				
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 2462.00	118.18	-----	-----	97.17	26.00	7.44	31.78	18.47	100	152 PEAK																																																																				
Avg	Site : 83CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2484.12</td><td>53.18</td><td>54.00</td><td>-0.82</td><td>40.18</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.40</td><td>100</td><td>152 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2484.12	53.18	54.00	-0.82	40.18	26.84	7.47	31.79	18.40	100	152 AVERAGE	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>102.65</td><td>-----</td><td>-----</td><td>89.72</td><td>26.00</td><td>7.44</td><td>31.78</td><td>18.47</td><td>100</td><td>152 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2462.00	102.65	-----	-----	89.72	26.00	7.44	31.78	18.47	100	152 AVERAGE
		Limit	Read	Ant	Cable	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 2484.12	53.18	54.00	-0.82	40.18	26.84	7.47	31.79	18.40	100	152 AVERAGE																																																																				
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																						
1 2462.00	102.65	-----	-----	89.72	26.00	7.44	31.78	18.47	100	152 AVERAGE																																																																				

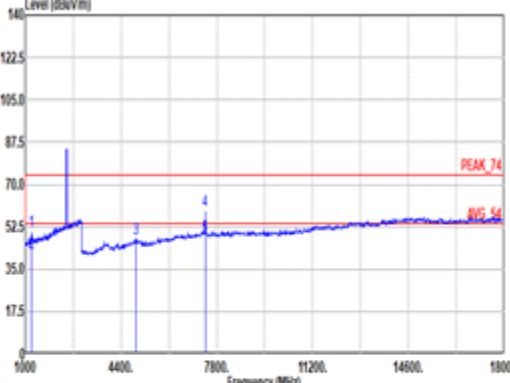
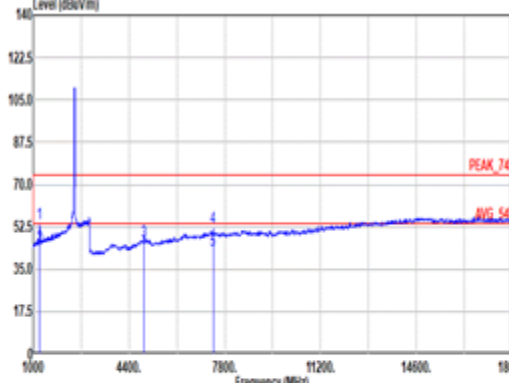


Mode	6																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak Avg	 Site : 80CH23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1231.00</td><td>50.73</td><td>74.00</td><td>-23.27</td><td>42.47</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>100</td><td>257</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>33.26</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>100</td><td>257</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>47.30</td><td>74.00</td><td>-26.70</td><td>35.26</td><td>32.75</td><td>10.50</td><td>32.90</td><td>1.77</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7306.00</td><td>59.42</td><td>74.00</td><td>-14.58</td><td>43.89</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>240</td><td>229</td><td>PEAK</td></tr><tr><td>5</td><td>7306.00</td><td>48.36</td><td>54.00</td><td>-5.64</td><td>32.83</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>240</td><td>229</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1231.00	50.73	74.00	-23.27	42.47	23.60	5.50	31.81	10.17	100	257	Peak	2	1231.00	41.52	54.00	-12.48	33.26	23.60	5.50	31.81	10.17	100	257	Average	3	4924.00	47.30	74.00	-26.70	35.26	32.75	10.50	32.90	1.77	--	--	PEAK	4	7306.00	59.42	74.00	-14.58	43.89	37.13	12.81	35.60	1.99	240	229	PEAK	5	7306.00	48.36	54.00	-5.64	32.83	37.13	12.81	35.60	1.99	240	229	AVERAGE	 Site : 80CH23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1231.00</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>45.79</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>100</td><td>152</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>44.40</td><td>54.00</td><td>-9.52</td><td>36.22</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>100</td><td>152</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>46.30</td><td>74.00</td><td>-27.70</td><td>34.26</td><td>32.75</td><td>10.50</td><td>32.90</td><td>1.77</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7306.00</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>36.15</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>263</td><td>282</td><td>PEAK</td></tr><tr><td>5</td><td>7306.00</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>26.60</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>263</td><td>282</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1231.00	54.05	74.00	-19.95	45.79	23.60	5.50	31.81	10.17	100	152	Peak	2	1231.00	44.40	54.00	-9.52	36.22	23.60	5.50	31.81	10.17	100	152	Average	3	4924.00	46.30	74.00	-27.70	34.26	32.75	10.50	32.90	1.77	--	--	PEAK	4	7306.00	52.48	74.00	-21.52	36.15	37.13	12.81	35.60	1.99	263	282	PEAK	5	7306.00	42.93	54.00	-11.07	26.60	37.13	12.81	35.60	1.99	263	282	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	1231.00	50.73	74.00	-23.27	42.47	23.60	5.50	31.81	10.17	100	257	Peak																																																																																																																																																																																						
2	1231.00	41.52	54.00	-12.48	33.26	23.60	5.50	31.81	10.17	100	257	Average																																																																																																																																																																																						
3	4924.00	47.30	74.00	-26.70	35.26	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																																																																						
4	7306.00	59.42	74.00	-14.58	43.89	37.13	12.81	35.60	1.99	240	229	PEAK																																																																																																																																																																																						
5	7306.00	48.36	54.00	-5.64	32.83	37.13	12.81	35.60	1.99	240	229	AVERAGE																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	1231.00	54.05	74.00	-19.95	45.79	23.60	5.50	31.81	10.17	100	152	Peak																																																																																																																																																																																						
2	1231.00	44.40	54.00	-9.52	36.22	23.60	5.50	31.81	10.17	100	152	Average																																																																																																																																																																																						
3	4924.00	46.30	74.00	-27.70	34.26	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																																																																						
4	7306.00	52.48	74.00	-21.52	36.15	37.13	12.81	35.60	1.99	263	282	PEAK																																																																																																																																																																																						
5	7306.00	42.93	54.00	-11.07	26.60	37.13	12.81	35.60	1.99	263	282	AVERAGE																																																																																																																																																																																						

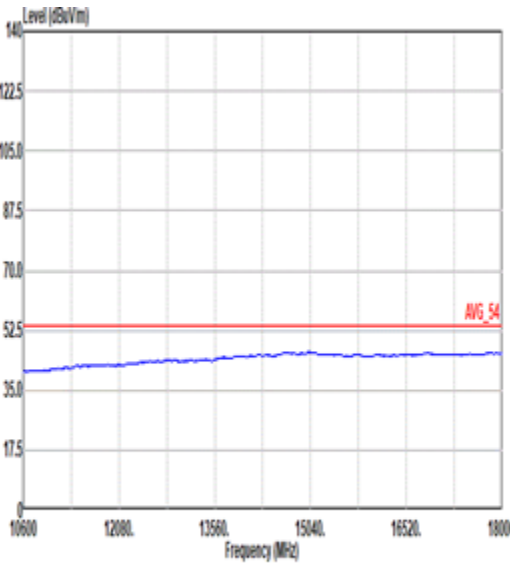
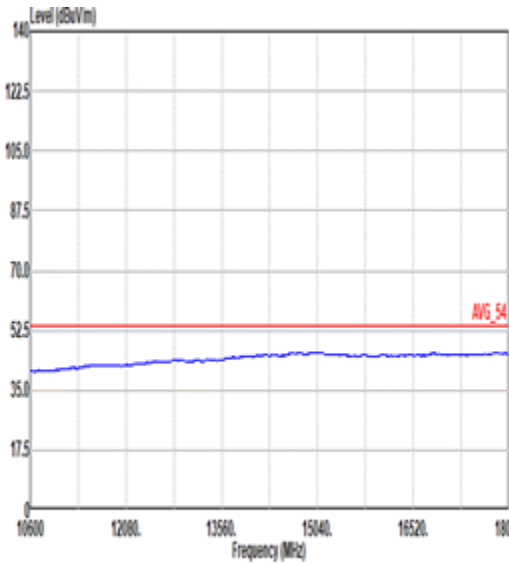


Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20HSA18EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20HSA18EN_238712 VERTICAL

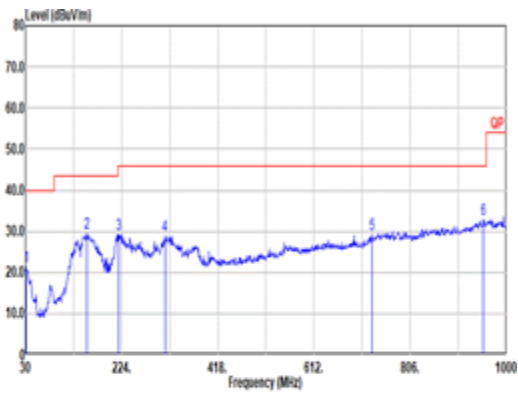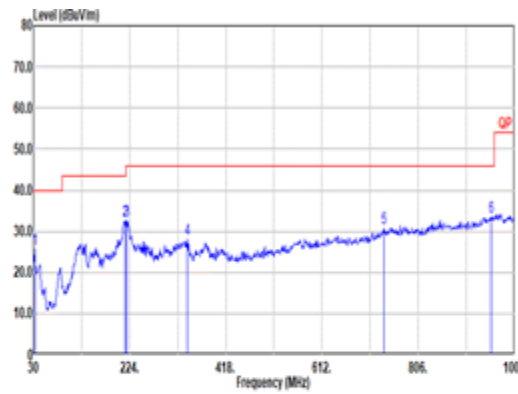





Mode	13											
	LF											
	2400-2483.5_802.11g_CH11_2462MHz											
ANT	1											
Pol.	Horizontal					Vertical						
QP/ Peak												
	Site : 830K3-HY Condition: QP 3m CBL61110_62028 & 003_233815 HORIZONTAL					Site : 830K3-HY Condition: QP 3m CBL61110_62028 & 003_233815 VERTICAL						
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBm	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1	38.97	21.49	40.00	-18.51	20.80	24.27	1.87	32.73	0.00	--	--	Peak
2	154.16	29.63	43.50	-13.87	43.24	16.92	1.95	32.68	0.20	--	--	Peak
3	228.18	29.31	46.00	-16.69	44.55	15.06	2.21	32.68	0.17	--	--	Peak
4	311.30	29.12	46.00	-16.88	39.74	19.37	2.64	32.72	0.09	--	--	Peak
5	729.37	29.25	46.00	-16.75	30.20	27.74	3.85	32.76	0.14	--	--	Peak
6	953.44	32.88	46.00	-13.12	28.70	30.92	4.30	31.30	0.26	--	--	Peak
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBm	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1	32.91	25.67	40.00	-14.33	33.88	23.46	1.06	32.73	0.00	--	--	Peak
2	224.30	32.66	43.50	-10.84	40.06	14.92	2.19	32.68	0.17	--	--	Peak
3	228.18	32.68	46.00	-13.32	47.92	15.06	2.21	32.68	0.17	--	--	Peak
4	340.40	28.89	46.00	-17.91	37.94	20.83	2.74	32.72	0.10	--	--	Peak
5	736.16	30.85	46.00	-15.15	31.61	27.97	3.86	32.73	0.14	--	--	Peak
6	953.44	33.57	46.00	-12.43	29.39	30.92	4.30	31.30	0.26	--	--	Peak

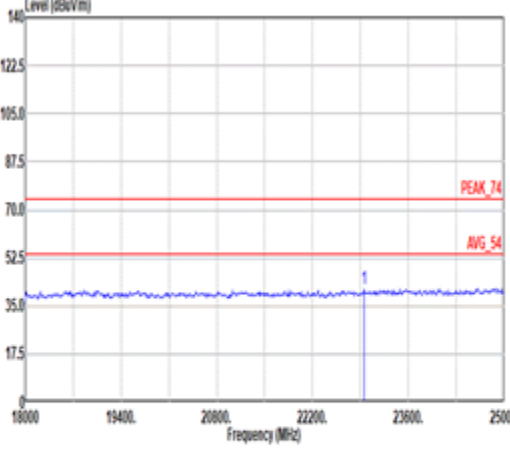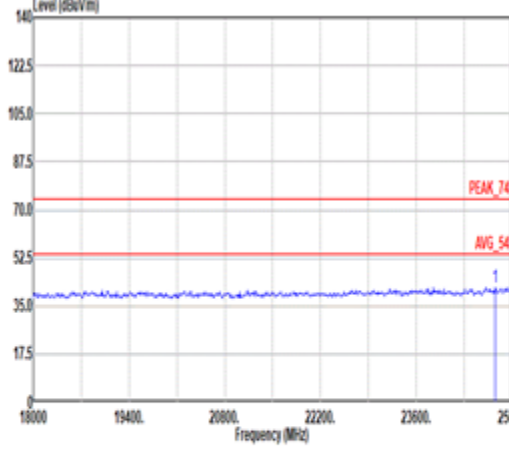





Mode	14																																																																																	
	SHF																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 Site : 83CH23-HY Condition: PEAK_74 In 88H48170_1225_230710 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 22950.00</td><td>41.04</td><td>74.00</td><td>-32.96</td><td>51.96</td><td>39.20</td><td>19.73</td><td>60.31</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 22950.00	41.04	74.00	-32.96	51.96	39.20	19.73	60.31	-9.54	-- -- Peak	 Site : 83CH23-HY Condition: PEAK_74 In 88H48170_1225_230710 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 24754.00</td><td>41.90</td><td>74.00</td><td>-32.10</td><td>51.42</td><td>39.59</td><td>20.78</td><td>60.35</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 24754.00	41.90	74.00	-32.10	51.42	39.59	20.78	60.35	-9.54	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 22950.00	41.04	74.00	-32.96	51.96	39.20	19.73	60.31	-9.54	-- -- Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 24754.00	41.90	74.00	-32.10	51.42	39.59	20.78	60.35	-9.54	-- -- Peak																																																																									





<Ant. 2>

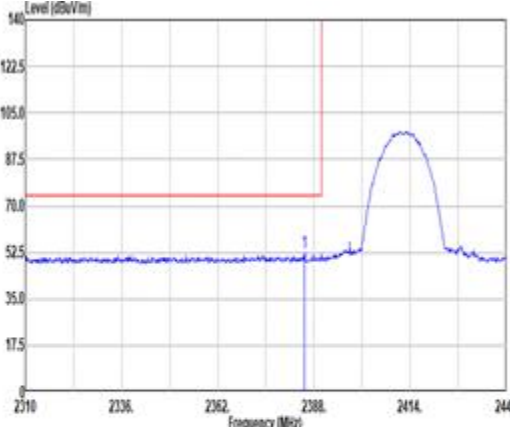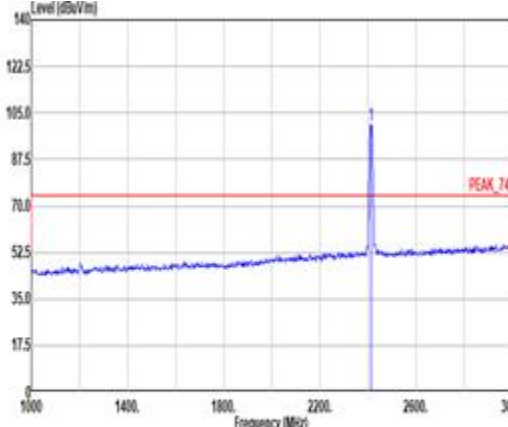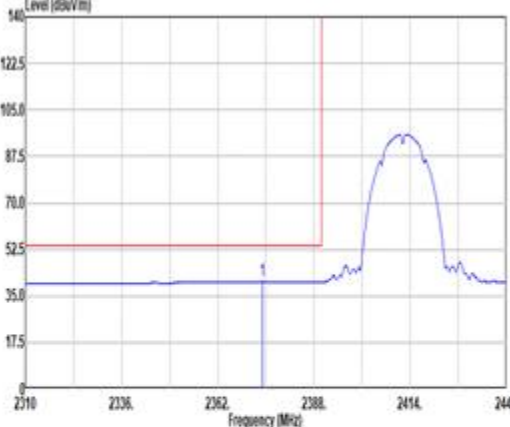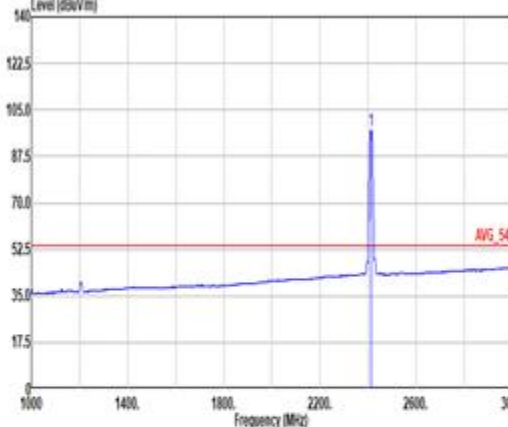Mode	7																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.48</td><td>52.31</td><td>74.00</td><td>-21.69</td><td>39.27</td><td>27.00</td><td>7.33</td><td>31.73</td><td>18.44</td><td>283</td><td>185</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.48	52.31	74.00	-21.69	39.27	27.00	7.33	31.73	18.44	283	185	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>180.58</td><td>-----</td><td>-----</td><td>87.46</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>283</td><td>185</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	180.58	-----	-----	87.46	26.96	7.38	31.75	18.45	283	185	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2385.48	52.31	74.00	-21.69	39.27	27.00	7.33	31.73	18.44	283	185	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	180.58	-----	-----	87.46	26.96	7.38	31.75	18.45	283	185	PEAK																																																																														
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.96</td><td>48.44</td><td>54.00</td><td>-13.56</td><td>27.36</td><td>27.00</td><td>7.31</td><td>31.72</td><td>18.43</td><td>283</td><td>185</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.96	48.44	54.00	-13.56	27.36	27.00	7.31	31.72	18.43	283	185	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.25</td><td>-----</td><td>-----</td><td>84.21</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>283</td><td>185</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.25	-----	-----	84.21	26.96	7.38	31.75	18.45	283	185	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2373.96	48.44	54.00	-13.56	27.36	27.00	7.31	31.72	18.43	283	185	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	97.25	-----	-----	84.21	26.96	7.38	31.75	18.45	283	185	AVERAGE																																																																														

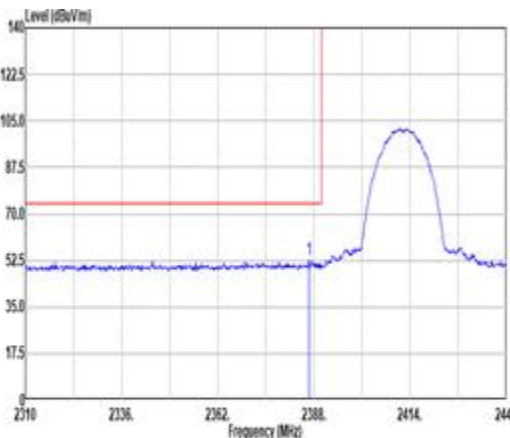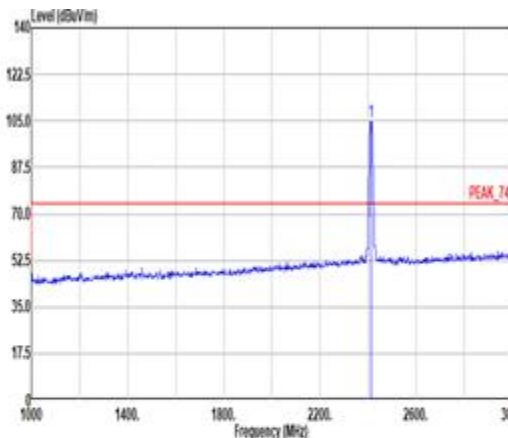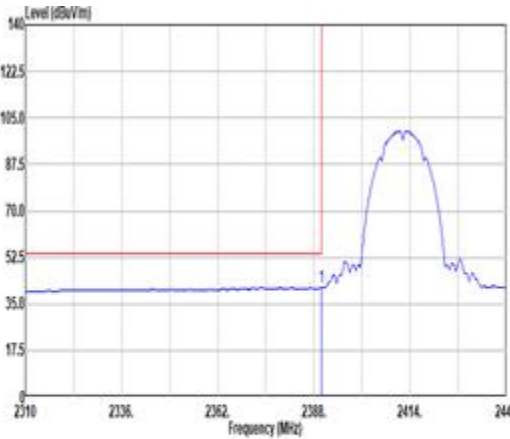
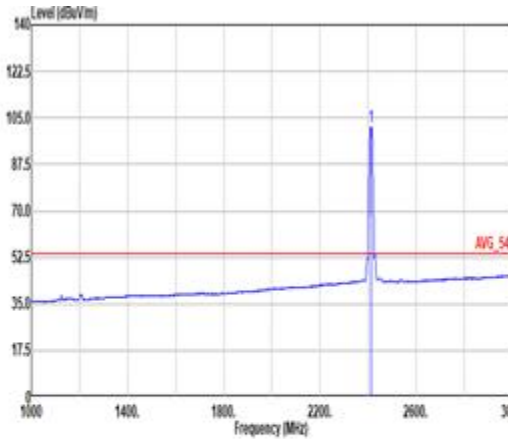


Mode	7																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.78</td><td>52.71</td><td>74.00</td><td>-21.29</td><td>39.66</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>100</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.78	52.71	74.00	-21.29	39.66	27.00	7.34	31.73	18.44	100	100	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.66</td><td>-----</td><td>-----</td><td>91.62</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>100</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.66	-----	-----	91.62	26.96	7.38	31.75	18.45	100	100	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.78	52.71	74.00	-21.29	39.66	27.00	7.34	31.73	18.44	100	100	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	104.66	-----	-----	91.62	26.96	7.38	31.75	18.45	100	100	PEAK																																																																																								
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>21.38</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	41.43	54.00	-12.57	21.38	27.00	7.34	31.73	18.44	100	100	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.55</td><td>-----</td><td>-----</td><td>88.48</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.55	-----	-----	88.48	27.00	7.37	31.74	18.44	100	100	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	41.43	54.00	-12.57	21.38	27.00	7.34	31.73	18.44	100	100	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	105.55	-----	-----	88.48	27.00	7.37	31.74	18.44	100	100	AVERAGE																																																																																								



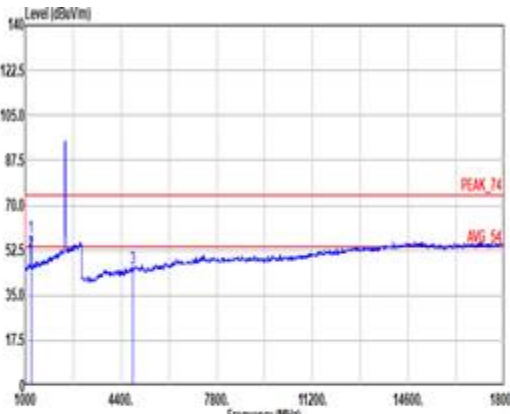
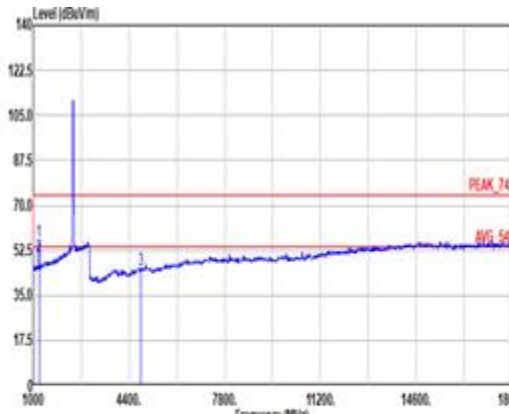


Mode	7																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																									
ANT	2																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	 Site : #30K23-HY Condition: PEAK_74 3m DRH08-E_LE2085418EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>57.53</td><td>74.00</td><td>-16.47</td><td>49.26</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>25 Peak</td></tr><tr><td>2 1206.00</td><td>51.97</td><td>54.00</td><td>-2.03</td><td>43.78</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>25 Average</td></tr><tr><td>3 4824.00</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>33.85</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 1206.00	57.53	74.00	-16.47	49.26	23.64	5.48	31.81	10.16	25 Peak	2 1206.00	51.97	54.00	-2.03	43.78	23.64	5.48	31.81	10.16	25 Average	3 4824.00	45.63	74.00	-28.37	33.85	32.40	10.55	32.98	1.81	-- PEAK	 Site : #30K23-HY Condition: PEAK_74 3m DRH08-E_LE2085418EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>47.66</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 206 Peak</td></tr><tr><td>2 1206.00</td><td>50.18</td><td>54.00</td><td>-3.90</td><td>41.83</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 206 Average</td></tr><tr><td>3 4824.00</td><td>45.82</td><td>74.00</td><td>-28.98</td><td>33.24</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 1206.00	55.93	74.00	-18.07	47.66	23.64	5.48	31.81	10.16	400 206 Peak	2 1206.00	50.18	54.00	-3.90	41.83	23.64	5.48	31.81	10.16	400 206 Average	3 4824.00	45.82	74.00	-28.98	33.24	32.40	10.55	32.98	1.81	-- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																																																	
1 1206.00	57.53	74.00	-16.47	49.26	23.64	5.48	31.81	10.16	25 Peak																																																																																																																	
2 1206.00	51.97	54.00	-2.03	43.78	23.64	5.48	31.81	10.16	25 Average																																																																																																																	
3 4824.00	45.63	74.00	-28.37	33.85	32.40	10.55	32.98	1.81	-- PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																																																	
1 1206.00	55.93	74.00	-18.07	47.66	23.64	5.48	31.81	10.16	400 206 Peak																																																																																																																	
2 1206.00	50.18	54.00	-3.90	41.83	23.64	5.48	31.81	10.16	400 206 Average																																																																																																																	
3 4824.00	45.82	74.00	-28.98	33.24	32.40	10.55	32.98	1.81	-- PEAK																																																																																																																	

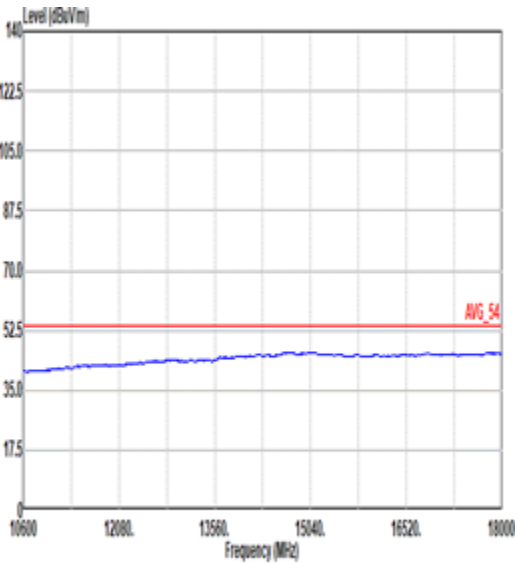
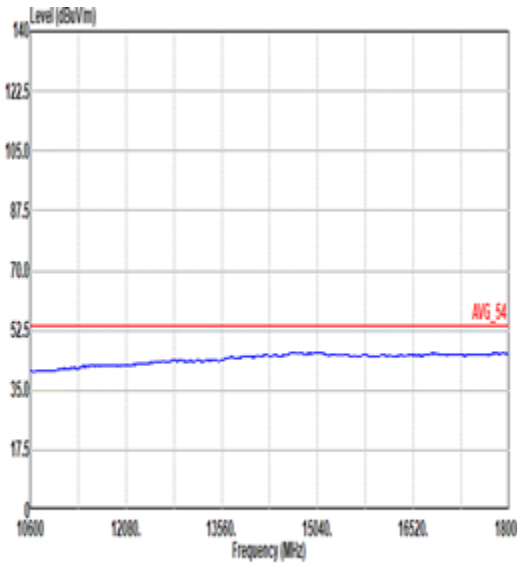


Mode	7	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

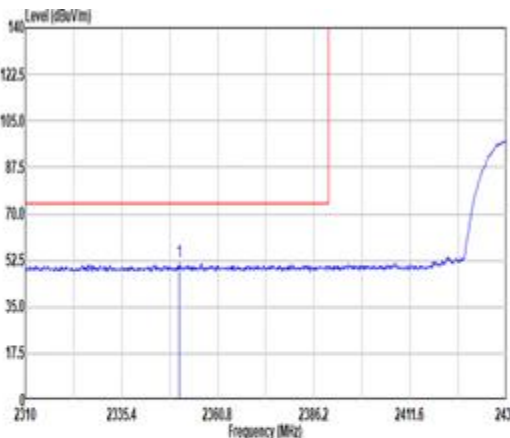
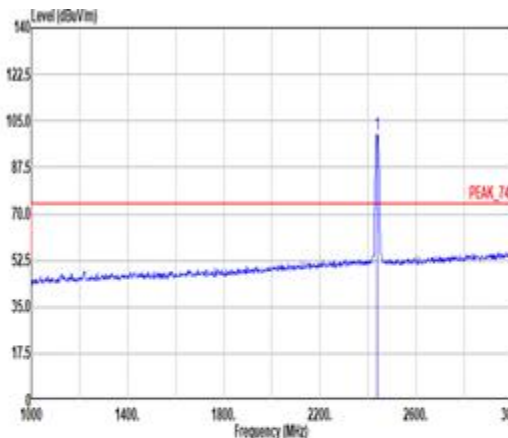
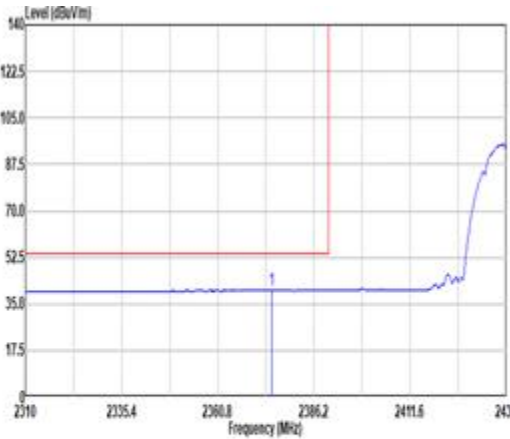
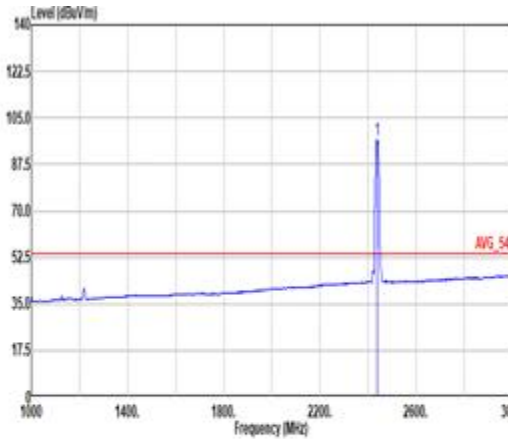


Mode	8																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2358.64</td><td>51.61</td><td>74.00</td><td>-22.39</td><td>16.52</td><td>17.18</td><td>7.27</td><td>31.71</td><td>18.43</td><td>261</td><td>187</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.64	51.61	74.00	-22.39	16.52	17.18	7.27	31.71	18.43	261	187	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>99.73</td><td>-----</td><td>-----</td><td>86.76</td><td>26.06</td><td>7.41</td><td>31.76</td><td>18.46</td><td>261</td><td>187</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.73	-----	-----	86.76	26.06	7.41	31.76	18.46	261	187	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2358.64	51.61	74.00	-22.39	16.52	17.18	7.27	31.71	18.43	261	187	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	99.73	-----	-----	86.76	26.06	7.41	31.76	18.46	261	187	PEAK																																																																																								
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.02</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>27.15</td><td>27.05</td><td>7.31</td><td>31.72</td><td>18.43</td><td>261</td><td>187</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.02	40.22	54.00	-13.78	27.15	27.05	7.31	31.72	18.43	261	187	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>96.55</td><td>-----</td><td>-----</td><td>83.58</td><td>26.06</td><td>7.41</td><td>31.76</td><td>18.46</td><td>261</td><td>187</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.55	-----	-----	83.58	26.06	7.41	31.76	18.46	261	187	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2375.02	40.22	54.00	-13.78	27.15	27.05	7.31	31.72	18.43	261	187	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	96.55	-----	-----	83.58	26.06	7.41	31.76	18.46	261	187	AVERAGE																																																																																								

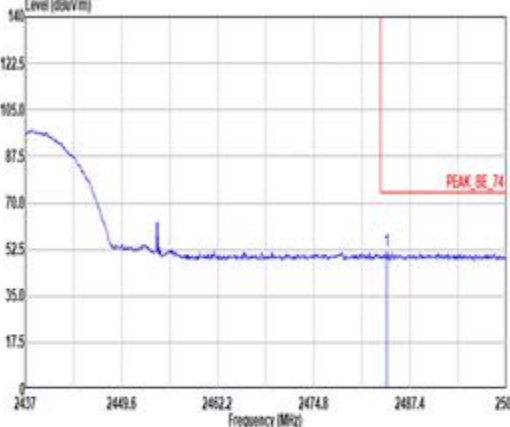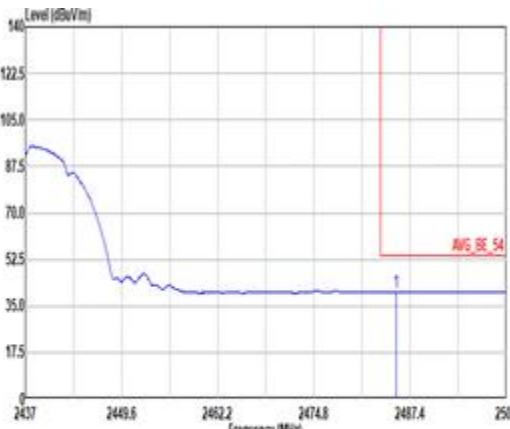

Mode	8																																												
	Band Edge - R																																												
	2400-2483.5_802.11b_CH06_2437MHz																																												
ANT	2																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.38</td><td>51.72</td><td>74.00</td><td>-22.28</td><td>16.72</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>261</td><td>187</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg	1	2484.38	51.72	74.00	-22.28	16.72	26.84	7.47	31.79	18.48	261	187	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg																																				
1	2484.38	51.72	74.00	-22.28	16.72	26.84	7.47	31.79	18.48	261	187	PEAK																																	
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:3000.000kHz VBW:0.800kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.51</td><td>48.20</td><td>54.00</td><td>-13.80</td><td>27.17</td><td>26.86</td><td>7.48</td><td>31.79</td><td>18.48</td><td>261</td><td>187</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg	1	2485.51	48.20	54.00	-13.80	27.17	26.86	7.48	31.79	18.48	261	187	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg																																				
1	2485.51	48.20	54.00	-13.80	27.17	26.86	7.48	31.79	18.48	261	187	AVERAGE																																	

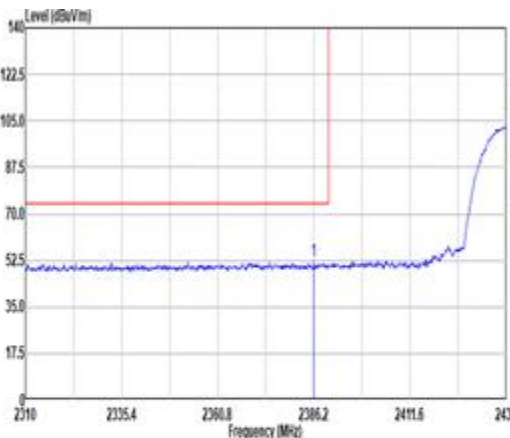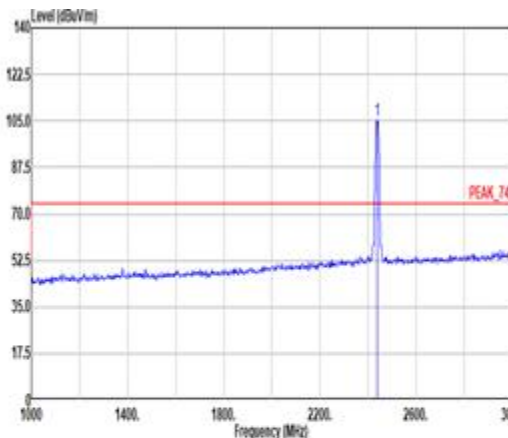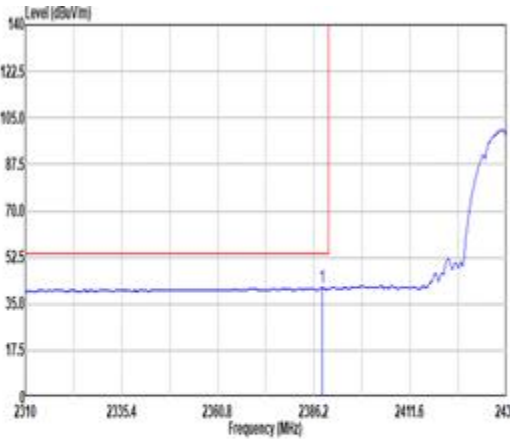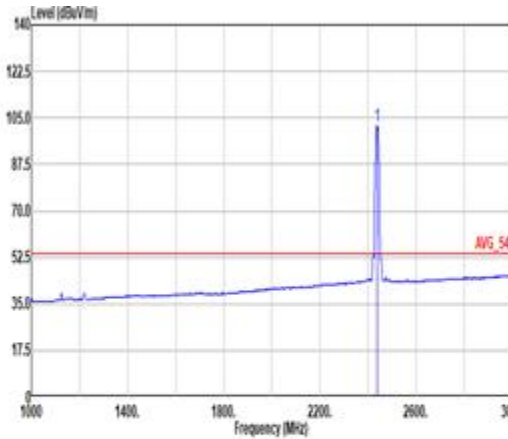

Mode	8																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																	
ANT	2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.28</td><td>52.23</td><td>74.00</td><td>-21.77</td><td>39.19</td><td>27.00</td><td>7.33</td><td>31.73</td><td>18.44</td><td>300 265 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2386.28	52.23	74.00	-21.77	39.19	27.00	7.33	31.73	18.44	300 265 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>185.24</td><td>-----</td><td>92.27</td><td>26.86</td><td>7.41</td><td>31.76</td><td>18.46</td><td>300</td><td>265 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	185.24	-----	92.27	26.86	7.41	31.76	18.46	300	265 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2386.28	52.23	74.00	-21.77	39.19	27.00	7.33	31.73	18.44	300 265 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	185.24	-----	92.27	26.86	7.41	31.76	18.46	300	265 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.36</td><td>41.63</td><td>54.00</td><td>-12.37</td><td>27.90</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>300 265 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2386.36	41.63	54.00	-12.37	27.90	27.00	7.34	31.73	18.44	300 265 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>185.99</td><td>-----</td><td>89.00</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>300</td><td>265 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	185.99	-----	89.00	26.88	7.41	31.76	18.46	300	265 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2386.36	41.63	54.00	-12.37	27.90	27.00	7.34	31.73	18.44	300 265 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	185.99	-----	89.00	26.88	7.41	31.76	18.46	300	265 AVERAGE																																																																									





Mode	8																																													
	Band Edge - R																																													
	2400-2483.5_802.11b_CH06_2437MHz																																													
ANT	2																																													
Pol.	Vertical	Fundamental																																												
Peak	Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2482.19</td><td>56.35</td><td>74.00</td><td>-17.65</td><td>43.29</td><td>26.90</td><td>7.48</td><td>31.80</td><td>18.40</td><td>300</td><td>265</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2482.19	56.35	74.00	-17.65	43.29	26.90	7.48	31.80	18.40	300	265	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2482.19	56.35	74.00	-17.65	43.29	26.90	7.48	31.80	18.40	300	265	PEAK																																		
Avg	Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.70</td><td>48.99</td><td>54.00</td><td>-13.01</td><td>27.96</td><td>26.86</td><td>7.48</td><td>31.79</td><td>18.48</td><td>300</td><td>265</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.70	48.99	54.00	-13.01	27.96	26.86	7.48	31.79	18.48	300	265	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.70	48.99	54.00	-13.01	27.96	26.86	7.48	31.79	18.48	300	265	AVERAGE																																		







Mode	8																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																	
ANT	2																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	Site : 83CH23-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_238712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.50</td><td>57.40</td><td>74.00</td><td>-16.52</td><td>49.24</td><td>23.60</td><td>5.49</td><td>31.81</td><td>10.16</td><td>193 46 Peak</td></tr><tr><td>2 1218.50</td><td>52.19</td><td>54.00</td><td>-1.81</td><td>43.95</td><td>23.60</td><td>5.49</td><td>31.81</td><td>10.16</td><td>193 46 Average</td></tr><tr><td>3 4074.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>33.86</td><td>32.60</td><td>10.52</td><td>32.90</td><td>1.79</td><td>-- -- PEAK</td></tr><tr><td>4 7311.00</td><td>40.55</td><td>74.00</td><td>-33.45</td><td>32.25</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- PEAK</td></tr><tr><td>5 7311.00</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>29.36</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1218.50	57.40	74.00	-16.52	49.24	23.60	5.49	31.81	10.16	193 46 Peak	2 1218.50	52.19	54.00	-1.81	43.95	23.60	5.49	31.81	10.16	193 46 Average	3 4074.00	45.79	74.00	-28.21	33.86	32.60	10.52	32.90	1.79	-- -- PEAK	4 7311.00	40.55	74.00	-33.45	32.25	37.20	12.62	35.54	2.82	-- -- PEAK	5 7311.00	39.66	54.00	-14.34	29.36	37.20	12.62	35.54	2.82	-- -- AVERAGE	Site : 83CH23-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_238712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1218.50</td><td>57.24</td><td>74.00</td><td>-16.76</td><td>49.00</td><td>23.60</td><td>5.49</td><td>31.81</td><td>10.16</td><td>320 281 Peak</td></tr><tr><td>2 1218.50</td><td>51.06</td><td>54.00</td><td>-2.94</td><td>42.82</td><td>23.60</td><td>5.49</td><td>31.81</td><td>10.16</td><td>320 281 Average</td></tr><tr><td>3 4074.00</td><td>45.39</td><td>74.00</td><td>-28.61</td><td>33.46</td><td>32.60</td><td>10.52</td><td>32.90</td><td>1.79</td><td>-- -- PEAK</td></tr><tr><td>4 7311.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>32.00</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- PEAK</td></tr><tr><td>5 7311.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>29.42</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1218.50	57.24	74.00	-16.76	49.00	23.60	5.49	31.81	10.16	320 281 Peak	2 1218.50	51.06	54.00	-2.94	42.82	23.60	5.49	31.81	10.16	320 281 Average	3 4074.00	45.39	74.00	-28.61	33.46	32.60	10.52	32.90	1.79	-- -- PEAK	4 7311.00	40.18	74.00	-33.82	32.00	37.20	12.62	35.54	2.82	-- -- PEAK	5 7311.00	39.72	54.00	-14.28	29.42	37.20	12.62	35.54	2.82	-- -- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1 1218.50	57.40	74.00	-16.52	49.24	23.60	5.49	31.81	10.16	193 46 Peak																																																																																																																																																									
2 1218.50	52.19	54.00	-1.81	43.95	23.60	5.49	31.81	10.16	193 46 Average																																																																																																																																																									
3 4074.00	45.79	74.00	-28.21	33.86	32.60	10.52	32.90	1.79	-- -- PEAK																																																																																																																																																									
4 7311.00	40.55	74.00	-33.45	32.25	37.20	12.62	35.54	2.82	-- -- PEAK																																																																																																																																																									
5 7311.00	39.66	54.00	-14.34	29.36	37.20	12.62	35.54	2.82	-- -- AVERAGE																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1 1218.50	57.24	74.00	-16.76	49.00	23.60	5.49	31.81	10.16	320 281 Peak																																																																																																																																																									
2 1218.50	51.06	54.00	-2.94	42.82	23.60	5.49	31.81	10.16	320 281 Average																																																																																																																																																									
3 4074.00	45.39	74.00	-28.61	33.46	32.60	10.52	32.90	1.79	-- -- PEAK																																																																																																																																																									
4 7311.00	40.18	74.00	-33.82	32.00	37.20	12.62	35.54	2.82	-- -- PEAK																																																																																																																																																									
5 7311.00	39.72	54.00	-14.28	29.42	37.20	12.62	35.54	2.82	-- -- AVERAGE																																																																																																																																																									



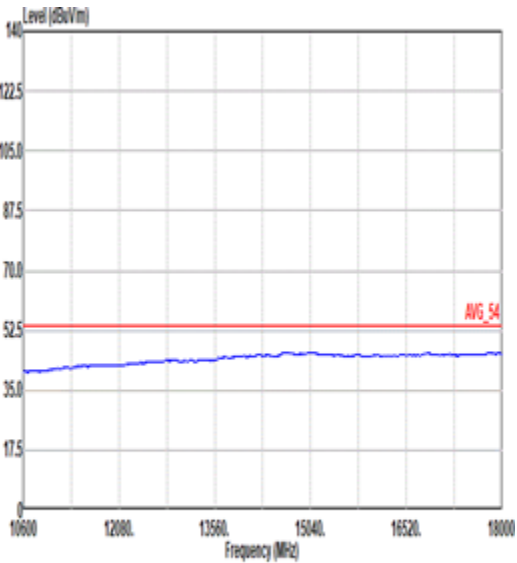
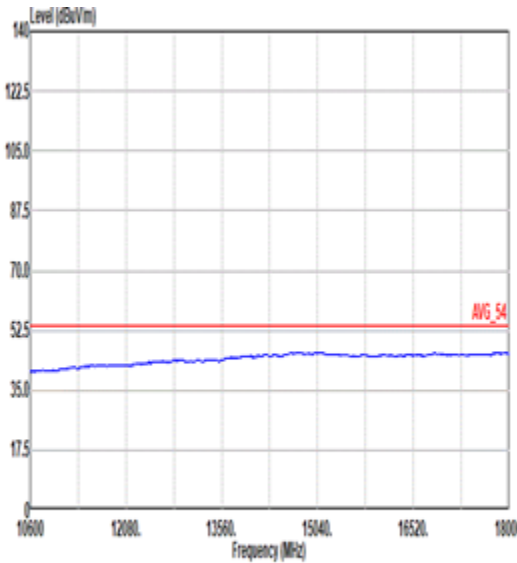


Mode	8	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 VERTICAL

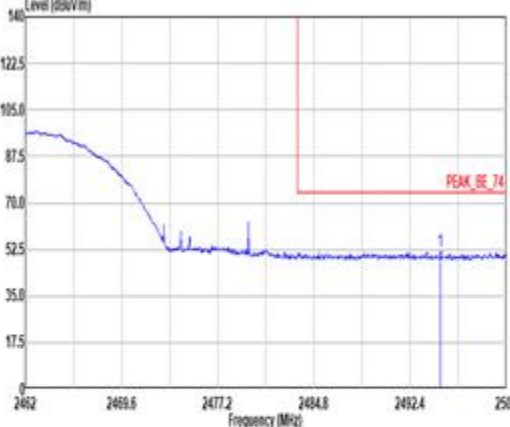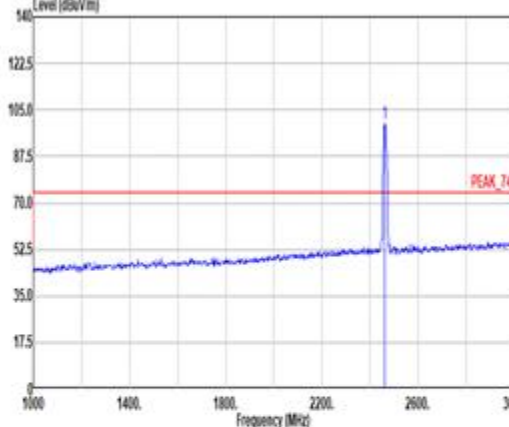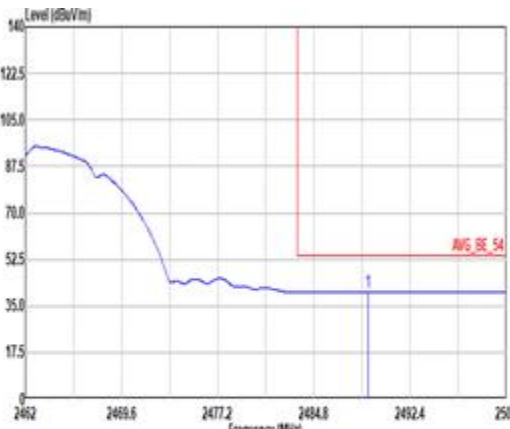
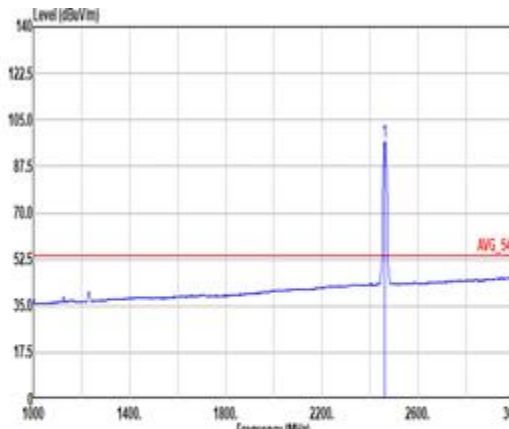


Mode	9																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																	
ANT	2																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.97</td><td>74.00</td><td>-22.09</td><td>30.04</td><td>26.00</td><td>7.44</td><td>31.78 10.47 301 190 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg	1 2462.00	99.97	74.00	-22.09	30.04	26.00	7.44	31.78 10.47 301 190 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.97</td><td>74.00</td><td>-22.09</td><td>30.04</td><td>26.00</td><td>7.44</td><td>31.78 10.47 301 190 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg	1 2462.00	99.97	74.00	-22.09	30.04	26.00	7.44	31.78 10.47 301 190 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg																																																											
1 2462.00	99.97	74.00	-22.09	30.04	26.00	7.44	31.78 10.47 301 190 PEAK																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg																																																											
1 2462.00	99.97	74.00	-22.09	30.04	26.00	7.44	31.78 10.47 301 190 PEAK																																																											
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>96.83</td><td>54.00</td><td>-13.67</td><td>27.27</td><td>26.00</td><td>7.44</td><td>31.78 10.47 301 190 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg	1 2462.00	96.83	54.00	-13.67	27.27	26.00	7.44	31.78 10.47 301 190 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.800kHz SUT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>96.83</td><td>54.00</td><td>-13.67</td><td>27.27</td><td>26.00</td><td>7.44</td><td>31.78 10.47 301 190 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg	1 2462.00	96.83	54.00	-13.67	27.27	26.00	7.44	31.78 10.47 301 190 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg																																																											
1 2462.00	96.83	54.00	-13.67	27.27	26.00	7.44	31.78 10.47 301 190 AVERAGE																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBm	dBm	dB	dBm	dBm	dB	cm deg																																																											
1 2462.00	96.83	54.00	-13.67	27.27	26.00	7.44	31.78 10.47 301 190 AVERAGE																																																											

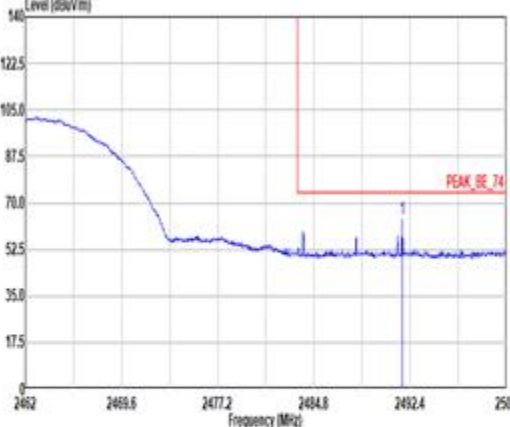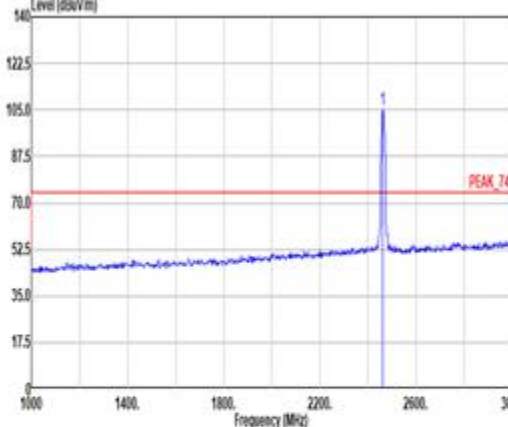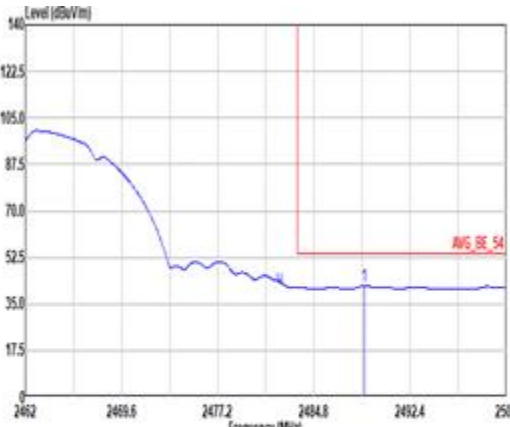
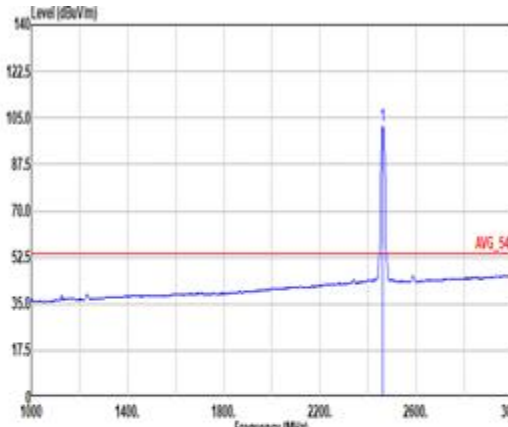


Mode	9																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																	
ANT	2																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>63.75</td><td>74.00</td><td>-10.25</td><td>50.60</td><td>26.00</td><td>7.40</td><td>31.79</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	63.75	74.00	-10.25	50.60	26.00	7.40	31.79	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>104.88</td><td>-----</td><td>-----</td><td>91.95</td><td>26.00</td><td>7.44</td><td>31.78</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	104.88	-----	-----	91.95	26.00	7.44	31.78
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	63.75	74.00	-10.25	50.60	26.00	7.40	31.79																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	104.88	-----	-----	91.95	26.00	7.44	31.78																																																											
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>41.91</td><td>54.00</td><td>-12.00</td><td>20.06</td><td>26.00</td><td>7.40</td><td>31.79</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	41.91	54.00	-12.00	20.06	26.00	7.40	31.79	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.800kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>105.74</td><td>-----</td><td>-----</td><td>88.81</td><td>26.00</td><td>7.44</td><td>31.78</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm	1 2462.00	105.74	-----	-----	88.81	26.00	7.44	31.78
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	41.91	54.00	-12.00	20.06	26.00	7.40	31.79																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	cm																																																											
1 2462.00	105.74	-----	-----	88.81	26.00	7.44	31.78																																																											



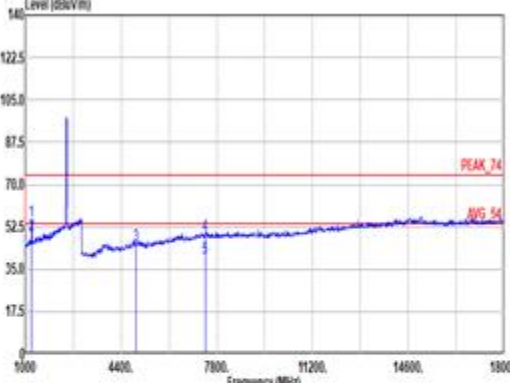
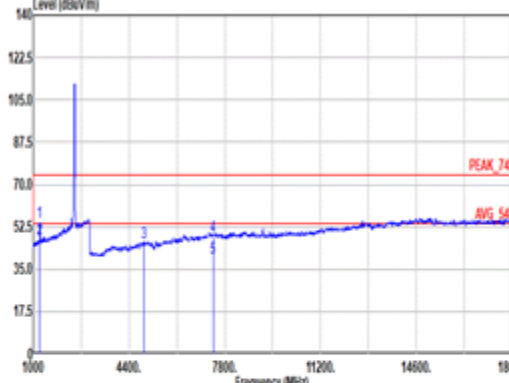


Mode	9																																																																																									
	Harmonic																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal					Vertical																																																																																				
Peak Avg																																																																																										
	Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_238712 HORIZONTAL					Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_238712 VERTICAL																																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 1231.00</td><td>55.82</td><td>74.00</td><td>-18.98</td><td>46.76</td><td>23.68</td><td>5.50</td><td>31.81</td><td>18.17</td><td>100 24 Peak</td></tr><tr><td>2 1231.00</td><td>49.25</td><td>54.00</td><td>-4.84</td><td>40.99</td><td>23.68</td><td>5.50</td><td>31.81</td><td>18.17</td><td>100 24 Average</td></tr><tr><td>3 4924.00</td><td>45.87</td><td>74.00</td><td>-28.93</td><td>33.83</td><td>32.75</td><td>10.50</td><td>32.98</td><td>1.77</td><td>-- -- PEAK</td></tr><tr><td>4 7386.00</td><td>49.83</td><td>74.00</td><td>-24.97</td><td>32.79</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>-- -- PEAK</td></tr><tr><td>5 7386.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>23.12</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>-- -- AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1231.00	55.82	74.00	-18.98	46.76	23.68	5.50	31.81	18.17	100 24 Peak	2 1231.00	49.25	54.00	-4.84	40.99	23.68	5.50	31.81	18.17	100 24 Average	3 4924.00	45.87	74.00	-28.93	33.83	32.75	10.50	32.98	1.77	-- -- PEAK	4 7386.00	49.83	74.00	-24.97	32.79	37.13	12.81	35.60	1.99	-- -- PEAK	5 7386.00	39.45	54.00	-14.55	23.12	37.13	12.81	35.60	1.99	-- -- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 1231.00	55.82	74.00	-18.98	46.76	23.68	5.50	31.81	18.17	100 24 Peak																																																																																	
2 1231.00	49.25	54.00	-4.84	40.99	23.68	5.50	31.81	18.17	100 24 Average																																																																																	
3 4924.00	45.87	74.00	-28.93	33.83	32.75	10.50	32.98	1.77	-- -- PEAK																																																																																	
4 7386.00	49.83	74.00	-24.97	32.79	37.13	12.81	35.60	1.99	-- -- PEAK																																																																																	
5 7386.00	39.45	54.00	-14.55	23.12	37.13	12.81	35.60	1.99	-- -- AVERAGE																																																																																	



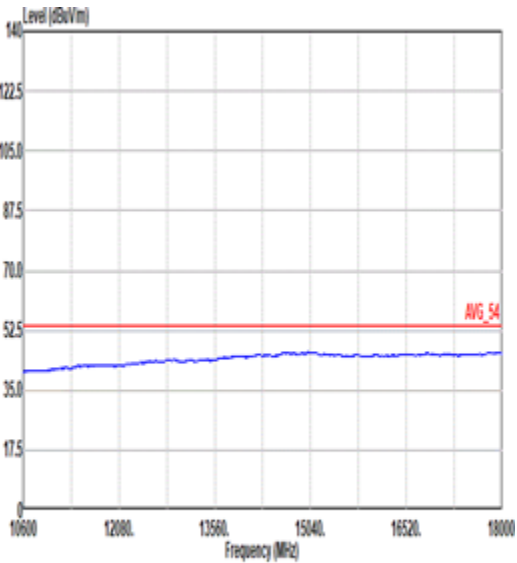
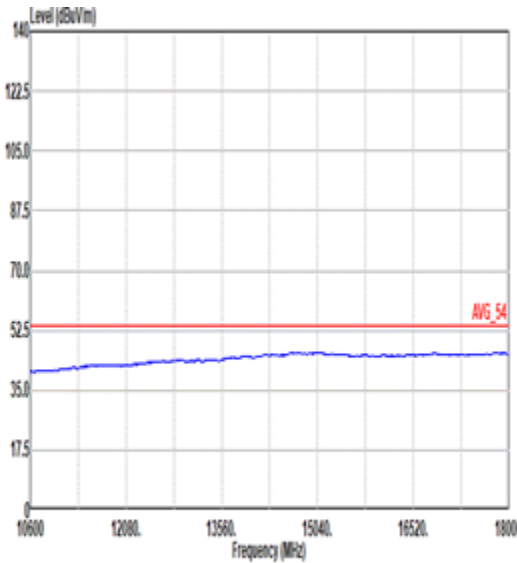


Mode	9	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 VERTICAL

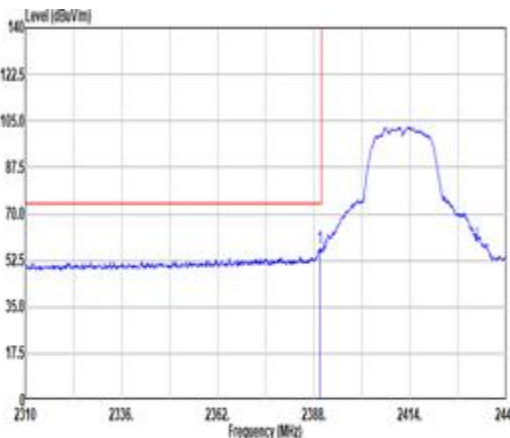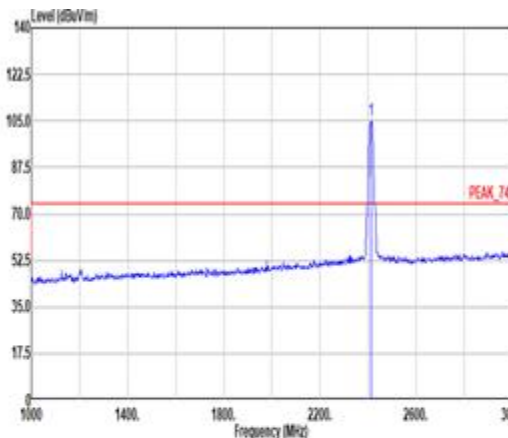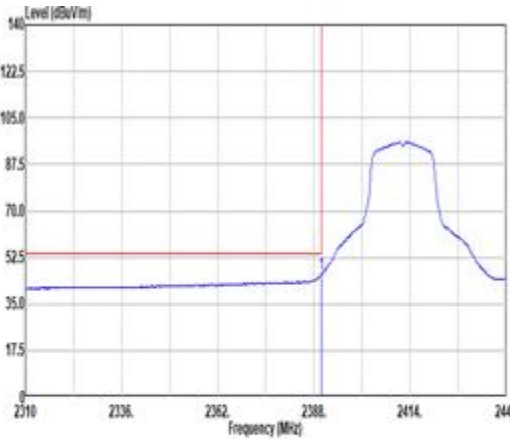
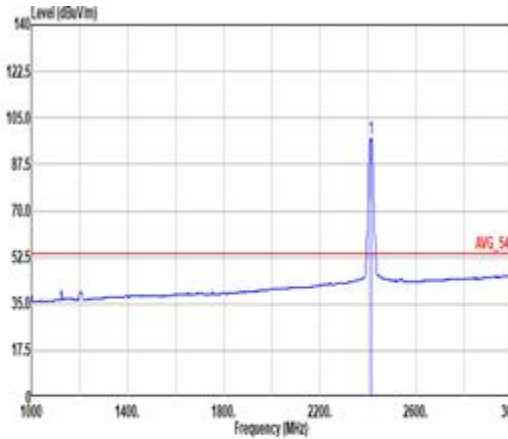


Mode	10																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																																																							
ANT	2																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>57.26</td><td>74.00</td><td>-16.74</td><td>44.21</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>185 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.69	57.26	74.00	-16.74	44.21	27.00	7.34	31.73	18.44	100	185 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.88</td><td>-----</td><td>-----</td><td>91.88</td><td>26.92</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>185 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	104.88	-----	-----	91.88	26.92	7.38	31.75	18.45	100	185 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.69	57.26	74.00	-16.74	44.21	27.00	7.34	31.73	18.44	100	185 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	104.88	-----	-----	91.88	26.92	7.38	31.75	18.45	100	185 PEAK																																																																													
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.88</td><td>54.00</td><td>-8.12</td><td>32.83</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>185 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	45.88	54.00	-8.12	32.83	27.00	7.34	31.73	18.44	100	185 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.44</td><td>-----</td><td>-----</td><td>84.37</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>100</td><td>185 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	97.44	-----	-----	84.37	27.00	7.37	31.74	18.44	100	185 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.95	45.88	54.00	-8.12	32.83	27.00	7.34	31.73	18.44	100	185 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	97.44	-----	-----	84.37	27.00	7.37	31.74	18.44	100	185 AVERAGE																																																																													

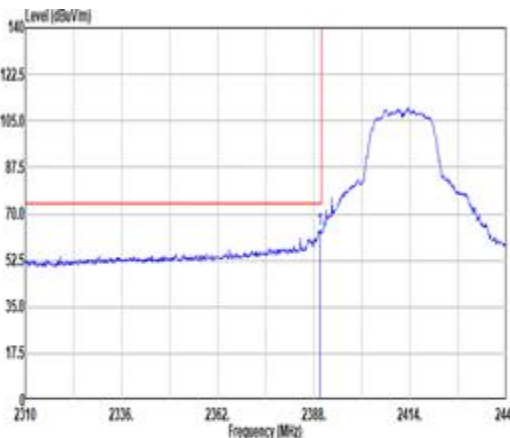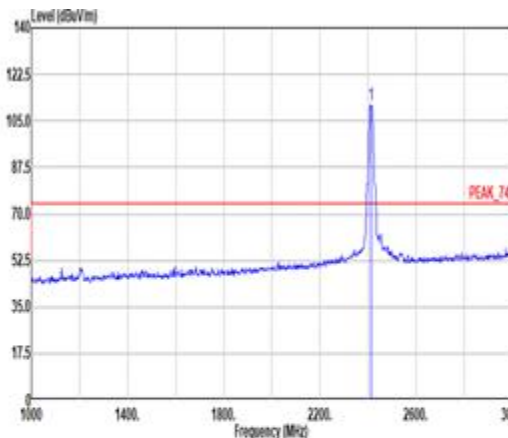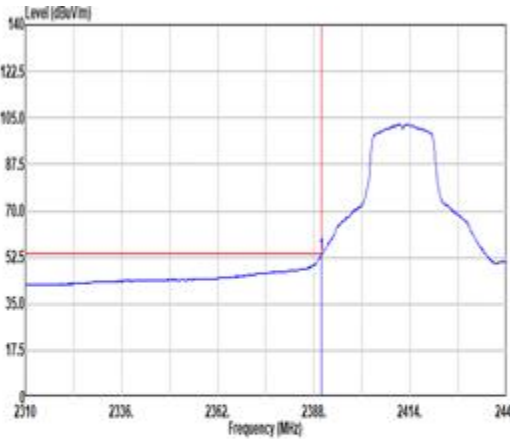
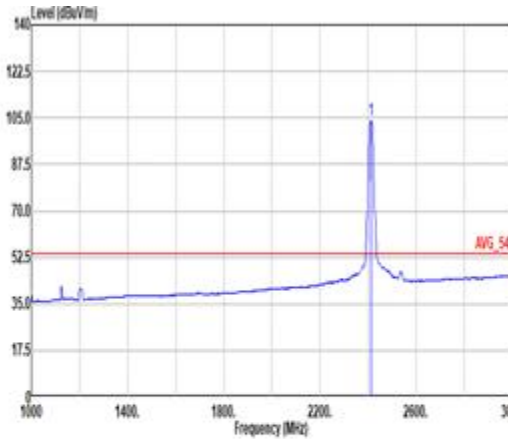


Mode	10																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																																																							
ANT	2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>64.03</td><td>74.00</td><td>-9.97</td><td>50.90</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>200</td><td>264</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	64.03	74.00	-9.97	50.90	17.00	7.34	31.73	18.44	200	264	PEAK	 Site : 830K13-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>111.16</td><td>-----</td><td>-----</td><td>90.07</td><td>27.02</td><td>7.37</td><td>31.74</td><td>18.44</td><td>200</td><td>264</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.16	-----	-----	90.07	27.02	7.37	31.74	18.44	200	264	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2389.56	64.03	74.00	-9.97	50.90	17.00	7.34	31.73	18.44	200	264	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2412.00	111.16	-----	-----	90.07	27.02	7.37	31.74	18.44	200	264	PEAK																																																																												
Avg	 Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>53.12</td><td>54.00</td><td>-8.88</td><td>40.07</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>200</td><td>264</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	53.12	54.00	-8.88	40.07	27.00	7.34	31.73	18.44	200	264	AVERAGE	 Site : 830K13-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.90</td><td>-----</td><td>-----</td><td>90.91</td><td>27.00</td><td>7.37</td><td>31.74</td><td>18.44</td><td>200</td><td>264</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.90	-----	-----	90.91	27.00	7.37	31.74	18.44	200	264	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2389.95	53.12	54.00	-8.88	40.07	27.00	7.34	31.73	18.44	200	264	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2412.00	103.90	-----	-----	90.91	27.00	7.37	31.74	18.44	200	264	AVERAGE																																																																												



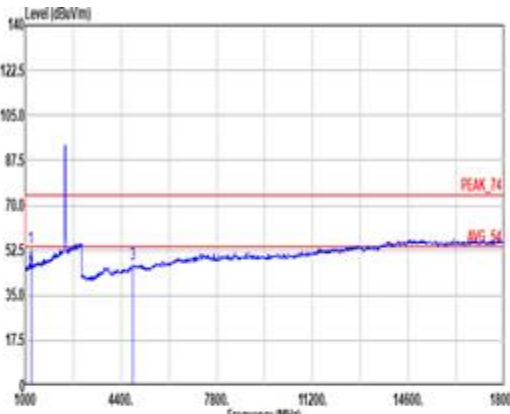
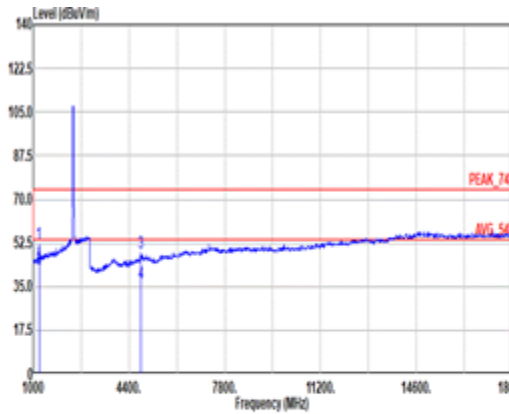


Mode	10																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																			
ANT	2																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	 Site : #3CH23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>45.34</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 24 Peak</td></tr><tr><td>2 1206.00</td><td>44.11</td><td>54.00</td><td>-9.89</td><td>35.04</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>100 24 Average</td></tr><tr><td>3 4824.00</td><td>46.92</td><td>74.00</td><td>-27.08</td><td>35.14</td><td>32.40</td><td>10.55</td><td>32.90</td><td>1.81</td><td>-- -- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1206.00	53.61	74.00	-20.39	45.34	23.64	5.48	31.81	10.16	100 24 Peak	2 1206.00	44.11	54.00	-9.89	35.04	23.64	5.48	31.81	10.16	100 24 Average	3 4824.00	46.92	74.00	-27.08	35.14	32.40	10.55	32.90	1.81	-- -- PEAK	 Site : #3CH23-HY Condition: PEAK_74 3m DRH08-E_LE2C05A18EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>43.89</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 205 Peak</td></tr><tr><td>2 1206.00</td><td>42.40</td><td>54.00</td><td>-11.52</td><td>34.21</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 205 Average</td></tr><tr><td>3 4824.00</td><td>48.40</td><td>74.00</td><td>-25.60</td><td>36.62</td><td>32.40</td><td>10.55</td><td>32.90</td><td>1.81</td><td>-- -- PEAK</td></tr><tr><td>4 4824.00</td><td>36.33</td><td>54.00</td><td>-17.67</td><td>24.55</td><td>32.40</td><td>10.55</td><td>32.90</td><td>1.81</td><td>-- -- AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 1206.00	52.16	74.00	-21.84	43.89	23.64	5.48	31.81	10.16	400 205 Peak	2 1206.00	42.40	54.00	-11.52	34.21	23.64	5.48	31.81	10.16	400 205 Average	3 4824.00	48.40	74.00	-25.60	36.62	32.40	10.55	32.90	1.81	-- -- PEAK	4 4824.00	36.33	54.00	-17.67	24.55	32.40	10.55	32.90	1.81	-- -- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1 1206.00	53.61	74.00	-20.39	45.34	23.64	5.48	31.81	10.16	100 24 Peak																																																																																																																											
2 1206.00	44.11	54.00	-9.89	35.04	23.64	5.48	31.81	10.16	100 24 Average																																																																																																																											
3 4824.00	46.92	74.00	-27.08	35.14	32.40	10.55	32.90	1.81	-- -- PEAK																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1 1206.00	52.16	74.00	-21.84	43.89	23.64	5.48	31.81	10.16	400 205 Peak																																																																																																																											
2 1206.00	42.40	54.00	-11.52	34.21	23.64	5.48	31.81	10.16	400 205 Average																																																																																																																											
3 4824.00	48.40	74.00	-25.60	36.62	32.40	10.55	32.90	1.81	-- -- PEAK																																																																																																																											
4 4824.00	36.33	54.00	-17.67	24.55	32.40	10.55	32.90	1.81	-- -- AVERAGE																																																																																																																											

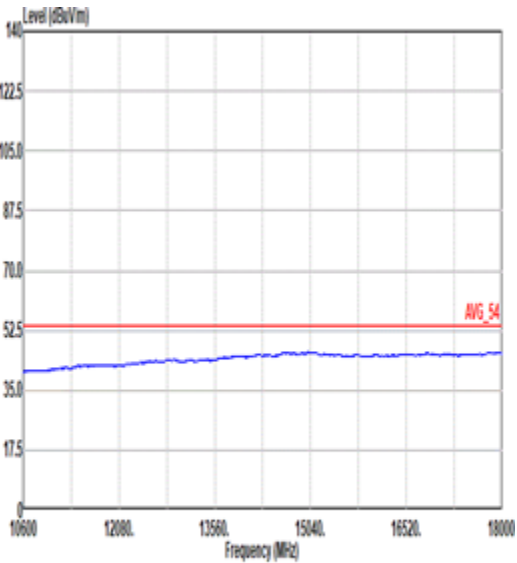
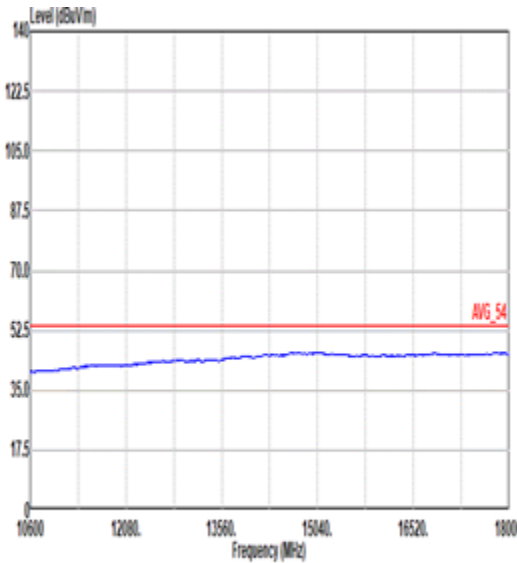


Mode	10	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY18-E_LE20H5418EN_238712 VERTICAL

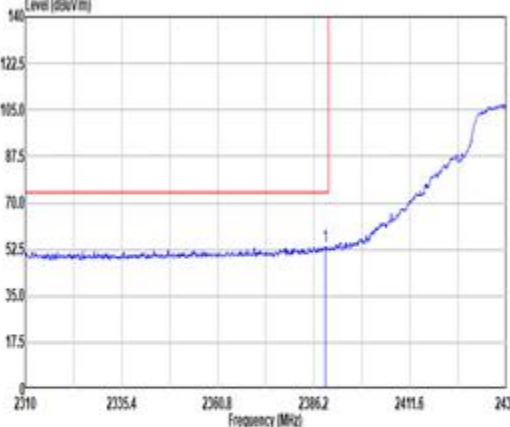
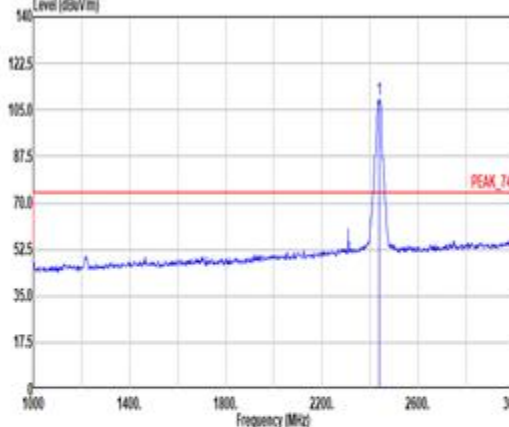
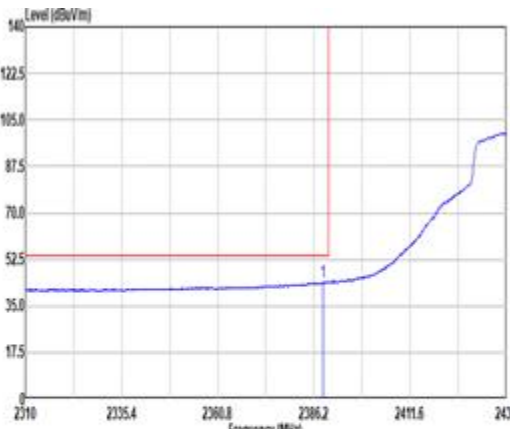
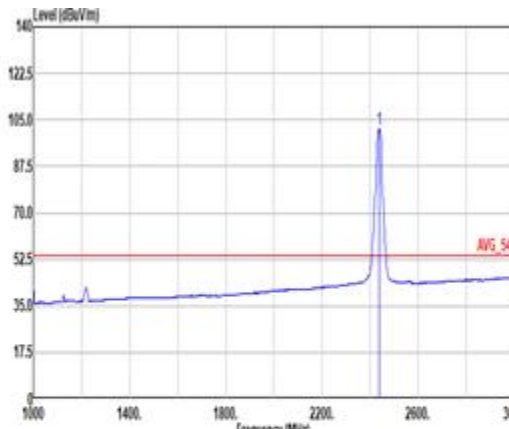


Mode	11																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																
ANT	2																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto						Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto																																																																																										
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.12</td><td>53.68</td><td>74.00</td><td>-28.40</td><td>40.55</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>314</td><td>100</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2389.12	53.68	74.00	-28.40	40.55	27.00	7.34	31.73	18.44	314	100	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>188.77</td><td>-----</td><td>-----</td><td>95.75</td><td>26.90</td><td>7.42</td><td>31.76</td><td>18.46</td><td>314</td><td>100</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2437.00	188.77	-----	-----	95.75	26.90	7.42	31.76	18.46	314	100	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																								
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.12	53.68	74.00	-28.40	40.55	27.00	7.34	31.73	18.44	314	100	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																								
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	188.77	-----	-----	95.75	26.90	7.42	31.76	18.46	314	100	PEAK																																																																																					
Avg																																																																																																	
	Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto						Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto																																																																																										
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.61</td><td>43.83</td><td>54.00</td><td>-18.17</td><td>38.78</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>314</td><td>100</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2388.61	43.83	54.00	-18.17	38.78	27.00	7.34	31.73	18.44	314	100	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>181.55</td><td>-----</td><td>-----</td><td>88.56</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>314</td><td>100</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2437.00	181.55	-----	-----	88.56	26.88	7.41	31.76	18.46	314	100	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																								
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																								
1	2388.61	43.83	54.00	-18.17	38.78	27.00	7.34	31.73	18.44	314	100	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																								
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	181.55	-----	-----	88.56	26.88	7.41	31.76	18.46	314	100	AVERAGE																																																																																					

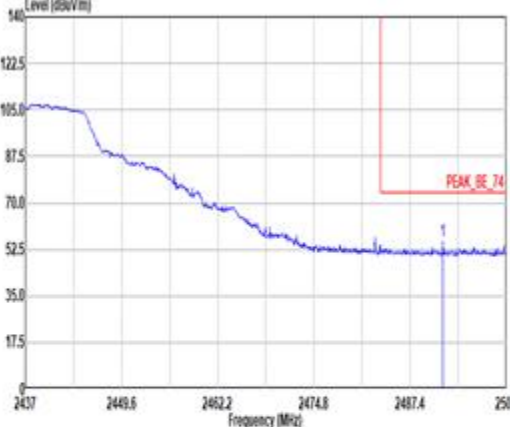
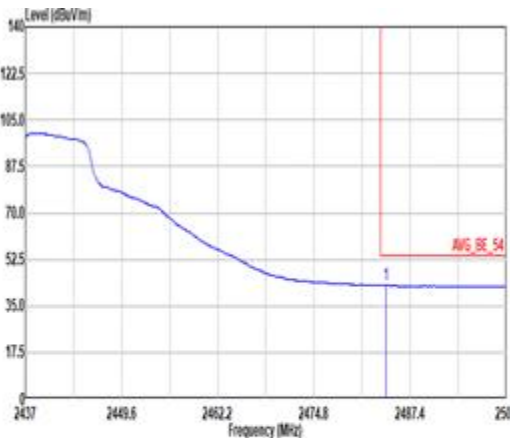


Mode	11																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11g_CH06_2437MHz																																																						
ANT	2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2491.68</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>42.21</td><td>26.98</td><td>7.48</td><td>31.79</td><td>18.48</td><td>314</td><td>100 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2491.68	55.28	74.00	-18.72	42.21	26.98	7.48	31.79	18.48	314	100 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2491.68	55.28	74.00	-18.72	42.21	26.98	7.48	31.79	18.48	314	100 PEAK																																												
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.25</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>29.84</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>314</td><td>100 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.25	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	314	100 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.25	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	314	100 AVERAGE																																												

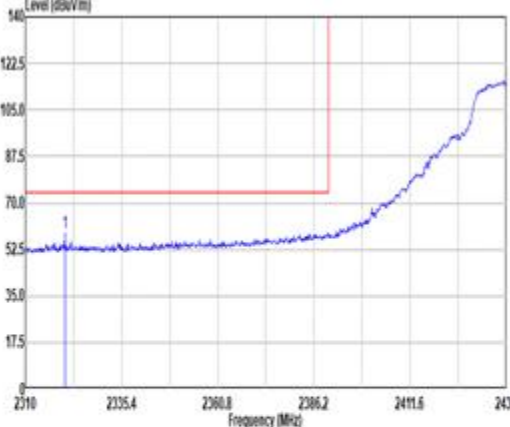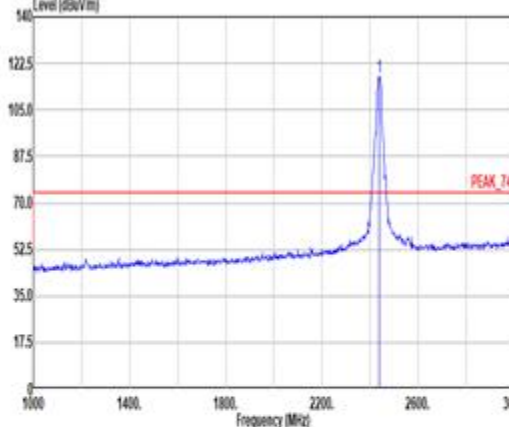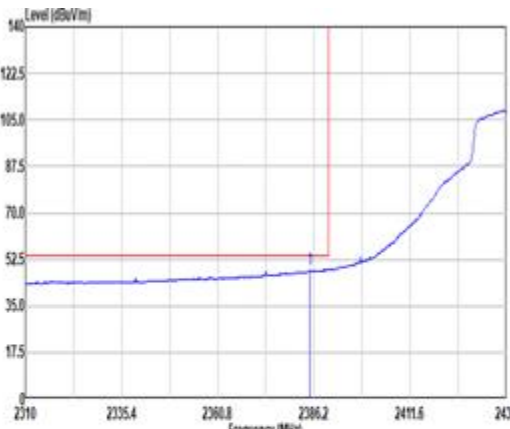
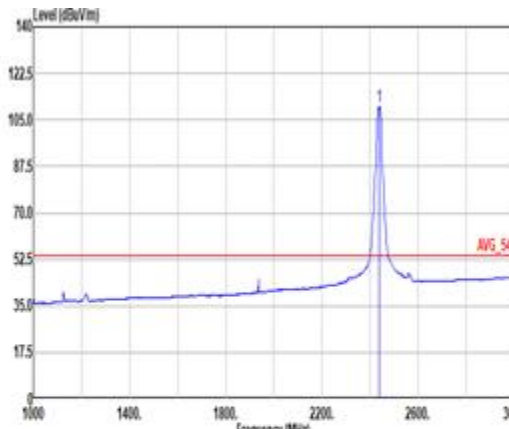


Mode	11																																																																	
	Band Edge - L																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																	
ANT	2																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2320.41</td><td>58.72</td><td>74.00</td><td>-15.28</td><td>45.50</td><td>27.20</td><td>7.21</td><td>31.69</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2320.41	58.72	74.00	-15.28	45.50	27.20	7.21	31.69	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2437.00</td><td>117.18</td><td>-----</td><td>-----</td><td>104.19</td><td>26.00</td><td>7.41</td><td>31.76</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2437.00	117.18	-----	-----	104.19	26.00	7.41	31.76
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																											
1 2320.41	58.72	74.00	-15.28	45.50	27.20	7.21	31.69																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																											
1 2437.00	117.18	-----	-----	104.19	26.00	7.41	31.76																																																											
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2385.06</td><td>48.79</td><td>54.00</td><td>-5.21</td><td>35.75</td><td>27.00</td><td>7.33</td><td>31.73</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2385.06	48.79	54.00	-5.21	35.75	27.00	7.33	31.73	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2437.00</td><td>110.07</td><td>-----</td><td>-----</td><td>97.00</td><td>26.00</td><td>7.41</td><td>31.76</td></tr></tbody></table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2437.00	110.07	-----	-----	97.00	26.00	7.41	31.76
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																											
1 2385.06	48.79	54.00	-5.21	35.75	27.00	7.33	31.73																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																											
1 2437.00	110.07	-----	-----	97.00	26.00	7.41	31.76																																																											

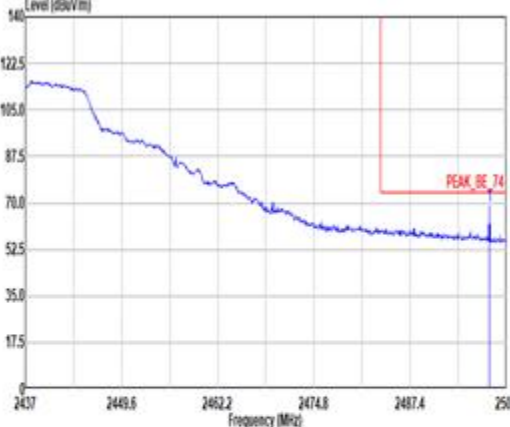
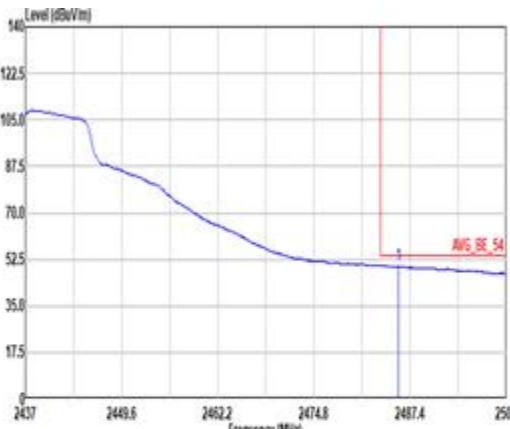


Mode	11																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11g_CH06_2437MHz																																																				
ANT	2																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2497.00</td><td>60.43</td><td>74.00</td><td>-5.57</td><td>55.36</td><td>26.90</td><td>7.40</td><td>31.80</td><td>105</td><td>334 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.00	60.43	74.00	-5.57	55.36	26.90	7.40	31.80	105	334 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2497.00	60.43	74.00	-5.57	55.36	26.90	7.40	31.80	105	334 PEAK																																											
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.03</td><td>50.42</td><td>54.00</td><td>-3.58</td><td>37.39</td><td>26.06</td><td>7.40</td><td>31.79</td><td>105</td><td>334 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.03	50.42	54.00	-3.58	37.39	26.06	7.40	31.79	105	334 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2485.03	50.42	54.00	-3.58	37.39	26.06	7.40	31.79	105	334 AVERAGE																																											


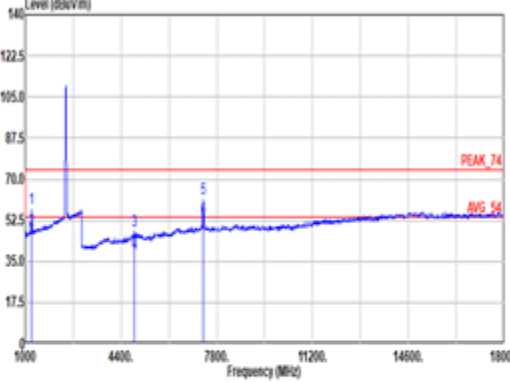
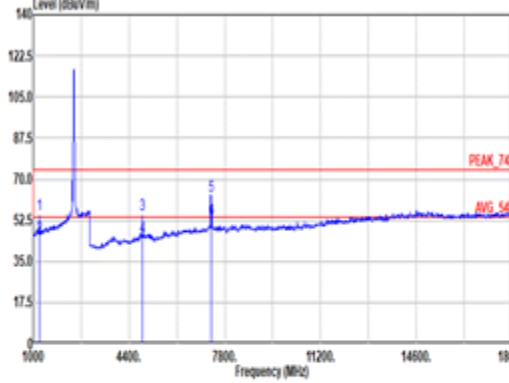


Mode	11											
	Harmonic											
	2400-2483.5_802.11g_CH06_2437MHz											
ANT	2											
Pol.	Horizontal						Vertical					
Peak Avg												
	Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_1E2C05A180N_230712 HORIZONTAL						Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_1E2C05A180N_230712 VERTICAL					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1218.58	57.73	74.00	-16.27	49.49	23.60	5.49	31.81	10.16	100	27	PEAK
2	1218.58	48.56	54.00	-5.44	40.32	23.60	5.49	31.81	10.16	100	27	Average
3	4874.00	48.85	74.00	-25.95	36.12	32.60	10.52	32.90	1.79	100	360	PEAK
4	4874.00	38.42	54.00	-15.58	26.49	32.60	10.52	32.90	1.79	100	360	AVERAGE
5	7311.00	61.90	74.00	-12.10	45.60	37.20	12.62	35.54	2.82	219	267	PEAK
6	7311.00	53.20	54.00	-0.80	36.90	37.20	12.62	35.54	2.82	219	267	AVERAGE
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1218.58	54.84	74.00	-19.16	46.68	23.60	5.49	31.81	10.16	400	260	PEAK
2	1218.58	45.68	54.00	-8.40	37.36	23.60	5.49	31.81	10.16	400	260	Average
3	4874.00	54.96	74.00	-19.04	43.03	32.60	10.52	32.90	1.79	252	337	PEAK
4	4874.00	45.35	54.00	-8.65	33.42	32.60	10.52	32.90	1.79	252	337	AVERAGE
5	7311.00	62.72	74.00	-11.28	46.42	37.20	12.62	35.54	2.82	200	249	PEAK
6	7311.00	52.68	54.00	-1.40	36.30	37.20	12.62	35.54	2.82	200	249	AVERAGE


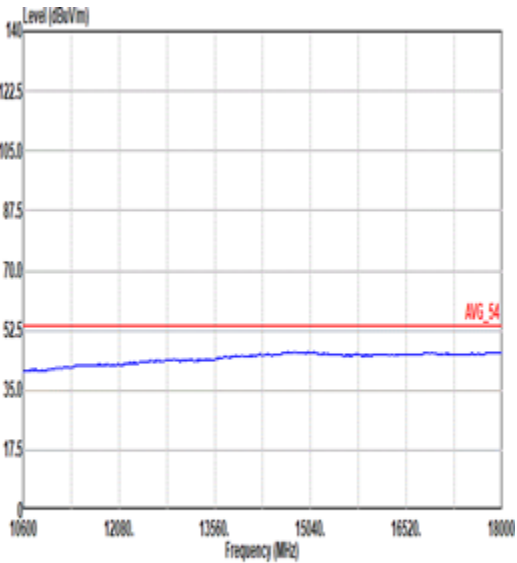
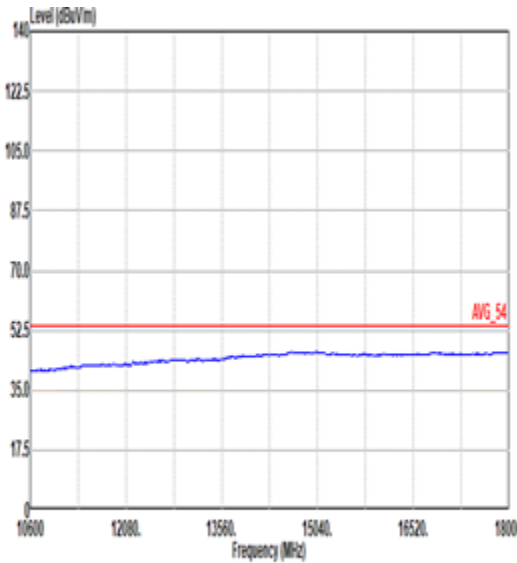


Mode	11	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20H5410EN_230712 VERTICAL

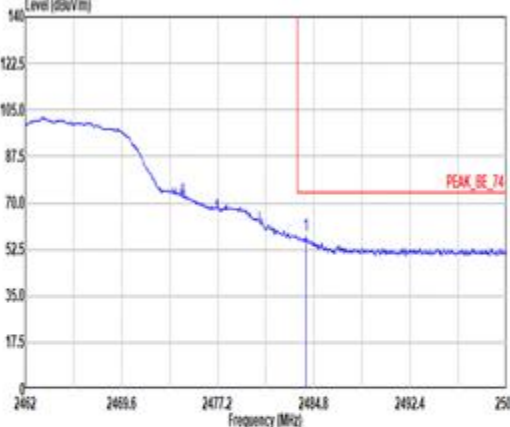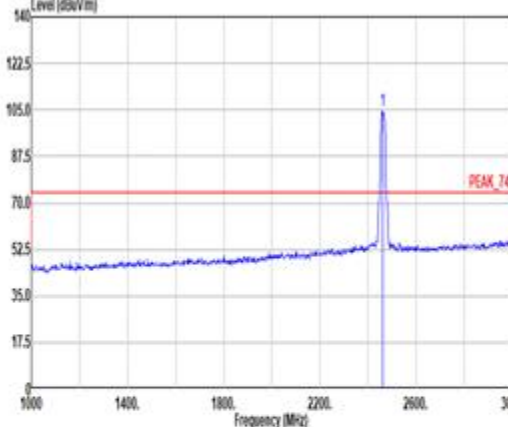
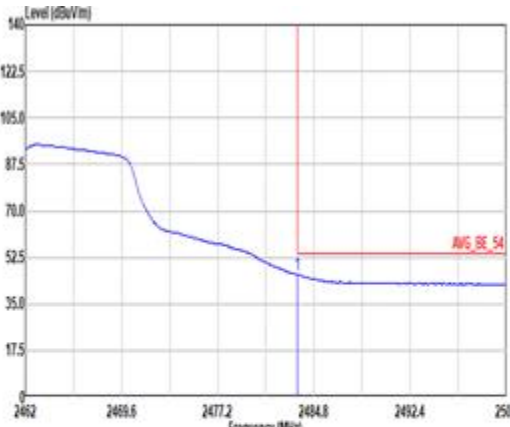


Mode	12																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																							
ANT	2																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.19</td><td>57.46</td><td>74.00</td><td>-16.54</td><td>44.46</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>178</td><td>177</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2484.19	57.46	74.00	-16.54	44.46	26.84	7.47	31.79	18.48	178	177	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.41</td><td>-----</td><td>-----</td><td>91.45</td><td>26.82</td><td>7.44</td><td>31.77</td><td>18.47</td><td>178</td><td>177</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2462.00	104.41	-----	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																															
1	2484.19	57.46	74.00	-16.54	44.46	26.84	7.47	31.79	18.48	178	177	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																															
1	2462.00	104.41	-----	-----	91.45	26.82	7.44	31.77	18.47	178	177	PEAK																																																																												
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>45.95</td><td>54.00</td><td>-8.05</td><td>32.95</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>178</td><td>177</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2483.51	45.95	54.00	-8.05	32.95	26.84	7.47	31.79	18.48	178	177	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.56</td><td>-----</td><td>-----</td><td>83.63</td><td>26.80</td><td>7.44</td><td>31.78</td><td>18.47</td><td>178</td><td>177</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1	2462.00	96.56	-----	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																															
1	2483.51	45.95	54.00	-8.05	32.95	26.84	7.47	31.79	18.48	178	177	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																															
1	2462.00	96.56	-----	-----	83.63	26.80	7.44	31.78	18.47	178	177	AVERAGE																																																																												

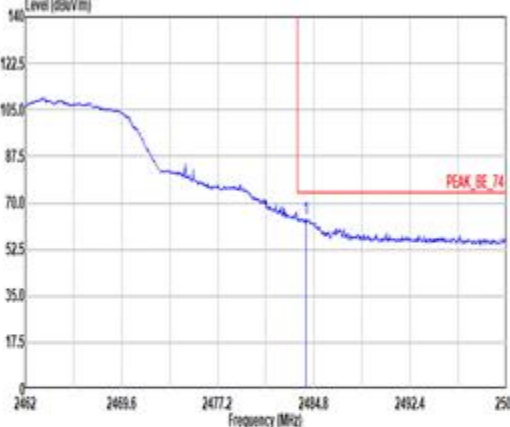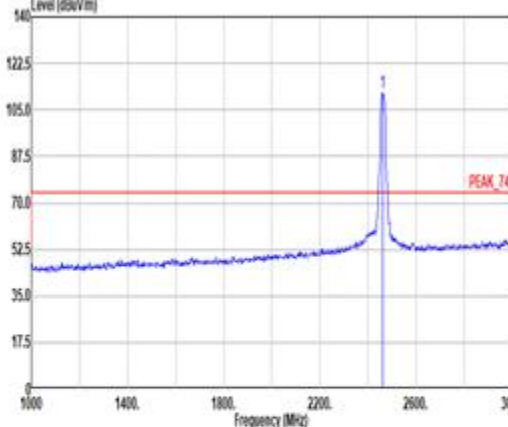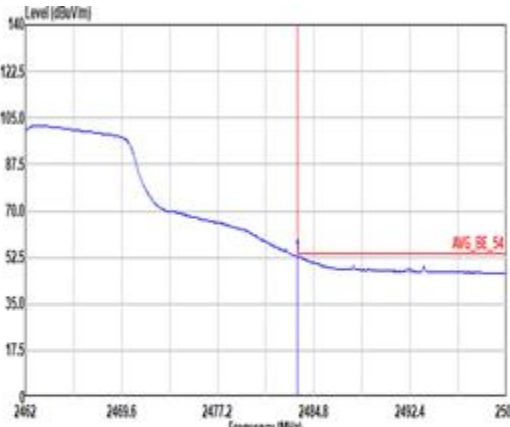





Mode	12																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.15</td><td>63.91</td><td>74.00</td><td>-10.09</td><td>50.91</td><td>26.84</td><td>7.47</td><td>31.79</td><td>10.40</td><td>266</td><td>251</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.15	63.91	74.00	-10.09	50.91	26.84	7.47	31.79	10.40	266	251	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.38</td><td>-----</td><td>-----</td><td>90.42</td><td>26.82</td><td>7.44</td><td>31.77</td><td>10.47</td><td>266</td><td>251</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.38	-----	-----	90.42	26.82	7.44	31.77	10.47	266	251	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.15	63.91	74.00	-10.09	50.91	26.84	7.47	31.79	10.40	266	251	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	111.38	-----	-----	90.42	26.82	7.44	31.77	10.47	266	251	PEAK																																																																														
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.89</td><td>54.00</td><td>-1.11</td><td>39.89</td><td>26.84</td><td>7.47</td><td>31.79</td><td>10.40</td><td>266</td><td>251</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.89	54.00	-1.11	39.89	26.84	7.47	31.79	10.40	266	251	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SdF:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>183.76</td><td>-----</td><td>-----</td><td>90.83</td><td>26.80</td><td>7.44</td><td>31.78</td><td>10.47</td><td>266</td><td>251</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	183.76	-----	-----	90.83	26.80	7.44	31.78	10.47	266	251	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.51	52.89	54.00	-1.11	39.89	26.84	7.47	31.79	10.40	266	251	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	183.76	-----	-----	90.83	26.80	7.44	31.78	10.47	266	251	AVERAGE																																																																														

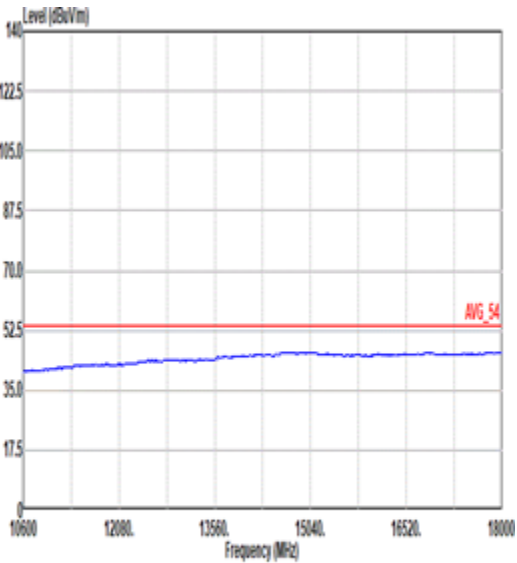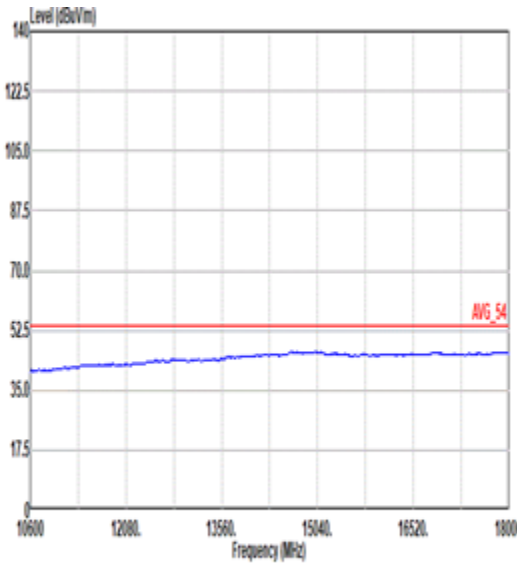





Mode	12	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL



MIMO <Ant. 1+2>

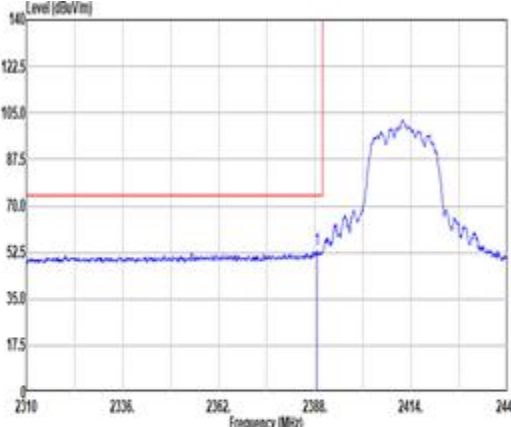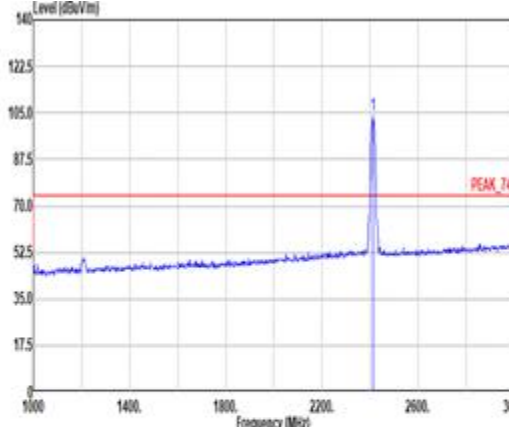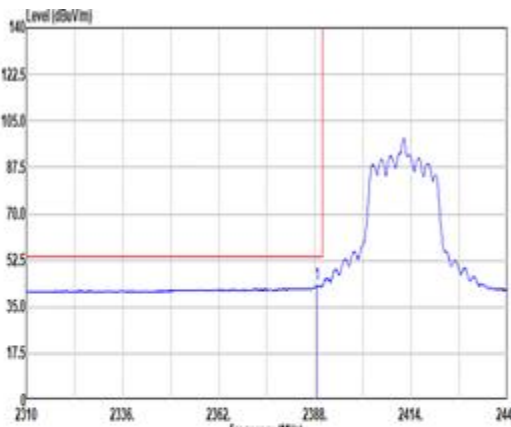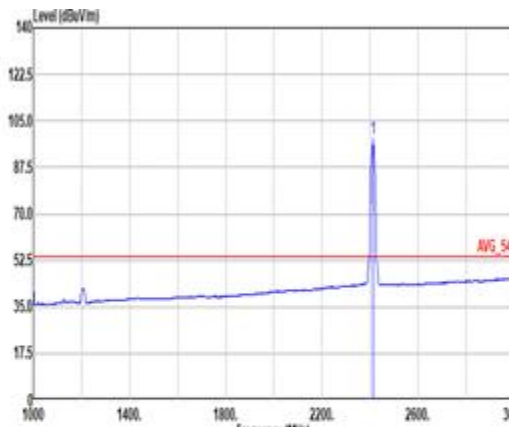		15																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																									
ANT	1+2																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2388.65</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>40.47</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 295 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.65	53.52	74.00	-20.48	40.47	27.00	7.34	31.73	18.44	100 295 PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>183.83</td><td>-----</td><td>98.79</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>295 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	183.83	-----	98.79	26.96	7.38	31.75	18.45	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2388.65	53.52	74.00	-20.48	40.47	27.00	7.34	31.73	18.44	100 295 PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	183.83	-----	98.79	26.96	7.38	31.75	18.45	100	295 PEAK																																																																																	
Avg																																																																																										
	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2388.65</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>30.06</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 295 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.65	43.11	54.00	-10.89	30.06	27.00	7.34	31.73	18.44	100 295 AVERAGE	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>98.46</td><td>-----</td><td>85.42</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>295 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	98.46	-----	85.42	26.96	7.38	31.75	18.45	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2388.65	43.11	54.00	-10.89	30.06	27.00	7.34	31.73	18.44	100 295 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	98.46	-----	85.42	26.96	7.38	31.75	18.45	100	295 AVERAGE																																																																																	

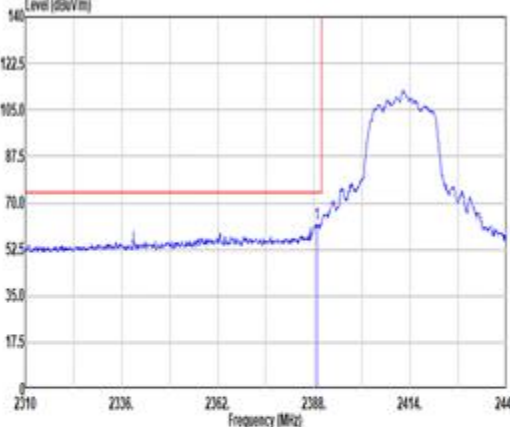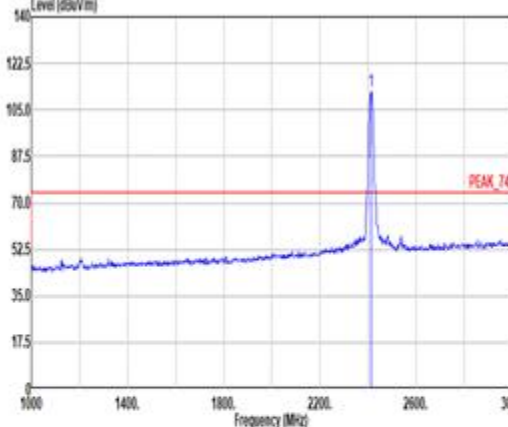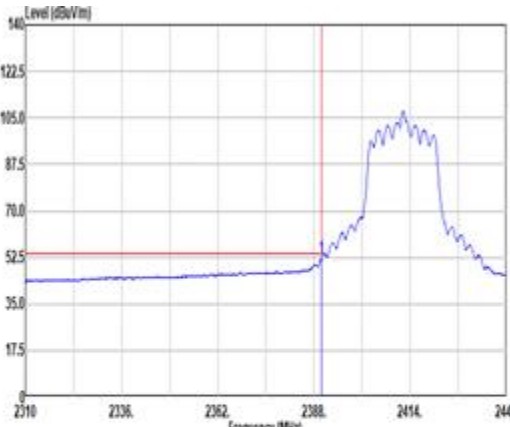
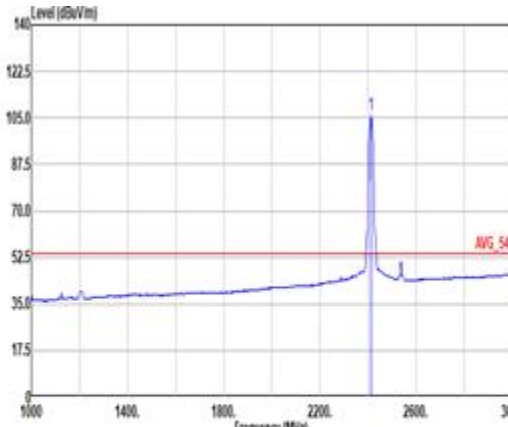


Mode	15																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																							
ANT	1+2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.78</td><td>62.03</td><td>74.00</td><td>-11.97</td><td>48.98</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>333 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg	1	2388.78	62.03	74.00	-11.97	48.98	17.00	7.34	31.73	18.44	100	333 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>112.17</td><td>-----</td><td>-----</td><td>99.13</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>333 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg	1	2412.00	112.17	-----	-----	99.13	26.96	7.38	31.75	18.45	100	333 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg																																																																														
1	2388.78	62.03	74.00	-11.97	48.98	17.00	7.34	31.73	18.44	100	333 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	112.17	-----	-----	99.13	26.96	7.38	31.75	18.45	100	333 PEAK																																																																													
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>52.89</td><td>54.00</td><td>-1.91</td><td>39.04</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>333 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg	1	2389.95	52.89	54.00	-1.91	39.04	17.00	7.34	31.73	18.44	100	333 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>106.37</td><td>-----</td><td>-----</td><td>93.33</td><td>26.96</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100</td><td>333 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg	1	2412.00	106.37	-----	-----	93.33	26.96	7.38	31.75	18.45	100	333 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg																																																																														
1	2389.95	52.89	54.00	-1.91	39.04	17.00	7.34	31.73	18.44	100	333 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	106.37	-----	-----	93.33	26.96	7.38	31.75	18.45	100	333 AVERAGE																																																																													







Mode	15																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																									
ANT	1+2																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>55.78</td><td>74.00</td><td>-18.22</td><td>47.52</td><td>23.62</td><td>5.49</td><td>31.81</td><td>10.16</td><td>326 255 Peak</td></tr><tr><td>2 1206.00</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>38.47</td><td>23.62</td><td>5.49</td><td>31.81</td><td>10.16</td><td>326 255 Average</td></tr><tr><td>3 4824.00</td><td>47.83</td><td>74.00</td><td>-26.97</td><td>35.25</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- -- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 1206.00	55.78	74.00	-18.22	47.52	23.62	5.49	31.81	10.16	326 255 Peak	2 1206.00	46.73	54.00	-7.27	38.47	23.62	5.49	31.81	10.16	326 255 Average	3 4824.00	47.83	74.00	-26.97	35.25	32.40	10.55	32.98	1.81	-- -- PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DRH08-E_LE2C05418EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 1206.00</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>45.26</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 287 Peak</td></tr><tr><td>2 1206.00</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>36.82</td><td>23.64</td><td>5.48</td><td>31.81</td><td>10.16</td><td>400 287 Average</td></tr><tr><td>3 4824.00</td><td>47.68</td><td>74.00</td><td>-26.40</td><td>35.82</td><td>32.40</td><td>10.55</td><td>32.98</td><td>1.81</td><td>-- -- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 1206.00	53.53	74.00	-20.47	45.26	23.64	5.48	31.81	10.16	400 287 Peak	2 1206.00	44.29	54.00	-9.71	36.82	23.64	5.48	31.81	10.16	400 287 Average	3 4824.00	47.68	74.00	-26.40	35.82	32.40	10.55	32.98	1.81	-- -- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 1206.00	55.78	74.00	-18.22	47.52	23.62	5.49	31.81	10.16	326 255 Peak																																																																																																																	
2 1206.00	46.73	54.00	-7.27	38.47	23.62	5.49	31.81	10.16	326 255 Average																																																																																																																	
3 4824.00	47.83	74.00	-26.97	35.25	32.40	10.55	32.98	1.81	-- -- PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 1206.00	53.53	74.00	-20.47	45.26	23.64	5.48	31.81	10.16	400 287 Peak																																																																																																																	
2 1206.00	44.29	54.00	-9.71	36.82	23.64	5.48	31.81	10.16	400 287 Average																																																																																																																	
3 4824.00	47.68	74.00	-26.40	35.82	32.40	10.55	32.98	1.81	-- -- PEAK																																																																																																																	

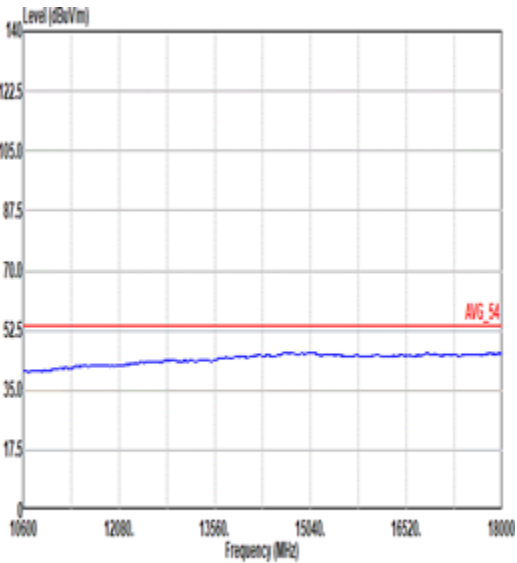
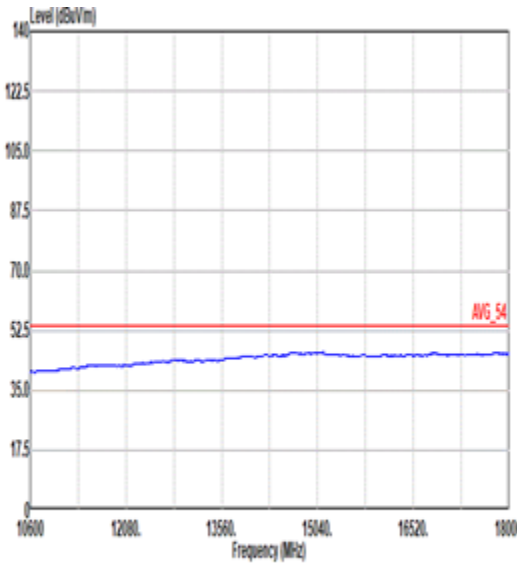


Mode	15	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20HSA18EN_238712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRH18-E_LE20HSA18EN_238712 VERTICAL

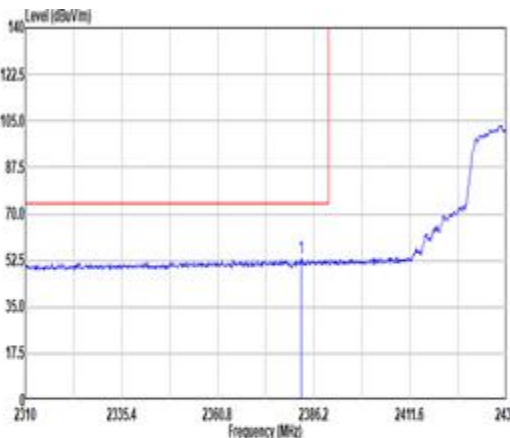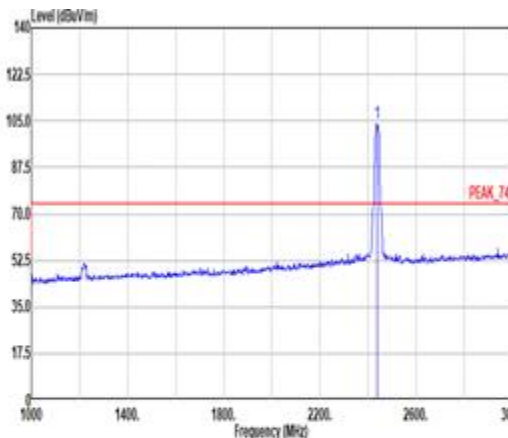
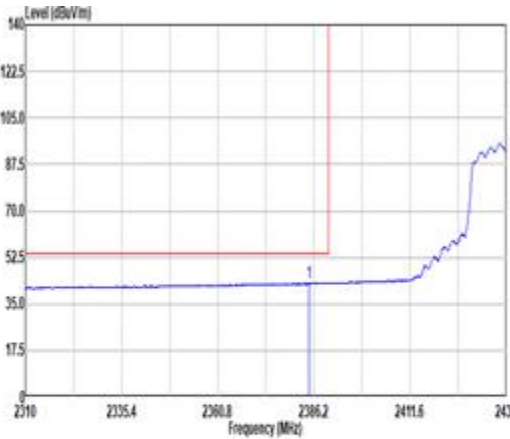
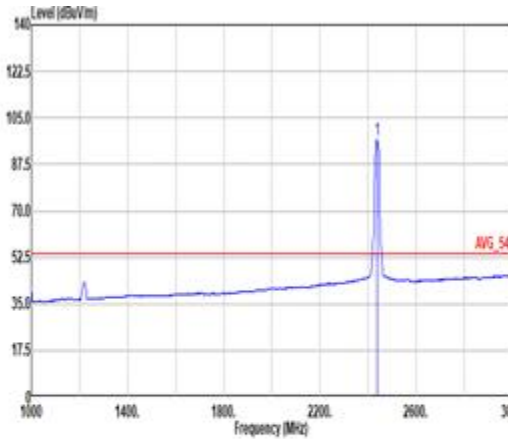


Mode	16																																																																																							
	Band Edge - L																																																																																							
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																							
ANT	1+2																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_74 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.77</td><td>53.22</td><td>74.00</td><td>-28.70</td><td>40.18</td><td>27.00</td><td>7.33</td><td>31.73</td><td>18.44</td><td>200</td><td>184</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.77	53.22	74.00	-28.70	40.18	27.00	7.33	31.73	18.44	200	184	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>184.14</td><td>-----</td><td>-----</td><td>91.17</td><td>26.06</td><td>7.41</td><td>31.76</td><td>18.46</td><td>200</td><td>184</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	184.14	-----	-----	91.17	26.06	7.41	31.76	18.46	200	184	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2382.77	53.22	74.00	-28.70	40.18	27.00	7.33	31.73	18.44	200	184	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	184.14	-----	-----	91.17	26.06	7.41	31.76	18.46	200	184	PEAK																																																																												
Avg	 Site : 83CH3-HY Condition: AVG_54 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.93</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>29.93</td><td>27.00</td><td>7.33</td><td>31.73</td><td>18.44</td><td>200</td><td>184</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.93	42.97	54.00	-11.03	29.93	27.00	7.33	31.73	18.44	200	184	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3e DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>96.71</td><td>-----</td><td>-----</td><td>83.72</td><td>26.06</td><td>7.41</td><td>31.76</td><td>18.46</td><td>200</td><td>184</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.71	-----	-----	83.72	26.06	7.41	31.76	18.46	200	184	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2384.93	42.97	54.00	-11.03	29.93	27.00	7.33	31.73	18.44	200	184	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	96.71	-----	-----	83.72	26.06	7.41	31.76	18.46	200	184	AVERAGE																																																																												

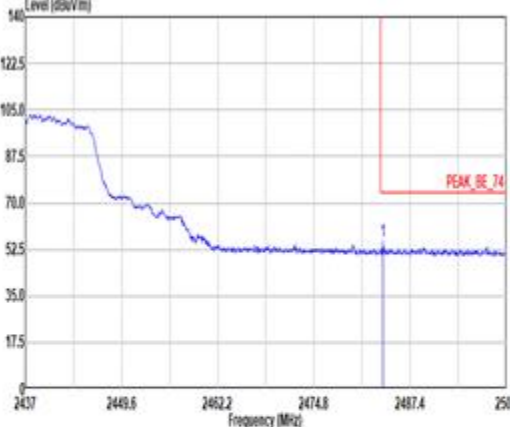
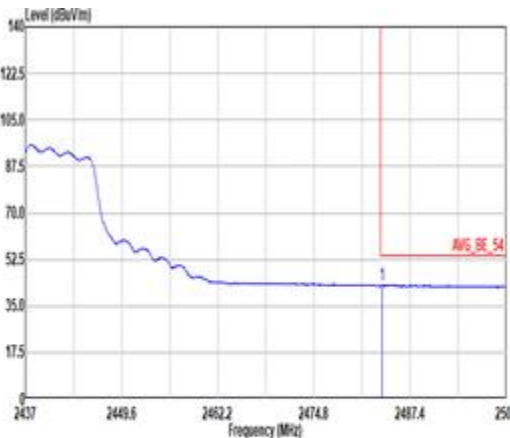


Mode	16																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																						
ANT	1+2																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.01</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>42.66</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>200</td><td>184</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1 2483.01	55.66	74.00	-18.34	42.66	26.84	7.47	31.79	18.48	200	184	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																													
1 2483.01	55.66	74.00	-18.34	42.66	26.84	7.47	31.79	18.48	200	184	PEAK																																												
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SUT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.75</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>29.84</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>200</td><td>184</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1 2483.75	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	200	184	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																													
1 2483.75	42.84	54.00	-11.16	29.84	26.84	7.47	31.79	18.48	200	184	AVERAGE																																												

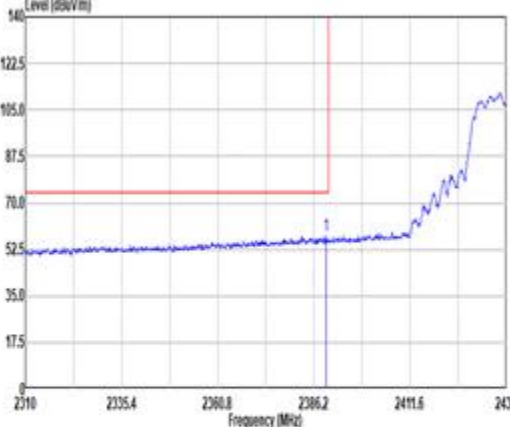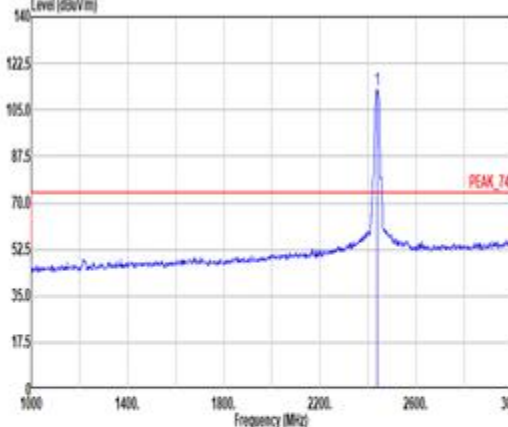
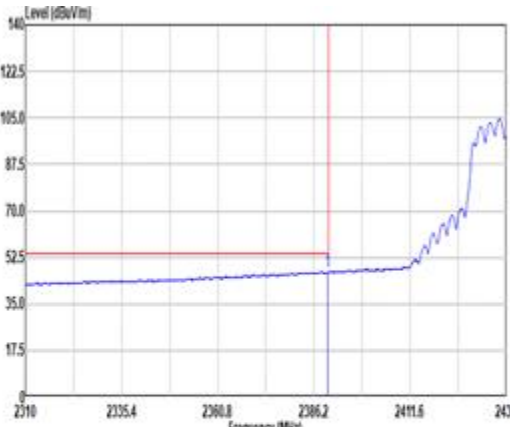


Mode	16																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CHSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.58</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>44.00</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 341 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.58	57.85	74.00	-16.15	44.00	27.00	7.34	31.73	18.44	100 341 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CHSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>112.44</td><td>-----</td><td>-----</td><td>99.45</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>100 341 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	112.44	-----	-----	99.45	26.88	7.41	31.76	18.46	100 341 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.58	57.85	74.00	-16.15	44.00	27.00	7.34	31.73	18.44	100 341 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	112.44	-----	-----	99.45	26.88	7.41	31.76	18.46	100 341 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CHSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.00</td><td>46.96</td><td>54.00</td><td>-7.04</td><td>33.91</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 341 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.00	46.96	54.00	-7.04	33.91	27.00	7.34	31.73	18.44	100 341 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CHSA18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>106.82</td><td>-----</td><td>-----</td><td>93.83</td><td>26.88</td><td>7.41</td><td>31.76</td><td>18.46</td><td>100 341 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	106.82	-----	-----	93.83	26.88	7.41	31.76	18.46	100 341 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.00	46.96	54.00	-7.04	33.91	27.00	7.34	31.73	18.44	100 341 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	106.82	-----	-----	93.83	26.88	7.41	31.76	18.46	100 341 AVERAGE																																																																									

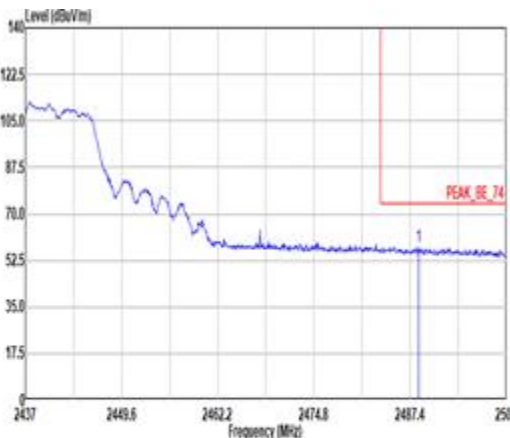
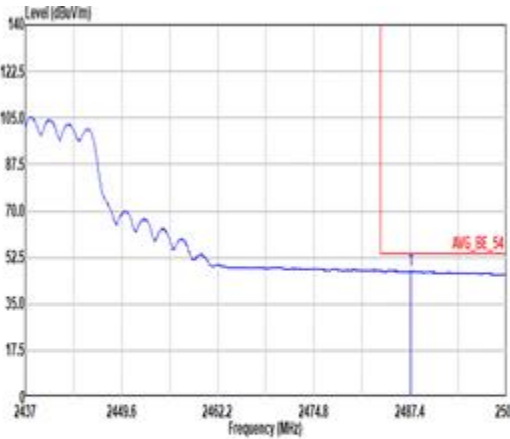


Mode	16																																									
	Band Edge - R																																									
	2400-2483.5_802.11n HT20_CH06_2437MHz																																									
ANT	1+2																																									
Pol.	Vertical	Fundamental																																								
Peak	 Site : 80CH3-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2488.53</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>44.37</td><td>26.09</td><td>7.48</td><td>31.79</td><td>18.48</td><td>100 341 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2488.53	57.43	74.00	-16.57	44.37	26.09	7.48	31.79	18.48	100 341 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																	
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																	
1 2488.53	57.43	74.00	-16.57	44.37	26.09	7.48	31.79	18.48	100 341 PEAK																																	
Avg	 Site : 80CH3-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL RBW:1000.000kHz VBW:0.020kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2487.53</td><td>47.75</td><td>54.00</td><td>-6.25</td><td>34.70</td><td>26.00</td><td>7.48</td><td>31.79</td><td>18.48</td><td>100 341 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2487.53	47.75	54.00	-6.25	34.70	26.00	7.48	31.79	18.48	100 341 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																	
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																	
1 2487.53	47.75	54.00	-6.25	34.70	26.00	7.48	31.79	18.48	100 341 AVERAGE																																	

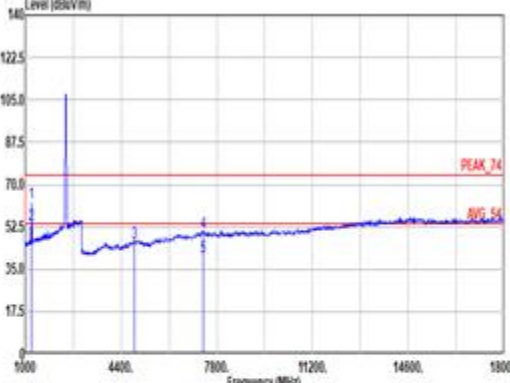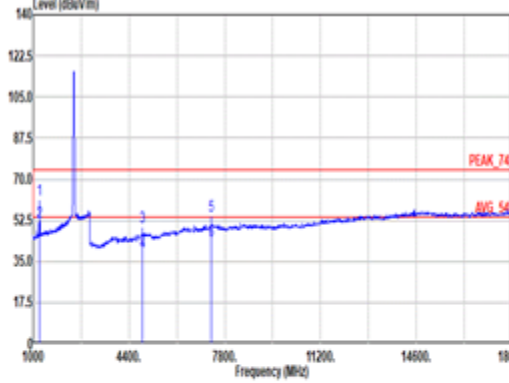

Mode	16																																																																																																																																																																																				
	Harmonic																																																																																																																																																																																				
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																																				
ANT	1+2																																																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																																																														
Peak Avg																																																																																																																																																																																					
	Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 HORIZONTAL						Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 VERTICAL																																																																																																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 1220.00</td><td>62.28</td><td>74.00</td><td>-11.72</td><td>54.83</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.16</td><td>310 262 Peak</td></tr><tr><td>2 1220.00</td><td>53.45</td><td>54.00</td><td>-0.55</td><td>45.20</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.16</td><td>310 262 Average</td></tr><tr><td>3 4074.00</td><td>45.83</td><td>74.00</td><td>-28.17</td><td>33.90</td><td>32.60</td><td>10.52</td><td>32.90</td><td>1.79</td><td>-- -- PEAK</td></tr><tr><td>4 4074.00</td><td>50.86</td><td>74.00</td><td>-23.94</td><td>33.76</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- PEAK</td></tr><tr><td>5 7311.00</td><td>48.39</td><td>54.00</td><td>-13.61</td><td>24.89</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>-- -- AVERAGE</td></tr></table> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 1220.00</td><td>61.15</td><td>74.00</td><td>-12.85</td><td>52.90</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.16</td><td>400 289 Peak</td></tr><tr><td>2 1220.00</td><td>52.81</td><td>54.00</td><td>-1.99</td><td>43.76</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.16</td><td>400 289 Average</td></tr><tr><td>3 4074.00</td><td>49.87</td><td>74.00</td><td>-24.13</td><td>37.94</td><td>32.60</td><td>10.52</td><td>32.90</td><td>1.79</td><td>199 319 PEAK</td></tr><tr><td>4 4074.00</td><td>39.21</td><td>54.00</td><td>-14.79</td><td>27.28</td><td>32.60</td><td>10.52</td><td>32.90</td><td>1.79</td><td>199 319 AVERAGE</td></tr><tr><td>5 7311.00</td><td>54.31</td><td>74.00</td><td>-19.69</td><td>38.81</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>206 305 PEAK</td></tr><tr><td>6 7311.00</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>27.63</td><td>37.20</td><td>12.62</td><td>35.54</td><td>2.82</td><td>206 305 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 1220.00	62.28	74.00	-11.72	54.83	23.60	5.50	31.81	10.16	310 262 Peak	2 1220.00	53.45	54.00	-0.55	45.20	23.60	5.50	31.81	10.16	310 262 Average	3 4074.00	45.83	74.00	-28.17	33.90	32.60	10.52	32.90	1.79	-- -- PEAK	4 4074.00	50.86	74.00	-23.94	33.76	37.20	12.62	35.54	2.82	-- -- PEAK	5 7311.00	48.39	54.00	-13.61	24.89	37.20	12.62	35.54	2.82	-- -- AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 1220.00	61.15	74.00	-12.85	52.90	23.60	5.50	31.81	10.16	400 289 Peak	2 1220.00	52.81	54.00	-1.99	43.76	23.60	5.50	31.81	10.16	400 289 Average	3 4074.00	49.87	74.00	-24.13	37.94	32.60	10.52	32.90	1.79	199 319 PEAK	4 4074.00	39.21	54.00	-14.79	27.28	32.60	10.52	32.90	1.79	199 319 AVERAGE	5 7311.00	54.31	74.00	-19.69	38.81	37.20	12.62	35.54	2.82	206 305 PEAK	6 7311.00	43.93	54.00	-10.07	27.63	37.20	12.62	35.54	2.82	206 305 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																												
1 1220.00	62.28	74.00	-11.72	54.83	23.60	5.50	31.81	10.16	310 262 Peak																																																																																																																																																																												
2 1220.00	53.45	54.00	-0.55	45.20	23.60	5.50	31.81	10.16	310 262 Average																																																																																																																																																																												
3 4074.00	45.83	74.00	-28.17	33.90	32.60	10.52	32.90	1.79	-- -- PEAK																																																																																																																																																																												
4 4074.00	50.86	74.00	-23.94	33.76	37.20	12.62	35.54	2.82	-- -- PEAK																																																																																																																																																																												
5 7311.00	48.39	54.00	-13.61	24.89	37.20	12.62	35.54	2.82	-- -- AVERAGE																																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																												
1 1220.00	61.15	74.00	-12.85	52.90	23.60	5.50	31.81	10.16	400 289 Peak																																																																																																																																																																												
2 1220.00	52.81	54.00	-1.99	43.76	23.60	5.50	31.81	10.16	400 289 Average																																																																																																																																																																												
3 4074.00	49.87	74.00	-24.13	37.94	32.60	10.52	32.90	1.79	199 319 PEAK																																																																																																																																																																												
4 4074.00	39.21	54.00	-14.79	27.28	32.60	10.52	32.90	1.79	199 319 AVERAGE																																																																																																																																																																												
5 7311.00	54.31	74.00	-19.69	38.81	37.20	12.62	35.54	2.82	206 305 PEAK																																																																																																																																																																												
6 7311.00	43.93	54.00	-10.07	27.63	37.20	12.62	35.54	2.82	206 305 AVERAGE																																																																																																																																																																												

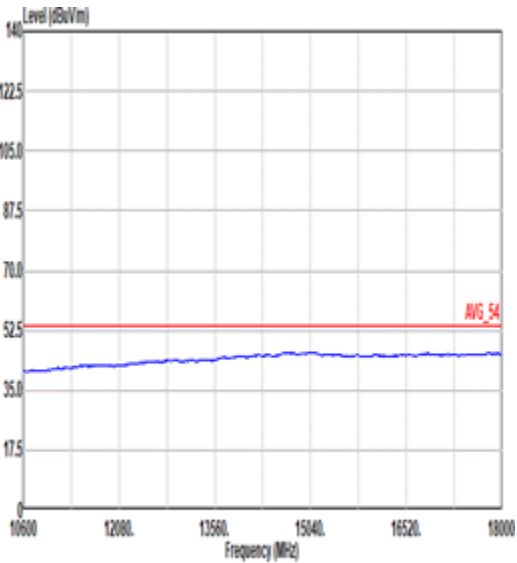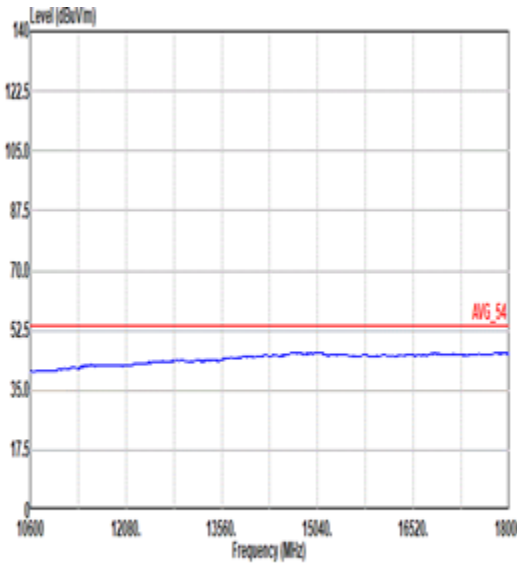

Mode	16	
	Harmonic	
	2400-2483.5_802.11n HT20_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL



Mode	17																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2463.39</td><td>58.00</td><td>74.00</td><td>-15.92</td><td>45.01</td><td>26.98</td><td>7.49</td><td>31.88</td><td>18.48</td><td>100 181 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	1 2463.39	58.00	74.00	-15.92	45.01	26.98	7.49	31.88	18.48	100 181 PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>104.98</td><td>-----</td><td>-----</td><td>92.04</td><td>26.88</td><td>7.45</td><td>31.78</td><td>18.47</td><td>100 181 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	1 2462.00	104.98	-----	-----	92.04	26.88	7.45	31.78	18.47	100 181 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm																																																																									
1 2463.39	58.00	74.00	-15.92	45.01	26.98	7.49	31.88	18.48	100 181 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm																																																																									
1 2462.00	104.98	-----	-----	92.04	26.88	7.45	31.78	18.47	100 181 PEAK																																																																									
Avg	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2483.51</td><td>45.00</td><td>54.00</td><td>-8.20</td><td>32.80</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>100 181 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	1 2483.51	45.00	54.00	-8.20	32.80	26.84	7.47	31.79	18.48	100 181 AVERAGE	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>97.83</td><td>-----</td><td>-----</td><td>84.90</td><td>26.88</td><td>7.44</td><td>31.78</td><td>18.47</td><td>100 181 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	1 2462.00	97.83	-----	-----	84.90	26.88	7.44	31.78	18.47	100 181 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm																																																																									
1 2483.51	45.00	54.00	-8.20	32.80	26.84	7.47	31.79	18.48	100 181 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm																																																																									
1 2462.00	97.83	-----	-----	84.90	26.88	7.44	31.78	18.47	100 181 AVERAGE																																																																									





Mode	17																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.78</td><td>64.15</td><td>74.00</td><td>-9.85</td><td>51.15</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>100</td><td>340</td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1	2483.78	64.15	74.00	-9.85	51.15	26.84	7.47	31.79	18.48	100	340	PEAK	Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>112.62</td><td>-----</td><td>-----</td><td>99.68</td><td>26.88</td><td>7.45</td><td>31.78</td><td>18.47</td><td>100</td><td>340</td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1	2462.00	112.62	-----	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK
	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1	2483.78	64.15	74.00	-9.85	51.15	26.84	7.47	31.79	18.48	100	340	PEAK																																																																						
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1	2462.00	112.62	-----	-----	99.68	26.88	7.45	31.78	18.47	100	340	PEAK																																																																						
Avg	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>52.41</td><td>54.00</td><td>-1.59</td><td>39.41</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>100</td><td>340</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1	2483.55	52.41	54.00	-1.59	39.41	26.84	7.47	31.79	18.48	100	340	AVERAGE	Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SdF:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pream</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>185.48</td><td>-----</td><td>-----</td><td>92.46</td><td>26.88</td><td>7.45</td><td>31.78</td><td>18.47</td><td>100</td><td>340</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1	2462.00	185.48	-----	-----	92.46	26.88	7.45	31.78	18.47	100	340	AVERAGE
	Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1	2483.55	52.41	54.00	-1.59	39.41	26.84	7.47	31.79	18.48	100	340	AVERAGE																																																																						
Limit	Read	Ant	Cable	Pream	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																																		
1	2462.00	185.48	-----	-----	92.46	26.88	7.45	31.78	18.47	100	340	AVERAGE																																																																						







Mode	17																																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																																												
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																																																																												
ANT	1+2																																																																																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																																																																																											
Peak Avg	Site : 80CH3-HY Condition: PEAK_74 3m DRH38-E_LEXORSA18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>1231.00</td><td>56.80</td><td>74.00</td><td>-17.92</td><td>47.82</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>313</td><td>294</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>47.47</td><td>54.00</td><td>-6.53</td><td>39.21</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>313</td><td>294</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>46.85</td><td>74.00</td><td>-27.15</td><td>34.81</td><td>32.75</td><td>10.50</td><td>32.90</td><td>1.77</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7306.00</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>37.11</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>306</td><td>274</td><td>PEAK</td></tr><tr><td>5</td><td>7306.00</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>27.23</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>306</td><td>274</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	1231.00	56.80	74.00	-17.92	47.82	23.60	5.50	31.81	10.17	313	294	Peak	2	1231.00	47.47	54.00	-6.53	39.21	23.60	5.50	31.81	10.17	313	294	Average	3	4924.00	46.85	74.00	-27.15	34.81	32.75	10.50	32.90	1.77	--	--	PEAK	4	7306.00	53.44	74.00	-20.56	37.11	37.13	12.81	35.60	1.99	306	274	PEAK	5	7306.00	43.56	54.00	-10.44	27.23	37.13	12.81	35.60	1.99	306	274	AVERAGE	Site : 80CH3-HY Condition: PEAK_74 3m DRH38-E_LEXORSA18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>1231.00</td><td>53.41</td><td>74.00</td><td>-20.59</td><td>45.15</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>400</td><td>267</td><td>Peak</td></tr><tr><td>2</td><td>1231.00</td><td>47.18</td><td>54.00</td><td>-6.82</td><td>38.92</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>400</td><td>267</td><td>Average</td></tr><tr><td>3</td><td>4924.00</td><td>51.82</td><td>74.00</td><td>-22.18</td><td>39.70</td><td>32.75</td><td>10.50</td><td>32.90</td><td>1.77</td><td>400</td><td>326</td><td>PEAK</td></tr><tr><td>4</td><td>4924.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>29.42</td><td>32.75</td><td>10.50</td><td>32.90</td><td>1.77</td><td>400</td><td>326</td><td>AVERAGE</td></tr><tr><td>5</td><td>7306.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>38.93</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>101</td><td>302</td><td>PEAK</td></tr><tr><td>6</td><td>7306.00</td><td>45.00</td><td>54.00</td><td>-9.00</td><td>28.67</td><td>37.13</td><td>12.81</td><td>35.60</td><td>1.99</td><td>101</td><td>302</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	1231.00	53.41	74.00	-20.59	45.15	23.60	5.50	31.81	10.17	400	267	Peak	2	1231.00	47.18	54.00	-6.82	38.92	23.60	5.50	31.81	10.17	400	267	Average	3	4924.00	51.82	74.00	-22.18	39.70	32.75	10.50	32.90	1.77	400	326	PEAK	4	4924.00	41.46	54.00	-12.54	29.42	32.75	10.50	32.90	1.77	400	326	AVERAGE	5	7306.00	55.26	74.00	-18.74	38.93	37.13	12.81	35.60	1.99	101	302	PEAK	6	7306.00	45.00	54.00	-9.00	28.67	37.13	12.81	35.60	1.99	101	302	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																				
1	1231.00	56.80	74.00	-17.92	47.82	23.60	5.50	31.81	10.17	313	294	Peak																																																																																																																																																																																																	
2	1231.00	47.47	54.00	-6.53	39.21	23.60	5.50	31.81	10.17	313	294	Average																																																																																																																																																																																																	
3	4924.00	46.85	74.00	-27.15	34.81	32.75	10.50	32.90	1.77	--	--	PEAK																																																																																																																																																																																																	
4	7306.00	53.44	74.00	-20.56	37.11	37.13	12.81	35.60	1.99	306	274	PEAK																																																																																																																																																																																																	
5	7306.00	43.56	54.00	-10.44	27.23	37.13	12.81	35.60	1.99	306	274	AVERAGE																																																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																				
1	1231.00	53.41	74.00	-20.59	45.15	23.60	5.50	31.81	10.17	400	267	Peak																																																																																																																																																																																																	
2	1231.00	47.18	54.00	-6.82	38.92	23.60	5.50	31.81	10.17	400	267	Average																																																																																																																																																																																																	
3	4924.00	51.82	74.00	-22.18	39.70	32.75	10.50	32.90	1.77	400	326	PEAK																																																																																																																																																																																																	
4	4924.00	41.46	54.00	-12.54	29.42	32.75	10.50	32.90	1.77	400	326	AVERAGE																																																																																																																																																																																																	
5	7306.00	55.26	74.00	-18.74	38.93	37.13	12.81	35.60	1.99	101	302	PEAK																																																																																																																																																																																																	
6	7306.00	45.00	54.00	-9.00	28.67	37.13	12.81	35.60	1.99	101	302	AVERAGE																																																																																																																																																																																																	

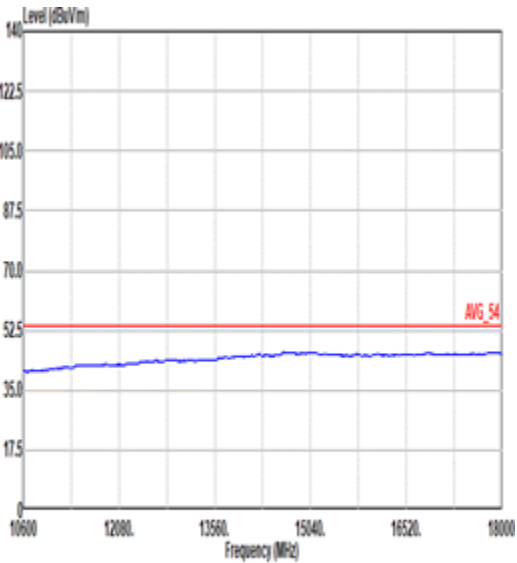
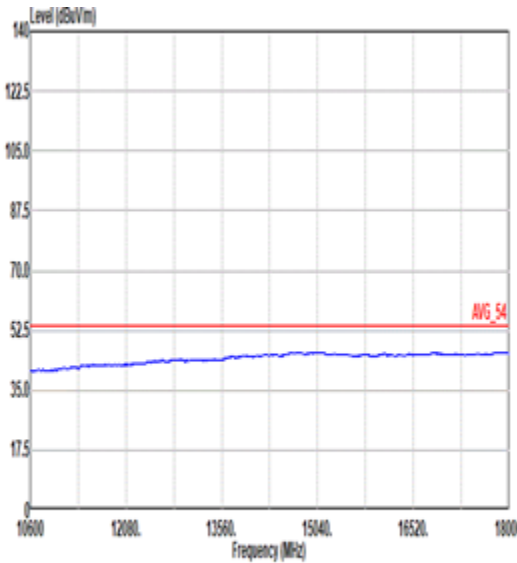


Mode	17	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH11_2462MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

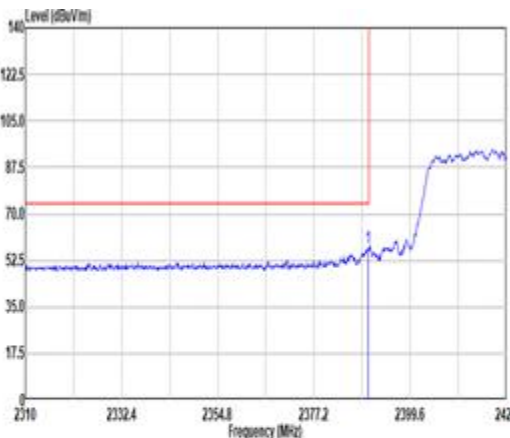
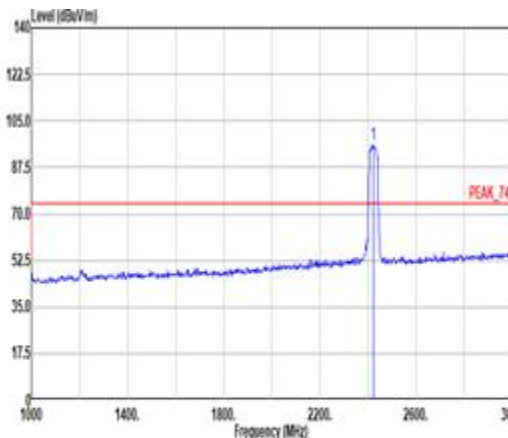
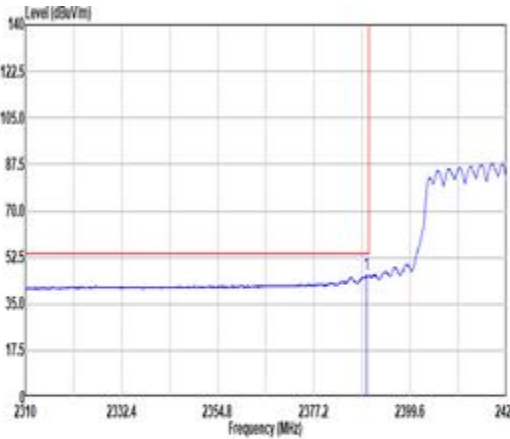
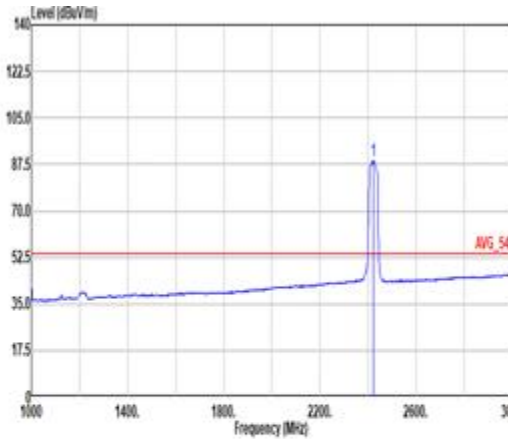


Mode	18																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.86</td><td>57.23</td><td>74.00</td><td>-16.77</td><td>44.18</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 243 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.86	57.23	74.00	-16.77	44.18	27.00	7.34	31.73	18.44	100 243 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>95.98</td><td>-----</td><td>-----</td><td>83.02</td><td>26.88</td><td>7.38</td><td>31.75</td><td>18.45</td><td>100 243 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2422.00	95.98	-----	-----	83.02	26.88	7.38	31.75	18.45	100 243 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.86	57.23	74.00	-16.77	44.18	27.00	7.34	31.73	18.44	100 243 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	95.98	-----	-----	83.02	26.88	7.38	31.75	18.45	100 243 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.52</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>32.69</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100 243 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.52	45.74	54.00	-8.26	32.69	27.00	7.34	31.73	18.44	100 243 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DR18-E_LE2CR5A18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>88.81</td><td>-----</td><td>-----</td><td>75.92</td><td>26.88</td><td>7.39</td><td>31.75</td><td>18.45</td><td>100 243 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2422.00	88.81	-----	-----	75.92	26.88	7.39	31.75	18.45	100 243 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.52	45.74	54.00	-8.26	32.69	27.00	7.34	31.73	18.44	100 243 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	88.81	-----	-----	75.92	26.88	7.39	31.75	18.45	100 243 AVERAGE																																																																									

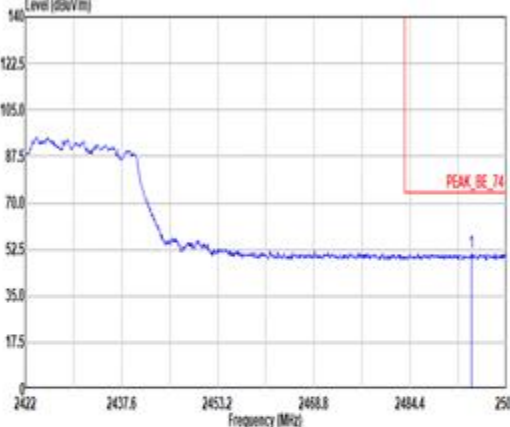
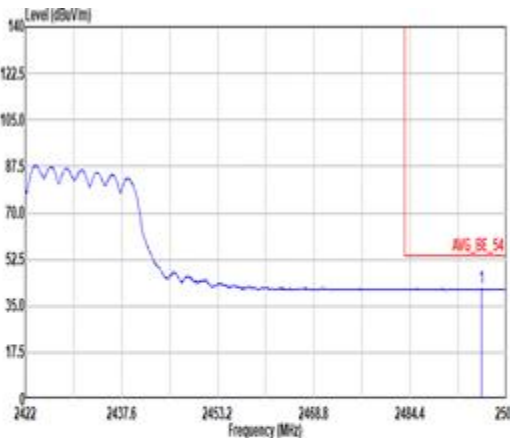


Mode	18																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH03_2422MHz																																												
ANT	1+2																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CH05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.38</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>30.10</td><td>26.00</td><td>7.40</td><td>31.00</td><td>18.40</td><td>100</td><td>243 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2484.38	51.17	74.00	-22.83	30.10	26.00	7.40	31.00	18.40	100	243 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																			
1	2484.38	51.17	74.00	-22.83	30.10	26.00	7.40	31.00	18.40	100	243 PEAK																																		
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRH18-E_LE2CH05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.94</td><td>41.57</td><td>54.00</td><td>-12.43</td><td>28.50</td><td>26.00</td><td>7.40</td><td>31.00</td><td>18.40</td><td>100</td><td>243 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2485.94	41.57	54.00	-12.43	28.50	26.00	7.40	31.00	18.40	100	243 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																			
1	2485.94	41.57	54.00	-12.43	28.50	26.00	7.40	31.00	18.40	100	243 AVERAGE																																		

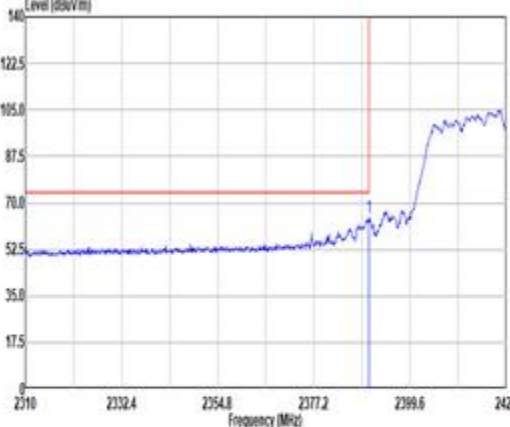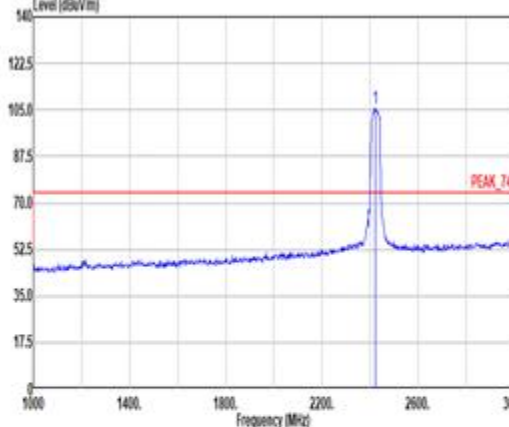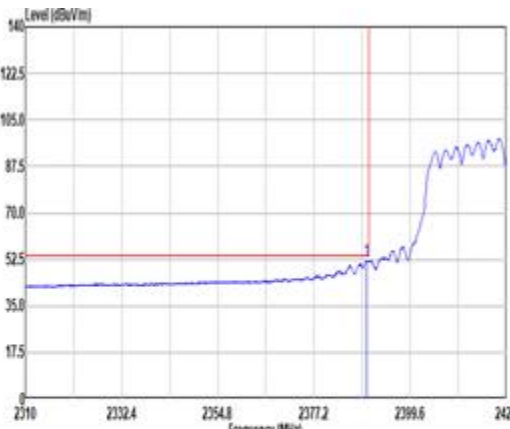
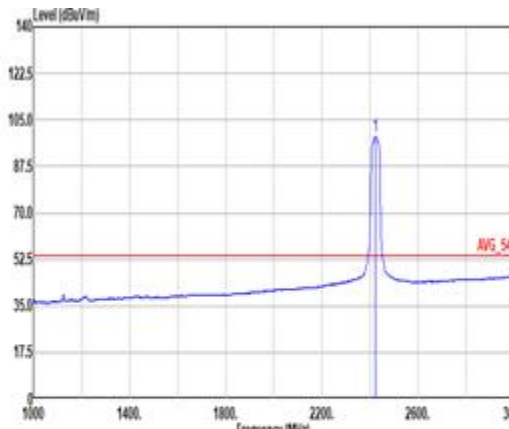


Mode	18																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.97</td><td>64.19</td><td>74.00</td><td>-9.81</td><td>51.14</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>135 337 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.97	64.19	74.00	-9.81	51.14	17.00	7.34	31.73	18.44	135 337 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>185.89</td><td>-----</td><td>92.97</td><td>26.84</td><td>7.38</td><td>31.75</td><td>18.45</td><td>135</td><td>337 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2422.00	185.89	-----	92.97	26.84	7.38	31.75	18.45	135	337 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.97	64.19	74.00	-9.81	51.14	17.00	7.34	31.73	18.44	135 337 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	185.89	-----	92.97	26.84	7.38	31.75	18.45	135	337 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.41</td><td>52.04</td><td>54.00</td><td>-1.96</td><td>38.99</td><td>17.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>135 337 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.41	52.04	54.00	-1.96	38.99	17.00	7.34	31.73	18.44	135 337 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>98.71</td><td>-----</td><td>85.82</td><td>26.80</td><td>7.39</td><td>31.75</td><td>18.45</td><td>135</td><td>337 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2422.00	98.71	-----	85.82	26.80	7.39	31.75	18.45	135	337 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.41	52.04	54.00	-1.96	38.99	17.00	7.34	31.73	18.44	135 337 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	98.71	-----	85.82	26.80	7.39	31.75	18.45	135	337 AVERAGE																																																																									



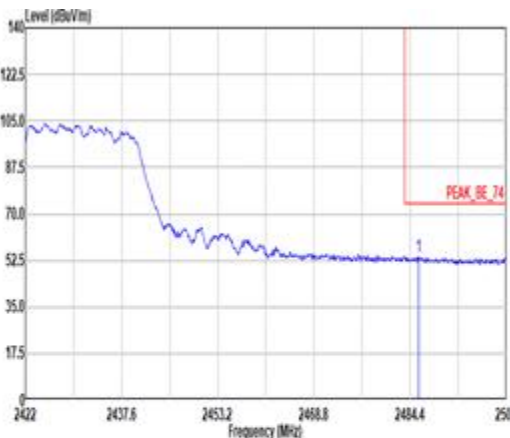
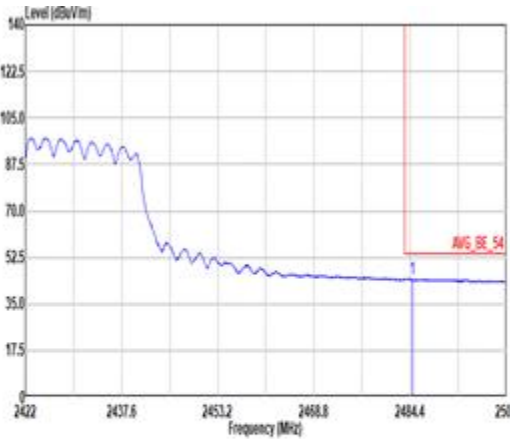


Mode	18																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH03_2422MHz																																													
ANT	1+2																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 89CH3-HY Condition: PEAK_BE_74 3e DRH18-E_LE2CH5A18EN_230712 VERTICAL : RBW:3000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.73</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>40.63</td><td>26.06</td><td>7.48</td><td>31.79</td><td>18.48</td><td>135</td><td>337</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.73	53.66	74.00	-20.34	40.63	26.06	7.48	31.79	18.48	135	337	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.73	53.66	74.00	-20.34	40.63	26.06	7.48	31.79	18.48	135	337	PEAK																																		
Avg	 Site : 89CH3-HY Condition: AVG_BE_54 3e DRH18-E_LE2CH5A18EN_230712 VERTICAL : RBW:3000.000kHz VBW:1.600kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.71</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>31.36</td><td>26.05</td><td>7.47</td><td>31.79</td><td>18.48</td><td>135</td><td>337</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.71	44.37	54.00	-9.63	31.36	26.05	7.47	31.79	18.48	135	337	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.71	44.37	54.00	-9.63	31.36	26.05	7.47	31.79	18.48	135	337	AVERAGE																																		

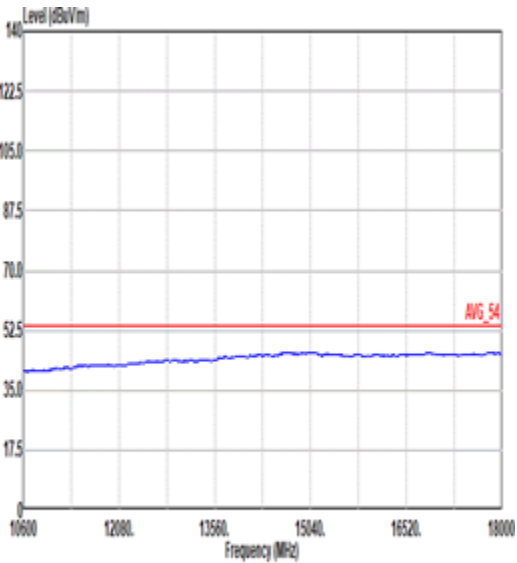
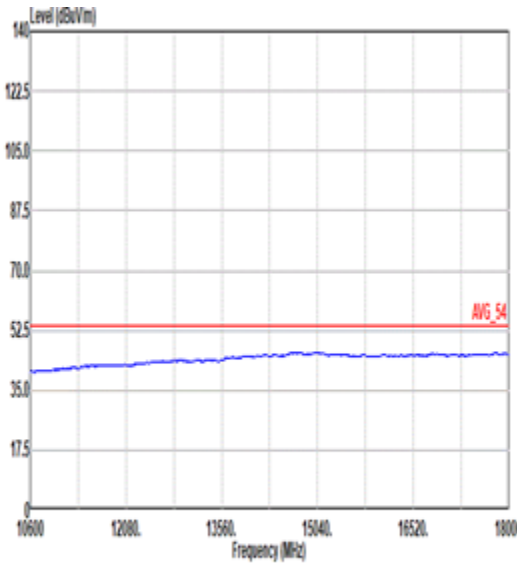


Mode	18	
	Harmonic	
	2400-2483.5_802.11n HT40_CH03_2422MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

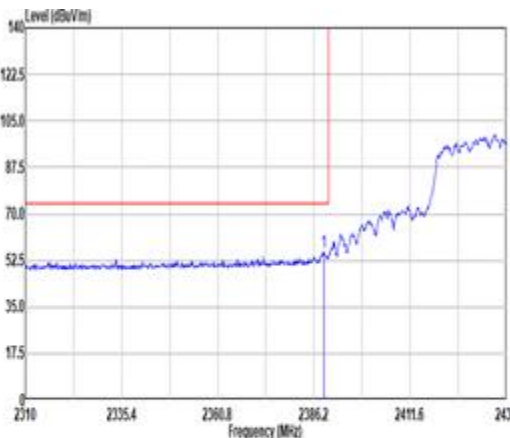
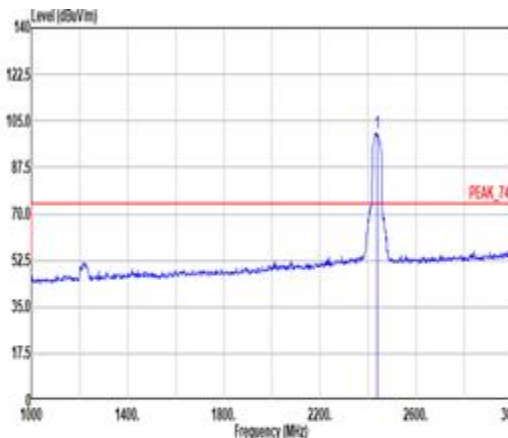
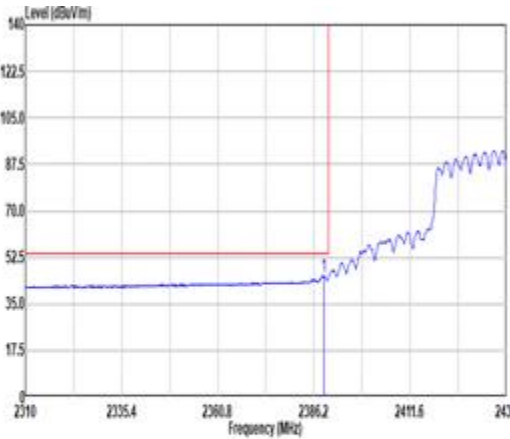
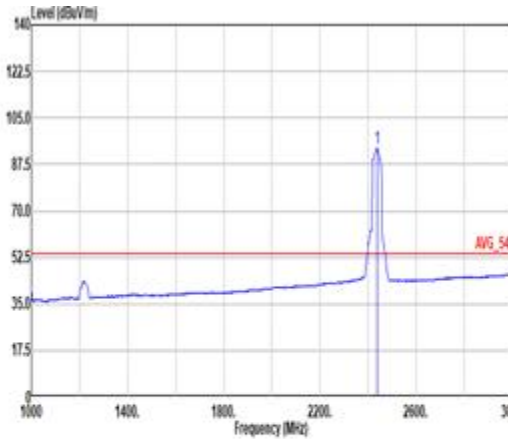


Mode	19																																																																																							
	Band Edge - L																																																																																							
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																							
ANT	1+2																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.74</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>42.64</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>240</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	55.69	74.00	-18.31	42.64	27.00	7.34	31.73	18.44	100	240	PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>100.48</td><td>-----</td><td>-----</td><td>87.59</td><td>26.00</td><td>7.40</td><td>31.76</td><td>18.45</td><td>100</td><td>240</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.48	-----	-----	87.59	26.00	7.40	31.76	18.45	100	240	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2388.74	55.69	74.00	-18.31	42.64	27.00	7.34	31.73	18.44	100	240	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	100.48	-----	-----	87.59	26.00	7.40	31.76	18.45	100	240	PEAK																																																																												
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.74</td><td>45.60</td><td>54.00</td><td>-8.40</td><td>32.55</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>100</td><td>240</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	45.60	54.00	-8.40	32.55	27.00	7.34	31.73	18.44	100	240	AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>93.69</td><td>-----</td><td>-----</td><td>80.74</td><td>26.04</td><td>7.41</td><td>31.76</td><td>18.46</td><td>100</td><td>240</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	93.69	-----	-----	80.74	26.04	7.41	31.76	18.46	100	240	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2388.74	45.60	54.00	-8.40	32.55	27.00	7.34	31.73	18.44	100	240	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2437.00	93.69	-----	-----	80.74	26.04	7.41	31.76	18.46	100	240	AVERAGE																																																																												

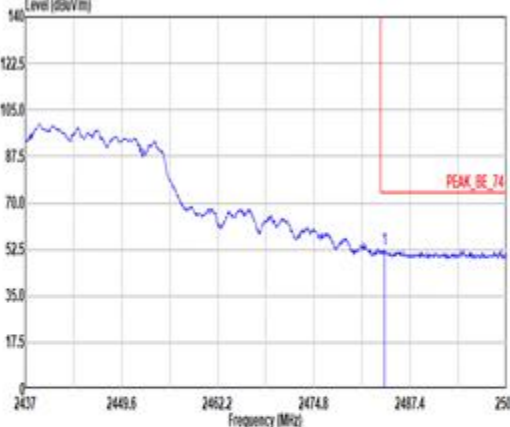
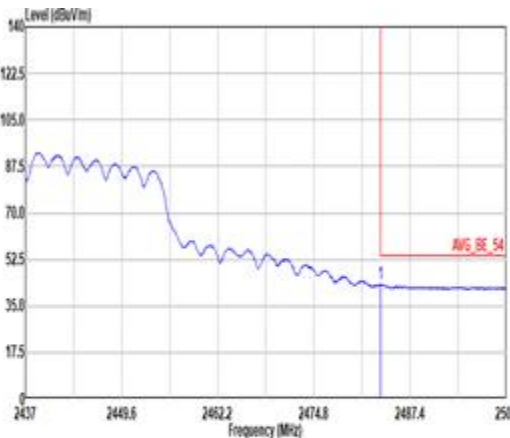


Mode	19																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																		
ANT	1+2																																																		
Pol.	Horizontal						Fundamental																																												
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2484.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>39.30</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.40 100 240 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	dB	cm deg	1	2484.00	52.30	74.00	-21.70	39.30	26.84	7.47	31.79	18.40 100 240 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																										
MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	dB	cm deg																																										
1	2484.00	52.30	74.00	-21.70	39.30	26.84	7.47	31.79	18.40 100 240 PEAK																																										
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SUT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>43.00</td><td>54.00</td><td>-10.92</td><td>30.00</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.40 100 240 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	dB	cm deg	1	2483.56	43.00	54.00	-10.92	30.00	26.84	7.47	31.79	18.40 100 240 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																										
MHz	dBV/m	dBV/m	dB	dBV/m	dB/m	dB	dB	dB	cm deg																																										
1	2483.56	43.00	54.00	-10.92	30.00	26.84	7.47	31.79	18.40 100 240 AVERAGE																																										

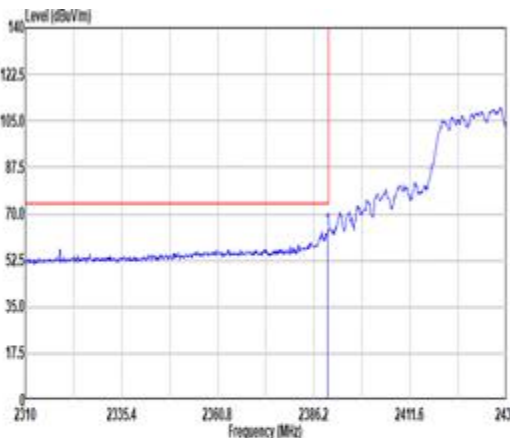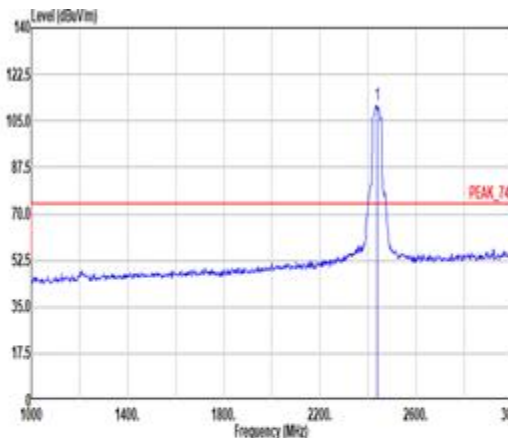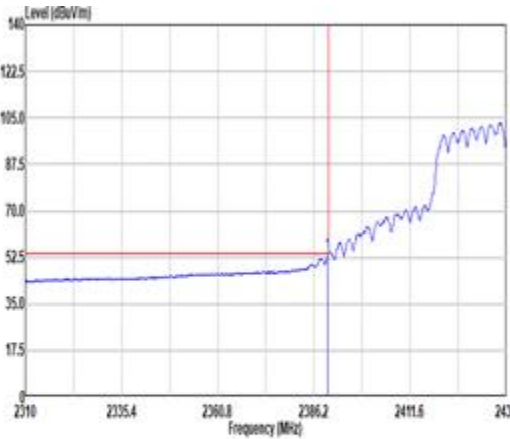
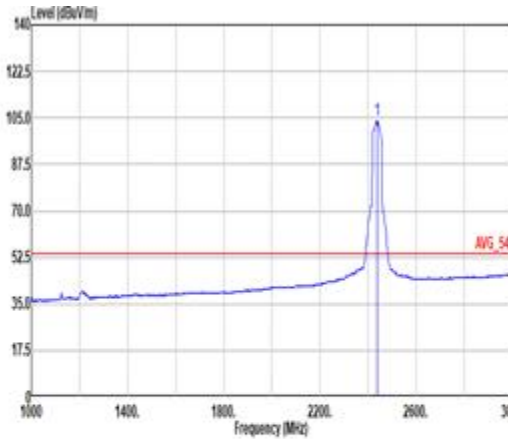


Mode	19																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.00</td><td>63.67</td><td>74.00</td><td>-10.33</td><td>50.62</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>219 341 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.00	63.67	74.00	-10.33	50.62	27.00	7.34	31.73	18.44	219 341 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>111.05</td><td>-----</td><td>-----</td><td>90.18</td><td>26.84</td><td>7.41</td><td>31.76</td><td>18.46</td><td>219 341 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	111.05	-----	-----	90.18	26.84	7.41	31.76	18.46	219 341 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.00	63.67	74.00	-10.33	50.62	27.00	7.34	31.73	18.44	219 341 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	111.05	-----	-----	90.18	26.84	7.41	31.76	18.46	219 341 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.00</td><td>53.32</td><td>54.00</td><td>-0.68</td><td>40.27</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>219 341 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.00	53.32	54.00	-0.68	40.27	27.00	7.34	31.73	18.44	219 341 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>103.09</td><td>-----</td><td>-----</td><td>90.92</td><td>26.06</td><td>7.41</td><td>31.76</td><td>18.46</td><td>219 341 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2437.00	103.09	-----	-----	90.92	26.06	7.41	31.76	18.46	219 341 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.00	53.32	54.00	-0.68	40.27	27.00	7.34	31.73	18.44	219 341 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2437.00	103.09	-----	-----	90.92	26.06	7.41	31.76	18.46	219 341 AVERAGE																																																																									



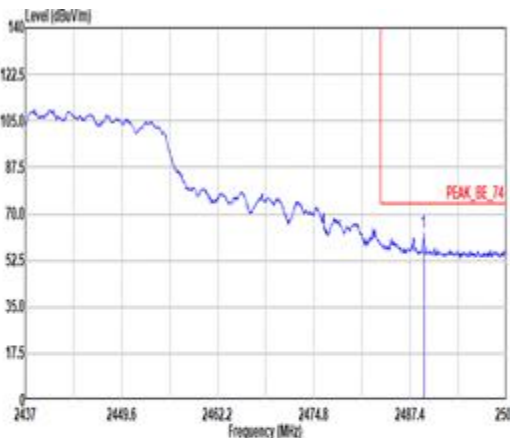
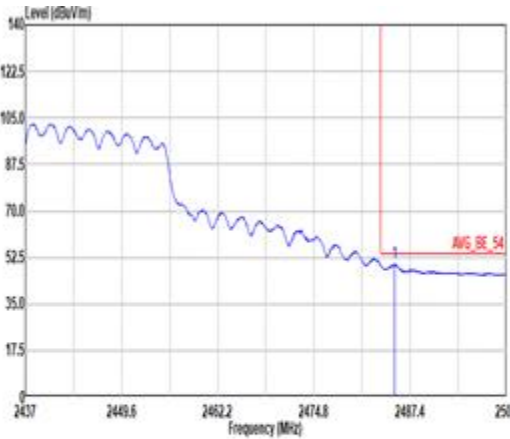


Mode	19																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH06_2437MHz																																												
ANT	1+2																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 89CH3-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.16</td><td>63.12</td><td>74.00</td><td>-10.88</td><td>50.06</td><td>26.09</td><td>7.48</td><td>31.79</td><td>18.48</td><td>219</td><td>341 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.16	63.12	74.00	-10.88	50.06	26.09	7.48	31.79	18.48	219	341 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2483.16	63.12	74.00	-10.88	50.06	26.09	7.48	31.79	18.48	219	341 PEAK																																		
Avg	 Site : 89CH3-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.30</td><td>49.97</td><td>54.00</td><td>-4.03</td><td>36.95</td><td>26.05</td><td>7.48</td><td>31.79</td><td>18.48</td><td>219</td><td>341 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.30	49.97	54.00	-4.03	36.95	26.05	7.48	31.79	18.48	219	341 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2483.30	49.97	54.00	-4.03	36.95	26.05	7.48	31.79	18.48	219	341 AVERAGE																																		

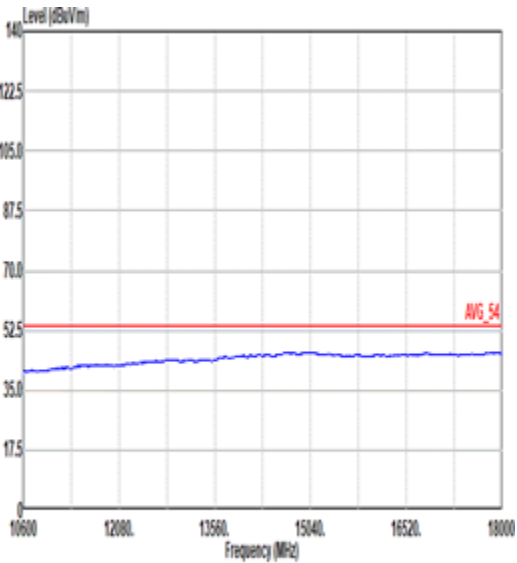
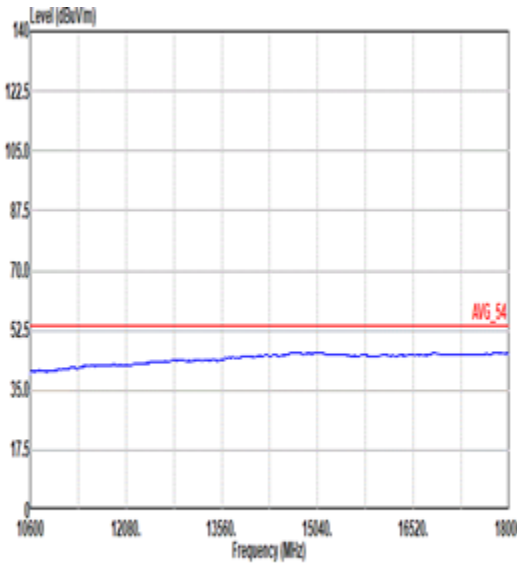


Mode	19	
	Harmonic	
	2400-2483.5_802.11n HT40_CH06_2437MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL

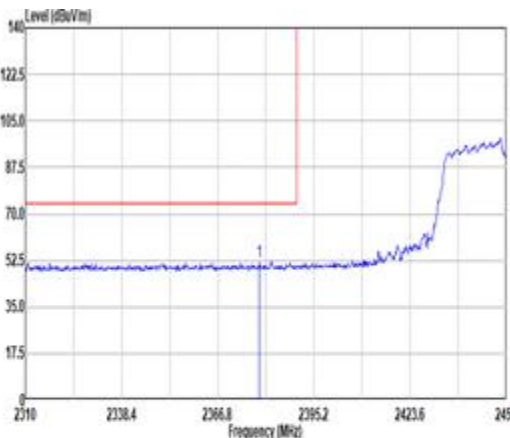
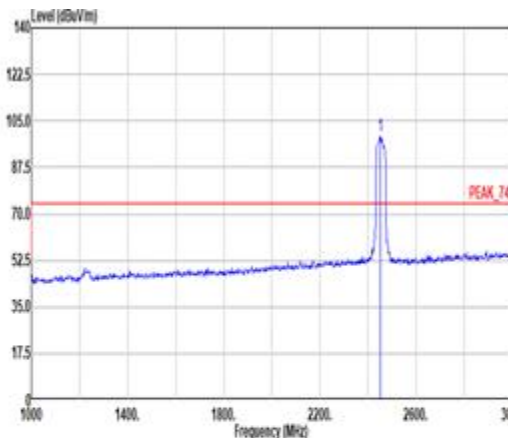
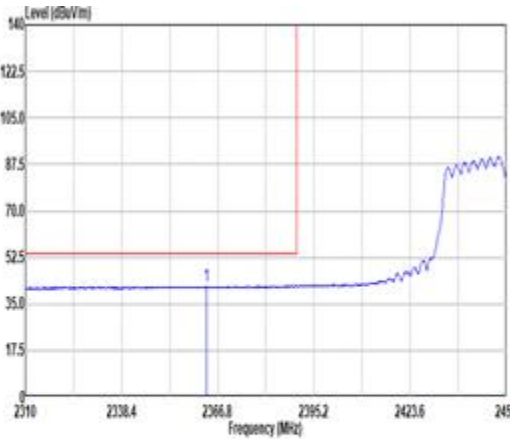
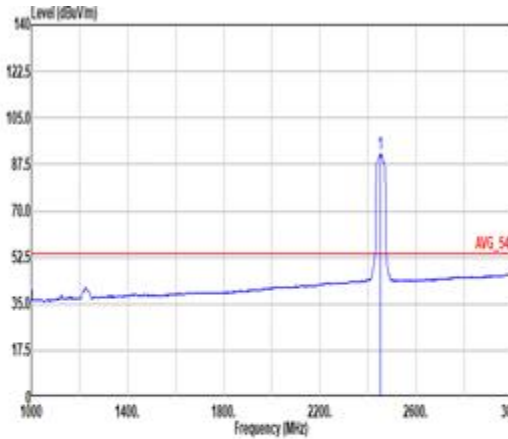


Mode	20																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_BE_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2379.01</td><td>51.97</td><td>74.00</td><td>-22.03</td><td>36.93</td><td>27.01</td><td>7.32</td><td>31.72</td><td>18.43</td><td>237 169 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2379.01	51.97	74.00	-22.03	36.93	27.01	7.32	31.72	18.43	237 169 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>99.18</td><td>-----</td><td>86.16</td><td>26.90</td><td>7.43</td><td>31.77</td><td>18.46</td><td>237 169</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2452.00	99.18	-----	86.16	26.90	7.43	31.77	18.46	237 169	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2379.01	51.97	74.00	-22.03	36.93	27.01	7.32	31.72	18.43	237 169 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	99.18	-----	86.16	26.90	7.43	31.77	18.46	237 169	PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_BE_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2363.53</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>28.79</td><td>27.10</td><td>7.29</td><td>31.72</td><td>18.43</td><td>237 169 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2363.53	41.89	54.00	-12.11	28.79	27.10	7.29	31.72	18.43	237 169 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRM18-E_LE2CPSA18EN_238712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>91.46</td><td>-----</td><td>78.44</td><td>26.90</td><td>7.43</td><td>31.77</td><td>18.46</td><td>237 169</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2452.00	91.46	-----	78.44	26.90	7.43	31.77	18.46	237 169	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2363.53	41.89	54.00	-12.11	28.79	27.10	7.29	31.72	18.43	237 169 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor				Remark																																																																									
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	91.46	-----	78.44	26.90	7.43	31.77	18.46	237 169	AVERAGE																																																																									

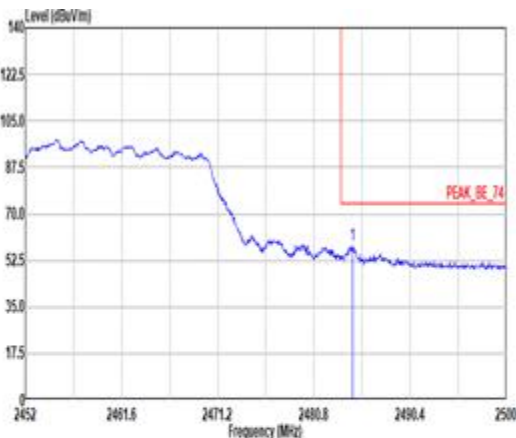
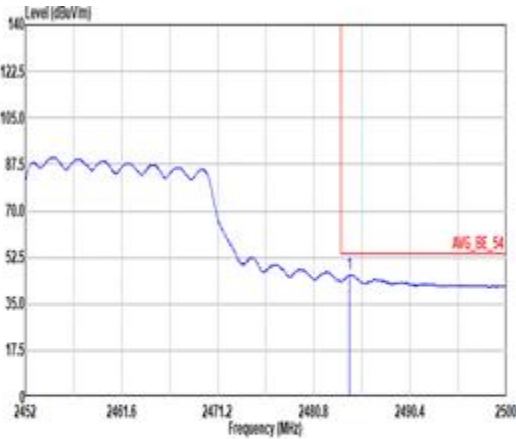


Mode	20																																											
	Band Edge - R																																											
	2400-2483.5_802.11n HT40_CH09_2452MHz																																											
ANT	1+2																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 80CH3-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.64</td><td>57.97</td><td>74.00</td><td>-16.03</td><td>44.96</td><td>26.05</td><td>7.47</td><td>31.79</td><td>18.48</td><td>237</td><td>169 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg	1	2484.64	57.97	74.00	-16.03	44.96	26.05	7.47	31.79	18.48	237	169 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																			
	MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg																																			
1	2484.64	57.97	74.00	-16.03	44.96	26.05	7.47	31.79	18.48	237	169 PEAK																																	
Avg	 Site : 80CH3-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SUT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.35</td><td>46.01</td><td>54.00</td><td>-7.99</td><td>33.01</td><td>26.04</td><td>7.47</td><td>31.79</td><td>18.48</td><td>237</td><td>169 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg	1	2484.35	46.01	54.00	-7.99	33.01	26.04	7.47	31.79	18.48	237	169 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																			
	MHz	dBV/m	dBV/m	dB	dB/m	dB	dB	cm	deg																																			
1	2484.35	46.01	54.00	-7.99	33.01	26.04	7.47	31.79	18.48	237	169 AVERAGE																																	

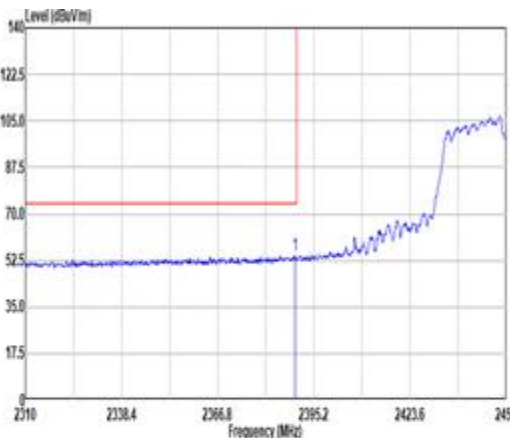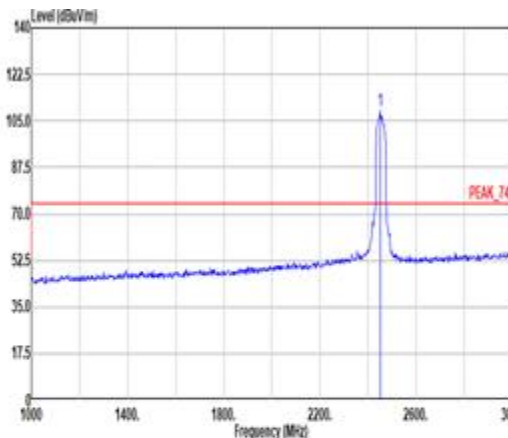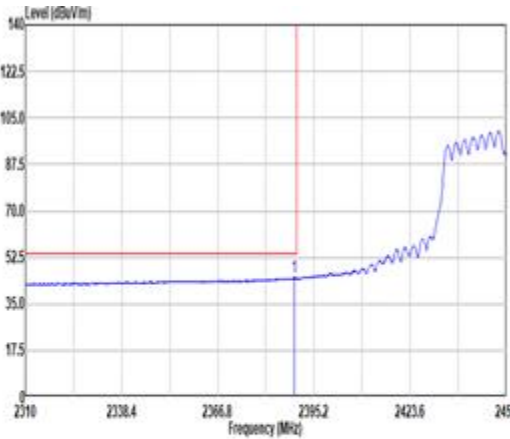
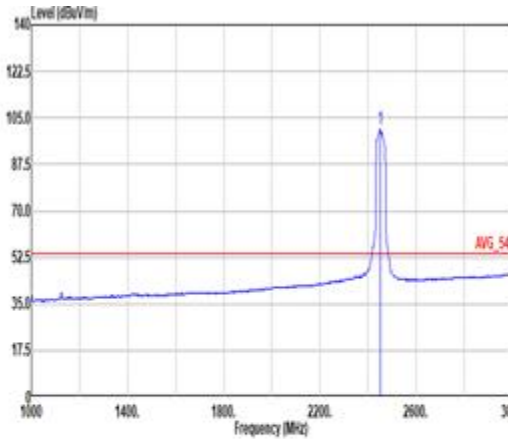


Mode	20																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																	
ANT	1+2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.66</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>41.12</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>185 95 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.66	54.17	74.00	-19.83	41.12	27.00	7.34	31.73	18.44	185 95 PEAK	 Site : 83CH3-HY Condition: PEAK_74 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>109.81</td><td>-----</td><td>-----</td><td>95.99</td><td>26.90</td><td>7.43</td><td>31.77</td><td>18.46</td><td>185 95 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2452.00	109.81	-----	-----	95.99	26.90	7.43	31.77	18.46	185 95 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.66	54.17	74.00	-19.83	41.12	27.00	7.34	31.73	18.44	185 95 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	109.81	-----	-----	95.99	26.90	7.43	31.77	18.46	185 95 PEAK																																																																									
Avg	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.30</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>31.80</td><td>27.00</td><td>7.34</td><td>31.73</td><td>18.44</td><td>185 95 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2389.30	44.93	54.00	-9.07	31.80	27.00	7.34	31.73	18.44	185 95 AVERAGE	 Site : 83CH3-HY Condition: AVG_54 3m DRH18-E_LE2CR5A18EN_238712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SdF:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2452.00</td><td>100.87</td><td>-----</td><td>-----</td><td>87.85</td><td>26.90</td><td>7.43</td><td>31.77</td><td>18.46</td><td>185 95 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg	1 2452.00	100.87	-----	-----	87.85	26.90	7.43	31.77	18.46	185 95 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2389.30	44.93	54.00	-9.07	31.80	27.00	7.34	31.73	18.44	185 95 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	100.87	-----	-----	87.85	26.90	7.43	31.77	18.46	185 95 AVERAGE																																																																									

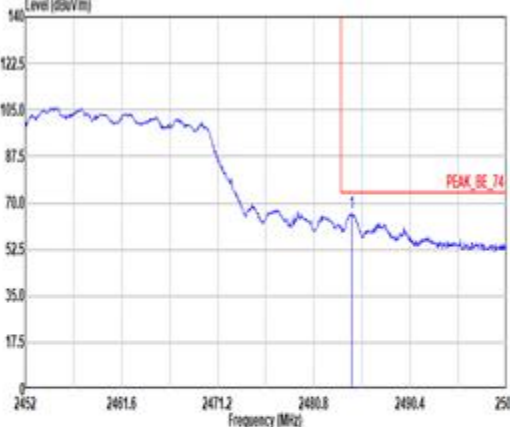
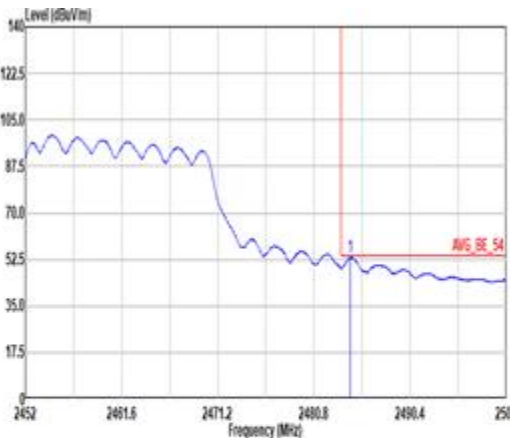


Mode	20																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																						
ANT	1+2																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 80CH03-HY Condition: PEAK_BE_74 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.54</td><td>65.82</td><td>74.00</td><td>-8.18</td><td>52.81</td><td>26.85</td><td>7.47</td><td>31.79</td><td>18.48</td><td>185</td><td>95</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1 2484.54	65.82	74.00	-8.18	52.81	26.85	7.47	31.79	18.48	185	95	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																													
1 2484.54	65.82	74.00	-8.18	52.81	26.85	7.47	31.79	18.48	185	95	PEAK																																												
Avg	 Site : 80CH03-HY Condition: AVG_BE_54 3m DRX18-E_LE2CH5A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBV/m</th><th>dBV/m</th><th>dB</th><th>dBV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.48</td><td>53.38</td><td>54.00</td><td>-0.70</td><td>48.38</td><td>26.84</td><td>7.47</td><td>31.79</td><td>18.48</td><td>185</td><td>95</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg		1 2484.48	53.38	54.00	-0.70	48.38	26.84	7.47	31.79	18.48	185	95	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBV/m	dBV/m	dB	dBV	dB/m	dB	dB	dB	cm	deg																																													
1 2484.48	53.38	54.00	-0.70	48.38	26.84	7.47	31.79	18.48	185	95	AVERAGE																																												

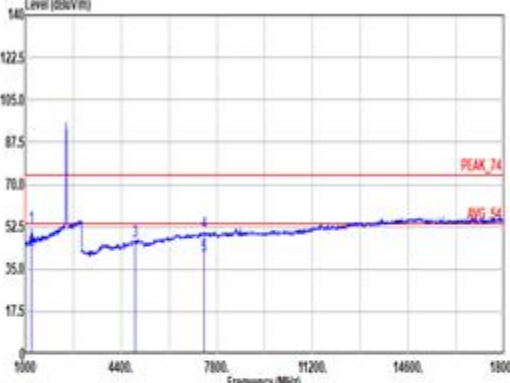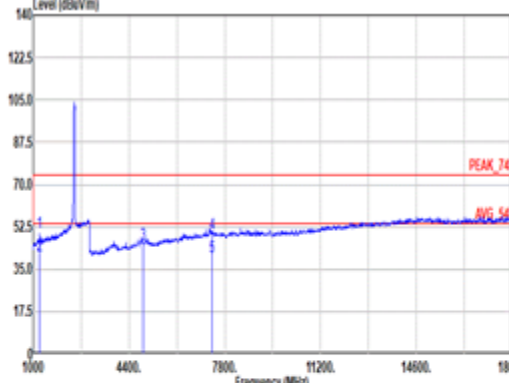

Mode	20																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																			
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																																																																			
ANT	1+2																																																																																																																																																																																			
Pol.	Horizontal					Vertical																																																																																																																																																																														
Peak Avg																																																																																																																																																																																				
	Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 HORIZONTAL					Site : 83CH3-HY Condition: PEAK_74 3m DRH38-E_LE2C05A18EN_230712 VERTICAL																																																																																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1226.00</td><td>52.12</td><td>74.00</td><td>-21.88</td><td>43.86</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>106 209 Peak</td></tr><tr><td>2 1226.00</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>34.53</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>106 209 Average</td></tr><tr><td>3 4984.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>34.54</td><td>32.71</td><td>10.51</td><td>32.90</td><td>1.78</td><td>-- -- PEAK</td></tr><tr><td>4 7356.00</td><td>50.45</td><td>74.00</td><td>-23.55</td><td>34.11</td><td>37.19</td><td>12.73</td><td>35.50</td><td>2.00</td><td>-- -- PEAK</td></tr><tr><td>5 7356.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>24.18</td><td>37.19</td><td>12.73</td><td>35.50</td><td>2.00</td><td>-- -- AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					Hz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1226.00	52.12	74.00	-21.88	43.86	23.60	5.50	31.81	10.17	106 209 Peak	2 1226.00	42.79	54.00	-11.21	34.53	23.60	5.50	31.81	10.17	106 209 Average	3 4984.00	46.56	74.00	-27.44	34.54	32.71	10.51	32.90	1.78	-- -- PEAK	4 7356.00	50.45	74.00	-23.55	34.11	37.19	12.73	35.50	2.00	-- -- PEAK	5 7356.00	40.52	54.00	-13.48	24.18	37.19	12.73	35.50	2.00	-- -- AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 1226.00</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>42.81</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>197 314 Peak</td></tr><tr><td>2 1226.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>32.43</td><td>23.60</td><td>5.50</td><td>31.81</td><td>10.17</td><td>197 314 Average</td></tr><tr><td>3 4984.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>33.65</td><td>32.71</td><td>10.51</td><td>32.90</td><td>1.78</td><td>-- -- PEAK</td></tr><tr><td>4 7356.00</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>33.40</td><td>37.19</td><td>12.73</td><td>35.50</td><td>2.00</td><td>-- -- PEAK</td></tr><tr><td>5 7356.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>24.82</td><td>37.19</td><td>12.73</td><td>35.50</td><td>2.00</td><td>-- -- AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					Hz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 1226.00	50.27	74.00	-23.73	42.81	23.60	5.50	31.81	10.17	197 314 Peak	2 1226.00	40.69	54.00	-13.31	32.43	23.60	5.50	31.81	10.17	197 314 Average	3 4984.00	45.67	74.00	-28.33	33.65	32.71	10.51	32.90	1.78	-- -- PEAK	4 7356.00	49.83	74.00	-24.17	33.40	37.19	12.73	35.50	2.00	-- -- PEAK	5 7356.00	40.36	54.00	-13.64	24.82	37.19	12.73	35.50	2.00	-- -- AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																															
Hz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																											
1 1226.00	52.12	74.00	-21.88	43.86	23.60	5.50	31.81	10.17	106 209 Peak																																																																																																																																																																											
2 1226.00	42.79	54.00	-11.21	34.53	23.60	5.50	31.81	10.17	106 209 Average																																																																																																																																																																											
3 4984.00	46.56	74.00	-27.44	34.54	32.71	10.51	32.90	1.78	-- -- PEAK																																																																																																																																																																											
4 7356.00	50.45	74.00	-23.55	34.11	37.19	12.73	35.50	2.00	-- -- PEAK																																																																																																																																																																											
5 7356.00	40.52	54.00	-13.48	24.18	37.19	12.73	35.50	2.00	-- -- AVERAGE																																																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																															
Hz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																											
1 1226.00	50.27	74.00	-23.73	42.81	23.60	5.50	31.81	10.17	197 314 Peak																																																																																																																																																																											
2 1226.00	40.69	54.00	-13.31	32.43	23.60	5.50	31.81	10.17	197 314 Average																																																																																																																																																																											
3 4984.00	45.67	74.00	-28.33	33.65	32.71	10.51	32.90	1.78	-- -- PEAK																																																																																																																																																																											
4 7356.00	49.83	74.00	-24.17	33.40	37.19	12.73	35.50	2.00	-- -- PEAK																																																																																																																																																																											
5 7356.00	40.36	54.00	-13.64	24.82	37.19	12.73	35.50	2.00	-- -- AVERAGE																																																																																																																																																																											

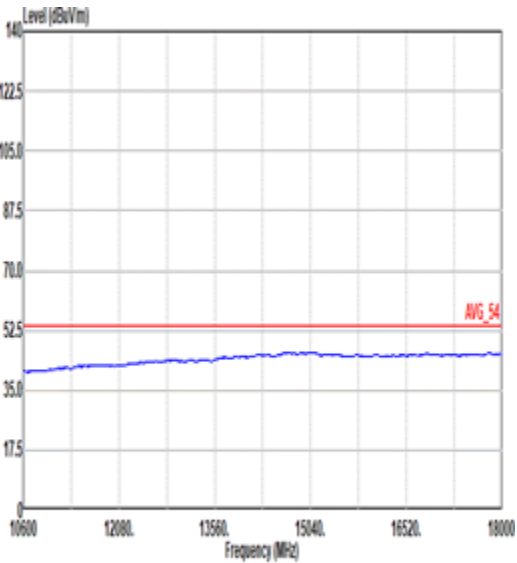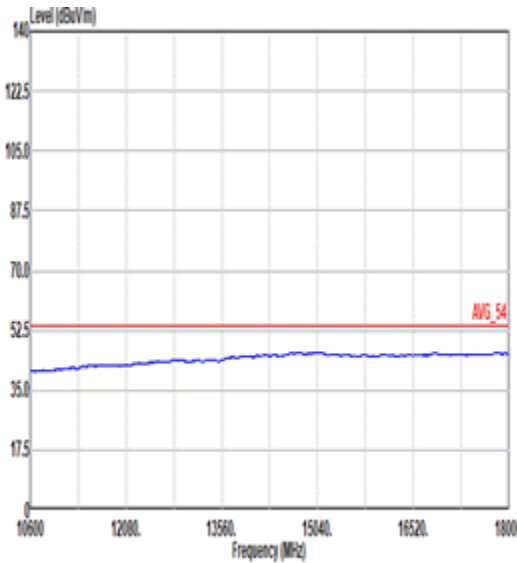

Mode	20	
	Harmonic	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	1+2	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 HORIZONTAL	 Site : 88CH23-HY Condition: AVG_54 3m DRY10-E_LE20HSA10EN_230712 VERTICAL