

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1135
FCC ID: JOYEB1135

In accordance with FCC Part 27 Subpart C

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-22085-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2022.04.20

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 27 Subpart C.



Certificate #3686.03

DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.
Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
www.tuvsud.com/ja-jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period	3
2	Equipment Under Test	4
2.1	EUT information	4
2.2	Modification to the EUT	6
2.3	Variation of family model(s)	6
2.4	Description of test mode	6
3	Configuration of Equipment	7
3.1	Equipment used	7
3.2	System configuration	7
4	Test Result	8
4.1	Effective Radiated Power	8
4.2	Peak to Average Ratio	13
4.3	Occupied Bandwidth	21
4.4	Band Edge Spurious and Harmonic at Antenna Terminals	29
4.5	Radiated Emissions and Harmonic Emissions	73
4.6	Frequency Stability	84
5	Measurement Uncertainty	86
6	Laboratory Information	87
	Appendix A. Test Equipment	88

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-22085-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 27 Subpart C

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA 603-E-2016
ANSI C63.26-2015

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
27.50	Effective Radiated Power	Radiated	PASS	-
27.50	Peak to Average Ratio	Conducted	PASS	-
2.1049	Occupied Bandwidth	Conducted	PASS	-
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
27.54 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

21-February-2022 - 9-April-2022

2 Equipment Under Test

All information in this chapter was provided by the applicant.

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1135
Serial number	RF7, RF8, RF9
Trade name	Kyocera
Number of sample(s)	3
EUT condition	Pre-Production
Power rating	Battery: DC 3.8 V
Size	(W) 112.9 mm × (D) 51.3 mm × (H) 18.0 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1
Software version	nightly_20220208
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link LTE Band XII: 699-716 MHz LTE Band XVII: 704-716 MHz Down Link LTE Band XII: 729-746 MHz LTE Band XVII: 734-746 MHz
Modulation type	QPSK, 16QAM, 64QAM
Emission designator	LTE Band XII: BW 1.4M QPSK: 1M10G7D, 16QAM: 1M10W7D, 64QAM: 1M10W7D BW 3M QPSK: 2M70G7D, 16QAM: 2M69W7D, 64QAM: 2M71W7D BW 5M QPSK: 4M57G7D, 16QAM: 4M53W7D, 64QAM: 4M52W7D BW 10M QPSK: 9M03G7D, 16QAM: 9M01W7D, 64QAM: 9M00W7D LTE Band XVII: BW 5M QPSK: 4M54G7D, 16QAM: 4M53W7D, 64QAM: 4M53W7D BW 10M QPSK: 9M03G7D, 16QAM: 9M03W7D, 64QAM: 9M00W7D



Japan

Effective Radiated Power (E.R.P.)	LTE Band XII: 0.4074 W (26.1 dBm) LTE Band XVII: 0.4169 W (26.2 dBm)
Antenna type	Internal antenna
Antenna gain	LTE Band XII: -0.58 dBi LTE Band XVII: -0.58 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1135, Serial Number: RF7, RF8, RF9			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

EB1135 has model with camera and without camera.

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
LTE Band XII	QPSK, 16QAM, 64QAM	1.4	23017, 23095, 23173	699.7, 707.5, 715.3
		3	23025, 23095, 23165	700.5, 707.5, 714.5
		5	23035, 23095, 23155	701.5, 707.5, 713.5
		10	23060, 23095, 23130	704.0, 707.5, 711.0
LTE Band XVII	QPSK, 16QAM, 64QAM	5	23755, 23790, 23825	701.5, 707.5, 713.5
		10	23780, 23790, 23800	709.0, 710.0, 711.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis, Open, Without camera (LTE Band XII), X-axis, Open, With camera (LTE Band XVII) and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1135	RF7, RF8, RF9	JOYEB1135	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Effective Radiated Power

4.1.1 Measurement procedure

[FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>


The substitution antenna is replaced by the transmitter antenna (EUT).
The frequency of the signal generator is adjusted to the measurement frequency.
Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges.

If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

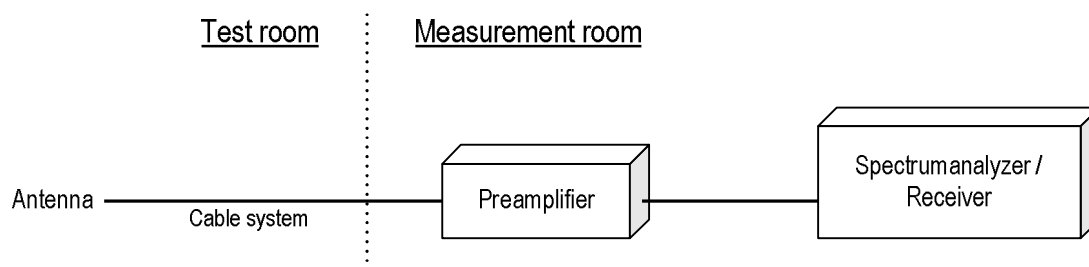

4.1.2 Calculation method

Result (ERP) = Ant. Input - Cable loss + Antenna Gain
 Margin = Limit – Result (ERP)

Example:

Limit @ 710MHz : 34.7 dBm

Ant. Input = 25.5 dBm Cable loss = 0.7 dB Ant. Gain = -10.1 dBd

Result = 25.5 - 0.7 + (-10.1) = 14.7 dBm

Margin = 34.7 – 14.7 = 20.0 dB

4.1.3 Limit

3 W (34.7 dBm)

4.1.4 Test data

Date	: 21-February-2022		
Temperature	: 21.9 [°C]		
Humidity	: 18.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 21~22-February-2022		
Temperature	: 23.1 [°C]		
Humidity	: 19.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 22-February-2022		
Temperature	: 22.0 [°C]		
Humidity	: 18.8 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 28-February-2022		
Temperature	: 20.9 [°C]		
Humidity	: 21.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

**[LTE Band XII - X-axis, Open, Without camera]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	699.7	-29.5	32.3	0.7	-5.9	25.8	34.7	8.9
H	707.5	-29.1	32.7	0.7	-6.0	26.1	34.7	8.6
H	715.3	-29.6	32.2	0.7	-6.0	25.5	34.7	9.2

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	699.7	-30.7	31.1	0.7	-5.9	24.6	34.7	10.1
H	707.5	-30.2	31.6	0.7	-6.0	25.0	34.7	9.7
H	715.3	-30.5	31.3	0.7	-6.0	24.6	34.7	10.1

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	699.7	-31.2	30.7	0.7	-5.9	24.2	34.7	10.5
H	707.5	-31.2	30.6	0.7	-6.0	24.0	34.7	10.7
H	715.3	-31.0	30.8	0.7	-6.0	24.1	34.7	10.6

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	700.5	-29.5	32.3	0.7	-5.9	25.7	34.7	9.0
H	707.5	-29.2	32.6	0.7	-6.0	26.0	34.7	8.7
H	714.5	-29.4	32.4	0.7	-6.0	25.7	34.7	9.0

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	700.5	-30.5	31.3	0.7	-5.9	24.7	34.7	10.0
H	707.5	-30.2	31.6	0.7	-6.0	25.0	34.7	9.7
H	714.5	-30.4	31.4	0.7	-6.0	24.7	34.7	10.0

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	700.5	-31.4	30.4	0.7	-5.9	23.8	34.7	10.9
H	707.5	-31.1	30.7	0.7	-6.0	24.1	34.7	10.6
H	714.5	-31.6	30.2	0.7	-6.0	23.5	34.7	11.2

[LTE Band XII - X-axis, Open, Without camera]**QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	701.5	-29.5	32.3	0.7	-5.9	25.7	34.7	9.0
H	707.5	-29.1	32.7	0.7	-6.0	26.1	34.7	8.6
H	713.5	-29.5	32.3	0.7	-6.0	25.6	34.7	9.1

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	701.5	-30.5	31.3	0.7	-5.9	24.7	34.7	10.0
H	707.5	-30.0	31.8	0.7	-6.0	25.2	34.7	9.5
H	713.5	-30.3	31.5	0.7	-6.0	24.8	34.7	9.9

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	701.5	-31.3	30.5	0.7	-5.9	23.9	34.7	10.8
H	707.5	-31.1	30.7	0.7	-6.0	24.1	34.7	10.6
H	713.5	-31.3	30.5	0.7	-6.0	23.8	34.7	10.9

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.0	-29.2	32.6	0.7	-5.9	26.0	34.7	8.7
H	707.5	-29.1	32.7	0.7	-6.0	26.1	34.7	8.6
H	711.0	-29.2	32.6	0.7	-6.0	25.9	34.7	8.8

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.0	-30.1	31.7	0.7	-5.9	25.1	34.7	9.6
H	707.5	-29.9	31.9	0.7	-6.0	25.3	34.7	9.4
H	711.0	-30.2	31.6	0.7	-6.0	24.9	34.7	9.8

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	704.0	-31.2	30.6	0.7	-5.9	24.0	34.7	10.7
H	707.5	-30.8	31.0	0.7	-6.0	24.4	34.7	10.3
H	711.0	-30.9	30.9	0.7	-6.0	24.2	34.7	10.5

[LTE Band XVII - X-axis, Open, With camera]**QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-29.3	32.6	0.7	-5.9	26.0	34.7	8.7
H	710.0	-29.1	32.8	0.7	-6.0	26.1	34.7	8.6
H	713.5	-29.0	32.9	0.7	-6.0	26.2	34.7	8.5

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-30.2	31.7	0.7	-5.9	25.1	34.7	9.6
H	710.0	-30.3	31.6	0.7	-6.0	24.9	34.7	9.8
H	713.5	-30.6	31.3	0.7	-6.0	24.6	34.7	10.1

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-31.3	30.6	0.7	-5.9	24.0	34.7	10.7
H	710.0	-31.0	30.9	0.7	-6.0	24.2	34.7	10.5
H	713.5	-31.4	30.5	0.7	-6.0	23.8	34.7	10.9

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-29.3	32.6	0.7	-6.0	26.0	34.7	8.7
H	710.0	-29.3	32.6	0.7	-6.0	25.9	34.7	8.8
H	711.0	-29.5	32.4	0.7	-6.0	25.7	34.7	9.0

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-30.1	31.8	0.7	-6.0	25.2	34.7	9.5
H	710.0	-30.2	31.7	0.7	-6.0	25.0	34.7	9.7
H	711.0	-30.4	31.5	0.7	-6.0	24.8	34.7	9.9

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-31.2	30.7	0.7	-6.0	24.1	34.7	10.6
H	710.0	-31.1	30.8	0.7	-6.0	24.1	34.7	10.6
H	711.0	-31.3	30.6	0.7	-6.0	23.9	34.7	10.8

4.2 Peak to Average Ratio

4.2.1 Measurement procedure


[FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth $\geq$ signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

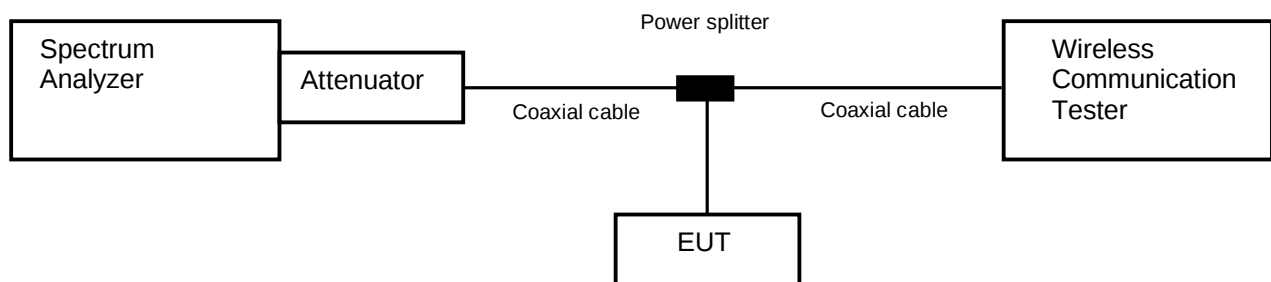

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 18-February-2022
 Temperature : 24.0 [°C]
 Humidity : 27.5 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Date : 8-April-2022
 Temperature : 22.5 [°C]
 Humidity : 29.1 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band XII	23095	707.5	QPSK	1.4	6-0	4.98	13.0
				3	15-0	5.13	
				5	25-0	5.24	
				10	50-0	4.56	
			16QAM	1.4	6-0	5.81	
				3	15-0	5.82	
				5	25-0	5.81	
				10	50-0	5.95	
			64QAM	1.4	6-0	5.99	
				3	15-0	6.19	
				5	25-0	6.13	
				10	50-0	6.30	


Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band X VII	23790	710	QPSK	5	25-0	5.22	13.0
				10	50-0	4.61	
			16QAM	5	25-0	6.03	
				10	50-0	6.04	
			64QAM	5	25-0	6.33	
				10	50-0	6.37	

4.2.4 Trace data


[LTE Band XII]

Channel: 23095


QPSK, BW 1.4MHz, RB6-0

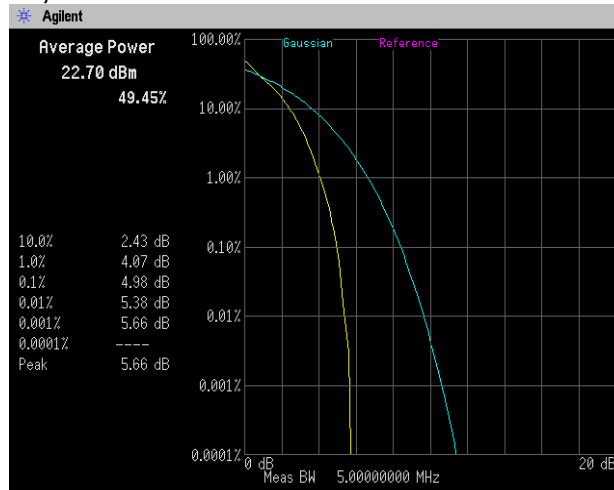

QPSK, BW 3MHz, RB15-0

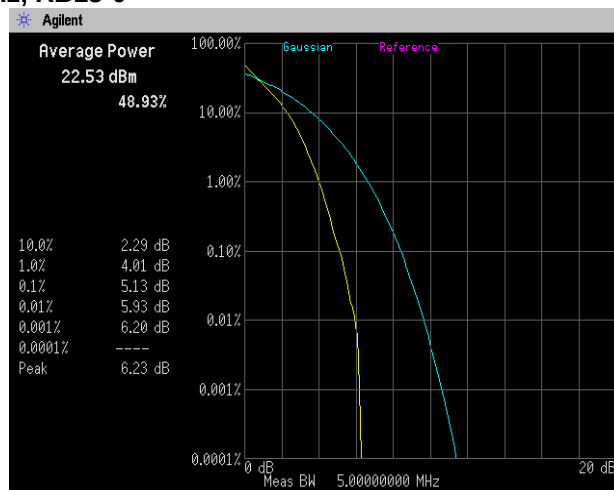


QPSK, BW 5MHz, RB25-0

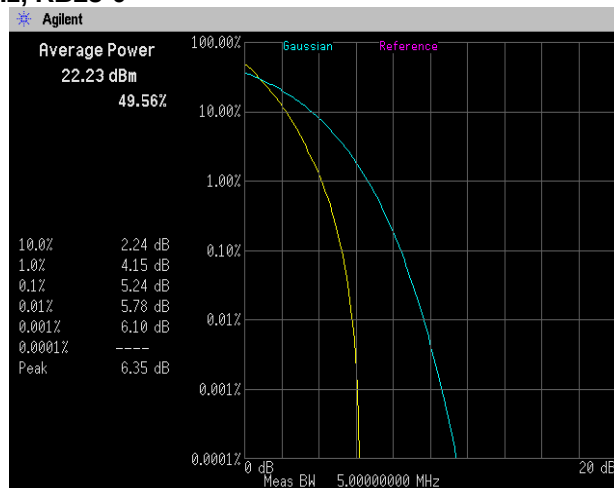


[LTE Band XII]

Channel: 23095


QPSK, BW 10MHz, RB50-0

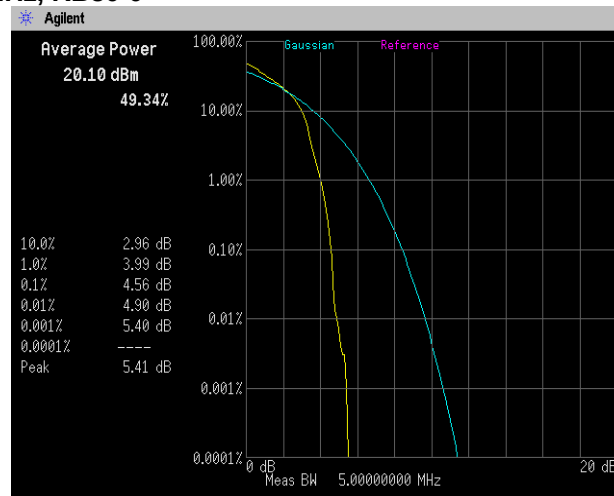

16QAM, BW 1.4MHz, RB6-0

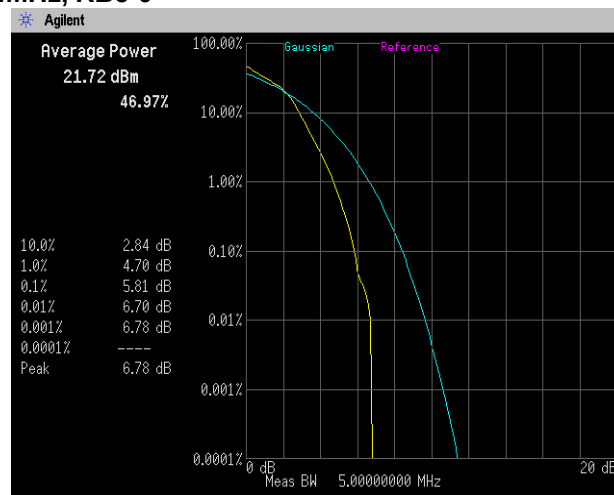


16QAM, BW 3MHz, RB15-0

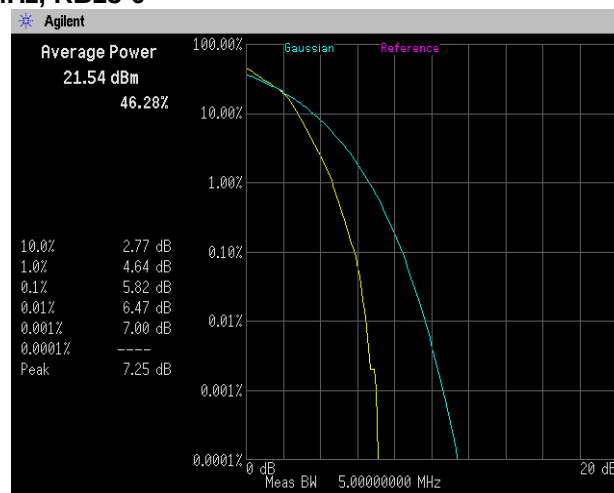


[LTE Band XII]

Channel: 23095


16QAM, BW 5MHz, RB25-0

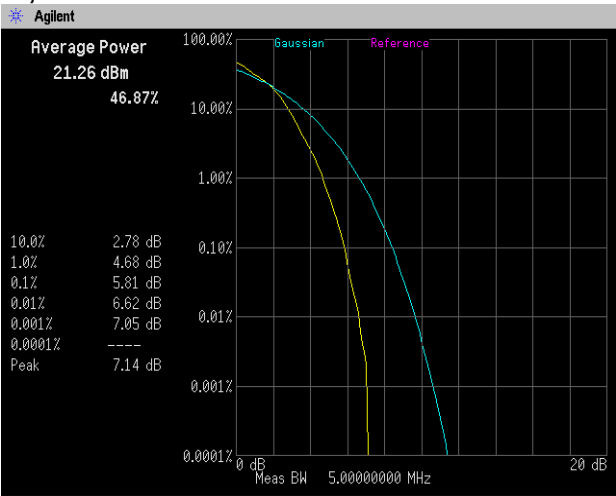

16QAM, BW 10MHz, RB50-0

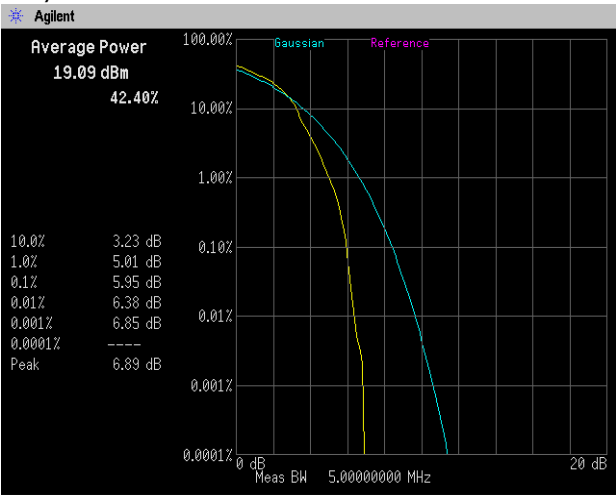


64QAM, BW 1.4MHz, RB6-0

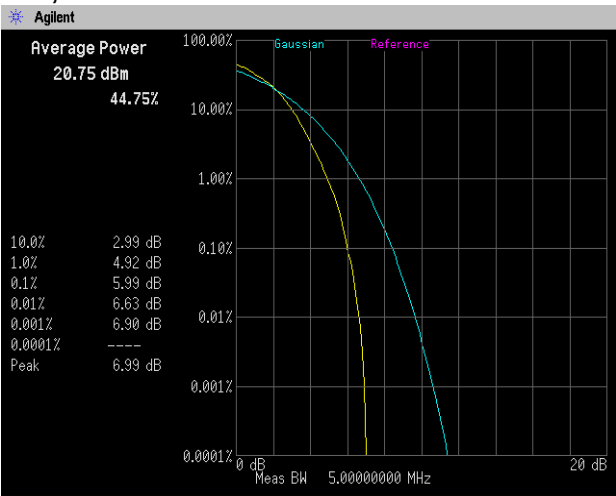


[LTE Band XII]

Channel: 23095


64QAM, BW 3MHz, RB15-0



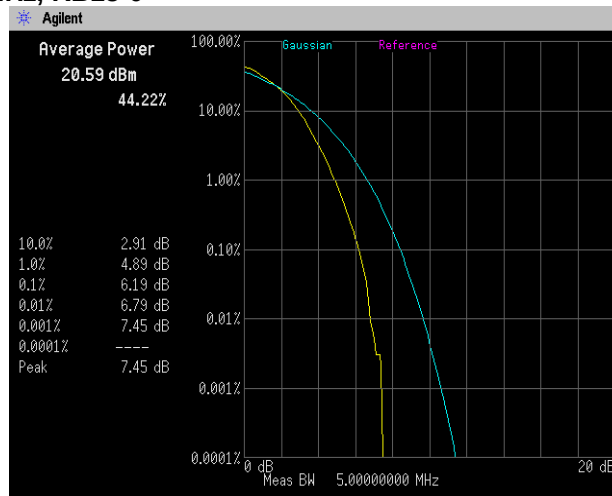


64QAM, BW 5MHz, RB25-0

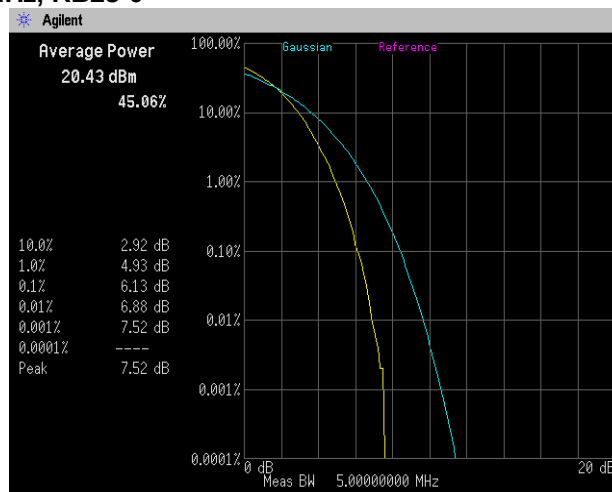

64QAM, BW 10MHz, RB50-0

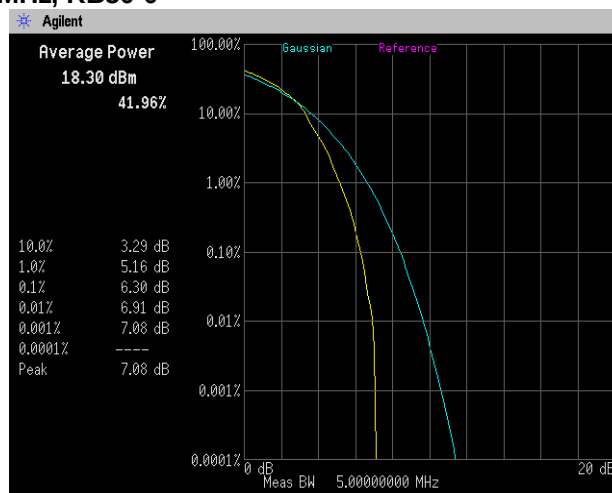


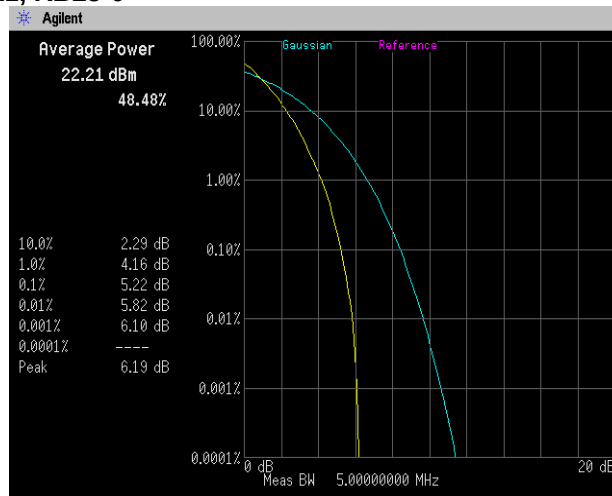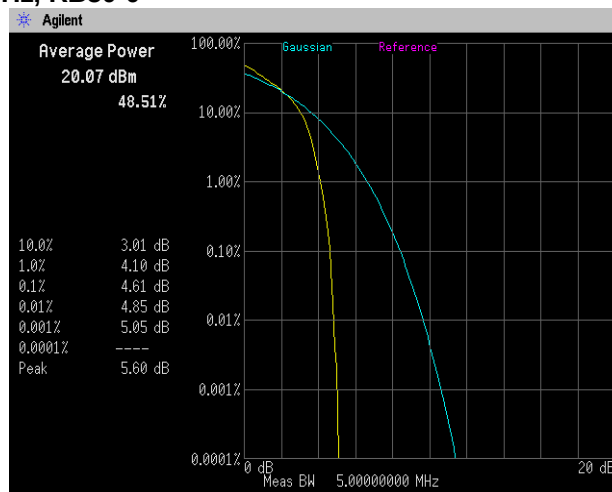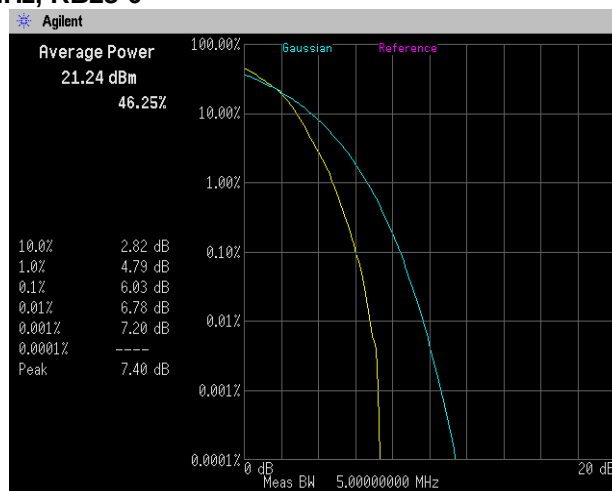[LTE Band XVII]**Channel: 23790****QPSK, BW 5MHz, RB25-0****QPSK, BW 10MHz, RB50-0****16QAM, BW 5MHz, RB25-0**


[LTE Band XVII]

Channel: 23790


16QAM, BW 10MHz, RB50-0

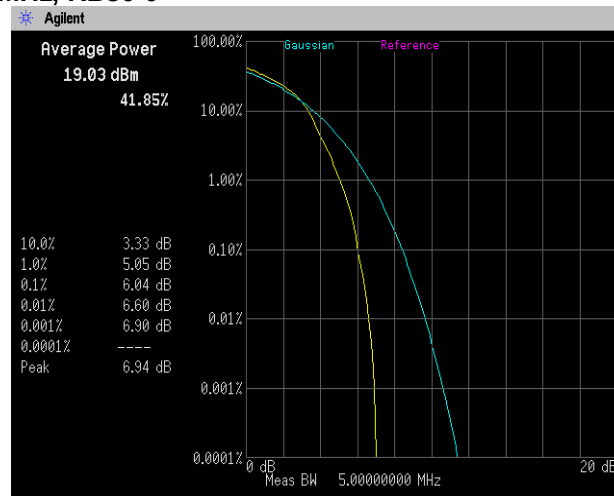

16QAM, BW 5MHz, RB25-0

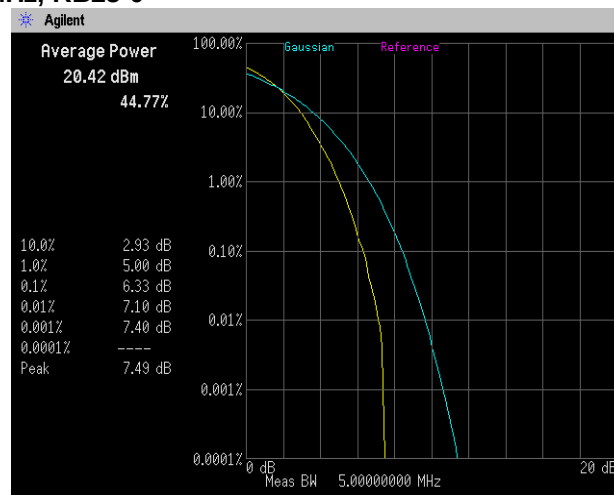

16QAM, BW 10MHz, RB50-0

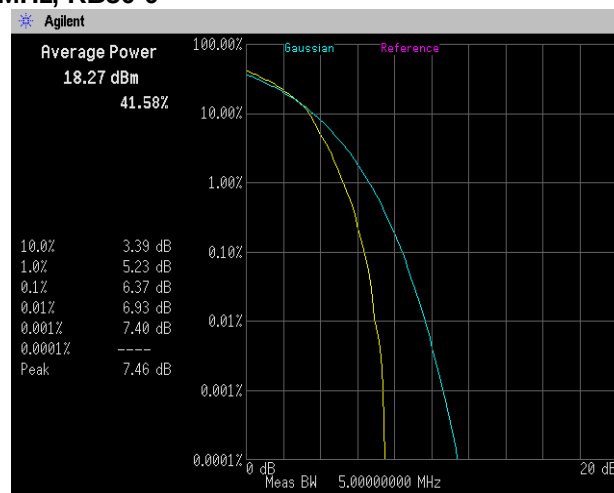

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

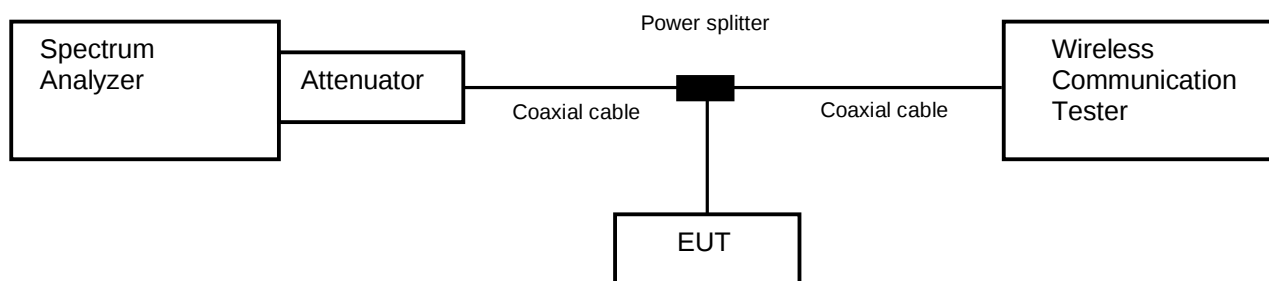

4.3.2 Limit

None

4.3.3 Measurement result

Date : 18-February-2022
 Temperature : 24.0 [°C]
 Humidity : 27.5 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Date : 8-April-2022
 Temperature : 22.5 [°C]
 Humidity : 29.1 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito


Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band XII	23095	707.5	1.4	QPSK	3-1	0.5944
					6-0	1.0980
				16QAM	3-1	0.6065
					6-0	1.0995
				64QAM	3-1	0.5924
					6-0	1.1042
			3	QPSK	8-4	1.5141
					15-0	2.6967
				16QAM	8-4	1.5169
					15-0	2.6941
				64QAM	8-4	1.5071
					15-0	2.7067
			5	QPSK	12-7	2.2904
					25-0	4.5663
				16QAM	12-7	2.2914
					25-0	4.5260
				64QAM	12-7	2.2776
					25-0	4.5204
			10	QPSK	25-12	4.6642
					50-0	9.0293
				16QAM	25-12	4.6604
					50-0	9.0066
				64QAM	25-12	4.6649
					50-0	9.0049

Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band XVII	23790	710	5	QPSK	12-7	2.2927
					25-0	4.5417
				16QAM	12-7	2.2851
					25-0	4.5334
				64QAM	12-7	2.2825
					25-0	4.5292
			10	QPSK	25-12	4.6677
					50-0	9.0274
				16QAM	25-12	4.7570
					50-0	9.0278
				64QAM	25-12	4.6943
					50-0	9.0001


Trace data

[LTE Band XII]
Channel: 23095


QPSK, BW 1.4MHz
RB3-1

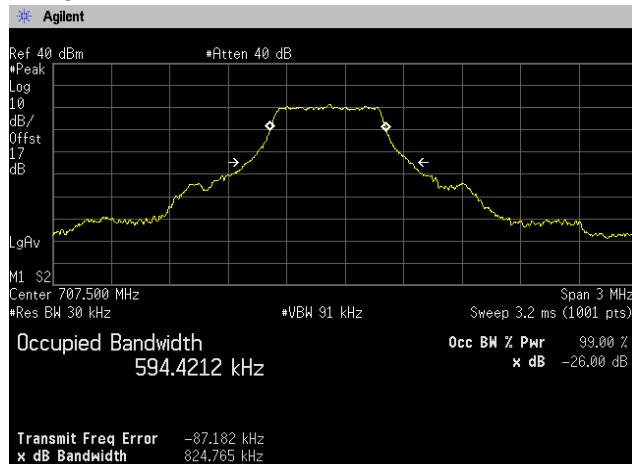


RB6-0

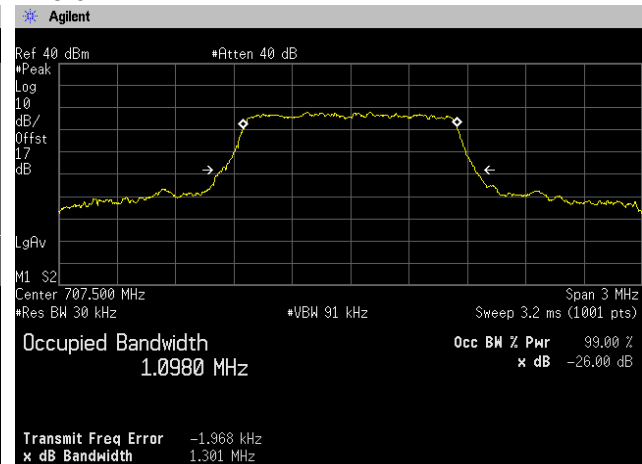


16QAM, BW 1.4MHz
RB3-1

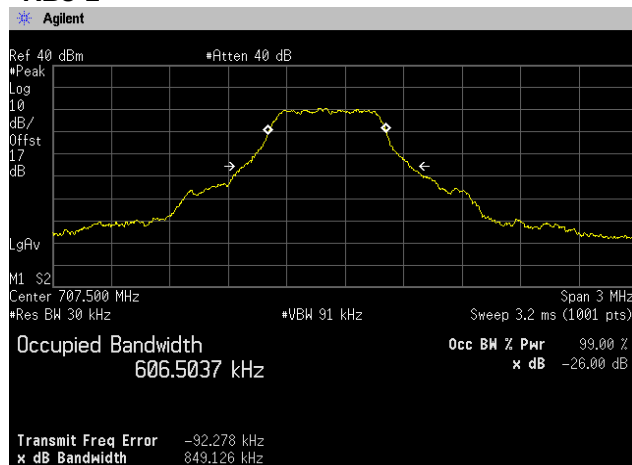


RB6-0

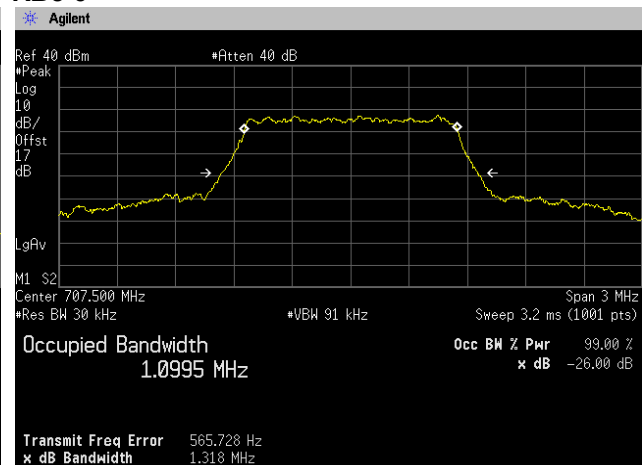

64QAM, BW 1.4MHz
RB3-1

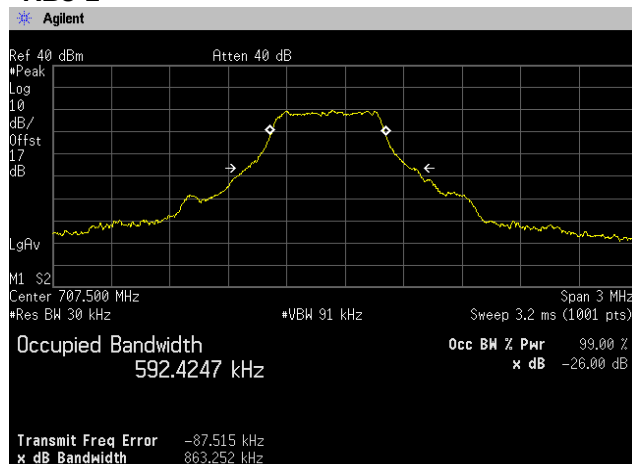


RB6-0

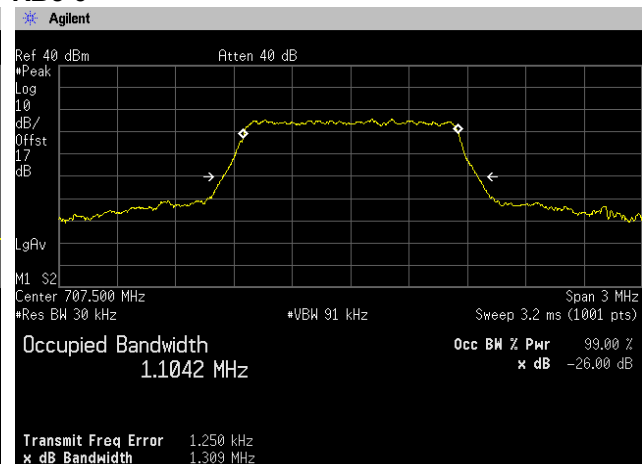


[LTE Band XII]
Channel: 23095


QPSK, BW 3MHz
RB8-4

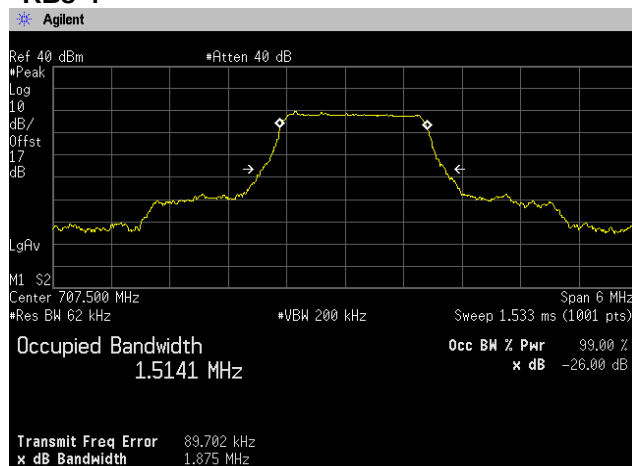


RB15-0

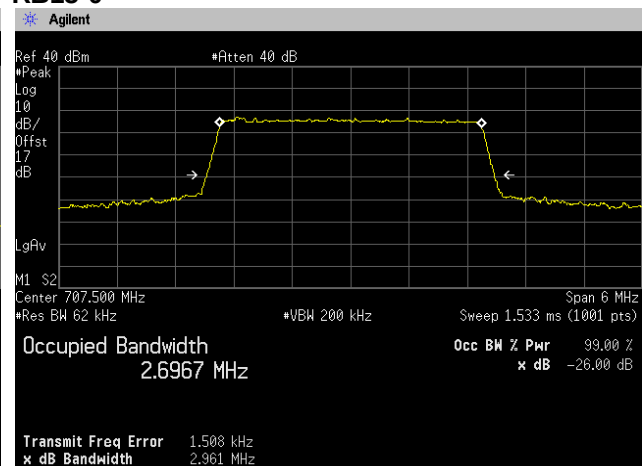


16QAM, BW 3MHz
RB8-4

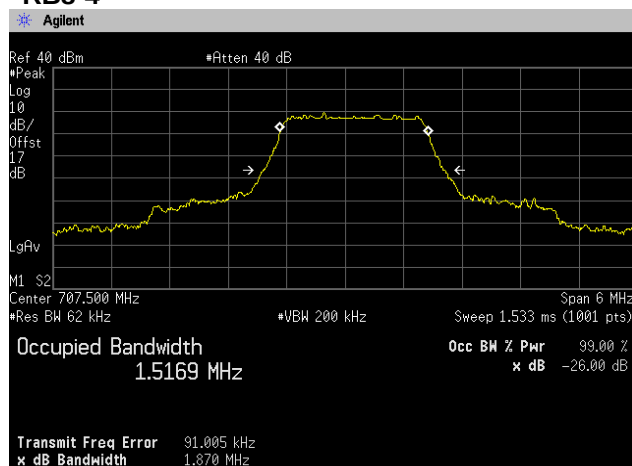


RB15-0

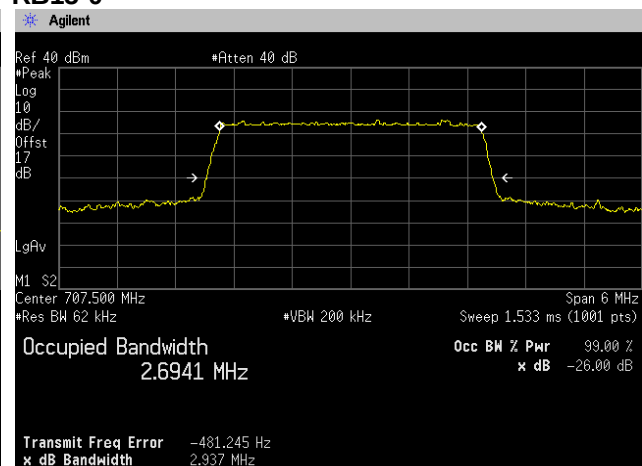

64QAM, BW 3MHz
RB8-4

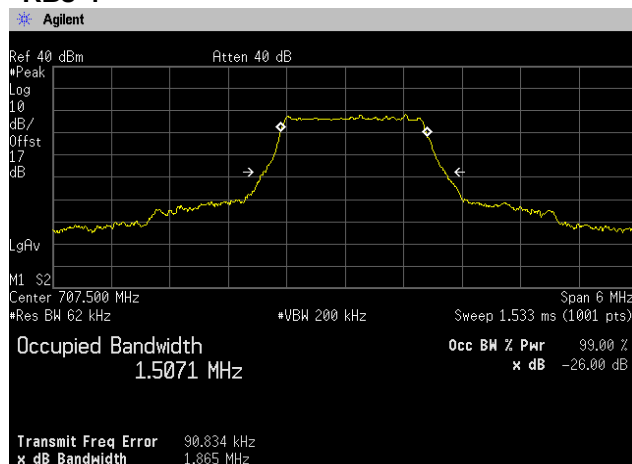


RB15-0

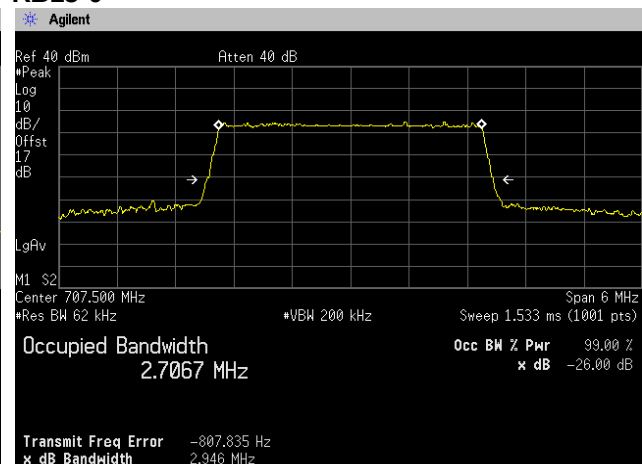


[LTE Band XII]
Channel: 23095


QPSK, BW 5MHz
RB12-7

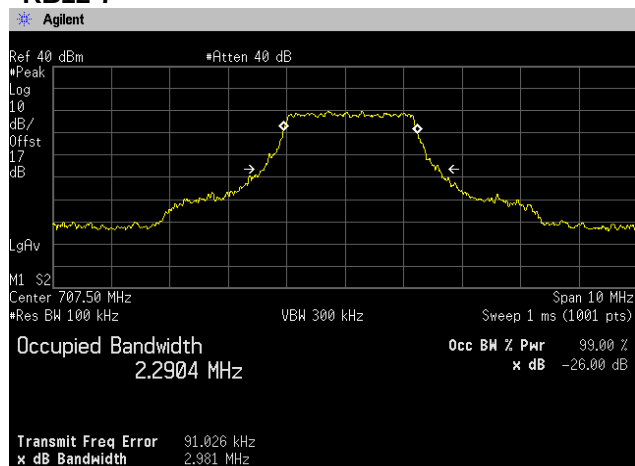


RB25-0

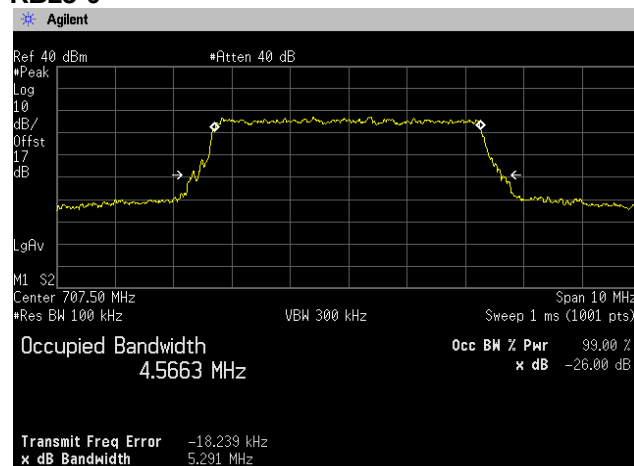


16QAM, BW 5MHz
RB12-7

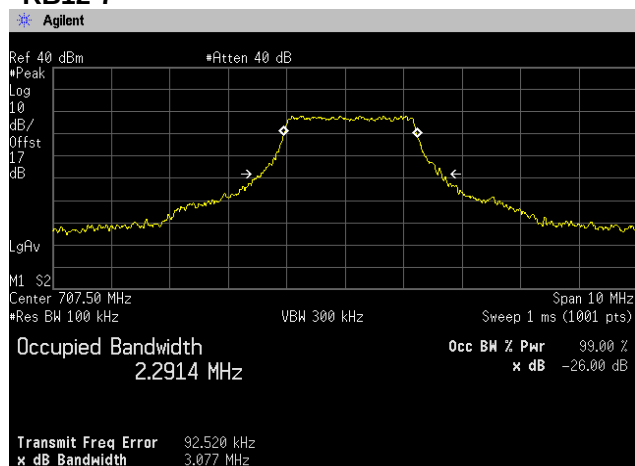


RB25-0

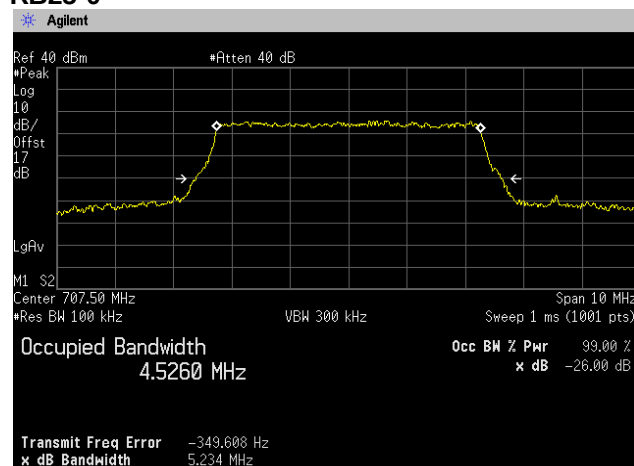

64QAM, BW 5MHz
RB12-7

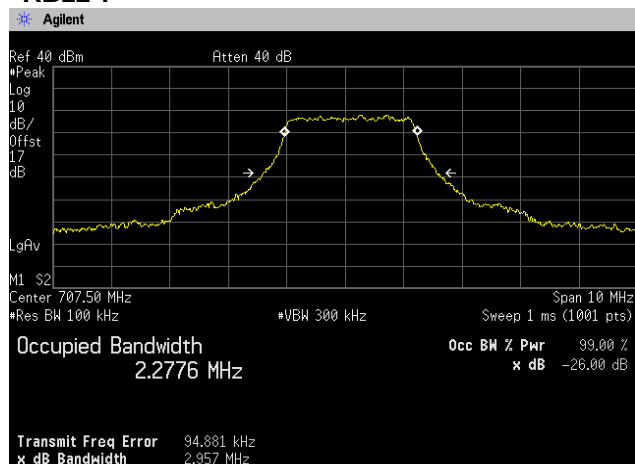


RB25-0

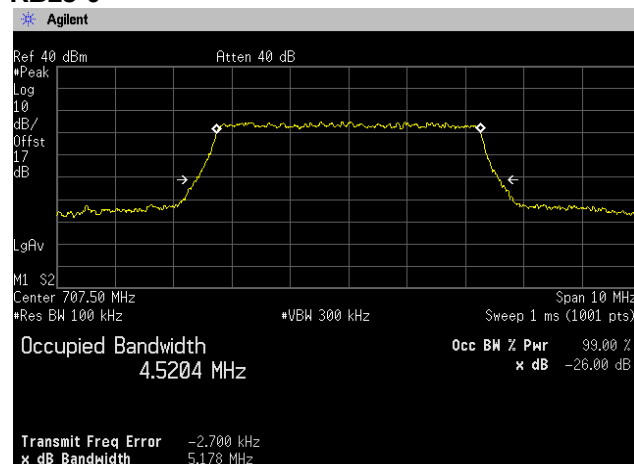


[LTE Band XII]
Channel: 23095


QPSK, BW 10MHz
RB25-12

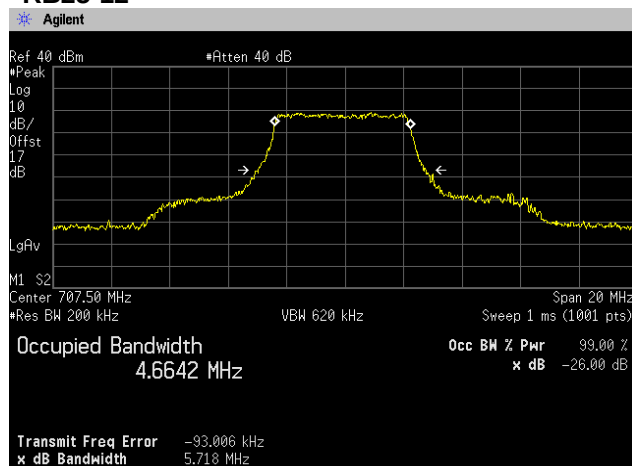


RB50-0

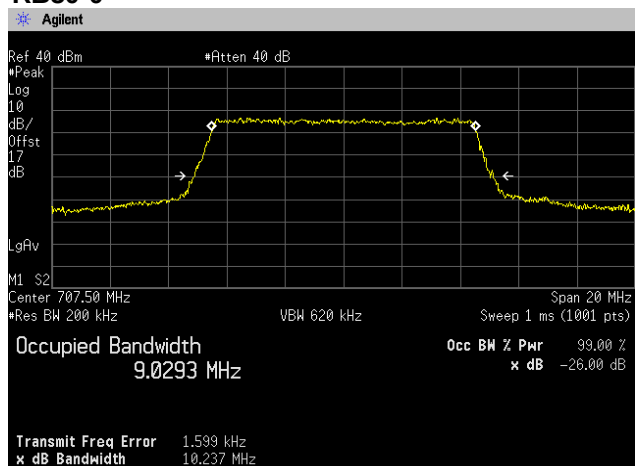


16QAM, BW 10MHz
RB25-12

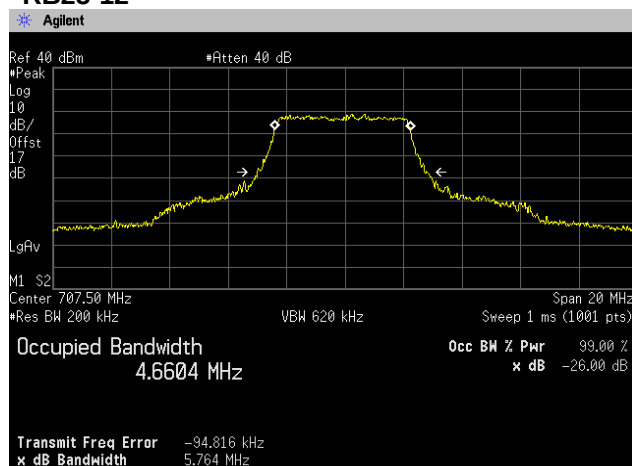


RB50-0

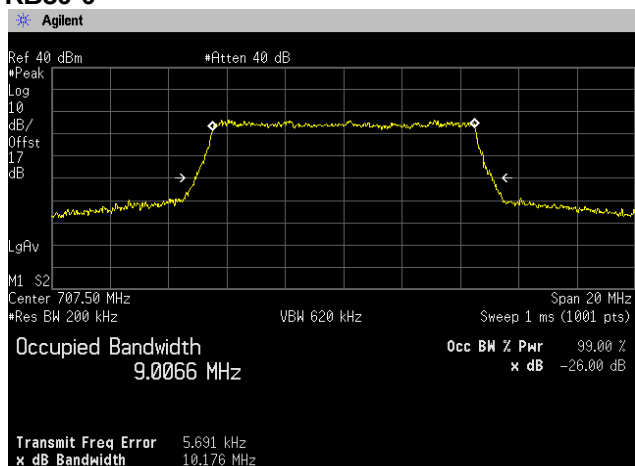

64QAM, BW 10MHz
RB25-12

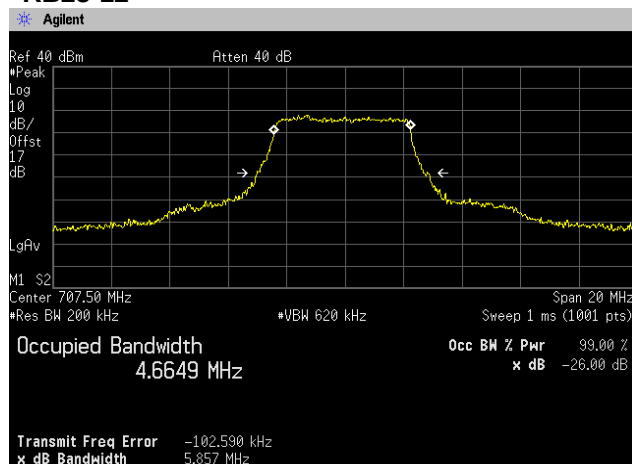


RB50-0

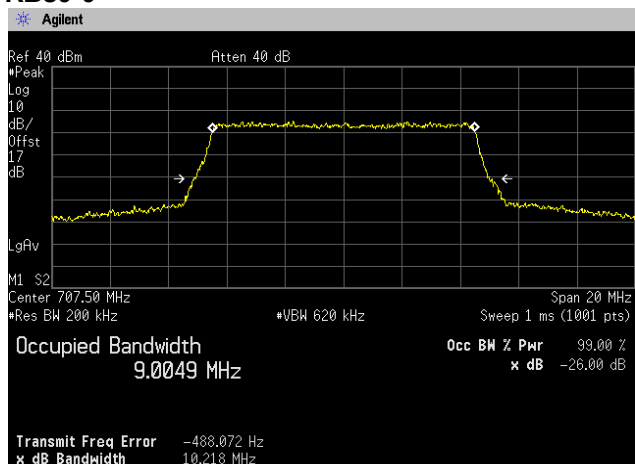


[LTE Band XVII]
Channel: 23790


QPSK, BW 5MHz
RB12-7

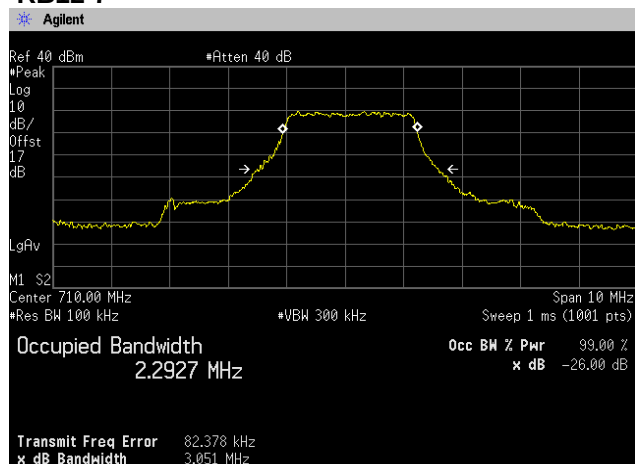


RB25-0

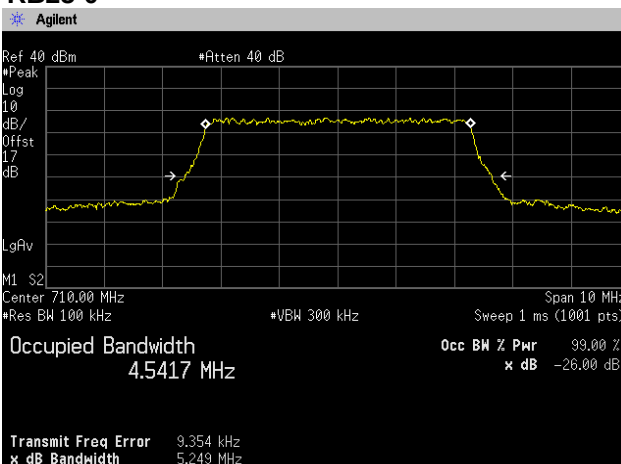


16QAM, BW 5MHz
RB12-7

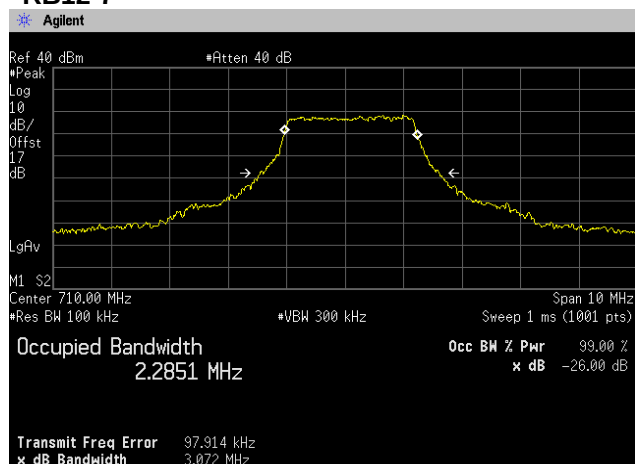


RB25-0

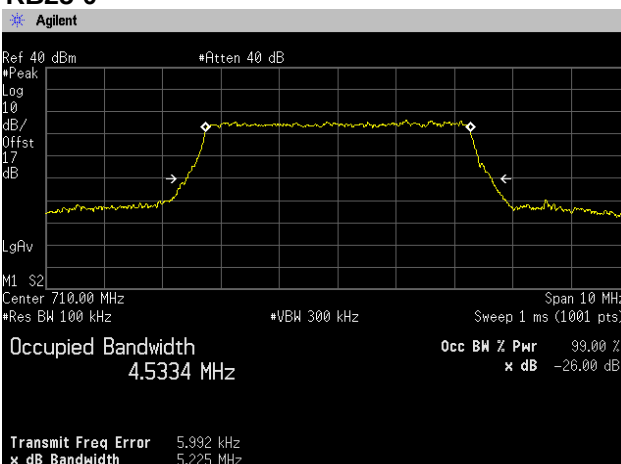

64QAM, BW 5MHz
RB12-7

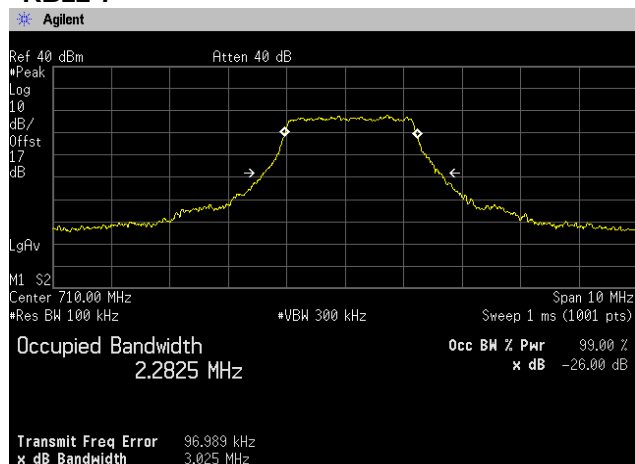


RB25-0

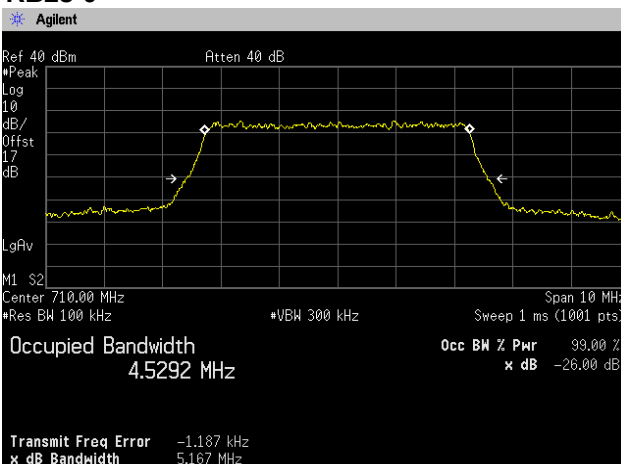


[LTE Band XVII]
Channel: 23790


QPSK, BW 10MHz
RB25-12

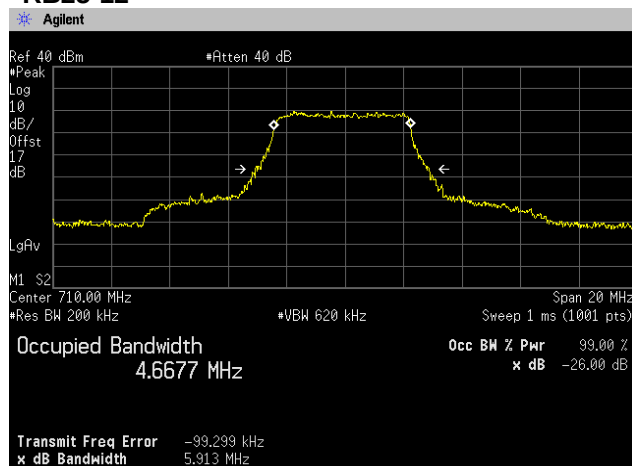


RB50-0

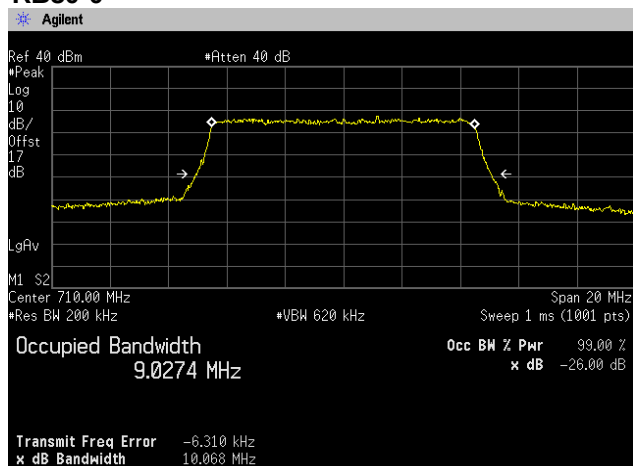


16QAM, BW 10MHz
RB25-12

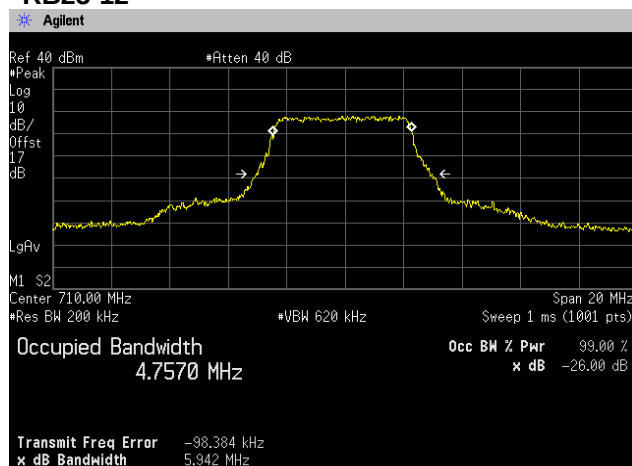


RB50-0

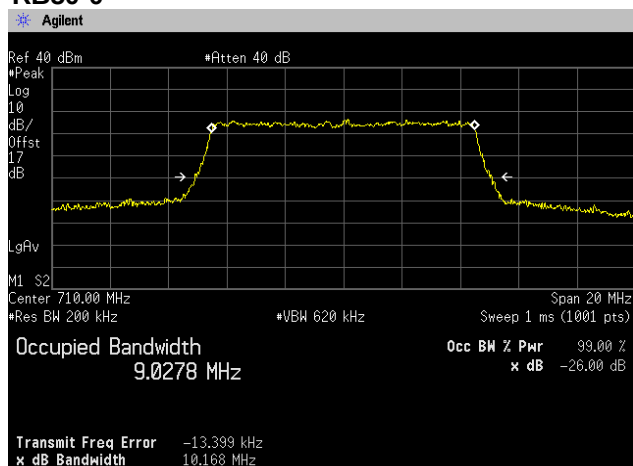

64QAM, BW 10MHz
RB25-12

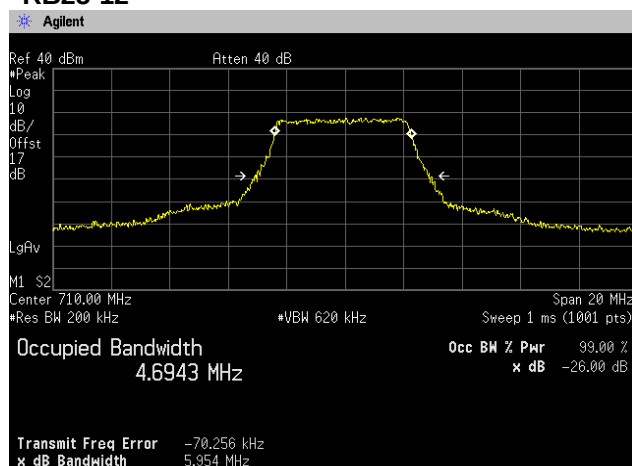

RB50-0

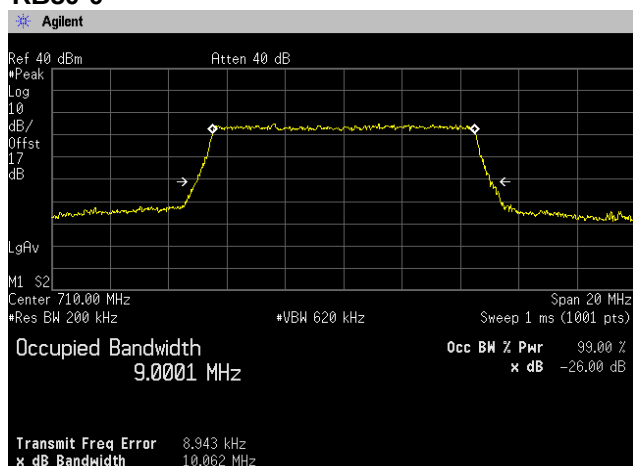

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

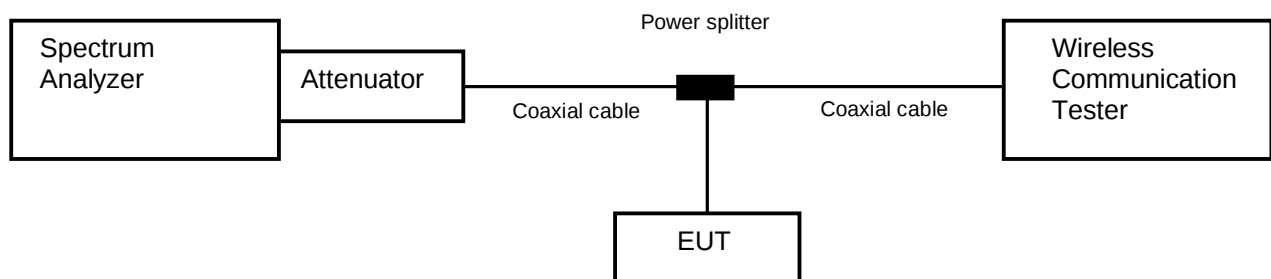

4.4.2 Limit

-13 dBm or less

[27.53(g)]

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

4.4.3 Measurement result

Date : 18-February-2022
 Temperature : 24.0 [°C]
 Humidity : 27.5 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Date : 30-March-2022
 Temperature : 24.6 [°C]
 Humidity : 46.3 [%]
 Test place : Shielded room No.4

Test engineer : Taiki Watanabe

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Results	
LTE Band XII	QPSK, 16QAM, 64QAM	1.4	23017	699.7	See the trace data	PASS
			23173	715.3	See the trace data	PASS
		3	23025	700.5	See the trace data	PASS
			23165	714.5	See the trace data	PASS
		5	23035	701.5	See the trace data	PASS
			23155	713.5	See the trace data	PASS
		10	23060	704.0	See the trace data	PASS
			23130	711.0	See the trace data	PASS

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Results	
LTE Band XVII	QPSK, 16QAM, 64QAM	5	23755	706.5	See the trace data	PASS
			23825	713.5	See the trace data	PASS
		10	23780	709.0	See the trace data	PASS
			23800	711.0	See the trace data	PASS


4.4.4 Trace data

Band Edge

[LTE Band XII]


QPSK, BW 1.4MHz, RB1-0

Channel: Low

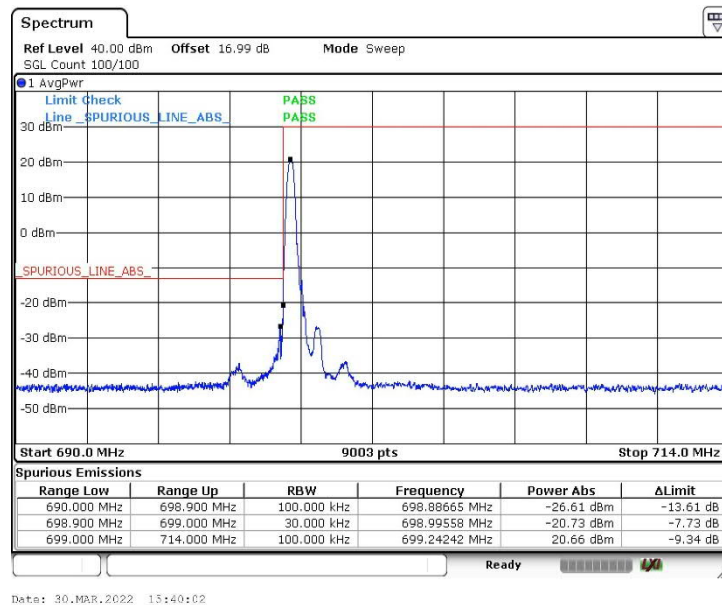


QPSK, BW 1.4MHz, RB1-5


Channel: High

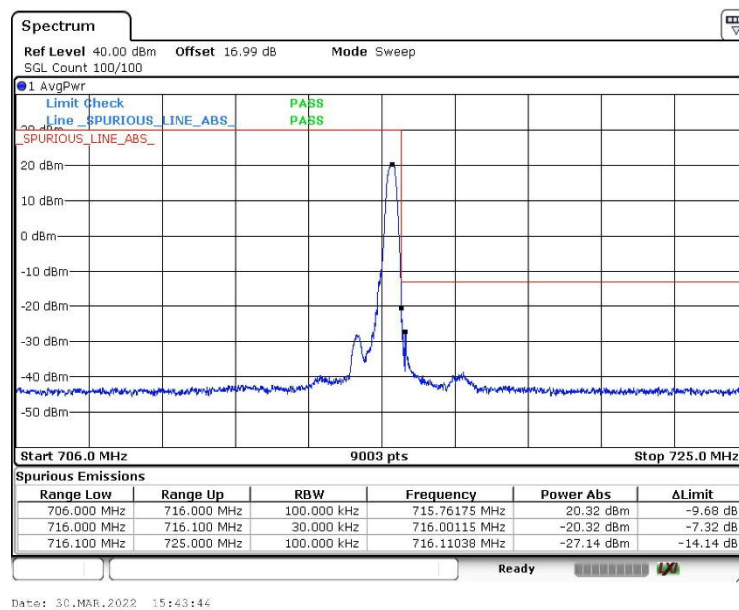


[LTE Band XII]
QPSK, BW 1.4MHz, RB6-0
Channel: Low

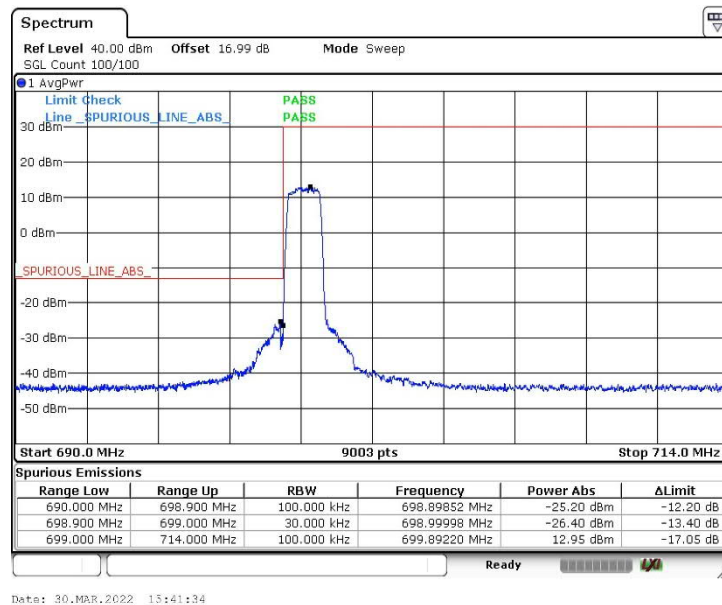


QPSK, BW 1.4MHz, RB6-0
Channel: High

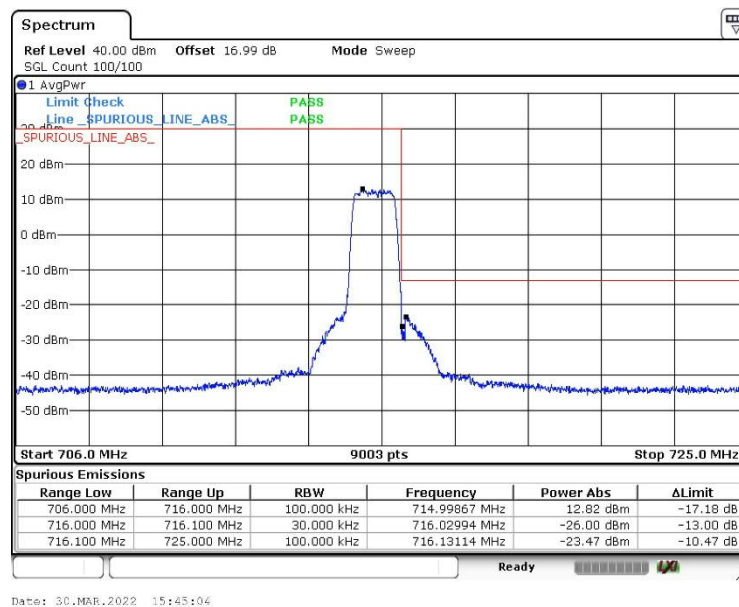


[LTE Band XII]
16QAM, BW 1.4MHz, RB1-0
Channel: Low

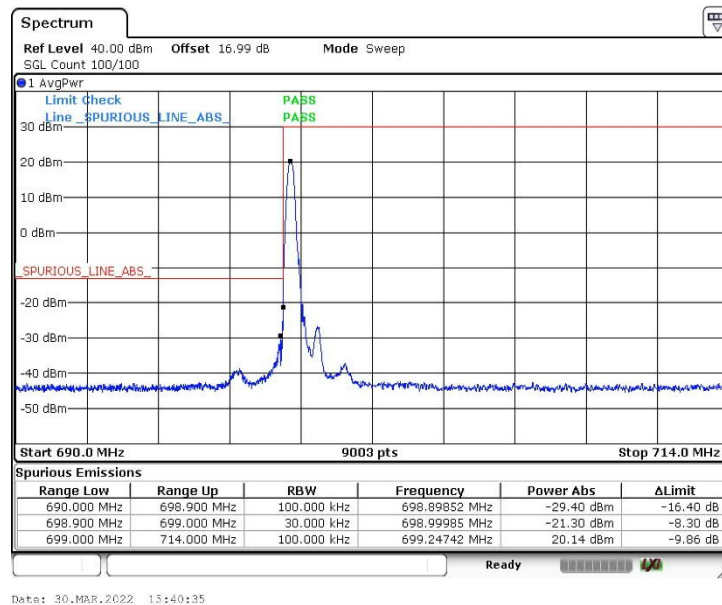


16QAM, BW 1.4MHz, RB1-5
Channel: High

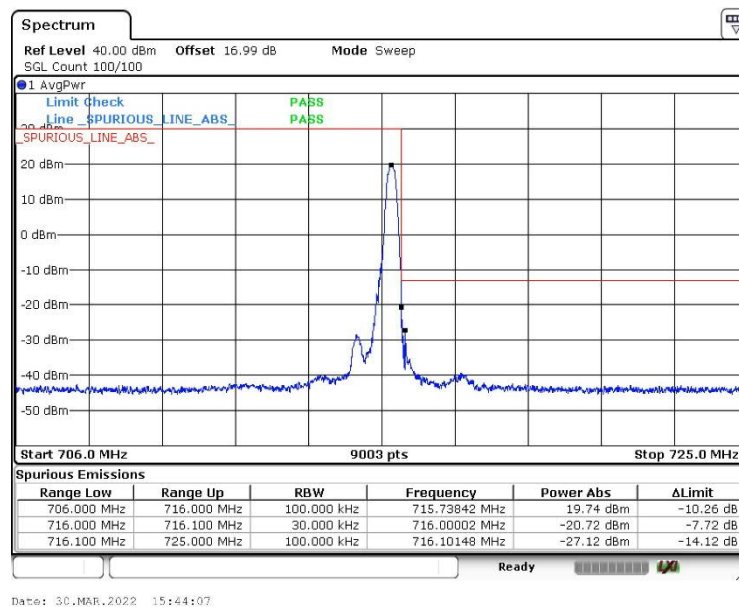


[LTE Band XII]
16QAM, BW 1.4MHz, RB6-0
Channel: Low

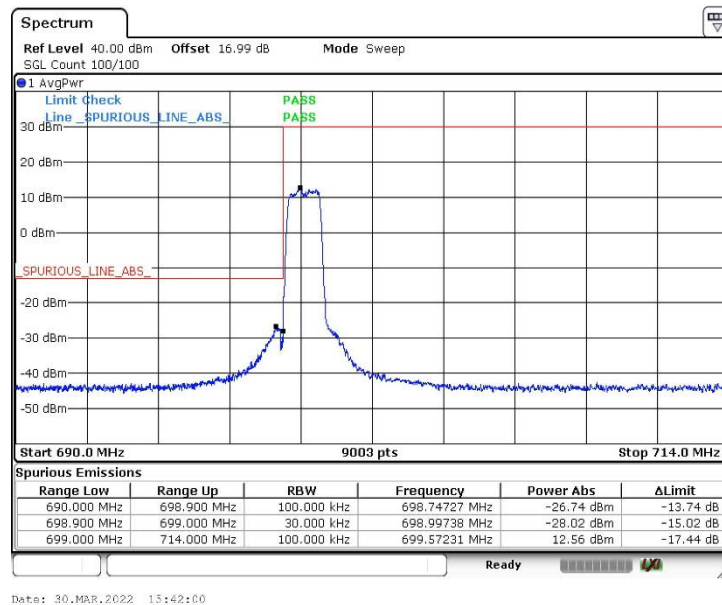


16QAM, BW 1.4MHz, RB6-0
Channel: High

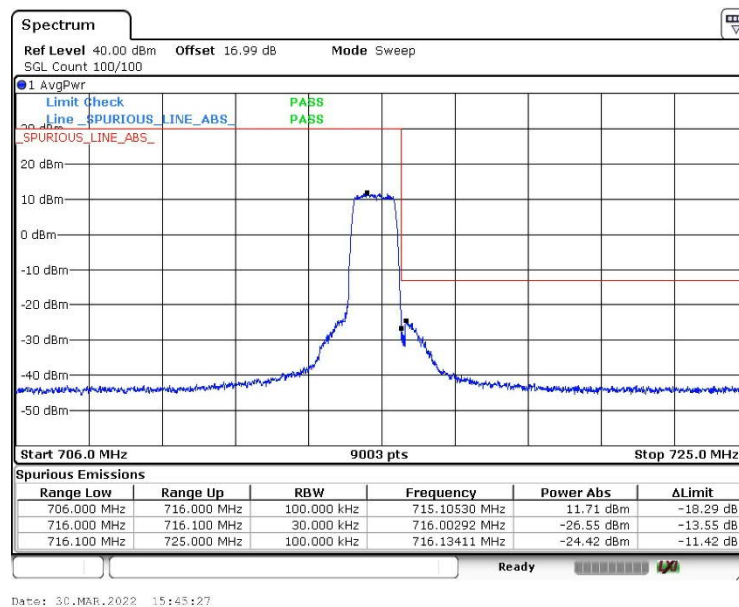


[LTE Band XII]
64QAM, BW 1.4MHz, RB1-0
Channel: Low

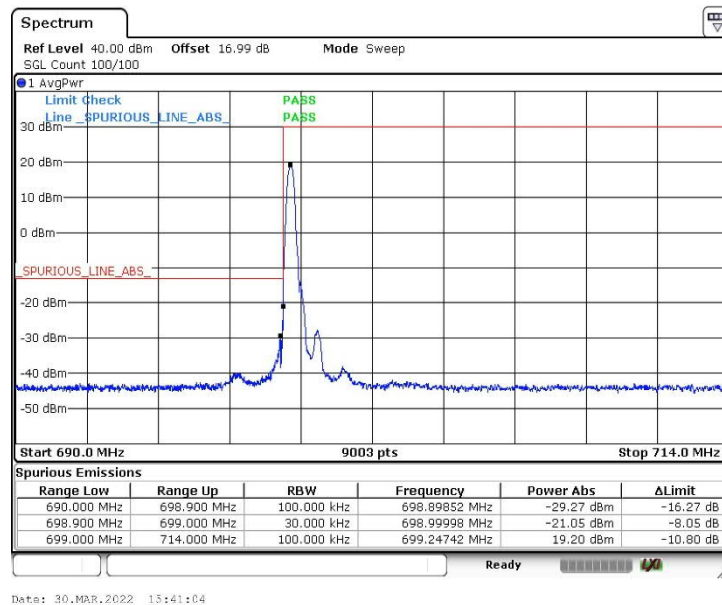


64QAM, BW 1.4MHz, RB1-5
Channel: High

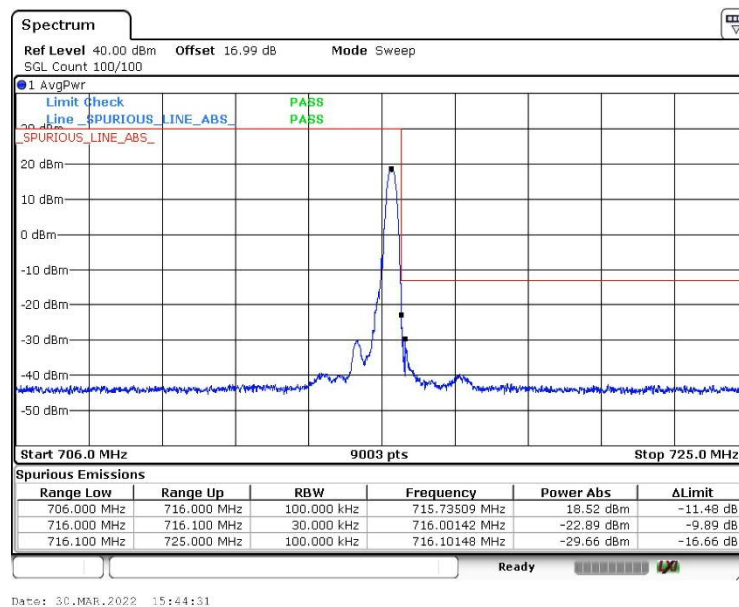


[LTE Band XII]
64QAM, BW 1.4MHz, RB6-0
Channel: Low

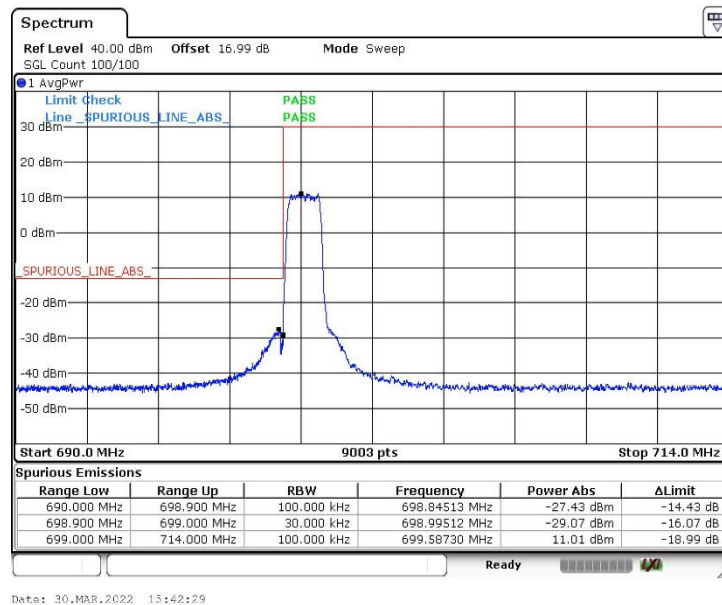


64QAM, BW 1.4MHz, RB6-0
Channel: High

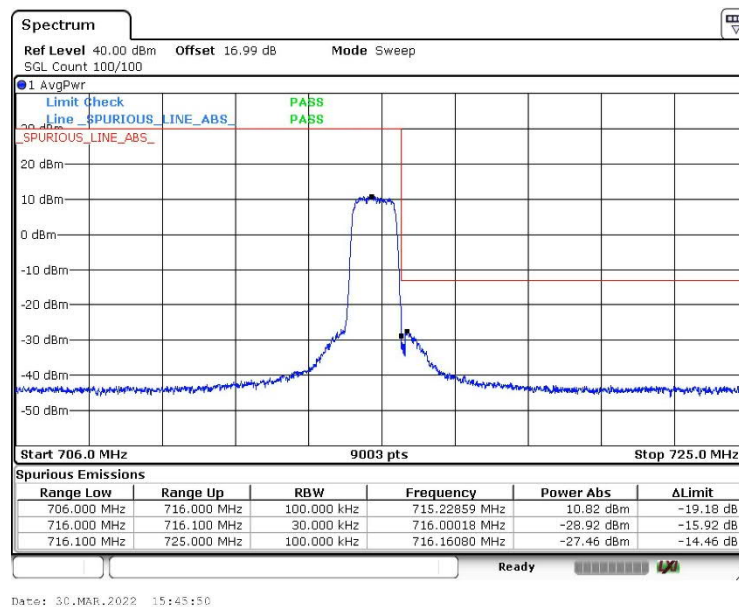


[LTE Band XII]
QPSK, BW 3MHz, RB1-0
Channel: Low

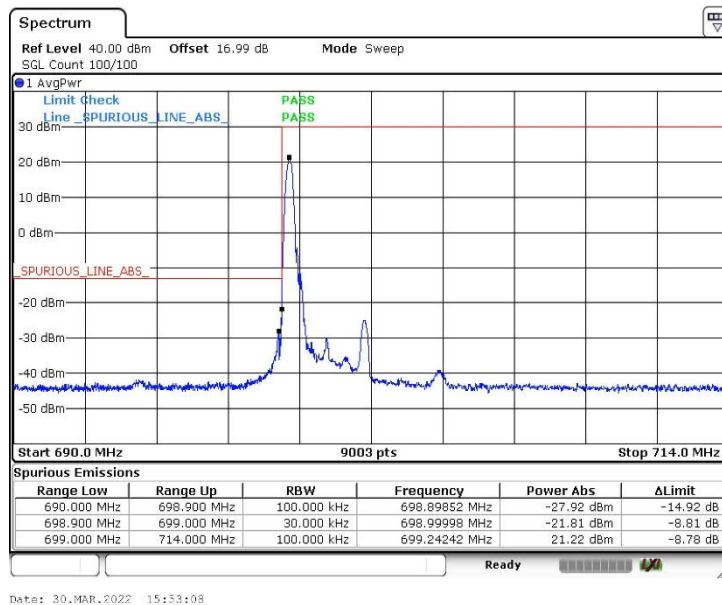


QPSK, BW 3MHz, RB1-14
Channel: High

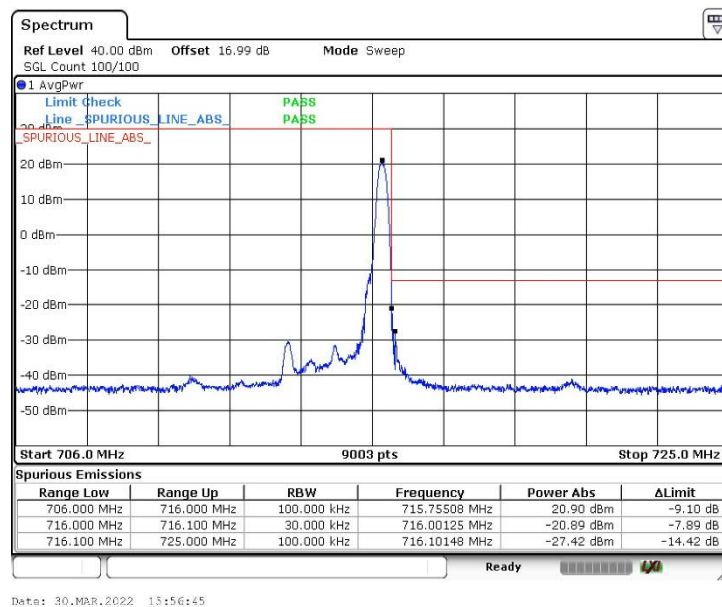


[LTE Band XII]
QPSK, BW 3MHz, RB15-0
Channel: Low

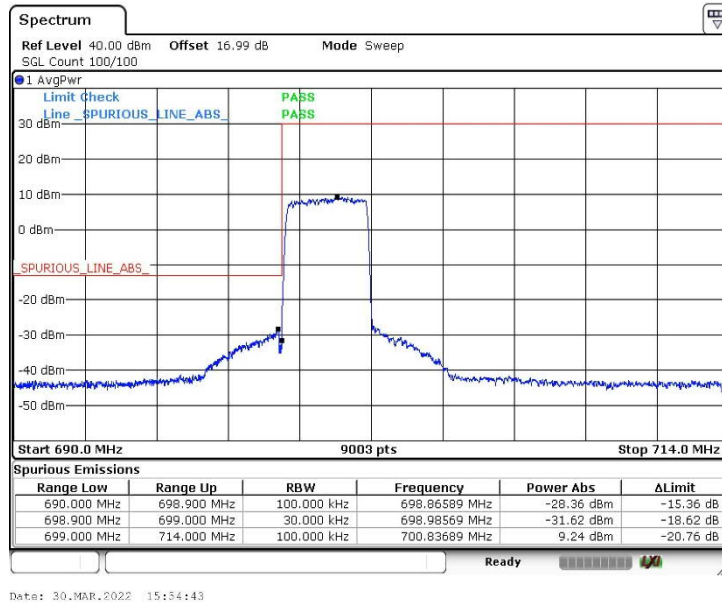


QPSK, BW 3MHz, RB15-0
Channel: High

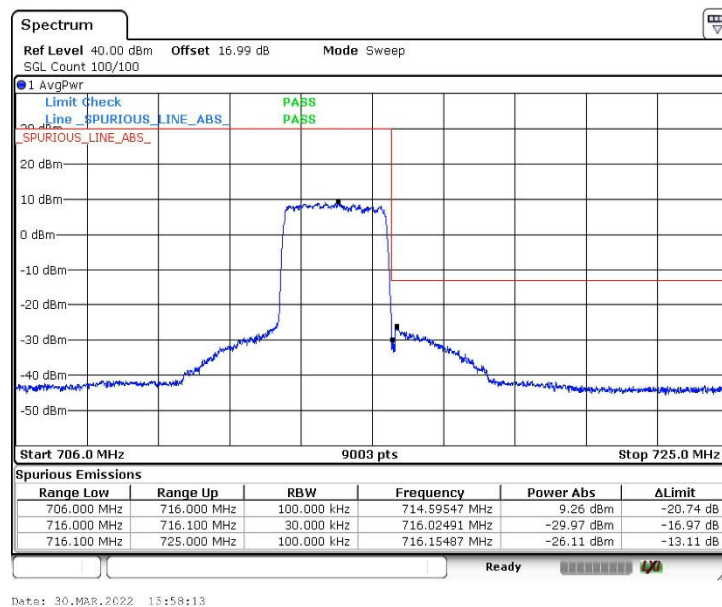


[LTE Band XII]
16QAM, BW 3MHz, RB1-0
Channel: Low

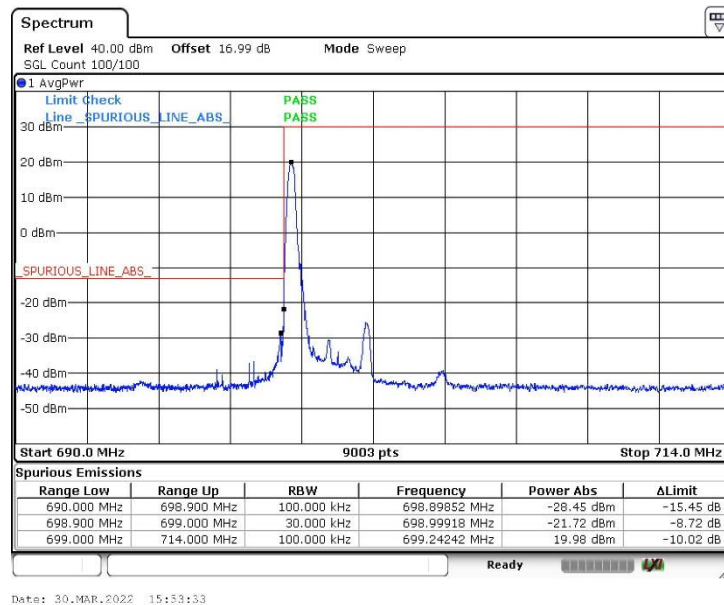


16QAM, BW 3MHz, RB1-14
Channel: High

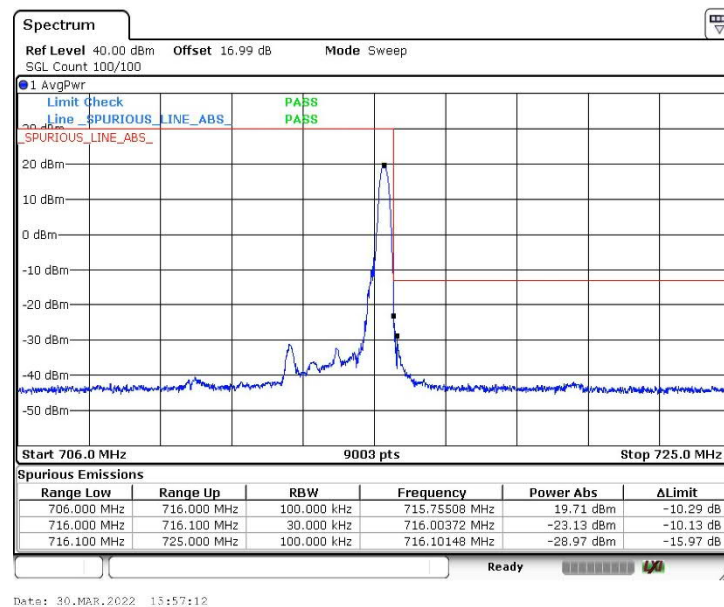


[LTE Band XII]
16QAM, BW 3MHz, RB15-0
Channel: Low

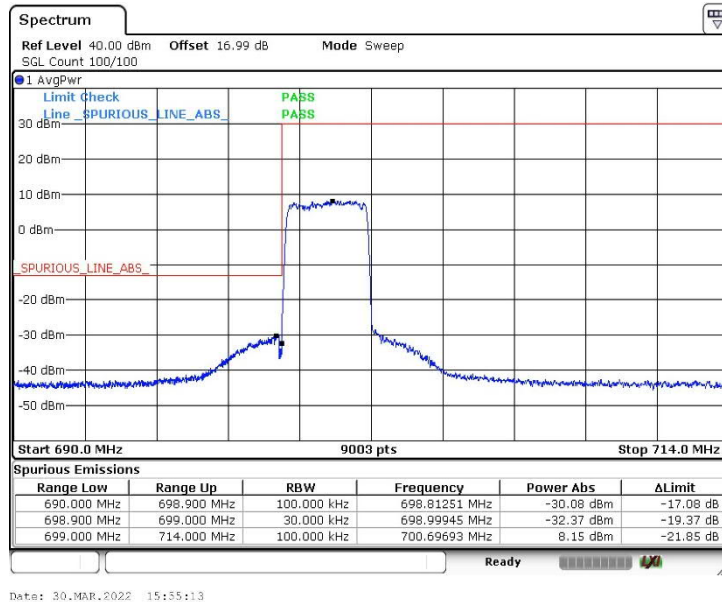


16QAM, BW 3MHz, RB15-0
Channel: High

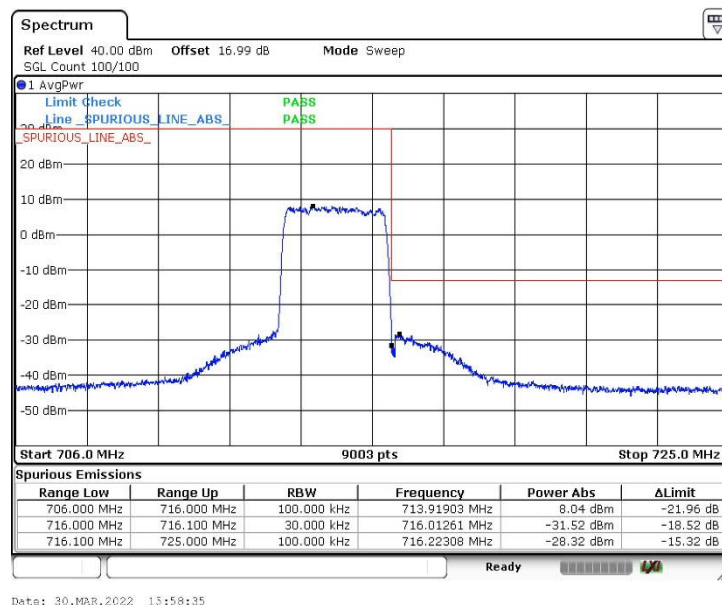


[LTE Band XII]
64QAM, BW 3MHz, RB1-0
Channel: Low

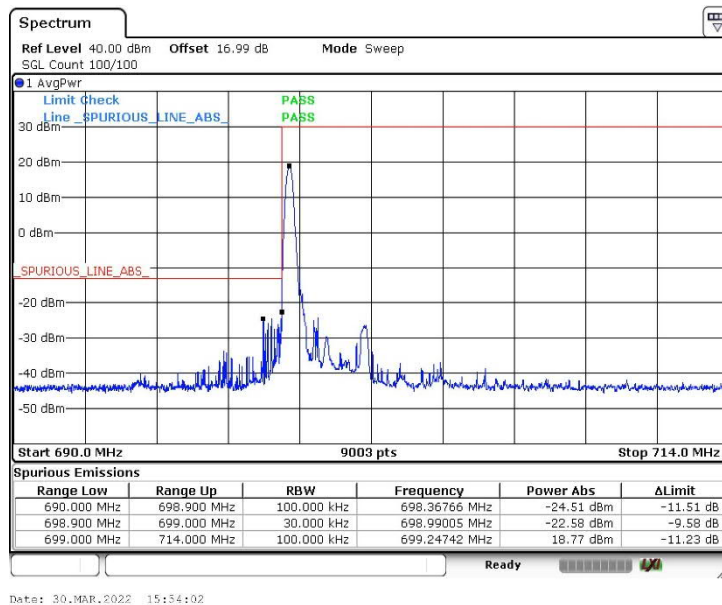


64QAM, BW 3MHz, RB1-14
Channel: High

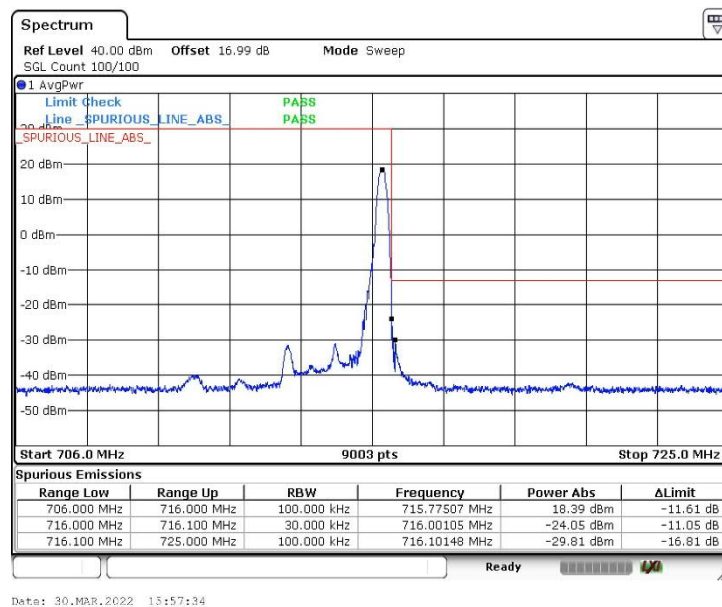


[LTE Band XII]
64QAM, BW 3MHz, RB15-0
Channel: Low

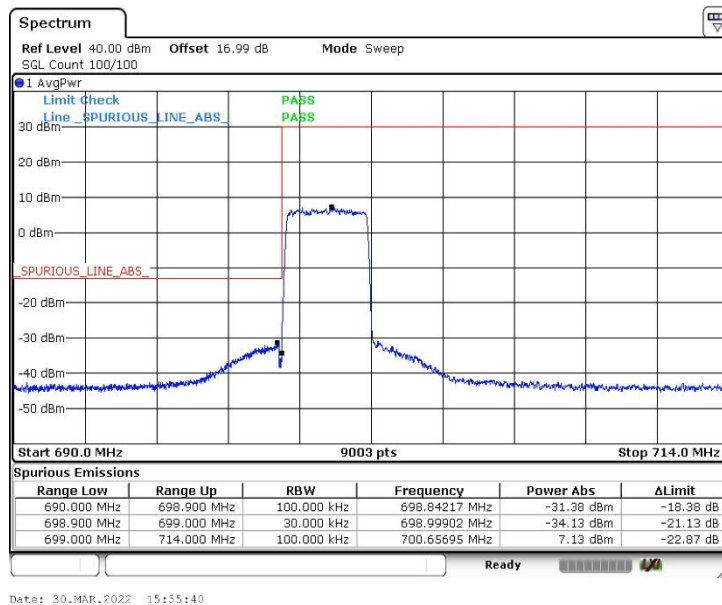


64QAM, BW 3MHz, RB15-0
Channel: High

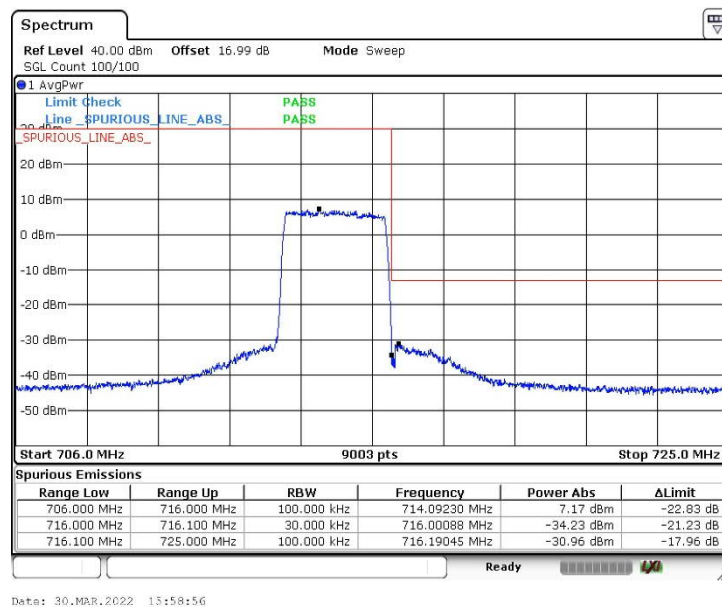


[LTE Band XII]
QPSK, BW 5MHz, RB1-0
Channel: Low

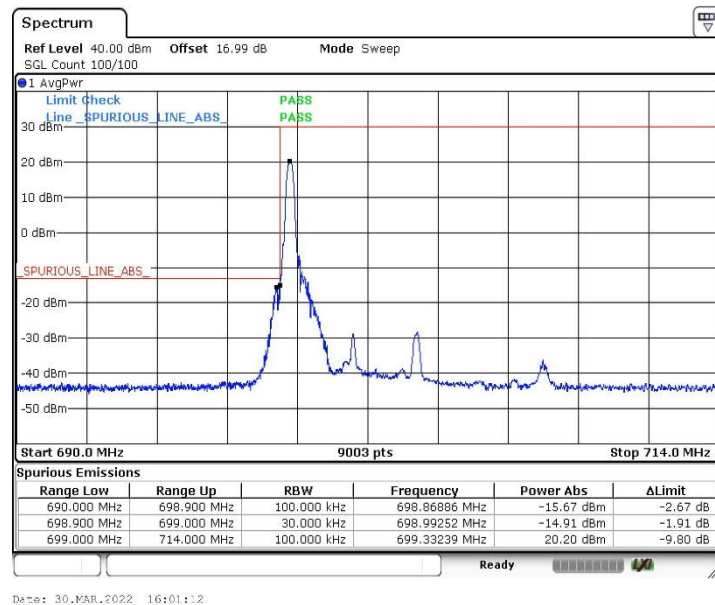


QPSK, BW 5MHz, RB1-24
Channel: High

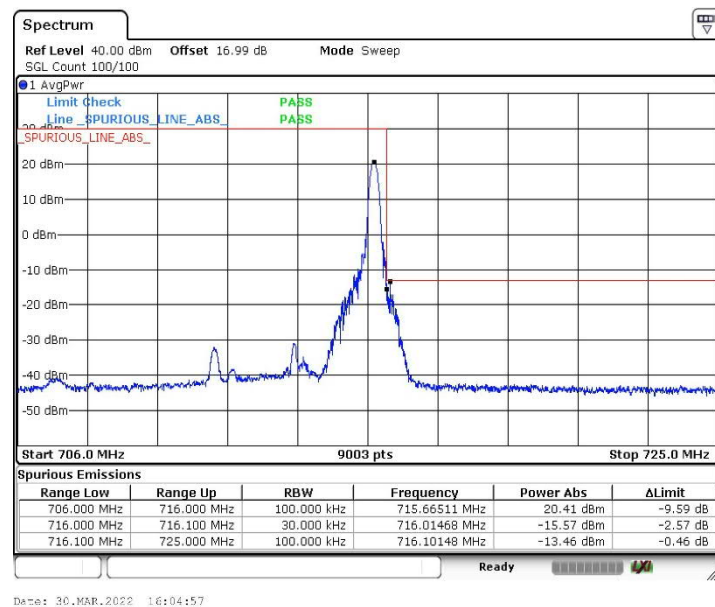


[LTE Band XII]
QPSK, BW 5MHz, RB25-0
Channel: Low

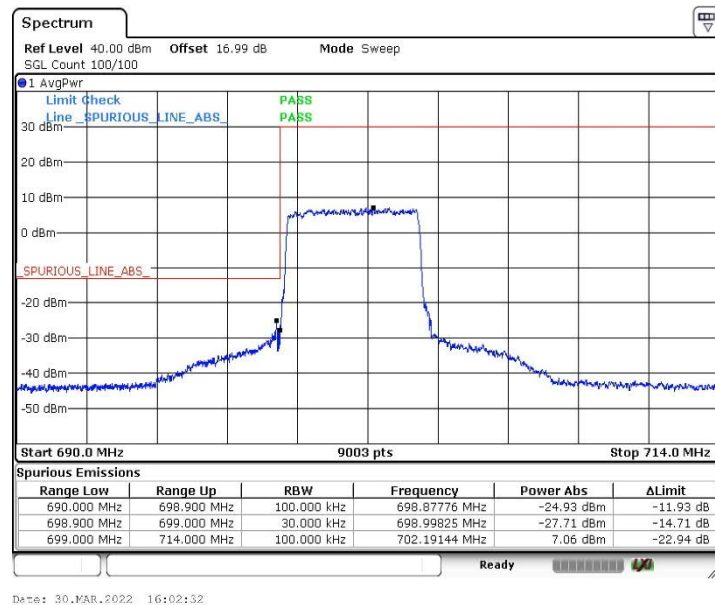


QPSK, BW 5MHz, RB25-0
Channel: High

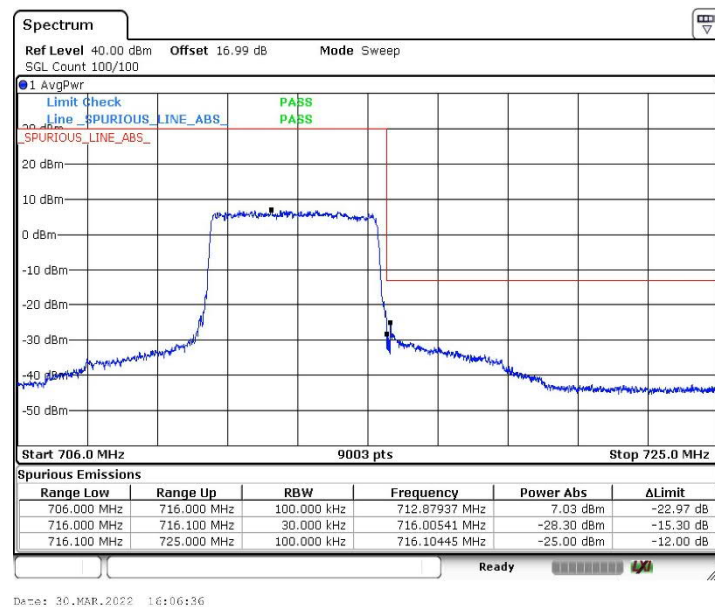


[LTE Band XII]
16QAM, BW 5MHz, RB1-0
Channel: Low

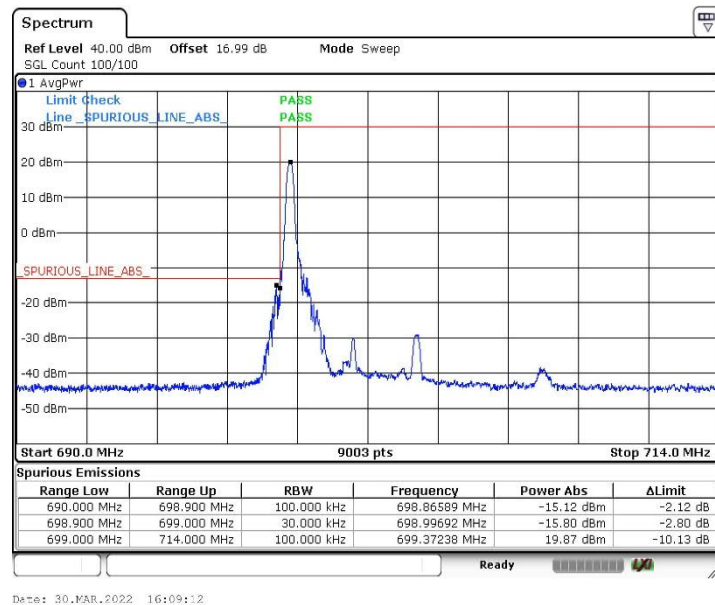


16QAM, BW 5MHz, RB1-24
Channel: High

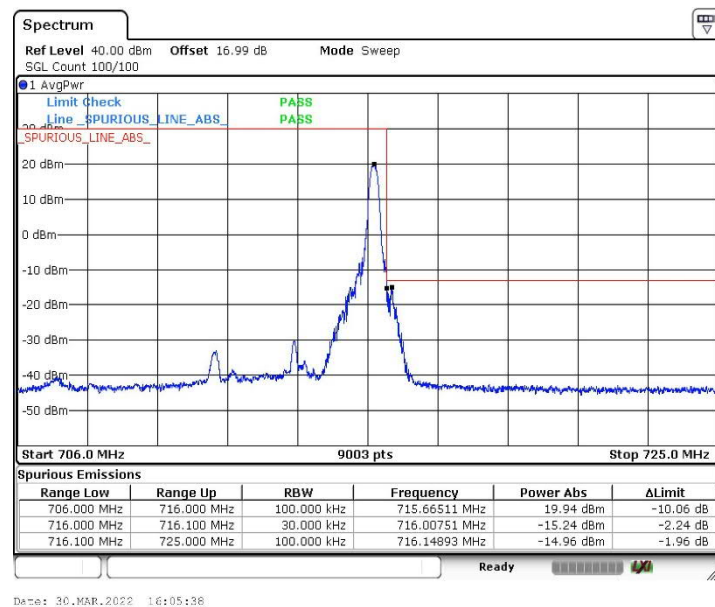


[LTE Band XII]
16QAM, BW 5MHz, RB25-0
Channel: Low

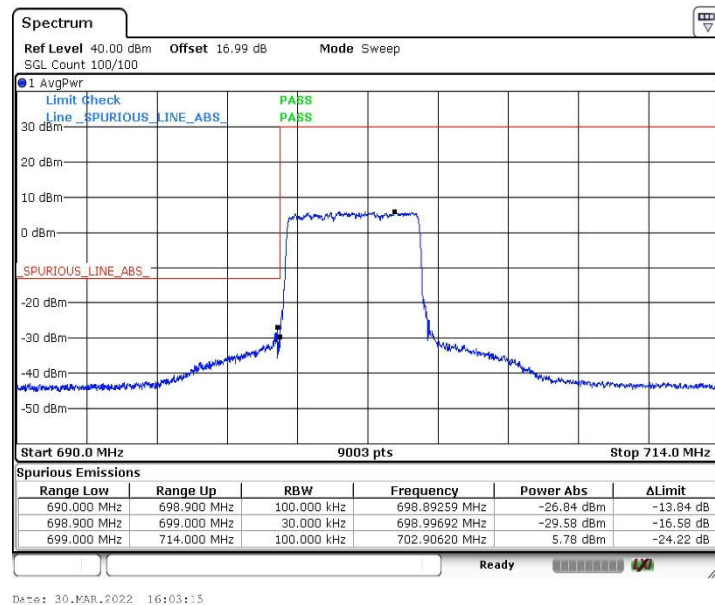


16QAM, BW 5MHz, RB25-0
Channel: High

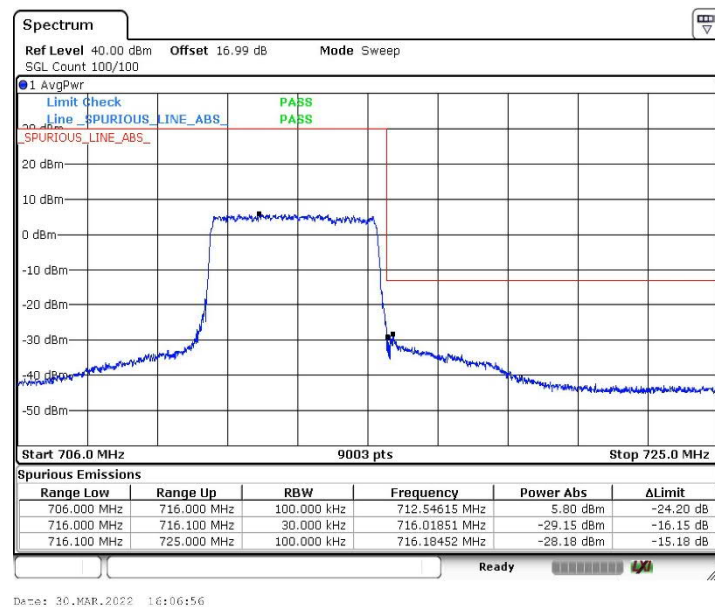


[LTE Band XII]
64QAM, BW 5MHz, RB1-0
Channel: Low

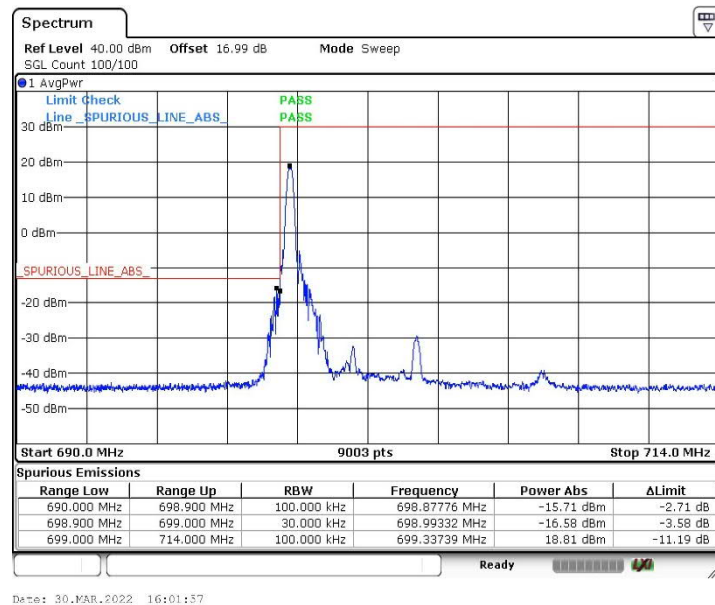


64QAM, BW 5MHz, RB1-24
Channel: High

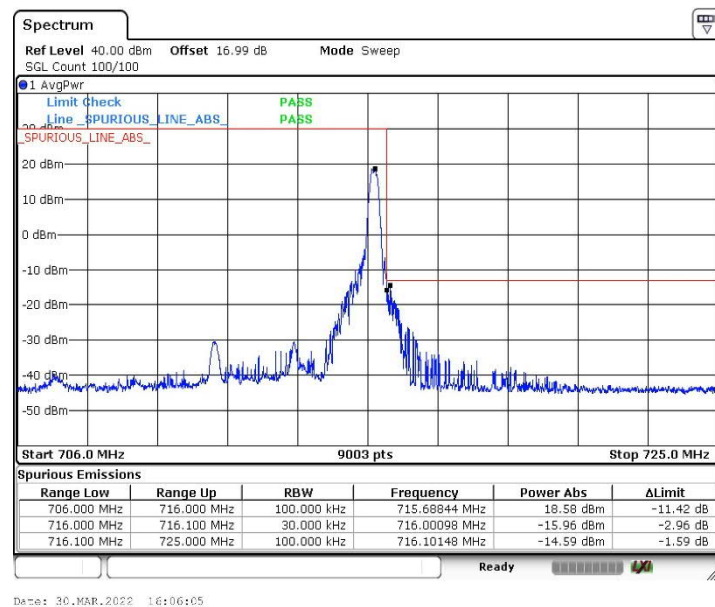


[LTE Band XII]
64QAM, BW 5MHz, RB25-0
Channel: Low

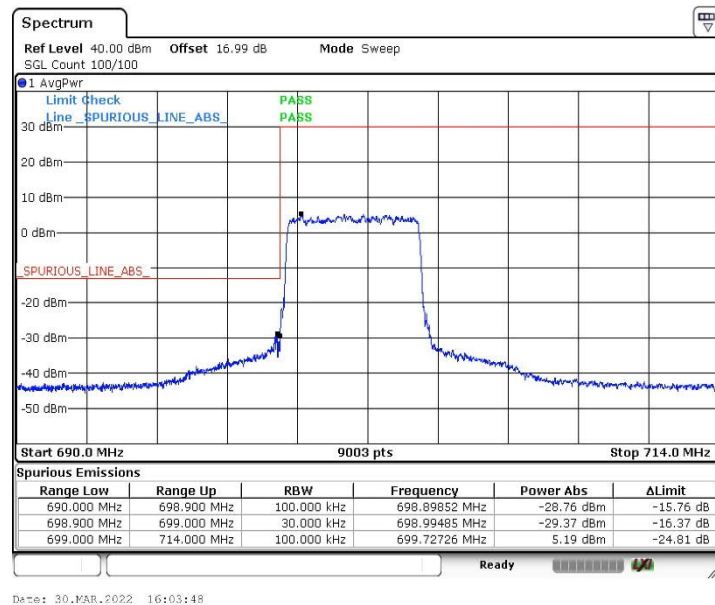


64QAM, BW 5MHz, RB25-0
Channel: High

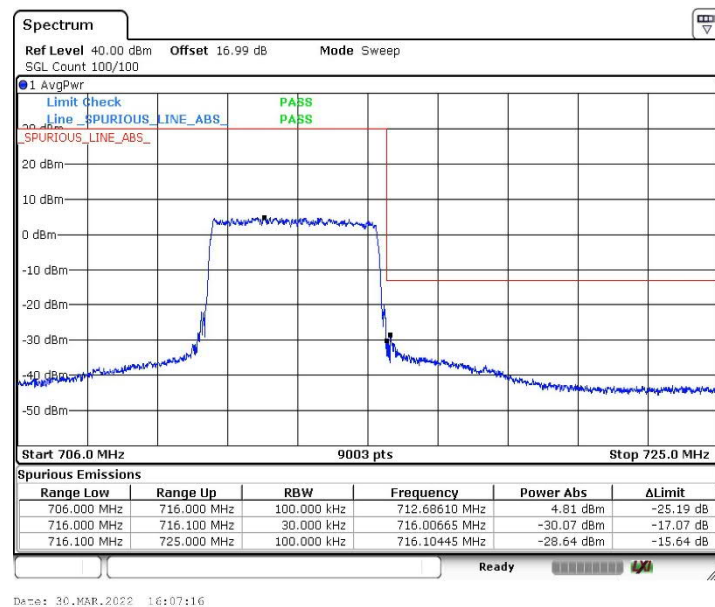


[LTE Band XII]
QPSK, BW 10MHz, RB1-0
Channel: Low

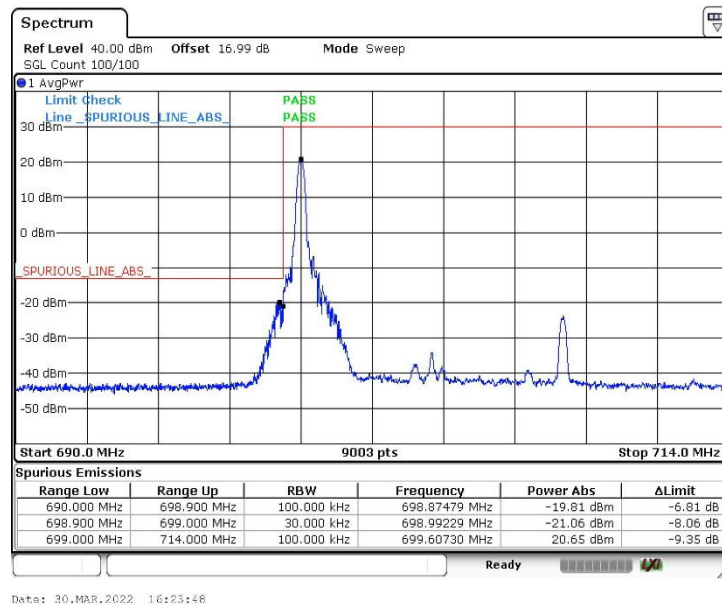


QPSK, BW 10MHz, RB1-49
Channel: High

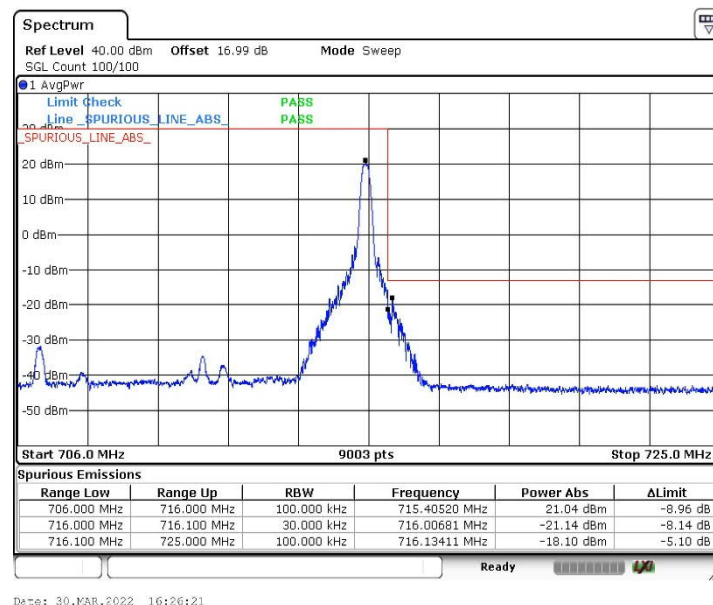


[LTE Band XII]
QPSK, BW 10MHz, RB50-0
Channel: Low

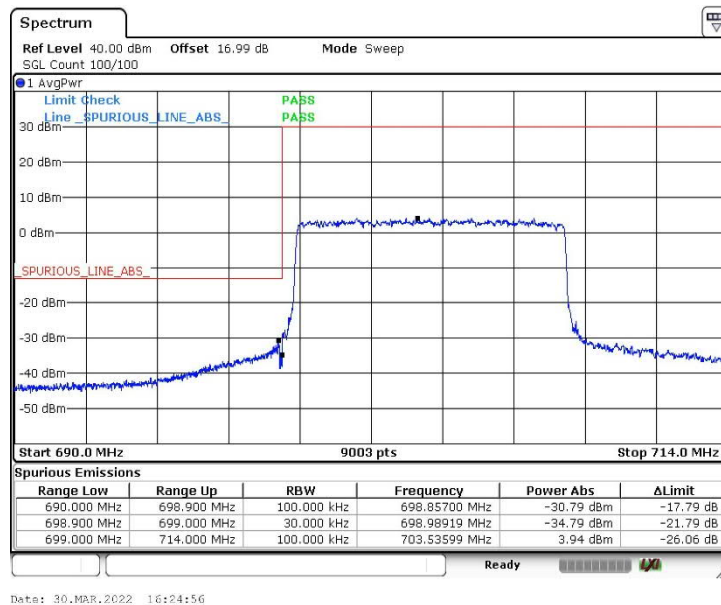


QPSK, BW 10MHz, RB50-0
Channel: High

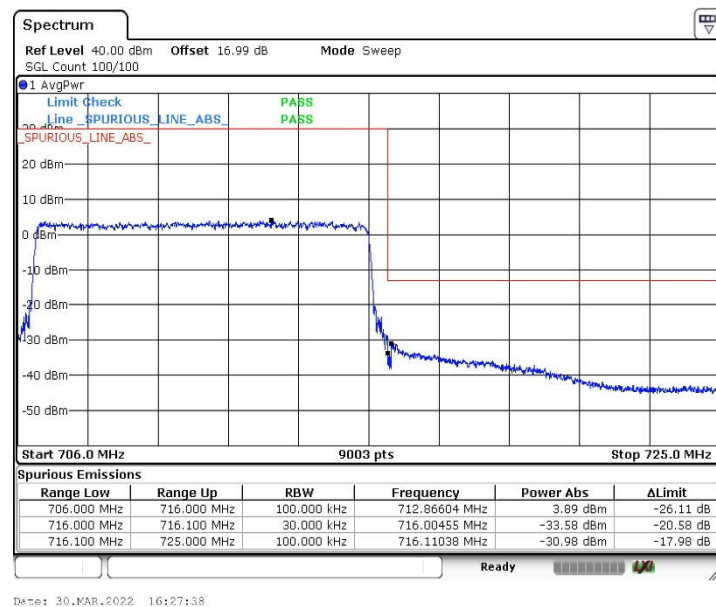


[LTE Band XII]
16QAM, BW 10MHz, RB1-0
Channel: Low

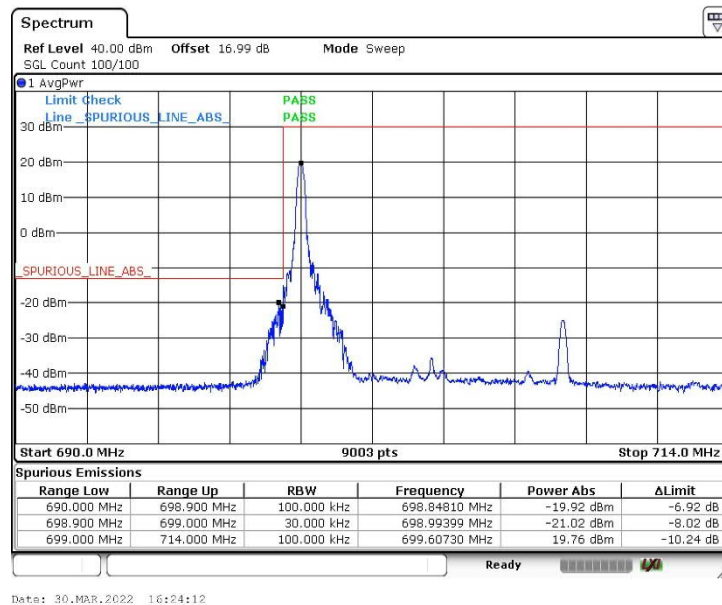


16QAM, BW 10MHz, RB1-49
Channel: High

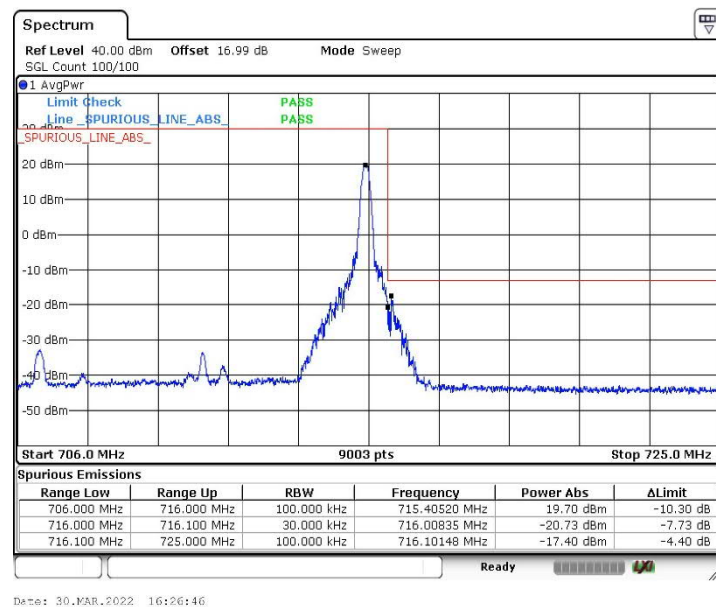


[LTE Band XII]
16QAM, BW 10MHz, RB50-0
Channel: Low

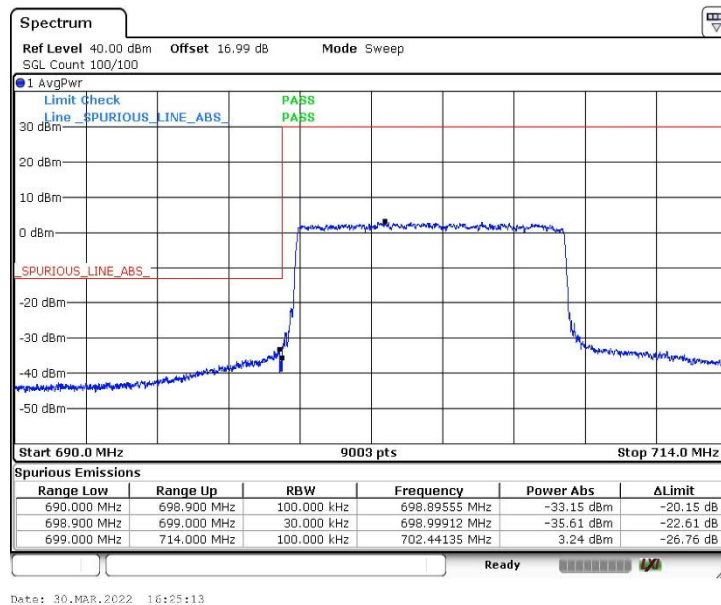


16QAM, BW 10MHz, RB50-0
Channel: High

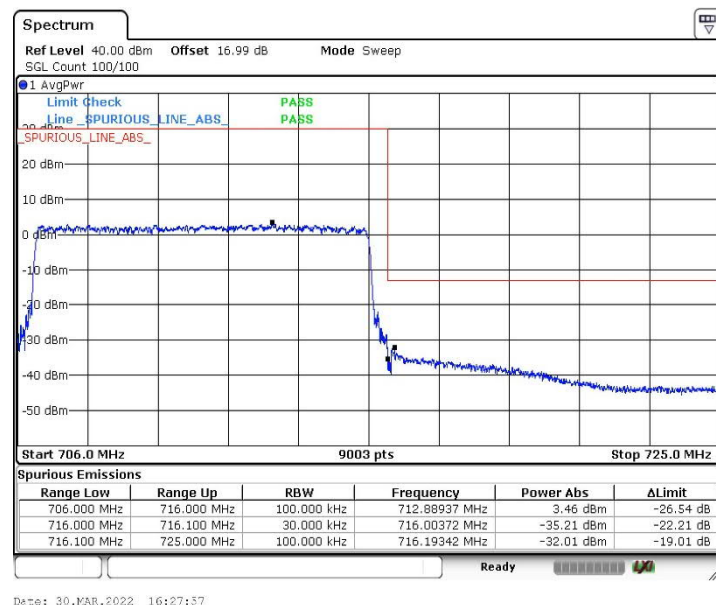


[LTE Band XII]
64QAM, BW 10MHz, RB1-0
Channel: Low

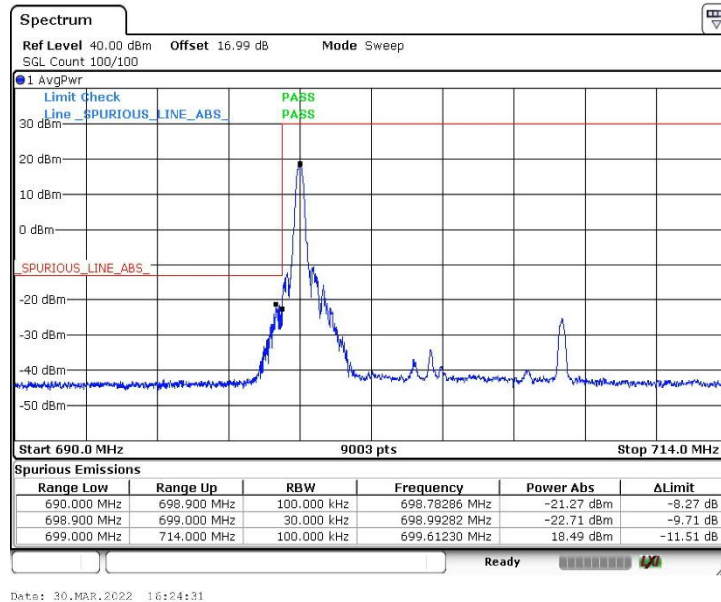


64QAM, BW 10MHz, RB1-49
Channel: High

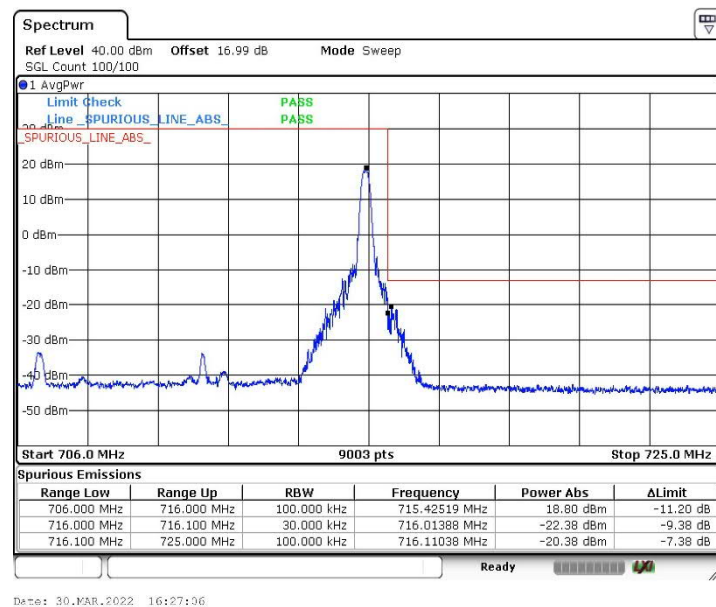

[LTE Band XII]
64QAM, BW 10MHz, RB50-0
Channel: Low

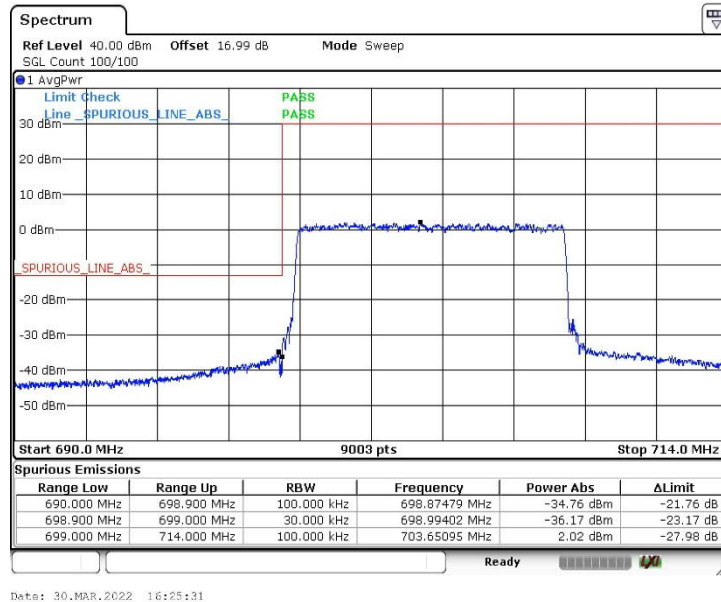

64QAM, BW 10MHz, RB50-0
Channel: High

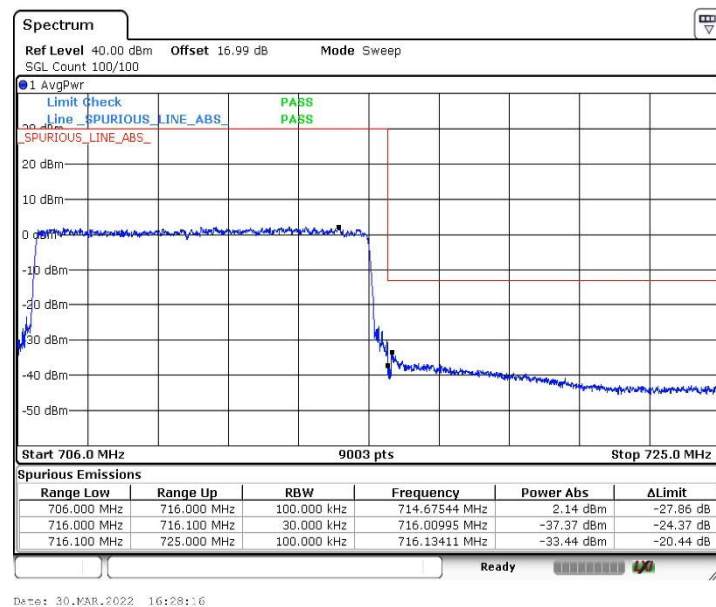

Spurious Emissions


Note: Conducted spurious test was measured in the worst case of Effective Radiated Power.

[LTE Band XII]


QPSK, BW 1.4MHz, RB1-3

Channel: 23017


30MHz-5GHz

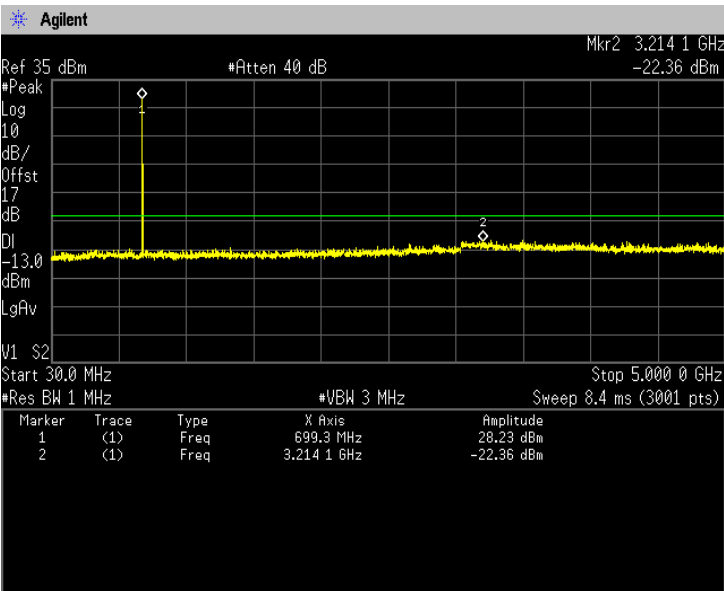


5GHz-10GHz

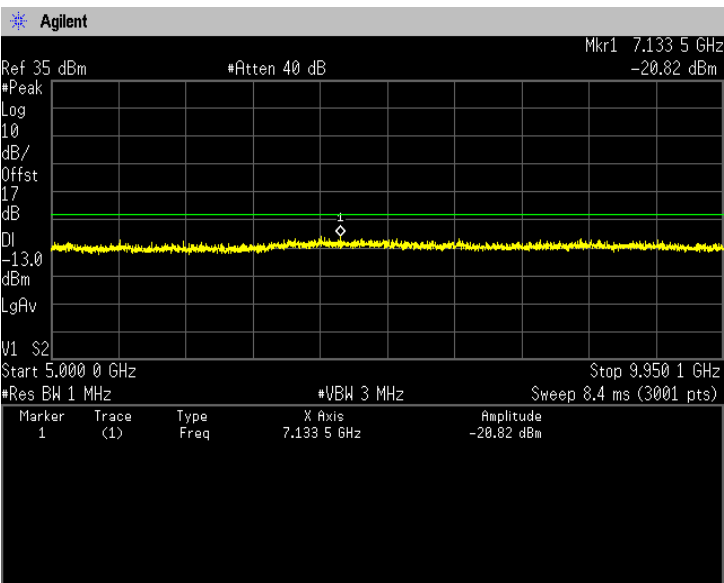


**[LTE Band XII]
QPSK, BW 1.4MHz, RB1-3
Channel: 23095
30MHz-5GHz**

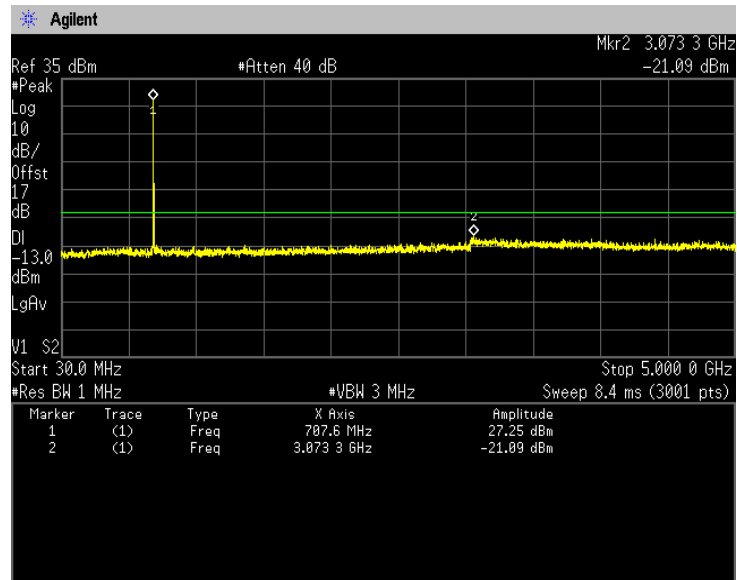


5GHz-10GHz

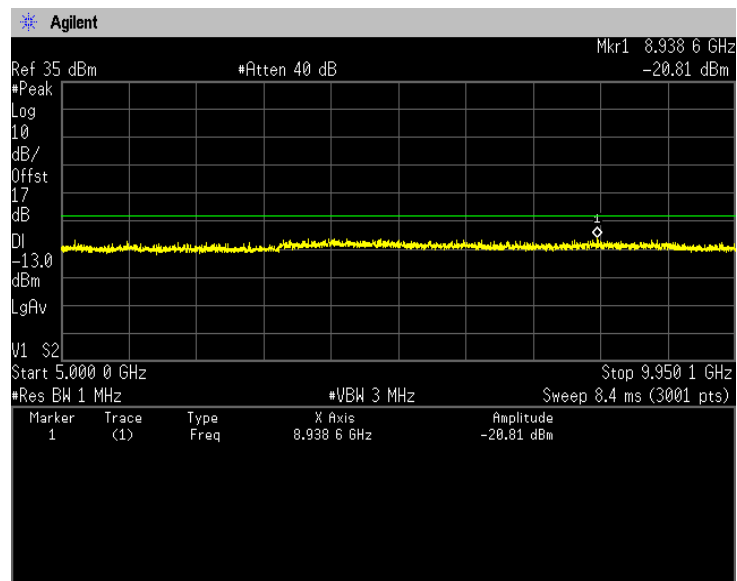

[LTE Band XII]
QPSK, BW 1.4MHz, RB1-3
Channel: 23173
30MHz-5GHz

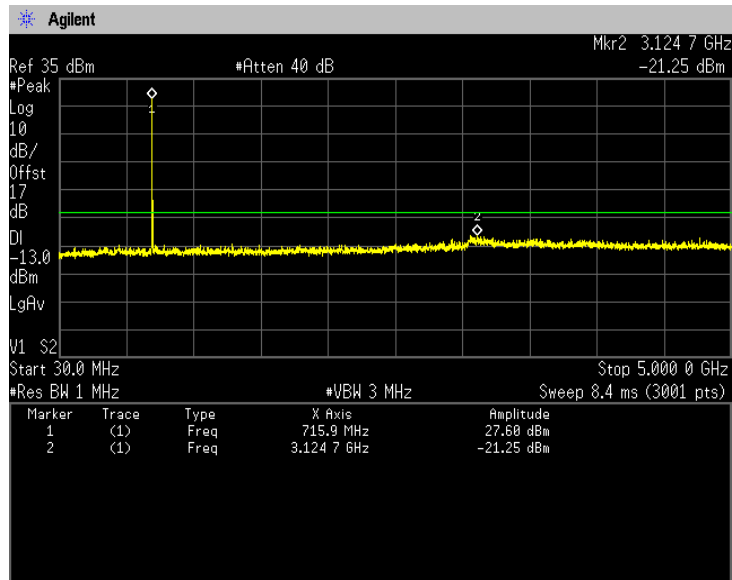


5GHz-10GHz

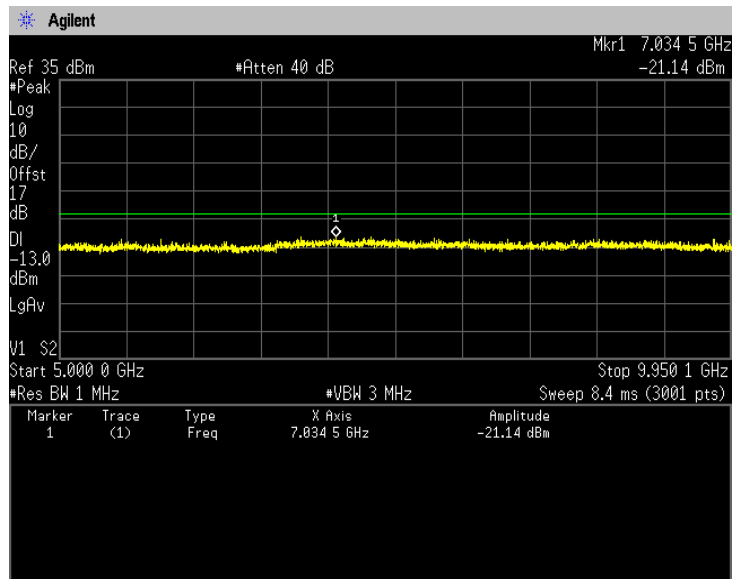


Band Edge


[LTE Band XVII]
QPSK, BW 5MHz, RB1-0
Channel: Low

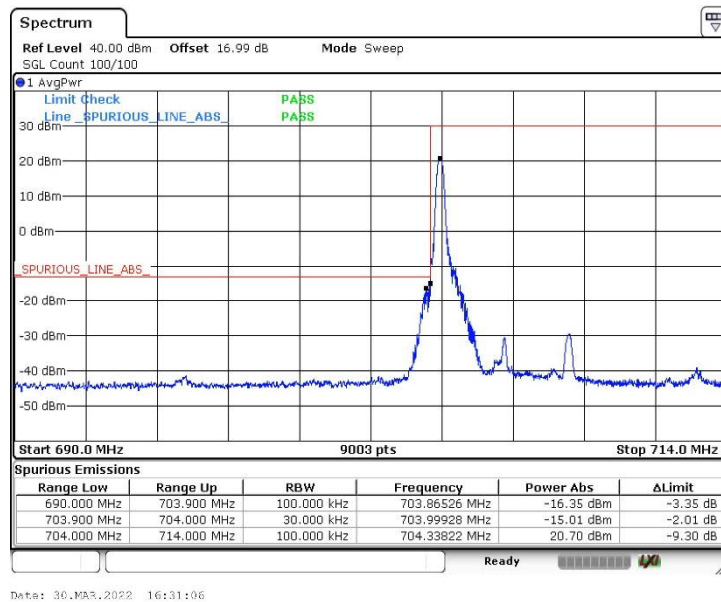


QPSK, BW 5MHz, RB1-24
Channel: High

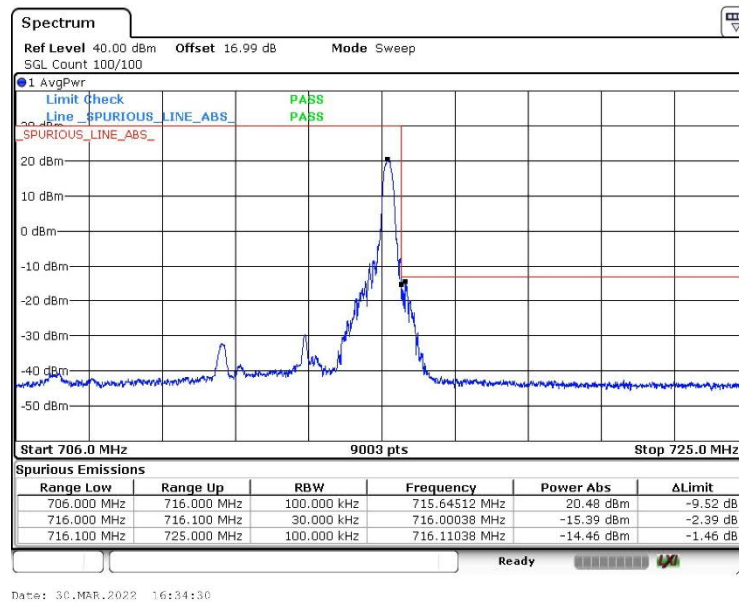


[LTE Band XVII]
QPSK, BW 5MHz, RB25-0
Channel: Low

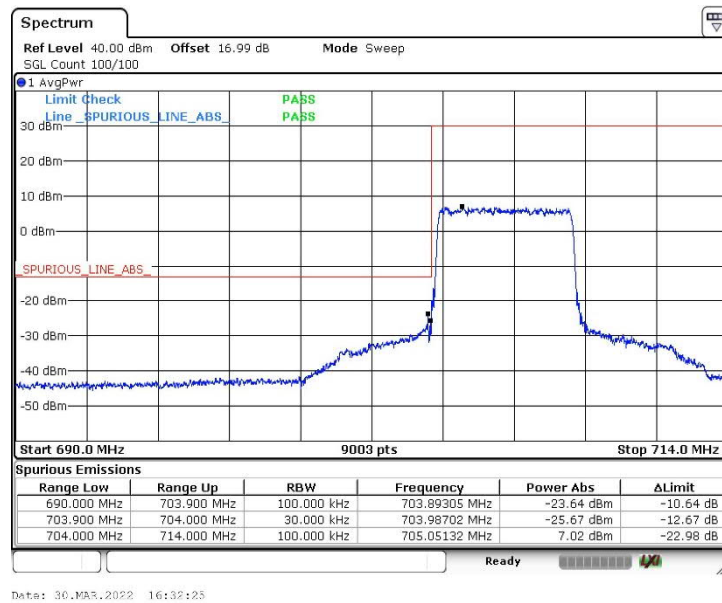


QPSK, BW 5MHz, RB25-0
Channel: High

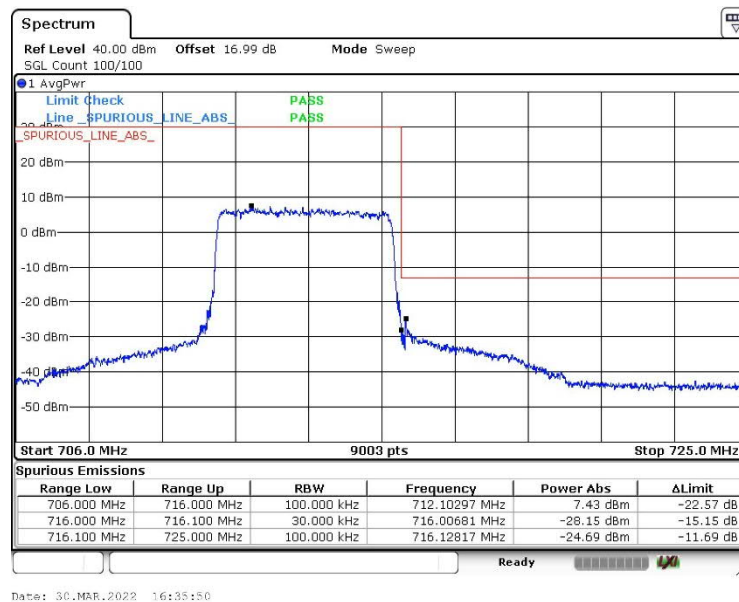


**[LTE Band XVII]
16QAM, BW 5MHz, RB1-0
Channel: Low**

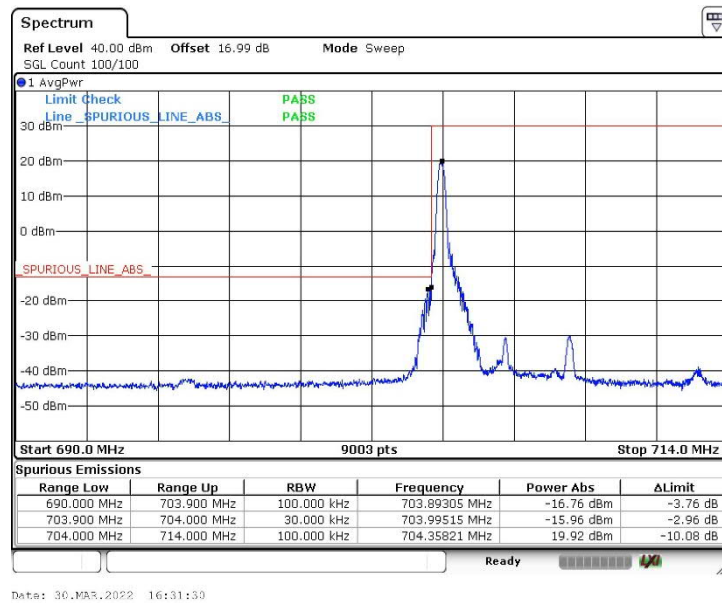


**16QAM, BW 5MHz, RB1-24
Channel: High**

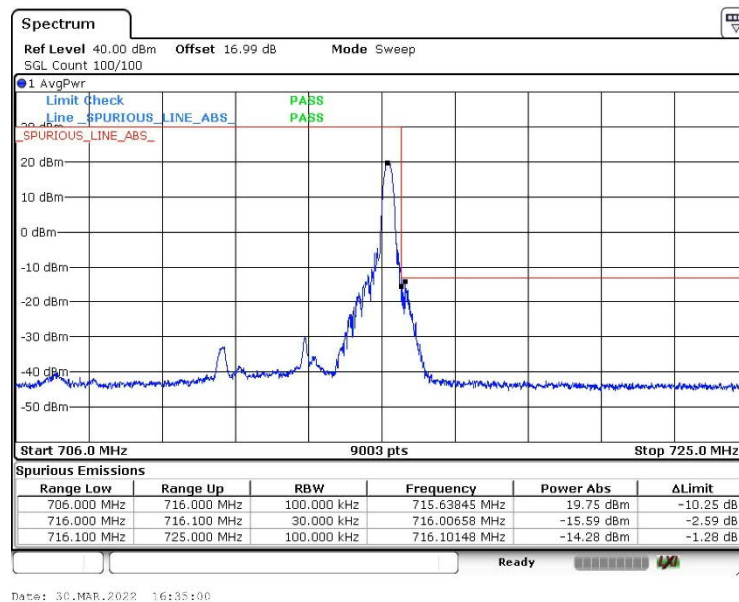


[LTE Band XVII]
16QAM, BW 5MHz, RB25-0
Channel: Low

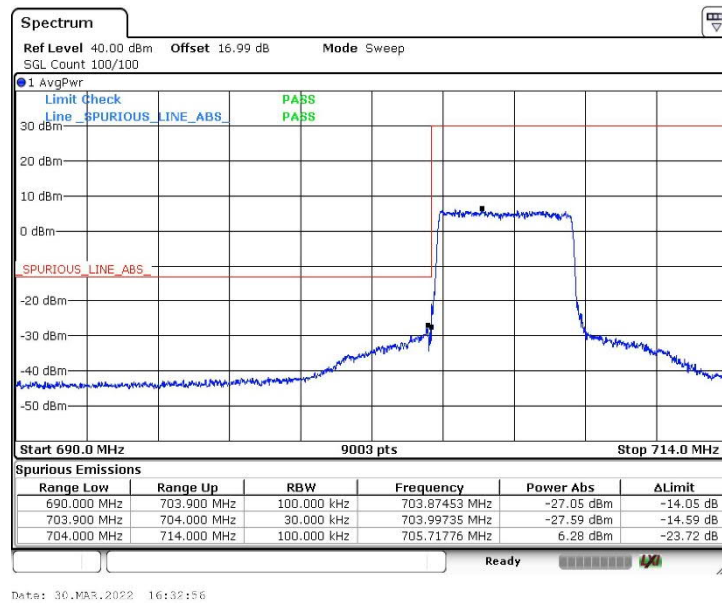


16QAM, BW 5MHz, RB25-0
Channel: High

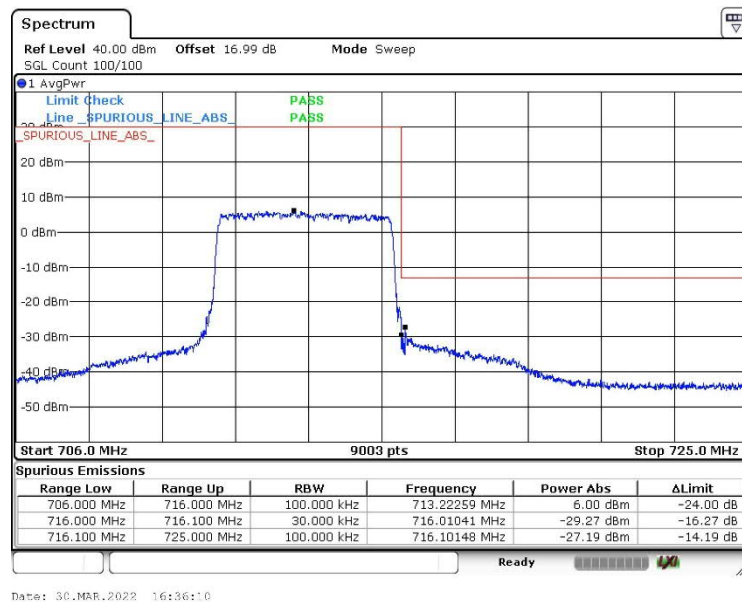


[LTE Band XVII]
64QAM, BW 5MHz, RB1-0
Channel: Low

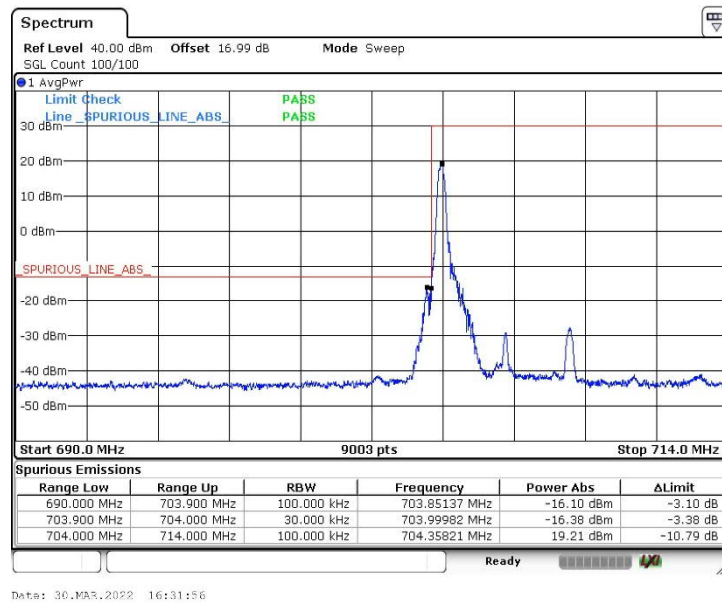


64QAM, BW 5MHz, RB1-24
Channel: High

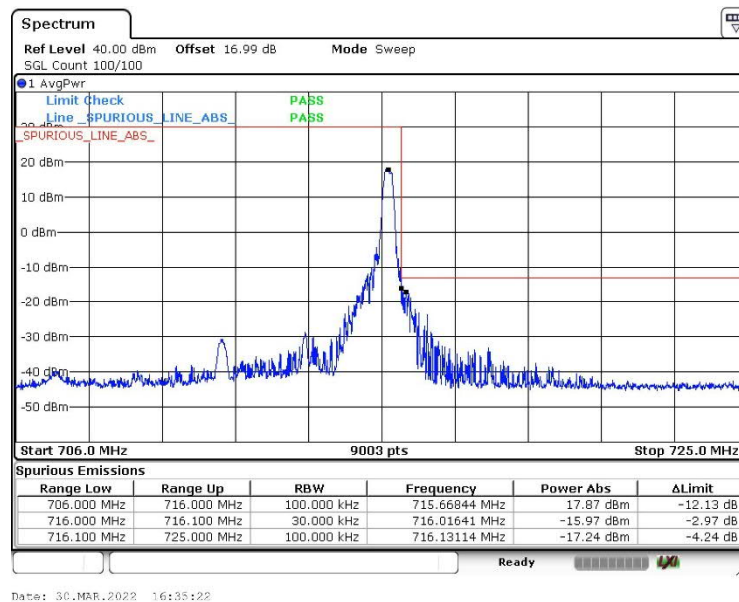


[LTE Band XVII]
64QAM, BW 5MHz, RB25-0
Channel: Low

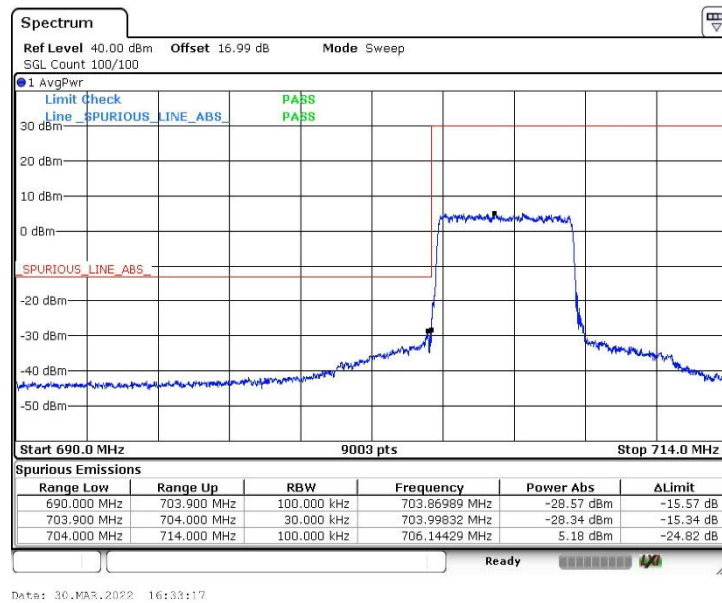


64QAM, BW 5MHz, RB25-0
Channel: High

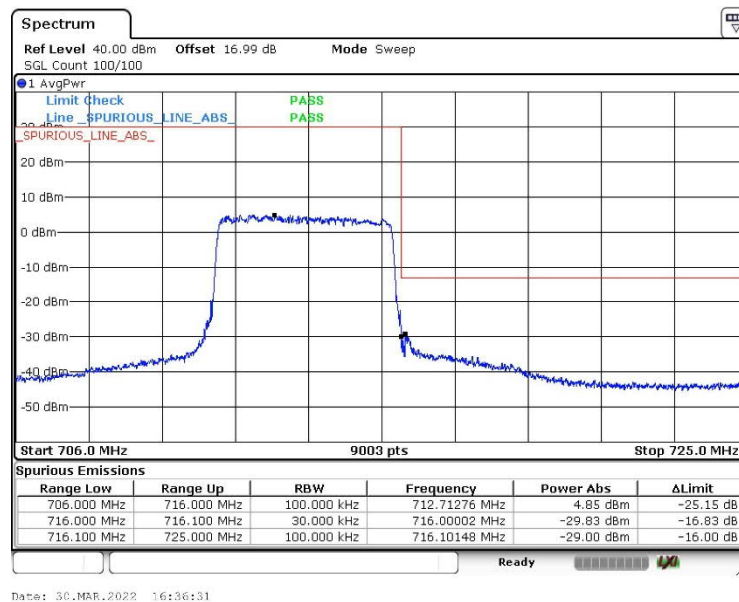


**[LTE Band XVII]
QPSK, BW 10MHz, RB1-0
Channel: Low**

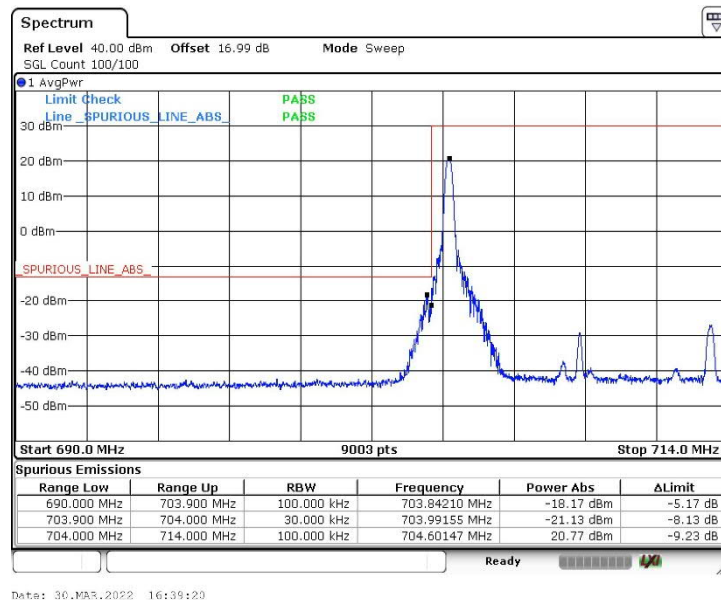


**QPSK, BW 10MHz, RB1-49
Channel: High**

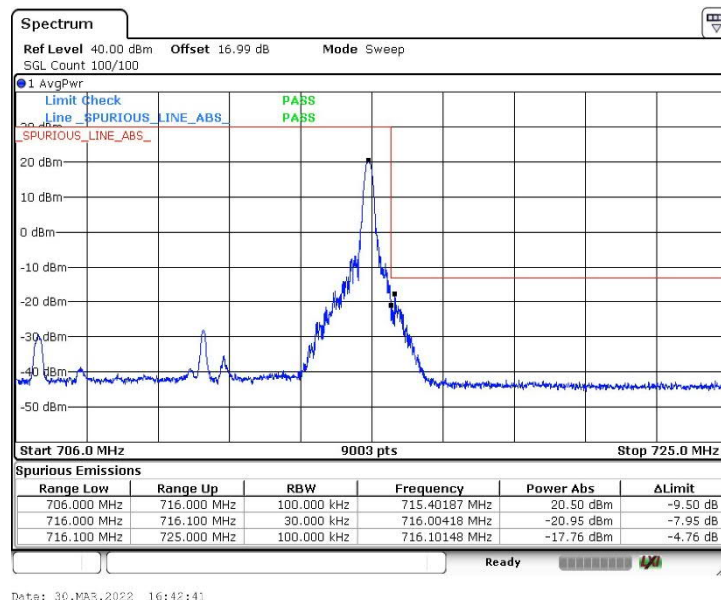


[LTE Band XVII]
QPSK, BW 10MHz, RB50-0
Channel: Low

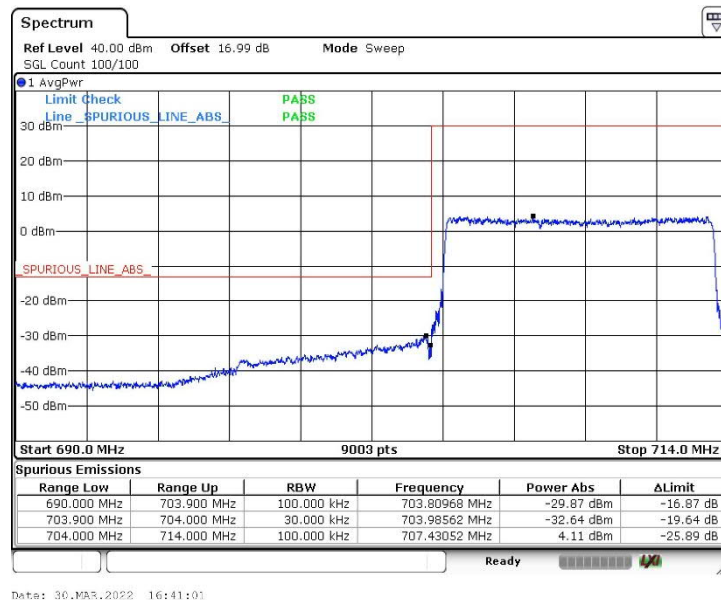


QPSK, BW 10MHz, RB50-0
Channel: High

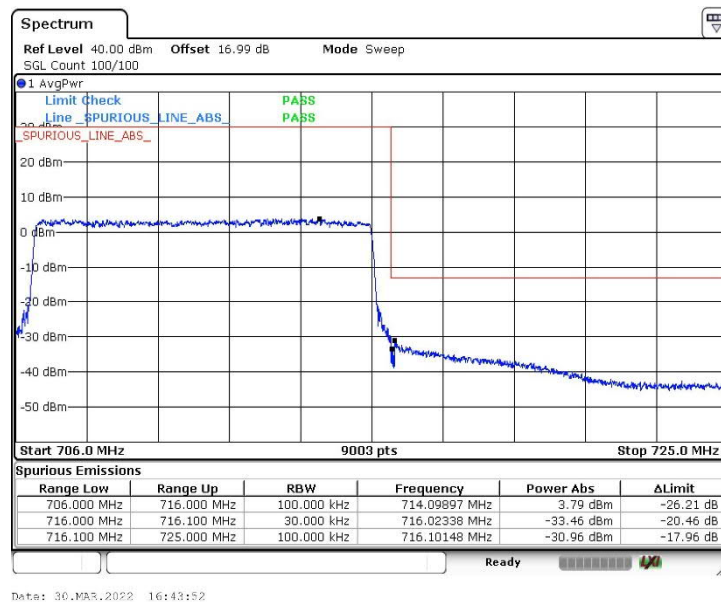


[LTE Band XVII]
16QAM, BW 10MHz, RB1-0
Channel: Low

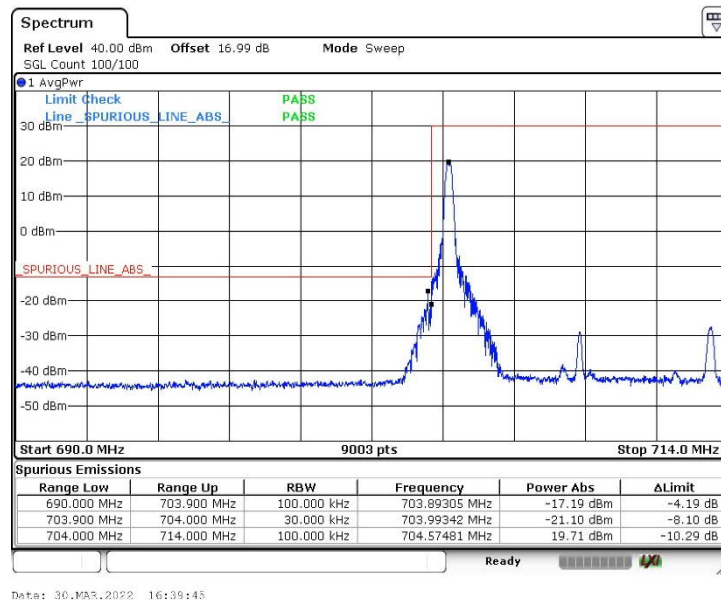


16QAM, BW 10MHz, RB1-49
Channel: High

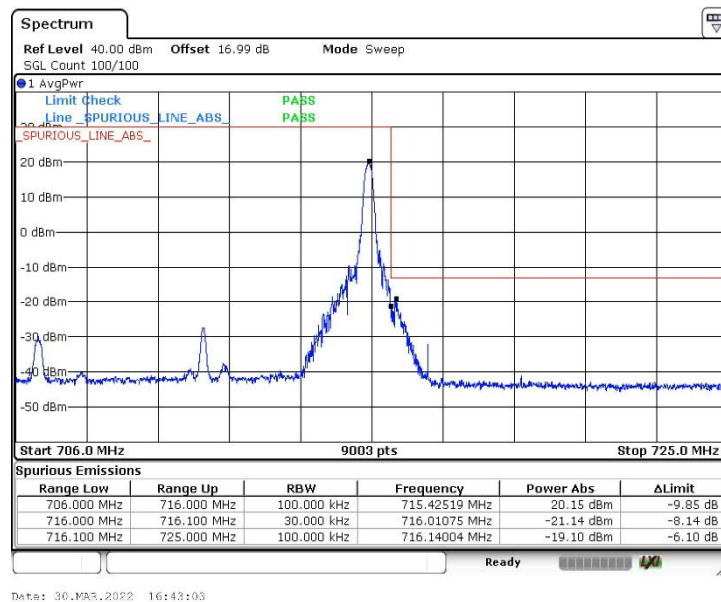


[LTE Band XVII]
16QAM, BW 10MHz, RB50-0
Channel: Low

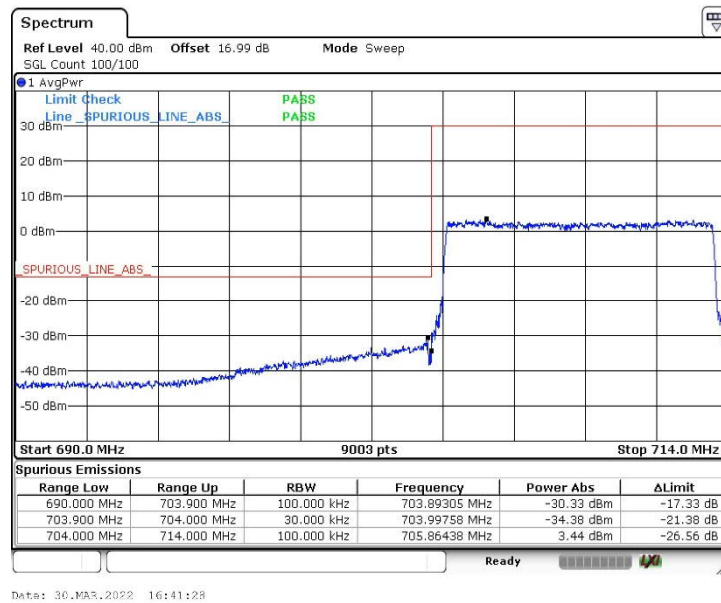


16QAM, BW 10MHz, RB50-0
Channel: High

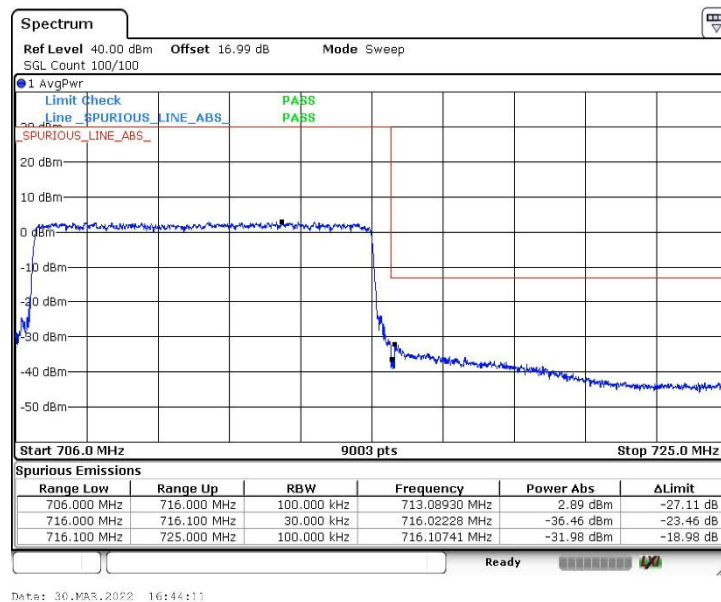


[LTE Band XVII]
64QAM, BW 10MHz, RB1-0
Channel: Low

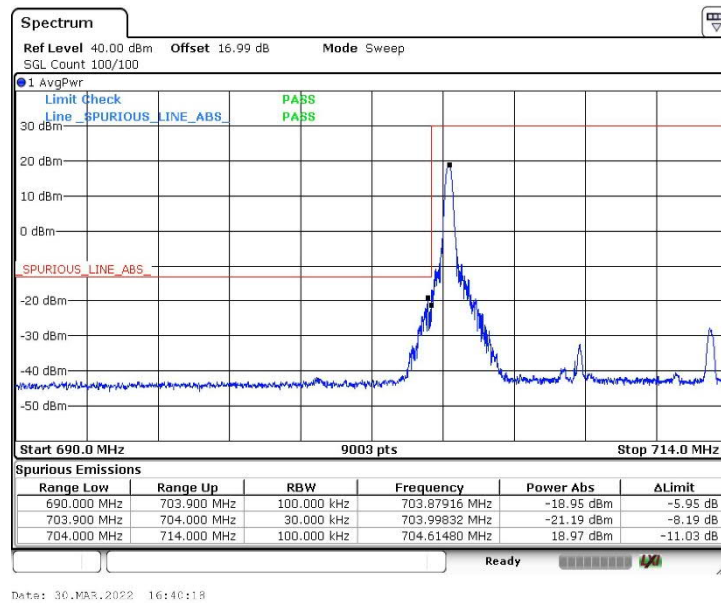


64QAM, BW 10MHz, RB1-49
Channel: High

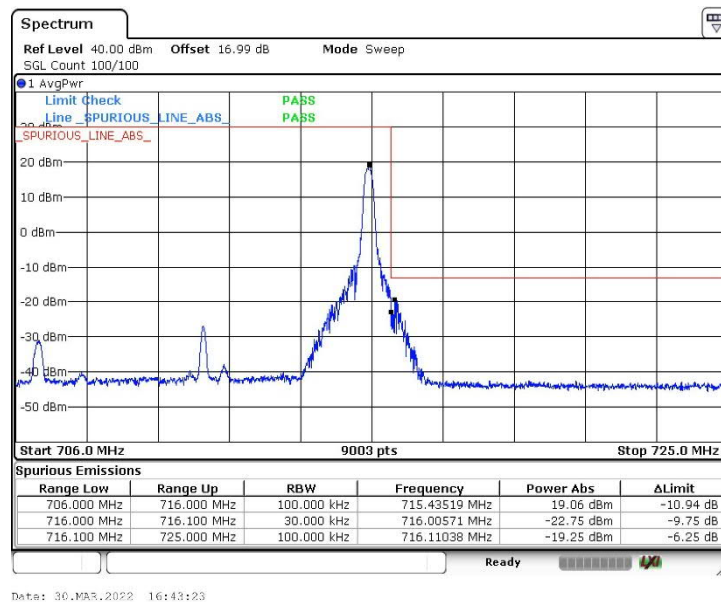

[LTE Band XVII]
64QAM, BW 10MHz, RB50-0
Channel: Low

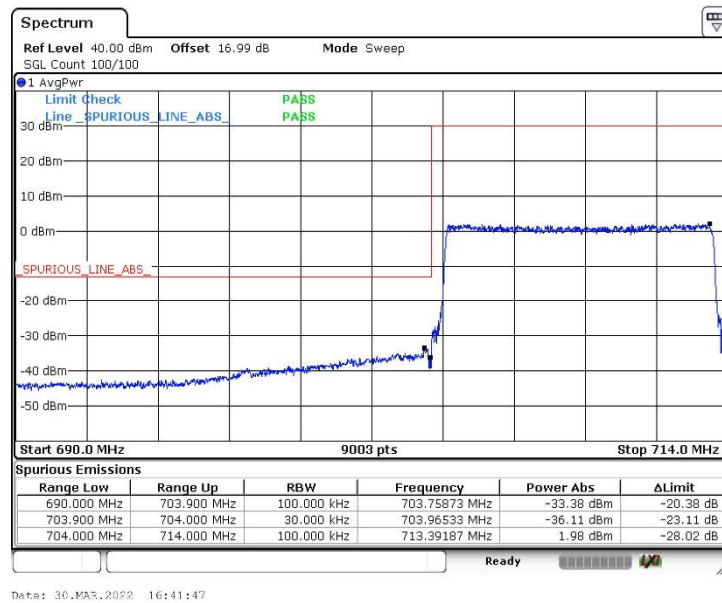

64QAM, BW 10MHz, RB50-0
Channel: High

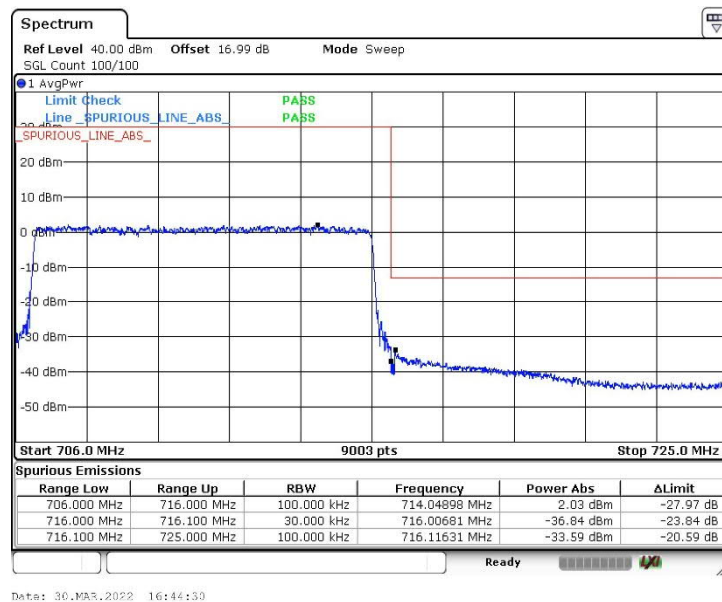

Spurious Emissions



Note: Conducted spurious test was measured in the worst case of Effective Radiated Power.

[LTE Band XVII]


QPSK, BW 5MHz, RB1-13

Channel: 23775


30MHz-5GHz

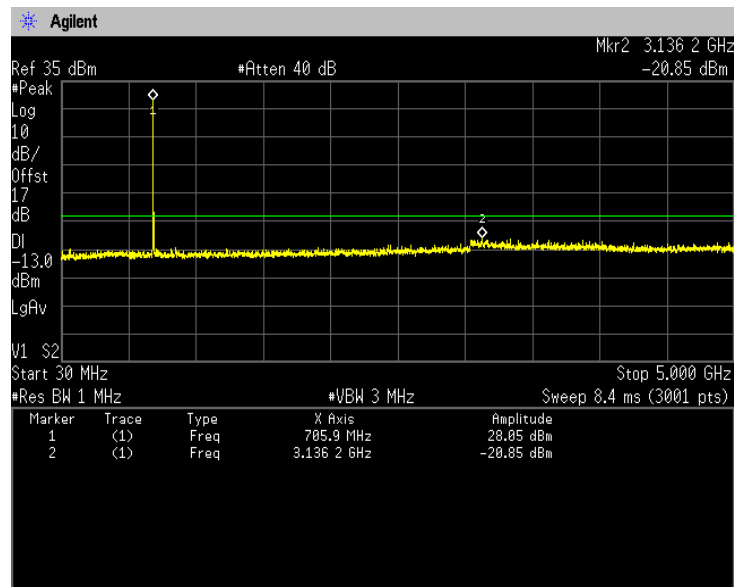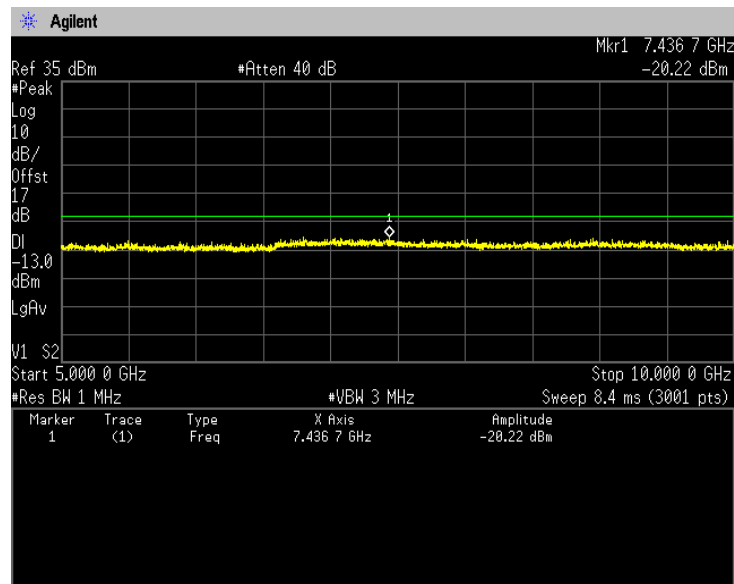**5GHz-10GHz**


[LTE Band XVII]
QPSK, BW 5MHz, RB1-13
Channel: 23790
30MHz-5GHz

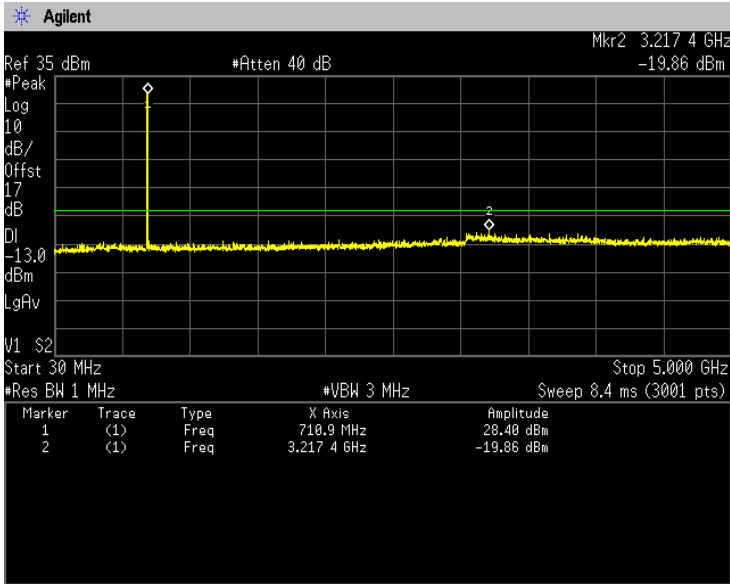


5GHz-10GHz

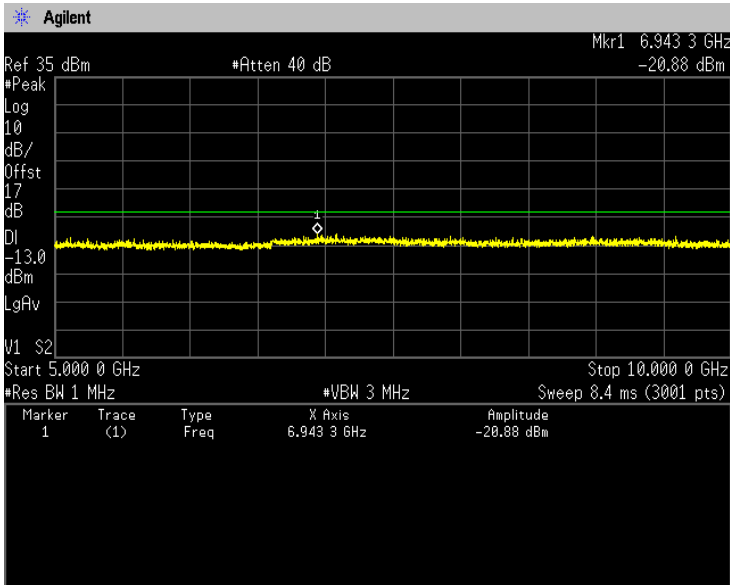

[LTE Band XVII]
QPSK, BW 5MHz, RB1-13
Channel: 23825
30MHz-5GHz

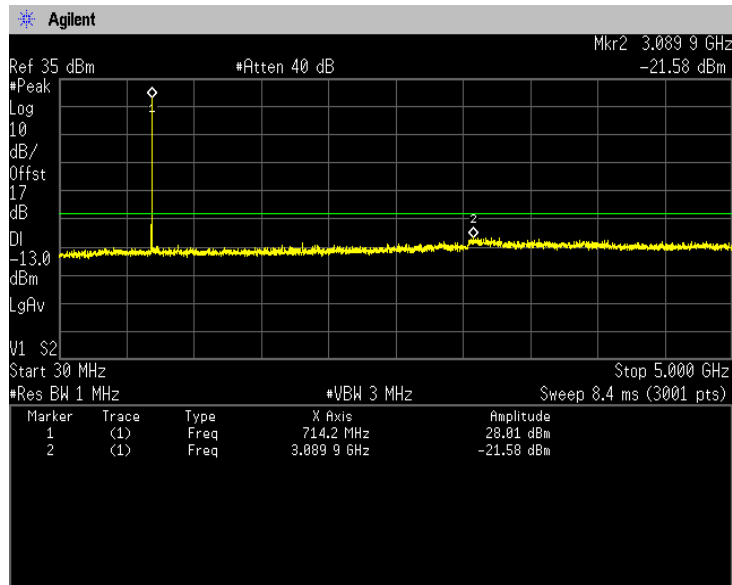

5GHz-10GHz

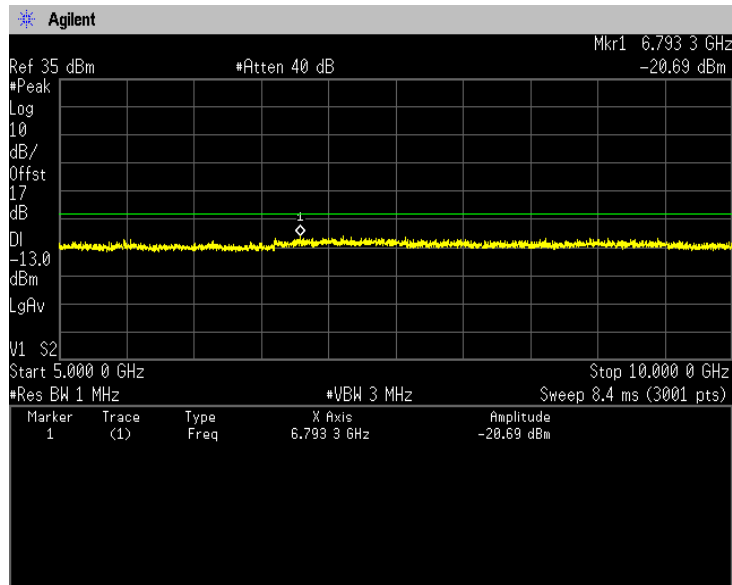

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height (Below 1GHz) or 0.6 meter x 0.6 meter surface, 1.5 meter height (Above 1GHz) styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1GHz and 1MHz for above 1GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

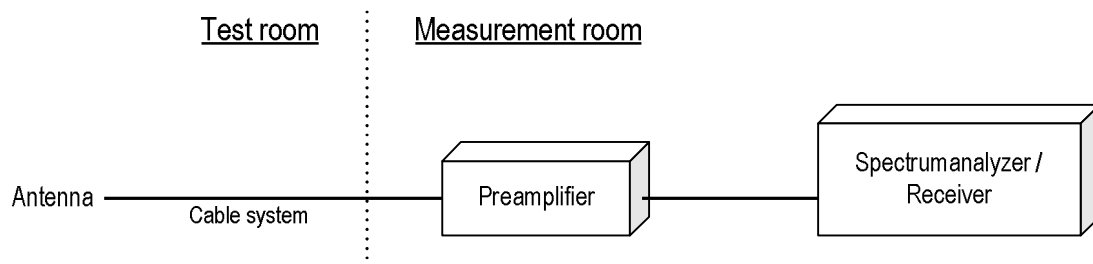

4.5.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1420 MHz : -13.0 dBm

Ant. Input = -55.6 dBm Cable loss = 1.0dB Ant. Gain = 5.9 dBi

Result = -55.6 - 1.0 + 5.9 = -50.7 dBm

Margin = -13.0 - (-50.7) = 37.7 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date : 24~25-February-2022
 Temperature : 21.7 [°C]
 Humidity : 19.0 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 25~26-February-2022
 Temperature : 22.1 [°C]
 Humidity : 23.2 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 28-February-2022
 Temperature : 20.9 [°C]
 Humidity : 21.1 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : 28-February~1-March-2022
 Temperature : 22.4 [°C]
 Humidity : 23.1 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

[LTE Band XII - X-axis, Open, Without camera]**QPSK, BW 1.4MHz****Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-48.4	-42.4	1.0	4.6	-38.8	-13.0	25.8
H	2099.1	-49.9	-42.6	1.2	4.8	-39.0	-13.0	26.0
H	2798.8	-54.1	-53.4	1.4	6.3	-48.5	-13.0	35.5

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.2	-48.0	1.0	4.8	-44.2	-13.0	31.2
H	2122.5	-48.0	-39.6	1.2	5.0	-35.8	-13.0	22.8
H	2830.0	-51.5	-44.4	1.4	6.6	-39.3	-13.0	26.3

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-50.2	-46.2	1.0	5.1	-42.1	-13.0	29.1
H	2145.9	-49.6	-41.4	1.2	5.3	-37.3	-13.0	24.3
H	2861.2	-49.5	-40.9	1.4	6.8	-35.5	-13.0	22.5

16QAM, BW 1.4MHz**Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-49.2	-43.2	1.0	4.6	-39.6	-13.0	26.6
H	2099.1	-50.0	-42.7	1.2	4.8	-39.1	-13.0	26.1
H	2798.8	-54.2	-53.5	1.4	6.3	-48.6	-13.0	35.6

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.6	-48.4	1.0	4.8	-44.6	-13.0	31.6
H	2122.5	-48.7	-40.3	1.2	5.0	-36.5	-13.0	23.5
H	2830.0	-51.6	-44.5	1.4	6.6	-39.4	-13.0	26.4

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-51.1	-57.1	1.0	5.1	-53.0	-13.0	40.0
H	2145.9	-50.1	-41.9	1.2	5.3	-37.8	-13.0	24.8
H	2861.7	-50.5	-41.9	1.4	6.8	-36.5	-13.0	23.5

[LTE Band XII - X-axis, Open, Without camera]**64QAM, BW 1.4MHz****Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-49.4	-43.4	1.0	4.6	-39.8	-13.0	26.8
H	2099.1	-50.1	-42.8	1.2	4.8	-39.2	-13.0	26.2
H	2798.8	-54.5	-53.8	1.4	6.3	-48.9	-13.0	35.9

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.5	-48.3	1.0	4.8	-44.5	-13.0	31.5
H	2122.5	-48.8	-40.4	1.2	5.0	-36.6	-13.0	23.6
H	2830.0	-52.0	-44.9	1.4	6.6	-39.8	-13.0	26.8

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-52.0	-58.0	1.0	5.1	-53.9	-13.0	40.9
H	2145.9	-50.6	-42.4	1.2	5.3	-38.3	-13.0	25.3
H	2861.2	-51.2	-42.6	1.4	6.8	-37.2	-13.0	24.2

QPSK, BW 3MHz**Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-48.6	-42.7	1.0	4.6	-39.1	-13.0	26.1
H	2101.5	-50.0	-42.1	1.2	4.8	-38.5	-13.0	25.5
H	2802.0	-54.2	-52.7	1.4	6.3	-47.8	-13.0	34.8

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.5	-48.3	1.0	4.8	-44.5	-13.0	31.5
H	2122.5	-48.2	-39.8	1.2	5.0	-36.0	-13.0	23.0
H	2830.0	-51.4	-44.3	1.4	6.6	-39.2	-13.0	26.2

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-49.6	-46.2	1.0	5.0	-42.2	-13.0	29.2
H	2143.5	-50.6	-42.7	1.2	5.3	-38.7	-13.0	25.7
H	2858.0	-50.5	-42.1	1.4	6.8	-36.7	-13.0	23.7

[LTE Band XII - X-axis, Open, Without camera]**16QAM, BW 3MHz****Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-49.1	-43.2	1.0	4.6	-39.6	-13.0	26.6
H	2101.5	-50.3	-42.4	1.2	4.8	-38.8	-13.0	25.8
H	2802.0	-54.5	-53.0	1.4	6.3	-48.1	-13.0	35.1

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.6	-48.4	1.0	4.8	-44.6	-13.0	31.6
H	2122.5	-49.0	-40.6	1.2	5.0	-36.8	-13.0	23.8
H	2830.0	-51.9	-44.8	1.4	6.6	-39.7	-13.0	26.7

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-50.2	-46.8	1.0	5.0	-42.8	-13.0	29.8
H	2143.5	-51.2	-43.3	1.2	5.3	-39.3	-13.0	26.3
H	2858.0	-51.5	-43.1	1.4	6.8	-37.7	-13.0	24.7

64QAM, BW 3MHz**Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-50.1	-44.2	1.0	4.6	-40.6	-13.0	27.6
H	2101.5	-50.7	-42.8	1.2	4.8	-39.2	-13.0	26.2
H	2802.0	-54.8	-53.3	1.4	6.3	-48.4	-13.0	35.4

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.7	-48.5	1.0	4.8	-44.7	-13.0	31.7
H	2122.5	-48.9	-49.7	1.2	5.0	-45.9	-13.0	32.9
H	2830.0	-52.0	-44.9	1.4	6.6	-39.8	-13.0	26.8

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-50.6	-47.2	1.0	5.0	-43.2	-13.0	30.2
H	2143.5	-51.5	-43.6	1.2	5.3	-39.6	-13.0	26.6
H	2858.0	-52.6	-44.2	1.4	6.8	-38.8	-13.0	25.8

[LTE Band XII - X-axis, Open, Without camera]**QPSK, BW 5MHz****Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-49.6	-44.3	1.0	4.6	-40.7	-13.0	27.7
H	2104.5	-50.5	-43.3	1.2	4.9	-39.7	-13.0	26.7
H	2806.0	-54.6	-52.9	1.4	6.3	-48.0	-13.0	35.0

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.2	-48.0	1.0	4.8	-44.2	-13.0	31.2
H	2122.5	-48.5	-40.1	1.2	5.0	-36.3	-13.0	23.3
H	2830.0	-51.5	-44.4	1.4	6.6	-39.3	-13.0	26.3

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-48.0	-43.2	1.0	5.0	-39.2	-13.0	26.2
H	2140.0	-51.4	-44.8	1.2	5.2	-40.8	-13.0	27.8
H	2854.0	-51.3	-43.0	1.4	6.8	-37.6	-13.0	24.6

16QAM, BW 5MHz**Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-50.5	-45.2	1.0	4.6	-41.6	-13.0	28.6
H	2104.5	-51.1	-43.9	1.2	4.9	-40.3	-13.0	27.3
H	2806.0	-54.4	-52.7	1.4	6.3	-47.8	-13.0	34.8

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.6	-48.4	1.0	4.8	-44.6	-13.0	31.6
H	2122.5	-48.7	-40.3	1.2	5.0	-36.5	-13.0	23.5
H	2830.0	-52.4	-45.3	1.4	6.6	-40.2	-13.0	27.2

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-48.9	-44.1	1.0	5.0	-40.1	-13.0	27.1
H	2140.5	-51.7	-45.1	1.2	5.2	-41.1	-13.0	28.1
H	2854.0	-52.6	-44.3	1.4	6.8	-38.9	-13.0	25.9

[LTE Band XII - X-axis, Open, Without camera]**64QAM, BW 5MHz****Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-51.0	-45.7	1.0	4.6	-42.1	-13.0	29.1
H	2104.5	-51.4	-44.2	1.2	4.9	-40.6	-13.0	27.6
H	2806.0	-54.8	-53.1	1.4	6.3	-48.2	-13.0	35.2

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.5	-48.3	1.0	4.8	-44.5	-13.0	31.5
H	2122.5	-49.0	-40.6	1.2	5.0	-36.8	-13.0	23.8
H	2830.0	-53.3	-46.2	1.4	6.6	-41.1	-13.0	28.1

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-49.9	-45.1	1.0	5.0	-41.1	-13.0	28.1
H	2122.0	-51.8	-45.2	1.2	5.0	-41.4	-13.0	28.4
H	2854.0	-53.7	-45.4	1.4	6.8	-40.0	-13.0	27.0

QPSK, BW 10MHz**Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-50.7	-45.4	1.0	4.7	-41.7	-13.0	28.7
H	2112.0	-51.2	-44.5	1.2	4.9	-40.8	-13.0	27.8
H	2816.0	-52.8	-49.2	1.4	6.4	-44.2	-13.0	31.2

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.2	-48.0	1.0	4.8	-44.2	-13.0	31.2
H	2122.5	-48.9	-40.5	1.2	5.0	-36.7	-13.0	23.7
H	2830.0	-51.5	-44.4	1.4	6.6	-39.3	-13.0	26.3

Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-47.5	-42.3	1.0	4.9	-38.4	-13.0	25.4
H	2133.0	-50.0	-41.6	1.2	5.2	-37.7	-13.0	24.7
H	2844.0	-53.9	-50.2	1.4	6.7	-44.9	-13.0	31.9

[LTE Band XII - X-axis, Open, Without camera]**16QAM, BW 10MHz****Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-51.3	-46.0	1.0	4.7	-42.3	-13.0	29.3
H	2112.0	-51.8	-45.1	1.2	4.9	-41.4	-13.0	28.4
H	2816.0	-52.7	-49.1	1.4	6.4	-44.1	-13.0	31.1

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.5	-48.3	1.0	4.8	-44.5	-13.0	31.5
H	2122.5	-49.1	-40.7	1.2	5.0	-36.9	-13.0	23.9
H	2830.0	-52.1	-45.0	1.4	6.6	-39.9	-13.0	26.9

Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-47.9	-42.7	1.0	4.9	-38.8	-13.0	25.8
H	2133.0	-50.5	-42.1	1.2	5.2	-38.2	-13.0	25.2
H	2844.0	-54.4	-50.7	1.4	6.7	-45.4	-13.0	32.4

64QAM, BW 10MHz**Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-51.4	-46.1	1.0	4.7	-42.4	-13.0	29.4
H	2112.0	-52.1	-45.4	1.2	4.9	-41.7	-13.0	28.7
H	2816.0	-55.0	-51.4	1.4	6.4	-46.4	-13.0	33.4

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-52.6	-48.4	1.0	4.8	-44.6	-13.0	31.6
H	2122.5	-49.2	-40.8	1.2	5.0	-37.0	-13.0	24.0
H	2830.0	-53.1	-46.0	1.4	6.6	-40.9	-13.0	27.9

Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-48.4	-43.2	1.0	4.9	-39.3	-13.0	26.3
H	2133.0	-51.0	-42.6	1.2	5.2	-38.7	-13.0	25.7
H	2844.0	-54.5	-50.8	1.4	6.7	-45.5	-13.0	32.5

[LTE Band XVII - X-axis, Open, With camera]**QPSK, BW 5MHz****Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-52.5	-50.0	1.0	4.8	-46.2	-13.0	33.2
H	2119.5	-49.7	-42.6	1.2	5.0	-38.8	-13.0	25.8

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-49.8	-44.6	1.0	4.9	-40.7	-13.0	27.7
H	2130.0	-48.9	-40.9	1.2	5.1	-37.0	-13.0	24.0

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-47.7	-42.3	1.0	5.0	-38.3	-13.0	25.3
H	2140.5	-51.5	-44.6	1.2	5.2	-40.6	-13.0	27.6

16QAM, BW 5MHz**Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-52.7	-50.2	1.0	4.8	-46.4	-13.0	33.4
H	2119.5	-50.4	-43.3	1.2	5.0	-39.5	-13.0	26.5

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-50.0	-44.8	1.0	4.9	-40.9	-13.0	27.9
H	2130.0	-49.0	-41.0	1.2	5.1	-37.1	-13.0	24.1

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-48.6	-43.2	1.0	5.0	-39.2	-13.0	26.2
H	2140.5	-51.9	-45.0	1.2	5.2	-41.0	-13.0	28.0

[LTE Band XVII - X-axis, Open, With camera]**64QAM, BW 5MHz****Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-52.8	-50.3	1.0	4.8	-46.5	-13.0	33.5
H	2119.5	-50.6	-43.5	1.2	5.0	-39.7	-13.0	26.7

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-50.0	-44.8	1.0	4.9	-40.9	-13.0	27.9
H	2130.0	-49.4	-41.4	1.2	5.1	-37.5	-13.0	24.5

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-49.5	-44.1	1.0	5.0	-40.1	-13.0	27.1
H	2140.5	-52.3	-45.4	1.2	5.2	-41.4	-13.0	28.4

QPSK, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-51.2	-48.2	1.0	4.9	-44.3	-13.0	31.3
H	2127.0	-48.6	-40.7	1.2	5.1	-36.8	-13.0	23.8

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-49.4	-44.2	1.0	4.9	-40.3	-13.0	27.3
H	2130.0	-49.2	-41.2	1.2	5.1	-37.3	-13.0	24.3

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-47.7	-42.5	1.0	4.9	-38.6	-13.0	25.6
H	2133.0	-50.1	-42.6	1.2	5.2	-38.7	-13.0	25.7

[LTE Band XVII - X-axis, Open, With camera]**16QAM, BW 10MHz****Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-51.7	-48.7	1.0	4.9	-44.8	-13.0	31.8
H	2127.0	-49.0	-41.1	1.2	5.1	-37.2	-13.0	24.2

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-49.7	-44.5	1.0	4.9	-40.6	-13.0	27.6
H	2130.0	-49.5	-41.5	1.2	5.1	-37.6	-13.0	24.6

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-47.5	-42.7	1.0	4.9	-38.8	-13.0	25.8
H	2133.0	-50.1	-42.6	1.2	5.2	-38.7	-13.0	25.7

64QAM, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-51.8	-48.8	1.0	4.9	-44.9	-13.0	31.9
H	2127.0	-49.0	-41.1	1.2	5.1	-37.2	-13.0	24.2

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-50.2	-45.0	1.0	4.9	-41.1	-13.0	28.1
H	2130.0	-49.6	-41.6	1.2	5.1	-37.7	-13.0	24.7

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-48.5	-43.7	1.0	4.9	-39.8	-13.0	26.8
H	2133.0	-50.9	-43.4	1.2	5.2	-39.5	-13.0	26.5


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 27.54, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

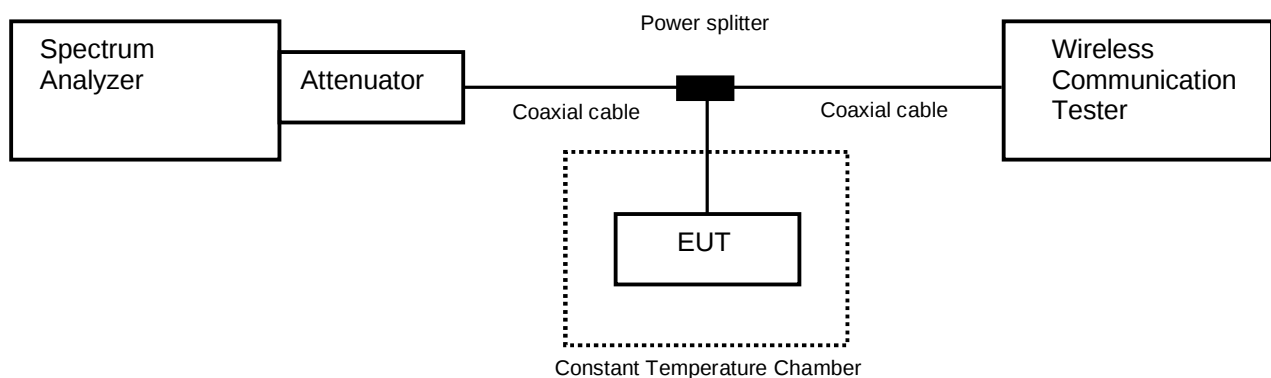

4.6.2 Limit

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.6.3 Measurement result

Date : 9-April-2022
Temperature : 20.3 [°C]
Humidity : 27.7 [%]
Test place : Shielded room No.4

Test engineer : Kazunori Saito

[LTE Band XII]
QPSK, BW 10MHz, RB 50-0
Channel: 23095

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Result
3.80	25(Ref.)	707,499,991	0.00000	Pass
	50	707,499,989	-0.00269	Pass
	40	707,499,986	-0.00677	Pass
	30	707,499,991	0.00085	Pass
	20	707,499,992	0.00178	Pass
	10	707,499,989	-0.00307	Pass
	0	707,499,992	0.00202	Pass
	-10	707,499,989	-0.00284	Pass
	-20	707,499,993	0.00315	Pass
	-30	707,499,991	0.00038	Pass
3.42	25	707,499,992	0.00245	Pass
4.18	25	707,499,989	-0.00167	Pass

[LTE Band XVII]
QPSK, BW 10MHz, RB 50-0
Channel: 23790

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Result
3.80	25(Ref.)	710,000,009	0.00000	Pass
	50	709,999,994	-0.02018	Pass
	40	709,999,983	-0.03563	Pass
	30	710,000,011	0.00279	Pass
	20	709,999,988	-0.02977	Pass
	10	709,999,992	-0.02383	Pass
	0	709,999,994	-0.02132	Pass
	-10	709,999,993	-0.02177	Pass
	-20	710,000,012	0.00527	Pass
	-30	710,000,008	-0.00028	Pass
3.42	25	709,999,990	-0.02649	Pass
4.18	25	709,999,994	-0.02062	Pass




Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.2 dB
Radiated emission (30 MHz – 1000 MHz)	± 5.5 dB
Radiated emission (1 GHz – 6 GHz)	± 4.8 dB
Radiated emission (6 GHz – 18 GHz)	± 4.4 dB
Radiated emission (18 GHz – 40 GHz)	± 6.4 dB
Radio Frequency	$\pm 1.3 \times 10^{-8}$
RF power, conducted	± 0.7 dB
Adjacent channel power	± 1.5 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Case1  Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case2  Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Case3  Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Standard limit value +Uncertainty -Uncertainty Measured value Case4  Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	



Japan

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	30-Sep-2022	01-Sep-2021
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	30-Jun-2022	08-Jun-2021
Attenuator	HUBER+SUHNER	6810.19.A	N/A(S450)	31-Dec-2022	21-Dec-2021
Microwave cable	Junkosha Inc.	MWX221/1m	N/A(S400)	31-Mar-2023	02-Mar-2022
Power divider	Keysight	11636B	MY51360915	30-Sep-2022	15-Sep-2021
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2022	04-Aug-2021
Temperature and humidity chamber	ESPEC	PL1KP	14007261	30-Sep-2022	21-Sep-2021

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2022	15-Sep-2021
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Dec-2022	13-Dec-2021
Preamplifier	SONOMA	310	372170	30-Sep-2022	15-Sep-2021
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2022	15-Dec-2021
Log periodic antenna	Schwarzbeck	VUSLP9111B	346	31-Oct-2022	15-Oct-2021
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2022	16-Sep-2021
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2022	20-Jul-2021
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2022	22-Dec-2021
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2022	22-Dec-2021
Double ridged guide antenna	ETS LINDGREN	3117	00052315	31-May-2022	24-May-2021
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2022	23-Dec-2021
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2022	02-Aug-2021
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2022	02-Aug-2021
Notch Filter	Micro-Tronics	BRM50706	003	31-Jul-2022	19-Jul-2021
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Dec-2022	08-Dec-2021
RF power amplifier	R&K	CGA020M602-2633R	B40240	30-Jun-2022	02-Jun-2021
Attenuator	HUBER+SUHNER	6820.19.A	N/A(2399)	30-Sep-2022	15-Sep-2021
Microwave cable	HUBER+SUHNER	SUCOFLEX102/2m	31648	31-Mar-2022	10-Mar-2021
Dipole antenna	Schwarzbeck	VHAP	1021	31-Jul-2022	28-Jul-2021
Dipole antenna	Schwarzbeck	UHAP	993	31-Jul-2022	28-Jul-2021
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2022	06-Dec-2021
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	30-Nov-2022	15-Nov-2021
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2022	04-Aug-2021
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	my24610/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	MY32976/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/7m	41625/6	31-Dec-2022	22-Dec-2021
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2022	20-May-2021
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2022	20-May-2021

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.