

# FCC SAR Test Report

## FCC ID: QISE5573FS-508

**Project No.** : 1804C039  
**Equipment** : Mobile WiFi  
**Model Name** : E5573Fs-508  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Apr. 19, 2018  
**Date of Test** : Apr. 22, 2018~ Apr. 24, 2018  
**Issued Date** : May 04, 2018  
**Tested by** : BTL Inc.

**PREPARED BY** : Rot Liang  
(Rot Liang)

**APPROVED BY** : Herbert Liu  
(Herbert Liu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**), or National Institute of Standards and Technology (**NIST**) .

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . GENERAL SUMMARY</b>	<b>6</b>
<b>2 . RF EMISSIONS MEASUREMENT</b>	<b>7</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 STATEMENT OF COMPLIANCE	8
3.1.1 GENERAL DESCRIPTION OF EUT	9
3.2 LABORATORY ENVIRONMENT	10
3.3 MAIN TEST INSTRUMENTS	11
<b>4 . SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>12</b>
4.1 SAR MEASUREMENT SET-UP	12
4.1.1 TEST SETUP LAYOUT	12
4.2 DASY5E-FIELDPROBESYSTEM	13
4.2.1 EX3DV4 PROBE SPECIFICATION	13
4.2.2 E-FIELD PROBE CALIBRATION	14
4.2.3 OTHER TEST EQUIPMENT	15
4.2.4 SCANNING PROCEDURE	16
4.2.5 SPATIAL PEAK SAR EVALUATION	17
4.2.6 DATA STORAGE AND EVALUATION	18
<b>5 . SYSTEM VERIFICATION PROCEDURE</b>	<b>21</b>
5.1 TISSUE VERIFICATION	21
5.2 SYSTEM CHECK	22
5.3 SYSTEM CHECK PROCEDURE	22
<b>6 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>23</b>
6.1 SAR MEASUREMENT VARIABILITY	23
6.2 SAR MEASUREMENT UNCERTAINTY	23
<b>7 . OPERATIONAL CONDITIONS DURING TEST</b>	<b>24</b>
7.1 SAR TEST CONFIGURATION	24
7.1.1 UMTS TEST CONFIGURATION	24
7.1.2 LTE TEST CONFIGURATION	28
7.1.3 WIFI TEST CONFIGURATION	30
7.2 SAR SENSOR WORKING	31

<b>Table of Contents</b>	<b>Page</b>
<b>7.3 POWER REDUCTION BY PROXIMITY SENSOR</b>	<b>32</b>
7.3.1 PROXIMITY SENSOR TRIGGERING DISTANCE	32
7.3.2 PROXIMITY SENSOR COVERAGE (KDB 616217 §6.3)	36
7.3.3 PROXIMITY SENSOR TILT ANGLE ASSESSMENT (KDB 616217 §6.4)	36
<b>7.4 TEST POSITION</b>	<b>38</b>
7.4.1 HOTSPOT MODE EXPOSURE CONDITONS	38
<b>8 . POWER TEST RESULT</b>	<b>39</b>
8.1 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 2	39
8.2 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 4	41
8.3 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 5	43
8.4 CONDUCTED POWER MEASUREMENTS OF LTE BAND 2	44
8.5 CONDUCTED POWER MEASUREMENTS OF LTE BAND 4	50
8.6 CONDUCTED POWER MEASUREMENTS OF LTE BAND 5	56
8.7 CONDUCTED POWER MEASUREMENTS OF LTE BAND 7	60
8.8 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G	64
<b>9 · SAR TEST RESULTS</b>	<b>65</b>
9.1 SAR MEASUREMENT RESULT	67
<b>10. SIMULTANEOUS TRANSMISSION CONDITIONS</b>	<b>73</b>
<b>11. SAR SUMMATION SCENARIO</b>	<b>74</b>
<b>APPENDIX</b>	<b>75</b>
<b>1. TEST LAYOUT</b>	<b>75</b>
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of the Test Set-Up	

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCC-SAR-1804C039	Original Issue.	May 04, 2018

**1. GENERAL SUMMARY**

Equipment	Mobile WiFi
Model Name	E5573Fs-508
Brand Name	N/A
Manufacturer	Huawei Technologies Co.,Ltd.
Address	Administration Building, Huawei Base, Bantian, Longgang District ,S henzhen 518129, P.R.China
Factory	Huawei Technologies Co.,Ltd.
Address	Administration Building, Huawei Base, Bantian, Longgang District ,S henzhen 518129, P.R.China
Standard(s)	<p><b>FCC 47CFR §2.1093</b> Radio frequency Radiation Exposure Evaluation: Portable Devices</p> <p><b>ANSI Std C95.1-1992</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)</p> <p><b>IEEE Std 1528-2013</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p><b>KDB616217 D04</b> SAR for laptop and tablets v01r02  <b>KDB941225 D01</b> 3G SAR Procedures v03r01  <b>KDB941225 D05</b> SAR for LTE Devices v02r05  <b>KDB941225 D06</b> Hotspot Mode V02r01  <b>KDB447498 D01</b> General RF Exposure Guidance v06  <b>KDB248227 D01</b> 802. 11 Wi-Fi SAR v02r02  <b>KDB865664 D01</b> SAR measurement 100 MHz to 6 GHz v01r04  <b>KDB865664 D02</b> RF Exposure Reporting v01r02  <b>KDB690783 D01</b> SAR Listings on Grants v01r03</p>

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1804C039) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. RF EMISSIONS MEASUREMENT

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town,Dong Guan, China.523792

### 2.2 MEASUREMENT UNCERTAINTY

Note: Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04,when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

### 3. GENERAL INFORMATION

#### 3.1 STATEMENT OF COMPLIANCE

Equipment Class	Mode	Highest Sensor off SAR-1g (W/kg)	Highest Sensor on SAR-1g (W/kg)
PCE	WCDMA II	0.56	0.54
	WCDMA IV	0.78	0.94
	WCDMA V	1.09	-
	LTE 2	0.77	0.45
	LTE 4	0.77	0.45
	LTE 5	0.91	0.58
	LTE 7	0.88	0.67
DTS	2.4G WLAN	0.25	-
<b>Note : The highest reported SAR for body and simultaneous transmission are 1.09 W/kg and 1.31 W/kg respectively.</b>			

Note:

The device is in compliance with Specific Absorption Rate ( SAR ) for general population/

uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

### 3.1.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile WiFi		
Model Name	E5573Fs-508		
IMEI Code	Sample 1: 822107011002184		
	Sample 2: 822107011002143		
S/N	Sample 1: H7H0118306000209		
	Sample 2: H7H0118306000139		
HW Version	CL1E5577ESM02		
SW Version	8.0.1.1(H331SP11C00)		
Modulation	WCDMA(QPSK),LTE(QPSK/16QAM),WiFi(DSSS/OFDM), BT(GFSK/ $\pi$ /4-DQPSK/8-DPSK)		
Operation Frequency Range(s)	Band	TX (MHz)	RX (MHz)
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	WiFi	2412-2457	
HSDPA UE Category	14		
HSUPA UE Category	6		
Power Class:	3, tested with power control “all 1”(WCDMA Band 2/4/5)		
	3, tested with power control “all Max” (LTE Band 2/4/5/7)		
Test Channels (low-mid-high):	9262-9400-9538(WCDMA Band 2)		
	1312-1413-1513 (WCDMA Band 4)		
	4132-4182-4233 (WCDMA Band 5)		
	18700-18900-19100(LTE Band 2 BW=20MHz)		
	20050-20175-20300(LTE Band 4 BW=20MHz)		
	20450-20525-20600(LTE Band 5 BW=10MHz)		
	20850-21100-21350(LTE Band 7 BW=20MHz)		
	1-5-10 (2.4G WIFI 802.11b/g/n HT20)		
	3-5-8 (2.4G WIFI 802.11n HT40)		
Antenna Gain	Band	Value(dBi)	
	WCDMA Band 2	3.4	
	WCDMA Band 4	4.6	
	WCDMA Band 5	-0.1	
	LTE Band 2	3.4	
	LTE Band 4	4.6	
	LTE Band 5	-0.1	
	LTE Band 7	3.2	
	WiFi	1.6	

Other Information	
Battery	Huawei Technologies Co., Ltd.
	Battery Model: HB434666RBC
	Nominal Voltage: --- +3.8V
	Rated capacity: 1500mAh
	1. SCUD (FUJIAN) Electronics Co., Ltd
	2. Sunwoda Electronic Co., Ltd

### 3.2 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

### 3.3 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Sep. 15, 2017	1 Year
2	E-field Probe	Speag	EX3DV4	7396	May 25, 2017	1 Year
3	Electro Optical Converter	Speag	ECO90	1151	N/A	N/A
4	System Validation Dipole	Speag	D835V2	4d160	Sep. 30, 2015	3 Years
5	System Validation Dipole	Speag	D1750V2	1101	Sep. 22, 2015	3 Years
6	System Validation Dipole	Speag	D1900V2	5d179	Sep. 29, 2015	3 Years
7	System Validation Dipole	Speag	D2450V2	919	Sep. 28, 2015	3 Years
8	System Validation Dipole	Speag	D2600V2	1067	Sep. 28, 2015	3 Years
9	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1784	N/A	N/A
10	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1896	N/A	N/A
11	8960 Series 10 Wireless Com Test set	Agilent	E5515E	MY52112163	Aug. 20, 2017	1 Year
12	CMW500-Wideband Radio Communication Tester	RS	CMW500	152372	Mar. 11, 2018	1Year
13	CMW500-Wideband Radio Communication Tester	RS	CMW500	153883	Mar. 11, 2018	1Year
14	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Mar. 09, 2018	1Year
15	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 11, 2018	1 Year
16	MXG Analog Signal Generator	Agilent	N5181A	MY49060477	Jun. 30, 2017	1 Year
17	P-series power meter	Agilent	N1911A	MY45100473	Aug. 20, 2017	1 Year
18	wideband power sensor	Agilent	N1921A	MY51100041	Aug. 20, 2017	1 Year
19	Dielectric Assessment Kit	Speag	DAK-3.5	1226	N/A	N/A
20	Dual directional coupler	Woken	TS-PCC0M-05	107090019	Mar. 11, 2018	1 Year
21	coupler	Woken	0110A05601O-10	COM5BNW1A2	Mar. 11, 2018	1 Year

Remark: " N/A" denotes no model name, serial No. or calibration specified.  
All calibration period of equipment list is one year.


## 4. SAR MEASUREMENTS SYSTEM CONFIGURATION

### 4.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.1.1 TEST SETUP LAYOUT

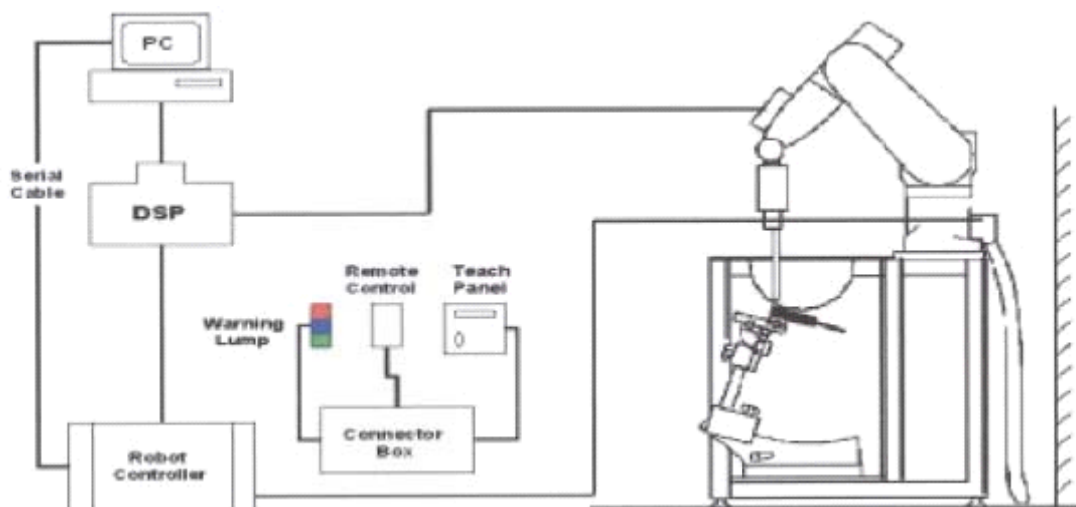

## 4.2 DASY5E-FIELDPROBESYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4(manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 4.2.1 EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



**EX3DV4 E-field Probe**

#### 4.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or 
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  $\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg/m}^3$ ).


## 4.2.3 OTHER TEST EQUIPMENT


### 4.2.3.1 Device Holder for Transmitters

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam

### 4.2.3.2 Phantom

Model	ELI4 Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet	
Available	Special	

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000mm; Width: 500mm Height: adjustable feet	
Available	Special	

#### 4.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or Body) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{ mm}$  and 4-6 GHz -  $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ , 3-4 GHz -  $\leq 4\text{mm}$  and 4-6GHz -  $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

#### 4.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points( with 8mm horizontal resolution) or 7 x 7 x 7 points( with 5mm horizontal resolution) or 8 x 8 x 7 points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

## **4.2.6 DATA STORAGE AND EVALUATION**

### **4.2.6.1 Data Storage**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### 4.2.6.2 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, $a_{i0}$ , $a_{i1}$ , $a_{i2}$
	Conversion factor	ConvF <sub>i</sub>
	Diode compression point	Dcp <sub>i</sub>
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	$V_i$ = compensated signal of channel i	(i = x, y, z)
	$U_i$ = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp <sub>i</sub> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = ( V_i / \text{Norm}_i \cdot \text{ConvF} )^{1/2}$$

$$\text{H-field probes: } H_i = ( V_i )^{1/2} \cdot ( a_{i0} + a_{i1} f + a_{i2} f^2 ) / f$$

With  $V_i$  = compensated signal of channel i ( i = x, y, z )

$\text{Norm}_i$  = sensor sensitivity of channel i ( i = x, y, z )  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$\text{ConvF}$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With  $\text{SAR}$  = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m  
= conductivity in [mho/m] or [Siemens/m]  
= equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{\text{tot}}$  = total field strength in V/m

$H_{\text{tot}}$  = total magnetic field strength in A/m

## 5. SYSTEM VERIFICATION PROCEDURE

### 5.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Body 835	0.2	-	0.2	0.9	48.5	-	50.2	-
Body 1750	-	31.0	-	0.2	-	-	68.8	-
Body 1900	-	29.5	-	0.3	-	-	70.2	-
Body 2450	-	31.4	-	0.1	-	-	68.5	-
Body 2600	-	31.8	-	0.1	-	-	68.1	-

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Targeted Conductivity ( $\sigma$ )	Targeted Permittivity ( $\epsilon_r$ )	Deviation Conductivity ( $\sigma$ ) (%)	Deviation Permittivity ( $\epsilon_r$ ) (%)	Date
Body	835	22.5	0.973	54.324	0.97	55.2	0.31	-1.59	Apr. 23, 2018
Body	1750	22.3	1.499	52.446	1.49	53.4	0.60	-1.79	Apr. 24, 2018
Body	1900	22.6	1.551	53.760	1.52	53.3	2.04	0.86	Apr. 22, 2018
Body	2450	22.4	1.998	51.714	1.95	52.7	2.46	-1.87	Apr. 24, 2018
Body	2600	22.4	2.234	52.085	2.16	52.5	3.43	-0.79	Apr. 23, 2018

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 5.2 SYSTEM CHECK


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Date	Frequency (MHz)	Targeted SAR-1g (W/kg)	Measured SAR-1g (W/kg)	normalized SAR-1g (W/kg)	Deviation (%)	Dipole S/N
Body	Apr. 23, 2018	835	9.52	2.31	9.24	-2.94	4d160
Body	Apr. 24, 2018	1750	35.70	9.35	37.40	4.76	1101
Body	Apr. 22, 2018	1900	39.60	9.82	39.28	-0.81	5d179
Body	Apr. 24, 2018	2450	51.10	13.30	53.20	4.11	919
Body	Apr. 23, 2018	2600	54.10	13.80	55.20	2.03	1067

## 5.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

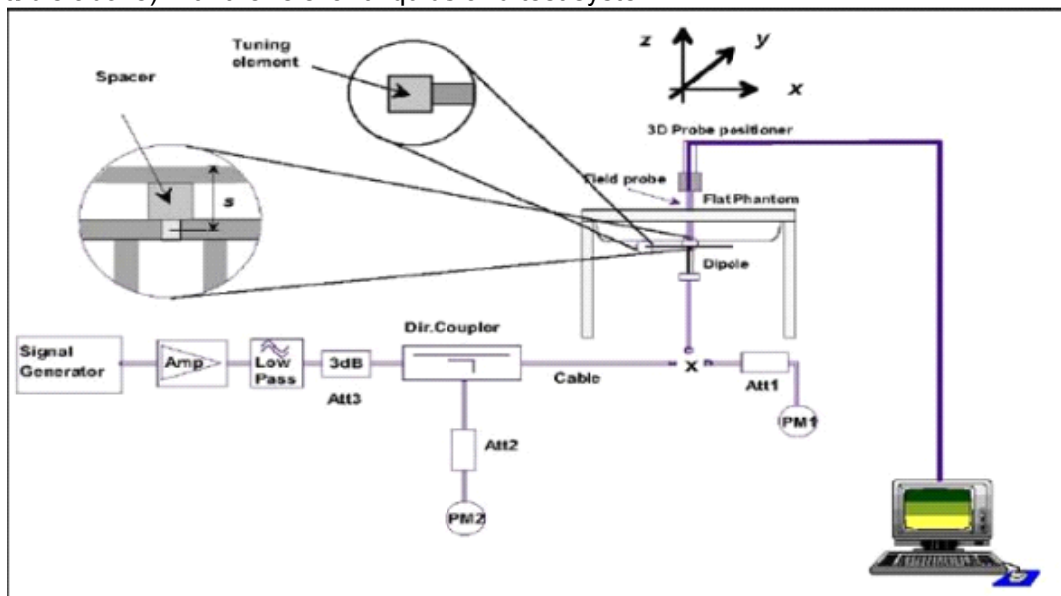

## **6. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY**

### **6.1 SAR MEASUREMENT VARIABILITY**

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

### **6.2 SAR MEASUREMENT UNCERTAINTY**

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis.

## 7. OPERATIONAL CONDITIONS DURING TEST

### 7.1 SAR TEST CONFIGURATION

#### 7.1.1 UMTS TEST CONFIGURATION

##### 1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA)

Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

##### 2. WCDMA

###### (1). Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

###### (2). Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

##### 3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the

below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK$ ,  $\Delta NACK$ ,

$\Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c / \beta_d$ <sup>o</sup>	$\beta_{hs}$ (1) <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
Note 1: $\Delta ACK$ , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM=1 for $\beta_c / \beta_d = 12/15$ , $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 3: For subtest 2 the $\beta_c / \beta_d$ ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$							

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

#### 4. HSUPA

SAR for Body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the primary mode and the adjusted SAR is less than 1.2W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03r01, the 3G SAR test reduction procedures is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the “WCDMA Handset” and „Release 5 HSDPA Data Device” sections of 3G device.

#### Subtests for UMTS Release 6 HSUPA

Sub-test <sup>1</sup>	$\beta_c$ <sup>2</sup>	$\beta_d$ <sup>2</sup>	$\beta_d$ (SF) <sup>3</sup>	$\beta_c/\beta_d$ <sup>2</sup>	$\beta_{hs}$ <sup>(1)</sup> <sup>2</sup>	$\beta_{ec}$ <sup>2</sup>	$\beta_{ed}$ <sup>2</sup>	$\beta_{ec}$ <sup>2</sup> (SF) <sup>2</sup>	$\beta_{ed}$ <sup>(code)</sup> <sup>2</sup>	CM <sup>(2)</sup> <sup>2</sup> (dB) <sup>2</sup>	MP R <sup>(2)</sup> (dB) <sup>2</sup>	AG <sup>(4)</sup> Inde <sup>x</sup>	E-TFC I <sup>2</sup>
1 <sup>2</sup>	11/15 <sup>(3)</sup> <sup>2</sup>	15/15 <sup>(3)</sup> <sup>2</sup>	64 <sup>2</sup>	11/15 <sup>(3)</sup> <sup>2</sup>	22/15 <sup>2</sup>	209/225 <sup>2</sup>	1039/225 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	1.0 <sup>2</sup>	0.0 <sup>2</sup>	20 <sup>2</sup>	75 <sup>2</sup>
2 <sup>2</sup>	6/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	6/15 <sup>2</sup>	12/15 <sup>2</sup>	12/15 <sup>2</sup>	94/75 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	3.0 <sup>2</sup>	2.0 <sup>2</sup>	12 <sup>2</sup>	67 <sup>2</sup>
3 <sup>2</sup>	15/15 <sup>2</sup>	9/15 <sup>2</sup>	64 <sup>2</sup>	15/9 <sup>2</sup>	30/15 <sup>2</sup>	30/15 <sup>2</sup>	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ <sup>2</sup>	4 <sup>2</sup>	2 <sup>2</sup>	2.0 <sup>2</sup>	1.0 <sup>2</sup>	15 <sup>2</sup>	92 <sup>2</sup>
4 <sup>2</sup>	2/15 <sup>2</sup>	15/15 <sup>2</sup>	64 <sup>2</sup>	2/15 <sup>2</sup>	4/15 <sup>2</sup>	2/15 <sup>2</sup>	56/75 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	3.0 <sup>2</sup>	2.0 <sup>2</sup>	17 <sup>2</sup>	71 <sup>2</sup>
5 <sup>2</sup>	15/15 <sup>(4)</sup> <sup>2</sup>	15/15 <sup>(4)</sup> <sup>2</sup>	64 <sup>2</sup>	15/15 <sup>(4)</sup> <sup>2</sup>	30/15 <sup>2</sup>	24/15 <sup>2</sup>	134/15 <sup>2</sup>	4 <sup>2</sup>	1 <sup>2</sup>	1.0 <sup>2</sup>	0.0 <sup>2</sup>	21 <sup>2</sup>	81 <sup>2</sup>
Note 1: $\Delta ACK$ , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$ , $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference <sup>2</sup> Note 3 : For subtest 1 the $\beta_c/\beta_d$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ <sup>2</sup> Note 4 : For subtest 5 the $\beta_c/\beta_d$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ <sup>2</sup> Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g <sup>2</sup> Note 6: $\beta_{ed}$ can not be set directly; it is set by Absolute Grant Value. <sup>2</sup>													

# HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

### 7.1.2 LTE TEST CONFIGURATION

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r04. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

#### 1. Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2. MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

#### 3. A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS\_01" on the base station simulator.

#### **4. LTE procedures for SAR testing**

##### **A) Largest channel bandwidth standalone SAR test requirements**

###### **i) QPSK with 1 RB allocation**

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

###### **ii) QPSK with 50% RB allocation**

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation

###### **iii) QPSK with 100% RB allocation**

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

###### **iv) Higher order modulations**

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

##### **B) Other channel bandwidth standalone SAR test requirements**

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

### 7.1.3 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

Mode	802.11a	802.11b	802.11g	802.11n (20M/40M)	802.11ac (20M/40M/80M)
Duty cycle	100%				
Crest factor	1				

#### 7.1.3.1 2.4G SAR Test Requirements

##### ✧ 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

##### ✧ 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 7.2 SAR SENSOR WORKING

When the sensor is active, the active distance as below:

Band	Test Position	Active distance (mm)
UMTS Band 2	Front Face	18
	Rear Face	20
	Right Side	16
UMTS Band 4	Front Face	18
	Rear Face	20
	Right Side	16
LTE Band 2	Front Face	18
	Rear Face	20
	Right Side	16
LTE Band 4	Front Face	18
	Rear Face	20
	Right Side	16
LTE Band 5	Front Face	18
	Rear Face	20
	Right Side	16
LTE Band 7	Front Face	18
	Rear Face	20
	Right Side	16

The SAR power reduce as below:

Band	Reduce power (dBm)	Full power level
UMTS Band 2	20	23.5
UMTS Band 4	21	23.5
LTE Band 2	19.5	23.5
LTE Band 4	19.5	23.5
LTE Band 5	22	24
LTE Band 7	19.5	23

- Note:
1. The UMTS reduce power refers to the power of WCDMA.
  2. The LTE reduce power refers to the power of QPSK/1RB
  3. When the power is reach at the Full power level , the power will not be reduced any more.
  4. The sensor can only be triggered at the rear face and top side.


## 7.3 POWER REDUCTION BY PROXIMITY SENSOR

### 7.3.1 PROXIMITY SENSOR TRIGGERING DISTANCE

The bottom of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The measurement was then repeated for the Rear surface.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

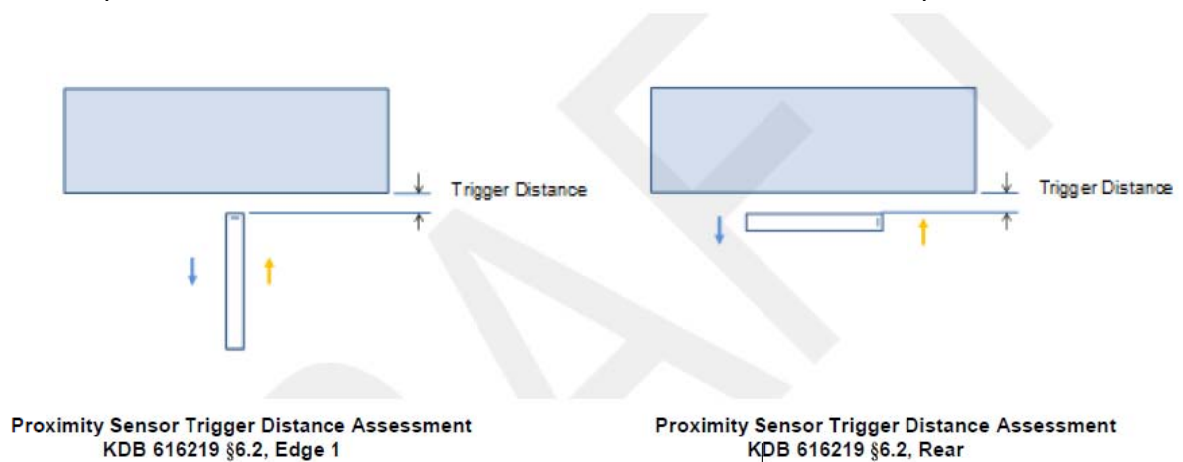

#### LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

**Table: Summary of Trigger Distances**

Band(MHz)	Trigger distance-Front Side		Trigger distance-Rear Side		Trigger distance-Right Side	
	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom
LTE B2	18mm	18mm	20mm	20mm	16mm	16mm
LTE B4	18mm	18mm	20mm	20mm	16mm	16mm
LTE B5	18mm	18mm	20mm	20mm	16mm	16mm
LTE B7	18mm	18mm	20mm	20mm	16mm	16mm
WCDMA B2	18mm	18mm	20mm	20mm	16mm	16mm
WCDMA B4	18mm	18mm	20mm	20mm	16mm	16mm

Note:

- 1) For Front side, based on the most conservative measured triggering distance of N mm, additional SAR test is required at (N-1) mm.
- 2) For Rear side, based on the most conservative measured triggering distance of N mm, additional SAR test is required at (N-1) mm.
- 2) For Right side, based on the most conservative measured triggering distance of N mm, additional SAR test is required at (N-1) mm.




The proximity sensor is not triggered, when approaching from other sides. Therefore, the proximity sensor coverage is not evaluated on these orientations.

### Proximity Sensor Triggering Distance Measurement Results (Including move toward and move away from phantom)

mode		Distance (mm)										
		Front Face										
		Sensor on						Sensor off				
		13	14	15	16	17	18	19	20	21	22	23
UMTS	UMTS B2	19.65	19.65	19.65	19.65	19.65	19.65	22.71	22.71	22.71	22.71	22.71
	UMTS B4	19.81	19.81	19.81	19.81	19.81	19.81	22.42	22.42	22.42	22.42	22.42
LTE	LTE B2	18.13	18.13	18.13	18.13	18.13	18.13	22.01	22.01	22.01	22.01	22.01
	LTE B4	18.09	18.09	18.09	18.09	18.09	18.09	22.35	22.35	22.35	22.35	22.35
	LTE B5	21.48	21.48	21.48	21.48	21.48	21.48	23.39	23.39	23.39	23.39	23.39
	LTE B7	18.02	18.02	18.02	18.02	18.02	18.02	21.59	21.59	21.59	21.59	21.59

mode		Distance (mm)										
		Rear Face										
		Sensor on						Sensor off				
		15	16	17	18	19	20	21	22	23	24	25
UMTS	UMTS B2	19.65	19.65	19.65	19.65	19.65	19.65	22.71	22.71	22.71	22.71	22.71
	UMTS B4	19.81	19.81	19.81	19.81	19.81	19.81	22.42	22.42	22.42	22.42	22.42
LTE	LTE B2	18.13	18.13	18.13	18.13	18.13	18.13	22.01	22.01	22.01	22.01	22.01
	LTE B4	18.09	18.09	18.09	18.09	18.09	18.09	22.35	22.35	22.35	22.35	22.35
	LTE B5	21.48	21.48	21.48	21.48	21.48	21.48	23.39	23.39	23.39	23.39	23.39
	LTE B7	18.02	18.02	18.02	18.02	18.02	18.02	21.59	21.59	21.59	21.59	21.59

mode		Distance (mm)										
		Right Side										
		Sensor on						Sensor off				
		11	12	13	14	15	16	17	18	19	20	21
UMTS	UMTS B2	19.65	19.65	19.65	19.65	19.65	19.65	22.71	22.71	22.71	22.71	22.71
	UMTS B4	19.81	19.81	19.81	19.81	19.81	19.81	22.42	22.42	22.42	22.42	22.42
LTE	LTE B2	18.13	18.13	18.13	18.13	18.13	18.13	22.01	22.01	22.01	22.01	22.01
	LTE B4	18.09	18.09	18.09	18.09	18.09	18.09	22.35	22.35	22.35	22.35	22.35
	LTE B5	21.48	21.48	21.48	21.48	21.48	21.48	23.39	23.39	23.39	23.39	23.39
	LTE B7	18.02	18.02	18.02	18.02	18.02	18.02	21.59	21.59	21.59	21.59	21.59

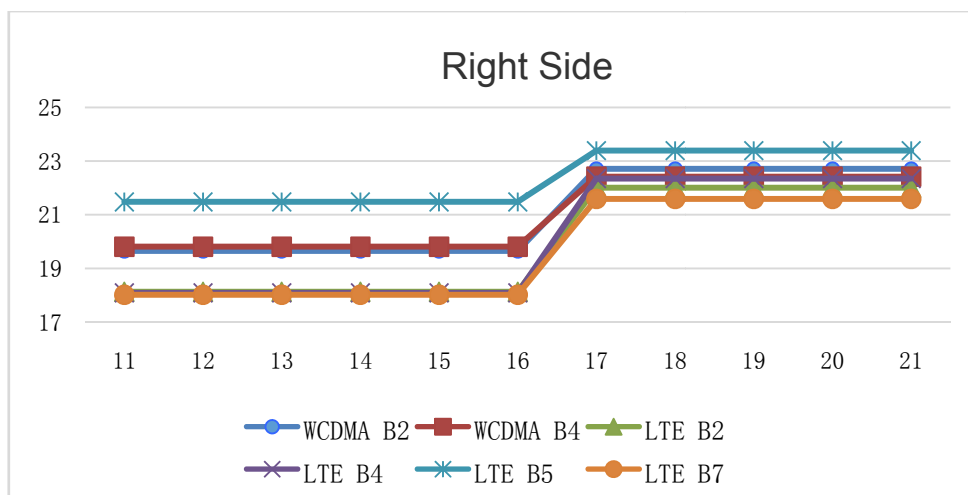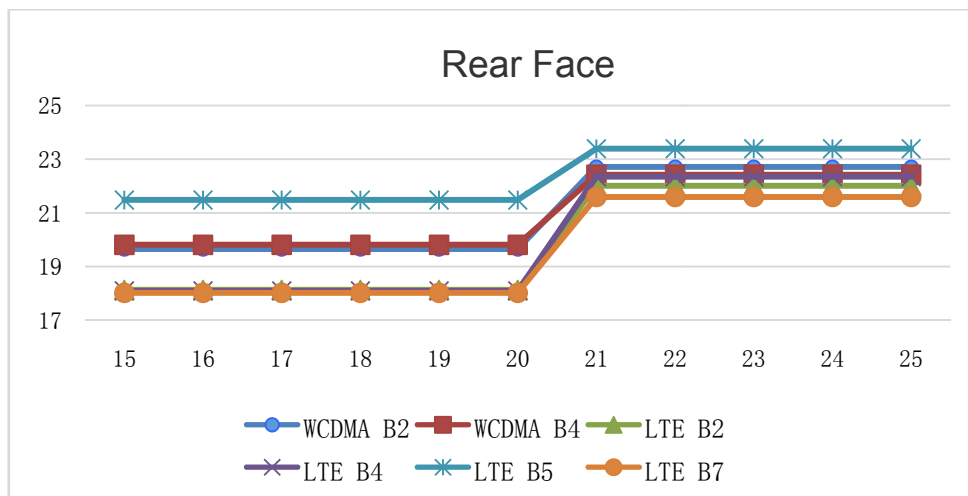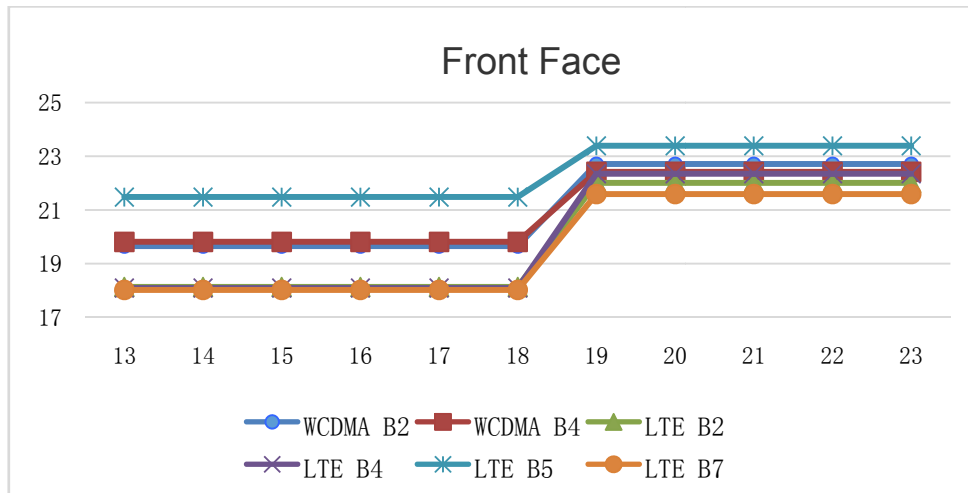


### 7.3.2 PROXIMITY SENSOR COVERAGE (KDB 616217 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

### 7.3.3 PROXIMITY SENSOR TILT ANGLE ASSESSMENT (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 1 for angles up to  $\pm 45^\circ$ . If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to  $\pm 45^\circ$ .

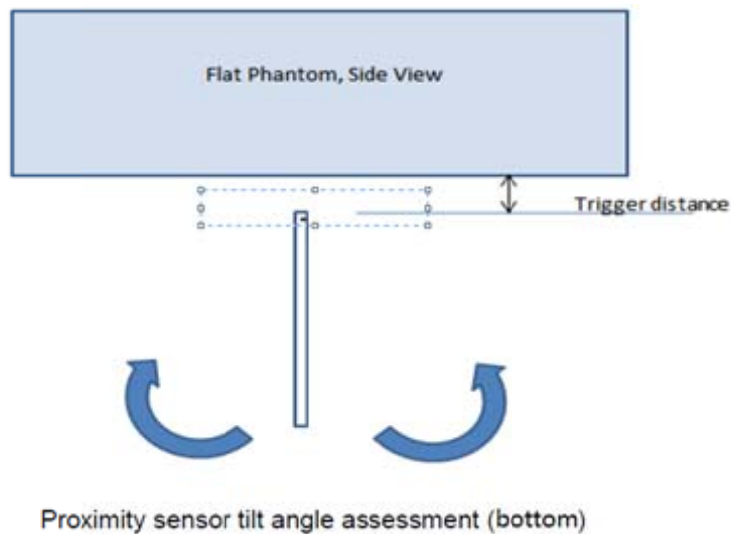

### Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Bottom

Band (MHz)	Minimum distance at which power reduction was maintained over +/-45°			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
	Front Face	Rear Face	Right Side											
UMTS B2	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on
UMTS B4	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on
LTE B2	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on
LTE B4	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on
LTE B5	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on
LTE B7	18mm	20mm	16mm	on	on	on	on	on	on	on	on	on	on	on


## 7.4 TEST POSITION

According to KDB 941225 D06v02r01, 3G/4G TRINITY PORTABLE SIM-BASED WI-FI HOTSPOT is tested for SAR compliance in body configurations described in the following subsections.

### 7.4.1 HOTSPOT MODE EXPOSURE CONDITONS

A test separation of 10mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode. The standalone SAR results in each device test orientation must be analyzed for the applicable hotspot mode simultaneous transmission configurations to determine SAR test exclusion and volume scan requirements. The simultaneous transmission configurations must be clearly described in the SAR report to support the analyses or test results. When the device form factor is smaller than 9cm X 5cm, unless a test separation distance of 5 mm or less is used a KDB inquiry is required to determine the acceptable test distance.

The location of the antenna inside EUT is as below.

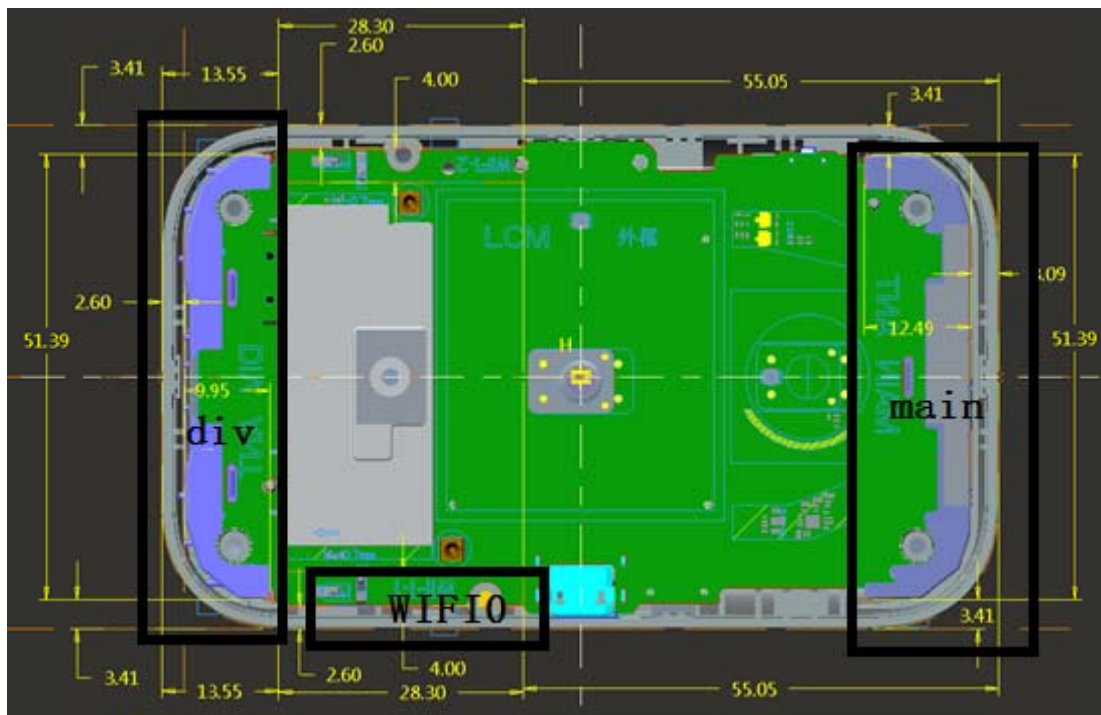

Note : The Div Antenna only has the RX function.

**Table 7.2.1 Hotspot Side For SAR Testing**

Mode	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
WCDMA Band 2/4/5	YES	YES	NO	YES	YES	YES
LTE Band 2/4/5/7	YES	YES	NO	YES	YES	YES
2.4GWiFi	YES	YES	YES	NO	NO	YES

## 8. POWER TEST RESULT

### 8.1 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 2

UMTS Band 2 (sensor off)		Tune-up	SAR Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880	1907.6
WCDMA	12.2kbps RMC	23.50	22.71	<b>22.33</b>	22.30
	64kbps RMC	23.50	22.73	22.28	22.29
	144kbps RMC	23.50	22.27	22.25	22.26
	384kbps RMC	23.50	22.29	22.22	22.22
HSDPA	Subtest 1	23.50	22.30	22.30	22.23
	Subtest 2	22.50	21.50	21.47	21.51
	Subtest 3	22.00	21.39	21.33	21.32
	Subtest 4	22.00	21.45	21.36	20.71
HSUPA	Subtest 1	23.50	21.51	21.52	21.60
	Subtest 2	20.50	18.73	18.57	18.78
	Subtest 3	21.50	19.87	20.18	20.11
	Subtest 4	20.50	19.59	19.12	19.35
	Subtest 5	23.50	22.30	22.28	22.31
UMTS Band 2 (sensor on)		Tune-up	SAR Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880	1907.6
WCDMA	12.2kbps RMC	20.00	19.65	<b>19.50</b>	19.71
	64kbps RMC	20.00	19.53	19.48	19.69
	144kbps RMC	20.00	19.62	19.48	19.70
	384kbps RMC	20.00	19.59	19.45	19.68
HSDPA	Subtest 1	20.00	19.65	19.51	19.72
	Subtest 2	20.00	18.79	18.71	18.93
	Subtest 3	19.50	18.49	18.38	18.52
	Subtest 4	19.50	18.45	18.27	18.56
HSUPA	Subtest 1	19.00	18.49	18.14	18.55
	Subtest 2	17.50	15.72	15.55	15.85
	Subtest 3	18.50	17.33	17.18	17.04
	Subtest 4	17.50	16.06	15.86	15.72
	Subtest 5	19.00	18.77	18.74	18.91

Note:

- 1) The conducted power of UMTS Band 2 is measured with RMS detector.
- 2) Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.
- 3) The tested channels are marks in bold.

## 8.2 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 4

UMTS Band 4 (sensor off)		Tune-up	SAR Conducted Power (dBm)		
			CH1312	CH1413	CH1513
			1712.4	1732.6	1752.6
WCDMA	12.2kbps RMC	23.50	22.42	<b>22.47</b>	22.54
	64kbps RMC	23.50	22.49	22.51	22.64
	144kbps RMC	23.50	22.46	22.35	22.47
	384kbps RMC	23.50	22.45	22.33	22.49
HSDPA	Subtest 1	23.50	22.26	22.21	22.45
	Subtest 2	22.50	21.97	21.90	22.06
	Subtest 3	22.00	21.50	21.33	21.54
	Subtest 4	22.00	21.31	21.45	21.74
HSUPA	Subtest 1	23.50	21.54	21.61	21.54
	Subtest 2	20.50	18.78	18.93	19.12
	Subtest 3	21.50	21.02	20.74	20.85
	Subtest 4	20.50	19.48	19.45	19.46
	Subtest 5	23.50	22.46	22.38	22.59
UMTS Band 4 (sensor on)		Tune-up	SAR Conducted Power (dBm)		
			CH1312	CH1413	CH1513
			1712.4	1732.6	1752.6
WCDMA	12.2kbps RMC	21.00	<b>19.81</b>	<b>19.66</b>	<b>19.77</b>
	64kbps RMC	21.00	19.82	19.65	19.72
	144kbps RMC	21.00	19.72	19.63	19.64
	384kbps RMC	21.00	19.77	19.62	19.78
HSDPA	Subtest 1	21.00	19.92	19.66	19.72
	Subtest 2	21.00	19.32	19.25	19.41
	Subtest 3	20.50	18.74	18.59	18.66
	Subtest 4	20.50	18.77	18.63	18.73
HSUPA	Subtest 1	19.00	18.09	18.23	18.26
	Subtest 2	17.50	15.75	16.02	15.95
	Subtest 3	18.50	17.01	17.08	17.42
	Subtest 4	17.50	16.05	16.45	16.21
	Subtest 5	19.00	18.82	18.83	18.56

Note:

- 1) The conducted power of UMTS Band 4 is measured with RMS detector.
- 2) Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.
- 3) The tested channels are marks in bold.

### 8.3 CONDUCTED POWER MEASUREMENTS OF UMTS BAND 5

UMTS Band 5		Tune-up	SAR Conducted Power (dBm)		
			CH4132	CH4182	CH4233
			826.4	836.4	846.6
WCDMA	12.2kbps RMC	23.50	<b>22.91</b>	<b>22.94</b>	<b>22.96</b>
	64kbps RMC	23.50	22.89	22.92	22.97
	144kbps RMC	23.50	22.91	22.80	22.91
	384kbps RMC	23.50	22.92	22.91	22.88
HSDPA	Subtest 1	23.50	22.76	22.67	22.69
	Subtest 2	22.50	21.93	21.87	21.89
	Subtest 3	22.00	21.40	21.33	21.31
	Subtest 4	22.00	21.40	21.27	21.30
HSUPA	Subtest 1	23.50	21.55	21.70	21.67
	Subtest 2	20.50	18.92	18.78	18.57
	Subtest 3	21.50	20.38	20.46	20.47
	Subtest 4	20.50	19.58	19.56	19.32
	Subtest 5	23.50	22.23	22.06	22.13

Note:

1) The conducted power of UMTS Band 5 is measured with RMS detector.

2)Note: Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

3) The tested channels are marks in bold.

## 8.4 CONDUCTED POWER MEASUREMENTS OF LTE BAND 2

1) Conducted power measurement results of LTE Band 2(sensor off)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18607 1850.7MHz	CH18900 1880MHz	CH19193 1909.3MHz
2 / 1.4M	QPSK	1/0	23.50	21.55	21.59	21.62
		1/2	23.50	21.72	21.58	21.67
		1/5	23.50	21.63	21.52	21.56
		3/0	23.50	21.55	21.53	21.59
		3/1	23.50	21.61	21.62	21.65
		3/3	23.50	21.63	21.65	21.66
		6/0	22.50	20.57	20.60	20.65
	16QAM	1/0	22.50	20.67	20.79	20.71
		1/2	22.50	20.83	20.96	20.75
		1/5	22.50	20.74	20.90	20.65
		3/0	22.50	20.63	20.59	20.60
		3/1	22.50	20.83	20.66	20.65
		3/3	22.50	20.84	20.68	20.66
		6/0	21.50	20.44	19.89	19.96

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18615 1851.5MHz	CH18900 1880MHz	CH19185 1908.5MHz
2 / 3M	QPSK	1/0	23.50	21.55	21.60	21.67
		1/7	23.50	21.92	21.70	21.83
		1/14	23.50	21.86	21.62	21.57
		8/0	22.50	20.73	20.57	20.58
		8/3	22.50	20.86	20.54	20.80
		8/7	22.50	20.95	20.55	20.68
		15/0	22.50	20.73	20.63	20.67
	16QAM	1/0	22.50	20.74	20.59	20.60
		1/7	22.50	21.01	20.79	20.85
		1/14	22.50	20.84	20.53	20.67
		8/0	21.50	20.28	19.58	19.72
		8/3	21.50	20.43	19.75	19.95
		8/7	21.50	20.50	19.77	19.82
		15/0	21.50	20.27	19.62	19.73

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18625	CH18900	CH19175
				1852.5MHz	1880MHz	1907.5MHz
2 / 5M	QPSK	1/0	23.50	22.02	21.72	21.79
		1/12	23.50	22.76	22.33	22.46
		1/24	23.50	22.21	21.87	21.68
		12/0	22.50	21.40	21.27	21.26
		12/6	22.50	21.67	21.38	21.38
		12/13	22.50	21.63	21.34	21.36
		25/0	22.50	21.41	21.18	21.02
	16QAM	1/0	22.50	21.30	21.05	21.02
		1/12	22.50	21.95	21.65	21.90
		1/24	22.50	21.52	21.07	21.12
		12/0	21.50	20.71	20.50	20.73
		12/6	21.50	20.97	20.61	20.85
		12/13	21.50	20.94	20.57	20.83
		25/0	21.50	20.75	20.42	20.46

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18650	CH18900	CH19150
				1855MHz	1880MHz	1905MHz
2 / 10M	QPSK	1/0	23.50	22.40	22.17	22.27
		1/24	23.50	22.76	22.38	22.50
		1/49	23.50	22.24	22.10	21.82
		25/0	22.50	21.40	20.95	21.43
		25/12	22.50	21.65	21.13	21.33
		25/25	22.50	21.40	20.96	20.94
		50/0	22.50	21.33	20.82	21.04
	16QAM	1/0	22.50	21.72	21.47	21.57
		1/24	22.50	22.24	21.66	21.74
		1/49	22.50	21.67	21.62	21.05
		25/0	21.50	20.69	20.48	20.79
		25/12	21.50	20.93	20.65	20.62
		25/25	21.50	20.69	20.48	20.22
		50/0	21.50	20.59	20.32	20.33

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18675	CH18900	CH19125
				1857.5MHz	1880MHz	1902.5MHz
2 / 15M	QPSK	1/0	23.50	22.58	22.37	22.78
		1/37	23.50	22.80	22.33	22.76
		1/74	23.50	22.34	22.14	22.00
		36/0	22.50	21.53	22.14	21.59
		36/19	22.50	21.68	21.41	21.58
		36/39	22.50	21.47	21.23	21.22
		75/0	22.50	21.41	21.29	21.21
	16QAM	1/0	22.50	21.84	21.67	22.20
		1/37	22.50	22.02	21.60	22.13
		1/74	22.50	21.64	21.45	21.39
		36/0	21.50	20.89	21.45	21.02
		36/19	21.50	21.05	20.62	21.00
		36/39	21.50	20.86	20.60	20.62
		75/0	21.50	20.80	20.66	20.59

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18700	CH18900	CH19100
				1860MHz	1880MHz	1900MHz
2 / 20M	QPSK	1/0	23.50	22.01	21.83	<b>22.32</b>
		1/50	23.50	21.83	21.56	21.97
		1/99	23.50	21.64	22.07	21.72
		50/0	22.50	20.75	20.62	<b>20.90</b>
		50/25	22.50	20.75	20.54	20.79
		50/50	22.50	20.67	20.68	20.85
		100/0	22.50	20.65	20.60	20.57
	16QAM	1/0	22.50	21.49	21.23	21.77
		1/50	22.50	21.24	20.58	21.49
		1/99	22.50	21.20	21.36	21.21
		50/0	21.50	20.13	19.83	20.32
		50/25	21.50	20.15	19.96	20.19
		50/50	21.50	20.08	19.86	19.81
		100/0	21.50	20.05	19.75	20.03

Note: The tested channels are marks in bold.

2) Conducted power measurement results of LTE Band 2(sensor on)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18607	CH18900	CH19193
				1850.7MHz	1880MHz	1909.3MHz
2 / 1.4M	QPSK	1/0	19.50	17.59	17.76	17.83
		1/2	19.50	17.69	17.95	18.00
		1/5	19.50	17.53	18.09	18.02
		3/0	19.50	17.61	17.79	17.80
		3/1	19.50	17.66	17.90	17.92
		3/3	19.50	17.62	17.98	17.99
		6/0	19.50	17.59	17.91	18.03
	16QAM	1/0	19.50	17.60	17.95	17.59
		1/2	19.50	17.72	18.20	17.98
		1/5	19.50	17.55	18.25	18.27
		3/0	19.50	17.80	17.89	17.87
		3/1	19.50	17.84	18.01	17.98
		3/3	19.50	17.82	18.11	18.04
		6/0	19.50	17.62	17.94	17.92

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18615	CH18900	CH19185
				1851.5MHz	1880MHz	1908.5MHz
2 / 3M	QPSK	1/0	19.50	17.52	17.60	17.54
		1/7	19.50	17.76	18.18	18.04
		1/14	19.50	17.64	18.11	17.87
		8/0	19.50	17.69	17.63	17.52
		8/3	19.50	17.74	17.96	17.86
		8/7	19.50	17.75	18.05	17.87
		15/0	19.50	17.64	17.83	17.72
	16QAM	1/0	19.50	17.74	17.69	17.58
		1/7	19.50	18.08	18.24	17.67
		1/14	19.50	17.85	18.16	17.94
		8/0	19.50	17.56	17.60	17.58
		8/3	19.50	17.60	17.93	17.58
		8/7	19.50	17.59	18.00	18.07
		15/0	19.50	17.64	17.78	17.69

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18625	CH18900	CH19175
				1852.5MHz	1880MHz	1907.5MHz
2 / 5M	QPSK	1/0	19.50	17.96	17.84	17.64
		1/12	19.50	18.05	18.83	18.67
		1/24	19.50	17.68	18.56	18.30
		12/0	19.50	18.13	18.50	18.05
		12/6	19.50	18.29	18.83	18.51
		12/13	19.50	17.72	18.88	18.59
		25/0	19.50	18.04	18.59	18.20
	16QAM	1/0	19.50	17.67	18.22	17.82
		1/12	19.50	18.15	19.20	19.00
		1/24	19.50	17.60	18.80	18.63
		12/0	19.50	18.22	18.53	18.00
		12/6	19.50	17.95	18.87	18.46
		12/13	19.50	17.83	18.92	18.52
		25/0	19.50	17.66	18.53	18.12

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18650	CH18900	CH19150
				1855MHz	1880MHz	1905MHz
2 / 10M	QPSK	1/0	19.50	18.29	18.30	17.88
		1/24	19.50	18.04	19.00	18.16
		1/49	19.50	17.51	19.25	18.60
		25/0	19.50	17.78	18.18	17.63
		25/12	19.50	17.92	18.58	17.81
		25/25	19.50	17.53	18.78	17.88
		50/0	19.50	17.66	18.37	17.51
	16QAM	1/0	19.50	18.69	18.41	17.77
		1/24	19.50	18.47	19.09	18.07
		1/49	19.50	17.75	19.33	18.51
		25/0	19.50	17.67	17.89	17.63
		25/12	19.50	17.82	18.28	17.76
		25/25	19.50	17.63	18.48	17.83
		50/0	19.50	17.53	18.07	17.67

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18675	CH18900	CH19125
				1857.5MHz	1880MHz	1902.5MHz
2 / 15M	QPSK	1/0	19.50	18.36	18.18	18.30
		1/37	19.50	17.68	18.97	17.99
		1/74	19.50	17.67	19.21	18.49
		36/0	19.50	17.96	19.21	17.92
		36/19	19.50	18.02	18.59	17.79
		36/39	19.50	17.73	18.95	17.83
		75/0	19.50	17.86	18.64	17.72
	16QAM	1/0	19.50	18.17	18.38	18.34
		1/37	19.50	18.13	19.12	18.03
		1/74	19.50	17.68	19.39	18.55
		36/0	19.50	17.62	19.39	17.70
		36/19	19.50	17.66	18.42	17.70
		36/39	19.50	17.56	18.99	18.06
		75/0	19.50	17.67	18.64	17.93

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH18700	CH18900	CH19100
				1860MHz	1880MHz	1900MHz
2 / 20M	QPSK	1/0	19.50	18.13	18.04	19.06
		1/50	19.50	17.67	17.58	17.74
		1/99	19.50	17.90	<b>19.32</b>	18.75
		50/0	19.50	17.77	18.36	18.10
		50/25	19.50	17.61	18.75	17.59
		50/50	19.50	17.58	<b>19.02</b>	17.65
		100/0	19.50	17.64	18.92	17.78
	16QAM	1/0	19.50	18.35	18.39	18.64
		1/50	19.50	17.65	17.52	18.16
		1/99	19.50	17.92	18.68	19.15
		50/0	19.50	17.78	18.35	18.08
		50/25	19.50	17.51	18.73	17.57
		50/50	19.50	17.50	19.32	17.65
		100/0	19.50	17.63	18.91	17.77

Note: The tested channels are marks in bold.

## 8.5 CONDUCTED POWER MEASUREMENTS OF LTE BAND 4

1) Conducted power measurement results of LTE Band 4(sensor off)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19957	CH20175	CH20393
				1710.7MHz	1732.5MHz	1754.3MHz
4 / 1.4M	QPSK	1/0	23.50	21.56	21.67	21.83
		1/2	23.50	21.62	21.81	22.00
		1/5	23.50	21.63	21.83	21.56
		3/0	23.50	21.57	21.98	21.53
		3/1	23.50	21.58	22.04	21.59
		3/3	23.50	21.63	22.05	21.61
		6/0	22.50	20.94	21.11	21.01
	16QAM	1/0	22.50	20.68	21.15	20.91
		1/2	22.50	20.94	21.35	21.09
		1/5	22.50	20.94	21.26	20.97
		3/0	22.50	20.77	20.88	21.03
		3/1	22.50	21.00	20.93	21.08
		3/3	22.50	21.04	20.94	21.09
		6/0	21.50	20.49	20.41	20.61

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19965	CH20175	CH20385
				1711.5MHz	1732.5MHz	1753.5MHz
4 / 3M	QPSK	1/0	23.50	21.56	21.60	21.54
		1/7	23.50	21.71	21.85	21.90
		1/14	23.50	21.59	21.84	21.61
		8/0	22.50	20.68	20.72	20.71
		8/3	22.50	20.95	20.98	21.17
		8/7	22.50	20.98	20.96	21.12
		15/0	22.50	20.82	20.87	21.06
	16QAM	1/0	22.50	20.50	20.72	20.84
		1/7	22.50	21.27	21.31	21.24
		1/14	22.50	21.11	21.07	20.90
		8/0	21.50	20.28	20.29	20.66
		8/3	21.50	20.57	20.55	20.69
		8/7	21.50	20.60	20.54	20.64
		15/0	21.50	20.39	20.44	20.50

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19975	CH20175	CH20375
				1712.5MHz	1732.5MHz	1752.5MHz
4 / 5M	QPSK	1/0	23.50	21.73	21.92	22.25
		1/12	23.50	22.77	22.83	22.74
		1/24	23.50	21.96	22.28	22.05
		12/0	22.50	21.31	21.58	21.72
		12/6	22.50	21.61	21.86	21.85
		12/13	22.50	21.54	21.76	21.63
		25/0	22.50	21.35	21.64	21.50
	16QAM	1/0	22.50	20.94	21.31	21.54
		1/12	22.50	21.90	22.11	22.21
		1/24	22.50	21.11	21.53	21.38
		12/0	21.50	20.82	21.08	21.18
		12/6	21.50	21.14	21.37	21.30
		12/13	21.50	21.12	21.27	21.07
		25/0	21.50	21.00	21.19	20.91

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20000	CH20175	CH20350
				1715MHz	1732.5MHz	1750MHz
4 / 10M	QPSK	1/0	23.50	22.21	22.21	22.63
		1/24	23.50	22.60	22.74	22.79
		1/49	23.50	22.03	22.60	22.41
		25/0	22.50	21.25	21.49	21.33
		25/12	22.50	21.33	21.70	21.60
		25/25	22.50	20.94	21.56	21.43
		50/0	22.50	21.00	21.53	21.32
	16QAM	1/0	22.50	21.53	21.56	21.75
		1/24	22.50	21.75	22.30	22.04
		1/49	22.50	21.23	22.01	21.52
		25/0	21.50	20.71	21.09	20.92
		25/12	21.50	20.80	21.33	21.20
		25/25	21.50	20.43	21.20	21.04
		50/0	21.50	20.54	21.18	20.96

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20025	CH20175	CH20325
				1717.5MHz	1732.5MHz	1747.5MHz
4 / 15M	QPSK	1/0	23.50	21.97	21.95	22.43
		1/37	23.50	22.00	22.45	22.52
		1/74	23.50	21.65	22.13	21.94
		36/0	22.50	20.89	22.13	21.25
		36/19	22.50	20.93	21.35	21.37
		36/39	22.50	20.82	21.25	21.01
		75/0	22.50	20.76	21.13	21.24
	16QAM	1/0	22.50	21.30	21.40	21.71
		1/37	22.50	21.34	21.70	21.73
		1/74	22.50	21.08	21.41	21.18
		36/0	21.50	20.92	21.41	20.91
		36/19	21.50	20.62	21.03	21.02
		36/39	21.50	20.54	20.96	20.66
		75/0	21.50	20.45	20.85	20.90

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20050	CH20175	CH20300
				1720MHz	1732.5MHz	1745MHz
4 / 20M	QPSK	1/0	23.50	21.95	21.75	22.25
		1/50	23.50	21.65	21.64	22.03
		1/99	23.50	21.85	<b>22.35</b>	22.01
		50/0	22.50	21.08	<b>21.15</b>	21.04
		50/25	22.50	20.52	21.01	21.12
		50/50	22.50	20.61	21.00	20.73
		100/0	22.50	20.85	20.99	20.88
	16QAM	1/0	22.50	21.94	21.40	21.63
		1/50	22.50	21.21	20.52	21.34
		1/99	22.50	21.57	21.80	21.50
		50/0	21.50	20.76	20.70	20.61
		50/25	21.50	20.11	20.57	20.68
		50/50	21.50	20.32	20.56	20.65
		100/0	21.50	20.58	20.54	20.44

Note: The tested channels are marks in bold.

2) Conducted power measurement results of LTE Band 4(sensor on)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19957	CH20175	CH20393
				1710.7MHz	1732.5MHz	1754.3MHz
4 / 1.4M	QPSK	1/0	19.50	17.86	17.72	18.11
		1/2	19.50	18.15	17.87	18.23
		1/5	19.50	18.19	17.81	18.07
		3/0	19.50	17.97	17.68	18.18
		3/1	19.50	18.11	17.75	18.22
		3/3	19.50	18.15	17.77	18.18
		6/0	19.50	18.08	17.72	18.15
	16QAM	1/0	19.50	17.69	17.78	18.27
		1/2	19.50	17.97	17.99	18.33
		1/5	19.50	18.01	17.91	18.15
		3/0	19.50	17.89	17.59	18.08
		3/1	19.50	18.02	17.64	18.20
		3/3	19.50	18.09	17.66	18.11
		6/0	19.50	17.96	17.58	18.10

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19965	CH20175	CH20385
				1711.5MHz	1732.5MHz	1753.5MHz
4 / 3M	QPSK	1/0	19.50	17.70	17.89	18.00
		1/7	19.50	18.00	17.90	18.48
		1/14	19.50	17.88	17.70	17.96
		8/0	19.50	17.55	17.68	18.16
		8/3	19.50	17.85	17.94	18.27
		8/7	19.50	17.90	17.94	18.18
		15/0	19.50	17.71	17.84	18.16
	16QAM	1/0	19.50	18.08	17.68	18.21
		1/7	19.50	18.15	18.14	18.43
		1/14	19.50	18.08	17.94	17.99
		8/0	19.50	17.68	17.59	18.07
		8/3	19.50	17.69	17.65	18.18
		8/7	19.50	17.76	17.63	18.12
		15/0	19.50	17.56	17.52	18.08

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH19975	CH20175	CH20375
				1712.5MHz	1732.5MHz	1752.5MHz
4 / 5M	QPSK	1/0	19.50	17.59	17.66	18.59
		1/12	19.50	17.86	18.35	18.58
		1/24	19.50	18.03	17.76	18.63
		12/0	19.50	18.33	17.52	19.00
		12/6	19.50	18.69	18.06	18.50
		12/13	19.50	18.61	17.96	18.37
		25/0	19.50	18.39	17.85	19.21
	16QAM	1/0	19.50	17.87	17.61	18.77
		1/12	19.50	18.95	18.32	18.73
		1/24	19.50	18.10	17.74	18.80
		12/0	19.50	18.27	17.58	18.92
		12/6	19.50	18.62	17.88	18.23
		12/13	19.50	18.56	17.79	18.11
		25/0	19.50	18.33	17.67	18.98

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20000	CH20175	CH20350
				1715MHz	1732.5MHz	1750MHz
4 / 10M	QPSK	1/0	19.50	18.16	17.50	18.09
		1/24	19.50	18.90	17.80	19.12
		1/49	19.50	17.65	17.62	18.88
		25/0	19.50	18.41	17.52	18.29
		25/12	19.50	18.61	17.63	18.90
		25/25	19.50	17.93	17.51	18.94
		50/0	19.50	18.13	17.50	18.64
	16QAM	1/0	19.50	18.32	17.81	18.35
		1/24	19.50	18.85	18.11	18.53
		1/49	19.50	17.61	18.01	18.11
		25/0	19.50	18.17	17.56	18.29
		25/12	19.50	18.40	17.67	18.89
		25/25	19.50	17.75	17.55	18.85
		50/0	19.50	17.88	17.53	18.45

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20025	CH20175	CH20325
				1717.5MHz	1732.5MHz	1747.5MHz
4 / 15M	QPSK	1/0	19.50	18.57	17.56	17.58
		1/37	19.50	18.51	17.75	18.79
		1/74	19.50	17.65	17.63	18.78
		36/0	19.50	18.61	17.63	17.63
		36/19	19.50	18.42	17.53	18.54
		36/39	19.50	18.08	17.71	18.69
		75/0	19.50	18.31	17.60	18.43
	16QAM	1/0	19.50	17.63	17.75	17.73
		1/37	19.50	18.40	17.97	18.91
		1/74	19.50	17.55	17.83	18.85
		36/0	19.50	18.52	17.83	17.62
		36/19	19.50	18.33	17.53	18.50
		36/39	19.50	17.99	17.64	18.67
		75/0	19.50	18.24	17.59	18.38

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20050	CH20175	CH20300
				1720MHz	1732.5MHz	1745MHz
4 / 20M	QPSK	1/0	19.50	18.75	17.89	17.69
		1/50	19.50	18.11	17.78	18.30
		1/99	19.50	17.57	18.09	<b>19.16</b>
		50/0	19.50	18.50	17.57	17.84
		50/25	19.50	18.19	17.71	18.46
		50/50	19.50	17.78	17.77	<b>18.74</b>
		100/0	19.50	18.45	17.92	18.45
	16QAM	1/0	19.50	18.14	18.39	17.88
		1/50	19.50	18.57	18.13	18.48
		1/99	19.50	18.08	18.60	18.51
		50/0	19.50	18.58	17.93	17.77
		50/25	19.50	18.13	17.67	18.41
		50/50	19.50	17.73	17.73	18.69
		100/0	19.50	18.39	17.87	18.41

Note: The tested channels are marks in bold.

## 8.6 CONDUCTED POWER MEASUREMENTS OF LTE BAND 5

### 1) Conducted power measurement results of LTE Band 5(sensor off)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20407	CH20525	CH20643
				824.7MHz	836.5MHz	848.3MHz
5 / 1.4M	QPSK	1/0	24.00	22.07	22.16	22.57
		1/2	24.00	22.15	22.33	22.68
		1/5	24.00	22.18	22.27	22.69
		3/0	24.00	22.03	22.29	22.48
		3/1	24.00	22.09	22.33	22.56
		3/3	24.00	22.12	22.32	22.59
		6/0	23.00	21.08	21.27	21.52
	16QAM	1/0	23.00	21.06	21.39	21.62
		1/2	23.00	21.18	21.50	21.68
		1/5	23.00	21.09	21.34	21.71
		3/0	23.00	21.03	21.03	21.49
		3/1	23.00	21.08	21.06	21.69
		3/3	23.00	21.16	21.05	21.85
		6/0	22.00	20.06	20.50	21.24

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20415	CH20525	CH20635
				825.5MHz	836.5MHz	847.5MHz
5 / 3M	QPSK	1/0	24.00	22.04	22.27	22.24
		1/7	24.00	22.10	22.56	23.11
		1/14	24.00	22.13	22.36	22.90
		8/0	23.00	21.08	21.44	21.77
		8/3	23.00	21.07	21.42	21.80
		8/7	23.00	21.06	21.20	21.79
		15/0	23.00	21.09	21.28	21.64
	16QAM	1/0	23.00	21.04	21.63	21.28
		1/7	23.00	21.30	21.85	22.03
		1/14	23.00	21.24	21.25	21.80
		8/0	22.00	20.06	20.90	21.19
		8/3	22.00	20.26	20.54	20.91
		8/7	22.00	20.51	20.33	20.90
		15/0	22.00	20.14	20.40	20.73

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20425	CH20525	CH20625
				826.5MHz	836.5MHz	846.5MHz
5 / 5M	QPSK	1/0	24.00	22.24	23.06	22.31
		1/12	24.00	22.83	23.39	23.60
		1/24	24.00	22.41	22.25	22.97
		12/0	23.00	21.24	22.27	21.93
		12/6	23.00	21.64	22.29	22.31
		12/13	23.00	21.69	21.95	22.46
		25/0	23.00	21.22	21.99	22.25
	16QAM	1/0	23.00	21.22	22.52	21.86
		1/12	23.00	21.94	22.84	22.14
		1/24	23.00	21.57	21.42	22.51
		12/0	22.00	20.48	21.50	21.60
		12/6	22.00	20.85	21.52	21.93
		12/13	22.00	20.89	21.18	21.87
		25/0	22.00	20.46	21.26	21.65

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20450	CH20525	CH20600
				829MHz	836.5MHz	844MHz
5 / 10M	QPSK	1/0	24.00	22.15	<b>23.33</b>	22.37
		1/24	24.00	23.10	23.24	23.23
		1/49	24.00	<b>23.38</b>	22.25	<b>23.39</b>
		25/0	23.00	21.10	22.01	21.51
		25/12	23.00	21.77	21.83	21.95
		25/25	23.00	21.93	21.44	<b>21.99</b>
		50/0	23.00	21.38	21.73	<b>21.78</b>
	16QAM	1/0	23.00	21.04	22.34	21.24
		1/24	23.00	22.18	22.38	22.06
		1/49	23.00	22.39	21.43	22.21
		25/0	22.00	20.17	21.27	20.70
		25/12	22.00	20.80	21.07	21.12
		25/25	22.00	20.95	20.68	21.15
		50/0	22.00	20.41	20.94	20.97

Note: The tested channels are marks in bold.

2) Conducted power measurement results of LTE Band 5(sensor on)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20407	CH20525	CH20643
				824.7MHz	836.5MHz	848.3MHz
5 / 1.4M	QPSK	1/0	22.00	21.45	20.47	20.78
		1/2	22.00	21.47	20.58	20.95
		1/5	22.00	20.28	20.38	20.97
		3/0	22.00	20.17	20.49	20.75
		3/1	22.00	20.30	20.52	20.87
		3/3	22.00	20.62	20.50	20.95
		6/0	22.00	20.46	20.44	20.84
	16QAM	1/0	22.00	20.93	20.53	20.98
		1/2	22.00	20.43	20.88	21.04
		1/5	22.00	20.56	20.44	21.05
		3/0	22.00	20.20	20.64	20.91
		3/1	22.00	20.43	20.67	21.02
		3/3	22.00	20.66	20.66	21.09
		6/0	22.00	20.49	20.42	21.00

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20415	CH20525	CH20635
				825.5MHz	836.5MHz	847.5MHz
5 / 3M	QPSK	1/0	22.00	20.40	20.78	20.57
		1/7	22.00	20.63	21.01	20.95
		1/14	22.00	20.71	20.42	20.84
		8/0	22.00	20.28	20.92	20.82
		8/3	22.00	20.53	20.85	20.81
		8/7	22.00	20.68	20.63	20.78
		15/0	22.00	20.46	20.75	20.74
	16QAM	1/0	22.00	20.60	20.82	20.72
		1/7	22.00	21.30	21.01	21.10
		1/14	22.00	21.31	20.42	20.98
		8/0	22.00	20.21	20.47	20.86
		8/3	22.00	20.44	20.40	20.85
		8/7	22.00	20.59	20.17	20.82
		15/0	22.00	20.28	20.29	20.77

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20425	CH20525	CH20625
				826.5MHz	836.5MHz	846.5MHz
5 / 5M	QPSK	1/0	22.00	20.63	21.06	20.77
		1/12	22.00	20.92	21.35	20.98
		1/24	22.00	20.53	20.19	21.23
		12/0	22.00	20.27	21.27	21.36
		12/6	22.00	20.72	21.26	21.35
		12/13	22.00	20.78	20.91	21.63
		25/0	22.00	20.38	20.99	21.40
	16QAM	1/0	22.00	21.28	21.57	21.27
		1/12	22.00	20.60	21.69	20.63
		1/24	22.00	20.68	20.67	21.72
		12/0	22.00	20.22	21.29	21.30
		12/6	22.00	20.66	21.28	21.64
		12/13	22.00	20.97	20.91	21.56
		25/0	22.00	20.51	20.93	21.32

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20450	CH20525	CH20600
				829MHz	836.5MHz	844MHz
5 / 10M	QPSK	1/0	22.00	21.21	21.54	20.38
		1/24	22.00	21.41	21.27	21.22
		1/49	22.00	21.47	20.45	<b>21.48</b>
		25/0	22.00	20.19	21.04	20.48
		25/12	22.00	20.84	20.82	21.02
		25/25	22.00	21.05	20.34	<b>21.09</b>
		50/0	22.00	20.38	20.62	20.77
	16QAM	1/0	22.00	21.58	21.14	20.47
		1/24	22.00	20.73	21.62	21.34
		1/49	22.00	20.64	20.83	21.57
		25/0	22.00	20.14	21.09	20.52
		25/12	22.00	20.61	20.84	21.05
		25/25	22.00	20.93	20.35	21.01
		50/0	22.00	20.38	20.61	20.79

Note: The tested channels are marks in bold.

## 8.7 CONDUCTED POWER MEASUREMENTS OF LTE BAND 7

1) Conducted power measurement results of LTE Band 7(sensor off)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20775	CH21100	CH21425
				2502.5MHz	2535MHz	2567.5MHz
7 / 5M	QPSK	1/0	23.00	21.66	22.13	22.22
		1/12	23.00	22.43	22.74	22.23
		1/24	23.00	21.79	22.01	22.43
		12/0	22.00	21.58	21.60	21.40
		12/6	22.00	21.84	21.83	21.84
		12/13	22.00	21.76	21.63	21.70
		25/0	22.00	21.62	21.52	21.50
	16QAM	1/0	22.00	20.65	20.91	21.25
		1/12	22.00	21.46	21.47	21.96
		1/24	22.00	20.85	20.81	21.23
		12/0	21.00	20.02	19.99	20.38
		12/6	21.00	20.27	20.23	20.62
		12/13	21.00	20.18	20.02	20.49
		25/0	21.00	19.99	19.95	20.73

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20800	CH21100	CH21400
				2505MHz	2535MHz	2565MHz
7 / 10M	QPSK	1/0	23.00	21.32	22.40	22.30
		1/24	23.00	22.50	22.69	22.66
		1/49	23.00	21.91	21.90	21.90
		25/0	22.00	21.35	21.72	21.63
		25/12	22.00	21.62	21.84	21.83
		25/25	22.00	21.41	21.58	21.43
		50/0	22.00	21.36	21.58	21.36
	16QAM	1/0	22.00	20.90	21.57	21.35
		1/24	22.00	21.42	21.83	21.91
		1/49	22.00	20.92	21.70	21.21
		25/0	21.00	19.86	20.74	20.32
		25/12	21.00	20.60	20.86	20.52
		25/25	21.00	20.40	20.62	20.14
		50/0	21.00	20.34	20.60	20.58

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20825	CH21100	CH21375
				2507.5MHz	2535MHz	2562.5MHz
7 / 15M	QPSK	1/0	23.00	21.08	22.13	21.67
		1/37	23.00	21.31	22.23	22.63
		1/74	23.00	21.70	21.41	22.05
		36/0	22.00	21.16	21.53	21.61
		36/19	22.00	21.30	21.58	21.86
		36/39	22.00	21.20	21.16	21.64
		75/0	22.00	21.16	21.23	21.56
	16QAM	1/0	22.00	20.95	21.33	20.80
		1/37	22.00	21.24	21.43	21.46
		1/74	22.00	20.92	20.72	20.87
		36/0	21.00	19.55	19.93	20.46
		36/19	21.00	19.71	20.00	20.69
		36/39	21.00	19.58	19.80	20.45
		75/0	21.00	19.56	19.81	20.35

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20850	CH21100	CH21350
				2510MHz	2535MHz	2560MHz
7 / 20M	QPSK	1/0	23.00	21.22	22.00	21.59
		1/50	23.00	<b>21.14</b>	<b>21.76</b>	<b>22.28</b>
		1/99	23.00	21.74	21.17	22.03
		50/0	22.00	20.82	21.04	21.22
		50/25	22.00	<b>20.85</b>	<b>20.97</b>	21.26
		50/50	22.00	21.07	20.79	<b>21.34</b>
		100/0	22.00	20.92	20.85	<b>21.20</b>
	16QAM	1/0	22.00	20.81	21.19	21.47
		1/50	22.00	20.86	20.93	21.70
		1/99	22.00	21.03	20.88	21.71
		50/0	21.00	19.13	20.05	20.06
		50/25	21.00	19.10	20.00	20.01
		50/50	21.00	19.33	19.86	20.10
		100/0	21.00	19.22	19.87	20.02

Note: The tested channels are marks in bold.

2) Conducted power measurement results of LTE Band 7(sensor on)

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20775	CH21100	CH21425
				2502.5MHz	2535MHz	2567.5MHz
7 / 5M	QPSK	1/0	19.50	17.57	18.16	18.63
		1/12	19.50	18.53	18.74	18.70
		1/24	19.50	18.06	18.15	18.32
		12/0	19.00	18.19	18.49	18.92
		12/6	19.00	18.69	18.78	18.68
		12/13	19.00	18.77	18.60	18.89
		25/0	19.00	18.45	18.43	18.72
	16QAM	1/0	19.00	18.66	18.42	18.68
		1/12	19.00	18.27	18.30	18.24
		1/24	19.00	18.28	18.67	18.36
		12/0	19.00	18.18	18.68	18.70
		12/6	19.00	18.50	18.97	18.86
		12/13	19.00	18.59	18.78	18.66
		25/0	19.00	18.24	18.53	18.45

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20800	CH21100	CH21400
				2505MHz	2535MHz	2565MHz
7 / 10M	QPSK	1/0	19.50	18.46	18.25	18.66
		1/24	19.50	18.71	18.81	19.05
		1/49	19.50	18.20	18.19	18.28
		25/0	19.00	18.07	18.33	18.76
		25/12	19.00	18.51	18.44	18.92
		25/25	19.00	18.34	18.26	18.39
		50/0	19.00	18.13	18.16	18.43
	16QAM	1/0	19.00	18.29	18.47	18.82
		1/24	19.00	18.16	18.21	18.40
		1/49	19.00	18.74	18.39	18.38
		25/0	19.00	18.04	18.26	18.46
		25/12	19.00	18.48	18.36	18.63
		25/25	19.00	18.31	18.19	18.11
		50/0	19.00	18.03	18.07	18.22

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20825	CH21100	CH21375
				2507.5MHz	2535MHz	2562.5MHz
7 / 15M	QPSK	1/0	19.50	17.93	18.36	18.47
		1/37	19.50	18.62	18.54	18.81
		1/74	19.50	18.27	17.98	18.02
		36/0	19.00	18.09	18.37	18.38
		36/19	19.00	18.39	18.33	18.57
		36/39	19.00	18.36	18.16	18.16
		75/0	19.00	18.09	18.20	18.24
	16QAM	1/0	19.00	17.98	18.36	18.46
		1/37	19.00	18.65	18.51	18.78
		1/74	19.00	18.35	17.99	18.26
		36/0	19.00	17.81	18.09	18.36
		36/19	19.00	18.11	18.13	18.54
		36/39	19.00	18.07	17.88	18.13
		75/0	19.00	17.77	17.88	18.19

Band / BW	Modulation	RB Size/Offset	Max. Tune-up Power	CH20850	CH21100	CH21350
				2510MHz	2535MHz	2560MHz
7 / 20M	QPSK	1/0	19.50	<b>19.09</b>	18.08	18.02
		1/50	19.50	18.04	17.90	18.03
		1/99	19.50	18.00	17.72	18.07
		50/0	19.00	17.84	17.55	<b>18.19</b>
		50/25	19.00	17.78	17.63	18.10
		50/50	19.00	17.85	17.67	17.96
		100/0	19.00	17.69	17.67	18.07
	16QAM	1/0	19.00	18.95	18.40	18.32
		1/50	19.00	18.50	18.21	18.35
		1/99	19.00	18.44	18.02	18.10
		50/0	19.00	17.77	17.51	17.90
		50/25	19.00	17.75	17.60	17.81
		50/50	19.00	17.81	17.64	17.66
		100/0	19.00	17.66	17.62	17.92

Note: The tested channels are marks in bold.

## 8.8 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power(dBm)	SAR Test(Yes/No)
802.11b	1	2412	1	16	15.15	No
	5	2432		16	14.91	No
	10	2457		16	<b>15.38</b>	Yes
802.11g	1	2412	6	15	Not Required	No
	5	2432		15	Not Required	No
	10	2457		15	Not Required	No
802.11n HT20	1	2412	6.5	14	Not Required	No
	5	2432		14	Not Required	No
	10	2457		14	Not Required	No
802.11n HT40	3	2422	13.5	14	Not Required	No
	5	2432		14	Not Required	No
	8	2447		14	Not Required	No

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes(802.11b)was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes(802.11g/n)to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
- 3) The tested channels are marks in bold.

## 9 · SAR TEST RESULTS

### General Notes:

- 1) Per KDB447498 D01v06, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/Kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/Kg, only one repeated measurement is required.
- 4) Per KDB648474 D04v01r03, SAR is evaluated without a headset connected to the device. When the standalone reported Body SAR is  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset are required.
- 5) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5$  W/kg, or  $> 7.0$  W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

### WCDMA Notes:

Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r04. The general test procedures used for SAR testing can be found in Section 7.1.3.
- 2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

**WLAN Notes:**

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated(peak)SAR is used as the initial test position. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1.4 for more information.

## 9.1 SAR MEASUREMENT RESULT

### SAR test results of UMTS

Test No.	Band	Mode	CH	Test Position	Separation Distance (cm)	Battery	Sensor	Tune up	Conducted Power	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T01	UMTS B2	RMC12.2K	9400	Front Face	1.7	1	off	23.5	22.33	0.03	0.239	0.313
T02	UMTS B2	RMC12.2K	9400	Rear Face	1.9	1	off	23.5	22.33	-0.09	0.428	<b>0.560</b>
T03	UMTS B2	RMC12.2K	9400	Right Side	1.5	1	off	23.5	22.33	0.05	0.075	0.098
T04	UMTS B2	RMC12.2K	9400	Top Side	1	1	off	23.5	22.33	-0.02	0.275	0.360
T05	UMTS B2	RMC12.2K	9400	Bottom Side	1	1	off	23.5	22.33	0.08	0.209	0.274
T06	UMTS B2	RMC12.2K	9400	Rear Face	1.9	2	off	23.5	22.71	-0.03	0.403	0.483
T11	UMTS B2	RMC12.2K	9400	Front Face	1	1	on	20	19.5	0.06	0.311	0.349
T12	UMTS B2	RMC12.2K	9400	Rear Face	1	1	on	20	19.5	-0.06	0.478	<b>0.536</b>
T13	UMTS B2	RMC12.2K	9400	Right Side	1	1	on	20	19.5	-0.08	0.07	0.079
T14	UMTS B2	RMC12.2K	9400	Rear Face	1	2	on	20	19.65	-0.09	0.453	0.491
T20	UMTS B4	RMC12.2K	1413	Front Face	1.7	1	off	23.5	22.47	-0.09	0.618	<b>0.783</b>
T21	UMTS B4	RMC12.2K	1413	Rear Face	1.9	1	off	23.5	22.47	0.06	0.467	0.592
T22	UMTS B4	RMC12.2K	1413	Right Side	1.5	1	off	23.5	22.47	0.02	0.076	0.096
T23	UMTS B4	RMC12.2K	1413	Top Side	1	1	off	23.5	22.47	-0.04	0.14	0.177
T24	UMTS B4	RMC12.2K	1413	Bottom Side	1	1	off	23.5	22.47	0.06	0.231	0.293
T25	UMTS B4	RMC12.2K	1413	Front Face	1.7	2	off	23.5	22.47	-0.1	0.612	0.776
T31	UMTS B4	RMC12.2K	1413	Front Face	1	1	on	21	19.66	0.01	0.684	0.931
T32	UMTS B4	RMC12.2K	1413	Rear Face	1	1	on	21	19.66	0.07	0.636	0.866
T33	UMTS B4	RMC12.2K	1413	Right Side	1	1	on	21	19.66	-0.04	0.136	0.185
T34	UMTS B4	RMC12.2K	1312	Front Face	1	1	on	21	19.81	0.06	0.626	0.823
T35	UMTS B4	RMC12.2K	1513	Front Face	1	1	on	21	19.77	0.09	0.652	0.865
T36	UMTS B4	RMC12.2K	1413	Front Face	1	2	on	21	19.77	-0.03	0.707	<b>0.938</b>
T40	UMTS B5	RMC12.2K	4182	Front Face	1	1	off	23.5	22.94	-0.16	0.959	<b>1.091</b>
T41	UMTS B5	RMC12.2K	4182	Rear Face	1	1	off	23.5	22.94	-0.03	0.76	0.865
T42	UMTS B5	RMC12.2K	4182	Right Side	1	1	off	23.5	22.94	0.02	0.065	0.074
T43	UMTS B5	RMC12.2K	4182	Top Side	1	1	off	23.5	22.94	0.05	0.394	0.448
T44	UMTS B5	RMC12.2K	4182	Bottom Side	1	1	off	23.5	22.94	0.04	0.42	0.478
T45	UMTS B5	RMC12.2K	4132	Front Face	1	1	off	23.5	22.91	0.08	0.686	0.786
T46	UMTS B5	RMC12.2K	4233	Front Face	1	1	off	23.5	22.96	-0.06	0.861	0.975
T47	UMTS B5	RMC12.2K	4132	Rear Face	1	1	off	23.5	22.91	0.09	0.662	0.758
T48	UMTS B5	RMC12.2K	4233	Rear Face	1	1	off	23.5	22.96	-0.02	0.723	0.819
T49	UMTS B5	RMC12.2K	4182	Front Face	1	2	off	23.5	22.94	-0.18	0.95	1.081
T50	UMTS B5	RMC12.2K	4182	Front Face ( 1st repeated )	1	1	off	23.5	22.94	-0.09	0.942	1.072

Note: 1.The value with boldface is the maximum SAR Value of each test band.

### SAR test results of LTE Band 2

Test No.	Band	Mode	CH	RB	Offset	Test Position	Separation Distance (cm)	Battery	Sensor	Tune up	Conducted Power	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T51	LTE B2	QPSK20M	19100	1	0	Front Face	1.7	1	off	23.5	22.32	0.09	0.261	0.342
T52	LTE B2	QPSK20M	19100	1	0	Rear Face	1.9	1	off	23.5	22.32	-0.15	0.583	<b>0.765</b>
T53	LTE B2	QPSK20M	19100	1	0	Right Side	1.5	1	off	23.5	22.32	0.06	0.112	0.147
T54	LTE B2	QPSK20M	19100	1	0	Top Side	1	1	off	23.5	22.32	0	0.345	0.453
T55	LTE B2	QPSK20M	19100	1	0	Bottom Side	1	1	off	23.5	22.32	0.04	0.27	0.354
T56	LTE B2	QPSK20M	19100	50	0	Front Face	1.7	1	off	22.5	20.90	-0.02	0.206	0.298
T57	LTE B2	QPSK20M	19100	50	0	Rear Face	1.9	1	off	22.5	20.90	-0.07	0.466	0.674
T58	LTE B2	QPSK20M	19100	50	0	Right Side	1.5	1	off	22.5	20.90	0.12	0.067	0.097
T59	LTE B2	QPSK20M	19100	50	0	Top Side	1	1	off	22.5	20.90	-0.05	0.313	0.453
T60	LTE B2	QPSK20M	19100	50	0	Bottom Side	1	1	off	22.5	20.90	0.03	0.189	0.273
T61	LTE B2	QPSK20M	19100	1	0	Rear Face	1.9	2	off	23.5	22.32	0.08	0.543	0.712
T65	LTE B2	QPSK20M	18900	1	99	Front Face	1	1	on	19.5	19.32	0.06	0.234	0.244
T66	LTE B2	QPSK20M	18900	1	99	Rear Face	1	1	on	19.5	19.32	-0.08	0.432	<b>0.450</b>
T67	LTE B2	QPSK20M	18900	1	99	Right Side	1	1	on	19.5	19.32	0.04	0.056	0.058
T68	LTE B2	QPSK20M	18900	50	50	Front Face	1	1	on	19.5	19.02	0.01	0.178	0.199
T69	LTE B2	QPSK20M	18900	50	50	Rear Face	1	1	on	19.5	19.02	-0.07	0.337	0.377
T70	LTE B2	QPSK20M	18900	50	50	Right Side	1	1	on	19.5	19.02	0.03	0.042	0.047
T71	LTE B2	QPSK20M	18900	1	99	Rear Face	1	2	on	19.5	19.32	0.11	0.413	0.430

Note: 1.The value with boldface is the maximum SAR Value of each test band.

### SAR test results of LTE Band 4

Test No.	Band	Mode	CH	RB	Offset	Test Position	Separation Distance (cm)	Battery	Sensor	Tune up	Conducted Power	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T75	LTE B4	QPSK20M	20175	1	99	Front Face	1.7	1	off	23.5	22.35	0.18	0.59	<b>0.768</b>
T76	LTE B4	QPSK20M	20175	1	99	Rear Face	1.9	1	off	23.5	22.35	0.03	0.44	0.573
T77	LTE B4	QPSK20M	20175	1	99	Right Side	1.5	1	off	23.5	22.35	0.06	0.135	0.176
T78	LTE B4	QPSK20M	20175	1	99	Top Side	1	1	off	23.5	22.35	-0.16	0.228	0.297
T79	LTE B4	QPSK20M	20175	1	99	Bottom Side	1	1	off	23.5	22.35	0.03	0.51	0.664
T80	LTE B4	QPSK20M	20175	50	0	Front Face	1.7	1	off	22.5	21.15	0.05	0.393	0.536
T81	LTE B4	QPSK20M	20175	50	0	Rear Face	1.9	1	off	22.5	21.15	-0.04	0.347	0.474
T82	LTE B4	QPSK20M	20175	50	0	Right Side	1.5	1	off	22.5	21.15	0.07	0.068	0.093
T83	LTE B4	QPSK20M	20175	50	0	Top Side	1	1	off	22.5	21.15	-0.06	0.087	0.119
T84	LTE B4	QPSK20M	20175	50	0	Bottom Side	1	1	off	22.5	21.15	-0.02	0.292	0.399
T85	LTE B4	QPSK20M	20175	1	99	Front Face	1.7	2	off	23.5	22.35	0.07	0.563	0.733
T90	LTE B4	QPSK20M	20300	1	99	Front Face	1	1	on	19.5	19.16	-0.08	0.408	0.442
T91	LTE B4	QPSK20M	20300	1	99	Rear Face	1	1	on	19.5	19.16	0.01	0.384	0.416
T92	LTE B4	QPSK20M	20300	1	99	Right Side	1	1	on	19.5	19.16	0.09	0.084	0.091
T93	LTE B4	QPSK20M	20300	50	50	Front Face	1	1	on	19.5	18.74	0.02	0.279	0.333
T94	LTE B4	QPSK20M	20300	50	50	Rear Face	1	1	on	19.5	18.74	-0.05	0.321	0.383
T95	LTE B4	QPSK20M	20300	50	50	Right Side	1	1	on	19.5	18.74	0.03	0.063	0.075
T96	LTE B4	QPSK20M	20300	1	99	Front Face	1	2	on	19.5	19.16	0	0.412	<b>0.446</b>

Note: 1.The value with boldface is the maximum SAR Value of each test band.

### SAR test results of LTE Band 5

Test No.	Band	Mode	CH	RB	Offset	Test Position	Separation Distance (cm)	Battery	Sensor	Tune up	Conducted Power	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T100	LTE B5	QPSK10M	20600	1	49	Front Face	1.7	1	off	24	23.39	0.09	0.708	0.814
T101	LTE B5	QPSK10M	20600	1	49	Rear Face	1.9	1	off	24	23.39	-0.01	0.495	0.569
T102	LTE B5	QPSK10M	20600	1	49	Right Side	1.5	1	off	24	23.39	0.06	0.049	0.056
T103	LTE B5	QPSK10M	20600	1	49	Top Side	1	1	off	24	23.39	0.04	0.388	0.446
T104	LTE B5	QPSK10M	20600	1	49	Bottom Side	1	1	off	24	23.39	0.07	0.375	0.431
T105	LTE B5	QPSK10M	20600	25	25	Front Face	1.7	1	off	23	21.99	-0.02	0.403	0.508
T106	LTE B5	QPSK10M	20600	25	25	Rear Face	1.9	1	off	23	21.99	0.06	0.287	0.362
T107	LTE B5	QPSK10M	20600	25	25	Right Side	1.5	1	off	23	21.99	-0.12	0.034	0.043
T108	LTE B5	QPSK10M	20600	25	25	Top Side	1	1	off	23	21.99	0.09	0.26	0.328
T109	LTE B5	QPSK10M	20600	25	25	Bottom Side	1	1	off	23	21.99	0.01	0.213	0.269
T113	LTE B5	QPSK10M	20600	50	0	Front Face	1.7	1	off	23	21.78	0.07	0.416	0.551
T110	LTE B5	QPSK10M	20450	1	49	Front Face	1.7	1	off	24	23.38	-0.03	0.633	0.730
T111	LTE B5	QPSK10M	20525	1	0	Front Face	1.7	1	off	24	23.33	0.02	0.555	0.648
T112	LTE B5	QPSK10M	20600	1	49	Front Face	1.7	2	off	24	23.39	-0.12	0.79	<b>0.909</b>
T115	LTE B5	QPSK10M	20600	1	49	Front Face	1	1	on	22	21.48	0.05	0.512	<b>0.577</b>
T116	LTE B5	QPSK10M	20600	1	49	Rear Face	1	1	on	22	21.48	-0.03	0.383	0.431
T117	LTE B5	QPSK10M	20600	1	49	Right Side	1	1	on	22	21.48	0.04	0.047	0.053
T118	LTE B5	QPSK10M	20600	25	25	Front Face	1	1	on	22	21.09	0.09	0.414	0.510
T119	LTE B5	QPSK10M	20600	25	25	Rear Face	1	1	on	22	21.09	-0.05	0.324	0.399
T120	LTE B5	QPSK10M	20600	25	25	Right Side	1	1	on	22	21.09	0.06	0.04	0.049
T121	LTE B5	QPSK10M	20600	1	49	Front Face	1	2	on	22	21.48	-0.08	0.496	0.559

Note: 1.The value with boldface is the maximum SAR Value of each test band.

### SAR test results of LTE Band 7

Test No.	Band	Mode	CH	RB	Offset	Test Position	Separation Distance (cm)	Battery	Sensor	Tune up	Conducted Power	Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T123	LTE B7	QPS K20M	21350	1	50	Front Face	1.7	1	off	23	22.28	0.06	0.257	0.303
T124	LTE B7	QPS K20M	21350	1	50	Rear Face	1.9	1	off	23	22.28	0.04	0.149	0.176
T125	LTE B7	QPS K20M	21350	1	50	Right Side	1.5	1	off	23	22.28	-0.02	0.371	0.438
T126	LTE B7	QPS K20M	21350	1	50	Top Side	1	1	off	23	22.28	0.09	0.044	0.052
T127	LTE B7	QPS K20M	21350	1	50	Bottom Side	1	1	off	23	22.28	0.05	0.426	0.503
T128	LTE B7	QPS K20M	21350	50	50	Front Face	1.7	1	off	22	21.34	0.06	0.199	0.232
T129	LTE B7	QPS K20M	21350	50	50	Rear Face	1.9	1	off	22	21.34	-0.03	0.114	0.133
T130	LTE B7	QPS K20M	21350	50	50	Right Side	1.5	1	off	22	21.34	0.03	0.257	0.299
T131	LTE B7	QPS K20M	21350	50	50	Top Side	1	1	off	22	21.34	0.02	0.039	0.045
T132	LTE B7	QPS K20M	21350	50	50	Bottom Side	1	1	off	22	21.34	-0.14	0.4	0.466
T133	LTE B7	QPS K20M	20850	1	50	Bottom Side	1	1	off	23	21.14	-0.04	0.389	0.597
T134	LTE B7	QPS K20M	21100	1	50	Bottom Side	1	1	off	23	21.76	0.01	0.661	<b>0.880</b>
T135	LTE B7	QPS K20M	20850	50	25	Bottom Side	1	1	off	22	20.85	0.09	0.348	0.454
T136	LTE B7	QPS K20M	21100	50	25	Bottom Side	1	1	off	22	20.97	-0.09	0.49	0.621
T137	LTE B7	QPS K20M	21350	100	0	Bottom Side	1	1	off	22	21.34	0.08	0.355	0.413
T138	LTE B7	QPS K20M	21100	1	50	Bottom Side	1	2	off	23	21.76	0.11	0.614	0.818
T139	LTE B7	QPS K20M	20850	1	0	Front Face	1	1	on	19.5	19.09	0.06	0.385	0.423
T140	LTE B7	QPS K20M	20850	1	0	Rear Face	1	1	on	19.5	19.09	0.04	0.298	0.328
T141	LTE B7	QPS K20M	20850	1	0	Right Side	1	1	on	19.5	19.09	0.09	0.479	0.527
T142	LTE B7	QPS K20M	21350	50	0	Front Face	1	1	on	19	18.19	-0.05	0.2	0.241
T143	LTE B7	QPS K20M	21350	50	0	Rear Face	1	1	on	19	18.19	0.07	0.154	0.186
T144	LTE B7	QPS K20M	21350	50	0	Right Side	1	1	on	19	18.19	-0.02	0.26	0.313
T145	LTE B7	QPS K20M	21100	1	50	Right Side	1	1	on	19.5	17.90	0.08	0.464	<b>0.671</b>
T146	LTE B7	QPS K20M	21350	1	50	Right Side	1	1	on	19.5	18.03	0.05	0.226	0.317
T147	LTE B7	QPS K20M	20850	50	25	Right Side	1	1	on	19	17.78	0.14	0.426	0.565
T148	LTE B7	QPS K20M	21100	50	25	Right Side	1	1	on	19	17.63	0.15	0.378	0.518
T149	LTE B7	QPS K20M	21100	1	50	Right Side	1	2	on	19.5	17.90	-0.05	0.434	0.628

Note: 1.The value with boldface is the maximum SAR Value of each test band.

### SAR test results of WIFI

Test No.	Band	CH	Test Position	Separation Distance(cm)	Battery	Date Rate	Tune up	Conducted Power	Drift(dB)	SAR Value (W/kg)1-g	Reported SAR
T150	802.11b	10	Front Face	1	1	1	16	15.38	-0.06	0.187	0.216
T151	802.11b	10	Rear Face	1	1	1	16	15.38	-0.03	0.113	0.130
T152	802.11b	10	Left Side	1	1	1	16	15.38	0.02	0.042	0.049
T153	802.11b	10	Bottom Side	1	1	1	16	15.38	-0.08	0.217	<b>0.250</b>
T154	802.11b	10	Bottom Side	1	2	1	16	15.38	0.05	0.206	0.238

Note: 1.The value with boldface is the maximum SAR Value of each test band.

## 10. SIMULTANEOUS TRANSMISSION CONDITIONS

Per FCC KDB 447498D01, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	GPRS/EDGE (DATA) + WiFi 2.4G	N/A
2	UMTS (DATA)+WiFi 2.4G	Yes
3	LTE(DATA)+WiFi 2.4G	Yes

Note:

- i) 3G&4G share the same antenna and can't transmit simultaneously.
- ii) The device does not support DTM function.

## 11. SAR SUMMATION SCENARIO

### 1) About 2.4G WiFi and UMTS/LTE antenna (sensor off)

Test Position SAR <sub>1g</sub> (W/kg)	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
UMTS Band 2	0.313	0.560	-	0.098	0.360	0.274
UMTS Band 4	0.783	0.592	-	0.096	0.177	0.293
UMTS Band 5	1.091	0.865	-	0.074	0.448	0.478
LTE Band 2	0.342	0.765	-	0.147	0.453	0.354
LTE Band 4	0.768	0.573	-	0.176	0.297	0.664
LTE Band 5	0.909	0.569	-	0.056	0.446	0.431
LTE Band 7	0.303	0.176	-	0.438	0.052	0.880
2.4GWiFi	0.216	0.130	0.049	-	-	0.250
MAX $\Sigma$ SAR <sub>1g</sub>	<b>1.307</b>	<b>0.995</b>	<b>0.049</b>	<b>0.438</b>	<b>0.453</b>	<b>1.131</b>

MAX.  $\Sigma$ SAR<sub>1g</sub>=1.307 W/Kg<1.6 W/Kg,so the SAR to peak location separation ratio should not be considered.

### 2) About 2.4G WiFi and UMTS/LTE antenna (sensor on)

Test Position SAR <sub>1g</sub> (W/kg)	Front Face	Rear Face	Right Side
UMTS Band 2	0.349	0.536	0.079
UMTS Band 4	0.938	0.866	0.185
UMTS Band 5	-	-	-
LTE Band 2	0.244	0.450	0.058
LTE Band 4	0.446	0.416	0.091
LTE Band 5	0.577	0.431	0.053
LTE Band 7	0.423	0.328	0.671
2.4GWiFi	0.216	0.130	-
MAX $\Sigma$ SAR <sub>1g</sub>	<b>1.154</b>	<b>0.996</b>	<b>0.671</b>

MAX.  $\Sigma$ SAR<sub>1g</sub>=1.154 W/Kg<1.6 W/Kg,so the SAR to peak location separation ratio should not be considered.

## APPENDIX

### 1. Test Layout


#### Specific Absorption Rate Test Layout




**Liquid depth in the flat Phantom ( $\geq 15\text{cm}$  depth)**

Body(835MHz)\_15.6cm

Body(1750MHz)\_16.2cm

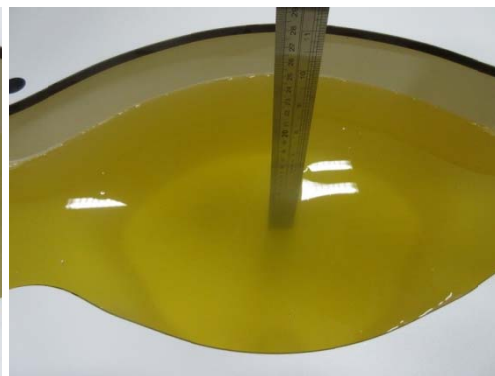

Body(1900MHz~3800MHz)\_15.7cm

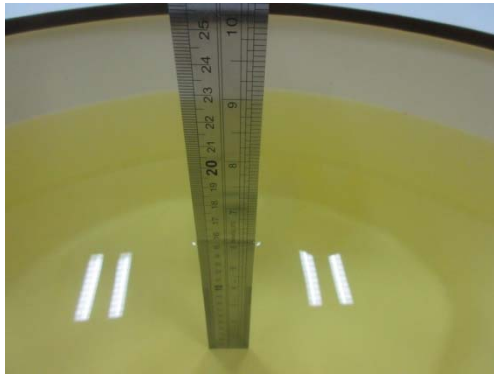

## **Appendix A. SAR Plots of System Verification**

(Pls See Appendix A.)

## **Appendix B. SAR Plots of SAR Measurement**

(Pls See Appendix B.)

## **Appendix C. Calibration Certificate for Probe and Dipole**

(Pls See Appendix C.)

## **Appendix D. Photographs of the Test Set-Up**

(Pls See Appendix D.)