


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

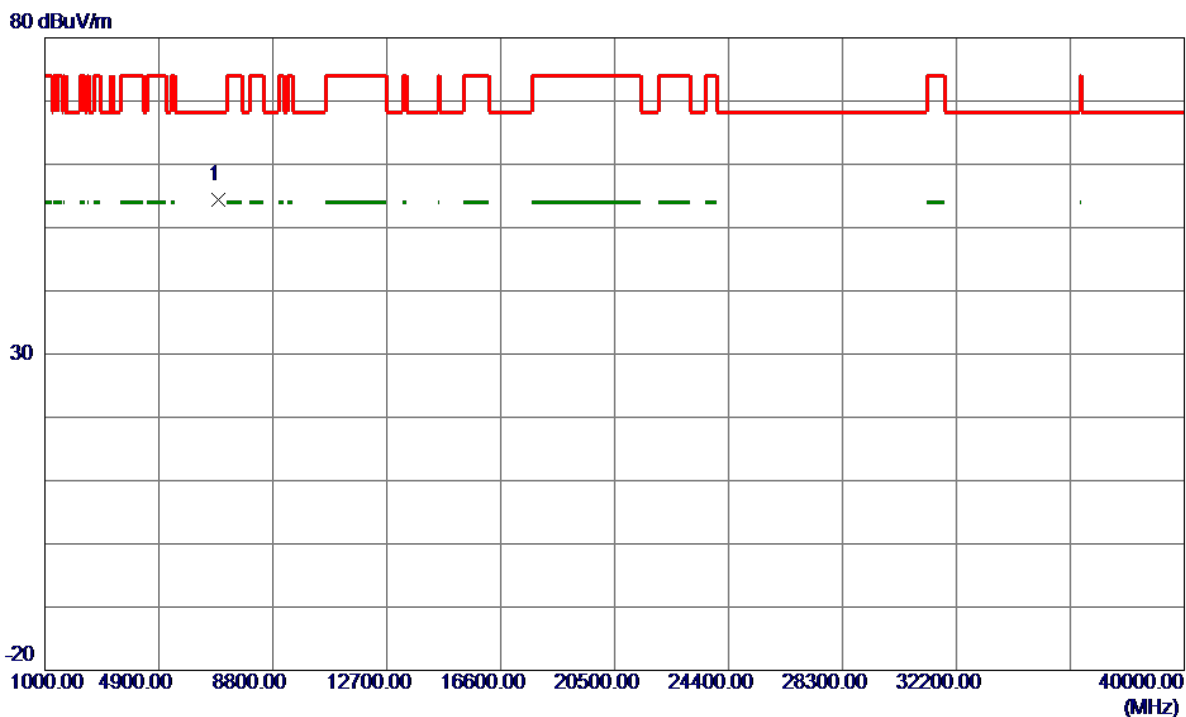

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6919.9620	45.76	8.69	54.45	68.30	-13.85	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

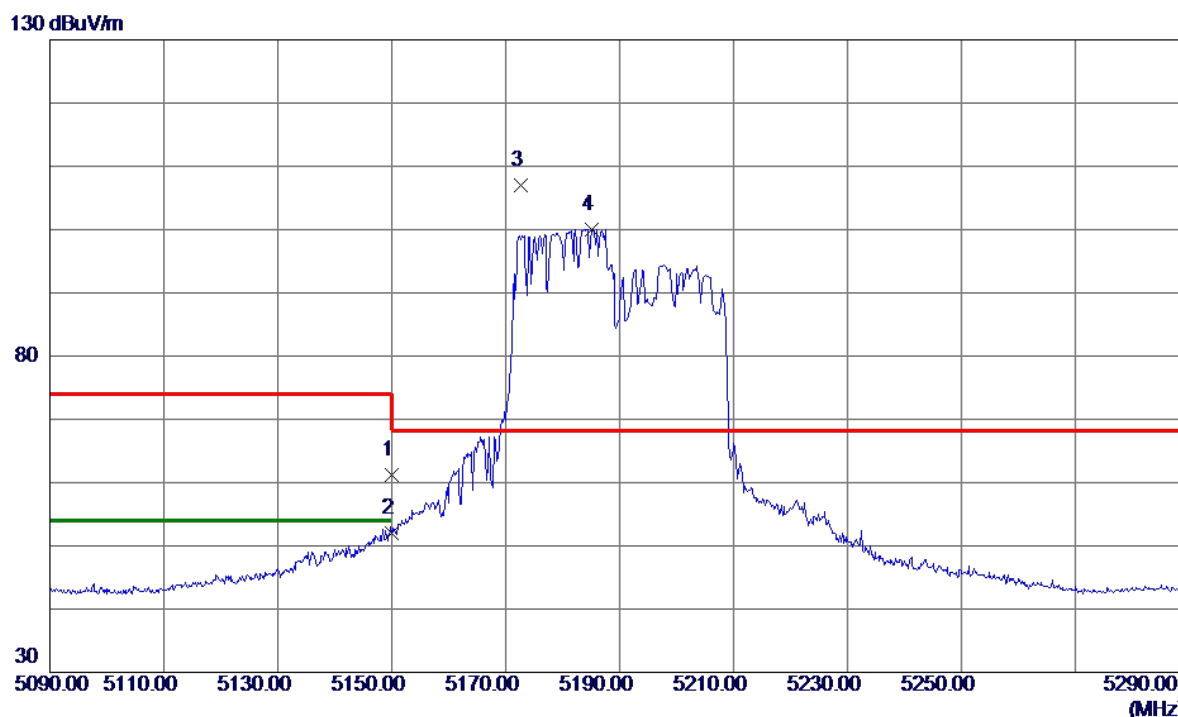

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.77	14.35	61.12	74.00	-12.88	Peak	
2	5150.0000	37.58	14.35	51.93	54.00	-2.07	AVG	
3 *	5172.7000	92.67	14.40	107.07	68.30	38.77	Peak	No Limit
4	5185.2000	85.60	14.44	100.04	999.00	-898.96	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

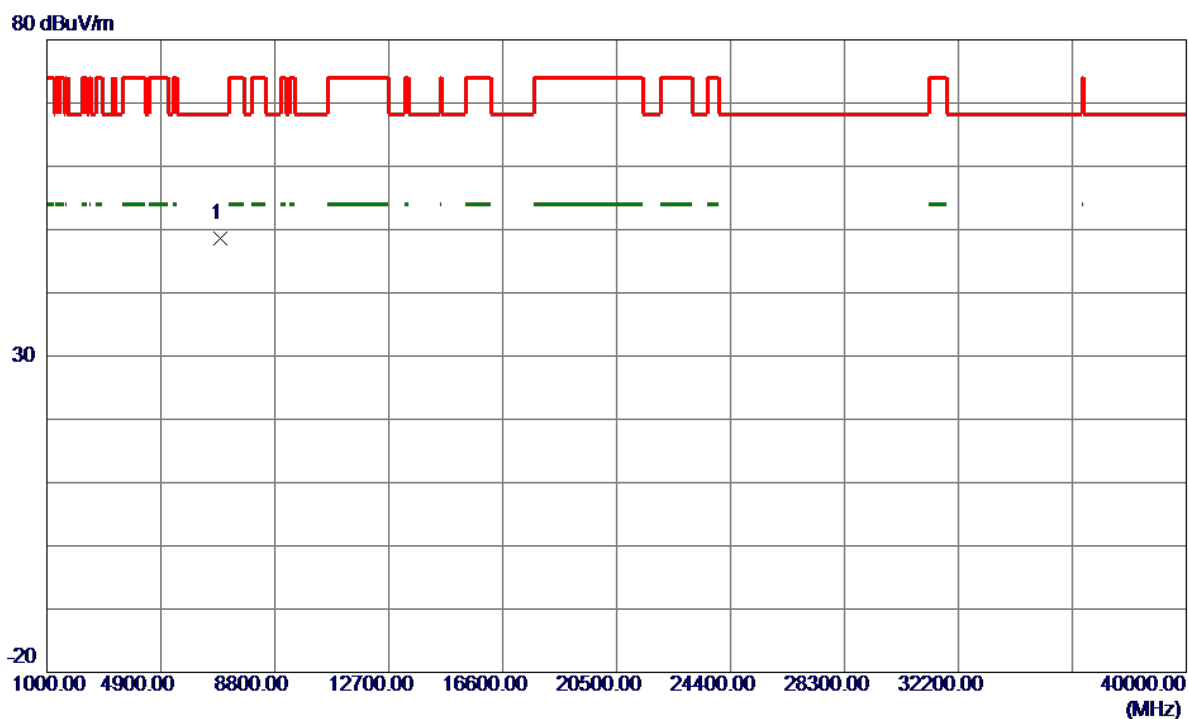

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6919.9030	39.95	8.69	48.64	68.30	-19.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

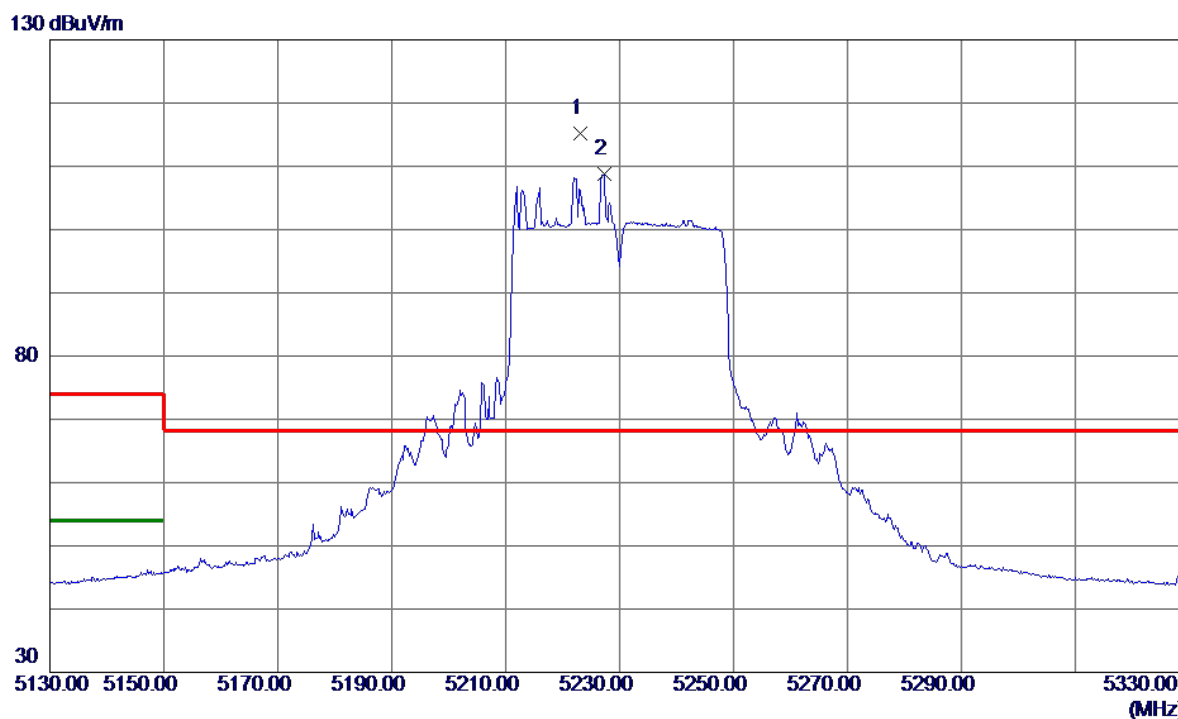

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5223.1000	100.74	14.53	115.27	68.30	46.97	Peak	No Limit
2	5227.3000	94.23	14.54	108.77	999.00	-890.23	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

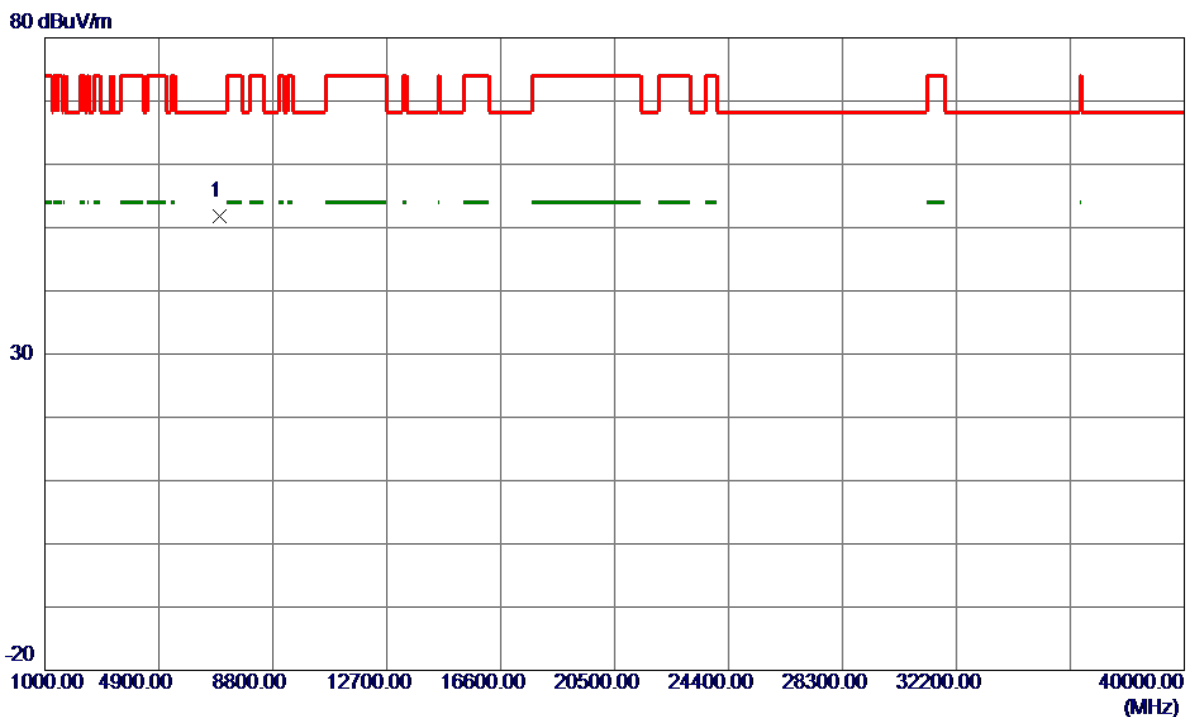


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.3630	43.08	8.81	51.89	68.30	-16.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


130 dBuV/m

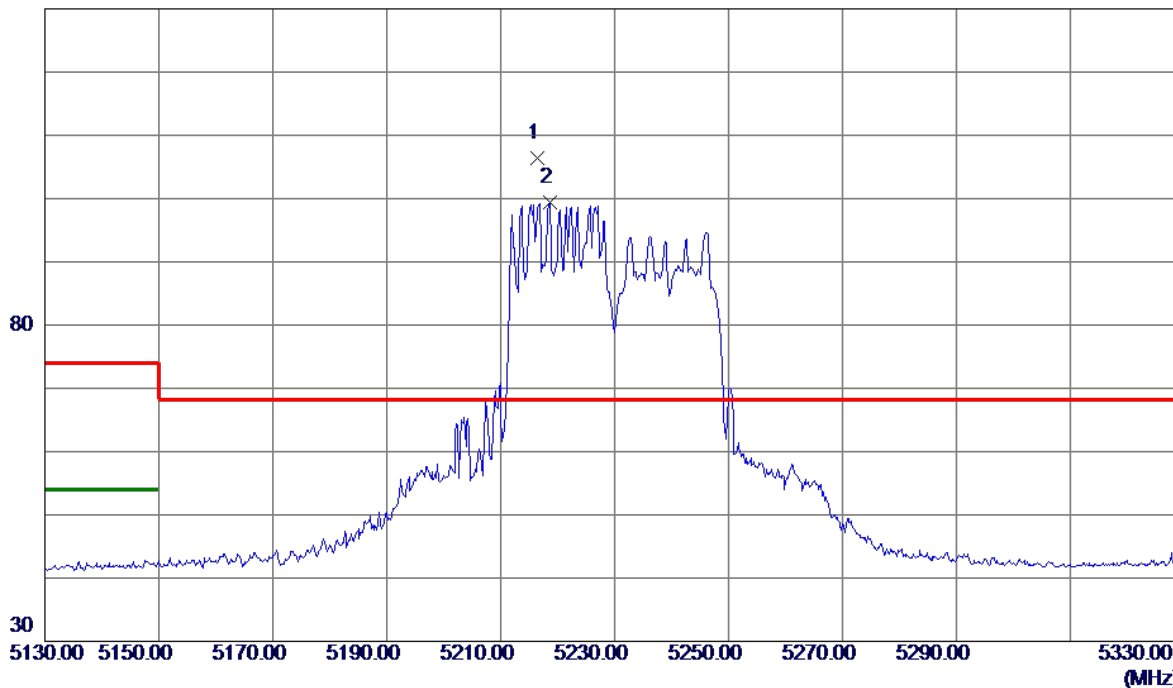

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5216.4000	91.80	14.52	106.32	68.30	38.02	Peak	No Limit
2	5218.6000	84.81	14.52	99.33	999.00	-899.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

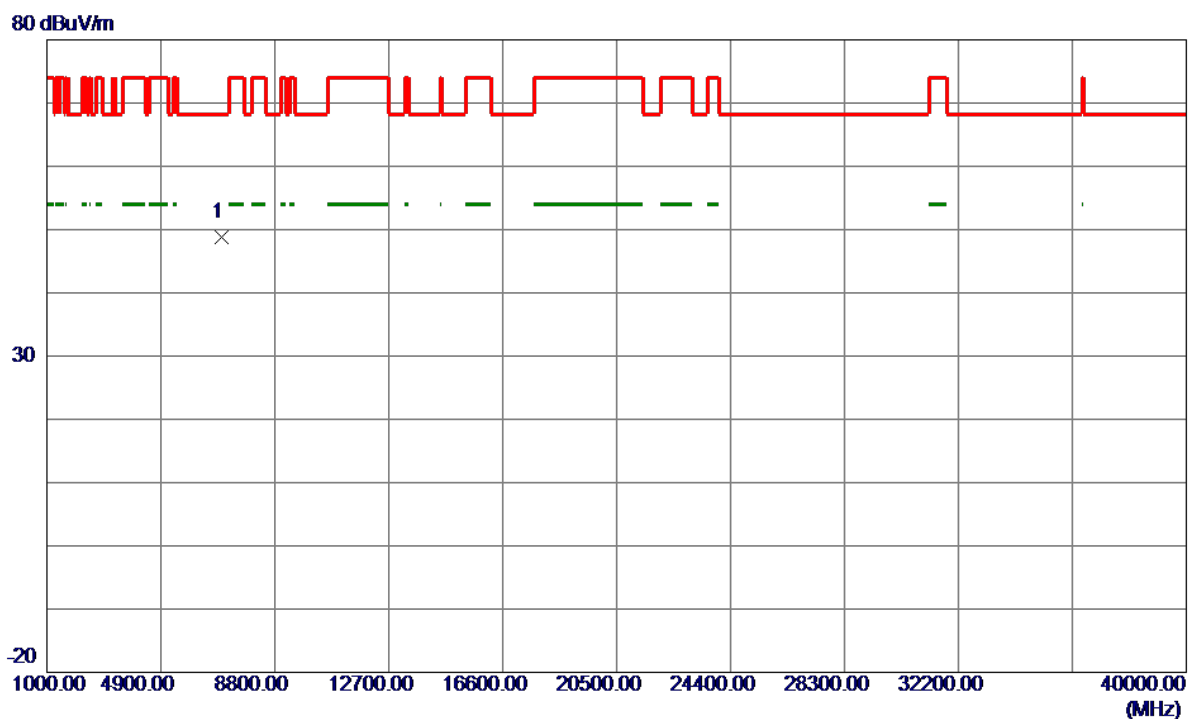

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.3470	40.06	8.81	48.87	68.30	-19.43	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz


Vertical

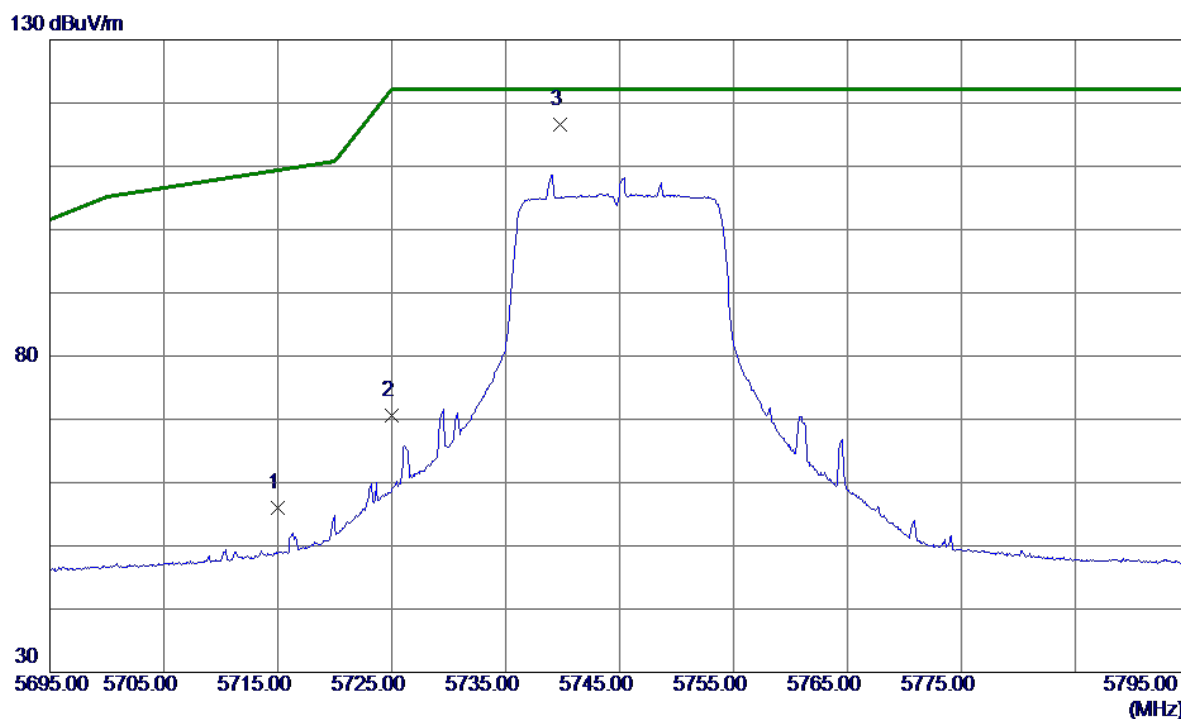

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.98	15.93	55.91	109.40	-53.49	Peak	
2	5725.0000	54.69	15.96	70.65	122.20	-51.55	Peak	
3 *	5739.7500	100.56	16.01	116.57	122.20	-5.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz


Vertical

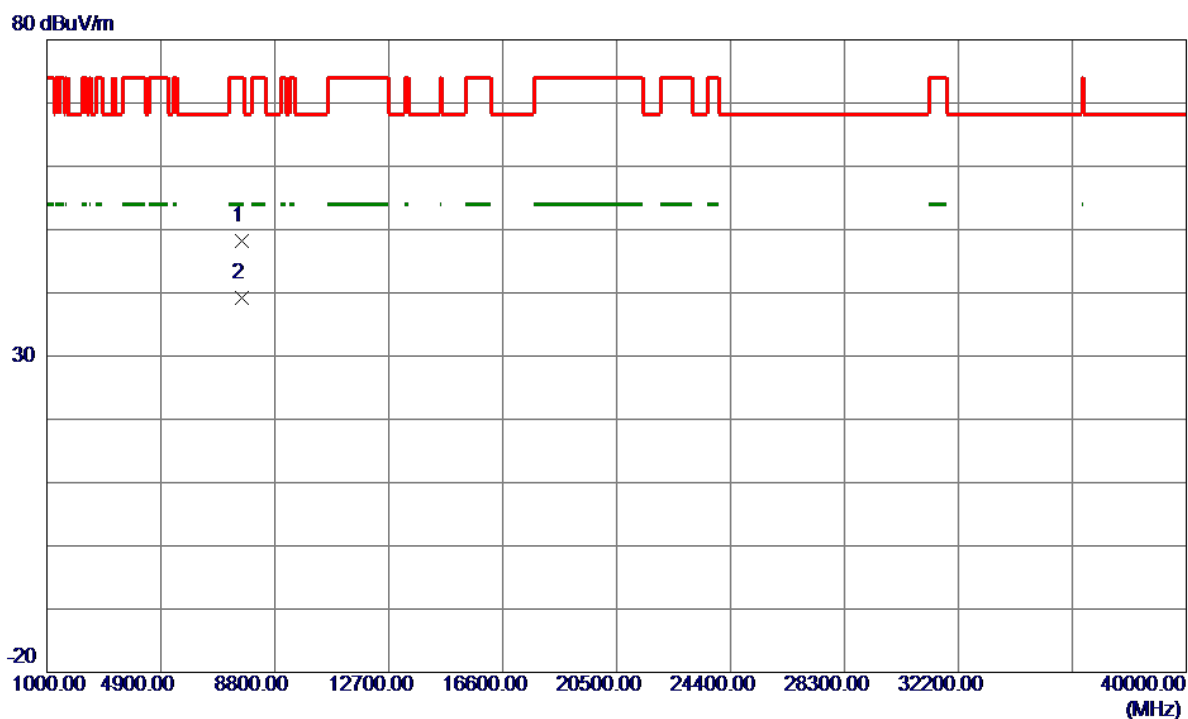

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7659.6720	38.14	10.00	48.14	74.00	-25.86	Peak	
2 *	7660.0300	29.22	10.00	39.22	54.00	-14.78	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz


Horizontal

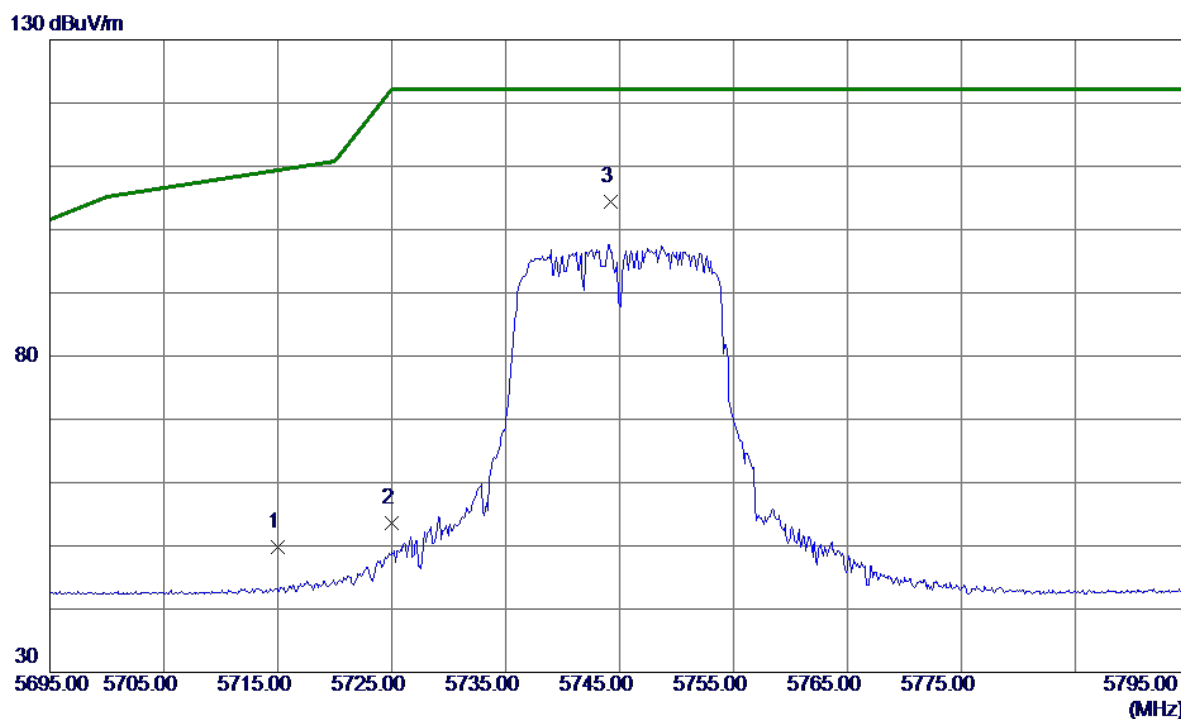

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	33.96	15.93	49.89	109.40	-59.51	Peak	
2	5725.0000	37.73	15.96	53.69	122.20	-68.51	Peak	
3 *	5744.2000	88.33	16.02	104.35	122.20	-17.85	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz

Horizontal

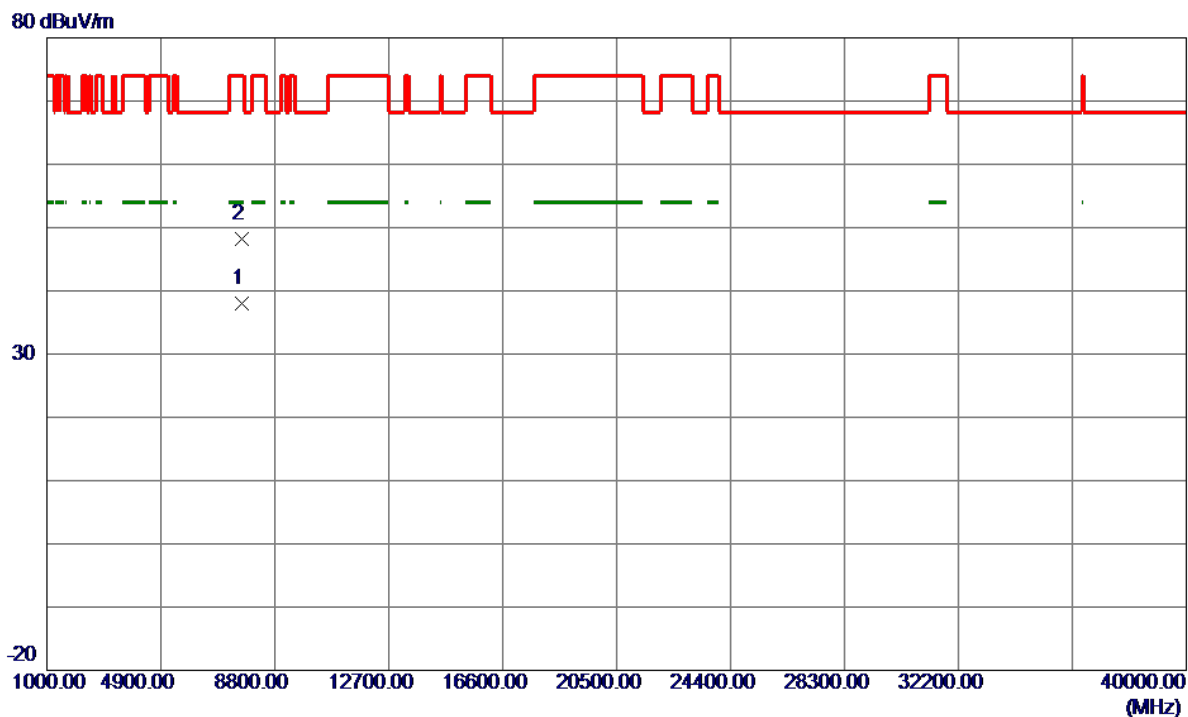


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7660.0780	28.02	10.00	38.02	54.00	-15.98	AVG	
2	7660.2880	38.11	10.00	48.11	74.00	-25.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz

Vertical


130 dBuV/m

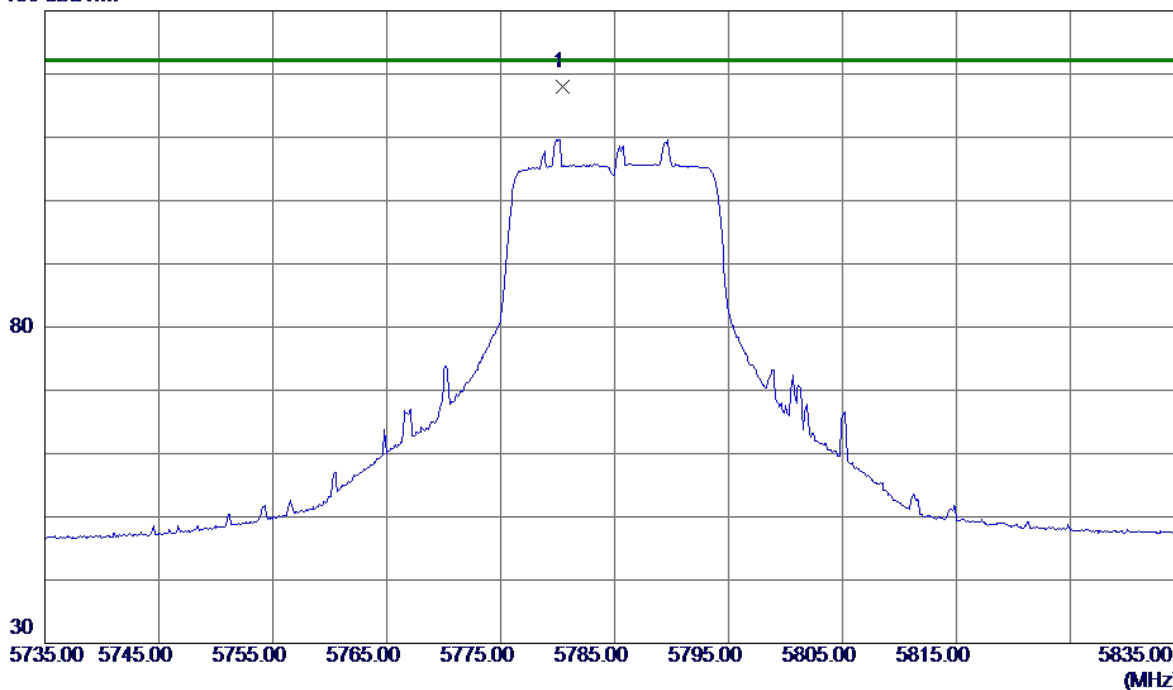

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5780.4000	101.79	16.13	117.92	122.20	-4.28	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Vertical

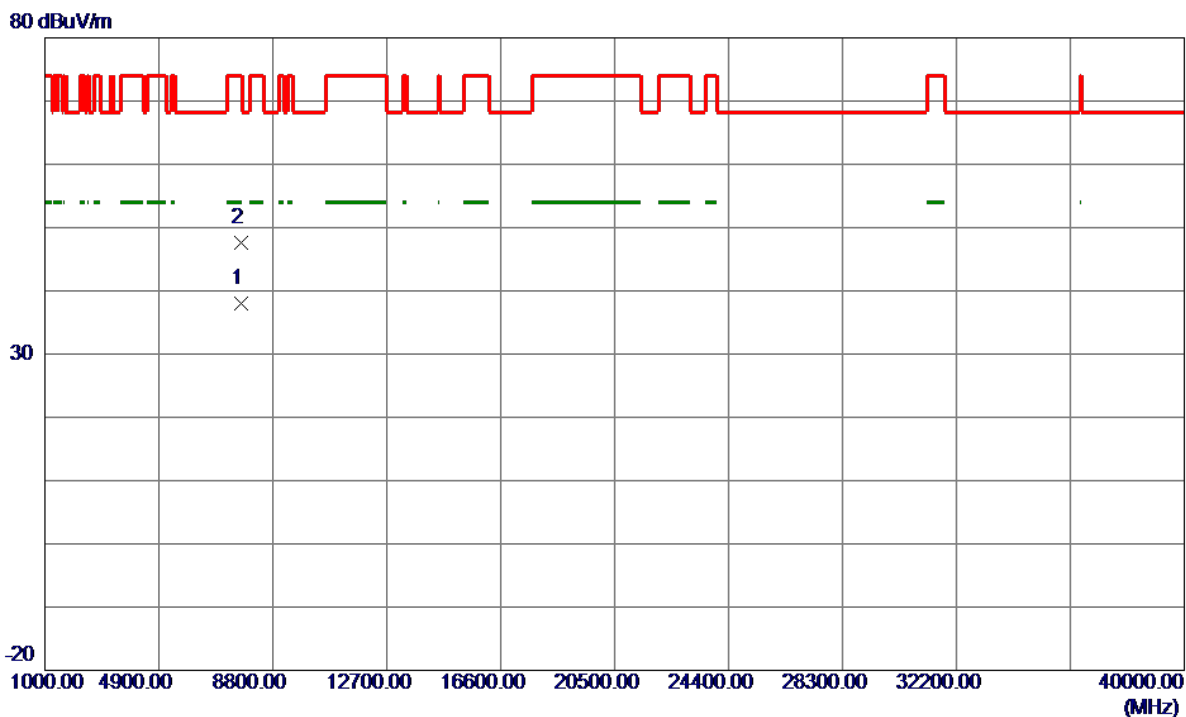

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.3370	28.13	9.96	38.09	54.00	-15.91	AVG	
2	7715.1850	37.59	9.96	47.55	74.00	-26.45	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Horizontal

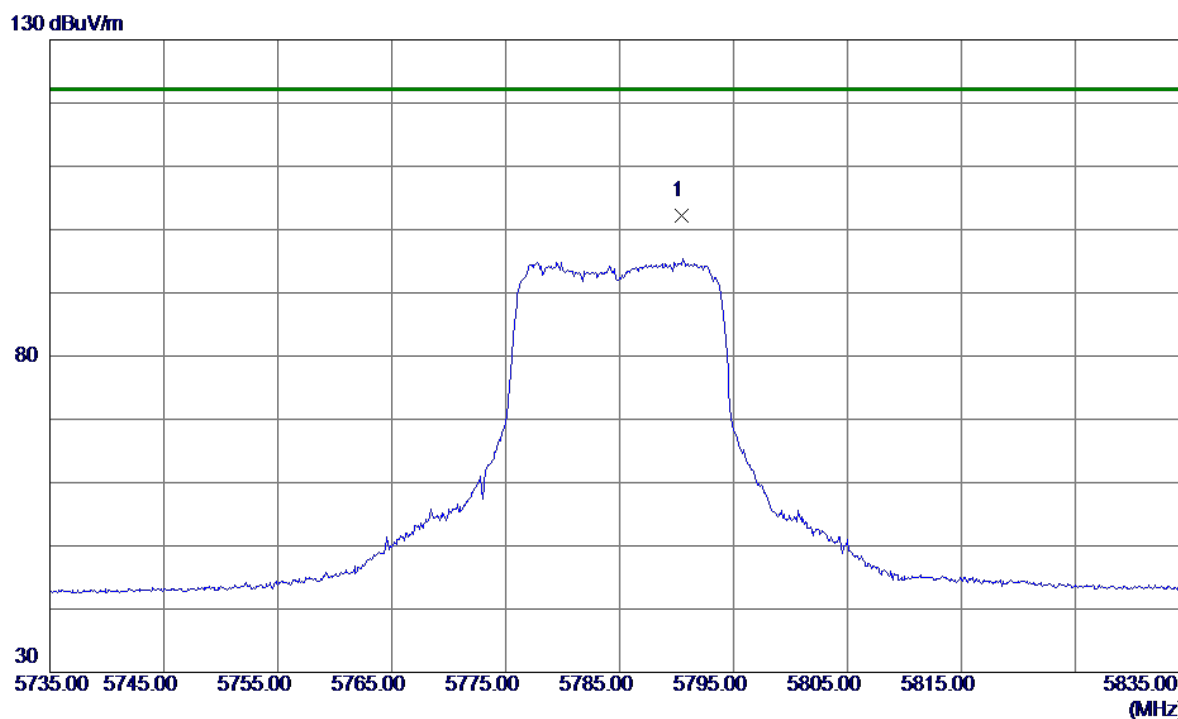

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5790.4000	86.05	16.17	102.22	122.20	-19.98	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Horizontal

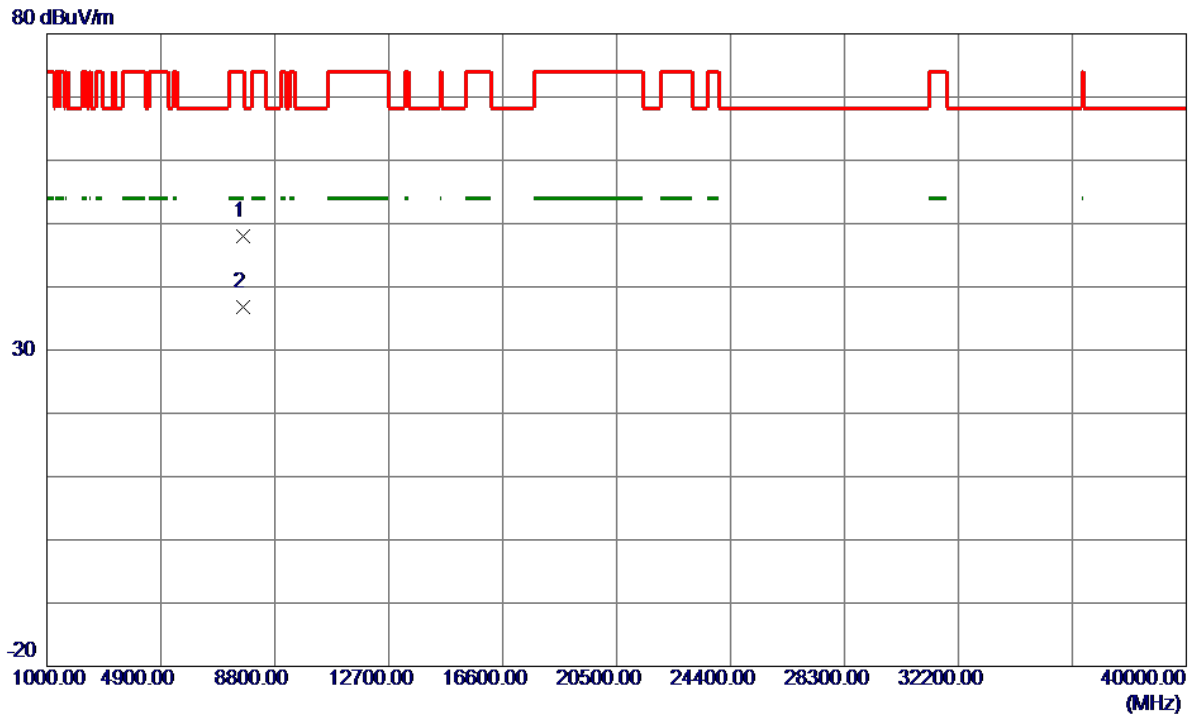

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7710.8950	38.10	9.97	48.07	74.00	-25.93	Peak	
2 *	7713.1130	26.78	9.97	36.75	54.00	-17.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Vertical

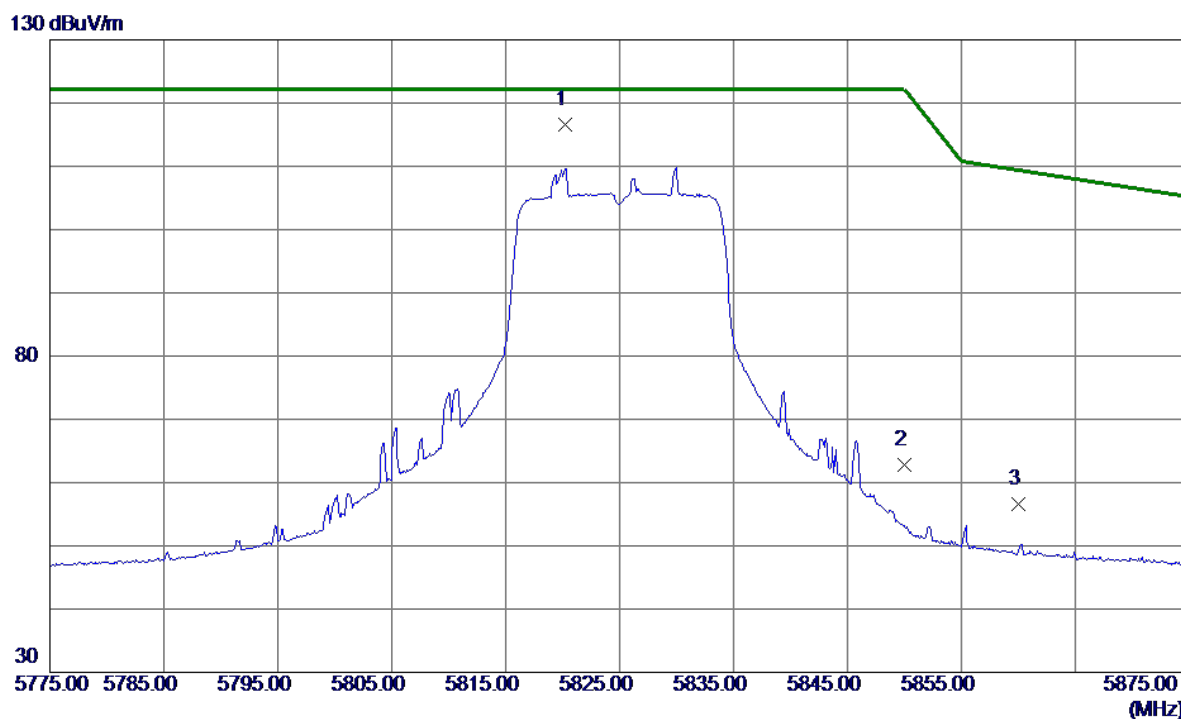

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.2500	100.39	16.26	116.65	122.20	-5.55	Peak	No Limit
2	5850.0000	46.53	16.35	62.88	122.20	-59.32	Peak	
3	5860.0000	40.19	16.39	56.58	109.40	-52.82	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Vertical

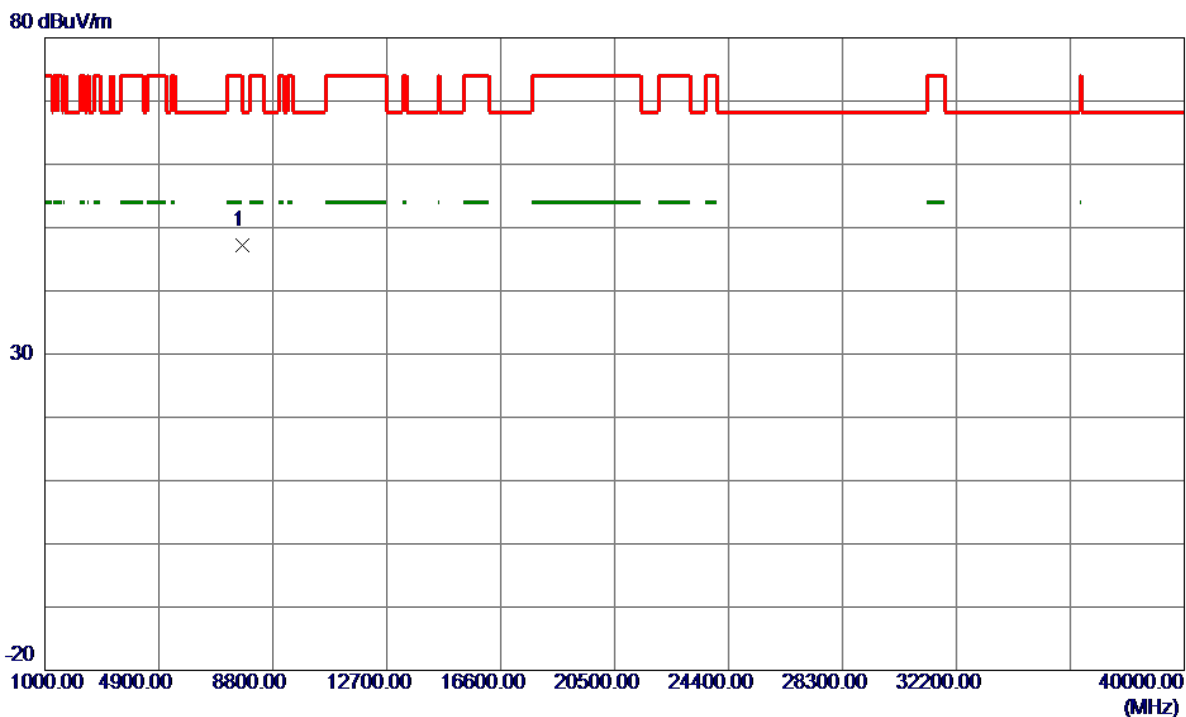

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.4220	37.35	9.93	47.28	68.30	-21.02	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Horizontal

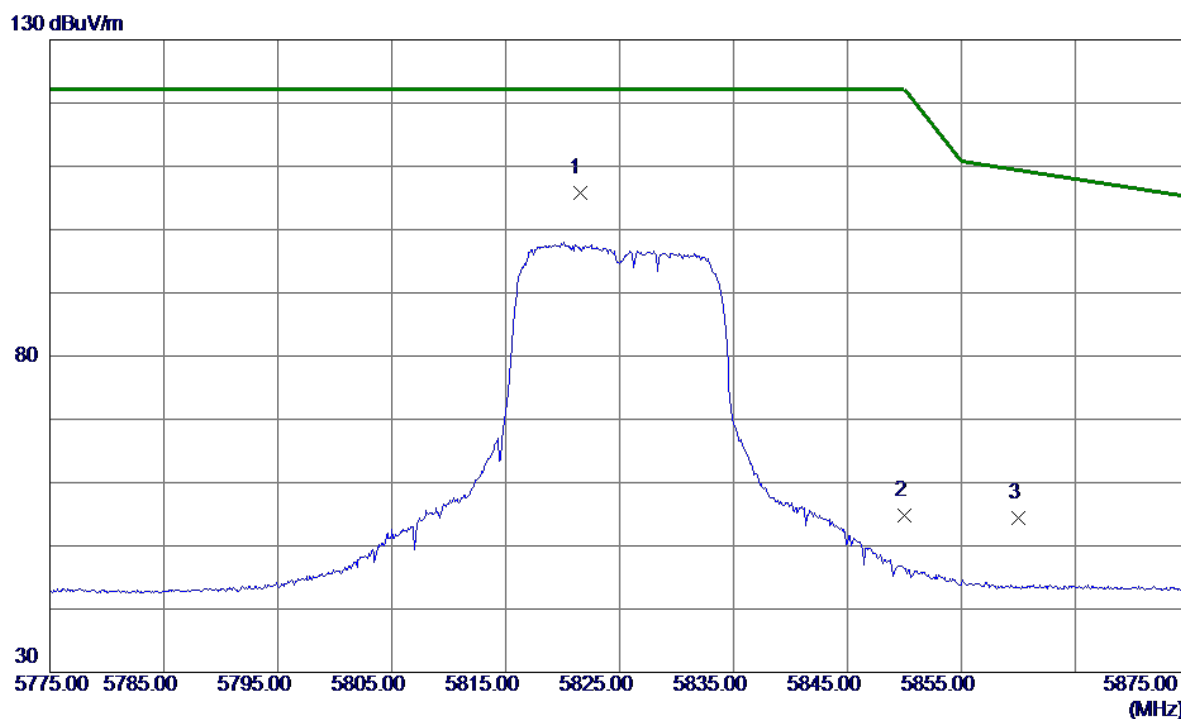

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.5000	89.62	16.26	105.88	122.20	-16.32	Peak	No Limit
2	5850.0000	38.38	16.35	54.73	122.20	-67.47	Peak	
3	5860.0000	37.92	16.39	54.31	109.40	-55.09	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Horizontal

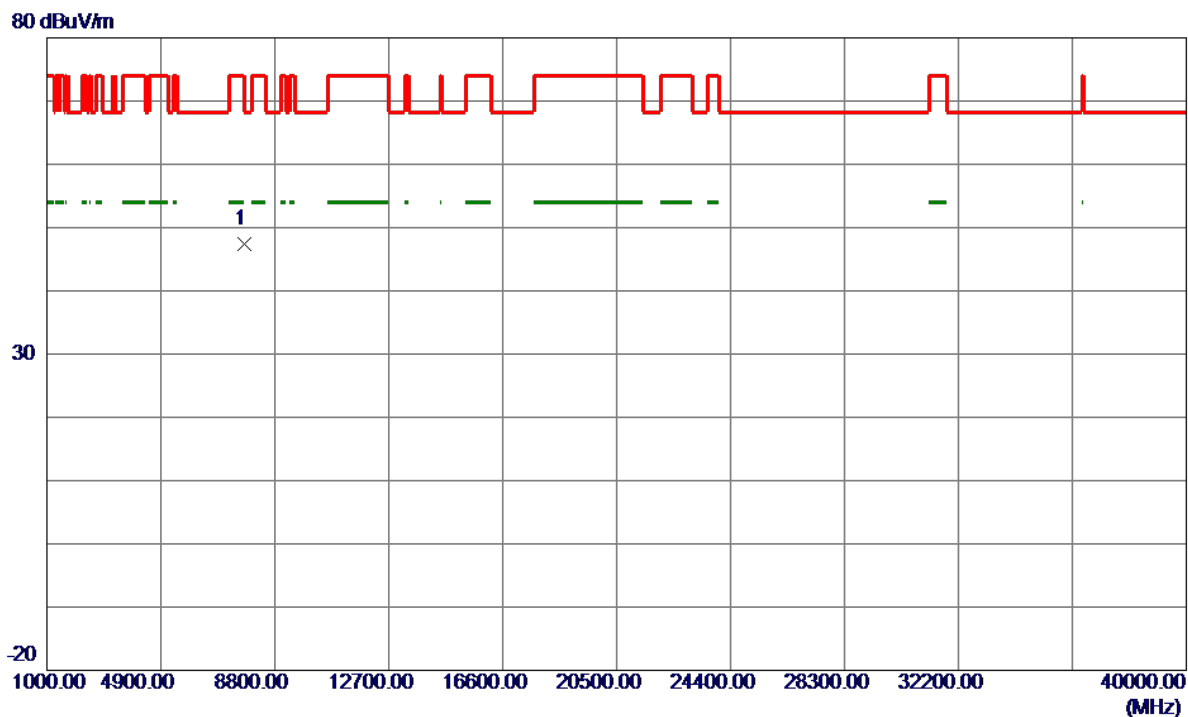

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.6350	37.40	9.93	47.33	68.30	-20.97	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

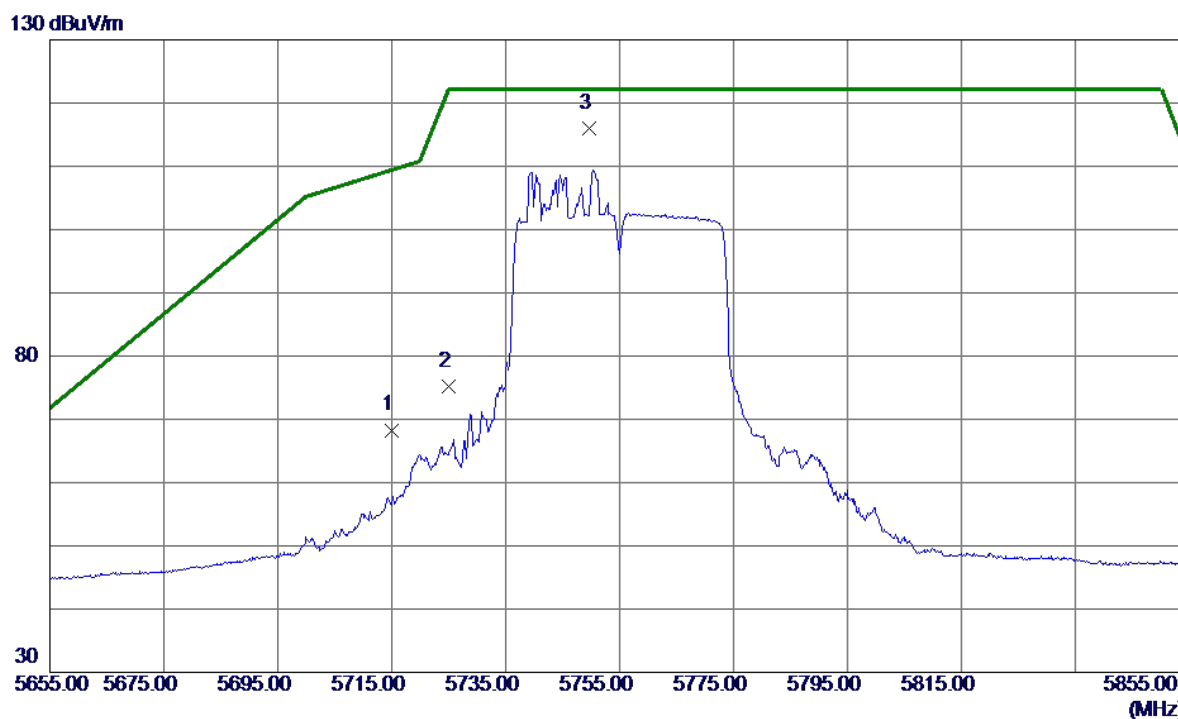

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	52.37	15.93	68.30	109.40	-41.10	Peak	
2	5725.0000	59.17	15.96	75.13	122.20	-47.07	Peak	
3 *	5749.6000	99.93	16.04	115.97	122.20	-6.23	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

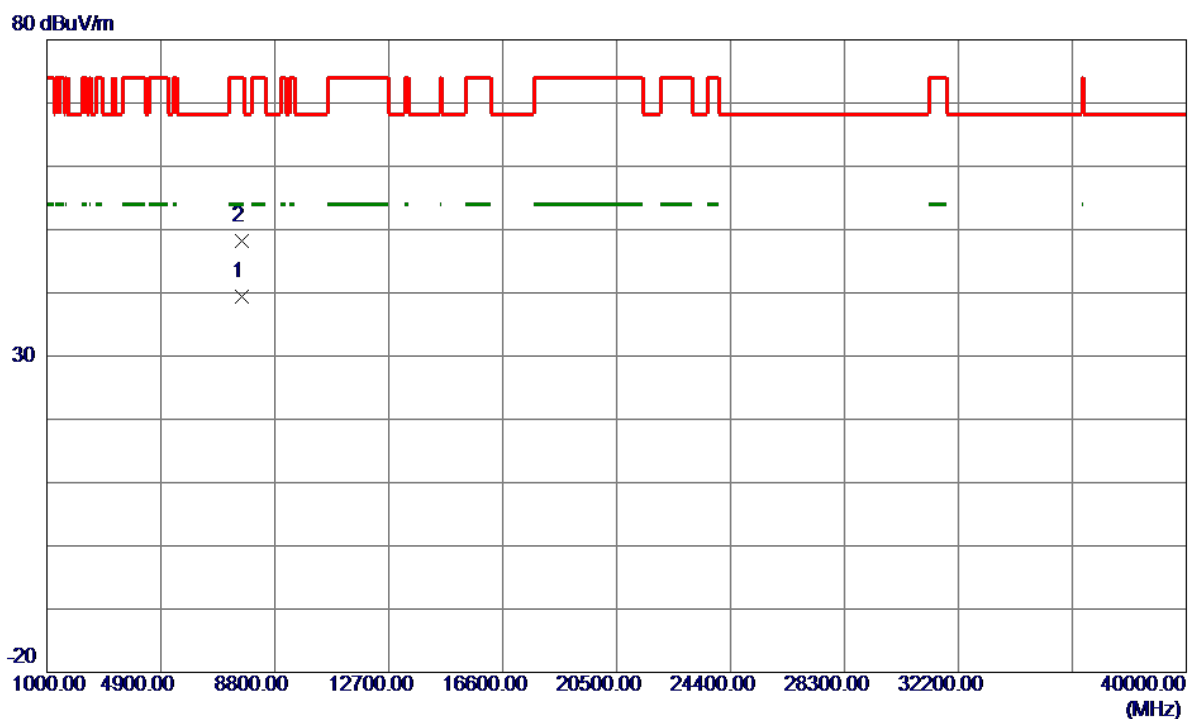

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.2800	29.32	9.99	39.31	54.00	-14.69	AVG	
2	7674.8800	38.17	9.99	48.16	74.00	-25.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

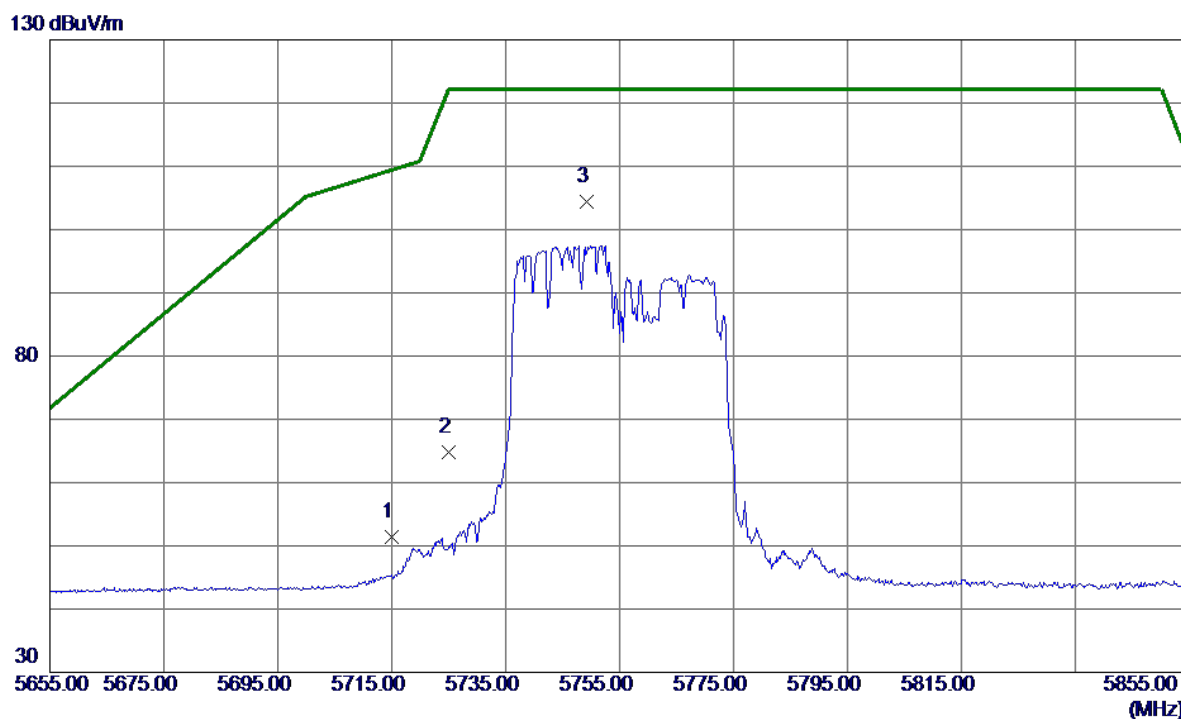

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.53	15.93	51.46	109.40	-57.94	Peak	
2	5725.0000	48.80	15.96	64.76	122.20	-57.44	Peak	
3 *	5749.2000	88.41	16.04	104.45	122.20	-17.75	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

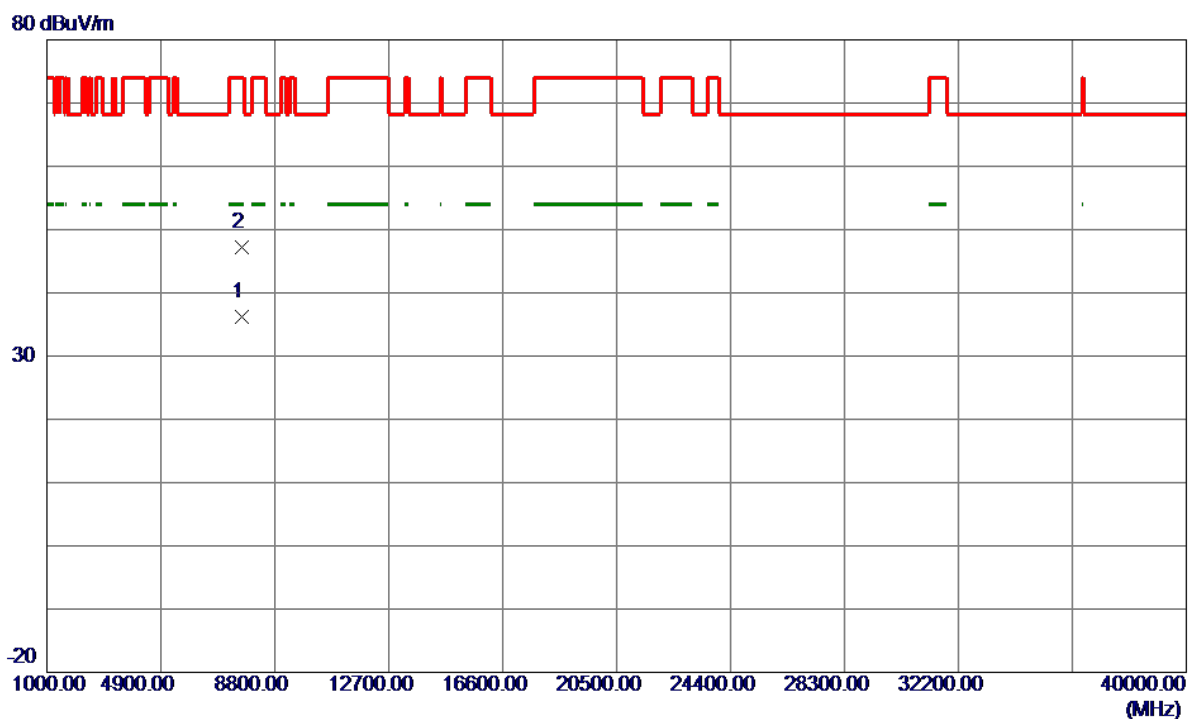

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.5870	26.18	9.99	36.17	54.00	-17.83	AVG	
2	7673.9150	37.29	9.99	47.28	74.00	-26.72	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

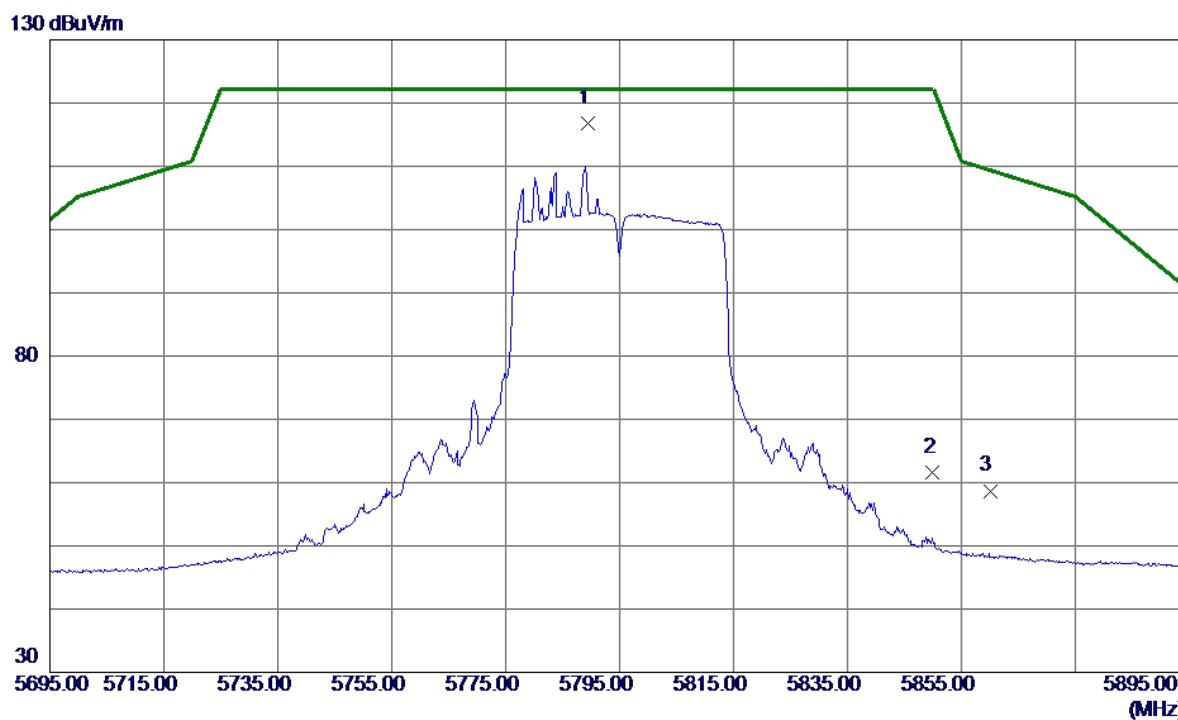

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.4000	100.70	16.16	116.86	122.20	-5.34	Peak	No Limit
2	5850.0000	45.25	16.35	61.60	122.20	-60.60	Peak	
3	5860.0000	42.31	16.39	58.70	109.40	-50.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

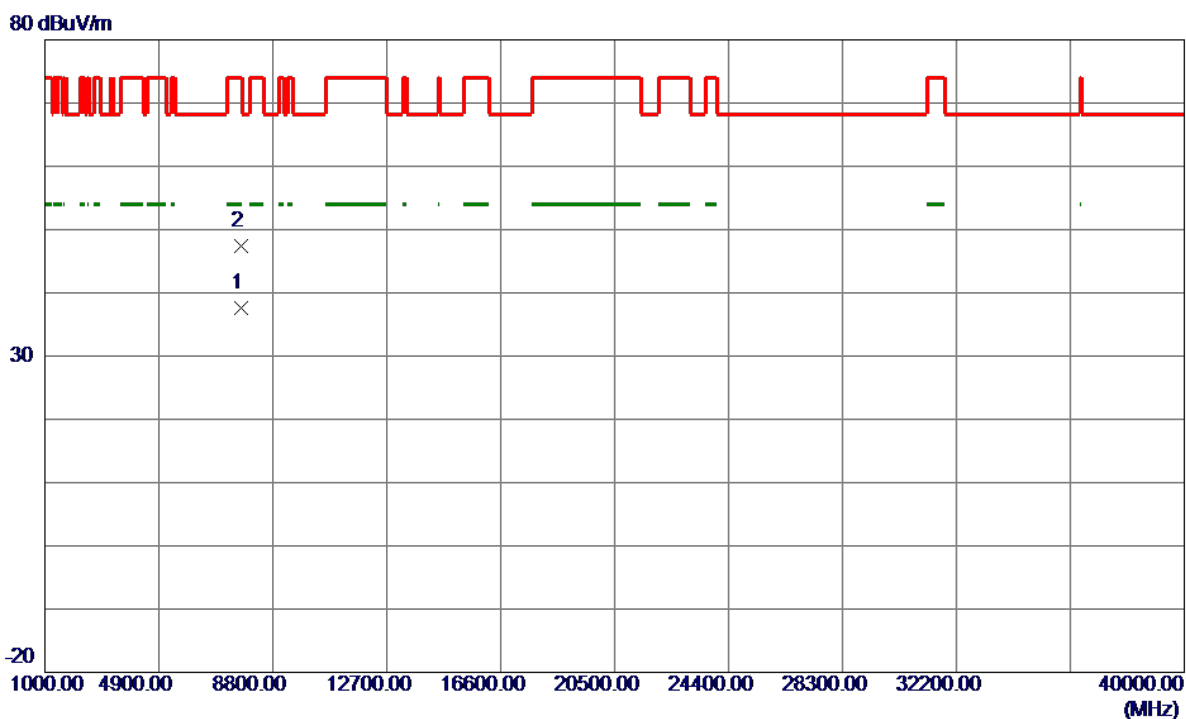

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.6530	27.68	9.96	37.64	54.00	-16.36	AVG	
2	7728.3180	37.38	9.95	47.33	74.00	-26.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

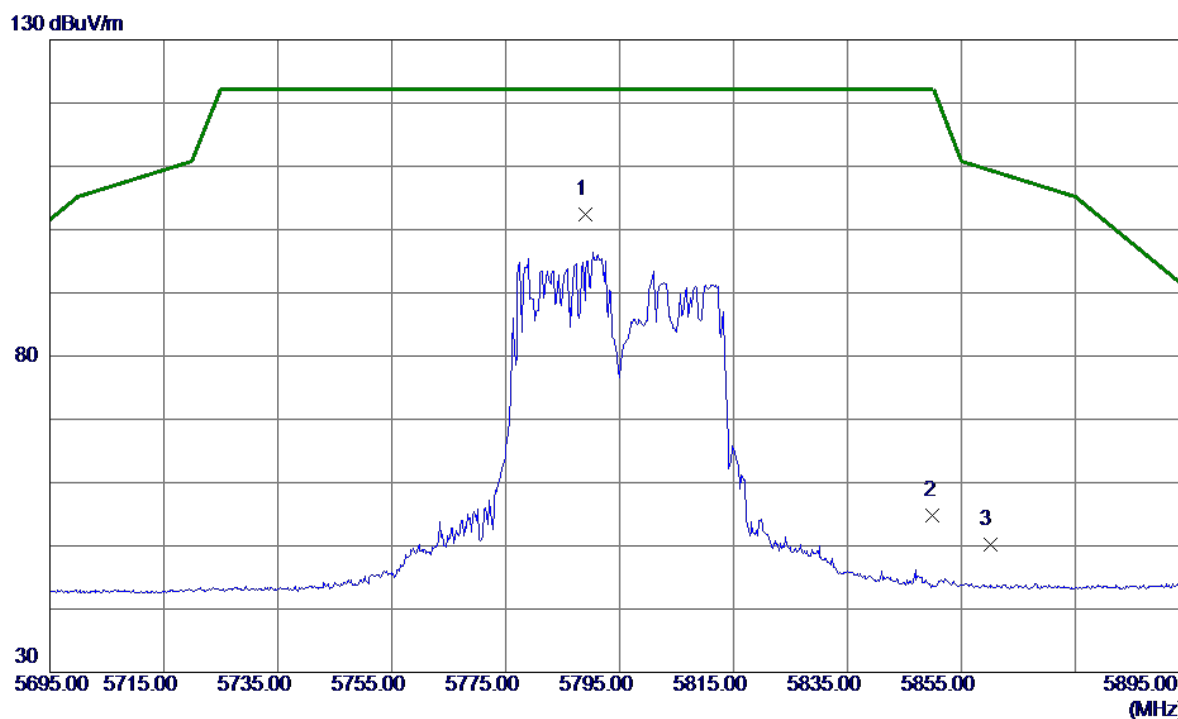

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.0000	86.23	16.16	102.39	122.20	-19.81	Peak	No Limit
2	5850.0000	38.50	16.35	54.85	122.20	-67.35	Peak	
3	5860.0000	33.83	16.39	50.22	109.40	-59.18	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

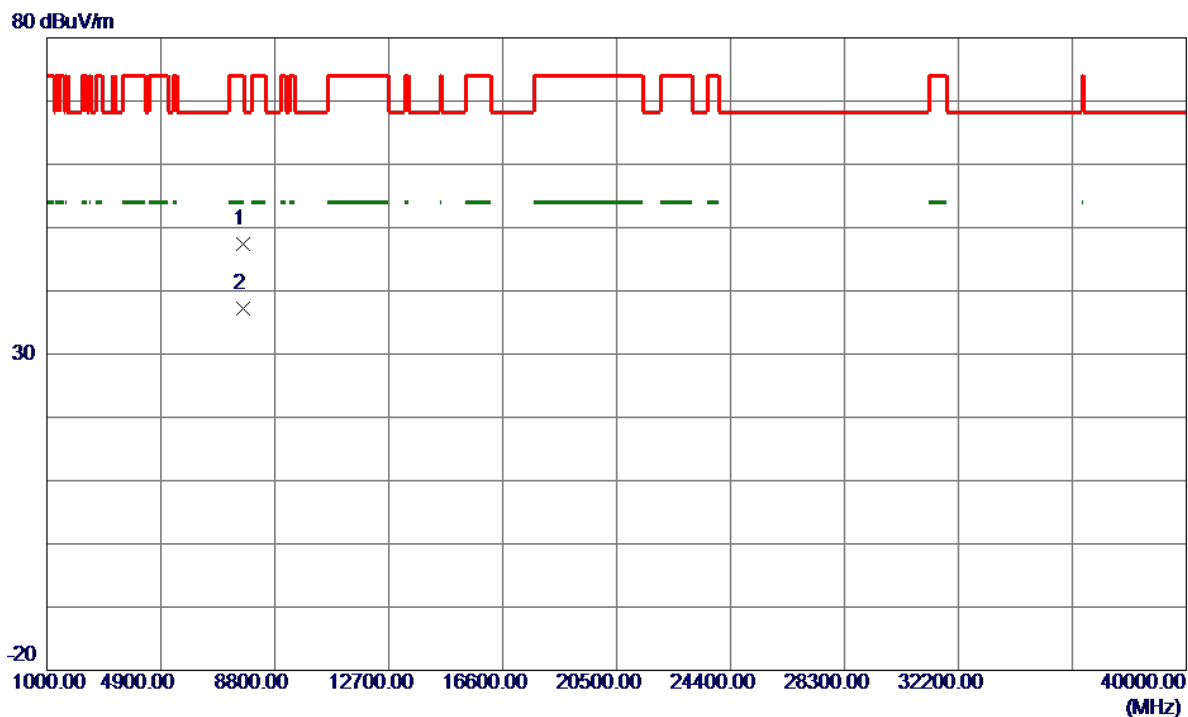

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7726.6500	37.47	9.96	47.43	74.00	-26.57	Peak	
2 *	7726.6670	27.20	9.96	37.16	54.00	-16.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz


Vertical

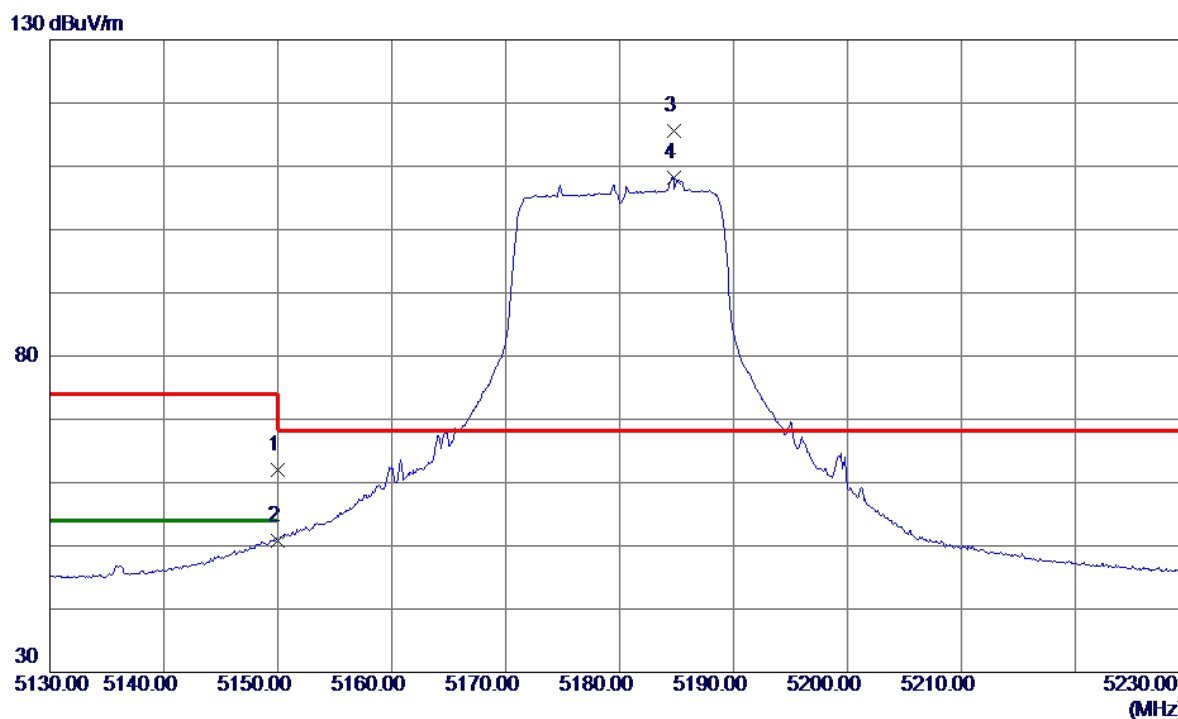

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.66	14.35	62.01	74.00	-11.99	Peak	
2	5150.0000	36.50	14.35	50.85	54.00	-3.15	AVG	
3 *	5184.7500	101.19	14.43	115.62	68.30	47.32	Peak	No Limit
4	5184.7500	93.82	14.43	108.25	999.00	-890.75	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz


Vertical

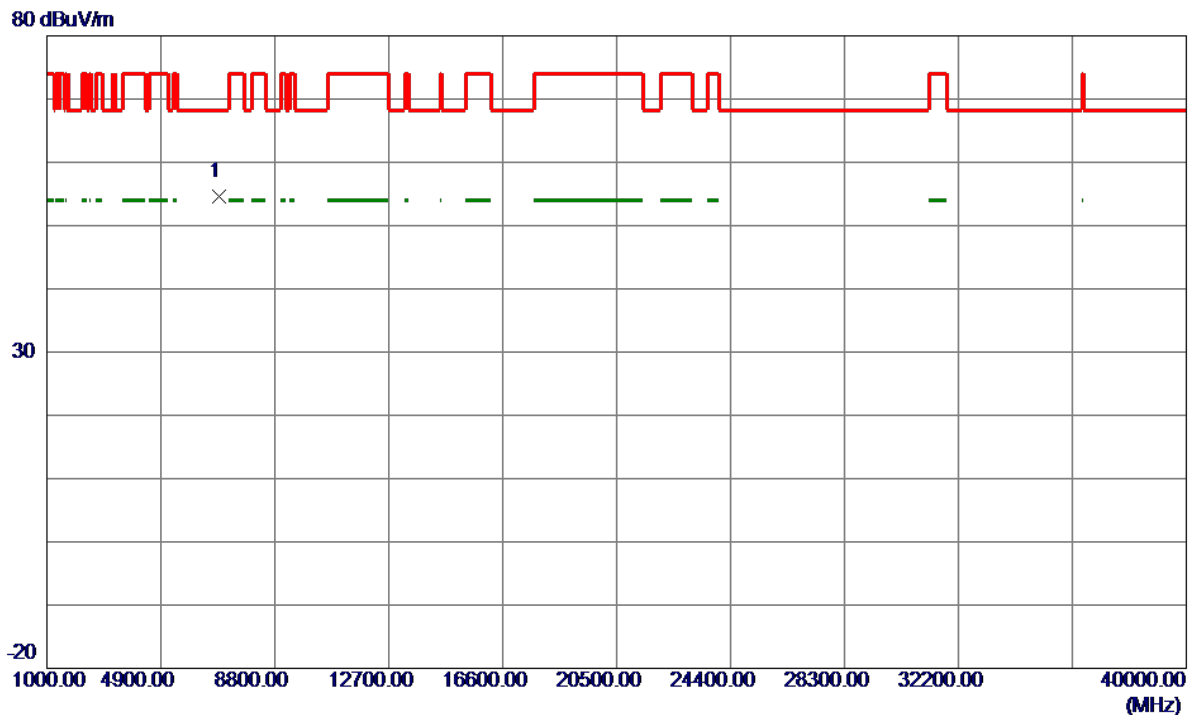

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.5850	46.00	8.66	54.66	68.30	-13.64	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz


Horizontal

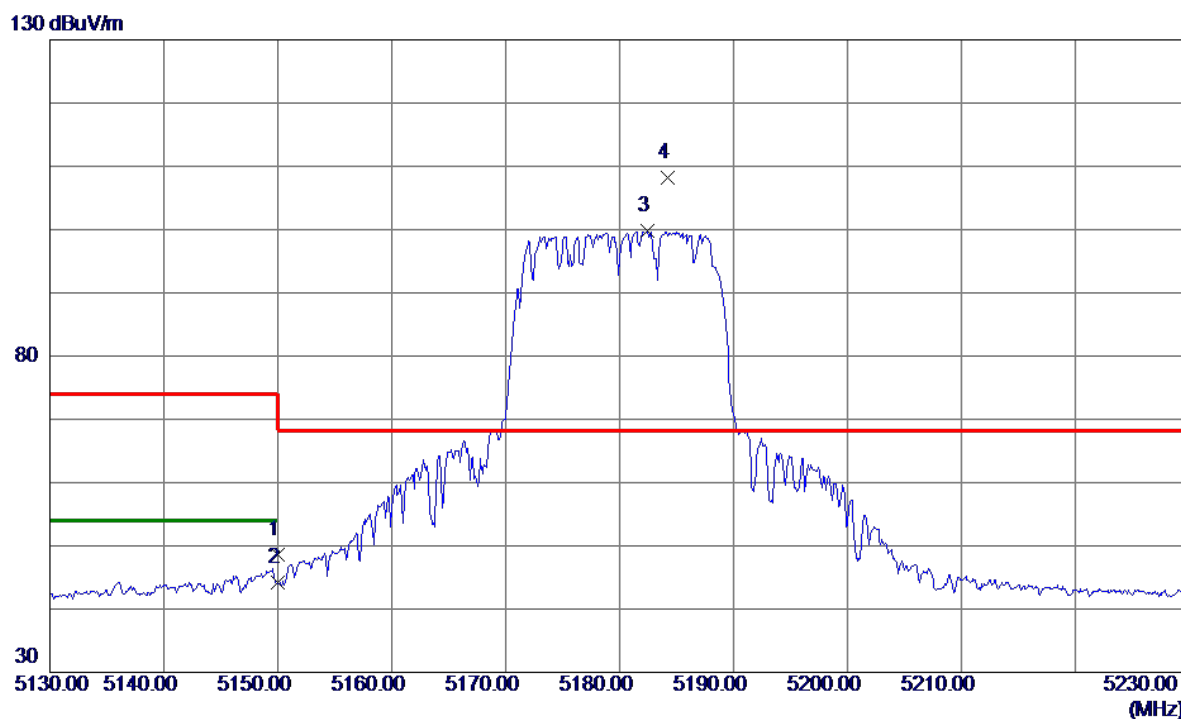

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	34.26	14.35	48.61	74.00	-25.39	Peak	
2	5150.0000	29.81	14.35	44.16	54.00	-9.84	AVG	
3	5182.4000	85.28	14.43	99.71	999.00	-899.29	AVG	No Limit
4 *	5184.2000	93.78	14.43	108.21	68.30	39.91	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz

Horizontal

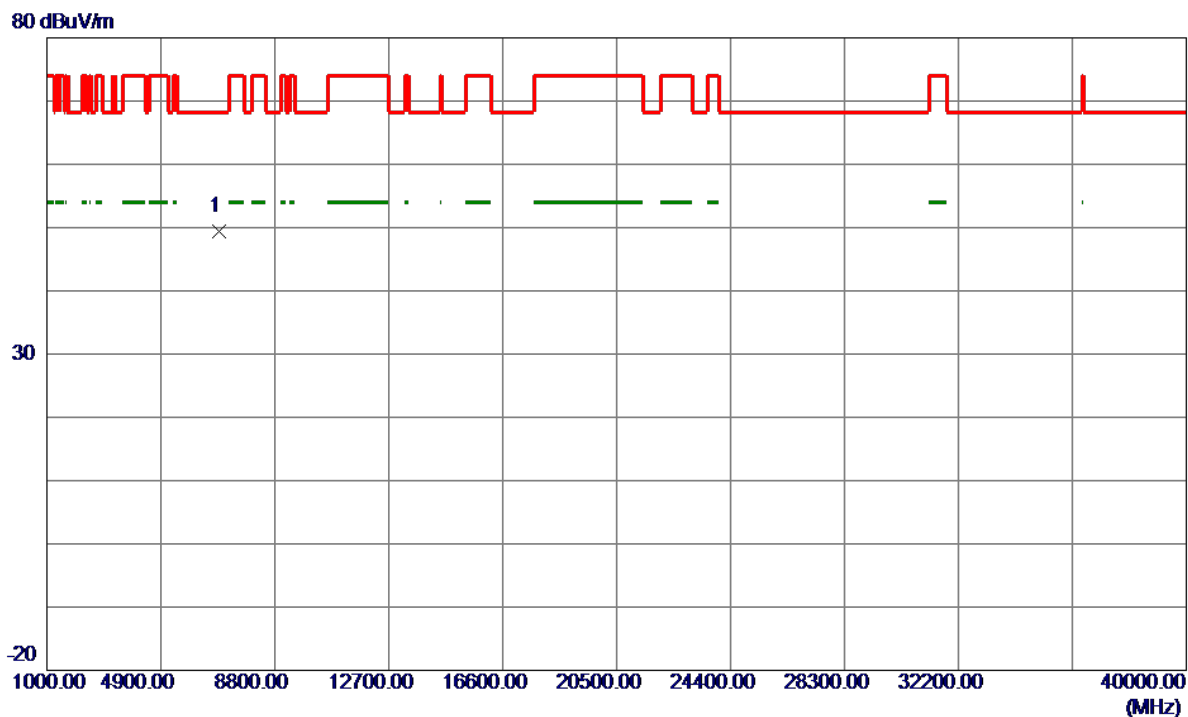


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.7100	40.70	8.66	49.36	68.30	-18.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz

Vertical


130 dBuV/m

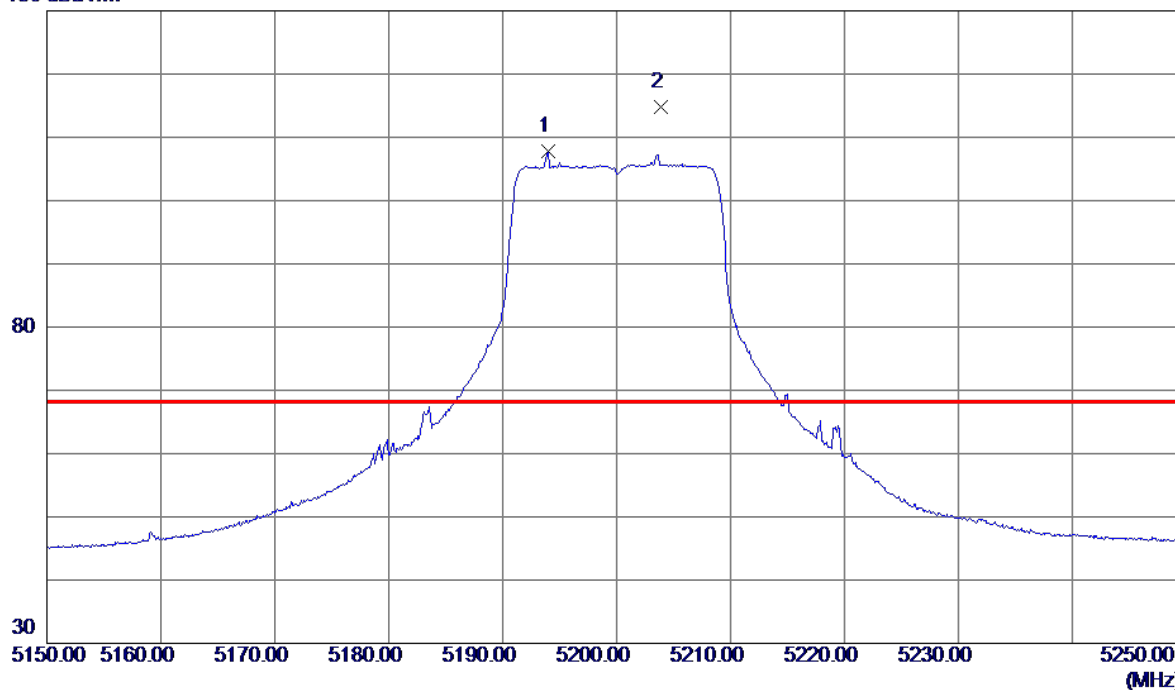

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5194.0000	93.30	14.46	107.76	999.00	-891.24	AVG	No Limit
2 *	5203.8500	100.37	14.48	114.85	68.30	46.55	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz


Vertical

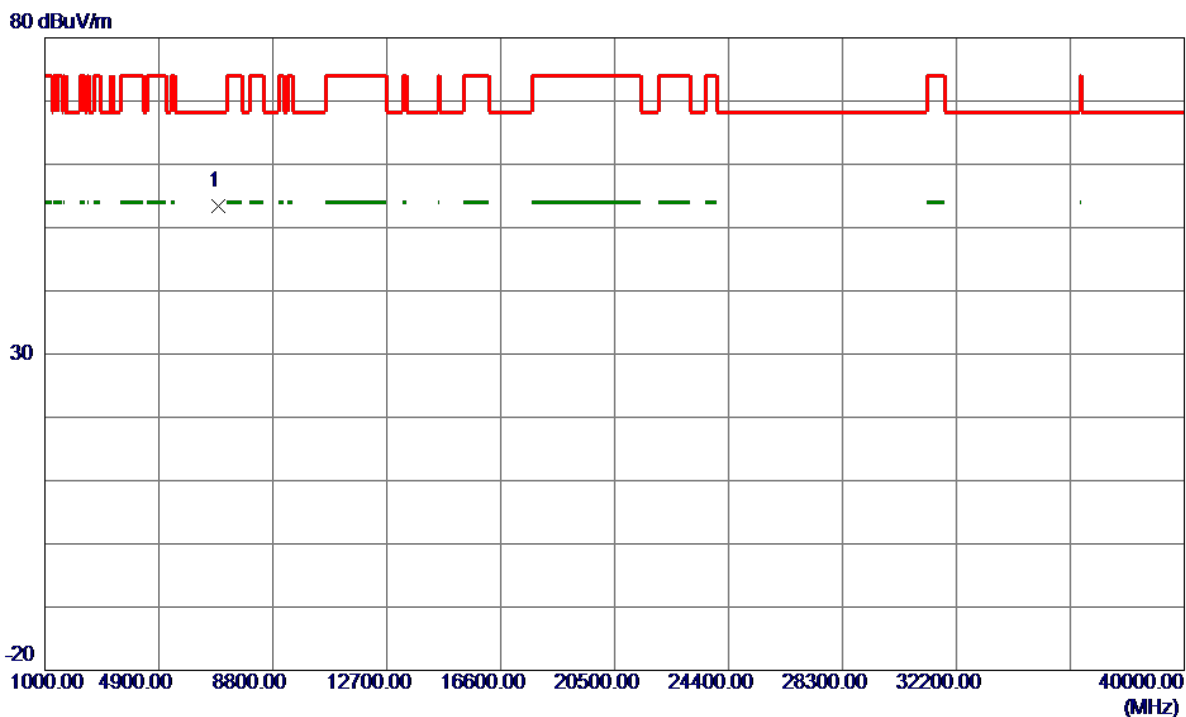

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.3650	44.71	8.72	53.43	68.30	-14.87	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz


Horizontal

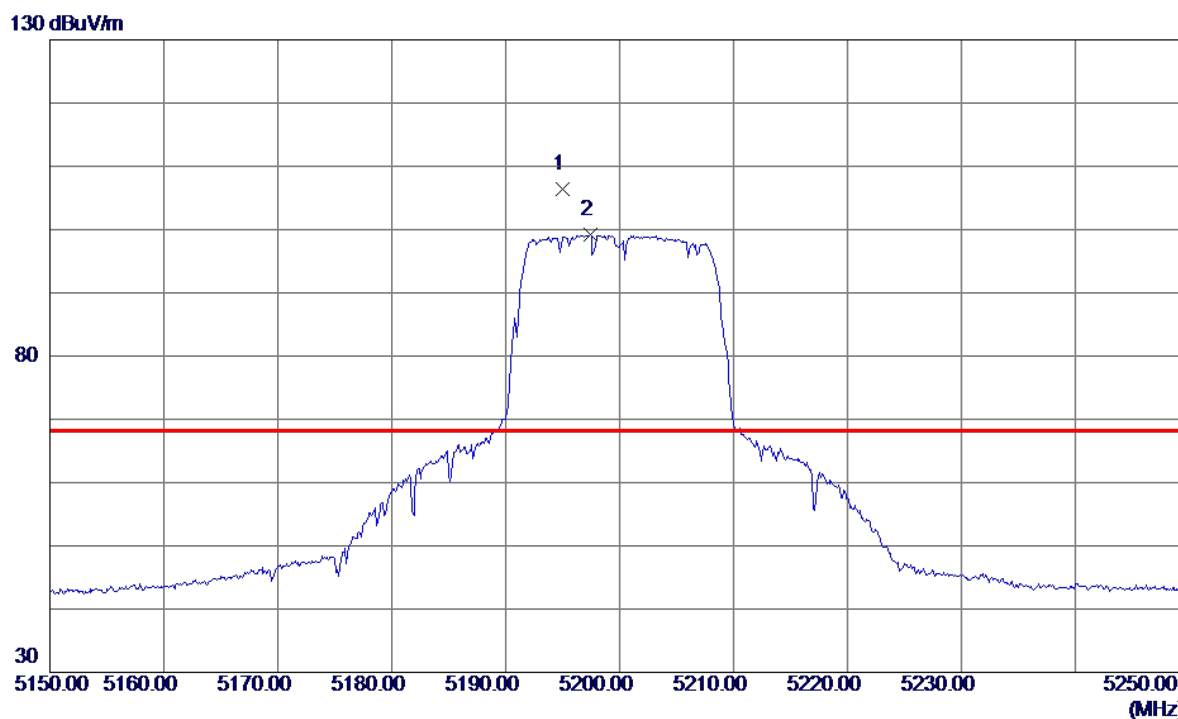

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5195.0000	91.88	14.46	106.34	68.30	38.04	Peak	No Limit
2	5197.4500	84.78	14.47	99.25	999.00	-899.75	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz


Horizontal

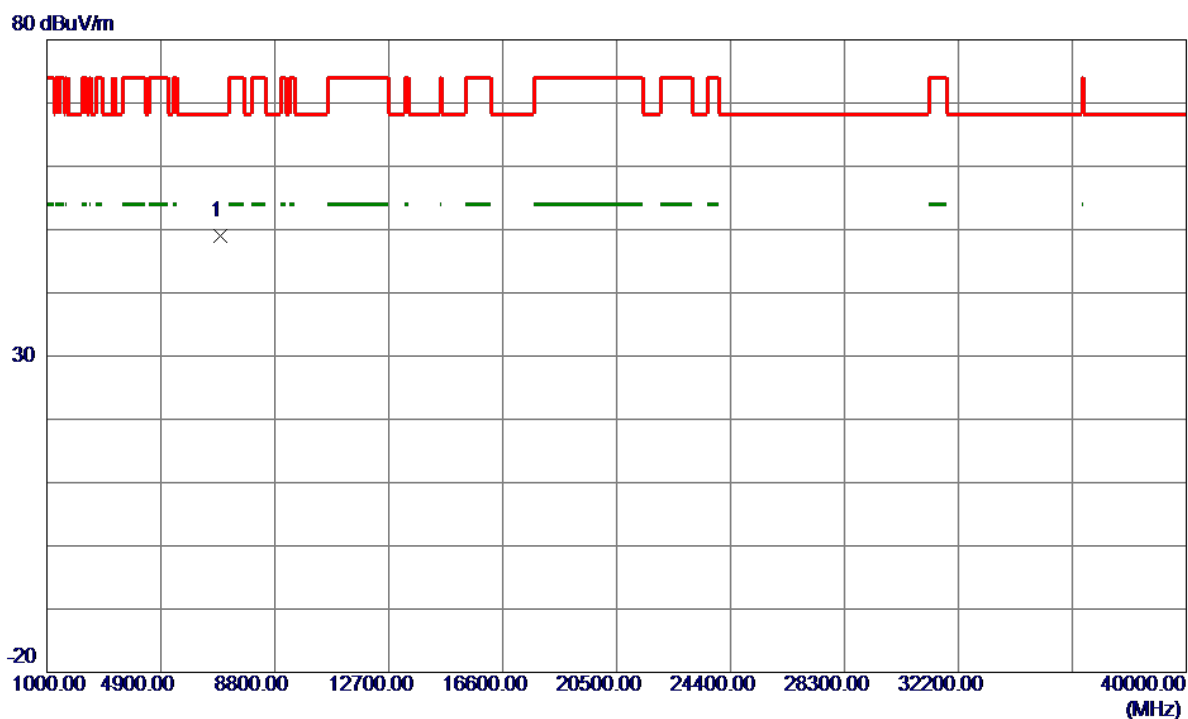

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.2450	40.32	8.72	49.04	68.30	-19.26	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz


Vertical

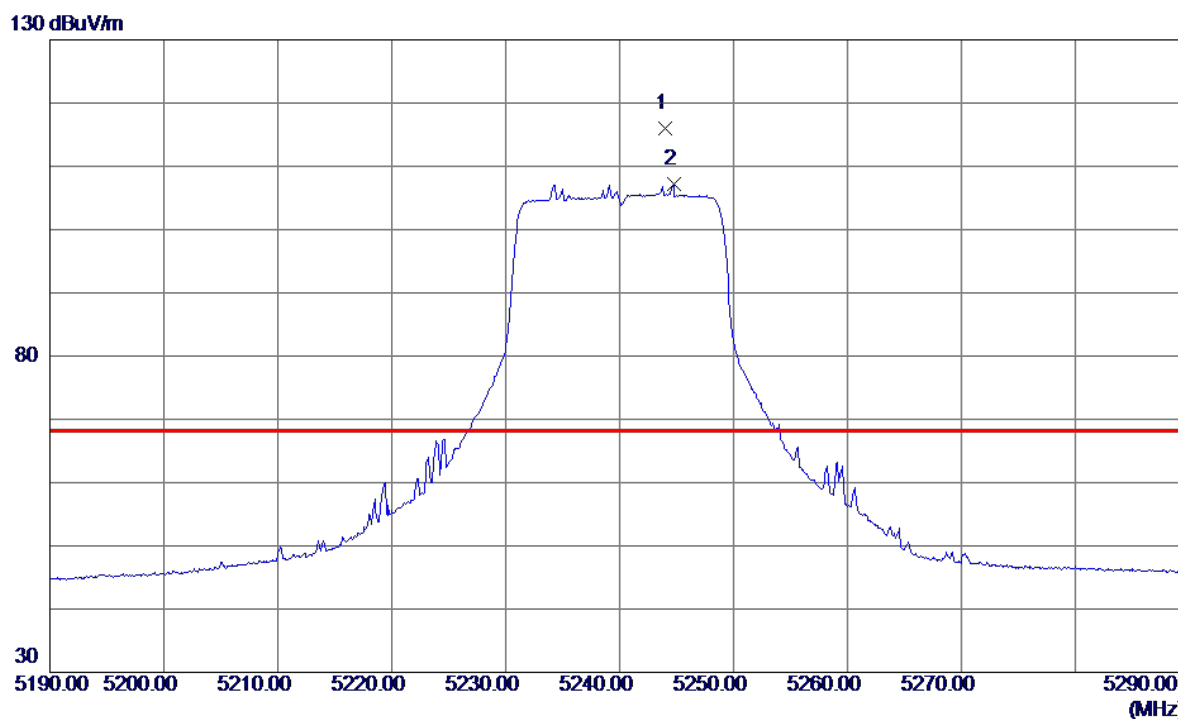

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5244.0000	101.41	14.59	116.00	68.30	47.70	Peak	No Limit
2	5244.7500	92.54	14.59	107.13	999.00	-891.87	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz


Vertical

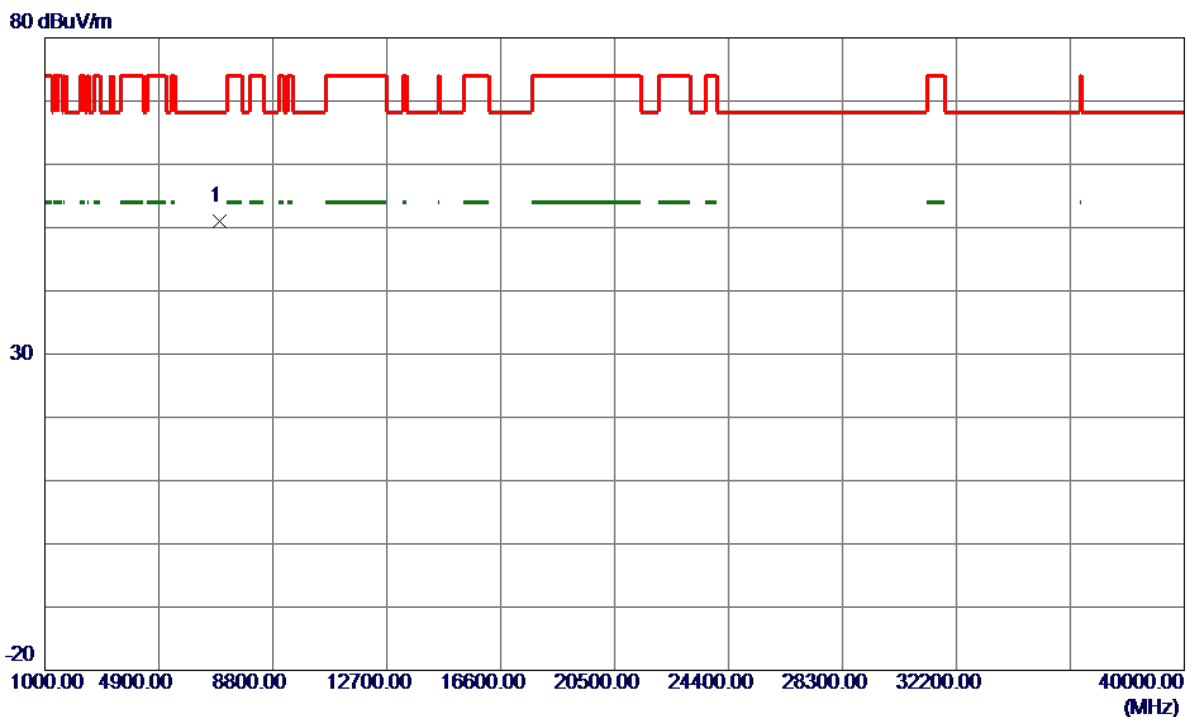

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.5500	42.19	8.84	51.03	68.30	-17.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz


Horizontal

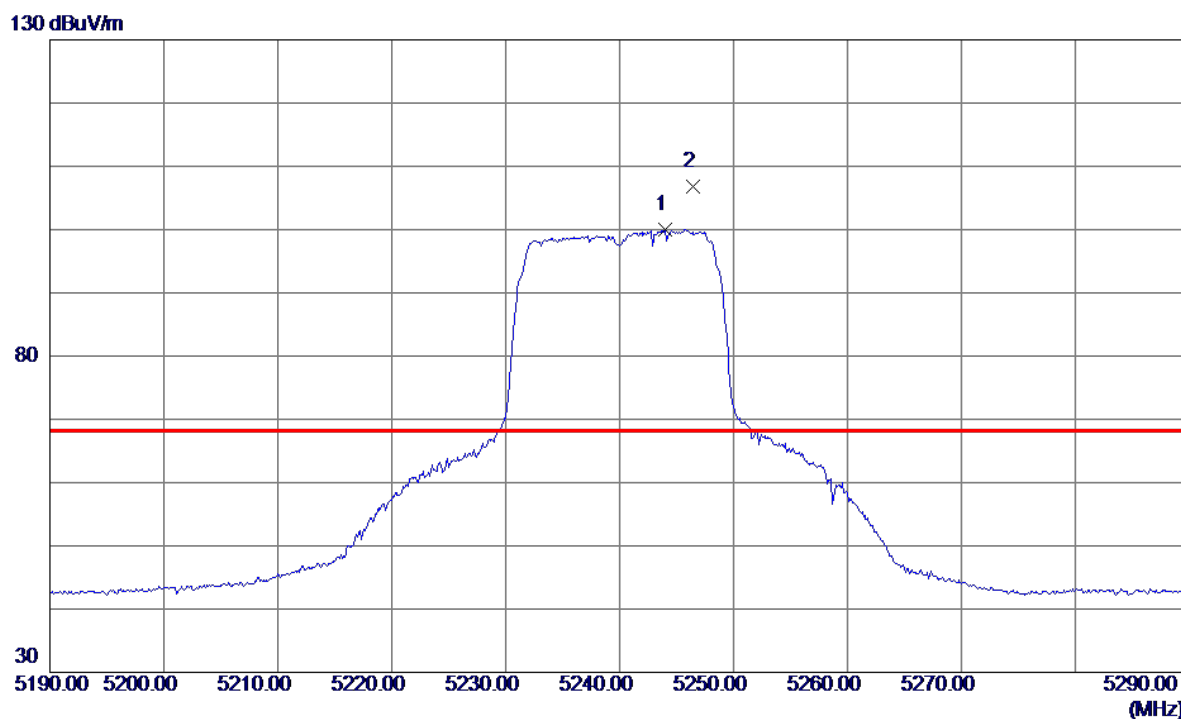

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5244.0000	85.34	14.59	99.93	999.00	-899.07	AVG	No Limit
2 *	5246.4000	92.29	14.59	106.88	68.30	38.58	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Horizontal

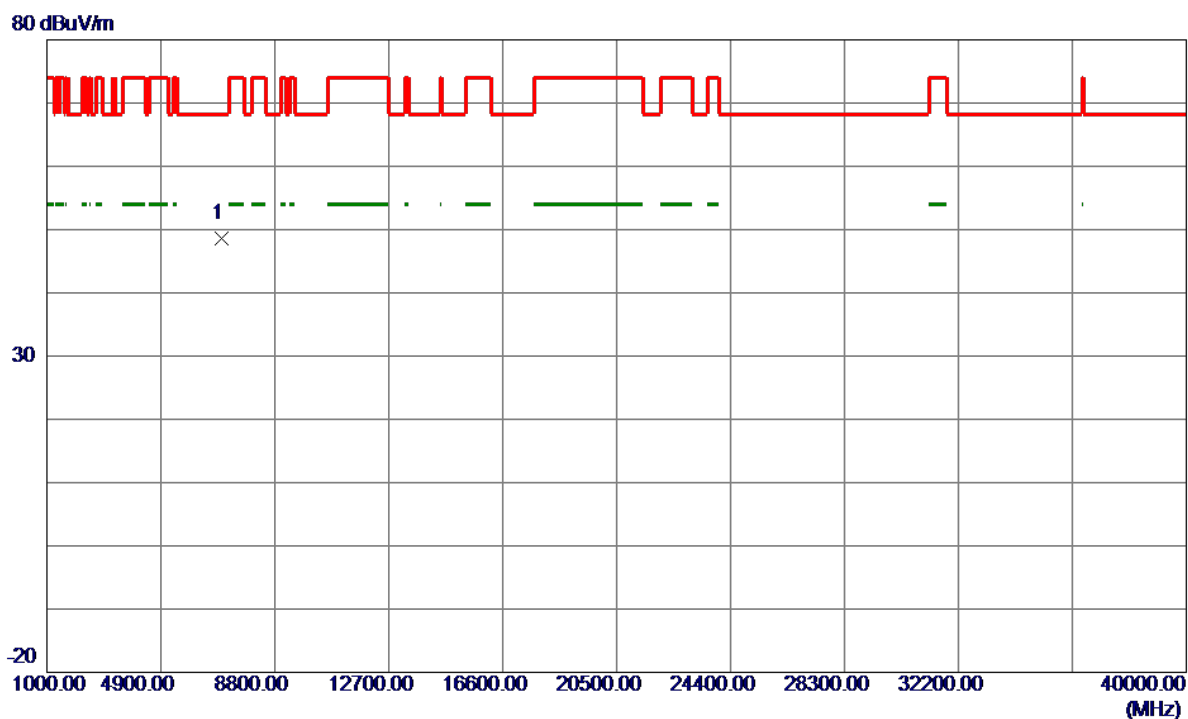


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.7480	39.76	8.84	48.60	68.30	-19.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


130 dBuV/m

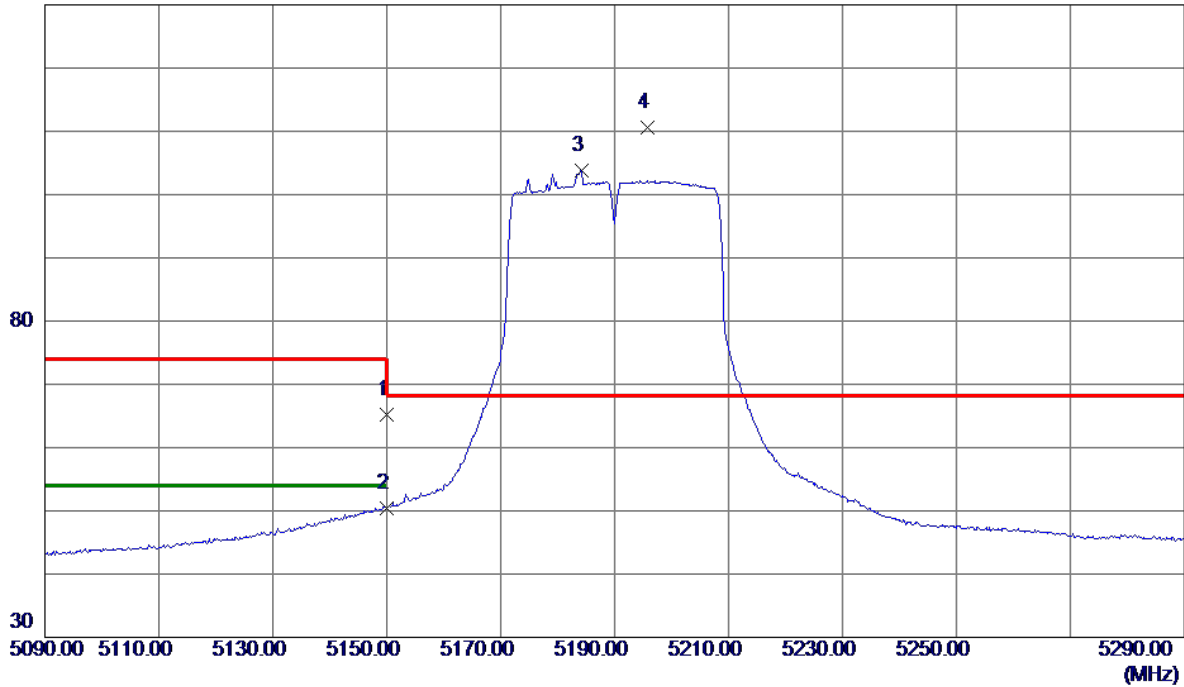

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	50.82	14.35	65.17	74.00	-8.83	Peak	
2	5150.0000	36.11	14.35	50.46	54.00	-3.54	AVG	
3	5184.2000	89.39	14.43	103.82	999.00	-895.18	AVG	No Limit
4 *	5195.7000	96.11	14.46	110.57	68.30	42.27	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

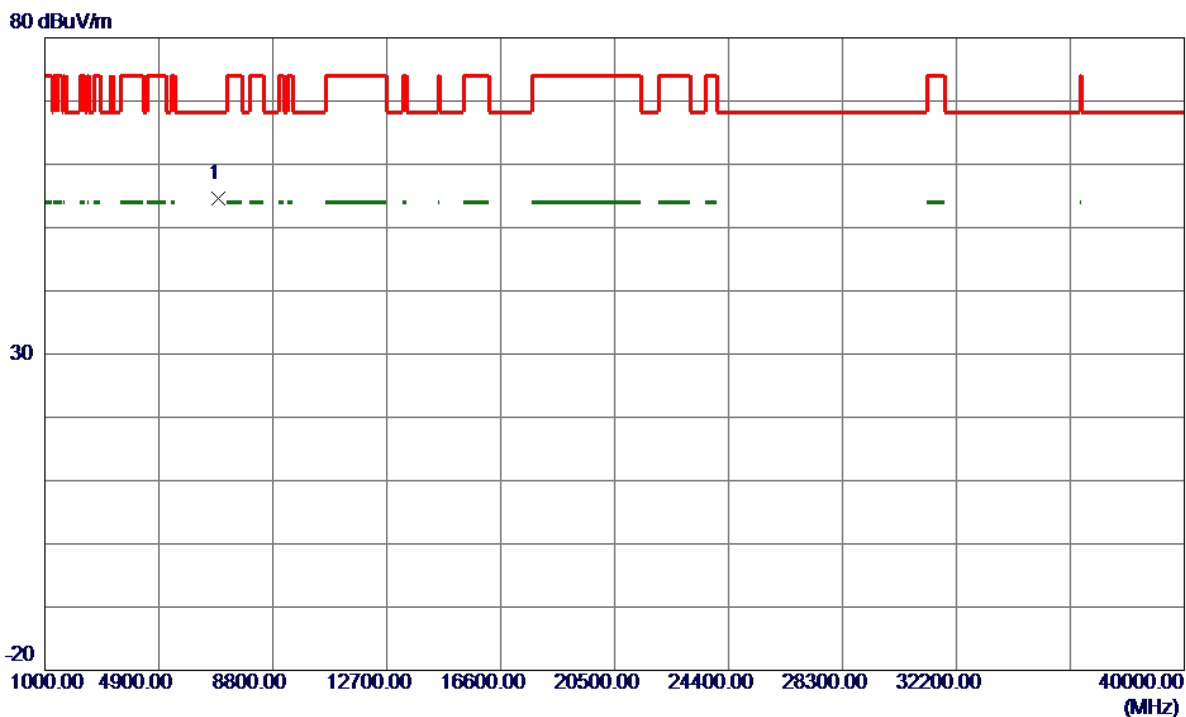


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6919.9000	45.85	8.69	54.54	68.30	-13.76	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


130 dBuV/m

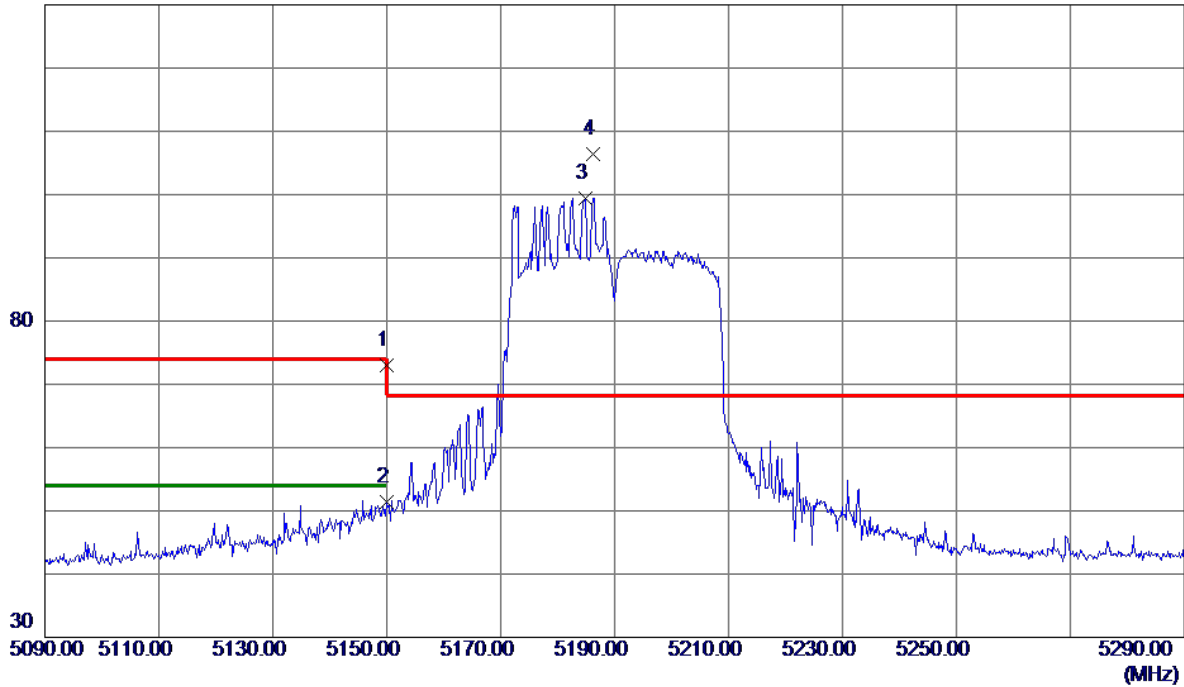

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	58.65	14.35	73.00	74.00	-1.00	Peak	
2	5150.0000	36.96	14.35	51.31	54.00	-2.69	AVG	
3	5184.8000	84.98	14.43	99.41	999.00	-899.59	AVG	No Limit
4 *	5186.3000	91.90	14.44	106.34	68.30	38.04	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

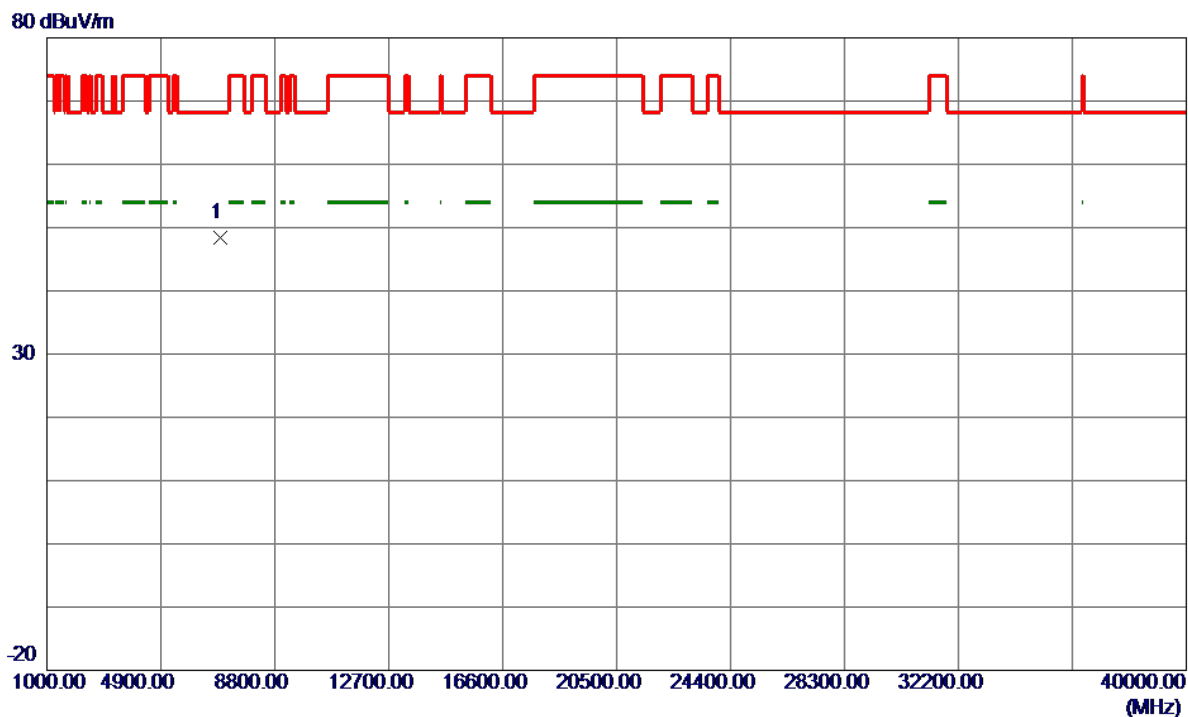

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	6920.1650	39.72	8.69	48.41	68.30	-19.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

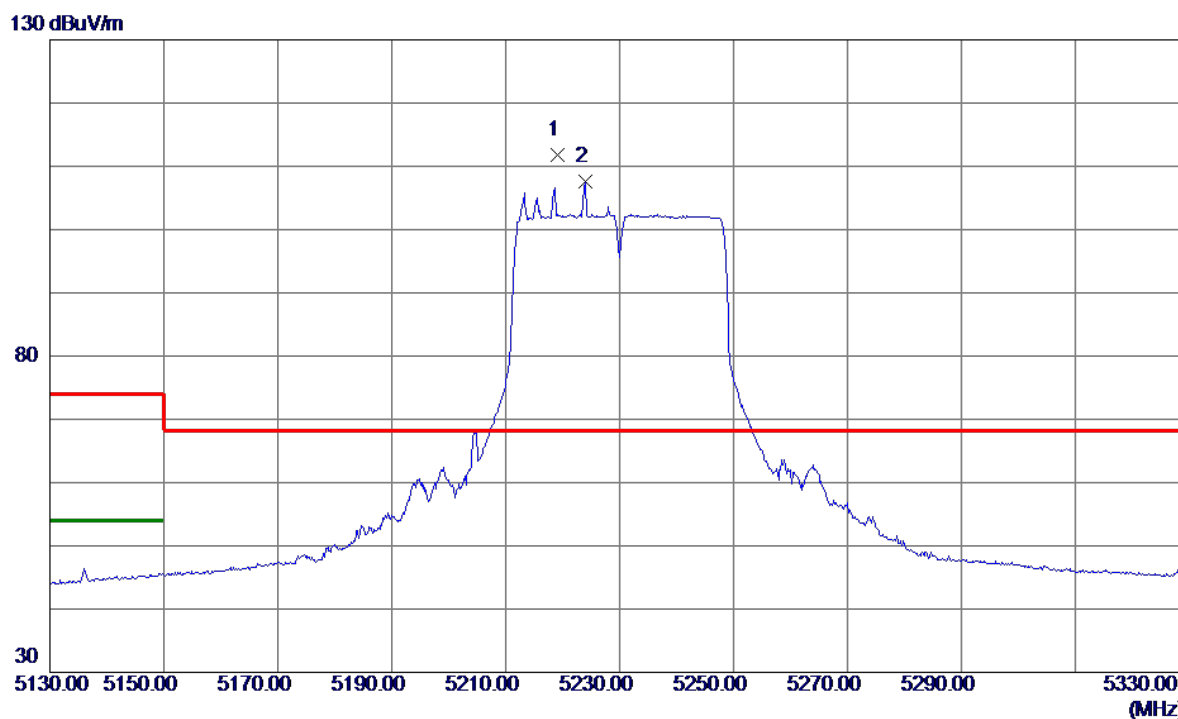

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5219.2000	97.25	14.52	111.77	68.30	43.47	Peak	No Limit
2	5223.9000	92.98	14.54	107.52	999.00	-891.48	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

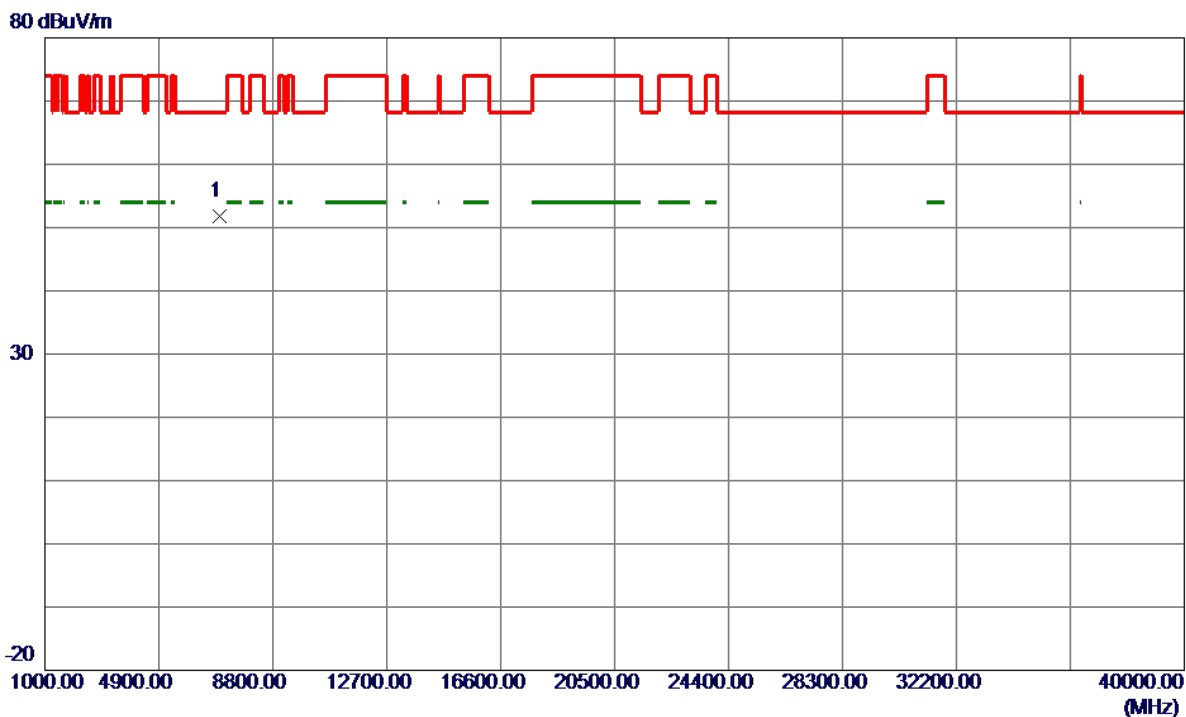

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	6973.3650	42.92	8.81	51.73	68.30	-16.57	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

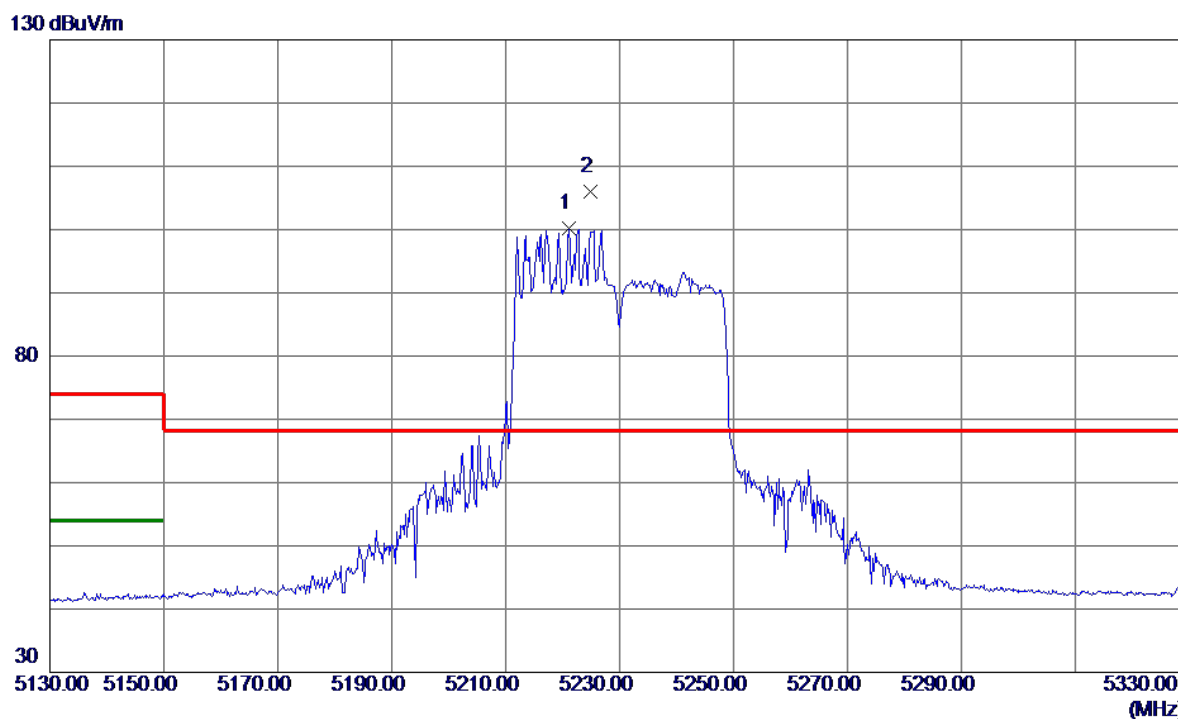

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5221.2000	85.65	14.53	100.18	999.00	-898.82	AVG	No Limit
2 *	5224.9000	91.36	14.54	105.90	68.30	37.60	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

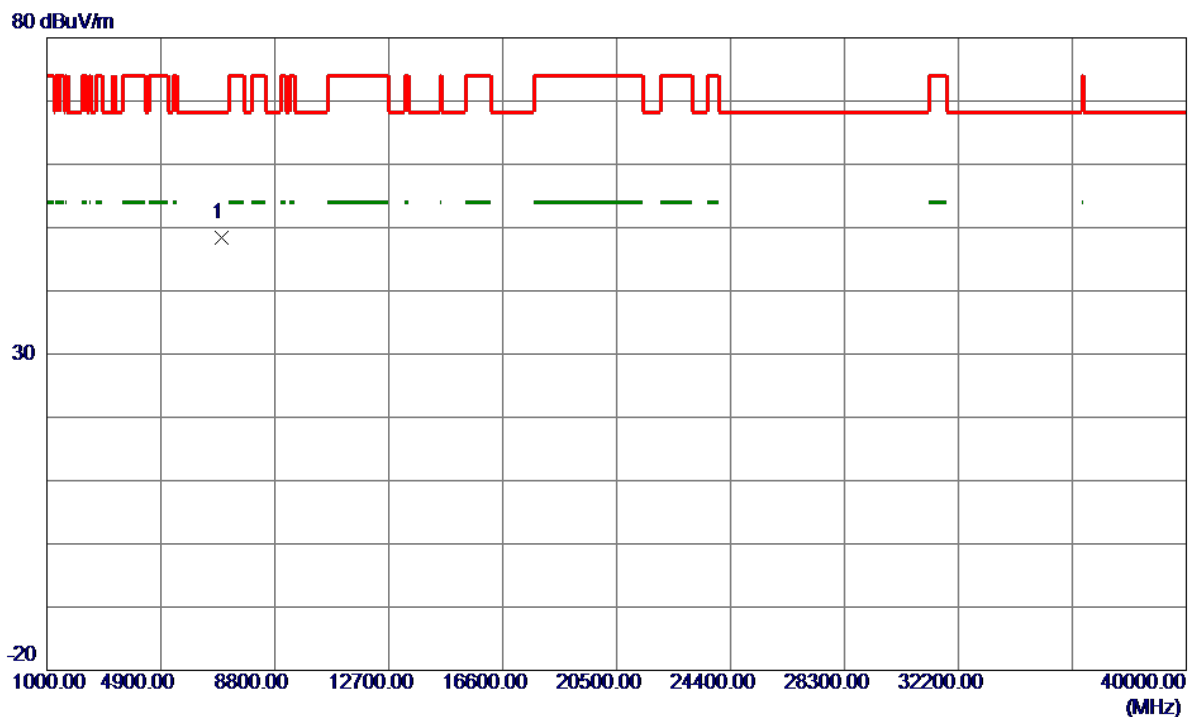


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.4450	39.68	8.81	48.49	68.30	-19.81	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


130 dBuV/m

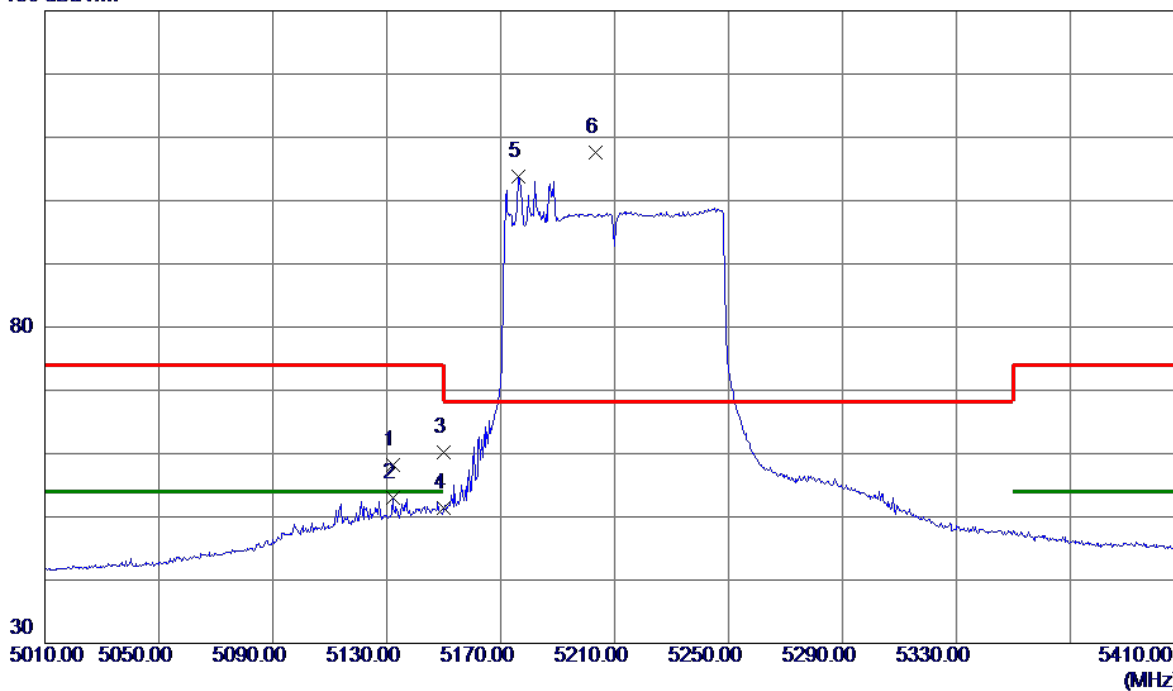

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5132.2000	43.98	14.30	58.28	74.00	-15.72	Peak	
2	5132.2000	38.76	14.30	53.06	54.00	-0.94	AVG	
3	5150.0000	45.93	14.35	60.28	74.00	-13.72	Peak	
4	5150.0000	36.96	14.35	51.31	54.00	-2.69	AVG	
5	5176.2000	89.32	14.41	103.73	999.00	-895.27	AVG	No Limit
6 *	5203.2000	93.11	14.48	107.59	68.30	39.29	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

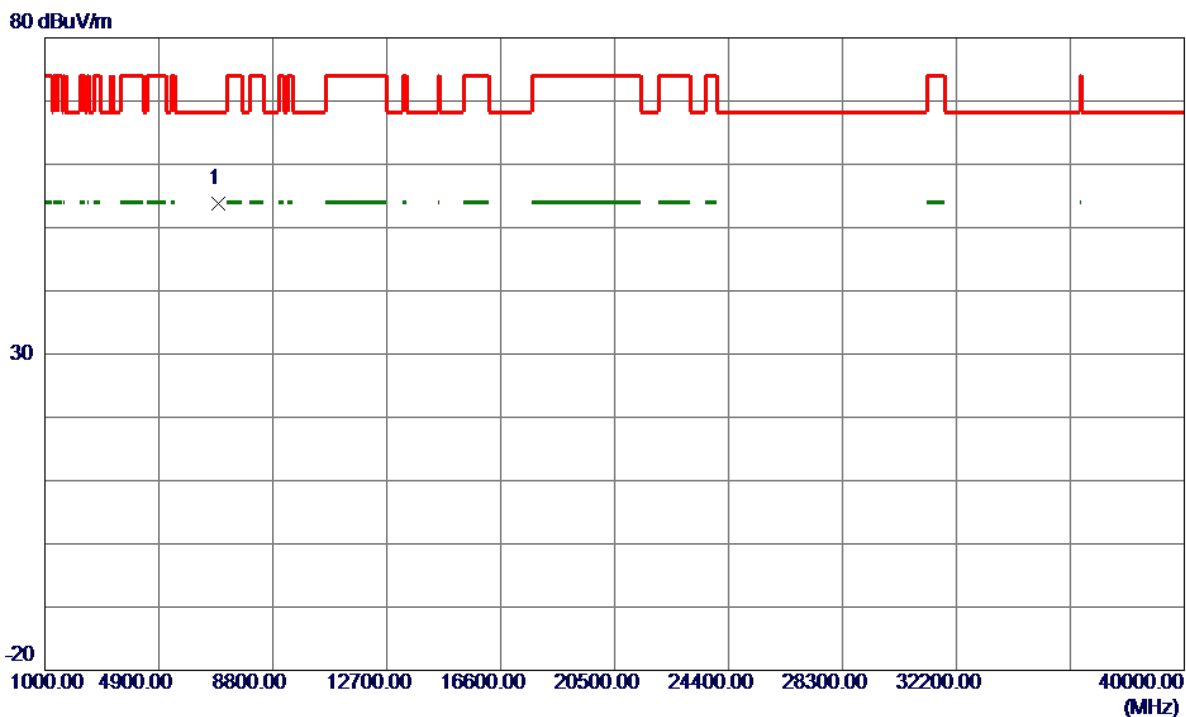


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	6946.6550	44.96	8.75	53.71	68.30	-14.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


130 dBuV/m

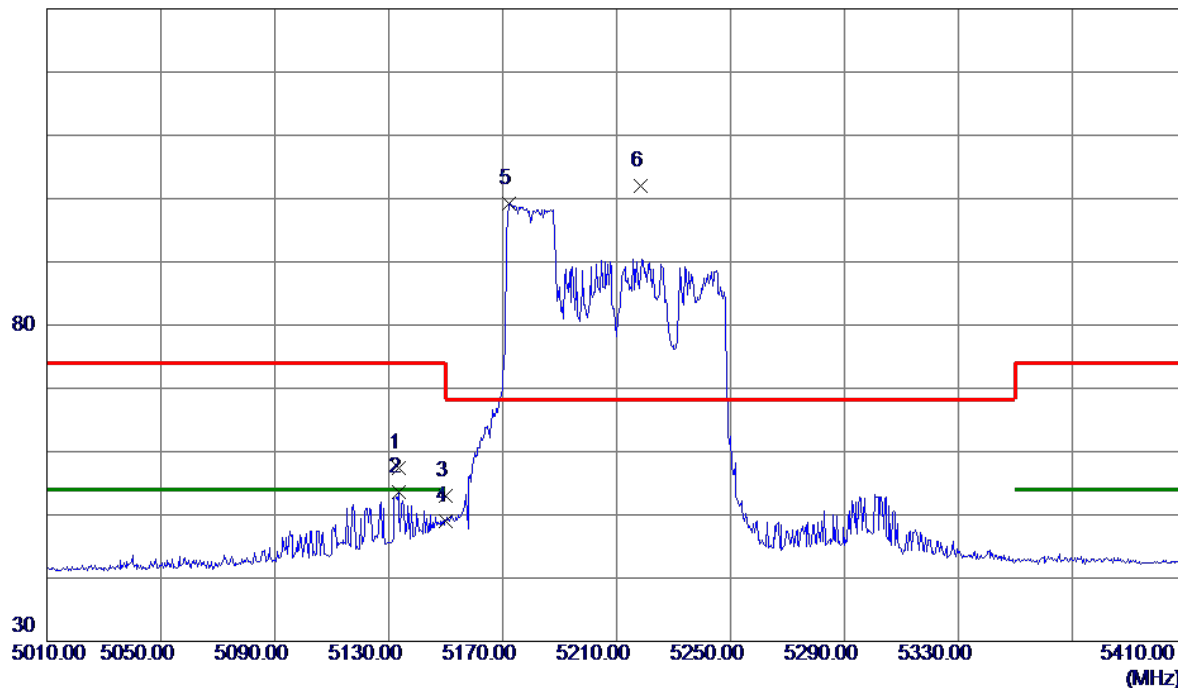

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5133.4000	43.10	14.30	57.40	74.00	-16.60	Peak	
2	5133.4000	39.24	14.30	53.54	54.00	-0.46	AVG	
3	5150.0000	38.72	14.35	53.07	74.00	-20.93	Peak	
4	5150.0000	34.74	14.35	49.09	54.00	-4.91	AVG	
5	5172.4000	84.72	14.40	99.12	999.00	-899.88	AVG	No Limit
6 *	5218.4000	87.51	14.52	102.03	68.30	33.73	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

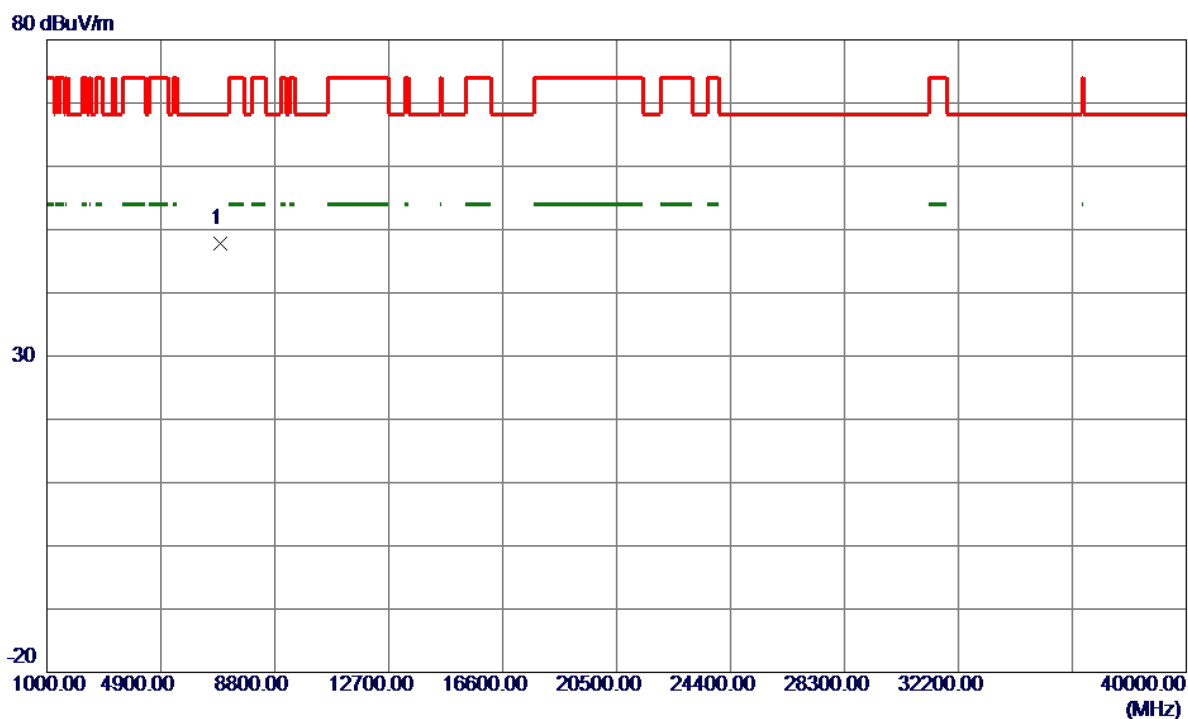


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6946.5100	38.96	8.75	47.71	68.30	-20.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Vertical


130 dBuV/m

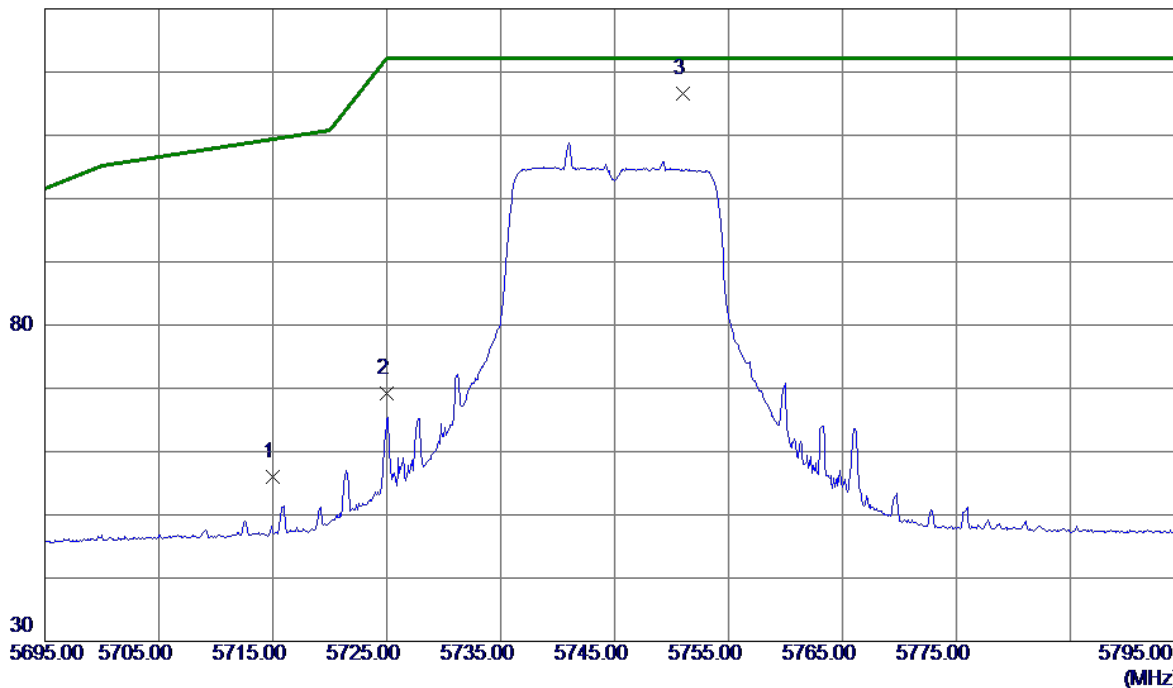

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	40.10	15.93	56.03	109.40	-53.37	Peak	
2	5725.0000	53.21	15.96	69.17	122.20	-53.03	Peak	
3 *	5751.0000	100.50	16.04	116.54	122.20	-5.66	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Vertical

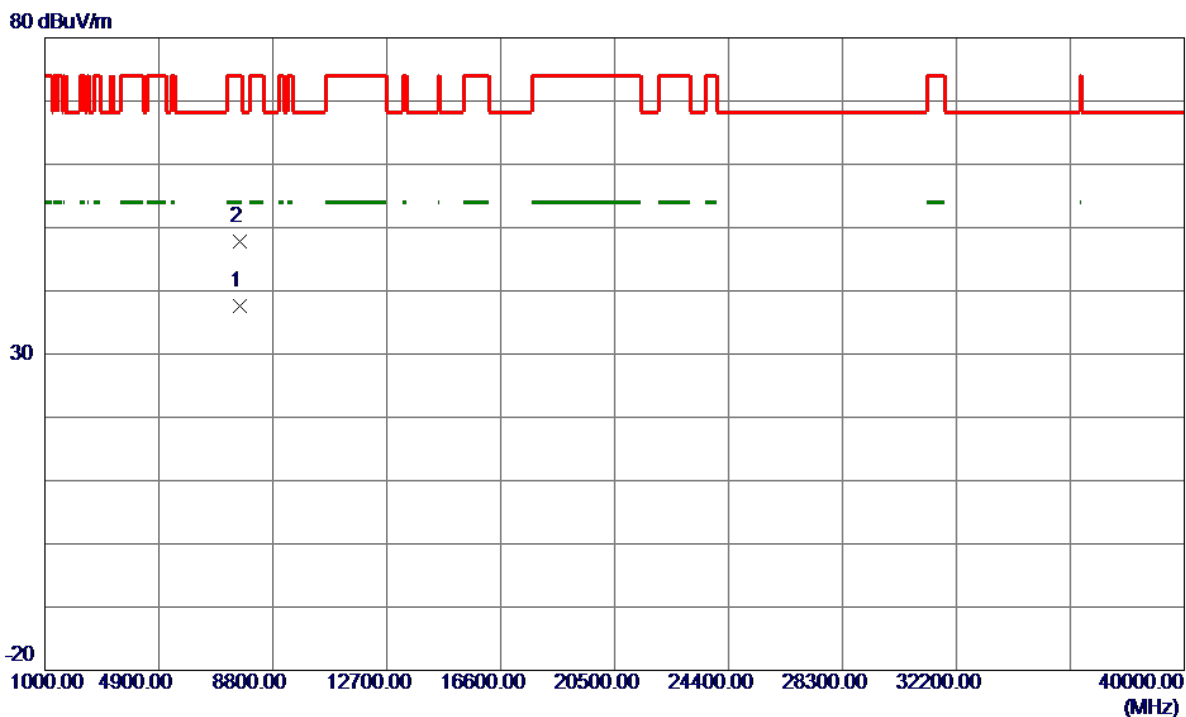

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7659.8800	27.59	10.00	37.59	54.00	-16.41	AVG	
2	7659.8900	37.86	10.00	47.86	74.00	-26.14	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Horizontal

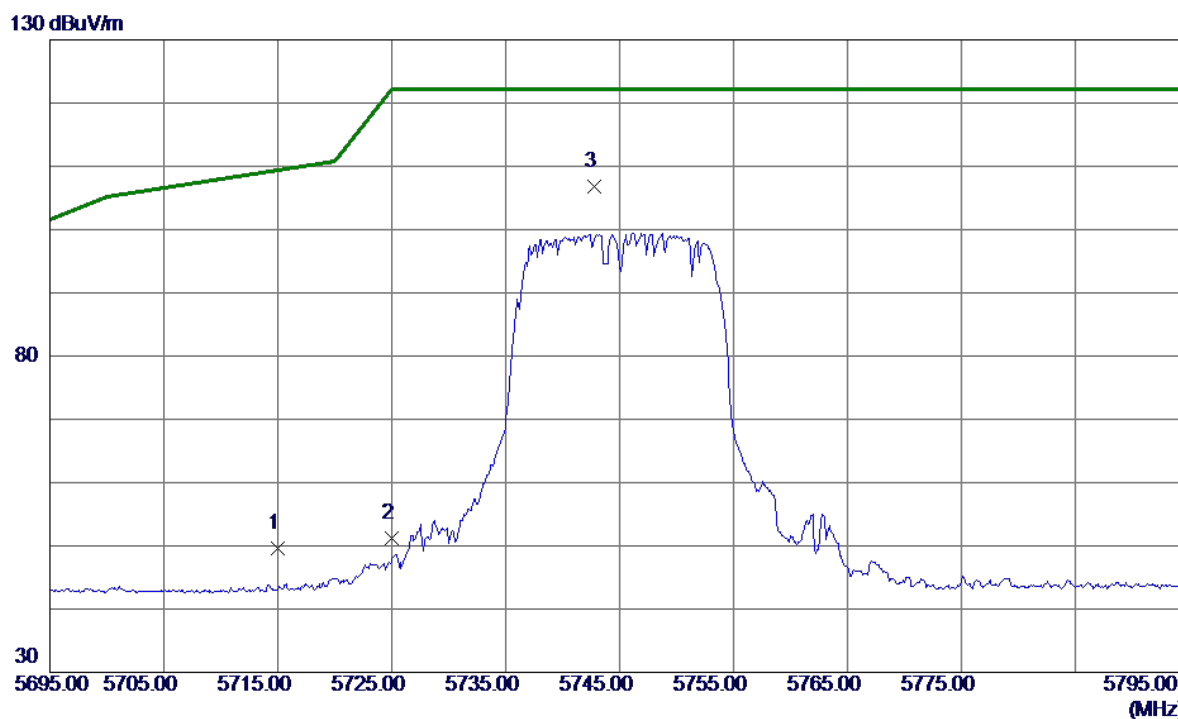

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	33.75	15.93	49.68	109.40	-59.72	Peak	
2	5725.0000	35.28	15.96	51.24	122.20	-70.96	Peak	
3 *	5742.8000	90.70	16.01	106.71	122.20	-15.49	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Horizontal

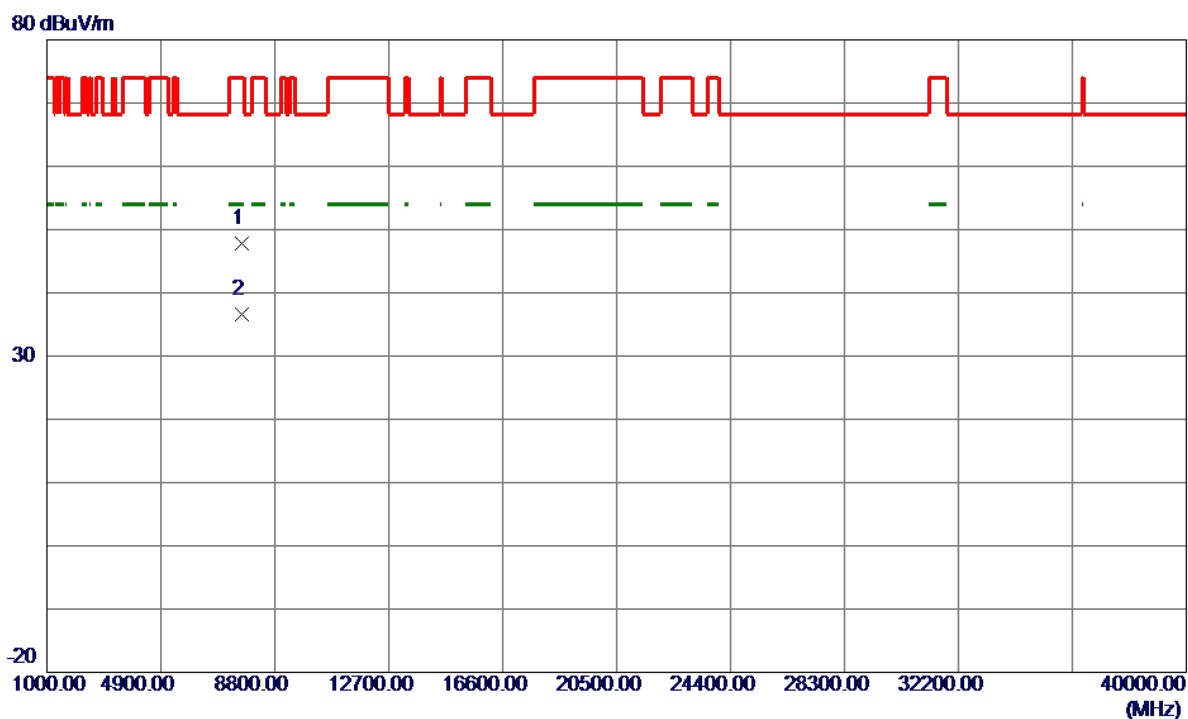

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7659.9430	37.84	10.00	47.84	74.00	-26.16	Peak	
2 *	7660.0750	26.69	10.00	36.69	54.00	-17.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Vertical

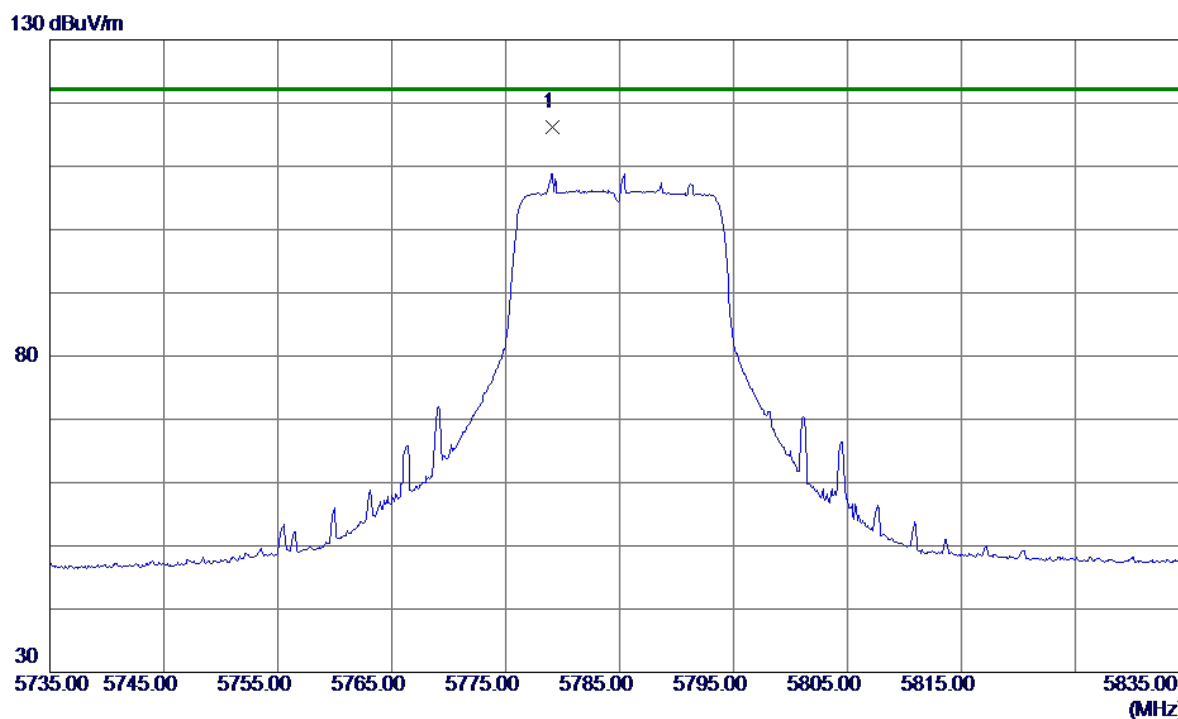

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5779.1500	100.01	16.13	116.14	122.20	-6.06	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Vertical

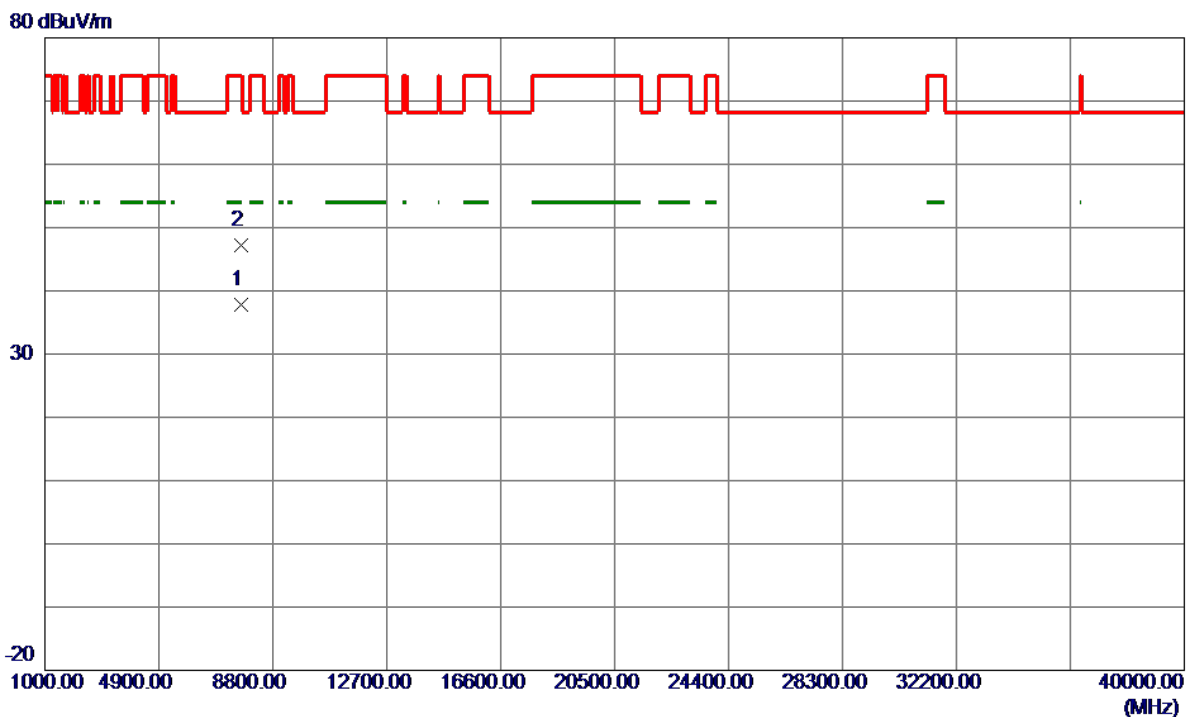

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.2380	27.83	9.96	37.79	54.00	-16.21	AVG	
2	7713.2700	37.31	9.96	47.27	74.00	-26.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

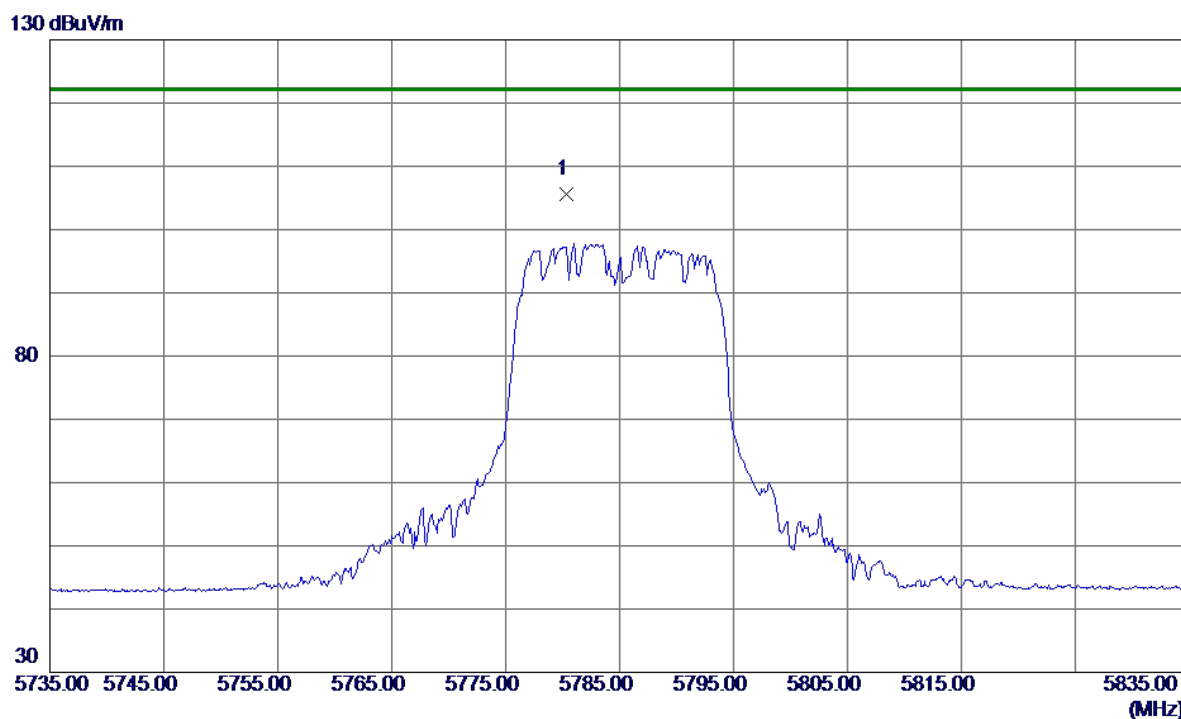

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5780.3500	89.47	16.13	105.60	122.20	-16.60	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

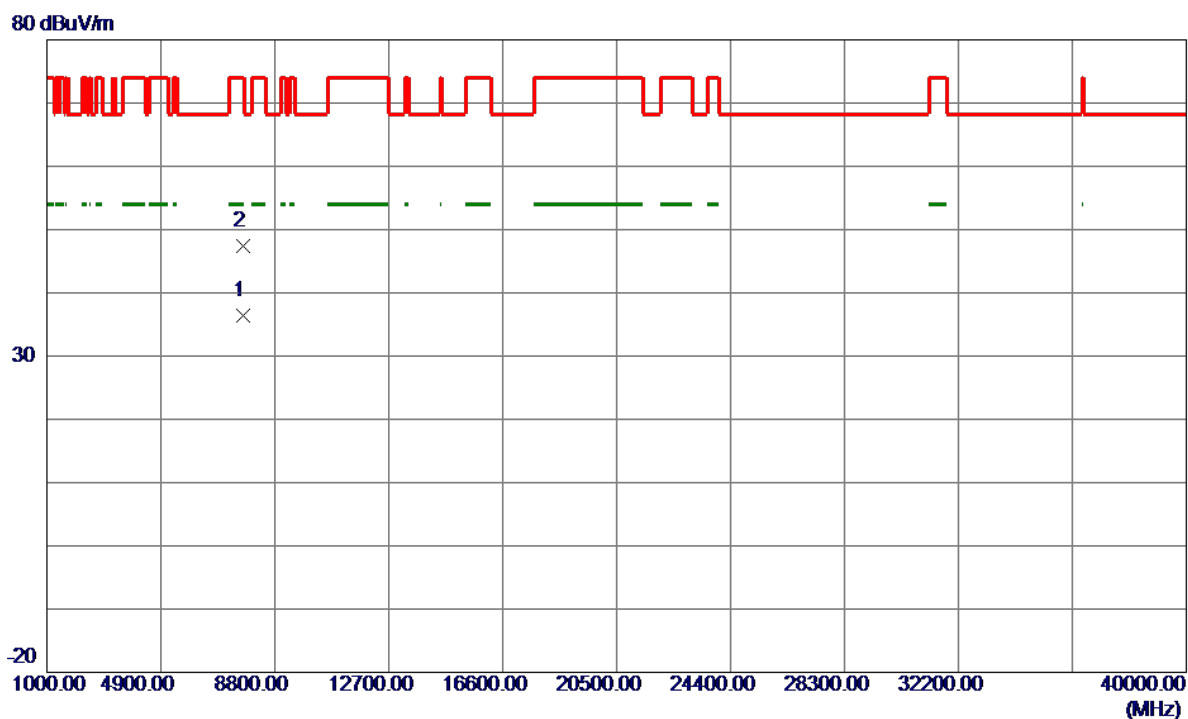

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.3600	26.35	9.96	36.31	54.00	-17.69	AVG	
2	7713.7250	37.42	9.96	47.38	74.00	-26.62	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

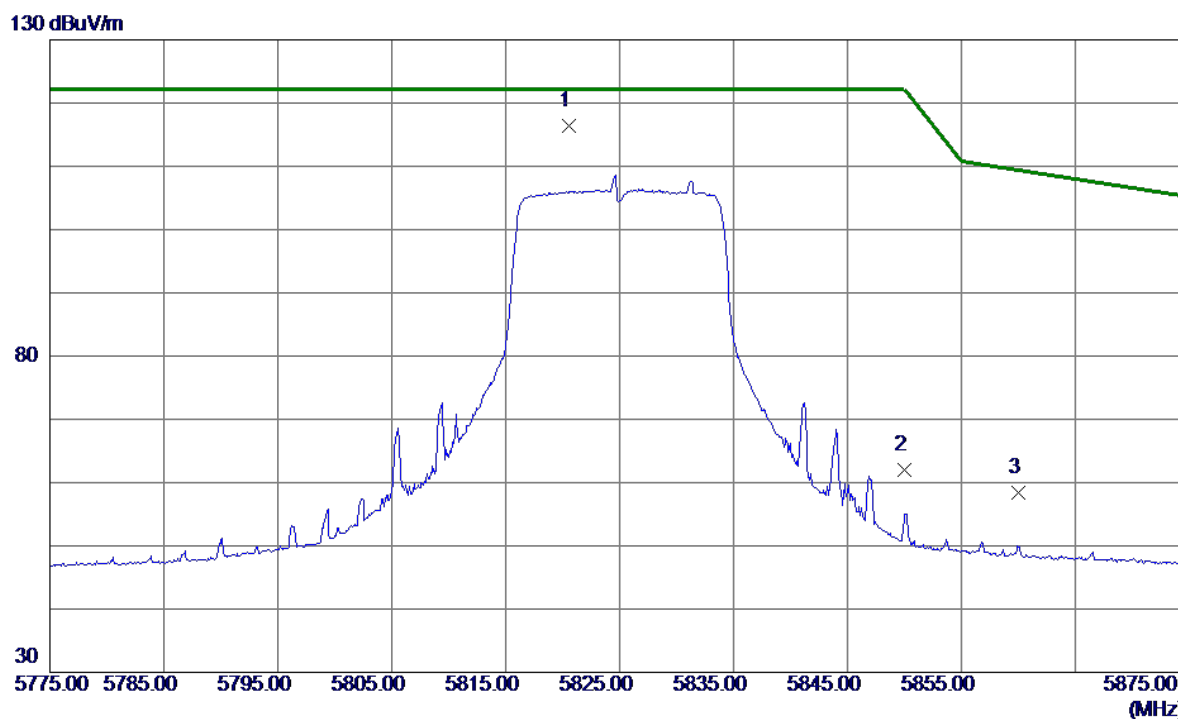

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.5500	100.10	16.26	116.36	122.20	-5.84	Peak	No Limit
2	5850.0000	45.67	16.35	62.02	122.20	-60.18	Peak	
3	5860.0000	42.10	16.39	58.49	109.40	-50.91	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

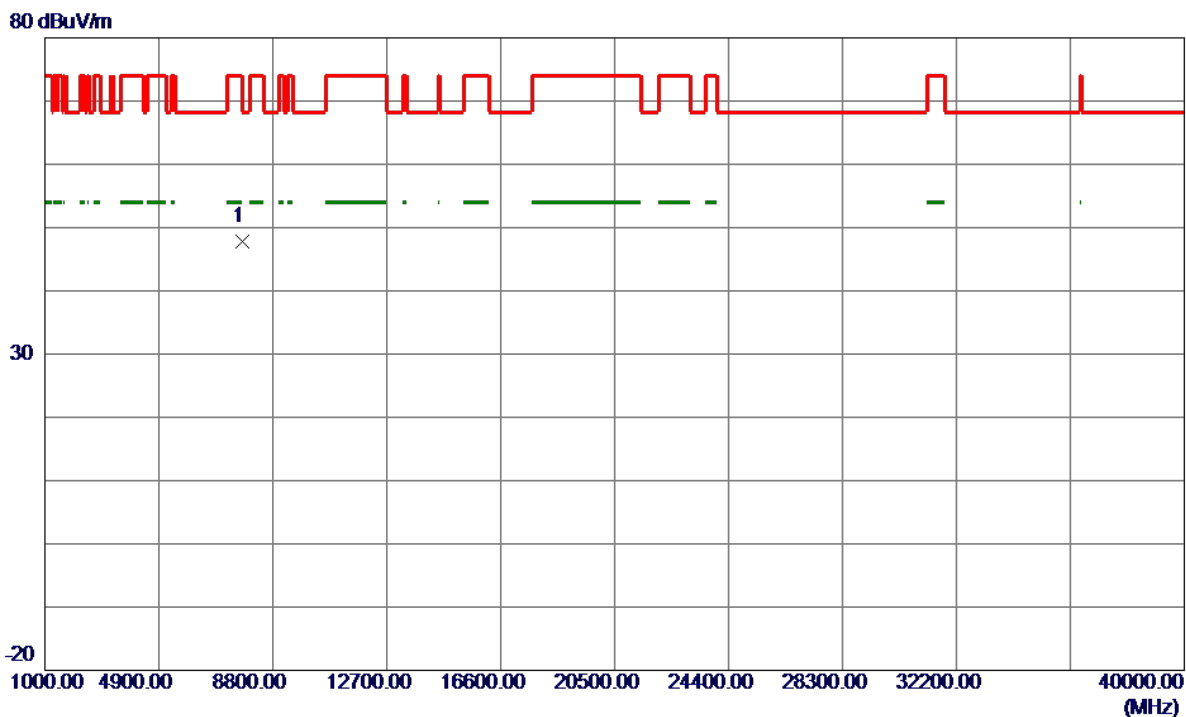

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.6180	37.88	9.93	47.81	68.30	-20.49	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

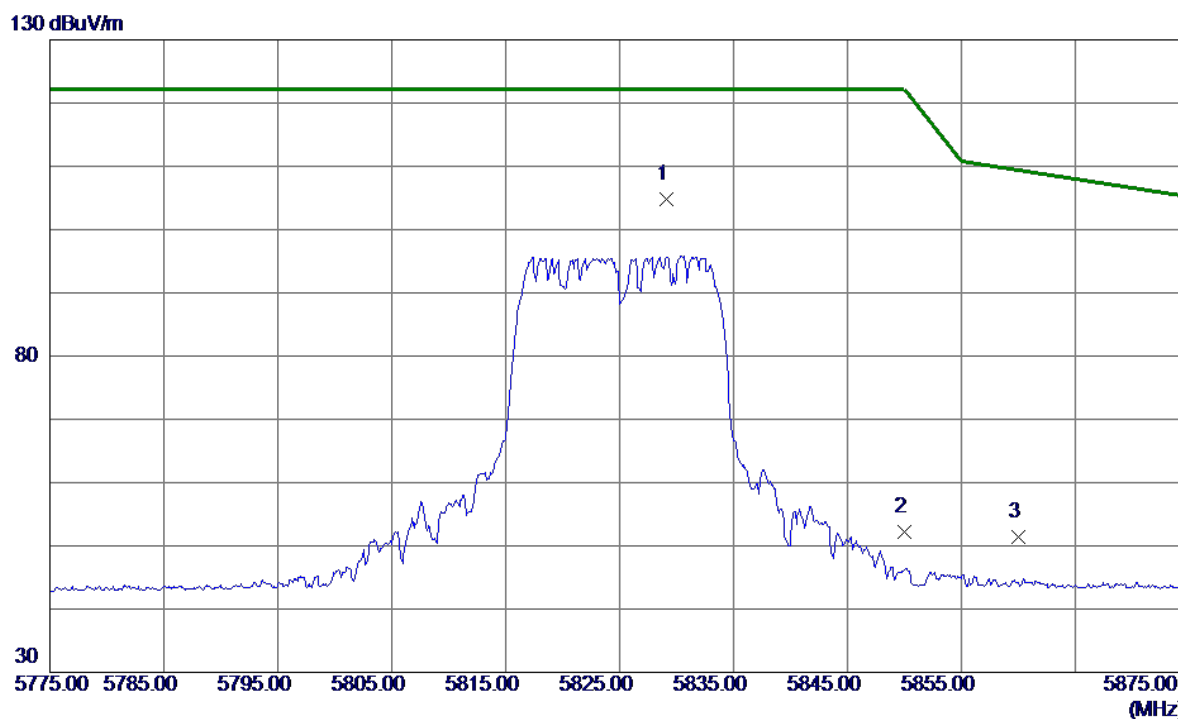

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5829.1500	88.52	16.29	104.81	122.20	-17.39	Peak	No Limit
2	5850.0000	35.76	16.35	52.11	122.20	-70.09	Peak	
3	5860.0000	35.09	16.39	51.48	109.40	-57.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

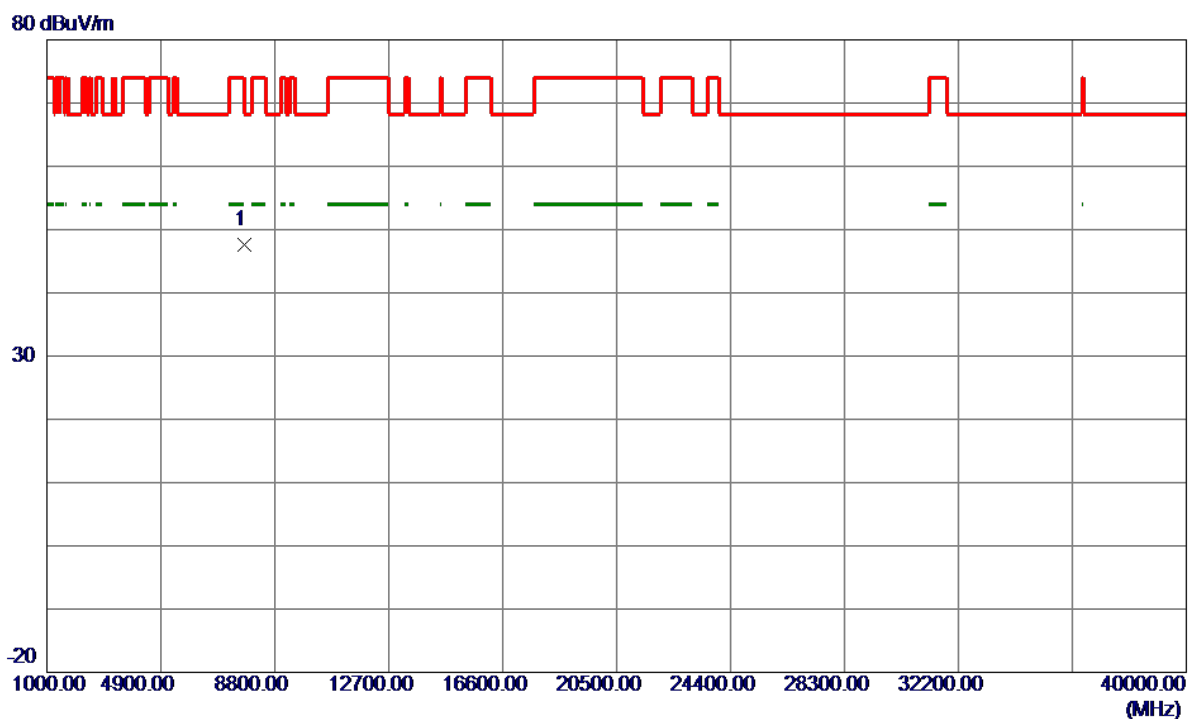

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.6850	37.62	9.93	47.55	68.30	-20.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

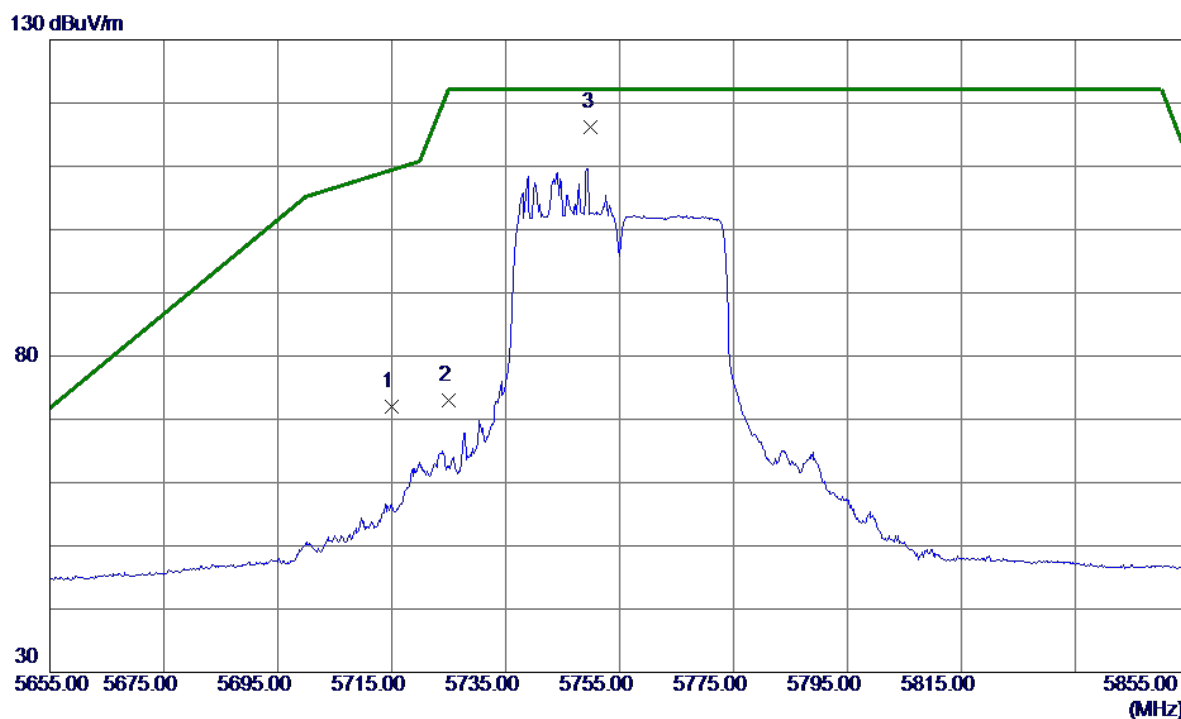

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.05	15.93	71.98	109.40	-37.42	Peak	
2	5725.0000	56.99	15.96	72.95	122.20	-49.25	Peak	
3 *	5750.0000	100.18	16.04	116.22	122.20	-5.98	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7673.2570	38.51	9.99	48.50	74.00	-25.50	Peak	
2 *	7673.2600	29.50	9.99	39.49	54.00	-14.51	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

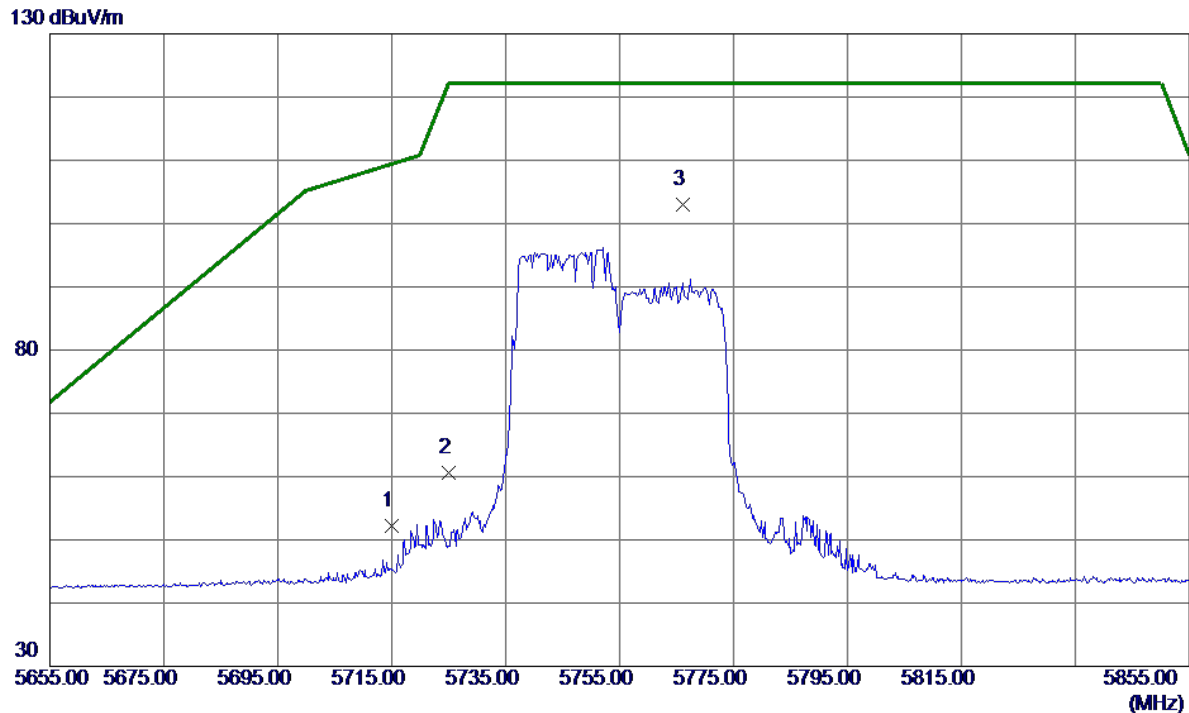

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.22	15.93	52.15	109.40	-57.25	Peak	
2	5725.0000	44.55	15.96	60.51	122.20	-61.69	Peak	
3 *	5766.2000	86.98	16.09	103.07	122.20	-19.13	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

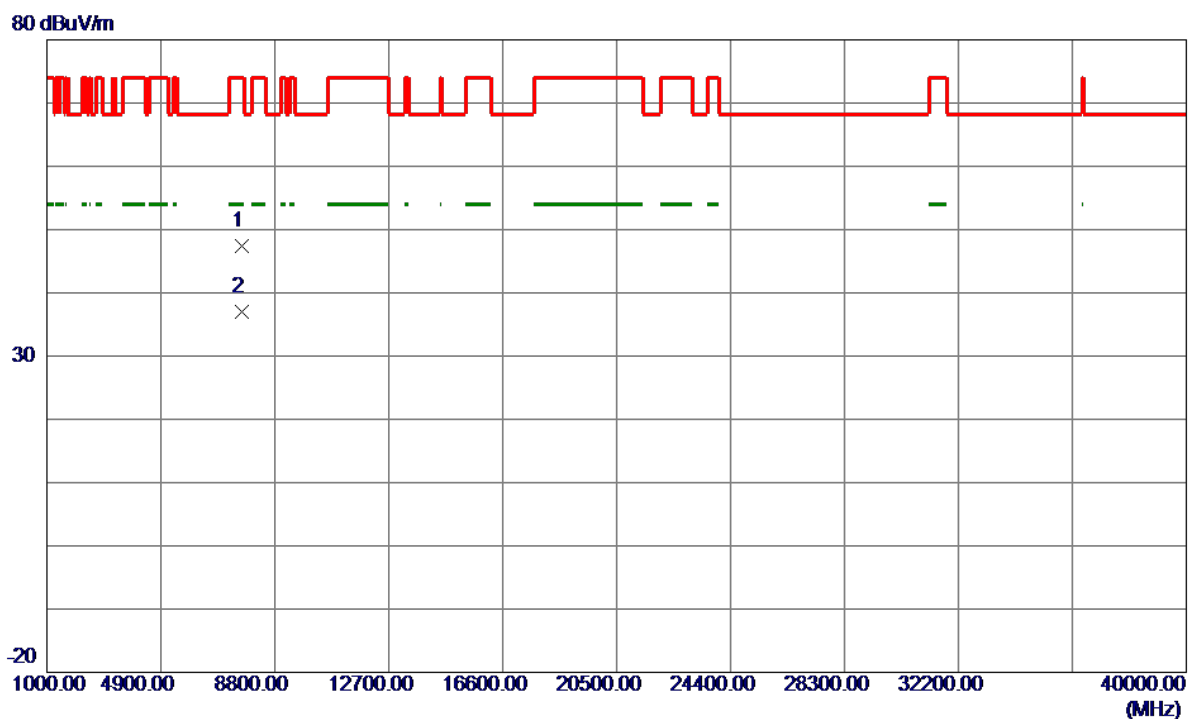

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7670.8450	37.50	9.99	47.49	74.00	-26.51	Peak	
2 *	7673.0830	27.05	9.99	37.04	54.00	-16.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

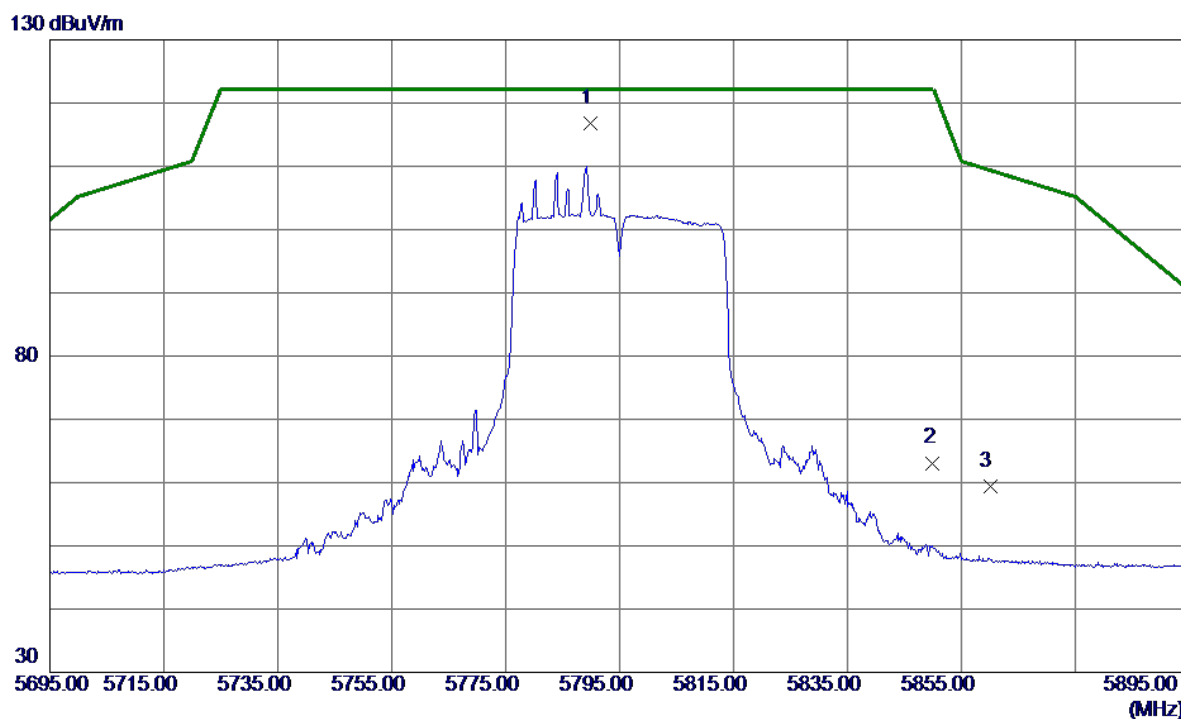

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.8000	100.68	16.16	116.84	122.20	-5.36	Peak	No Limit
2	5850.0000	46.75	16.35	63.10	122.20	-59.10	Peak	
3	5860.0000	42.95	16.39	59.34	109.40	-50.06	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

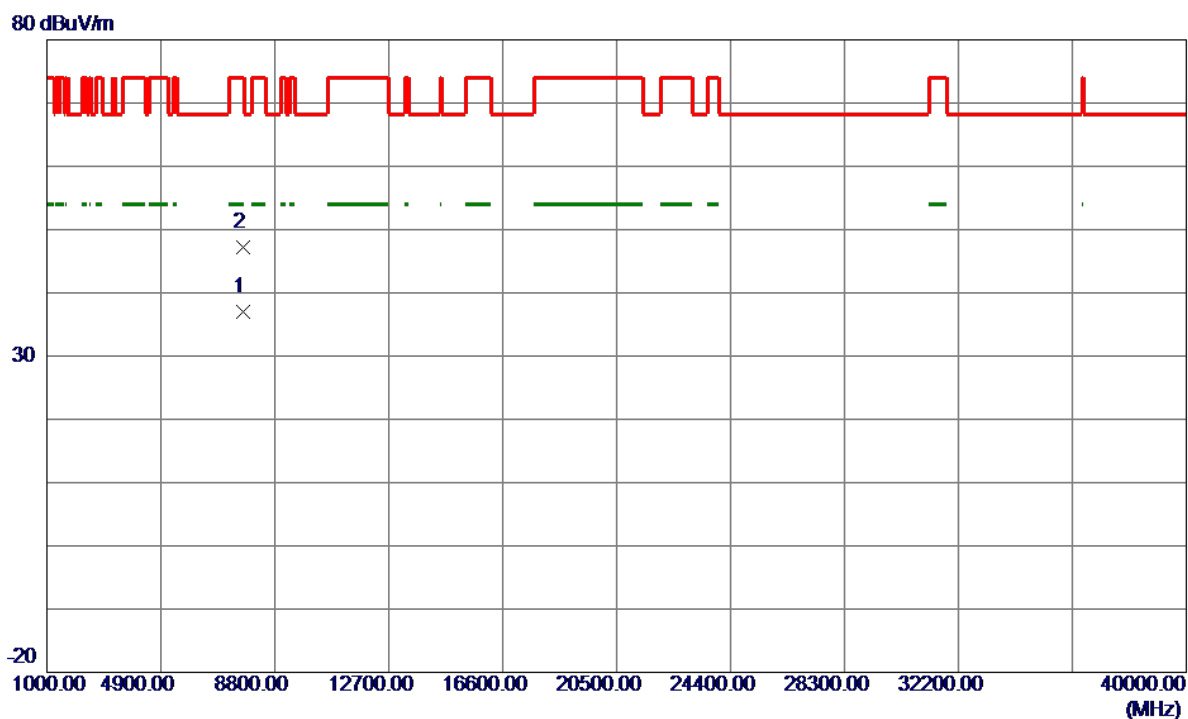

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.6950	27.11	9.96	37.07	54.00	-16.93	AVG	
2	7728.2450	37.19	9.95	47.14	74.00	-26.86	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

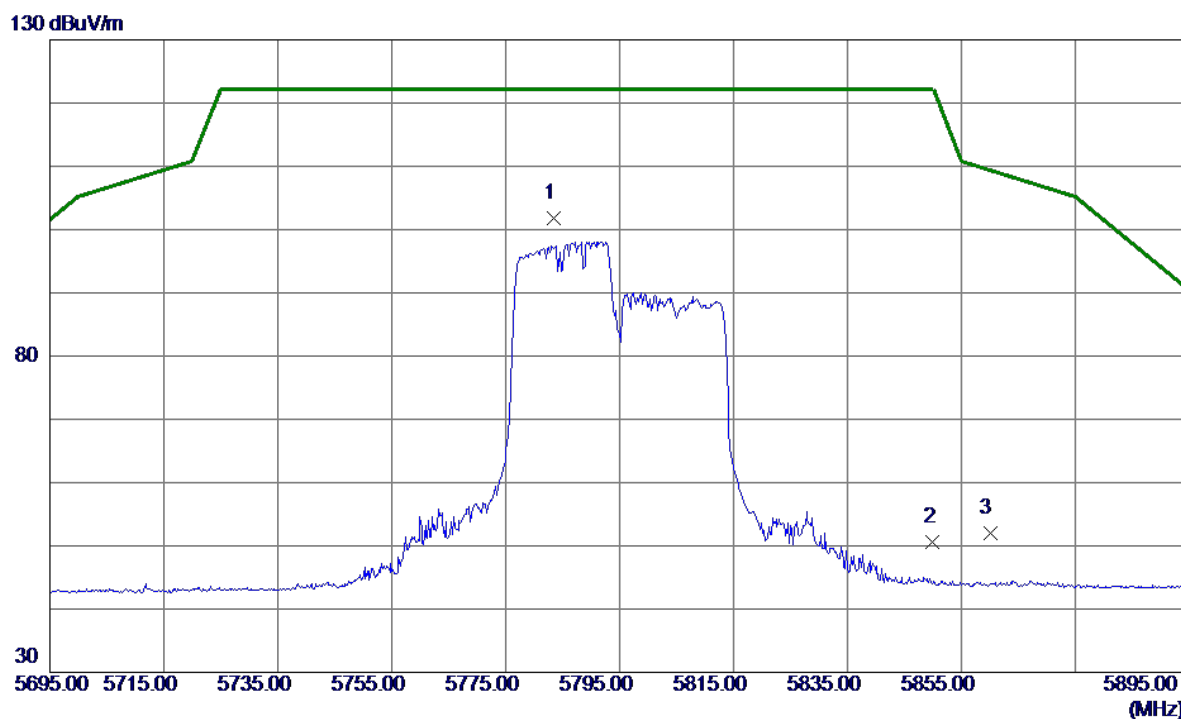

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.4000	85.62	16.14	101.76	122.20	-20.44	Peak	No Limit
2	5850.0000	34.26	16.35	50.61	122.20	-71.59	Peak	
3	5860.0000	35.69	16.39	52.08	109.40	-57.32	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

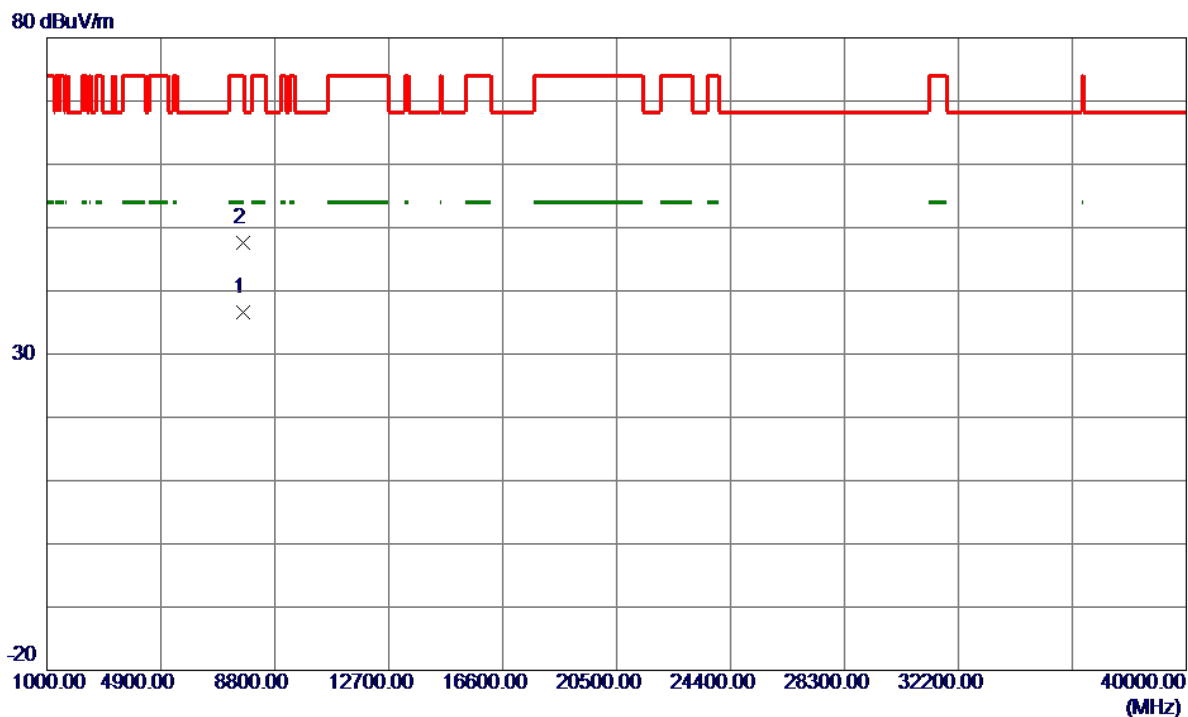

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.5100	26.70	9.96	36.66	54.00	-17.34	AVG	
2	7726.5970	37.56	9.96	47.52	74.00	-26.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

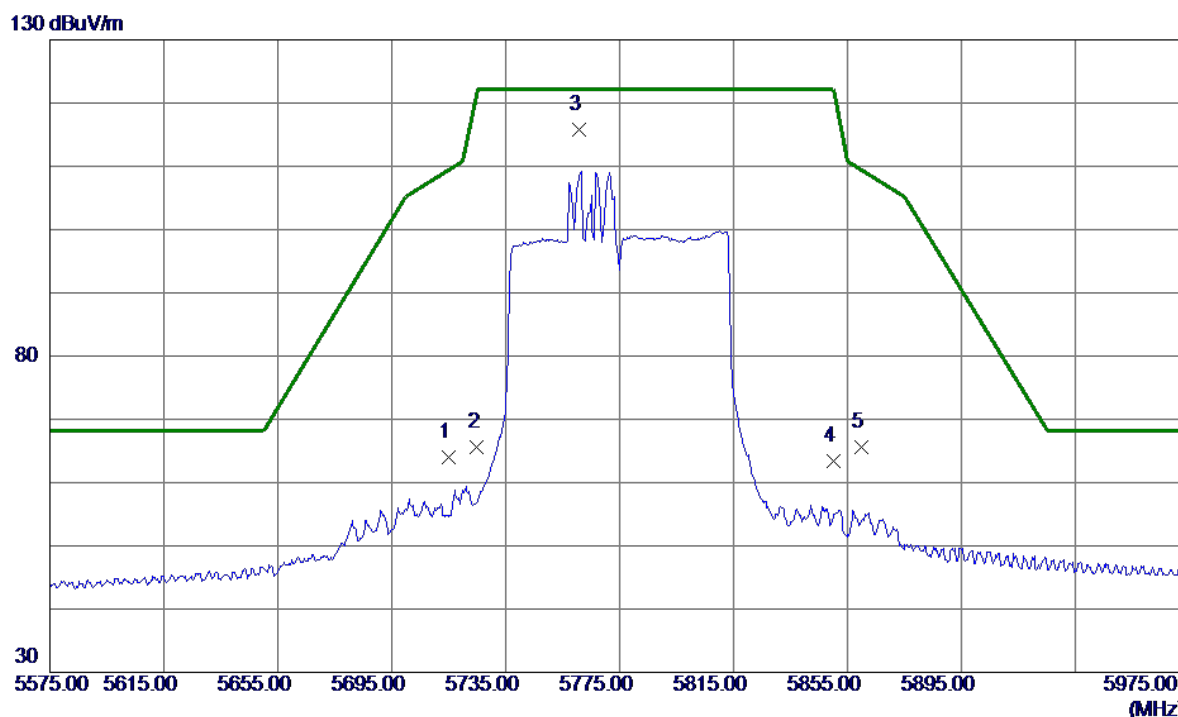

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	48.09	15.93	64.02	109.40	-45.38	Peak	
2	5725.0000	49.73	15.96	65.69	122.20	-56.51	Peak	
3 *	5760.6000	99.71	16.07	115.78	122.20	-6.42	Peak	No Limit
4	5850.0000	47.02	16.35	63.37	122.20	-58.83	Peak	
5	5860.0000	49.24	16.39	65.63	109.40	-43.77	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

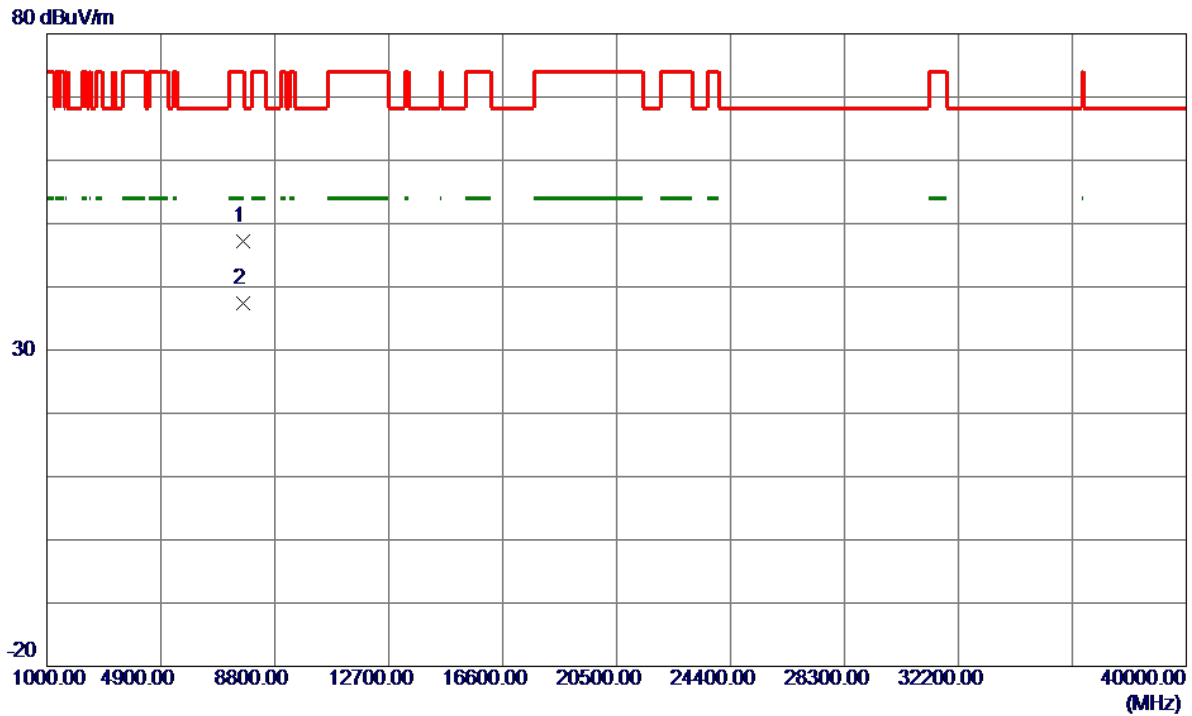


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7695.0900	37.21	9.98	47.19	74.00	-26.81	Peak	
2 *	7699.9200	27.48	9.97	37.45	54.00	-16.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal


130 dBuV/m

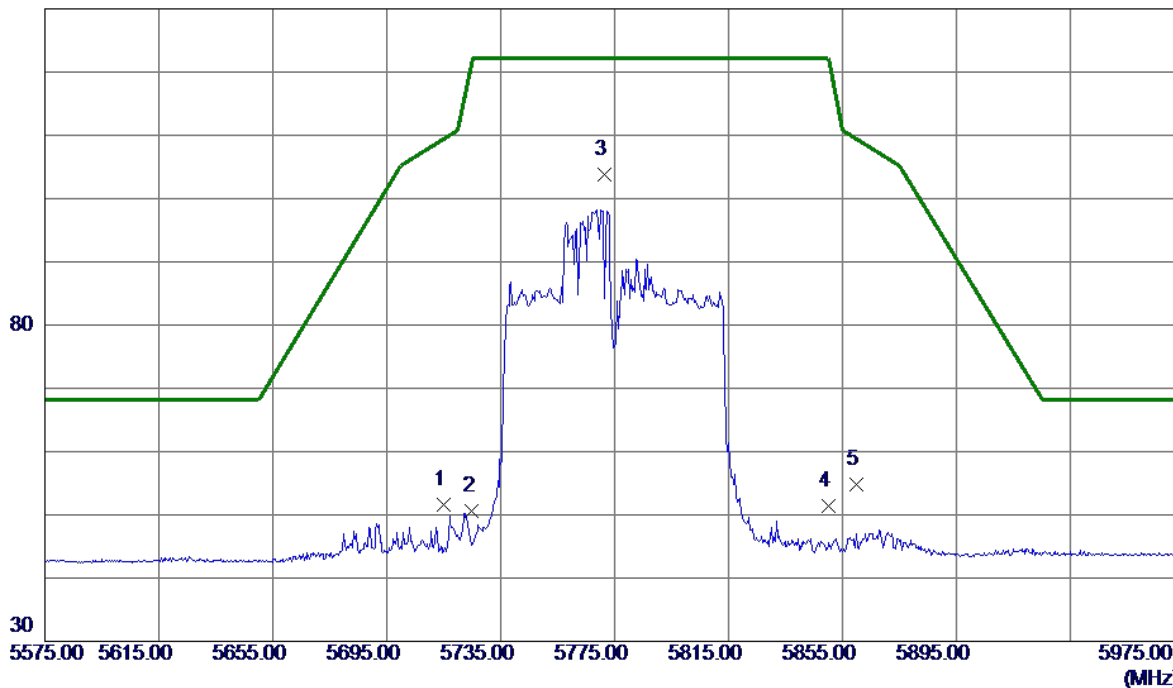

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	35.71	15.93	51.64	109.40	-57.76	Peak	
2	5725.0000	34.65	15.96	50.61	122.20	-71.59	Peak	
3 *	5771.4000	87.72	16.11	103.83	122.20	-18.37	Peak	No Limit
4	5850.0000	35.01	16.35	51.36	122.20	-70.84	Peak	
5	5860.0000	38.33	16.39	54.72	109.40	-54.68	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

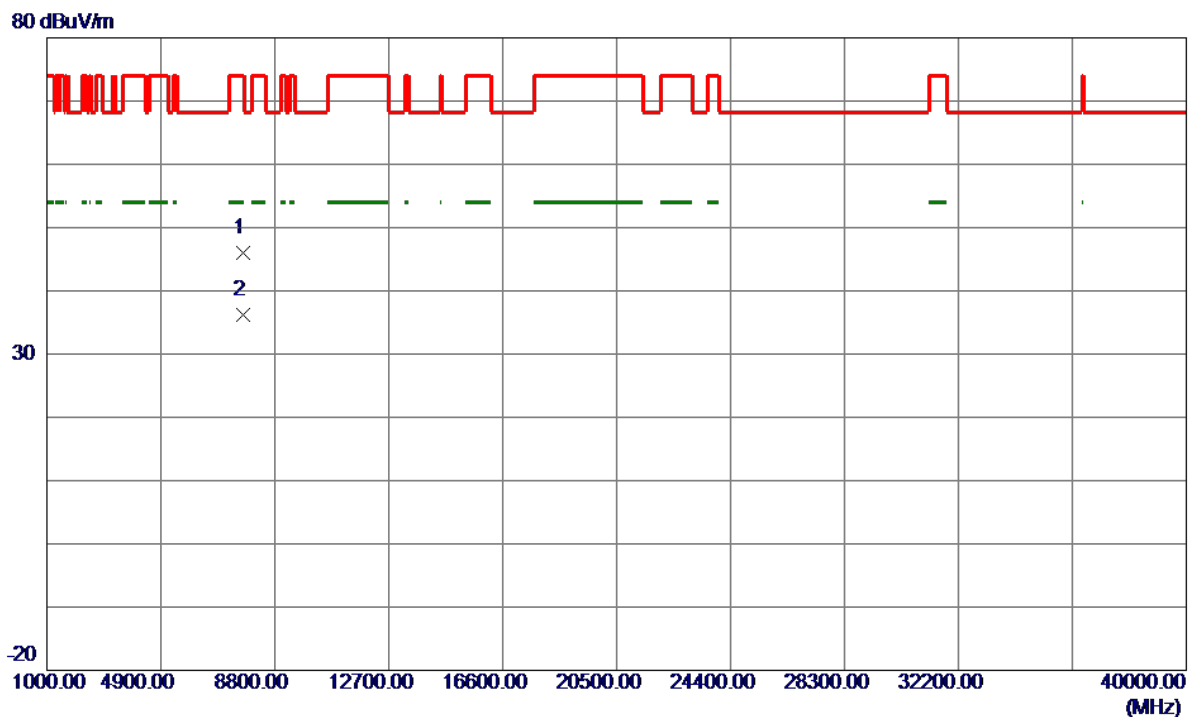

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7697.4450	36.00	9.98	45.98	74.00	-28.02	Peak	
2 *	7699.9600	26.23	9.97	36.20	54.00	-17.80	AVG	

TX A Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.068 msec

T_{Total} : 2.145 msec

Duty cycle: 96.41%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.16$$

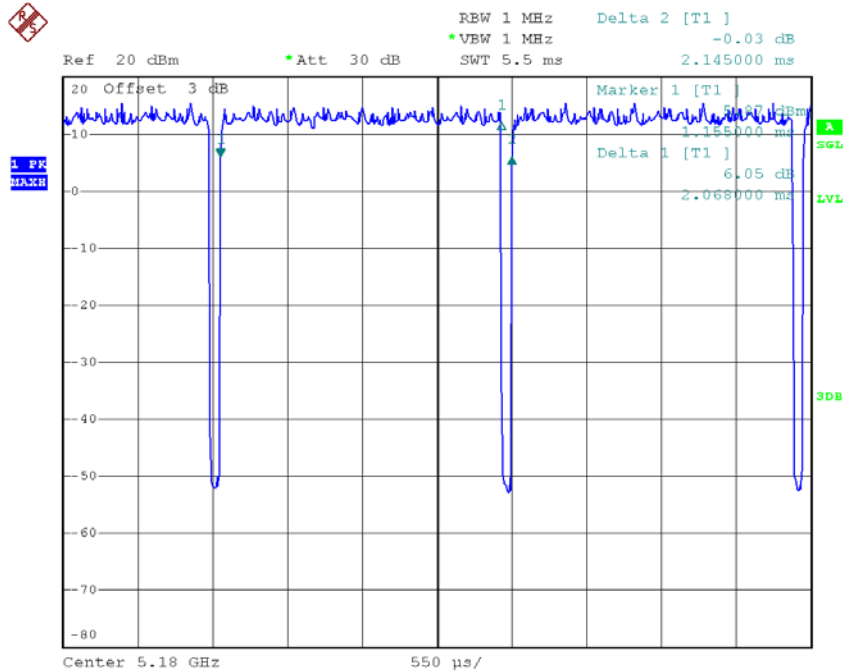

Date: 16.AUG.2018 14:44:19

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 5.020 msec

T_{Total} : 5.100 msec

Duty cycle: 98.43%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.07

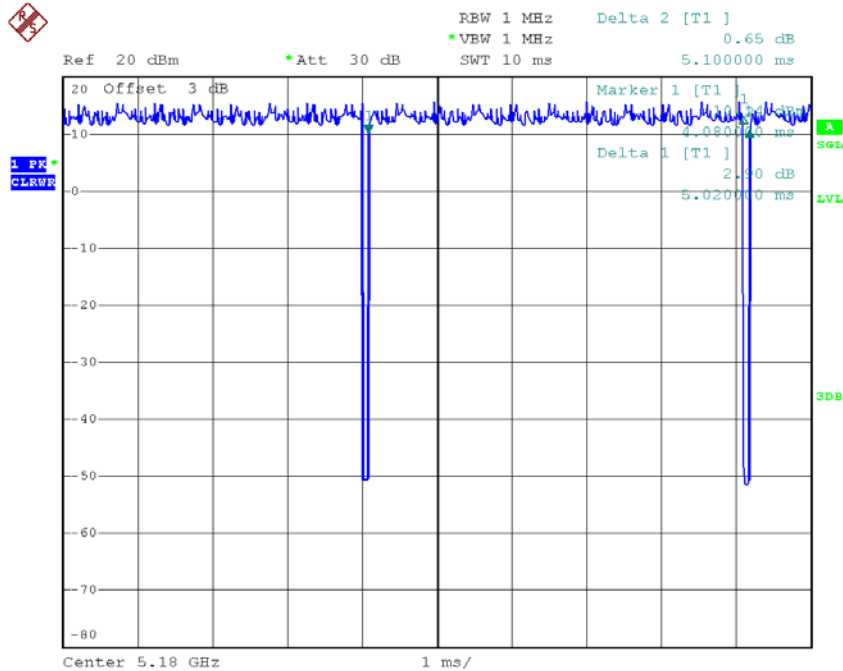

Date: 16.AUG.2018 14:44:56

Note: The duty cycle is $\geq 98\%$ no need to calculated as Duty Factor.

TX N40 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.420 msec

T_{Total} : 2.519 msec

Duty cycle: 96.07%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.17$$

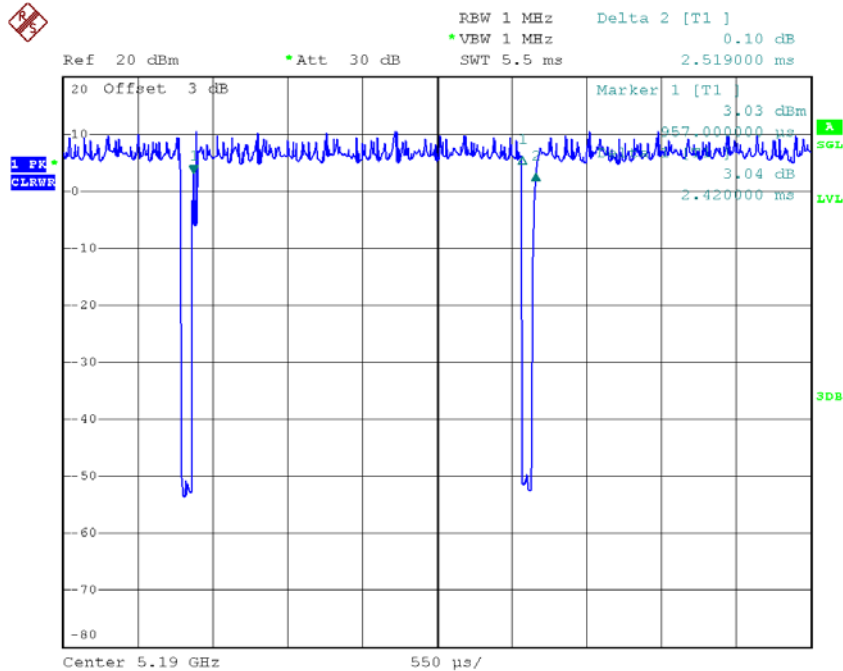

Date: 16.AUG.2018 14:46:52

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 5.014 msec

T_{Total} : 5.106 msec

Duty cycle: 98.20%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.08$$

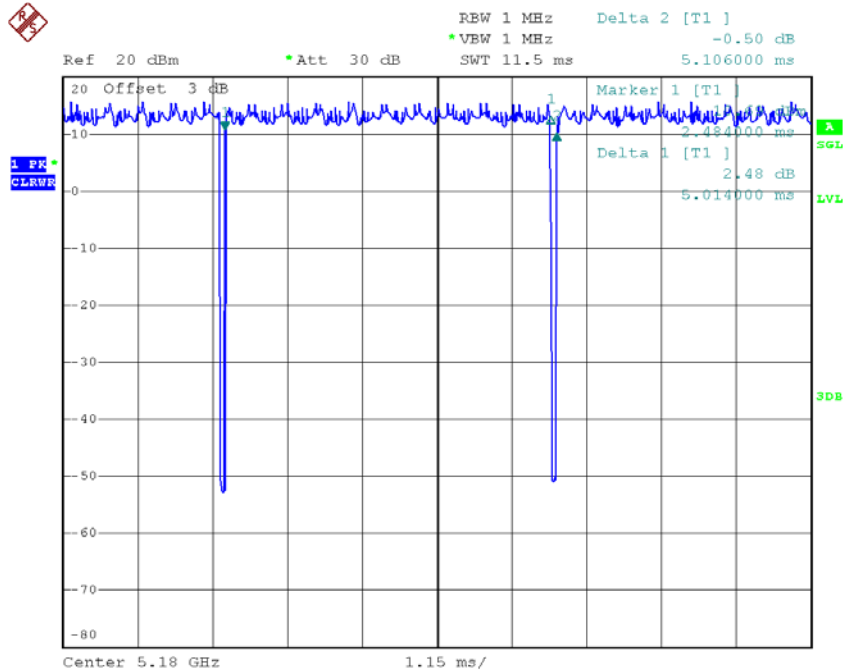

Date: 16.AUG.2018 14:46:24

Note: The duty cycle is $\geq 98\%$ no need to calculated as Duty Factor.

TX AC40 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.432 msec

T_{Total} : 2.520 msec

Duty cycle: 96.51%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.15$$

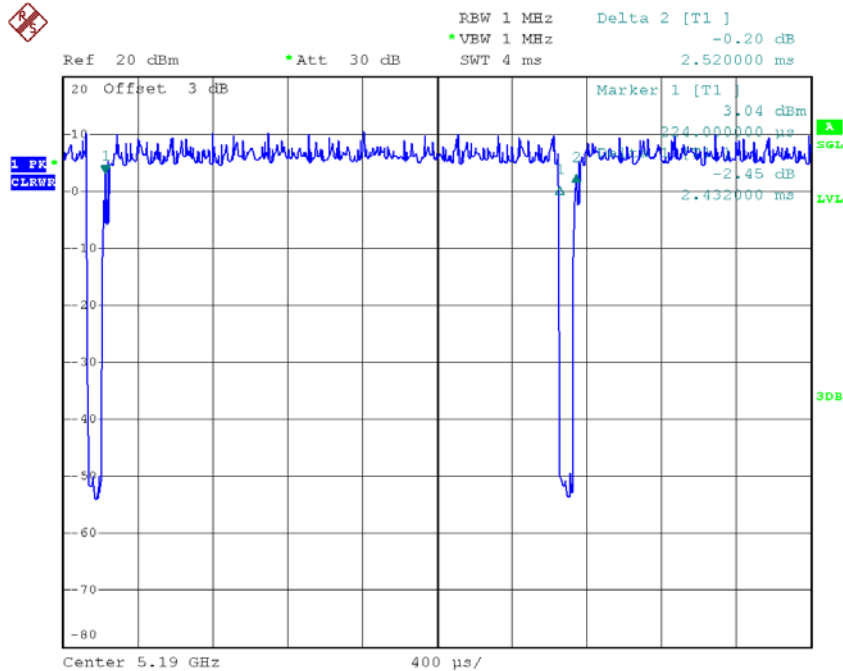

Date: 16.AUG.2018 14:47:19

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 1.120 msec

T_{Total} : 1.235 msec

Duty cycle: 90.69%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.42$$

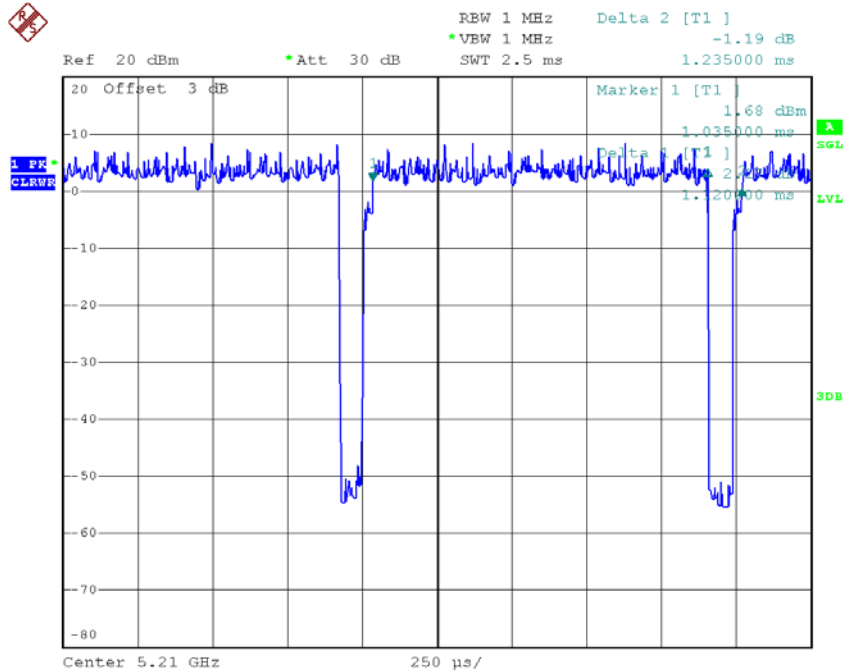

Date: 16.AUG.2018 14:47:44

Note: The EUT was programmed to be in continually transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor


APPENDIX E - BANDWIDTH

Non-Beamforming

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	19.69	16.60
CH40	5200	20.89	16.60
CH48	5240	20.69	16.60

TX CH36

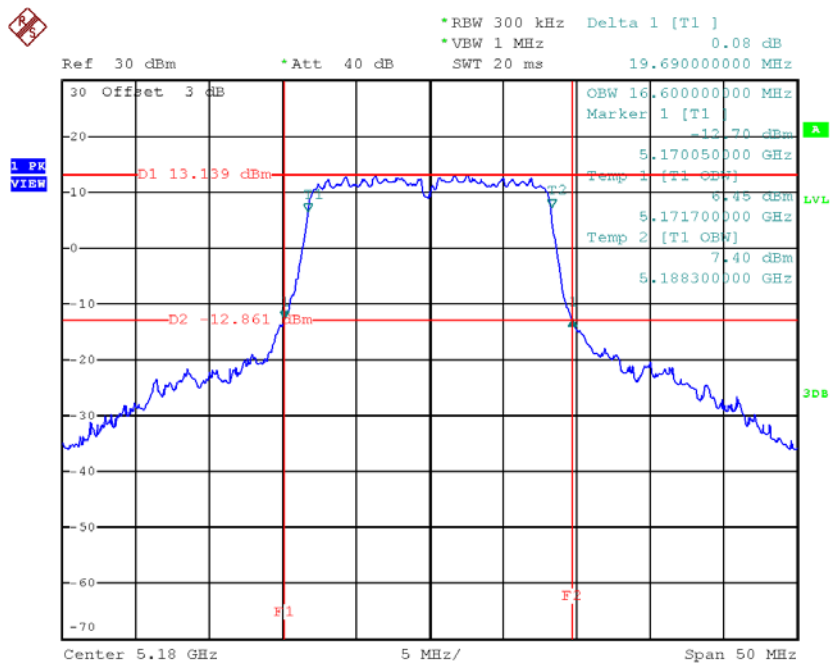


Date: 27.AUG.2018 10:21:38

TX CH40

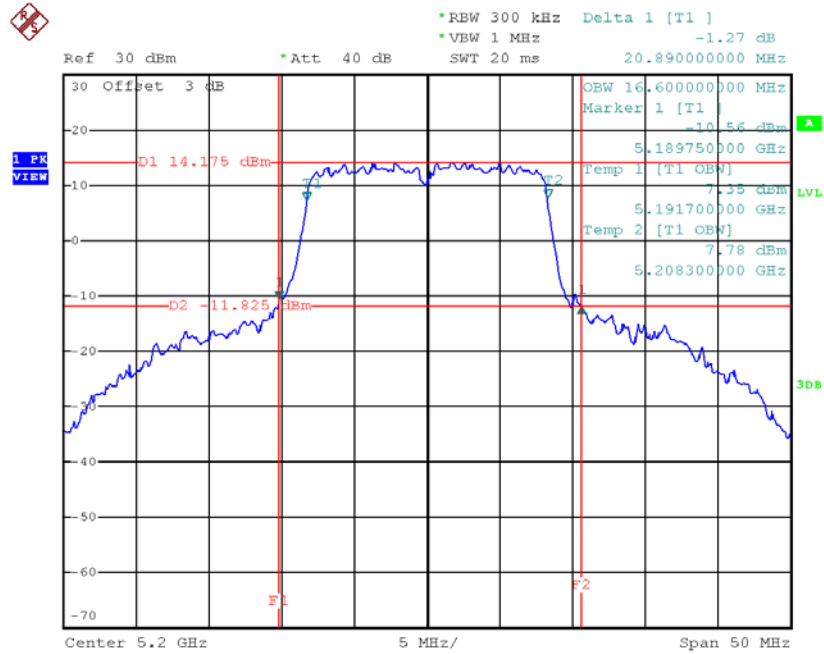

Date: 27.AUG.2018 10:23:02

TX CH48

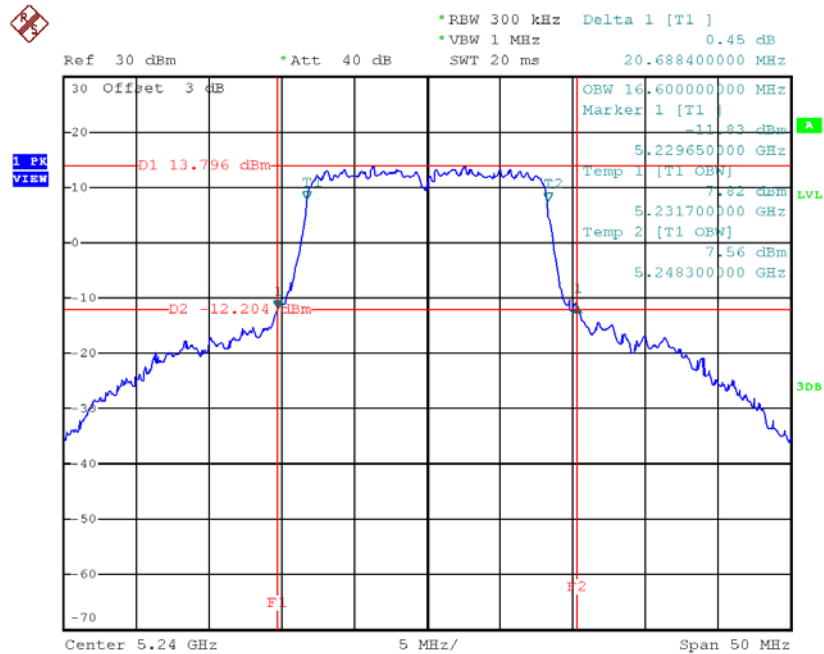


Date: 27.AUG.2018 10:25:00

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.70	17.80
CH40	5200	22.19	17.80
CH48	5240	25.00	17.80

TX CH36

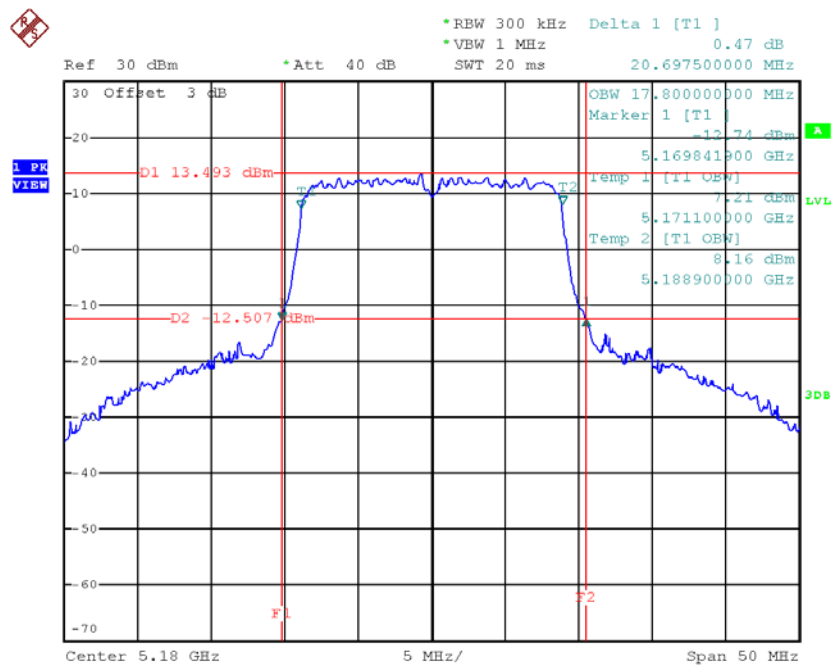


Date: 27.AUG.2018 10:47:51

TX CH40

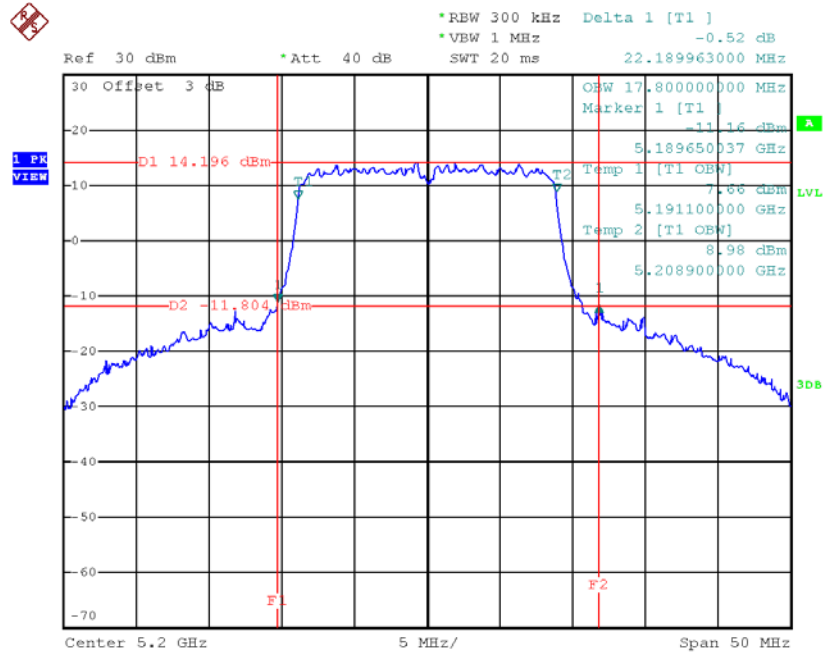

Date: 27.AUG.2018 10:49:18

TX CH48

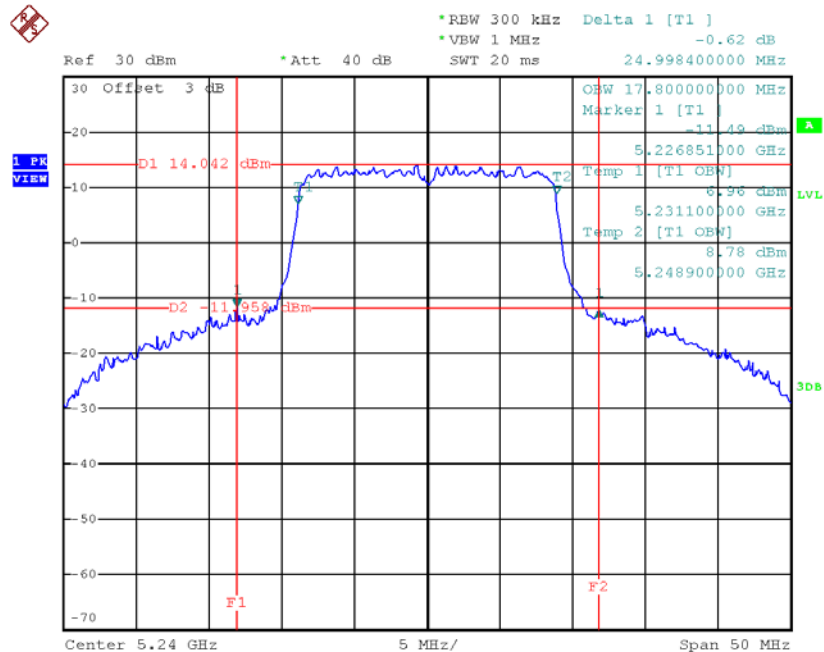


Date: 27.AUG.2018 10:50:21

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.81	36.20
CH46	5230	56.40	36.40

TX CH38

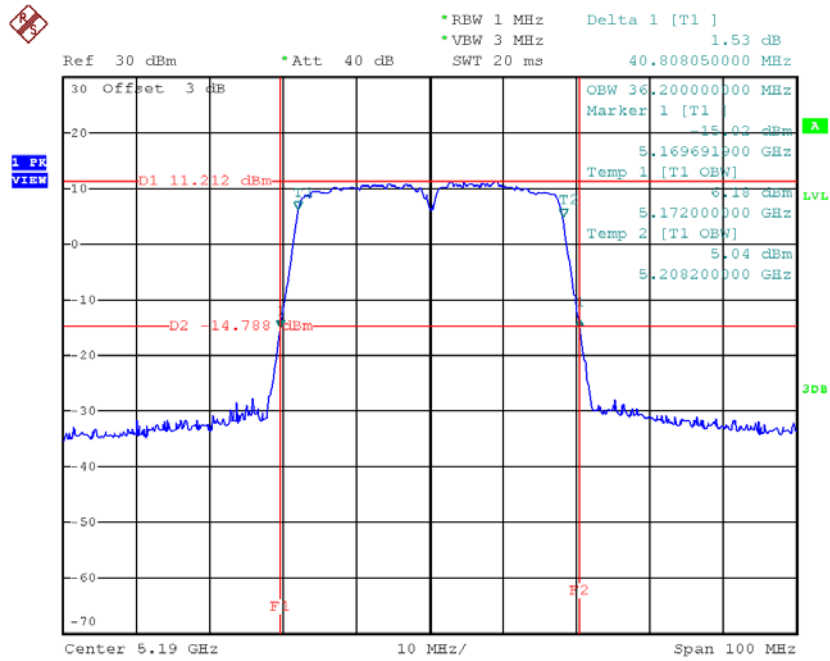

Date: 27.AUG.2018 14:03:43

TX CH46

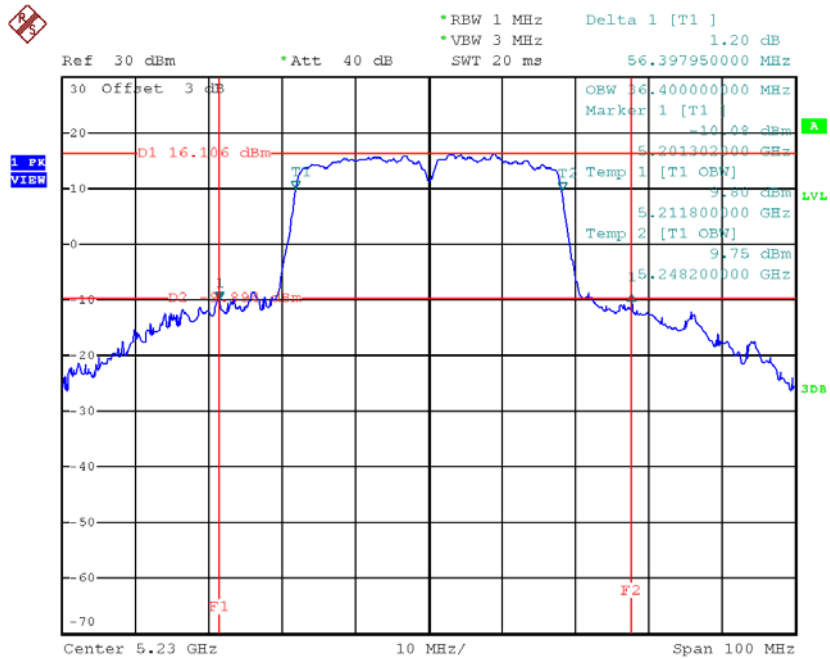


Date: 27.AUG.2018 14:04:36

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.41	16.40	>=500
CH157	5785	16.50	16.40	>=500
CH165	5825	16.50	16.40	>=500

TX CH 149

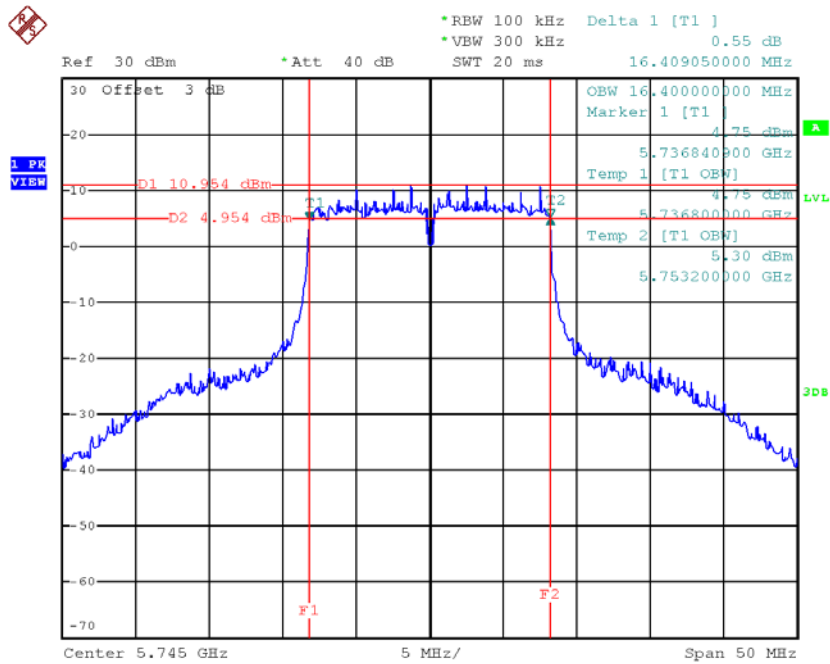


Date: 27.AUG.2018 10:42:19

TX CH 157

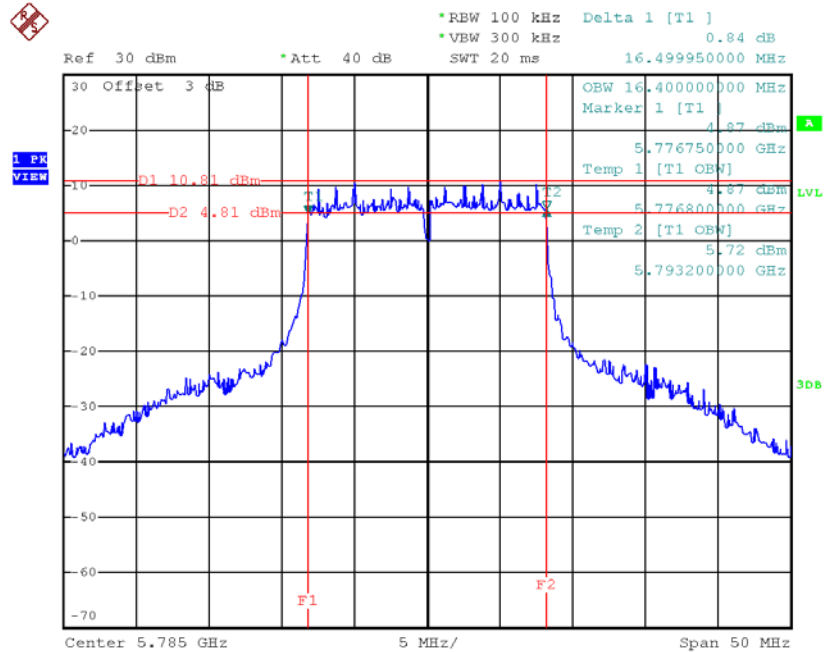

Date: 27.AUG.2018 10:43:27

TX CH 165

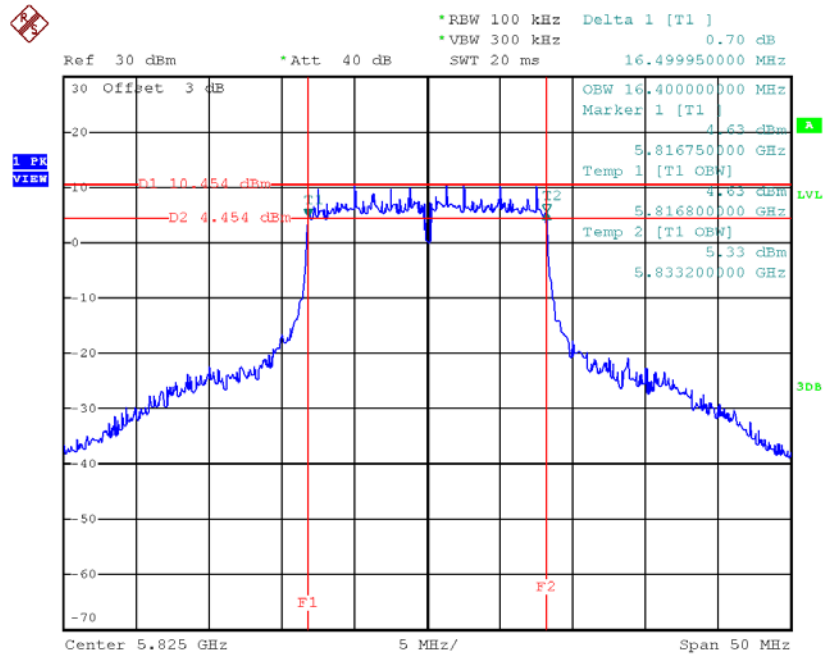


Date: 27.AUG.2018 10:44:27

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.55	17.70	>=500
CH157	5785	17.65	17.60	>=500
CH165	5825	17.65	17.60	>=500

TX CH 149

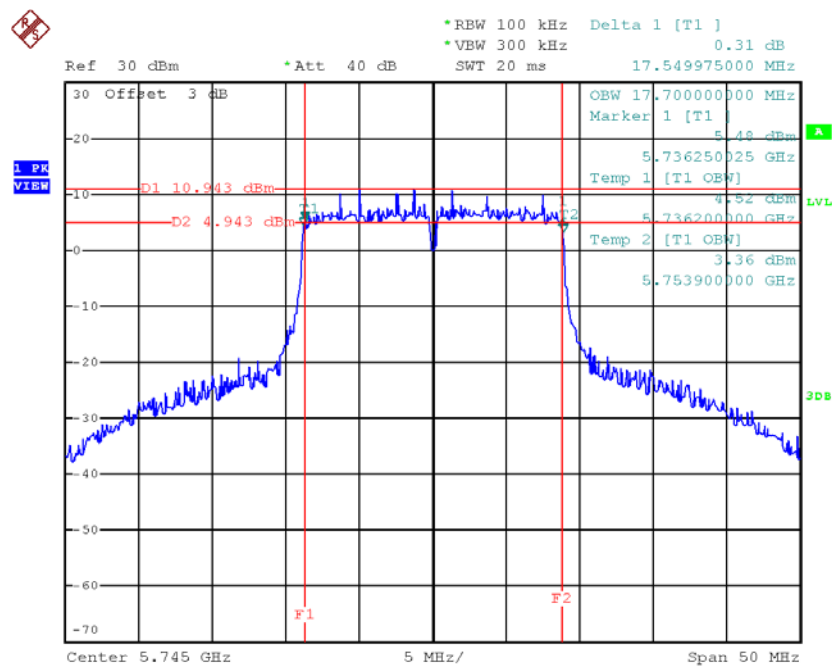


Date: 27.AUG.2018 10:51:37

TX CH 157

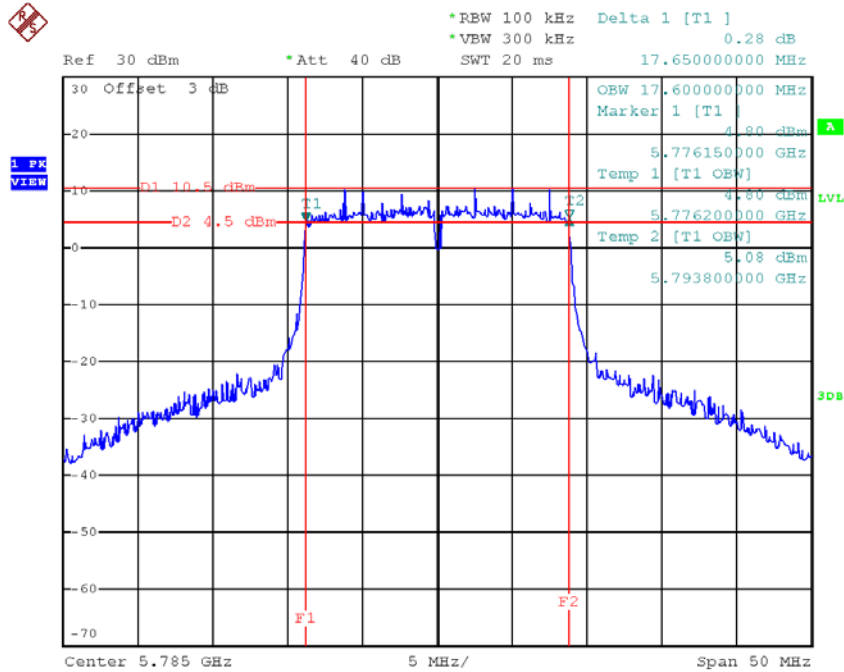

Date: 27.AUG.2018 10:53:10

TX CH 165

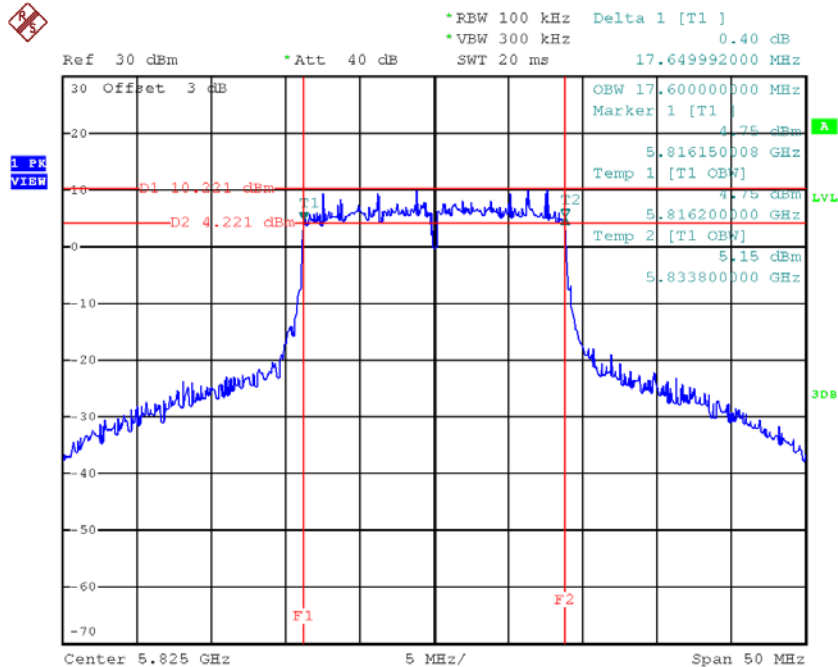


Date: 27.AUG.2018 10:54:15

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	34.10	36.20	≥ 500
CH159	5795	34.60	36.00	≥ 500

TX CH 151

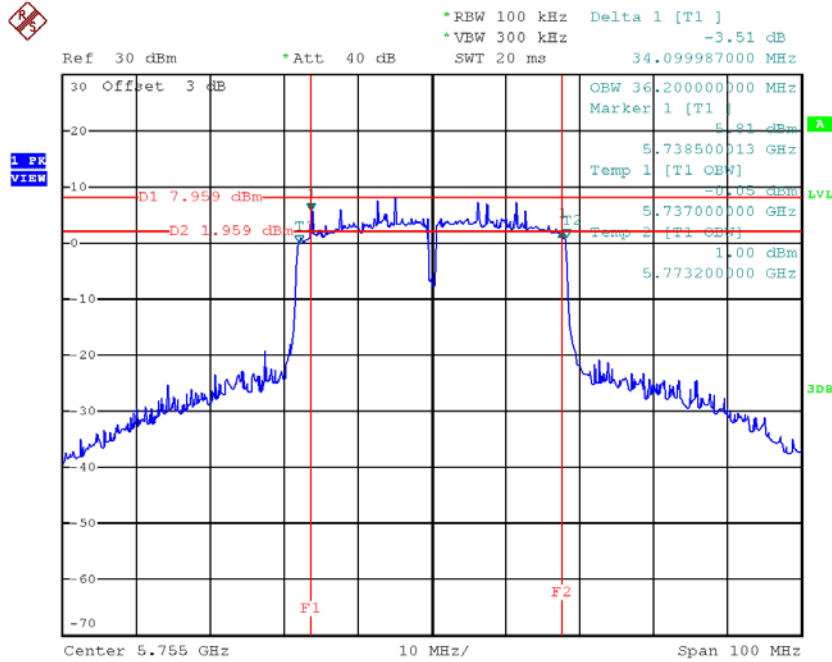

Date: 27.AUG.2018 14:06:05

TX CH 159

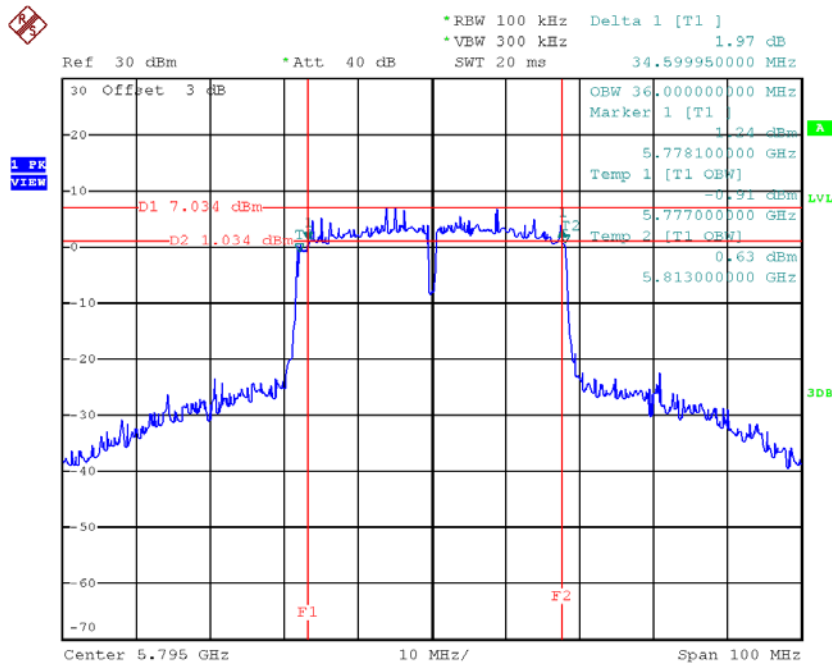


Date: 27.AUG.2018 14:07:31

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.90	17.70
CH40	5200	22.29	17.80
CH48	5240	25.20	17.80

TX CH36

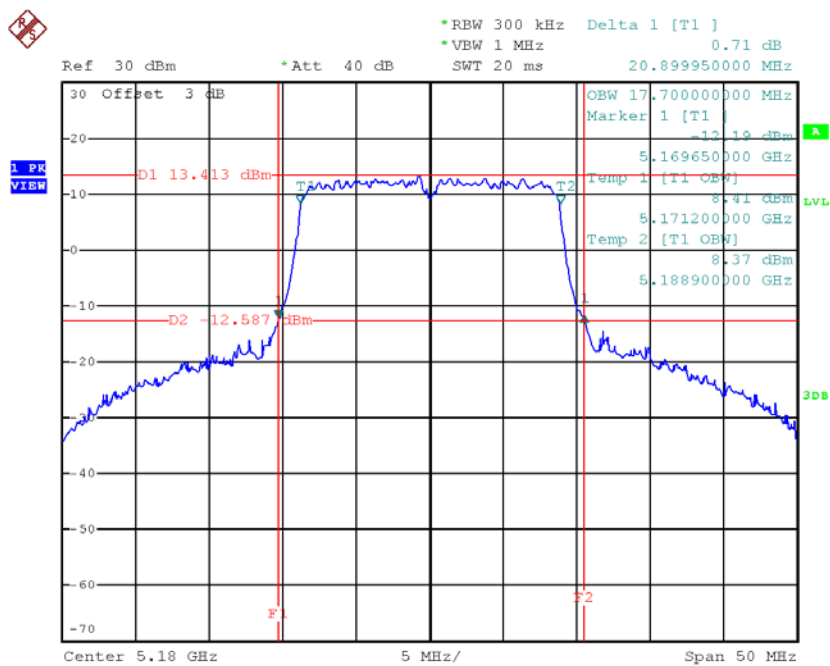


Date: 27.AUG.2018 11:16:52

TX CH40

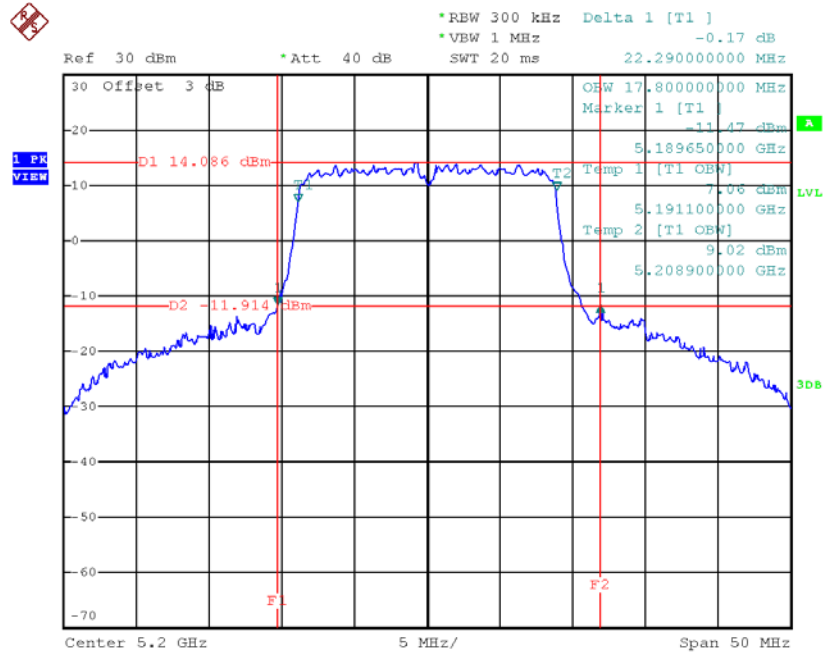

Date: 27.AUG.2018 11:21:29

TX CH48

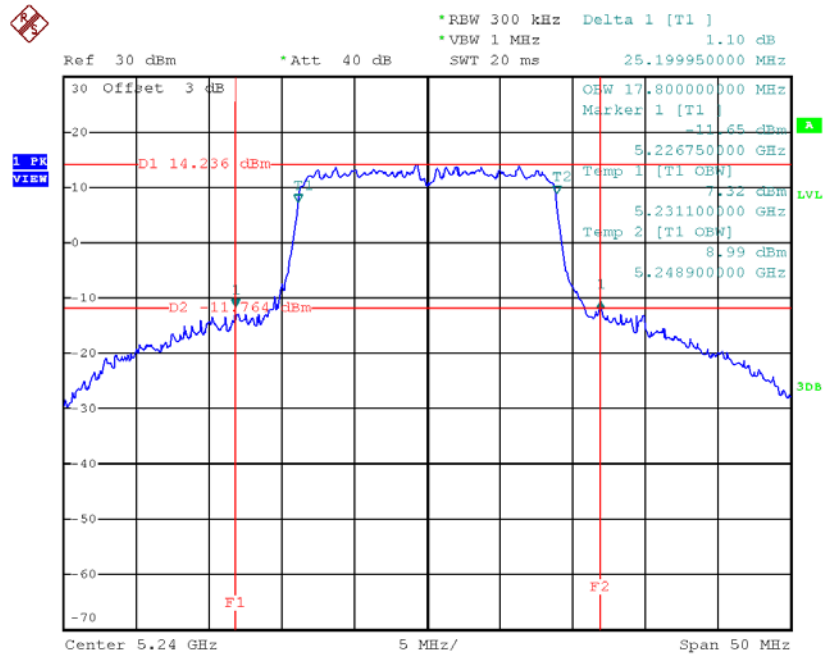


Date: 27.AUG.2018 11:22:22

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.82	36.20
CH46	5230	51.01	36.40

TX CH38

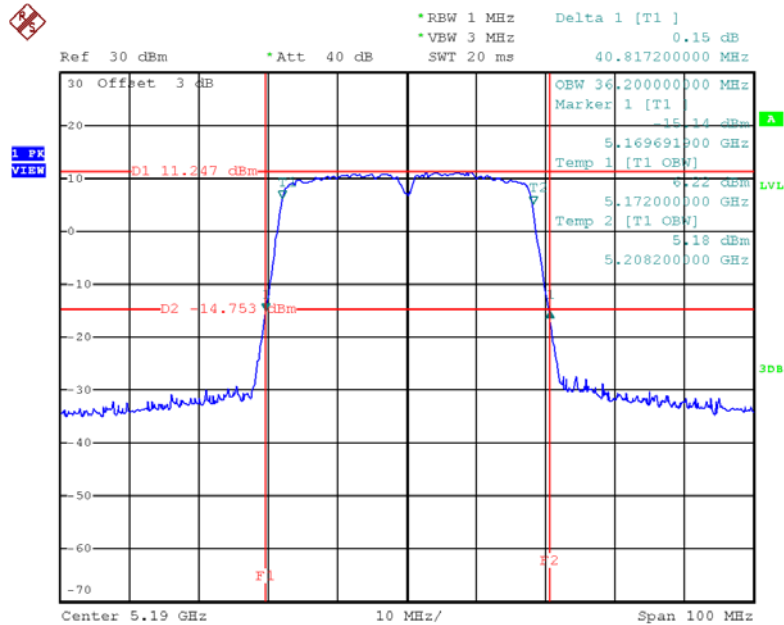

Date: 27.AUG.2018 14:09:30

TX CH46

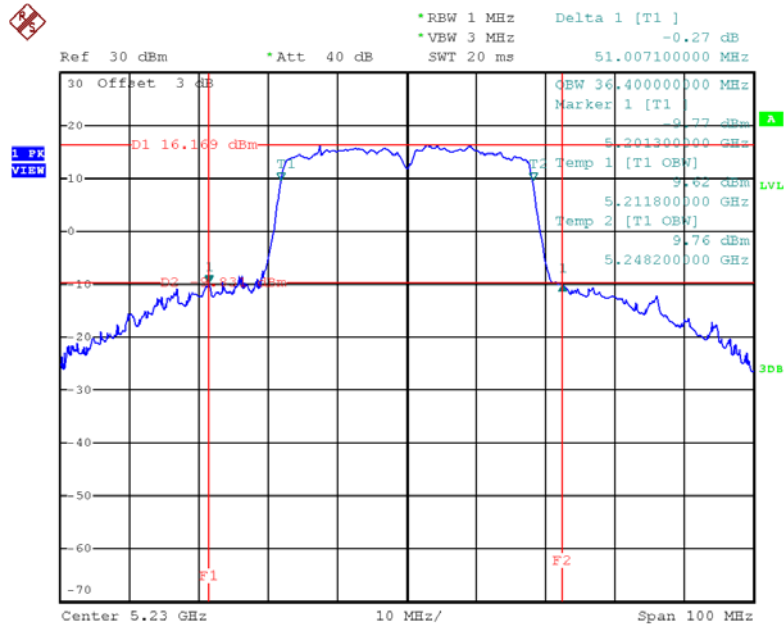


Date: 27.AUG.2018 14:10:37

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	84.81	76.00

TX CH42

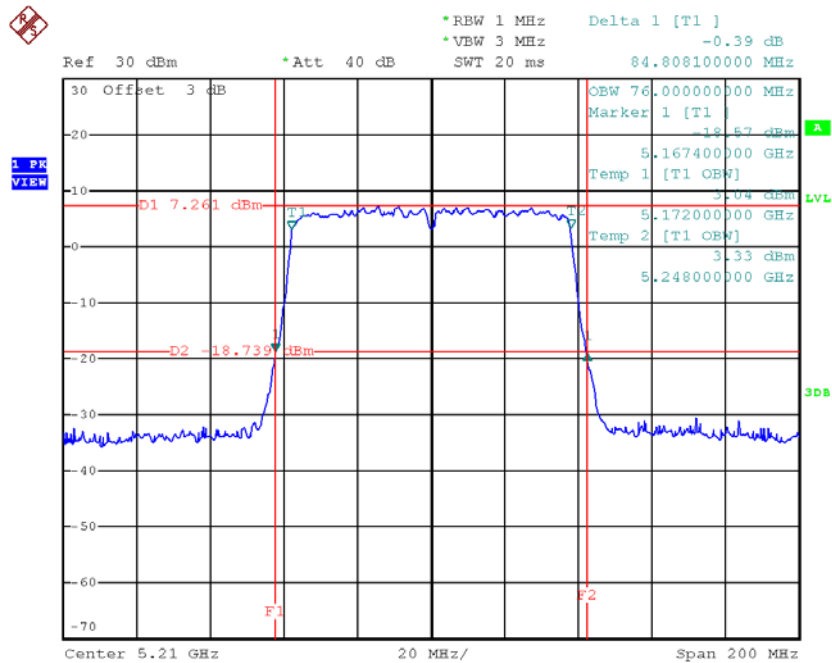


Date: 27.AUG.2018 14:23:41

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.70	>=500
CH157	5785	17.61	17.70	>=500
CH165	5825	17.65	17.70	>=500

TX CH 149

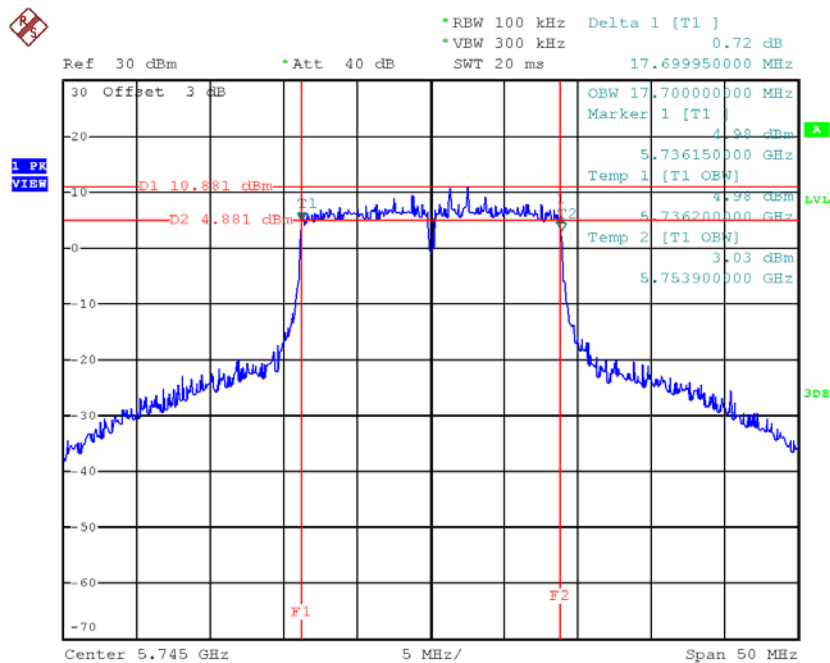


Date: 27.AUG.2018 11:23:41

TX CH 157

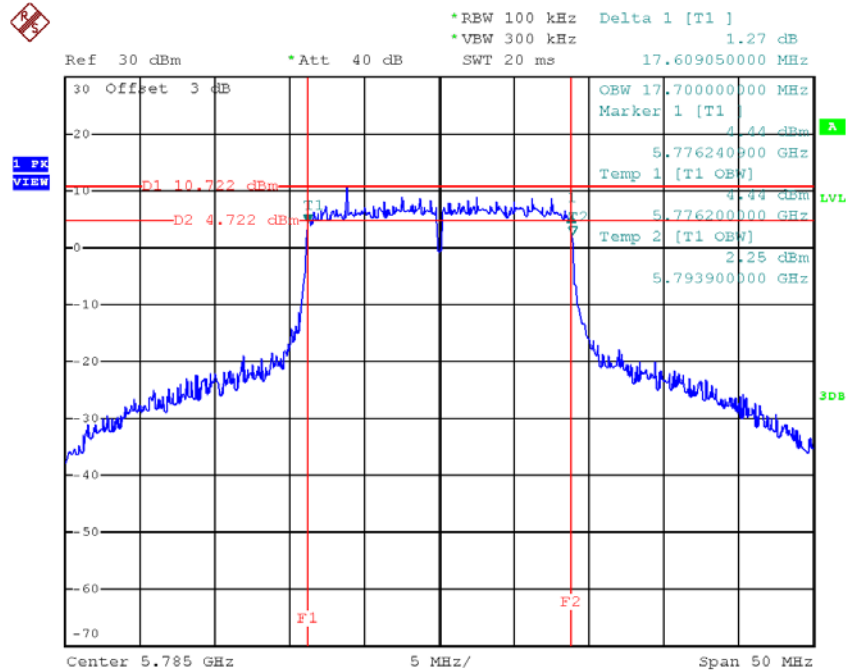

Date: 27.AUG.2018 11:25:19

TX CH 165

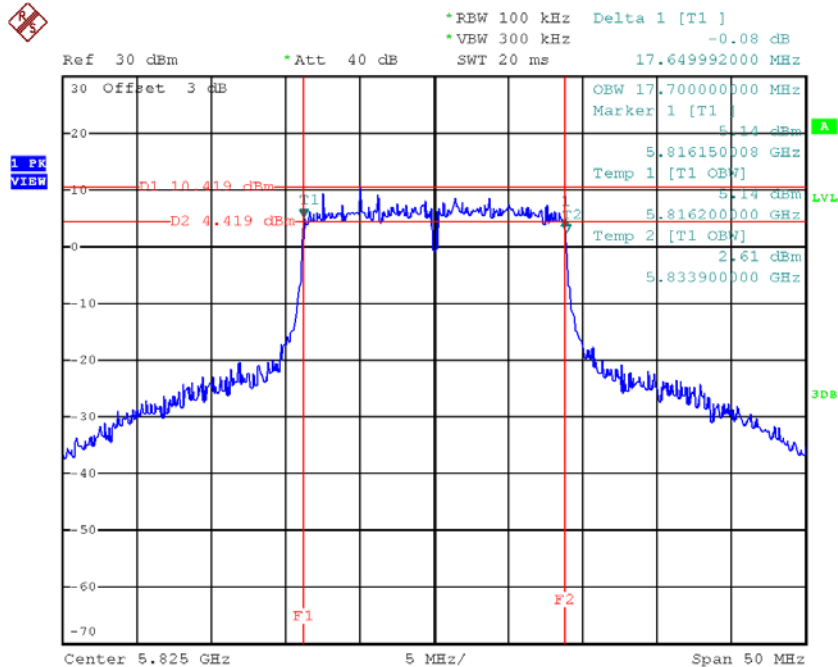


Date: 27.AUG.2018 11:26:16

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	34.10	36.20	≥ 500
CH159	5795	36.10	36.40	≥ 500

TX CH 151

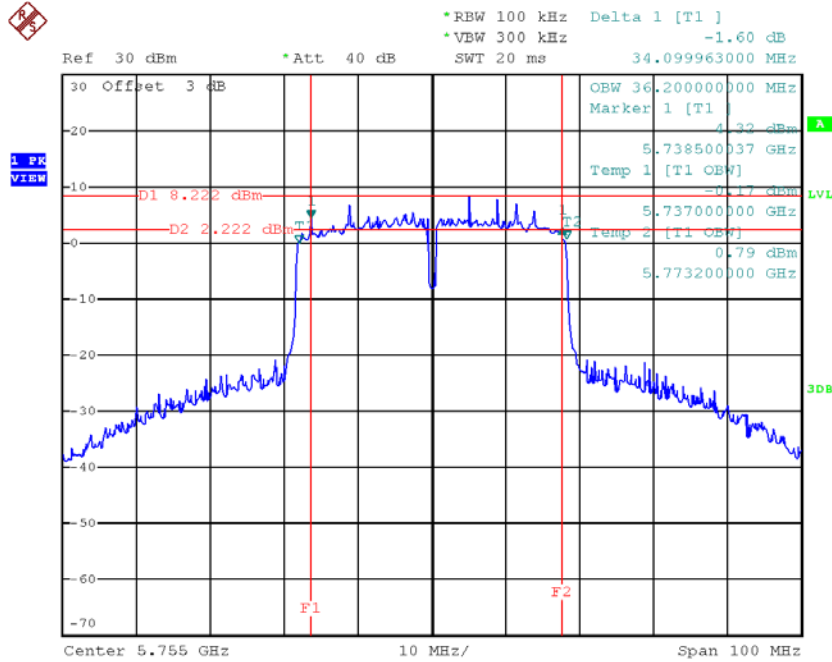

Date: 27.AUG.2018 14:12:11

TX CH 159

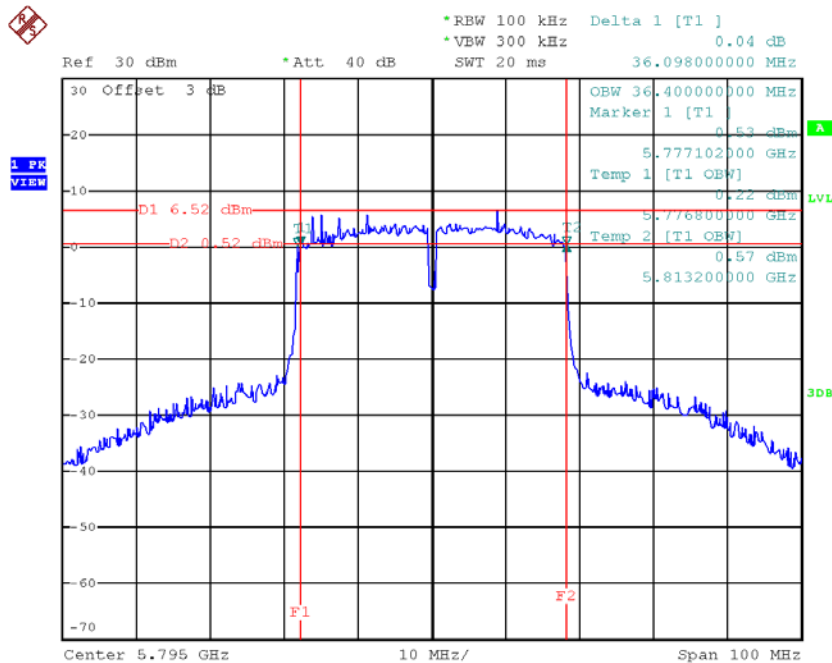


Date: 27.AUG.2018 14:13:26

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	74.60	76.00	>=500

TX CH 155

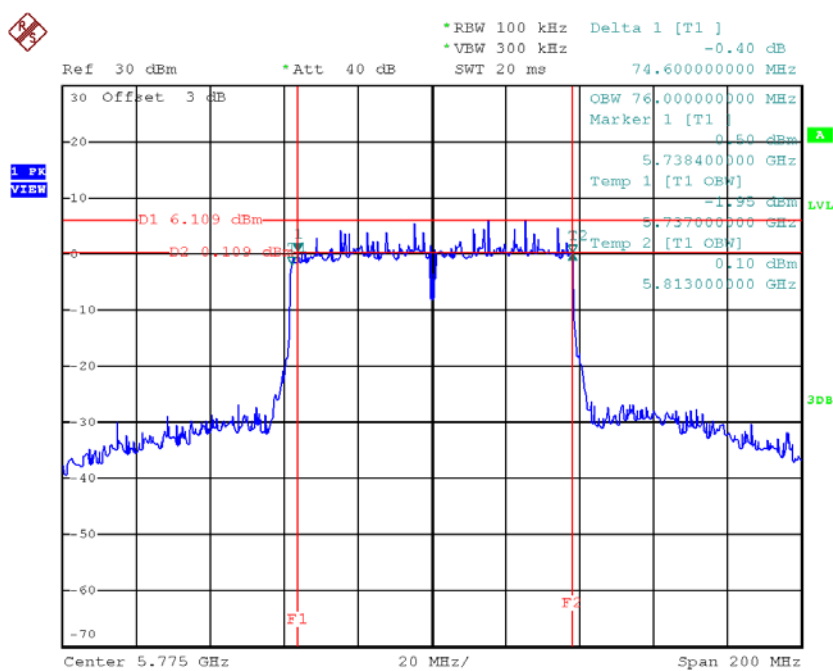


Date: 27.AUG.2018 14:25:21

Beamforming

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.79	17.80
CH40	5200	22.19	17.80
CH48	5240	22.90	17.80

TX CH36

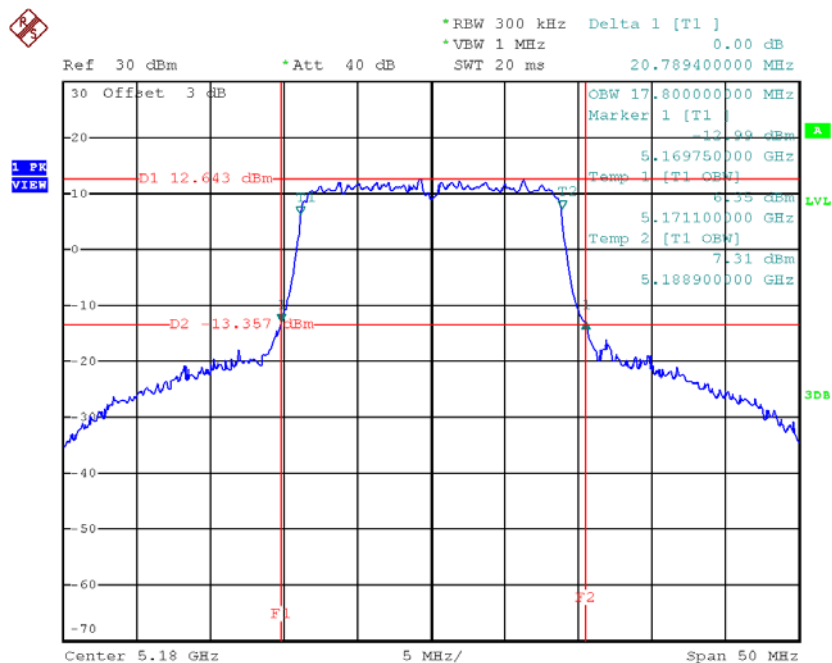


Date: 27.AUG.2018 14:40:45

TX CH40

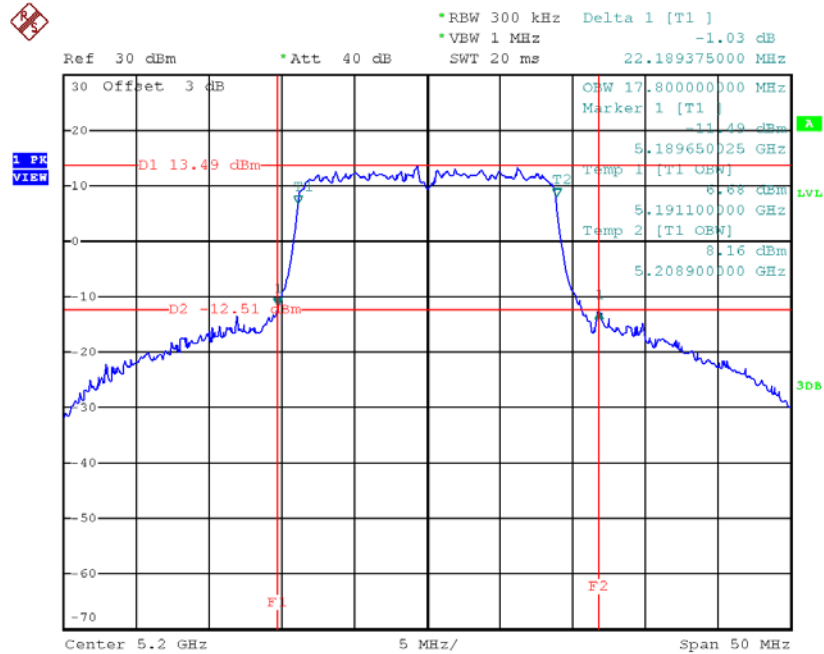

Date: 27.AUG.2018 14:42:13

TX CH48

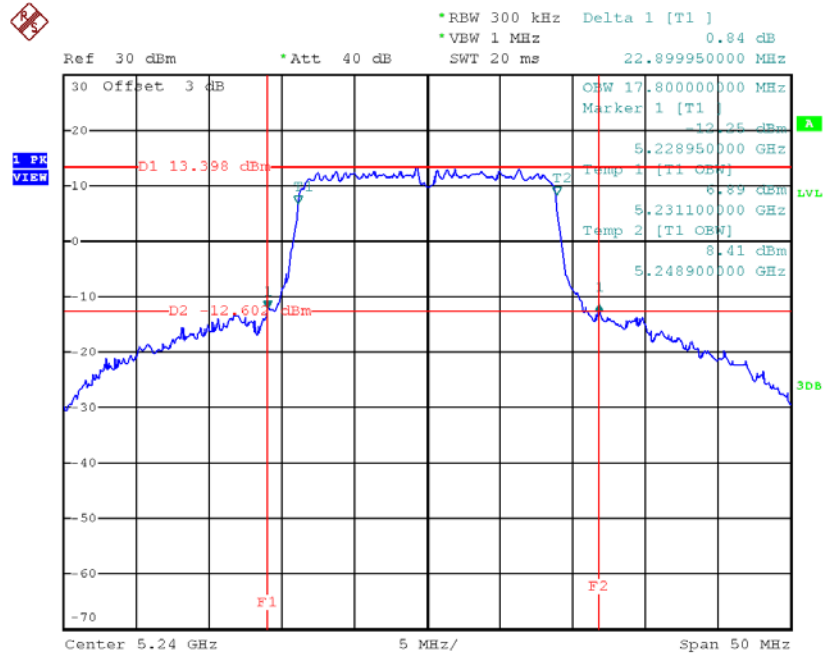


Date: 27.AUG.2018 14:44:08

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.81	36.20
CH46	5230	51.59	36.60

TX CH38

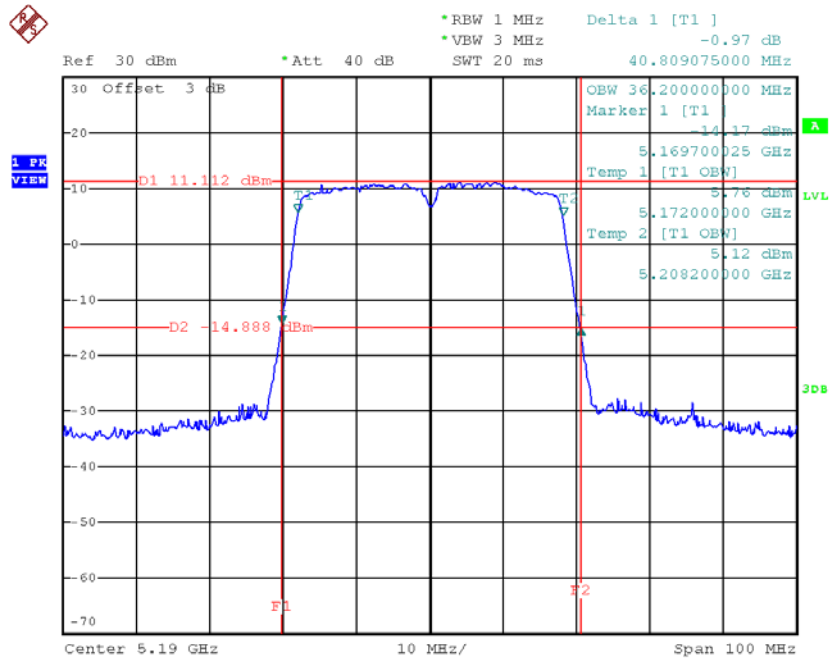

Date: 27.AUG.2018 15:29:19

TX CH46

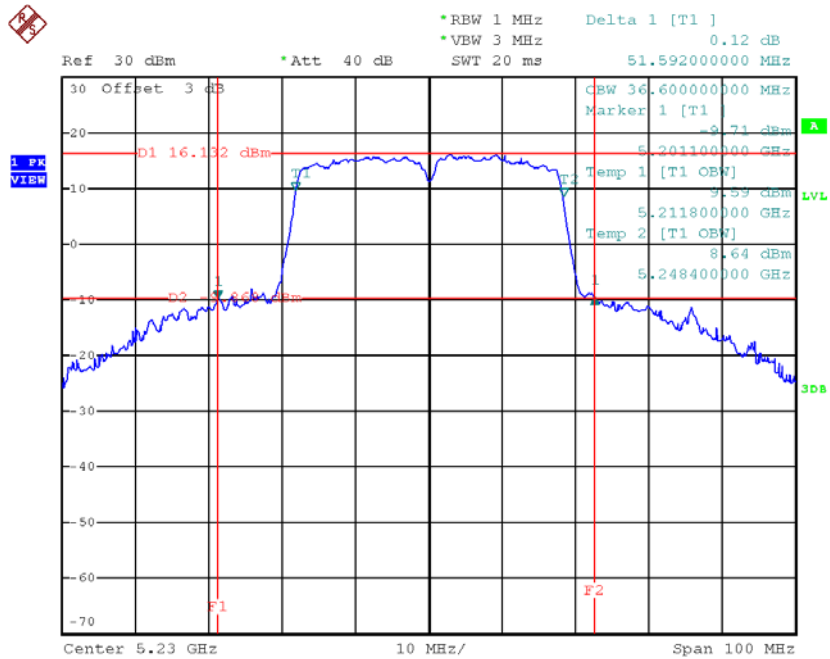


Date: 27.AUG.2018 15:30:33

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.55	17.70	>=500
CH157	5785	17.70	17.70	>=500
CH165	5825	17.65	17.60	>=500

TX CH 149

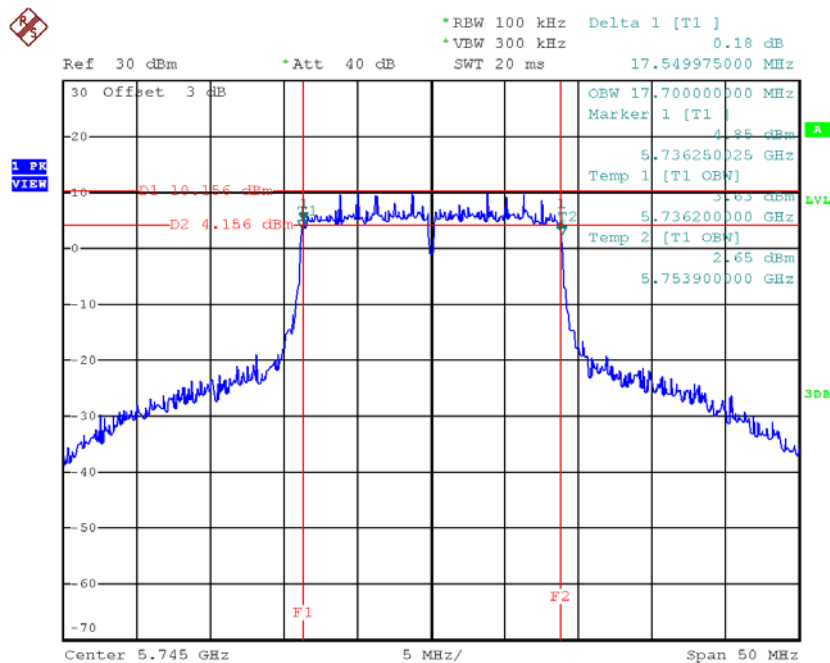


Date: 27.AUG.2018 14:45:33

TX CH 157

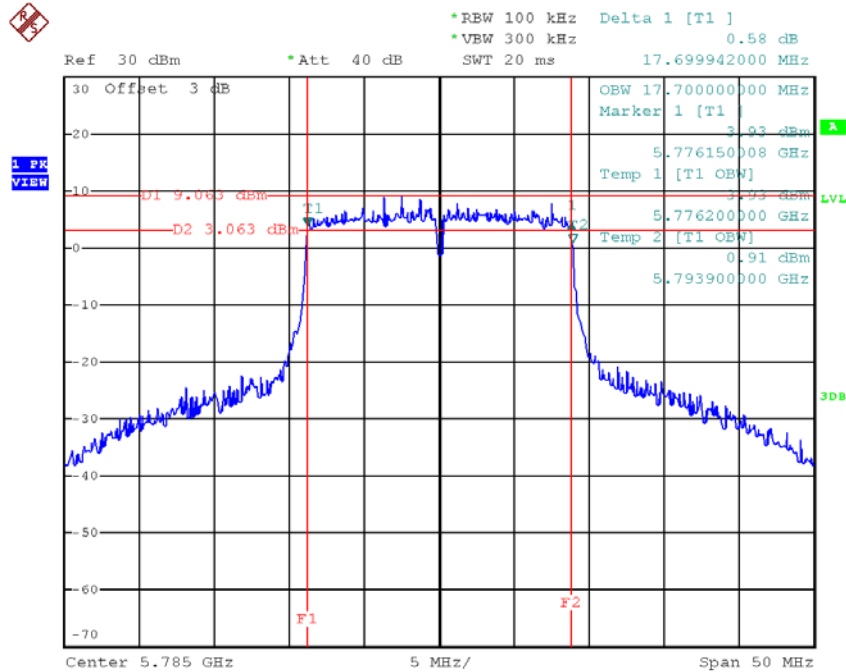

Date: 27.AUG.2018 14:46:40

TX CH 165

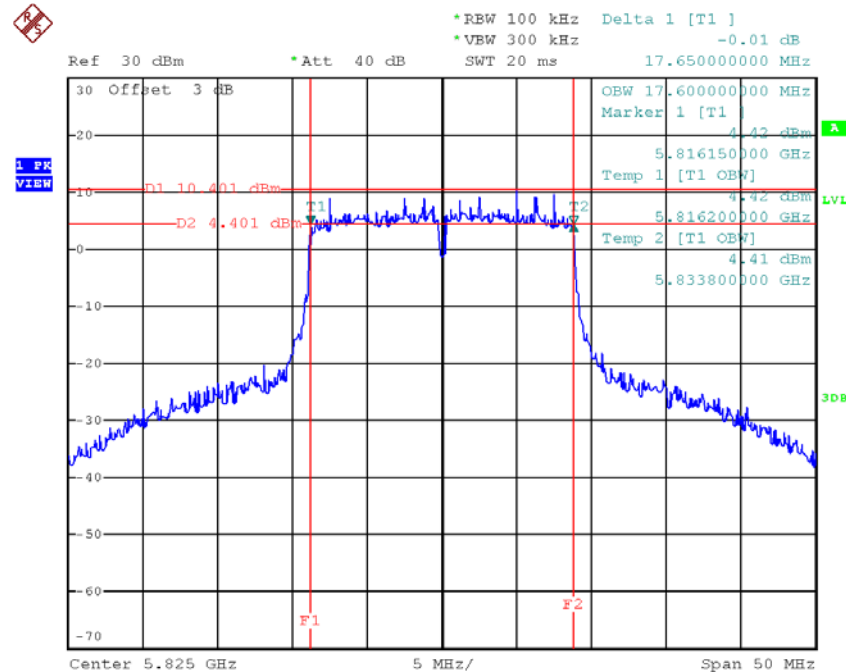


Date: 27.AUG.2018 14:47:38

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	34.39	36.20	≥ 500
CH159	5795	35.30	36.20	≥ 500

TX CH 151

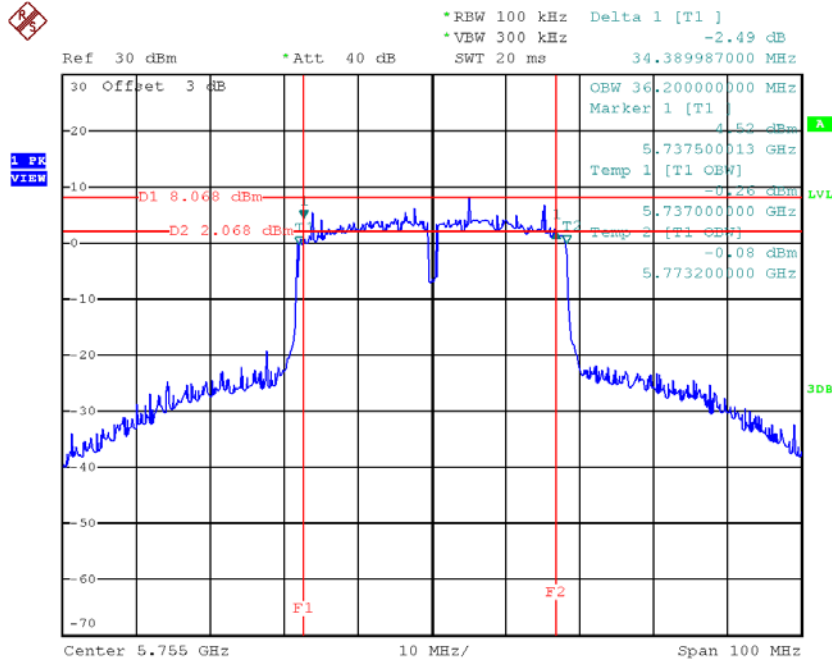

Date: 27.AUG.2018 15:31:55

TX CH 159

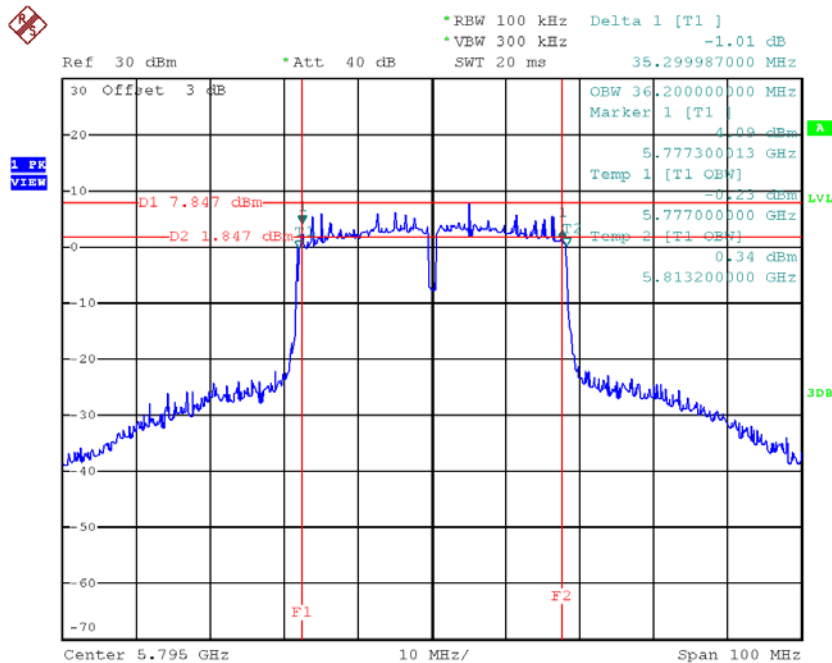


Date: 27.AUG.2018 15:34:16

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.05	17.70
CH40	5200	22.59	17.90
CH48	5240	28.19	17.90

TX CH36

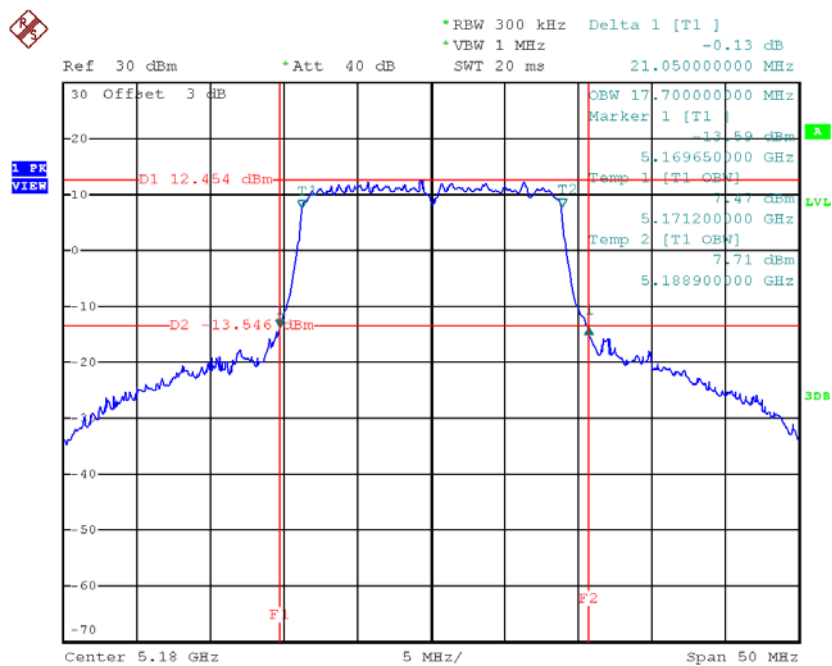


Date: 27.AUG.2018 15:22:11

TX CH40

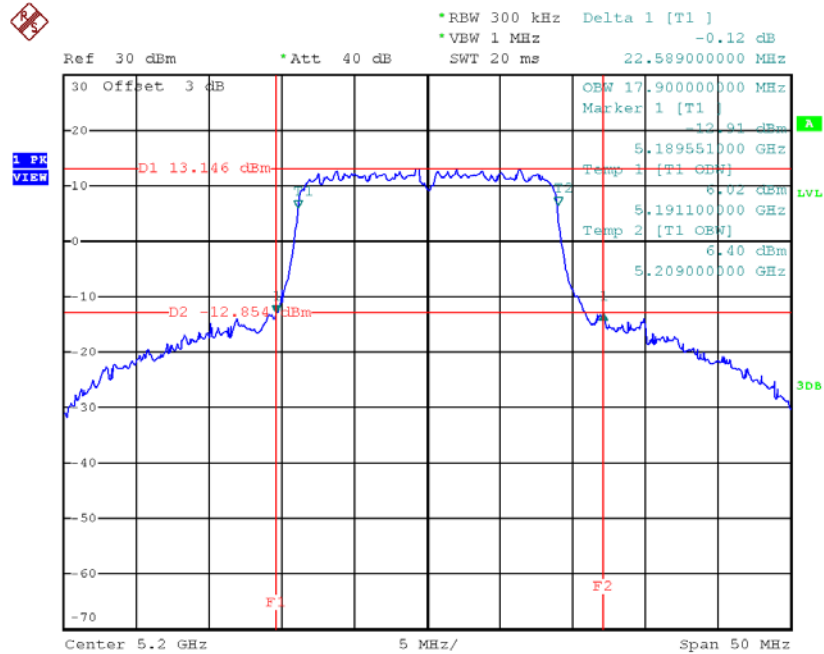

Date: 27.AUG.2018 15:23:09

TX CH48

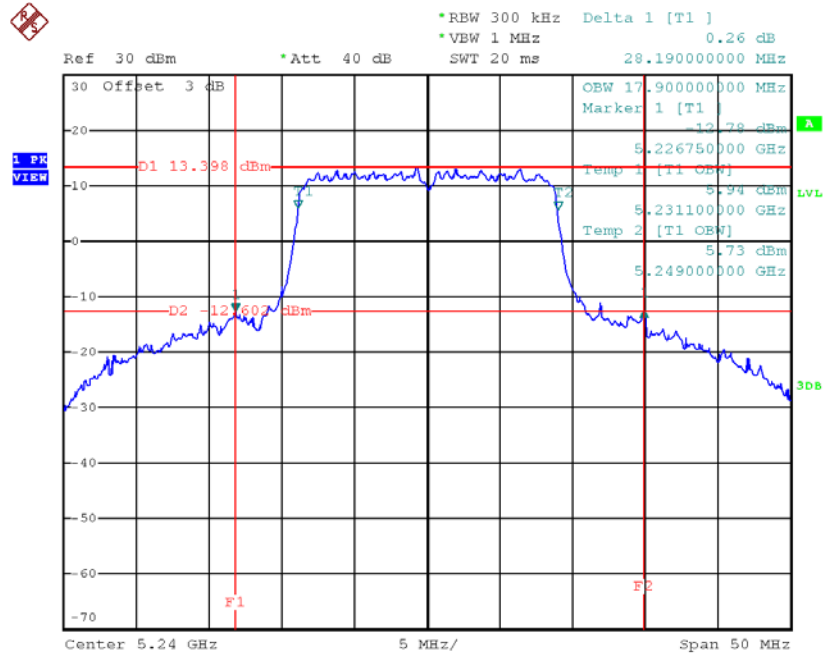

Date: 27.AUG.2018 15:23:56

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.80	36.20
CH46	5230	52.00	36.40