

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


9. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
10. RBW = 1MHz
11. VBW $\geq 1/T$
12. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
13. Detector = Peak
14. Sweep time = auto
15. Trace mode = max hold
16. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup

1GHz ~ 18GHz Test Setup:

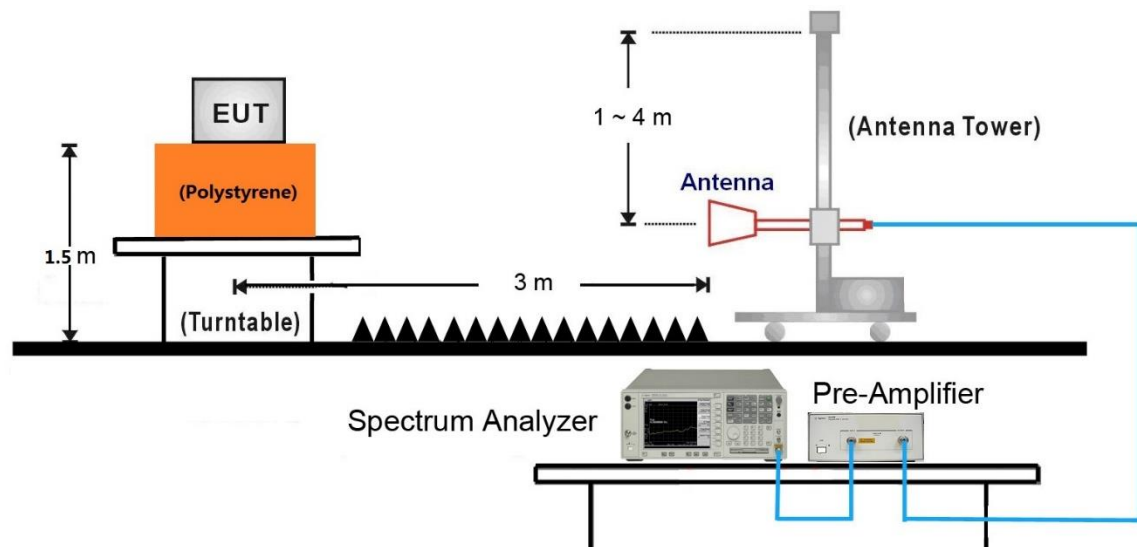


18GHz ~40GHz Test Setup:

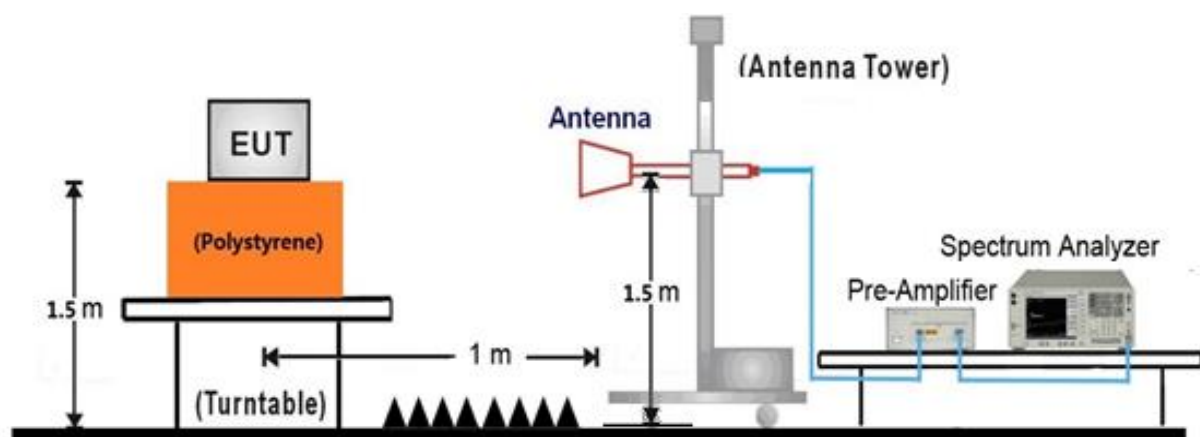

7.9.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

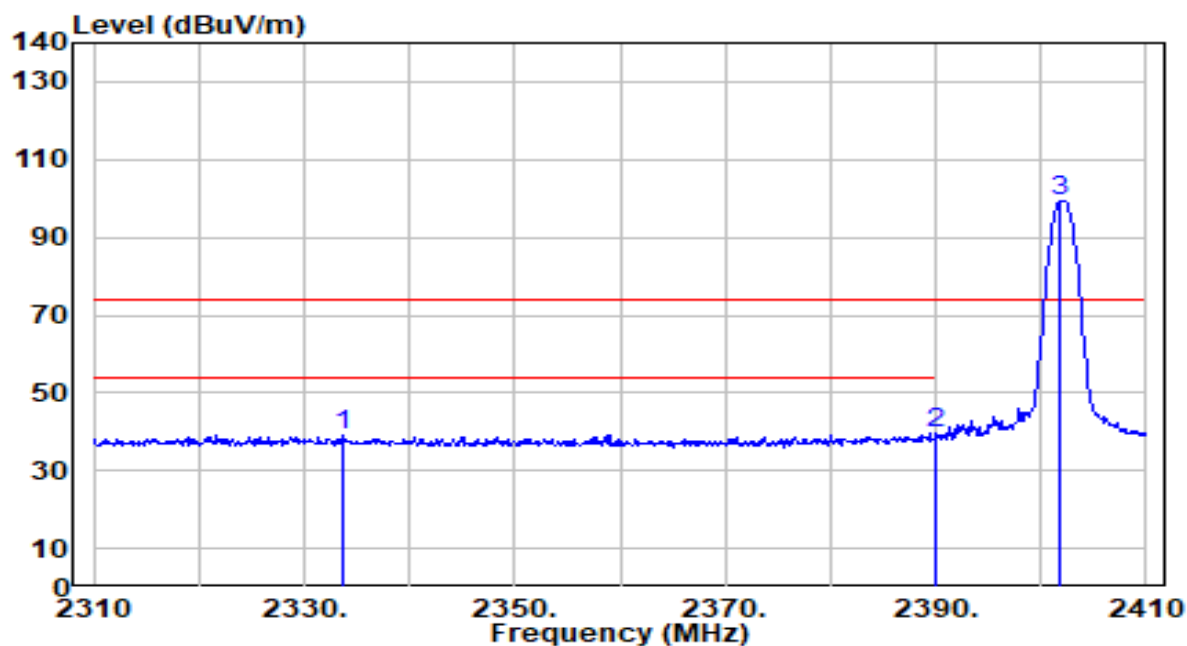


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2333.600	44.32	-5.02	39.30	-34.70	74.00	117	288	Peak
2	* 2390.000	44.44	-5.00	39.44	-34.56	74.00	117	288	Peak
3	2401.900	104.43	-4.99	99.44	N/A	N/A	117	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

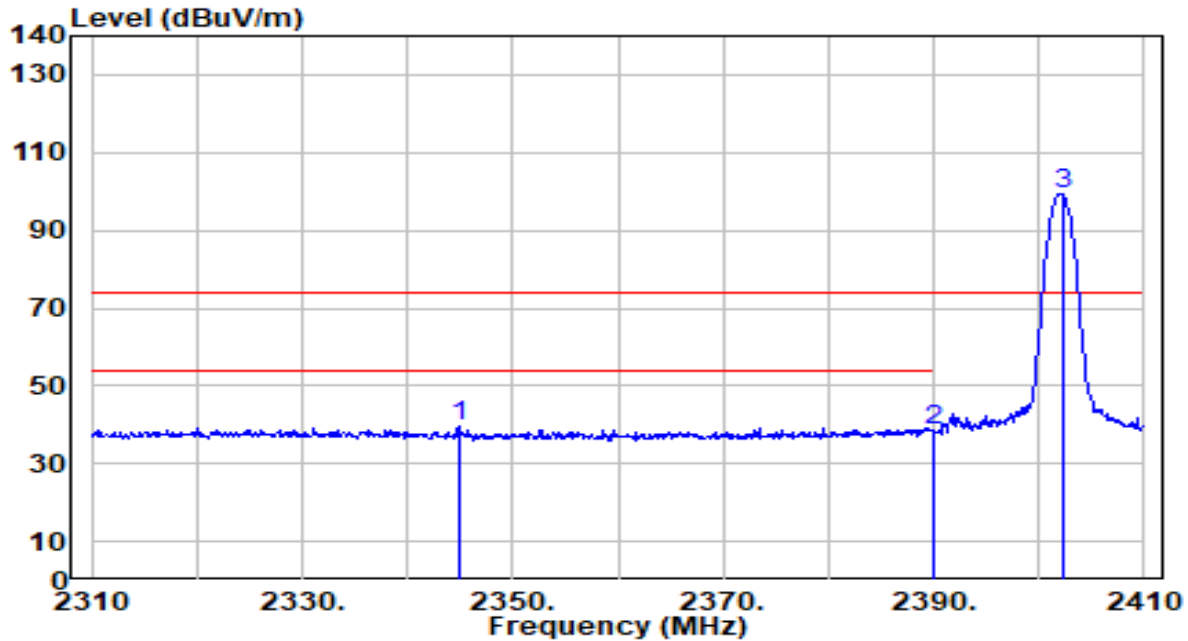


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2344.900	44.59	-5.02	39.58	-34.42	74.00	100	4	Peak
2	2390.000	43.68	-5.00	38.68	-35.32	74.00	100	4	Peak
3	2402.200	104.13	-4.99	99.14	N/A	N/A	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

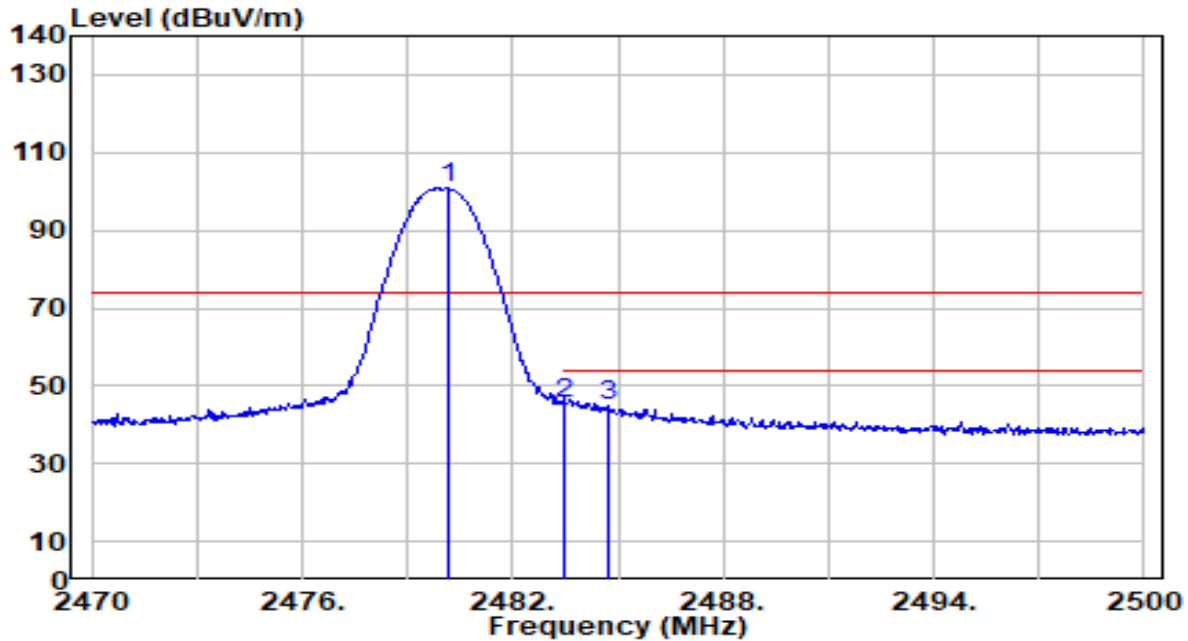


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.140	105.46	-4.80	100.66	N/A	N/A	100	288	Peak
2	* 2483.500	50.34	-4.79	45.55	-28.45	74.00	100	288	Peak
3	2484.730	49.50	-4.79	44.71	-29.29	74.00	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

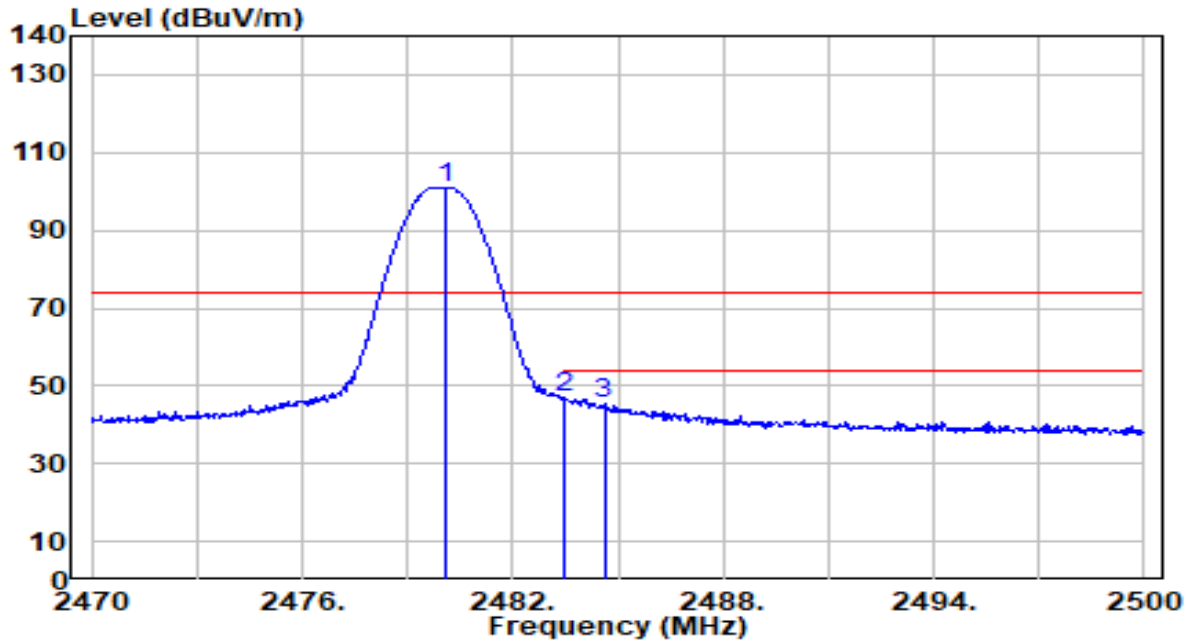


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.110	105.95	-4.80	101.15	N/A	N/A	100	45	Peak
2	* 2483.500	51.81	-4.79	47.02	-26.98	74.00	100	45	Peak
3	2484.610	50.03	-4.79	45.25	-28.75	74.00	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

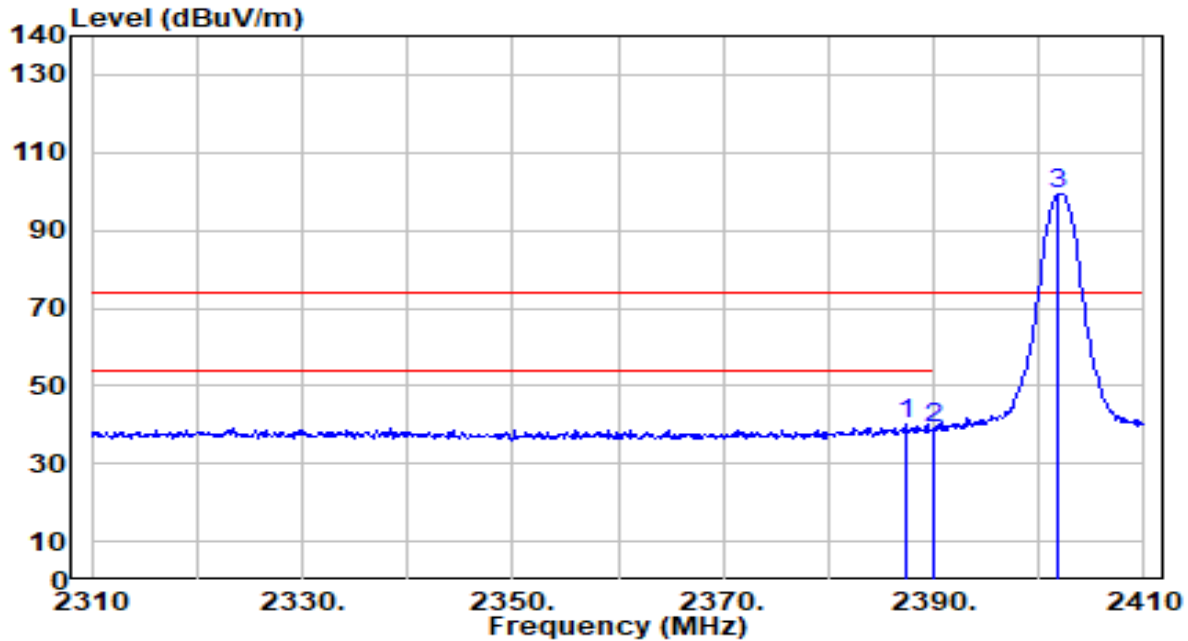


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.300	45.20	-5.00	40.20	-33.80	74.00	100	288	Peak
2	2390.000	44.23	-5.00	39.23	-34.77	74.00	100	288	Peak
3	2401.900	104.50	-4.99	99.52	N/A	N/A	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

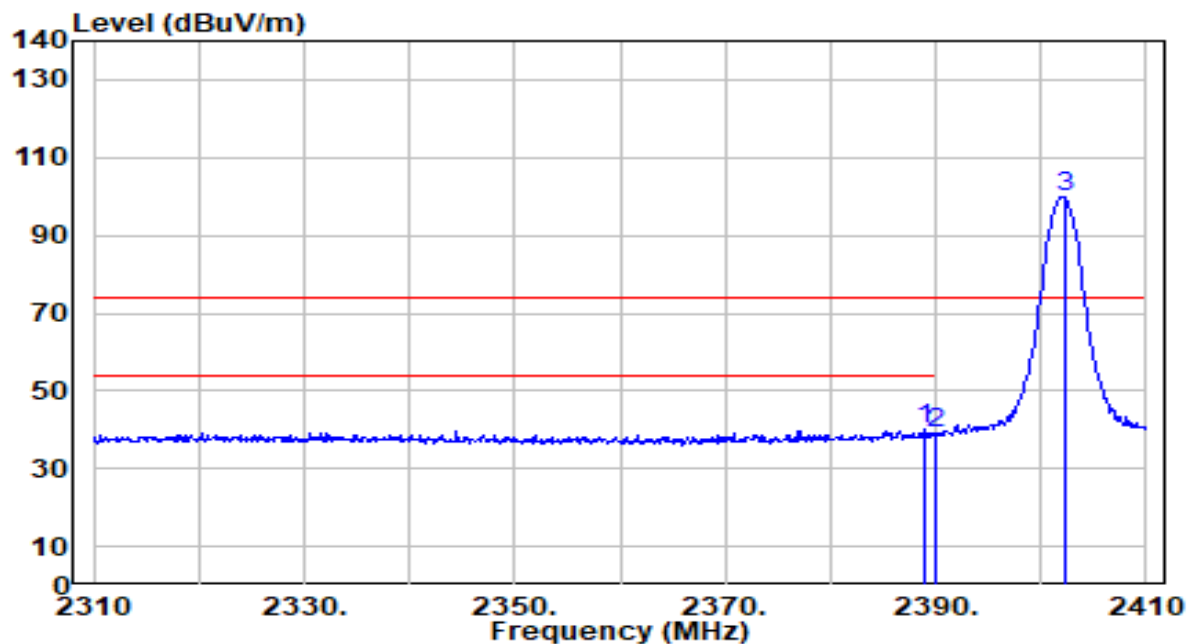


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	45.20	-5.00	40.21	-33.79	74.00	105	23	Peak
2		2390.000	44.00	-5.00	39.00	-35.00	74.00	105	23	Peak
3		2402.200	104.59	-4.99	99.60	N/A	N/A	105	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

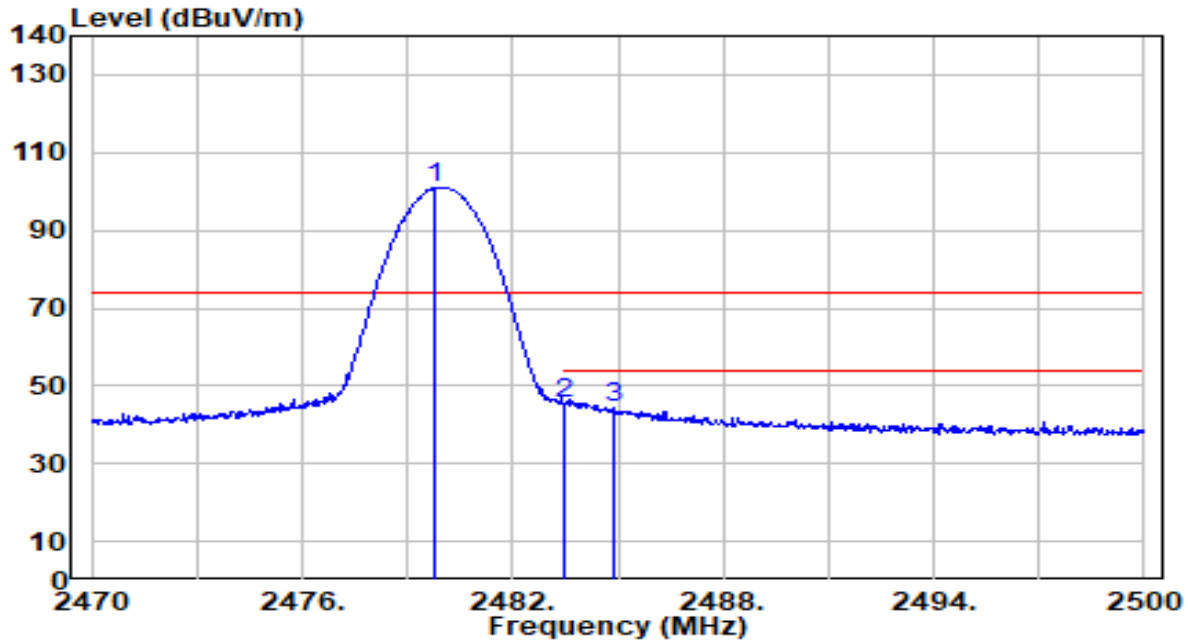


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	105.53	-4.80	100.74	N/A	N/A	100	288	Peak
2	* 2483.500	50.26	-4.79	45.47	-28.53	74.00	100	288	Peak
3	2484.850	49.28	-4.79	44.49	-29.51	74.00	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

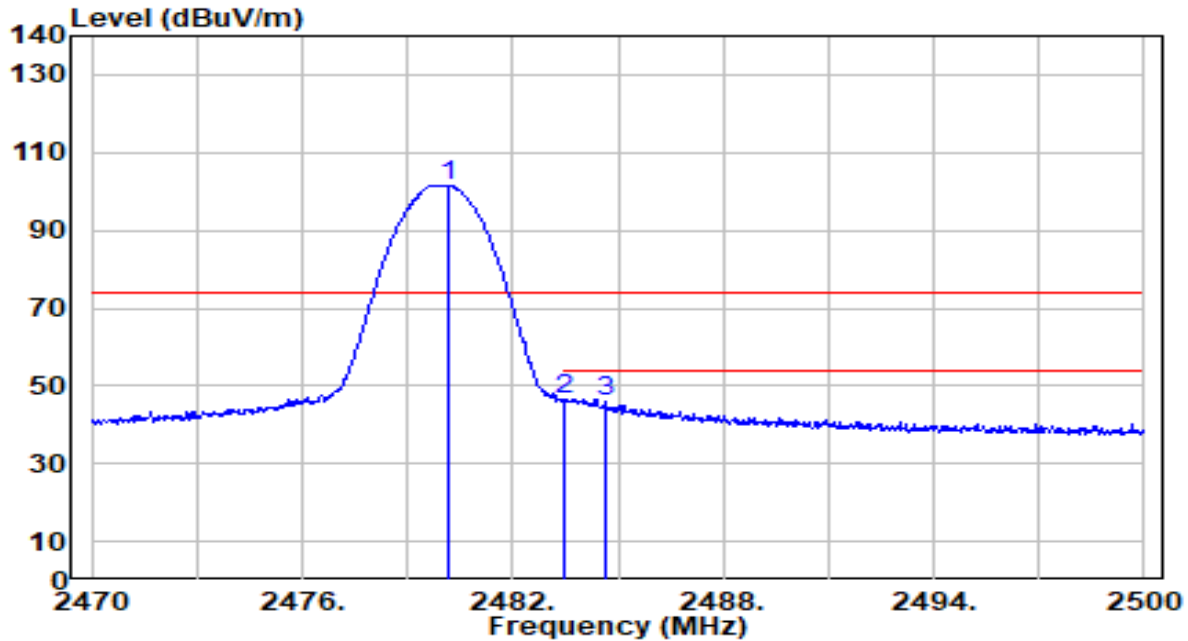


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.140	106.46	-4.80	101.66	N/A	N/A	116	19	Peak
2	* 2483.500	51.11	-4.79	46.32	-27.68	74.00	116	19	Peak
3	2484.640	50.83	-4.79	46.04	-27.96	74.00	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

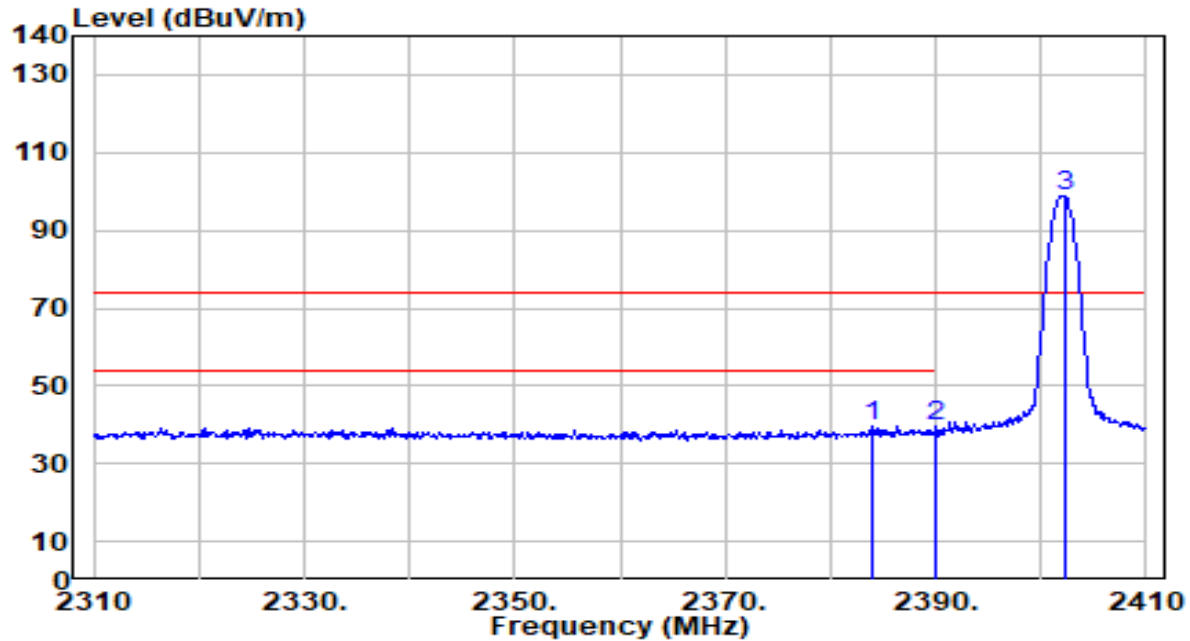


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.900	44.60	-5.00	39.61	-34.39	74.00	100	186	Peak
2		2390.000	44.39	-5.00	39.39	-34.61	74.00	100	186	Peak
3		2402.200	103.64	-4.99	98.65	N/A	N/A	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

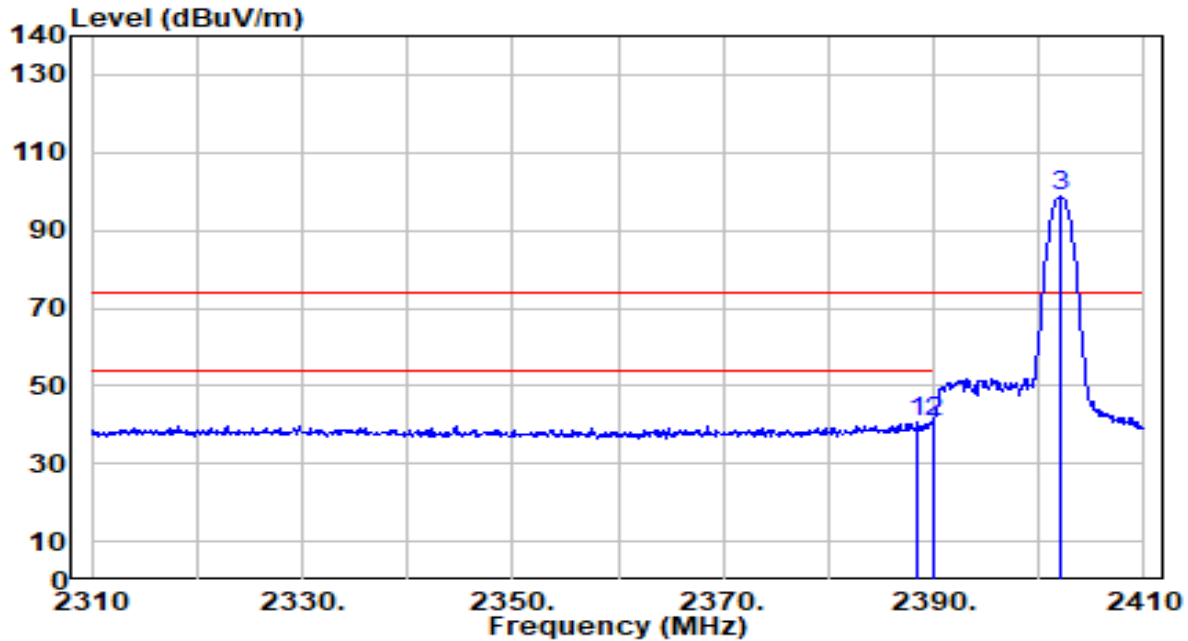


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.500	45.92	-5.00	40.92	-33.08	74.00	100	276	Peak
2	2390.000	45.56	-5.00	40.56	-33.44	74.00	100	276	Peak
3	2402.000	103.53	-4.99	98.54	N/A	N/A	100	276	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C / 63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

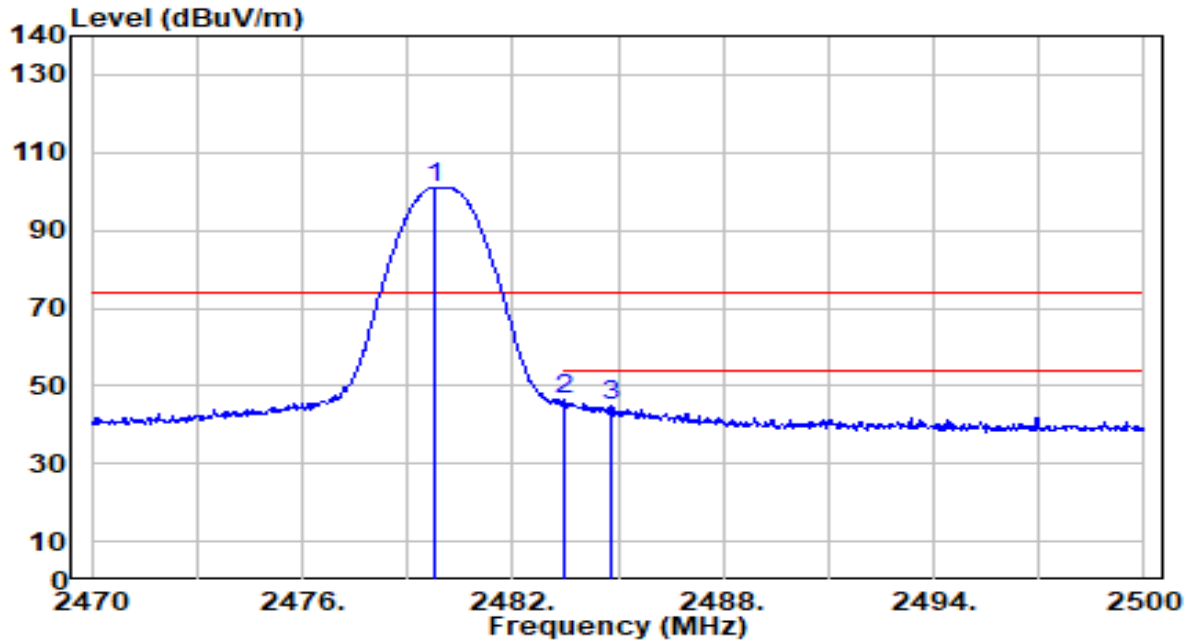


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	105.95	-4.80	101.16	N/A	N/A	101	216	Peak
2	* 2483.500	51.42	-4.79	46.63	-27.37	74.00	101	216	Peak
3	2484.790	49.55	-4.79	44.76	-29.24	74.00	101	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

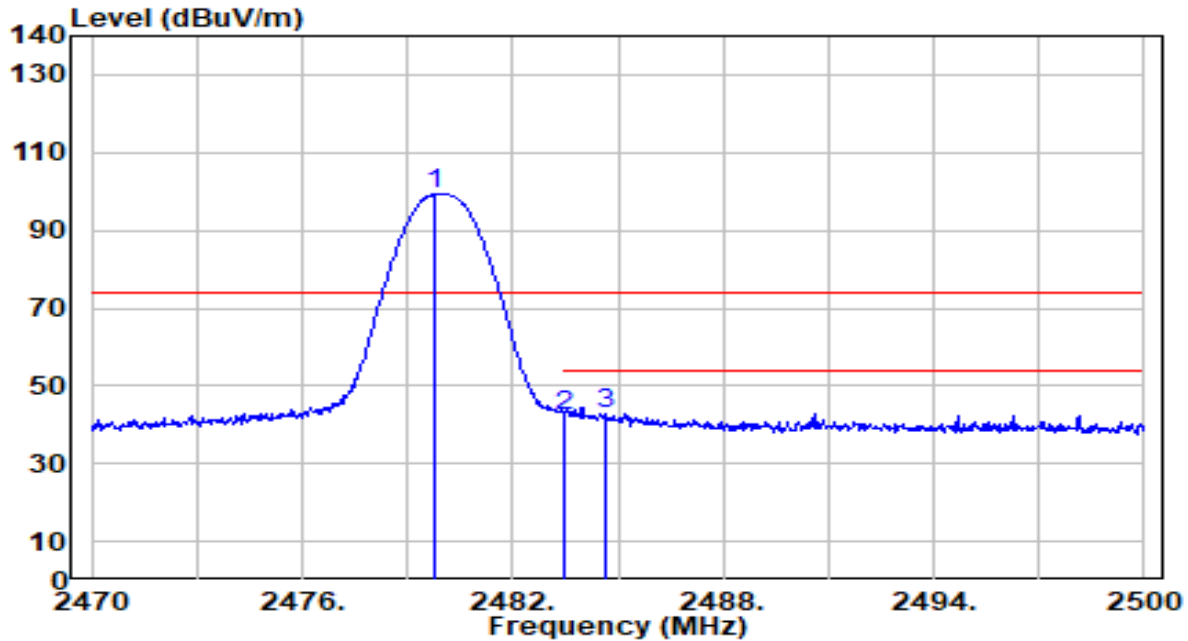


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	103.92	-4.80	99.12	N/A	N/A	100	278	Peak
2	2483.500	47.32	-4.79	42.53	-31.47	74.00	100	278	Peak
3	* 2484.640	47.76	-4.79	42.98	-31.02	74.00	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

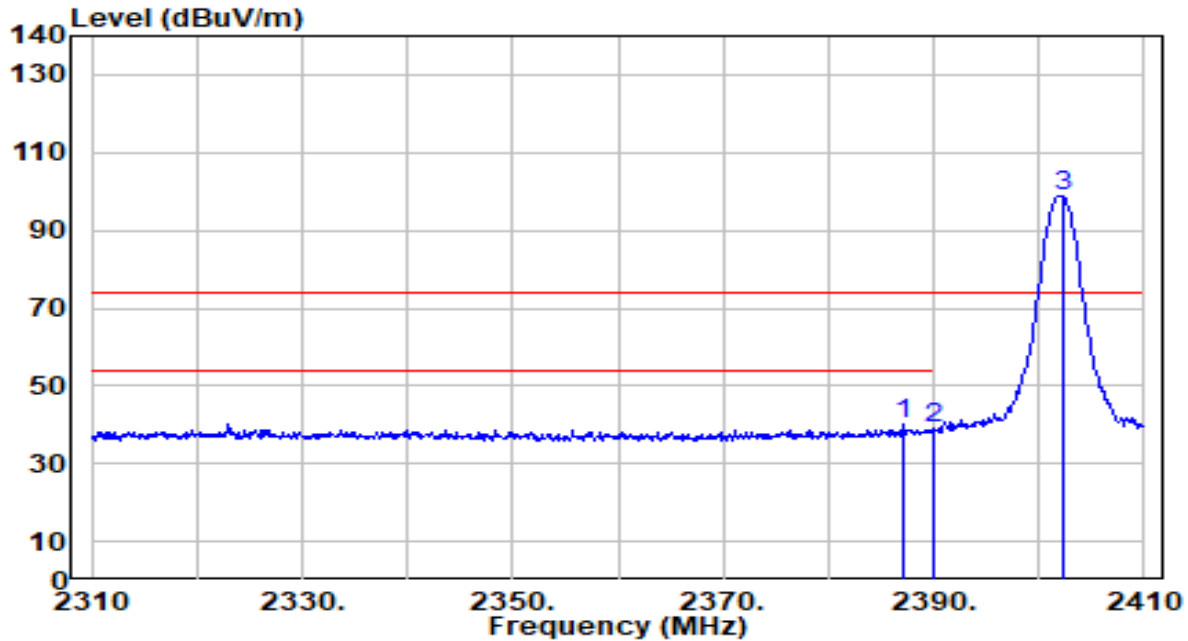


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.100	45.25	-5.00	40.26	-33.74	74.00	100	185	Peak
2		2390.000	44.00	-5.00	39.00	-35.00	74.00	100	185	Peak
3		2402.200	104.01	-4.99	99.03	N/A	N/A	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

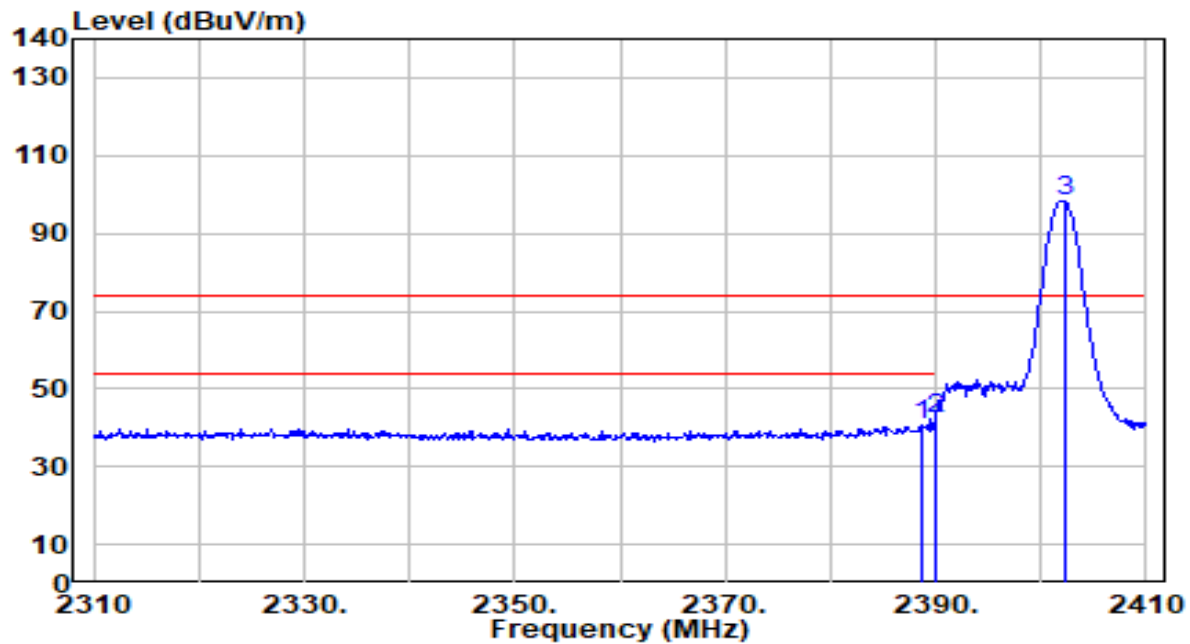


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.700	45.45	-5.00	40.45	-33.55	74.00	100	276	Peak
2	* 2390.000	47.40	-5.00	42.41	-31.59	74.00	100	276	Peak
3	2402.200	103.41	-4.99	98.42	N/A	N/A	100	276	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

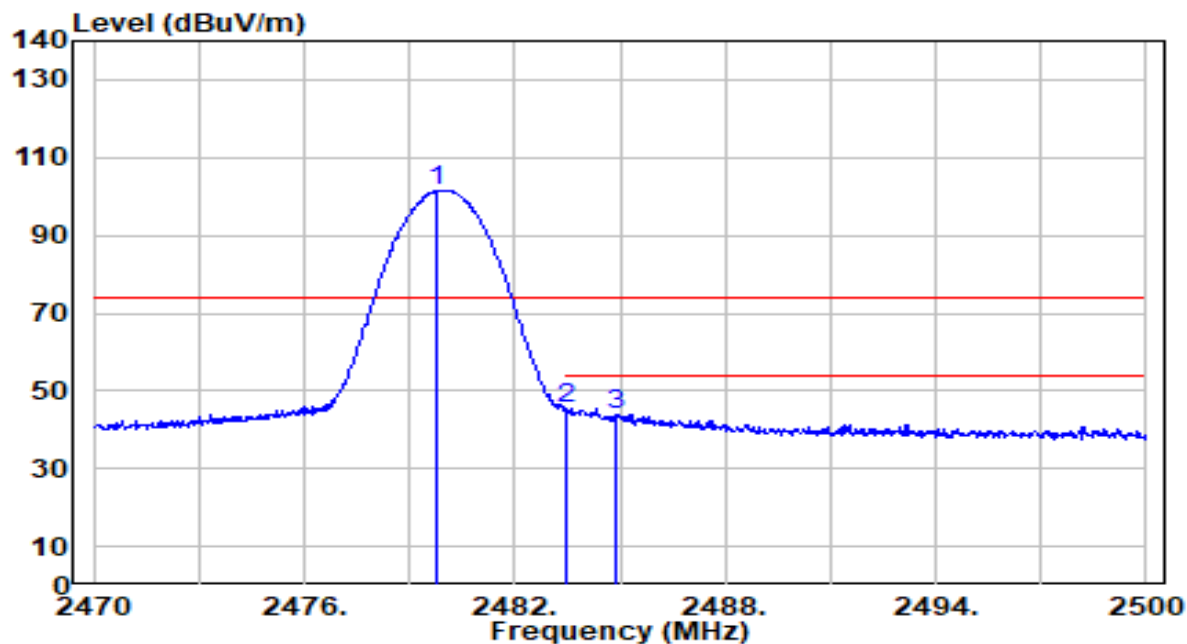


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	106.08	-4.80	101.28	N/A	N/A	100	216	Peak
2	* 2483.500	50.22	-4.79	45.43	-28.57	74.00	100	216	Peak
3	2484.850	48.57	-4.79	43.78	-30.22	74.00	100	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C / 63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

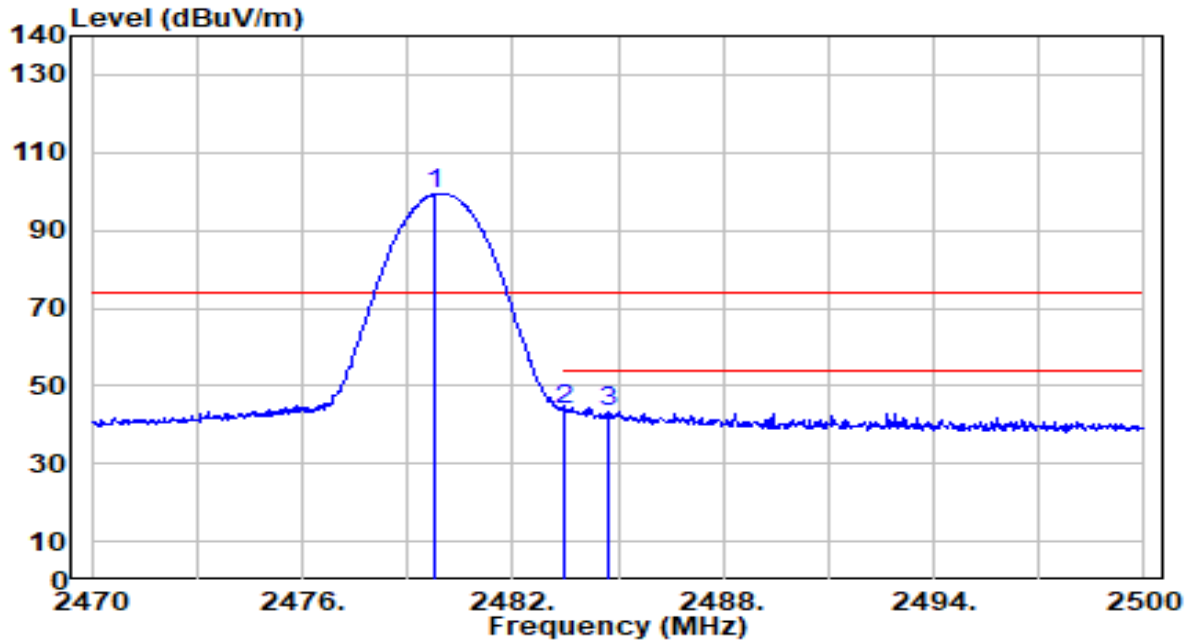

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	103.97	-4.80	99.17	N/A	N/A	100	278	Peak
2	* 2483.500	48.61	-4.79	43.82	-30.18	74.00	100	278	Peak
3	2484.700	47.92	-4.79	43.13	-30.87	74.00	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

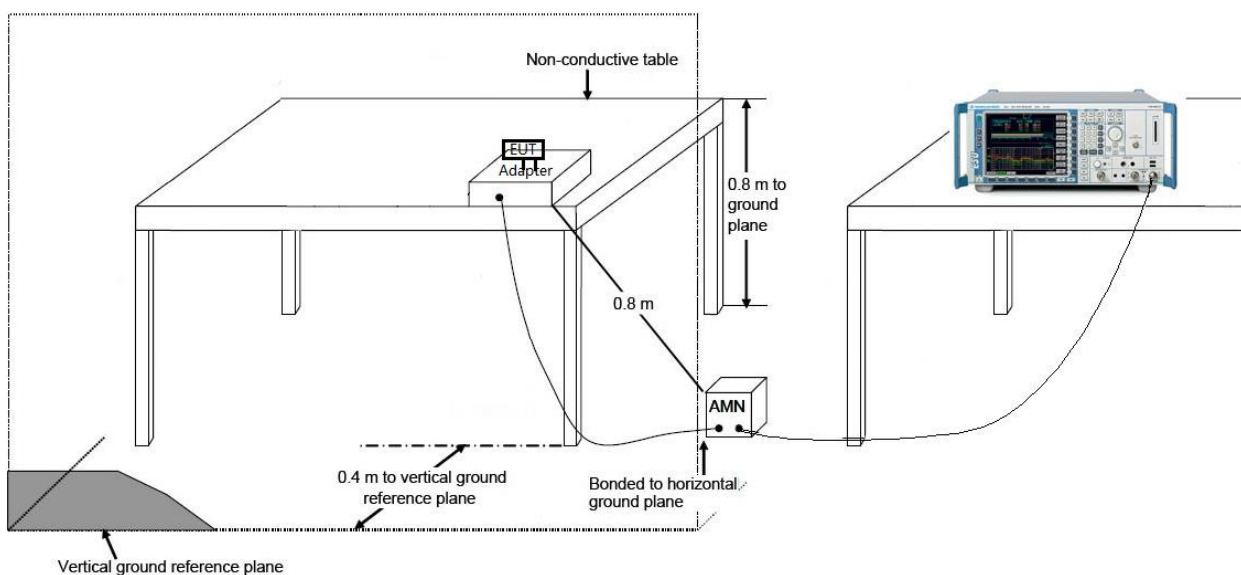

7.10.3. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 120V/60Hz

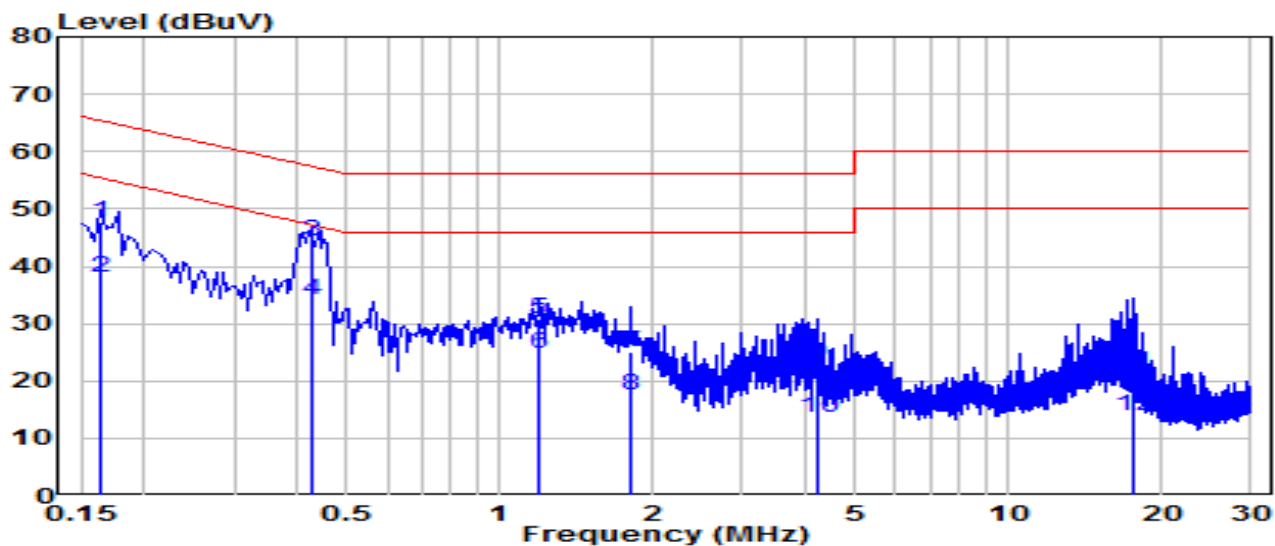


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	38.03	9.62	47.65	-17.64	65.28	QP
2	0.163	28.55	9.62	38.17	-17.12	55.28	Average
3	* 0.424	34.78	9.64	44.42	-12.94	57.36	QP
4	* 0.424	24.58	9.64	34.22	-13.14	47.36	Average
5	1.198	21.10	9.67	30.77	-25.23	56.00	QP
6	1.198	15.08	9.67	24.75	-21.25	46.00	Average
7	1.801	15.32	9.69	25.00	-31.00	56.00	QP
8	1.801	7.93	9.69	17.61	-28.39	46.00	Average
9	4.213	13.18	9.73	22.91	-33.09	56.00	QP
10	4.213	3.90	9.73	13.63	-32.37	46.00	Average
11	17.595	11.67	9.91	21.58	-38.42	60.00	QP
12	17.595	3.86	9.91	13.77	-36.23	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 120V/60Hz

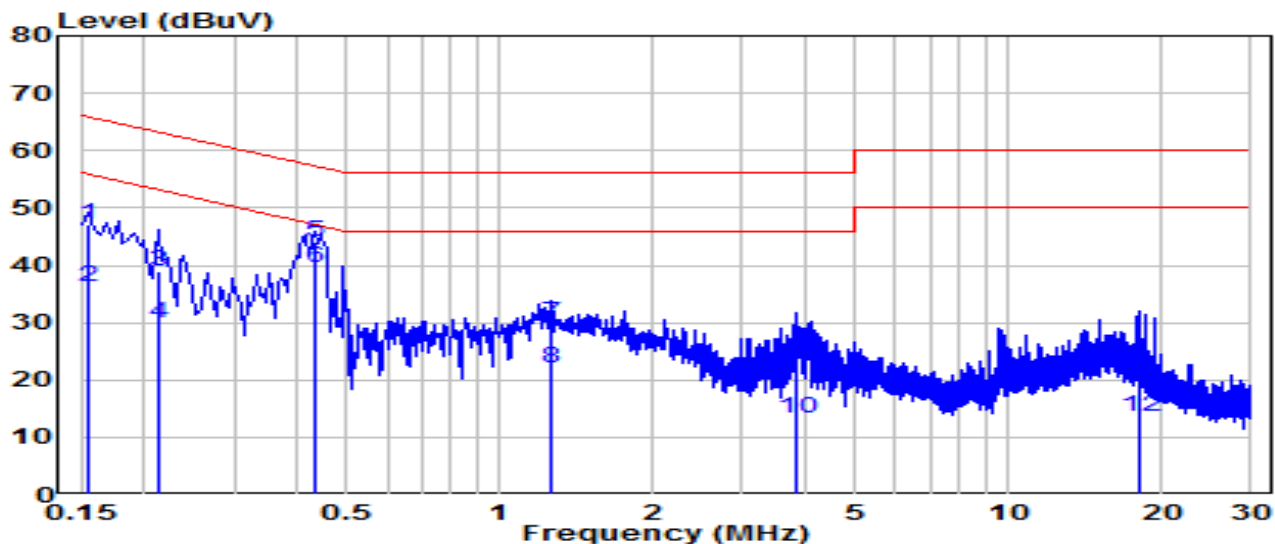


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	37.38	9.62	47.00	-18.76	65.75	QP
2		0.154	26.49	9.62	36.11	-19.65	55.75	Average
3		0.213	29.30	9.62	38.92	-24.17	63.09	QP
4		0.213	20.26	9.62	29.88	-23.21	53.09	Average
5	*	0.433	34.47	9.64	44.10	-13.08	57.19	QP
6	*	0.433	29.82	9.64	39.46	-7.72	47.19	Average
7		1.257	20.09	9.68	29.76	-26.24	56.00	QP
8		1.257	12.44	9.68	22.12	-23.88	46.00	Average
9		3.817	13.54	9.73	23.27	-32.73	56.00	QP
10		3.817	3.55	9.73	13.28	-32.72	46.00	Average
11		18.022	10.53	9.97	20.50	-39.50	60.00	QP
12		18.022	3.58	9.97	13.55	-36.45	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 240V/60Hz

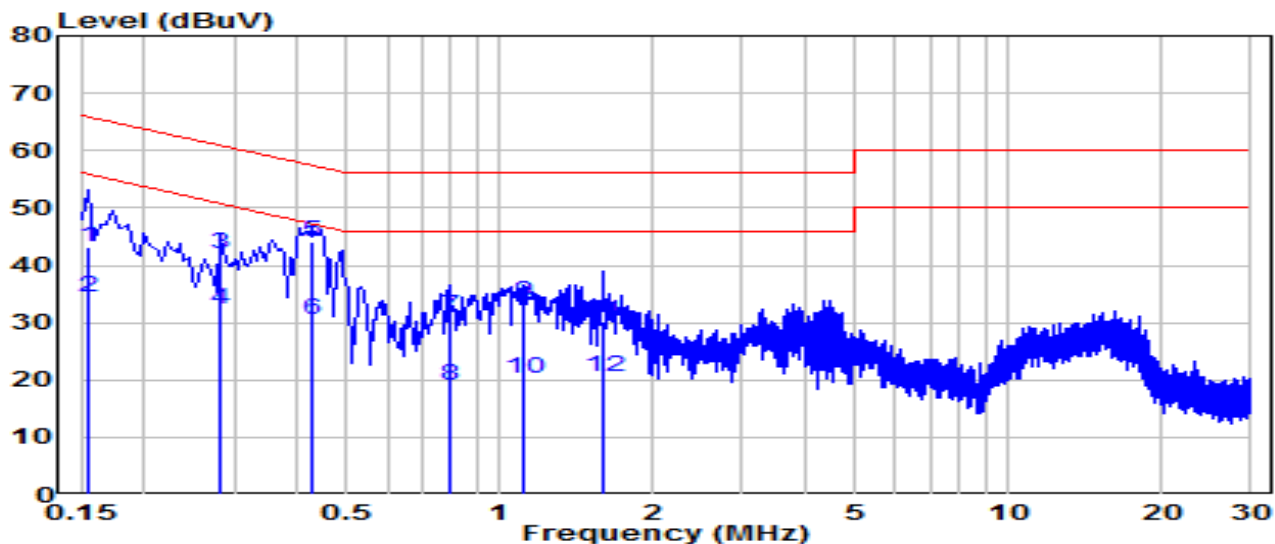


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	33.55	9.62	43.17	-22.58	65.75	QP
2		0.154	24.93	9.62	34.55	-21.20	55.75	Average
3		0.280	32.38	9.63	42.01	-18.79	60.80	QP
4		0.280	22.58	9.63	32.20	-18.60	50.80	Average
5	*	0.424	34.55	9.64	44.19	-13.17	57.36	QP
6	*	0.424	20.97	9.64	30.61	-16.75	47.36	Average
7		0.793	21.53	9.66	31.19	-24.81	56.00	QP
8		0.793	9.34	9.66	19.00	-27.00	46.00	Average
9		1.108	23.71	9.67	33.38	-22.62	56.00	QP
10		1.108	10.44	9.67	20.11	-25.89	46.00	Average
11		1.599	20.40	9.68	30.08	-25.92	56.00	QP
12		1.599	10.91	9.68	20.60	-25.40	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 240V/60Hz

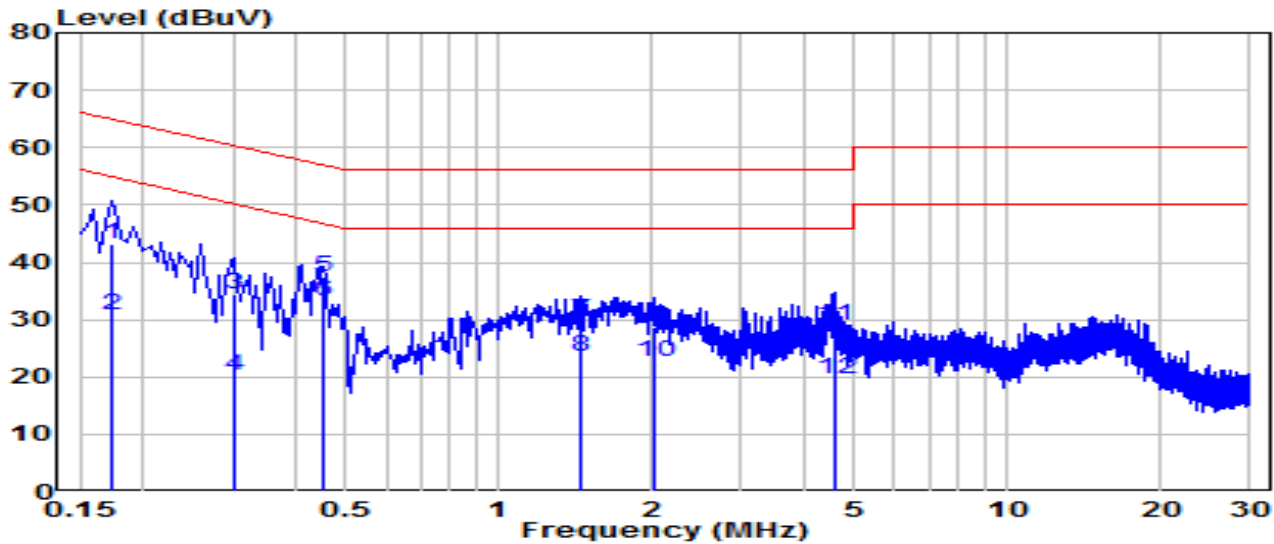


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.172	33.54	9.62	43.16	-21.68	64.84	QP
2		0.172	21.13	9.62	30.75	-24.09	54.84	Average
3		0.303	24.77	9.63	34.40	-25.76	60.16	QP
4		0.303	10.74	9.63	20.37	-29.79	50.16	Average
5	*	0.451	27.66	9.64	37.30	-19.55	56.85	QP
6	*	0.451	23.68	9.64	33.32	-13.53	46.85	Average
7		1.455	20.11	9.68	29.78	-26.22	56.00	QP
8		1.455	13.74	9.68	23.42	-22.58	46.00	Average
9		2.022	18.93	9.69	28.62	-27.38	56.00	QP
10		2.022	13.05	9.69	22.74	-23.26	46.00	Average
11		4.591	19.33	9.74	29.07	-26.93	56.00	QP
12		4.591	9.79	9.74	19.53	-26.47	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C / 60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 120V/60Hz

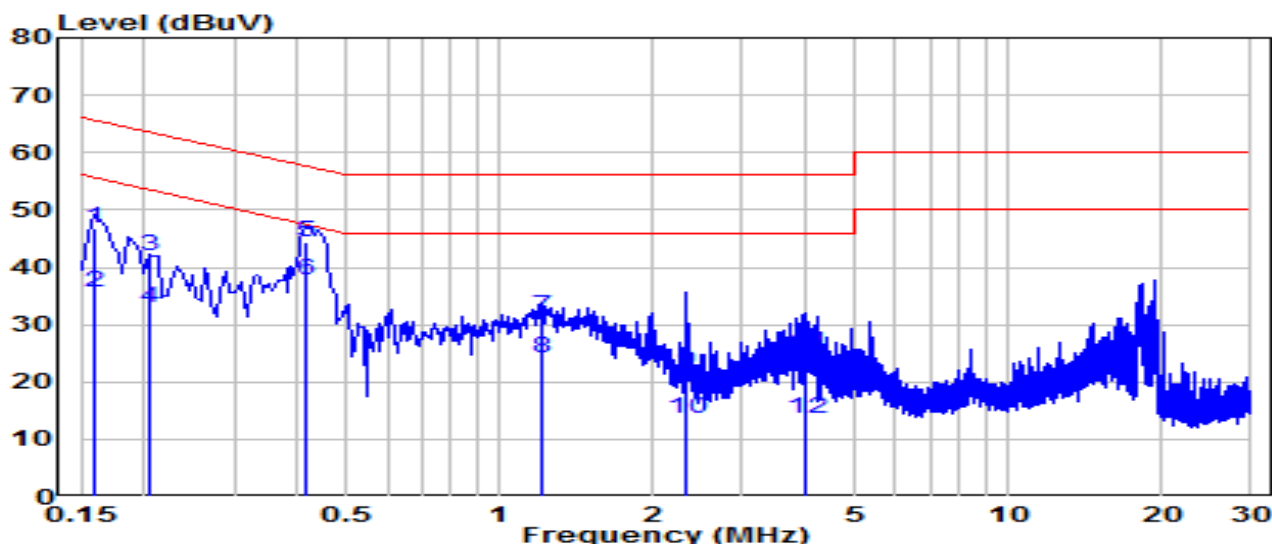


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.159	37.18	9.62	46.80	-18.71	65.52	QP
2		0.159	26.15	9.62	35.77	-19.74	55.52	Average
3		0.204	32.43	9.62	42.05	-21.39	63.45	QP
4		0.204	23.35	9.62	32.98	-20.47	53.45	Average
5	*	0.415	34.84	9.64	44.48	-13.06	57.54	QP
6	*	0.415	27.96	9.64	37.60	-9.94	47.54	Average
7		1.203	21.65	9.67	31.32	-24.68	56.00	QP
8		1.203	14.50	9.67	24.18	-21.82	46.00	Average
9		2.332	12.06	9.70	21.76	-34.24	56.00	QP
10		2.332	3.87	9.70	13.57	-32.43	46.00	Average
11		4.011	15.41	9.73	25.14	-30.86	56.00	QP
12		4.011	3.83	9.73	13.56	-32.44	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 120V/60Hz

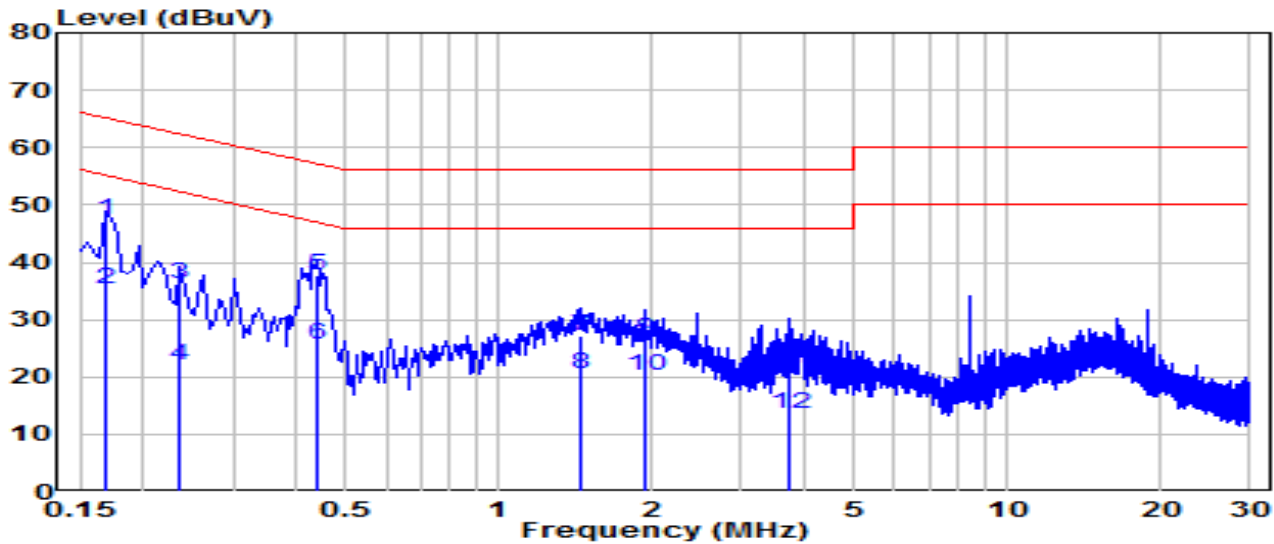


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.168	37.86	9.62	47.49	-17.57	65.06	QP
2	*	0.168	25.75	9.62	35.37	-19.69	55.06	Average
3		0.235	26.61	9.62	36.23	-26.02	62.25	QP
4		0.235	12.51	9.62	22.13	-30.12	52.25	Average
5		0.438	27.98	9.64	37.62	-19.48	57.10	QP
6		0.438	15.88	9.64	25.52	-21.58	47.10	Average
7		1.441	17.63	9.68	27.31	-28.69	56.00	QP
8		1.441	10.94	9.68	20.62	-25.38	46.00	Average
9		1.936	16.81	9.69	26.49	-29.51	56.00	QP
10		1.936	10.44	9.69	20.13	-25.87	46.00	Average
11		3.732	11.72	9.72	21.44	-34.56	56.00	QP
12		3.732	3.83	9.72	13.55	-32.45	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 240V/60Hz

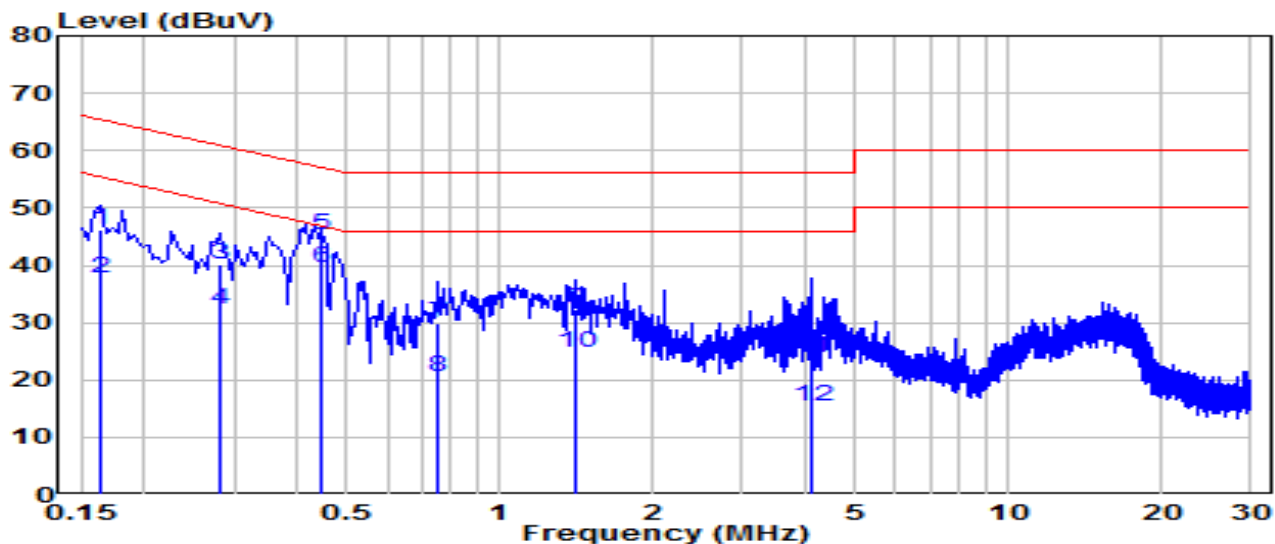


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.163	36.68	9.62	46.30	-18.99	65.28	QP
2		0.163	28.21	9.62	37.83	-17.45	55.28	Average
3		0.280	30.48	9.63	40.10	-20.70	60.80	QP
4		0.280	22.69	9.63	32.32	-18.48	50.80	Average
5	*	0.442	35.78	9.64	45.42	-11.60	57.02	QP
6	*	0.442	29.92	9.64	39.55	-7.46	47.02	Average
7		0.757	20.12	9.66	29.78	-26.22	56.00	QP
8		0.757	10.96	9.66	20.62	-25.38	46.00	Average
9		1.410	22.74	9.68	32.42	-23.58	56.00	QP
10		1.410	15.14	9.68	24.82	-21.18	46.00	Average
11		4.110	14.25	9.73	23.98	-32.02	56.00	QP
12		4.110	5.70	9.73	15.43	-30.57	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 240V/60Hz

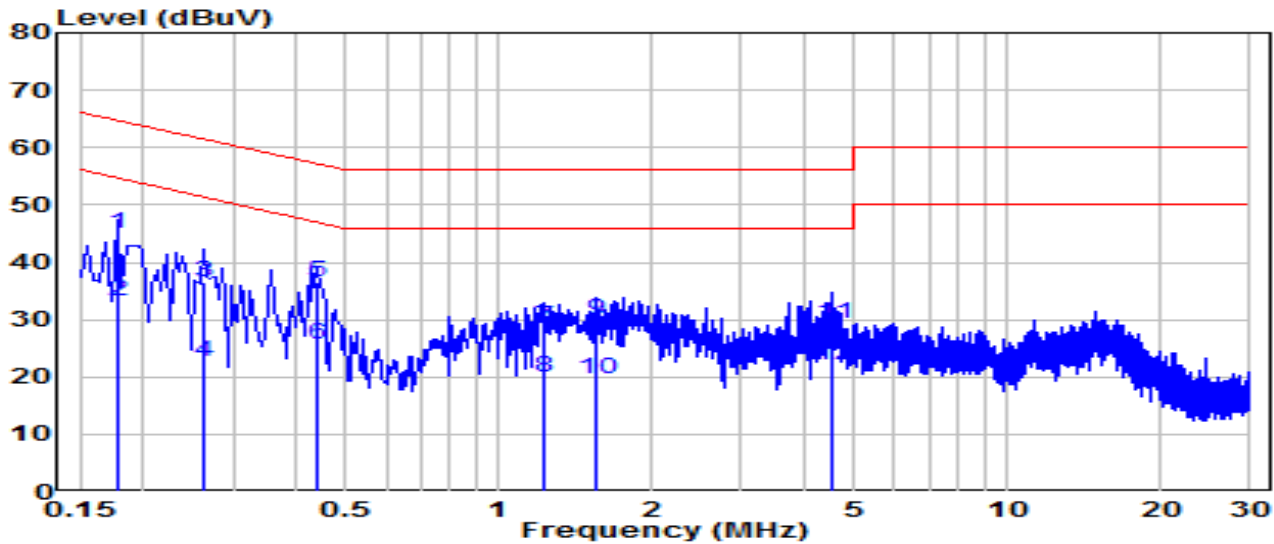

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.177	35.30	9.62	44.92	-19.70	64.63	QP
2	*	0.177	23.68	9.62	33.30	-21.32	54.63	Average
3		0.262	26.94	9.63	36.56	-24.79	61.35	QP
4		0.262	12.88	9.63	22.51	-28.84	51.35	Average
5		0.438	26.82	9.64	36.46	-20.64	57.10	QP
6		0.438	16.00	9.64	25.64	-21.46	47.10	Average
7		1.225	19.11	9.67	28.79	-27.21	56.00	QP
8		1.225	10.25	9.67	19.92	-26.08	46.00	Average
9		1.554	20.22	9.68	29.90	-26.10	56.00	QP
10		1.554	10.00	9.68	19.68	-26.32	46.00	Average
11		4.546	19.41	9.74	29.15	-26.85	56.00	QP
12		4.546	12.16	9.74	21.90	-24.10	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Digital Wireless Stereo Earphones, FCC ID: ACJ-EAH-AZ40M2** is in compliance with Part 15C of the FCC Rules.

_____ The End _____