折页说明书：128g铜版纸四色印刷

C6 M68 Y100 K0

285.00 mm

155mm

620.00 mm

尺寸: 285X620 毫米

ROYAL KLUDGE

RK M87 MECHANICAL KEYBOARD

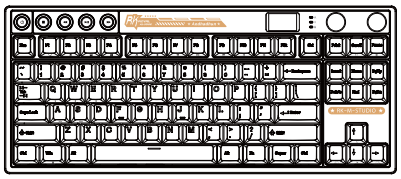

FCC WARNING:

WHEN USING A KEYBOARD:

GUARANTEE
Non-human damage
12-month warranty

PRODUCT BASIC

Manual	Switch and Keycaps Puller	Keyboard	USB Type-c cable	2.4G Dongle
●Size: 366.3(L)×155.5(W)×40.7(H)±2	●Backlight: RGB	●Version: USB/2.4G/BT	●Layout: 88keys	●Switch: Mechanical switches

FUNCTION KEYS

Key Functions from left to right: Long press for three seconds to turn on/off; Stop; Last Song; Play/Pause; Next Song

WIRED MODE

1. 2.

Method 1: Insert the USB cable, press the left knob to enter the menu interface, select the USB mode, and confirm. The display screen will show "USB Success".

Method 2: Insert the USB cable and press Fn+R briefly to switch to wired mode.

It supports 5V 1A rated power supply to charge.

INDICATOR LIGHT / KNOB FUNCTION

A. Caps Lock 2. Scroll Lock 3. Win Lock

Right knob: Clockwise Volume + / Counterclockwise Volume - / Press to mute

Volume calibration:
If the volume display is incorrect, it will be automatically calibrated after the driver is turned on. Driver download address: www.rkgaming.com

Left Knob: Short press or rotate the knob to enter the settings menu. / Short press for confirmation, rotate to select.

MANUAL TIME SETTING

Do the following from the main Time screen:

YY:MM:DD
HH:MM:SS

1.Access to time setting
Method 1: Press and hold the Left Knob for approximately 5 seconds until the year starts flashing, entering the manual adjustment mode

Method 2: Select Time Settings in the menu

2.Press the Left knob in turn to adjust the Date(YY/MM/DD) and Time (HH/MM/SS) respectively

3.Similarly, rotate the knob to adjust the numbers: Clockwise to increase, Counterclockwise to decrease.

4.After completing the settings.

4.1:Press and hold the knob once more for 5s to save and exit Or Using the left knob to select "Yes"

4.2:Alternatively, you can short press Fn+T to quickly save and exit.

BT CONNECTION

1. 2.

BT connection with Knob:

1.Long press " " for 3 seconds to boot and press the left knob to access the menu. Use the left knob to select any of the following icons: " " " " ".

Pairing: For example, using the knob to select " " and then press and hold the left knob. The screen will display " " to indicate the pairing process is active.

Reconnection: For example, select " " using the left knob and then press it briefly. The screen will display " " to indicate the device has entered the reconnection state.

BT connection with combination keys:

2.Long press " " for 3 seconds to boot.
Pairing: Press and hold Fn+Q / W / E for 3 seconds, for example, long-press Fn+Q, the display screen will show " " to indicate the pairing process is active.

Reconnection: Press Fn+Q / W / E, for example, press Fn+Q briefly, The screen will display " " to indicate the device has entered the reconnection state.

3.Turn on your computer/mobile devices, BT and search for the keyboard. Connect to it with the displayed name: RK M87.

4.After the connection is successful, the display screen will show " " and return to the Home screen automatically.

Similarly, follow the steps above to store 3 groups of different BT devices.

Friendly reminder: Prior to switching, kindly ensure that you have already paired three sets of BT devices.

2.4G CONNECTION

1. 2.

2.4G connection with Knob:

1.Long press " " for 3 seconds to boot and press the left knob to access the menu. Use the left knob to select the following icon: " ".

2.Press the left knob briefly to switch the keyboard to 2.4G mode, and the screen will display " " to indicate the keyboard is in reconnection state, and then insert the 2.4G dongle.

3.After a successful reconnection, the display screen will show " " and return to the Home screen automatically.

2.4G pairing with knob:

1.Press the left knob to access the menu, choose the icon " " and long-press the left knob until the screen shows " ", and then insert the 2.4G dongle.

2.After a successful pairing, the display screen will show " " and return to the Home screen.

2.4G pairing with combination keys:

1.Long-press Fn+P for 3 seconds until the display screen shows " " and then insert the receiver.

2.After a successful pairing, the display screen will show " " and return to the Home screen.

Friendly reminder: The devices are already paired at the factory, so there is no need to pair them again.

2.4G Storage Area

DISPLAY OPERATION

- Volume Adjustment
- Caps Lock
- Win Lock
- Win mode
- Mac mode
- Wired mode
- 2.4G
- BT

Home/Layout/Language
1. The main screen can be set to
1).Time interface
2).Customizable GIF image (with driver support)
2. Layout switching: Win/Mac
3. Language selection: English/Chinese

Backlight Effects/Colour Settings
1. Select the effect icon and press left knob. Use the knob to choose different backlight effects.
2. Select the colour icon and press left knob. Use the knob to choose different backlight colour.

Backlight Brightness/Speed Settings
1. Select the Brightness icon and press left knob. Use the knob to adjust backlight brightness.
2. Select the Speed icon and press left knob. Use the knob to adjust backlight effect speed.

BACKLIGHT CONTROL

- Fn + ↑ : Backlight brightness +
- Fn + ↓ : Backlight brightness -
- Fn + ← : Backlight speed -
- Fn + → : Backlight speed +
- Fn + Pause : (RGB Version only) Switch backlight color
- Fn + PgUp : Switch dynamic backlight effects
- Fn + Space Bar : Press and hold for three seconds to restore factory settings
- Fn + Win : Locking WIN key and APP key functions

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620×285mm)-更新24-5-5.pdf 2024年5月6日 星期一

尺寸: 285X620 毫米

ROYAL KLUDGE

RK M87 MECHANICAL KEYBOARD

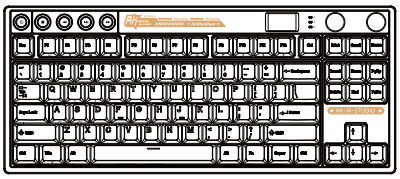

ISED STATEMENT:

BATTERIES:

GUARANTEE
Non-human damage
12-month warranty

CUSTOM BACKLIGHT SET

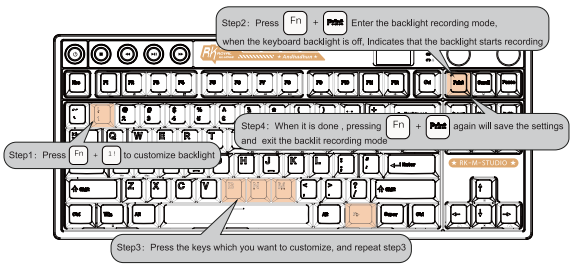

MULTIMEDIA KEY FOR WINDOWS

Windows system(Fn + A: switch to Windows system)

Fn + F1	Computer	Fn + F7	Last Song
Fn + F2	Browser	Fn + F8	Play / Pause
Fn + F3	Mailbox	Fn + F9	Next Song
Fn + F4	Calculator	Fn + F10	Mute
Fn + F5	Player	Fn + F11	Volume-
Fn + F6	Stop	Fn + F12	Volume+

MULTIMEDIA KEY FOR MAC

MAC system(Fn + S: switch to Mac system)

Fn + F1	Screen Brightness -	Fn + F8	Play / Pause
Fn + F2	Screen Brightness +	Fn + F9	Next Song
Fn + F5	Keyboard Backlight Brightness-	Fn + F10	Mute
Fn + F6	Keyboard Backlight Brightness+	Fn + F11	Volume-
Fn + F7	Last Song	Fn + F12	Volume+

Have an issue with one of our RK products?

Feel free to contact us with any product issues or questions.
We will reply as quickly as possible to ensure all your needs are handled.
For better technical support, please contact rkgaming@rkgaming.com

ROYAL KLUDGE

Executive standard:GB/T 1408.1-2010
Made in China www.rkgaming.com
Download Driver Address: www.rkgaming.com/Download/31/
1862739341

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: 772-英文说明书-100书写纸(620×285mm)-更新24-5-5.pdf 2024年5月6日 星期一