

FCC SAR Test Report

FCC ID : O57C640RTL8822

Report No. : BTL-FCC-SAR-1-2007T046D

Equipment : Notebook Computer

Model Name : Yoga 6 13ARE05

Series Model : Yoga 6 13ARE05*****; Yoga 6 13ALC6; Yoga 6 13ALC6***** (*=0~9, A~z, “_” or blank)

Brand Name : Lenovo

Applicant : Lenovo (Shanghai) Electronics Technology Co., Ltd.

Address : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer : Lenovo PC HK Limited

Address : 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

Date of Receipt : July. 30, 2021

Date of Test : Aug. 3, 2021 ~ Aug. 4, 2021

Issued Date : Aug. 13, 2021

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Justin Huang
Justin Huang, Engineer

Approved by : Herbert Liu
Herbert Liu, Section Manager



Certificate #5123.02

BTL Inc.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
1. GENERAL INFORMATION	6
1.1. GENERAL DESCRIPTION OF EUT	6
2. RF EMISSIONS MEASUREMENT	7
2.1. TEST FACILITY	7
2.2. MEASUREMENT UNCERTAINTY	7
2.3 WLAN ANTENNA INFORMATION:	9
2.4 THE MAXIMUM SAR1G VALUES	10
2.5 LABORATORY ENVIRONMENT	10
2.6 MAIN TEST INSTRUMENTS	11
3. SAR MEASUREMENTS SYSTEM CONFIGURATION	12
3.1. SAR MEASUREMENT SET-UP	12
3.1.1. TEST SETUP LAYOUT	12
3.2. DASY5 E-FIELD PROBE SYSTEM	13
3.2.1. EX3DV4 PROBE SPECIFICATION	13
3.2.2. E-FIELD PROBE CALIBRATION	14
3.2.3. OTHER TEST EQUIPMENT	15
3.2.4. SCANNING PROCEDURE	16
3.2.5. DATA STORAGE AND EVALUATION	17
3.2.6. DATA EVALUATION BY SEMCAD	18
4. TISSUE-EQUIVALENT LIQUID	20
4.1. TISSUE-EQUIVALENT LIQUID INGREDIENTS	20
4.2. TISSUE-EQUIVALENT LIQUID PROPERTIES	20
5. SYSTEM CHECK	22
5.1. DESCRIPTION OF SYSTEM CHECK	22
5.2. DESCRIPTION OF SYSTEM CHECK	23
6. OPERATIONAL CONDITIONS DURING TEST	24
6.1. GENERAL DESCRIPTION OF TEST PROCEDURES	24
6.2. TEST POSITION OF PORTABLE DEVICES	24
6.3. TEST POSITION ANTENNA LOCATION	24
6.4. TEST POSITION	26
6.4.1. BODY TEST CONFIGURATION	26
7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	33
7.1. SAR MEASUREMENT VARIABILITY	33
7.2. TEST CONFIGURATION	34
7.2.1. WIFI TEST CONFIGURATION	34
7.2.2 WLAN2.4G SAR TEST REQUIREMENTS	36
7.2.3 WLAN5G SAR TEST REQUIREMENTS	37
7.2.4 OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION	37
7.2.5 INITIAL TEST CONFIGURATION PROCEDURE	37
8. POWER REDUCTION BY PROXIMITY SENSING	38

Table of Contents	Page
8.1. PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES	38
8.2. PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE	39
8.3. PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE	40
8.4. TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING	41
8.5. POWER REDUCTION PER AIR-INTERFACE	42
9. CONDUCTED POWER RESULTS	43
9.1. CONDUCTED POWER MEASUREMENT RESULTS OF BLUETOOTH	43
9.2. CONDUCTED POWER MEASUREMENT RESULTS OF 2.4G BAND	44
9.3. CONDUCTED POWER MEASUREMENTS OF UNII_1	46
9.4. CONDUCTED POWER MEASUREMENTS OF UNII_2A	47
9.5. CONDUCTED POWER MEASUREMENTS OF UNII_2C	48
9.6. CONDUCTED POWER MEASUREMENTS OF UNII_2C	49
9.7. SARTEST RESULTS	50
10. SAR TEST RESULTS	51
10.1. BODY SAR TEST RESULTS	51
11. SIMULTANEOUS TRANSMISSION CONDITIONS	53
11.1 STAND-ALONE SAR TEST EXCLUSION	53
11.3 ESTIMATED SAR FOR SIMULTANEOUS TRANSMISSION SAR ANALYSIS	55
CONSIDERATIONS FOR SAR ESTIMATION	55
11.3.1 ESTIMATED SAR FOR BLUETOOTH	55
11.4 SIMULTANEOUS TRANSMISSION CONDITIONS	56
12. TEST LAYOUT	57

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2021/8/13

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Notebook Computer	
Brand Name	Lenovo	
Model Name	Yoga 6 13ARE05	
Series Model	Yoga 6 13ARE05*****, Yoga 6 13ALC6; Yoga 6 13ALC6***** (*=0~9, A~z, “ _ ” or blank)	
WLAN Module	Brand Name: Realtek Model Name: RTL8822CE	
Battery Information	Band: Sunwoda Model: L19D4PD1 Rating:7820mAh / 60Wh	
P-Sensor Type	Capacitive Proximity Sensor	
Frequency Range	WLAN 2.4 GHz Band:	2400 MHz ~ 2483.5 MHz
	RLAN 5 GHz Band:	5150 MHz ~ 5250 MHz 5250 MHz ~ 5350 MHz 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz
	Bluetooth:	2400 MHz ~ 2483.5 MHz
Standard(s)	KDB447498 D01 General RF Exposure Guidance v06 KDB248227 D01 802.11 Wi-Fi SAR v02r02 KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB865664 D02 SAR Reporting v01r02 KDB616217 D04 SAR for laptop and Tablets ANSI Std C95.1:2019 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.	

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1-2007T046D) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

The device will automatically detect the status of P-sensor . If the P-sensor fail , it will automatically reduce power by a fix maximum power reduction amplitude to ensure SAR compliance.

2 RF EMISSIONS MEASUREMENT

2.1 Test Facility

The test facilities used to collect the test data in this report is **SAR Test room** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

2.2 Measurement Uncertainty

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Error Description	Uncertainty Value (± %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V _{ef}
Measurement System									
Probe Calibration	6.05		Normal	1	1	1	± 6.05 %	± 6.05 %	∞
Axial Isotropy	4.7		Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	9.6		Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Linearity	4.7		Rectangular	√3	1	1	± 2.7 %	± 2.7 %	∞
Detection Limits	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Modulation response	2.4		Rectangular	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	0.3		Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	0.8		Rectangular	√3	1	1	± 0.5%	± 0.5 %	∞
Integration Time	2.6		Rectangular	√3	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient – Noise	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient– Reflections	3		Rectangula	√3	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	0.4		Rectangular	√3	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	2.9		Rectangular	√3	1	1	± 1.7 %	±1.7 %	∞
Post-processing	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Max.SAR Evaluation	2		Rectangular	√3	1	1	± 1.15 %	± 1.15 %	∞
Test Sample Related									
Device Positioning	1.6	1.8	Normal	1	1	1	± 1.6 %	± 1.8 %	145
Device Holder	1.5	1.7	Normal	1	1	1	± 1.5 %	± 1.7 %	5
Power Drift	5.0		Rectangular	√3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Setup									
Phantom Production Tolerances	6.1		Rectangular	√3	1	1	3.52	3.52	∞
SAR correction	1.9		Rectangular	√3	1	0.84	1.10	1.10	
Liquid Conductivity (mea.)	2.4		Rectangular	√3	0.78	0.71	1.08	1.08	∞
Liquid Permittivity (mea.)	2.4		Rectangular	√3	0.26	0.26	0.36	0.36	∞
Temp. unc. - Conductivity	3.4		Rectangular	√3	0.78	0.71	1.53	1.53	∞
Temp. unc. - Permittivity	0.4		Rectangular	√3	0.23	0.26	0.05	0.05	∞
Combined Standard Uncertainty (K = 1)							± 10.42 %	± 10.48 %	361
Expanded Uncertainty (K = 2)							± 20.84 %	± 20.97 %	

Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Uncertainty Budget for Frequency Range 0.6 GHz to 6 GHz									
Error Description	Uncertainty Value (± %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V _{eff}
Measurement System									
Probe Calibration	6.65		Normal	1	1	1	± 6.65 %	± 6.65 %	∞
Axial Isotropy	4.7		Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	9.6		Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	2		Rectangular	√3	1	1	± 1.2 %	± 1.2 %	∞
Linearity	4.7		Rectangular	√3	1	1	± 2.7 %	± 2.7 %	∞
Detection Limits	1		Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Modulation response	2.4		Rectangular	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	0.3		Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	0.8		Rectangular	√3	1	1	± 0.5%	± 0.5 %	∞
Integration Time	2.6		Rectangular	√3	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient – Noise	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient– Reflections	3		Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	0.4		Rectangular	√3	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	6.7		Rectangular	√3	1	1	± 3.9 %	±3.9 %	∞
Post-processing	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Max.SAR Evaluation	4		Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related									
Device Positioning	1.6	1.8	Normal	1	1	1	±1.6 %	± 1.8 %	145
Device Holder	1.5	1.7	Normal	1	1	1	± 1.5 %	± 1.7 %	5
Power Drift	5.0		Rectangular	√3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Setup									
Phantom Production Tolerances	6.6		Rectangular	√3	1	1	3.81	3.81	∞
SAR correction	1.9		Rectangular	√3	1	0.84	1.10	0.92	
Liquid Conductivity (mea.)	2.4		Rectangular	√3	0.78	0.71	1.08	0.98	∞
Liquid Permittivity (mea.)	2.4		Rectangular	√3	0.26	0.26	0.36	0.36	∞
Temp. unc. - Conductivity	3.4		Rectangular	√3	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4		Rectangular	√3	0.23	0.26	0.05	0.06	∞
Combined Standard Uncertainty (K = 1)							± 11.65 %	± 11.66 %	361
Expanded Uncertainty (K = 2)							± 23.29 %	± 23.33 %	

2.3 WLAN Antenna Information:

Ant.	Brand	Model	Type	Frequency Range (MHz)	Gain (dBi)
Main	AWAN	AUF6Y-100025	PIFA	2400-2500	1.14
				5150-5350	-1.73
				5470-5725	-3.61
				5725-5850	-2.83
Aux	AWAN	AUF6Y-100026	PIFA	2400-2500	-1.53
				5150-5350	-2.43
				5470-5725	-2.91
				5725-5850	-1.54

2.4 The Maximum SAR1g Values

P-Sensor On

Ant	Test Distance (mm)	Mode	Highest Body Reported SAR-1g(W/kg)
DTS	0	WLAN 2.4G	0.521
UNII		UNII_1	0.511
		UNII_2a	0.433
		UNII_2c	1.056
		UNII_3	0.790

P-Sensor Off

F. Sensor On			
Ant	Test Distance (mm)	Mode	Highest Body Reported SAR-1g(W/kg)
FHSS	0	Bluetooth_DH5	0.411
DTS	19	WLAN 2.4G	0.130
UNII		UNII_2a	0.207
		UNII_2c	0.899
		UNII_3	0.472

Note:

- 1) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:2019/IEEE C95.1:2019, the NCRP Report Number 86 for uncontrolled environment and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 .

2.5 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2.6 Main Test Instruments

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Nov. 06, 2020	1 Year
2	E-field Probe	Speag	EX3DV4	7544	Oct. 29, 2020	1 Year
3	System Validation Dipole	Speag	D2450V2	919	May. 28, 2021	3 Year
4	System Validation Dipole	Speag	D5GHzV2	1160	May. 27, 2021	3 Year
5	ELI Phantom	Speag	ELI Phantom V5.0	1222	N/A	N/A
6	Network Analyzer	Agilent	E5071C	MY46102965	Feb. 28, 2021	1 Year
7	Signal Generator	Agilent	N5172B	MY53050758	Feb. 27, 2021	1 Year
8	Signal Analyzer	R&S	FSV7	103120	Jul. 10, 2021	1 Year
9	DC Source meter	Iteck	IT6154	006104126768 201001	Jul. 24, 2021	1 Year
10	Smart Power Sensor	R&S	NRP-Z21	102209	Feb. 27, 2021	1 Year
11	Dielectric Probe Kit	Agilent	85070E	2593	N/A	N/A
12	Low pass filter	Mini-Circuits	SLP-2950+	M108294	N/A	N/A
13	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Dec. 29, 2020	1 Year
14	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Feb. 27, 2021	1 Year
15	Digital Thermometer	LKM	DTM3000	3519	Jun. 24, 2021	1 Year

Remark: "N/A" denotes no model name, serial No. or calibration specified.


3 SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1 SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1 Test Setup Layout

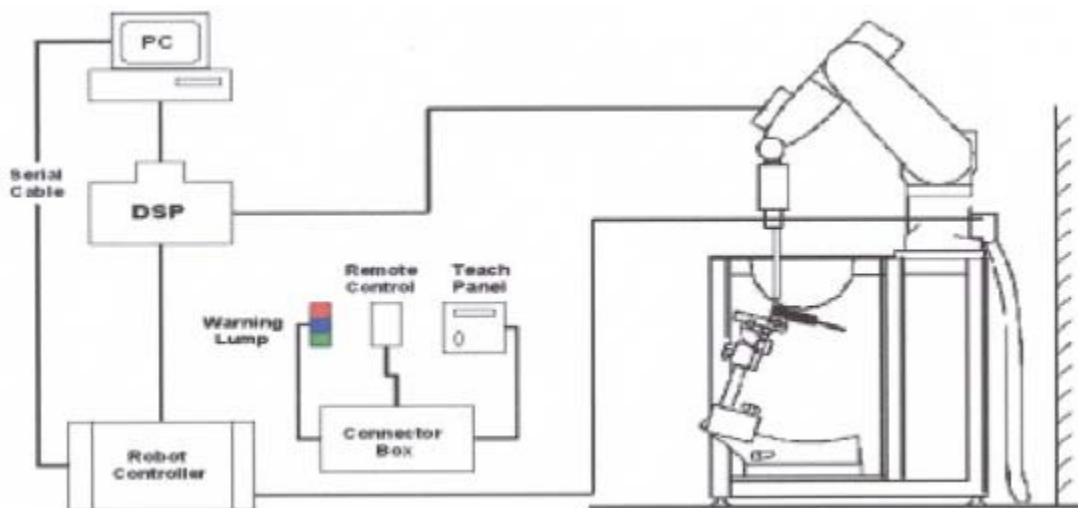


3.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1 EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

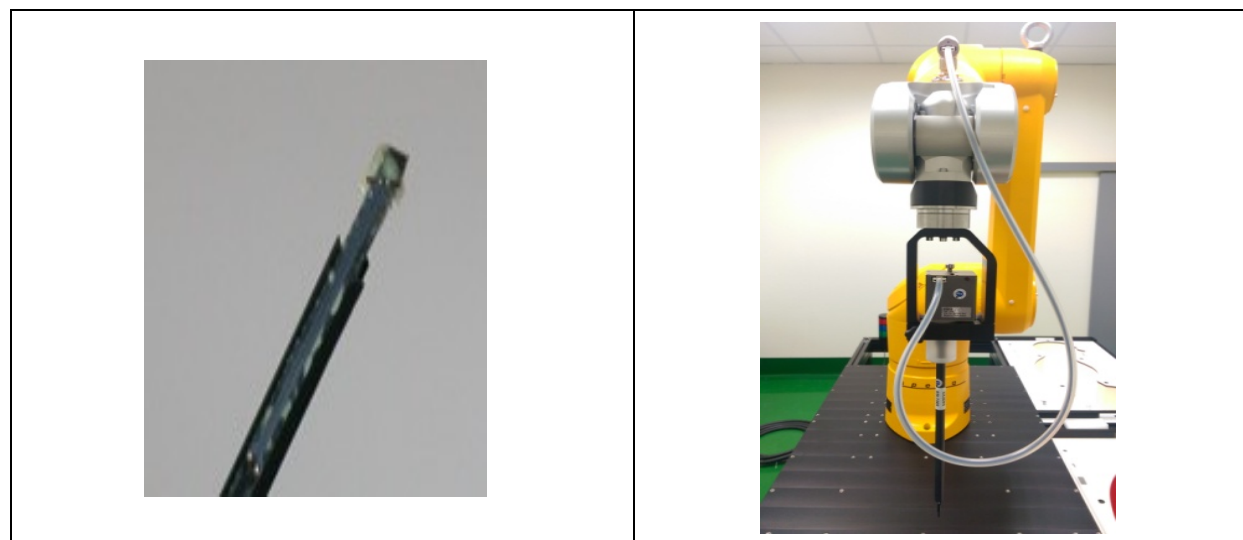

EX3DV4 E-field Probe

3.2.2 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).


3.2.3 Other Test Equipment


3.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam


3.2.3.2 Phantom

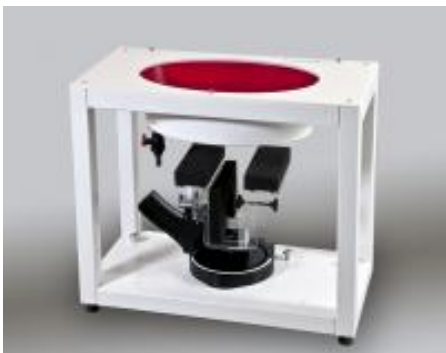Model	ELI4 Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet	
Available	Special	

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length:1000mm; Width: 500mm Height: adjustable feet	
Available	Special	

3.2.4 Scanning Procedure

The SAR test against the head and body-worn phantom was carried out as follow:

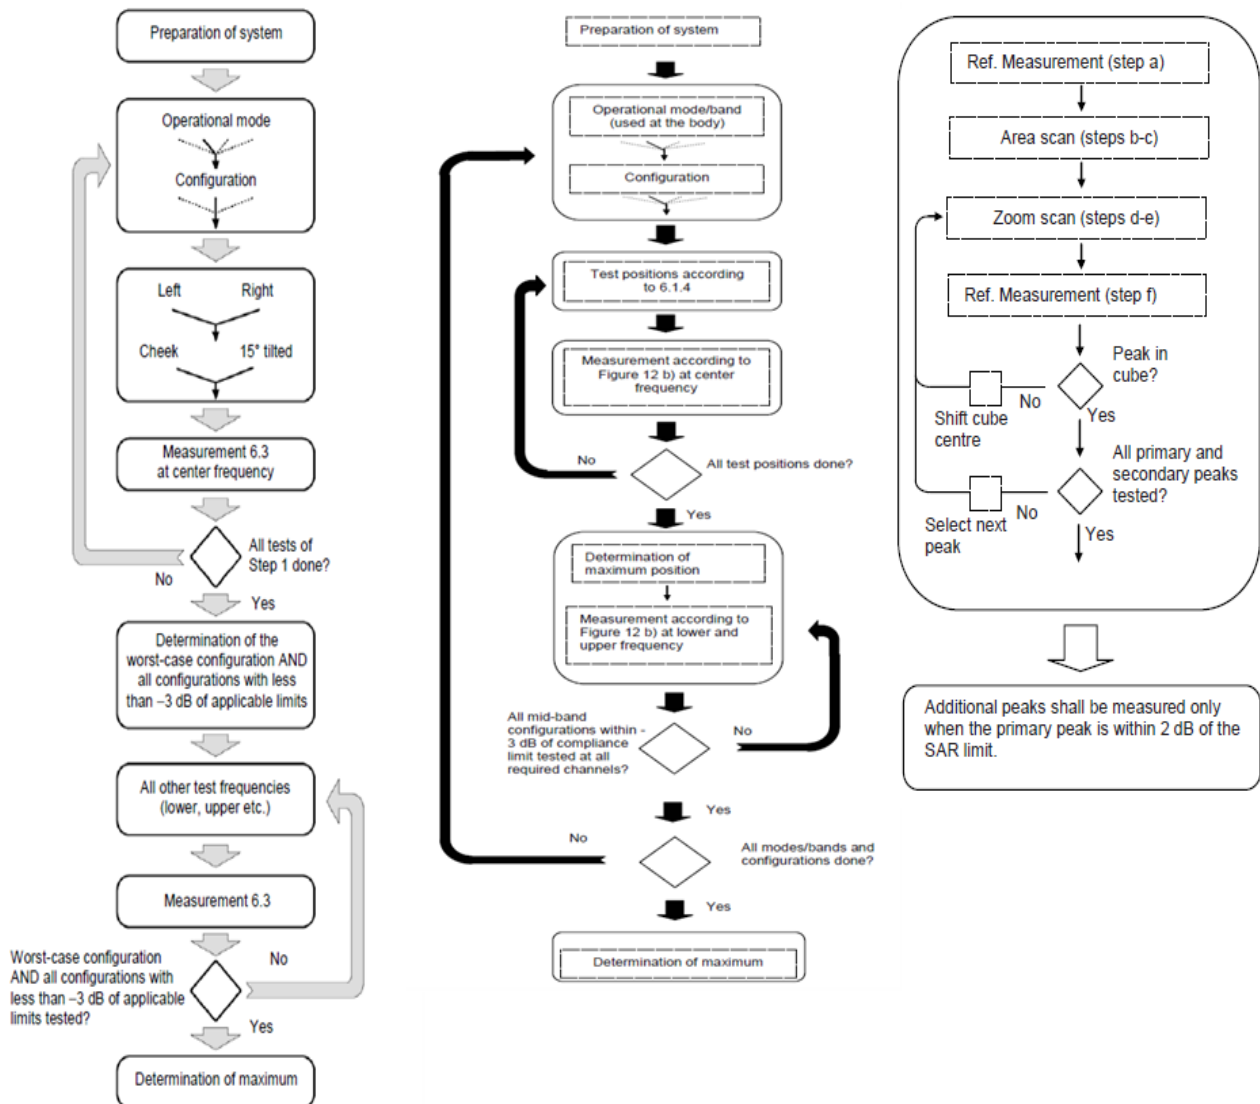

After an area scan has been done at a fixed distance of 1.4mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE1528 standard.

This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

3.2.5 Data Storage and Evaluation

3.2.5.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.6 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a_{i0} , a_{i1} , a_{i2}
	Conversion factor	ConvF _i
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 TISSUE-EQUIVALENT LIQUID

4.1 Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt and Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values. The below table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEC 62209.

Composition of the Tissue Equivalent Matter

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

4.2 Tissue-equivalent Liquid Properties

Dielectric Performance of Tissue Simulating Liquid

Tissue Verification									
Date	Tissue Type	Frequency (MHz)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Limit (%) ± 5
2021/8/3	Head	2402	1.80	39.14	1.76	39.29	2.41	-0.38	± 5
2021/8/3	Head	2412	1.81	39.10	1.77	39.27	2.56	-0.43	± 5
2021/8/3	Head	2422	1.82	39.06	1.78	39.25	2.76	-0.48	± 5
2021/8/3	Head	2437	1.84	39.00	1.79	39.22	3.00	-0.56	± 5
2021/8/3	Head	2441	1.85	38.99	1.79	39.21	3.03	-0.57	± 5
2021/8/3	Head	2457	1.87	38.92	1.81	39.19	3.22	-0.69	± 5
2021/8/3	Head	2462	1.87	38.90	1.81	39.18	3.26	-0.72	± 5
2021/8/3	Head	2467	1.88	38.88	1.82	39.17	3.25	-0.74	± 5
2021/8/3	Head	2472	1.88	38.86	1.82	39.17	3.29	-0.80	± 5
2021/8/3	Head	2480	1.89	38.82	1.83	39.16	3.30	-0.86	± 5
2021/8/4	Head	5180	4.75	35.56	4.64	36.02	2.46	-1.27	± 5
2021/8/4	Head	5200	4.78	35.51	4.66	36.00	2.53	-1.36	± 5
2021/8/4	Head	5220	4.80	35.46	4.68	35.98	2.61	-1.45	± 5
2021/8/4	Head	5240	4.83	35.41	4.70	35.96	2.68	-1.54	± 5
2021/8/4	Head	5260	4.85	35.35	4.72	35.94	2.76	-1.63	± 5
2021/8/4	Head	5280	4.87	35.30	4.74	35.92	2.84	-1.72	± 5
2021/8/4	Head	5300	4.90	35.25	4.76	35.90	2.92	-1.81	± 5
2021/8/4	Head	5320	4.92	35.20	4.78	35.88	3.00	-1.90	± 5
2021/8/4	Head	5500	5.14	34.75	4.96	35.60	3.69	-2.39	± 5
2021/8/4	Head	5520	5.17	34.70	4.98	35.58	3.71	-2.48	± 5
2021/8/4	Head	5540	5.19	34.65	5.00	35.56	3.74	-2.57	± 5
2021/8/4	Head	5560	5.22	34.60	5.03	35.54	3.76	-2.66	± 5
2021/8/4	Head	5580	5.24	34.55	5.05	35.52	3.80	-2.74	± 5
2021/8/4	Head	5600	5.26	34.50	5.07	35.50	3.83	-2.82	± 5
2021/8/4	Head	5620	5.29	34.45	5.09	35.48	3.88	-2.91	± 5
2021/8/4	Head	5640	5.31	34.40	5.11	35.46	3.94	-3.00	± 5
2021/8/4	Head	5660	5.34	34.35	5.13	35.44	4.00	-3.09	± 5
2021/8/4	Head	5680	5.36	34.30	5.15	35.42	4.07	-3.17	± 5
2021/8/4	Head	5700	5.38	34.25	5.17	35.40	4.14	-3.25	± 5
2021/8/4	Head	5720	5.41	34.20	5.19	35.38	4.19	-3.33	± 5
2021/8/4	Head	5745	5.44	34.14	5.22	35.35	4.26	-3.42	± 5
2021/8/4	Head	5765	5.46	34.09	5.24	35.33	4.32	-3.51	± 5
2021/8/4	Head	5785	5.49	34.04	5.26	35.31	4.38	-3.60	± 5
2021/8/4	Head	5800	5.50	34.00	5.27	35.30	4.42	-3.68	± 5
2021/8/4	Head	5805	5.51	33.99	5.28	35.29	4.43	-3.69	± 5
2021/8/4	Head	5825	5.53	33.94	5.30	35.27	4.47	-3.77	± 5

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.
- 4) According to FCC TCB workshop April, 2019 RF Exposure Procedures Update (Effective February 19, 2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEEE 62209-1- for all SAR tests.

5 SYSTEM CHECK


5.1 Description of System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW(below 3GHz) or 100mW(3-6GHz), which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the 6.2.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

System Check Set-up

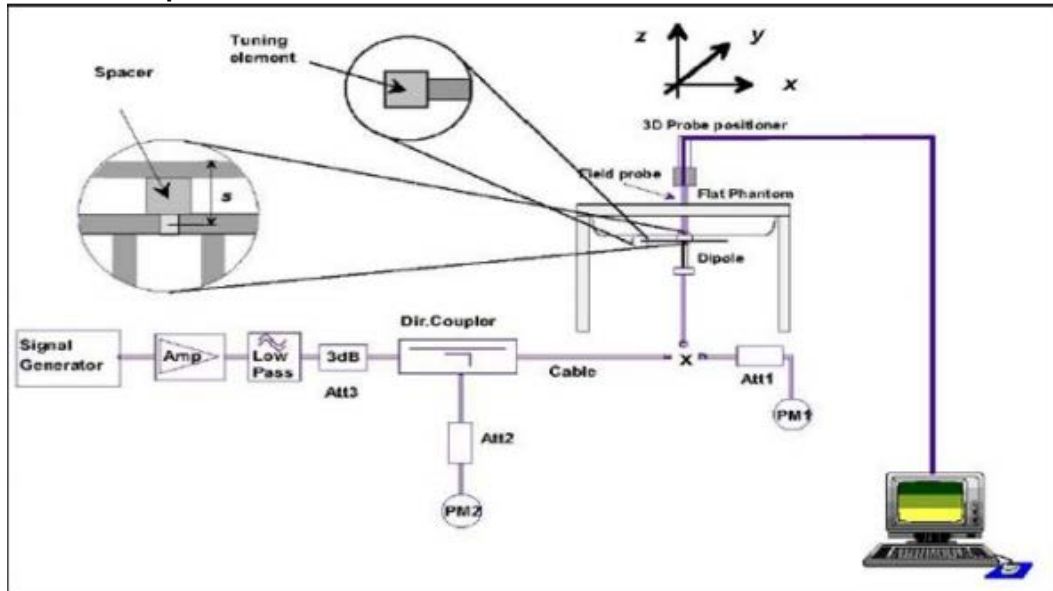

5.2 Description of System Check

System Check in Tissue Simulating Liquid

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

Date	System Dipole			Parameters	Target [W/kg]	Measured [W/kg]	Deviation [%]	Limited [%]
	Type	Serial No.	Liquid					
2021/8/3	D2450V2	919	Head	1g SAR:	52.1	50.4	-3.26	± 10
2021/8/4	D5GHzV2 (5.25GHz)	1160	Head	1g SAR	78.0	76.5	-1.92	± 10
2021/8/4	D5GHzV2 (5.6GHz)	1160	Head	1g SAR	80.6	86.1	6.82	± 10
2021/8/4	D5GHzV2 (5.75GHz)	1160	Head	1g SAR	76.5	81.2	6.14	± 10

6 OPERATIONAL CONDITIONS DURING TEST


6.1 General Description of Test Procedures


Connection to the EUT is established via air interface with base station An, and the EUT is Set to maximum output power by base station. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

6.2 Test Position of Portable Devices

This DUT was tested in 6 different positions. They are top, right, bottom, left, rear and stand as illustrated below, which recommended by EN62209-2:

6.3 Test position Antenna Location

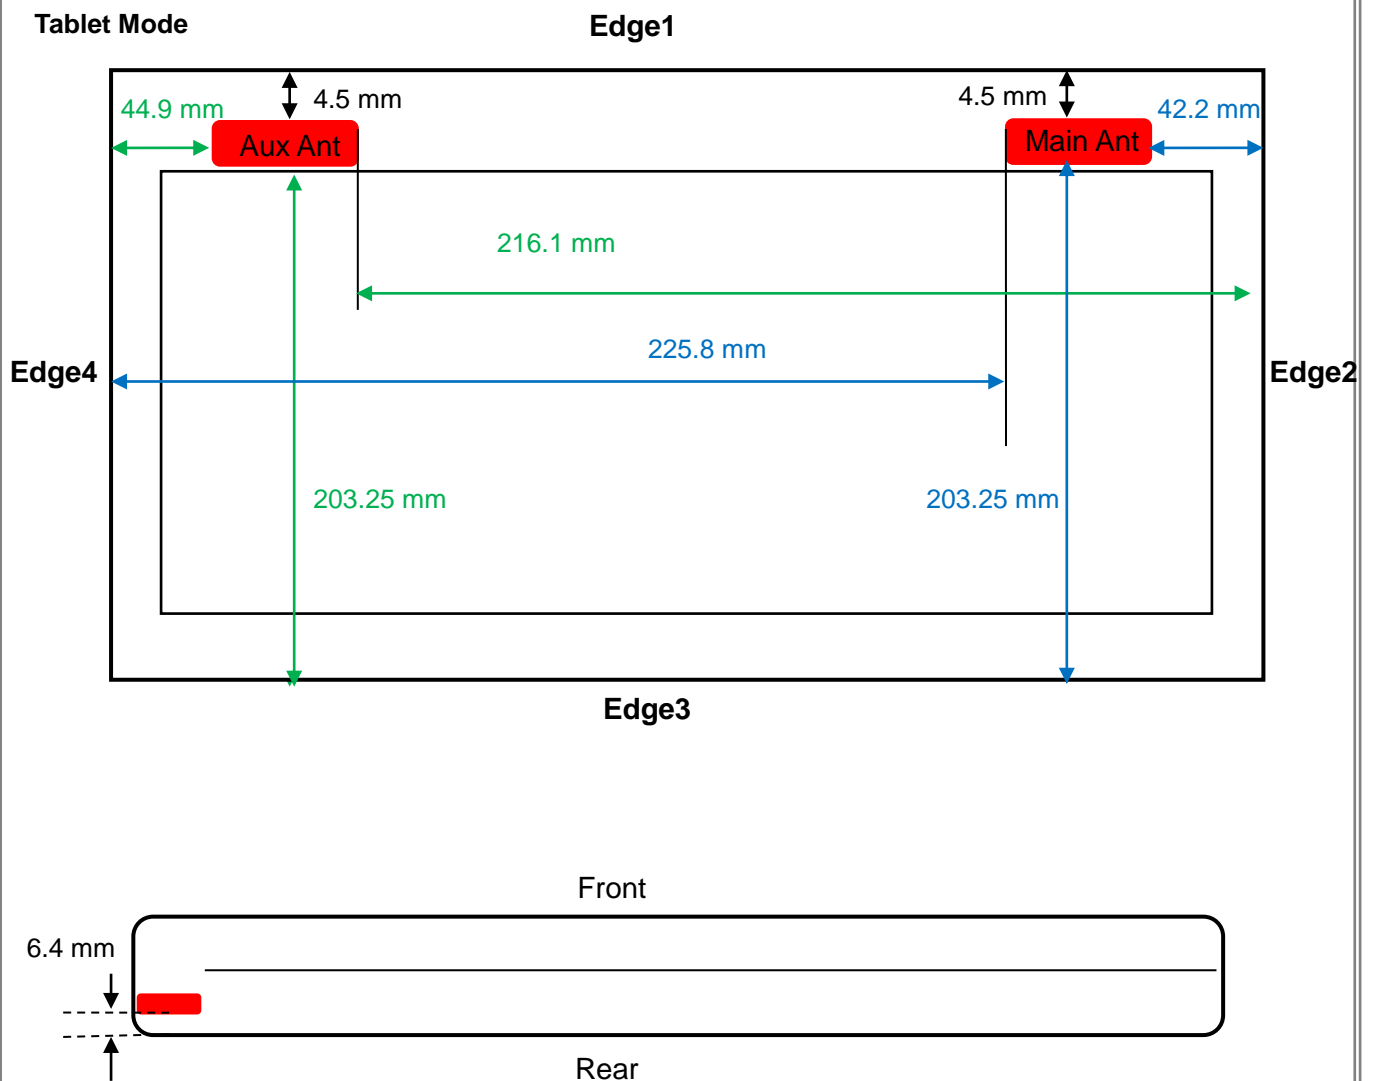

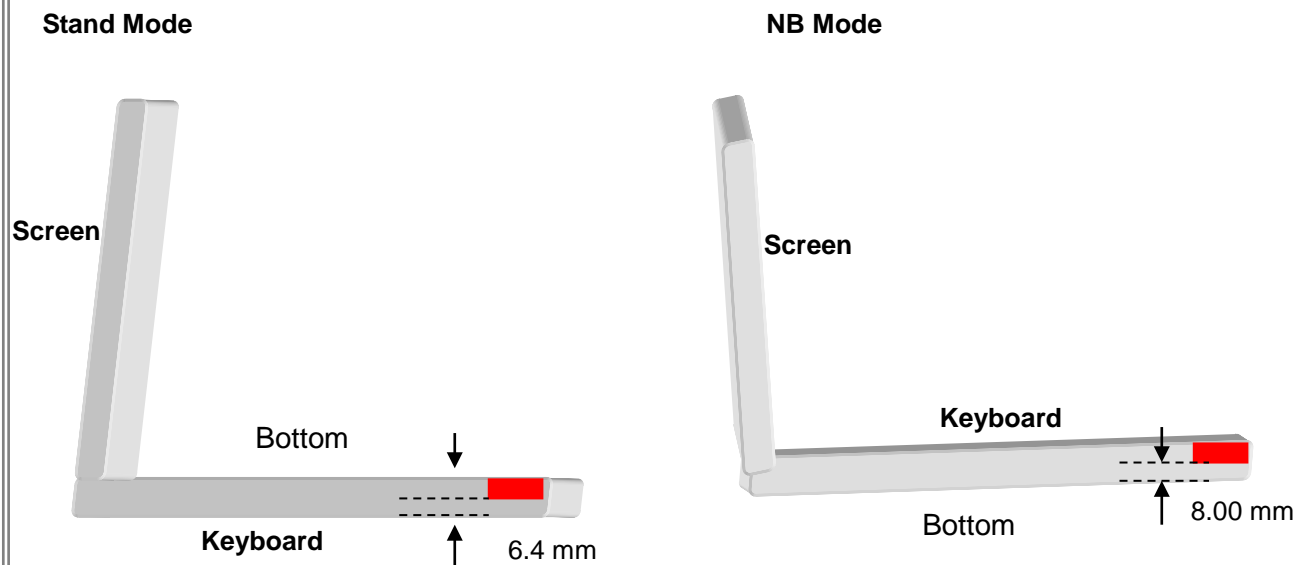

Minimum Separation Distance_Tablet Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Rear	6.40	Yes
	Bottom	8.00	Yes
	Edge1	4.50	Yes
	Edge2	42.2	Yes
	Edge3	203.25	No
	Edge4	225.80	No
WLAN-Aux & BT	Rear	6.40	Yes
	Bottom	8.00	Yes
	Edge1	4.50	Yes
	Edge2	216.10	No
	Edge3	203.25	No
	Edge4	44.90	Yes

Minimum Separation Distance_NB Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Bottom	8.00	Yes
WLAN-Aux & BT	Bottom	8.00	Yes

Minimum Separation Distance_Stand Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Stand	6.40	No
WLAN-Aux & BT	Stand	6.40	No

6.4 Test position

6.4.1 BODY TEST CONFIGURATION

The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an EUT edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

SAR test reduction and exclusion guidance

(1)The SAR exclusion threshold for is defined by the following equation:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

Example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

P-Sensor off

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
Bluetooth	Aux	Edge1	4.50	2480	13.00	19.95	2	Yes
Bluetooth	Aux	Edge2	216.10	2480	13.00	19.95	219	No
Bluetooth	Aux	Edge3	203.25	2480	13.00	19.95	219	No
Bluetooth	Aux	Edge4	44.90	2480	13.00	19.95	178	No
Bluetooth	Aux	Rear	6.40	2480	13.00	19.95	4	Yes
Bluetooth	Aux	Bottom	8.00	2480	13.00	19.95	7	Yes
Bluetooth	Aux	Stand	6.40	2480	13.00	19.95	4	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
2.4GHz	Main	Edge1	24.50	2462	21.50	141.25	56	Yes
2.4GHz	Main	Edge2	62.20	2462	21.50	141.25	219	No
2.4GHz	Main	Edge3	203.25	2462	21.50	141.25	219	No
2.4GHz	Main	Edge4	225.80	2462	21.50	141.25	219	No
2.4GHz	Main	Rear	26.40	2462	21.50	141.25	65	Yes
2.4GHz	Main	Bottom	28.00	2462	21.50	141.25	73	Yes
2.4GHz	Main	Stand	26.40	2462	21.50	141.25	65	Yes
2.4GHz	Aux	Edge1	24.50	2462	21.50	141.25	56	Yes
2.4GHz	Aux	Edge2	216.10	2462	21.50	141.25	219	No
2.4GHz	Aux	Edge3	203.25	2462	21.50	141.25	219	No
2.4GHz	Aux	Edge4	64.90	2462	21.50	141.25	219	No
2.4GHz	Aux	Rear	26.40	2462	21.50	141.25	65	Yes
2.4GHz	Aux	Bottom	28.00	2462	21.50	141.25	73	Yes
2.4GHz	Aux	Stand	26.40	2462	21.50	141.25	65	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.2GHz	Main	Edge1	24.50	5210	18.00	63.10	40	Yes
5.2GHz	Main	Edge2	62.20	5210	18.00	63.10	169	No
5.2GHz	Main	Edge3	203.25	5210	18.00	63.10	169	No
5.2GHz	Main	Edge4	225.80	5210	18.00	63.10	169	No
5.2GHz	Main	Rear	26.40	5210	18.00	63.10	47	Yes
5.2GHz	Main	Bottom	28.00	5210	18.00	63.10	53	Yes
5.2GHz	Main	Stand	26.40	5210	18.00	63.10	47	Yes
5.2GHz	Aux	Edge1	24.50	5210	18.00	63.10	40	Yes
5.2GHz	Aux	Edge2	216.10	5210	18.00	63.10	169	No
5.2GHz	Aux	Edge3	203.25	5210	18.00	63.10	169	No
5.2GHz	Aux	Edge4	64.90	5210	18.00	63.10	169	No
5.2GHz	Aux	Rear	26.40	5210	18.00	63.10	47	Yes
5.2GHz	Aux	Bottom	28.00	5210	18.00	63.10	53	Yes
5.2GHz	Aux	Stand	26.40	5210	18.00	63.10	47	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.3GHz	Main	Edge1	24.50	5290	18.00	63.10	40	Yes
5.3GHz	Main	Edge2	62.20	5290	18.00	63.10	169	No
5.3GHz	Main	Edge3	203.25	5290	18.00	63.10	169	No
5.3GHz	Main	Edge4	225.80	5290	18.00	63.10	169	No
5.3GHz	Main	Rear	26.40	5290	18.00	63.10	46	Yes
5.3GHz	Main	Bottom	28.00	5290	18.00	63.10	52	Yes
5.3GHz	Main	Stand	26.40	5290	18.00	63.10	46	Yes
5.3GHz	Aux	Edge1	24.50	5290	18.00	63.10	40	Yes
5.3GHz	Aux	Edge2	216.10	5290	18.00	63.10	169	No
5.3GHz	Aux	Edge3	203.25	5290	18.00	63.10	169	No
5.3GHz	Aux	Edge4	64.90	5290	18.00	63.10	169	No
5.3GHz	Aux	Rear	26.40	5290	18.00	63.10	46	Yes
5.3GHz	Aux	Bottom	28.00	5290	18.00	63.10	52	Yes
5.3GHz	Aux	Stand	26.40	5290	18.00	63.10	46	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.6GHz	Main	Edge1	24.50	5530	22.00	158.49	39	Yes
5.6GHz	Main	Edge2	62.20	5530	22.00	158.49	169	No
5.6GHz	Main	Edge3	203.25	5530	22.00	158.49	169	No
5.6GHz	Main	Edge4	225.80	5530	22.00	158.49	169	No
5.6GHz	Main	Rear	26.40	5530	22.00	158.49	45	Yes
5.6GHz	Main	Bottom	28.00	5530	22.00	158.49	51	Yes
5.6GHz	Main	Stand	26.40	5530	22.00	158.49	45	Yes
5.6GHz	Aux	Edge1	24.50	5530	22.00	158.49	39	Yes
5.6GHz	Aux	Edge2	216.10	5530	22.00	158.49	169	No
5.6GHz	Aux	Edge3	203.25	5530	22.00	158.49	169	No
5.6GHz	Aux	Edge4	64.90	5530	22.00	158.49	169	No
5.6GHz	Aux	Rear	26.40	5530	22.00	158.49	45	Yes
5.6GHz	Aux	Bottom	28.00	5530	22.00	158.49	51	Yes
5.6GHz	Aux	Stand	26.40	5530	22.00	158.49	45	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.8GHz	Main	Edge1	24.50	5775	22.00	158.49	38	Yes
5.8GHz	Main	Edge2	62.20	5775	22.00	158.49	169	No
5.8GHz	Main	Edge3	203.25	5775	22.00	158.49	169	No
5.8GHz	Main	Edge4	225.80	5775	22.00	158.49	169	No
5.8GHz	Main	Rear	26.40	5775	22.00	158.49	45	Yes
5.8GHz	Main	Bottom	28.00	5775	22.00	158.49	50	Yes
5.8GHz	Main	Stand	26.40	5775	22.00	158.49	45	Yes
5.8GHz	Aux	Edge1	24.50	5775	22.00	158.49	38	Yes
5.8GHz	Aux	Edge2	216.10	5775	22.00	158.49	169	No
5.8GHz	Aux	Edge3	203.25	5775	22.00	158.49	169	No
5.8GHz	Aux	Edge4	64.90	5775	22.00	158.49	169	No
5.8GHz	Aux	Rear	26.40	5775	22.00	158.49	45	Yes
5.8GHz	Aux	Bottom	28.00	5775	22.00	158.49	50	Yes
5.8GHz	Aux	Stand	26.40	5775	22.00	158.49	45	Yes

P-Sensor On

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
2.4GHz	Main	Edge1	4.50	2462	14.00	25.12	2	Yes
2.4GHz	Main	Edge2	42.20	2462	14.00	25.12	158	No
2.4GHz	Main	Edge3	203.25	2462	14.00	25.12	219	No
2.4GHz	Main	Edge4	225.80	2462	14.00	25.12	219	No
2.4GHz	Main	Rear	6.40	2462	14.00	25.12	4	Yes
2.4GHz	Main	Bottom	8.00	2462	14.00	25.12	7	Yes
2.4GHz	Main	Stand	6.40	2462	14.00	25.12	4	Yes
2.4GHz	Aux	Edge1	4.50	2462	14.00	25.12	2	Yes
2.4GHz	Aux	Edge2	216.10	2462	14.00	25.12	219	No
2.4GHz	Aux	Edge3	203.25	2462	14.00	25.12	219	No
2.4GHz	Aux	Edge4	44.90	2462	14.00	25.12	178	No
2.4GHz	Aux	Rear	6.40	2462	14.00	25.12	4	Yes
2.4GHz	Aux	Bottom	8.00	2462	14.00	25.12	7	Yes
2.4GHz	Aux	Stand	6.40	2462	14.00	25.12	4	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.2GHz	Main	Edge1	4.50	5210	12.50	17.78	1	Yes
5.2GHz	Main	Edge2	42.20	5210	12.50	17.78	123	No
5.2GHz	Main	Edge3	203.25	5210	12.50	17.78	169	No
5.2GHz	Main	Edge4	225.80	5210	12.50	17.78	169	No
5.2GHz	Main	Rear	6.40	5210	12.50	17.78	2	Yes
5.2GHz	Main	Bottom	8.00	5210	12.50	17.78	4	Yes
5.2GHz	Main	Stand	6.40	5210	12.50	17.78	2	Yes
5.2GHz	Aux	Edge1	4.50	5210	12.50	17.78	1	Yes
5.2GHz	Aux	Edge2	216.10	5210	12.50	17.78	169	No
5.2GHz	Aux	Edge3	203.25	5210	12.50	17.78	169	No
5.2GHz	Aux	Edge4	44.90	5210	12.50	17.78	140	No
5.2GHz	Aux	Rear	6.40	5210	12.50	17.78	2	Yes
5.2GHz	Aux	Bottom	8.00	5210	12.50	17.78	4	Yes
5.2GHz	Aux	Stand	6.40	5210	12.50	17.78	2	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.3GHz	Main	Edge1	4.50	5290	12.50	17.78	1	Yes
5.3GHz	Main	Edge2	42.20	5290	12.50	17.78	122	No
5.3GHz	Main	Edge3	203.25	5290	12.50	17.78	169	No
5.3GHz	Main	Edge4	225.80	5290	12.50	17.78	169	No
5.3GHz	Main	Rear	6.40	5290	12.50	17.78	2	Yes
5.3GHz	Main	Bottom	8.00	5290	12.50	17.78	4	Yes
5.3GHz	Main	Stand	6.40	5290	12.50	17.78	2	Yes
5.3GHz	Aux	Edge1	4.50	5290	12.50	17.78	1	Yes
5.3GHz	Aux	Edge2	216.10	5290	12.50	17.78	169	No
5.3GHz	Aux	Edge3	203.25	5290	12.50	17.78	169	No
5.3GHz	Aux	Edge4	44.90	5290	12.50	17.78	139	No
5.3GHz	Aux	Rear	6.40	5290	12.50	17.78	2	Yes
5.3GHz	Aux	Bottom	8.00	5290	12.50	17.78	4	Yes
5.3GHz	Aux	Stand	6.40	5290	12.50	17.78	2	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.6GHz	Main	Edge1	4.50	5530	12.50	17.78	1	Yes
5.6GHz	Main	Edge2	42.20	5530	12.50	17.78	120	No
5.6GHz	Main	Edge3	203.25	5530	12.50	17.78	169	No
5.6GHz	Main	Edge4	225.80	5530	12.50	17.78	169	No
5.6GHz	Main	Rear	6.40	5530	12.50	17.78	2	Yes
5.6GHz	Main	Bottom	8.00	5530	12.50	17.78	4	Yes
5.6GHz	Main	Stand	6.40	5530	12.50	17.78	2	Yes
5.6GHz	Aux	Edge1	4.50	5530	12.50	17.78	1	Yes
5.6GHz	Aux	Edge2	216.10	5530	12.50	17.78	169	No
5.6GHz	Aux	Edge3	203.25	5530	12.50	17.78	169	No
5.6GHz	Aux	Edge4	44.90	5530	12.50	17.78	137	No
5.6GHz	Aux	Rear	6.40	5530	12.50	17.78	2	Yes
5.6GHz	Aux	Bottom	8.00	5530	12.50	17.78	4	Yes
5.6GHz	Aux	Stand	6.40	5530	12.50	17.78	2	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
5.8GHz	Main	Edge1	4.50	5775	12.50	17.78	1	Yes
5.8GHz	Main	Edge2	42.20	5775	12.50	17.78	119	No
5.8GHz	Main	Edge3	203.25	5775	12.50	17.78	169	No
5.8GHz	Main	Edge4	225.80	5775	12.50	17.78	169	No
5.8GHz	Main	Rear	6.40	5775	12.50	17.78	2	Yes
5.8GHz	Main	Bottom	8.00	5775	12.50	17.78	4	Yes
5.8GHz	Main	Stand	6.40	5775	12.50	17.78	2	Yes
5.8GHz	Aux	Edge1	4.50	5775	12.50	17.78	1	Yes
5.8GHz	Aux	Edge2	216.10	5775	12.50	17.78	169	No
5.8GHz	Aux	Edge3	203.25	5775	12.50	17.78	169	No
5.8GHz	Aux	Edge4	44.90	5775	12.50	17.78	135	No
5.8GHz	Aux	Rear	6.40	5775	12.50	17.78	2	Yes
5.8GHz	Aux	Bottom	8.00	5775	12.50	17.78	4	Yes
5.8GHz	Aux	Stand	6.40	5775	12.50	17.78	2	Yes

7 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

7.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

7.2 TEST CONFIGURATION

7.2.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

Wi-Fi 2.4GHz Band

Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Duty cycle	100%			
Crest factor	1			


Wi-Fi 5GHz Band

Mode	802.11a	802.11n HT20	802.11n HT40	802.11 ac20	802.11 ac40	802.11 ac80
Duty cycle	100%					
Crest factor	1					

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 are applied.

Bluetooth

Mode	Bluetooth BR	Bluetooth EDR	BLE 1M	BLE 2M
Duty cycle	100.00%	100.00%	100.00%	100.00%
Crest factor	1.00	1.00	1.00	1.00

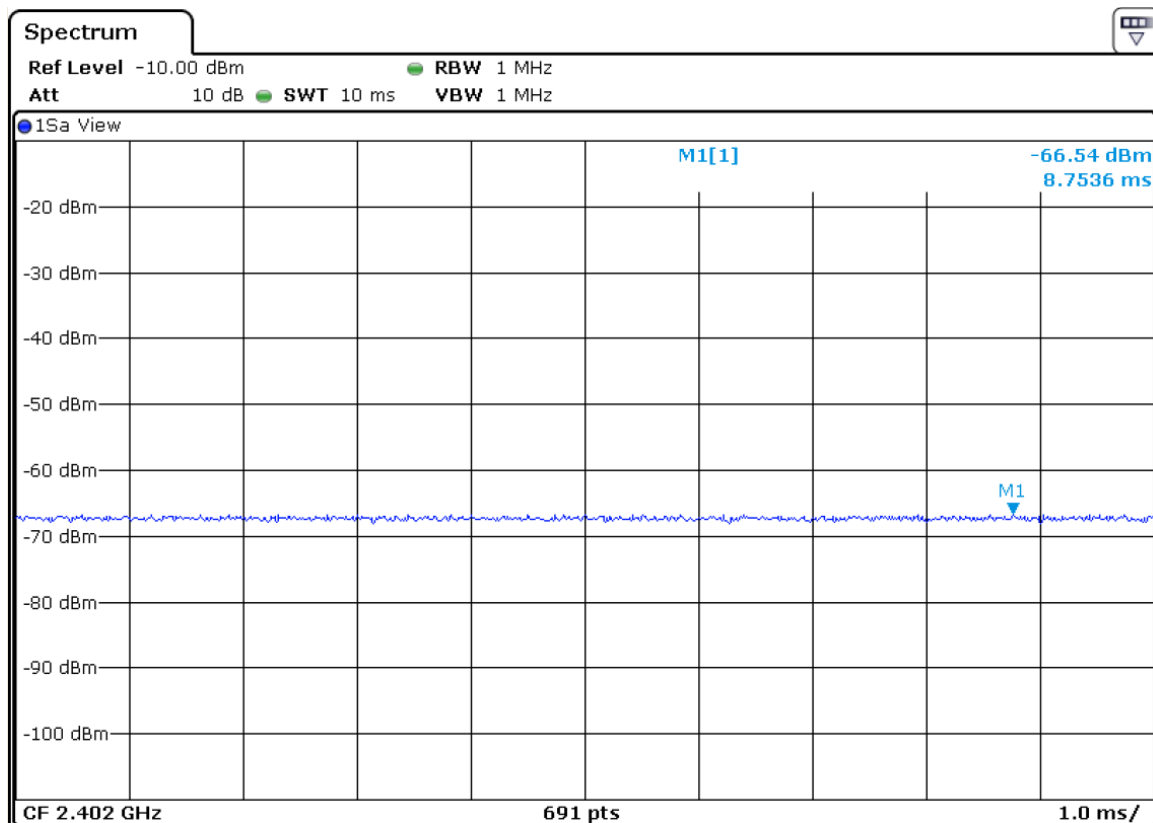

7.2.2 WLAN2.4G SAR TEST REQUIREMENTS

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.3 WLAN5G SAR TEST REQUIREMENTS

U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing.

To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.2.4 OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.2.5 INITIAL TEST CONFIGURATION PROCEDURE

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

8 POWER REDUCTION BY PROXIMITY SENSING

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r02)

8.1 procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

1. The relevant transmitter should be set to operate at its normal maximum output power.
2. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
3. It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
4. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
5. The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
6. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
7. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
8. The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
9. The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
10. If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
11. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

8.2 procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

1. The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
2. The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
4. The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
5. The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.

If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

8.3 proximity sensor status table of trigger distance


As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status –Edge1	Proximity Sensor Status – Rear	Proximity Sensor Status – Bottom
30	OFF	OFF	OFF
27	OFF	OFF	OFF
25	OFF	OFF	OFF
24	OFF	OFF	OFF
23	OFF	OFF	OFF
22	OFF	OFF	OFF
21	OFF	OFF	OFF
20	ON	ON	ON
19	ON	ON	ON
18	ON	ON	ON
17	ON	ON	ON
16	ON	ON	ON
15	ON	ON	ON
14	ON	ON	ON
13	ON	ON	ON
12	ON	ON	ON
11	ON	ON	ON
10	ON	ON	ON
9	ON	ON	ON
8	ON	ON	ON
7	ON	ON	ON
6	ON	ON	ON
5	ON	ON	ON
4	ON	ON	ON
3	ON	ON	ON
2	ON	ON	ON
1	ON	ON	ON
0	ON	ON	ON

8.4 Tilt angle influences to proximity sensor triggering


As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.4, the following procedure is used to determine the tilt angle influences to proximity sensor triggering.

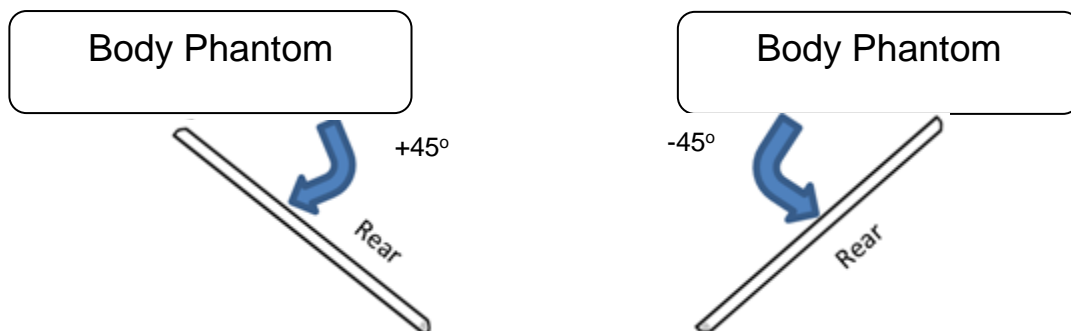

Distance to the DUT (mm)	Proximity Sensor Status 0° to +45°	Proximity Sensor Status 0° to +45°
20	ON	ON
19	ON	ON
18	ON	ON
17	ON	ON
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON

8.5 power reduction per air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Edge1 / Rear / Bottom

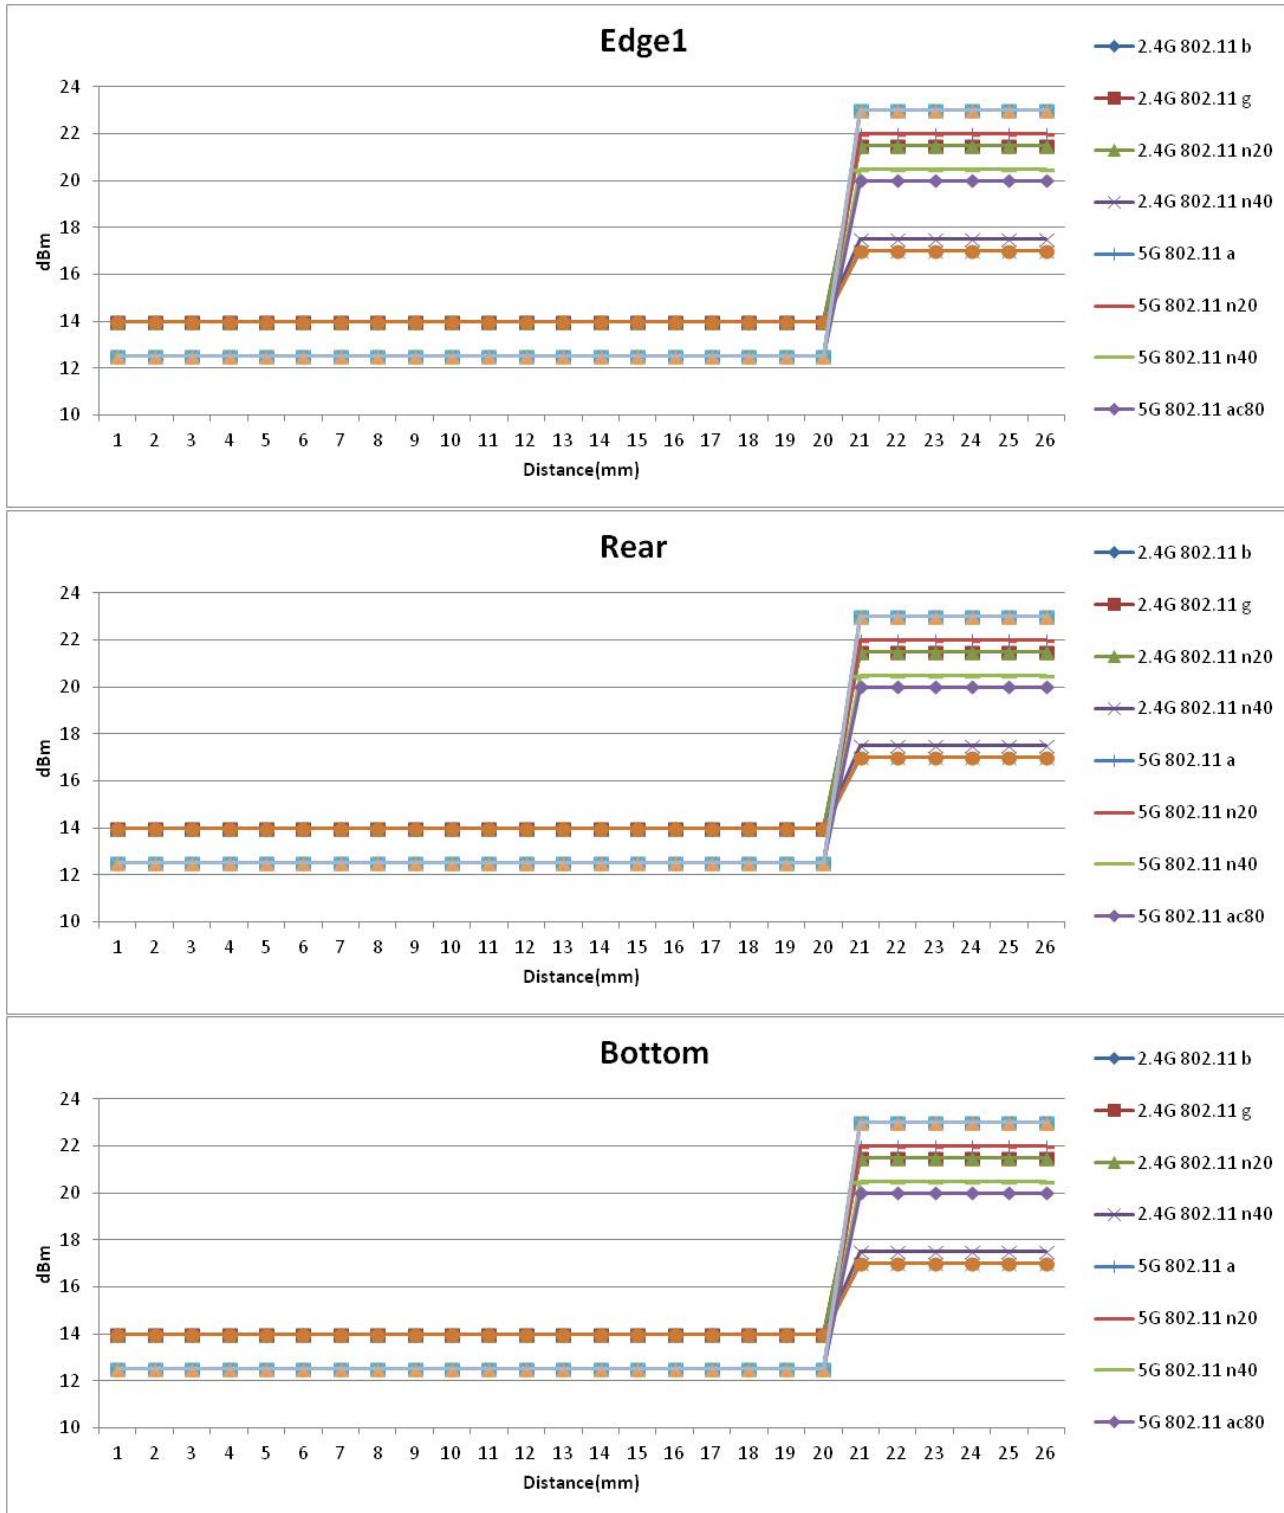

9 CONDUCTED POWER RESULTS

9.1 Conducted power measurement results of Bluetooth

Band	Mode	Channel	Frequency (MHz)	Max Power (dBm)	AVG Power (dBm)
BR	DH5	0	2402	13.00	12.67
		39	2441	13.00	12.82
		78	2480	13.00	12.74
EDR	3DH5	0	2402	10.00	Not Require
		39	2441	10.00	
		78	2480	10.00	
BLE	1M	0	2402	5.00	Not Require
		19	2440	5.00	
		39	2480	5.00	
	2M	0	2402	5.00	
		19	2440	5.00	
		39	2480	5.00	

9.2 Conducted power measurement results of 2.4G Band

P-Senser_On

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
2.4G	802.11b	1-13	2412-2472	1	14.00	Not Required	
	802.11g	1-13	2412-2472	6	14.00		
	802.11n20	1-13	2412-2472	HT0	14.00		
	802.11n40	3	2422	HT0	14.00	13.91	
	802.11n40	6	2437	HT0	14.00	13.93	
	802.11n40	9	2452	HT0	14.00	13.86	
	802.11n40	10	2457	HT0	14.00	13.91	
	802.11n40	11	2462	HT0	14.00	13.91	
	802.11b	1-13	2412-2472	1	14.00	Not Required	
	802.11g	1-13	2412-2472	6	14.00		
	802.11n20	1-13	2412-2472	HT0	14.00		
	802.11n40	3	2422	HT0	14.00		13.91
	802.11n40	6	2437	HT0	14.00		13.94
	802.11n40	9	2452	HT0	14.00		13.88
	802.11n40	10	2457	HT0	14.00		13.92
	802.11n40	11	2462	HT0	14.00		13.88

Note:

1.As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.

P-Senser_Off

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
2.4G	802.11b	1	2412	1	19.50	19.41	
		6	2437	1	21.50	21.44	
		11	2462	1	19.50	19.45	
		12	2467	1	14.50	14.36	
		13	2472	1	13.50	13.42	
	802.11g	1-13	2412-2472	6	21.50	Not Required	
	802.11n20	1-13	2412-2472	HT0	21.50		
	802.11n40	3-11	2422-2462	HT0	17.50		
	802.11b	1	2412	1	19.50		19.46
		6	2437	6	21.50		21.42
		11	2462	6	19.50		19.38
		12	2467	6	14.50		14.41
		13	2472	6	13.50		13.39
	802.11g	1-13	2412-2472	6	21.50	Not Required	
	802.11n20	1-13	2422-2462	HT0	21.50		
	802.11n40	3-11	2412-2472	HE0	17.50		

Note:

1.As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2W/kg$.

9.3 Conducted power measurements of UNII_1

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.2 UNII_1	802.11a	36-48	5180-5240	6	12.50	Not Required	
		802.11 n20	36-48	5180-5240	HT0	12.50		
		802.11 n40	38-46	5190-5230	HT0	12.50		
		802.11 ac80	42	5210	VHT0	12.50	12.48	12.46
		802.11 ax20	36-48	5180-5240	HT0	12.50	Not Required	
		802.11 ax40	38-46	5190-5230	HT0	12.50		
		802.11 ax80	42	5210	VHT0	12.50		
Off	5.2 UNII_1	802.11a	36-48	5180-5240	6	17.50	Not Required	
		802.11 n20	36-48	5180-5240	HT0	17.50		
		802.11 n40	38-46	5190-5230	HT0	18.00		
		802.11 ac80	42	5210	VHT0	18.00	Not Required	
		802.11 ax20	36-48	5180-5240	HT0	17.50		
		802.11 ax40	38-46	5190-5230	HT0	18.00		
		802.11 ax80	42	5210	VHT0	18.00		

Note:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

9.4 Conducted power measurements of UNII_2a

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.3 UNII_2a	802.11a	52-64	5260-5320	6	12.50	Not Required	
		802.11 n20	52-64	5260-5320	HT0	12.50		
		802.11 n40	54-62	5270-5310	HT0	12.50		
		802.11 ac80	58	5290	VHT0	12.50	12.49	12.47
		802.11 ax20	52-64	5260-5320	HT0	12.50	Not Required	
		802.11 ax40	54-62	5270-5310	HT0	12.50		
		802.11 ax80	58	5290	VHT0	12.50		
Off	5.3 UNII_2a	802.11a	52	5260	6	18.00	17.86	17.88
			56	5280		18.00	17.84	17.86
			60	5300		18.00	17.88	17.91
			64	5320		18.00	17.83	17.89
		802.11 n20	52-64	5260-5320	HT0	18.00	Not Required	
		802.11 n40	54-62	5270-5310	HT0	18.00		
		802.11 ac80	58	5290	VHT0	17.50		
		802.11 ax20	52-64	5260-5320	HT0	18.00		
		802.11 ax40	54-62	5270-5310	HT0	18.00		
		802.11 ax80	58	5290	VHT0	17.50		

Note:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11 a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

9.5 Conducted power measurements of UNII_2c

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.6 UNII_2c	802.11a	100-140	5500-5700	6	12.50	Not Required	
		802.11 n20	100-140	5500-5700	HTO	12.50		
		802.11 n40	102-134	5510-5670	HTO	12.50		
		802.11 ac80	106	5530	VHTO	12.50	12.43	12.44
		802.11 ac80	122	5610	VHTO	12.50	12.39	12.42
		802.11 ax20	100-140	5500-5700	HTO	12.50	Not Required	
		802.11 ax40	102-134	5510-5670	HTO	12.50		
		802.11 ax80	106-122	5530-5610	VHTO	12.50		
Off	5.6 UNII_2c	802.11a	100	5500	6	20.00	19.76	19.82
			104	5520		20.00	19.85	19.84
			108	5540		20.00	19.92	19.89
			112	5560		20.00	19.78	19.79
			116	5580		22.00	21.92	21.89
			120	5600		20.00	19.83	19.94
			124	5620		20.00	19.86	19.92
			128	5640		20.00	19.88	19.86
			132	5660		20.00	19.92	19.91
			136	5680		20.00	19.85	19.79
			140	5700		20.00	19.93	19.85
		802.11 n20	100-140	5500-5700	HTO	22.00	Not Required	
		802.11 n40	102-134	5510-5670	HTO	20.50		
		802.11 ac80	106-122	5530-5610	VHTO	16.50		
		802.11 ax20	100-140	5500-5700	HTO	22.00		
		802.11 ax40	102-134	5510-5670	HTO	20.50		
		802.11 ax80	106-122	5530-5610	VHTO	16.50		

Note:

- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

9.6 Conducted power measurements of UNII_2c

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.8 UNII_3	802.11a	149-165	5745-5825	6	12.50	Not Required	
		802.11 n20	149-165	5745-5825	HT0	12.50		
		802.11 n40	151	5670-5795	HT0	12.50	12.42	12.39
			159	5670-5795	HT0	12.50	12.45	12.42
		802.11 ac80	155	5775	VHT0	12.50	12.41	12.41
		802.11 ax20	149-165	5745-5825	HT0	12.50	Not Required	
		802.11 ax40	151-159	5755-5795	HT0	12.50		
		802.11 ax80	155	5775	VHT0	12.50		
Off	5.8 UNII_2c	802.11a	149	5745	6	22.00	21.87	21.84
			153	5765		22.00	21.89	21.78
			157	5785		22.00	21.94	21.92
			161	5805		22.00	21.82	21.87
			165	5825		22.00	21.85	21.89
		802.11 n20	149-165	5745-5825	HT0	22.00	Not Required	
		802.11 n40	151-159	5755-5795	HT0	20.50		
		802.11 ac80	155	5775	VHT0	20.00		
		802.11 ax20	149-165	5745-5825	HT0	22.00		
		802.11 ax40	151-159	5755-5795	HT0	20.50		
		802.11 ax80	155	5775	VHT0	20.00		

Note:

- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

9.7 SARTEST RESULTS

General Notes:

1. Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
2. Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
3. Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHz WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1.4 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission mode was not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 7.1.4 for more information.

10 SAR TEST RESULTS

10.1 Body SAR test results

SAR test results of Bluetooth

Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Duty Cycle %	Duty Factor	Reported SAR 1g	Note
Bluetooth	39	Edge1	AWAN	Aux	0	13.00	12.82	0.040	0.042	100.00%	1.00	0.044	
	39	Rear			0	13.00	12.82	0.372	0.343	100.00%	1.00	0.358	
	39	Bottom			0	13.00	12.82	0.301	0.274	100.00%	1.00	0.286	
	0	Rear			0	13.00	12.67	0.175	0.171	100.00%	1.00	0.184	
	78	Rear			0	13.00	12.74	0.384	0.387	100.00%	1.00	0.411	

SAR test results of 2.4G WiFi

P-sensor On/Off	Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Reported SAR 1g	Note
on	802.11n40	6	Edge1	AWAN	Main	0	14.00	13.93	0.076	0.067	0.068	
		6	Rear			0	14.00	13.93	0.481	0.409	0.416	
		3	Rear			0	14.00	13.91	0.558	0.478	0.488	
		9	Rear			0	14.00	13.86	0.448	0.391	0.404	
		10	Rear			0	14.00	13.91	0.574	0.463	0.473	
		11	Rear			0	14.00	13.91	0.539	0.447	0.456	
		6	Bottom			0	14.00	13.93	0.428	0.385	0.391	
		6	Edge1		Aux	0	14.00	13.94	0.027	0.027	0.027	
		6	Rear			0	14.00	13.94	0.399	0.445	0.451	
		3	Rear			0	14.00	13.91	0.304	0.343	0.350	
		9	Rear			0	14.00	13.88	0.447	0.487	0.501	
		10	Rear			0	14.00	13.92	0.420	0.461	0.470	
		11	Rear			0	14.00	13.88	0.441	0.507	0.521	
		6	Bottom			0	14.00	13.94	0.184	0.186	0.189	
Off	802.11b	6	Edge1	AWAN	Main	19	21.50	21.44	0.038		0.000	
		6	Rear			19	21.50	21.44	0.125	0.128	0.130	
		6	Bottom			19	21.50	21.44	0.121		0.000	
		6	Edge1		Aux	19	21.50	21.42	0.013		0.000	
		6	Rear			19	21.50	21.42	0.066	0.062	0.063	
		6	Bottom			19	21.50	21.42	0.046		0.000	

SAR test results of 5G WiFi

P-sensor On/Off	Band	Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Reported SAR 1g	Note
On	5G_UNII 1 & 2a	802.11 ac80	58	Edge1	AWAN	Main	0	12.50	12.49	0.066	0.062	0.062	
			58	Rear			0	12.50	12.49	0.443	0.432	0.433	
			58	Bottom			0	12.50	12.49	0.093	0.094	0.094	
			42	Rear			0	12.50	12.48	0.538	0.509	0.511	
			58	Edge1		Aux	0	12.50	12.47	0.025	0.023	0.023	
			58	Rear			0	12.50	12.47	0.406	0.372	0.375	
			58	Bottom			0	12.50	12.47	0.082	0.071	0.071	
			42	Rear			0	12.50	12.46	0.461	0.402	0.406	
			106	Edge1		Main	0	12.50	12.43	0.134	0.135	0.137	
			106	Rear			0	12.50	12.43	0.986	1.010	1.026	
			106	Bottom			0	12.50	12.43	0.249	0.301	0.306	
	5G_UNII 2c	802.11 ac80	122	Rear			0	12.50	12.39	0.976	1.030	1.056	1
			106	Edge1		Aux	0	12.50	12.44	0.030	0.020	0.020	
			106	Rear			0	12.50	12.44	0.406	0.361	0.366	
			106	Bottom			0	12.50	12.44	0.052	0.045	0.045	
			122	Rear			0	12.50	12.42	0.601	0.518	0.528	
			155	Edge1		Main	0	12.50	12.41	0.106	0.111	0.113	
			155	Rear			0	12.50	12.41	0.662	0.712	0.727	
			155	Bottom			0	12.50	12.41	0.449	0.388	0.396	
			151	Rear			0	12.50	12.42	0.725	0.776	0.790	
			159	Rear			0	12.50	12.45	0.720	0.743	0.752	
	5G_UNII 3	802.11 ac80	155	Edge1		Aux	0	12.50	12.41	0.030	0.022	0.022	
			155	Rear			0	12.50	12.41	0.444	0.465	0.475	
			155	Bottom			0	12.50	12.41	0.055	0.051	0.052	
			151	Rear			0	12.50	12.39	0.498	0.415	0.426	
		802.11 n40	159	Rear			0	12.50	12.42	0.608	0.474	0.483	
			155	Edge1			0	12.50	12.41	0.030	0.022	0.022	
Off	5G_UNII 1 & 2a	802.11 a	60	Edge1	AWAN	Main	19	18.00	17.88	0.042		0.000	
			60	Rear			19	18.00	17.88	0.206	0.201	0.207	
			60	Bottom			19	18.00	17.88	0.039		0.000	
			60	Edge1			19	18.00	17.91	0.020		0.000	
			60	Rear		Aux	19	18.00	17.91	0.100	0.093	0.095	
			60	Bottom			19	18.00	17.91	0.046		0.000	
	5G_UNII 2c	802.11 a	116	Edge1		Main	19	22.00	21.92	0.223		0.000	
			116	Rear			19	22.00	21.92	0.873	0.883	0.899	
			116	Bottom			19	22.00	21.92	0.315	0.335	0.341	
			116	Edge1		Aux	19	22.00	21.89	0.050		0.000	
			116	Rear			19	22.00	21.89	0.276	0.268	0.275	
			116	Bottom			19	22.00	21.89	0.078		0.000	
	5G_UNII 3	802.11 a	157	Edge1		Main	19	22.00	21.94	0.163		0.000	
			157	Rear			19	22.00	21.94	0.476	0.466	0.472	
			157	Bottom			19	22.00	21.94	0.312	0.307	0.311	
			157	Edge1		Aux	19	22.00	21.92	0.036		0.000	
			157	Rear			19	22.00	21.92	0.216	0.217	0.221	
			157	Bottom			19	22.00	21.92	0.058		0.000	
ON	5G UNII 2c	802.11 ac80	122	Rear	AWAN	Main	0	12.50	12.39	0.876	1.020	1.046	2

Note:

- Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position
 - Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
- Original SAR = 1.030 W/kg, therefore second times repeat SAR is required.
Repeat SAR = 1.020W/kg < 1.45W/kg
SAR variation= -0.97 % < 20%

11. SIMULTANEOUS TRANSMISSION CONDITIONS

11.1 Stand-alone SAR test exclusion

SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration
1	WLAN 2.4G(Main)+BT
2	RLAN 5G(Main)+BT
3	WLAN 2.4G(Main)+ WLAN 2.4G(Aux)
4	RLAN 5G(Main)+ RLAN 5G(Aux)
5	RLAN 5G(Main)+ RLAN 5G(Aux) +BT

11.2 Simultaneous transmission conditions

KDB 447498 D01 General RF Exposure Guidance v06, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$

11.3 Estimated SAR for Simultaneous Transmission SAR Analysis

CONSIDERATIONS FOR SAR ESTIMATION

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg

11.3.1 Estimated SAR for Bluetooth

According to section 9, the Bluetooth must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{\text{(GHz)}}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Estimated 1-g SAR (W/Kg)					
			dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Bluetooth	2.4GHz	2480	13.00	20.00	6.40	8.00	4.50	225.80	203.25	42.20	Test	Test	Test	>200mm	>200mm	0.10

11.4 Simultaneous transmission conditions

Test Position SAR _{1g} (W/kg)	Edge1	Rear	Bottom
WLAN 2.4G WiFi_Main	0.068	0.488	0.391
WLAN 2.4G WiFi_Aux	0.027	0.521	0.189
UNII_1 & 2a WiFi_Main	0.062	0.511	0.094
UNII_1 & 2a WiFi_Aux	0.023	0.406	0.071
UNII_2c WiFi_Main	0.137	1.056	0.306
UNII_2c WiFi_Aux	0.020	0.528	0.045
UNII_3 WiFi_Main	0.113	0.790	0.396
UNII_3 WiFi_Aux	0.022	0.483	0.052
Bluetooth_DH5	0.043	0.411	0.280
WLAN 2.4G_Main+WLAN 2.4G_Aux MAX \sum SAR _{1g}	0.095	1.009	0.580
RLAN 5G_Main+ RLAN 5G_Aux MAX \sum SAR _{1g}	0.160	1.584	0.467
WLAN_+BT MAX \sum SAR _{1g}	0.180	1.467	0.676

Note:

1. MAX. \sum SAR_{1g}= 1.584 W/Kg<1.6 W/Kg, so Peak location SAR are not required.
2. Test tool can't support mimo with different mode, so we select worse case to evaluation simultaneous transmission.

12. TEST LAYOUT

Specific Absorption Rate Test Layout




Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

HSL(2450MHz)



HSL(5GHz)

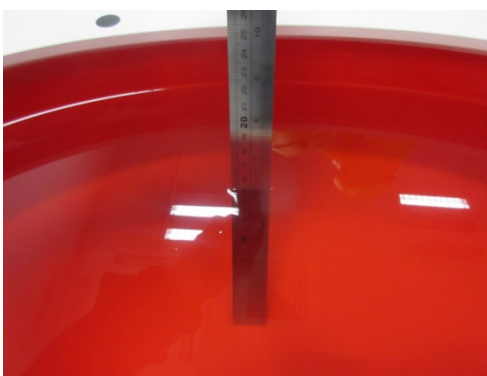

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2007T046D_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2007T046D_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2007T046D_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2007T046D_Appendix D.)

End of Test Report