

DFS Test Report

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : R95

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Jul. 02, 2024

Test Period : Nov. 26, 2024 ~ Nov. 27, 2024

Issued Date : Dec. 26, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Dec. 26, 2024	Initial Issue	Snow Wang

Verification of Compliance

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : R95

FCC ID : KA2R95A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	9
4	Dynamic Frequency Selection	10
4.1.	Limits	10
4.2.	Test and Measurement System	14
5	Test Results	17
5.1.	Radar Waveforms and Traffic.....	17
5.2.	Channel Loading	33
5.3.	Channel Availability Check Time.....	37
5.4.	Channel Move Time and Channel Closing Transmission Time.....	40
5.5.	Non-Occupancy Period	43
5.6.	U-NII Detection Bandwidth	45
5.7.	Statistical Performance check	48

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Product Name	BE9500 Wi-Fi 7 Smart Router Wi-Fi 7 BE9500 Mesh Router				
Product Name different description	Different product name is for marketing purpose. No physical difference.				
Trade Name	D-Link				
Model Number	R95				
FCC ID	KA2R95A1				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80	U-NII Band 2-A		5290	
		U-NII Band 2-C		5530 – 5610	
	802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160	U-NII Band 2-A		5250	
		U-NII Band 2-C		5570	
Modulation Type	OFDM/OFDMA				
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)	
	ANT-0 (ANT 2)	2/5G2	Dipole Antenna	U-NII Band 2-A	1.85
				U-NII Band 2-C	1.94
	ANT-1 (ANT 1)	2/5G1	Dipole Antenna	U-NII Band 2-A	0.9
U-NII Band 2-C				2.14	
Antenna Delivery	802.11a: 2TX (CDD) 802.11n / ac / ax / be: 2TX (MIMO/Beamforming on)				
Operate Temp. Range	0 ~ +40 °C				
EUT Power Rating	12 Vdc				

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point (point-to-point)	
	☐ Outdoor access point (point-to-multipoint)	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☒ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11be EHT20
802.11be EHT40
802.11be EHT80
802.11be EHT160

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Nov. 26 , 2024 ~ Nov. 27 , 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 8, 2024	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

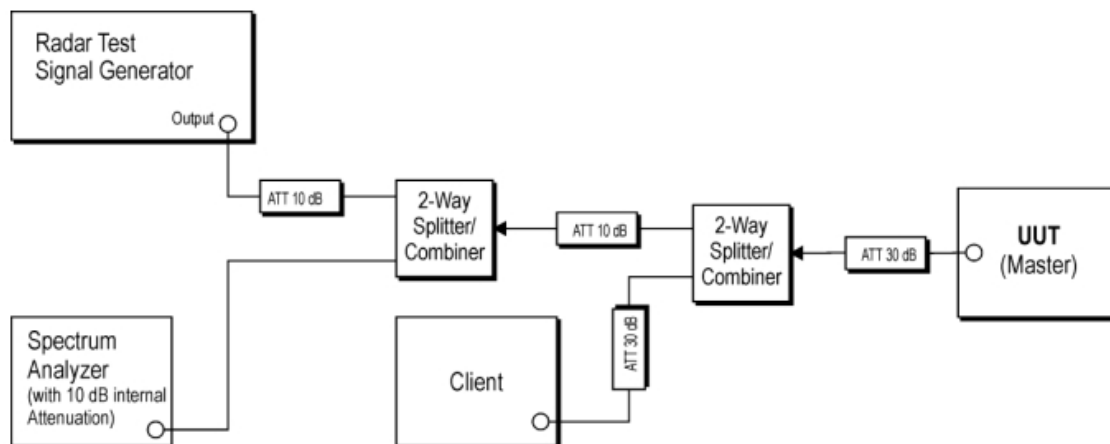


Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Access Point	D-Link	R95	FCC ID:KA2R95A1

4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

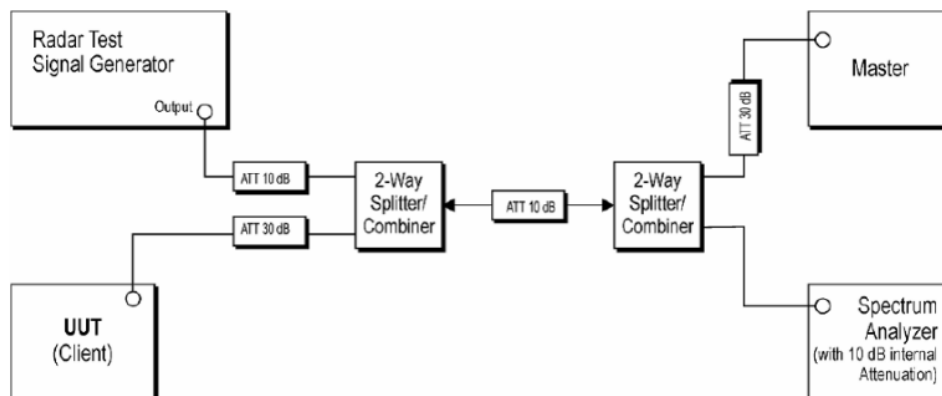

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Access Point	D-Link	R95	FCC ID:KA2R95A1

4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.5. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

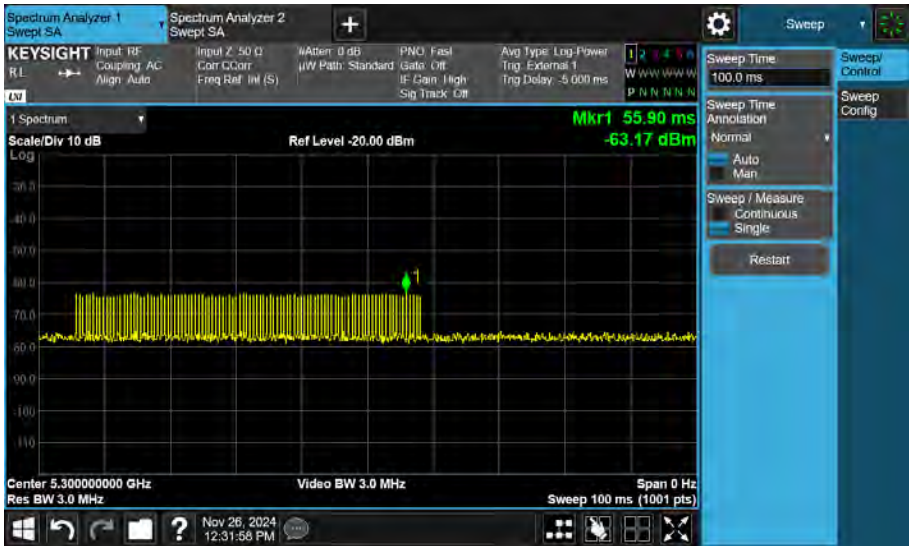802.11be EHT20_ 5300 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1	

802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 2

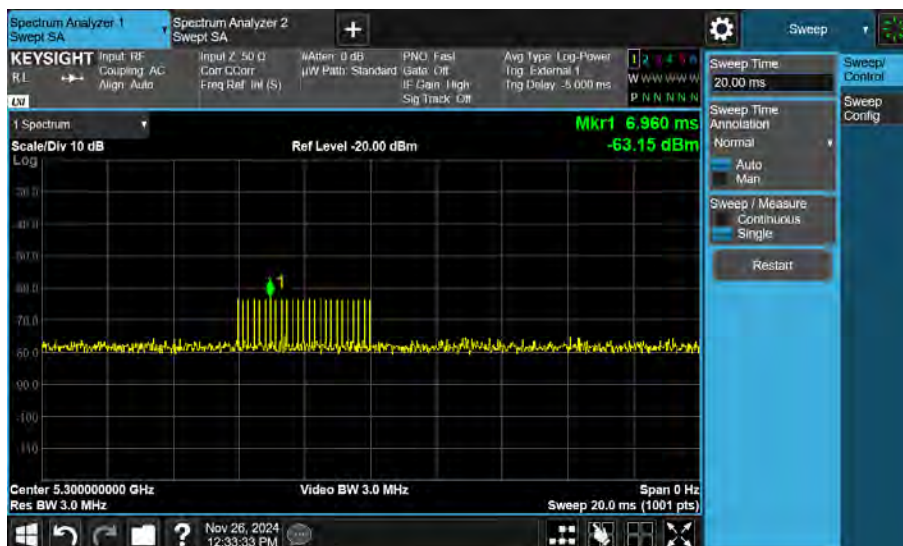


Short Pulse Radar
Type 3





802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 4

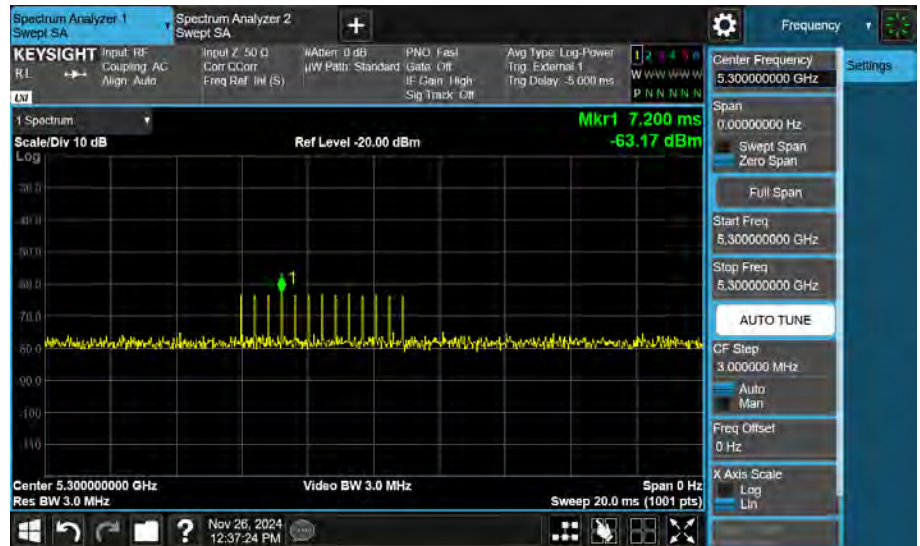


Long Pulse Radar
Type 5

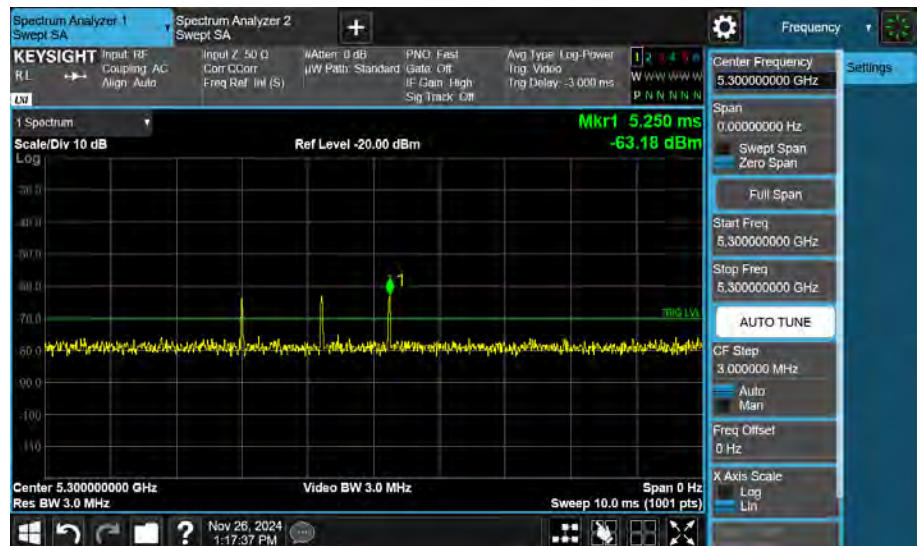

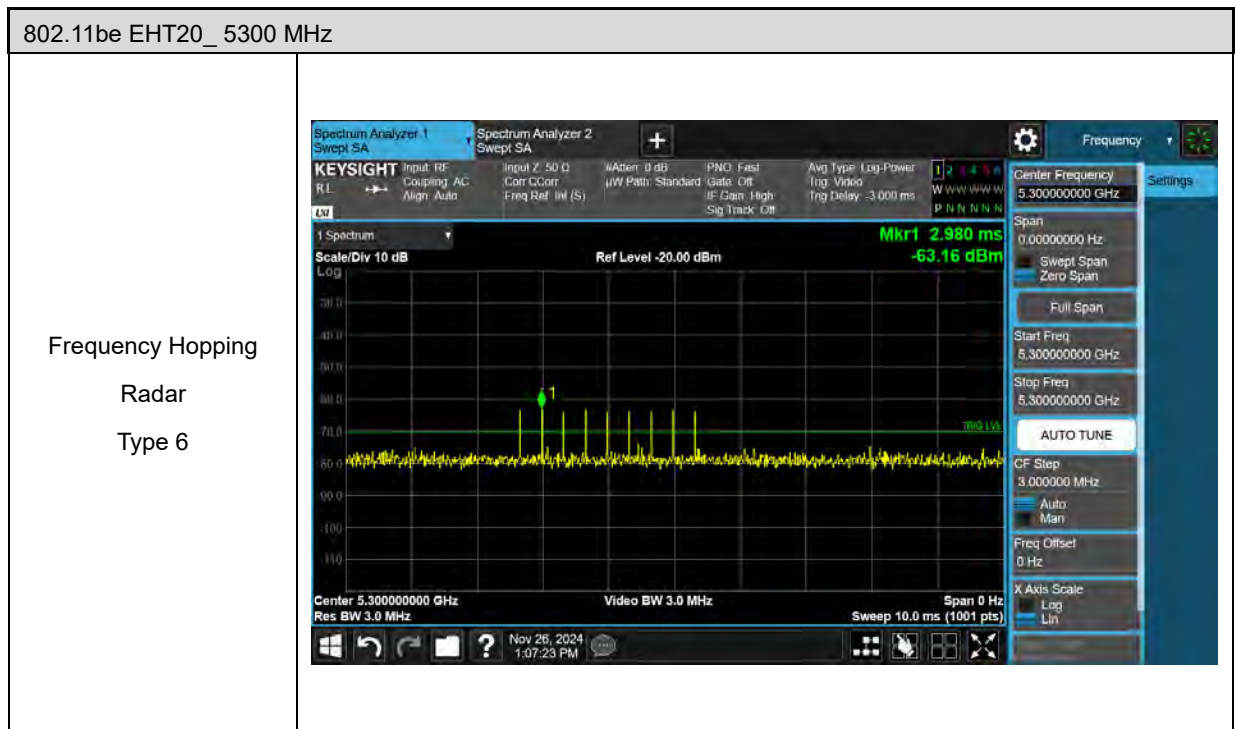




802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 0

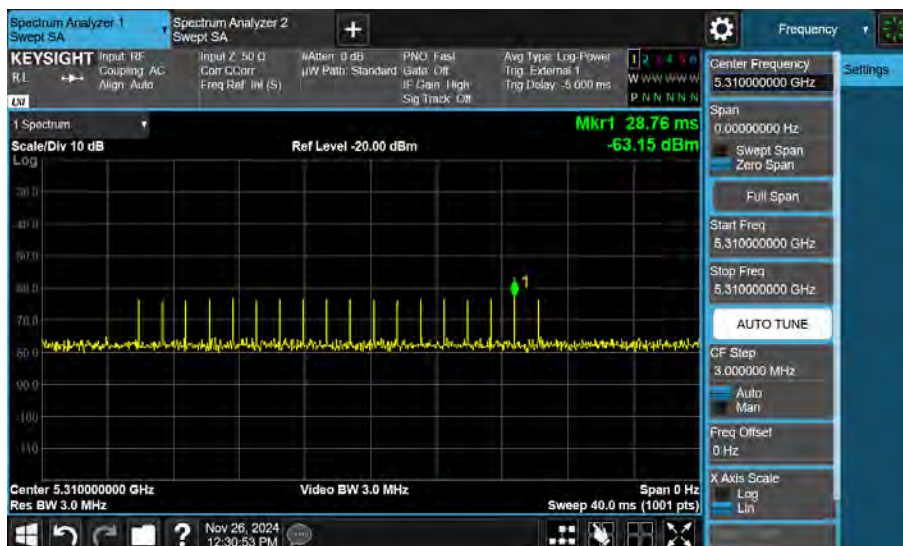

Short Pulse Radar
Type 1

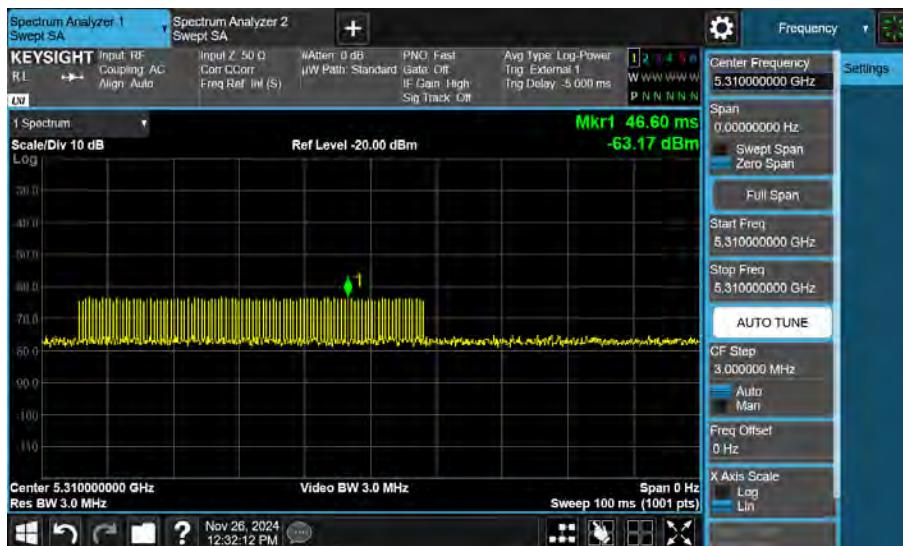

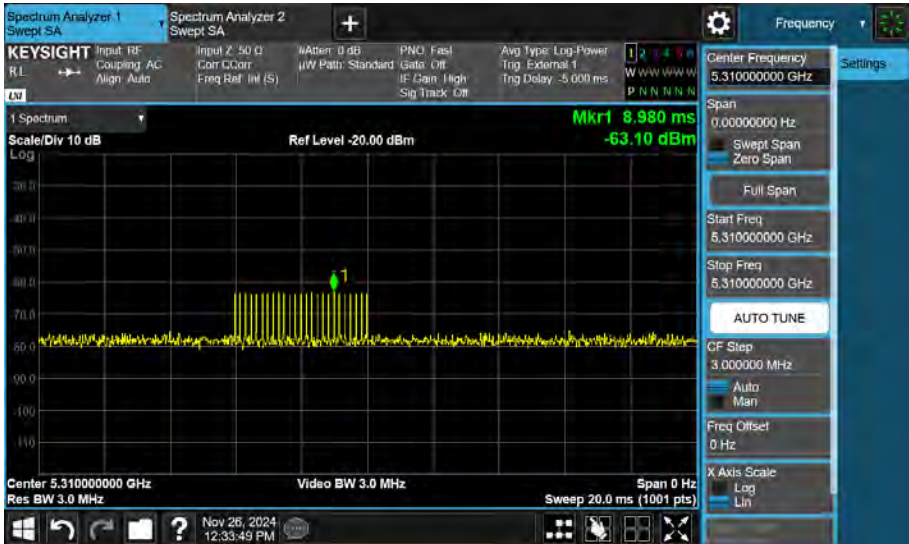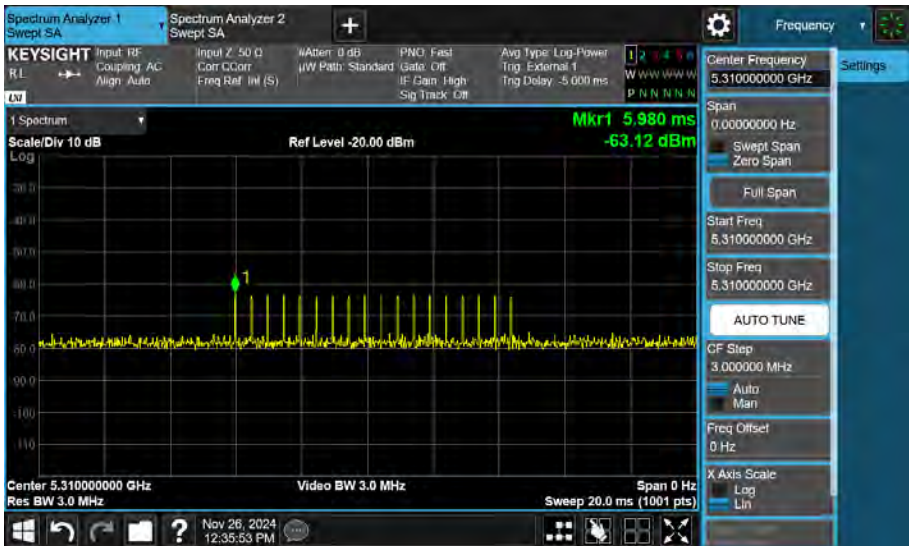
802.11be EHT40_ 5310 MHz	
Short Pulse Radar Type 2	
Short Pulse Radar Type 3	


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 4




Long Pulse Radar
Type 5

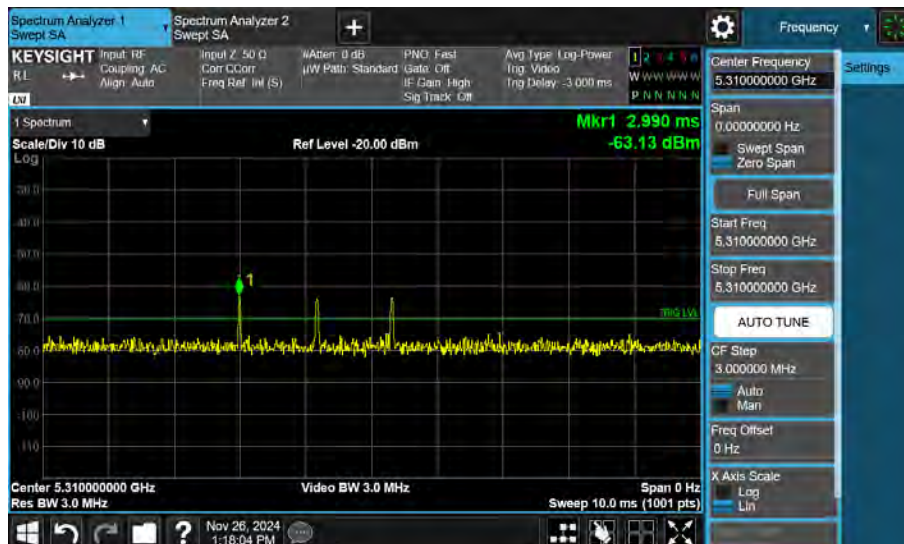

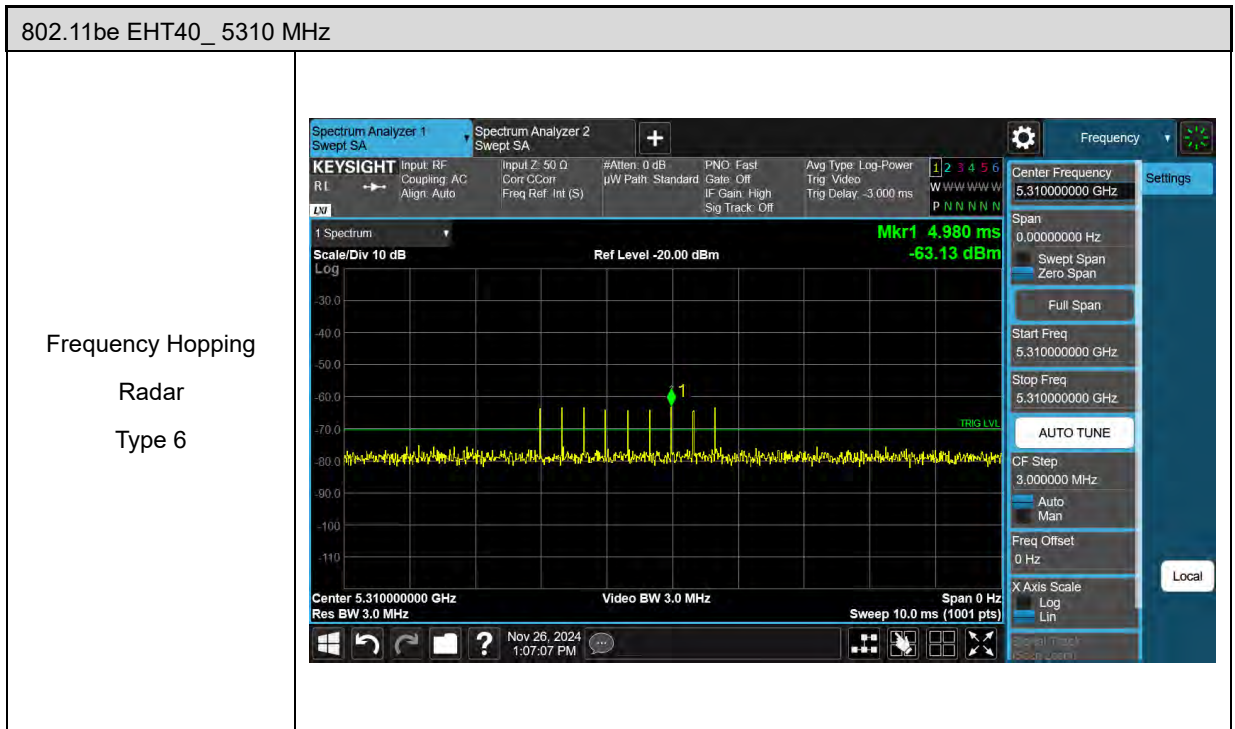


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 0

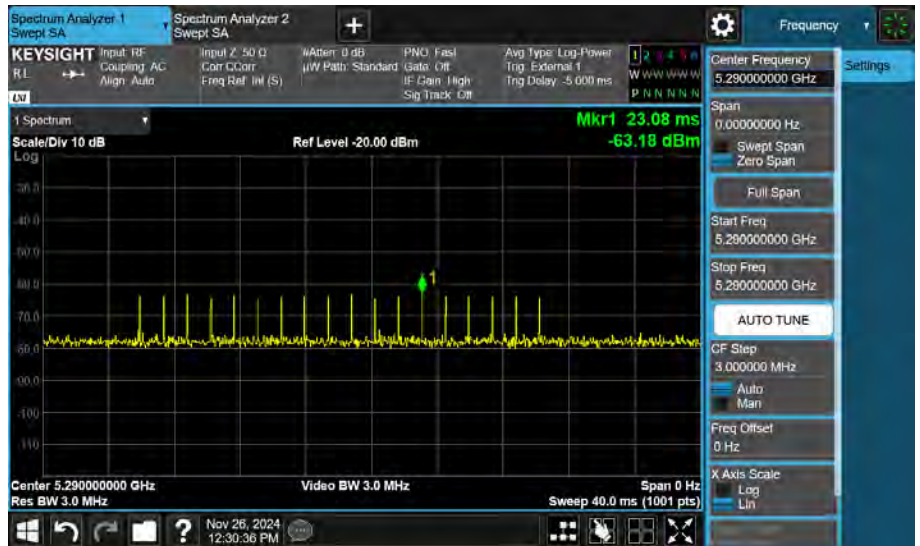


Short Pulse Radar
Type 1

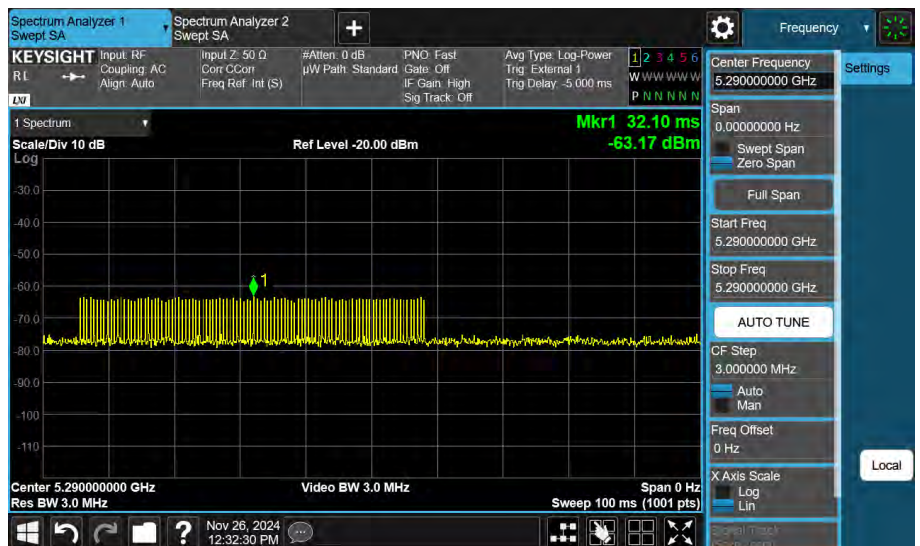

802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 2

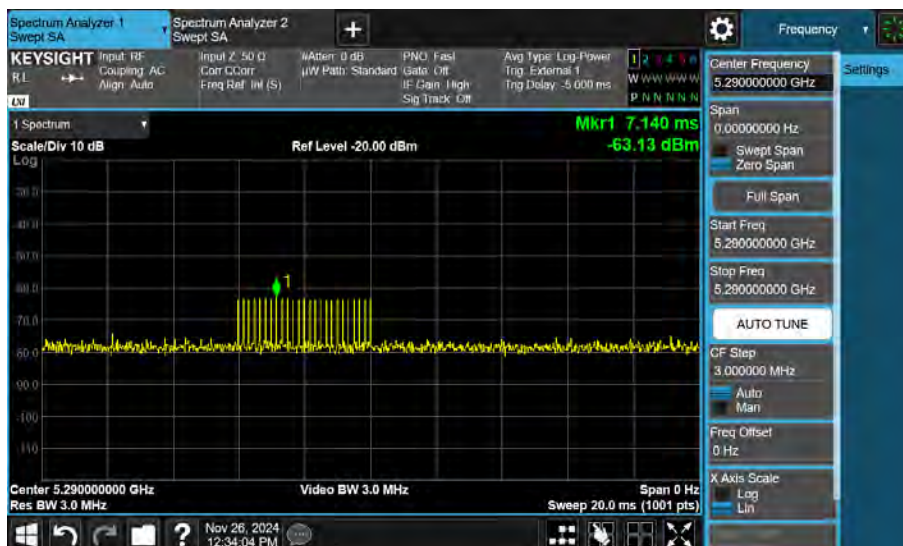


Short Pulse Radar
Type 3




802.11be EHT80_ 5290 MHz



Short Pulse Radar
Type 4

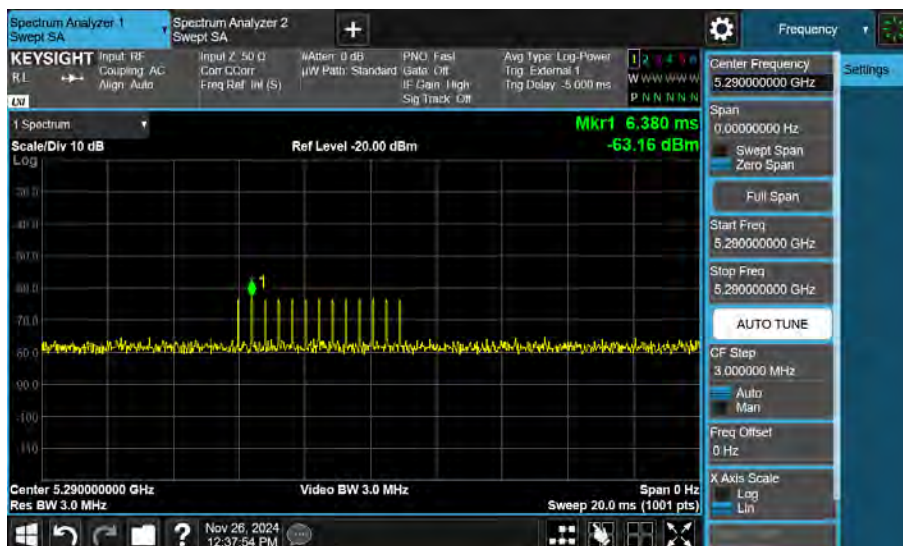

Long Pulse Radar
Type 5




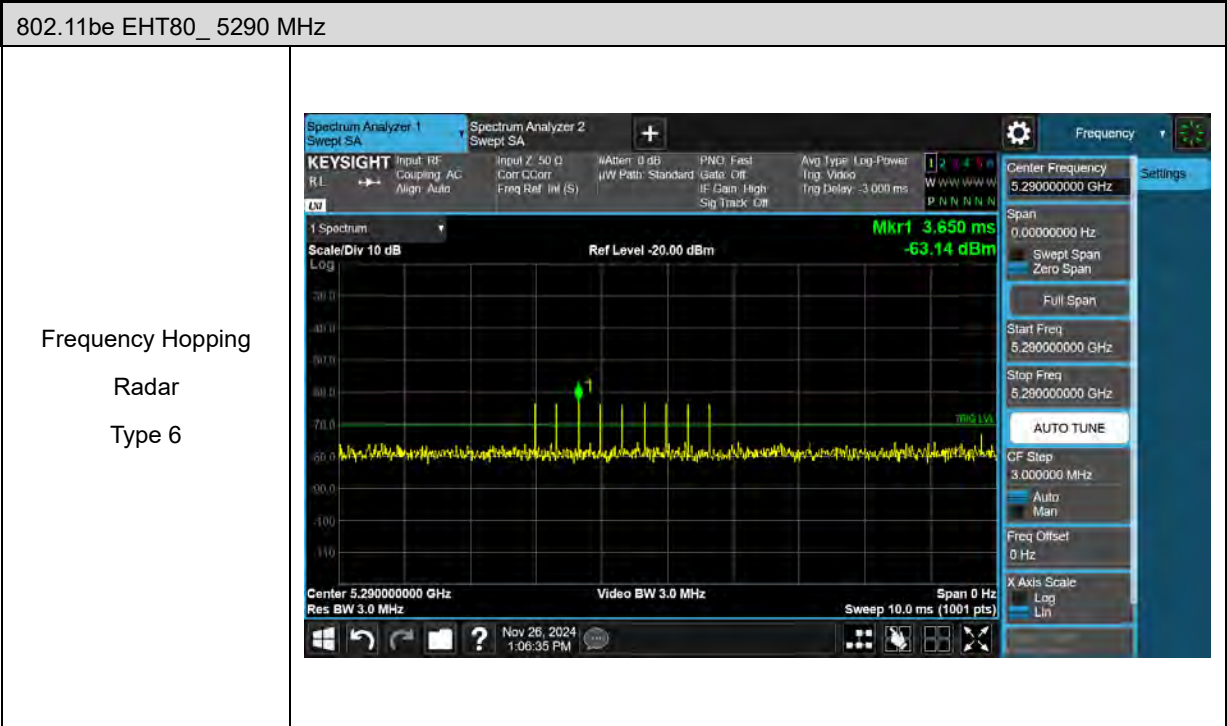

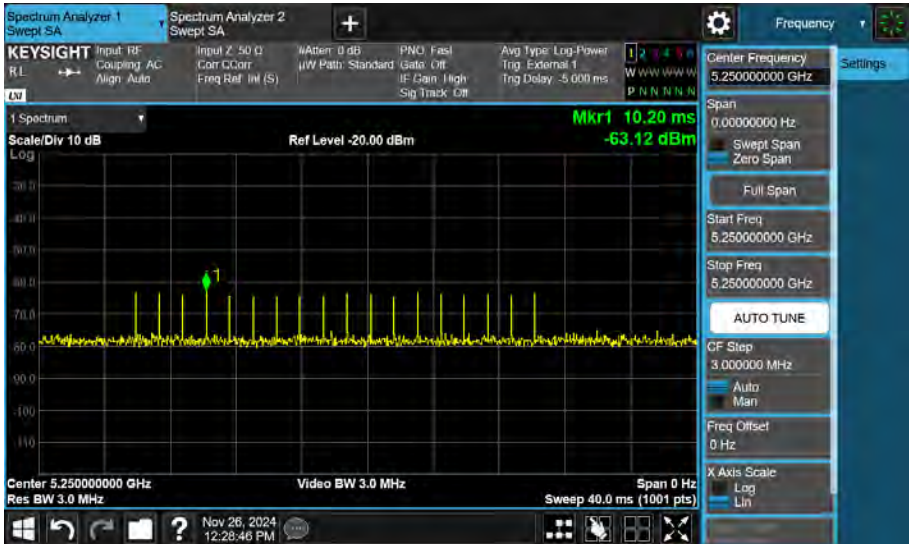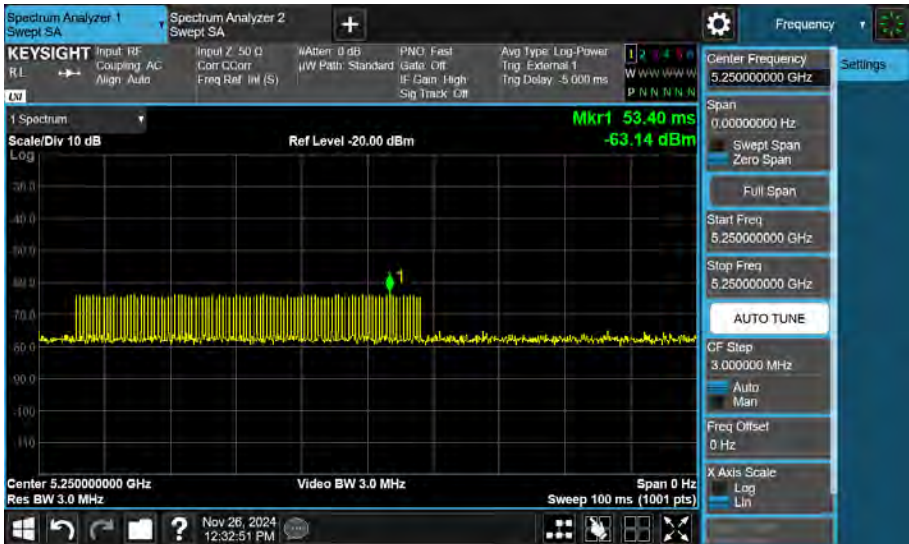
802.11be EHT160_ 5250 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1	

802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 2

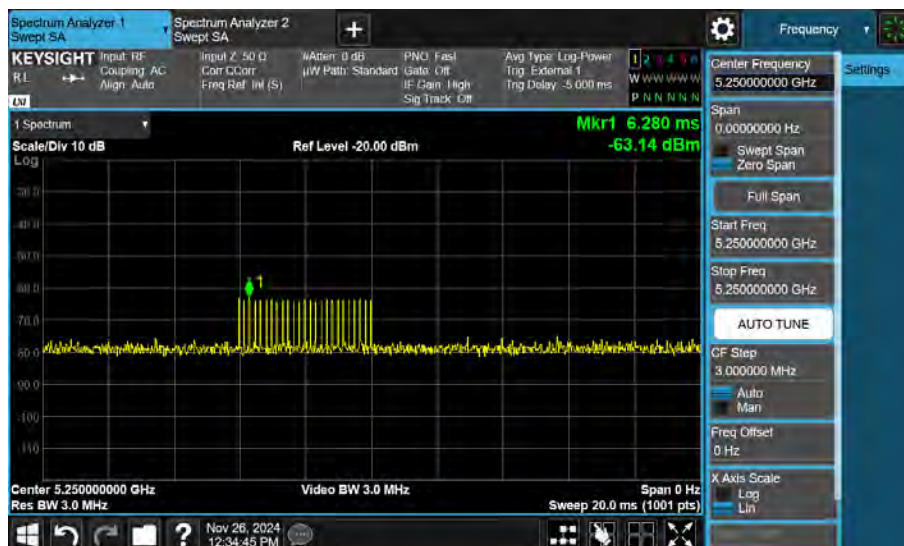

Short Pulse Radar
Type 3

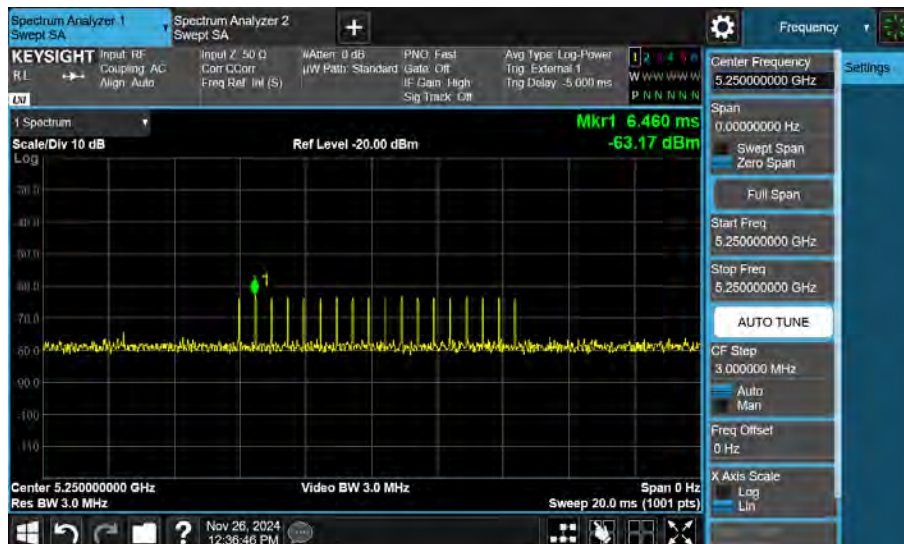




802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 4



Long Pulse Radar
Type 5

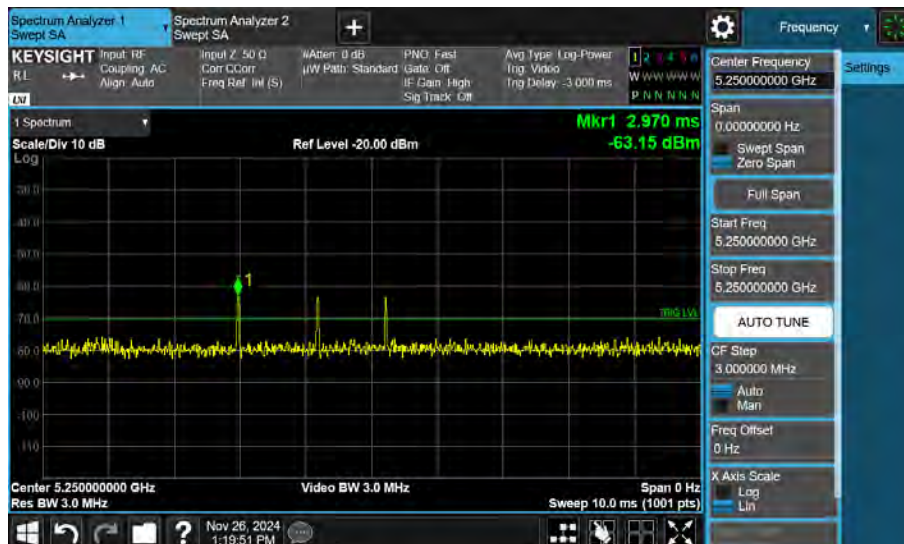

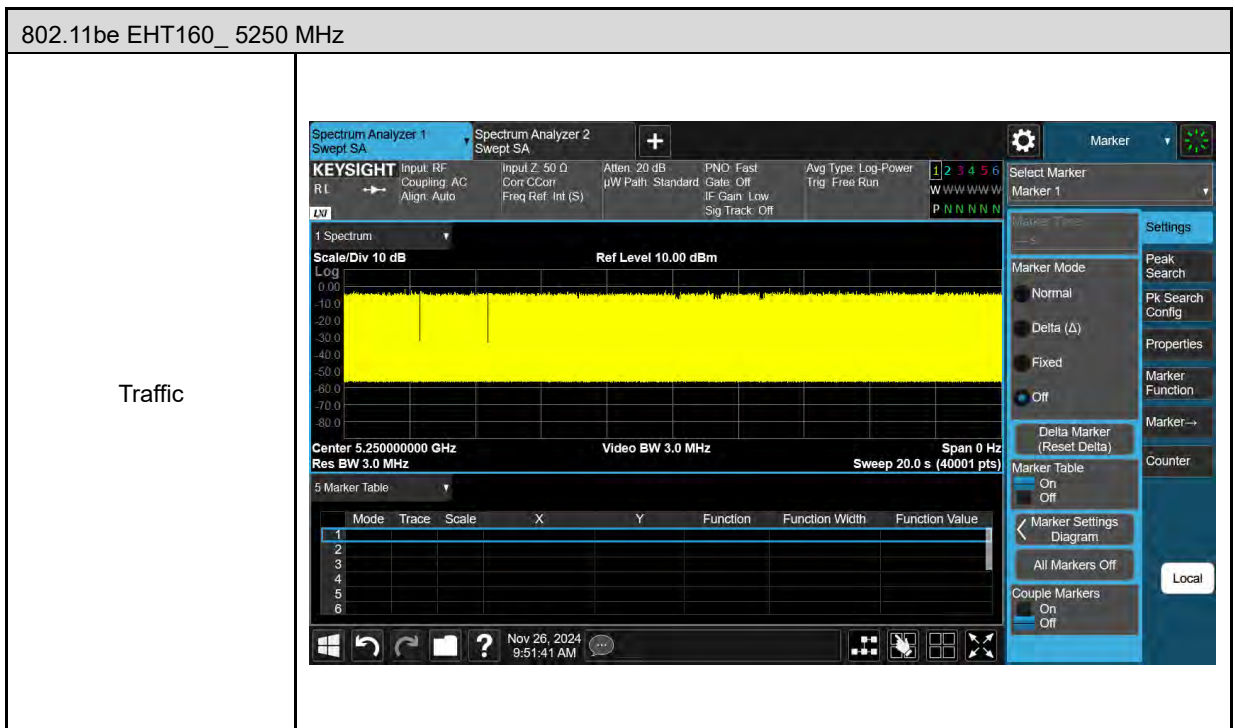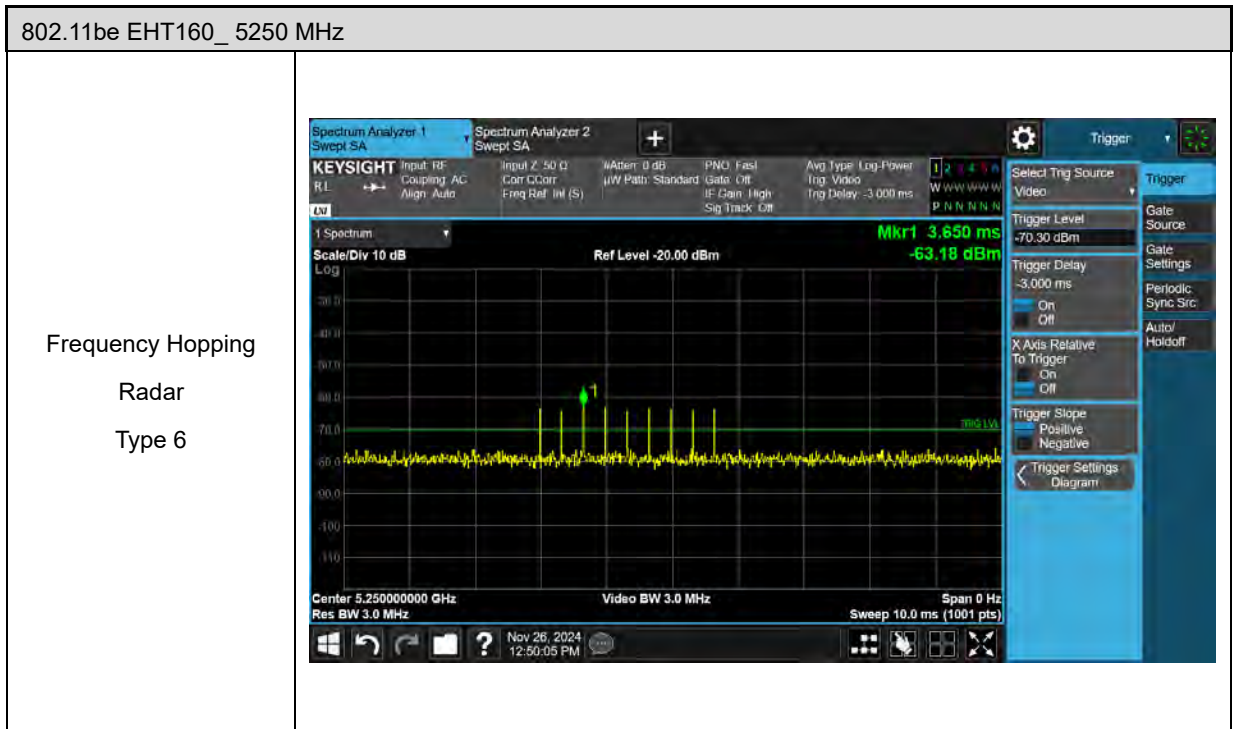

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11be EHT20



DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms
On Time Point:		Total Point:	Sum of On Time(s):
7996		39474	20.26ms
Sweep Time(s):		Sweep Point:	Duty Cycle(%):
101.33ms		40001	20.26%

Run

802.11be EHT40



DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7965
39474
20.18ms

Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
20.18%

eurofins

RUN

802.11be EHT80



DFS and Adaptivity

Device

Trigger Level(dBm):

MK1 Time(s):

MK2 Time(s):

Delta Time(s):

-50

0

100.00ms

100.00ms

On Time Point:

Total Point:

Sum of On Time(s):

7904

39474

20.02ms

Sweep Time(s):

Sweep Point:

Duty Cycle(%):

101.33ms

40001

20.02%

eurofins

RUN

802.11be EHT160



DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-45	0	100.00ms	100.00ms
On Time Point:		Total Point:	Sum of On Time(s):
7720		39474	19.56ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.33ms	40001	19.56%	

eurofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check

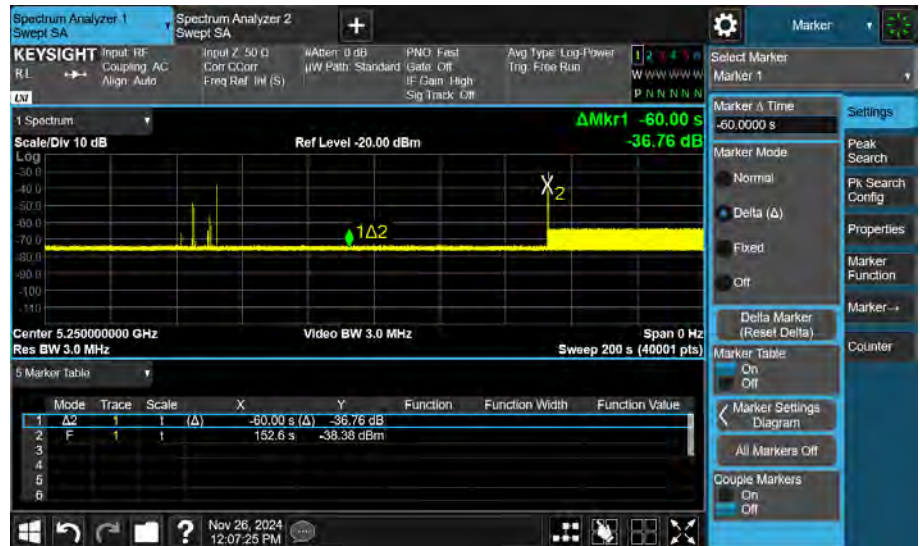


Initial Channel
Availability Check
Begin

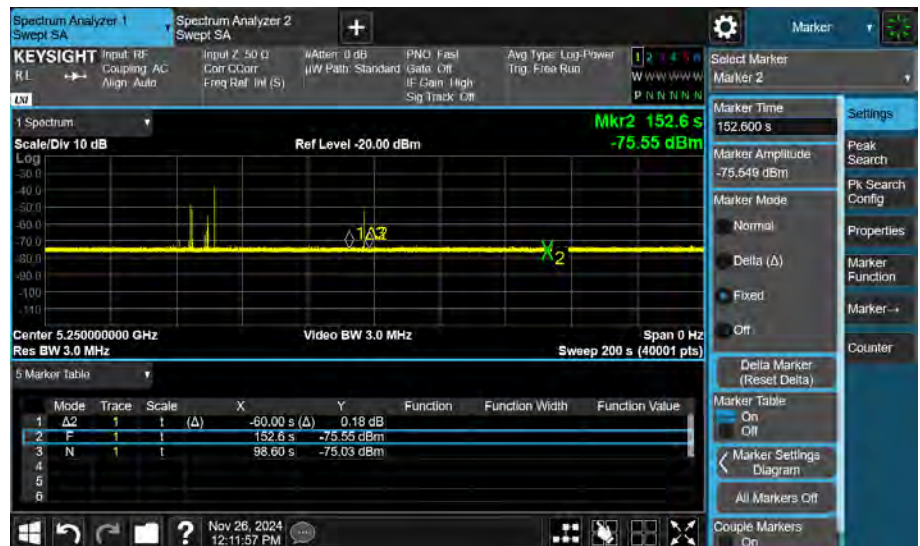

802.11be EHT160_ 5250 MHz

Initial Channel
 Availability Check
 End

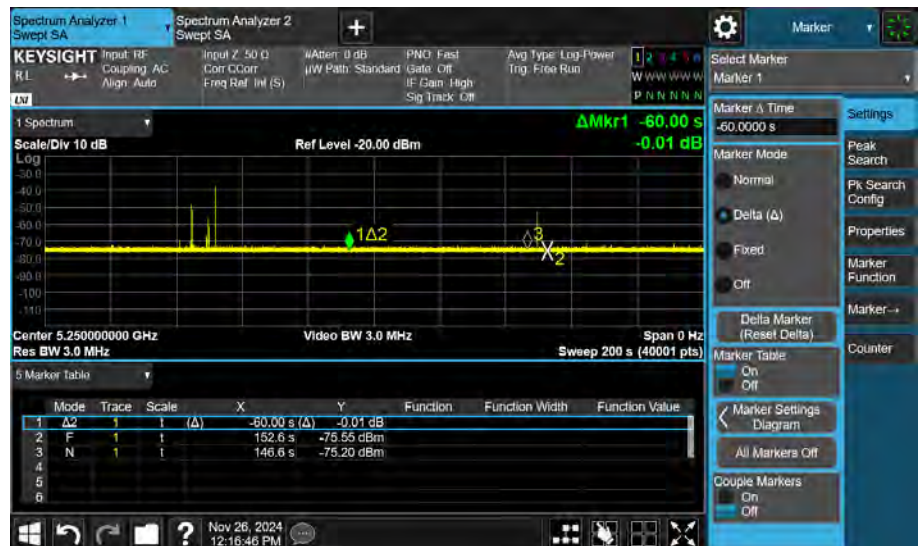

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)		Limit (sec)
		Master	Client	
5250	Type 0	547.0	767.0	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)		Limit (msec)
		Master	Client	
5250	Type 0	47.5	32	60

Master

802.11be EHT160_ 5250 MHz

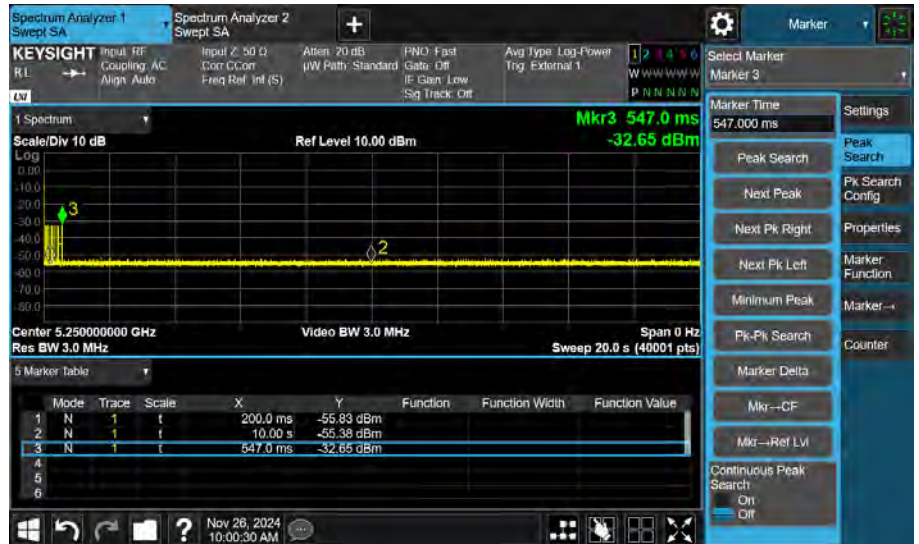

Channel Move and
Closing Time

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms

On Time Point:	Total Point:	Sum of On Time(s):
95	19600	47.50ms


Sweep Time(s):	Sweep Point:	Duty Cycle(%)
20000.00ms	40001	0.48%

euofins

RUN

Client

802.11be EHT160_ 5250 MHz

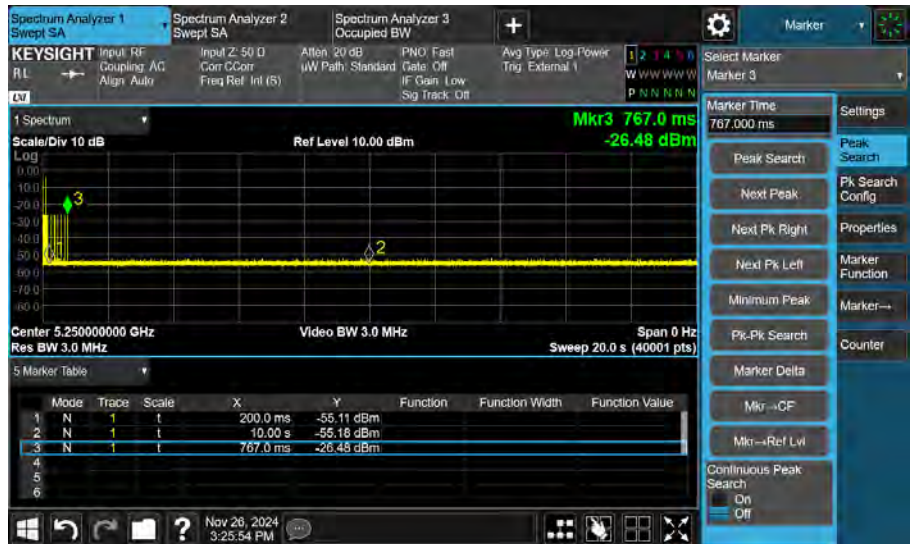

Channel Move and
Closing Time

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms

On Time Point:	Total Point:	Sum of On Time(s):
64	19600	32.00ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%)
20000.00ms	40001	0.33%



euofins


RUN

5.5. Non-Occupancy Period

802.11be EHT160_ 5250 MHz

Master

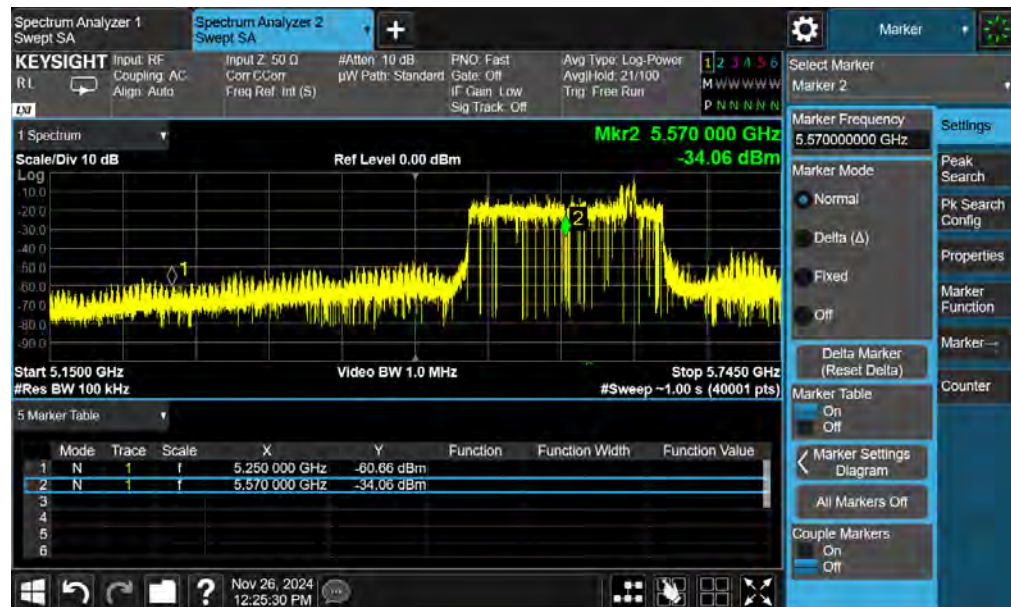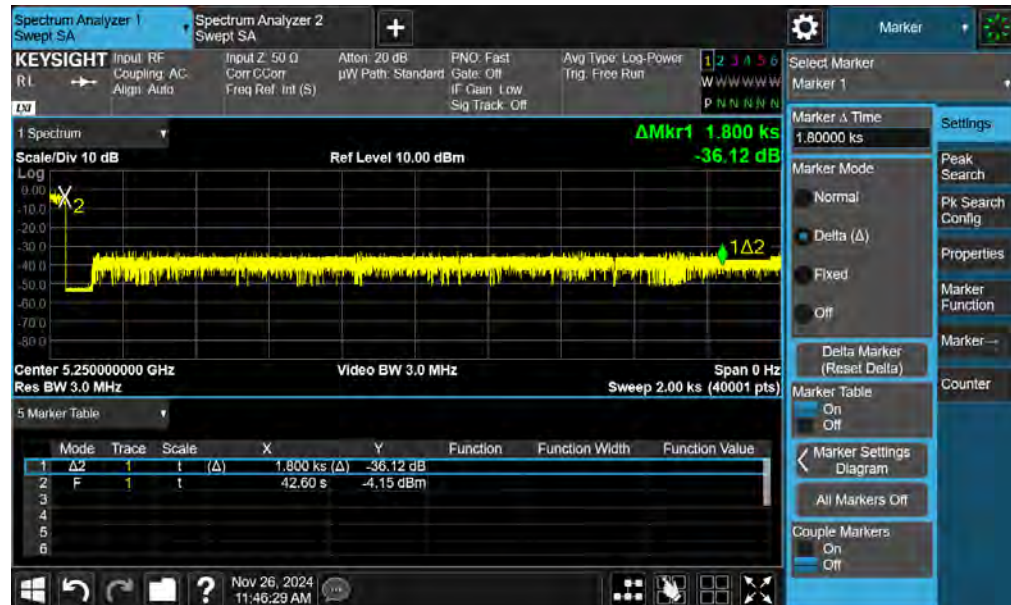

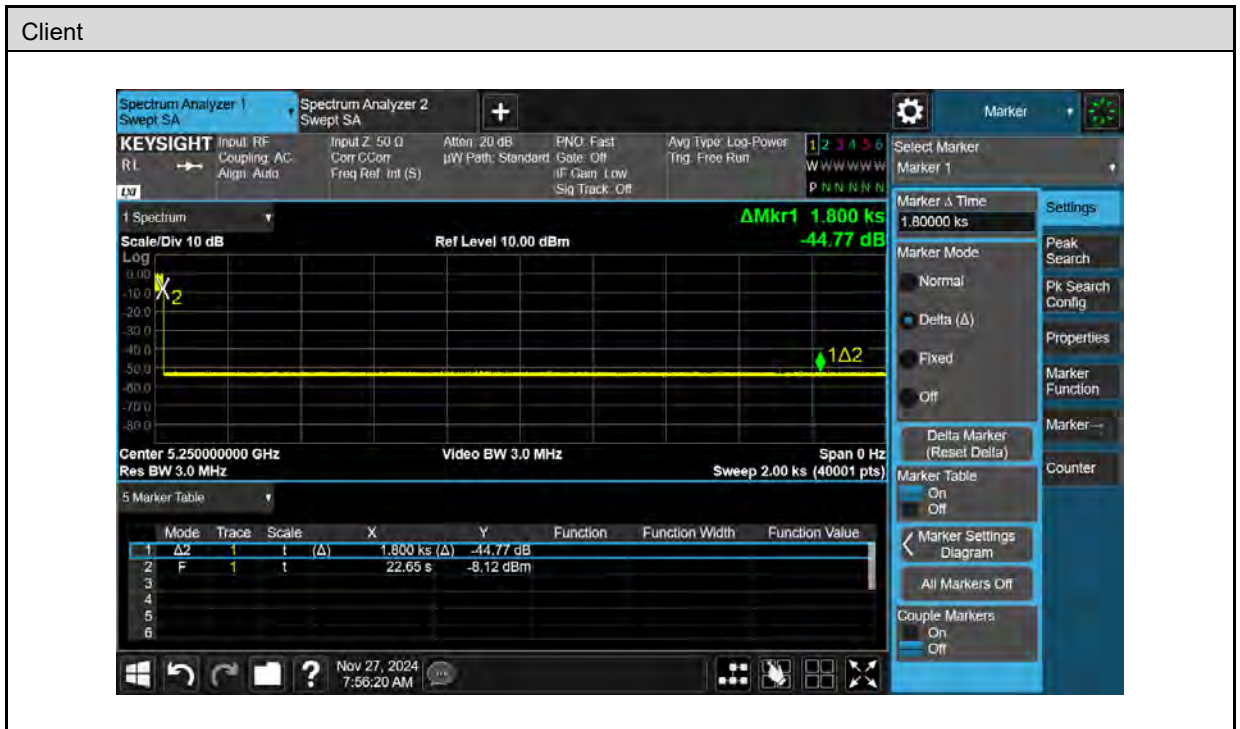

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode	802.11be EHT20					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.997	105.28	≥ 100

Test Mode	802.11be EHT40					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5530	5570	40	37.816	105.78	≥ 100

Test Mode	802.11be EHT80					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	77.25	103.56	≥ 100

Test Mode	802.11be EHT160					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	76.953	103.96	≥ 100

Test Graphs


802.11be EHT20_ 5300 MHz




802.11be EHT40_ 5310 MHz



802.11be EHT80_ 5290 MHz

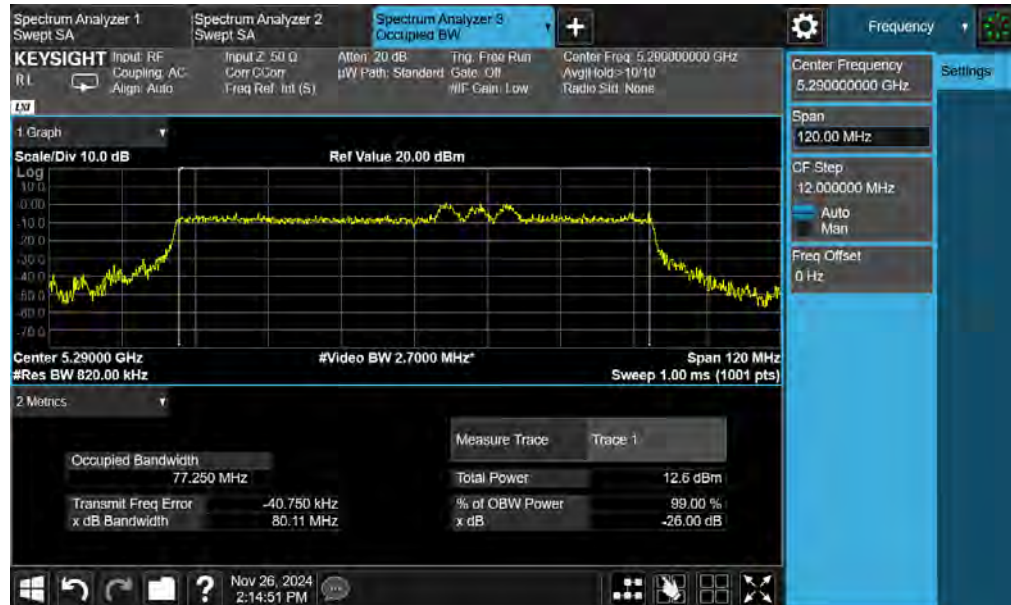

802.11be EHT160_ 5250 MHz

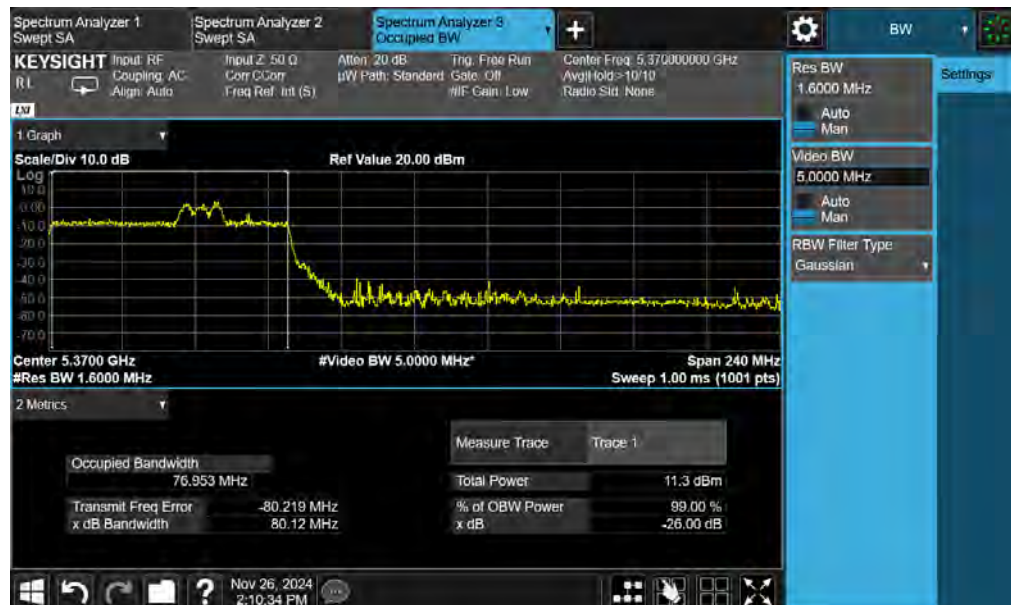

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	26	4	86.67%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	27	3	90.00%	≥ 60%
	Type1~4					90.00%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	27	3	90.00%	≥ 60%
	Type2	Random	Random	26	4	86.67%	≥ 60%
	Type3	Random	Random	29	1	96.67%	≥ 60%
	Type4	Random	Random	27	3	90.00%	≥ 60%
	Type1~4					90.83%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	29	1	96.67%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					93.33%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	29	1	96.67%	≥ 60%
	Type2	Random	Random	28	2	93.33%	≥ 60%
	Type3	Random	Random	28	2	93.33%	≥ 60%
	Type4	Random	Random	29	1	96.67%	≥ 60%
	Type1~4					95.00%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	3066	18	326	1
2	5300	1	638	83	1567	1
3	5300	1	558	95	1792	1
4	5300	1	938	57	1066	1
5	5300	1	758	70	1319	1
6	5300	1	598	89	1672	1
7	5300	1	878	61	1139	1
8	5300	1	638	83	1567	1
9	5300	1	938	57	1066	1
10	5300	1	558	95	1792	1
11	5300	1	718	74	1393	1
12	5300	1	798	67	1253	1
13	5300	1	558	95	1792	1
14	5300	1	938	57	1066	0
15	5300	1	538	99	1859	1
16	5300	1	2598	21	385	0
17	5300	1	1265	42	791	1
18	5300	1	1408	38	710	1
19	5300	1	1905	28	525	1
20	5300	1	1316	41	760	1
21	5300	1	2944	18	340	1
22	5300	1	2015	27	496	1
23	5300	1	1374	39	728	1
24	5300	1	1685	32	593	1
25	5300	1	2737	20	365	1
26	5300	1	2064	26	484	1
27	5300	1	1049	51	953	1
28	5300	1	1025	52	976	1
29	5300	1	880	60	1136	1
30	5300	1	1506	36	664	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	3.30	172.80	26	5787	1
2	5300	2.90	177.80	28	5624	0
3	5300	3.60	192.80	26	5187	1
4	5300	2.40	156.10	28	6406	1
5	5300	3.40	226.90	28	4407	1
6	5300	3.60	206.00	29	4854	1
7	5300	4.40	154.30	29	6481	1
8	5300	3.50	214.10	27	4671	1
9	5300	1.40	199.30	25	5018	1
10	5300	1.40	228.60	28	4374	1
11	5300	2.90	217.70	28	4593	0
12	5300	4.10	175.50	26	5698	1
13	5300	1.20	174.90	25	5718	1
14	5300	3.20	205.70	29	4861	1
15	5300	1.40	152.40	24	6562	1
16	5300	1.90	177.90	25	5621	1
17	5300	2.70	199.70	25	5008	1
18	5300	3.70	168.70	26	5928	1
19	5300	3.80	177.60	23	5631	1
20	5300	1.70	168.10	28	5949	0
21	5300	4.40	162.50	25	6154	0
22	5300	3.90	222.10	26	4502	1
23	5300	1.30	171.80	23	5821	1
24	5300	2.60	176.40	24	5669	1
25	5300	2.70	194.90	24	5131	1
26	5300	4.40	182.90	26	5467	1
27	5300	3.30	178.10	24	5615	1
28	5300	2.40	186.40	23	5365	1
29	5300	4.70	151.80	25	6588	1
30	5300	4.20	193.60	27	5165	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	8.10	292.70	18	3416.47	1
2	5300	7.70	200.50	16	4987.53	1
3	5300	10.00	200.60	16	4985.04	1
4	5300	7.90	475.90	18	2101.28	1
5	5300	7.10	357.30	18	2798.77	1
6	5300	8.80	473.00	18	2114.16	1
7	5300	6.80	402.80	16	2482.62	1
8	5300	9.30	332.60	18	3006.61	0
9	5300	7.90	425.10	17	2352.39	1
10	5300	8.70	408.00	17	2450.98	1
11	5300	8.30	222.80	16	4488.33	1
12	5300	9.70	432.50	17	2312.14	1
13	5300	7.30	485.40	18	2060.16	1
14	5300	6.60	343.10	18	2914.60	1
15	5300	9.40	236.70	16	4224.76	1
16	5300	6.50	410.90	18	2433.68	1
17	5300	9.40	336.60	16	2970.89	1
18	5300	7.30	247.30	16	4043.67	0
19	5300	8.00	338.70	18	2952.47	1
20	5300	6.30	451.20	18	2216.31	1
21	5300	9.10	269.90	16	3705.08	1
22	5300	6.10	208.60	18	4793.86	1
23	5300	9.10	357.60	18	2796.42	1
24	5300	9.00	363.90	17	2748.01	1
25	5300	6.10	209.40	18	4775.55	1
26	5300	8.30	207.20	16	4826.25	1
27	5300	8.00	223.80	18	4468.28	1
28	5300	9.40	291.50	18	3430.53	0
29	5300	9.30	322.50	17	3100.78	1
30	5300	8.60	279.40	16	3579.10	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	19.10	467.90	15	2137	1
2	5300	16.40	379.70	14	2634	0
3	5300	15.70	489.10	13	2045	1
4	5300	18.30	282.20	15	3544	1
5	5300	17.80	447.90	14	2233	1
6	5300	18.50	268.10	14	3730	1
7	5300	18.30	402.90	12	2482	1
8	5300	14.90	329.00	15	3040	1
9	5300	18.00	333.60	14	2998	1
10	5300	13.70	427.70	13	2338	1
11	5300	14.60	279.40	14	3579	1
12	5300	15.60	290.60	15	3441	1
13	5300	19.10	263.30	14	3798	1
14	5300	15.90	281.10	16	3557	1
15	5300	12.50	307.50	16	3252	1
16	5300	17.70	262.20	14	3814	1
17	5300	18.60	439.90	15	2273	1
18	5300	16.80	216.90	15	4610	1
19	5300	18.20	256.40	16	3900	1
20	5300	13.10	372.70	12	2683	1
21	5300	16.50	225.10	16	4442	1
22	5300	17.30	412.90	16	2422	0
23	5300	13.80	262.10	16	3815	0
24	5300	16.40	262.10	13	3815	1
25	5300	18.80	473.40	12	2112	1
26	5300	17.80	219.60	13	4554	1
27	5300	19.30	212.50	14	4706	1
28	5300	19.00	314.10	12	3184	1
29	5300	15.20	422.20	13	2369	1
30	5300	15.70	226.30	15	4419	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5293.5	1	78.7	7	1943.4	1	1
	5292.5	2	66.3	5	1040.8	1	
	5296.5	3	90.4	14	1888.5	2	
	5294.5	4	51.4	10	1136.7	1	
	5294.5	5	91.5	11	1585.3	3	
	5293.5	6	95.8	7	1916.5	1	
	5295.5	7	65.4	12	1878.7	3	
	5293.5	8	95.8	7	1894.3	3	
	5294.5	9	89.6	9	1248.3	3	
	5298.5	10	68.6	20	1771.7	3	
	5293.5	11	54.4	7	1699.5	3	
2	5293.5	1	92.5	7	1715.4	1	1
	5292.5	2	90.6	6	1985.4	1	
	5293.5	3	93.4	7	1870.0	2	
	5297.5	4	51.6	17	1001.2	2	
	5296.5	5	79.8	15	1085.7	1	
	5292.5	6	60.9	6	1291.8	3	
	5295.5	7	87.3	12	1755.5	2	
	5295.5	8	63.6	13	1607.0	3	
	5297.5	9	59.8	17	1275.2	3	
	5296.5	10	65.1	15	1917.1	2	
	5297.5	11	65.4	18	1964.8	3	
	5298.5	12	82.7	20	1048.5	2	
3	5293.5	1	68.8	7	1060.1	2	0
	5294.5	2	90.6	10	1563.2	2	
	5294.5	3	64.2	11	1660.4	1	
	5298.5	4	53.8	20	1460.7	3	
	5297.5	5	84.3	17	1866.6	3	
	5297.5	6	73.8	17	1576.6	1	
	5298.5	7	62.4	19	1684.8	3	
	5297.5	8	75.9	18	1266.7	2	
	5297.5	9	84.6	18	1775.3	1	
	5293.5	10	98.8	8	1994.9	1	
	5298.5	11	83.5	20	1984.8	2	
	5298.5	12	79.1	19	1618.4	1	
	5296.5	13	67.8	14	1998.3	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5298.5	1	65.6	19	1776.3	3	1
	5294.5	2	87.9	10	1163.8	2	
	5295.5	3	60.1	12	1302.9	2	
	5298.5	4	67.0	19	1944.3	2	
	5296.5	5	86.5	16	1966.4	3	
	5292.5	6	62.4	6	1714.2	1	
	5297.5	7	67.4	17	1636.9	2	
	5294.5	8	54.4	9	1087.3	3	
	5296.5	9	77.5	16	1656.9	1	
5	5292.5	1	92.0	5	1979.9	3	1
	5294.5	2	69.8	11	1023.5	2	
	5295.5	3	66.3	13	1629.2	2	
	5297.5	4	71.6	17	1223.9	2	
	5294.5	5	56.3	9	1268.1	1	
	5294.5	6	97.0	9	1957.6	3	
	5298.5	7	95.8	19	1879.7	1	
	5297.5	8	93.9	17	1107.0	3	
	5297.5	9	86.9	18	1997.0	3	
	5296.5	10	92.5	16	1707.4	1	
	5293.5	11	74.1	8	1979.1	3	
	5292.5	12	84.0	6	1963.6	3	
	5293.5	13	88.8	7	1221.0	1	
	5294.5	14	88.8	10	1810.5	1	
	5296.5	15	98.3	14	1879.3	1	
6	5292.5	1	95.1	6	1709.5	2	0
	5294.5	2	83.4	9	1176.0	3	
	5294.5	3	59.5	10	1844.3	1	
	5294.5	4	97.9	11	1239.4	3	
	5294.5	5	71.3	10	1716.7	1	
	5293.5	6	51.1	8	1917.9	3	
	5296.5	7	88.5	16	1783.7	2	
	5298.5	8	50.6	19	1546.5	1	
	5294.5	9	94.7	9	1534.4	3	
	5295.5	10	98.6	12	1039.4	1	
	5296.5	11	89.1	16	1332.8	2	
	5292.5	12	72.2	6	1413.8	3	
	5296.5	13	85.0	14	1970.3	1	
	5294.5	14	51.4	11	1780.5	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5295.5	1	58.2	13	1914.7	2	1
	5292.5	2	93.0	6	1554.2	2	
	5297.5	3	61.3	18	1545.7	1	
	5298.5	4	71.0	19	1772.3	2	
	5297.5	5	61.9	17	1955.9	3	
	5296.5	6	91.6	15	1989.2	1	
	5298.5	7	55.3	19	1280.9	3	
	5293.5	8	91.8	8	1800.9	1	
	5298.5	9	50.2	20	1305.2	1	
	5293.5	10	97.7	8	1231.5	3	
	5293.5	11	90.6	7	1655.7	1	
	5294.5	12	82.6	10	1867.9	1	
	5295.5	13	71.3	12	1168.0	3	
	5295.5	14	92.1	13	1670.3	1	
	5294.5	15	62.2	10	1044.8	1	
	5295.5	16	53.2	13	1840.3	3	
	5295.5	17	67.7	12	1100.8	2	
8	5297.5	1	65.3	18	1316.7	2	1
	5295.5	2	93.0	12	1873.8	3	
	5295.5	3	79.0	12	1992.6	2	
	5297.5	4	70.3	18	1698.6	2	
	5293.5	5	65.5	7	1185.3	2	
	5296.5	6	98.5	15	1230.2	3	
	5292.5	7	89.0	6	1016.6	2	
	5294.5	8	92.4	10	1402.4	3	
	5293.5	9	51.6	7	1562.0	1	
	5295.5	10	63.4	12	1827.7	1	
	5296.5	11	90.3	16	1680.2	3	
	5296.5	12	68.4	15	1238.9	1	
	5292.5	13	93.3	6	1642.0	2	
	5294.5	14	66.0	9	1521.8	3	
	5295.5	15	72.8	13	1250.3	1	
	5294.5	16	99.6	10	1117.4	1	
	5296.5	17	92.8	16	1497.1	1	
	5292.5	18	68.0	5	1492.8	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5296.5	1	55.5	16	1598.9	1	1
	5298.5	2	70.9	20	1279.6	2	
	5295.5	3	98.8	12	1581.1	3	
	5298.5	4	63.3	19	1926.2	3	
	5298.5	5	88.1	19	1704.8	1	
	5296.5	6	59.7	15	1938.7	1	
	5294.5	7	61.3	11	1090.5	2	
	5298.5	8	61.3	19	1190.4	1	
	5296.5	9	74.5	14	1015.2	2	
	5294.5	10	97.9	11	1913.1	1	
	5297.5	11	70.2	17	1584.0	1	
	5293.5	12	98.1	7	1841.4	1	
	5295.5	13	52.6	12	1559.6	2	
	5295.5	14	85.5	13	1498.6	1	
	5293.5	15	84.5	8	1970.1	1	
	5294.5	16	71.4	11	1349.9	3	
	5292.5	17	69.5	5	1686.3	2	
	5293.5	18	99.9	8	1676.2	3	
	5298.5	19	85.1	19	1442.6	1	
10	5296.5	1	55.2	16	1418.4	2	1
	5298.5	2	65.0	19	1203.7	1	
	5298.5	3	52.6	19	1284.3	3	
	5292.5	4	54.1	6	1091.4	2	
	5294.5	5	54.1	9	1421.0	2	
	5292.5	6	89.5	5	1388.1	3	
	5295.5	7	73.9	13	1705.2	3	
	5296.5	8	55.3	14	1982.7	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	65.1	7	1535.0	2	1
	5300	2	79.2	9	1025.7	3	
	5300	3	50.1	10	1778.2	2	
	5300	4	53.3	12	1869.0	1	
	5300	5	87.7	14	1440.4	1	
	5300	6	72.3	13	1077.4	1	
	5300	7	75.4	8	1719.3	3	
	5300	8	76.0	16	1521.0	1	
	5300	9	53.9	11	1923.3	1	
	5300	10	87.8	11	1336.3	3	
	5300	11	57.7	13	1154.2	3	
	5300	12	71.3	17	1458.7	3	
	5300	13	70.7	8	1484.5	2	
	5300	14	90.2	14	1558.9	2	
	5300	15	94.9	16	1218.5	3	
	5300	16	93.8	16	1297.2	1	
12	5300	1	84.0	7	1978.7	1	1
	5300	2	52.8	20	1769.3	2	
	5300	3	87.0	12	1751.1	2	
	5300	4	82.5	6	1802.1	2	
	5300	5	51.3	7	1807.1	3	
	5300	6	69.1	17	1704.8	3	
	5300	7	79.0	12	1886.1	1	
	5300	8	82.9	14	1441.7	1	
	5300	9	88.3	19	1978.4	1	
	5300	10	78.4	17	1659.4	3	
	5300	11	63.1	13	1216.5	1	
	5300	12	69.1	7	1634.2	1	
	5300	13	93.5	8	1237.6	2	
	5300	14	67.4	5	1690.8	2	
	5300	15	65.1	7	1358.8	3	
	5300	16	62.0	14	1383.3	1	
	5300	17	98.0	7	1315.8	2	
	5300	18	99.2	9	1950.9	3	
	5300	19	65.7	6	1201.3	2	
	5300	20	88.5	10	1236.8	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	93.0	18	1571.0	1	1
	5300	2	88.0	6	1516.6	3	
	5300	3	75.9	16	1294.1	3	
	5300	4	77.6	12	1270.2	3	
	5300	5	99.0	5	1899.0	1	
	5300	6	81.2	9	1675.0	2	
	5300	7	87.6	15	1715.9	1	
	5300	8	86.8	16	1989.9	1	
	5300	9	81.1	5	1396.5	3	
	5300	10	99.1	11	1319.7	2	
14	5300	1	68.8	14	1456.4	1	1
	5300	2	73.9	13	1202.4	3	
	5300	3	97.3	17	1890.1	1	
	5300	4	96.4	7	1251.1	3	
	5300	5	88.9	6	1652.3	2	
	5300	6	92.2	5	1527.6	3	
	5300	7	80.6	17	1865.8	3	
	5300	8	67.4	11	1073.3	3	
	5300	9	54.4	9	1385.7	1	
	5300	10	55.5	15	1523.2	3	
	5300	11	90.1	12	1927.5	2	
	5300	12	61.5	17	1511.6	3	
	5300	13	54.1	6	1243.5	3	
	5300	14	85.1	16	1252.4	1	
	5300	15	80.2	12	1831.2	3	
	5300	16	73.6	19	1110.1	3	
	5300	17	51.2	13	1090.1	3	
	5300	18	77.0	16	1172.3	1	
	5300	19	55.8	12	1465.7	1	
	5300	20	63.6	14	1375.7	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	94.7	18	1988.4	1	1
	5300	2	97.1	16	1540.7	3	
	5300	3	50.2	15	1561.9	3	
	5300	4	96.2	13	1562.8	3	
	5300	5	65.3	12	1187.9	2	
	5300	6	52.6	11	1401.8	1	
	5300	7	76.2	15	1492.7	2	
	5300	8	68.6	9	1528.7	2	
	5300	9	65.9	14	1376.0	1	
	5300	10	58.9	8	1335.5	1	
	5300	11	93.5	12	1044.6	3	
	5300	12	61.2	5	1617.6	3	
	5300	13	58.4	20	1122.4	3	
	5300	14	79.0	13	1542.9	1	
	5300	15	57.9	16	1189.2	1	
	5300	16	89.7	9	1337.7	2	
	5300	17	86.1	10	1363.5	2	
	5300	18	67.5	10	1164.2	1	
	5300	19	77.3	6	1975.4	3	
16	5300	1	99.5	20	1727.9	3	1
	5300	2	82.4	16	1723.1	3	
	5300	3	54.3	6	1618.2	1	
	5300	4	99.2	6	1577.5	3	
	5300	5	56.6	9	1377.9	3	
	5300	6	80.2	5	1418.8	2	
	5300	7	68.7	6	1067.3	3	
	5300	8	83.0	10	1997.5	3	
	5300	9	83.0	11	1255.0	3	
	5300	10	71.2	19	1380.3	3	
	5300	11	64.5	14	1323.7	1	
	5300	12	62.5	6	1610.4	1	
	5300	13	83.9	12	1922.7	3	
	5300	14	87.9	7	1225.2	2	
	5300	15	56.0	10	1439.6	1	
	5300	16	75.8	20	1467.3	1	
	5300	17	90.1	18	1521.2	1	
	5300	18	64.1	16	1226.9	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	56.3	19	1026.5	1	1
	5300	2	80.7	10	1455.3	2	
	5300	3	65.2	12	1895.0	3	
	5300	4	85.3	14	1923.6	3	
	5300	5	87.3	6	1836.1	1	
	5300	6	70.0	9	1665.1	2	
	5300	7	97.5	17	1659.1	3	
	5300	8	65.2	18	1818.7	1	
	5300	9	96.0	16	1146.3	1	
	5300	10	75.1	19	1051.6	2	
	5300	11	76.7	15	1624.6	2	
	5300	12	86.9	6	1061.2	1	
	5300	13	72.3	7	1341.9	2	
	5300	14	95.2	19	1160.8	3	
	5300	15	72.3	11	1421.6	2	
	5300	16	79.2	16	1832.9	3	
	5300	17	52.1	12	1325.3	3	
18	5300	1	81.7	11	1535.2	1	1
	5300	2	73.4	9	1541.1	1	
	5300	3	54.5	14	1370.0	1	
	5300	4	94.1	17	1184.2	2	
	5300	5	94.0	9	1576.7	2	
	5300	6	54.6	13	1676.7	2	
	5300	7	63.9	13	1107.2	3	
	5300	8	68.7	7	1079.9	2	
	5300	9	81.8	17	1648.4	3	
	5300	10	54.0	13	1798.1	3	
	5300	11	54.9	17	1890.2	1	
	5300	12	71.9	14	1516.1	1	
	5300	13	61.8	11	1337.7	1	
	5300	14	87.0	7	1375.5	1	
	5300	15	58.8	8	1578.6	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	86.7	17	1412.8	1	1
	5300	2	69.1	13	1269.0	3	
	5300	3	73.2	16	1830.1	3	
	5300	4	53.0	6	1803.6	1	
	5300	5	68.8	13	1558.8	3	
	5300	6	52.6	8	1106.9	3	
	5300	7	69.7	16	1813.1	1	
	5300	8	87.9	17	1838.2	1	
	5300	9	56.1	7	1433.1	3	
	5300	10	52.1	18	1366.7	2	
	5300	11	94.1	14	1747.1	2	
	5300	12	93.1	13	1699.2	1	
	5300	13	54.7	13	1091.2	2	
	5300	14	96.0	18	1314.7	1	
20	5300	1	72.0	18	1984.3	2	1
	5300	2	93.8	14	1014.0	1	
	5300	3	71.7	13	1923.1	2	
	5300	4	79.5	20	1530.7	2	
	5300	5	82.2	6	1367.6	3	
	5300	6	96.2	14	1954.9	3	
	5300	7	93.6	6	1999.1	2	
	5300	8	66.1	10	1925.7	1	
	5300	9	68.0	17	1522.9	3	
	5300	10	56.8	20	1922.7	2	
21	5303.5	1	52.1	14	1140.0	2	1
	5306.5	2	70.0	8	1311.2	1	
	5303.5	3	91.4	15	1549.7	1	
	5303.5	4	87.6	15	1376.6	2	
	5307.5	5	92.6	6	1437.7	2	
	5303.5	6	98.0	16	1762.9	3	
	5306.5	7	67.5	8	1248.3	1	
	5305.5	8	98.9	9	1120.5	2	
	5306.5	9	91.5	8	1161.0	2	
	5307.5	10	58.5	6	1089.4	1	
	5305.5	11	93.9	9	1654.0	2	
	5303.5	12	67.4	16	1312.6	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5302.5	1	89.1	17	1870.0	2	1
	5303.5	2	73.6	16	1334.2	2	
	5306.5	3	63.4	8	1948.3	3	
	5303.5	4	58.6	15	1524.9	3	
	5302.5	5	60.5	18	1421.5	3	
	5306.5	6	82.6	7	1269.0	1	
	5305.5	7	51.8	11	1638.0	2	
	5301.5	8	86.9	19	1198.6	3	
	5306.5	9	55.2	7	1569.5	3	
23	5302.5	1	84.3	18	1276.8	3	1
	5303.5	2	99.3	14	1678.4	2	
	5301.5	3	54.4	19	1109.8	3	
	5303.5	4	83.7	16	1095.1	1	
	5303.5	5	68.2	14	1829.3	3	
	5304.5	6	62.4	12	1961.6	3	
	5305.5	7	61.1	10	1251.5	1	
	5305.5	8	98.6	9	1197.1	3	
	5304.5	9	97.9	13	1291.4	3	
	5303.5	10	55.4	14	1548.5	1	
	5307.5	11	63.8	5	1632.5	2	
	5306.5	12	97.9	7	1191.9	1	
	5307.5	13	87.4	5	1072.5	2	
	5306.5	14	99.8	7	1645.2	2	
	5307.5	15	63.0	6	1683.8	1	
24	5304.5	1	69.6	13	1370.5	3	0
	5305.5	2	58.7	9	1242.6	3	
	5303.5	3	92.2	14	1564.3	3	
	5304.5	4	82.9	13	1229.5	2	
	5301.5	5	68.4	19	1209.5	2	
	5306.5	6	69.8	7	1606.5	1	
	5307.5	7	99.0	6	1178.8	3	
	5307.5	8	76.6	6	1509.4	2	
	5306.5	9	93.3	8	1035.4	3	
	5301.5	10	93.3	19	1893.5	1	
	5307.5	11	71.7	6	1165.6	3	
	5303.5	12	67.3	14	1301.5	1	
	5306.5	13	96.8	8	1275.8	1	
	5306.5	14	94.8	7	1615.0	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5307.5	1	61.8	6	1983.7	3	1
	5306.5	2	91.0	7	1565.1	3	
	5305.5	3	52.9	9	1047.3	1	
	5305.5	4	65.2	11	1360.5	1	
	5302.5	5	73.2	18	1526.1	3	
	5305.5	6	92.6	10	1071.7	3	
	5305.5	7	88.1	11	1210.9	2	
	5302.5	8	82.9	18	1542.7	3	
	5307.5	9	67.1	5	1138.9	3	
	5302.5	10	82.1	17	1544.4	3	
	5305.5	11	93.4	11	1783.4	3	
	5303.5	12	75.1	15	1022.3	1	
	5306.5	13	54.9	7	1947.8	2	
	5303.5	14	74.8	16	1809.9	3	
	5306.5	15	52.8	8	1120.0	2	
	5303.5	16	85.6	15	1910.5	1	
	5304.5	17	55.2	12	1201.9	2	
	5303.5	18	68.6	14	1242.5	2	
26	5302.5	1	55.9	17	1201.9	1	1
	5305.5	2	93.8	11	1402.5	1	
	5302.5	3	72.2	18	1637.3	2	
	5304.5	4	77.4	13	1961.9	2	
	5306.5	5	89.2	7	1573.1	2	
	5302.5	6	97.9	18	1079.9	3	
	5302.5	7	54.8	17	1830.3	1	
	5301.5	8	57.0	20	1290.9	3	
	5306.5	9	63.8	7	1704.8	2	
	5305.5	10	89.2	11	1110.5	3	
	5307.5	11	84.1	5	1304.0	3	
	5307.5	12	51.6	6	1019.3	3	
	5302.5	13	79.8	18	1542.6	3	
	5303.5	14	90.0	15	1133.7	3	
	5305.5	15	69.2	10	1829.9	2	
	5306.5	16	72.7	8	1327.3	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5305.5	1	62.8	10	1565.6	1	1
	5306.5	2	98.8	8	1603.1	2	
	5303.5	3	92.2	15	1450.0	3	
	5307.5	4	88.6	5	1748.2	1	
	5305.5	5	87.7	9	1657.3	3	
	5304.5	6	90.9	12	1998.2	2	
	5305.5	7	77.2	11	1474.3	2	
	5305.5	8	80.4	9	1347.8	1	
	5305.5	9	70.2	11	1708.3	1	
	5301.5	10	77.0	20	1437.0	3	
	5305.5	11	67.1	10	1184.2	3	
	5305.5	12	91.8	9	1086.4	2	
	5303.5	13	70.5	14	1794.8	2	
	5304.5	14	78.5	13	1140.6	2	
	5305.5	15	68.9	9	1568.3	2	
	5303.5	16	78.4	15	1829.2	2	
	5302.5	17	72.2	18	1927.7	3	
	5307.5	18	81.0	5	1084.6	1	
	5303.5	19	61.0	16	1368.9	1	
	5307.5	20	83.2	6	1406.1	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5301.5	1	64.1	19	1347.8	1	1
	5302.5	2	59.5	18	1064.6	2	
	5305.5	3	82.4	10	1888.9	3	
	5303.5	4	84.7	16	1232.2	2	
	5303.5	5	65.9	16	1382.5	1	
	5303.5	6	74.4	15	1222.5	1	
	5305.5	7	78.1	9	1650.2	2	
	5307.5	8	85.7	6	1856.6	3	
	5304.5	9	95.0	13	1304.1	2	
	5302.5	10	62.2	18	1034.2	2	
	5303.5	11	82.2	16	1655.4	3	
	5305.5	12	54.0	10	1124.0	3	
	5303.5	13	70.8	14	1726.9	2	
	5302.5	14	94.1	17	1585.4	2	
	5305.5	15	73.7	9	1264.3	2	
	5306.5	16	50.8	7	1612.8	3	
	5304.5	17	94.4	12	1284.9	1	
	5302.5	18	63.3	17	1615.2	3	
	5304.5	19	69.7	12	1324.5	2	
	5303.5	20	70.1	14	1182.7	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5307.5	1	73.9	6	1964.1	3	1
	5304.5	2	72.2	13	1873.6	2	
	5303.5	3	57.1	15	1685.2	2	
	5301.5	4	61.5	19	1404.9	2	
	5304.5	5	57.1	12	1650.3	3	
	5305.5	6	70.8	10	1721.5	1	
	5305.5	7	91.9	10	1907.5	2	
	5302.5	8	55.9	18	1791.3	1	
	5302.5	9	85.3	17	1373.8	2	
	5301.5	10	93.6	19	1161.4	1	
	5303.5	11	87.2	16	1534.6	1	
	5304.5	12	60.8	13	1969.8	2	
	5303.5	13	91.8	16	1053.4	3	
	5301.5	14	96.4	20	1669.0	1	
	5305.5	15	66.1	9	1813.5	1	
	5303.5	16	61.5	14	1649.5	3	
	5302.5	17	51.2	17	1403.9	1	
30	5304.5	1	72.8	13	1755.0	3	1
	5303.5	2	68.4	14	1954.0	1	
	5306.5	3	79.8	7	1081.4	3	
	5304.5	4	87.7	13	1629.2	3	
	5303.5	5	90.9	14	1947.5	1	
	5307.5	6	63.1	5	1907.7	2	
	5305.5	7	75.7	11	1960.5	3	
	5305.5	8	75.2	9	1512.2	3	
	5305.5	9	94.9	11	1659.1	2	
	5304.5	10	69.7	12	1533.6	1	
	5306.5	11	53.1	7	1222.6	3	
	5303.5	12	59.9	15	1929.3	1	
	5303.5	13	82.5	15	1620.7	2	
	5301.5	14	96.6	20	1299.6	2	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	638	83	1567	1
2	5310	1	558	95	1792	1
3	5310	1	898	59	1114	1
4	5310	1	818	65	1222	1
5	5310	1	918	58	1089	0
6	5310	1	878	61	1139	1
7	5310	1	718	74	1393	1
8	5310	1	738	72	1355	1
9	5310	1	778	68	1285	1
10	5310	1	598	89	1672	0
11	5310	1	798	67	1253	0
12	5310	1	798	67	1253	1
13	5310	1	758	70	1319	1
14	5310	1	538	99	1859	1
15	5310	1	558	95	1792	1
16	5310	1	1260	42	794	1
17	5310	1	723	73	1383	1
18	5310	1	1999	27	500	1
19	5310	1	1477	36	677	1
20	5310	1	723	73	1383	1
21	5310	1	849	63	1178	1
22	5310	1	2733	20	366	1
23	5310	1	2038	26	491	1
24	5310	1	2164	25	462	1
25	5310	1	2256	24	443	1
26	5310	1	677	78	1477	1
27	5310	1	1787	30	560	1
28	5310	1	2317	23	432	1
29	5310	1	2582	21	387	1
30	5310	1	2976	18	336	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	2.70	212.30	28	4710	1
2	5310	2.10	183.10	27	5461	1
3	5310	1.40	218.20	24	4583	1
4	5310	1.40	229.80	29	4352	1
5	5310	4.60	163.60	25	6112	1
6	5310	1.50	229.60	23	4355	0
7	5310	2.40	188.90	24	5294	1
8	5310	2.30	185.00	28	5405	1
9	5310	3.60	181.90	25	5498	1
10	5310	2.30	178.60	27	5599	1
11	5310	3.20	218.50	23	4577	1
12	5310	3.40	158.30	25	6317	1
13	5310	3.50	195.00	25	5128	0
14	5310	4.40	159.40	25	6274	1
15	5310	1.80	215.80	26	4634	1
16	5310	4.30	227.00	28	4405	1
17	5310	1.30	220.50	23	4535	0
18	5310	2.70	185.10	23	5402	1
19	5310	1.10	187.50	25	5333	1
20	5310	3.80	157.20	28	6361	1
21	5310	1.40	166.90	28	5992	1
22	5310	3.70	189.70	23	5271	1
23	5310	4.10	160.90	25	6215	1
24	5310	1.30	174.30	23	5737	1
25	5310	1.70	221.60	23	4513	1
26	5310	4.40	167.70	25	5963	1
27	5310	4.20	179.80	26	5562	1
28	5310	3.10	205.40	28	4869	1
29	5310	2.20	175.30	26	5705	0
30	5310	3.50	199.70	26	5008	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	8.40	482.60	17	2072.11	1
2	5310	8.90	408.50	17	2447.98	1
3	5310	9.80	234.50	17	4264.39	1
4	5310	9.60	262.60	18	3808.07	1
5	5310	9.70	327.60	16	3052.50	1
6	5310	9.80	456.70	16	2189.62	1
7	5310	8.20	229.90	17	4349.72	1
8	5310	9.20	499.90	16	2000.40	1
9	5310	7.30	392.40	17	2548.42	1
10	5310	8.80	298.60	17	3348.96	1
11	5310	7.50	454.50	18	2200.22	1
12	5310	9.70	246.80	18	4051.86	1
13	5310	9.40	219.80	17	4549.59	1
14	5310	6.70	397.70	16	2514.46	1
15	5310	9.40	368.60	16	2712.97	1
16	5310	7.50	251.20	18	3980.89	1
17	5310	6.30	394.20	17	2536.78	1
18	5310	7.10	367.90	17	2718.13	1
19	5310	7.40	493.40	16	2026.75	1
20	5310	6.50	257.60	18	3881.99	1
21	5310	9.00	450.10	18	2221.73	1
22	5310	8.40	225.20	17	4440.50	1
23	5310	8.00	457.10	16	2187.71	0
24	5310	6.20	322.50	17	3100.78	1
25	5310	9.30	216.40	18	4621.07	1
26	5310	7.30	456.10	16	2192.50	1
27	5310	6.30	414.70	18	2411.38	1
28	5310	6.20	270.90	18	3691.40	1
29	5310	6.10	472.10	16	2118.20	1
30	5310	8.30	321.90	18	3106.55	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	11.20	240.00	13	4167	1
2	5310	19.80	346.30	16	2888	1
3	5310	14.00	433.70	16	2306	1
4	5310	19.30	414.60	15	2412	1
5	5310	11.50	382.00	13	2618	1
6	5310	13.00	405.10	12	2469	1
7	5310	15.30	494.10	14	2024	1
8	5310	13.40	365.40	15	2737	1
9	5310	19.90	250.40	15	3994	1
10	5310	16.90	354.20	12	2823	0
11	5310	17.10	242.80	12	4119	1
12	5310	18.90	255.30	13	3917	1
13	5310	11.70	265.90	16	3761	1
14	5310	17.10	301.30	16	3319	1
15	5310	12.20	433.10	14	2309	1
16	5310	12.80	496.30	14	2015	1
17	5310	18.90	394.80	12	2533	1
18	5310	13.60	303.20	13	3298	1
19	5310	17.00	465.80	13	2147	1
20	5310	15.60	488.40	12	2048	1
21	5310	15.10	301.50	16	3317	1
22	5310	19.00	482.30	16	2073	1
23	5310	12.10	394.30	14	2536	1
24	5310	12.90	328.10	12	3048	0
25	5310	16.80	206.60	12	4840	1
26	5310	17.80	313.10	13	3194	0
27	5310	15.80	312.50	13	3200	1
28	5310	11.10	446.10	13	2242	1
29	5310	15.40	425.00	12	2353	1
30	5310	12.20	415.00	13	2410	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5298	1	97.9	18	1478.3	2	1
	5295	2	52.9	9	1201.0	3	
	5294	3	68.4	7	1596.7	1	
	5295	4	96.9	11	1255.1	1	
	5295	5	69.3	10	1949.8	3	
	5298	6	61.4	17	1230.6	1	
	5297	7	68.7	16	1462.9	3	
	5293	8	91.6	5	1215.4	3	
	5293	9	61.0	5	1073.7	3	
	5299	10	58.9	20	1510.4	2	
	5298	11	50.5	17	1661.5	1	
2	5295	1	51.4	10	1734.9	1	1
	5297	2	52.2	15	1274.2	2	
	5298	3	91.8	18	1113.2	2	
	5297	4	75.1	14	1657.5	1	
	5299	5	95.2	19	1070.6	1	
	5297	6	52.9	15	1552.5	2	
	5295	7	92.4	9	1806.6	3	
	5297	8	88.6	14	1849.3	2	
	5299	9	90.4	19	1336.1	1	
	5298	10	70.5	18	1375.3	1	
	5299	11	67.7	19	1059.0	1	
	5296	12	71.3	12	1044.7	2	
3	5297	1	61.3	15	1998.7	2	1
	5297	2	96.1	14	1414.8	1	
	5296	3	99.1	13	1110.7	1	
	5297	4	66.6	14	1664.4	1	
	5296	5	91.6	12	1806.4	3	
	5294	6	94.5	8	1979.0	3	
	5297	7	58.4	16	1752.0	1	
	5297	8	52.6	15	1827.1	3	
	5298	9	64.1	17	1487.9	2	
	5297	10	88.8	15	1533.0	3	
	5298	11	91.9	18	1949.7	1	
	5293	12	93.0	5	1625.8	3	
	5296	13	72.0	13	1943.9	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5295	1	56.3	10	1241.3	3	1
	5295	2	75.0	9	1108.9	1	
	5295	3	82.2	11	1599.6	2	
	5297	4	70.7	15	1172.5	1	
	5293	5	96.8	5	1575.8	3	
	5294	6	90.5	8	1299.1	2	
	5296	7	98.6	12	1266.5	1	
	5294	8	86.3	8	1636.2	3	
	5294	9	54.4	7	1950.4	1	
5	5298	1	67.6	17	1626.5	3	1
	5299	2	50.4	20	1303.6	3	
	5293	3	76.4	6	1592.7	3	
	5294	4	80.0	7	1396.6	1	
	5299	5	60.0	19	1509.8	2	
	5297	6	81.2	14	1880.4	1	
	5297	7	87.4	16	1795.9	2	
	5295	8	74.3	11	1874.4	3	
	5297	9	95.7	16	1494.8	2	
	5295	10	68.0	10	1935.4	2	
	5298	11	74.3	17	1776.2	3	
	5293	12	90.2	5	1610.0	2	
	5294	13	55.4	7	1316.5	3	
	5293	14	55.3	6	1084.0	2	
	5296	15	68.1	13	1042.4	2	
6	5297	1	96.9	14	1016.6	2	1
	5298	2	75.4	17	1200.5	3	
	5297	3	70.1	14	1637.8	2	
	5298	4	93.8	17	1006.9	2	
	5297	5	73.3	16	1791.8	2	
	5295	6	50.5	11	1796.8	2	
	5296	7	93.5	12	1430.7	3	
	5295	8	81.8	9	1093.5	3	
	5298	9	54.9	18	1709.0	3	
	5294	10	69.3	8	1403.6	3	
	5297	11	59.7	14	1885.2	2	
	5296	12	55.2	13	1468.5	1	
	5298	13	89.9	18	1058.8	2	
	5297	14	65.1	15	1291.7	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5293	1	90.5	6	1904.3	3	1
	5295	2	99.0	10	1123.4	3	
	5297	3	68.4	14	1428.4	2	
	5295	4	90.5	9	1213.4	3	
	5293	5	97.6	6	1936.0	1	
	5296	6	64.4	13	1152.3	2	
	5294	7	85.4	8	1852.4	2	
	5299	8	83.3	20	1860.1	2	
	5295	9	74.5	9	1074.8	2	
	5297	10	92.6	16	1251.0	3	
	5295	11	74.6	9	1014.4	1	
	5294	12	91.2	8	1906.2	2	
	5293	13	72.2	5	1657.0	1	
	5297	14	90.3	15	1932.4	2	
	5295	15	98.8	9	1881.2	3	
	5299	16	62.1	19	1267.5	2	
	5294	17	87.7	7	1880.0	3	
8	5294	1	88.1	7	1977.1	1	0
	5295	2	59.1	11	1761.4	1	
	5299	3	76.0	19	1882.1	3	
	5299	4	67.7	20	1014.7	3	
	5296	5	71.8	12	1017.9	1	
	5299	6	93.3	20	1621.2	2	
	5294	7	94.1	7	1255.9	1	
	5298	8	96.3	17	1814.6	1	
	5294	9	69.6	8	1796.3	1	
	5299	10	61.6	19	1668.5	3	
	5294	11	92.7	8	1325.6	2	
	5296	12	56.2	12	1981.7	3	
	5295	13	95.4	9	1405.5	1	
	5297	14	52.7	14	1881.7	2	
	5299	15	92.3	19	1023.6	2	
	5299	16	98.5	19	1958.7	2	
	5295	17	52.9	10	1574.4	2	
	5294	18	65.3	7	1404.2	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5295	1	91.4	9	1715.8	3	1
	5296	2	91.9	12	1488.4	1	
	5297	3	69.9	15	1846.4	2	
	5298	4	75.6	17	1377.7	2	
	5298	5	71.1	17	1613.9	2	
	5297	6	71.6	14	1286.7	1	
	5298	7	95.7	18	1991.5	1	
	5295	8	51.6	9	1648.9	1	
	5297	9	72.6	15	1228.6	3	
	5297	10	74.9	14	1410.0	3	
	5299	11	96.0	19	1825.8	2	
	5298	12	95.3	17	1372.1	3	
	5295	13	82.1	9	1118.3	3	
	5297	14	99.8	15	1072.2	3	
	5293	15	92.7	5	1196.8	1	
	5293	16	60.4	6	1034.8	1	
	5297	17	79.7	15	1305.9	1	
	5297	18	97.9	16	1265.4	1	
	5299	19	59.8	20	1223.2	1	
10	5298	1	62.4	18	1939.9	1	1
	5298	2	71.7	17	1377.4	1	
	5296	3	72.6	13	1040.2	2	
	5296	4	50.9	13	1123.0	1	
	5297	5	70.8	14	1464.9	2	
	5295	6	51.5	11	1621.5	2	
	5294	7	64.6	8	1372.3	1	
	5295	8	59.6	10	1980.6	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	74.6	15	1643.4	2	1
	5310	2	87.2	9	1993.6	1	
	5310	3	62.6	7	1852.9	1	
	5310	4	97.0	19	1606.7	2	
	5310	5	94.9	5	1850.3	2	
	5310	6	92.5	6	1864.2	1	
	5310	7	87.8	11	1415.4	1	
	5310	8	69.1	8	1452.5	2	
	5310	9	56.2	15	1130.5	1	
	5310	10	80.4	9	1288.1	3	
	5310	11	75.5	17	1677.0	2	
	5310	12	92.4	12	1079.6	2	
	5310	13	62.6	13	1237.1	1	
	5310	14	98.6	8	1478.9	1	
	5310	15	77.9	13	1098.5	1	
	5310	16	98.4	12	1420.6	2	
12	5310	1	88.6	11	1473.5	3	1
	5310	2	72.9	5	1709.2	2	
	5310	3	52.1	16	1655.3	3	
	5310	4	81.9	11	1950.3	2	
	5310	5	74.3	9	1735.7	2	
	5310	6	98.5	11	1581.7	3	
	5310	7	99.6	15	1004.4	1	
	5310	8	75.6	10	1266.5	3	
	5310	9	98.0	9	1510.2	3	
	5310	10	71.9	7	1380.4	1	
	5310	11	91.9	7	1549.9	2	
	5310	12	73.2	16	1233.7	2	
	5310	13	92.4	5	1889.7	2	
	5310	14	60.2	16	1613.6	2	
	5310	15	90.3	20	1476.5	2	
	5310	16	79.3	5	1720.2	1	
	5310	17	98.4	20	1291.9	2	
	5310	18	59.7	10	1155.1	1	
	5310	19	91.7	10	1755.3	2	
	5310	20	74.4	13	1026.1	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	57.9	7	1082.5	1	1
	5310	2	56.7	16	1581.8	1	
	5310	3	67.5	11	1844.9	2	
	5310	4	80.6	8	1436.5	2	
	5310	5	67.7	17	1786.3	2	
	5310	6	71.8	6	1853.1	2	
	5310	7	62.6	20	1110.0	3	
	5310	8	86.8	9	1355.2	3	
	5310	9	84.0	13	1370.9	2	
	5310	10	80.4	15	1281.2	3	
14	5310	1	67.7	19	1927.6	3	1
	5310	2	57.5	20	1373.8	1	
	5310	3	57.2	19	1052.1	1	
	5310	4	87.0	8	1990.4	1	
	5310	5	57.1	9	1201.9	1	
	5310	6	71.5	9	1682.3	2	
	5310	7	96.7	14	1445.3	1	
	5310	8	52.6	17	1475.1	2	
	5310	9	98.9	12	1896.7	1	
	5310	10	85.1	19	1332.4	1	
	5310	11	79.6	16	1799.6	1	
	5310	12	68.6	11	1508.3	1	
	5310	13	74.8	7	1325.1	1	
	5310	14	59.1	20	1425.5	3	
	5310	15	98.5	13	1419.4	3	
	5310	16	76.2	10	1194.9	2	
	5310	17	69.4	9	1062.8	3	
	5310	18	90.5	6	1105.8	1	
	5310	19	54.4	16	1619.3	1	
	5310	20	81.4	13	1250.5	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	80.5	17	1066.7	1	1
	5310	2	83.6	8	1866.7	3	
	5310	3	51.4	13	1341.8	1	
	5310	4	71.4	10	1948.8	2	
	5310	5	89.3	13	1221.6	2	
	5310	6	50.0	7	1324.0	3	
	5310	7	62.5	12	1549.4	2	
	5310	8	91.7	17	1726.3	2	
	5310	9	86.4	17	1884.2	2	
	5310	10	96.3	7	1741.4	3	
	5310	11	86.6	9	1826.7	2	
	5310	12	67.0	19	1334.4	1	
	5310	13	80.9	15	1525.2	3	
	5310	14	79.4	9	1087.8	3	
	5310	15	51.1	6	1132.1	2	
	5310	16	56.7	19	1745.0	3	
	5310	17	82.0	16	1790.4	3	
	5310	18	82.1	17	1664.5	3	
	5310	19	71.5	11	1880.6	2	
16	5310	1	69.0	16	1562.9	3	1
	5310	2	59.2	6	1088.5	2	
	5310	3	65.6	16	1944.3	2	
	5310	4	79.2	9	1880.4	1	
	5310	5	75.5	14	1349.2	3	
	5310	6	70.1	15	1618.3	1	
	5310	7	72.6	7	1334.4	3	
	5310	8	82.3	6	1621.5	2	
	5310	9	71.5	13	1974.2	2	
	5310	10	95.5	18	1285.2	1	
	5310	11	59.4	16	1471.1	1	
	5310	12	83.5	20	1686.0	1	
	5310	13	56.3	8	1889.1	1	
	5310	14	72.5	8	1491.4	1	
	5310	15	57.1	16	1376.1	2	
	5310	16	78.2	10	1607.7	2	
	5310	17	60.1	19	1336.3	1	
	5310	18	97.8	9	1881.6	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	64.2	5	1374.8	2	0
	5310	2	78.6	8	1224.5	1	
	5310	3	92.9	10	1761.6	1	
	5310	4	64.5	11	1203.4	1	
	5310	5	51.4	9	1083.5	3	
	5310	6	64.6	17	1554.7	1	
	5310	7	97.1	15	1308.6	1	
	5310	8	81.6	7	1153.4	2	
	5310	9	69.3	17	1676.2	3	
	5310	10	86.3	18	1424.3	1	
	5310	11	82.2	16	1538.2	3	
	5310	12	54.6	19	1974.7	3	
	5310	13	90.7	11	1148.2	1	
	5310	14	63.7	8	1829.9	2	
	5310	15	69.5	13	1803.3	3	
	5310	16	92.8	11	1392.3	3	
	5310	17	90.4	9	1108.3	1	
18	5310	1	84.7	16	1050.9	2	1
	5310	2	62.5	13	1597.1	2	
	5310	3	90.1	19	1211.7	1	
	5310	4	92.7	16	1773.7	2	
	5310	5	98.3	18	1568.4	2	
	5310	6	75.7	14	1664.8	2	
	5310	7	64.2	11	1968.6	1	
	5310	8	78.8	5	1831.7	2	
	5310	9	51.3	20	1816.7	2	
	5310	10	88.4	7	1028.4	1	
	5310	11	81.0	15	1801.9	1	
	5310	12	94.6	18	1452.9	3	
	5310	13	82.3	11	1608.4	2	
	5310	14	75.4	17	1652.6	2	
	5310	15	91.8	8	1336.9	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	69.9	6	1861.3	2	1
	5310	2	73.2	19	1027.5	2	
	5310	3	77.4	17	1096.1	3	
	5310	4	90.3	15	1803.7	2	
	5310	5	83.0	16	1637.1	2	
	5310	6	56.4	12	1784.6	2	
	5310	7	79.1	17	1957.5	1	
	5310	8	59.3	15	1107.6	1	
	5310	9	89.6	16	1272.7	3	
	5310	10	69.5	13	1210.4	3	
	5310	11	98.7	5	1656.8	2	
	5310	12	80.1	5	1283.9	2	
	5310	13	96.3	18	1011.0	3	
	5310	14	98.3	18	1132.1	3	
20	5310	1	99.7	11	1961.6	3	1
	5310	2	66.1	18	1536.9	3	
	5310	3	96.5	15	1182.5	1	
	5310	4	68.2	8	1361.4	1	
	5310	5	93.6	16	1646.8	2	
	5310	6	94.1	19	1203.8	2	
	5310	7	54.3	18	1009.6	3	
	5310	8	62.5	9	1643.5	2	
	5310	9	78.0	12	1611.3	3	
	5310	10	77.7	9	1527.3	3	
21	5323	1	70.5	15	1362.7	2	1
	5324	2	56.6	13	1961.7	3	
	5324	3	67.9	12	1981.3	2	
	5326	4	96.0	8	1675.0	2	
	5324	5	70.4	13	1361.3	1	
	5322	6	79.1	18	1163.7	2	
	5324	7	70.9	13	1425.4	2	
	5322	8	75.3	17	1231.3	3	
	5323	9	59.7	15	1752.8	1	
	5323	10	73.5	16	1465.4	3	
	5324	11	81.4	12	1103.4	1	
	5326	12	91.6	7	1344.7	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5321	1	76.7	19	1737.3	3	1
	5326	2	63.1	8	1300.5	1	
	5322	3	58.7	17	1931.2	3	
	5324	4	95.2	13	1687.5	1	
	5326	5	95.1	7	1496.8	3	
	5324	6	89.8	13	1965.9	1	
	5321	7	99.6	20	1824.6	2	
	5326	8	63.2	7	1405.9	3	
	5326	9	53.4	8	1268.9	3	
23	5326	1	65.9	7	1264.7	3	1
	5327	2	57.5	6	1367.4	1	
	5325	3	88.9	10	1563.3	1	
	5324	4	59.6	12	1274.1	1	
	5324	5	68.0	13	1675.9	1	
	5326	6	76.2	7	1209.6	1	
	5322	7	58.2	17	1853.0	2	
	5324	8	88.9	12	1939.0	2	
	5321	9	69.5	19	1615.0	1	
	5325	10	65.1	9	1779.5	2	
	5323	11	73.2	16	1753.4	3	
	5323	12	98.9	14	1512.9	3	
	5325	13	91.0	10	1110.3	3	
	5326	14	85.5	8	1529.5	1	
	5322	15	74.3	18	1137.5	3	
24	5327	1	85.1	5	1571.9	3	1
	5321	2	75.3	19	1325.4	1	
	5323	3	95.3	14	1487.5	1	
	5322	4	53.6	18	1593.8	2	
	5326	5	98.3	7	1785.1	3	
	5322	6	80.2	18	1103.2	2	
	5323	7	67.3	15	1419.3	3	
	5323	8	67.5	15	1329.4	1	
	5321	9	69.8	19	1529.0	1	
	5327	10	53.0	6	1828.2	3	
	5322	11	80.4	18	1465.9	1	
	5327	12	70.6	6	1513.1	2	
	5322	13	59.1	18	1082.1	2	
	5323	14	78.7	15	1287.1	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324	1	76.0	12	1850.4	3	0
	5325	2	83.7	11	1968.6	3	
	5324	3	83.0	13	1931.8	1	
	5326	4	67.5	7	1474.0	2	
	5327	5	91.4	6	1746.6	1	
	5326	6	80.9	7	1237.5	1	
	5325	7	65.1	9	1010.5	3	
	5325	8	68.6	9	1632.7	2	
	5321	9	92.9	20	1423.8	3	
	5322	10	80.3	17	1865.7	2	
	5324	11	55.7	13	1957.3	3	
	5326	12	95.7	7	1164.9	1	
	5326	13	95.0	7	1621.7	2	
	5325	14	84.0	11	1517.5	3	
	5325	15	73.6	11	1759.9	3	
	5324	16	55.1	12	1323.5	3	
	5326	17	64.9	7	1050.6	2	
	5323	18	53.8	14	1100.3	2	
26	5323	1	69.7	15	1290.8	1	1
	5323	2	97.1	15	1368.6	3	
	5326	3	95.4	8	1003.2	1	
	5327	4	72.5	6	1107.9	2	
	5324	5	51.9	13	1538.1	3	
	5326	6	80.1	8	1751.0	2	
	5322	7	76.2	18	1334.1	1	
	5322	8	64.3	18	1018.4	3	
	5323	9	50.8	14	1238.9	2	
	5326	10	52.8	7	1677.3	3	
	5324	11	52.3	13	1719.4	1	
	5325	12	51.8	11	1293.9	1	
	5323	13	53.4	15	1173.0	2	
	5323	14	74.1	16	1602.6	1	
	5323	15	66.8	15	1517.8	2	
	5324	16	85.9	13	1598.3	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324	1	65.4	12	1809.9	3	1
	5325	2	98.3	10	1344.9	1	
	5323	3	82.2	15	1724.2	3	
	5322	4	96.2	17	1518.3	3	
	5322	5	78.1	17	1601.2	2	
	5326	6	58.6	7	1935.8	1	
	5324	7	85.4	12	1460.0	2	
	5322	8	94.3	18	1423.7	2	
	5324	9	54.6	12	1346.9	3	
	5322	10	54.1	17	1057.7	3	
	5323	11	51.2	16	1616.3	2	
	5321	12	66.5	20	1455.9	3	
	5326	13	50.5	8	1906.9	1	
	5323	14	94.5	16	1822.6	1	
	5322	15	73.2	17	1389.0	2	
	5322	16	56.6	17	1264.8	2	
	5322	17	97.7	17	1200.7	3	
	5327	18	98.1	5	1468.0	3	
	5326	19	66.8	8	1334.4	3	
	5325	20	50.8	9	1062.1	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5321	1	85.6	19	1913.9	1	0
	5321	2	81.4	20	1204.4	3	
	5326	3	58.4	7	1250.1	3	
	5326	4	94.2	7	1892.4	3	
	5323	5	60.0	15	1100.6	1	
	5323	6	51.2	15	1023.2	1	
	5326	7	55.1	7	1413.8	1	
	5322	8	89.7	17	1596.5	1	
	5325	9	89.1	11	1142.5	2	
	5322	10	72.1	17	1907.9	3	
	5327	11	68.5	5	1423.9	2	
	5325	12	89.4	11	1665.9	2	
	5325	13	70.8	11	1132.4	1	
	5324	14	87.2	12	1138.0	2	
	5323	15	76.5	14	1663.1	3	
	5325	16	75.3	11	1763.7	1	
	5324	17	64.6	12	1224.7	2	
	5321	18	87.8	19	1586.4	1	
	5322	19	92.9	18	1400.9	3	
	5322	20	60.9	18	1754.4	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5326	1	60.8	7	1115.6	1	1
	5325	2	75.4	9	1440.8	2	
	5325	3	96.9	11	1962.3	3	
	5323	4	54.4	16	1069.8	3	
	5327	5	52.6	5	1306.3	2	
	5322	6	62.5	17	1185.3	1	
	5325	7	95.9	11	1337.5	3	
	5325	8	66.9	10	1709.0	2	
	5325	9	51.9	11	1565.0	2	
	5325	10	57.3	9	1070.8	1	
	5325	11	97.3	9	1906.0	2	
	5326	12	63.1	7	1652.0	3	
	5327	13	80.5	5	1850.1	3	
	5321	14	55.5	19	1888.9	1	
	5324	15	73.8	13	1302.3	3	
	5324	16	95.3	13	1268.5	1	
	5323	17	56.8	16	1821.5	2	
30	5325	1	94.2	10	1896.6	2	1
	5323	2	74.2	14	1709.3	1	
	5323	3	56.4	14	1736.4	3	
	5326	4	83.0	8	1261.8	3	
	5322	5	90.0	17	1220.1	2	
	5326	6	63.0	8	1019.0	2	
	5323	7	55.8	16	1539.0	1	
	5324	8	62.4	12	1343.5	2	
	5327	9	70.7	6	1199.7	3	
	5322	10	56.5	18	1984.7	2	
	5322	11	58.4	18	1175.7	1	
	5326	12	99.8	8	1383.3	1	
	5323	13	52.6	16	1963.4	3	
	5326	14	98.3	8	1493.7	2	
Detection Percentage (%)							86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	538	99	1859	1
2	5290	1	698	76	1433	1
3	5290	1	3066	18	326	1
4	5290	1	598	89	1672	0
5	5290	1	698	76	1433	1
6	5290	1	518	102	1931	1
7	5290	1	798	67	1253	1
8	5290	1	558	95	1792	1
9	5290	1	698	76	1433	1
10	5290	1	618	86	1618	1
11	5290	1	538	99	1859	1
12	5290	1	638	83	1567	1
13	5290	1	878	61	1139	1
14	5290	1	658	81	1520	1
15	5290	1	818	65	1222	1
16	5290	1	2825	19	354	1
17	5290	1	1369	39	730	1
18	5290	1	1011	53	989	1
19	5290	1	563	94	1776	1
20	5290	1	2318	23	431	1
21	5290	1	2559	21	391	1
22	5290	1	1396	38	716	1
23	5290	1	2968	18	337	1
24	5290	1	1273	42	786	1
25	5290	1	1755	31	570	1
26	5290	1	2253	24	444	1
27	5290	1	1062	50	942	0
28	5290	1	2950	18	339	1
29	5290	1	993	54	1007	1
30	5290	1	2243	24	446	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1.30	176.50	29	5666	1
2	5290	4.30	228.40	28	4378	1
3	5290	1.60	184.10	27	5432	1
4	5290	2.10	217.80	29	4591	1
5	5290	1.90	216.70	29	4615	1
6	5290	3.60	156.10	23	6406	0
7	5290	5.00	226.90	23	4407	1
8	5290	1.80	172.20	23	5807	1
9	5290	2.00	210.50	24	4751	1
10	5290	1.50	157.40	28	6353	1
11	5290	2.40	164.60	25	6075	1
12	5290	3.10	208.80	27	4789	1
13	5290	4.90	196.60	24	5086	1
14	5290	3.50	218.20	28	4583	1
15	5290	2.00	198.70	23	5033	1
16	5290	1.80	166.20	29	6017	1
17	5290	4.10	181.90	29	5498	1
18	5290	1.90	213.70	27	4679	1
19	5290	4.80	212.60	25	4704	1
20	5290	4.60	209.10	25	4782	0
21	5290	2.20	150.10	24	6662	1
22	5290	1.40	163.50	29	6116	1
23	5290	1.30	158.80	29	6297	1
24	5290	4.20	216.60	29	4617	0
25	5290	2.60	181.70	26	5504	1
26	5290	1.30	189.30	29	5283	1
27	5290	2.30	156.10	29	6406	1
28	5290	4.40	207.90	29	4810	1
29	5290	4.40	153.00	24	6536	1
30	5290	4.70	191.20	25	5230	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	8.00	257.50	16	3883.50	1
2	5290	8.20	402.50	18	2484.47	1
3	5290	7.80	372.70	18	2683.12	1
4	5290	8.70	289.60	17	3453.04	1
5	5290	6.50	396.90	17	2519.53	1
6	5290	7.60	271.80	17	3679.18	1
7	5290	9.70	224.60	17	4452.36	1
8	5290	9.70	338.50	17	2954.21	1
9	5290	8.00	476.20	17	2099.96	1
10	5290	9.20	279.40	17	3579.10	1
11	5290	9.60	348.90	17	2866.15	1
12	5290	6.70	449.20	16	2226.18	1
13	5290	8.40	331.40	16	3017.50	1
14	5290	8.40	309.40	16	3232.06	0
15	5290	8.90	222.00	18	4504.50	1
16	5290	9.60	254.90	17	3923.11	1
17	5290	7.70	454.60	17	2199.74	1
18	5290	8.20	454.90	17	2198.29	1
19	5290	8.70	222.80	16	4488.33	1
20	5290	9.00	353.20	18	2831.26	1
21	5290	8.50	345.40	16	2895.19	1
22	5290	7.80	271.50	17	3683.24	1
23	5290	8.70	347.60	17	2876.87	1
24	5290	9.30	347.30	18	2879.36	1
25	5290	9.70	487.10	18	2052.97	1
26	5290	6.10	429.50	17	2328.29	1
27	5290	9.40	386.50	17	2587.32	1
28	5290	7.00	308.20	16	3244.65	1
29	5290	6.50	329.80	16	3032.14	1
30	5290	7.80	428.40	17	2334.27	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	13.90	327.80	15	3051	1
2	5290	18.10	382.10	13	2617	1
3	5290	14.20	282.20	12	3544	1
4	5290	12.70	423.20	13	2363	1
5	5290	11.00	310.00	13	3226	0
6	5290	19.90	336.60	15	2971	1
7	5290	11.10	433.80	15	2305	1
8	5290	12.60	276.80	15	3613	1
9	5290	14.50	372.10	13	2687	1
10	5290	18.20	427.00	16	2342	1
11	5290	17.30	207.10	15	4829	1
12	5290	13.00	468.50	15	2134	1
13	5290	15.90	337.00	15	2967	1
14	5290	14.90	334.70	16	2988	1
15	5290	17.30	211.10	16	4737	1
16	5290	18.50	309.50	15	3231	1
17	5290	18.40	462.90	12	2160	1
18	5290	19.60	387.30	15	2582	1
19	5290	11.10	304.20	12	3287	0
20	5290	15.10	487.90	13	2050	1
21	5290	17.00	322.60	14	3100	1
22	5290	19.90	427.80	14	2338	1
23	5290	14.30	248.10	15	4031	1
24	5290	16.40	258.10	14	3874	1
25	5290	17.60	288.10	15	3471	1
26	5290	11.90	244.10	12	4097	1
27	5290	11.30	285.70	14	3500	1
28	5290	14.80	363.70	14	2750	1
29	5290	12.20	258.50	14	3868	1
30	5290	16.10	495.70	12	2017	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5254	1	90.2	7	1896.5	3	1
	5258	2	58.0	17	1591.0	2	
	5257	3	51.0	16	1011.8	3	
	5255	4	82.5	11	1298.3	1	
	5253	5	55.4	5	1663.5	2	
	5253	6	84.6	5	1207.7	3	
	5257	7	89.1	16	1667.2	1	
	5255	8	89.0	10	1532.1	2	
	5253	9	56.1	5	1829.2	1	
	5258	10	76.5	17	1707.6	2	
	5255	11	95.9	11	1851.1	3	
2	5253	1	80.9	6	1163.1	3	1
	5256	2	74.5	13	1465.4	2	
	5257	3	74.7	15	1849.4	2	
	5255	4	62.5	11	1643.1	3	
	5258	5	52.0	17	1274.7	1	
	5254	6	73.2	8	1709.3	2	
	5257	7	72.7	16	1508.9	2	
	5258	8	80.6	17	1629.1	1	
	5257	9	94.1	14	1673.1	3	
	5253	10	84.2	6	1258.5	3	
	5257	11	80.4	15	1274.7	1	
	5259	12	81.2	19	1564.6	3	
3	5257	1	51.7	14	1051.2	2	1
	5257	2	78.1	14	1243.3	3	
	5257	3	74.4	15	1545.1	1	
	5254	4	59.3	8	1801.1	2	
	5256	5	64.6	12	1173.6	2	
	5257	6	72.4	16	1439.1	3	
	5258	7	98.8	18	1859.3	3	
	5259	8	62.8	19	1582.9	2	
	5258	9	64.5	18	1510.0	1	
	5254	10	99.2	8	1223.7	2	
	5258	11	90.0	18	1278.3	1	
	5257	12	79.2	14	1912.3	1	
	5259	13	72.4	19	1735.8	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5257	1	89.1	15	1114.1	3	1
	5256	2	99.2	12	1989.3	1	
	5257	3	83.8	14	1203.5	1	
	5257	4	90.0	16	1638.0	2	
	5256	5	51.4	13	1993.9	2	
	5257	6	61.9	14	1215.8	2	
	5256	7	52.1	12	1467.8	3	
	5253	8	60.4	6	1647.8	1	
	5255	9	64.6	9	1519.7	2	
5	5257	1	50.4	16	1517.8	2	1
	5256	2	68.4	12	1728.7	1	
	5255	3	80.7	9	1949.1	2	
	5256	4	92.5	12	1058.1	1	
	5256	5	79.8	13	1779.7	1	
	5257	6	92.6	14	1011.9	1	
	5258	7	77.1	18	1103.9	2	
	5258	8	99.8	18	1973.9	1	
	5256	9	78.9	13	1711.5	1	
	5253	10	97.0	5	1367.9	3	
	5257	11	70.5	16	1349.7	3	
	5258	12	52.5	17	1066.0	3	
	5253	13	74.6	6	1920.4	2	
	5257	14	81.1	16	1925.9	1	
	5254	15	60.6	8	1206.1	1	
6	5255	1	99.4	9	1729.2	1	1
	5256	2	57.5	12	1218.9	2	
	5257	3	79.2	16	1447.1	2	
	5257	4	68.2	15	1993.8	1	
	5257	5	85.2	14	1909.9	3	
	5257	6	67.2	16	1019.9	3	
	5259	7	63.1	19	1254.0	3	
	5253	8	85.7	6	1863.9	2	
	5258	9	98.2	18	1352.7	2	
	5256	10	74.4	12	1764.7	3	
	5259	11	80.4	20	1113.5	3	
	5255	12	75.1	10	1244.9	3	
	5254	13	78.4	7	1721.3	1	
	5254	14	88.0	7	1111.9	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5258	1	98.8	17	1909.2	2	1
	5255	2	51.5	10	1609.2	1	
	5259	3	59.2	19	1426.8	2	
	5257	4	56.5	14	1219.7	2	
	5256	5	70.1	13	1987.3	1	
	5256	6	92.0	13	1827.2	2	
	5253	7	71.6	6	1508.2	1	
	5255	8	54.4	11	1309.5	3	
	5257	9	98.1	15	1153.0	1	
	5256	10	53.9	12	1529.8	1	
	5258	11	64.8	17	1344.6	2	
	5255	12	93.7	11	1001.2	2	
	5257	13	88.4	15	1033.7	3	
	5257	14	66.5	15	1623.5	1	
	5256	15	82.7	12	1278.2	3	
	5259	16	91.8	19	1906.1	2	
	5259	17	78.9	19	1701.0	2	
8	5259	1	87.5	19	1327.4	1	1
	5257	2	72.1	14	1954.1	1	
	5257	3	83.6	14	1886.6	3	
	5257	4	99.6	16	1399.9	1	
	5256	5	69.9	13	1263.1	2	
	5255	6	69.9	11	1014.0	3	
	5255	7	68.0	9	1217.3	3	
	5254	8	77.7	8	1878.8	2	
	5257	9	91.2	14	1304.7	2	
	5256	10	92.0	13	1321.0	2	
	5255	11	80.2	10	1514.0	2	
	5255	12	66.5	9	1037.4	2	
	5256	13	86.3	13	1129.5	1	
	5254	14	82.4	8	1488.1	3	
	5258	15	70.3	18	1853.8	2	
	5259	16	92.4	19	1138.1	3	
	5258	17	54.4	18	1834.4	2	
	5253	18	90.8	6	1505.5	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5259	1	54.7	19	1292.0	3	1
	5258	2	53.4	17	1081.3	2	
	5254	3	81.1	7	1783.9	3	
	5254	4	81.8	8	1763.1	1	
	5254	5	52.8	7	1189.2	1	
	5253	6	97.2	5	1236.2	2	
	5256	7	66.8	12	1631.3	2	
	5254	8	92.0	7	1119.8	1	
	5256	9	99.2	13	1769.4	1	
	5255	10	74.8	10	1775.6	3	
	5255	11	84.5	11	1159.2	3	
	5257	12	59.0	15	1987.2	3	
	5259	13	65.8	20	1963.7	1	
	5256	14	58.1	12	1100.2	3	
	5255	15	53.1	10	1933.2	2	
	5258	16	82.1	17	1784.6	1	
	5258	17	84.1	17	1349.3	2	
	5257	18	86.8	15	1430.1	3	
	5256	19	66.8	12	1782.8	3	
10	5255	1	96.6	11	1034.0	1	1
	5255	2	75.5	9	1481.9	2	
	5257	3	76.0	16	1082.8	2	
	5253	4	70.7	6	1573.8	3	
	5258	5	91.8	17	1663.6	1	
	5258	6	75.5	17	1739.4	3	
	5255	7	84.3	11	1441.9	1	
	5259	8	57.2	20	1325.6	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	61.9	9	1287.4	2	1
	5290	2	69.4	14	1005.1	2	
	5290	3	98.8	11	1639.0	1	
	5290	4	62.6	17	1076.8	1	
	5290	5	81.3	16	1317.0	3	
	5290	6	71.2	8	1566.8	2	
	5290	7	73.7	10	1331.1	3	
	5290	8	96.3	9	1939.3	2	
	5290	9	61.3	16	1287.7	1	
	5290	10	84.6	18	1180.7	3	
	5290	11	89.6	15	1071.2	3	
	5290	12	67.5	17	1045.5	3	
	5290	13	83.1	16	1379.6	2	
	5290	14	56.4	10	1696.3	2	
	5290	15	83.9	10	1325.0	1	
	5290	16	99.9	15	1887.2	3	
12	5290	1	71.2	10	1256.8	1	1
	5290	2	94.3	9	1963.9	1	
	5290	3	51.8	9	1582.1	1	
	5290	4	71.5	5	1367.3	2	
	5290	5	51.4	5	1155.1	2	
	5290	6	88.7	20	1839.8	2	
	5290	7	53.0	14	1306.4	2	
	5290	8	51.8	16	1104.9	1	
	5290	9	60.5	20	1069.8	3	
	5290	10	59.4	9	1710.1	3	
	5290	11	98.9	7	1474.1	1	
	5290	12	73.1	10	1176.8	1	
	5290	13	58.8	14	1690.4	3	
	5290	14	62.8	14	1419.7	2	
	5290	15	59.9	17	1746.1	3	
	5290	16	98.6	16	1878.2	2	
	5290	17	98.3	10	1118.3	2	
	5290	18	99.5	12	1425.1	3	
	5290	19	50.1	16	1724.1	3	
	5290	20	60.4	16	1937.9	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	90.9	11	1207.5	3	0
	5290	2	89.8	20	1269.2	2	
	5290	3	54.5	18	1899.1	2	
	5290	4	62.5	14	1258.0	3	
	5290	5	81.9	19	1198.3	1	
	5290	6	77.8	9	1145.6	2	
	5290	7	59.0	7	1916.8	3	
	5290	8	71.1	12	1773.1	3	
	5290	9	77.7	5	1343.0	2	
	5290	10	81.6	12	1850.7	1	
14	5290	1	98.0	14	1385.3	2	0
	5290	2	70.4	18	1154.3	1	
	5290	3	95.7	16	1973.6	3	
	5290	4	81.5	18	1478.8	1	
	5290	5	64.6	9	1363.9	1	
	5290	6	63.7	10	1231.7	1	
	5290	7	64.3	13	1283.6	2	
	5290	8	91.5	8	1056.2	1	
	5290	9	69.4	12	1882.4	2	
	5290	10	91.8	14	1024.5	1	
	5290	11	86.1	14	1610.4	3	
	5290	12	79.8	15	1344.8	1	
	5290	13	71.9	11	1111.8	2	
	5290	14	58.2	6	1279.9	2	
	5290	15	84.1	7	1337.4	2	
	5290	16	87.3	9	1261.5	3	
	5290	17	71.5	6	1194.1	3	
	5290	18	97.4	8	1597.5	2	
	5290	19	89.3	16	1143.1	1	
	5290	20	81.2	6	1968.2	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	56.0	12	1385.3	2	1
	5290	2	51.5	7	1361.3	1	
	5290	3	99.9	8	1263.7	3	
	5290	4	77.7	6	1166.8	3	
	5290	5	65.9	8	1403.1	1	
	5290	6	83.8	8	1626.8	2	
	5290	7	91.9	15	1033.8	1	
	5290	8	98.5	6	1249.3	3	
	5290	9	59.8	20	1008.2	3	
	5290	10	71.9	9	1115.8	3	
	5290	11	94.3	15	1737.2	2	
	5290	12	92.5	8	1050.9	3	
	5290	13	67.1	8	1570.6	1	
	5290	14	68.8	7	1123.7	2	
	5290	15	72.7	12	1913.1	1	
	5290	16	85.4	11	1051.5	2	
	5290	17	86.8	9	1696.5	1	
	5290	18	56.1	5	1467.0	3	
	5290	19	88.7	18	1846.9	1	
16	5290	1	80.3	9	1496.1	3	1
	5290	2	53.3	18	1796.9	2	
	5290	3	70.1	17	1333.4	2	
	5290	4	63.1	7	1265.9	2	
	5290	5	51.1	14	1068.5	1	
	5290	6	65.3	13	1251.8	2	
	5290	7	87.5	9	1097.6	1	
	5290	8	87.8	19	1606.1	1	
	5290	9	65.7	5	1577.3	3	
	5290	10	88.5	15	1376.4	1	
	5290	11	75.7	19	1096.6	3	
	5290	12	56.4	13	1217.1	3	
	5290	13	54.7	10	1507.1	1	
	5290	14	71.9	6	1248.5	2	
	5290	15	82.4	10	1650.9	3	
	5290	16	69.8	6	1469.2	3	
	5290	17	61.7	18	1375.2	3	
	5290	18	65.0	10	1128.0	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	70.5	11	1058.0	3	1
	5290	2	90.7	8	1722.0	1	
	5290	3	51.8	18	1694.4	2	
	5290	4	83.8	7	1606.8	3	
	5290	5	62.6	7	1233.2	3	
	5290	6	55.3	17	1044.8	3	
	5290	7	53.4	19	1781.0	3	
	5290	8	90.8	20	1573.2	3	
	5290	9	80.0	16	1310.4	1	
	5290	10	61.0	20	1905.6	1	
	5290	11	57.5	17	1886.3	3	
	5290	12	55.6	12	1230.8	3	
	5290	13	62.6	18	1037.3	2	
	5290	14	68.5	7	1699.0	1	
	5290	15	70.9	20	1527.2	3	
	5290	16	95.5	17	1496.9	1	
	5290	17	76.2	18	1966.1	1	
18	5290	1	84.3	20	1069.9	3	1
	5290	2	73.3	17	1433.3	1	
	5290	3	55.8	7	1219.6	1	
	5290	4	57.7	9	1455.0	2	
	5290	5	55.3	16	1013.8	3	
	5290	6	89.7	18	1794.4	3	
	5290	7	57.2	20	1053.2	2	
	5290	8	67.5	13	1302.8	3	
	5290	9	68.7	9	1697.1	3	
	5290	10	75.1	13	1015.0	2	
	5290	11	98.5	15	1462.9	3	
	5290	12	68.4	8	1429.8	1	
	5290	13	70.8	16	1720.9	1	
	5290	14	76.8	18	1607.1	3	
	5290	15	54.9	15	1098.3	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	83.4	20	1062.2	1	1
	5290	2	51.9	19	1857.3	2	
	5290	3	85.9	10	1750.0	3	
	5290	4	97.2	13	1935.5	2	
	5290	5	51.2	16	1696.6	3	
	5290	6	73.3	14	1883.3	3	
	5290	7	79.4	19	1248.6	1	
	5290	8	94.6	7	1605.7	1	
	5290	9	69.8	19	1728.4	1	
	5290	10	60.3	6	1860.8	3	
	5290	11	90.2	5	1973.9	2	
	5290	12	56.4	16	1853.2	1	
	5290	13	89.9	6	1370.9	2	
	5290	14	83.4	19	1559.1	2	
20	5290	1	59.7	16	1164.7	1	1
	5290	2	69.8	15	1065.8	2	
	5290	3	76.7	11	1654.9	1	
	5290	4	65.7	11	1202.8	2	
	5290	5	69.7	17	1949.5	3	
	5290	6	61.9	19	1564.8	2	
	5290	7	76.1	19	1565.0	1	
	5290	8	58.8	15	1474.2	3	
	5290	9	82.3	8	1800.4	1	
	5290	10	50.9	14	1617.8	3	
21	5327	1	73.9	5	1512.6	2	1
	5323	2	99.7	15	1619.8	2	
	5322	3	90.1	18	1287.4	2	
	5322	4	67.8	17	1532.9	3	
	5321	5	97.9	19	1328.6	3	
	5325	6	77.7	9	1117.1	2	
	5322	7	81.0	17	1032.1	1	
	5323	8	84.6	15	1390.1	2	
	5326	9	98.5	7	1388.2	1	
	5323	10	51.4	14	1013.6	2	
	5322	11	50.6	17	1004.2	2	
	5327	12	97.4	5	1851.1	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5321	1	52.6	19	1419.6	3	1
	5325	2	74.2	10	1691.0	3	
	5321	3	54.3	20	1626.0	1	
	5323	4	94.4	16	1206.7	3	
	5323	5	81.7	14	1077.5	1	
	5321	6	90.3	19	1519.6	1	
	5325	7	50.5	10	1317.0	3	
	5322	8	76.4	17	1160.8	1	
	5324	9	85.6	12	1534.4	2	
23	5325	1	55.7	9	1385.8	2	1
	5325	2	63.3	9	1560.0	3	
	5321	3	57.7	19	1718.3	3	
	5322	4	89.2	18	1948.5	2	
	5325	5	56.3	9	1965.6	1	
	5321	6	99.6	19	1666.0	3	
	5327	7	82.5	6	1472.8	1	
	5324	8	88.3	12	1037.4	3	
	5322	9	92.9	18	1455.6	3	
	5325	10	52.2	9	1713.1	2	
	5323	11	96.5	14	1037.4	1	
	5323	12	95.7	14	1194.3	3	
	5322	13	73.3	18	1439.4	1	
	5321	14	90.6	19	1372.2	2	
	5326	15	73.0	8	1536.7	1	
24	5322	1	62.8	18	1286.7	2	0
	5327	2	97.3	6	1104.0	1	
	5325	3	50.9	10	1809.4	3	
	5327	4	62.0	5	1665.8	3	
	5325	5	57.4	9	1992.3	3	
	5326	6	73.3	7	1204.4	1	
	5322	7	92.1	18	1575.3	2	
	5325	8	71.7	10	1316.5	2	
	5323	9	74.2	16	1079.9	2	
	5326	10	61.4	7	1862.1	1	
	5326	11	65.5	7	1090.1	3	
	5326	12	74.1	8	1451.7	1	
	5327	13	93.3	6	1577.1	3	
	5323	14	98.5	15	1529.1	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325	1	69.4	9	1225.9	1	1
	5325	2	98.3	10	1955.8	2	
	5324	3	85.8	13	1455.6	3	
	5323	4	87.4	16	1392.4	2	
	5327	5	82.6	5	1780.3	2	
	5323	6	64.1	14	1363.9	3	
	5321	7	56.9	20	1324.0	3	
	5324	8	72.7	13	1224.6	3	
	5325	9	82.9	11	1652.5	1	
	5322	10	85.9	18	1123.0	1	
	5325	11	61.4	10	1452.2	1	
	5322	12	73.3	18	1939.0	2	
	5322	13	80.9	17	1173.5	3	
	5326	14	81.4	7	1357.0	3	
	5323	15	81.2	15	1653.2	3	
	5326	16	71.0	7	1344.9	1	
	5324	17	50.2	12	1233.9	1	
	5325	18	72.5	9	1359.5	1	
26	5327	1	55.5	5	1200.9	2	1
	5327	2	61.6	6	1323.0	1	
	5321	3	71.6	19	1757.5	3	
	5324	4	60.7	13	1858.6	1	
	5325	5	66.8	11	1889.0	2	
	5327	6	65.6	5	1121.8	2	
	5326	7	61.9	7	1332.9	3	
	5322	8	83.0	18	1292.6	3	
	5325	9	90.9	9	1895.4	2	
	5325	10	90.5	9	1174.3	2	
	5326	11	86.0	7	1989.7	3	
	5326	12	59.2	7	1226.5	2	
	5321	13	71.3	20	1244.1	3	
	5325	14	82.9	9	1104.5	3	
	5325	15	91.9	10	1022.7	1	
	5325	16	80.6	10	1176.0	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5322	1	93.5	18	1348.8	1	1
	5325	2	81.4	11	1336.5	1	
	5326	3	54.9	7	1028.1	1	
	5327	4	51.4	5	1307.6	3	
	5323	5	83.2	15	1776.9	1	
	5322	6	95.6	17	1276.2	2	
	5323	7	52.5	15	1568.2	3	
	5324	8	89.5	13	1190.9	1	
	5325	9	86.8	9	1568.5	2	
	5324	10	69.1	12	1353.1	1	
	5325	11	69.7	11	1492.1	1	
	5327	12	56.5	6	1076.2	3	
	5323	13	90.4	15	1517.6	2	
	5321	14	76.5	19	1061.3	3	
	5324	15	79.1	13	1964.0	2	
	5325	16	83.8	9	1485.5	3	
	5327	17	79.3	6	1925.9	3	
	5324	18	69.0	12	1661.6	3	
	5323	19	85.6	16	1151.4	1	
	5322	20	61.0	17	1562.7	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5326	1	79.4	7	1096.8	1	1
	5322	2	59.2	17	1731.5	1	
	5324	3	55.1	12	1047.0	2	
	5326	4	65.7	7	1026.9	1	
	5321	5	90.9	19	1051.4	2	
	5322	6	94.9	17	1698.8	2	
	5326	7	76.4	8	1200.5	2	
	5327	8	89.8	5	1474.2	1	
	5327	9	96.8	6	1815.8	1	
	5323	10	98.8	14	1130.8	1	
	5325	11	59.9	9	1365.6	1	
	5324	12	76.3	13	1378.5	3	
	5325	13	80.2	11	1153.9	1	
	5323	14	53.5	16	1908.8	1	
	5326	15	79.8	8	1521.8	3	
	5325	16	72.8	10	1464.9	1	
	5323	17	71.0	15	1119.4	2	
	5324	18	98.3	12	1028.3	2	
	5323	19	99.6	16	1077.0	2	
	5321	20	93.3	19	1334.1	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5324	1	65.3	13	1877.8	3	1
	5327	2	63.8	6	1733.3	3	
	5327	3	65.0	5	1569.6	2	
	5323	4	96.2	15	1080.6	2	
	5322	5	50.9	17	1304.5	2	
	5327	6	86.2	6	1675.5	3	
	5326	7	79.5	7	1248.7	1	
	5323	8	65.6	14	1274.8	2	
	5326	9	79.6	7	1856.2	1	
	5327	10	68.1	6	1440.6	3	
	5324	11	62.9	12	1634.2	3	
	5325	12	90.0	9	1610.4	3	
	5322	13	96.4	18	1823.9	3	
	5323	14	86.4	16	1793.8	3	
	5325	15	62.3	11	1463.9	1	
	5322	16	74.3	17	1862.8	2	
	5325	17	66.2	11	1423.9	1	
30	5323	1	74.7	15	1060.9	3	1
	5323	2	83.6	15	1686.2	2	
	5325	3	65.7	11	1467.0	3	
	5322	4	91.0	17	1009.1	1	
	5325	5	62.4	9	1477.3	1	
	5324	6	81.6	12	1122.6	1	
	5327	7	84.8	6	1819.9	2	
	5322	8	51.1	17	1050.2	3	
	5326	9	77.3	7	1808.4	3	
	5322	10	77.3	17	1380.9	1	
	5327	11	94.5	6	1266.9	1	
	5323	12	85.4	14	1735.3	3	
	5327	13	95.4	5	1302.5	3	
	5326	14	90.2	7	1471.5	3	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	858	62	1166	1
2	5250	1	898	59	1114	1
3	5250	1	738	72	1355	1
4	5250	1	738	72	1355	1
5	5250	1	738	72	1355	1
6	5250	1	778	68	1285	1
7	5250	1	878	61	1139	1
8	5250	1	558	95	1792	1
9	5250	1	778	68	1285	1
10	5250	1	638	83	1567	1
11	5250	1	778	68	1285	1
12	5250	1	938	57	1066	1
13	5250	1	518	102	1931	1
14	5250	1	658	81	1520	1
15	5250	1	558	95	1792	1
16	5250	1	903	59	1107	0
17	5250	1	824	65	1214	1
18	5250	1	3040	18	329	1
19	5250	1	2431	22	411	1
20	5250	1	2851	19	351	1
21	5250	1	2201	24	454	1
22	5250	1	2729	20	366	1
23	5250	1	2935	18	341	1
24	5250	1	1685	32	593	1
25	5250	1	1656	32	604	1
26	5250	1	1580	34	633	1
27	5250	1	2544	21	393	1
28	5250	1	1827	29	547	1
29	5250	1	3003	18	333	1
30	5250	1	821	65	1218	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	3.40	229.30	27	4361	1
2	5250	4.80	176.00	28	5682	1
3	5250	2.50	214.20	25	4669	1
4	5250	4.20	221.00	25	4525	1
5	5250	2.70	212.50	26	4706	1
6	5250	4.10	179.00	26	5587	1
7	5250	1.70	202.70	29	4933	1
8	5250	3.60	171.30	27	5838	1
9	5250	1.10	219.50	29	4556	1
10	5250	4.10	151.40	29	6605	0
11	5250	1.10	193.60	26	5165	0
12	5250	1.80	220.00	28	4545	1
13	5250	2.70	195.20	23	5123	1
14	5250	2.80	175.50	28	5698	1
15	5250	2.80	228.80	27	4371	1
16	5250	1.80	157.60	25	6345	1
17	5250	4.80	207.20	27	4826	1
18	5250	3.50	179.30	27	5577	1
19	5250	2.70	207.40	28	4822	1
20	5250	2.20	227.90	27	4388	1
21	5250	4.30	198.80	25	5030	1
22	5250	3.60	195.70	24	5110	1
23	5250	1.30	195.00	23	5128	1
24	5250	3.40	177.60	28	5631	1
25	5250	3.90	227.20	24	4401	1
26	5250	1.30	178.10	28	5615	1
27	5250	1.10	205.70	23	4861	1
28	5250	3.30	167.80	29	5959	1
29	5250	2.30	190.40	23	5252	1
30	5250	4.30	151.60	26	6596	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	6.40	446.60	16	2239.14	1
2	5250	8.30	468.10	17	2136.30	1
3	5250	6.10	498.00	17	2008.03	1
4	5250	8.30	485.70	16	2058.88	1
5	5250	9.10	289.00	17	3460.21	1
6	5250	9.30	251.10	16	3982.48	1
7	5250	6.20	219.80	16	4549.59	1
8	5250	7.80	233.40	17	4284.49	1
9	5250	8.00	327.60	18	3052.50	1
10	5250	8.00	201.20	17	4970.18	1
11	5250	9.60	319.10	18	3133.81	1
12	5250	7.10	494.60	16	2021.84	1
13	5250	9.40	267.50	18	3738.32	0
14	5250	6.90	235.50	17	4246.28	1
15	5250	7.00	373.80	18	2675.23	1
16	5250	6.10	379.20	18	2637.13	1
17	5250	6.60	466.70	17	2142.70	1
18	5250	8.90	339.20	16	2948.11	1
19	5250	6.60	379.20	16	2637.13	1
20	5250	9.70	397.40	16	2516.36	1
21	5250	9.00	382.90	18	2611.65	1
22	5250	8.10	317.40	18	3150.60	1
23	5250	6.50	316.70	16	3157.56	1
24	5250	6.70	358.70	17	2787.84	1
25	5250	8.30	463.60	17	2157.03	1
26	5250	8.30	498.40	17	2006.42	0
27	5250	6.50	456.40	18	2191.06	1
28	5250	9.80	218.00	16	4587.16	1
29	5250	6.60	450.50	18	2219.76	1
30	5250	9.80	303.00	18	3300.33	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	18.20	222.50	16	4494	1
2	5250	14.80	423.80	16	2360	1
3	5250	13.00	296.40	13	3374	1
4	5250	17.00	475.60	16	2103	1
5	5250	14.30	409.70	16	2441	1
6	5250	11.10	423.40	12	2362	1
7	5250	14.70	435.30	12	2297	1
8	5250	16.30	415.70	12	2406	1
9	5250	12.80	239.70	16	4172	1
10	5250	12.60	418.80	12	2388	1
11	5250	16.90	282.00	12	3546	1
12	5250	15.00	293.60	15	3406	1
13	5250	17.30	385.20	15	2596	1
14	5250	13.90	303.50	13	3295	1
15	5250	11.40	484.80	15	2063	1
16	5250	19.20	390.40	14	2561	1
17	5250	14.00	306.90	13	3258	1
18	5250	15.00	213.10	14	4693	1
19	5250	11.00	467.40	16	2139	1
20	5250	18.10	404.60	15	2472	0
21	5250	19.60	389.00	12	2571	1
22	5250	14.60	386.10	14	2590	1
23	5250	11.90	478.00	13	2092	1
24	5250	11.70	395.30	16	2530	1
25	5250	11.90	396.10	15	2525	1
26	5250	13.40	327.90	13	3050	1
27	5250	16.60	321.20	14	3113	1
28	5250	13.90	273.80	16	3652	1
29	5250	16.70	331.70	16	3015	1
30	5250	13.20	421.80	16	2371	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	87.6	6	1354.4	3	1
	5250	2	58.1	13	1289.1	3	
	5250	3	94.3	6	1167.8	1	
	5250	4	98.8	8	1322.5	1	
	5250	5	84.6	8	1042.8	1	
	5250	6	91.7	14	1813.8	3	
	5250	7	75.5	10	1075.9	3	
	5250	8	87.0	20	1422.5	2	
	5250	9	81.5	15	1343.7	3	
	5250	10	54.7	6	1309.9	3	
	5250	11	62.2	5	1308.5	1	
	5250	12	61.9	15	1985.1	1	
	5250	13	58.2	15	1503.9	2	
	5250	14	74.5	10	1088.0	1	
	5250	15	75.8	17	1801.6	3	
	5250	16	69.3	9	1852.6	3	
12	5250	1	74.0	19	1175.3	2	1
	5250	2	60.8	19	1013.3	3	
	5250	3	62.8	8	1607.2	1	
	5250	4	98.6	6	1240.5	3	
	5250	5	52.2	8	1137.0	1	
	5250	6	95.6	9	1594.4	1	
	5250	7	72.0	10	1537.5	3	
	5250	8	56.2	18	1656.9	3	
	5250	9	53.9	11	1804.5	3	
	5250	10	54.5	9	1845.8	3	
	5250	11	87.7	16	1590.5	2	
	5250	12	65.0	11	1807.6	1	
	5250	13	81.3	17	1952.2	1	
	5250	14	62.7	11	1944.0	1	
	5250	15	51.0	15	1938.9	2	
	5250	16	64.5	13	1890.9	1	
	5250	17	95.6	10	1495.7	2	
	5250	18	57.6	10	1580.8	3	
	5250	19	57.0	15	1842.6	1	
	5250	20	52.2	19	1157.1	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	64.3	18	1282.8	3	1
	5250	2	83.5	14	1084.9	1	
	5250	3	75.4	12	1613.2	1	
	5250	4	58.3	16	1022.0	3	
	5250	5	97.1	20	1024.4	2	
	5250	6	59.8	5	1449.3	1	
	5250	7	74.5	14	1864.9	1	
	5250	8	74.4	5	1946.0	1	
	5250	9	69.6	6	1805.2	2	
	5250	10	76.3	8	1258.0	2	
14	5250	1	73.3	19	1111.4	3	1
	5250	2	83.6	16	1566.8	2	
	5250	3	90.6	12	1665.6	1	
	5250	4	82.7	17	1550.9	2	
	5250	5	54.5	13	1719.8	1	
	5250	6	65.3	5	1614.0	2	
	5250	7	61.7	18	1530.1	3	
	5250	8	56.1	14	1583.1	1	
	5250	9	95.2	15	1604.7	1	
	5250	10	99.1	11	1323.0	1	
	5250	11	96.1	13	1415.4	3	
	5250	12	67.0	5	1203.0	1	
	5250	13	84.1	19	1683.4	1	
	5250	14	99.6	20	1912.6	1	
	5250	15	62.7	20	1394.3	1	
	5250	16	67.4	15	1170.3	1	
	5250	17	83.3	10	1096.1	1	
	5250	18	80.8	18	1725.2	3	
	5250	19	50.1	9	1158.3	1	
	5250	20	71.4	19	1431.9	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	80.8	15	1011.5	1	1
	5250	2	76.9	11	1822.9	3	
	5250	3	75.3	5	1657.1	3	
	5250	4	56.9	14	1662.0	2	
	5250	5	84.0	18	1549.6	1	
	5250	6	52.1	11	1412.3	1	
	5250	7	59.6	10	1540.8	3	
	5250	8	65.8	6	1486.0	1	
	5250	9	76.1	7	1023.4	2	
	5250	10	86.2	7	1280.6	2	
	5250	11	53.8	9	1412.4	1	
	5250	12	98.8	15	1616.8	3	
	5250	13	89.6	20	1406.2	2	
	5250	14	56.2	20	1099.0	3	
	5250	15	70.8	10	1133.0	1	
	5250	16	88.3	19	1830.8	3	
	5250	17	78.4	15	1578.9	1	
	5250	18	81.3	17	1042.1	3	
	5250	19	90.9	8	1035.3	3	
16	5250	1	60.4	13	1830.5	1	0
	5250	2	50.7	18	1279.2	1	
	5250	3	51.6	6	1212.7	3	
	5250	4	91.7	14	1312.6	3	
	5250	5	81.0	6	1388.0	1	
	5250	6	98.6	6	1347.8	1	
	5250	7	78.4	20	1180.6	3	
	5250	8	73.2	13	1793.6	1	
	5250	9	88.4	16	1053.6	1	
	5250	10	79.0	7	1136.6	1	
	5250	11	99.2	12	1159.8	3	
	5250	12	92.0	14	1354.2	3	
	5250	13	69.9	14	1757.2	1	
	5250	14	63.4	13	1063.7	2	
	5250	15	99.0	6	1504.6	1	
	5250	16	61.9	10	1201.9	3	
	5250	17	60.1	8	1044.3	2	
	5250	18	91.7	16	1581.0	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	87.5	5	1790.6	1	1
	5250	2	59.4	18	1767.9	3	
	5250	3	80.9	19	1850.8	2	
	5250	4	54.3	8	1043.8	2	
	5250	5	92.8	6	1307.3	3	
	5250	6	50.2	15	1846.7	2	
	5250	7	75.6	12	1492.9	1	
	5250	8	51.5	17	1555.0	2	
	5250	9	72.5	12	1214.2	1	
	5250	10	54.0	15	1843.4	1	
	5250	11	88.7	13	1443.3	3	
	5250	12	75.5	14	1653.4	1	
	5250	13	90.4	12	1907.5	3	
	5250	14	74.2	6	1932.3	1	
	5250	15	88.7	15	1276.9	2	
	5250	16	95.9	11	1809.2	2	
	5250	17	60.5	13	1140.7	2	
18	5250	1	99.6	16	1776.1	3	1
	5250	2	67.4	13	1519.2	2	
	5250	3	65.4	18	1753.4	2	
	5250	4	55.5	11	1842.0	2	
	5250	5	64.9	5	1970.1	1	
	5250	6	64.9	12	1556.4	2	
	5250	7	74.2	5	1323.2	2	
	5250	8	59.7	13	1920.8	1	
	5250	9	84.5	13	1957.7	2	
	5250	10	79.5	9	1354.8	2	
	5250	11	71.4	19	1878.4	1	
	5250	12	50.4	19	1551.5	3	
	5250	13	91.6	14	1633.0	1	
	5250	14	94.9	17	1378.7	1	
	5250	15	94.7	20	1893.9	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	77.2	6	1017.4	2	1
	5250	2	65.5	7	1695.3	3	
	5250	3	81.3	16	1294.5	3	
	5250	4	92.0	5	1049.5	3	
	5250	5	62.9	13	1462.4	1	
	5250	6	83.9	14	1759.2	2	
	5250	7	83.5	16	1594.7	1	
	5250	8	74.8	12	1798.3	2	
	5250	9	78.3	12	1660.5	1	
	5250	10	84.6	19	1131.0	2	
	5250	11	68.9	19	1688.9	3	
	5250	12	84.6	19	1410.5	2	
	5250	13	74.4	19	1996.8	2	
	5250	14	56.6	7	1978.0	1	
20	5250	1	77.7	12	1025.8	2	0
	5250	2	53.6	6	1815.8	3	
	5250	3	96.9	19	1522.5	3	
	5250	4	88.3	19	1158.6	1	
	5250	5	66.6	20	1104.0	3	
	5250	6	60.6	19	1273.7	3	
	5250	7	64.4	11	1554.0	3	
	5250	8	86.6	18	1647.2	2	
	5250	9	54.9	5	1930.3	1	
	5250	10	78.3	13	1286.3	3	
21	5281.5	1	57.4	17	1005.0	3	1
	5285.5	2	99.7	8	1594.9	3	
	5284.5	3	58.2	10	1168.6	3	
	5283.5	4	97.5	12	1228.1	1	
	5281.5	5	79.3	17	1778.0	1	
	5282.5	6	83.9	15	1961.8	1	
	5284.5	7	71.5	11	1438.9	1	
	5286.5	8	77.4	6	1389.0	3	
	5285.5	9	92.2	8	1120.8	2	
	5283.5	10	50.9	13	1595.3	3	
	5283.5	11	77.9	12	1014.3	3	
	5282.5	12	98.4	15	1368.6	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5284.5	1	83.8	11	1584.6	2	1
	5286.5	2	74.7	6	1507.6	2	
	5285.5	3	71.2	7	1036.9	3	
	5281.5	4	62.1	18	1497.7	3	
	5284.5	5	82.8	9	1282.9	3	
	5284.5	6	91.3	11	1325.6	3	
	5286.5	7	88.8	6	1125.2	3	
	5283.5	8	78.2	12	1885.0	1	
	5283.5	9	60.3	13	1794.5	2	
23	5286.5	1	80.7	6	1797.9	3	1
	5286.5	2	60.3	6	1038.8	1	
	5282.5	3	77.6	16	1715.9	1	
	5283.5	4	83.8	12	1579.3	2	
	5282.5	5	95.0	15	1120.9	3	
	5283.5	6	52.7	12	1575.2	3	
	5283.5	7	59.9	12	1947.2	2	
	5283.5	8	91.6	13	1420.4	3	
	5284.5	9	93.8	9	1787.9	1	
	5282.5	10	87.5	16	1368.9	1	
	5284.5	11	89.3	9	1229.0	1	
	5282.5	12	97.1	14	1302.4	2	
	5283.5	13	54.1	12	1338.0	1	
	5280.5	14	83.0	19	1063.8	1	
	5282.5	15	55.2	14	1142.4	1	
24	5283.5	1	61.4	13	1605.5	2	1
	5284.5	2	57.0	11	1711.4	3	
	5284.5	3	79.4	10	1536.5	2	
	5285.5	4	64.9	7	1516.3	1	
	5286.5	5	88.8	5	1019.8	3	
	5283.5	6	58.6	12	1106.8	2	
	5280.5	7	57.8	19	1429.0	2	
	5282.5	8	92.0	15	1350.2	2	
	5284.5	9	87.9	10	1171.5	1	
	5284.5	10	57.4	10	1925.5	1	
	5283.5	11	97.4	13	1129.9	1	
	5281.5	12	57.5	17	1279.8	1	
	5284.5	13	50.5	11	1070.3	2	
	5280.5	14	53.4	19	1586.2	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5285.5	1	75.4	8	1089.6	1	1
	5283.5	2	56.7	13	1543.0	3	
	5280.5	3	92.9	19	1077.2	1	
	5285.5	4	59.2	7	1647.2	3	
	5286.5	5	60.3	6	1830.7	3	
	5280.5	6	98.3	19	1786.3	2	
	5283.5	7	92.0	13	1919.8	2	
	5283.5	8	99.7	12	1833.6	3	
	5285.5	9	84.8	7	1124.8	1	
	5285.5	10	79.8	7	1109.3	1	
	5284.5	11	60.3	11	1374.9	1	
	5282.5	12	63.8	15	1329.7	1	
	5280.5	13	73.5	19	1041.4	1	
	5281.5	14	89.6	18	1453.9	3	
	5282.5	15	67.8	14	1297.6	3	
	5282.5	16	89.9	16	1600.2	1	
	5284.5	17	98.7	9	1093.2	2	
	5285.5	18	72.3	7	1931.6	3	
26	5280.5	1	85.5	19	1096.0	2	1
	5280.5	2	80.8	20	1933.4	1	
	5283.5	3	95.9	13	1824.6	1	
	5283.5	4	77.0	12	1798.1	1	
	5280.5	5	56.2	19	1087.0	3	
	5284.5	6	55.0	10	1626.1	2	
	5283.5	7	60.2	13	1168.9	1	
	5284.5	8	94.9	9	1877.0	2	
	5285.5	9	99.7	7	1421.8	2	
	5282.5	10	99.8	14	1759.7	1	
	5283.5	11	69.3	12	1251.7	1	
	5282.5	12	96.3	14	1488.1	3	
	5282.5	13	70.1	14	1797.6	1	
	5283.5	14	60.0	13	1321.7	3	
	5281.5	15	55.8	18	1607.6	1	
	5280.5	16	58.1	19	1093.8	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5284.5	1	70.2	11	1522.6	3	1
	5282.5	2	60.5	15	1885.4	3	
	5283.5	3	51.9	12	1457.0	1	
	5285.5	4	85.0	8	1335.8	2	
	5284.5	5	59.5	9	1016.7	3	
	5281.5	6	80.9	18	1387.7	1	
	5281.5	7	89.3	18	1472.2	2	
	5282.5	8	87.8	15	1635.2	2	
	5280.5	9	59.0	19	1021.3	1	
	5286.5	10	68.4	5	1068.7	3	
	5284.5	11	51.5	11	1557.2	3	
	5283.5	12	71.3	13	1174.3	3	
	5286.5	13	51.9	6	1665.3	1	
	5282.5	14	99.2	15	1363.7	3	
	5282.5	15	81.8	16	1045.1	3	
	5283.5	16	67.9	12	1629.9	3	
	5282.5	17	88.6	15	1114.6	3	
	5284.5	18	57.5	9	1626.7	3	
	5283.5	19	79.1	13	1347.6	3	
	5281.5	20	56.2	18	1113.5	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5284.5	1	93.3	9	1890.6	1	1
	5285.5	2	68.8	7	1496.8	2	
	5282.5	3	72.2	16	1336.7	1	
	5283.5	4	76.6	12	1675.9	1	
	5280.5	5	82.8	19	1500.7	2	
	5284.5	6	65.4	10	1026.7	2	
	5285.5	7	67.8	8	1846.3	3	
	5283.5	8	53.2	13	1835.2	1	
	5286.5	9	73.2	6	1901.6	2	
	5281.5	10	65.9	18	1747.4	2	
	5281.5	11	60.5	17	1860.1	2	
	5281.5	12	94.0	17	1335.7	2	
	5284.5	13	82.3	11	1295.1	2	
	5281.5	14	80.3	18	1551.1	2	
	5281.5	15	79.7	17	1403.0	2	
	5283.5	16	88.7	12	1284.7	1	
	5281.5	17	67.5	18	1651.9	1	
	5283.5	18	66.2	12	1195.5	2	
	5284.5	19	87.8	10	1114.9	2	
	5285.5	20	98.4	8	1812.5	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5284.5	1	92.5	11	1191.6	2	1
	5284.5	2	80.7	10	1364.5	1	
	5280.5	3	57.7	19	1064.7	3	
	5281.5	4	57.1	18	1410.3	2	
	5282.5	5	55.5	15	1208.3	3	
	5285.5	6	90.9	7	1970.8	1	
	5284.5	7	95.1	11	1366.6	2	
	5280.5	8	78.0	19	1184.1	1	
	5282.5	9	94.5	14	1859.4	3	
	5283.5	10	50.0	12	1654.5	1	
	5282.5	11	85.9	16	1011.9	1	
	5283.5	12	80.6	13	1614.7	1	
	5285.5	13	54.3	8	1068.7	1	
	5283.5	14	56.8	13	1570.1	1	
	5282.5	15	97.8	14	1499.6	3	
	5282.5	16	58.3	16	1788.3	3	
	5284.5	17	82.8	11	1287.5	3	
30	5283.5	1	58.6	12	1531.5	3	1
	5285.5	2	88.3	7	1573.9	1	
	5281.5	3	58.8	17	1973.8	1	
	5283.5	4	66.0	13	1323.4	1	
	5280.5	5	86.9	19	1668.4	1	
	5283.5	6	65.1	13	1656.9	2	
	5281.5	7	53.0	18	1044.8	2	
	5280.5	8	88.2	20	1863.3	3	
	5281.5	9	77.1	17	1644.9	2	
	5281.5	10	64.4	17	1781.6	1	
	5282.5	11	95.3	16	1002.3	2	
	5283.5	12	76.9	13	1781.1	3	
	5280.5	13	96.5	19	1473.1	3	
	5280.5	14	59.3	19	1395.4	1	
Detection Percentage (%)							93.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---