


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

**FCC PART 15.519, SUBPART F
TEST REPORT**
for
the
IPAS Zone Tag
MODEL: PAS-K01-40

Prepared for

KYUNGWOO SYSTECH, INC.
 #401, Daeryung Post Tower 5, Gasan-dong,
 Geumcheon-gu, Seoul 153-702 South Korea

Prepared by:

ANDREAS DAVIDSSON

Approved by:

KEVIN BOTHMANN
ELECTRO MAGNETIC TEST, INC.
 1547 PLYMOUTH STREET
 MOUNTAIN VIEW, CALIFORNIA 94043
 (650) 965-4000

DATE: October 23, 2018

| | REPORT BODY | APPENDICES | | | | TOTAL |
|-------|----------------|------------|----------|----------|----------|-------|
| | | <i>A</i> | <i>B</i> | <i>C</i> | <i>D</i> | |
| PAGES | 27 | 12 | 3 | 2 | 2 | 46 |

This report shall not be reproduced except in full, without the written approval of Electro Magnetic Test, Inc.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

REVISION HISTORY

| REVISION | DATE | COMMENTS | MODIFIED BY |
|----------|-------------------|---|--------------------|
| 1.0 | October 23, 2018 | Original Document | - |
| 2.0 | October 30, 2018 | Updated due to comments from client. | Andreas Davidsson |
| 3.0 | November 30, 2018 | Updated 10 dB BW listed range. | Andreas Davidsson |
| 4.0 | March 29, 2019 | Updated Radiated Emissions data. | Andreas Davidsson. |
| 4.1 | April 3, 2019 | Updated due to comments from client. | Andreas Davidsson |
| 4.2 | April 8, 2019 | Updated with Correction Factors for applicable tests. | Andreas Davidsson |
| 4.3 | April 11, 2019 | Updated Correction Factors. | Andreas Davidsson |
| 4.4 | April 15, 2019 | Updated Antenna Gain on applicable tests. | Andreas Davidsson |



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

TABLE OF CONTENTS

| | |
|---|-----------|
| GENERAL REPORT SUMMARY..... | 6 |
| SUMMARY OF TEST RESULTS..... | 7 |
| 1. PURPOSE..... | 9 |
| 2.1 LOCATION OF TESTING..... | 10 |
| 2.2 TRACEABILITY STATEMENT..... | 10 |
| 2.3 COGNIZANT PERSONNEL..... | 10 |
| 2.4 DATE TEST SAMPLE WAS RECEIVED..... | 10 |
| 2.5 DISPOSITION OF THE TEST SAMPLE..... | 10 |
| 3. APPLICABLE DOCUMENTS..... | 11 |
| 4. DESCRIPTION OF TEST CONFIGURATION..... | 12 |
| 4.1 DESCRIPTION OF TEST CONFIGURATION – EMI..... | 12 |
| 4.1.1 Cable Construction and Termination..... | 13 |
| 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT..... | 14 |
| 5.1 EUT AND ACCESSORY LIST..... | 14 |
| 5.2 EMI TEST EQUIPMENT..... | 15 |
| 6. TEST SITE DESCRIPTION..... | 17 |
| 6.1 TEST FACILITY DESCRIPTION..... | 17 |
| 6.2 EUT MOUNTING, BONDING AND GROUNDING..... | 17 |
| 6.3 FACILITY ENVIRONMENTAL CHARACTERISTICS..... | 17 |
| 7. TEST PROCEDURES..... | 18 |
| 7.1 OPERATIONAL LIMITATIONS..... | 18 |
| 7.2 RADIATED EMISSIONS..... | 19 |
| 7.2.1 Limits..... | 19 |
| 7.2.3 Test Procedure (Radiated)..... | 20 |
| 7.3 UWB BANDWIDTH..... | 21 |
| 7.3.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))..... | 21 |
| 7.3.2 Test Procedure..... | 21 |
| 7.3.3 Test Result..... | 21 |
| 7.4 RADIATED EMISSIONS IN GPS BANDS..... | 22 |
| 7.4.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))..... | 22 |
| 7.4.2 Test Procedure..... | 22 |
| 7.4.3 Test Result..... | 22 |
| 7.5 PEAK EMISSIONS WITHIN A 50 MHz BANDWIDTH..... | 23 |
| 7.5.1 Limit (FCC PART 15 Section 15.519(e))..... | 23 |
| 7.5.2 Test Procedure..... | 23 |
| 7.5.3 Test Result..... | 23 |
| 7.6 ANTENNA REQUIREMENT..... | 24 |
| 7.6.1 Requirement (FCC PART 15 SECTION 15.203)..... | 24 |
| 7.6.2 Test Result..... | 24 |
| 7.7 CONDUCTED EMISSIONS..... | 25 |
| 7.7.1 Limits (FCC PART 15 SECTION 15.207)..... | 25 |
| 7.7.2 Test Procedure..... | 25 |
| 7.7.3 Test Result..... | 26 |
| 8. CONCLUSIONS / COMPLIANCE STATEMENT..... | 27 |
| APPENDIX A..... | 1 |
| APPENDIX B..... | 1 |



ELECTRO MAGNETIC TEST, INC.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

| | |
|-----------------|---|
| APPENDIX C..... | 1 |
| APPENDIX D..... | 1 |



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

LIST OF APPENDICES

| APPENDIX | TITLE |
|----------|---|
| A | Radiated Data Sheets <ul style="list-style-type: none"> • Radiated Emissions Test Data • Peak Emissions Test Data • UWB Bandwidth Test Data • Transmission Test Data • Conducted Emissions Test Data |
| B | Test Setup Diagrams |
| C | Modifications To The EUT |
| D | Additional Models Covered Under This Report |

LIST OF FIGURES

| FIGURE | TITLE |
|--------|---|
| 1 | Layout of 3 Meter Semi-Anechoic Chamber |
| 2 | Conducted Emissions Test Setup |


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

The measurement data and conclusions contained in this test report are deemed satisfactory evidence of compliance with Industry Canada Interference-Causing Equipment Standard ICES-003, Issue 5, August 2012.

Electro Magnetic Test, Inc. is recognized by the following agencies for performing EMI/EMC testing:

| COUNTRY | AGENCY | IDENTIFYING # |
|--|--|------------------------------------|
| USA | Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC) | Registration Number: 90576 |
| USA, Canada, Taiwan, Australia/New Zealand, European Community | National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.) | Lab Code: 200147-0 |
| Canada | Industry Canada | File No.: IC 2804 |
| Japan | Voluntary Control Council For Interference (VCCI) | A-0118 |
| | Open Field Test Site "A" | - |
| | Mains Conducted Emissions Test Site "D" | - |
| | Telecom Conducted Emissions Test Site "D" | - |
| | 3 Meter Semi-Anechoic Chamber Site "E" | - |
| | 3 Meter Semi-Anechoic Chamber Site "E" (1GHz – 6GHz) | - |
| | Mains Conducted Emissions Test Site "E" | - |
| | Telecom Conducted Emissions Test Site "E" | - |
| Korea | Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request) | US0036 |
| Taiwan | Bureau Of Standards, Metrology and Inspection (BSMI) | Reference Number: SL2-IN-E-1024 |
| Australia / New Zealand | Australian Communications Authority (AUSTEL) | * |

*These agencies do not issue an identifying number to test labs.


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY (CONTINUED)

Device Tested: IPAS Zone Tag
 Model: PAS-K01-40
 S/N: 4200-18B260017

Product Description: When the pedestrian enters the warning or danger range, The LED flash light and LCD display allows the operation without using the indicator.

Modifications: The EUT was not modified during the testing.

Manufacturer: KYUNGWOO SYSTECH, INC.
 #401, Daeryung Post Tower 5, Gasan-dong, Geumcheon-gu,
 Seoul 153-702 South Korea

Test Date(s): 6/20/2018, 10/16/2018, 03/21/2019, 04/03/2019

Test Specifications: EMI requirements
 Limits: FCC Title 47, Part 15 Subpart F, Section 15.519
 Test Procedure: ANSI C63.10.2013

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION | FCC STANDARD | REMARKS | RESULTS |
|------|--|--------------|-----------|-------------|
| 7.1 | Operational Limitations | 15.519(a) | Radiated | PASS |
| 7.2 | Radiated Emissions | 15.519(c) | Radiated | PASS |
| 7.3 | UWB Bandwidth | 15.519(b) | Radiated | PASS |
| 7.4 | Radiated Emissions in GPS Bands | 15.519(d) | Radiated | PASS |
| 7.5 | Peak Emissions within a 50 MHz Bandwidth | 15.519(e) | Radiated | PASS |
| 7.6 | Antenna Requirement | 15.203 | N/A | PASS |
| 7.7 | Conducted Emissions | 15.207 | Conducted | PASS |

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

TECHNICAL DESCRIPTION OF THE EUT

| | |
|------------------------------|---|
| Manufacturer: | KYUNGWOO SYSTECH, INC. |
| Manufacturer Address: | #401, Daeryung Post Tower 5, Gasan-dong, Geumcheon-gu, Seoul 153-702 South Korea |
| EUT Name: | Zone Tag |
| Model No: | PAS-K01-40 |
| Operation frequency: | 3993.6 MHz |
| Maximum Output Power: | 54.6 dB μ v @ 3M |
| Antenna Gain: | 2.73 dBi |

***ELECTRO MAGNETIC TEST, INC.***1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Zone Tag Model: PAS-K01-40. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10-2013. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined in FCC Title 47, Part 15, Subpart F, Section 15.519.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Electro Magnetic Test, Inc., 1547 Plymouth Street, Mountain View, California, 94043.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The measurement results in this report and the calibration of the test equipment are traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Kyungwoo Systech, Inc.

Won-Sik Bae Research Engineer

Electro Magnetic Test, Inc.

| | |
|-------------------|-----------------|
| Alok Patel | Test Technician |
| Andreas Davidsson | Test Technician |
| David Vivanco | Test Technician |
| Manan Modi | Test Technician |
| Sagar Bombaywala | Test Technician |
| Simeet Gandhi | Test Technician |
| Kevin Bothmann | Lab Manager |

2.4 Date Test Sample was Received

The test sample was received on June 20, 2018.

2.5 Disposition of the Test Sample

The test sample has not yet been returned to Kyungwoo Systech, Inc.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

| | |
|-------|---|
| RF | Radio Frequency |
| EMI | Electromagnetic Interference |
| EUT | Equipment Under Test |
| P/N | Part Number |
| S/N | Serial Number |
| HP | Hewlett Packard |
| ITE | Information Technology Equipment |
| CML | Corrected Meter Limit |
| LISN | Line Impedance Stabilization Network |
| CISPR | International Special Committee On Radio Interference |
| FCC | Federal Communications Commission |



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

| SPEC | TITLE |
|--|---|
| FCC Title 47, Part 15, Subpart F | FCC Rules - Radio frequency devices, Ultra Wideband Operation |
| FCC Title 47, Part 15, Subpart C | FCC Rules - Radio frequency devices, Intentional Radiators |
| FCC Publication 393764 D01 UWB FAQ v02 | Ultra-Wide Band (UWB) Device Frequently Asked Questions, January 29, 2018 |
| ANSI C63.10-2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. |
| CISPR 22: 1997 plus A1:2000 & A2:2002 | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |

***ELECTRO MAGNETIC TEST, INC.***1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – EMI

During testing the UWB radio was continuously transmitting. The EUT was tested in two positions; laying horizontally along the table and set vertically along the table. The horizontal layout was chosen for testing.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The EUT emissions were investigated in all 3 orthogonal planes. The final radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously.

***ELECTRO MAGNETIC TEST, INC.***1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

4.1.1 Cable Construction and Termination

Cables #1

This is a 20 foot DC power cable connecting the EUT to the DC Power Generator. It has a 6 Pin DIN 60° connector at the EUT end and a DC terminal on the DC Generator end.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

| EQUIPMENT TYPE | MANUFACTURER | MODEL | SERIAL NUMBER |
|---|-----------------------|------------|----------------|
| Vehicle Tag (EUT) | Kyungwoo Systech Inc. | PAS-K01-40 | 4200-18B260017 |
| THE FOLLOWING WERE LOCATED OUTSIDE THE TEST SITE: | | | |
| DC Power Generator | Mastech | HY1803DL | 243591 |


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5.2 EMI Test Equipment

| EQUIPMENT TYPE | MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | CAL. DATE | CAL. CYCLE |
|------------------------------|---------------------|-----------------------|----------------------|--------------------|-------------------|
| Spectrum Analyzer | Hewlett Packard | 8566B | 3024A20115 | September 30, 2018 | 1 Year |
| RF Preselector | Hewlett Packard | 85685A | 3010A01157 | September 30, 2018 | 1 Year |
| Quasi-Peak Adapter | Hewlett Packard | 85650A | 2430A00451 | September 30, 2018 | 1 Year |
| Radiated EMI Software | Sector Design | N/A | Ver.1.4.6 | N/A | N/A |
| EMI Receiver (Conducted EMI) | Rohde & Schwarz | ESU40 | 100295 | February 15, 2019 | 1 Year |
| Conducted EMI Software | ETS-Lindgren | Tile! | Rev. 7.0.12.697 | N/A | N/A |
| RF Attenuator | Com-Power | LIT-153A | 531175 | December 15, 2018 | 1 Year |
| LISN | Solar Electronics | Type 21107-50-TS-50-N | 21107150701 | January 2, 2019 | 1 Year |
| LISN | Solar Electronics | Type 21107-50-TS-50-N | 21107150702 | January 2, 2019 | 1 Year |
| LISN | Solar Electronics | Type 21107-50-TS-50-N | 21107150703 | January 2, 2019 | 1 Year |
| LISN | Solar Electronics | Type 21107-50-TS-50-N | 21107150704 | January 2, 2019 | 1 Year |
| TLISN (CAT5) | Fischer | F-071115-1057-1-09 | 091407 | October 31, 2018 | 1 Year |
| LCL Adaptor | Fischer | T8ALCL-1 | 091407.02 | October 31, 2018 | 1 Year |
| Biconical Antenna | Com Power | AB-100 | 01557 | July 20, 2018 | 1 Year |
| Log Periodic Antenna | Com Power | AL-100 | 16001 | August 9, 2018 | 1 Year |
| Antenna Mast | Com Power | AM-400 | N/A | N/A | N/A |
| Turntable | Com Power | TT-100 | N/A | N/A | N/A |
| Preamplifier | Hewlett Packard | 8447D | 1937A02579 | March 5, 2018 | 1 Year |
| Computer | Dell, Inc. | DHS | DNSV641 | N/A | N/A |
| Printer | Hewlett Packard | C8124A | CN39A220ZD | N/A | N/A |


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5.2 EMI Test Equipment (Continued)

| EQUIPMENT TYPE | MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | CAL. DATE | CAL. CYCLE |
|---------------------------|-----------------|--------------|---------------|--------------------|------------|
| EMI Receiver | Rohde & Schwarz | ESU40 | 100127 | February 16, 2019 | 1 Year |
| EMI Test Software | Rohde & Schwarz | EMC32 | V8.54.0 | N/A | N/A |
| BiConiLog Antenna | ETS-Lindgren | 3143B | 00206757 | August 28, 2018 | 1 Year |
| Horn Antenna | ETS-Lindgren | 3117 | 00109294 | September 18, 2018 | 1 Year |
| Preamplifier | Rohde & Schwarz | TS-PR18 | 100056 | December 12, 2018 | 1 Year |
| Antenna Mast | ETS-Lindgren | 2171B | 00150364 | N/A | N/A |
| Turntable | ETS-Lindgren | 2187-3.0 | 00118231 | N/A | N/A |
| Computer | Dell, Inc. | Optiplex 745 | 4T50WC1 | N/A | N/A |
| Multi-Function Controller | ETS-Lindgren | 2090 | 00102270 | N/A | N/A |

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to the table below and section 7 of this report for the details of which sites were used for testing. All sites are located at 1547 Plymouth Street, Mountain View, California 94043.

| Site Used For Test | Site Description |
|---------------------------|---|
| | Open Field Test Site "A" |
| X | Mains Conducted Emissions Test Site "D" |
| X | 3 Meter Semi-Anechoic Chamber Site "E" |
| | Mains Conducted Emissions Test Site "E" |

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane, with the height increased to 1.5 meters for radiated emissions testing above 1 GHz.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

All tests were performed in a climate controlled building. The temperature was 23° C, humidity 53%, and barometric pressure 102.7 kPa.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7. TEST PROCEDURES

7.1 Operational Limitations

FCC 47 CFR Section 15.519 (a) (1)

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

The EUT was tested for this requirement and found to comply, please see the datasheets in Appendix A for the measurement results.

FCC 47 CFR Section 15.519 (a) (2)

The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device.

The client has been informed of this requirement.

FCC 47 CFR Section 15.519 (a) (3)

UWB devices operating under the provisions of this section may operate indoors or outdoors.

The client has been informed of this requirement.


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.2 Radiated Emissions

7.2.1 Limits

General Requirements Limit (FCC PART 15 Section 15.209(a)(1))

| Frequency of Emission (MHz) | Field Strength | | Measurement Distance (Meters) |
|-----------------------------|-----------------|--------------------------|-------------------------------|
| | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ | |
| 0.009-0.49 | 2400/F(kHz) | | 300 |
| 0.49-1.705 | 24000/F(kHz) | | 30 |
| 1.705-30 | 30 | | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960* | 500* | 54* | 3* |

*Not applicable for above 960 MHz measurements

(FCC PART 15 Section 15.519(c))

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

| Frequency in MHz | EIRP in dBm |
|------------------|-------------|
| 960-1610 | -75.3 |
| 1610-1990 | -63.3 |
| 1990-3100 | -61.3 |
| 3100-10600 | -41.3 |
| Above 10600 | -61.3 |

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.2.3 Test Procedure (Radiated)

The Rohde & Schwarz ESU40 EMI receiver was used as a measuring meter while under software control by the Rohde & Schwarz EMC32 software. To increase the sensitivity of the instrument, the built in preamplifier was used from 9 KHz to 0.960 GHz. From 0.960 GHz to 1.610 GHz both built in and external preamplifiers were used. From 1.610 GHz to 40 GHz only external preamplifiers were used.

The EMI receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI receiver records the highest measured reading over all the sweeps. The built in quasi-peak or average detector was used only for those readings which are marked accordingly on the data sheets.

The Loop Antenna, Broadband BiConiLog and horn antennas were used as transducers during the measurement. The Loop antenna was used from 9 KHz to 30 MHz, the BiConiLog antenna was used from 30 MHz to 1000 MHz and horn antennas were used from 1GHz – 40GHz. The frequency spans were wide (9 kHz to 150 kHz, 150 kHz to 30 MHz, 30 MHz to 88 MHz, 88 MHz to 216 MHz, 216 to 300 MHz, 300 MHz to 1 GHz, 1 GHz to 18 GHz and 18 GHz to 26.5 GHz) during preliminary investigations. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The 3 meter semi-anechoic chamber of Electro Magnetic Test, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.10-2013. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. The EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of non EUT signals was verified by turning the EUT off. In case a non EUT signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the other signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance (unless noted) from 30 MHz to 18 GHz. to obtain final test data.

Calculation Of Radiated Emission Test Data:

Amplitude - Gain + Antenna Factor + Cable Loss = Corrected Amplitude

Corrected Amplitude - Limit = Margin


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.3 UWB Bandwidth
7.3.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))
FCC PART 15 Section 15.519(b)

(b) The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10600 MHz

| Limit |
|---|
| UWB bandwidth within 3100 MHz and 10600 MHz |

FCC PART 15 Section 15.503(d)

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fraction bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth

| Limit |
|--|
| Fractional Bandwidth ≥ 0.20 Or UWB Bandwidth (10 dB below highest radiated emission) ≥ 500 MHz |

7.3.2 Test Procedure

Set EUT and test equipment as indicted in Radiated Emissions Procedure

RBW: 1 MHz

VBW: $\geq 3 \times$ RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to center of signal.
- (2) Set measurement to 10 dB down.
- (3) Wait for Trace to stabilize.
- (4) Mark delta of bandwidth frequency.
- (5) Compare marker to limit.

7.3.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.4 Radiated Emissions in GPS Bands

7.4.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

| Frequency in MHz | EIRP in dBm |
|-------------------------|--------------------|
| 1164-1240 | -85.3 |
| 1559-1610 | -85.3 |

7.4.2 Test Procedure

Set EUT and test equipment as indicted in Radiated Emissions Procedure

RBW: > 1 kHz

VBW: \geq RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to 1164-1240 MHz
- (2) Wait for the result to stabilize.
- (3) Compare peak emission to limit (See data sheet for calculations)
- (4) Repeat for frequency range 1559-1610 MHz.

7.4.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.5 Peak Emissions within a 50 MHz Bandwidth**7.5.1 Limit (FCC PART 15 Section 15.519(e))**

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, $f(m)$. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, follow the procedures described in 15.521

| Limit |
|--|
| 0 dBm EIRP when using 50 MHz measurement bandwidth |

7.5.2 Test Procedure

Set EUT and test equipment as indicted in Radiated Emissions Procedure

RBW: 1 MHz

VBW: \geq RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to center of signal.
- (2) Let trace complete and turn on marker peak search mode.
- (3) Compare peak emission to limit.

7.5.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results and relevant calculations.

**ELECTRO MAGNETIC TEST, INC.**1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.6 Antenna Requirement

7.6.1 Requirement (FCC PART 15 SECTION 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

7.6.2 Test Result

The antenna is permanently attached.


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.7 Conducted Emissions

7.7.1 Limits (FCC PART 15 SECTION 15.207)

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

7.7.2 Test Procedure

The Rohde & Schwarz ESU40 EMI receiver was used as a measuring meter. The data was collected with the EMI receiver in the peak detect mode with the "Max Hold" feature activated. The quasi-peak and average detectors were used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the EMI receiver input stage, and the EMI receiver offset was adjusted accordingly to read the actual data measured. The LISN output was read by the Rohde & Schwarz ESU40 EMI receiver. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2014. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.15 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable and peripheral placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

***ELECTRO MAGNETIC TEST, INC.***1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

The final data was collected under program control by the ETS-Lindgren Tile! software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.

Associated with the conducted emission test data in this report is a $\pm 3.4\text{dB}$ measurement uncertainty.

7.7.3**Test Result**

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results and relevant calculations.

***ELECTRO MAGNETIC TEST, INC.***1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

8. CONCLUSIONS / COMPLIANCE STATEMENT

Based upon the results contained in this report, Electro Magnetic Test, Inc. has determined that the Zone Tag, Model: PAS-K01-40 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart F, Section 15.519



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX A

RADIATED DATA SHEETS



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

| | | | |
|-----------------------|-------------------|---------------------|-----------------|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 3/21/2019 |
| Test Engineer: | Andreas Davidsson | Measurement: | 30 MHz to 1 GHz |

Limit Calculation (960 GHz to 1.610 GHz):


$$E(\text{dB}\mu\text{V/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dB}\mu\text{V/m}) = 95.2 + (-75.3)$$

$$E(\text{dB}\mu\text{V/m}) = 19.9$$

FCC 15.519 (c) 30-1000MHz Radiated Scan 3m PK AVG

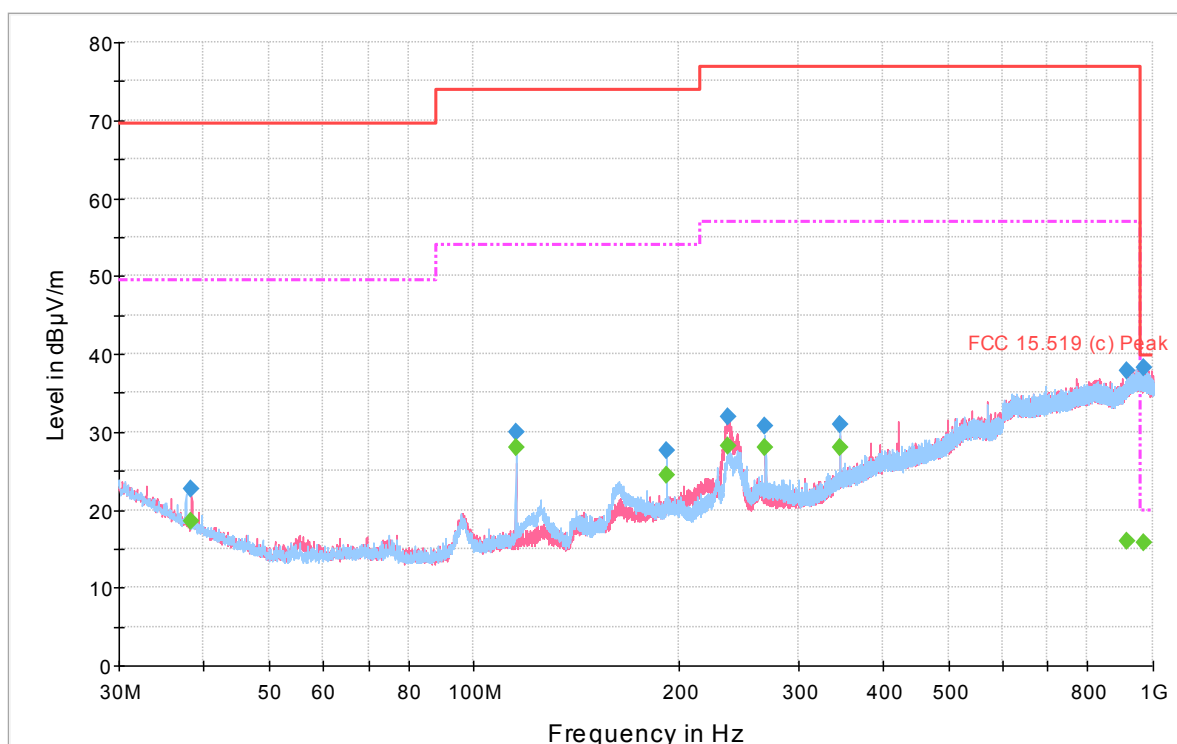

----- FCC 15.519 (c) ----- Preview Result 1V-PK+ ----- Preview Result 1H-PK+
◆ Final Result 1-PK+ ◆ Final Result 2-QPK ----- FCC 15.519 (c) Peak

| Frequency (MHz) | QuasiPeak (dBμV/m) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|--------------------|-------------|--------------|---------------|------------|-------------|----------------|
| 38.400000 | 18.4 | 113.0 | V | 0.0 | 16.0 | 31.10 | 49.50 |
| 115.200000 | 28.1 | 189.0 | H | 255.0 | 13.3 | 25.90 | 54.00 |
| 192.000000 | 24.5 | 100.0 | V | 170.0 | 15.1 | 29.50 | 54.00 |
| 236.070000 | 28.2 | 100.0 | V | 184.0 | 17.1 | 28.70 | 56.90 |
| 268.800000 | 27.9 | 100.0 | H | 79.0 | 18.2 | 29.00 | 56.90 |
| 345.600000 | 28.0 | 100.0 | H | 93.0 | 21.0 | 28.90 | 56.90 |
| 915.090000 | 16.1 | 224.0 | V | 277.0 | 31.2 | 26.40 | 56.90 |
| 971.340000 | 15.8 | 232.0 | H | 43.0 | 31.7 | -11.20 | 19.90 |


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

| | | | |
|-----------------------|-------------------|---------------------|----------------|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 3/21/2019 |
| Test Engineer: | Andreas Davidsson | Measurement: | 1GHz to 18 GHz |

Limit Calculation (1 GHz to 1.610 GHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dBuV/m}) = 95.2 + (-75.3)$$

$$E(\text{dBuV/m}) = 19.9$$

Limit Calculation (1.610 GHz to 1.990 GHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dBuV/m}) = 95.2 + (-63.3)$$

$$E(\text{dBuV/m}) = 31.9$$

Limit Calculation (1.990 GHz to 3.100 GHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$

$$E(\text{dBuV/m}) = 33.9$$

Limit Calculation (3.100 GHz to 10.6 GHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dBuV/m}) = 95.2 + (-41.3)$$

$$E(\text{dBuV/m}) = 53.9$$

Limit Calculation (10.6 GHz to 18 GHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

$$\text{Distance} = 3 \text{ M}$$

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$


$$E(\text{dBuV/m}) = 33.9$$



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

FCC 15.519 (c) 1000-18000MHz Radiated Scan 3m PK AVG

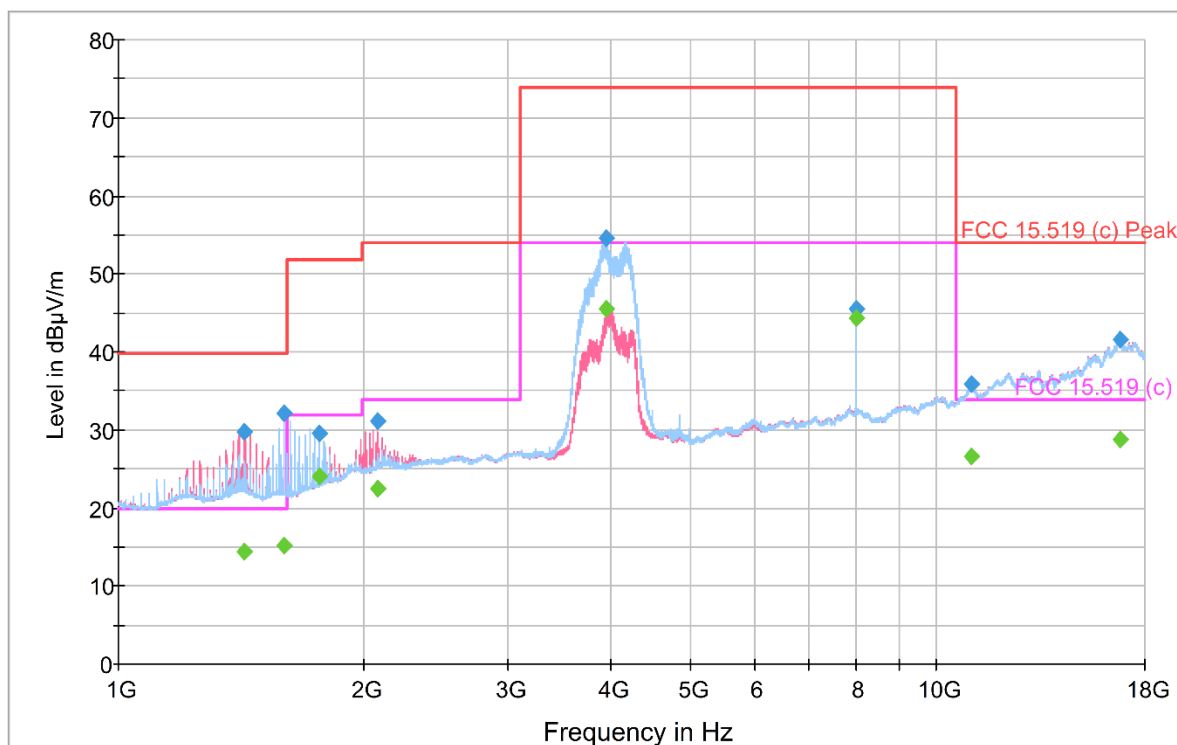

◆ FCC 15.519 (c) Final Result 1-PK+ ◆ Preview Result 1V-PK+ Final Result 2-AVG ◆ Preview Result 1H-PK+ FCC 15.519 (c) Peak

| Frequency (MHz) | Average (dBμV/m) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------|-------------|----------------|
| 1428.000000 | 14.3 | 175.0 | V | 113.0 | -2.7 | 5.60 | 19.90 |
| 1596.000000 | 15.2 | 315.0 | H | 58.0 | -2.8 | 4.70 | 19.90 |
| 1764.000000 | 24.1 | 314.0 | H | 85.0 | -1.4 | 7.80 | 31.90 |
| 2076.000000 | 22.4 | 350.0 | V | 211.0 | 1.2 | 11.50 | 33.90 |
| 3949.250000 | 45.6 | 297.0 | H | 78.0 | 4.6 | 8.30 | 53.90 |
| 7987.250000 | 44.3 | 247.0 | H | 86.0 | 11.1 | 9.60 | 53.90 |
| 11045.500000 | 26.5 | 148.0 | V | 342.0 | 15.6 | 7.40 | 33.90 |
| 16763.250000 | 28.7 | 149.0 | V | 16.0 | 23.7 | 5.20 | 33.90 |


ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions in GPS Bands

| | | | |
|-----------------------|-------------------|---------------------|---|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 04/03/2019 |
| Test Engineer: | Andreas Davidsson | Measurement: | 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz |

Limit Calculation (1164-1240 MHz and 1559-1610 MHz):

$$E \text{ (dBuV/m)} = 95.2 + \text{EIRP (dBm)}$$

$$\text{Distance} = 3 \text{ M}$$

$$E \text{ (dBuV/m)} = 95.2 + (-85.3)$$

$$E \text{ (dBuV/m)} = 9.9$$

Corrected Peak Power Calculation:

(1) Calculate the Field strength at 3 Meters.

$$(a) \ E3 = \text{Results} - G_p + AF + CL - 107$$

Where:

(b) Results = Specific uncorrected results from test (dBuV)

 (c) G_p = Pre-Amp Gain (dB)

(d) AF = Antenna Factor (dB/m)

(e) CL = Cable Loss (dB)

(2) Calculate the EIRP by using the following equation:

$$(a) \ \text{EIRP} = E3 - (20 \log F + 20 \log D - 27.5)$$

Where:

 (b) $E3$ = See Step 2 (dBuV/m @ 3m)

(c) F = Center frequency of radiated EUT signal, in MHz

(d) D = Measurement distance, in meters.

| Frequency (MHz) | Peak Output Power (dBm) | Limit (dBm) | Conclusion |
|---|-------------------------|--------------|------------|
| 1164 MHz to 1240 MHz | -149.59 | ≤ -85.3 | Pass |
| 1559 MHz to 1610 MHz | -148.00 | ≤ -85.3 | Pass |
| Test Equipment: Please refer to section 5.2 | | | |
| Peak Power Calculation (See above for calculation explanation) | | | |
| 1164 MHz to 1240 MHz: $((5.35-34.8+27.4+3-107)-(20*\text{LOG}(1188)+20*\text{LOG}(3)-27.5)) = -149.59$ | | | |
| 1559 MHz to 1610 MHz: $((7.921-34.7+28.4+3.5-107)-(20*\text{LOG}(1600)+20*\text{LOG}(3)-27.5)) = -148.00$ | | | |




ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650)965-4000 Fax: (650)965-3000

Radiated Emissions in GPS Bands

| | | | |
|-----------------------|-------------------|---------------------|---------------------|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 04/03/2019 |
| Test Engineer: | Andreas Davidsson | Measurement: | 1164MHz to 1240 MHz |

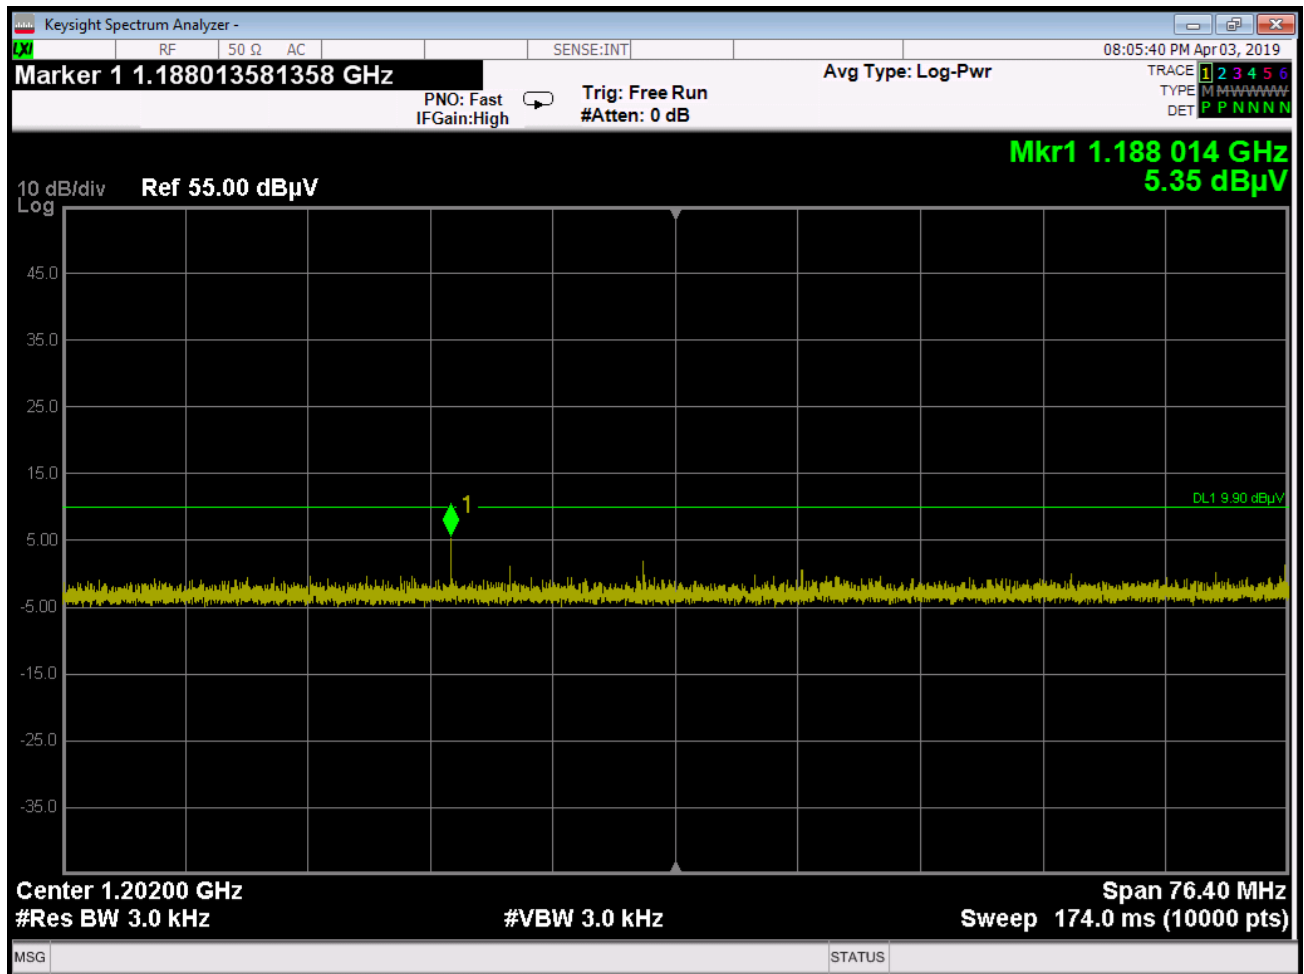

1164-1240 MHz, Antenna Polarization




ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions in GPS Bands

| | | | |
|-----------------------|-------------------|---------------------|----------------------|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 04/03/2019 |
| Test Engineer: | Andreas Davidsson | Measurement: | 1559 MHz to 1610 MHz |

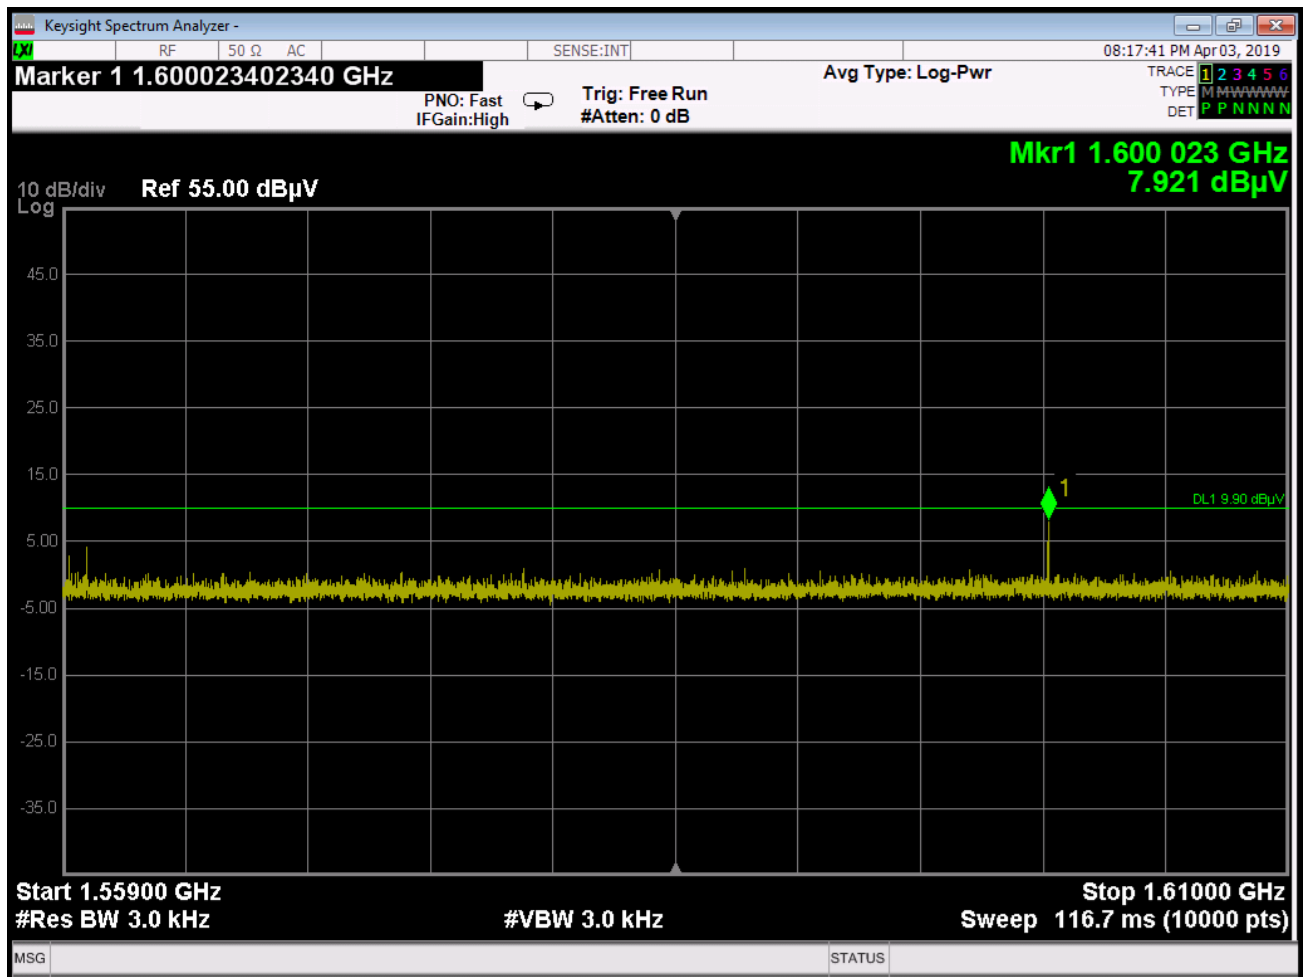

1559-1610 MHz, Antenna Polarization




ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Peak Emissions within a 50 MHz Bandwidths

| | | | |
|-----------------------|-------------------|---------------------|-------------|
| EUT: | Zone Tag | Model Name: | PAS-K01-40 |
| Test Mode: | UWB | Test Date: | 10/16/2018 |
| Test Engineer: | Andreas Davidsson | Measurement: | Fundamental |

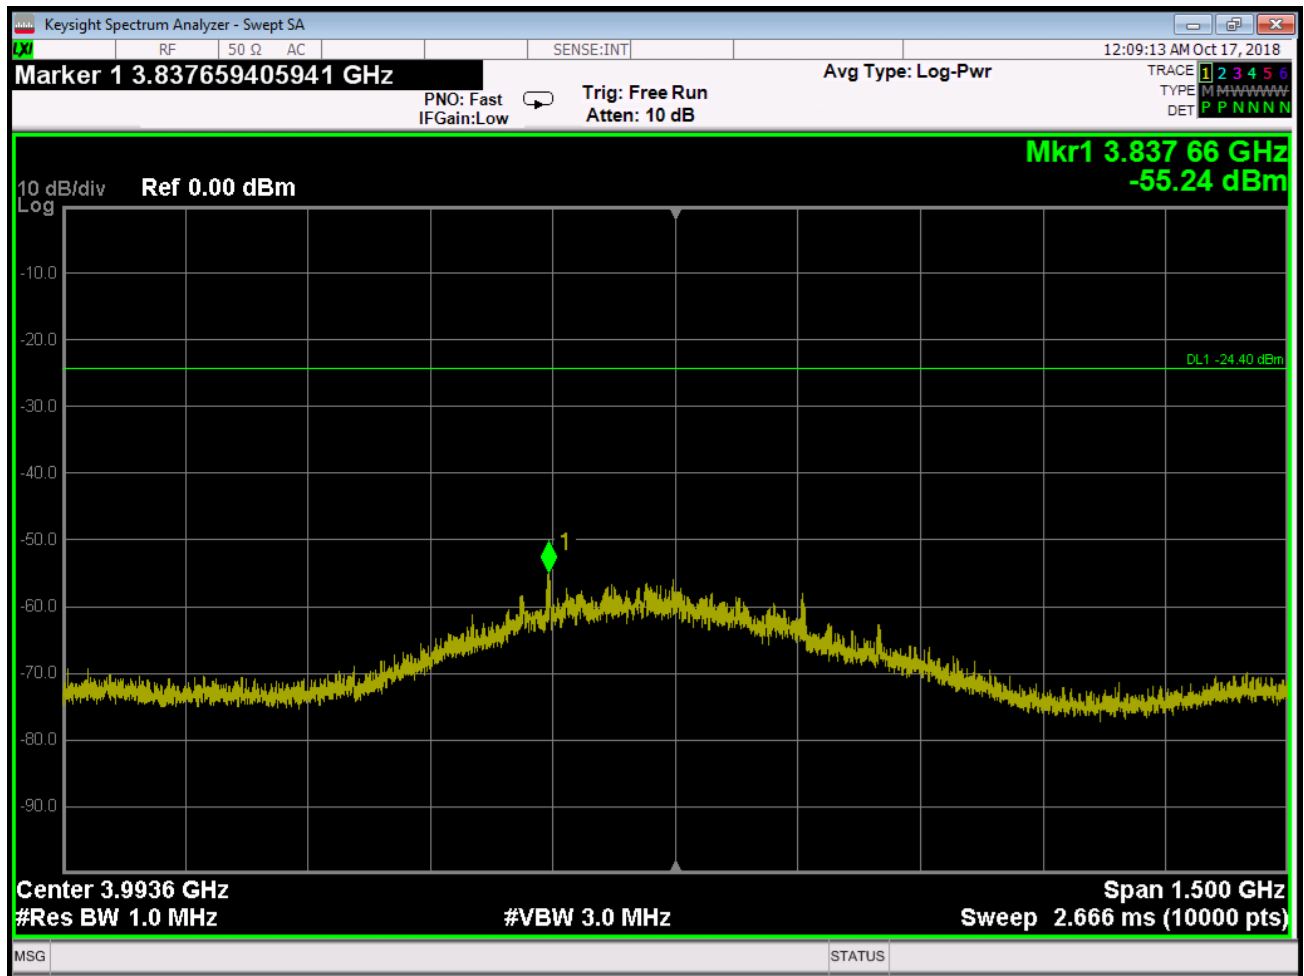

Result Peak



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Bandwidth Test

| | | | |
|------------------|------------------------|-----------------------|-------------------|
| Company: | Kyungwoo Systech, Inc. | Test Date: | 10/16/2018 |
| EUT Name: | Zone Tag | Test Engineer: | Andreas Davidsson |
| Model: | PAS-K01-40 | Test Result: | PASS |



| Limit: | Test Result: | Conclusion: |
|---|---|-------------|
| 10 dB bandwidth contained between 3100 to 10600 MHz | 10 dB bandwidth contained between 3720.27 MHz and 4225.82 MHz | PASS |
| 10 dB bandwidth \geq 500 MHz | 506 MHz | PASS |




ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Transmission Test

| | | | |
|------------------|------------------------|-----------------------|-------------------|
| Company: | Kyungwoo Systech, Inc. | Test Date: | 10/16/2018 |
| EUT Name: | Zone Tag | Test Engineer: | Andreas Davidsson |
| Model: | PAS-K01-40 | Test Result: | PASS |

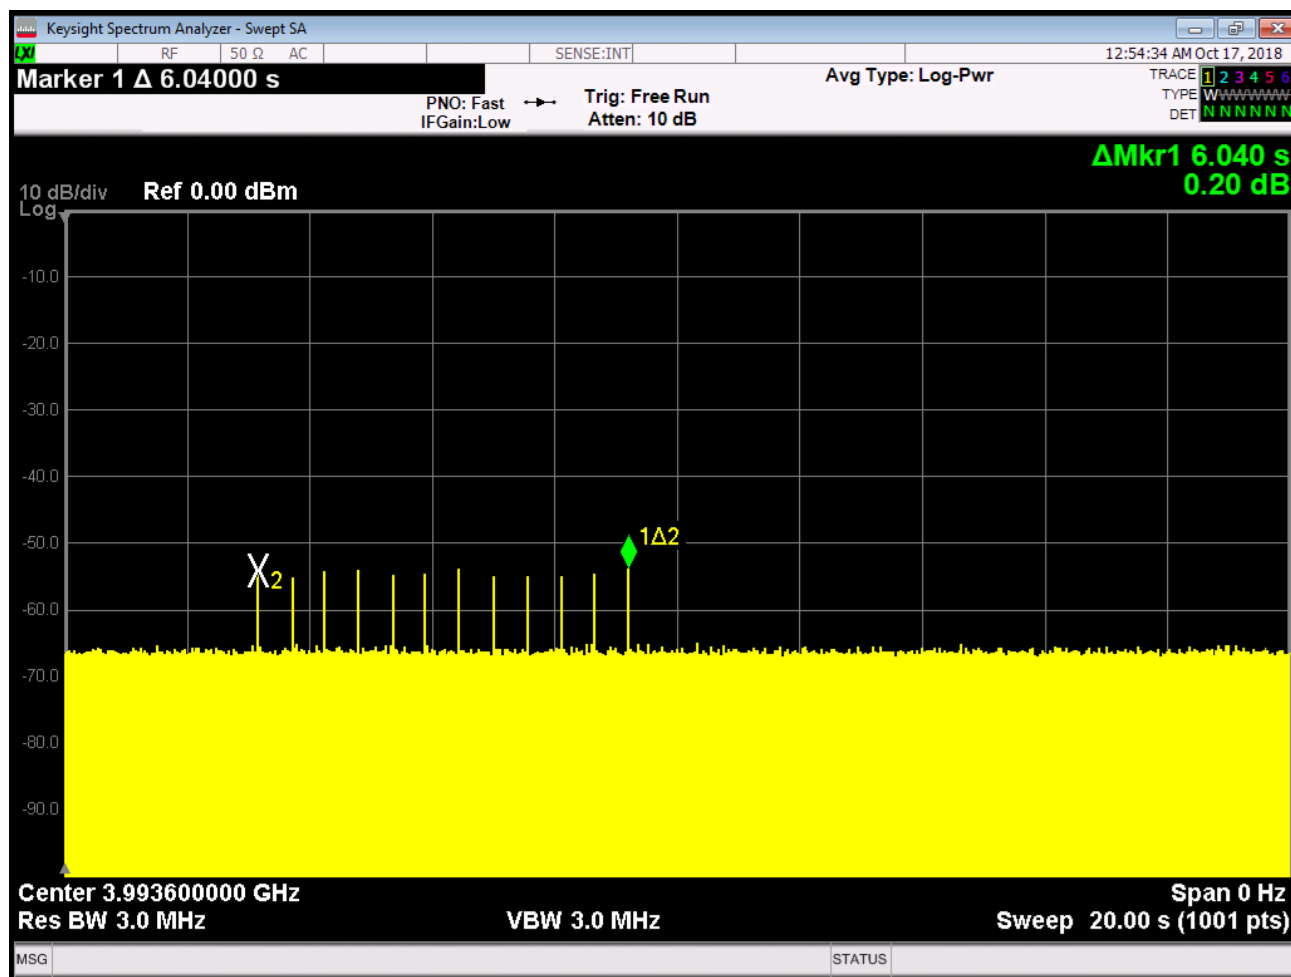


| Limit: | Test Result: | Conclusion: |
|--|---|-------------|
| An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting. | EUT stops transmission if it does not receive an acknowledgement within 10 seconds. | PASS |



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

AC Line Conducted Emissions Test Data

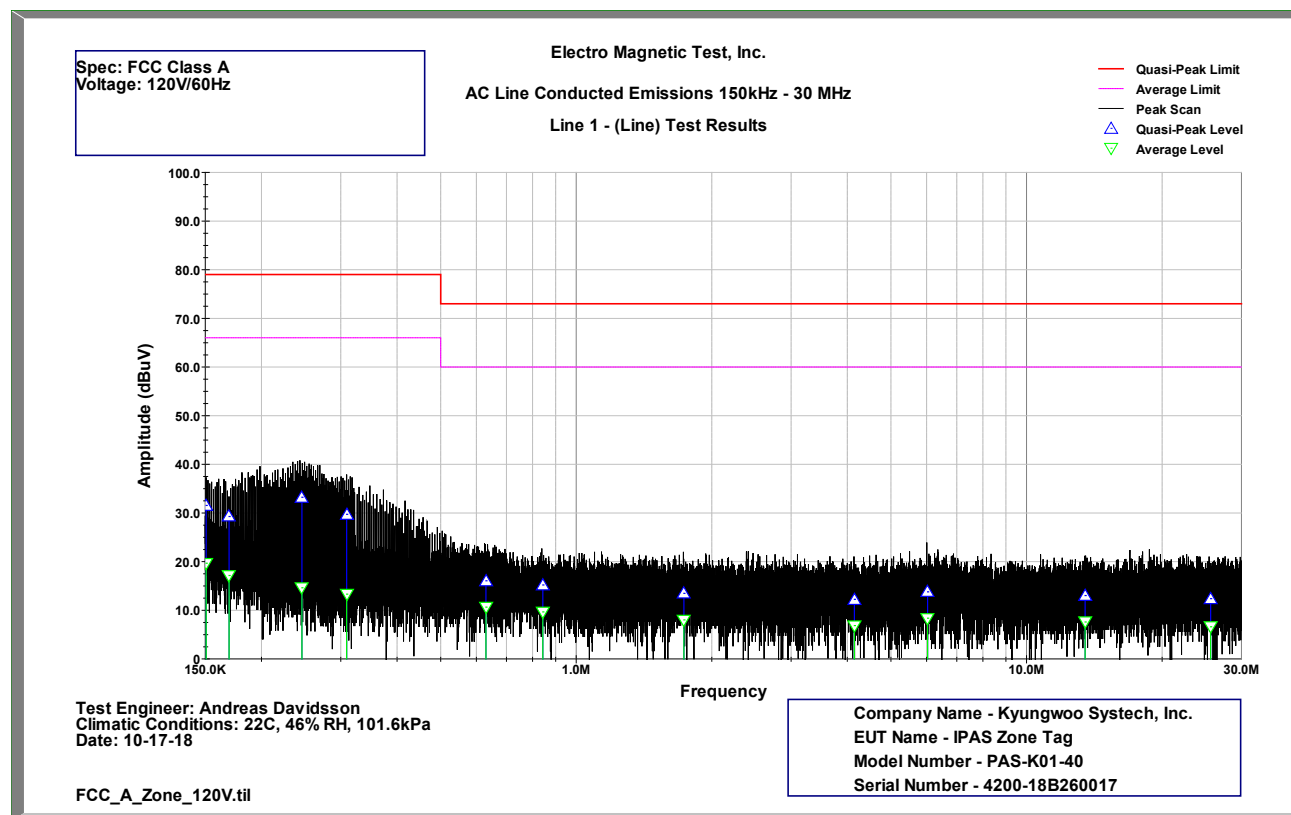

Line 1 - (Line) Test Results


| Frequency (MHz) | Peak (dBuV) | Quasi-Peak (dBuV) | Average (dBuV) | Corr. Factor (dB) | Quasi-Peak Limit | QP Margin | Average Limit | Average Margin |
|-----------------|-------------|-------------------|----------------|-------------------|------------------|-----------|---------------|----------------|
| 0.151 | 37.922 | 31.531 | 19.656 | 11.404 | 79.000 | -47.469 | 66.000 | -46.344 |
| 0.169 | 37.504 | 29.259 | 17.137 | 11.154 | 79.000 | -49.741 | 66.000 | -48.863 |
| 0.246 | 41.056 | 33.219 | 14.606 | 10.743 | 79.000 | -45.781 | 66.000 | -51.394 |
| 0.309 | 37.439 | 29.709 | 13.309 | 10.641 | 79.000 | -49.291 | 66.000 | -52.691 |
| 0.630 | 22.553 | 16.058 | 10.632 | 10.397 | 73.000 | -56.942 | 60.000 | -49.368 |
| 0.843 | 19.634 | 15.196 | 9.650 | 10.386 | 73.000 | -57.804 | 60.000 | -50.350 |
| 1.734 | 17.226 | 13.474 | 8.004 | 10.480 | 73.000 | -59.526 | 60.000 | -51.996 |
| 4.146 | 16.183 | 12.226 | 6.840 | 10.692 | 73.000 | -60.774 | 60.000 | -53.160 |
| 6.029 | 18.574 | 13.771 | 8.362 | 10.966 | 73.000 | -59.229 | 60.000 | -51.638 |
| 13.494 | 17.766 | 13.012 | 7.577 | 11.107 | 73.000 | -59.988 | 60.000 | -52.423 |
| 25.634 | 16.607 | 12.376 | 6.595 | 11.488 | 73.000 | -60.624 | 60.000 | -53.405 |



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

AC Line Conducted Emissions Test Data

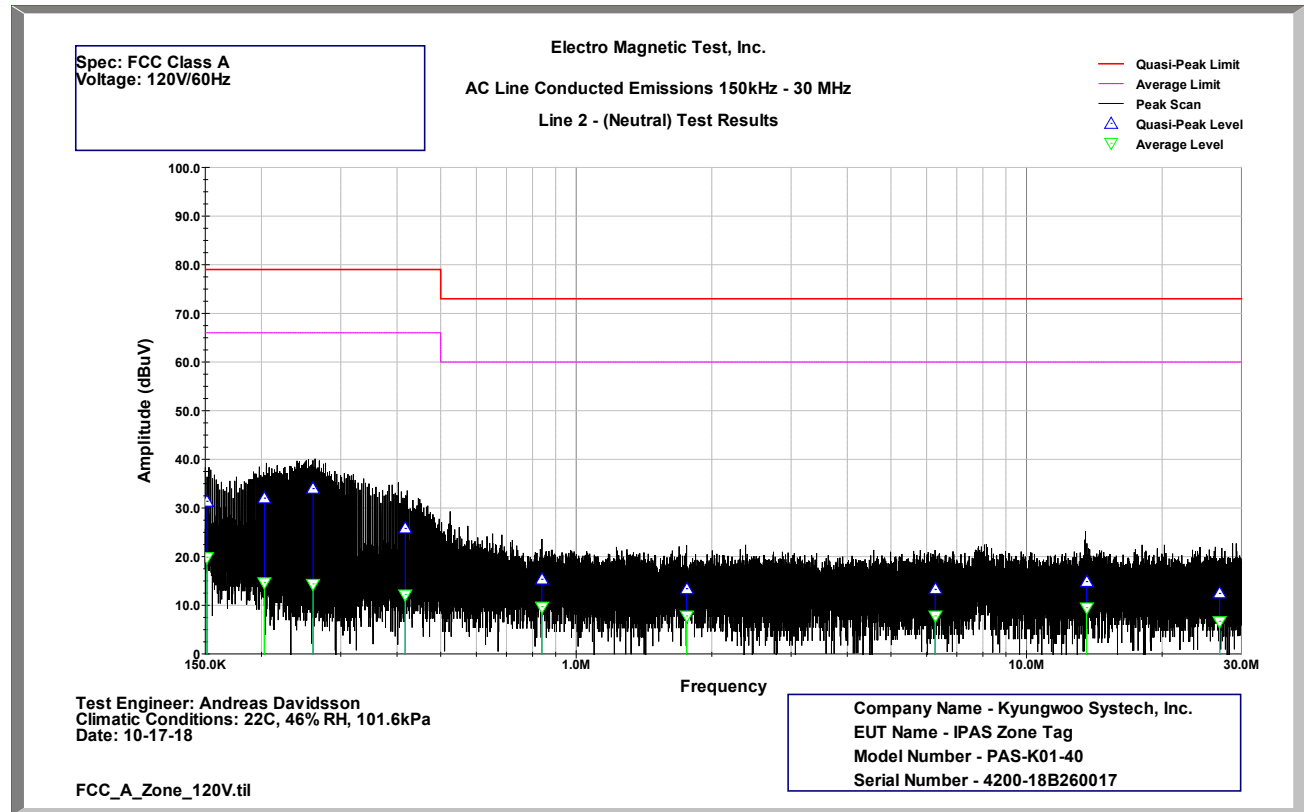

Line 2 - (Neutral) Test Results

| Frequency (MHz) | Peak (dBuV) | Quasi-Peak (dBuV) | Average (dBuV) | Corr. Factor (dB) | Quasi-Peak Limit | QP Margin | Average Limit | Average Margin |
|-----------------|-------------|-------------------|----------------|-------------------|------------------|-----------|---------------|----------------|
| 0.151 | 39.081 | 31.357 | 19.859 | 11.398 | 79.000 | -47.643 | 66.000 | -46.141 |
| 0.203 | 39.826 | 32.020 | 14.707 | 10.871 | 79.000 | -46.980 | 66.000 | -51.293 |
| 0.260 | 41.477 | 33.984 | 14.386 | 10.683 | 79.000 | -45.016 | 66.000 | -51.614 |
| 0.417 | 34.264 | 25.775 | 12.212 | 10.455 | 79.000 | -53.225 | 66.000 | -53.788 |
| 0.839 | 20.230 | 15.323 | 9.724 | 10.380 | 73.000 | -57.677 | 60.000 | -50.276 |
| 1.758 | 17.898 | 13.396 | 7.815 | 10.475 | 73.000 | -59.604 | 60.000 | -52.185 |
| 6.268 | 19.134 | 13.233 | 7.801 | 10.962 | 73.000 | -59.767 | 60.000 | -52.199 |
| 13.587 | 19.632 | 14.866 | 9.518 | 11.103 | 73.000 | -58.134 | 60.000 | -50.482 |
| 26.840 | 18.488 | 12.423 | 6.678 | 11.470 | 73.000 | -60.577 | 60.000 | -53.322 |



ELECTRO MAGNETIC TEST, INC.


1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX B

TEST SETUP DIAGRAMS

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

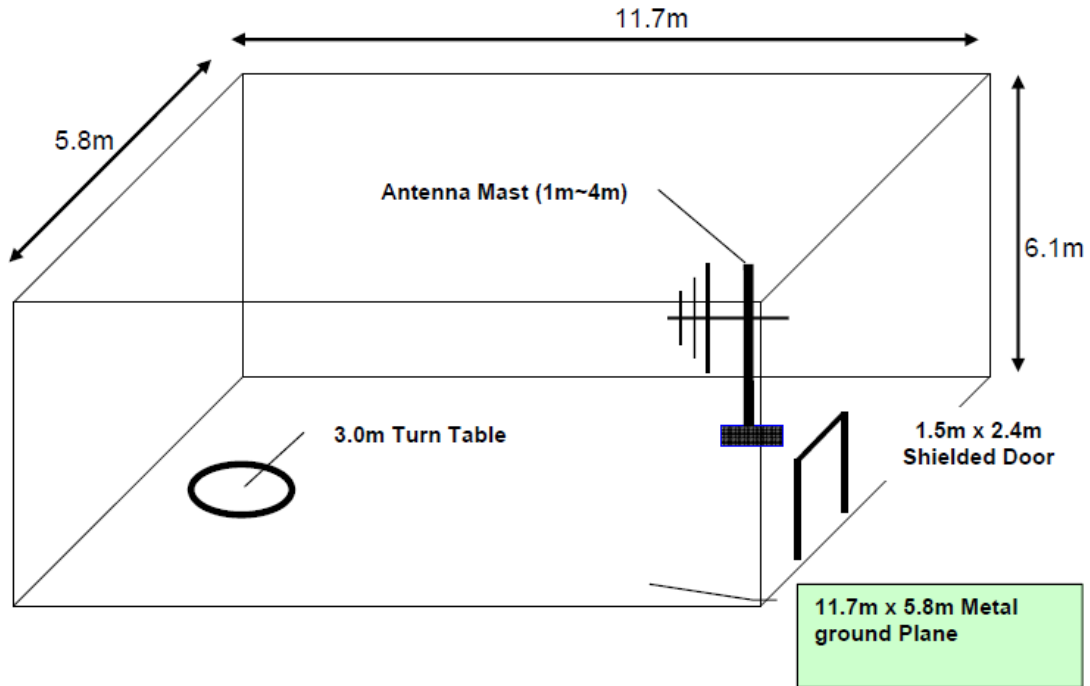**FIGURE 1 - LAYOUT OF 3 METER SEMI-ANECHOIC CHAMBER**



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

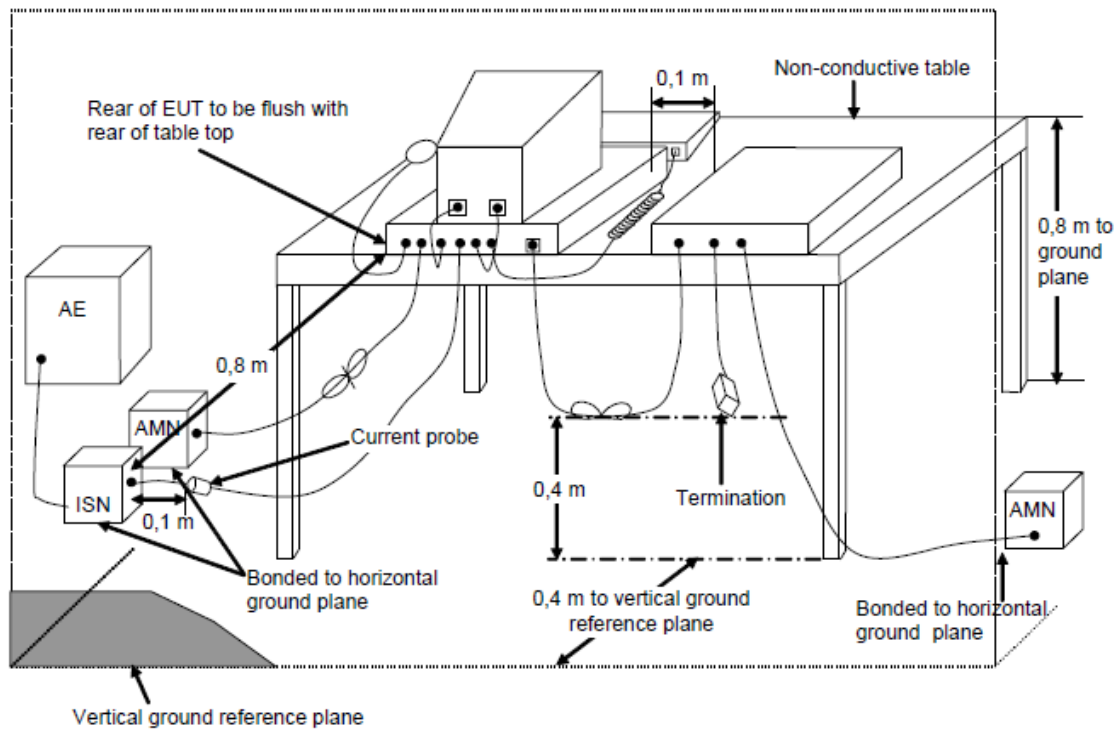


FIGURE 2 – TABLETOP CONDUCTED EMISSIONS TEST SETUP – SITE “D”

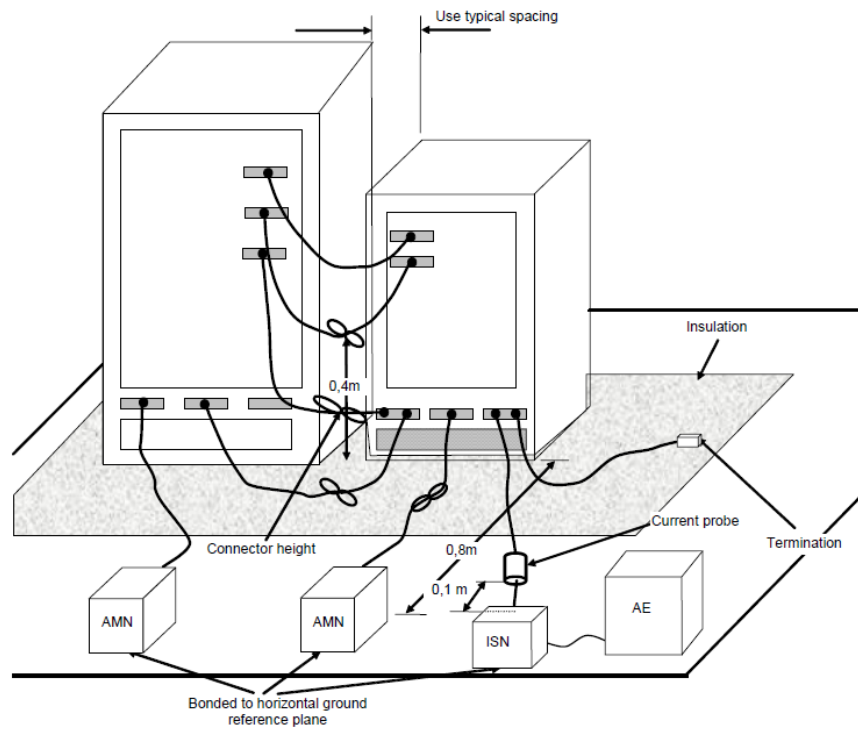


FIGURE 2a – FLOORSTANDING CONDUCTED EMISSIONS TEST SETUP – SITE “D”



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX C

MODIFICATIONS TO THE EUT



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

MODIFICATIONS TO THE EUT

No modifications were made to the EUT by Electro Magnetic Test, Inc. personnel during the testing.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX D

ADDITIONAL MODELS COVERED UNDER THIS REPORT



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

ADDITIONAL MODELS COVERED UNDER THIS REPORT

There are no additional models to be covered under this report.