

# FCC Radio Test Report

**FCC ID: Q1SCMR-W09**

**This report concerns (check one):** ☒Original Grant ☐Class I Change ☐Class II Change

**Project No.** : 1712C037A  
**Equipment** : Tablet  
**Test Model** : CMR-W09  
**Series Model** : N/A  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Dec. 07, 2017  
**Date of Test** : Dec. 07, 2017 ~ Jan. 03, 2018  
**Issued Date** : Jan. 09, 2018  
**Tested by** : BTL Inc.

Testing Engineer : Paul Li  
(Paul Li)

Technical Manager : Shawn Xiao  
(Shawn Xiao)

Authorized Signatory : David Mao  
(David Mao)

# BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000      FAX: +86-769-8319-6000



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>1 . CERTIFICATION</b>                                     | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY                                            | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 11          |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 13          |
| 3.5 DESCRIPTION OF SUPPORT UNITS                             | 13          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>14</b>   |
| 4.1 RADIATED EMISSION MEASUREMENT                            | 14          |
| 4.1.1 RADIATED EMISSION LIMITS                               | 14          |
| 4.1.2 TEST PROCEDURE                                         | 15          |
| 4.1.3 DEVIATION FROM TEST STANDARD                           | 15          |
| 4.1.4 TEST SETUP                                             | 15          |
| 4.1.5 EUT OPERATING CONDITIONS                               | 17          |
| 4.1.6 EUT TEST CONDITIONS                                    | 17          |
| 4.1.7 TEST RESULTS (9K TO 30MHz)                             | 18          |
| 4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)                  | 18          |
| 4.1.9 TEST RESULTS (ABOVE 1000 MHz)                          | 18          |
| <b>5 . MEASUREMENT INSTRUMENTS LIST</b>                      | <b>19</b>   |
| <b>APPENDIX A - RADIATED EMISSION (9KHZ TO 30MHZ)</b>        | <b>20</b>   |
| <b>APPENDIX B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>     | <b>29</b>   |
| <b>APPENDIX C - RADIATED EMISSION (ABOVE 1000MHZ)</b>        | <b>62</b>   |

### REPORT ISSUED HISTORY

| Issued No.           | Description                                                                                                                                               | Issued Date   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| BTL-FCCP-1-1712C037  | Original Report                                                                                                                                           | Jan. 04, 2018 |
| BTL-FCCP-1-1712C037A | Compared with the previous report (BTL-FCCP-2-1712C037),<br>The model name is changed which does not affected the test result the rest are kept the same. | Jan. 09, 2018 |

## 1. CERTIFICATION

Equipment : Tablet  
Brand Name : HUAWEI  
Test Model : CMR-W09  
Series Model : N/A  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Dec. 07, 2017 ~ Jan. 03, 2018  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1712C037A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart E(15.407) |                    |          |        |
|-------------------------------|--------------------|----------|--------|
| Standard(s)<br>Section        | Test Item          | Judgment | Remark |
| 15.407(a)                     | Radiated Emissions | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| DG-CB03   | CISPR  | 9kHz~30MHz                  | V          | 3.79    |
|           |        | 9kHz~30MHz                  | H          | 3.57    |
|           |        | 30MHz ~ 200MHz              | V          | 3.82    |
|           |        | 30MHz ~ 200MHz              | H          | 3.60    |
|           |        | 200MHz ~ 1,000MHz           | V          | 3.86    |
|           |        | 200MHz ~ 1,000MHz           | H          | 3.94    |
|           |        | 1GHz~18GHz                  | V          | 3.12    |
|           |        | 1GHz~18GHz                  | H          | 3.68    |
|           |        | 18GHz~40GHz                 | V          | 4.15    |
|           |        | 18GHz~40GHz                 | H          | 4.14    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                     |                                                                                                      |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Equipment           | Tablet                                                                                               |                                                                                                |
| Brand Name          | HUAWEI                                                                                               |                                                                                                |
| Test Model          | CMR-W09                                                                                              |                                                                                                |
| Series Model        | N/A                                                                                                  |                                                                                                |
| Mode Different      | N/A                                                                                                  |                                                                                                |
| Software Version    | CMR-W09 8.0.1.3(SP1C331)                                                                             |                                                                                                |
| Hardware Version    | SH1CMRONLM                                                                                           |                                                                                                |
| Product Description | Operation Frequency                                                                                  | UNII-1: 5150-5250MHz<br>UNII-2A: 5250-5350MHz<br>UNII-2C: 5470-5725MHz<br>UNII-3: 5725-5850MHz |
|                     | Modulation Type                                                                                      | OFDM                                                                                           |
|                     | Bit Rate of Transmitter                                                                              | 433.3 Mbps                                                                                     |
| Power Source        | #1 Supplied from AC/DC adapter.<br>#2 Battery Supplied.                                              |                                                                                                |
| Power Rating        | #1 Input: 100V~240V AC and 50/60 Hz,0.5A<br>Output: 5V – – 2A OR 9V – – 2A<br>#2 – – – 3.82V 7350mAh |                                                                                                |



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-1                                     |                 | UNII-1                          |                 | UNII-1         |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 36                                         | 5180            | 38                              | 5190            | 42             | 5210            |
| 40                                         | 5200            | 46                              | 5230            |                |                 |
| 44                                         | 5220            |                                 |                 |                |                 |
| 48                                         | 5240            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-2A                                    |                 | UNII-2A                         |                 | UNII-2A        |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 52                                         | 5260            | 54                              | 5270            | 58             | 5290            |
| 56                                         | 5280            | 62                              | 5310            |                |                 |
| 60                                         | 5300            |                                 |                 |                |                 |
| 64                                         | 5320            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-2C                                    |                 | UNII-2C                         |                 | UNII-2C        |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 100                                        | 5500            | 102                             | 5510            | 106            | 5530            |
| 104                                        | 5520            | 110                             | 5550            | 122            | 5610            |
| 108                                        | 5540            | 118                             | 5590            |                |                 |
| 112                                        | 5560            | 126                             | 5630            |                |                 |
| 116                                        | 5580            | 134                             | 5670            |                |                 |
| 132                                        | 5660            |                                 |                 |                |                 |
| 136                                        | 5680            |                                 |                 |                |                 |
| 140                                        | 5700            |                                 |                 |                |                 |

| 802.11a<br>802.11n 20MHz<br>802.11ac 20MHz |                 | 802.11n 40MHz<br>802.11ac 40MHz |                 | 802.11ac 80MHz |                 |
|--------------------------------------------|-----------------|---------------------------------|-----------------|----------------|-----------------|
| UNII-3                                     |                 | UNII-3                          |                 | UNII-3         |                 |
| Channel                                    | Frequency (MHz) | Channel                         | Frequency (MHz) | Channel        | Frequency (MHz) |
| 149                                        | 5745            | 151                             | 5755            | 155            | 5775            |
| 153                                        | 5765            | 159                             | 5795            |                |                 |
| 157                                        | 5785            |                                 |                 |                |                 |
| 161                                        | 5805            |                                 |                 |                |                 |
| 165                                        | 5825            |                                 |                 |                |                 |

### 3. Antenna Specification:

| Ant. | Manufacturer | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|--------------|------------|--------------|-----------|------------|
| 1    | NA           | NA         | Internal     | N/A       | -0.20      |

4.

The EUT contains following accessory devices.

| Item                                            | Mfr/Brand                                       | Model.           |
|-------------------------------------------------|-------------------------------------------------|------------------|
| Battery                                         | SCUD (FUJIAN) Electronics Co., Ltd              | HB2994I8ECW      |
|                                                 | Sunwoda Electronic Co., LTD.                    | HB2994I8ECW      |
|                                                 | Huizhou Desay Battery Co., Ltd                  | HB2994I8ECW      |
| USB Cable                                       | HONGLIN TECHNOLOGY CO.,LTD                      | 130-26988        |
|                                                 | Luxshare Precision Industry Co., Ltd            | L99UC001-CS-H    |
|                                                 | FOXCONN INTERCONNECT TECHNOLOGY LIMITED         | CUDU01B-HC288-EH |
|                                                 | foxlink cheng uei precision industry Co., Ltd   | 6691-10YZ-0183   |
| USB Type-C to 3.5 mm headset jack adapter cable | FOSTER ELECTRIC CO.(HONG KONG) LTD              | 620891           |
|                                                 | Boluo County Quancheng Electronic Co.,Ltd.      | 6001-7001-TC-294 |
|                                                 | Jiangxi Lianchuang Hongsheng Electronic Co.,LTD | HWTYPEC3R5009AW  |
|                                                 | MERRY ELECTRONICS CO., LTD.                     | L99UD002-CS-H    |
| Adapter                                         | Salcomp (Shenzhen) Co., Ltd.                    | HW-059200UHQ     |
|                                                 | HUIZHOU BYD ELECTRONIC CO.,LTD                  |                  |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


| Pretest Mode | Description                           |
|--------------|---------------------------------------|
| Mode 1       | TX A Mode / CH36, CH48 (UNII-1)       |
| Mode 2       | TX N20 Mode / CH36, CH48 (UNII-1)     |
| Mode 3       | TX N40 Mode / CH38, CH46 (UNII-1)     |
| Mode 4       | TX AC20 Mode / CH36, CH48 (UNII-1)    |
| Mode 5       | TX AC40 Mode / CH38, CH46 (UNII-1)    |
| Mode 6       | TX AC80 Mode / CH42 (UNII-1)          |
| Mode 7       | TX A Mode / CH52, CH64 (UNII-2A)      |
| Mode 8       | TX N20 Mode / CH52, CH64 (UNII-2A)    |
| Mode 9       | TX N40 Mode / CH54, CH62 (UNII-2A)    |
| Mode 10      | TX AC20 Mode / CH52, CH64 (UNII-2A)   |
| Mode 11      | TX AC40 Mode / CH54, CH62 (UNII-2A)   |
| Mode 12      | TX AC80 Mode / CH58 (UNII-2A)         |
| Mode 13      | TX A Mode / CH100, CH140 (UNII-2C)    |
| Mode 14      | TX N20 Mode / CH100, CH140 (UNII-2C)  |
| Mode 15      | TX N40 Mode / CH102, CH134 (UNII-2C)  |
| Mode 16      | TX AC20 Mode / CH100, CH140 (UNII-2C) |
| Mode 17      | TX AC40 Mode / CH102, CH134 (UNII-2C) |
| Mode 18      | TX AC80 Mode / CH106, CH122 (UNII-2C) |
| Mode 19      | TX A Mode / CH149, CH165 (UNII-3)     |
| Mode 20      | TX N20 Mode / CH149, CH165 (UNII-3)   |
| Mode 21      | TX N40 Mode / CH151, CH159 (UNII-3)   |
| Mode 22      | TX AC20 Mode / CH149, CH165 (UNII-3)  |
| Mode 23      | TX AC40 Mode / CH151, CH159 (UNII-3)  |
| Mode 24      | TX AC80 Mode / CH155 (UNII-3)         |

| For Radiated Test |                                       |
|-------------------|---------------------------------------|
| Final Test Mode   | Description                           |
| Mode 1            | TX A Mode / CH36, CH48 (UNII-1)       |
| Mode 2            | TX N20 Mode / CH36, CH48 (UNII-1)     |
| Mode 3            | TX N40 Mode / CH38, CH46 (UNII-1)     |
| Mode 4            | TX AC20 Mode / CH36, CH48 (UNII-1)    |
| Mode 5            | TX AC40 Mode / CH38, CH46 (UNII-1)    |
| Mode 6            | TX AC80 Mode / CH42 (UNII-1)          |
| Mode 7            | TX A Mode / CH52, CH64 (UNII-2A)      |
| Mode 8            | TX N20 Mode / CH52, CH64 (UNII-2A)    |
| Mode 9            | TX N40 Mode / CH54, CH62 (UNII-2A)    |
| Mode 10           | TX AC20 Mode / CH52, CH64 (UNII-2A)   |
| Mode 11           | TX AC40 Mode / CH54, CH62 (UNII-2A)   |
| Mode 12           | TX AC80 Mode / CH58 (UNII-2A)         |
| Mode 13           | TX A Mode / CH100, CH140 (UNII-2C)    |
| Mode 14           | TX N20 Mode / CH100, CH140 (UNII-2C)  |
| Mode 15           | TX N40 Mode / CH102, CH134 (UNII-2C)  |
| Mode 16           | TX AC20 Mode / CH100, CH140 (UNII-2C) |
| Mode 17           | TX AC40 Mode / CH102, CH134 (UNII-2C) |
| Mode 18           | TX AC80 Mode / CH106, CH122 (UNII-2C) |
| Mode 19           | TX A Mode / CH149, CH165 (UNII-3)     |
| Mode 20           | TX N20 Mode / CH149, CH165 (UNII-3)   |
| Mode 21           | TX N40 Mode / CH151, CH159 (UNII-3)   |
| Mode 22           | TX AC20 Mode / CH149, CH165 (UNII-3)  |
| Mode 23           | TX AC40 Mode / CH151, CH159 (UNII-3)  |
| Mode 24           | TX AC80 Mode / CH155 (UNII-3)         |

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

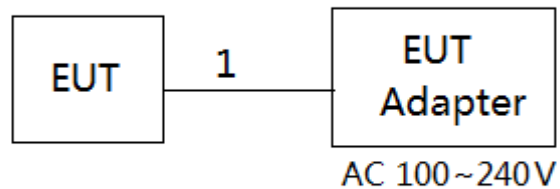

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. |
|------|-----------|-----------|----------------|--------|------------|
| -    | -         | -         | -              | -      | -          |

| Item | Shielded Type | Ferrite Core | Length | Note      |
|------|---------------|--------------|--------|-----------|
| 1    | NO            | NO           | 1.5m   | USB Cable |

## 4. EMC EMISSION TEST

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

| Frequencies<br>(MHz) | EIRP Limit (dBm) | Band edge<br>at 3m (dBμV/m) | Harmonic<br>at 1.5m (dBμV/m) |
|----------------------|------------------|-----------------------------|------------------------------|
| 5150-5250            | -27              | 68.3                        | 74.3 (Note 3)                |
| 5250-5350            | -27              | 68.3                        | 74.3 (Note 3)                |
| 5470-5725            | -27              | 68.3                        | 74.3 (Note 3)                |
| 5725-5850            | -27(Note 2)      | 68.3                        | 74.3 (Note 3)                |
|                      | 10(Note 2)       | 105.3                       | 111.3(Note 3)                |
|                      | 15.6(Note 2)     | 110.9                       | 116.9(Note 3)                |
|                      | 27(Note 2)       | 122.3                       | 128.3(Note 3)                |

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength:  $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$ , where P is the eirp (Watts)

- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

- 20log d limit/d measure=20log 3/1.5=6dB.

#### 4.1.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation


#### 4.1.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

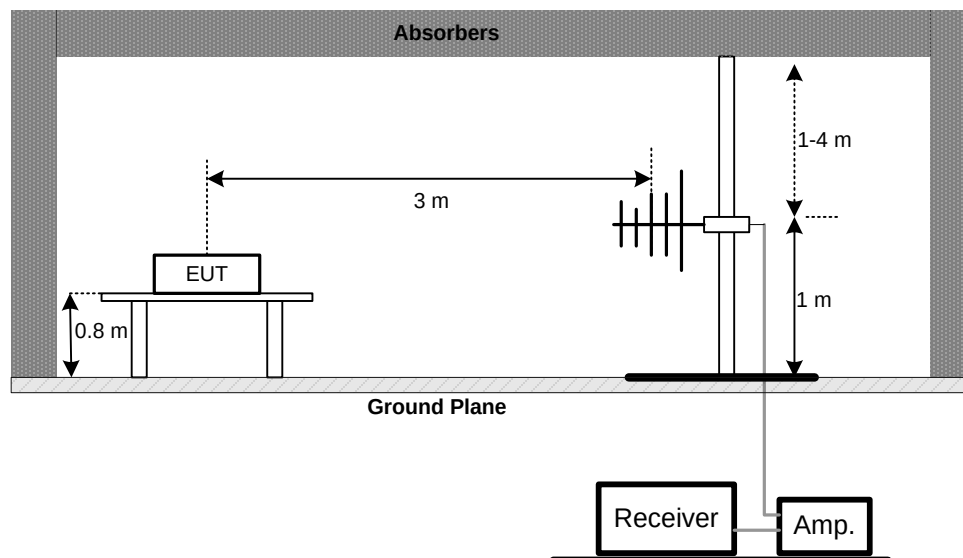


**(B) Radiated Emission Test Set-Up Frequency Above 1 GHz**

**Band edge**

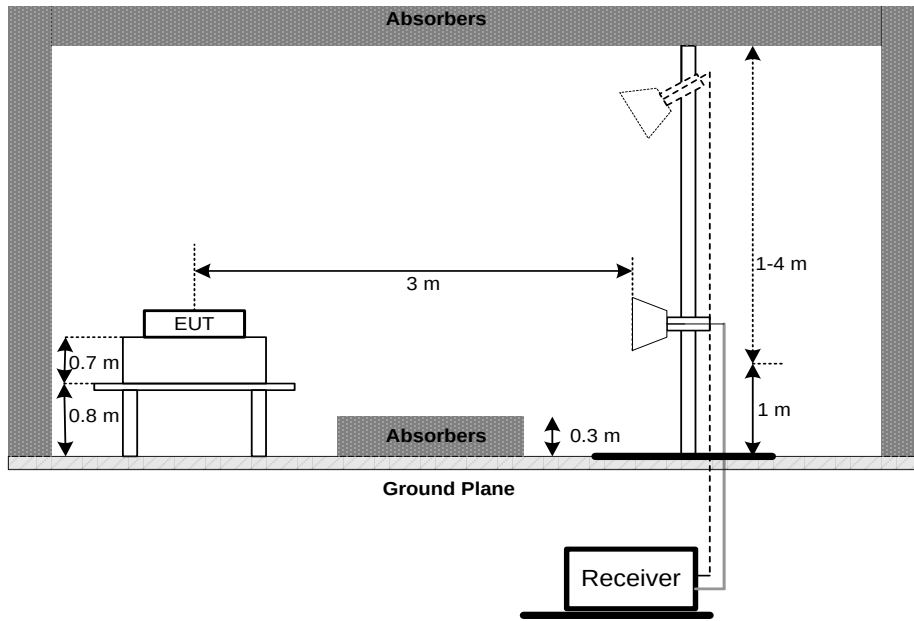


**Harmonic**

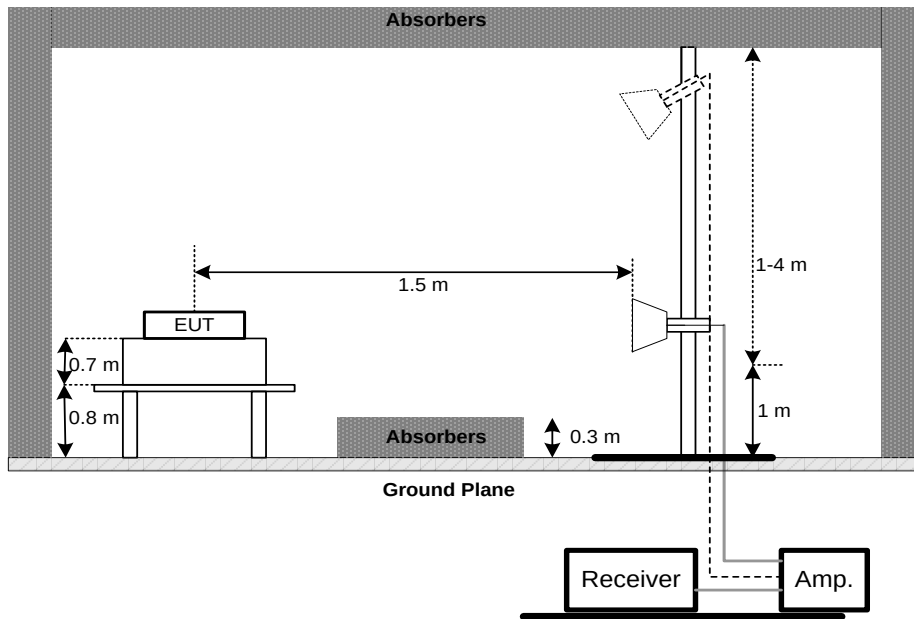



(C) Radiated emissions below 30MHz

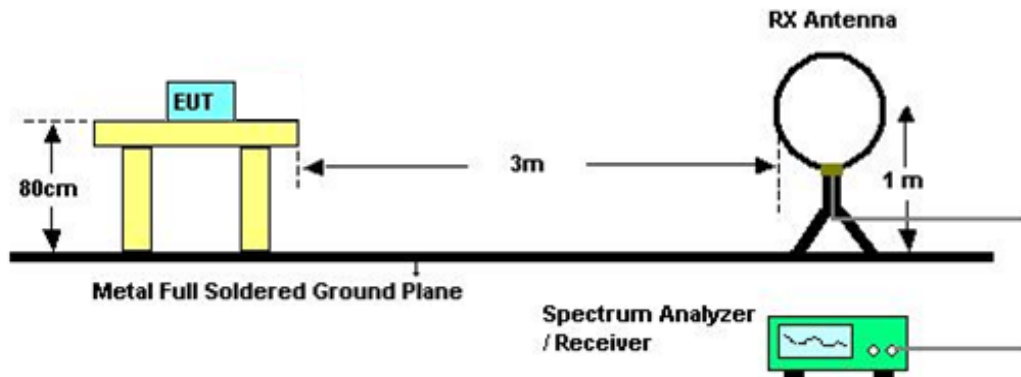

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### **4.1.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Appendix A

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Appendix B.

#### **4.1.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Appendix C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST

| Radiated Emission Below 1GHz |                      |              |                             |             |                  |
|------------------------------|----------------------|--------------|-----------------------------|-------------|------------------|
| Item                         | Kind of Equipment    | Manufacturer | Type No.                    | Serial No.  | Calibrated until |
| 1                            | Antenna              | Schwarbeck   | VULB9160                    | 9160-3232   | Mar. 26, 2018    |
| 2                            | Amplifier            | HP           | 8447D                       | 2944A09673  | Oct. 19, 2018    |
| 3                            | Receiver             | Agilent      | N9038A                      | MY52130039  | Aug. 20, 2018    |
| 4                            | Cable                | emci         | LMR-400(30MHz-1 GHz)(8m+5m) | N/A         | Jun. 26, 2018    |
| 5                            | Controller           | CT           | SC100                       | N/A         | N/A              |
| 6                            | Controller           | MF           | MF-7802                     | MF780208416 | N/A              |
| 7                            | Measurement Software | Farad        | EZ-EMC Ver.NB-03A1-01       | N/A         | N/A              |
| 8                            | Antenna              | EM           | EM-6876-1                   | 230         | Mar. 06, 2018    |


| Radiated Emission Above 1GHz |                                     |                |                          |               |                  |
|------------------------------|-------------------------------------|----------------|--------------------------|---------------|------------------|
| Item                         | Kind of Equipment                   | Manufacturer   | Type No.                 | Serial No.    | Calibrated until |
| 1                            | Double Ridged Guide Antenna         | ETS            | 3115                     | 75789         | Mar. 26, 2018    |
| 2                            | Broad-Band Horn Antenna             | Schwarzbeck    | BBHA 9170                | 9170319       | Jun. 08, 2018    |
| 3                            | Amplifier                           | Agilent        | 8449B                    | 3008A02274    | May. 16, 2018    |
| 4                            | Microwave Preamplifier With Adaptor | EMC INSTRUMENT | EMC2654045               | 980039 & HA01 | Mar. 26, 2018    |
| 5                            | Receiver                            | Agilent        | N9038A                   | MY52130039    | Aug. 20, 2018    |
| 6                            | Antenna                             | EM             | EM-6876-1                | 230           | Mar. 06, 2018    |
| 7                            | Controller                          | CT             | SC100                    | N/A           | N/A              |
| 8                            | Controller                          | MF             | MF-7802                  | MF780208416   | N/A              |
| 9                            | Cable                               | emci           | EMC104-SM-SM-1 2000(12m) | N/A           | Jun. 26, 2018    |
| 10                           | Measurement Software                | Farad          | EZ-EMC Ver.NB-03A1-01    | N/A           | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## APPENDIX A - RADIATED EMISSION (9KHZ TO 30MHZ)

|            |                     |
|------------|---------------------|
| Test Mode: | TX MODE_Adapter:BYD |
|------------|---------------------|


Ant 0°

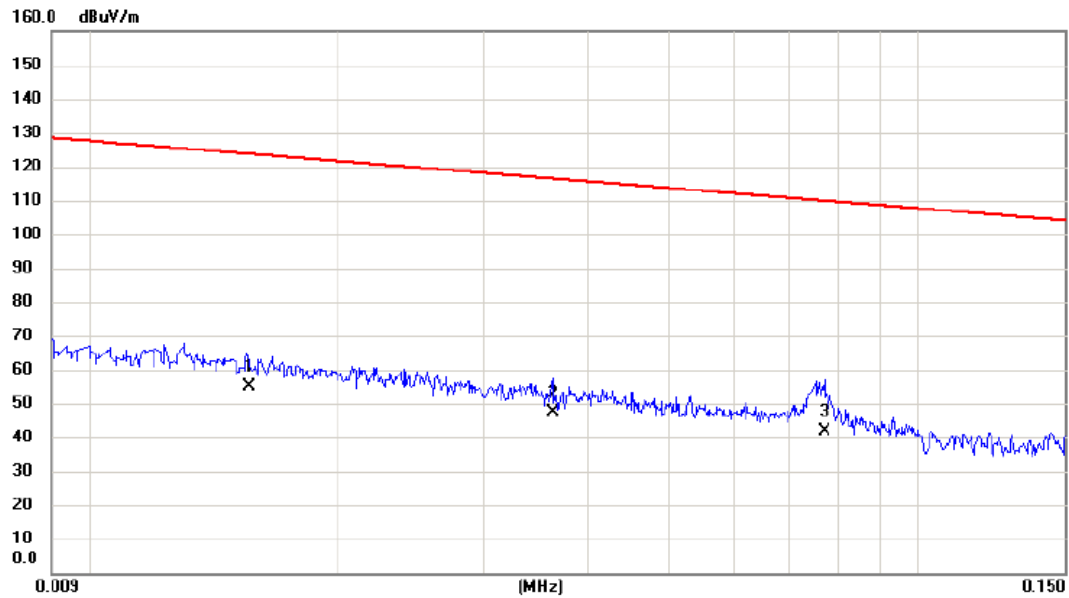

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 0.0156 | 34.65         | 20.19          | 54.84       | 123.74 | -68.90 | AVG      |         |
| 2   |     | 0.0362 | 28.08         | 19.13          | 47.21       | 116.43 | -69.22 | AVG      |         |
| 3   | *   | 0.0770 | 23.76         | 18.18          | 41.94       | 109.88 | -67.94 | AVG      |         |

Test Mode: TX MODE\_Adapter:BYD


Ant 0°

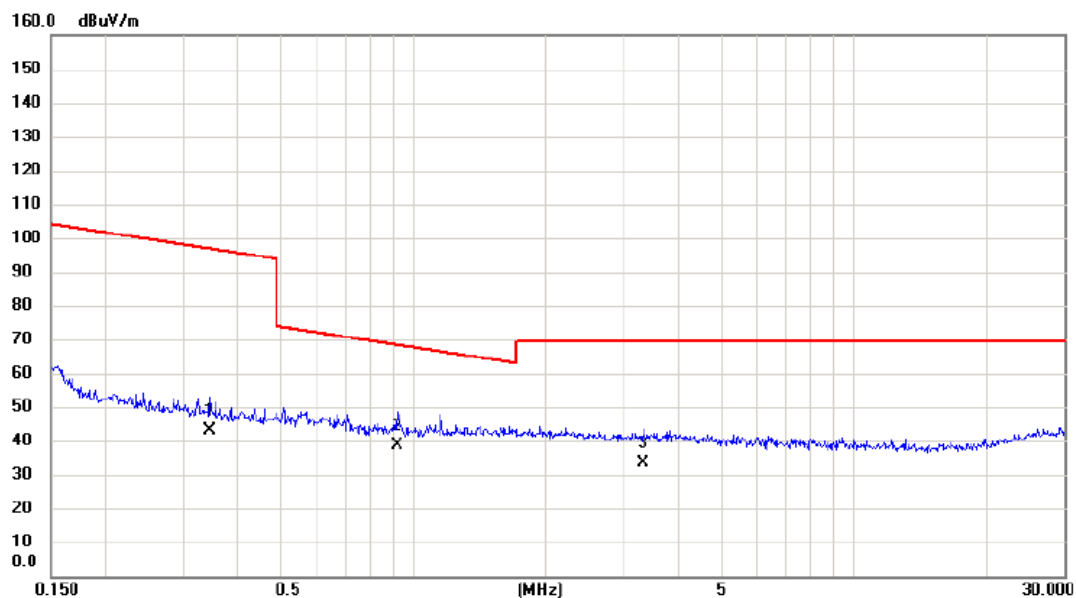

| No. | Mk. | Freq.  | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|--------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz    | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |        | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 0.3446 | 26.52   | 16.58   | 43.10    | 96.86  | -53.76 | AVG      |         |
| 2   | *   | 0.9184 | 22.65   | 15.99   | 38.64    | 68.34  | -29.70 | QP       |         |
| 3   |     | 3.3281 | 18.19   | 15.14   | 33.33    | 69.54  | -36.21 | QP       |         |

Test Mode: TX MODE\_Adapter:BYD


Ant 90°

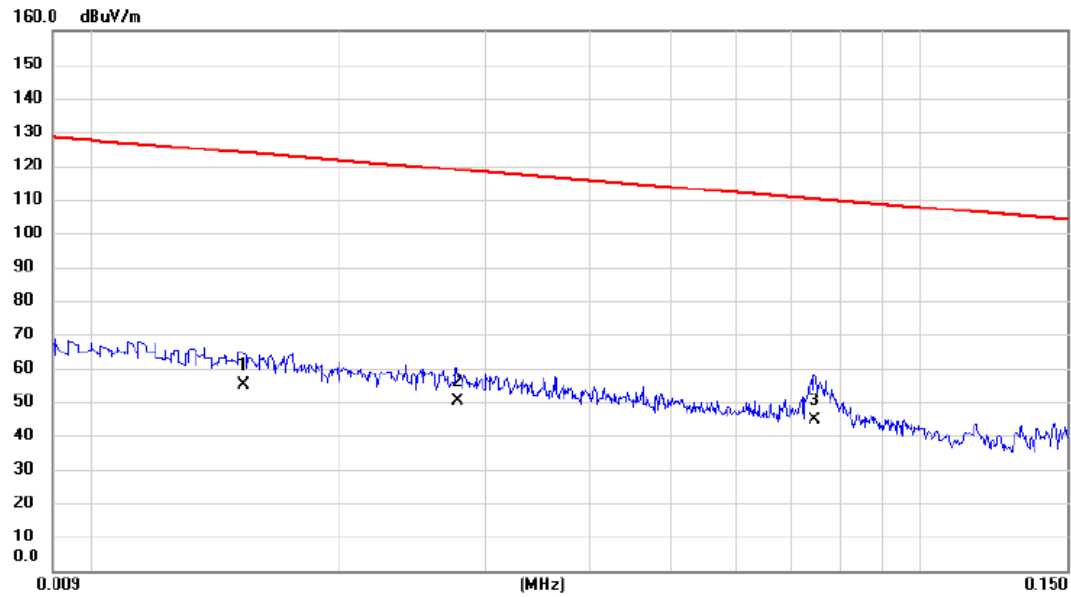

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 0.0153 | 34.93         | 20.23          | 55.16       | 123.91 | -68.75 | AVG      |         |
| 2   |     | 0.0277 | 30.73         | 19.39          | 50.12       | 118.76 | -68.64 | AVG      |         |
| 3   | *   | 0.0744 | 26.54         | 18.24          | 44.78       | 110.17 | -65.39 | AVG      |         |

Test Mode: TX MODE\_Adapter:BYD

Ant 90°

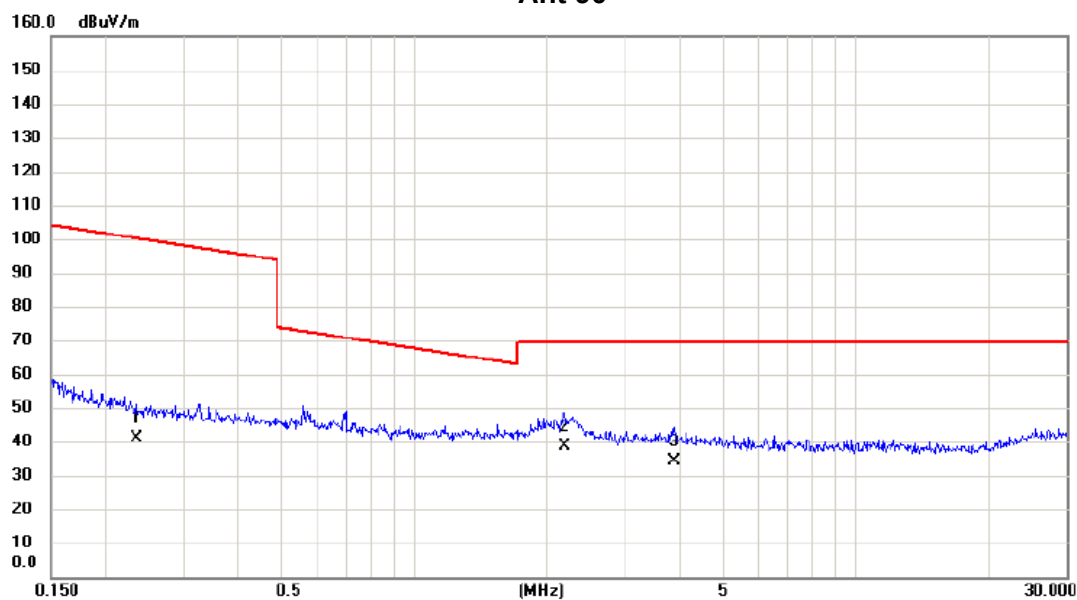


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.2341       | 24.32                    | 16.70                   | 41.02                      | 100.22          | -59.20       | AVG      |         |
| 2   | *   | 2.1898       | 23.32                    | 15.45                   | 38.77                      | 69.54           | -30.77       | QP       |         |
| 3   |     | 3.8808       | 19.31                    | 14.99                   | 34.30                      | 69.54           | -35.24       | QP       |         |



Test Mode: TX MODE\_Adapter: Salcomp


Ant 0°

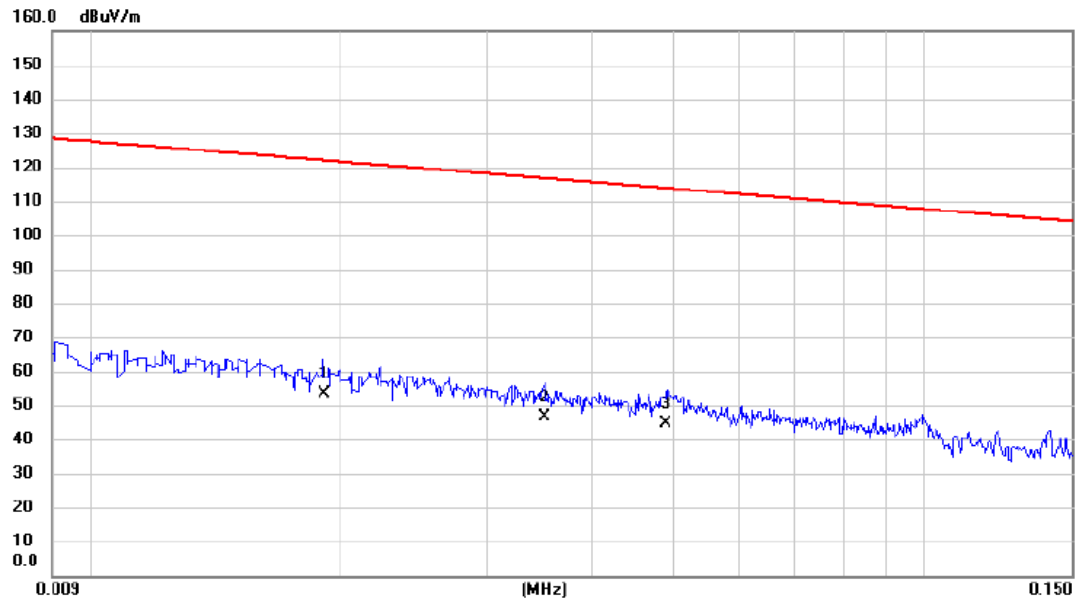

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz   | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 0.019 | 33.62         | 19.74          | 53.36       | 121.98 | -68.62 | AVG      |         |
| 2   |     | 0.035 | 27.44         | 19.17          | 46.61       | 116.72 | -70.11 | AVG      |         |
| 3   |     | 0.049 | 25.91         | 18.75          | 44.66       | 113.80 | -69.14 | AVG      |         |

Test Mode: TX MODE\_Adapter: Salcomp


Ant 0°

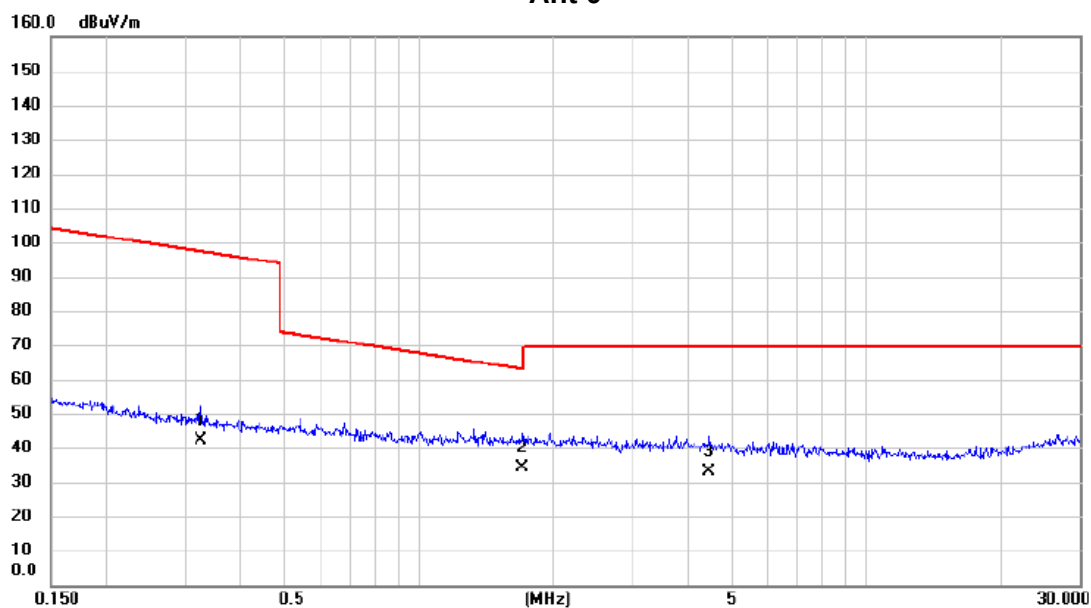

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.325        | 25.52                    | 16.60                   | 42.12                      | 97.36           | -55.24       | AVG      |         |
| 2   | *   | 1.698        | 18.74                    | 15.62                   | 34.36                      | 63.01           | -28.65       | QP       |         |
| 3   |     | 4.431        | 18.50                    | 14.70                   | 33.20                      | 69.54           | -36.34       | QP       |         |

Test Mode: TX MODE\_ Adapter: Salcomp


Ant 90°

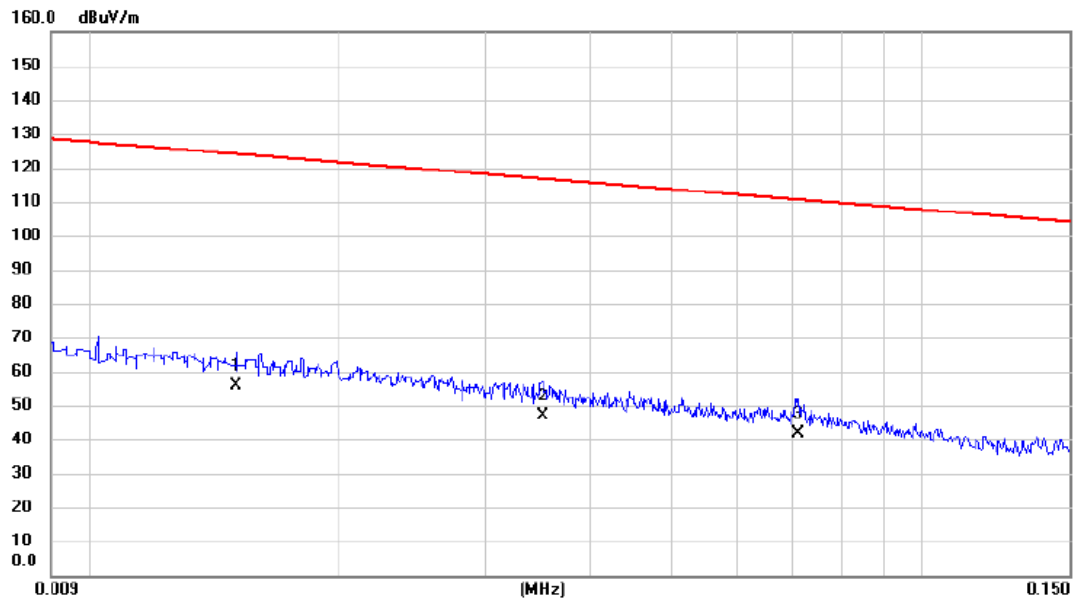

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|-------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz   | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |       | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   | *   | 0.015 | 35.54   | 20.27   | 55.81    | 124.08 | -68.27 | AVG      |         |
| 2   |     | 0.035 | 28.01   | 19.17   | 47.18    | 116.72 | -69.54 | AVG      |         |
| 3   |     | 0.071 | 23.69   | 18.31   | 42.00    | 110.57 | -68.57 | AVG      |         |

Test Mode: TX MODE\_ Adapter: Salcomp

Ant 90°

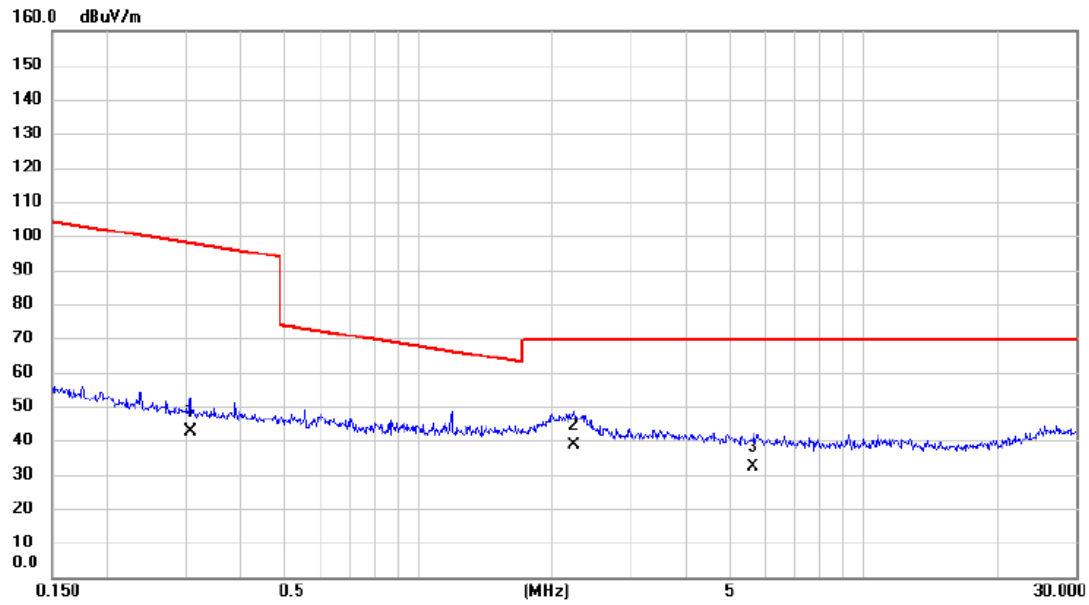


| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|-------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz   | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |       | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 0.307 | 26.14   | 16.61   | 42.75    | 97.87  | -55.12 | AVG      |         |
| 2   | *   | 2.237 | 23.26   | 15.44   | 38.70    | 69.54  | -30.84 | QP       |         |
| 3   |     | 5.653 | 17.86   | 14.29   | 32.15    | 69.54  | -37.39 | QP       |         |

## APPENDIX B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:BYD

## Vertical


80 dBuV/m

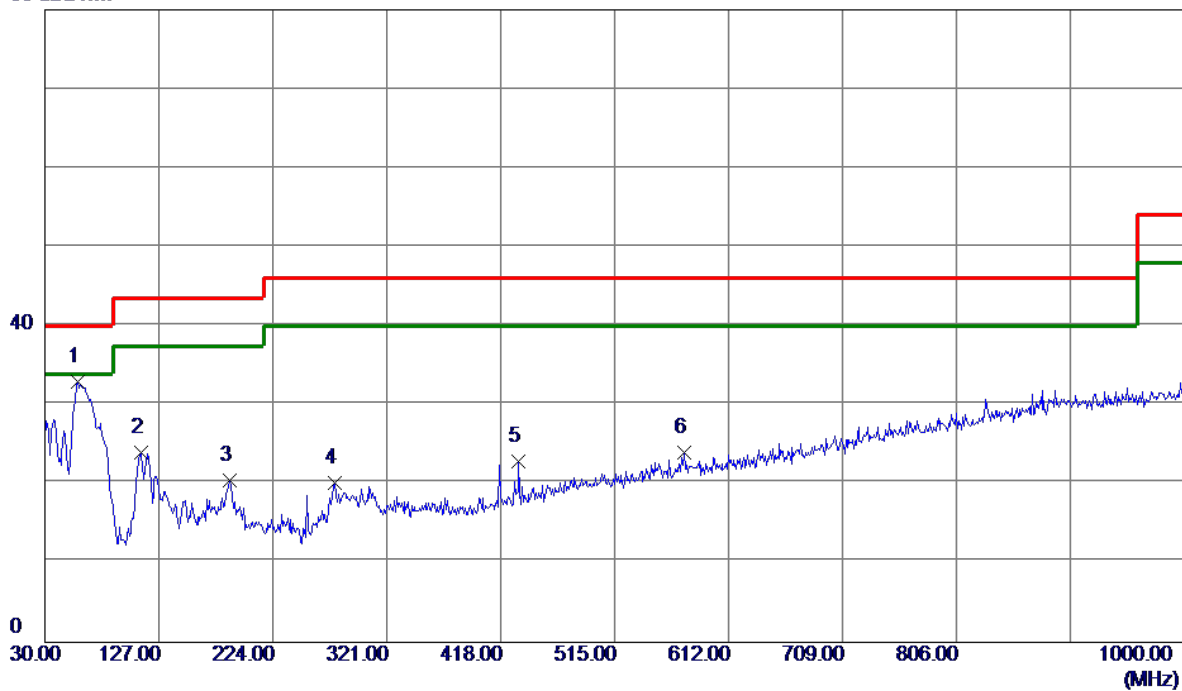

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 58.1300      | 47.11                      | -14.13                  | 32.98                     | 40.00           | -7.02        | Peak     |         |
| 2   | 111.4800     | 40.02                      | -16.07                  | 23.95                     | 43.50           | -19.55       | Peak     |         |
| 3   | 187.1400     | 33.12                      | -12.61                  | 20.51                     | 43.50           | -22.99       | Peak     |         |
| 4   | 276.3800     | 35.37                      | -15.16                  | 20.21                     | 46.00           | -25.79       | Peak     |         |
| 5   | 433.5200     | 33.26                      | -10.41                  | 22.85                     | 46.00           | -23.15       | Peak     |         |
| 6   | 574.1700     | 31.15                      | -7.09                   | 24.06                     | 46.00           | -21.94       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz\_Adapter:BYD


### Horizontal

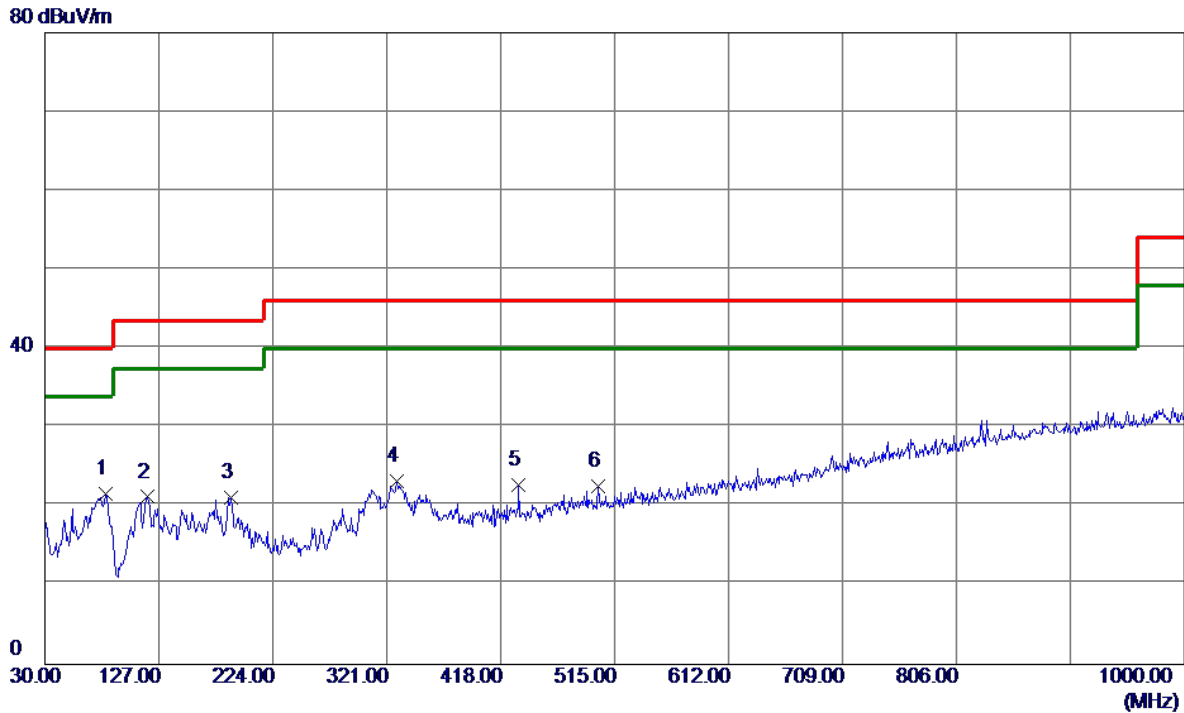

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 81.4100      | 39.88                      | -18.28                  | 21.60                     | 40.00           | -18.40       | Peak     |         |
| 2   | 117.3000     | 36.81                      | -15.61                  | 21.20                     | 43.50           | -22.30       | Peak     |         |
| 3   | 188.1100     | 33.87                      | -12.69                  | 21.18                     | 43.50           | -22.32       | Peak     |         |
| 4   | 329.7300     | 35.45                      | -12.31                  | 23.14                     | 46.00           | -22.86       | Peak     |         |
| 5   | 433.5200     | 33.20                      | -10.41                  | 22.79                     | 46.00           | -23.21       | Peak     |         |
| 6   | 501.4200     | 31.19                      | -8.69                   | 22.50                     | 46.00           | -23.50       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz\_Adapter:BYD

Vertical

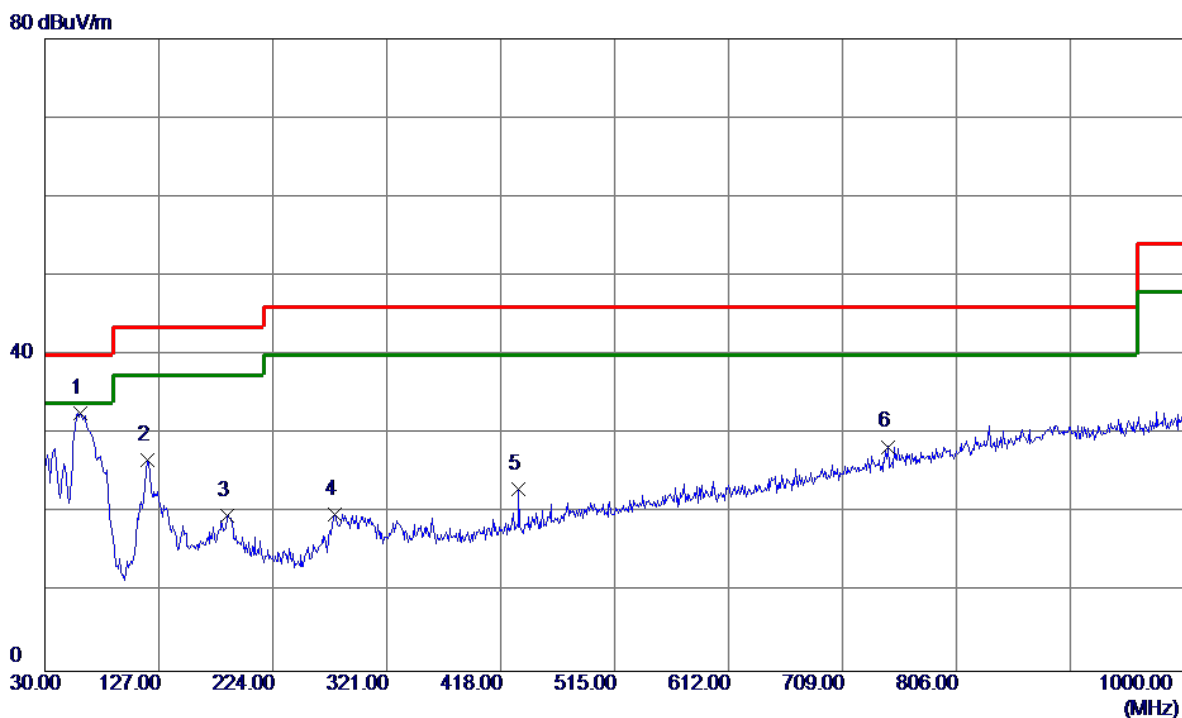


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 60.0700      | 46.98                      | -14.32                  | 32.66                     | 40.00           | -7.34        | Peak     |         |
| 2   | 117.3000     | 42.40                      | -15.61                  | 26.79                     | 43.50           | -16.71       | Peak     |         |
| 3   | 185.2000     | 32.21                      | -12.46                  | 19.75                     | 43.50           | -23.75       | Peak     |         |
| 4   | 276.3800     | 34.98                      | -15.16                  | 19.82                     | 46.00           | -26.18       | Peak     |         |
| 5   | 433.5200     | 33.38                      | -10.41                  | 22.97                     | 46.00           | -23.03       | Peak     |         |
| 6   | 747.8000     | 30.91                      | -2.51                   | 28.40                     | 46.00           | -17.60       | Peak     |         |



Test Mode: UNII-1/TX A Mode 5240MHz\_Adapter:BYD


### Horizontal

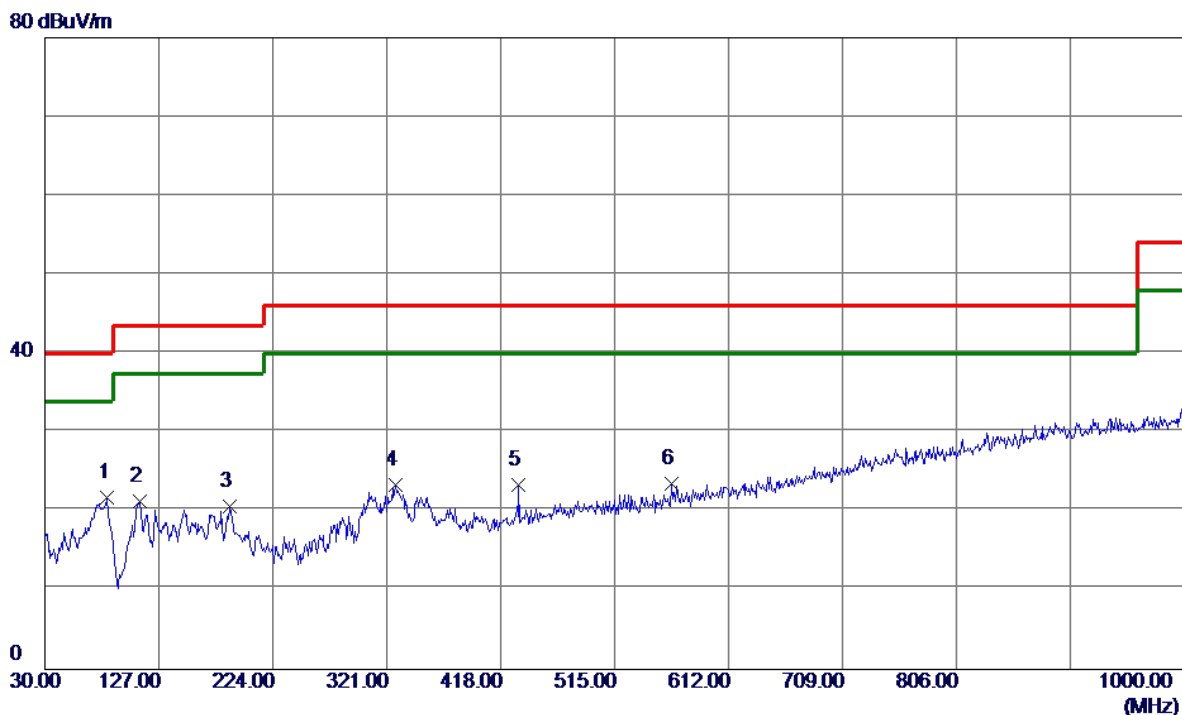

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 83.3500      | 40.08                      | -18.34                  | 21.74                     | 40.00           | -18.26       | Peak     |         |
| 2   | 110.5100     | 37.37                      | -16.15                  | 21.22                     | 43.50           | -22.28       | Peak     |         |
| 3   | 187.1400     | 33.20                      | -12.61                  | 20.59                     | 43.50           | -22.91       | Peak     |         |
| 4   | 328.7600     | 35.67                      | -12.33                  | 23.34                     | 46.00           | -22.66       | Peak     |         |
| 5   | 433.5200     | 33.80                      | -10.41                  | 23.39                     | 46.00           | -22.61       | Peak     |         |
| 6   | 563.5000     | 30.87                      | -7.37                   | 23.50                     | 46.00           | -22.50       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz\_Adapter:BYD


Vertical

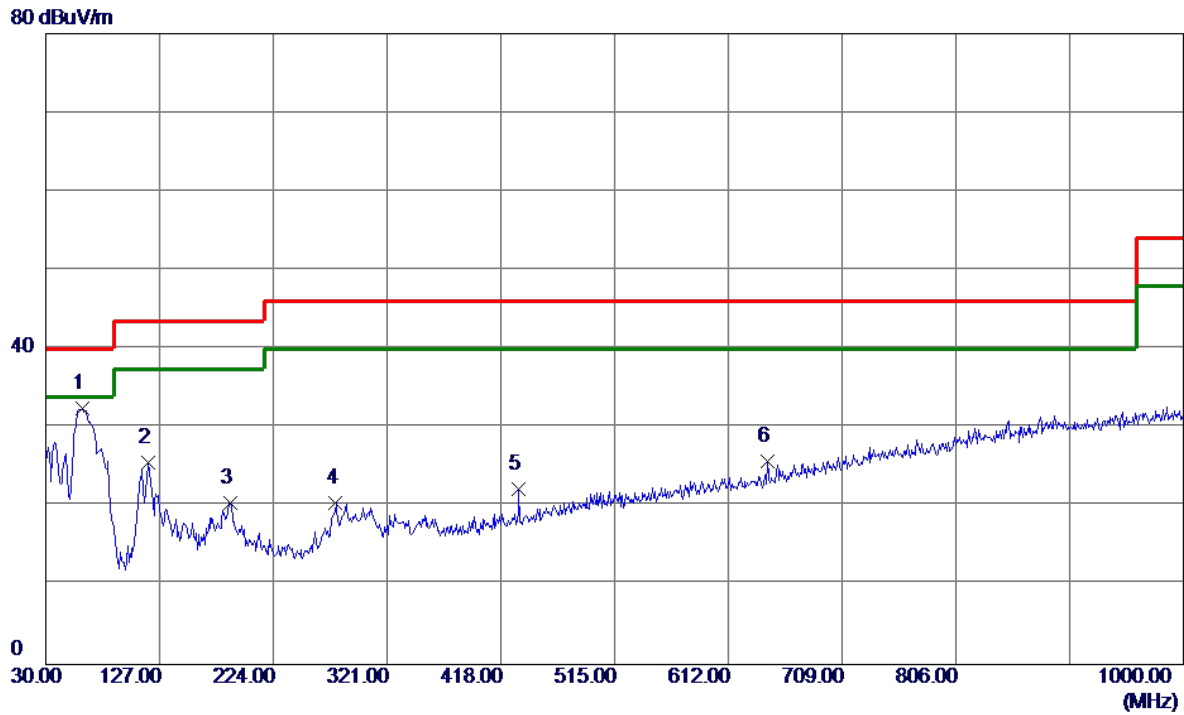

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 61.0400      | 47.03                      | -14.48                  | 32.55                     | 40.00           | -7.45        | Peak     |         |
| 2   | 117.3000     | 41.19                      | -15.61                  | 25.58                     | 43.50           | -17.92       | Peak     |         |
| 3   | 187.1400     | 33.11                      | -12.61                  | 20.50                     | 43.50           | -23.00       | Peak     |         |
| 4   | 277.3500     | 35.59                      | -15.06                  | 20.53                     | 46.00           | -25.47       | Peak     |         |
| 5   | 433.5200     | 32.62                      | -10.41                  | 22.21                     | 46.00           | -23.79       | Peak     |         |
| 6   | 644.9800     | 31.26                      | -5.57                   | 25.69                     | 46.00           | -20.31       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz\_Adapter:BYD

### Horizontal

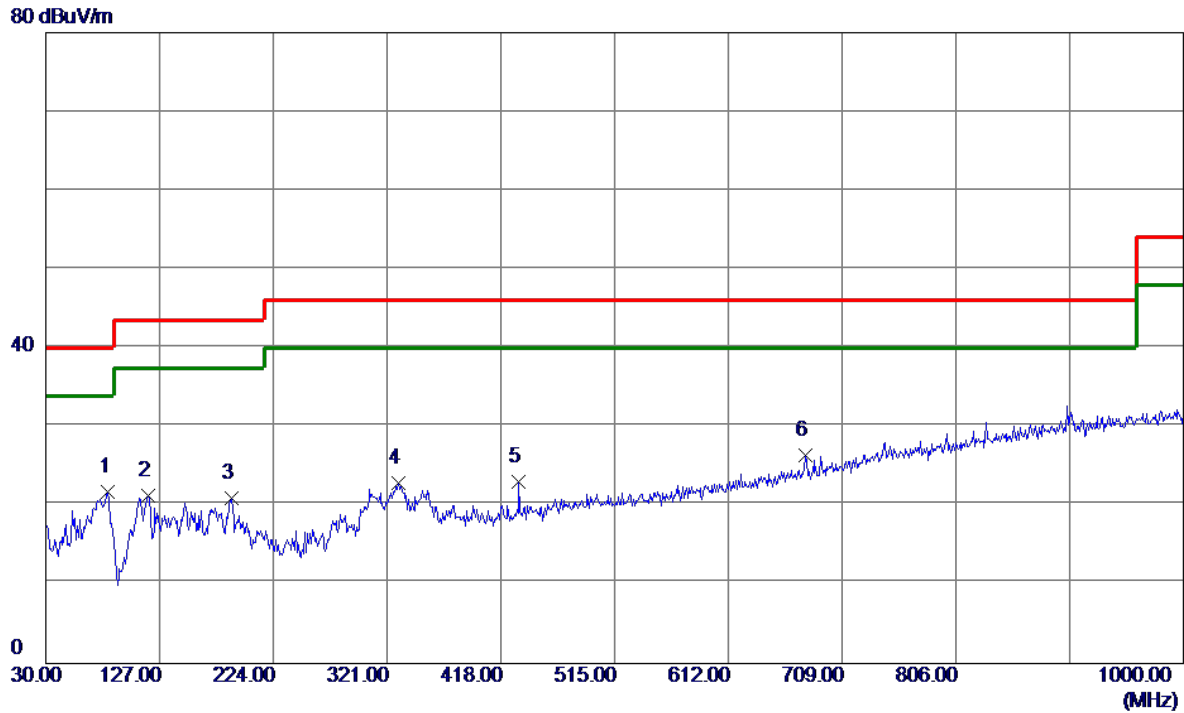


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 83.3500      | 40.10                      | -18.34                  | 21.76                     | 40.00           | -18.24       | Peak     |         |
| 2   | 117.3000     | 36.90                      | -15.61                  | 21.29                     | 43.50           | -22.21       | Peak     |         |
| 3   | 188.1100     | 33.59                      | -12.69                  | 20.90                     | 43.50           | -22.60       | Peak     |         |
| 4   | 330.7000     | 35.13                      | -12.29                  | 22.84                     | 46.00           | -23.16       | Peak     |         |
| 5   | 433.5200     | 33.48                      | -10.41                  | 23.07                     | 46.00           | -22.93       | Peak     |         |
| 6   | 677.9600     | 30.98                      | -4.62                   | 26.36                     | 46.00           | -19.64       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz\_Adapter:BYD

Vertical


80 dBuV/m

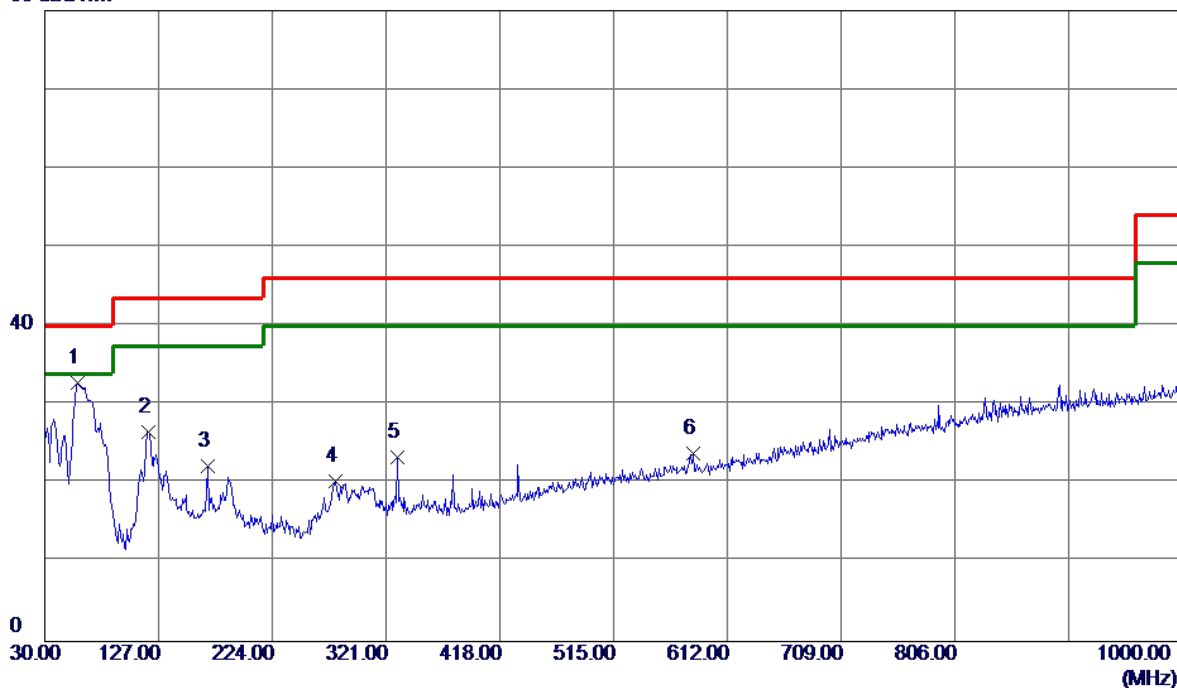

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 58.1300      | 46.89                      | -14.13                  | 32.76                     | 40.00           | -7.24        | Peak     |         |
| 2   | 118.2700     | 42.03                      | -15.53                  | 26.50                     | 43.50           | -17.00       | Peak     |         |
| 3   | 168.7100     | 34.69                      | -12.41                  | 22.28                     | 43.50           | -21.22       | Peak     |         |
| 4   | 278.3200     | 35.26                      | -14.95                  | 20.31                     | 46.00           | -25.69       | Peak     |         |
| 5   | 330.7000     | 35.68                      | -12.29                  | 23.39                     | 46.00           | -22.61       | Peak     |         |
| 6   | 582.9000     | 30.67                      | -6.86                   | 23.81                     | 46.00           | -22.19       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz\_Adapter:BYD

### Horizontal

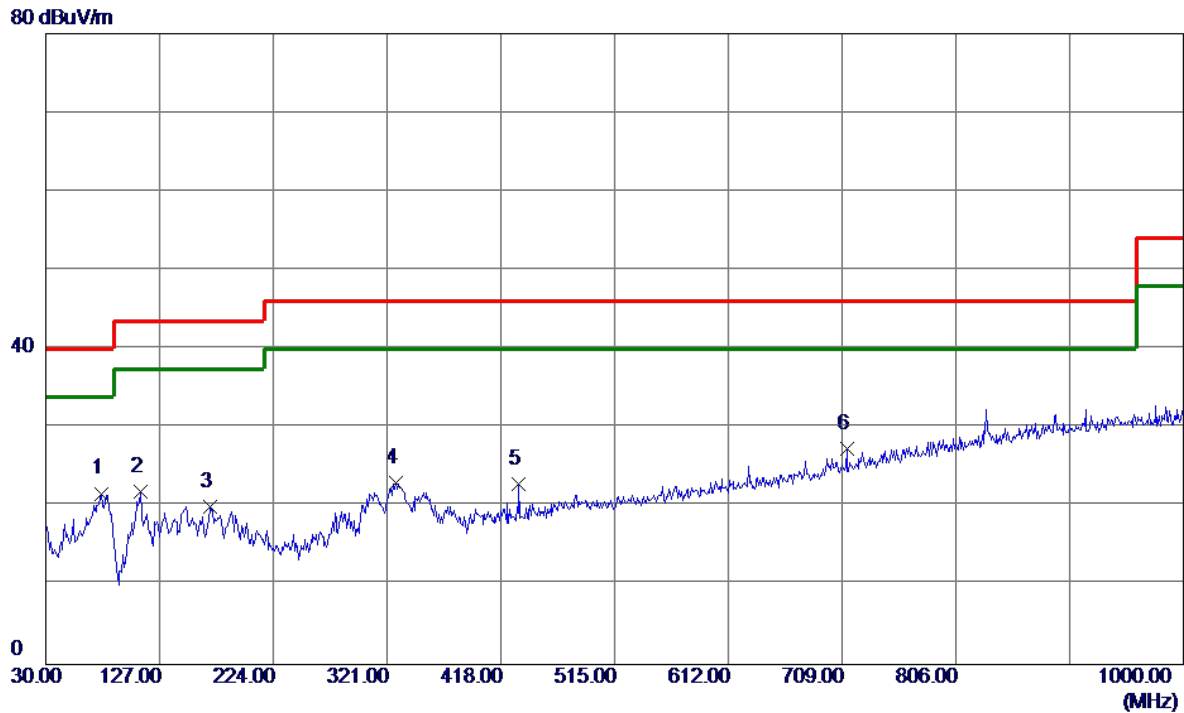


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 77.5300      | 39.35                      | -17.67                  | 21.68                     | 40.00           | -18.32       | Peak     |         |
| 2   | 110.5100     | 38.09                      | -16.15                  | 21.94                     | 43.50           | -21.56       | Peak     |         |
| 3   | 169.6799     | 32.36                      | -12.35                  | 20.01                     | 43.50           | -23.49       | Peak     |         |
| 4   | 328.7600     | 35.33                      | -12.33                  | 23.00                     | 46.00           | -23.00       | Peak     |         |
| 5   | 433.5200     | 33.32                      | -10.41                  | 22.91                     | 46.00           | -23.09       | Peak     |         |
| 6   | 712.8800     | 30.90                      | -3.55                   | 27.35                     | 46.00           | -18.65       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz\_Adapter:BYD

# Vertical


80 dBuV/m

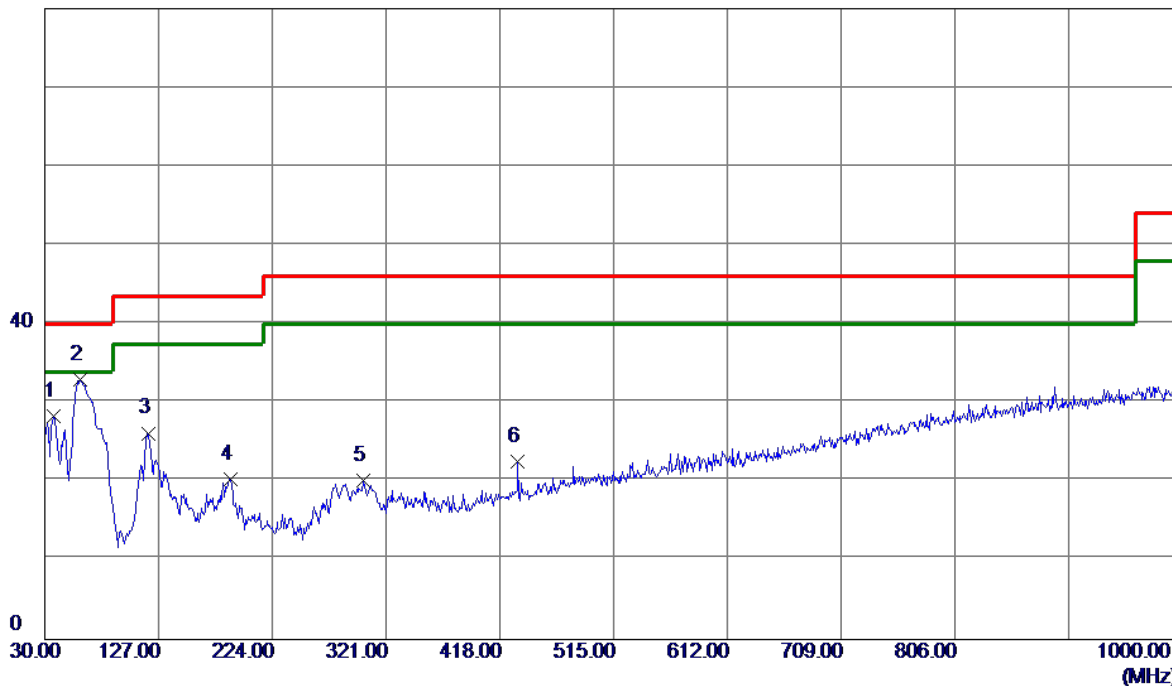

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 37.7599      | 42.58                      | -14.30                  | 28.28                     | 40.00           | -11.72       | Peak     |         |
| 2 * | 60.0700      | 47.21                      | -14.32                  | 32.89                     | 40.00           | -7.11        | Peak     |         |
| 3   | 118.2700     | 41.69                      | -15.53                  | 26.16                     | 43.50           | -17.34       | Peak     |         |
| 4   | 188.1100     | 33.08                      | -12.69                  | 20.39                     | 43.50           | -23.11       | Peak     |         |
| 5   | 301.6000     | 32.90                      | -12.80                  | 20.10                     | 46.00           | -25.90       | Peak     |         |
| 6   | 433.5200     | 32.92                      | -10.41                  | 22.51                     | 46.00           | -23.49       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz\_Adapter:BYD


### Horizontal

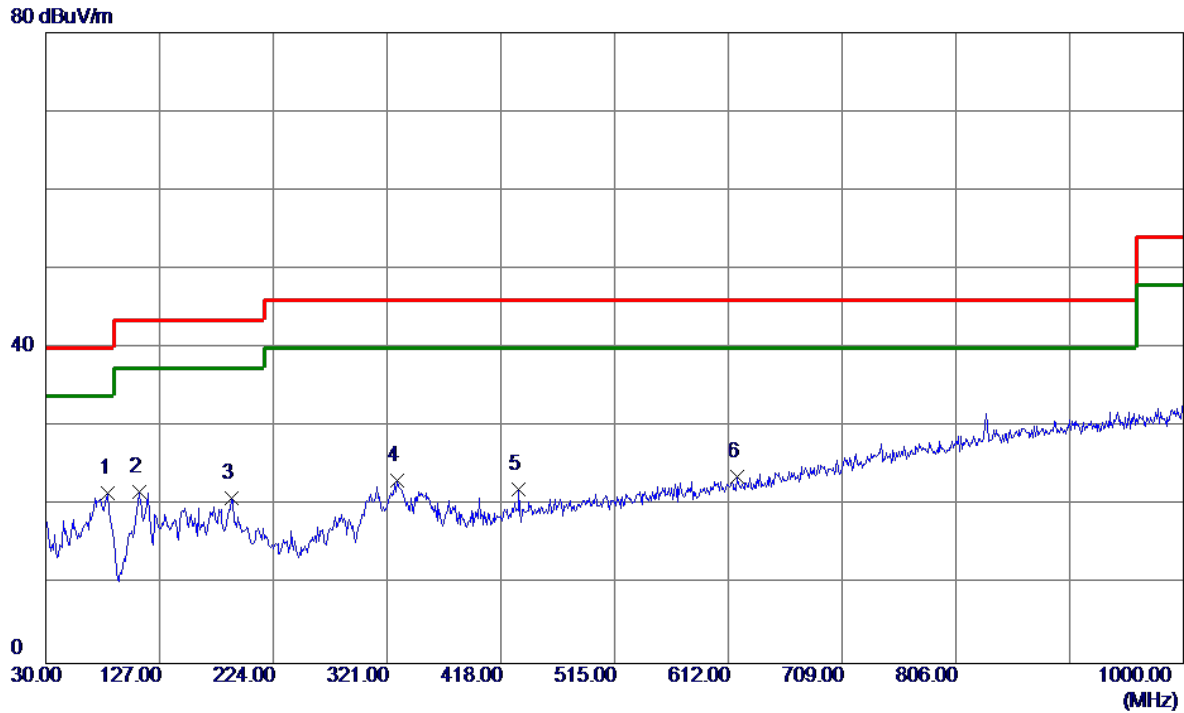

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 83.3500      | 39.99                      | -18.34                  | 21.65                     | 40.00           | -18.35       | Peak     |         |
| 2   | 109.5400     | 37.98                      | -16.25                  | 21.73                     | 43.50           | -21.77       | Peak     |         |
| 3   | 188.1100     | 33.67                      | -12.69                  | 20.98                     | 43.50           | -22.52       | Peak     |         |
| 4   | 329.7300     | 35.54                      | -12.31                  | 23.23                     | 46.00           | -22.77       | Peak     |         |
| 5   | 433.5200     | 32.49                      | -10.41                  | 22.08                     | 46.00           | -23.92       | Peak     |         |
| 6   | 619.7600     | 29.78                      | -6.05                   | 23.73                     | 46.00           | -22.27       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz\_Adapter:BYD

Vertical

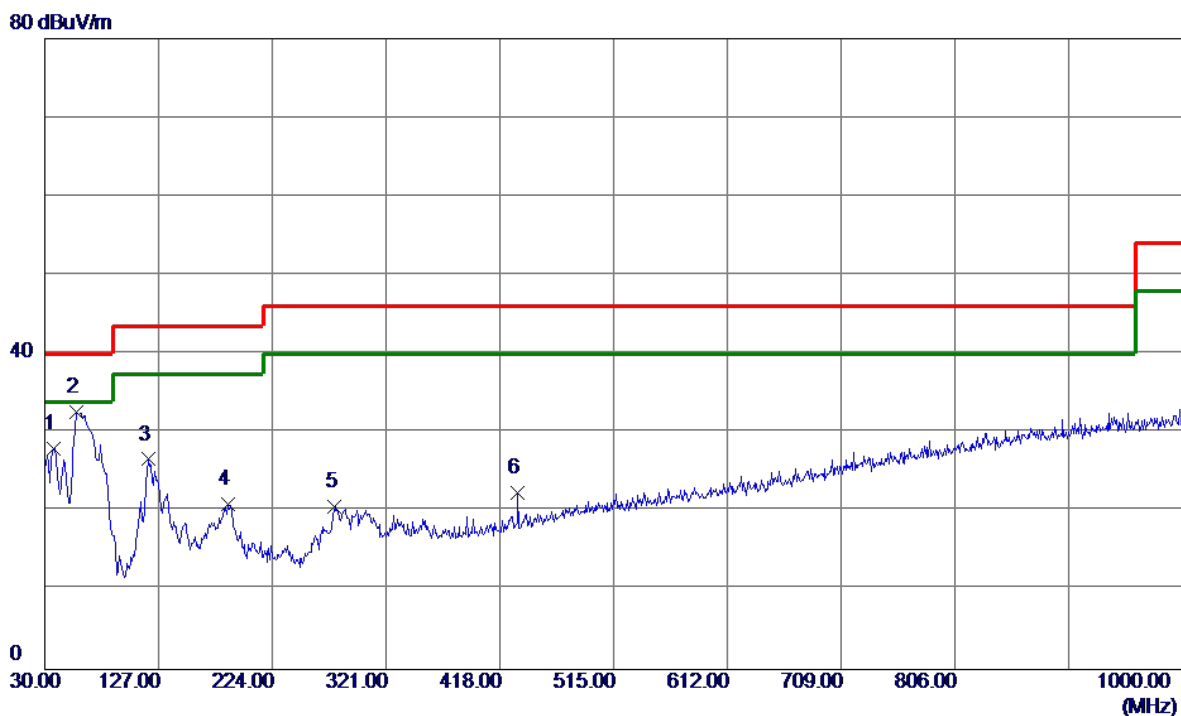


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 37.7599      | 42.33                      | -14.30                  | 28.03                     | 40.00           | -11.97       | Peak     |         |
| 2 * | 57.1600      | 46.67                      | -14.04                  | 32.63                     | 40.00           | -7.37        | Peak     |         |
| 3   | 118.2700     | 42.17                      | -15.53                  | 26.64                     | 43.50           | -16.86       | Peak     |         |
| 4   | 186.1700     | 33.56                      | -12.54                  | 21.02                     | 43.50           | -22.48       | Peak     |         |
| 5   | 277.3500     | 35.70                      | -15.06                  | 20.64                     | 46.00           | -25.36       | Peak     |         |
| 6   | 433.5200     | 32.86                      | -10.41                  | 22.45                     | 46.00           | -23.55       | Peak     |         |



Test Mode: UNII-2C/TX A Mode 5700MHz \_Adapter:BYD

# Horizontal


80 dBuV/m

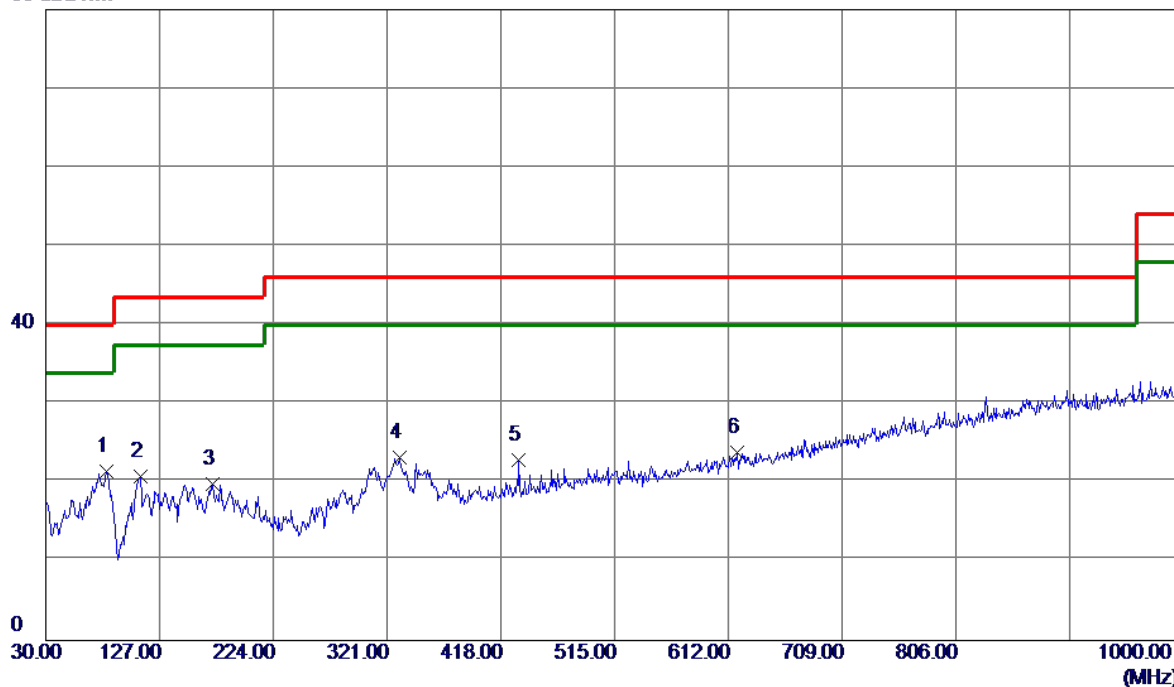

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 81.4100      | 39.78                      | -18.28                  | 21.50                     | 40.00           | -18.50       | Peak     |         |
| 2   | 110.5100     | 36.93                      | -16.15                  | 20.78                     | 43.50           | -22.72       | Peak     |         |
| 3   | 172.5900     | 32.11                      | -12.26                  | 19.85                     | 43.50           | -23.65       | Peak     |         |
| 4   | 331.6700     | 35.54                      | -12.28                  | 23.26                     | 46.00           | -22.74       | Peak     |         |
| 5   | 433.5200     | 33.36                      | -10.41                  | 22.95                     | 46.00           | -23.05       | Peak     |         |
| 6   | 619.7600     | 29.86                      | -6.05                   | 23.81                     | 46.00           | -22.19       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz\_Adapter:BYD


# Vertical

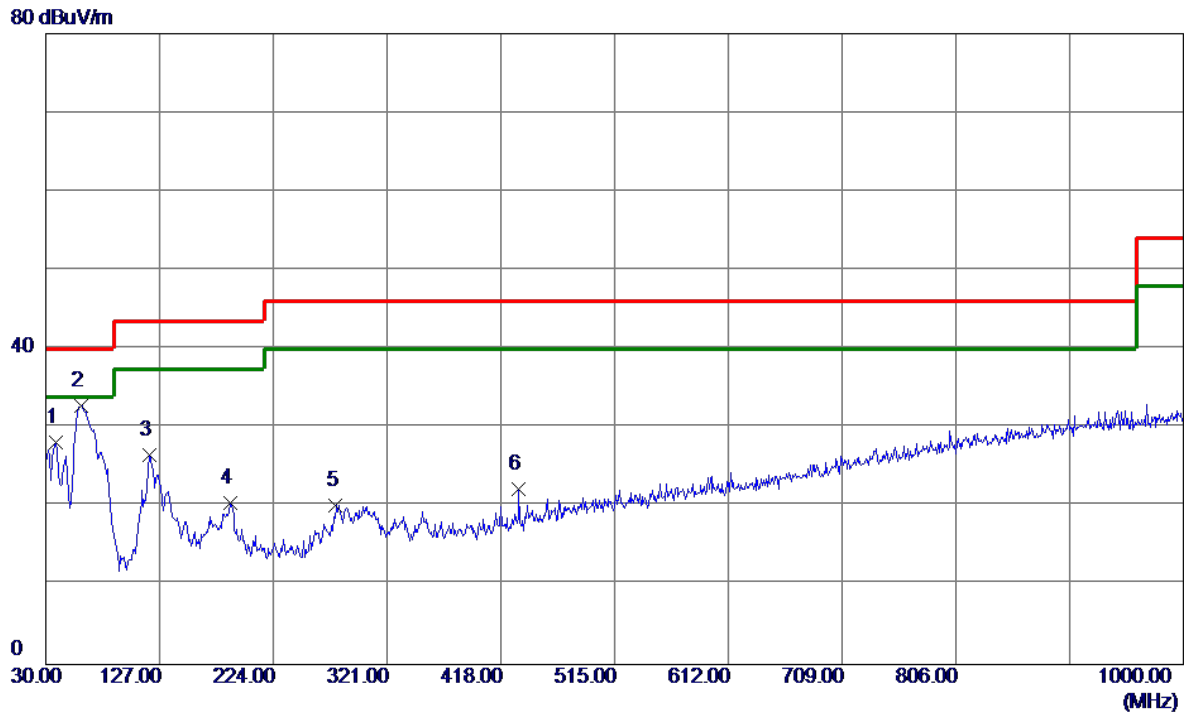

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 38.7300      | 42.37                      | -14.16                  | 28.21                     | 40.00           | -11.79       | Peak     |         |
| 2 * | 60.0700      | 47.12                      | -14.32                  | 32.80                     | 40.00           | -7.20        | Peak     |         |
| 3   | 118.2700     | 42.06                      | -15.53                  | 26.53                     | 43.50           | -16.97       | Peak     |         |
| 4   | 187.1400     | 33.07                      | -12.61                  | 20.46                     | 43.50           | -23.04       | Peak     |         |
| 5   | 277.3500     | 35.26                      | -15.06                  | 20.20                     | 46.00           | -25.80       | Peak     |         |
| 6   | 433.5200     | 32.61                      | -10.41                  | 22.20                     | 46.00           | -23.80       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz\_Adapter:BYD


### Horizontal

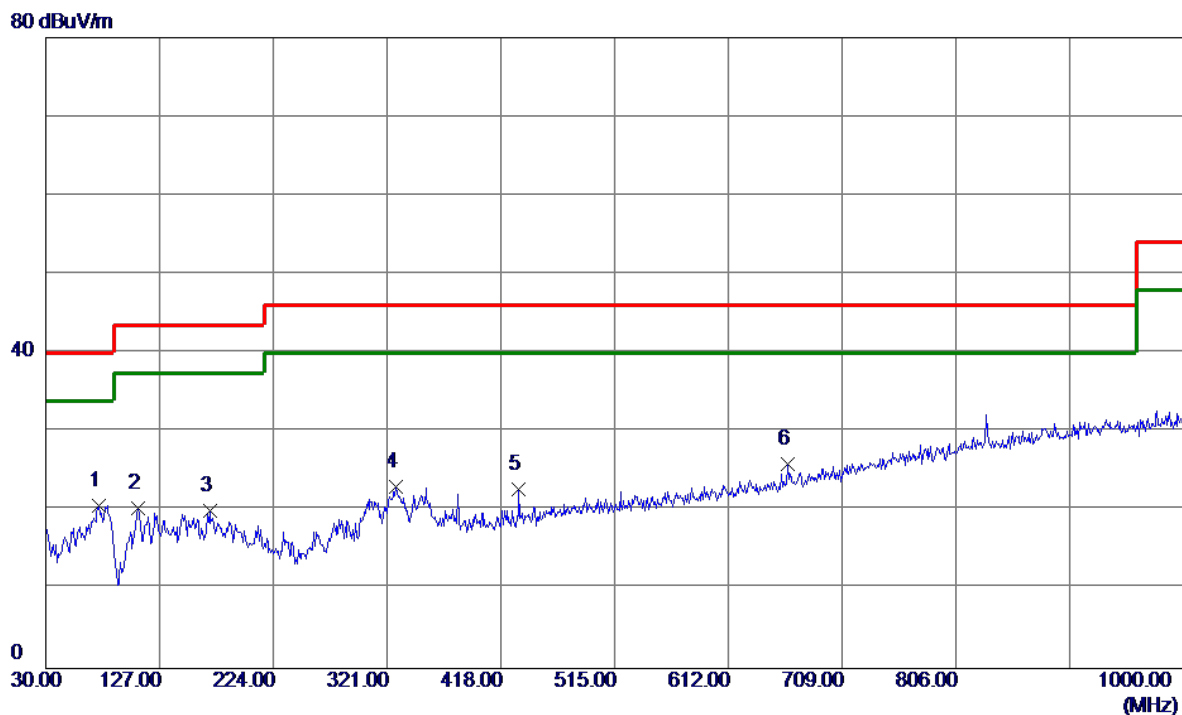

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 75.5899      | 37.93                      | -17.22                  | 20.71                     | 40.00           | -19.29       | Peak     |         |
| 2   | 108.5700     | 36.74                      | -16.37                  | 20.37                     | 43.50           | -23.13       | Peak     |         |
| 3   | 169.6799     | 32.30                      | -12.35                  | 19.95                     | 43.50           | -23.55       | Peak     |         |
| 4   | 328.7600     | 35.31                      | -12.33                  | 22.98                     | 46.00           | -23.02       | Peak     |         |
| 5   | 433.5200     | 33.14                      | -10.41                  | 22.73                     | 46.00           | -23.27       | Peak     |         |
| 6   | 662.4400     | 31.02                      | -5.09                   | 25.93                     | 46.00           | -20.07       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz\_Adapter:BYD

Vertical

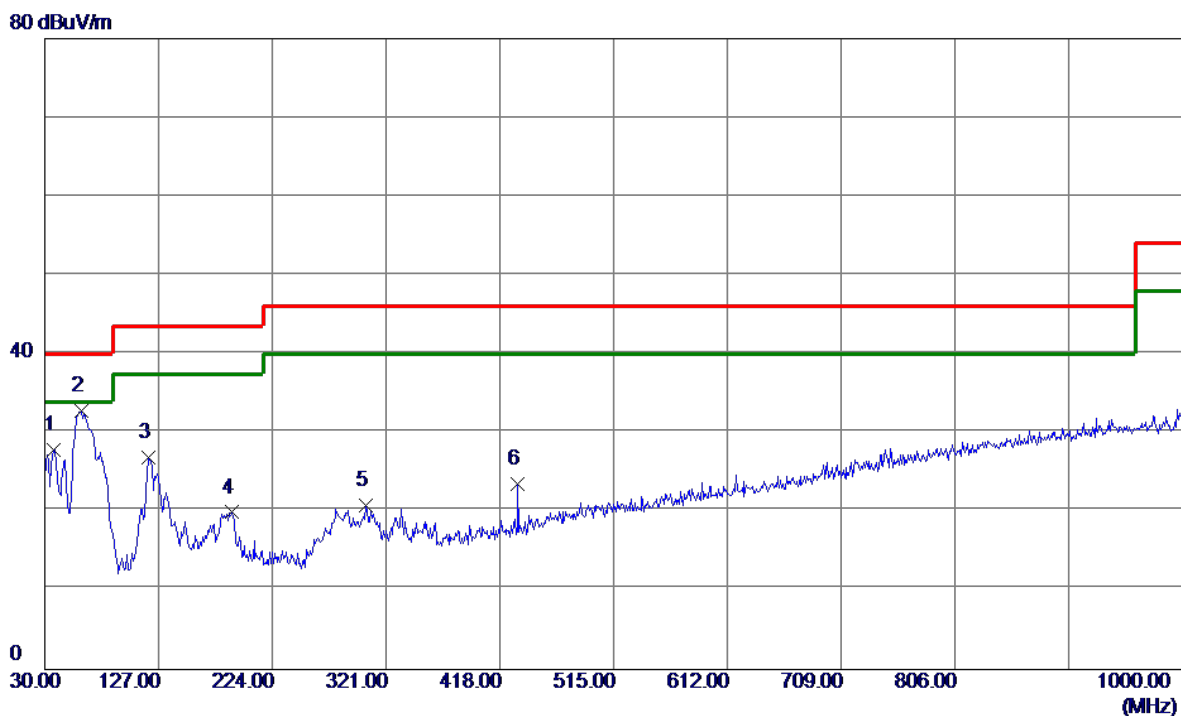


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 37.7599      | 42.20                      | -14.30                  | 27.90                     | 40.00           | -12.10       | Peak     |         |
| 2 * | 61.0400      | 47.35                      | -14.48                  | 32.87                     | 40.00           | -7.13        | Peak     |         |
| 3   | 118.2700     | 42.36                      | -15.53                  | 26.83                     | 43.50           | -16.67       | Peak     |         |
| 4   | 189.0800     | 32.69                      | -12.77                  | 19.92                     | 43.50           | -23.58       | Peak     |         |
| 5   | 303.5400     | 33.63                      | -12.77                  | 20.86                     | 46.00           | -25.14       | Peak     |         |
| 6   | 433.5200     | 33.90                      | -10.41                  | 23.49                     | 46.00           | -22.51       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz\_Adapter:BYD

# Horizontal

80 dBuV/m

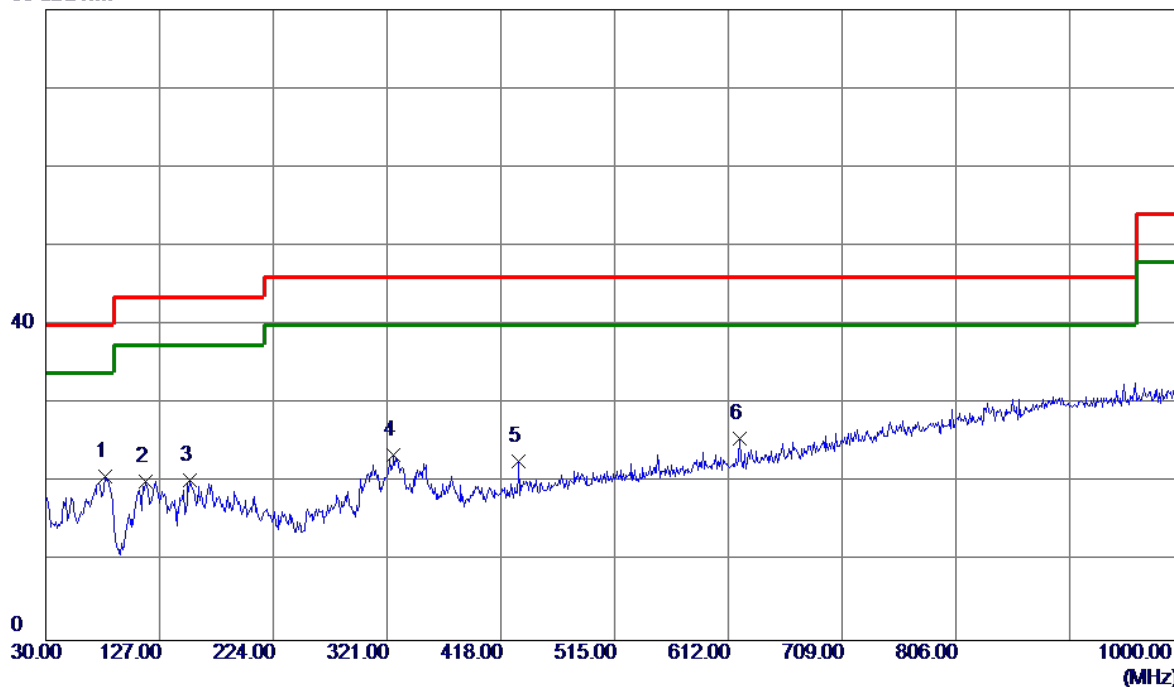


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 80.4400      | 39.01                      | -18.25                  | 20.76                     | 40.00           | -19.24       | Peak     |         |
| 2   | 115.3600     | 35.90                      | -15.77                  | 20.13                     | 43.50           | -23.37       | Peak     |         |
| 3   | 153.1900     | 33.65                      | -13.34                  | 20.31                     | 43.50           | -23.19       | Peak     |         |
| 4   | 326.8200     | 35.87                      | -12.36                  | 23.51                     | 46.00           | -22.49       | Peak     |         |
| 5   | 433.5200     | 33.13                      | -10.41                  | 22.72                     | 46.00           | -23.28       | Peak     |         |
| 6   | 621.7000     | 31.54                      | -6.01                   | 25.53                     | 46.00           | -20.47       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz\_ Adapter: Salcomp

# Vertical


80 dBuV/m

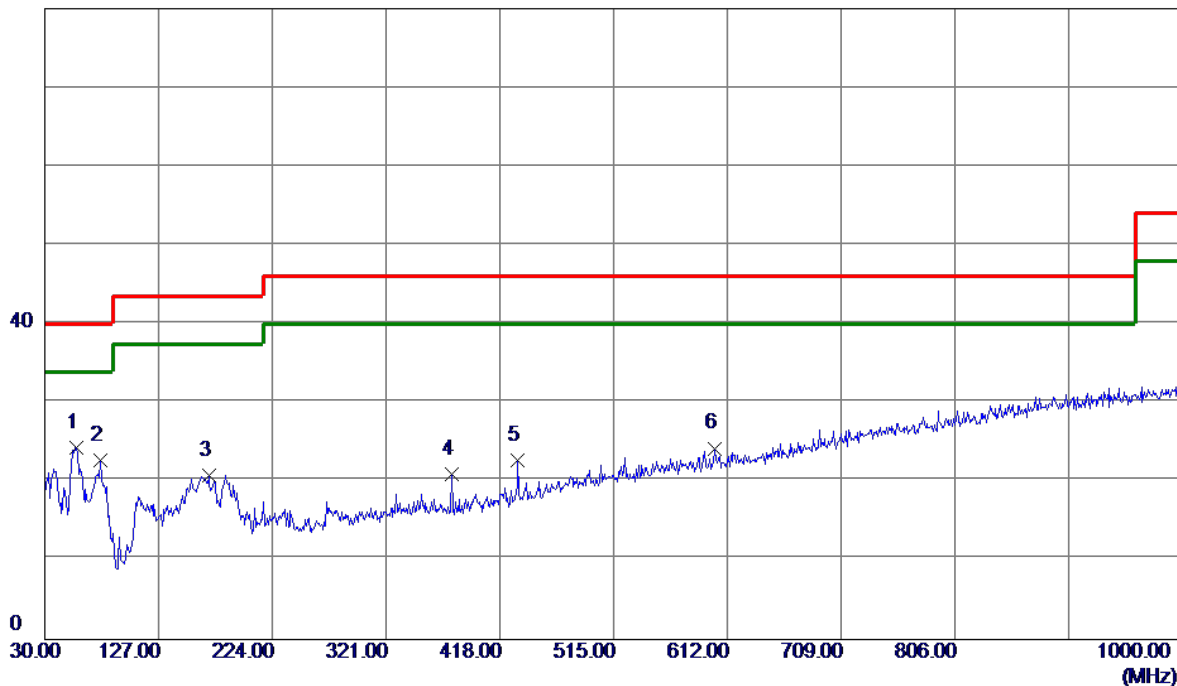

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 38.30                      | -14.04                  | 24.26                     | 40.00           | -15.74       | Peak     |         |
| 2   | 77.5300      | 40.39                      | -17.67                  | 22.72                     | 40.00           | -17.28       | Peak     |         |
| 3   | 169.6799     | 33.23                      | -12.35                  | 20.88                     | 43.50           | -22.62       | Peak     |         |
| 4   | 377.2600     | 32.52                      | -11.63                  | 20.89                     | 46.00           | -25.11       | Peak     |         |
| 5   | 433.5200     | 33.07                      | -10.41                  | 22.66                     | 46.00           | -23.34       | Peak     |         |
| 6   | 601.3300     | 30.63                      | -6.39                   | 24.24                     | 46.00           | -21.76       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5180MHz \_ Adapter: Salcomp


### Horizontal

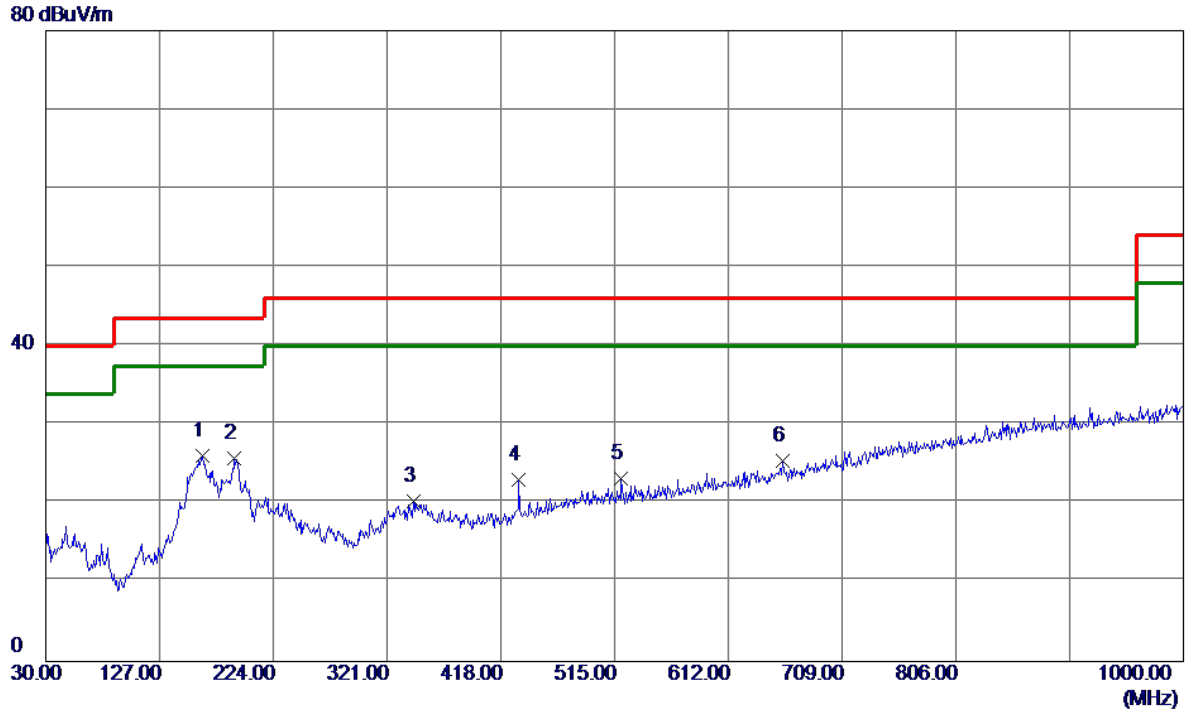

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 163.8600     | 38.74                      | -12.70                  | 26.04                     | 43.50           | -17.46       | Peak     |         |
| 2   | 191.0200     | 38.69                      | -12.94                  | 25.75                     | 43.50           | -17.75       | Peak     |         |
| 3   | 343.3100     | 32.41                      | -12.07                  | 20.34                     | 46.00           | -25.66       | Peak     |         |
| 4   | 433.5200     | 33.38                      | -10.41                  | 22.97                     | 46.00           | -23.03       | Peak     |         |
| 5   | 520.8200     | 31.46                      | -8.30                   | 23.16                     | 46.00           | -22.84       | Peak     |         |
| 6   | 658.5600     | 30.72                      | -5.21                   | 25.51                     | 46.00           | -20.49       | Peak     |         |

Test Mode: UNII-1/TX A Mode 5240MHz\_ Adapter: Salcomp

Vertical

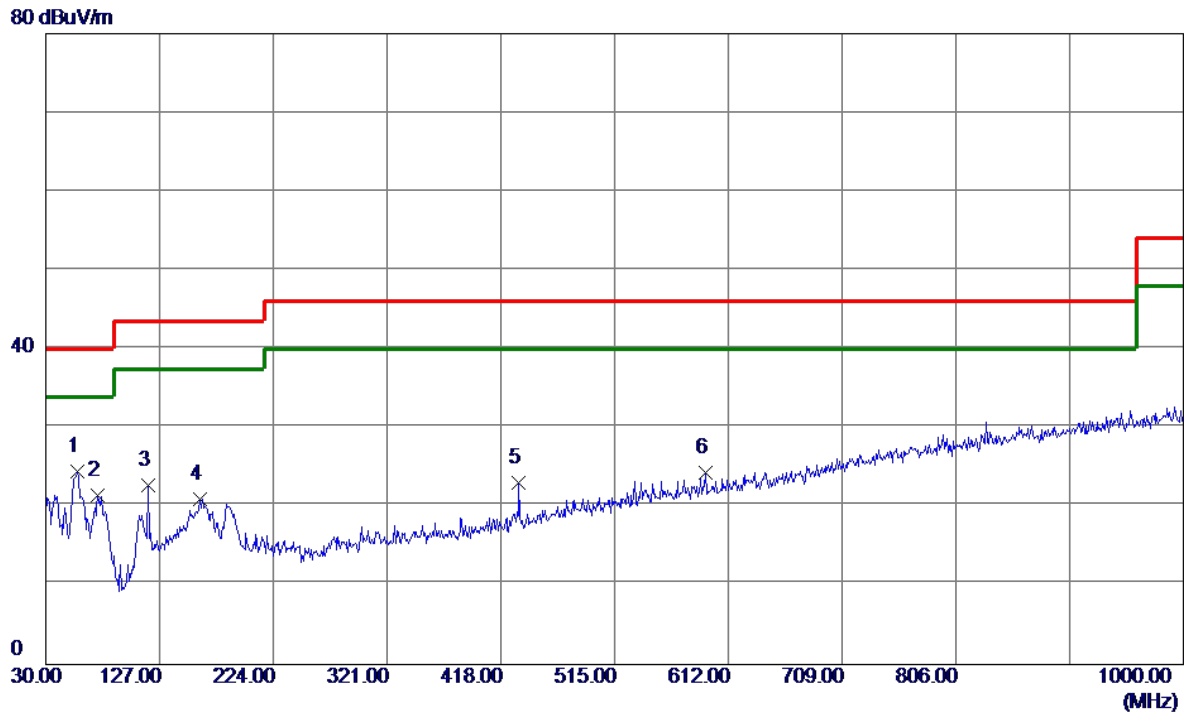


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 57.1600      | 38.50                      | -14.04                  | 24.46                     | 40.00           | -15.54       | Peak     |         |
| 2   | 74.6200      | 38.50                      | -17.04                  | 21.46                     | 40.00           | -18.54       | Peak     |         |
| 3   | 117.3000     | 38.33                      | -15.61                  | 22.72                     | 43.50           | -20.78       | Peak     |         |
| 4   | 161.9200     | 33.73                      | -12.82                  | 20.91                     | 43.50           | -22.59       | Peak     |         |
| 5   | 433.5200     | 33.52                      | -10.41                  | 23.11                     | 46.00           | -22.89       | Peak     |         |
| 6   | 592.6000     | 30.91                      | -6.61                   | 24.30                     | 46.00           | -21.70       | Peak     |         |



Test Mode: UNII-1/TX A Mode 5240MHz\_ Adapter: Salcomp

### Horizontal

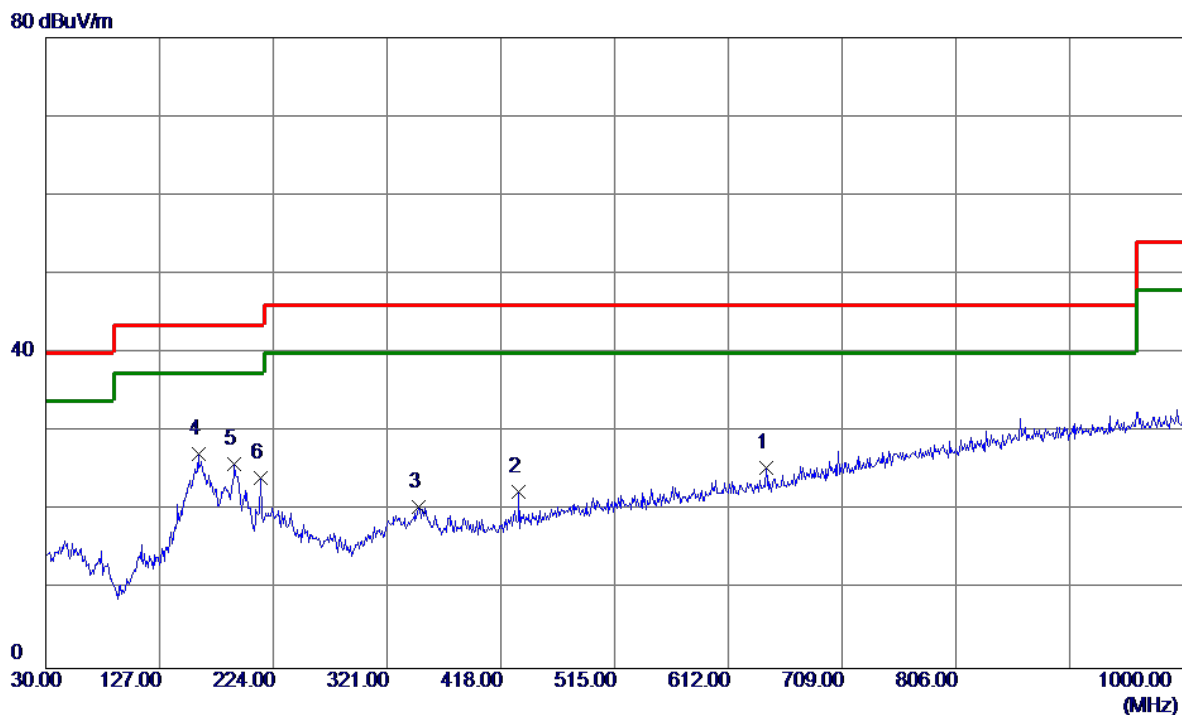


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 644.0100     | 31.04                      | -5.59                   | 25.45                     | 46.00           | -20.55       | Peak     |         |
| 2   | 433.5200     | 32.84                      | -10.41                  | 22.43                     | 46.00           | -23.57       | Peak     |         |
| 3   | 348.1600     | 32.42                      | -11.99                  | 20.43                     | 46.00           | -25.57       | Peak     |         |
| 4 * | 159.9800     | 40.09                      | -12.93                  | 27.16                     | 43.50           | -16.34       | Peak     |         |
| 5   | 191.0200     | 38.84                      | -12.94                  | 25.90                     | 43.50           | -17.60       | Peak     |         |
| 6   | 213.3300     | 38.10                      | -13.95                  | 24.15                     | 43.50           | -19.35       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MH\_ Adapter: Salcomp

# Vertical


80 dBuV/m

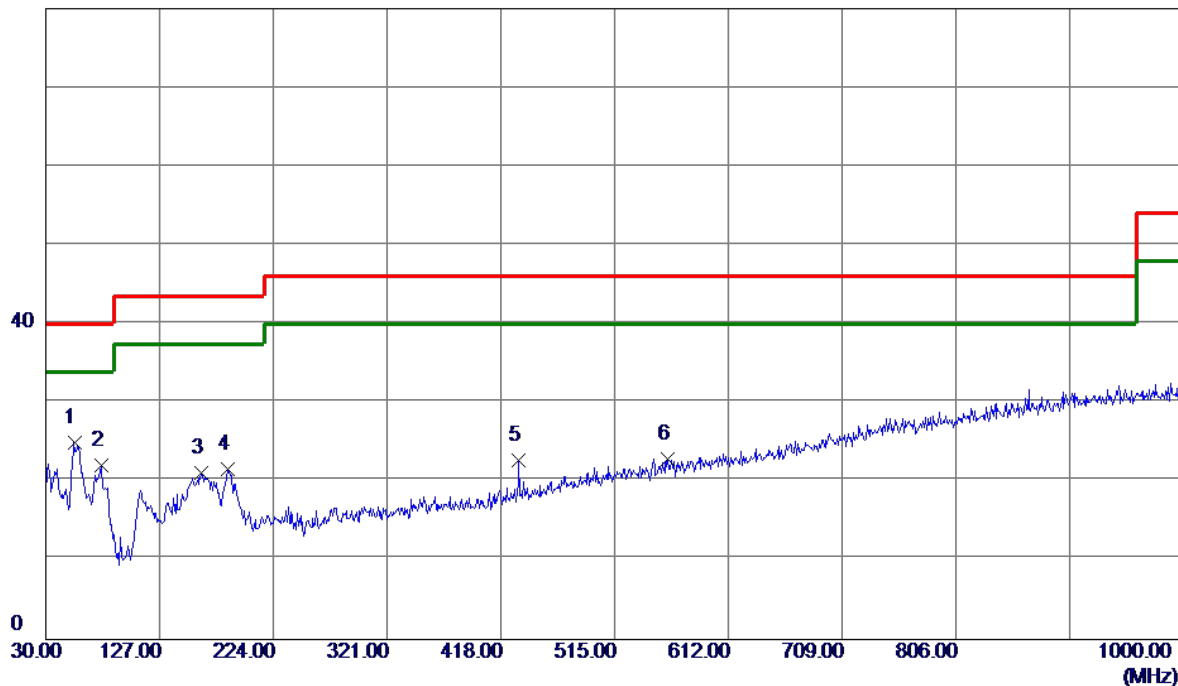

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 54.2500      | 38.95                      | -13.95                  | 25.00                     | 40.00           | -15.00       | Peak     |         |
| 2   | 77.5300      | 39.78                      | -17.67                  | 22.11                     | 40.00           | -17.89       | Peak     |         |
| 3   | 162.8900     | 33.83                      | -12.76                  | 21.07                     | 43.50           | -22.43       | Peak     |         |
| 4   | 185.2000     | 34.13                      | -12.46                  | 21.67                     | 43.50           | -21.83       | Peak     |         |
| 5   | 433.5200     | 33.13                      | -10.41                  | 22.72                     | 46.00           | -23.28       | Peak     |         |
| 6   | 560.5900     | 30.34                      | -7.44                   | 22.90                     | 46.00           | -23.10       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5260MHz\_ Adapter: Salcomp

### Horizontal

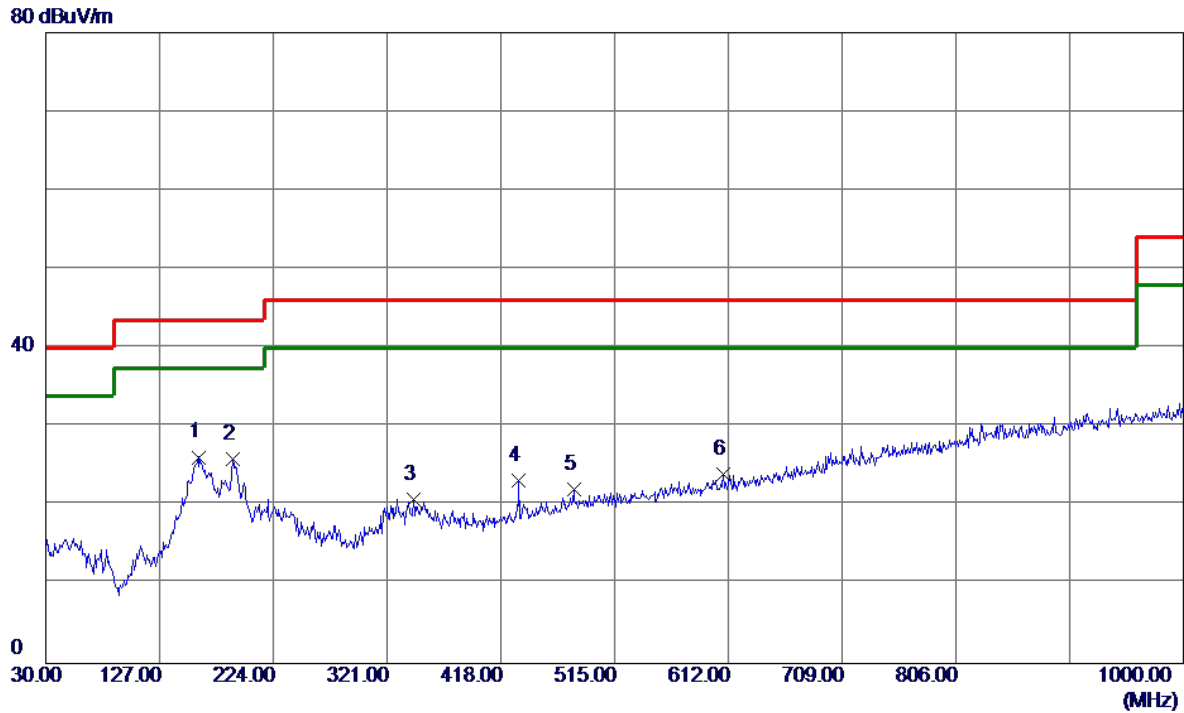


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 159.9800     | 39.09                      | -12.93                  | 26.16                     | 43.50           | -17.34       | Peak     |         |
| 2   | 189.0800     | 38.72                      | -12.77                  | 25.95                     | 43.50           | -17.55       | Peak     |         |
| 3   | 343.3100     | 32.87                      | -12.07                  | 20.80                     | 46.00           | -25.20       | Peak     |         |
| 4   | 433.5200     | 33.68                      | -10.41                  | 23.27                     | 46.00           | -22.73       | Peak     |         |
| 5   | 480.0800     | 31.30                      | -9.21                   | 22.09                     | 46.00           | -23.91       | Peak     |         |
| 6   | 608.1200     | 30.31                      | -6.27                   | 24.04                     | 46.00           | -21.96       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz\_ Adapter: Salcomp

Vertical


80 dBuV/m

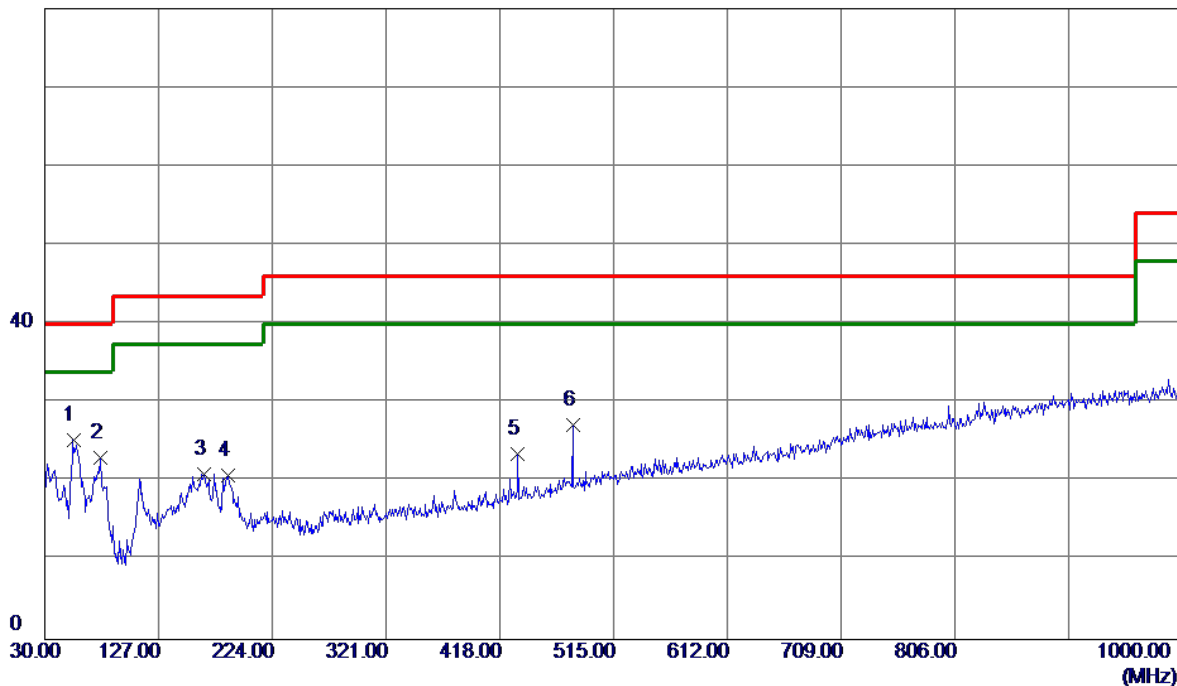

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 54.2500      | 39.26                      | -13.95                  | 25.31                     | 40.00           | -14.69       | Peak     |         |
| 2   | 77.5300      | 40.65                      | -17.67                  | 22.98                     | 40.00           | -17.02       | Peak     |         |
| 3   | 165.8000     | 33.57                      | -12.58                  | 20.99                     | 43.50           | -22.51       | Peak     |         |
| 4   | 186.1700     | 33.40                      | -12.54                  | 20.86                     | 43.50           | -22.64       | Peak     |         |
| 5   | 433.5200     | 33.96                      | -10.41                  | 23.55                     | 46.00           | -22.45       | Peak     |         |
| 6   | 480.0800     | 36.45                      | -9.21                   | 27.24                     | 46.00           | -18.76       | Peak     |         |

Test Mode: UNII-2A/TX A Mode 5320MHz\_ Adapter: Salcomp


### Horizontal

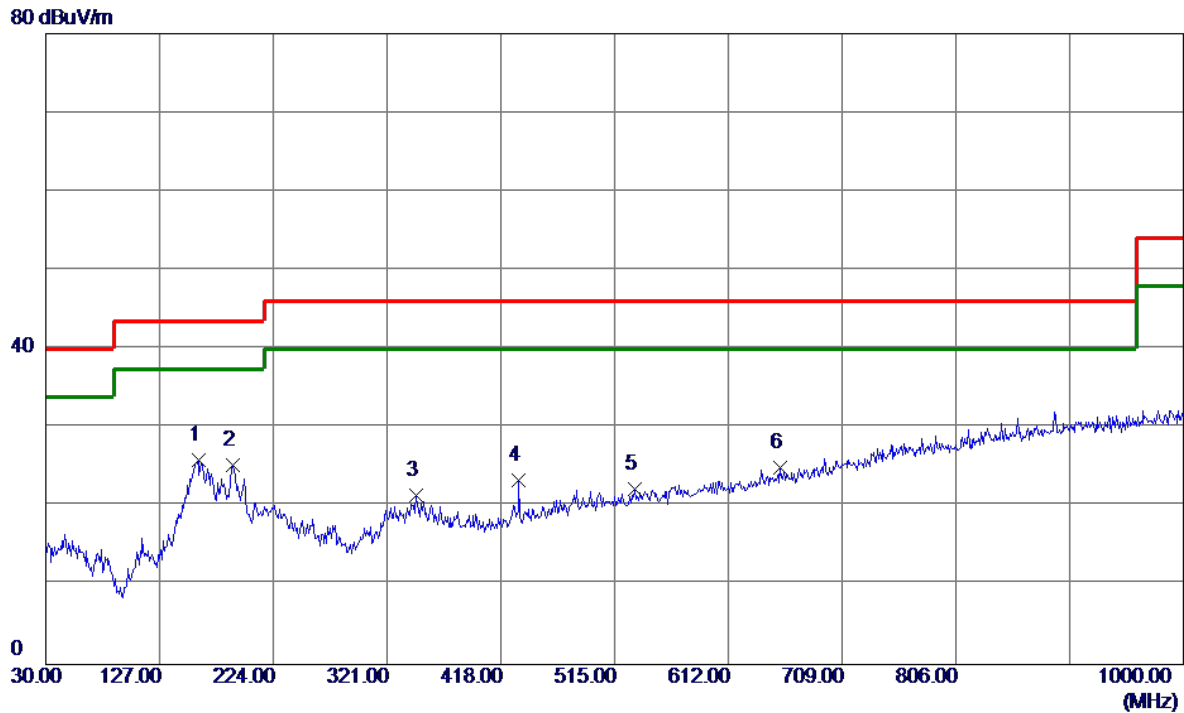

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 159.9800     | 38.86                      | -12.93                  | 25.93                     | 43.50           | -17.57       | Peak     |         |
| 2   | 189.0800     | 38.11                      | -12.77                  | 25.34                     | 43.50           | -18.16       | Peak     |         |
| 3   | 346.2200     | 33.41                      | -12.02                  | 21.39                     | 46.00           | -24.61       | Peak     |         |
| 4   | 433.5200     | 33.72                      | -10.41                  | 23.31                     | 46.00           | -22.69       | Peak     |         |
| 5   | 532.4600     | 30.26                      | -8.07                   | 22.19                     | 46.00           | -23.81       | Peak     |         |
| 6   | 656.6200     | 30.18                      | -5.27                   | 24.91                     | 46.00           | -21.09       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz\_ Adapter: Salcomp


### Vertical

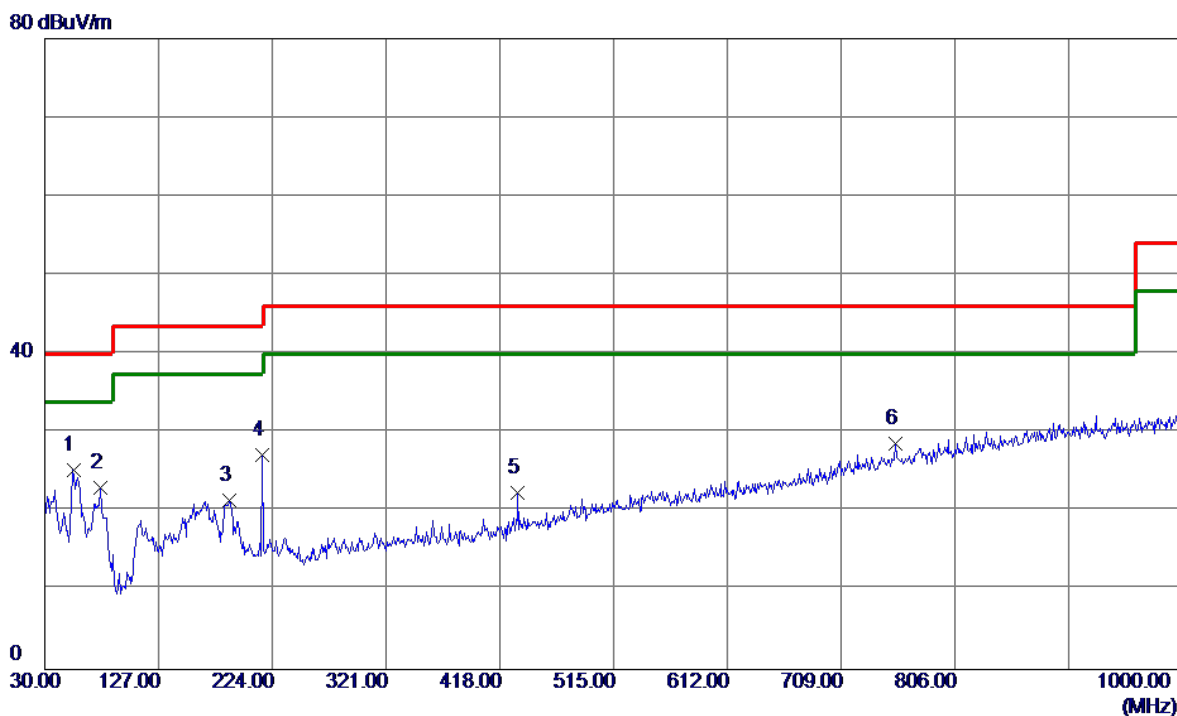

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 54.2500      | 39.27                      | -13.95                  | 25.32                     | 40.00           | -14.68       | Peak     |         |
| 2   | 77.5300      | 40.64                      | -17.67                  | 22.97                     | 40.00           | -17.03       | Peak     |         |
| 3   | 187.1400     | 34.07                      | -12.61                  | 21.46                     | 43.50           | -22.04       | Peak     |         |
| 4   | 215.2700     | 41.08                      | -13.94                  | 27.14                     | 43.50           | -16.36       | Peak     |         |
| 5   | 433.5200     | 32.87                      | -10.41                  | 22.46                     | 46.00           | -23.54       | Peak     |         |
| 6   | 755.5600     | 30.89                      | -2.32                   | 28.57                     | 46.00           | -17.43       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5500MHz\_ Adapter: Salcomp


### Horizontal

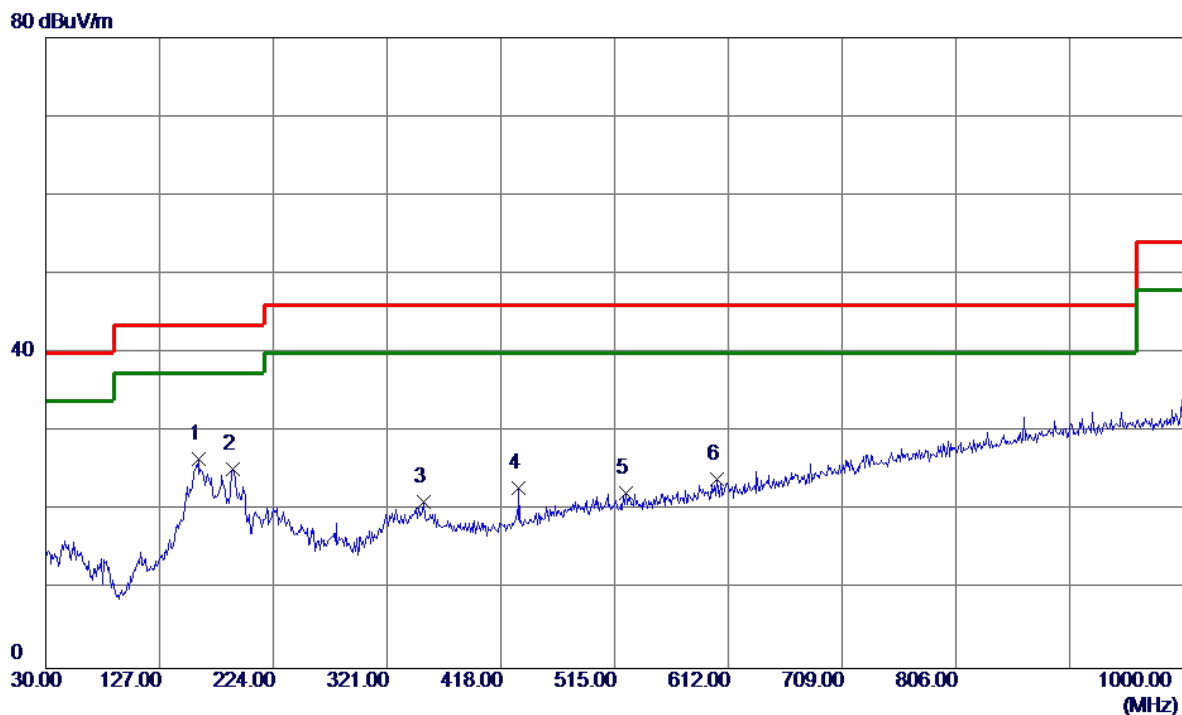

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 159.9800     | 39.51                      | -12.93                  | 26.58                     | 43.50           | -16.92       | Peak     |         |
| 2   | 189.0800     | 38.05                      | -12.77                  | 25.28                     | 43.50           | -18.22       | Peak     |         |
| 3   | 352.0400     | 32.99                      | -11.93                  | 21.06                     | 46.00           | -24.94       | Peak     |         |
| 4   | 433.5200     | 33.22                      | -10.41                  | 22.81                     | 46.00           | -23.19       | Peak     |         |
| 5   | 524.7000     | 30.39                      | -8.22                   | 22.17                     | 46.00           | -23.83       | Peak     |         |
| 6   | 602.3000     | 30.34                      | -6.38                   | 23.96                     | 46.00           | -22.04       | Peak     |         |

Test Mode: UNII-2C/TX A Mode 5700MHz\_ Adapter: Salcomp

### Vertical

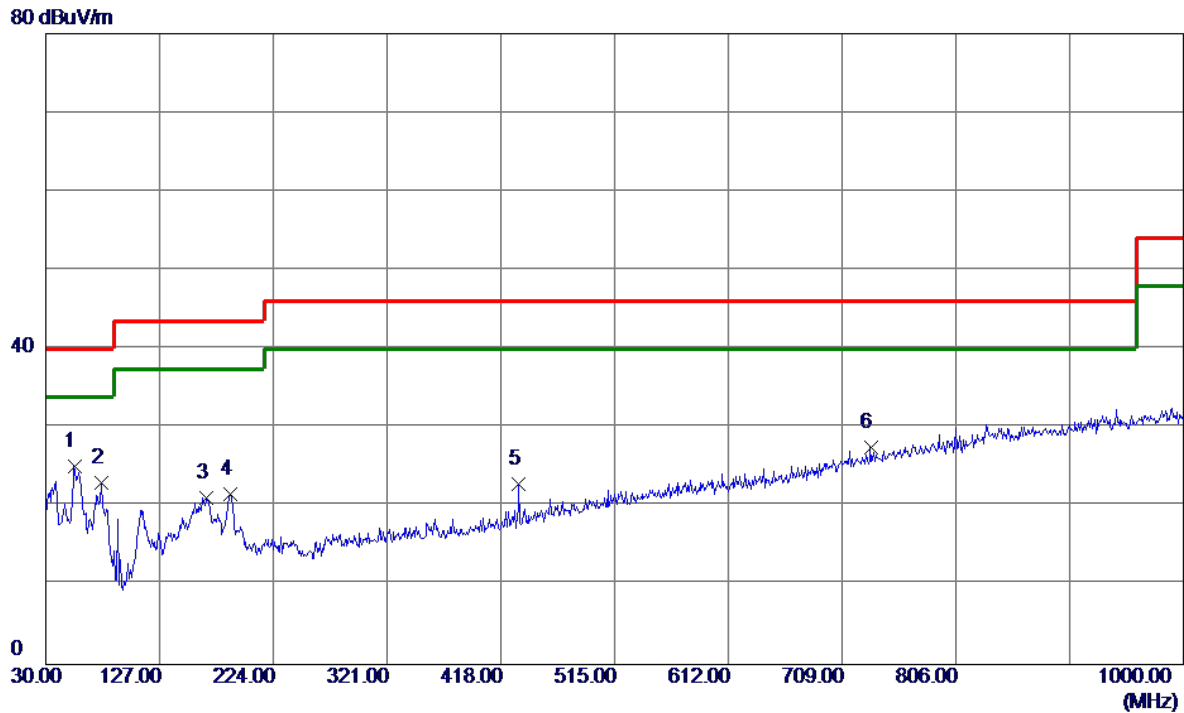


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 54.2500      | 39.12                      | -13.95                  | 25.17                     | 40.00           | -14.83       | Peak     |         |
| 2   | 77.5300      | 40.64                      | -17.67                  | 22.97                     | 40.00           | -17.03       | Peak     |         |
| 3   | 166.7700     | 33.65                      | -12.53                  | 21.12                     | 43.50           | -22.38       | Peak     |         |
| 4   | 187.1400     | 34.21                      | -12.61                  | 21.60                     | 43.50           | -21.90       | Peak     |         |
| 5   | 433.5200     | 33.28                      | -10.41                  | 22.87                     | 46.00           | -23.13       | Peak     |         |
| 6   | 733.2500     | 30.53                      | -2.95                   | 27.58                     | 46.00           | -18.42       | Peak     |         |



Test Mode: UNII-2C/TX A Mode 5700MHz\_ Adapter: Salcomp

# Horizontal


80 dBuV/m

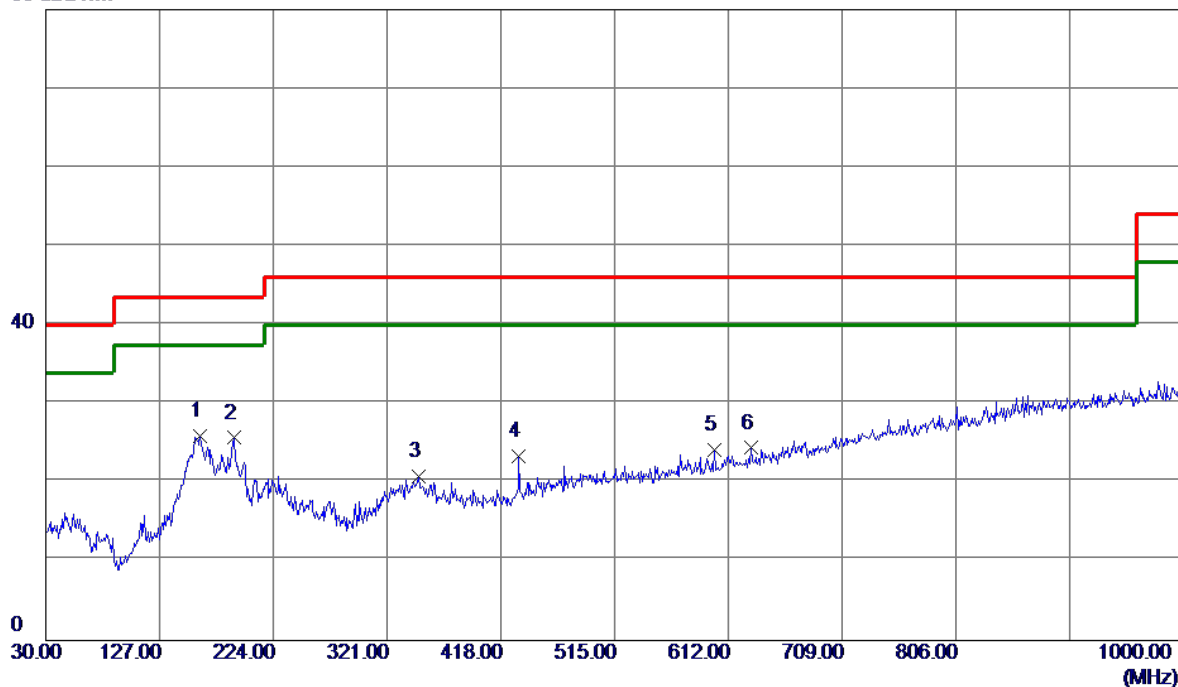

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 161.9200     | 38.69                      | -12.82                  | 25.87                     | 43.50           | -17.63       | Peak     |         |
| 2   | 190.0500     | 38.53                      | -12.85                  | 25.68                     | 43.50           | -17.82       | Peak     |         |
| 3   | 348.1600     | 32.86                      | -11.99                  | 20.87                     | 46.00           | -25.13       | Peak     |         |
| 4   | 433.5200     | 33.79                      | -10.41                  | 23.38                     | 46.00           | -22.62       | Peak     |         |
| 5   | 600.3600     | 30.62                      | -6.41                   | 24.21                     | 46.00           | -21.79       | Peak     |         |
| 6   | 631.4000     | 30.23                      | -5.83                   | 24.40                     | 46.00           | -21.60       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz\_ Adapter: Salcomp


### Vertical

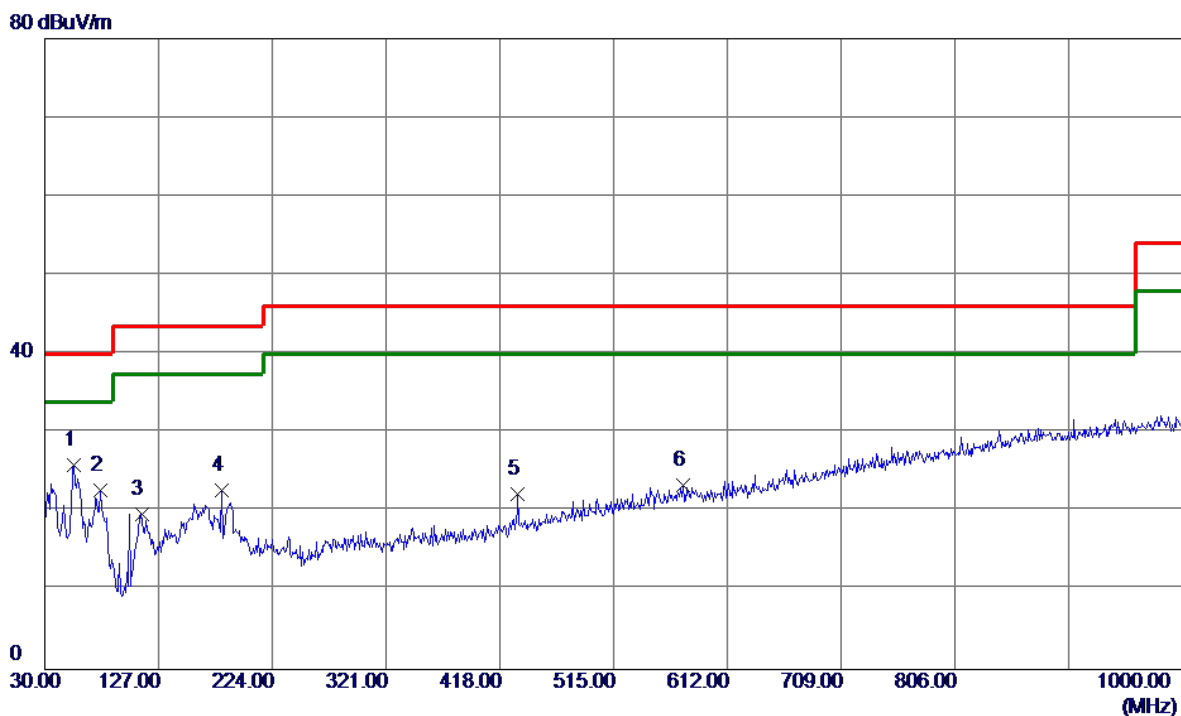

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 55.2200      | 39.84                      | -13.94                  | 25.90                     | 40.00           | -14.10       | Peak     |         |
| 2   | 77.5300      | 40.46                      | -17.67                  | 22.79                     | 40.00           | -17.21       | Peak     |         |
| 3   | 112.4500     | 35.73                      | -16.00                  | 19.73                     | 43.50           | -23.77       | Peak     |         |
| 4   | 181.3200     | 34.93                      | -12.15                  | 22.78                     | 43.50           | -20.72       | Peak     |         |
| 5   | 433.5200     | 32.66                      | -10.41                  | 22.25                     | 46.00           | -23.75       | Peak     |         |
| 6   | 574.1700     | 30.41                      | -7.09                   | 23.32                     | 46.00           | -22.68       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5745MHz\_ Adapter: Salcomp


### Horizontal

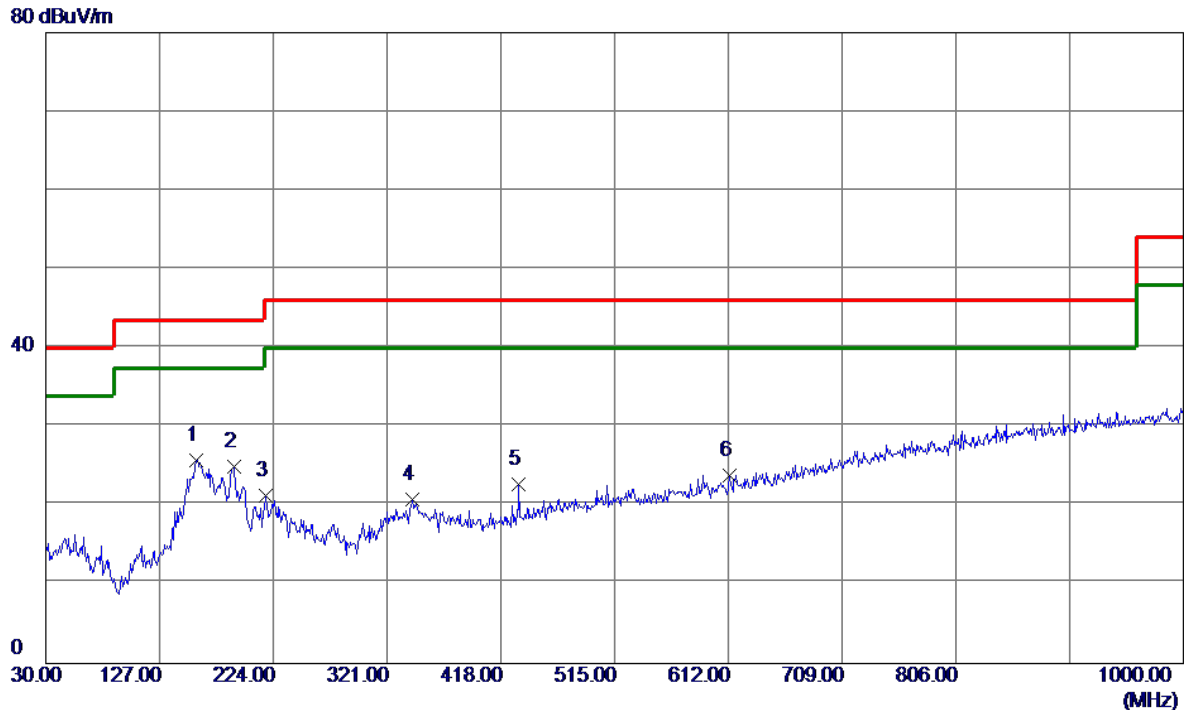

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 158.0399     | 38.80                      | -13.05                  | 25.75                     | 43.50           | -17.75       | Peak     |         |
| 2   | 190.0500     | 37.76                      | -12.85                  | 24.91                     | 43.50           | -18.59       | Peak     |         |
| 3   | 217.2100     | 35.15                      | -13.92                  | 21.23                     | 46.00           | -24.77       | Peak     |         |
| 4   | 342.3400     | 32.86                      | -12.09                  | 20.77                     | 46.00           | -25.23       | Peak     |         |
| 5   | 433.5200     | 33.14                      | -10.41                  | 22.73                     | 46.00           | -23.27       | Peak     |         |
| 6   | 612.9699     | 30.08                      | -6.17                   | 23.91                     | 46.00           | -22.09       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz\_ Adapter: Salcomp

Vertical

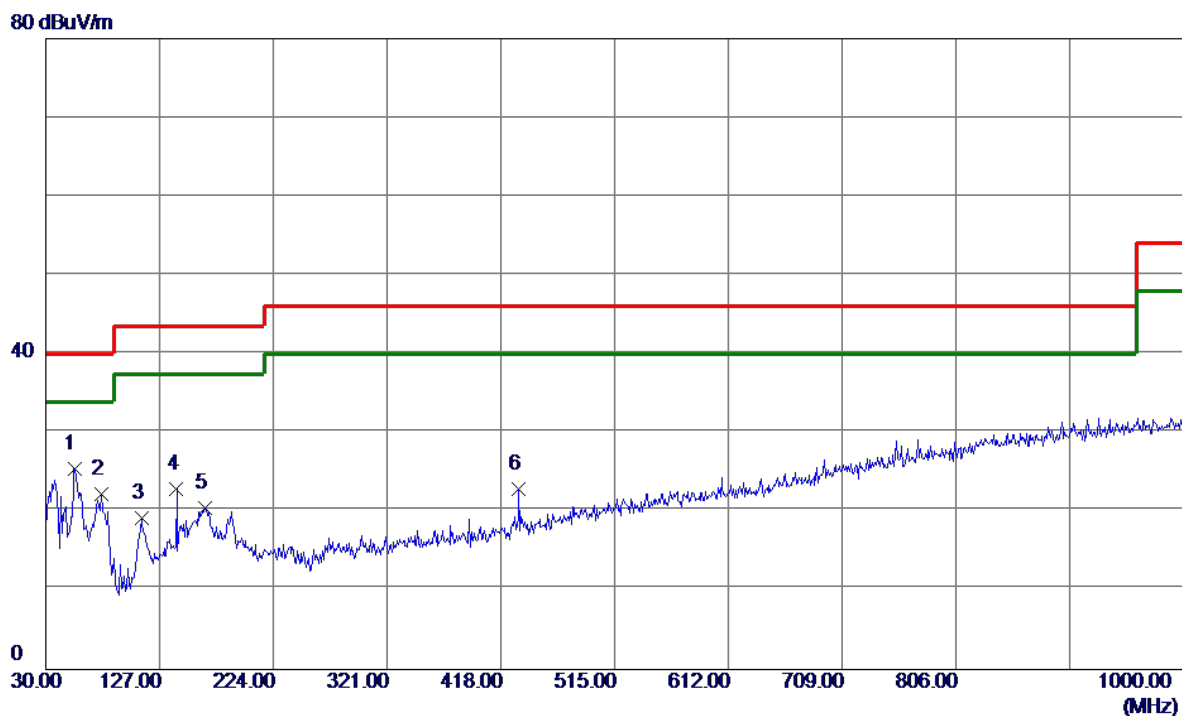


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 54.2500      | 39.34                      | -13.95                  | 25.39                     | 40.00           | -14.61       | Peak     |         |
| 2   | 77.5300      | 39.95                      | -17.67                  | 22.28                     | 40.00           | -17.72       | Peak     |         |
| 3   | 111.4800     | 35.29                      | -16.07                  | 19.22                     | 43.50           | -24.28       | Peak     |         |
| 4   | 141.5500     | 37.06                      | -14.11                  | 22.95                     | 43.50           | -20.55       | Peak     |         |
| 5   | 165.8000     | 33.10                      | -12.58                  | 20.52                     | 43.50           | -22.98       | Peak     |         |
| 6   | 433.5200     | 33.27                      | -10.41                  | 22.86                     | 46.00           | -23.14       | Peak     |         |

Test Mode: UNII-3/TX A Mode 5825MHz\_ Adapter: Salcomp

# Horizontal

80 dBuV/m

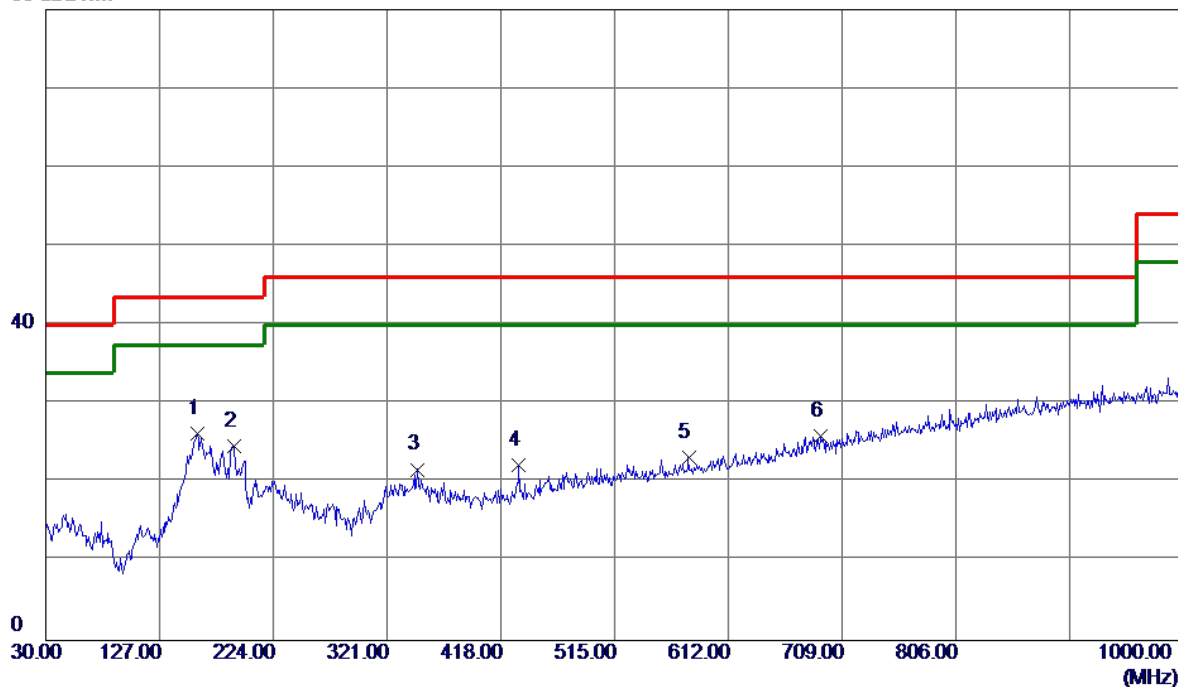


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 159.0100     | 39.16                      | -12.99                  | 26.17                     | 43.50           | -17.33       | Peak     |         |
| 2   | 190.0500     | 37.51                      | -12.85                  | 24.66                     | 43.50           | -18.84       | Peak     |         |
| 3   | 347.1900     | 33.68                      | -12.00                  | 21.68                     | 46.00           | -24.32       | Peak     |         |
| 4   | 433.5200     | 32.63                      | -10.41                  | 22.22                     | 46.00           | -23.78       | Peak     |         |
| 5   | 578.0500     | 30.20                      | -6.99                   | 23.21                     | 46.00           | -22.79       | Peak     |         |
| 6   | 690.5700     | 30.09                      | -4.23                   | 25.86                     | 46.00           | -20.14       | Peak     |         |

## APPENDIX C - RADIATED EMISSION (ABOVE 1000MHZ)

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Vertical

130 dBuV/m

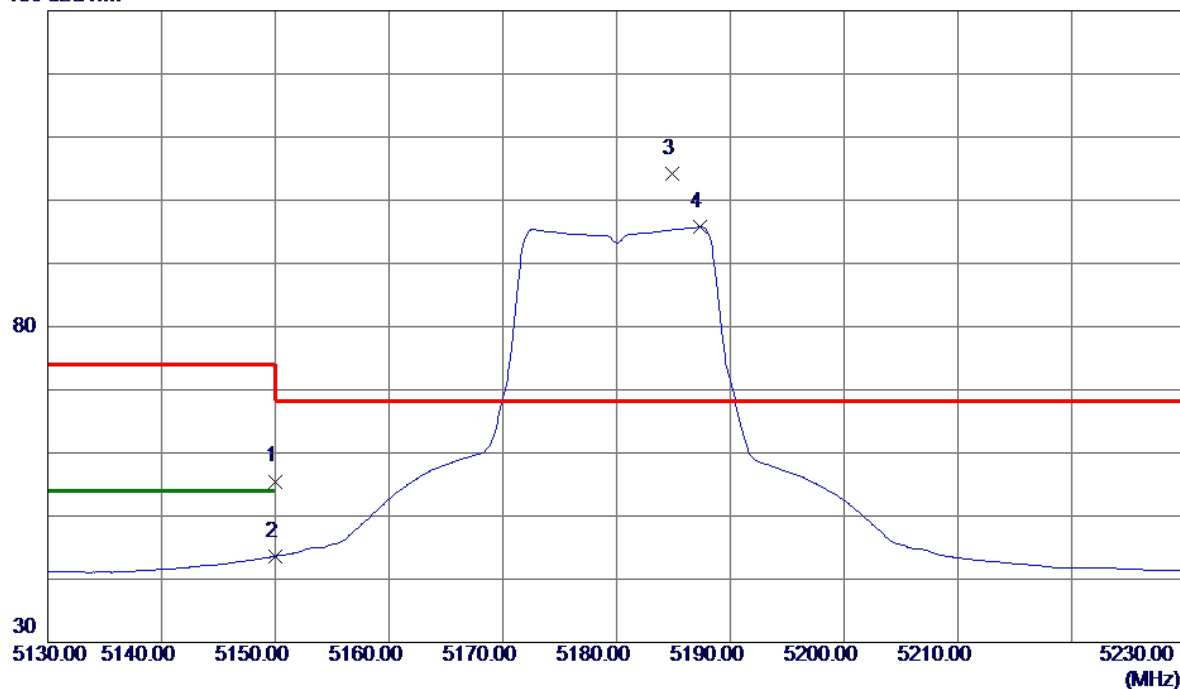


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 14.40                      | 41.10                   | 55.50                     | 74.00           | -18.50       | Peak     |          |
| 2   | 5150.0000    | 2.56                       | 41.10                   | 43.66                     | 54.00           | -10.34       | AVG      |          |
| 3 * | 5184.9000    | 63.01                      | 41.28                   | 104.29                    | 68.30           | 35.99        | Peak     | No Limit |
| 4   | 5187.3000    | 54.44                      | 41.29                   | 95.73                     | 999.00          | -903.27      | AVG      | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Vertical

120 dBuV/m

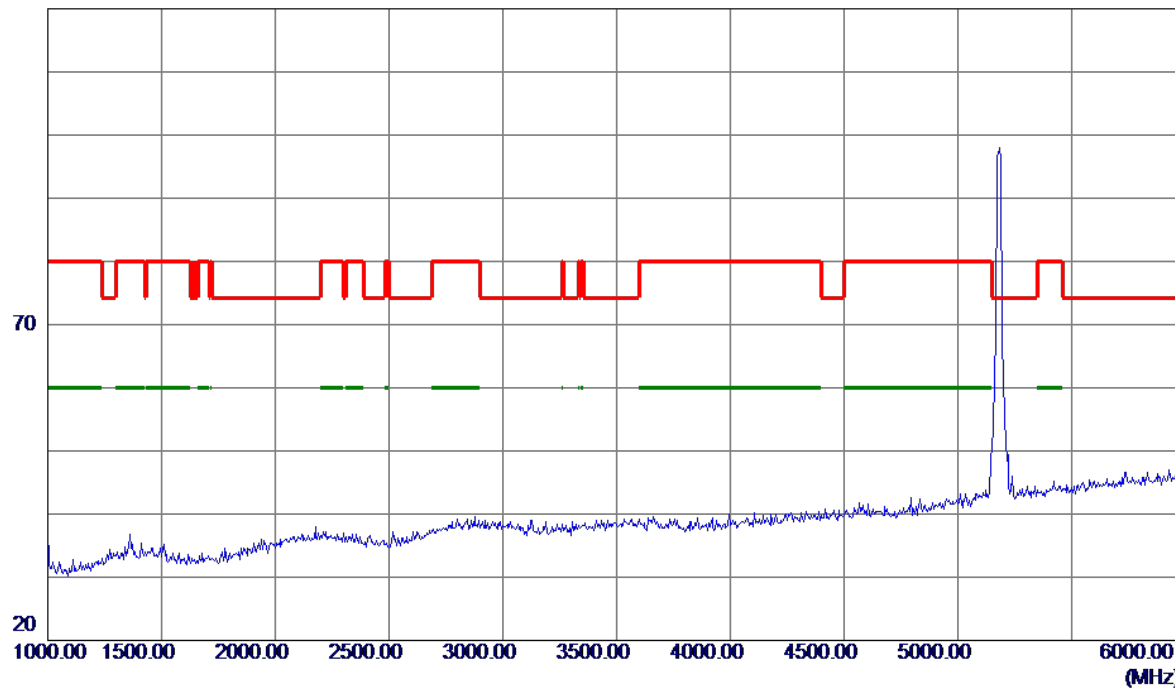


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Vertical

100 dBuV/m

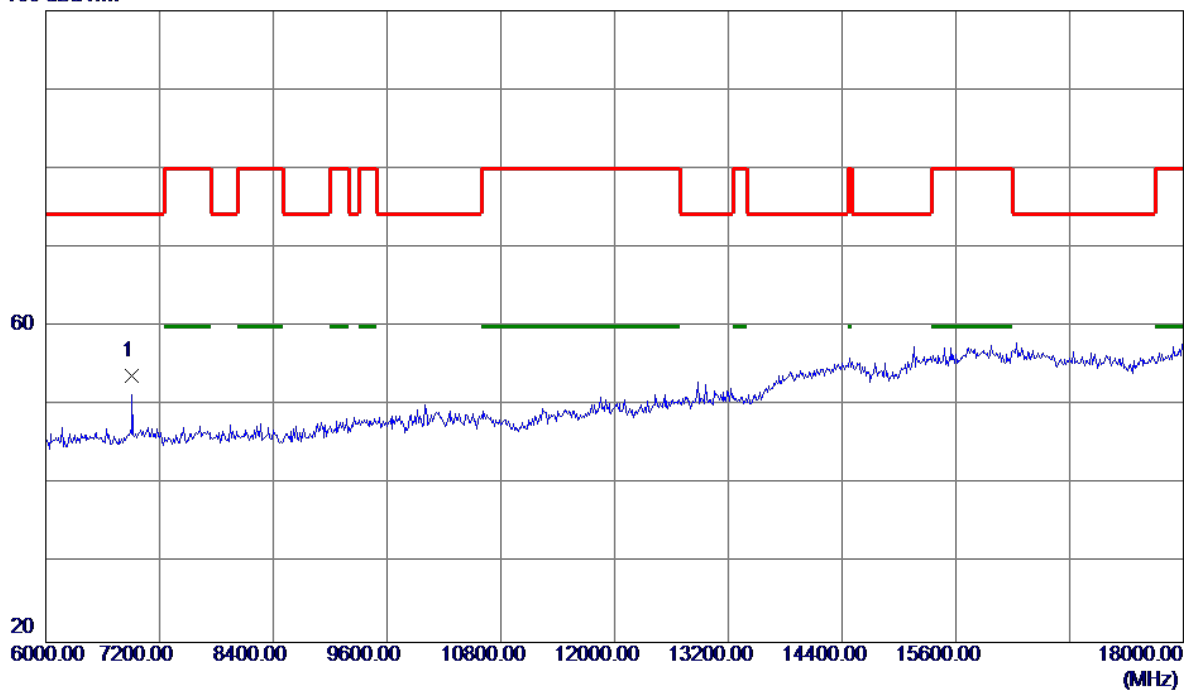


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6906.5920    | 40.87                      | 12.93                   | 53.80                     | 74.30           | -20.50       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Vertical


100 dBuV/m

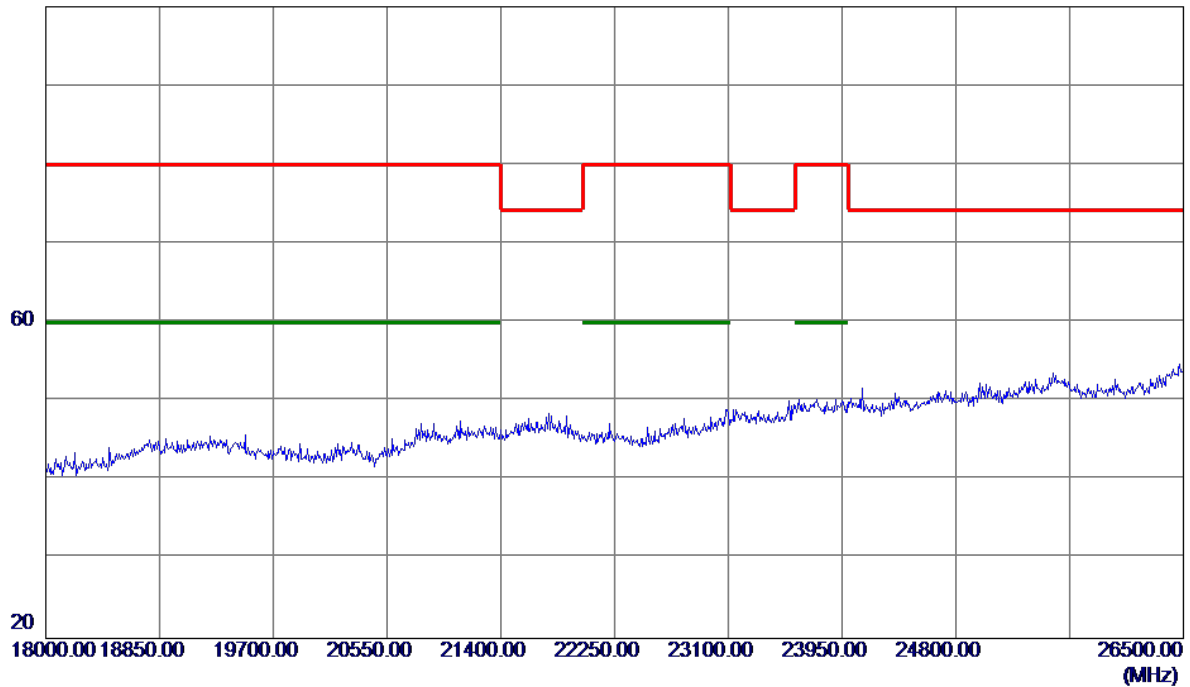

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Vertical

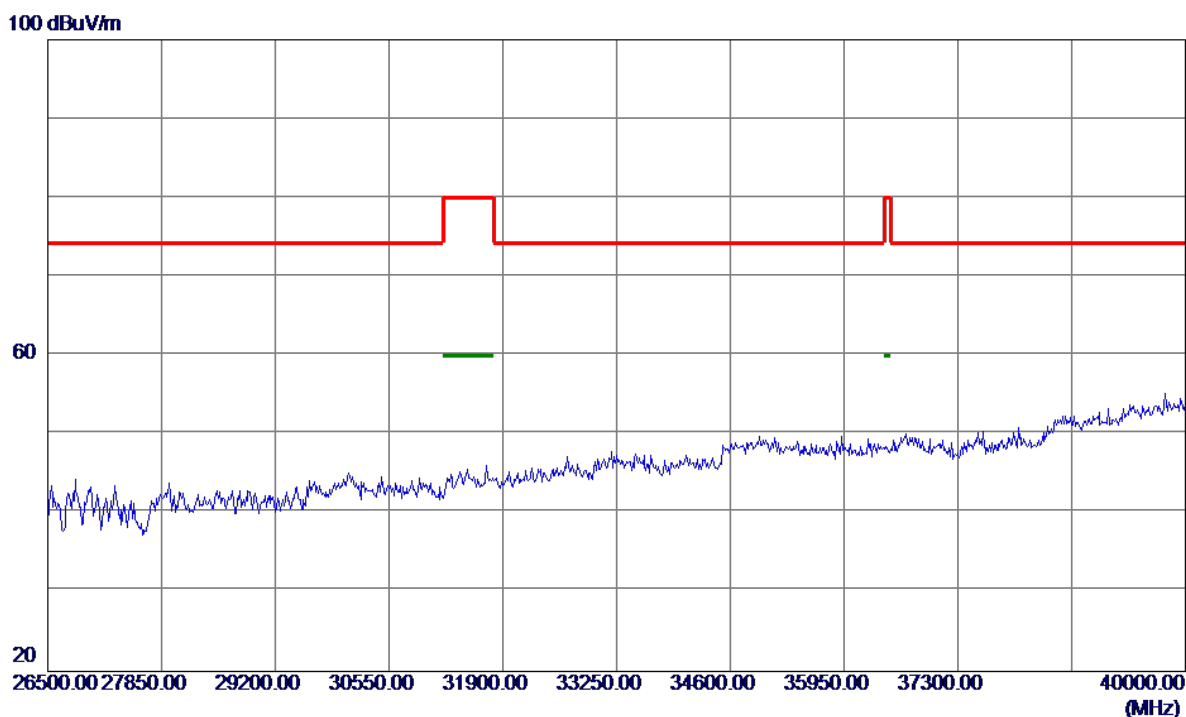


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal

130 dBuV/m

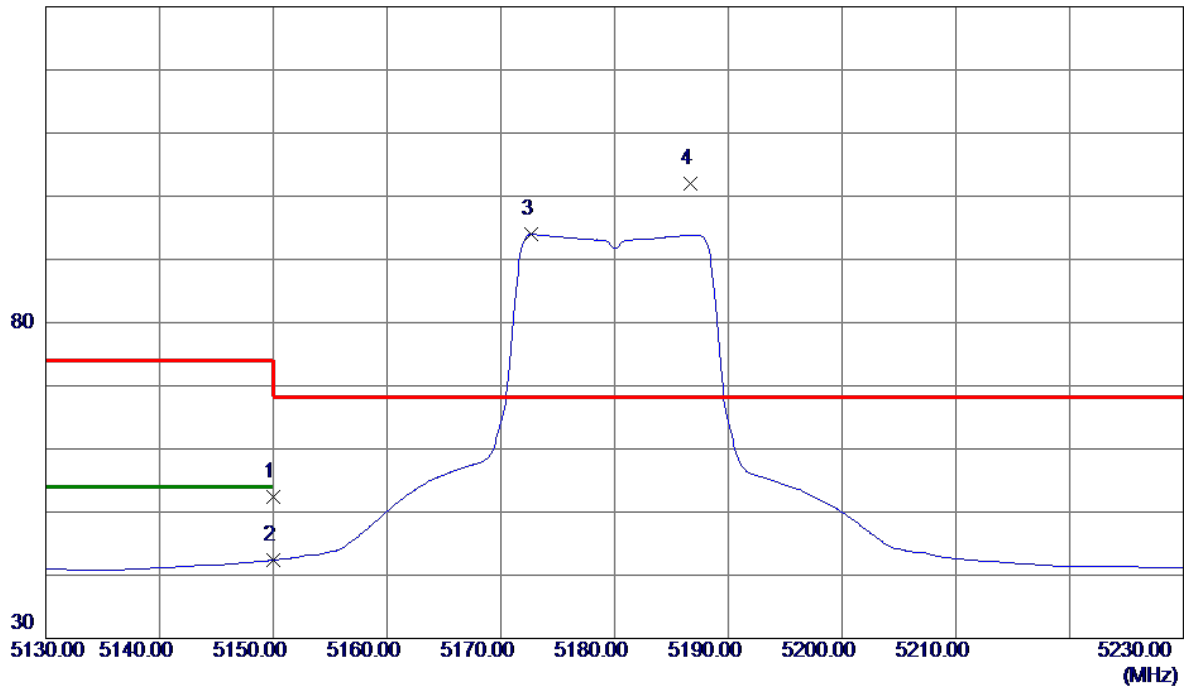


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 11.23                      | 41.10                   | 52.33                     | 74.00           | -21.67       | Peak     |          |
| 2   | 5150.0000    | 1.31                       | 41.10                   | 42.41                     | 54.00           | -11.59       | AVG      |          |
| 3   | 5172.7000    | 52.75                      | 41.22                   | 93.97                     | 999.00          | -905.03      | AVG      | No Limit |
| 4 * | 5186.7000    | 60.65                      | 41.29                   | 101.94                    | 68.30           | 33.64        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal


120 dBuV/m

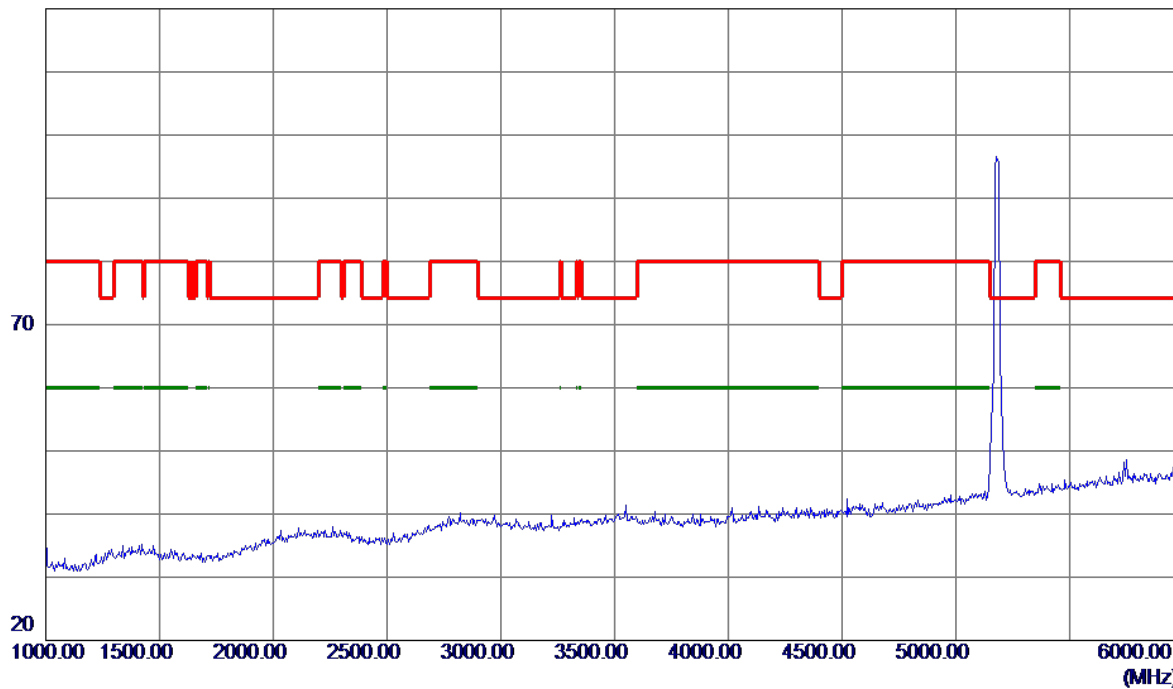

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal

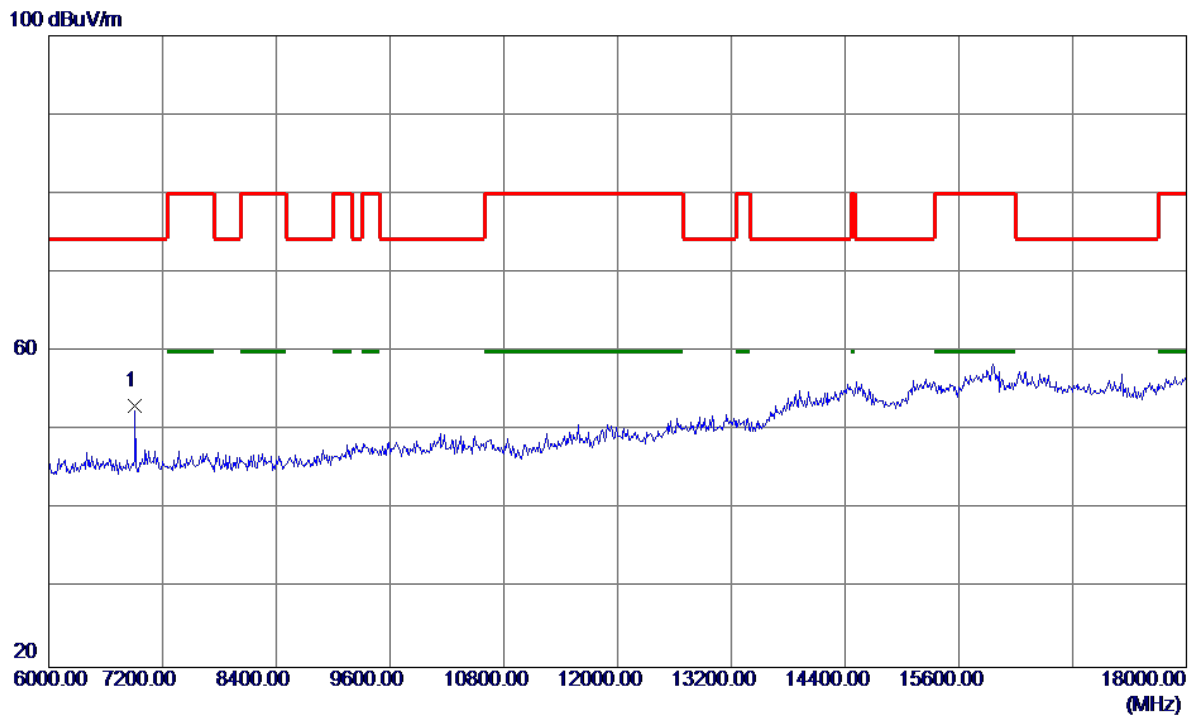


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6912.0000    | 40.23                      | 12.93                   | 53.16                     | 74.30           | -21.14       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal


100 dBuV/m

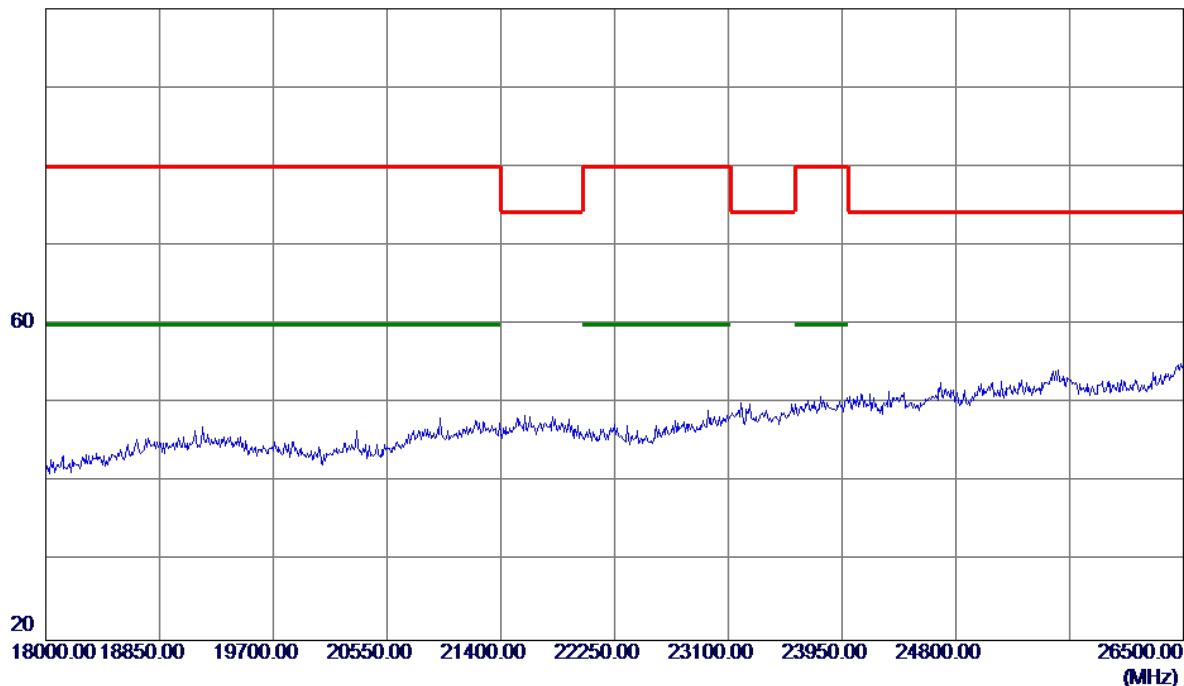

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5180MHz |

### Horizontal

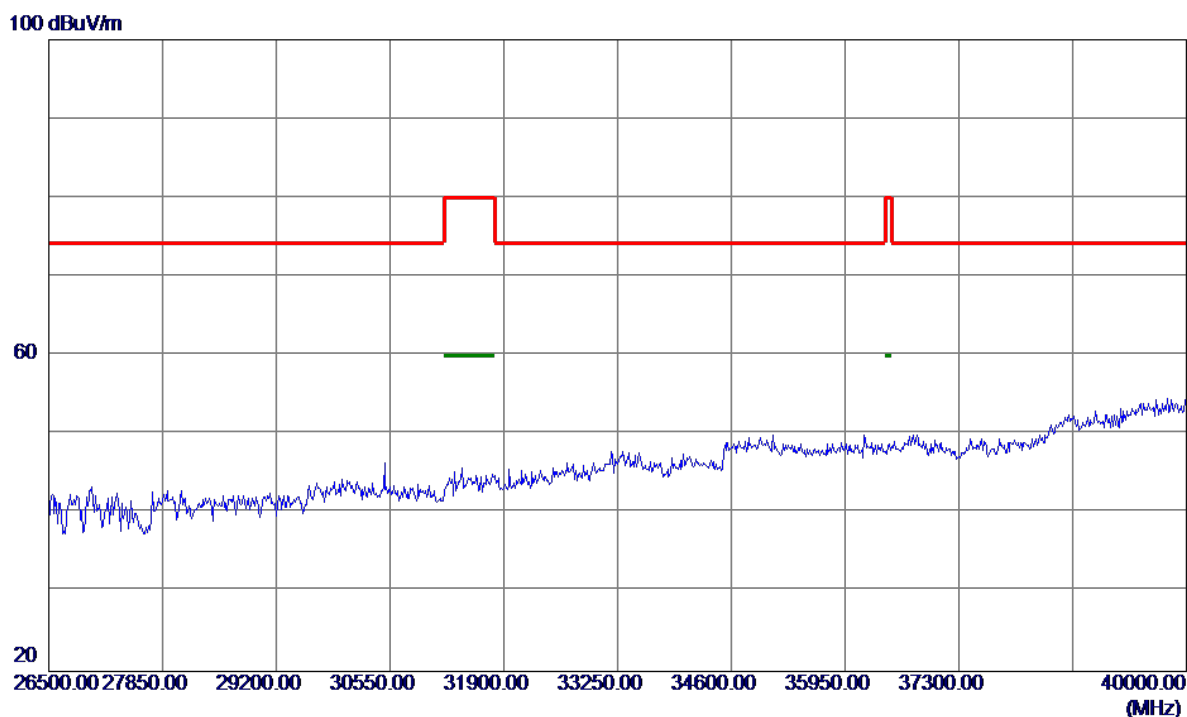


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |



|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Vertical

130 dBuV/m

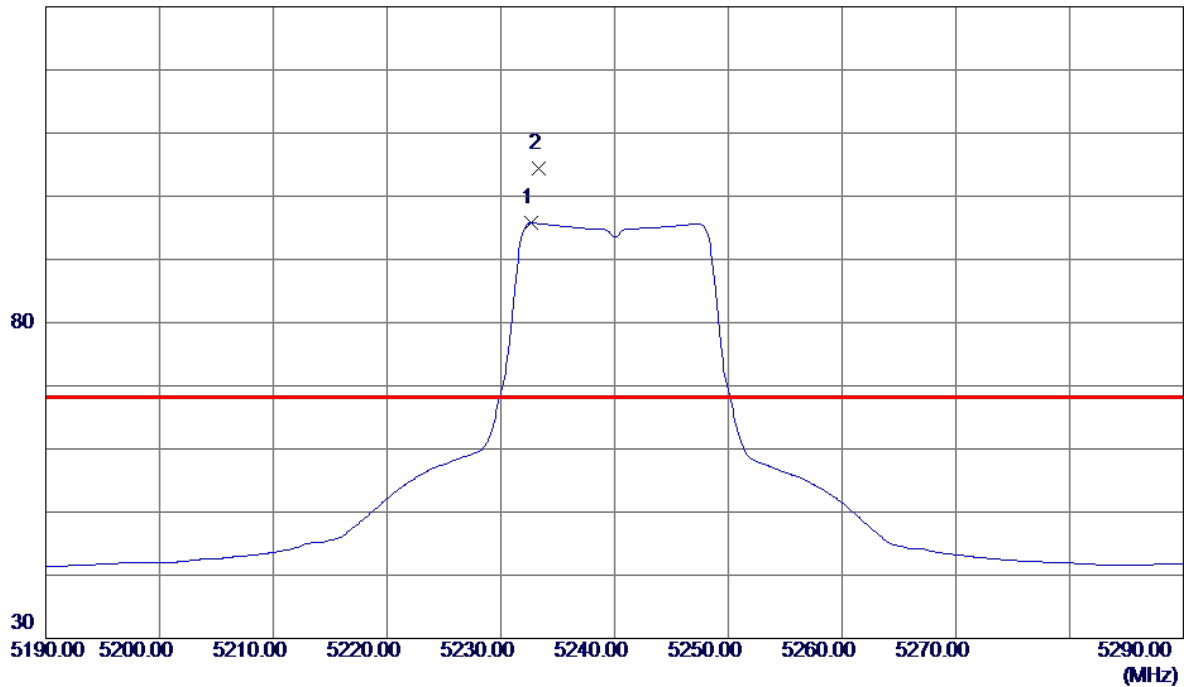


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5232.7000    | 54.25                      | 41.52                   | 95.77                     | 999.00          | -903.23      | AVG      | No Limit |
| 2 * | 5233.3000    | 62.91                      | 41.53                   | 104.44                    | 68.30           | 36.14        | Peak     | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Vertical


120 dBuV/m

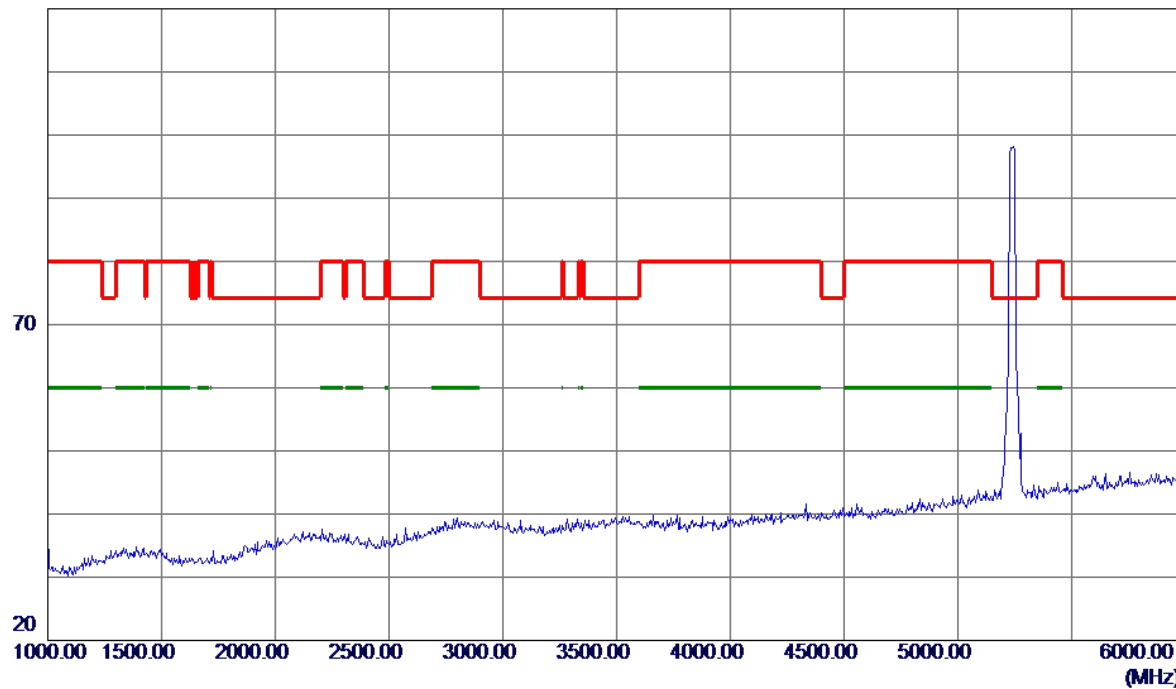

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Vertical

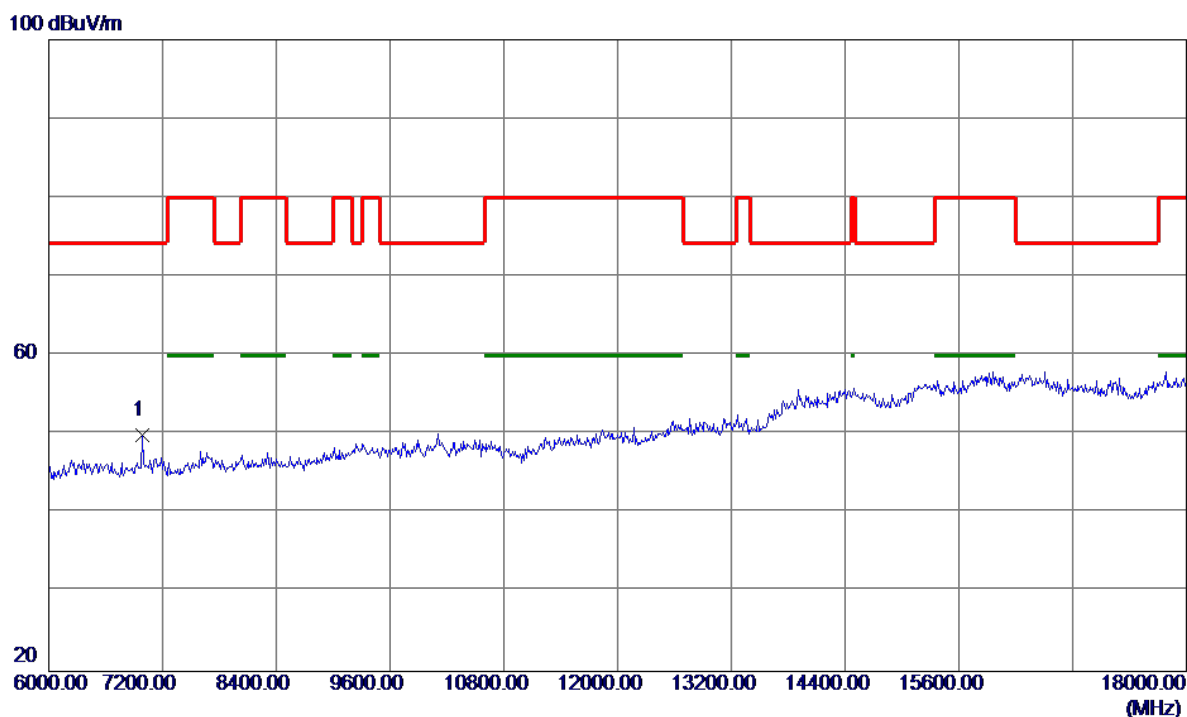


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6984.0000    | 36.88                      | 12.97                   | 49.85                     | 74.30           | -24.45       | Peak     |         |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Vertical

100 dBuV/m

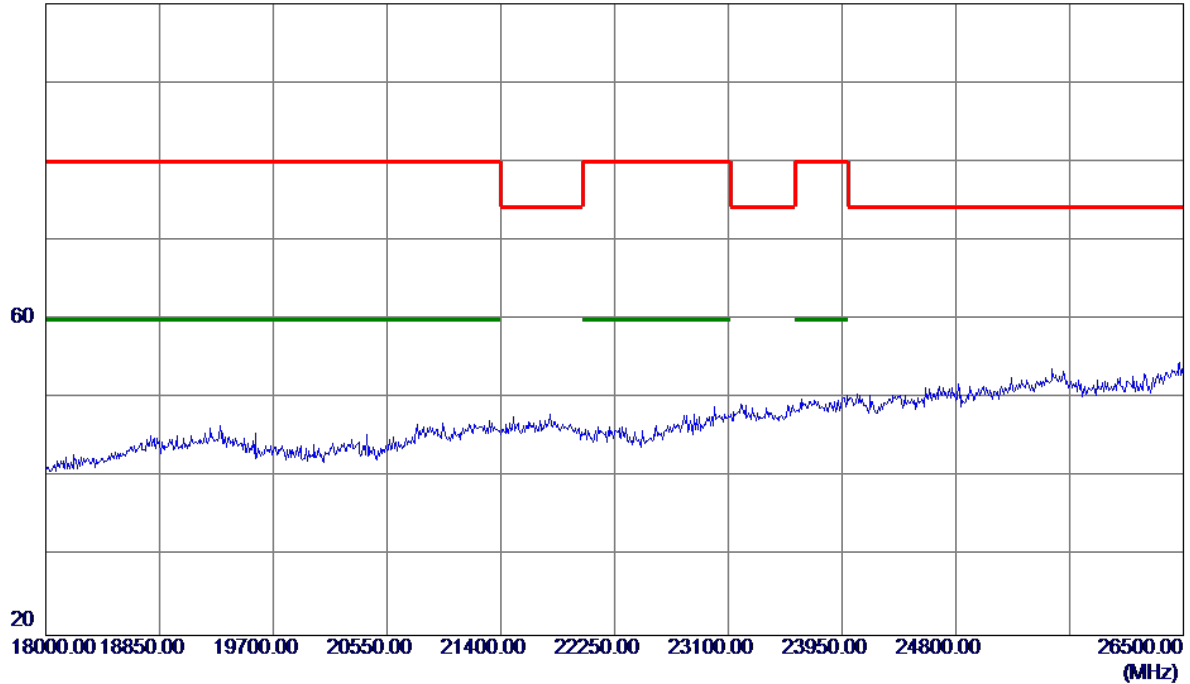


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Vertical


100 dBuV/m

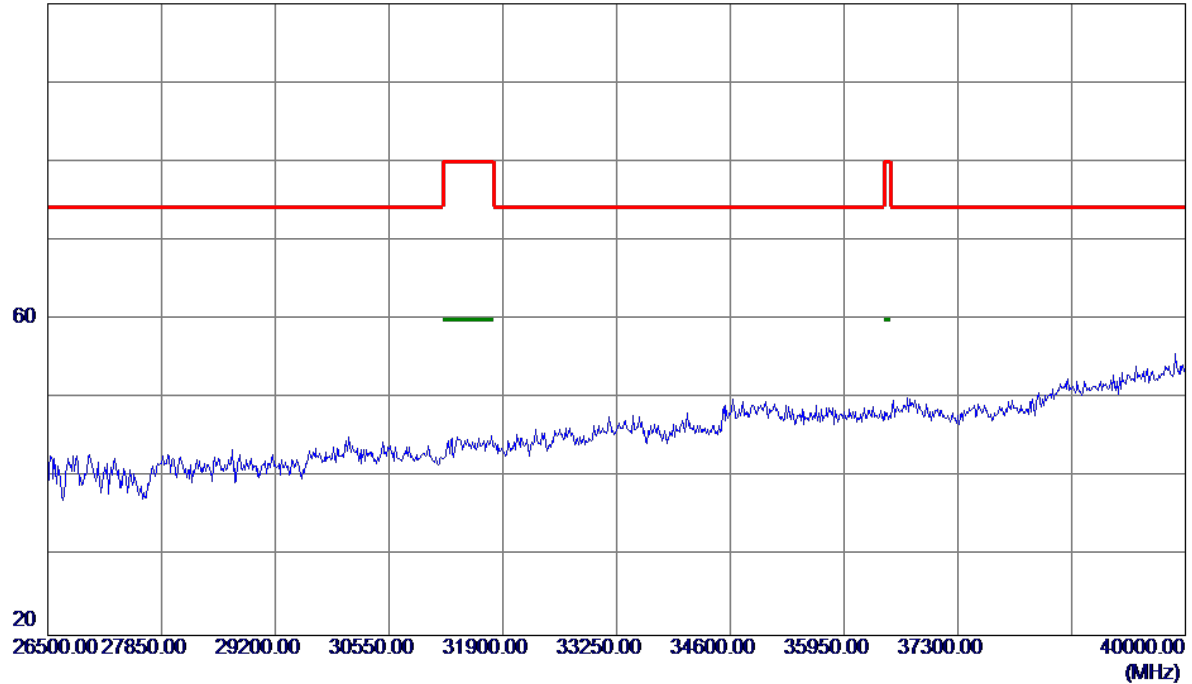

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |


### Horizontal

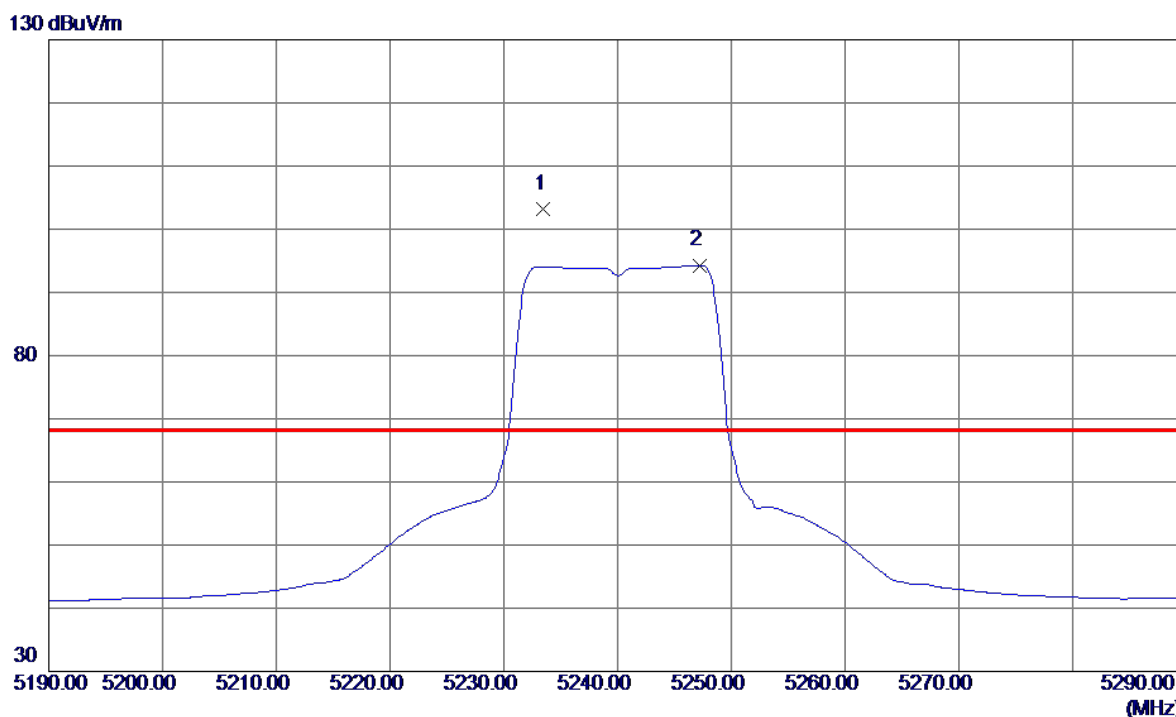

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5233.5000    | 61.59                      | 41.53                   | 103.12                    | 68.30           | 34.82        | Peak     | No Limit |
| 2   | 5247.2000    | 52.70                      | 41.60                   | 94.30                     | 999.00          | -904.70      | AVG      | No Limit |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |


### Horizontal

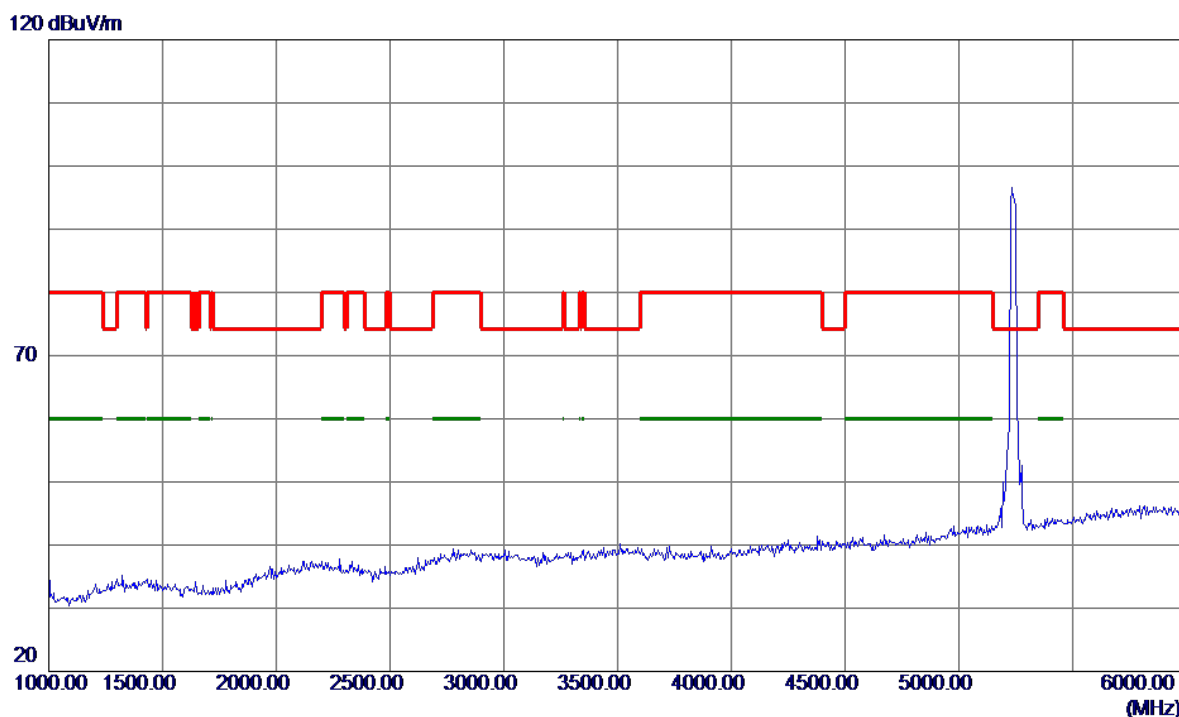

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Horizontal

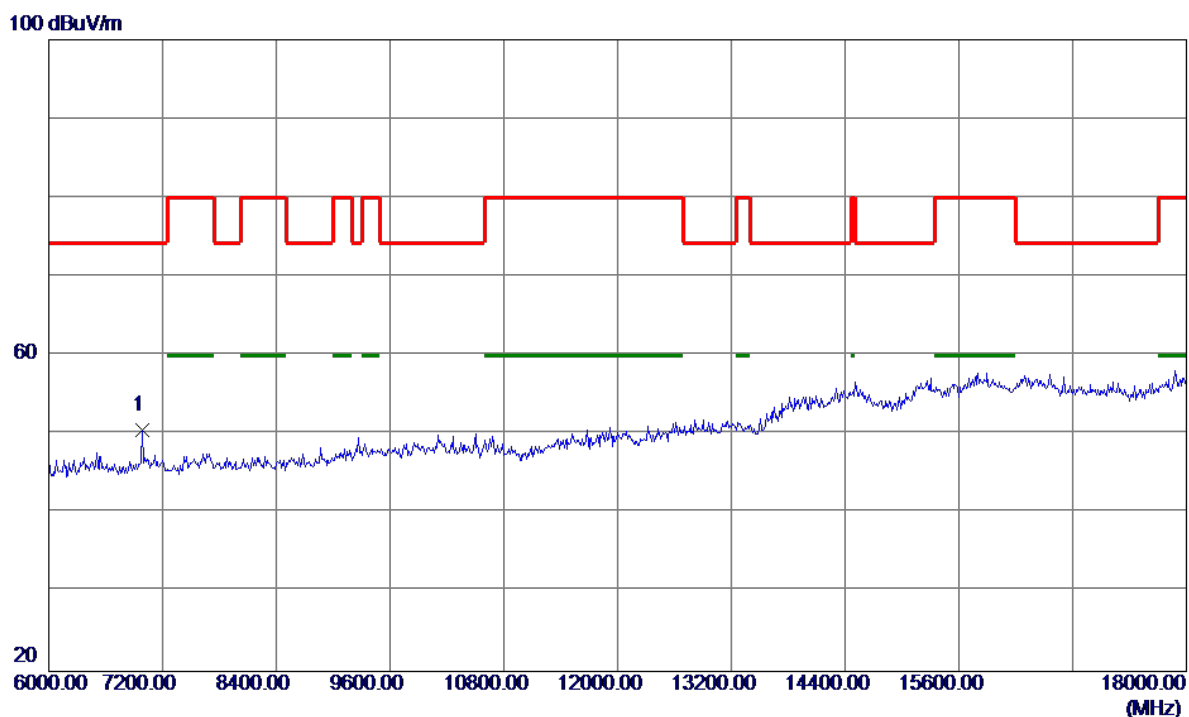


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6984.0000    | 37.58                      | 12.97                   | 50.55                     | 74.30           | -23.75       | Peak     |         |



|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Horizontal

100 dBuV/m

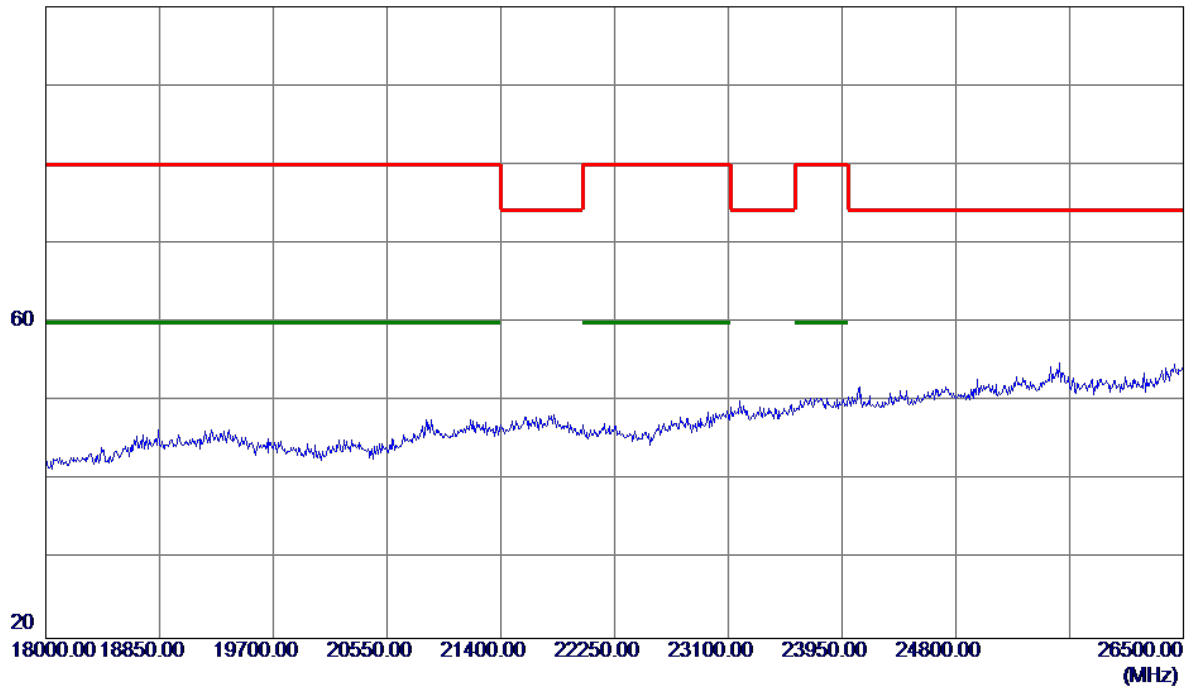


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                           |
|------------------|---------------------------|
| Orthogonal Axis: | X                         |
| Test Mode:       | UNII-1/ TX A Mode 5240MHz |

### Horizontal

100 dBuV/m

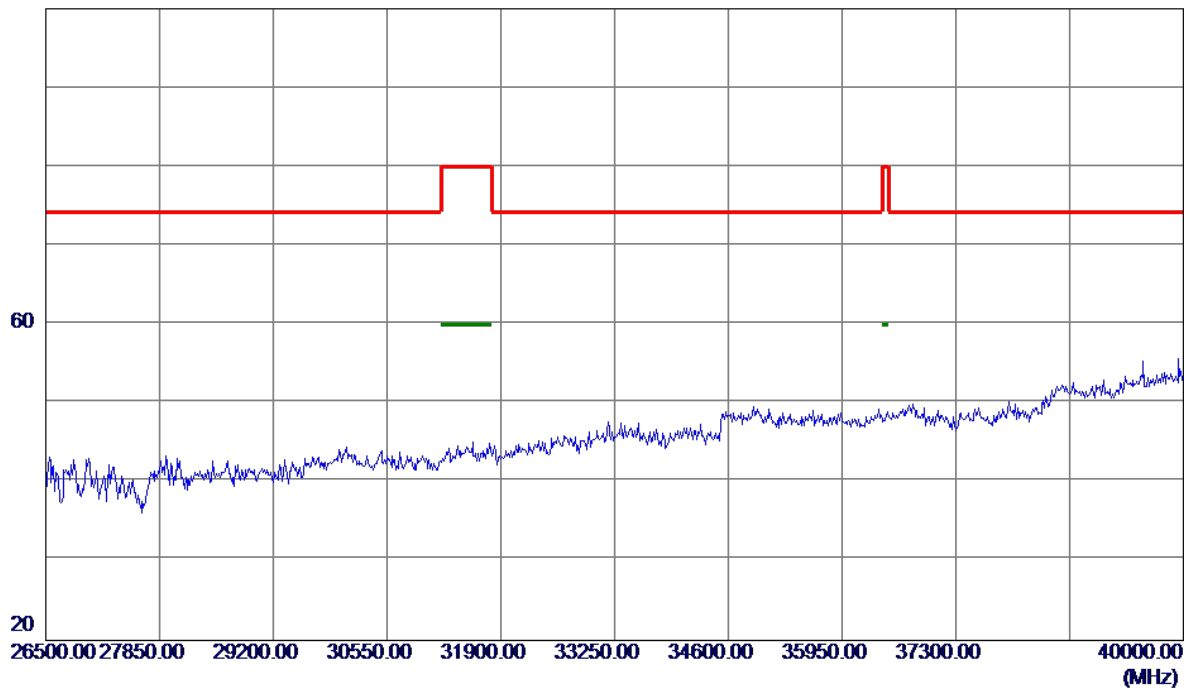


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical

130 dBuV/m

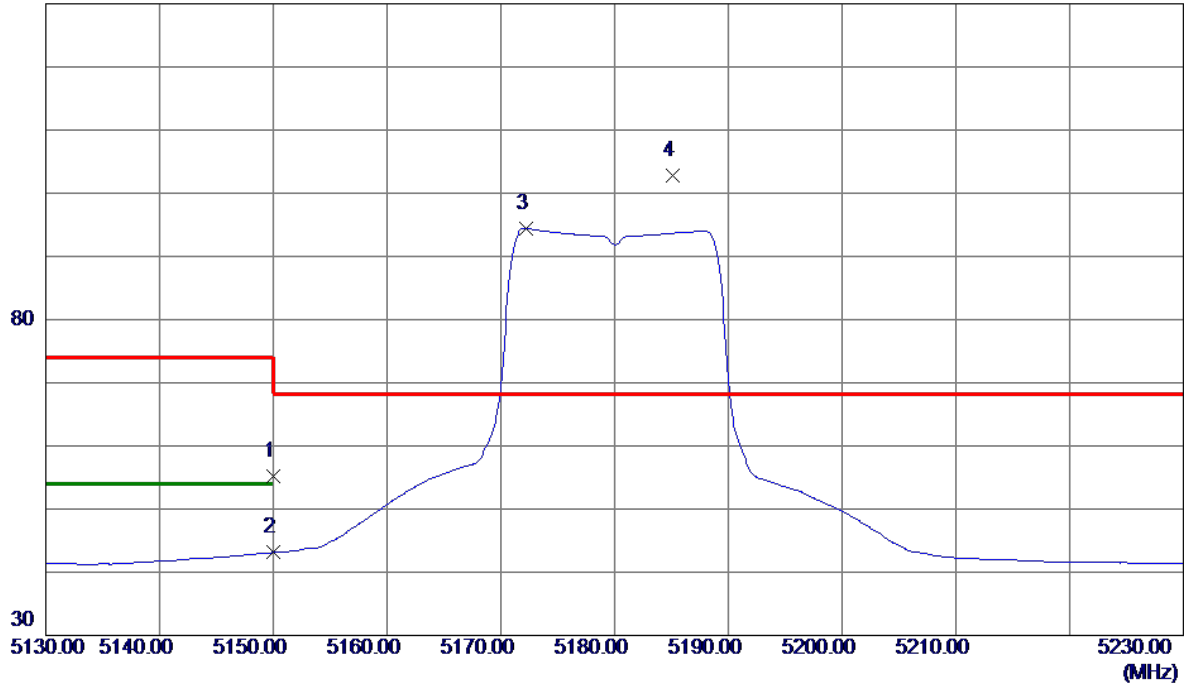


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 14.16                      | 41.10                   | 55.26                     | 74.00           | -18.74       | Peak     |          |
| 2   | 5150.0000    | 2.03                       | 41.10                   | 43.13                     | 54.00           | -10.87       | AVG      |          |
| 3   | 5172.2000    | 53.24                      | 41.21                   | 94.45                     | 999.00          | -904.55      | AVG      | No Limit |
| 4 * | 5185.1000    | 61.54                      | 41.28                   | 102.82                    | 68.30           | 34.52        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical


120 dBuV/m

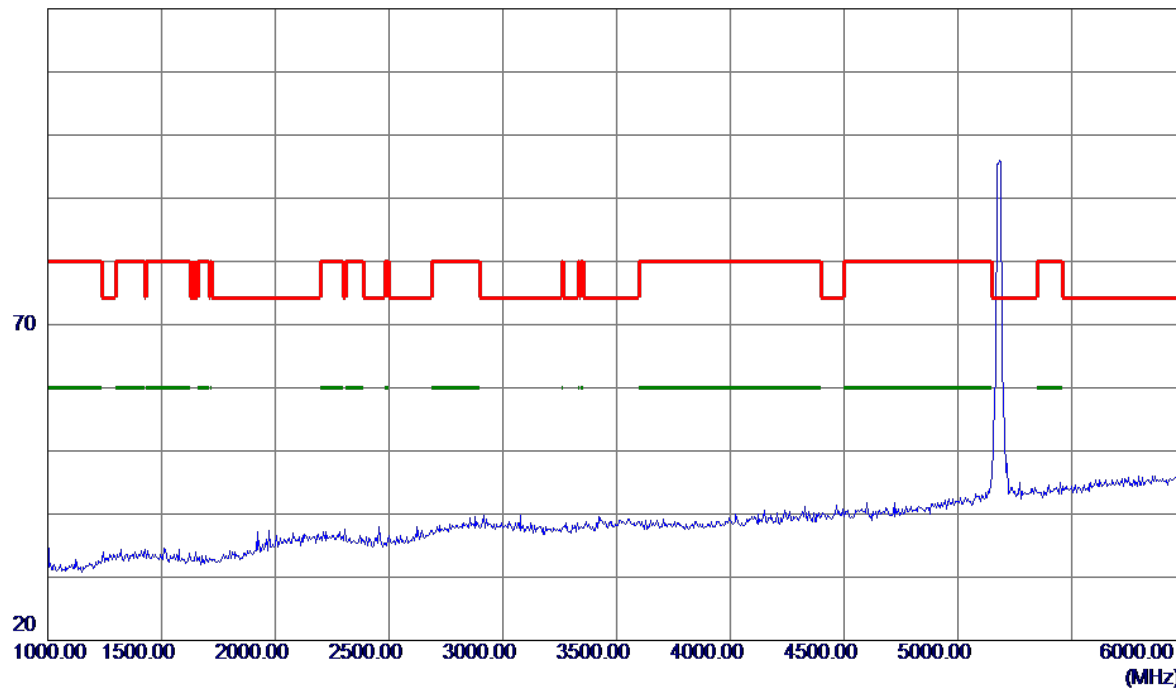

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical

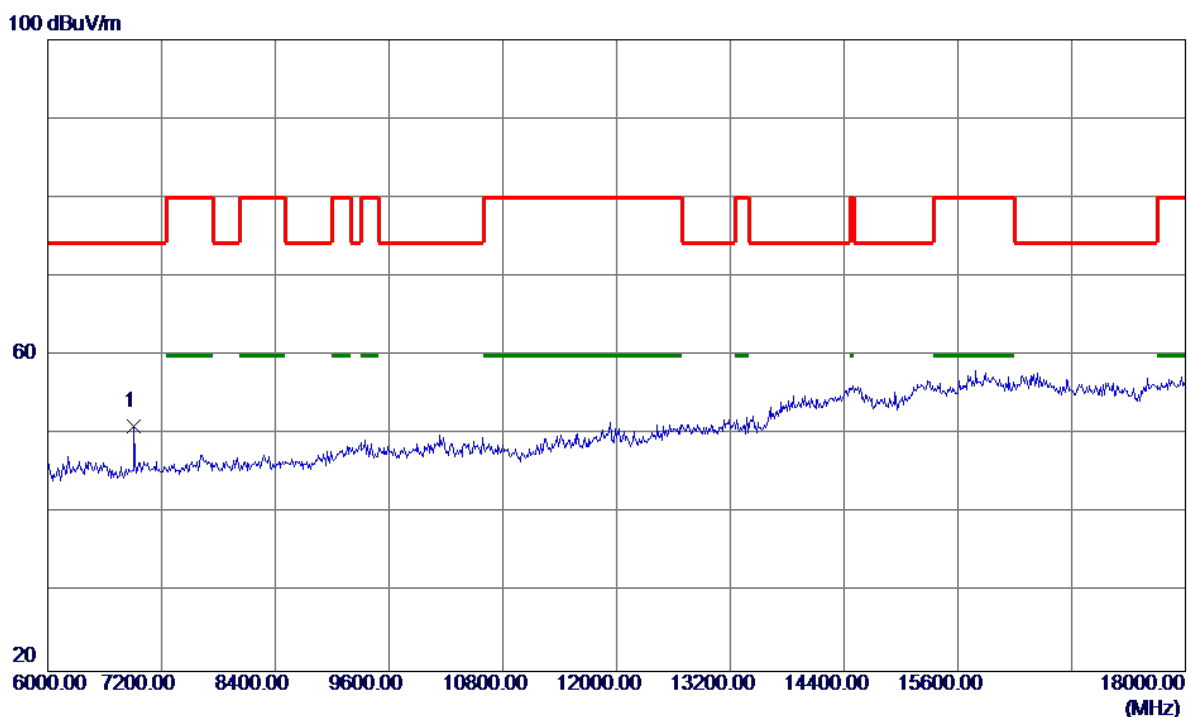


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6912.0000    | 38.15                      | 12.93                   | 51.08                     | 74.30           | -23.22       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical

100 dBuV/m

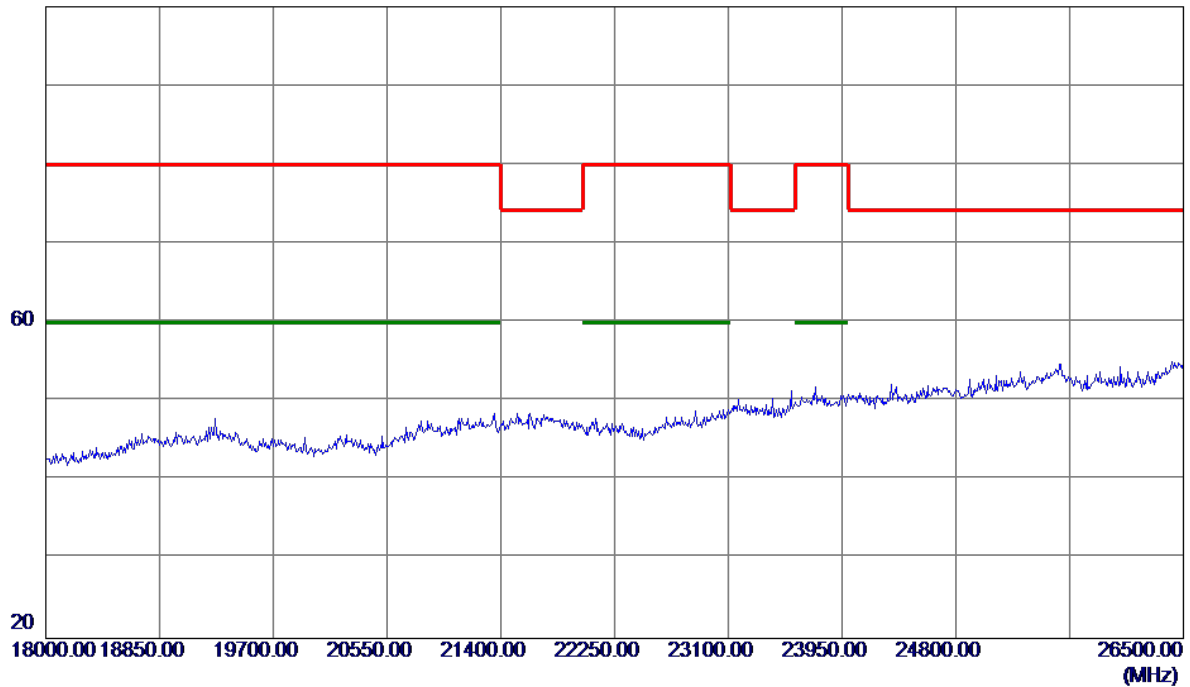


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Vertical

100 dBuV/m

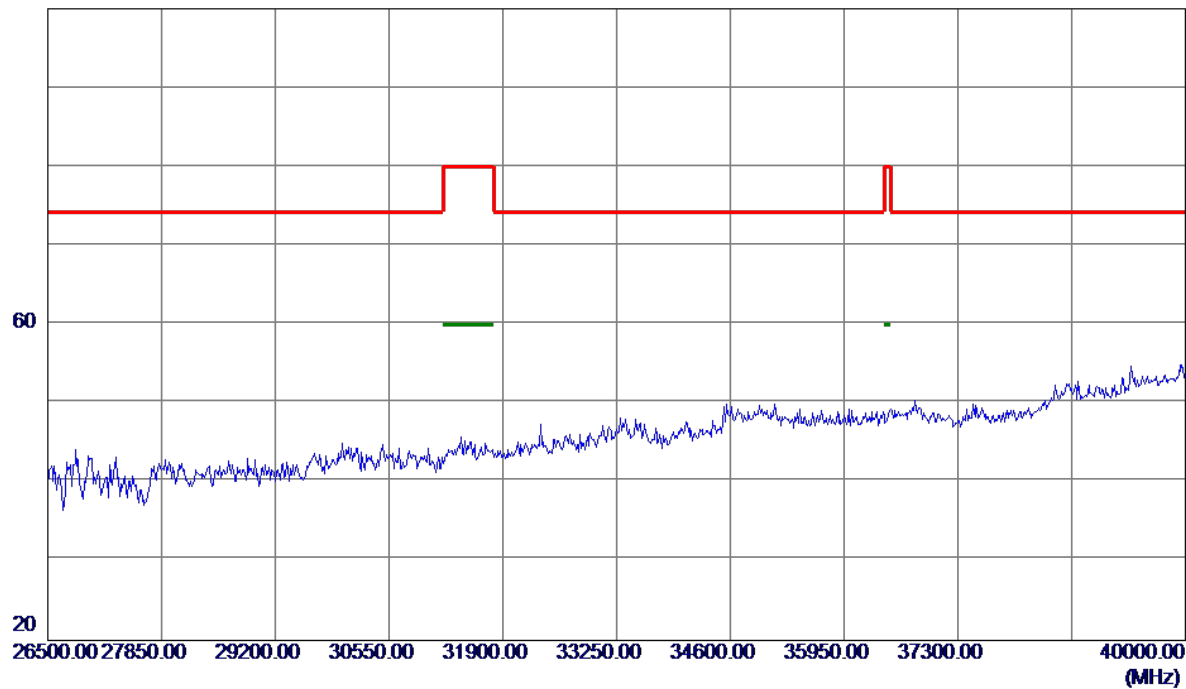


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal

130 dBuV/m

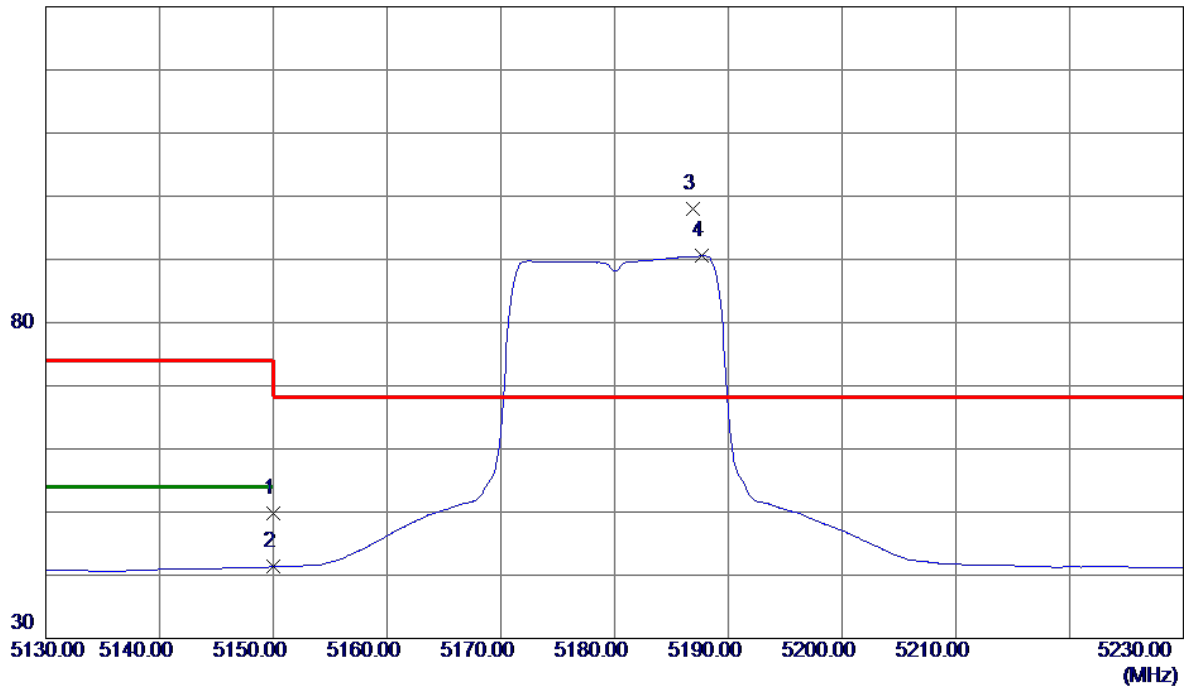


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 8.66                       | 41.10                   | 49.76                     | 74.00           | -24.24       | Peak     |          |
| 2   | 5150.0000    | 0.22                       | 41.10                   | 41.32                     | 54.00           | -12.68       | AVG      |          |
| 3 * | 5186.9000    | 56.78                      | 41.29                   | 98.07                     | 68.30           | 29.77        | Peak     | No Limit |
| 4   | 5187.7000    | 49.25                      | 41.29                   | 90.54                     | 999.00          | -908.46      | AVG      | No Limit |



|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal

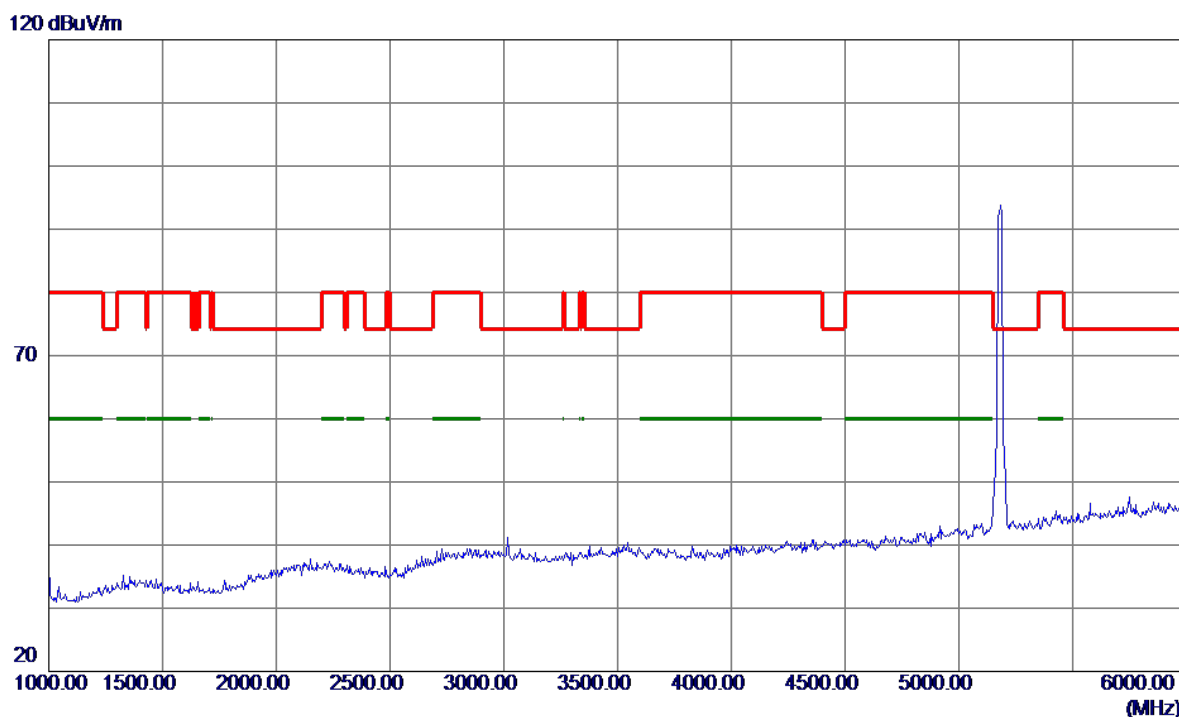


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal

100 dBuV/m

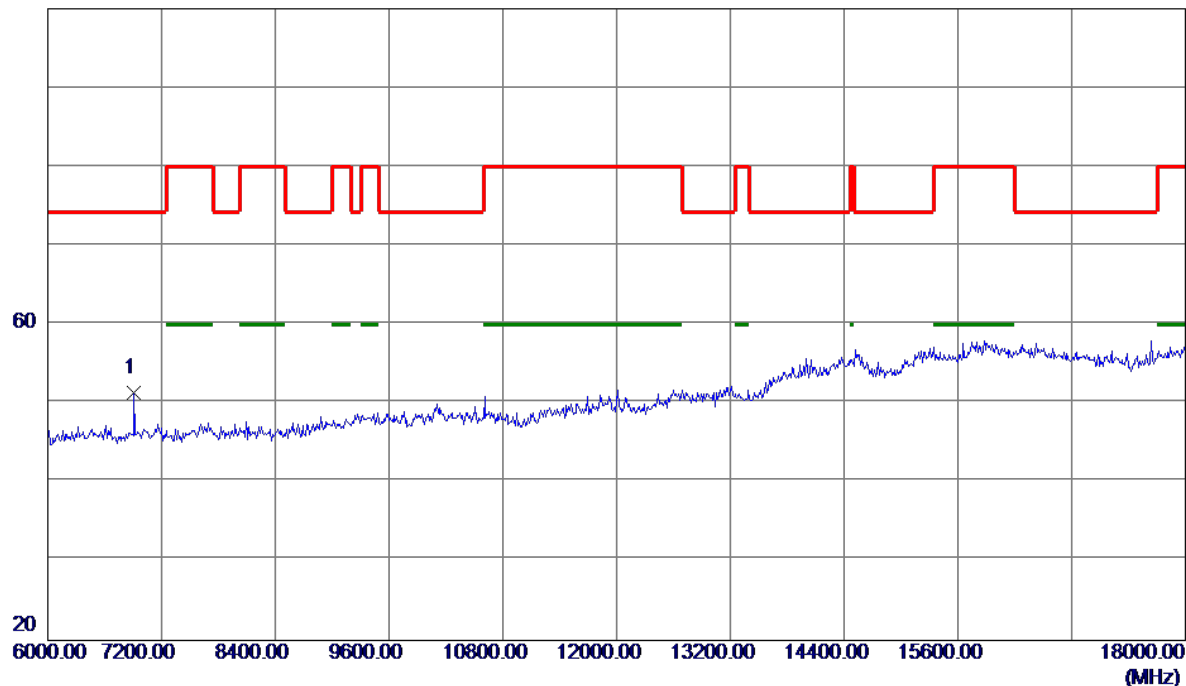


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6912.0000    | 38.40                      | 12.93                   | 51.33                     | 74.30           | -22.97       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal

100 dBuV/m

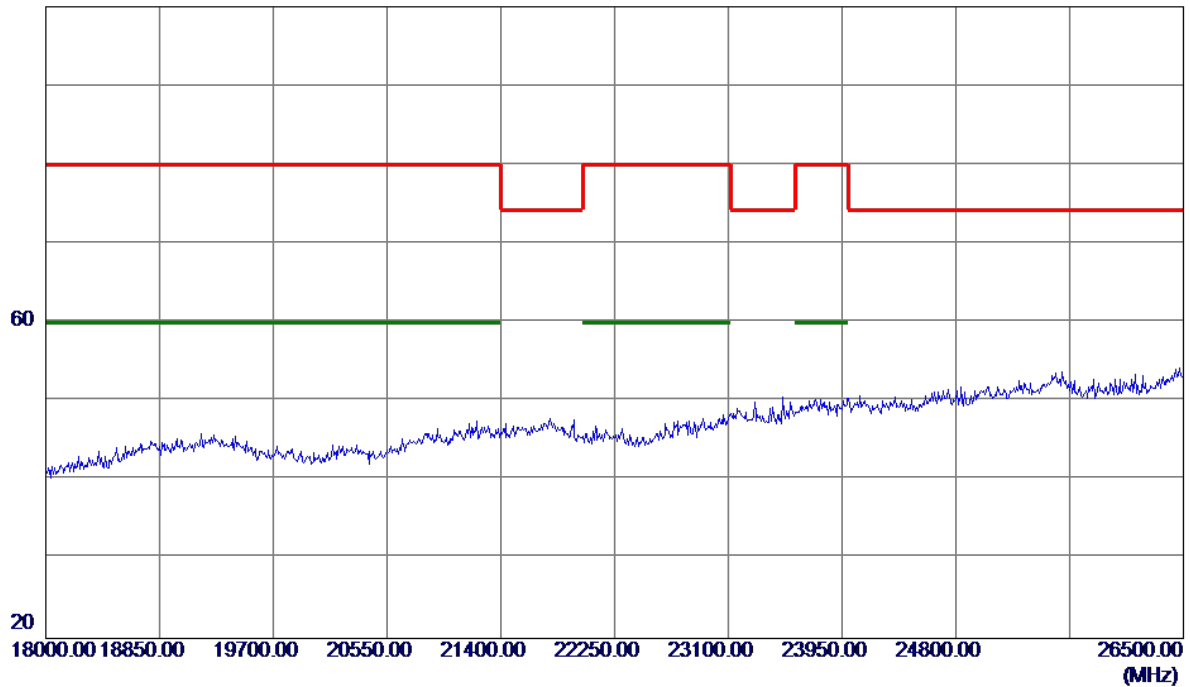


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5180MHz |

### Horizontal


100 dBuV/m

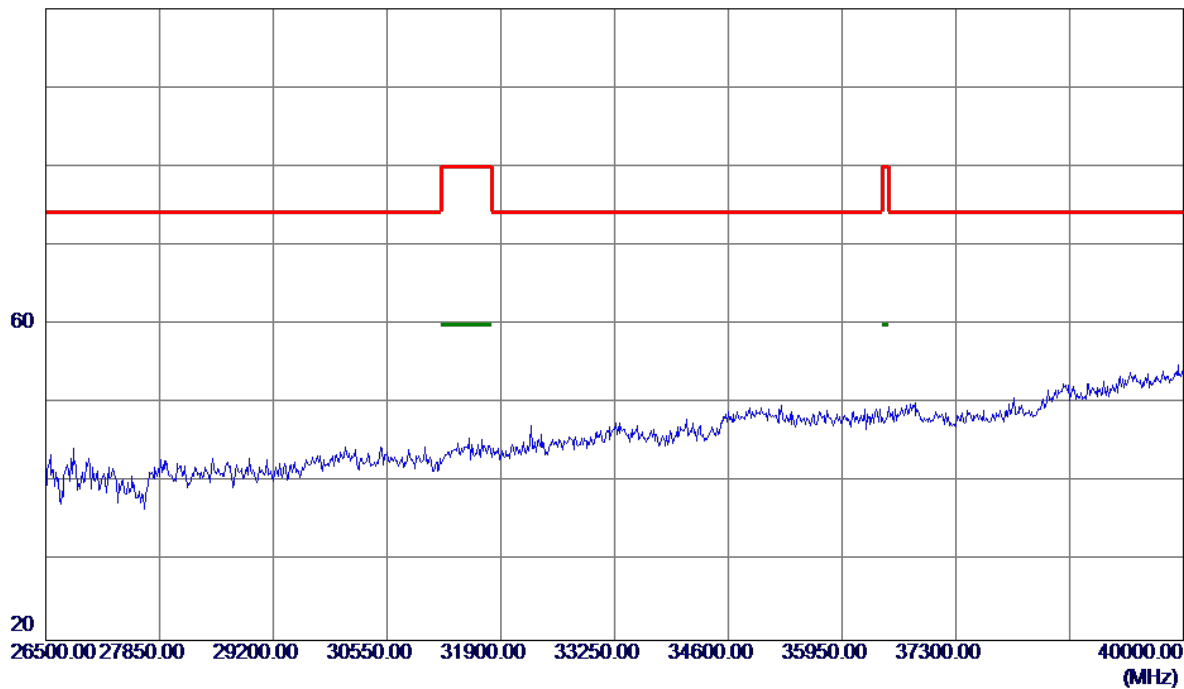

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical

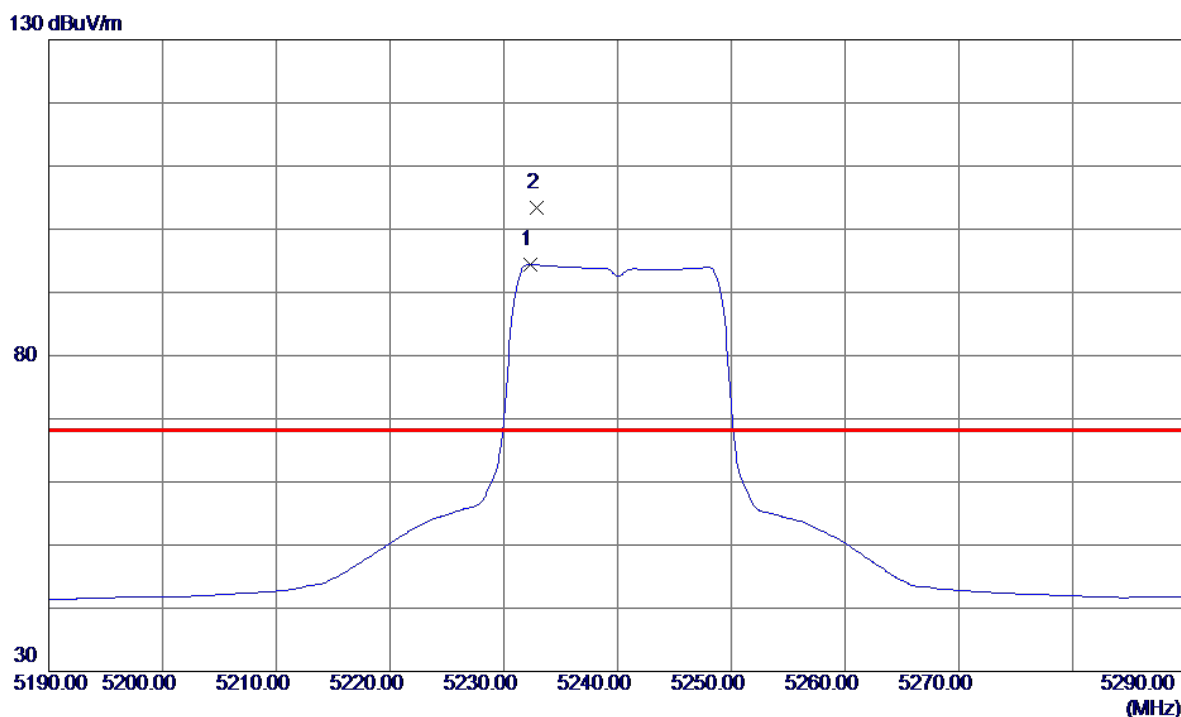


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5232.3000    | 52.88                      | 41.52                   | 94.40                     | 999.00          | -904.60      | AVG      | No Limit |
| 2 * | 5232.9000    | 61.79                      | 41.52                   | 103.31                    | 68.30           | 35.01        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical


120 dBuV/m

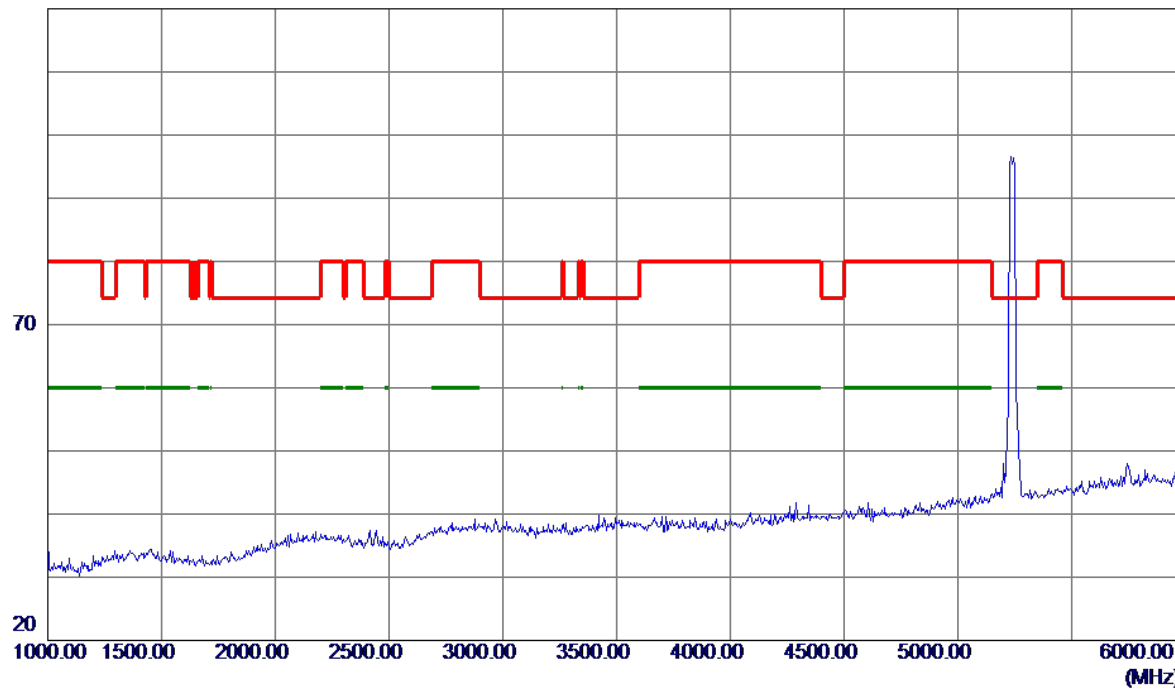

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical

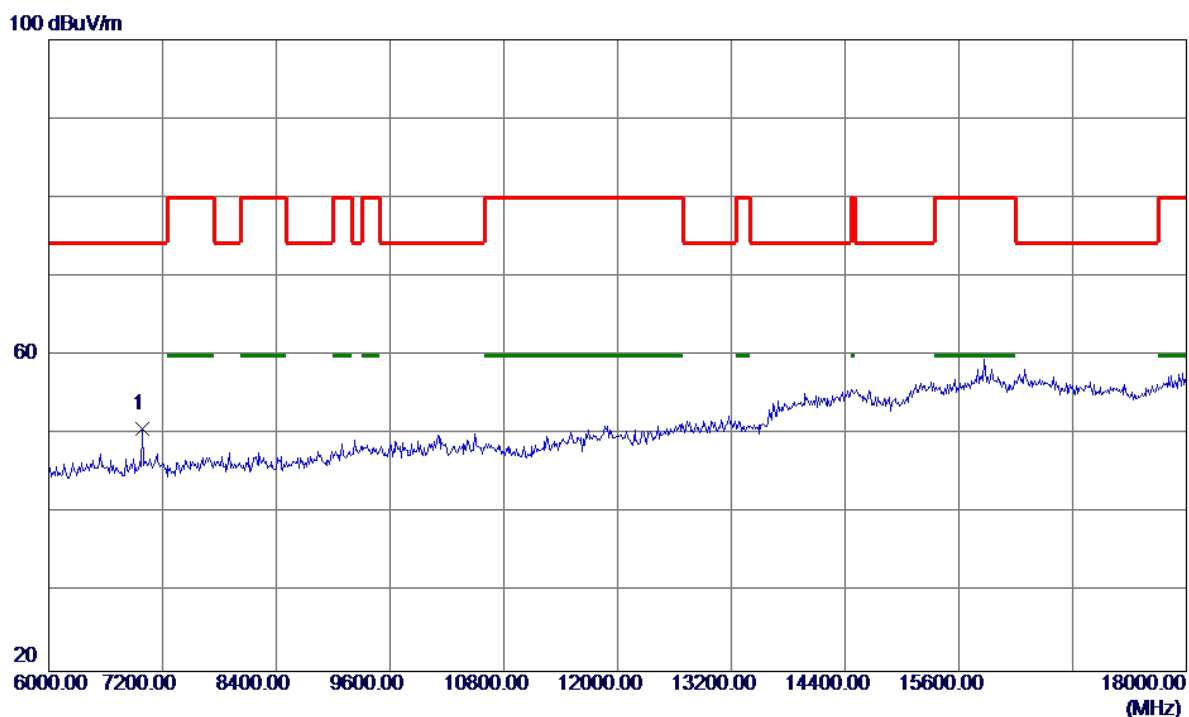


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6984.0000    | 37.73                      | 12.97                   | 50.70                     | 74.30           | -23.60       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical

100 dBuV/m

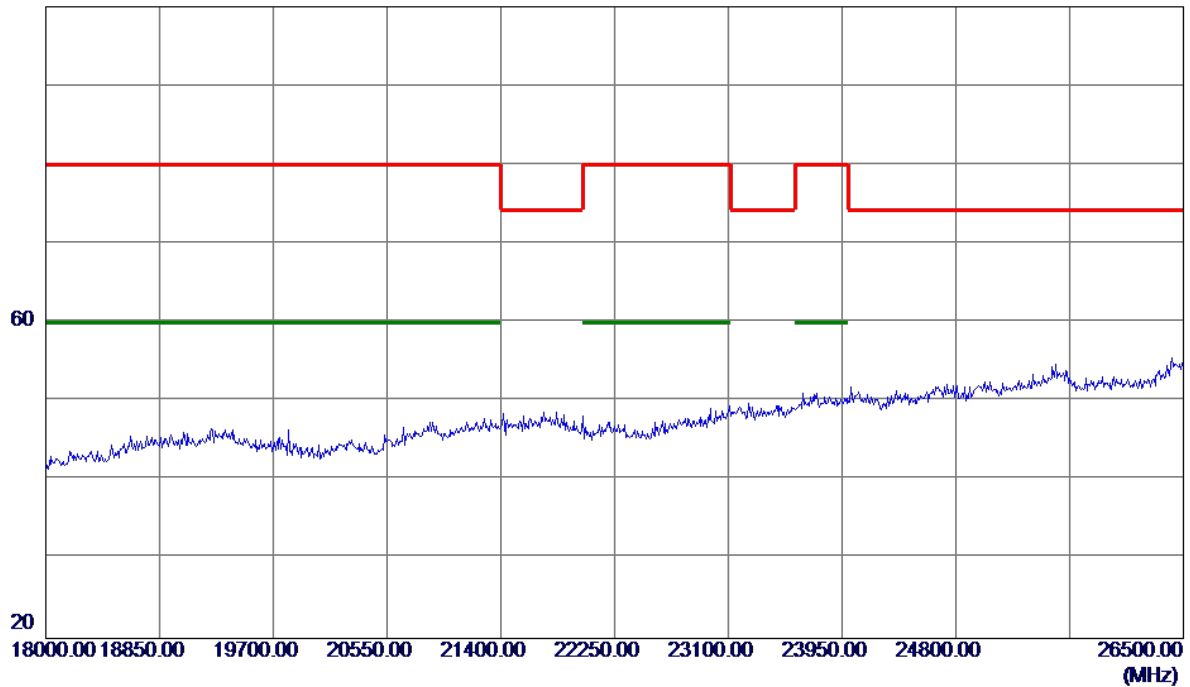


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Vertical

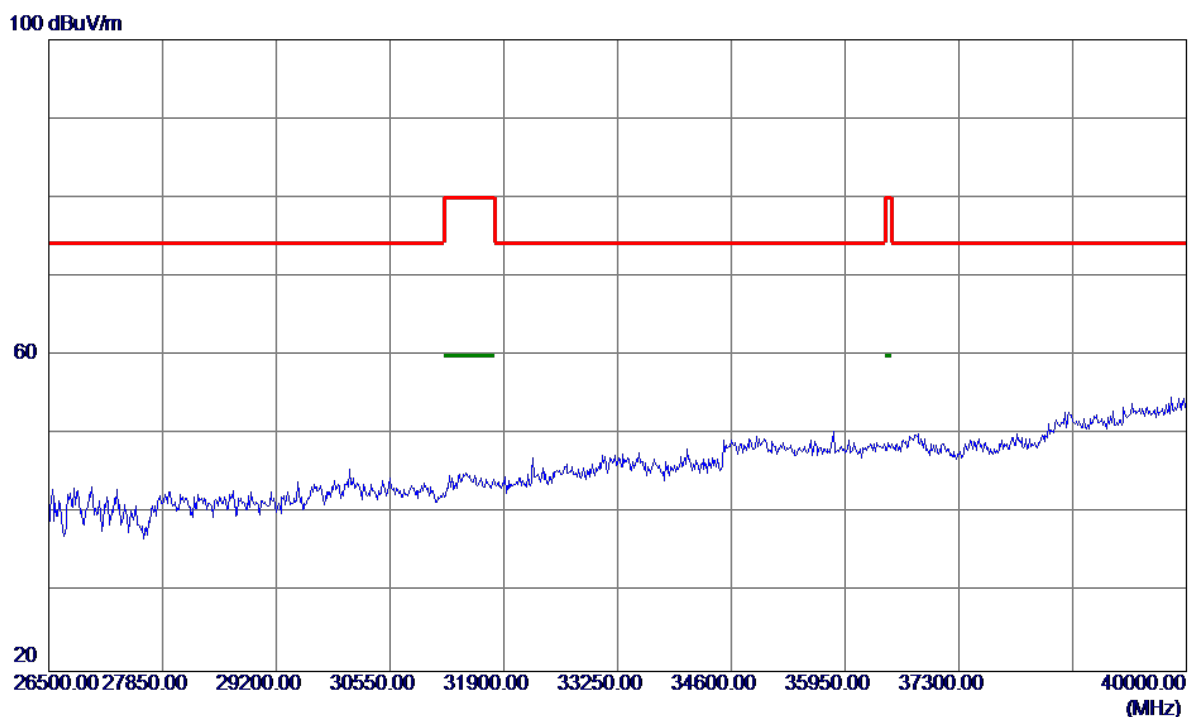


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Horizontal

130 dBuV/m

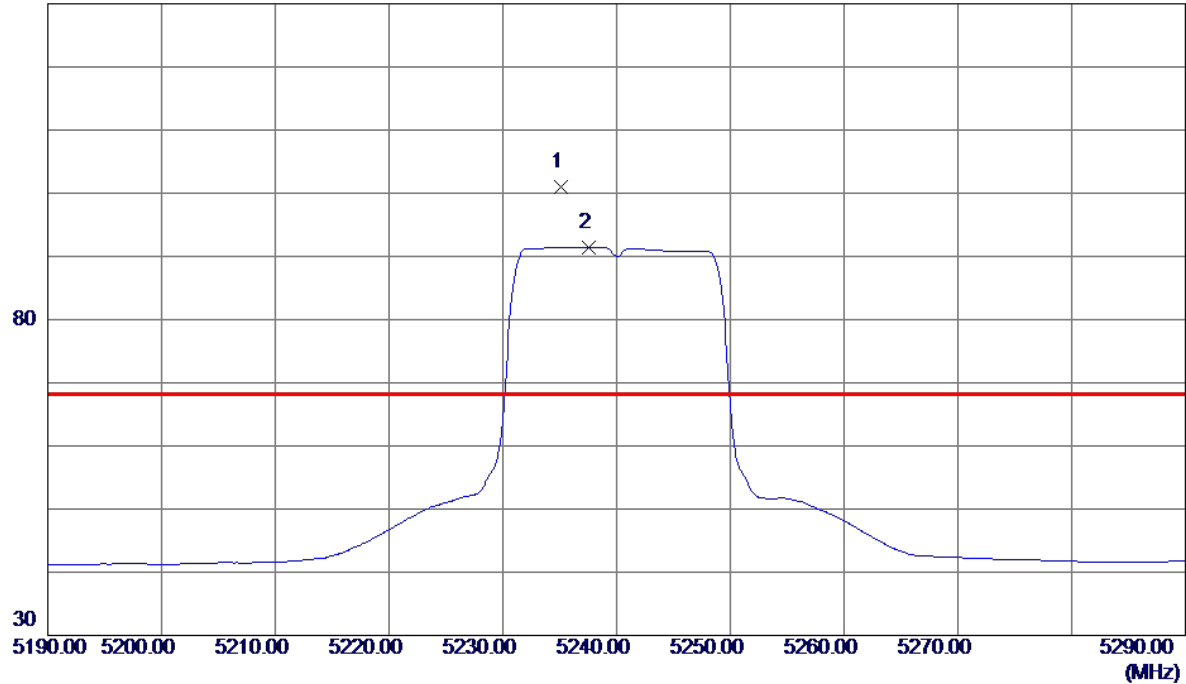

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5235.1000    | 59.45                      | 41.53                   | 100.98                    | 68.30           | 32.68        | Peak     | No Limit |
| 2   | 5237.6000    | 49.88                      | 41.55                   | 91.43                     | 999.00          | -907.57      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Horizontal

120 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Horizontal

100 dBuV/m

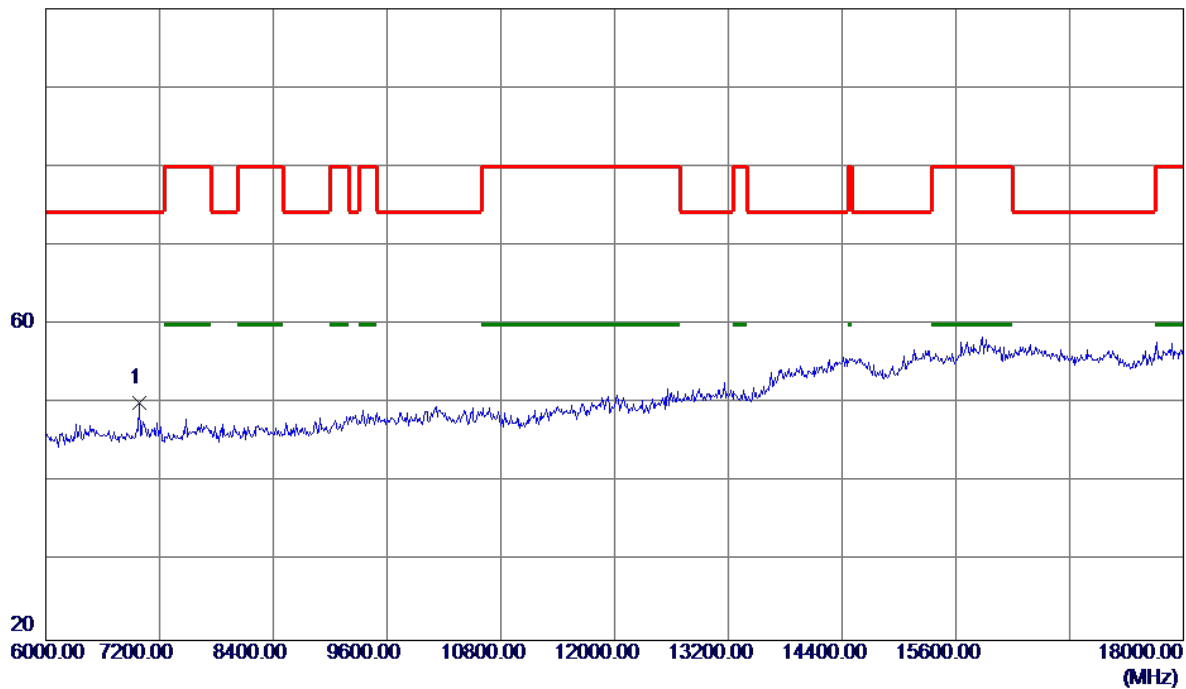


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6984.0000    | 37.17                      | 12.97                   | 50.14                     | 74.30           | -24.16       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Horizontal

100 dBuV/m

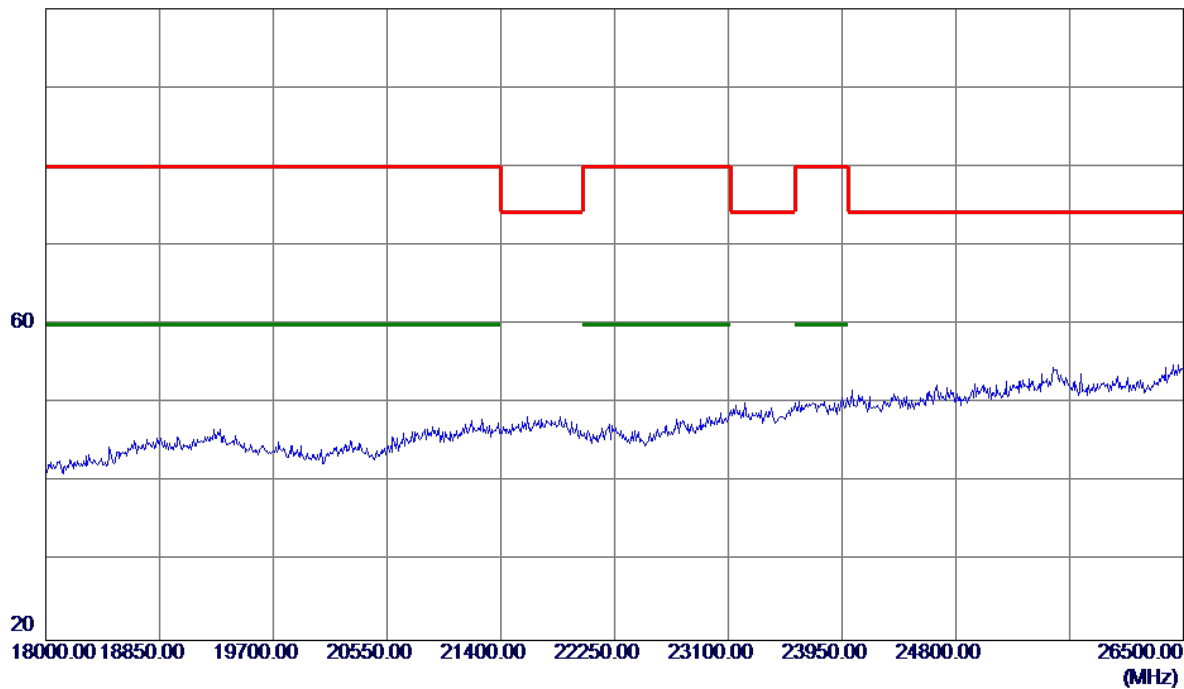

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N20 Mode 5240MHz |

### Horizontal

100 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

130 dBuV/m

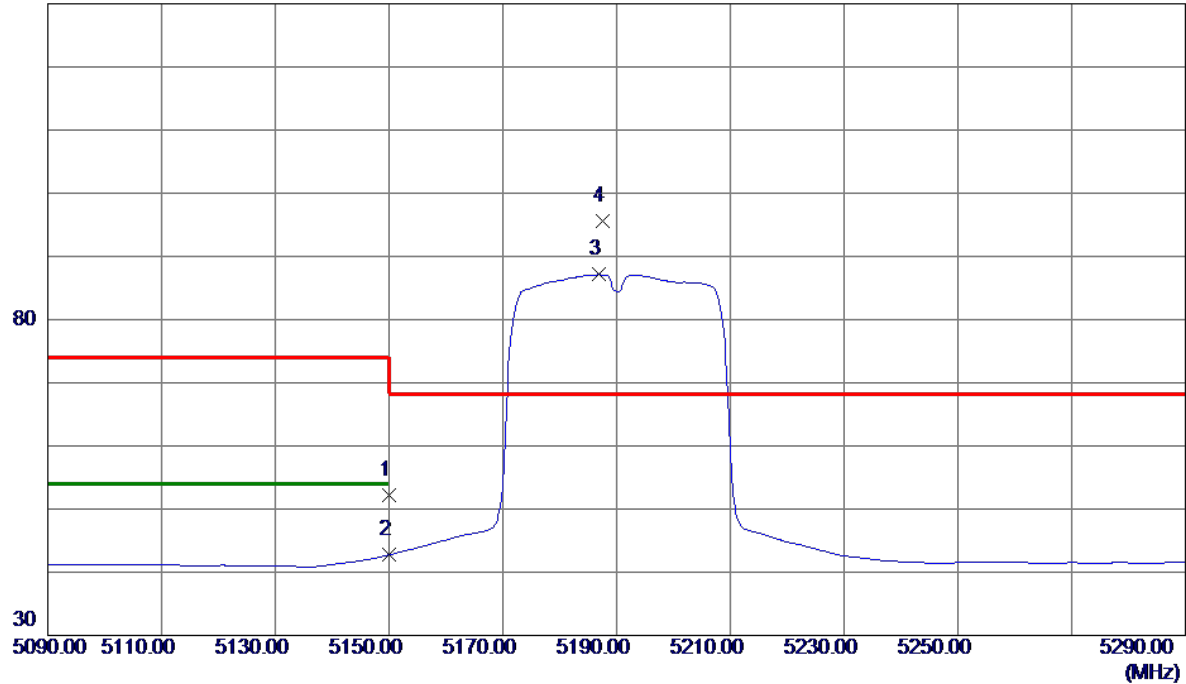


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 11.09                      | 41.10                   | 52.19                     | 74.00           | -21.81       | Peak     |          |
| 2   | 5150.0000    | 1.65                       | 41.10                   | 42.75                     | 54.00           | -11.25       | AVG      |          |
| 3   | 5186.8000    | 45.82                      | 41.29                   | 87.11                     | 999.00          | -911.89      | AVG      | No Limit |
| 4 * | 5187.6000    | 54.31                      | 41.29                   | 95.60                     | 68.30           | 27.30        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

120 dBuV/m

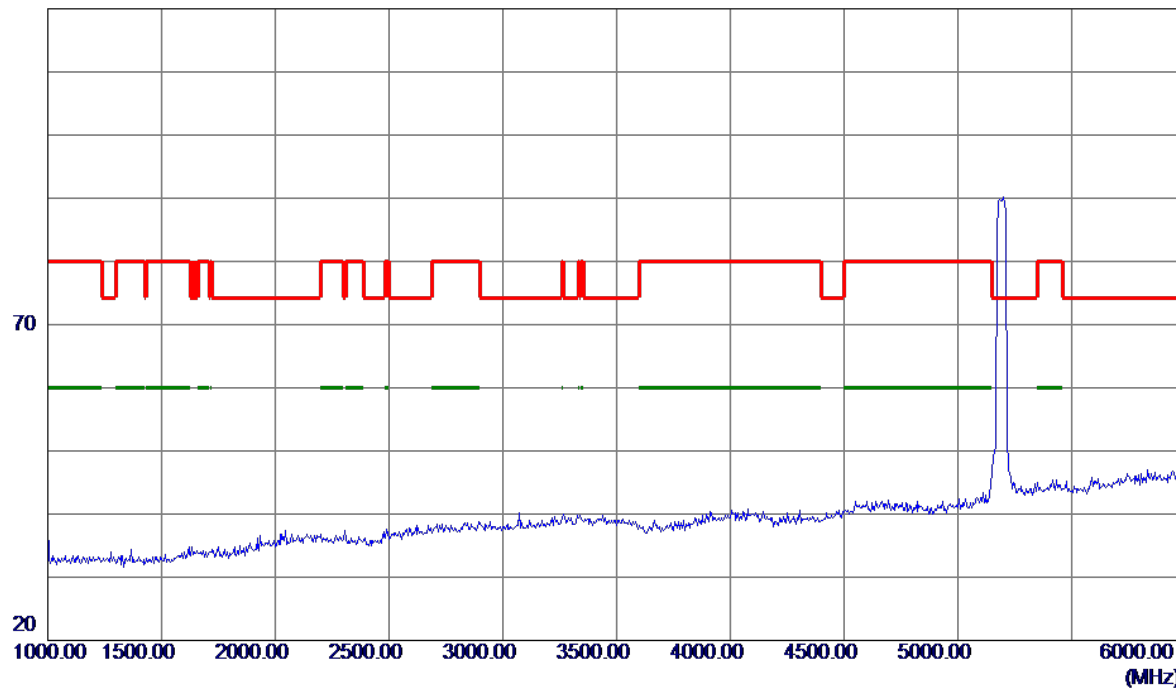


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

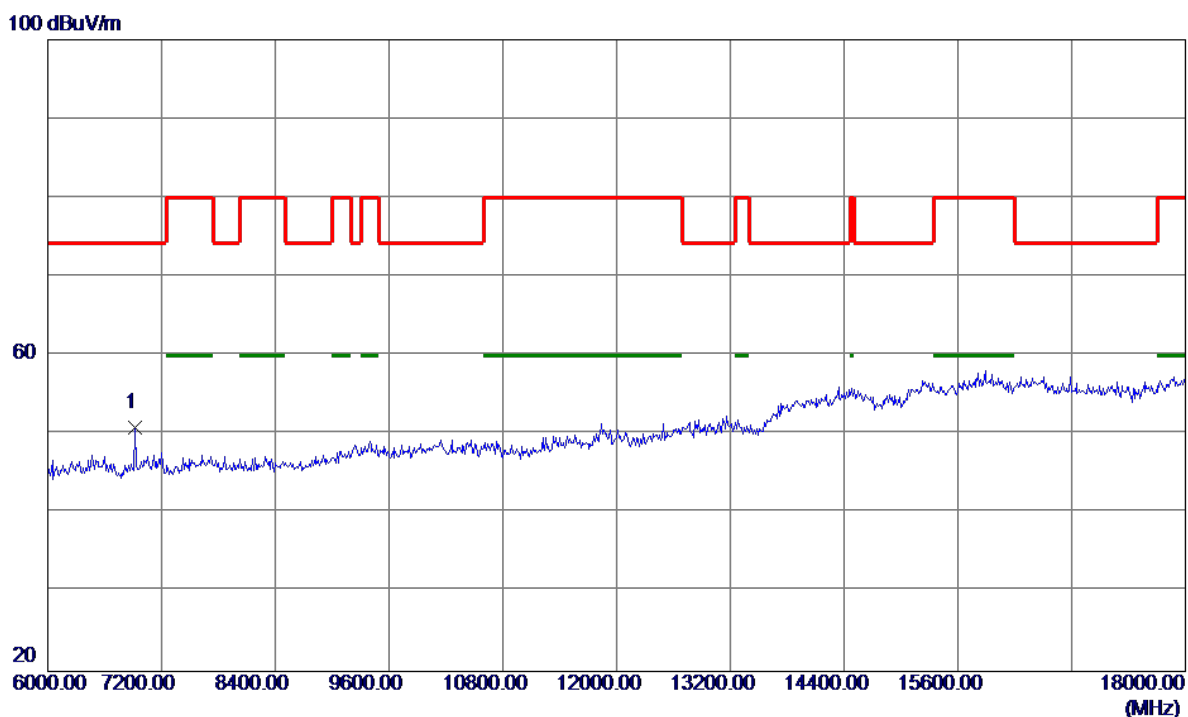


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6924.0000    | 37.96                      | 12.94                   | 50.90                     | 74.30           | -23.40       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

100 dBuV/m

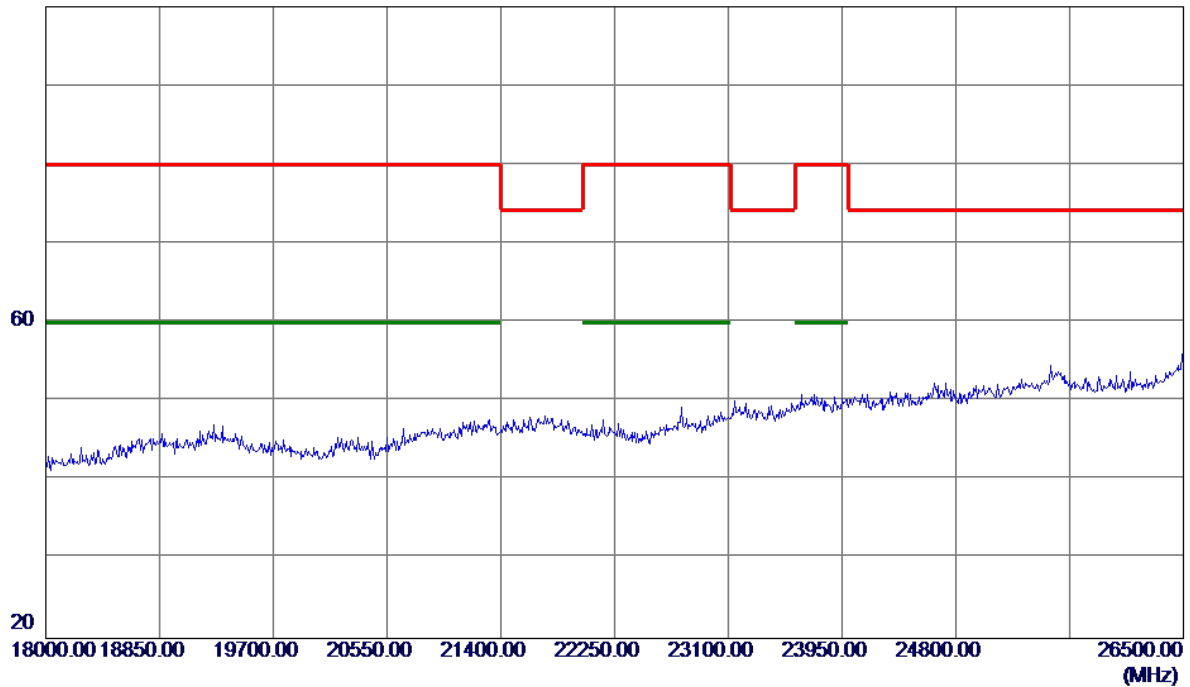


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Vertical

100 dBuV/m

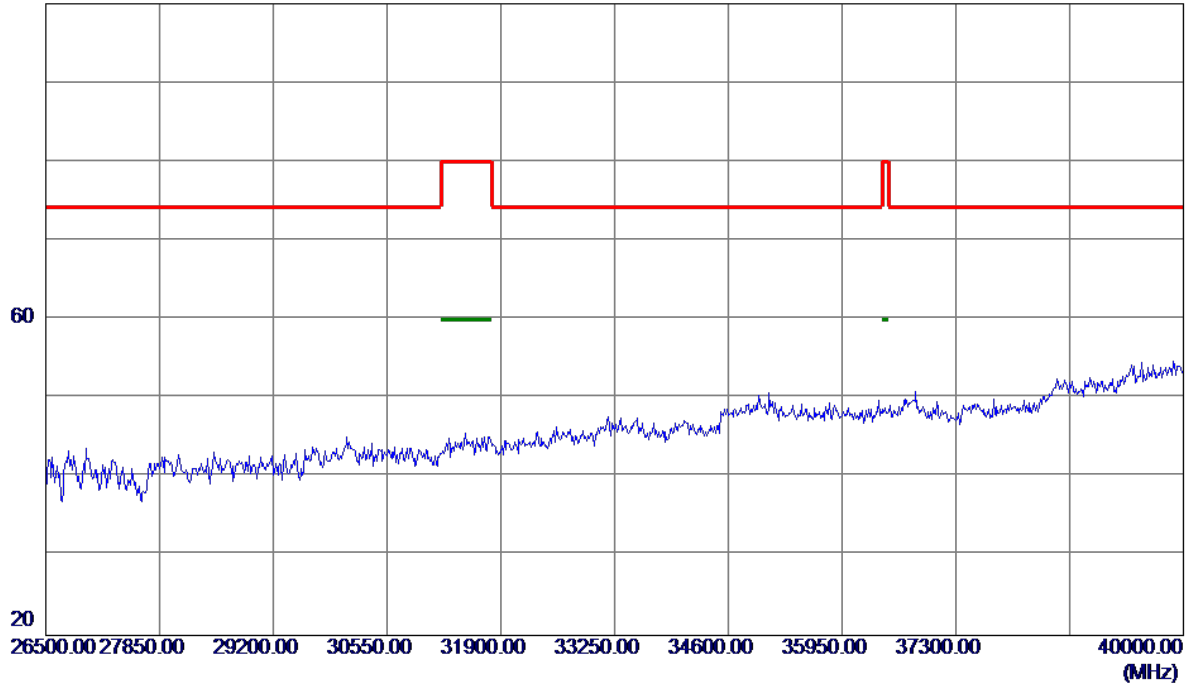


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal

130 dBuV/m

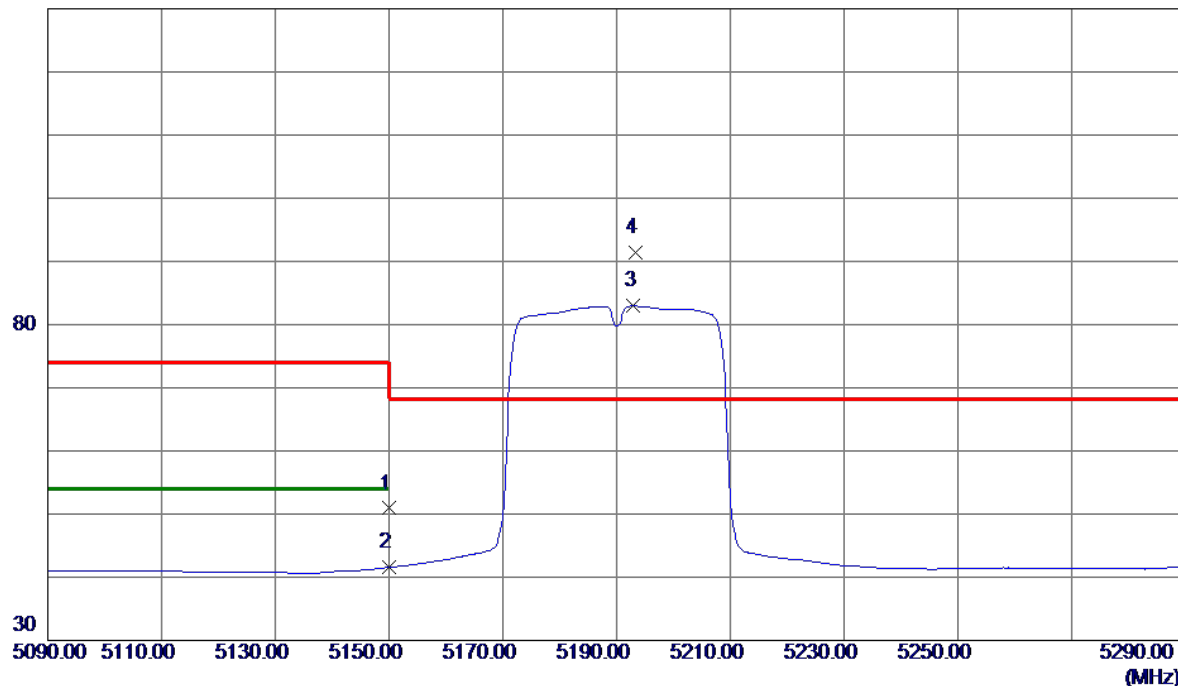


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5150.0000    | 9.80                       | 41.10                   | 50.90                     | 74.00           | -23.10       | Peak     |          |
| 2   | 5150.0000    | 0.46                       | 41.10                   | 41.56                     | 54.00           | -12.44       | AVG      |          |
| 3   | 5193.0000    | 41.63                      | 41.32                   | 82.95                     | 999.00          | -916.05      | AVG      | No Limit |
| 4 * | 5193.4000    | 50.04                      | 41.32                   | 91.36                     | 68.30           | 23.06        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal


120 dBuV/m

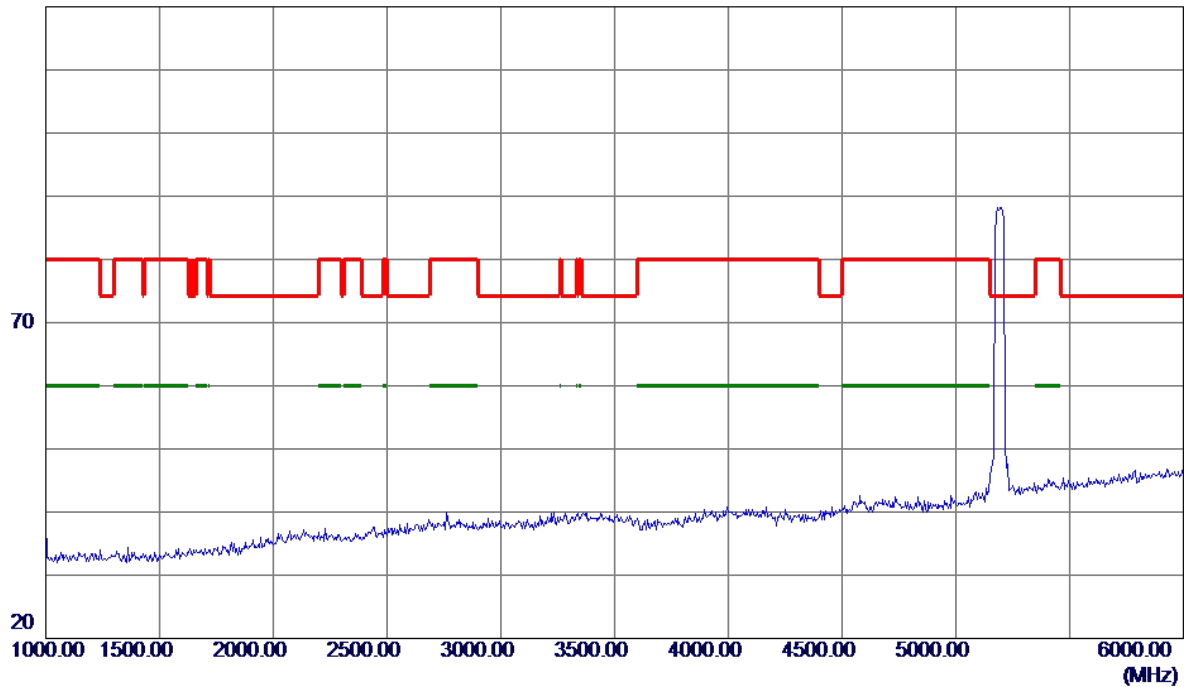

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal

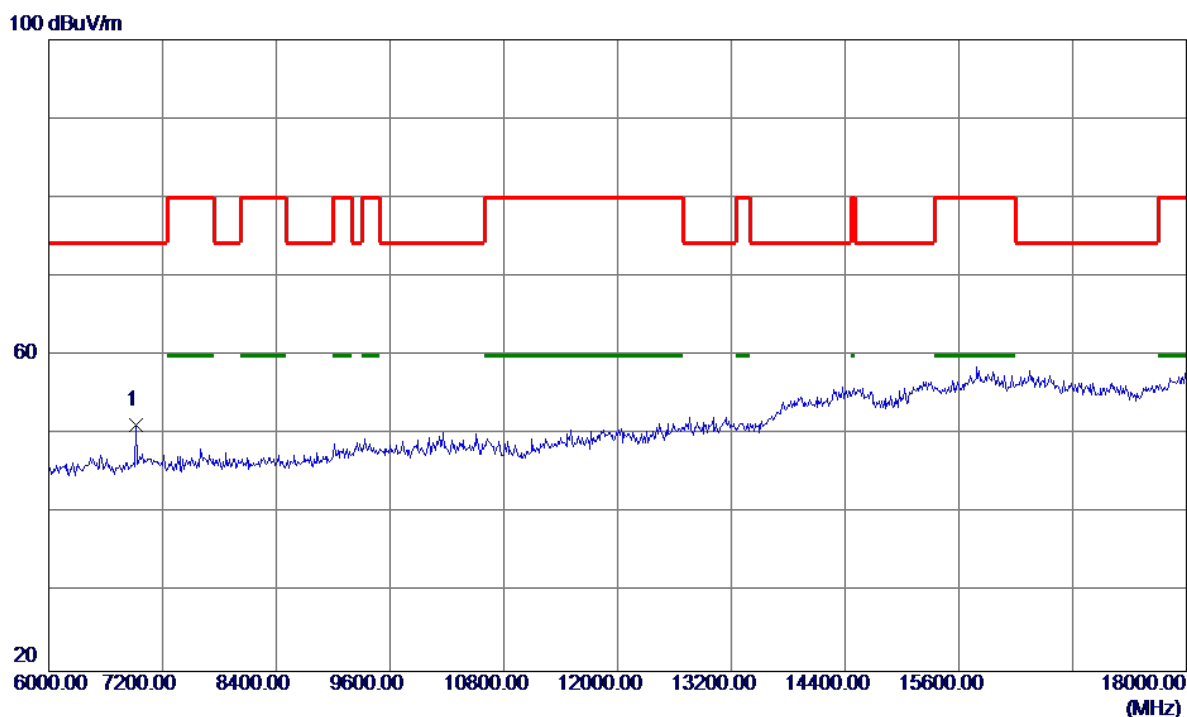


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6924.0000    | 38.28                      | 12.94                   | 51.22                     | 74.30           | -23.08       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal

100 dBuV/m

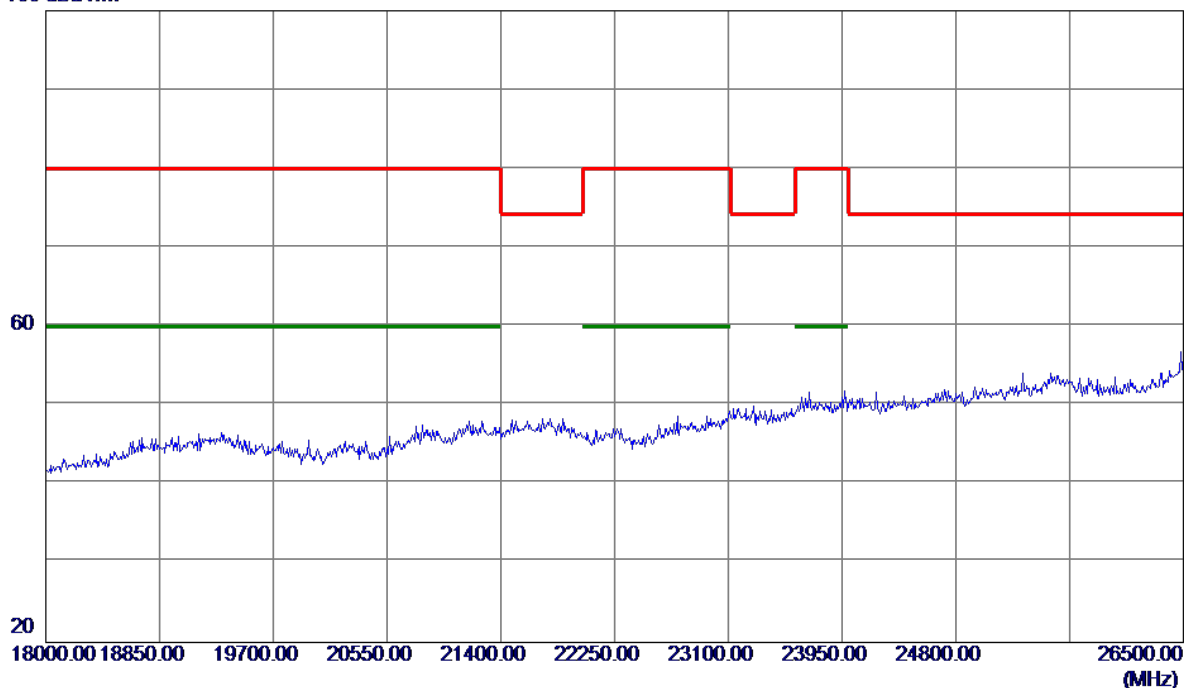


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5190MHz |

### Horizontal

100 dBuV/m

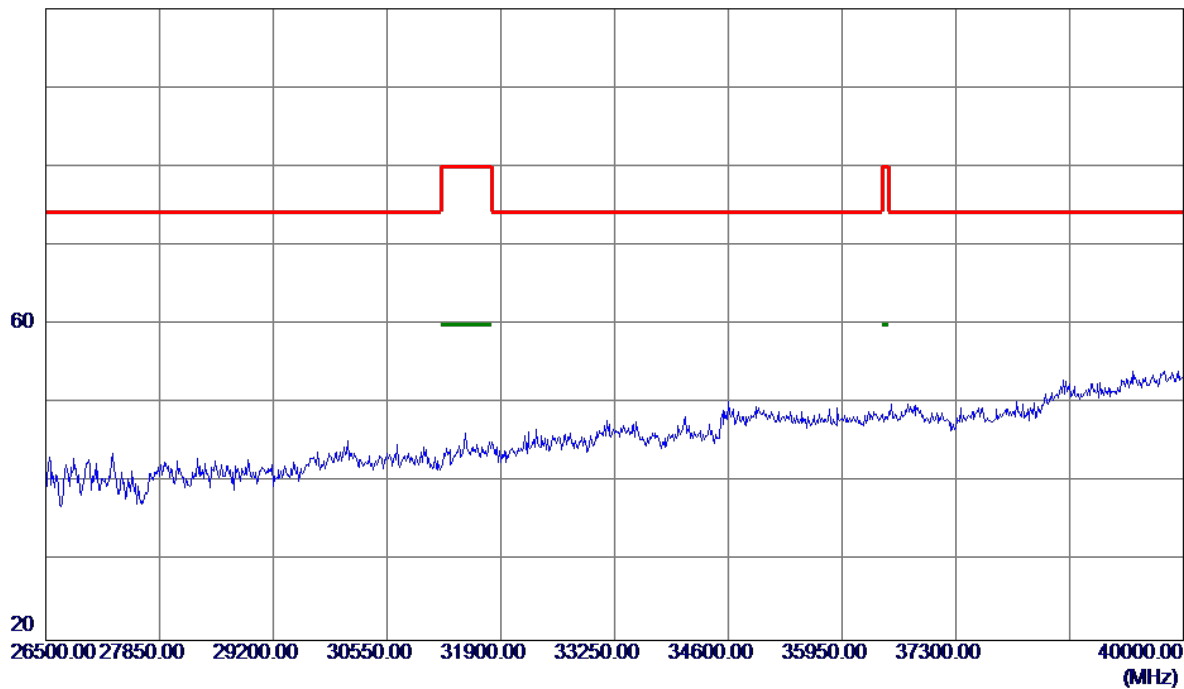


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical

130 dBuV/m

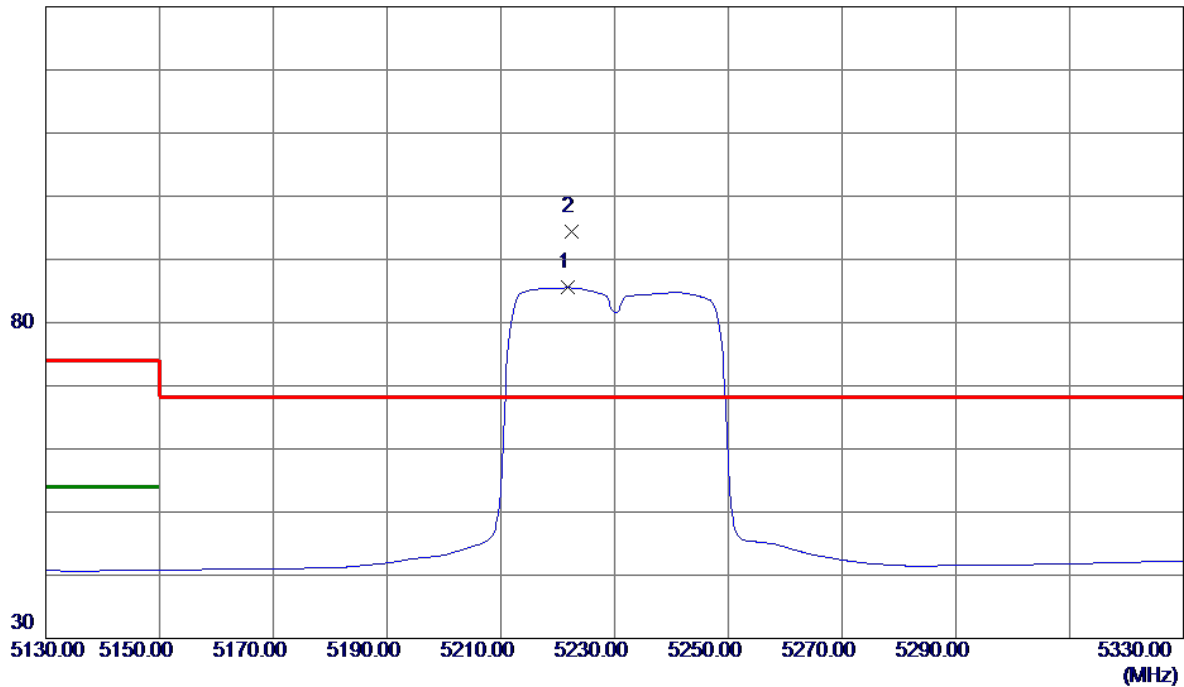


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5221.8000    | 44.05                      | 41.47                   | 85.52                     | 999.00          | -913.48      | AVG      | No Limit |
| 2 * | 5222.4000    | 52.85                      | 41.47                   | 94.32                     | 68.30           | 26.02        | Peak     | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical

120 dBuV/m

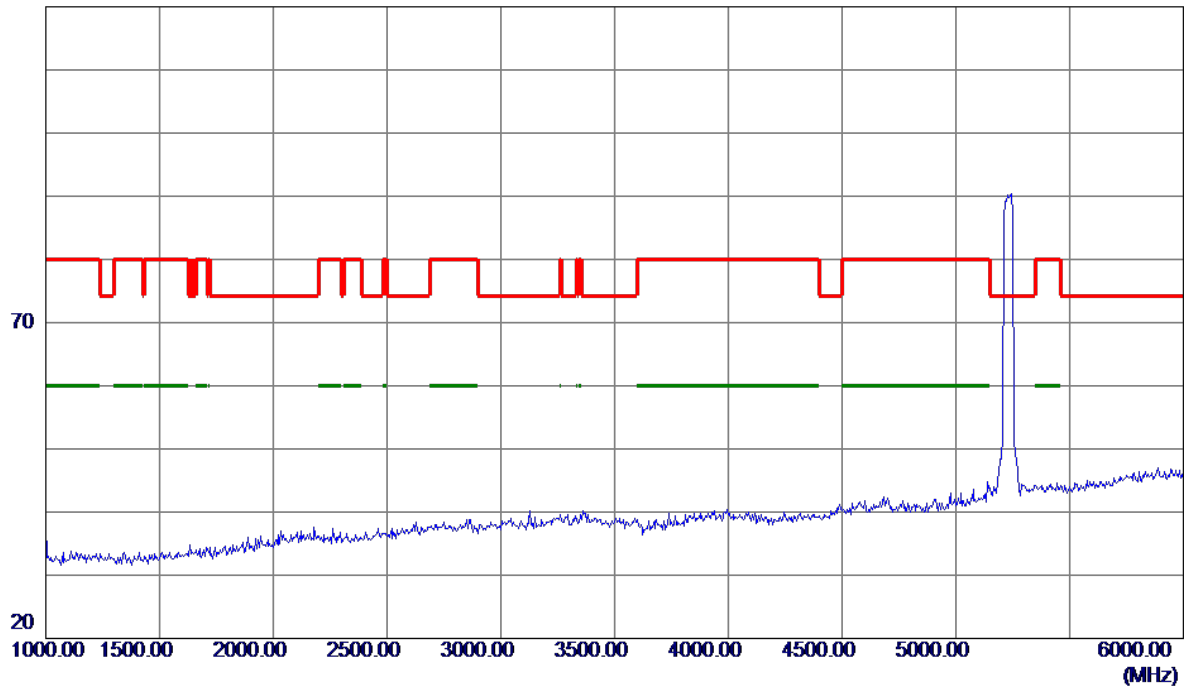


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical

100 dBuV/m

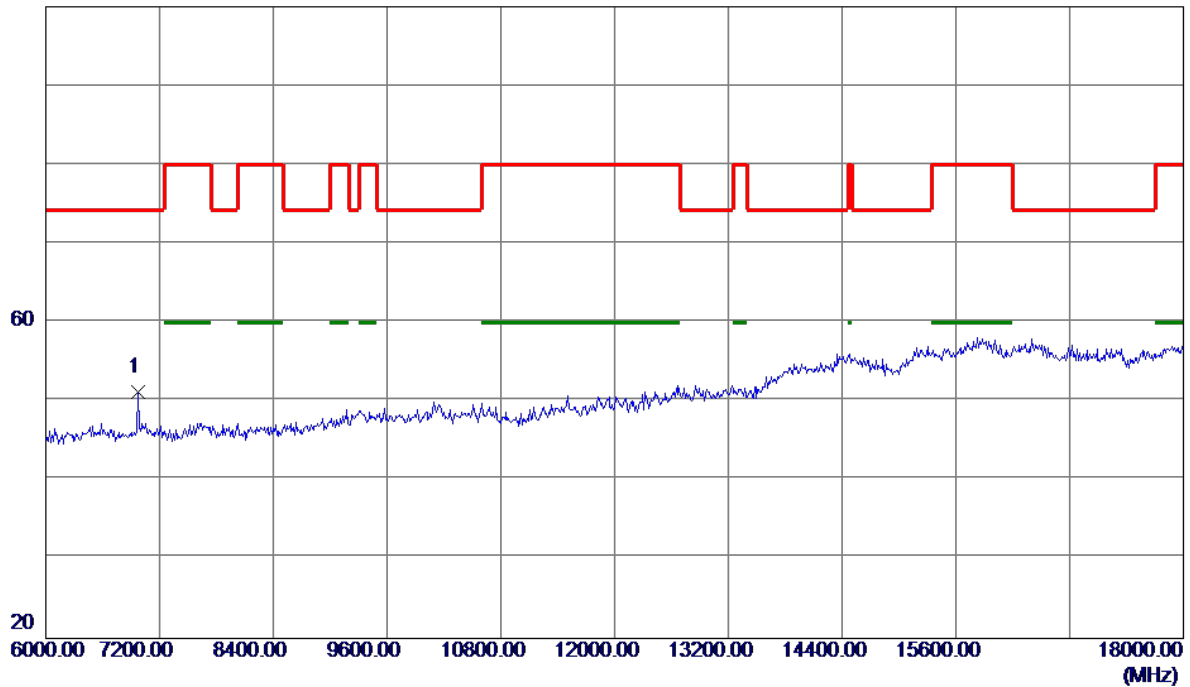


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6972.0000    | 38.24                      | 12.97                   | 51.21                     | 74.30           | -23.09       | Peak     |         |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical


100 dBuV/m

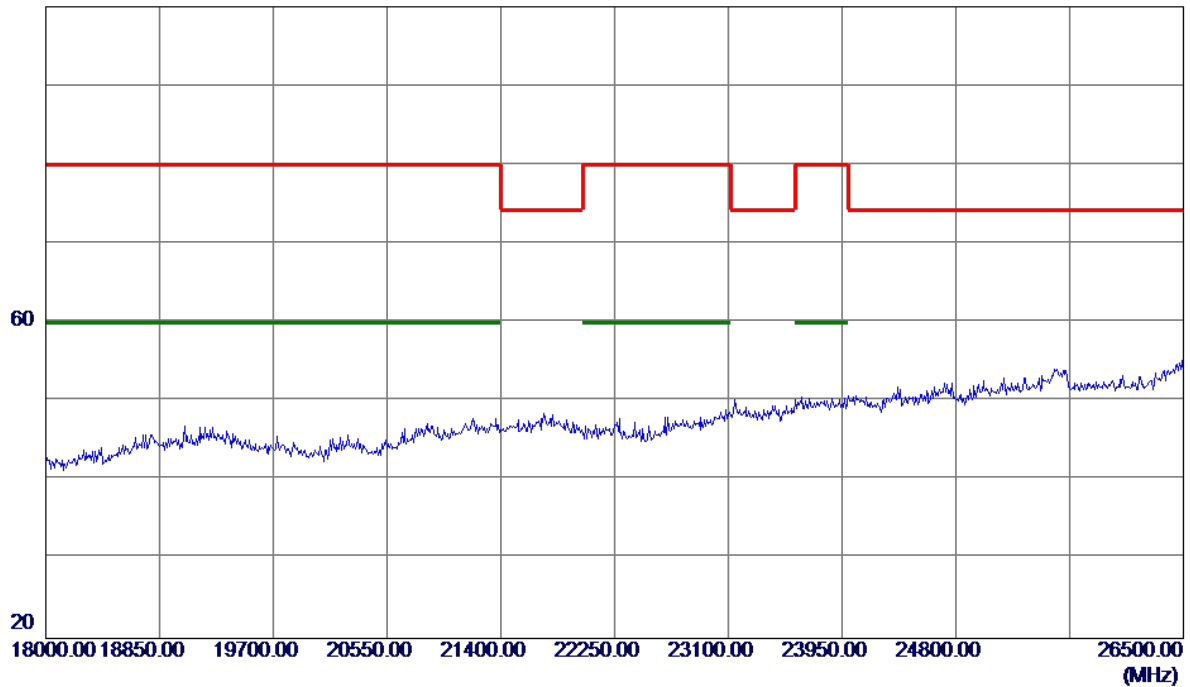

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Vertical

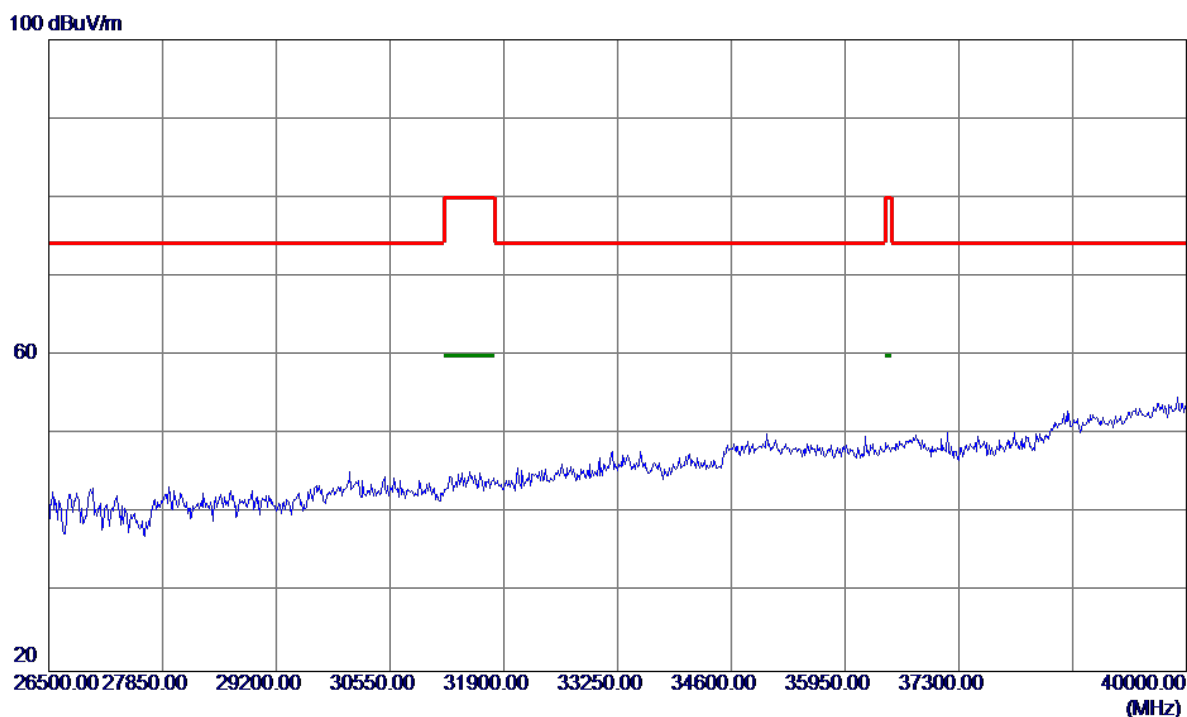


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal

130 dBuV/m

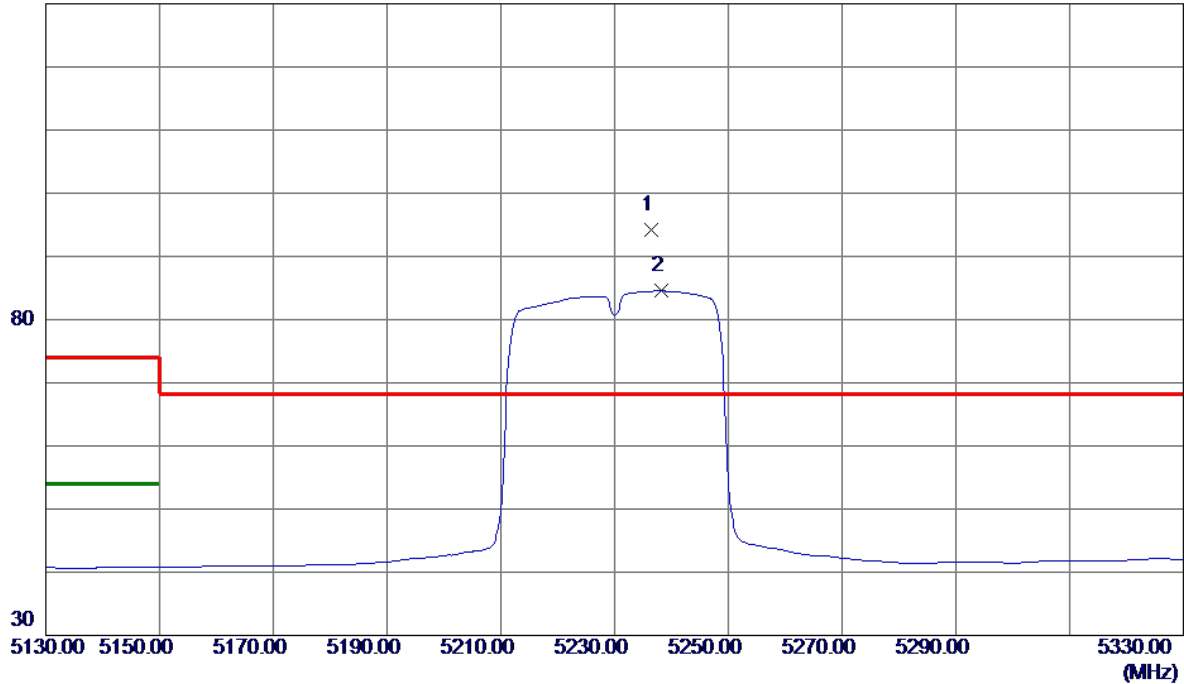


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5236.4000    | 52.65                      | 41.54                   | 94.19                     | 68.30           | 25.89        | Peak     | No Limit |
| 2   | 5238.2000    | 42.98                      | 41.55                   | 84.53                     | 999.00          | -914.47      | AVG      | No Limit |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal


120 dBuV/m

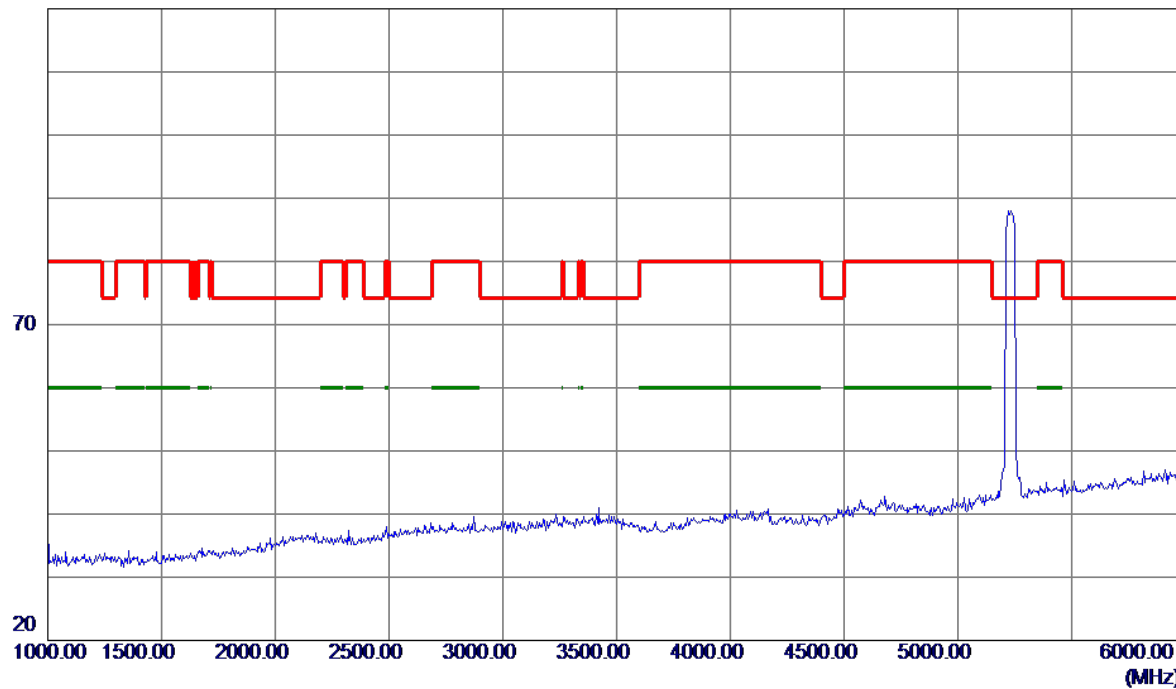

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal

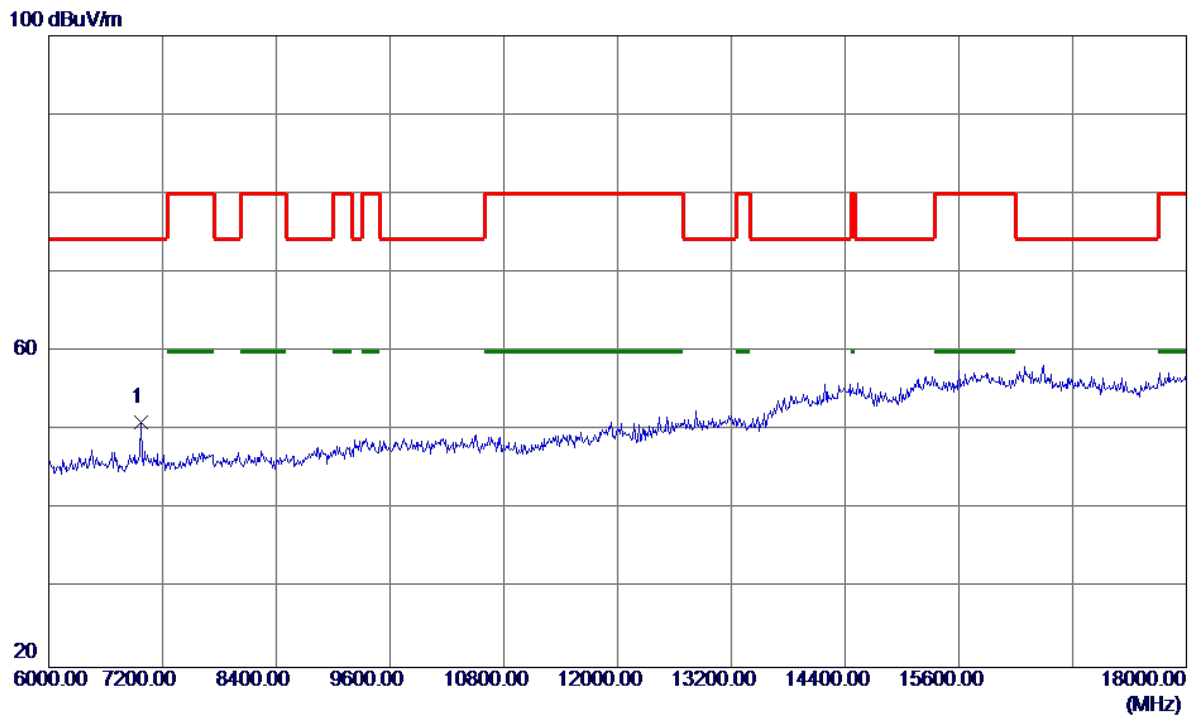


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 6972.0000    | 38.09                      | 12.97                   | 51.06                     | 74.30           | -23.24       | Peak     |         |



|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal

100 dBuV/m

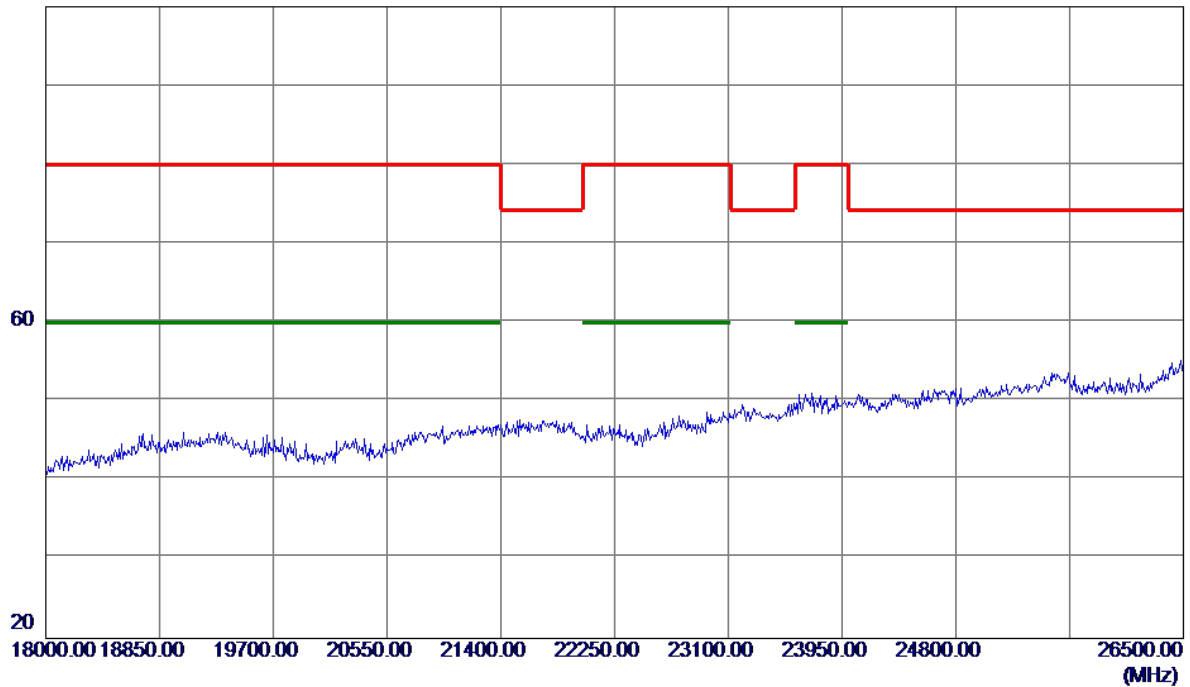

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                             |
|------------------|-----------------------------|
| Orthogonal Axis: | X                           |
| Test Mode:       | UNII-1/ TX N40 Mode 5230MHz |

### Horizontal


100 dBuV/m



| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

Vertical

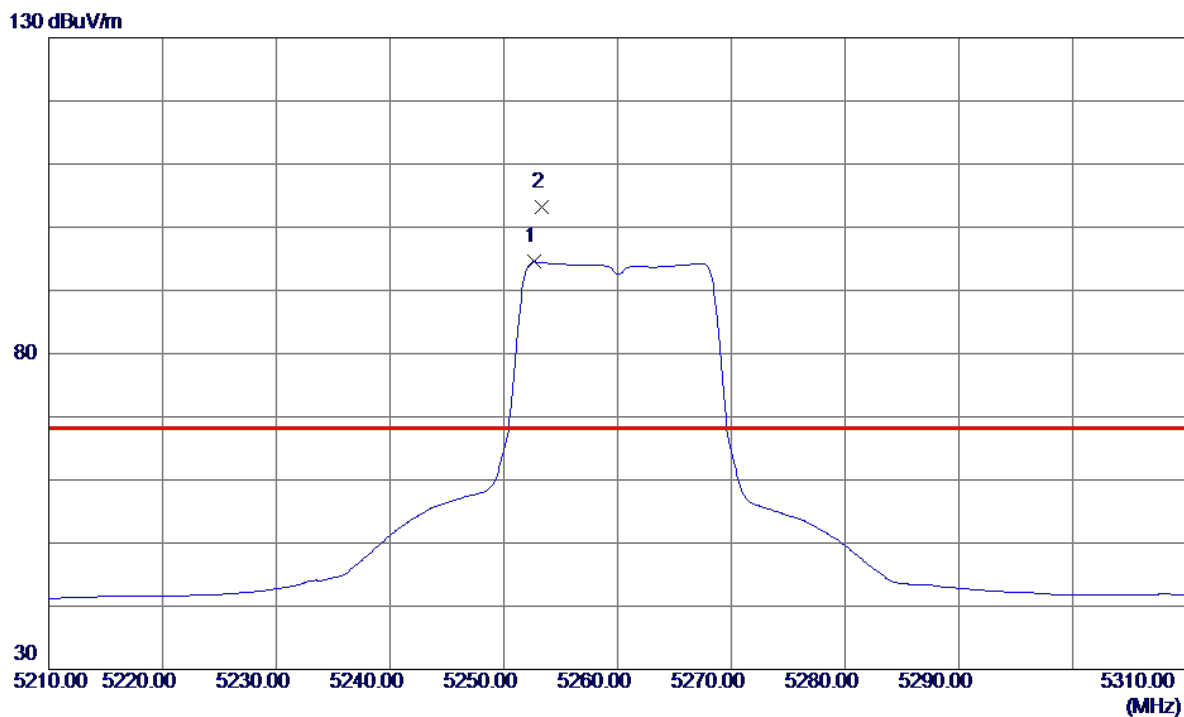


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5252.7000    | 52.89                      | 41.62                   | 94.51                     | 999.00          | -904.49      | AVG      | No Limit |
| 2 * | 5253.3000    | 61.56                      | 41.63                   | 103.19                    | 68.30           | 34.89        | Peak     | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Vertical

120 dBuV/m

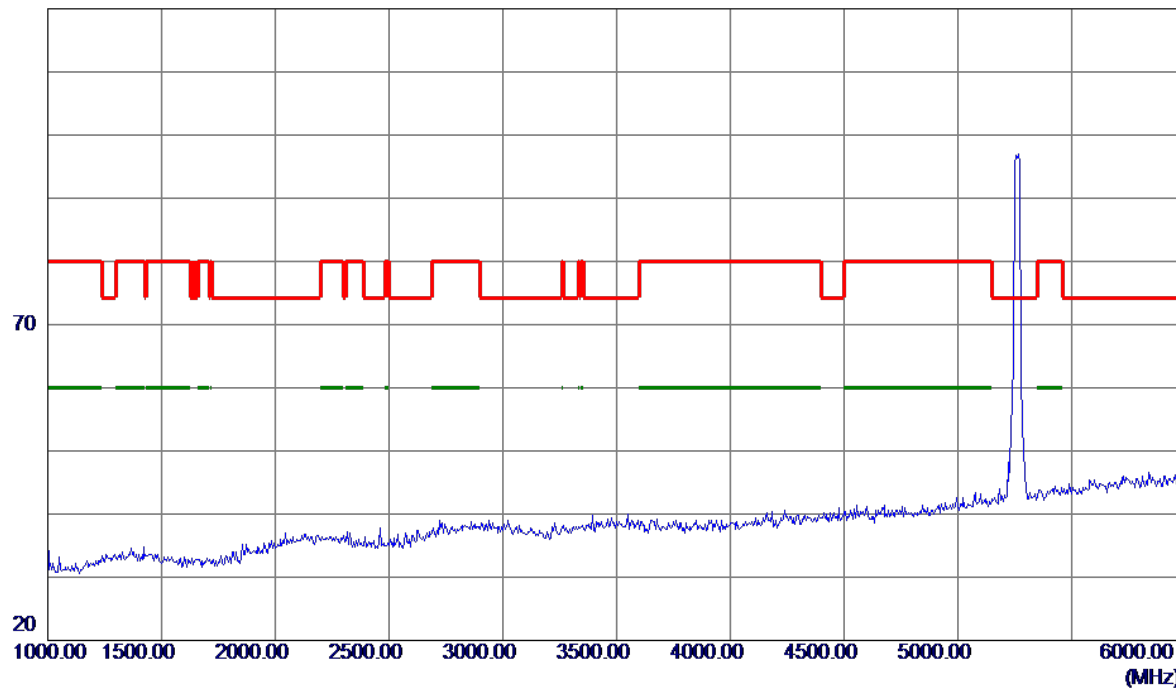


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Vertical

100 dBuV/m

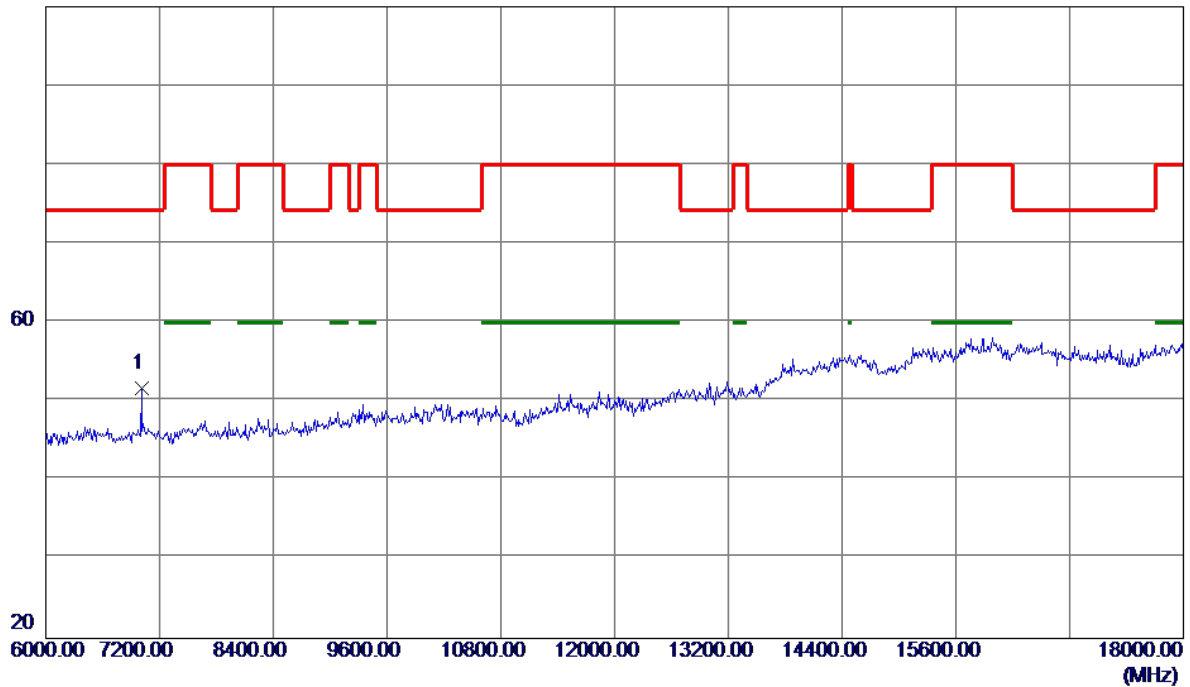


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7008.0000    | 38.67                      | 12.99                   | 51.66                     | 74.30           | -22.64       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Vertical


100 dBuV/m

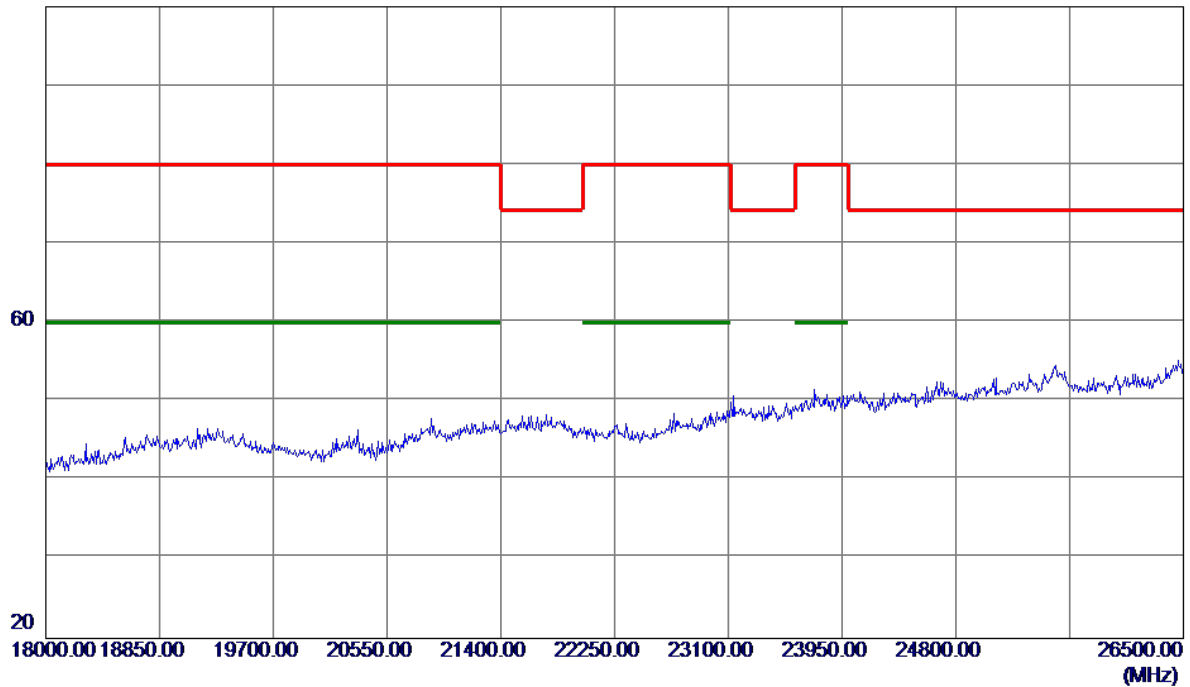

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Vertical

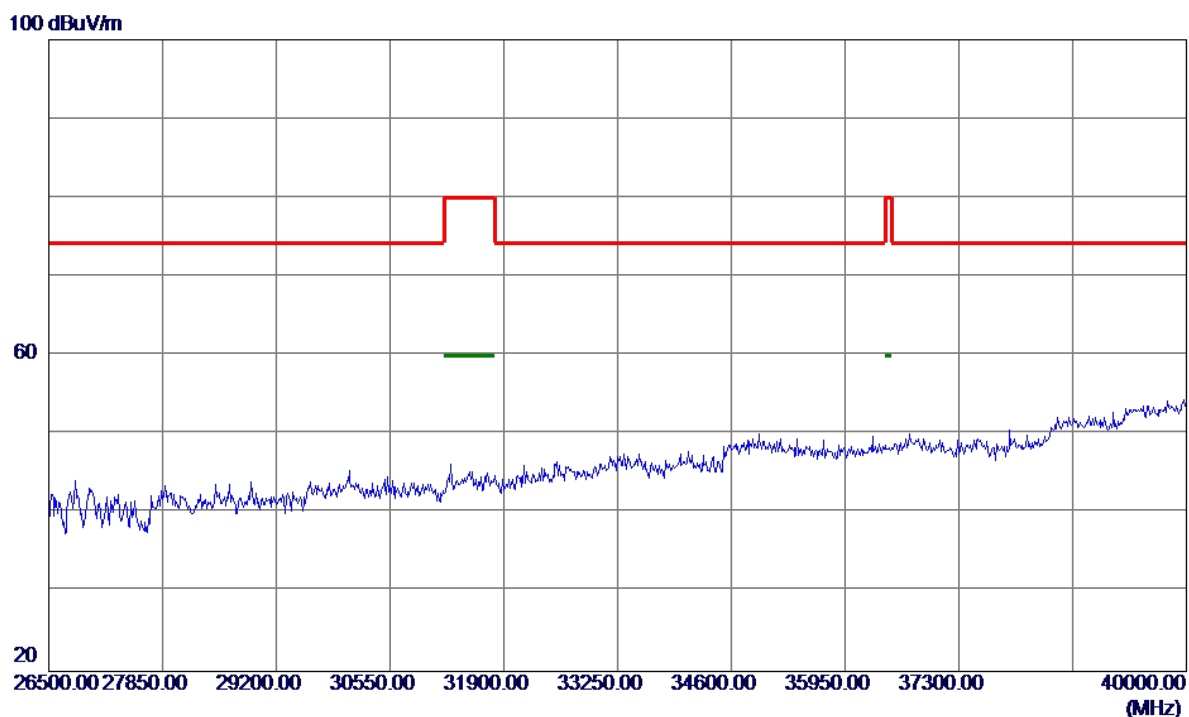


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal

130 dBuV/m

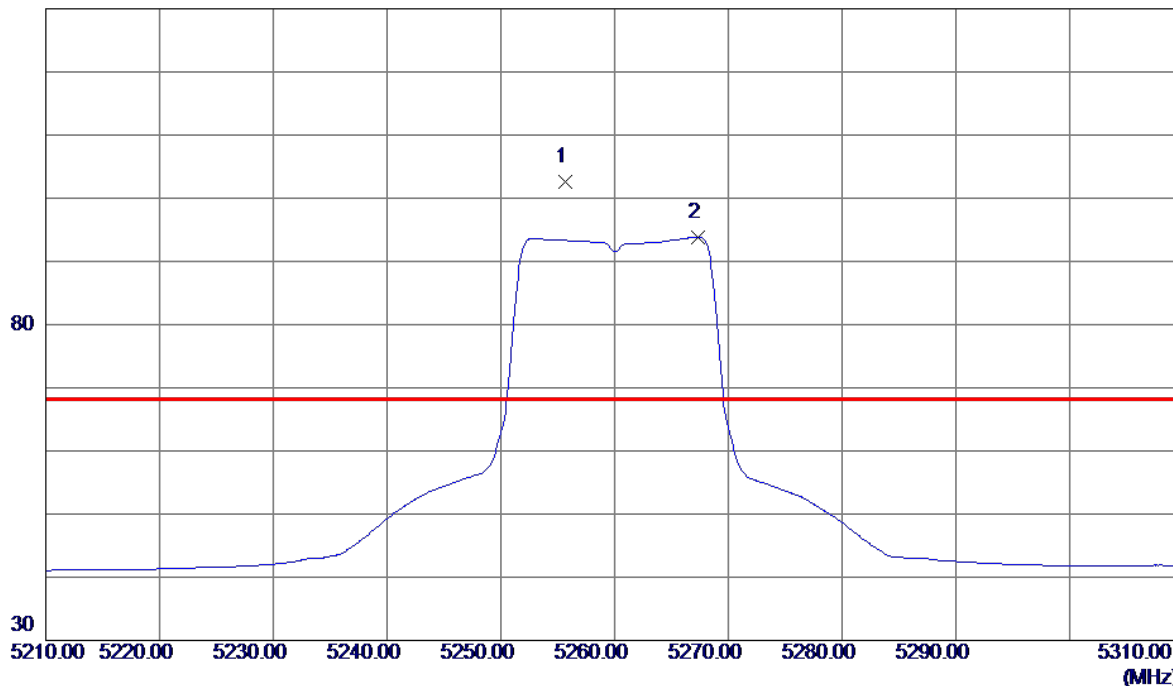


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5255.7000    | 61.01                      | 41.64                   | 102.65                    | 68.30           | 34.35        | Peak     | No Limit |
| 2   | 5267.3000    | 52.18                      | 41.70                   | 93.88                     | 999.00          | -905.12      | AVG      | No Limit |



|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal

120 dBuV/m

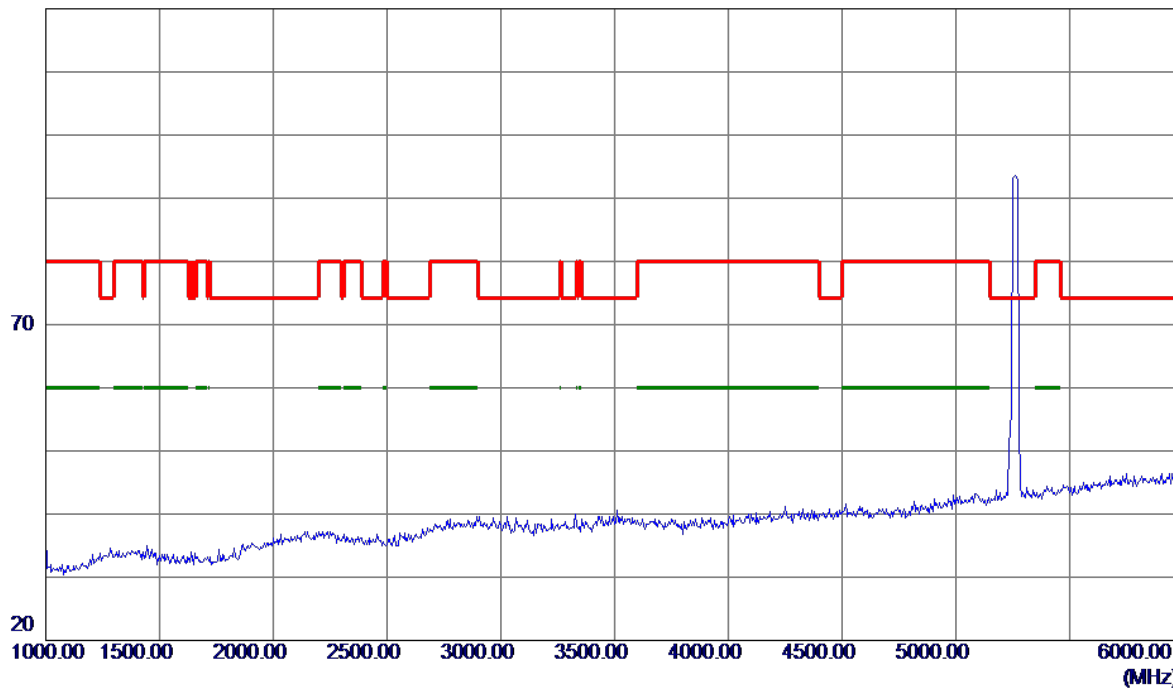


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal

100 dBuV/m

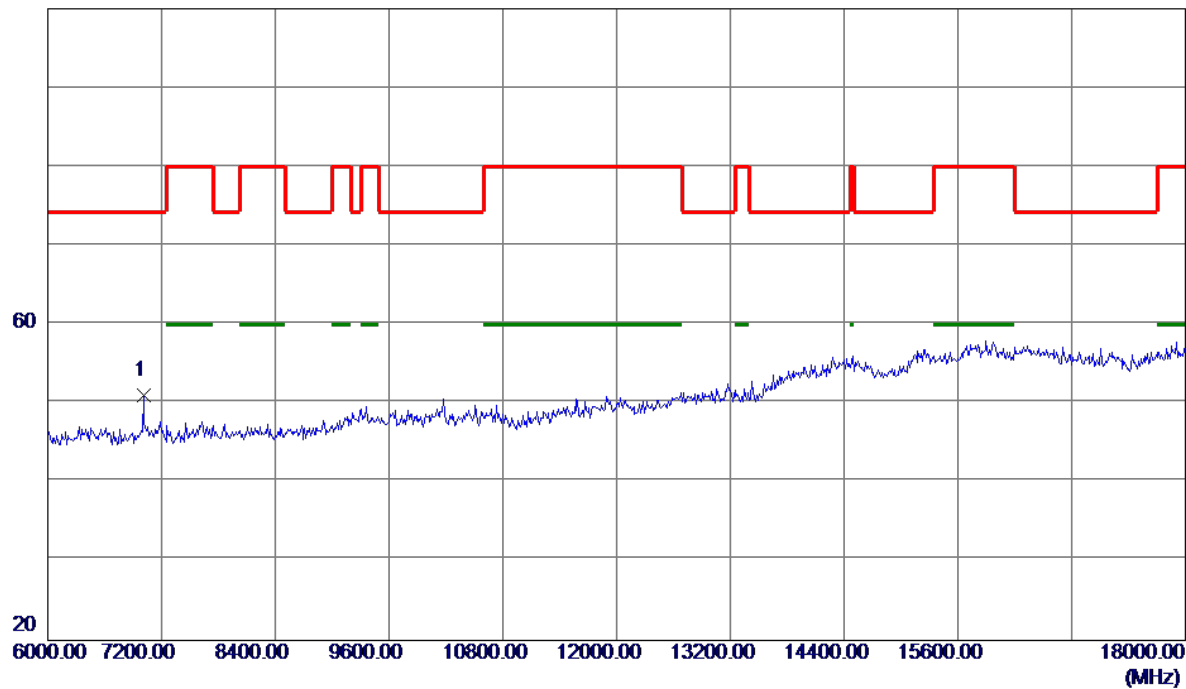


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7008.0000    | 37.98                      | 12.99                   | 50.97                     | 74.30           | -23.33       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal


100 dBuV/m

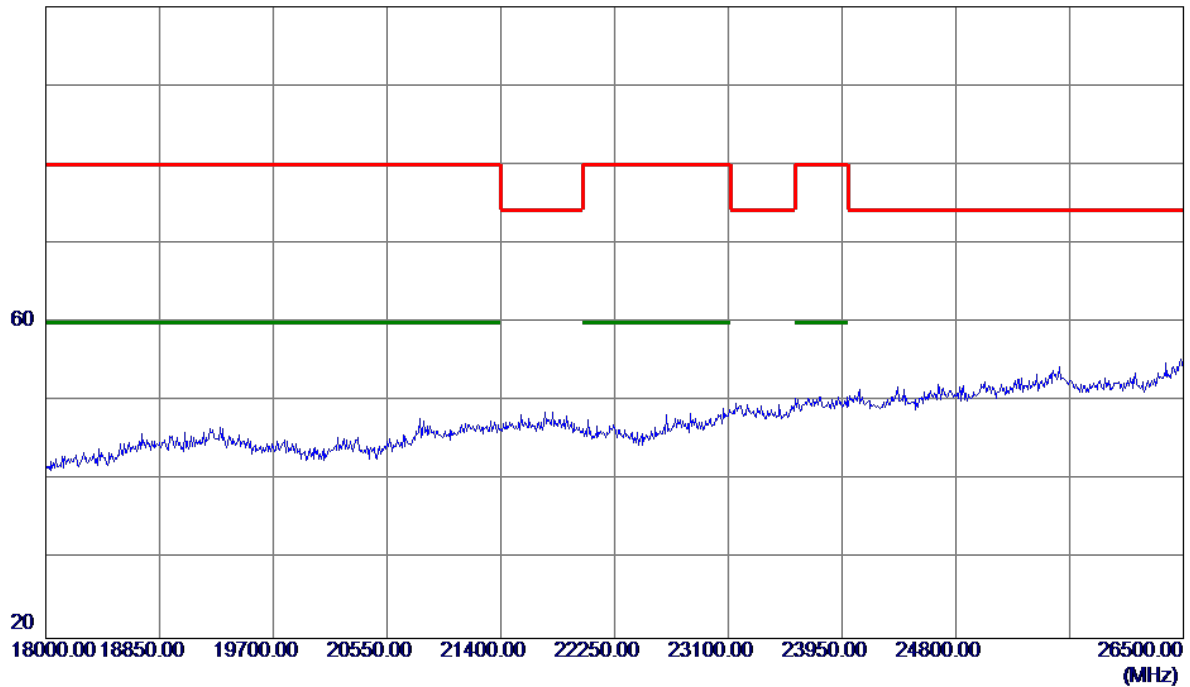

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5260MHz |

### Horizontal

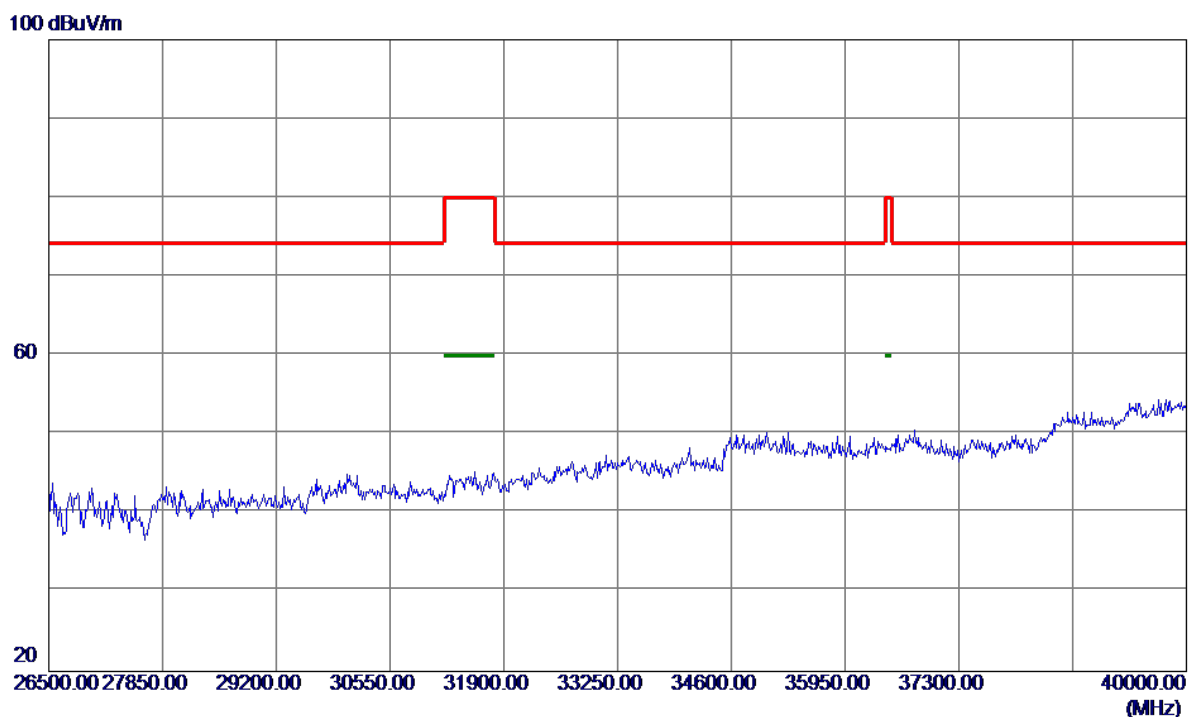


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical

130 dBuV/m

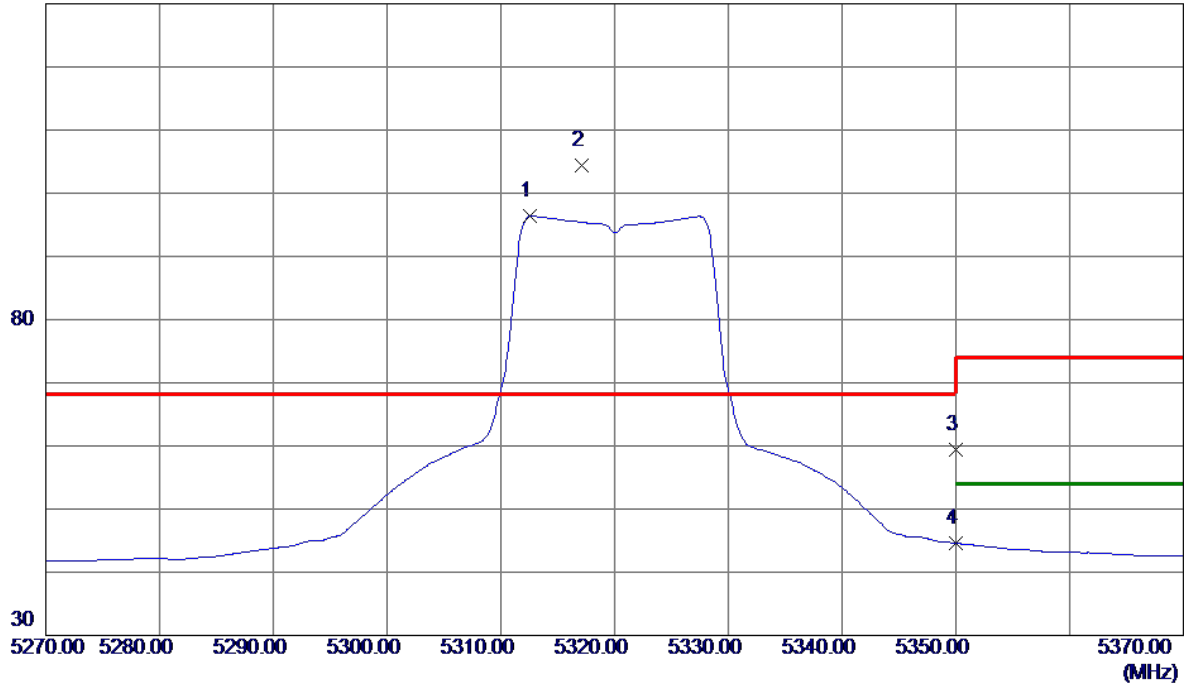

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5312.6000    | 54.47                      | 41.93                   | 96.40                     | 999.00          | -902.60      | AVG      | No Limit |
| 2 * | 5317.1000    | 62.39                      | 41.95                   | 104.34                    | 68.30           | 36.04        | Peak     | No Limit |
| 3   | 5350.0000    | 17.25                      | 42.12                   | 59.37                     | 68.30           | -8.93        | Peak     |          |
| 4   | 5350.0000    | 2.47                       | 42.12                   | 44.59                     | 999.00          | -954.41      | AVG      |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical

120 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical

100 dBuV/m

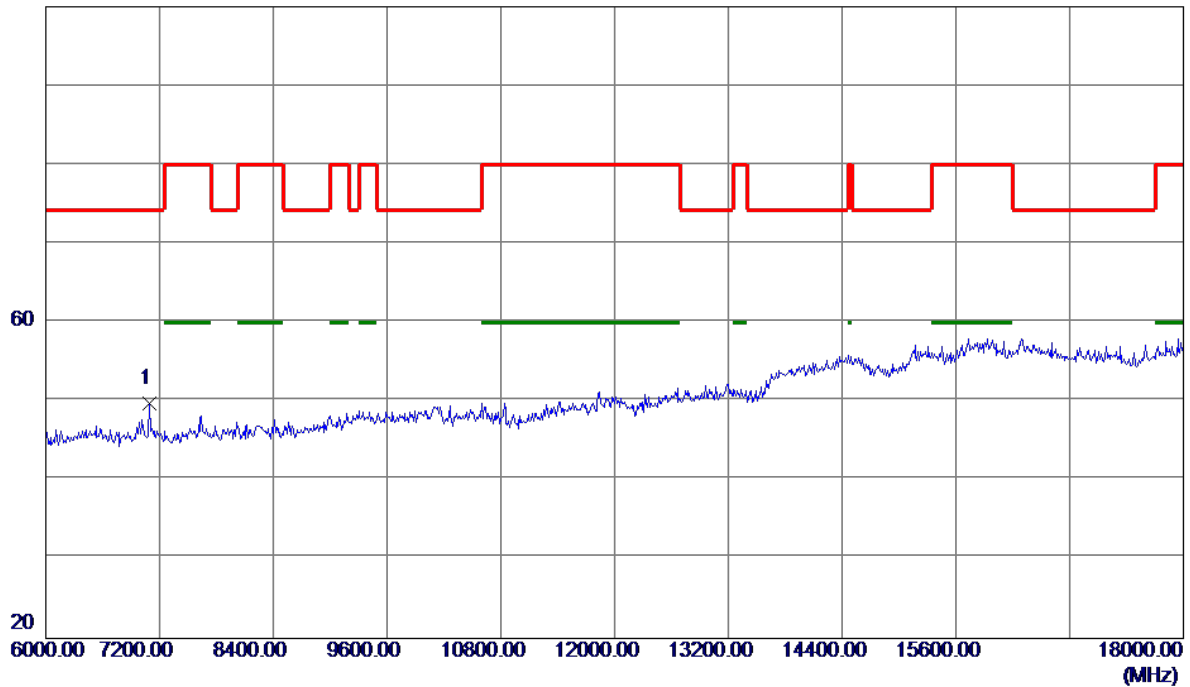


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7092.0000    | 36.74                      | 13.05                   | 49.79                     | 74.30           | -24.51       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical

100 dBuV/m

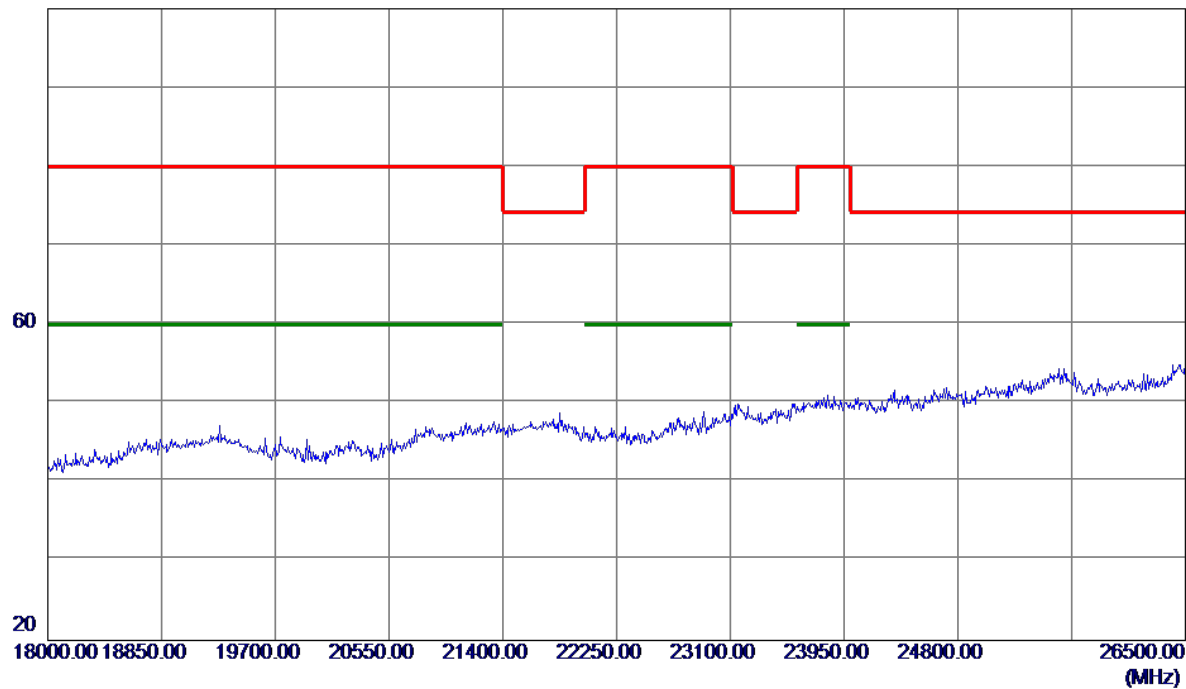

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Vertical


100 dBuV/m



| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal

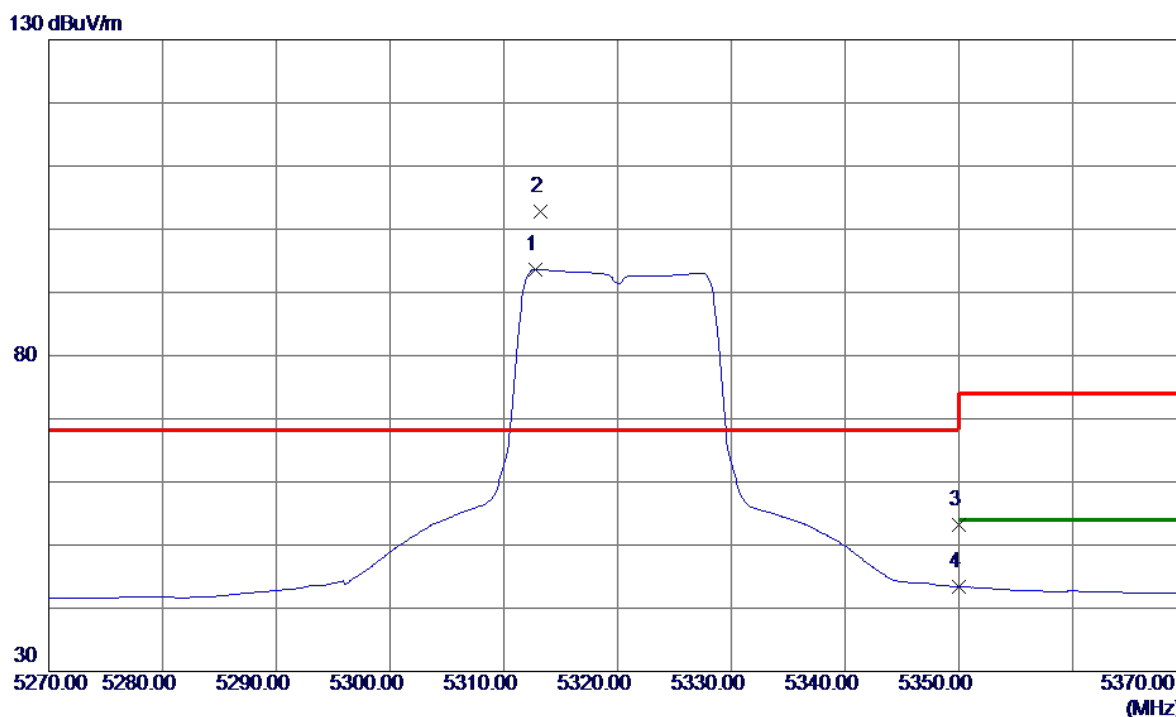


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5312.8000    | 51.68                      | 41.93                   | 93.61                     | 999.00          | -905.39      | AVG      | No Limit |
| 2 * | 5313.2000    | 60.79                      | 41.93                   | 102.72                    | 68.30           | 34.42        | Peak     | No Limit |
| 3   | 5350.0000    | 11.01                      | 42.12                   | 53.13                     | 68.30           | -15.17       | Peak     |          |
| 4   | 5350.0000    | 1.30                       | 42.12                   | 43.42                     | 999.00          | -955.58      | AVG      |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal

120 dBuV/m

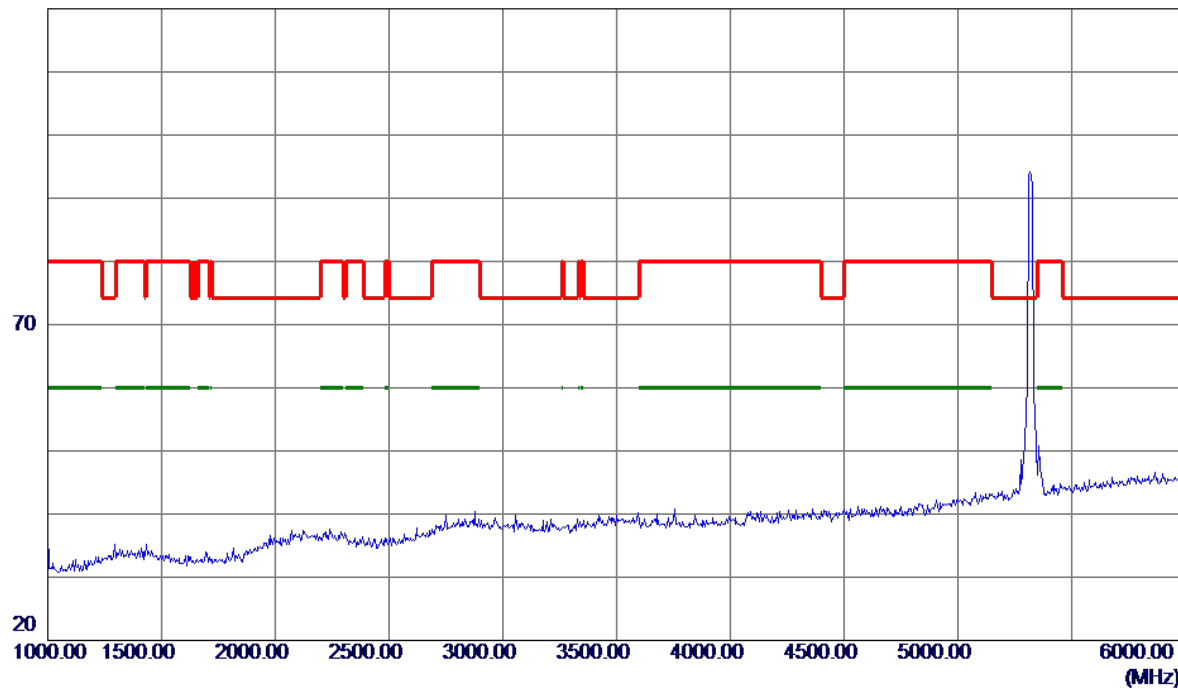


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal

100 dBuV/m

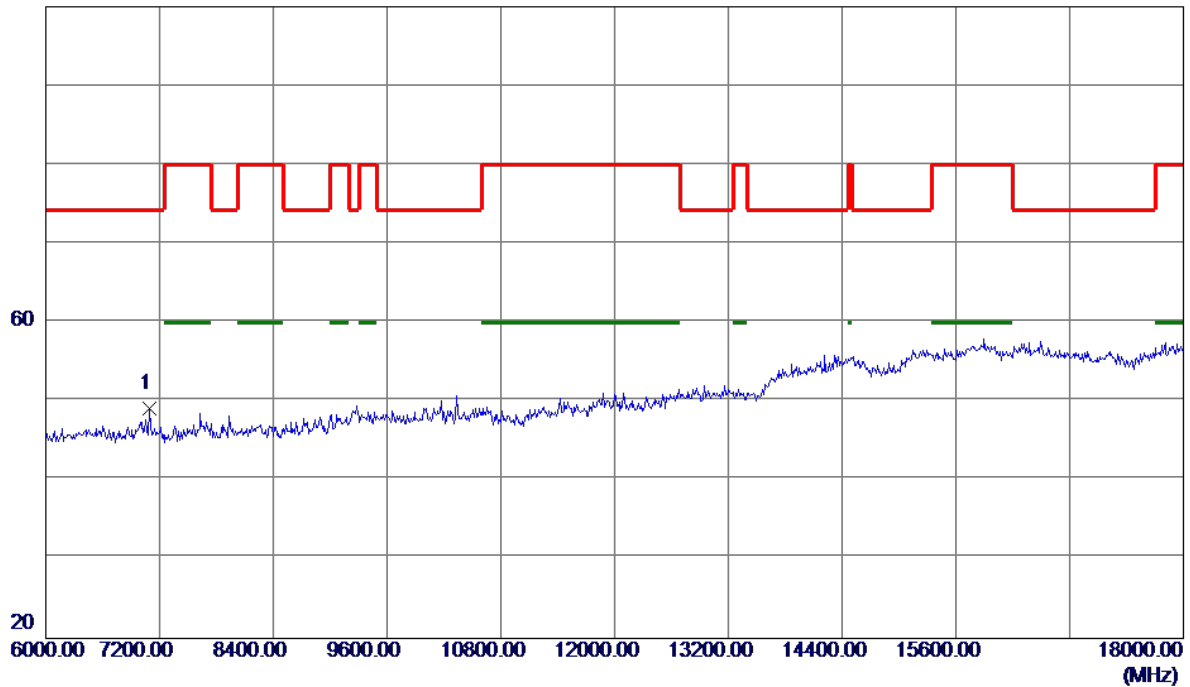


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7092.0000    | 36.09                      | 13.05                   | 49.14                     | 74.30           | -25.16       | Peak     |         |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal

100 dBuV/m

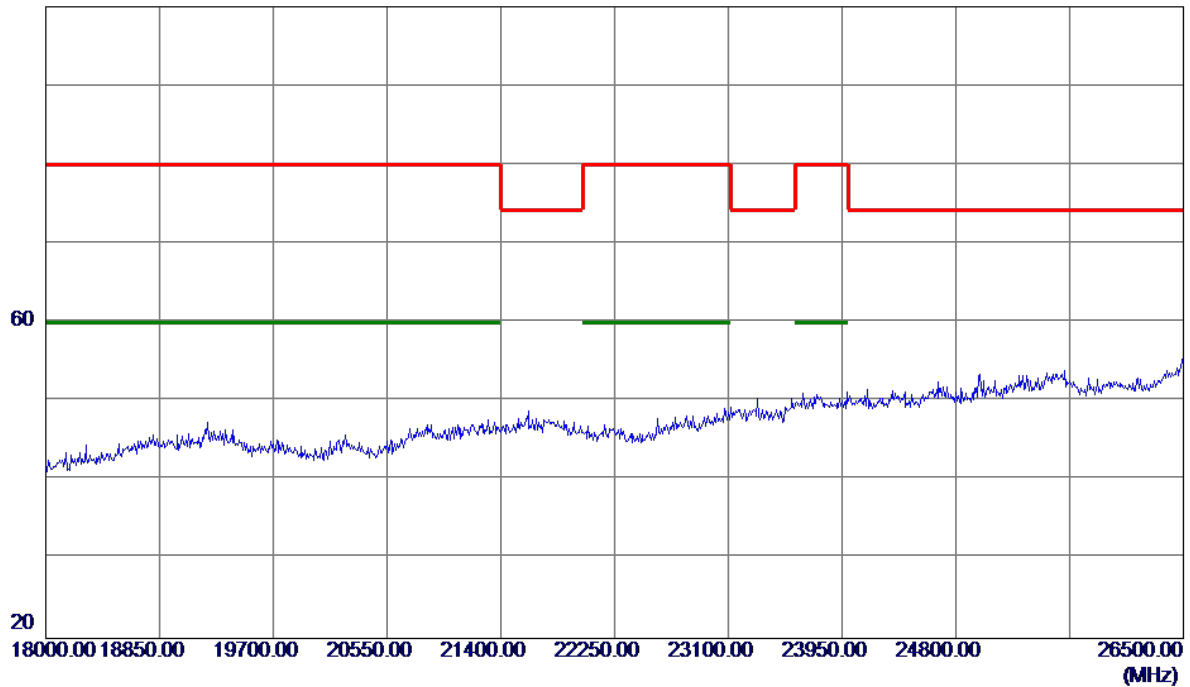

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2A/ TX A Mode 5320MHz |

### Horizontal

100 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Vertical

130 dBuV/m

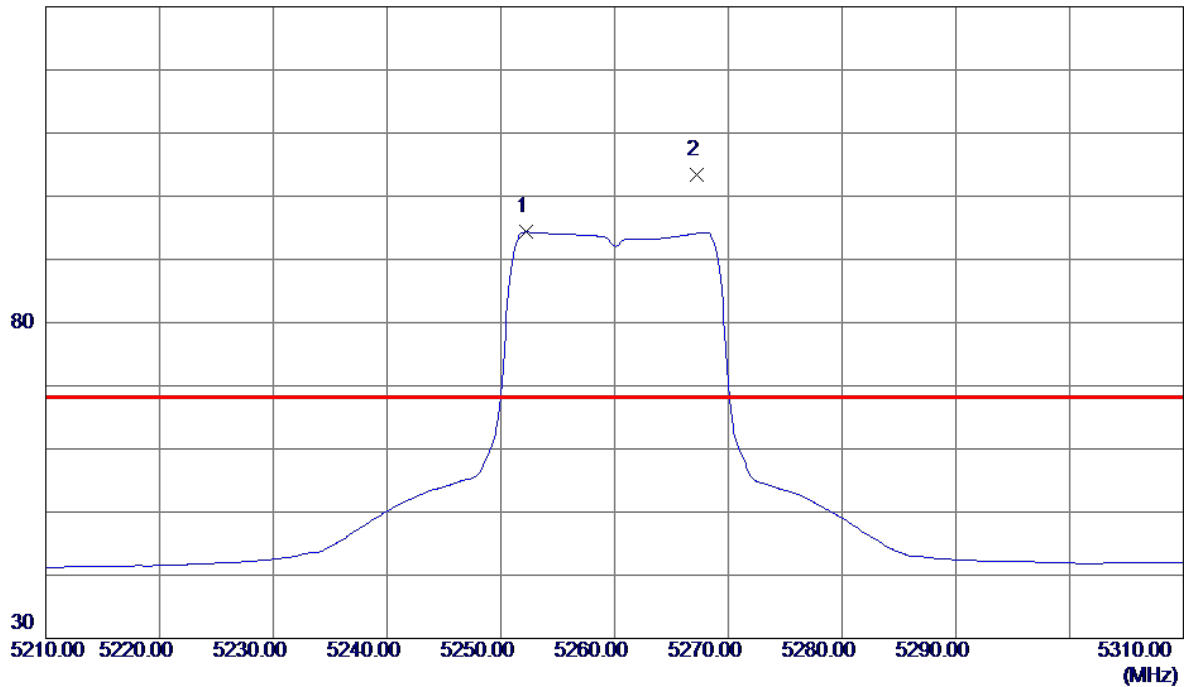


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5252.2000    | 52.70                      | 41.62                   | 94.32                     | 999.00          | -904.68      | AVG      | No Limit |
| 2 * | 5267.2000    | 61.63                      | 41.70                   | 103.33                    | 68.30           | 35.03        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Vertical

120 dBuV/m

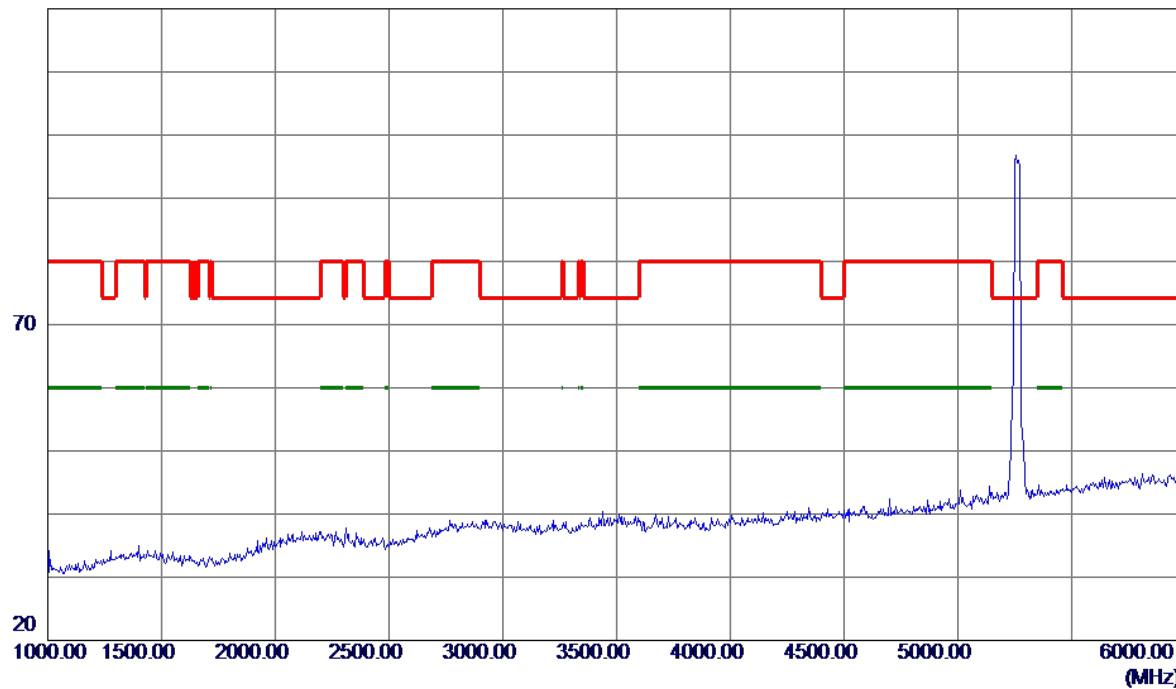


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Vertical

100 dBuV/m

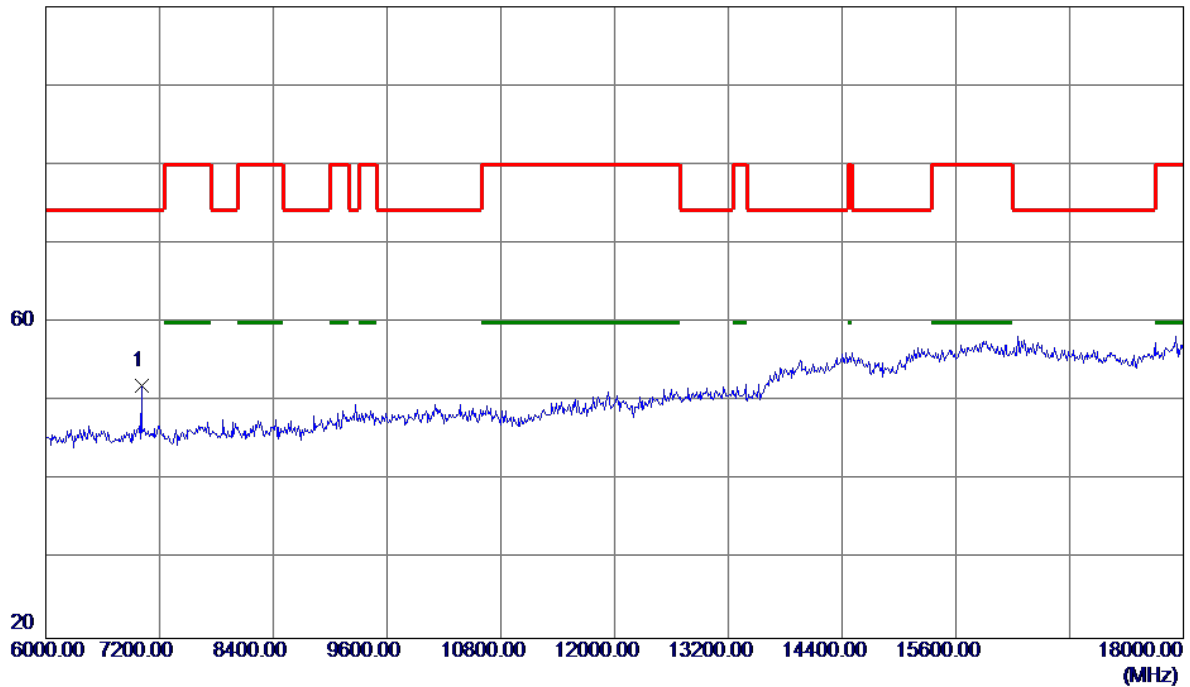


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7008.0000    | 39.04                      | 12.99                   | 52.03                     | 74.30           | -22.27       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

**Vertical**

100 dBuV/m

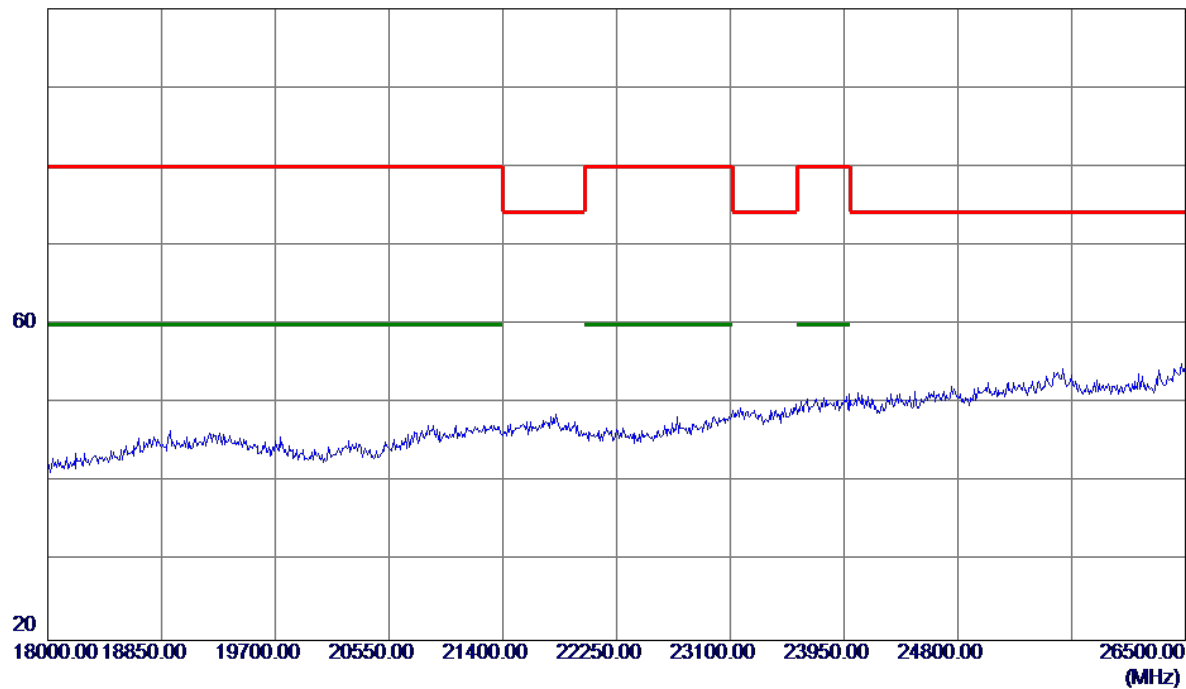

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Vertical


100 dBuV/m



| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

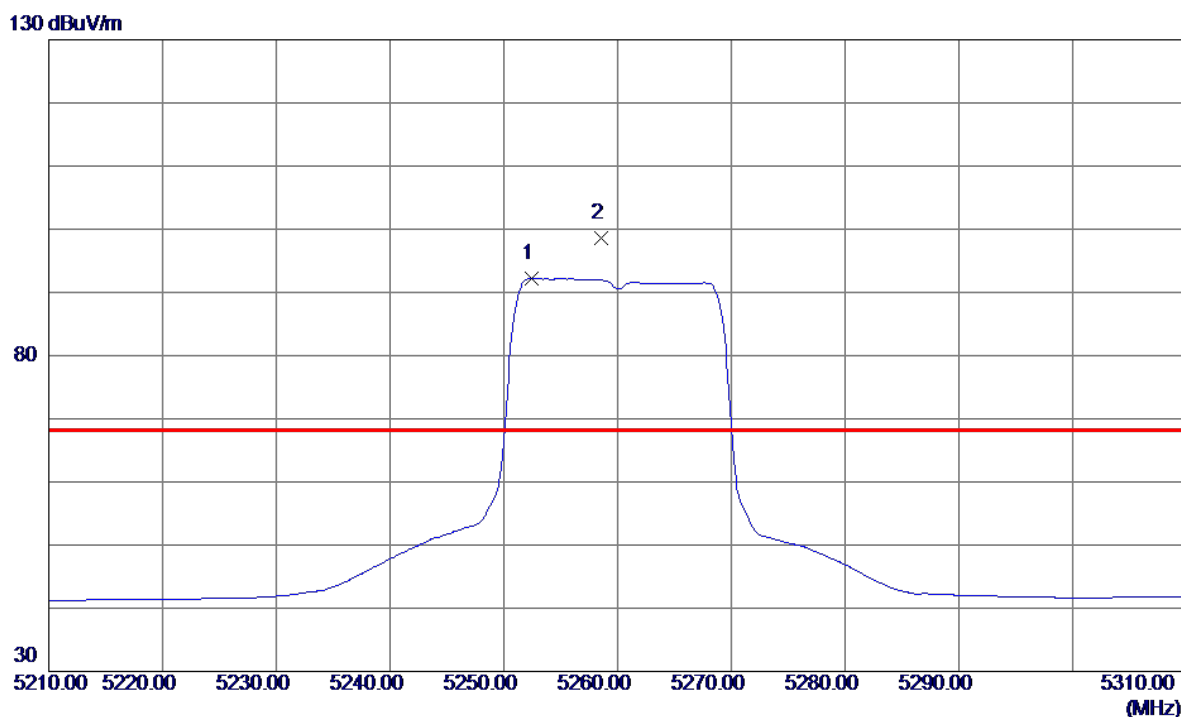


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5252.4000    | 50.55                      | 41.62                   | 92.17                     | 999.00          | -906.83      | AVG      | No Limit |
| 2 * | 5258.6000    | 56.91                      | 41.65                   | 98.56                     | 68.30           | 30.26        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

120 dBuV/m

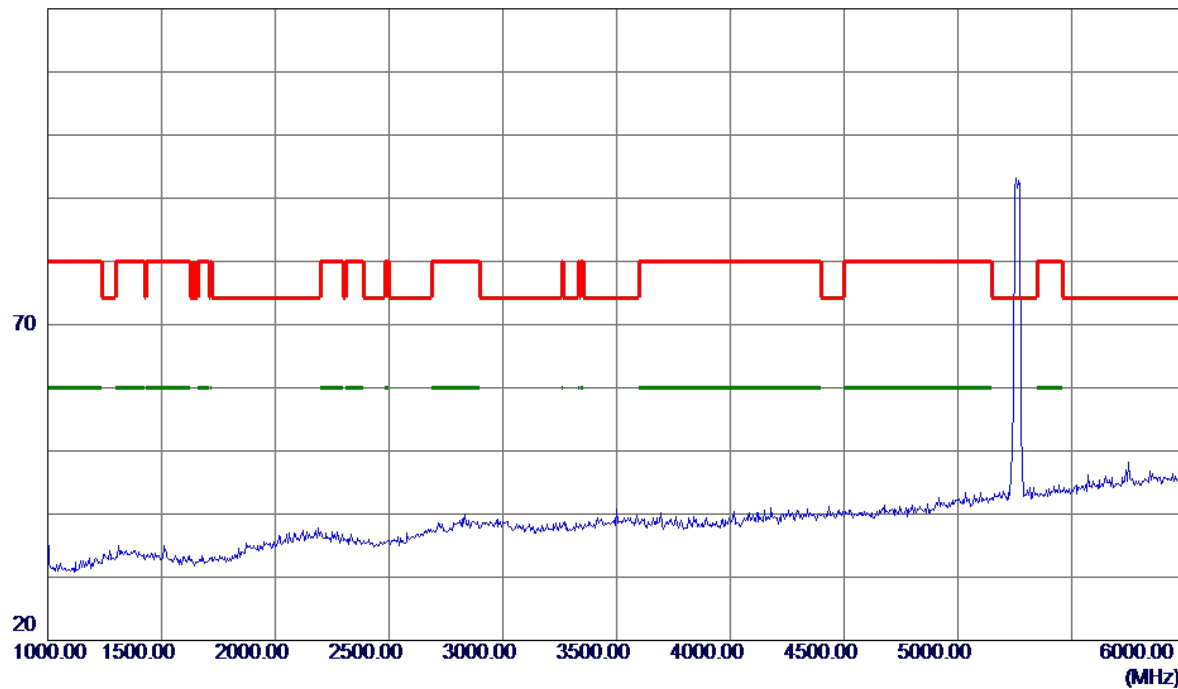


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

100 dBuV/m

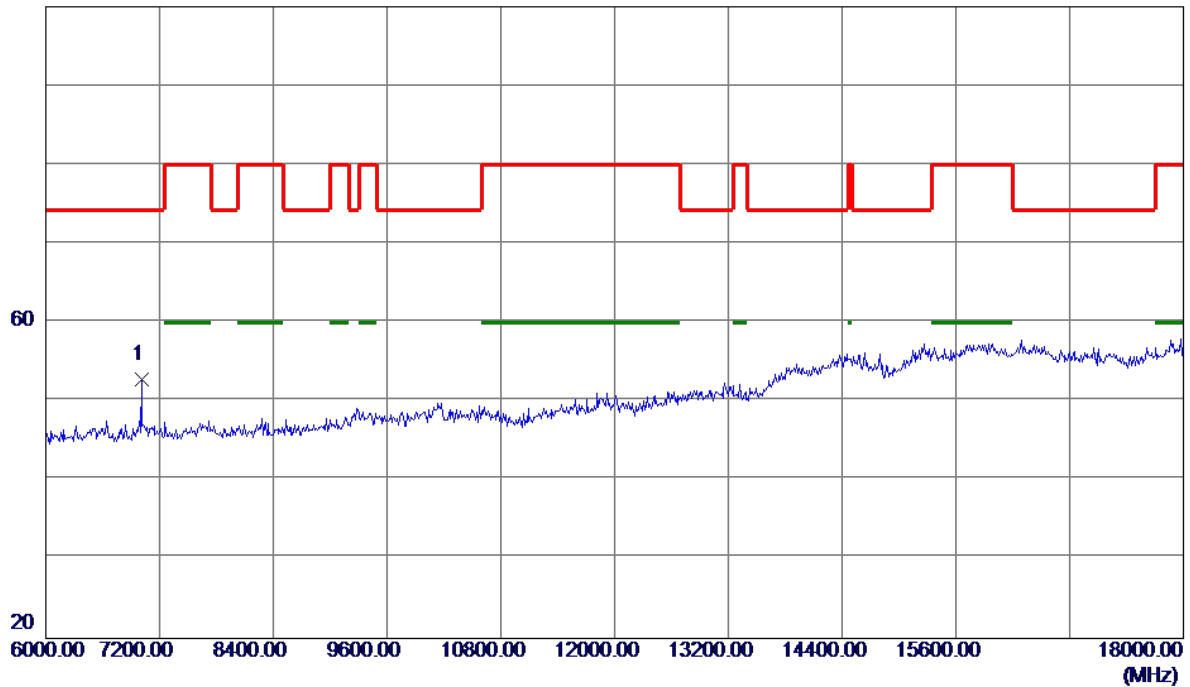


| No. | Freq.     | Reading | Correct | Measure | Limit  | Margin |          |         |
|-----|-----------|---------|---------|---------|--------|--------|----------|---------|
|     | MHz       | Level   | Factor  | ment    |        |        | Detector | Comment |
|     |           | dBuV/m  | dB      | dBuV/m  | dBuV/m | dB     |          |         |
| 1 * | 7008.0000 | 39.80   | 12.99   | 52.79   | 74.30  | -21.51 | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

100 dBuV/m

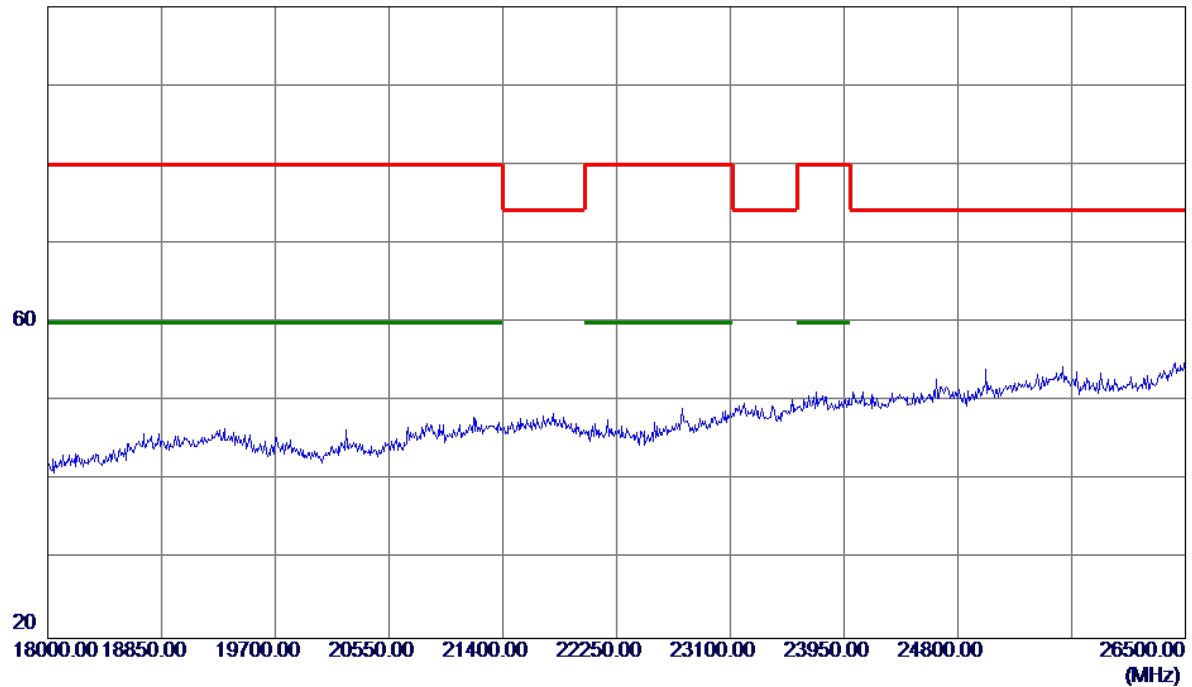


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5260MHz |

### Horizontal

100 dBuV/m

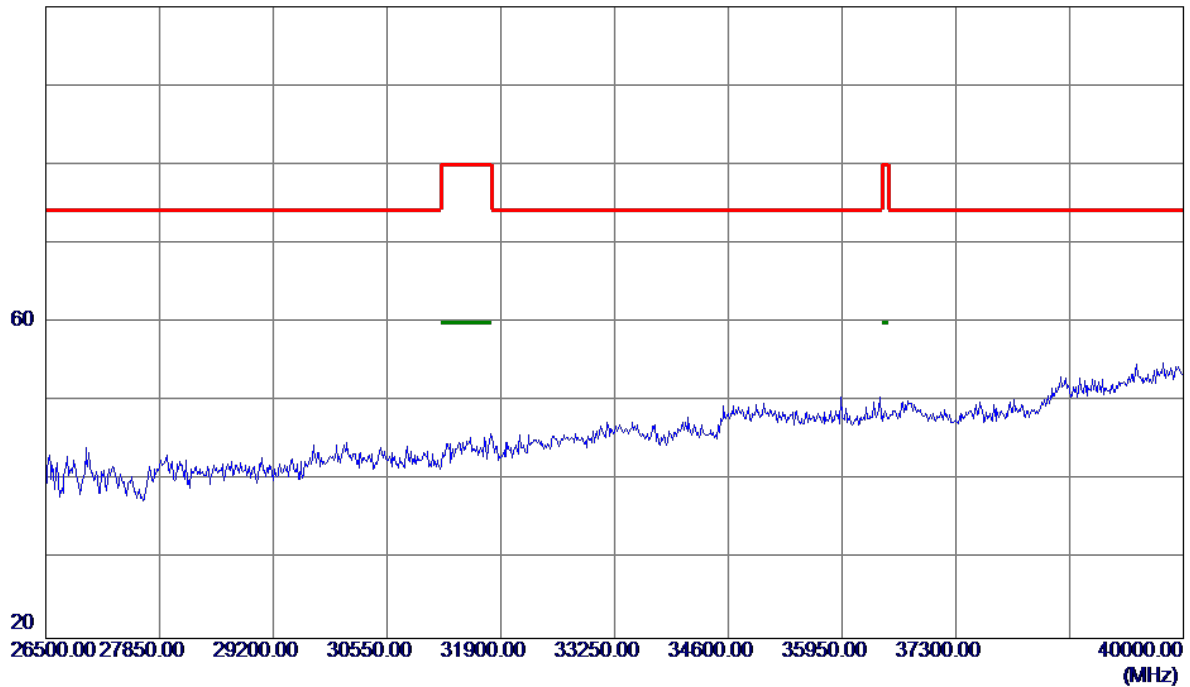


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical

130 dBuV/m

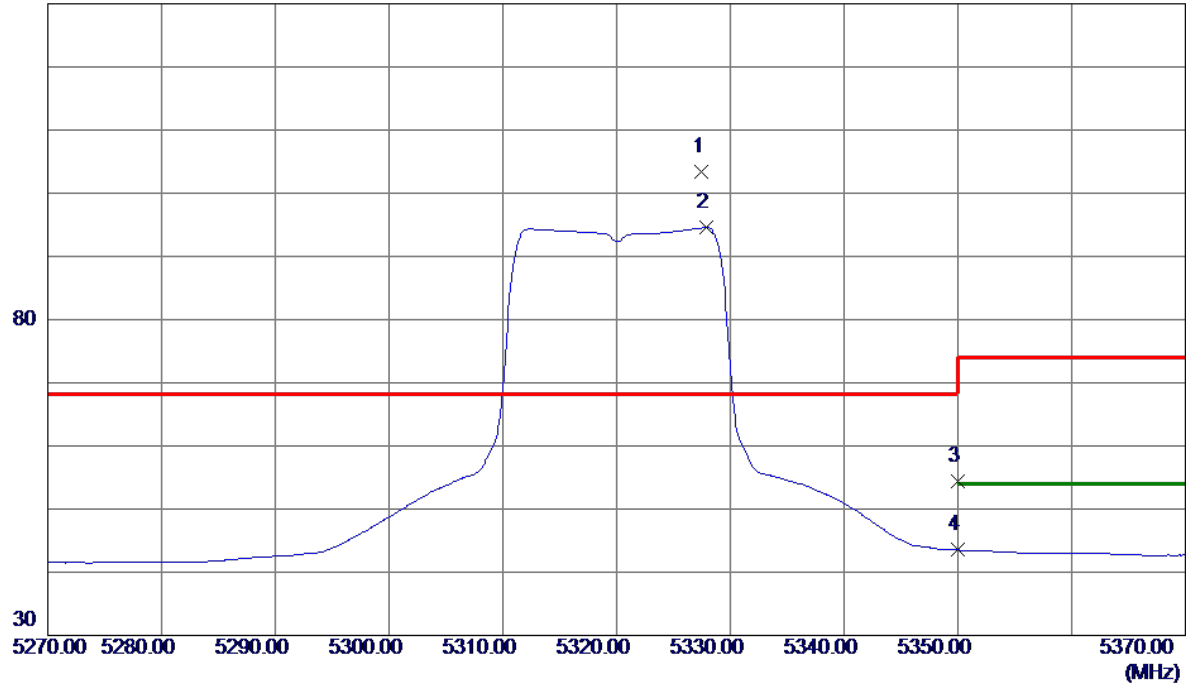


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5327.5000    | 61.32                      | 42.00                   | 103.32                    | 68.30           | 35.02        | Peak     | No Limit |
| 2   | 5327.9000    | 52.56                      | 42.01                   | 94.57                     | 999.00          | -904.43      | AVG      | No Limit |
| 3   | 5350.0000    | 12.37                      | 42.12                   | 54.49                     | 68.30           | -13.81       | Peak     |          |
| 4   | 5350.0000    | 1.39                       | 42.12                   | 43.51                     | 999.00          | -955.49      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical


120 dBuV/m

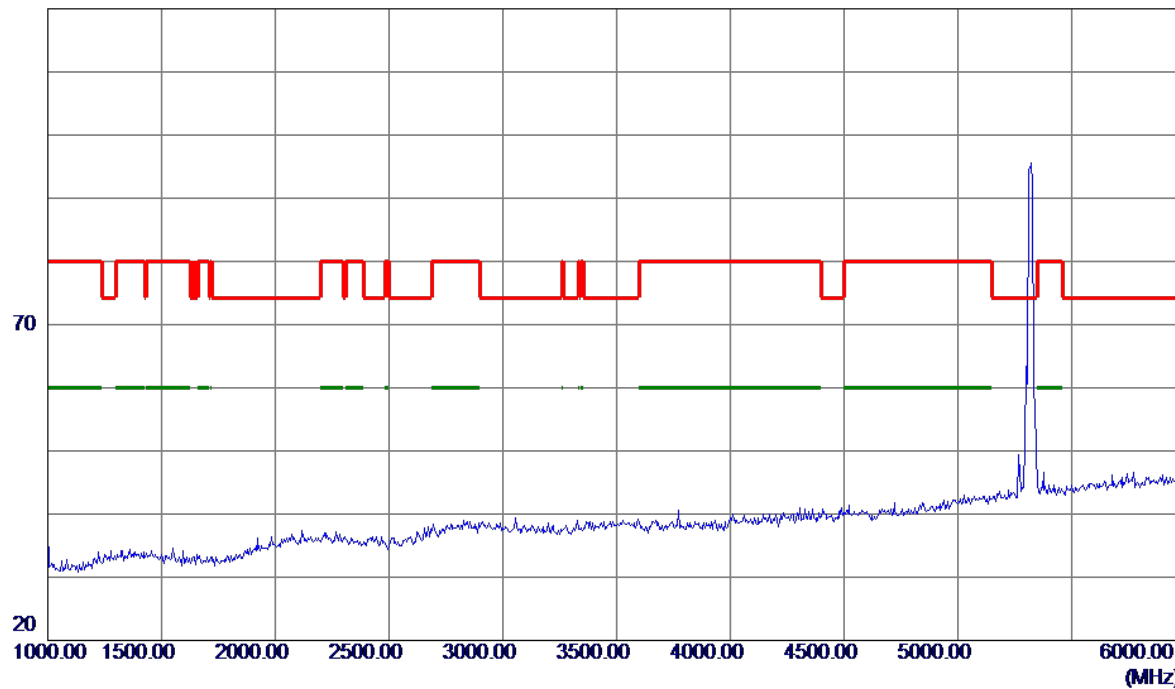

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical

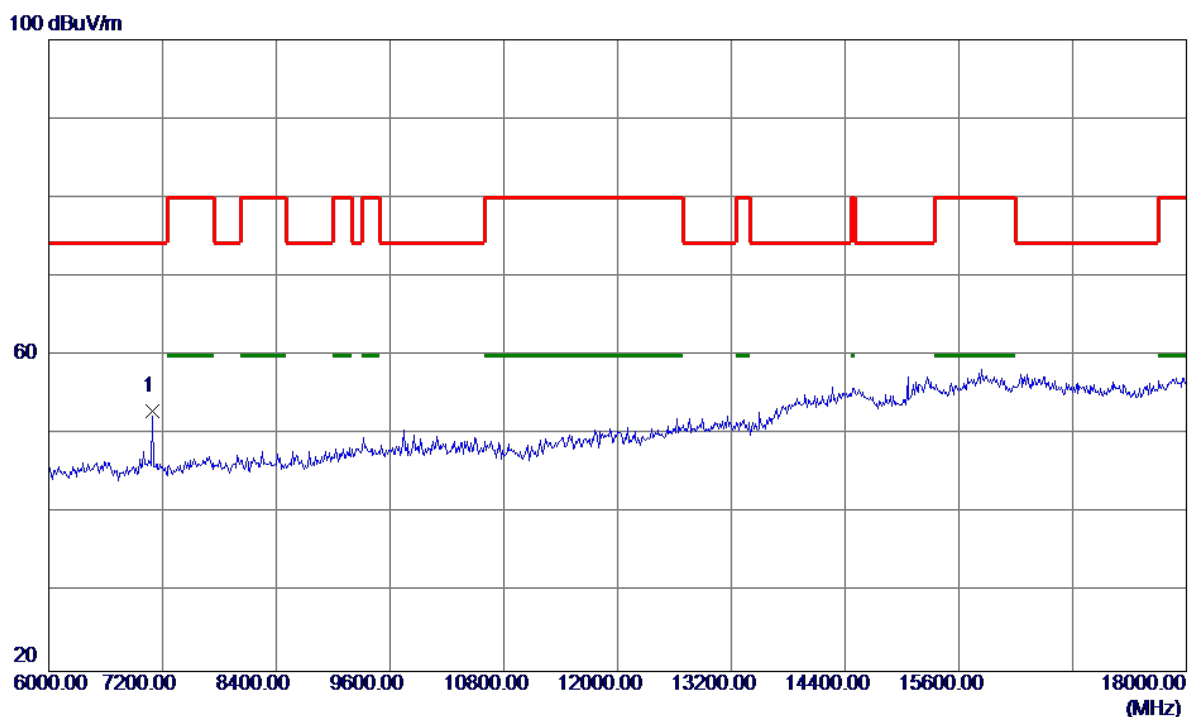


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7093.3070    | 39.98                      | 13.05                   | 53.03                     | 74.30           | -21.27       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical

100 dBuV/m

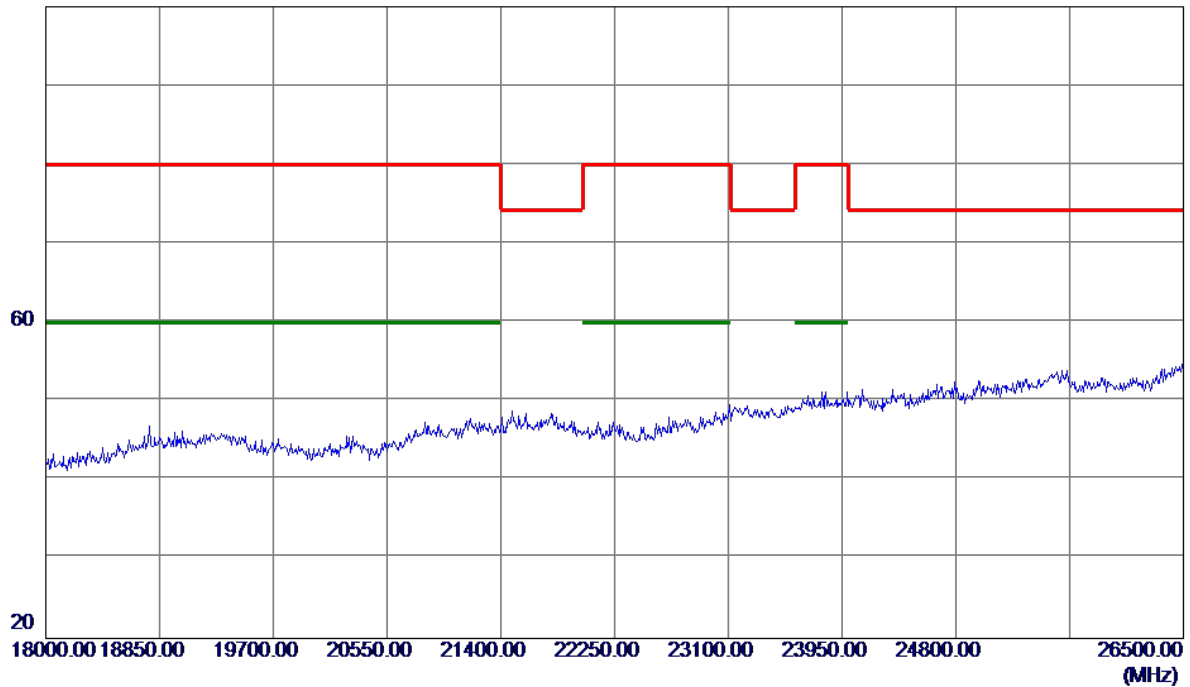

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Vertical

100 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal


130 dBuV/m

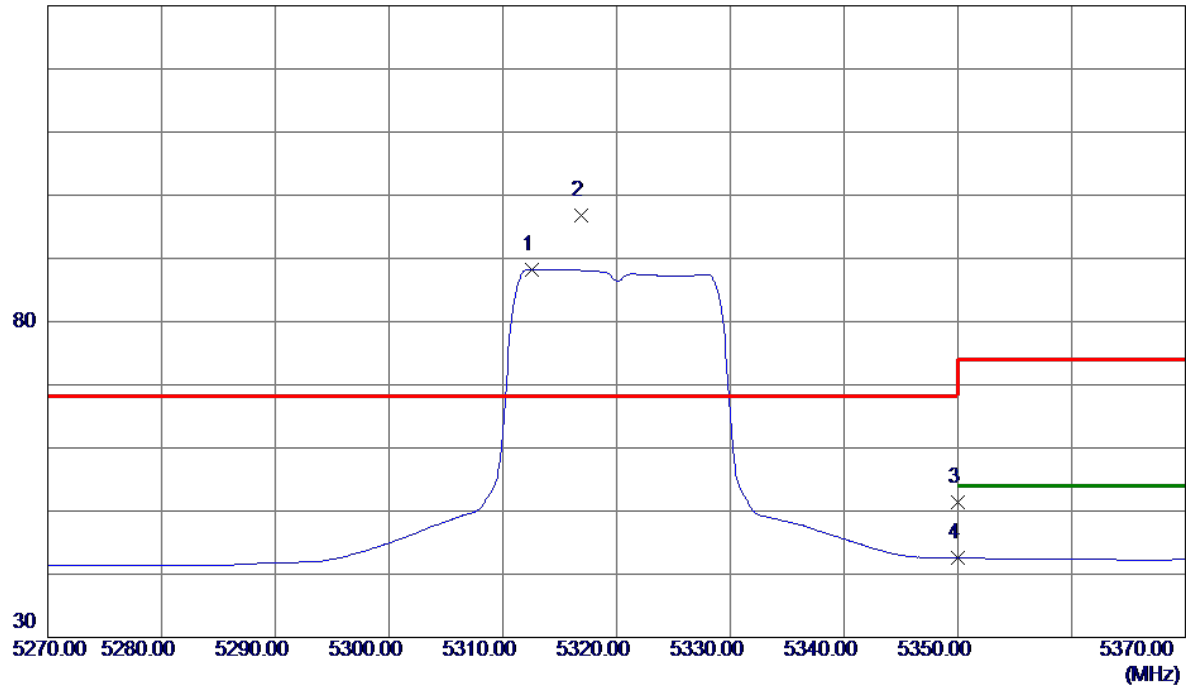

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5312.6000    | 46.32                      | 41.93                   | 88.25                     | 999.00          | -910.75      | AVG      | No Limit |
| 2 * | 5316.9000    | 54.86                      | 41.95                   | 96.81                     | 68.30           | 28.51        | Peak     | No Limit |
| 3   | 5350.0000    | 9.20                       | 42.12                   | 51.32                     | 68.30           | -16.98       | Peak     |          |
| 4   | 5350.0000    | 0.39                       | 42.12                   | 42.51                     | 999.00          | -956.49      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal

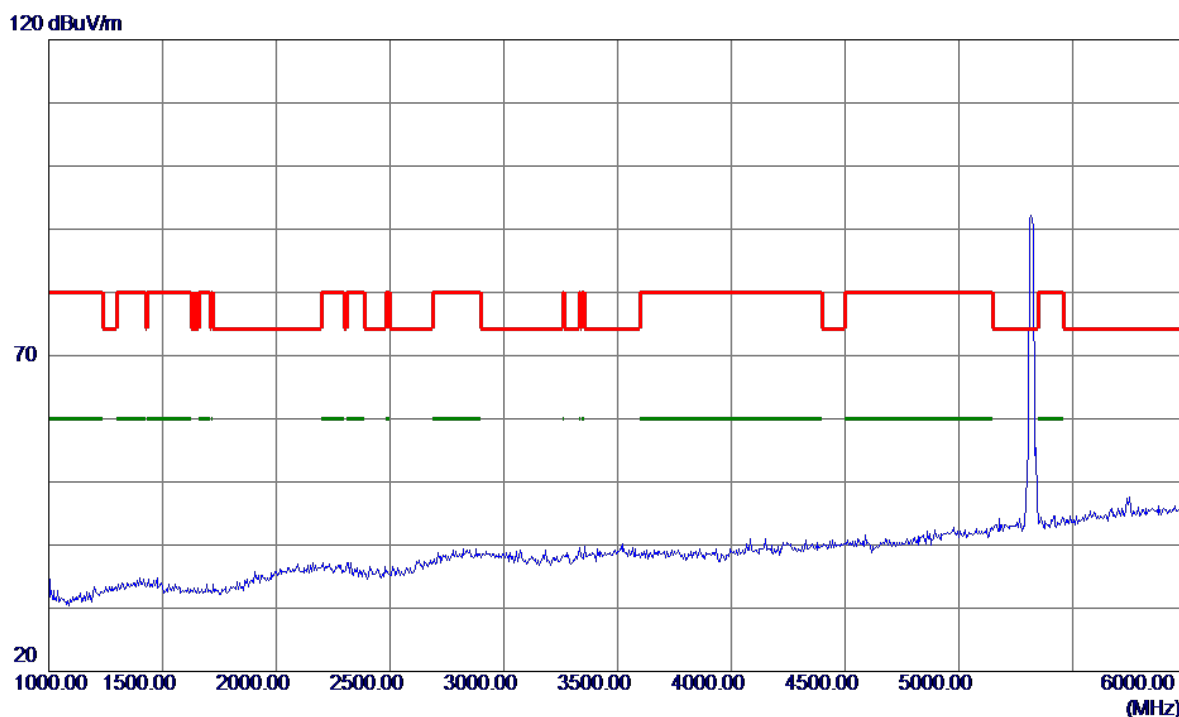


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal

100 dBuV/m

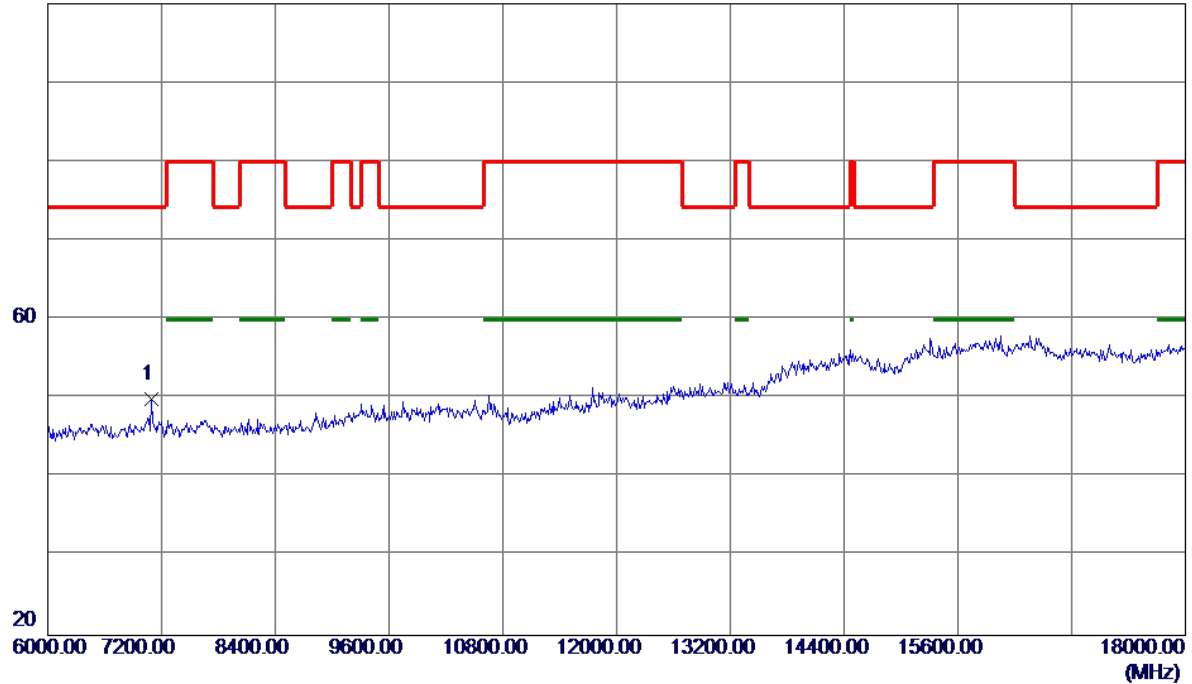


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7092.0000    | 36.90                      | 13.05                   | 49.95                     | 74.30           | -24.35       | Peak     |         |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |

### Horizontal


100 dBuV/m

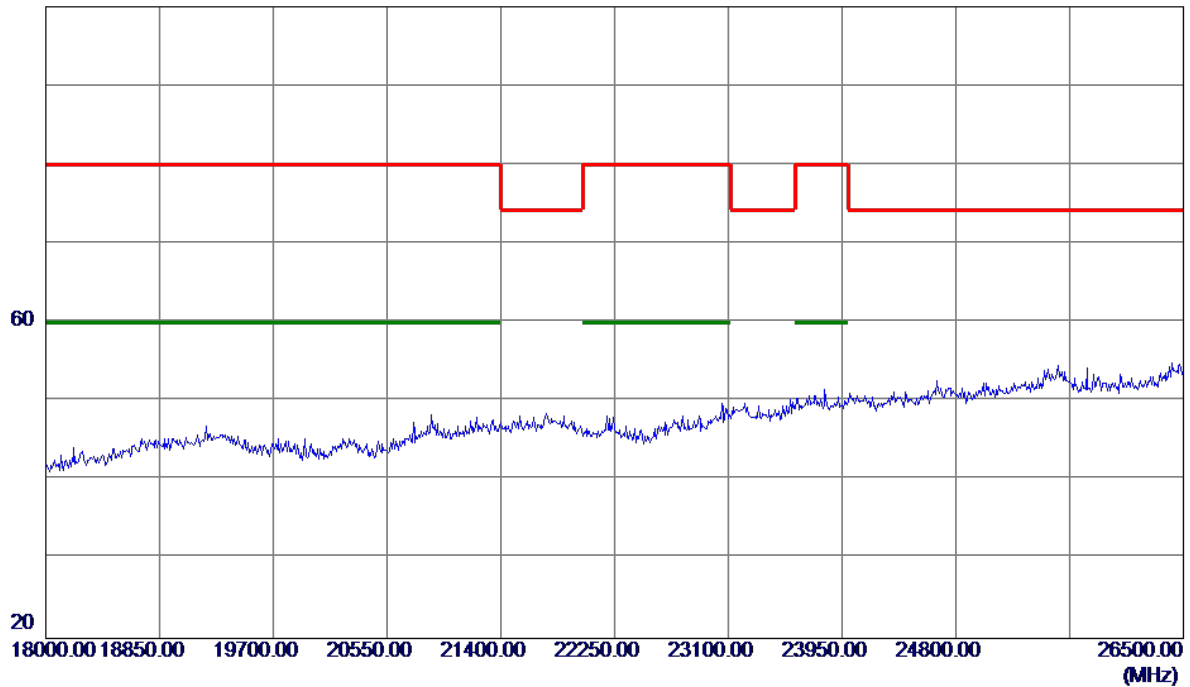

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N20 Mode 5320MHz |


### Horizontal

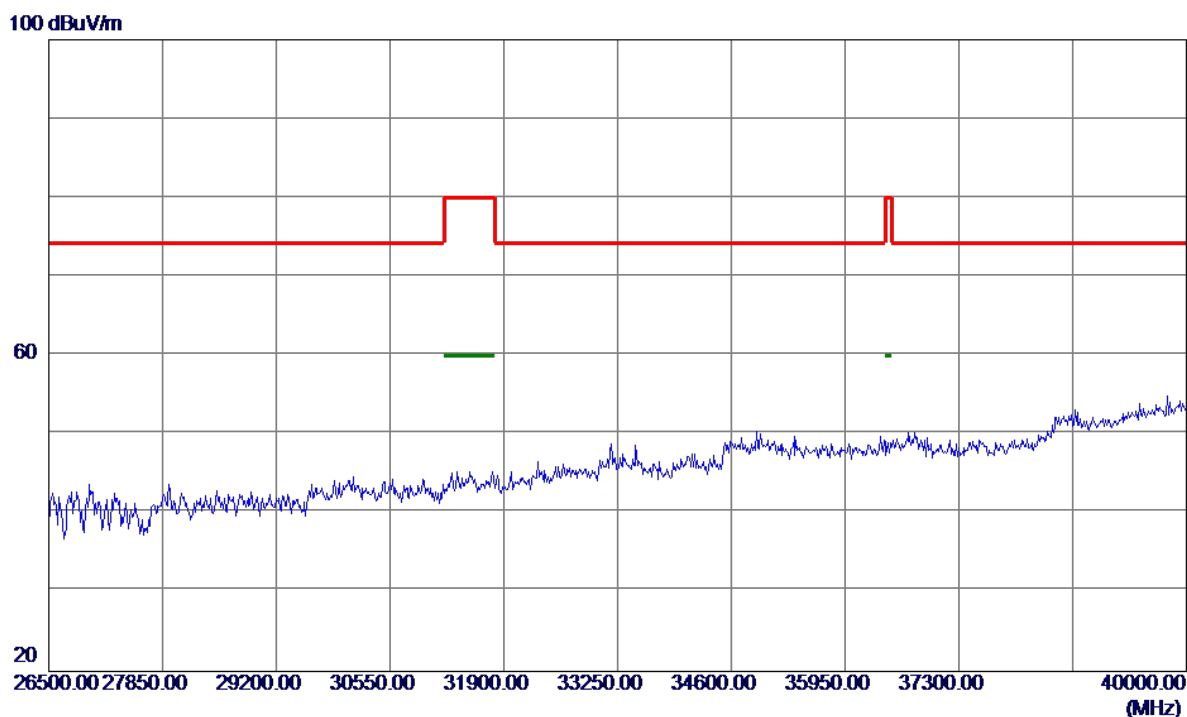

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Vertical

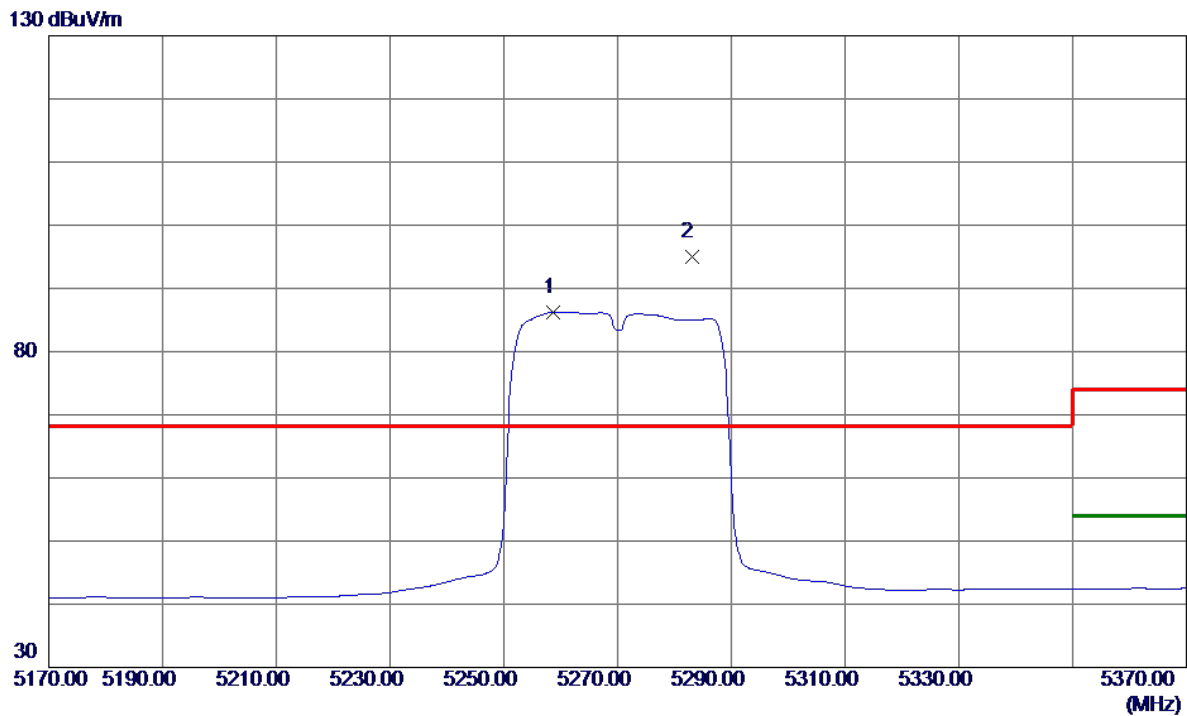


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5258.6000    | 44.58                      | 41.65                   | 86.23                     | 999.00          | -912.77      | AVG      | No Limit |
| 2 * | 5283.0000    | 53.24                      | 41.78                   | 95.02                     | 68.30           | 26.72        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Vertical

120 dBuV/m

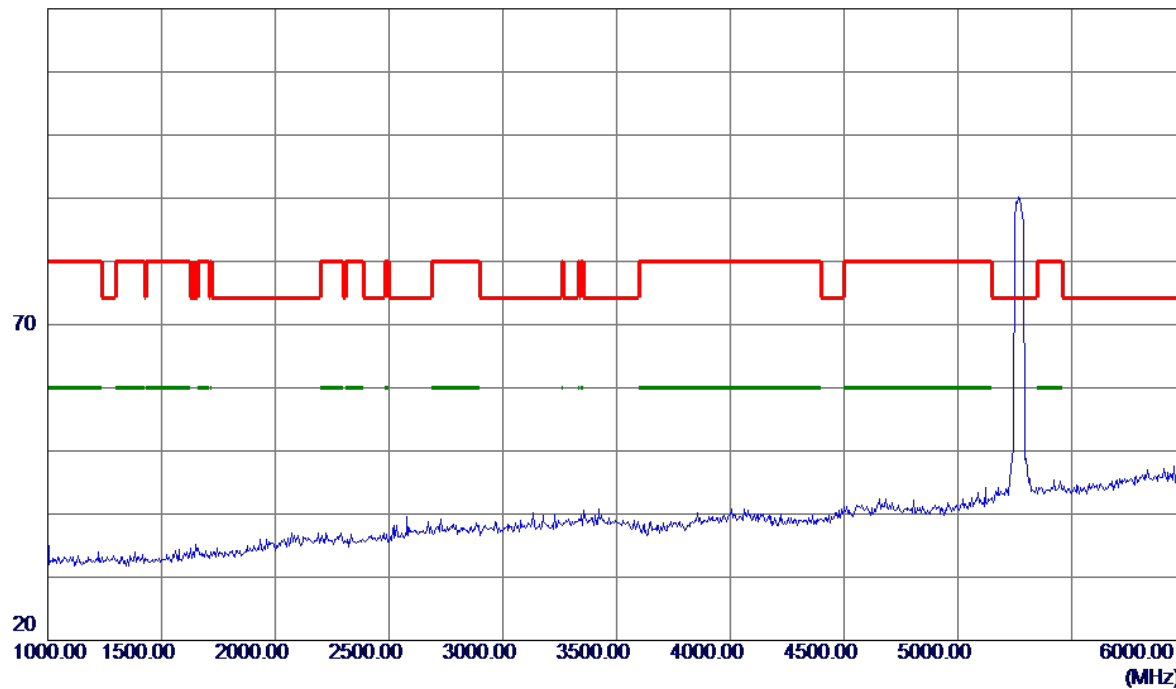


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Vertical

100 dBuV/m

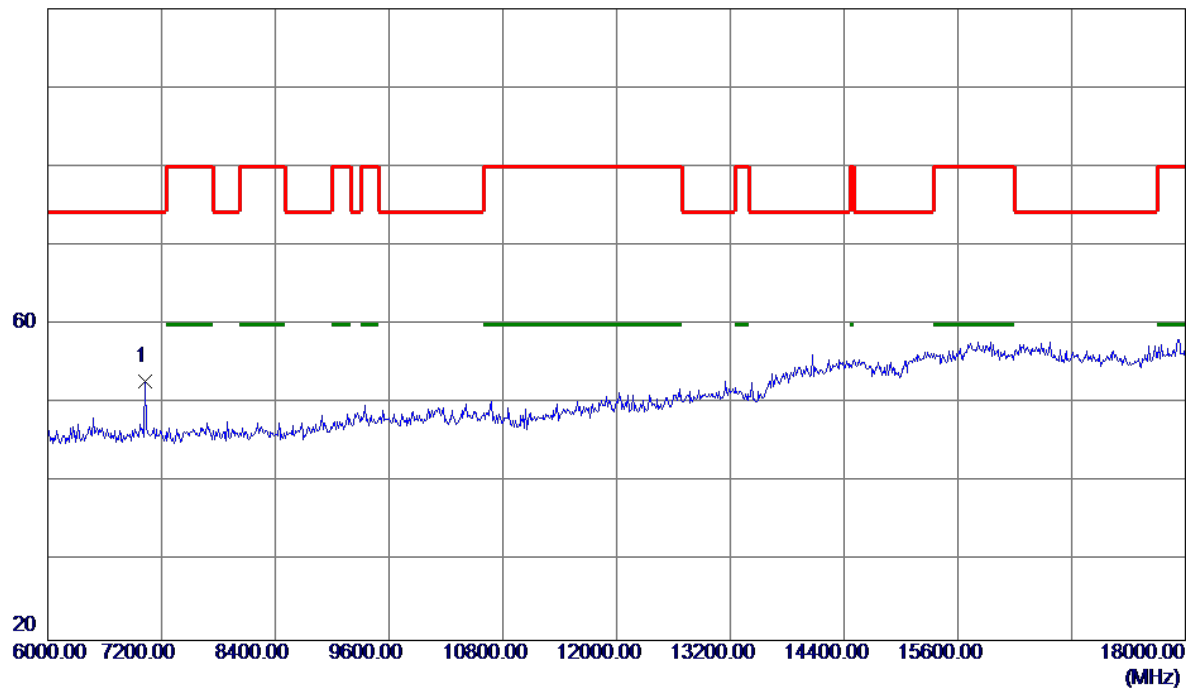


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7032.0000    | 39.86                      | 13.00                   | 52.86                     | 74.30           | -21.44       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Vertical


100 dBuV/m

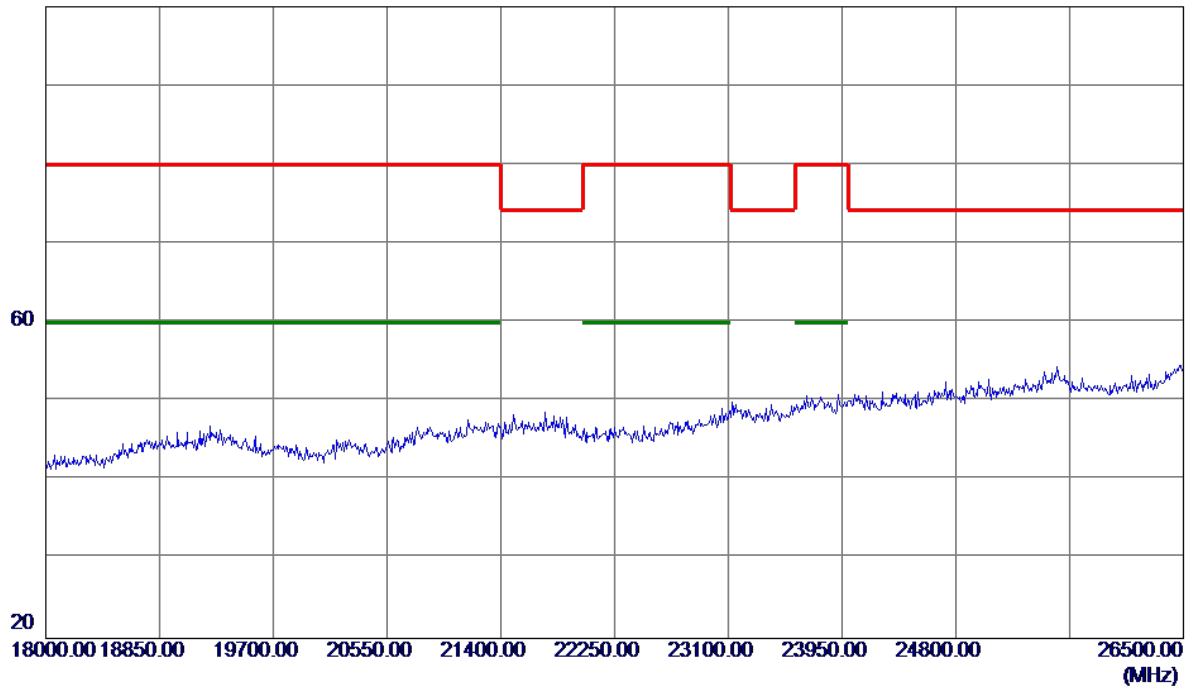

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |


### Vertical

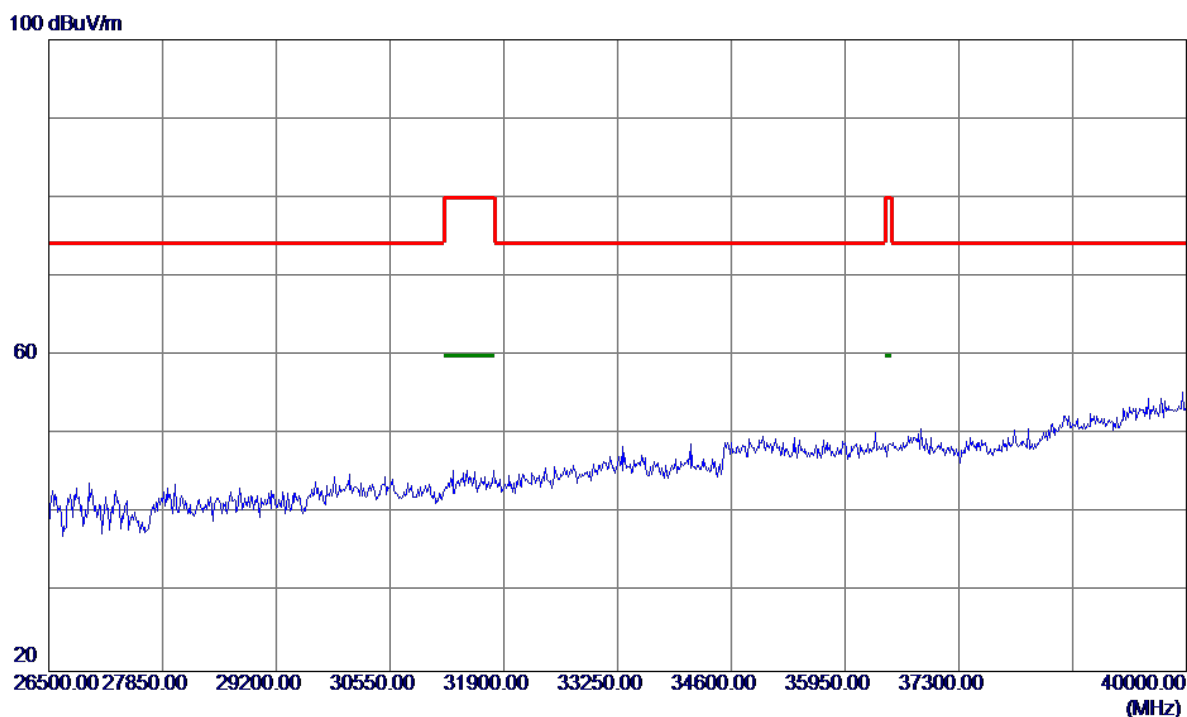

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Horizontal

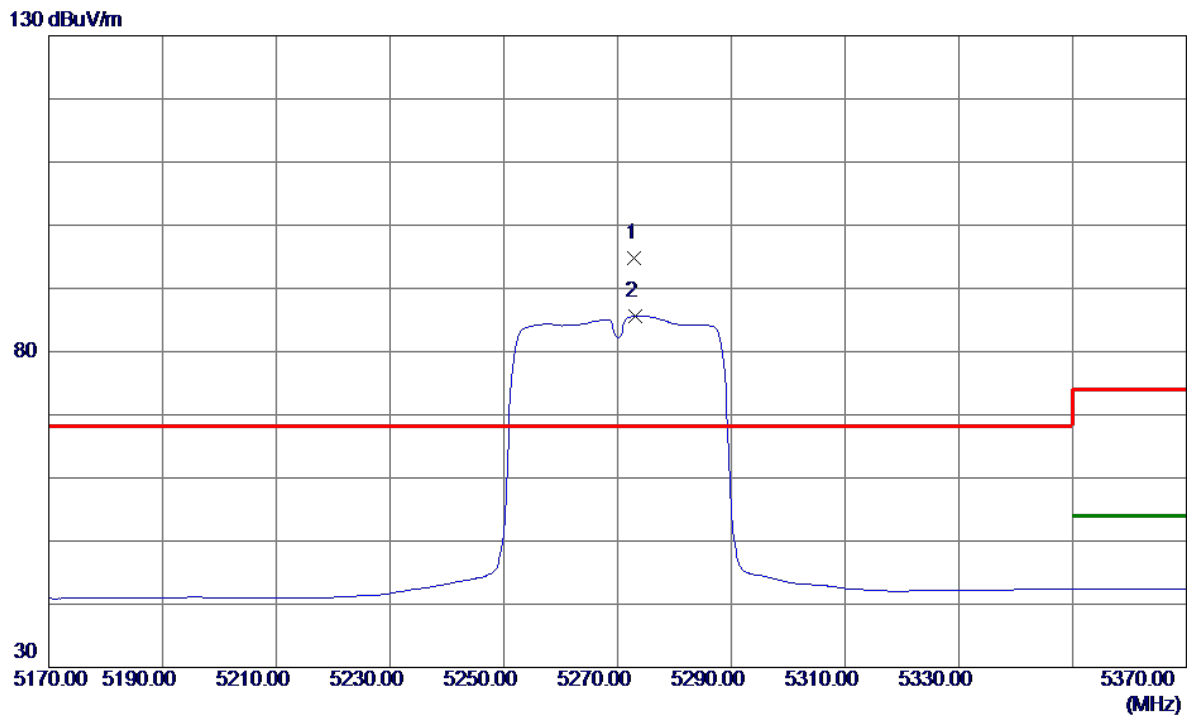


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5273.0000    | 53.08                      | 41.73                   | 94.81                     | 68.30           | 26.51        | Peak     | No Limit |
| 2   | 5273.2000    | 43.89                      | 41.73                   | 85.62                     | 999.00          | -913.38      | AVG      | No Limit |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |


### Horizontal

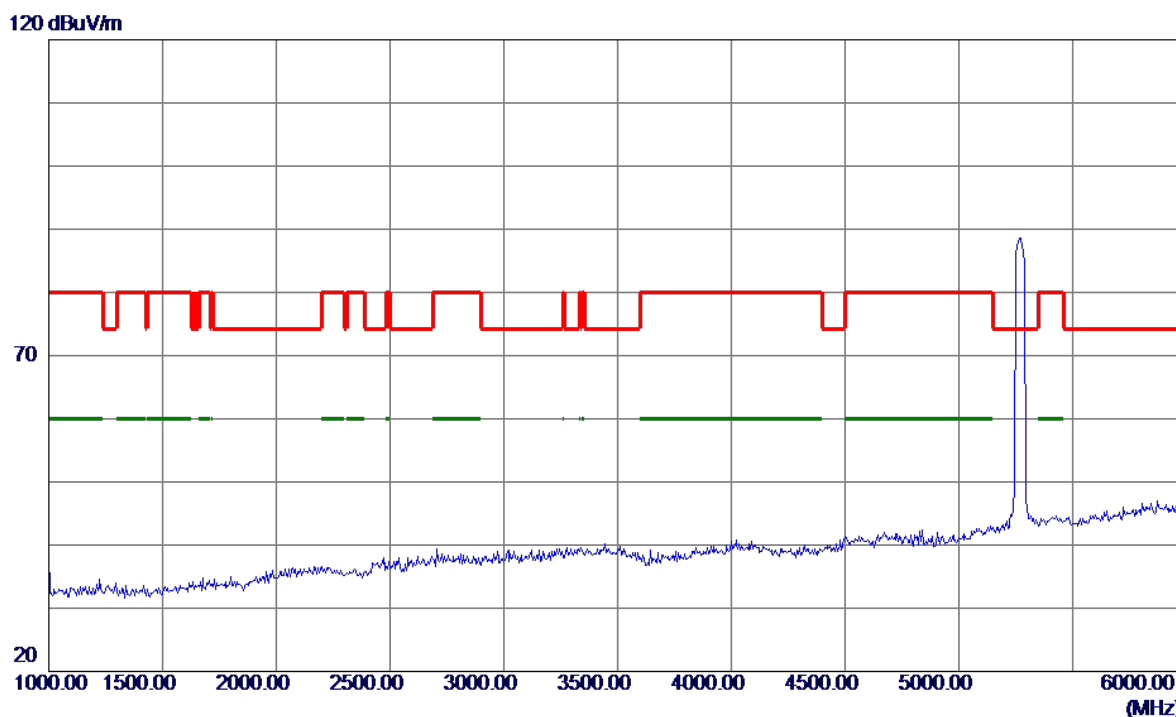

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Horizontal

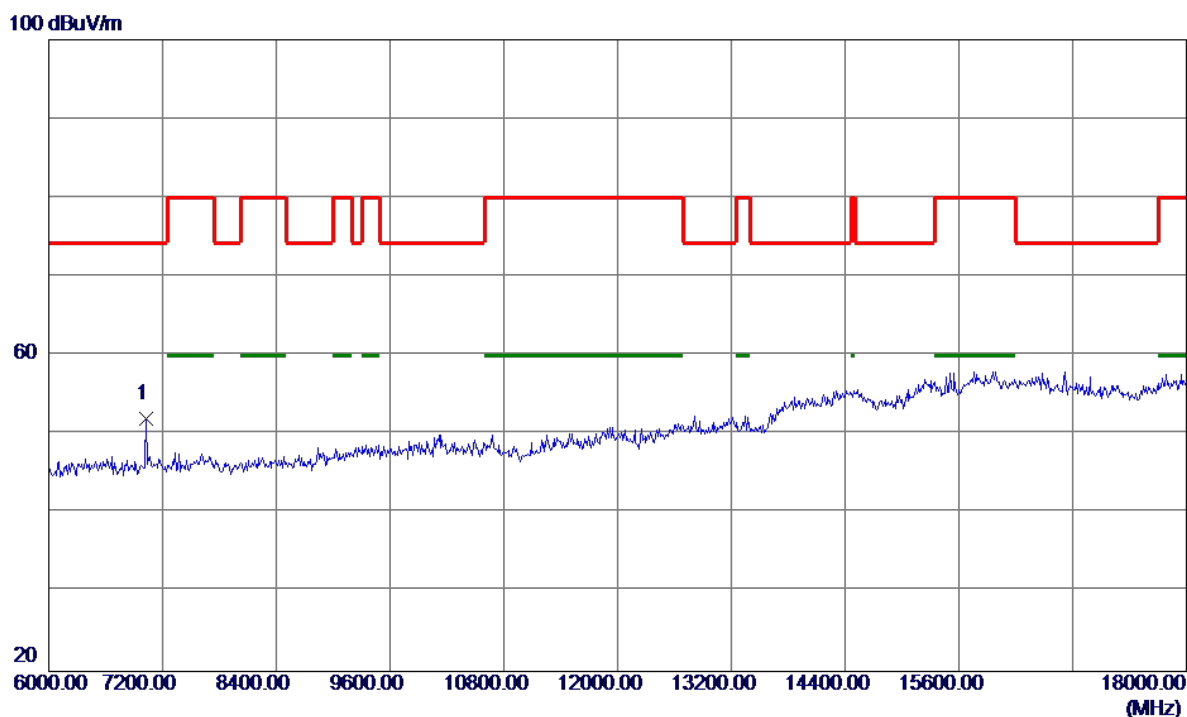


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7032.0000    | 38.97                      | 13.00                   | 51.97                     | 74.30           | -22.33       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Horizontal


100 dBuV/m

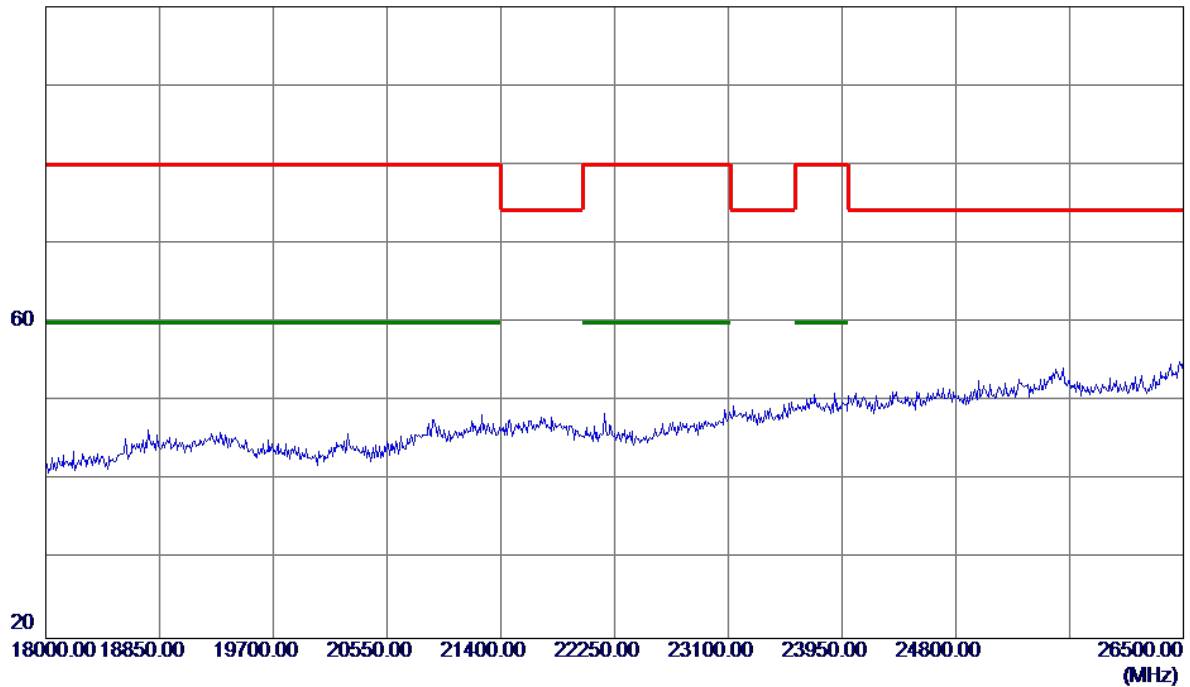

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5270MHz |

### Horizontal

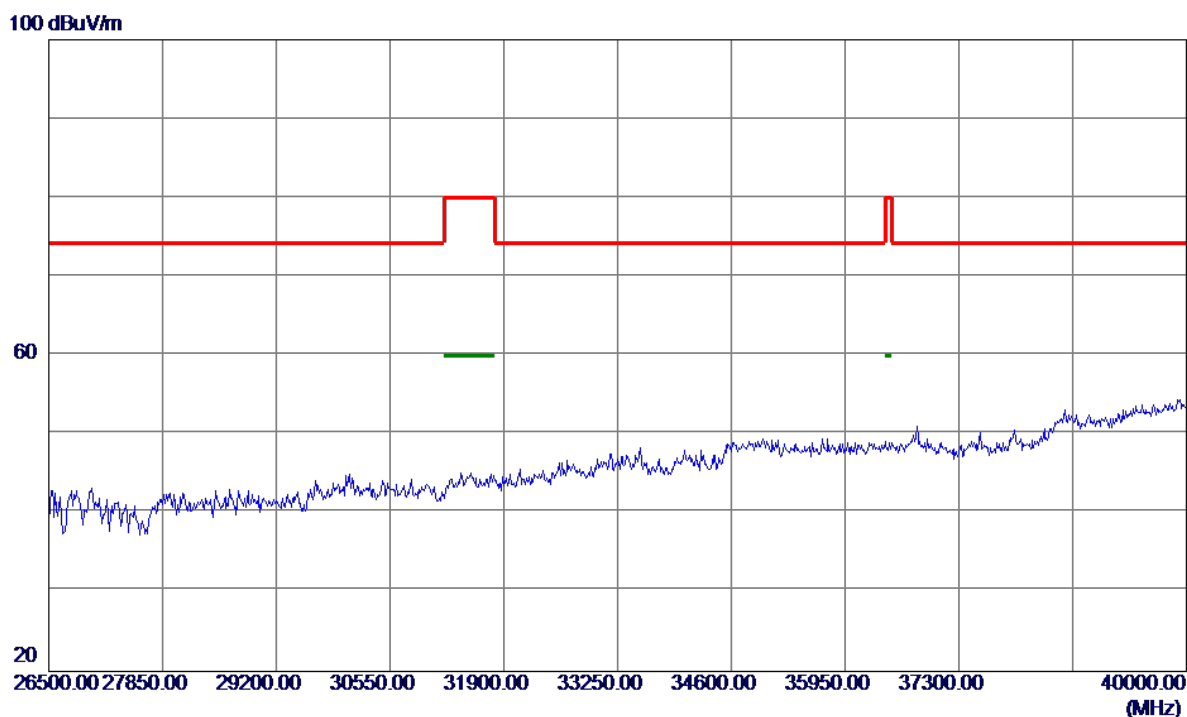


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Vertical

130 dBuV/m

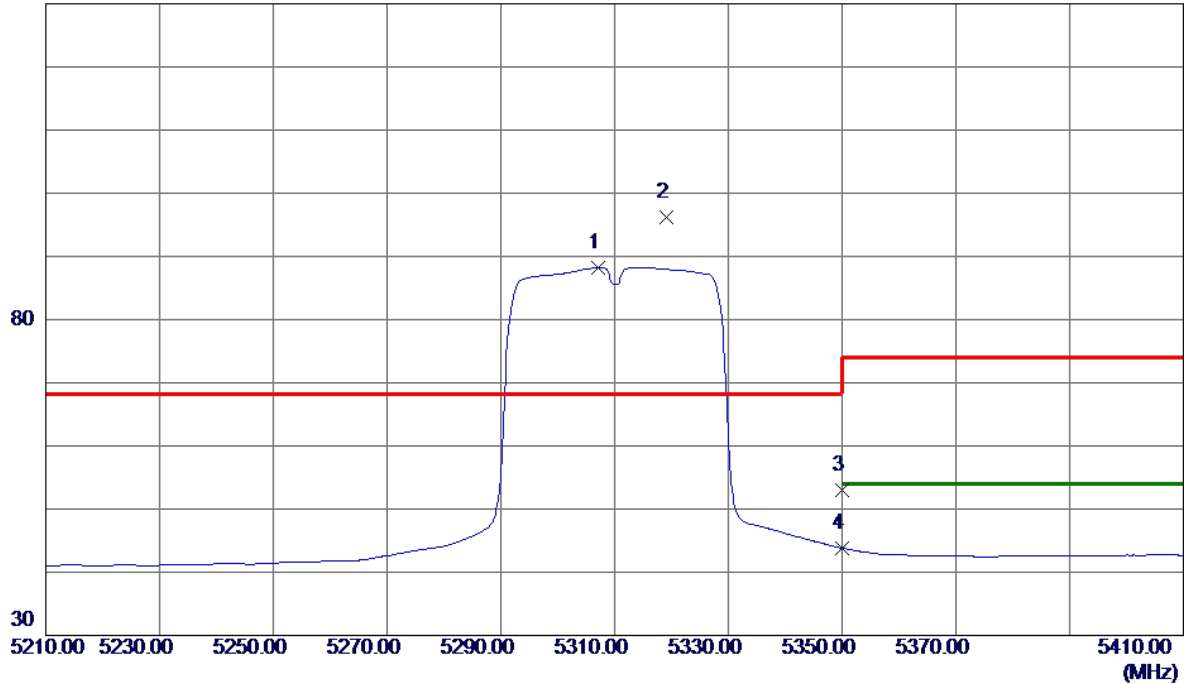


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5307.2000    | 46.30                      | 41.90                   | 88.20                     | 999.00          | -910.80      | AVG      | No Limit |
| 2 * | 5319.2000    | 54.24                      | 41.96                   | 96.20                     | 68.30           | 27.90        | Peak     | No Limit |
| 3   | 5350.0000    | 10.93                      | 42.12                   | 53.05                     | 68.30           | -15.25       | Peak     |          |
| 4   | 5350.0000    | 1.67                       | 42.12                   | 43.79                     | 999.00          | -955.21      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Vertical


120 dBuV/m

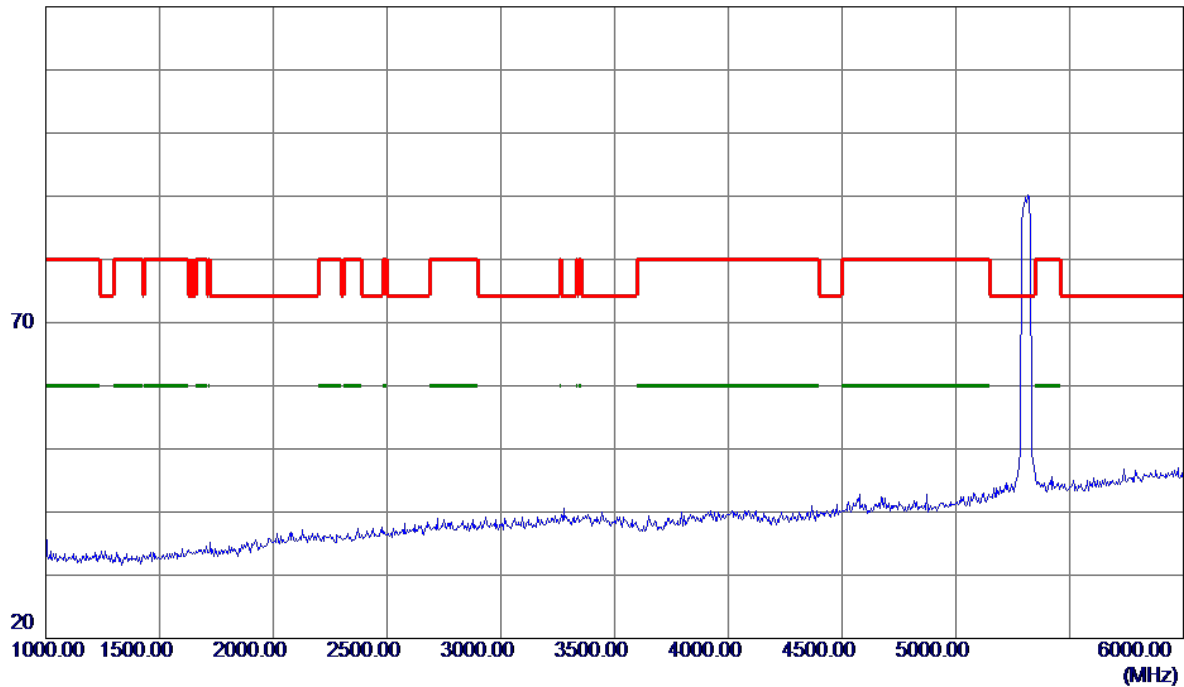

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

# Vertical

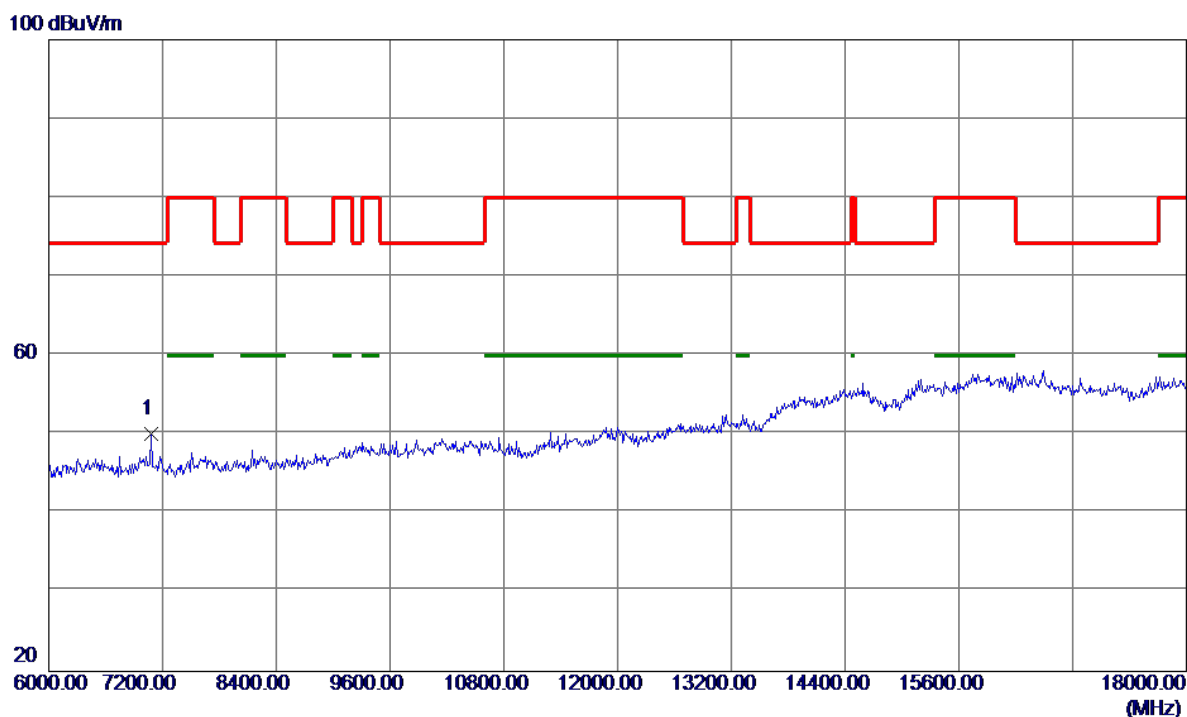


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7080.0000    | 37.07                      | 13.04                   | 50.11                     | 74.30           | -24.19       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Vertical

100 dBuV/m

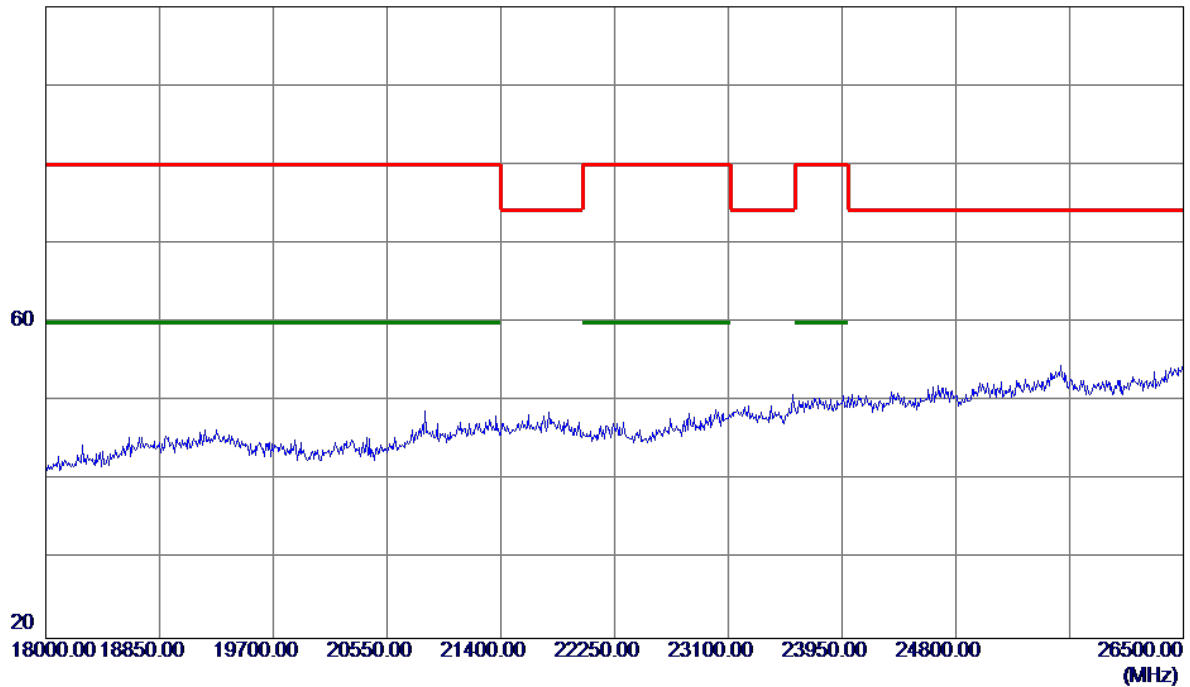


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |


### Vertical

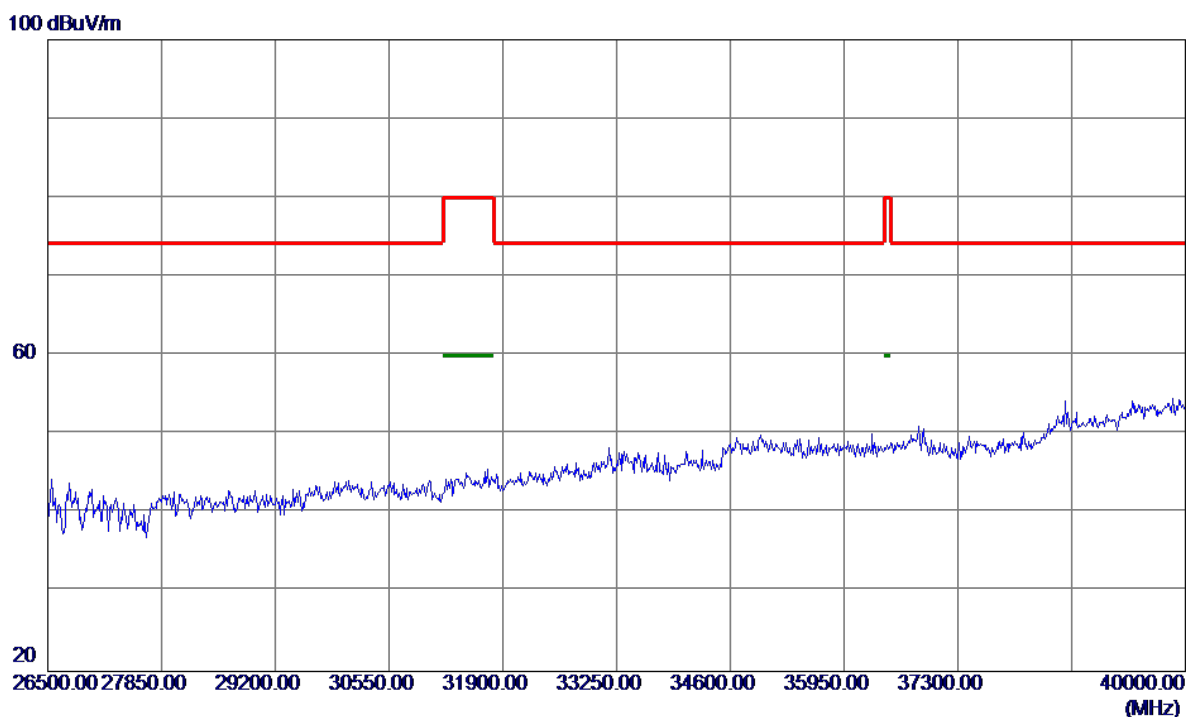

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal

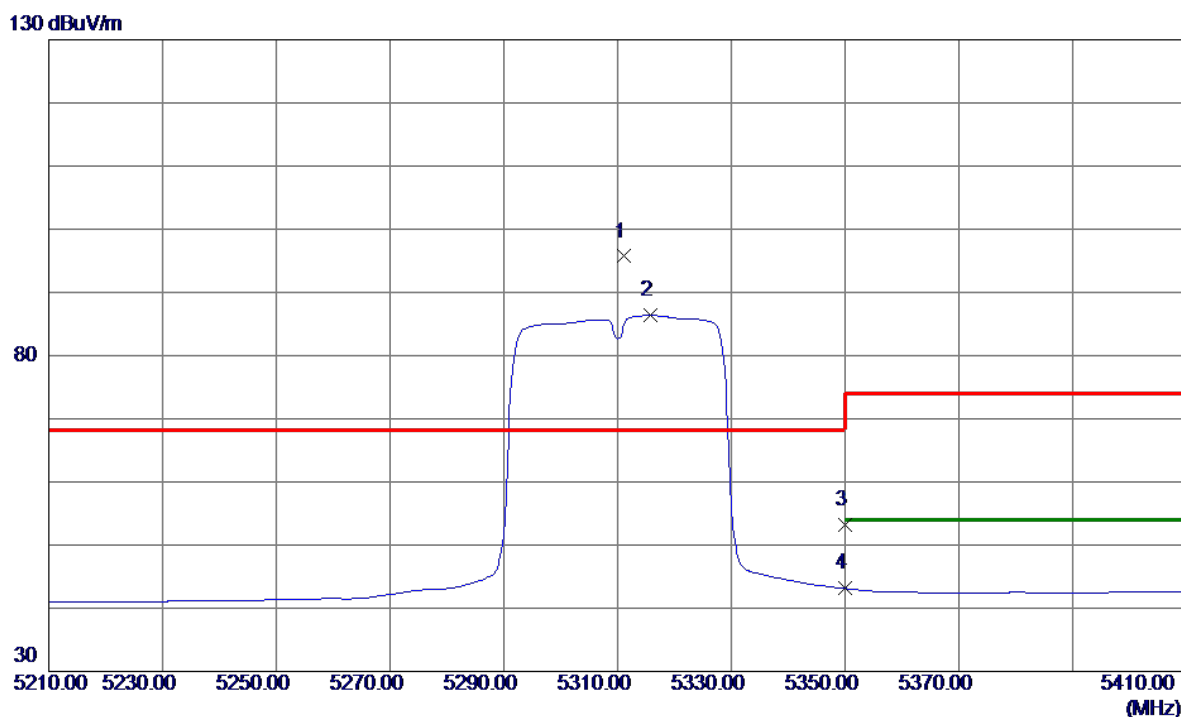


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5311.2000    | 53.78                      | 41.92                   | 95.70                     | 68.30           | 27.40        | Peak     | No Limit |
| 2   | 5315.8000    | 44.41                      | 41.94                   | 86.35                     | 999.00          | -912.65      | AVG      | No Limit |
| 3   | 5350.0000    | 10.99                      | 42.12                   | 53.11                     | 68.30           | -15.19       | Peak     |          |
| 4   | 5350.0000    | 1.00                       | 42.12                   | 43.12                     | 999.00          | -955.88      | AVG      |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal


120 dBuV/m

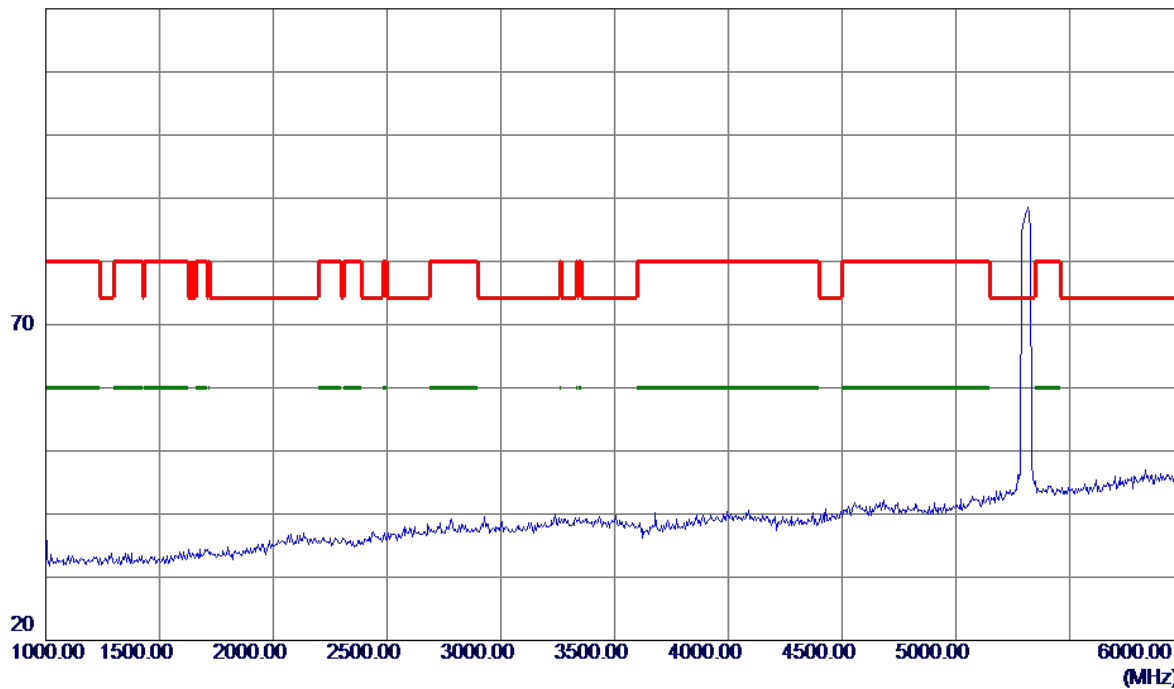

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal

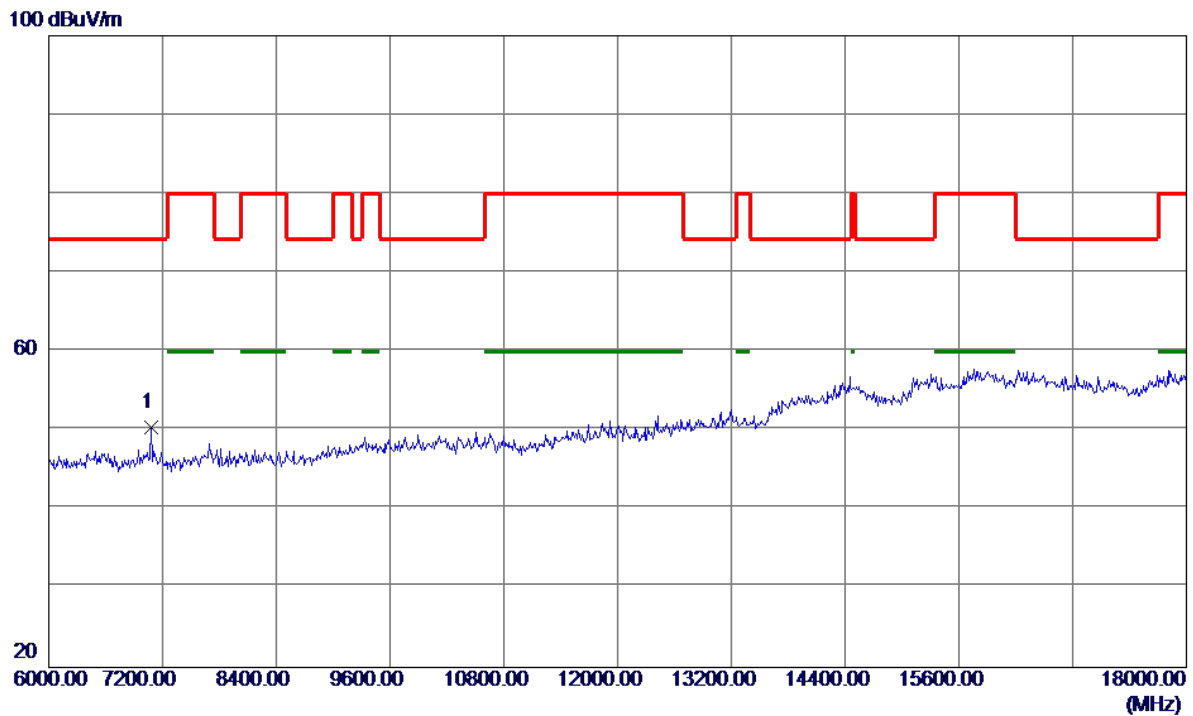


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 7080.0000    | 37.37                      | 13.04                   | 50.41                     | 74.30           | -23.89       | Peak     |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal


100 dBuV/m

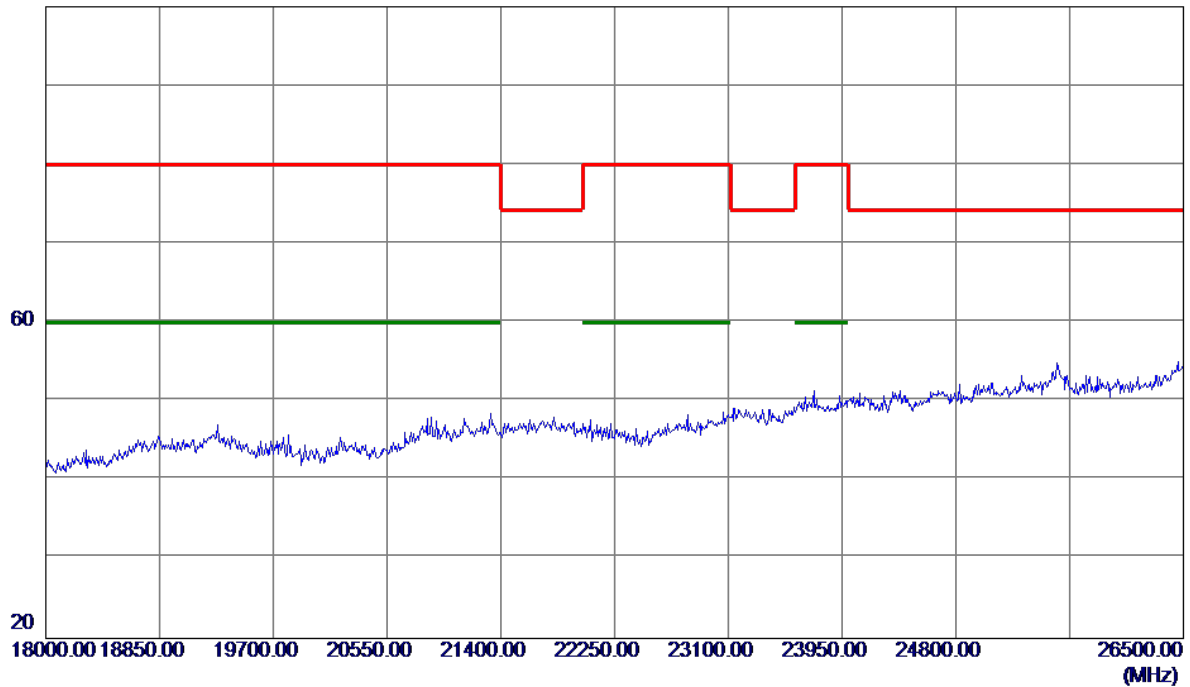

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2A/ TX N40 Mode 5310MHz |

### Horizontal

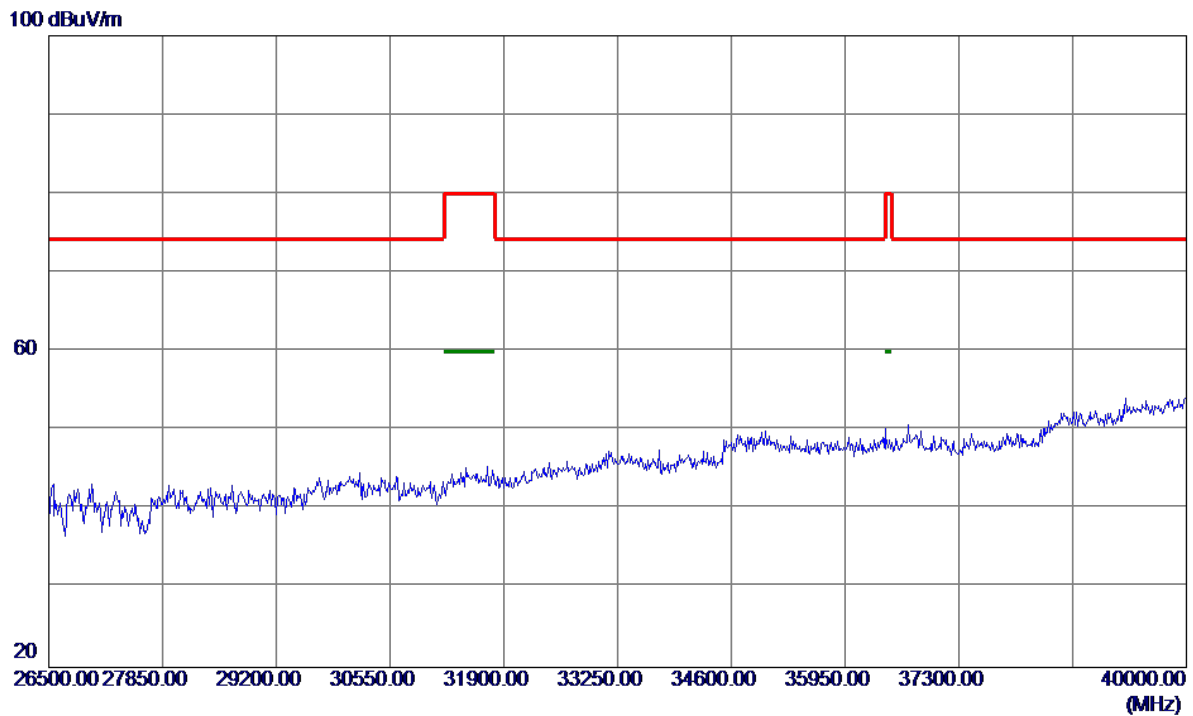


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical

130 dBuV/m

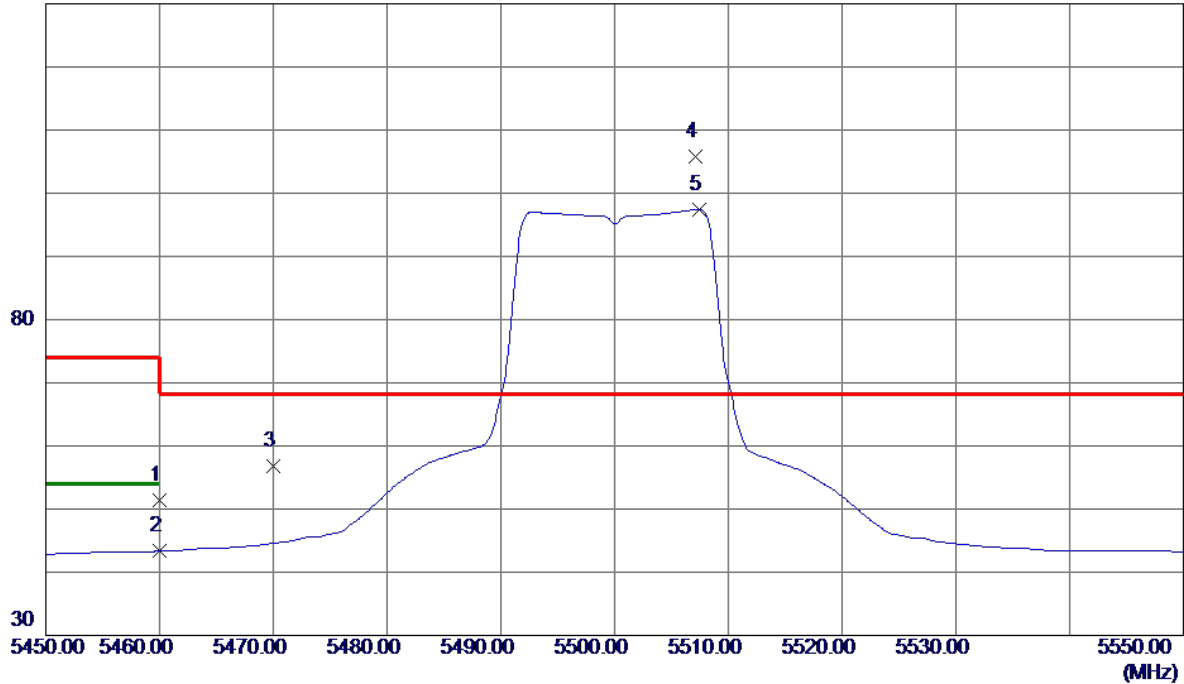


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 8.78                       | 42.68                   | 51.46                     | 74.00           | -22.54       | Peak     |          |
| 2   | 5460.0000    | 0.66                       | 42.68                   | 43.34                     | 54.00           | -10.66       | AVG      |          |
| 3   | 5470.0000    | 14.13                      | 42.73                   | 56.86                     | 68.30           | -11.44       | Peak     |          |
| 4 * | 5507.1000    | 62.87                      | 42.90                   | 105.77                    | 68.30           | 37.47        | Peak     | No Limit |
| 5   | 5507.4000    | 54.56                      | 42.90                   | 97.46                     | 999.00          | -901.54      | AVG      | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical

120 dBuV/m

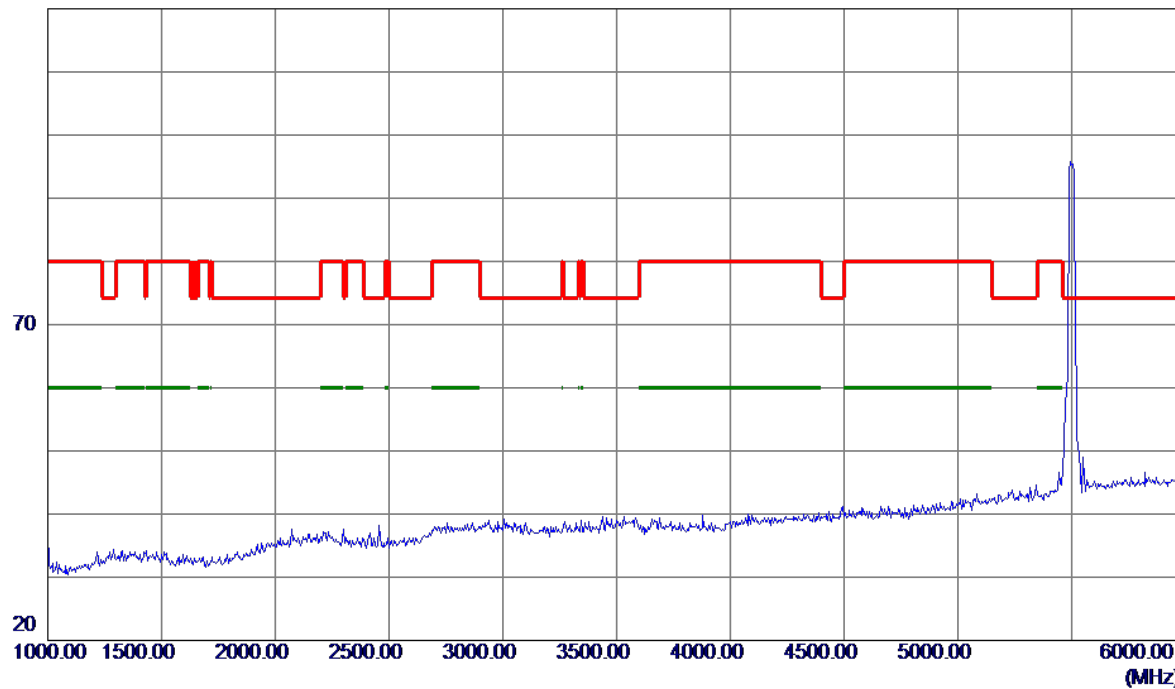


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical

100 dBuV/m

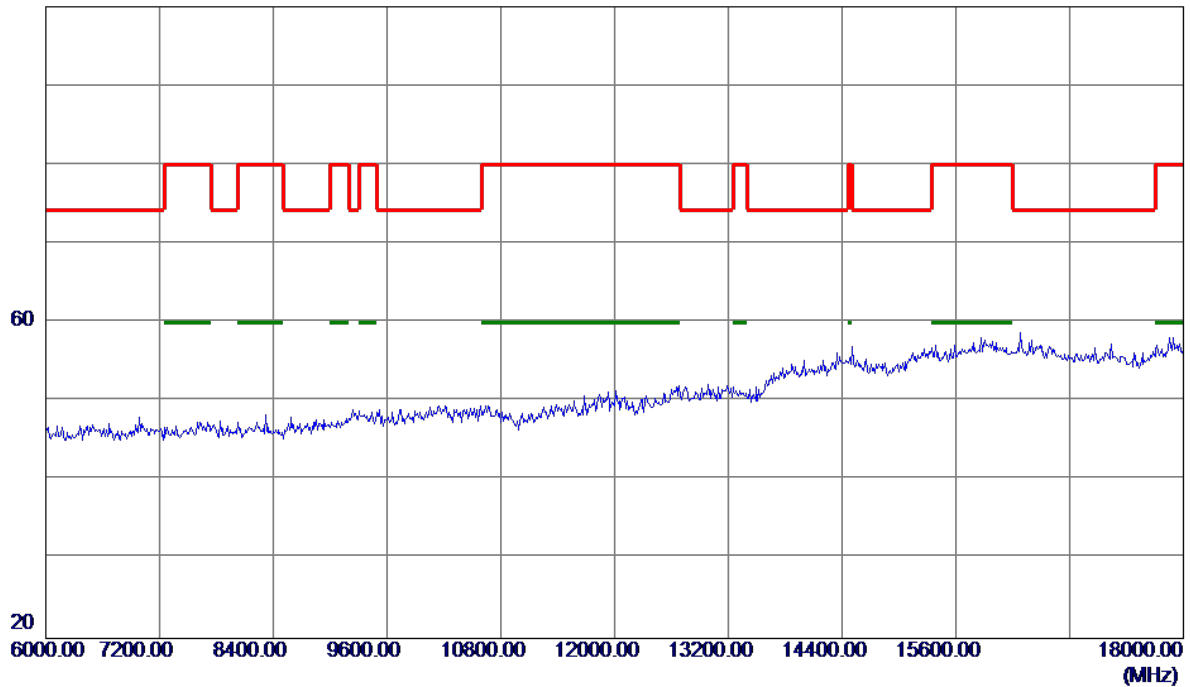


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical


100 dBuV/m

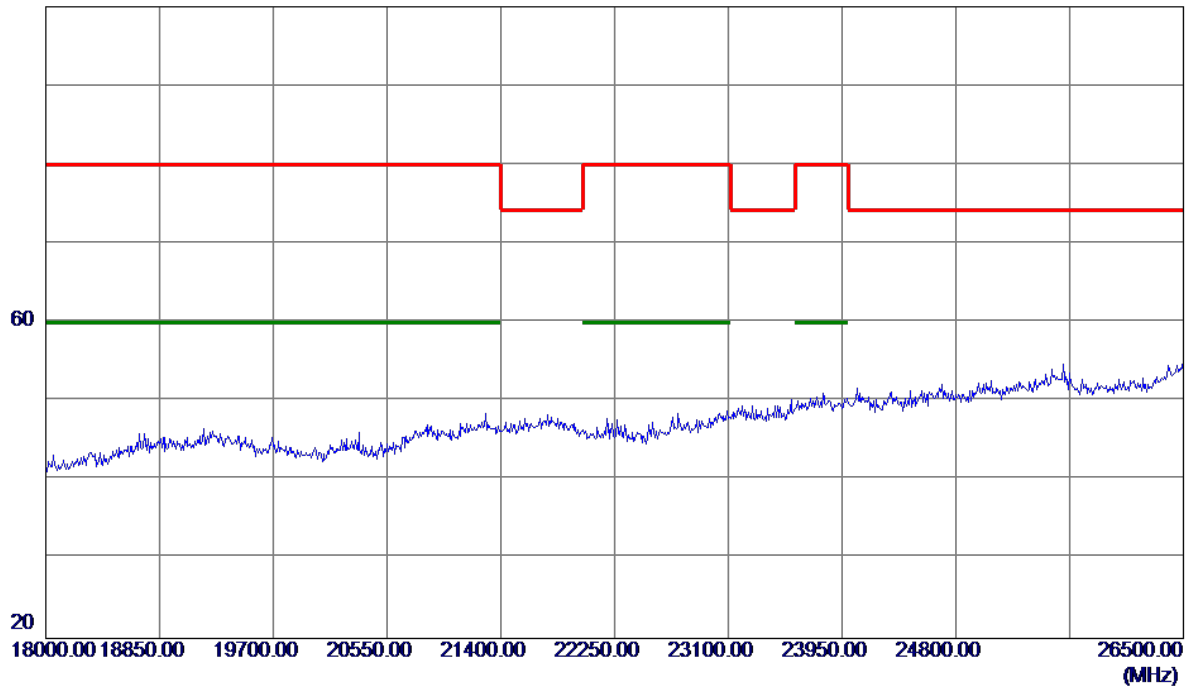

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Vertical

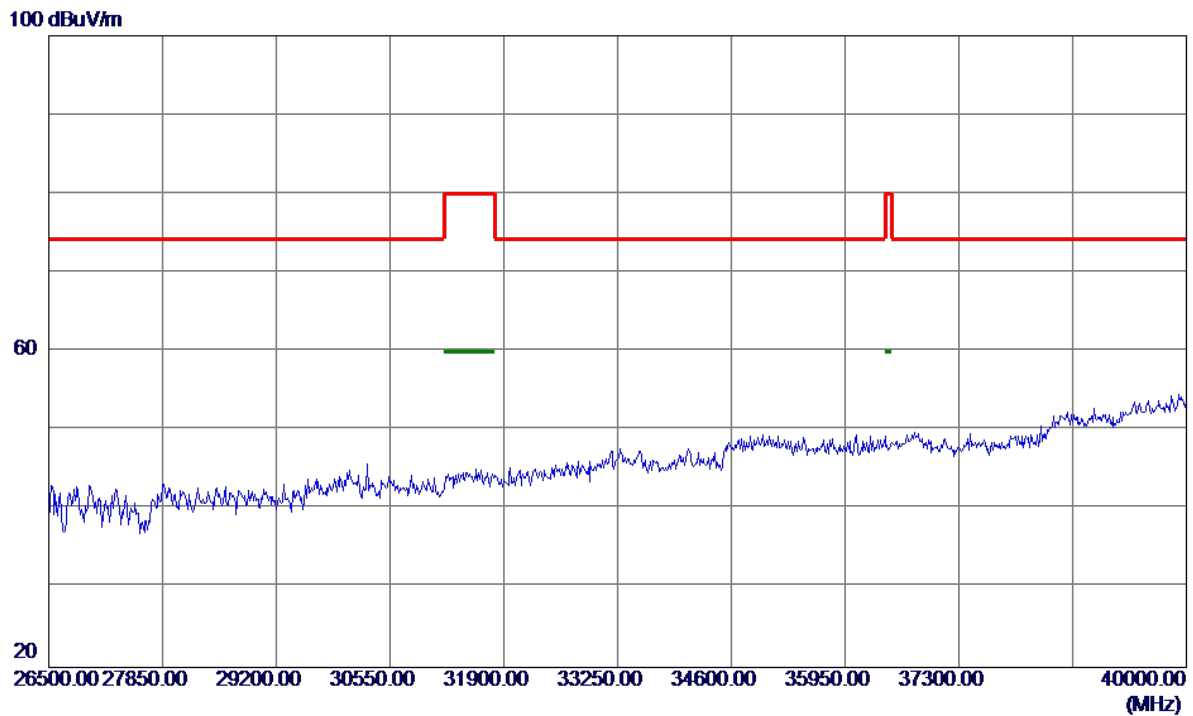


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

130 dBuV/m

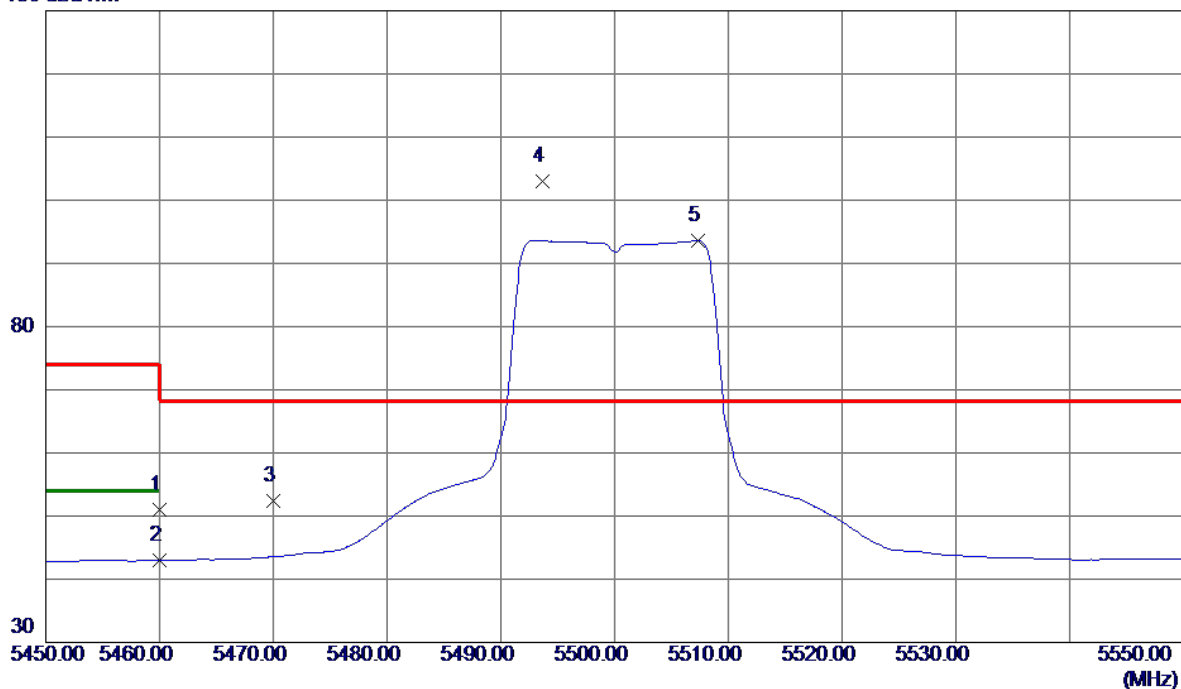


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 8.35                       | 42.68                   | 51.03                     | 74.00           | -22.97       | Peak     |          |
| 2   | 5460.0000    | 0.27                       | 42.68                   | 42.95                     | 54.00           | -11.05       | AVG      |          |
| 3   | 5470.0000    | 9.58                       | 42.73                   | 52.31                     | 68.30           | -15.99       | Peak     |          |
| 4 * | 5493.7000    | 60.05                      | 42.85                   | 102.90                    | 68.30           | 34.60        | Peak     | No Limit |
| 5   | 5507.3000    | 50.66                      | 42.90                   | 93.56                     | 999.00          | -905.44      | AVG      | No Limit |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

120 dBuV/m

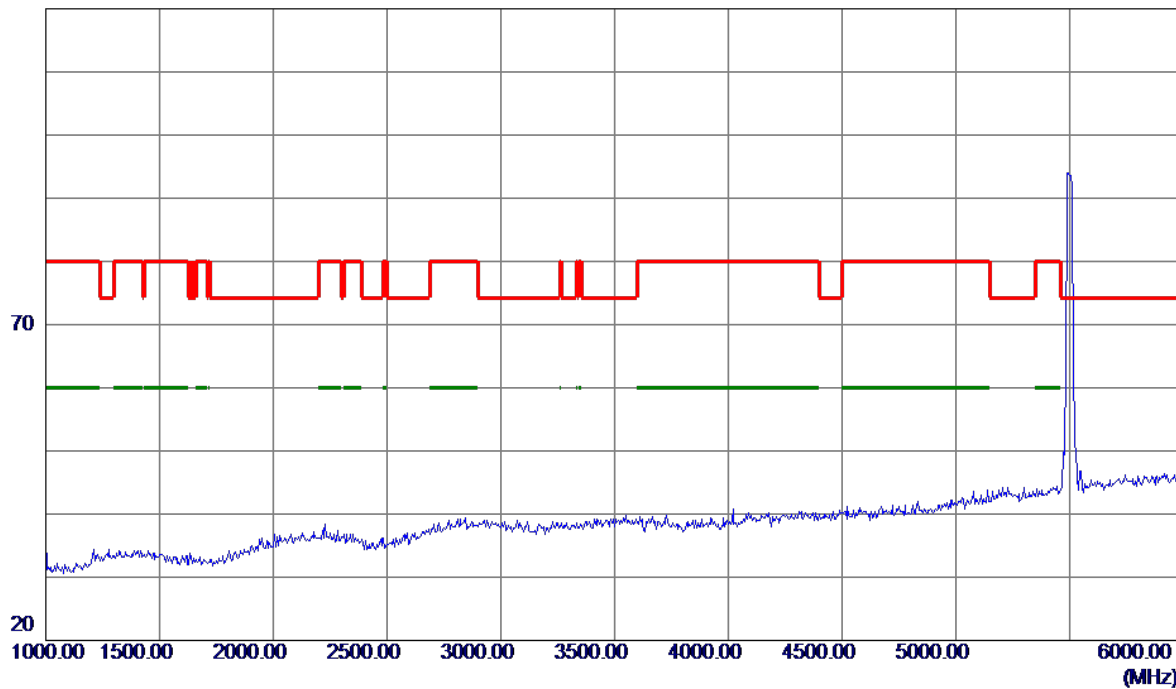


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

100 dBuV/m

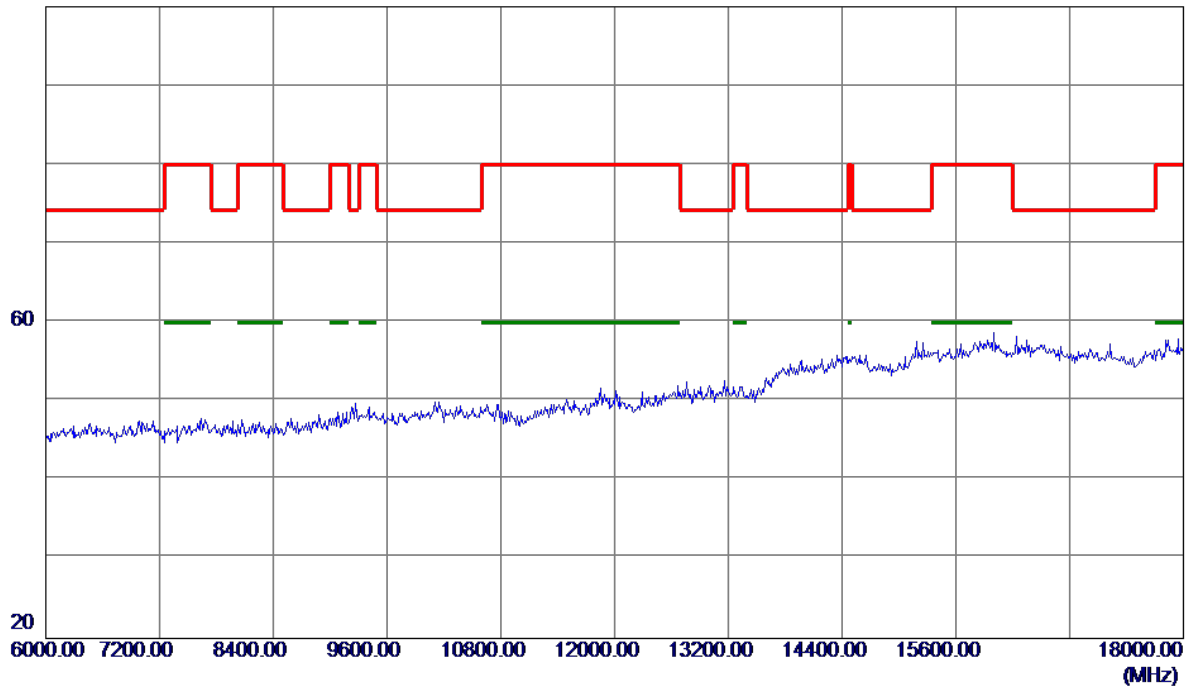


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

100 dBuV/m

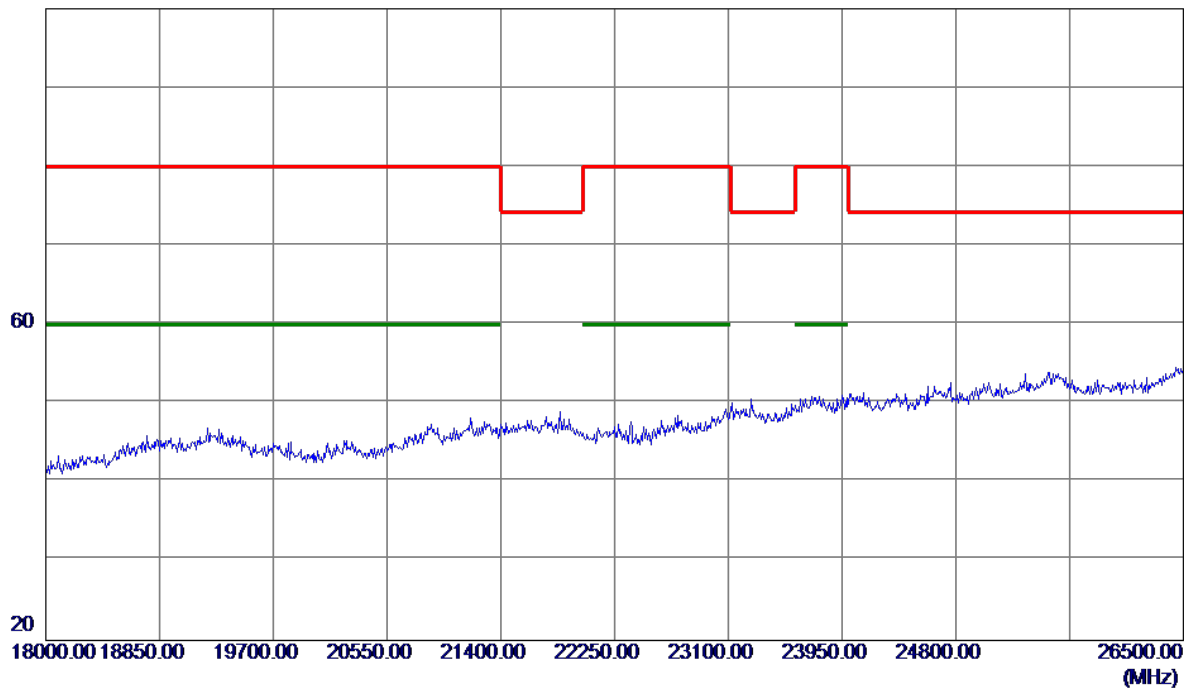

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5500MHz |

### Horizontal

100 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical

130 dBuV/m

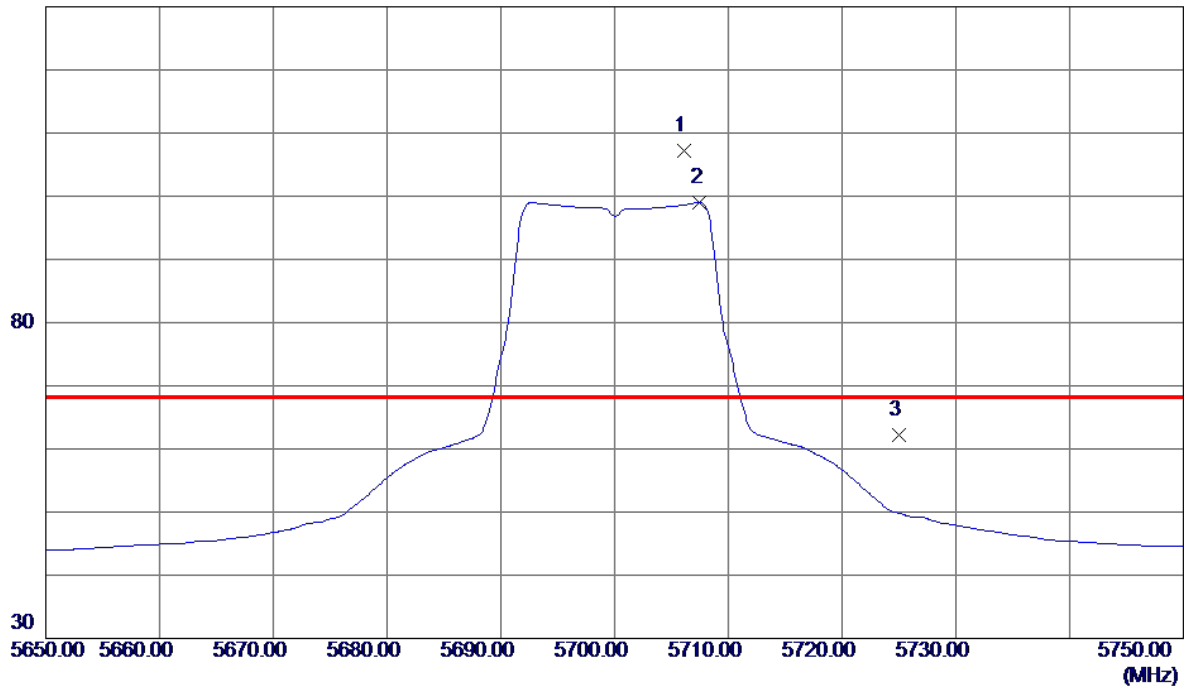


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5706.1000    | 63.71                      | 43.50                   | 107.21                    | 68.30           | 38.91        | Peak     | No Limit |
| 2   | 5707.5000    | 55.53                      | 43.51                   | 99.04                     | 999.00          | -899.96      | AVG      | No Limit |
| 3   | 5725.0000    | 18.59                      | 43.56                   | 62.15                     | 68.30           | -6.15        | Peak     |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical

120 dBuV/m

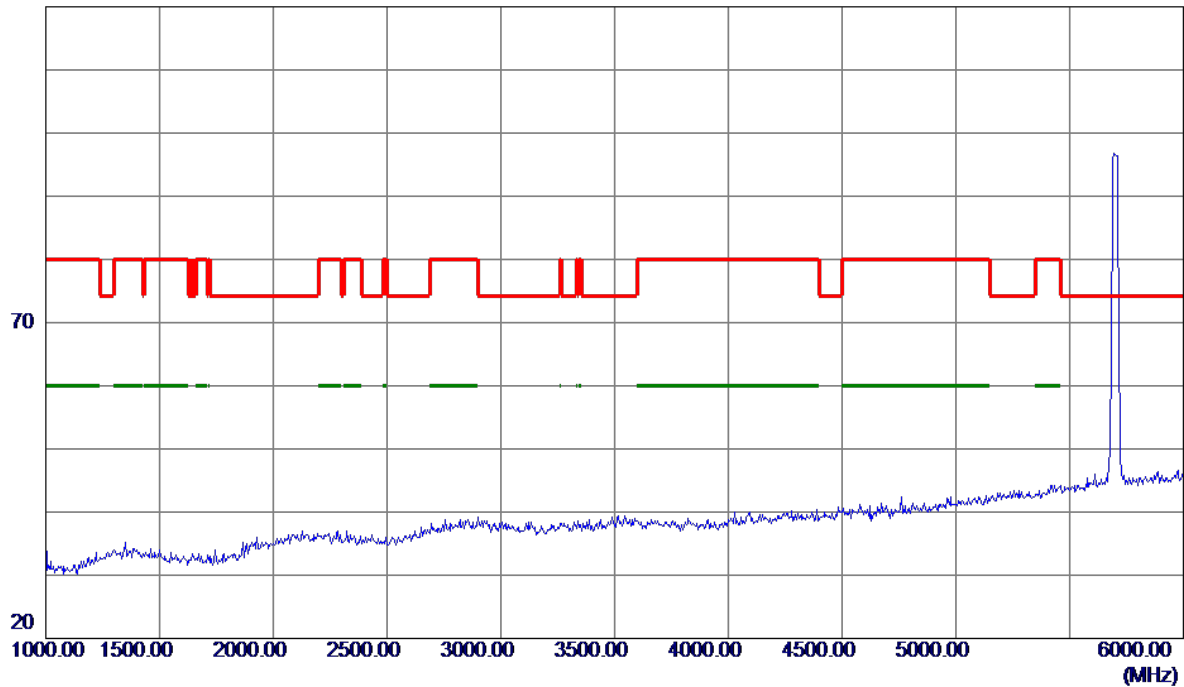


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical

100 dBuV/m

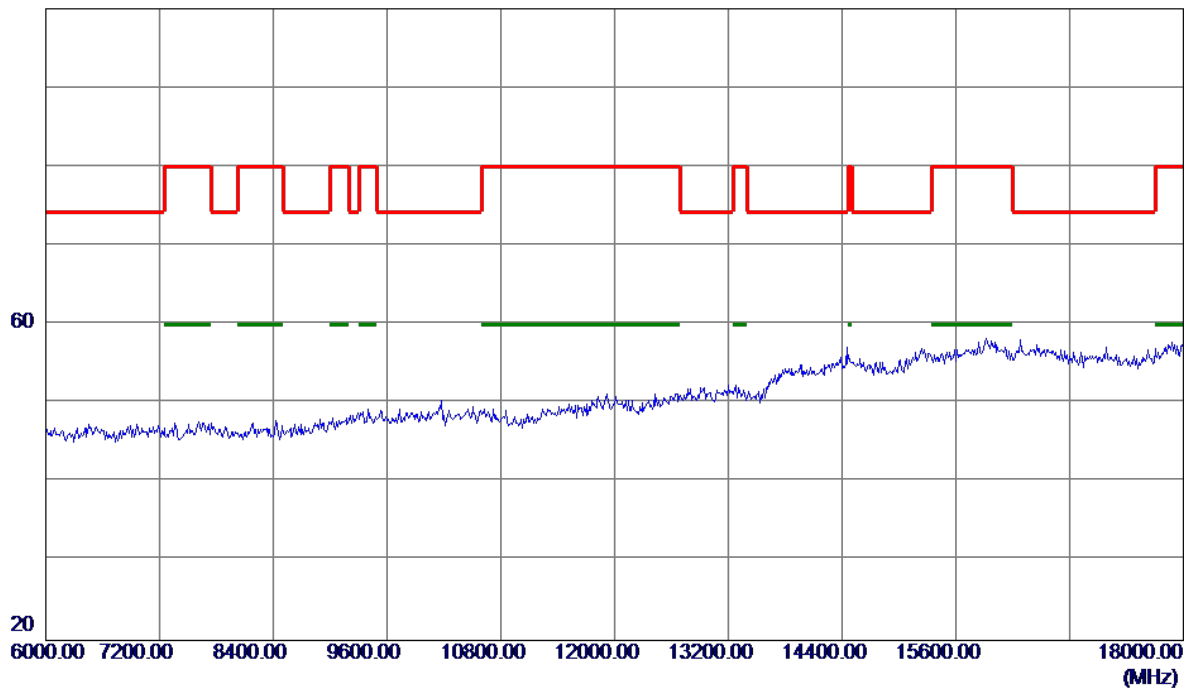


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical


100 dBuV/m

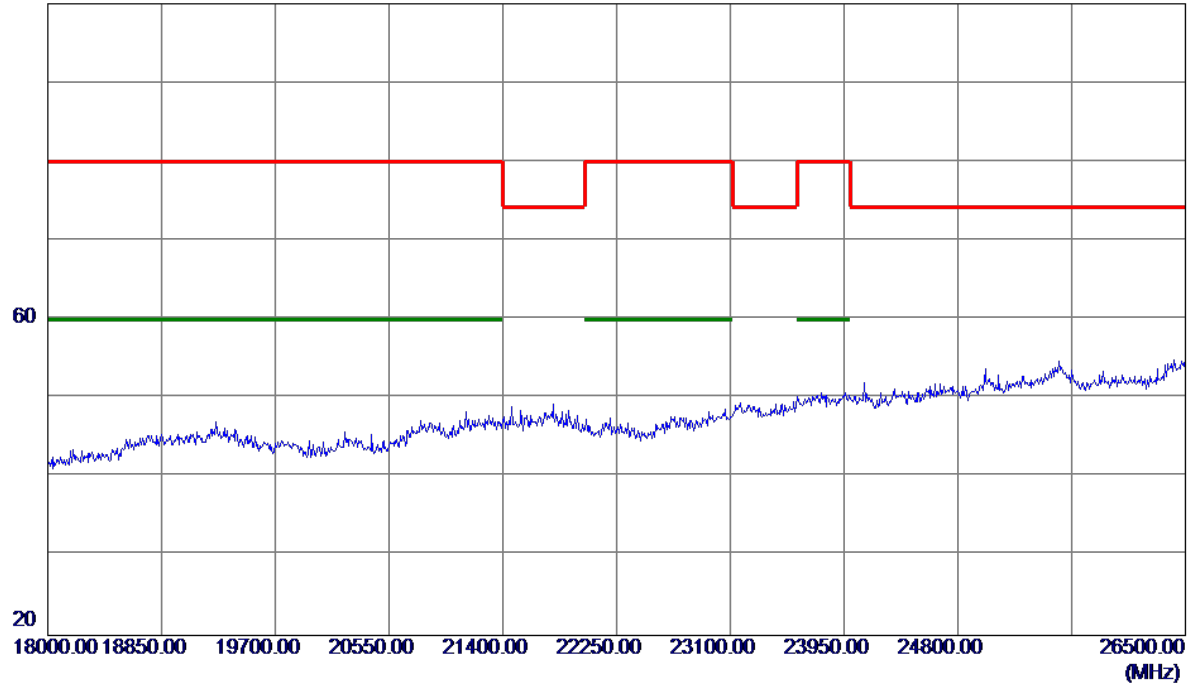

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Vertical

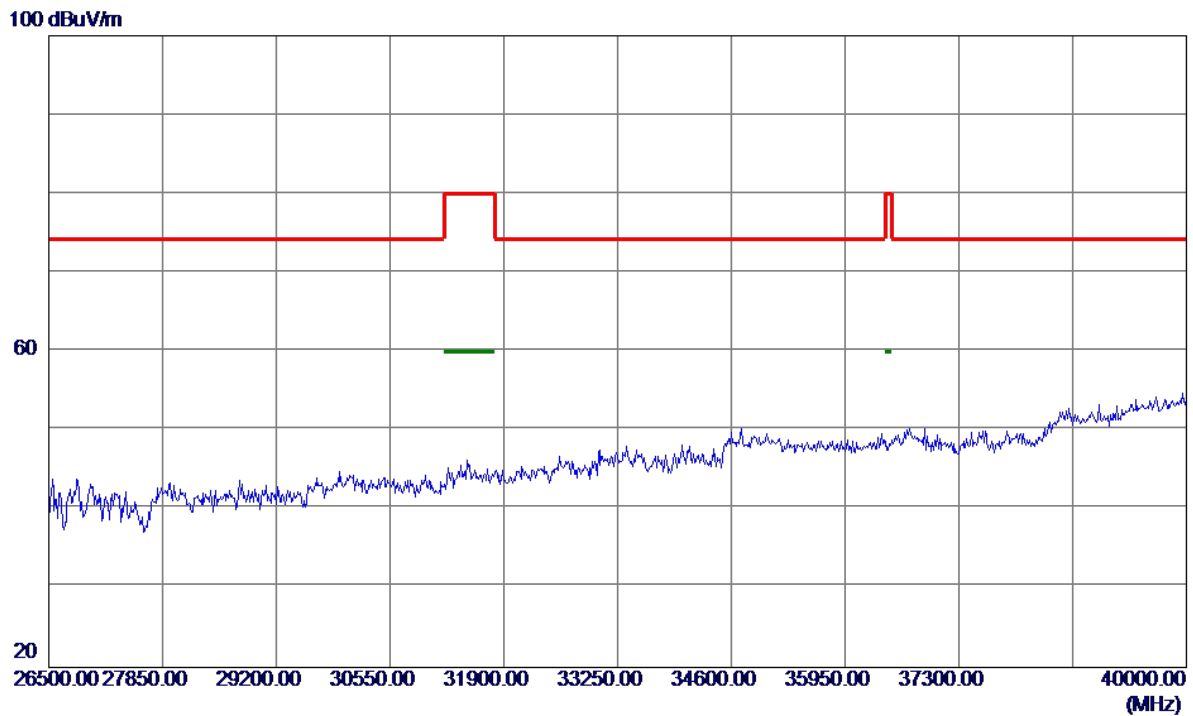


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal

130 dBuV/m

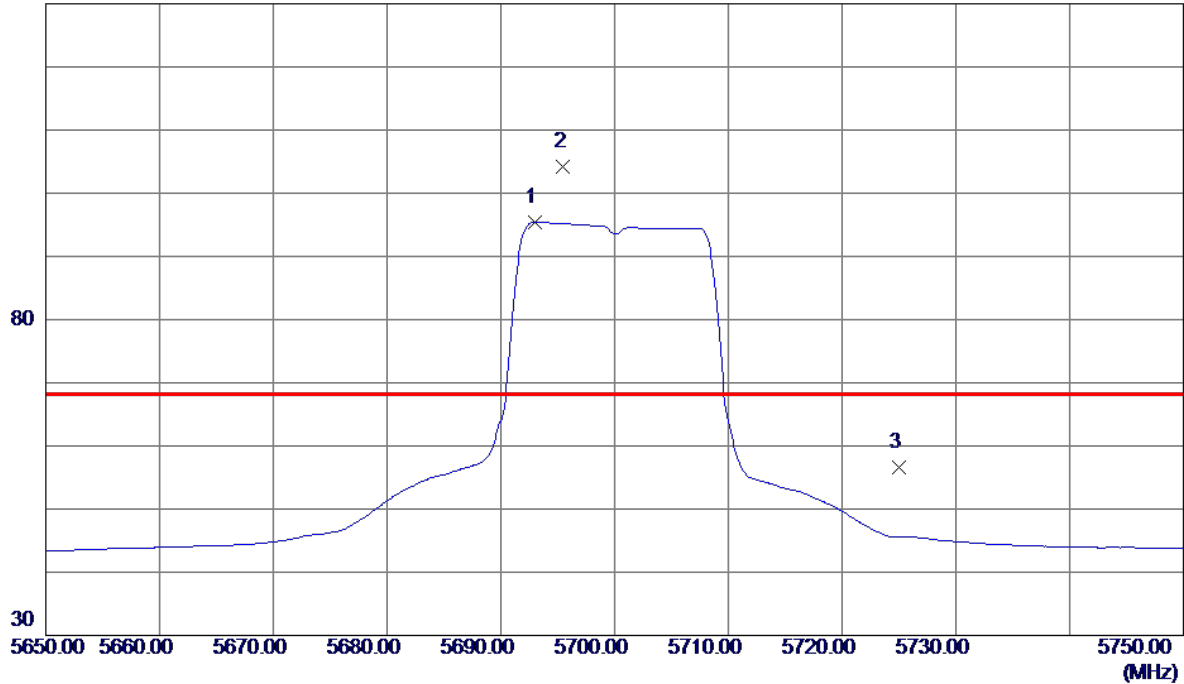


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5693.0000    | 51.90                      | 43.46                   | 95.36                     | 999.00          | -903.64      | AVG      | No Limit |
| 2 * | 5695.5000    | 60.69                      | 43.47                   | 104.16                    | 68.30           | 35.86        | Peak     | No Limit |
| 3   | 5725.0000    | 12.96                      | 43.56                   | 56.52                     | 68.30           | -11.78       | Peak     |          |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal

120 dBuV/m

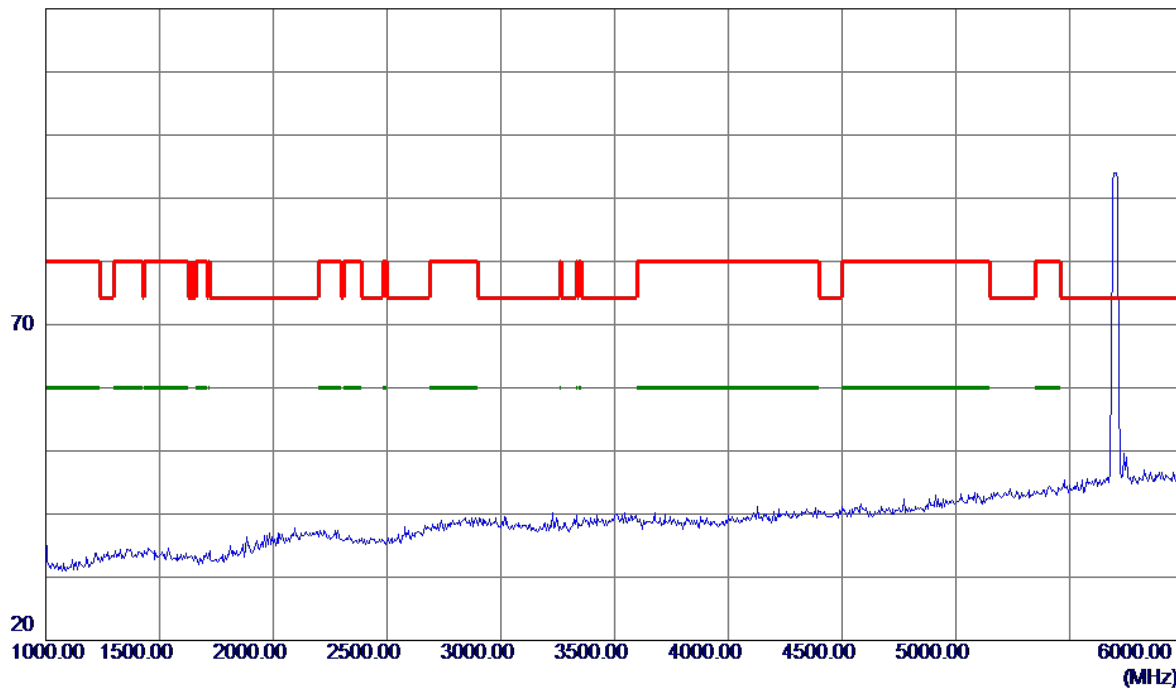


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal

100 dBuV/m

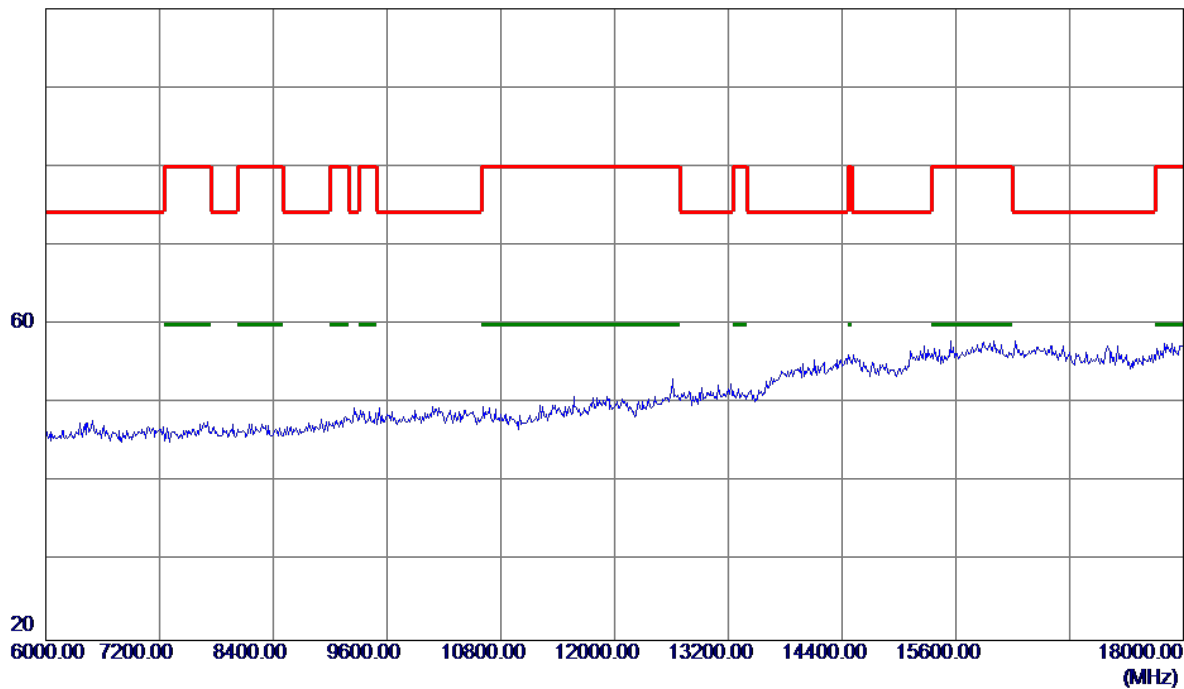


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal


100 dBuV/m

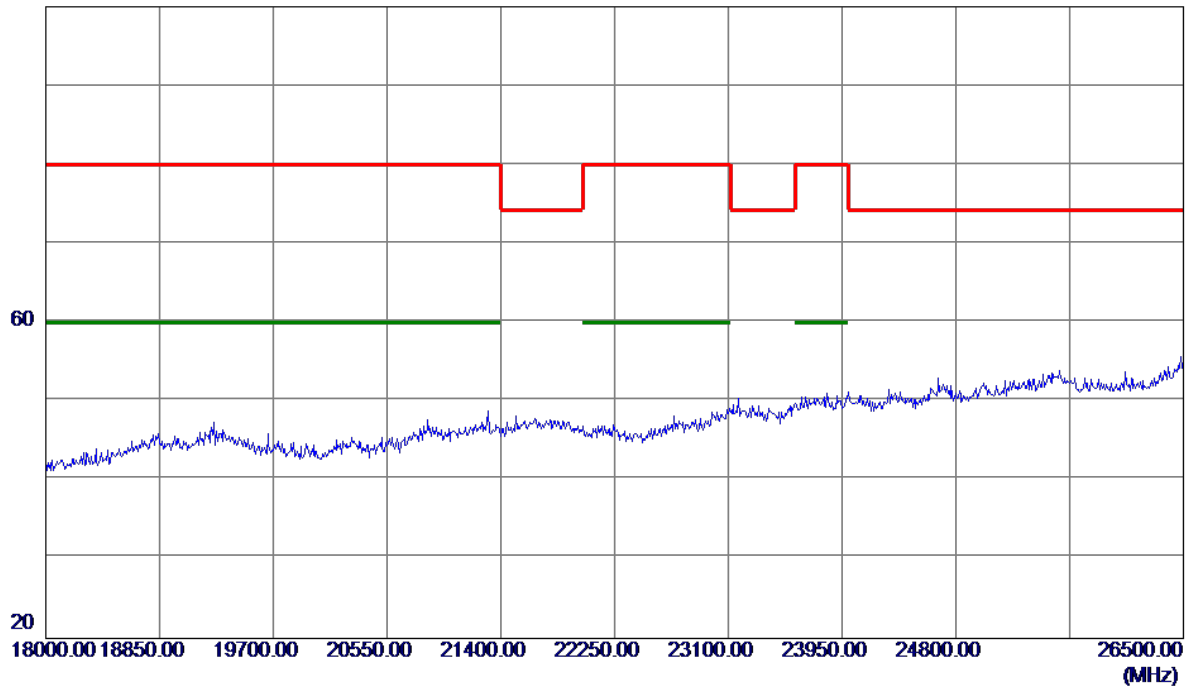

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                            |
|-------------------|----------------------------|
| Orthogonal Axis : | X                          |
| Test Mode :       | UNII-2C/ TX A Mode 5700MHz |

### Horizontal

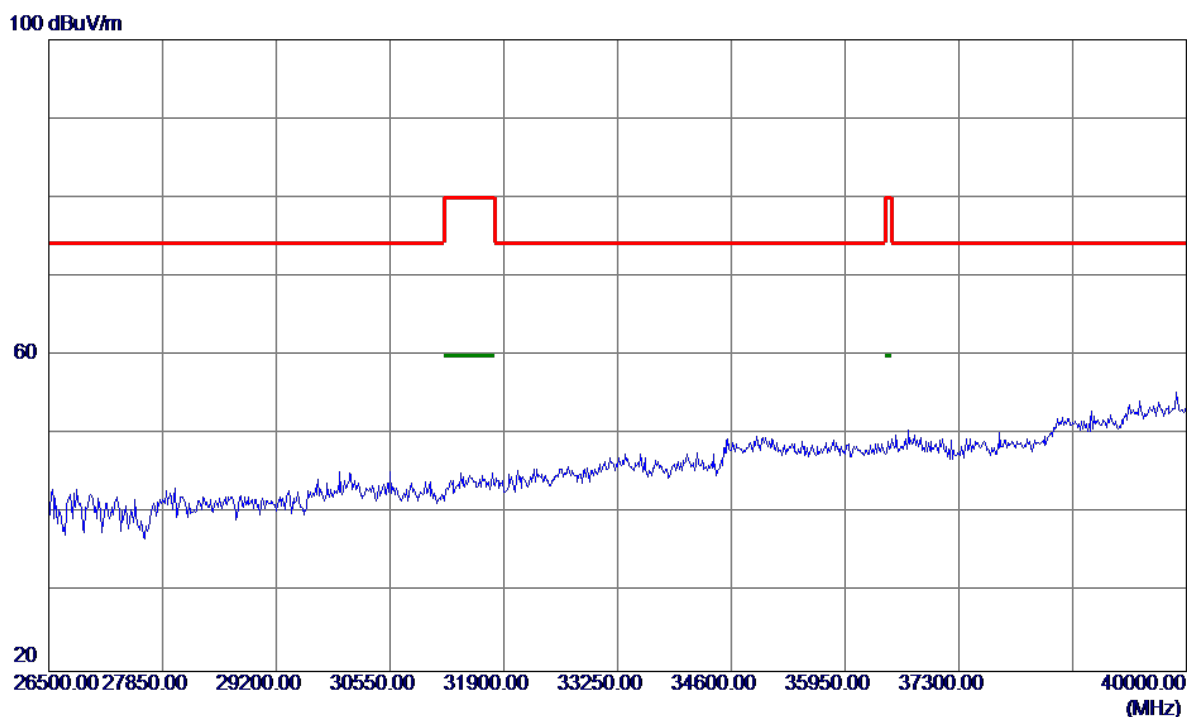


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical

130 dBuV/m

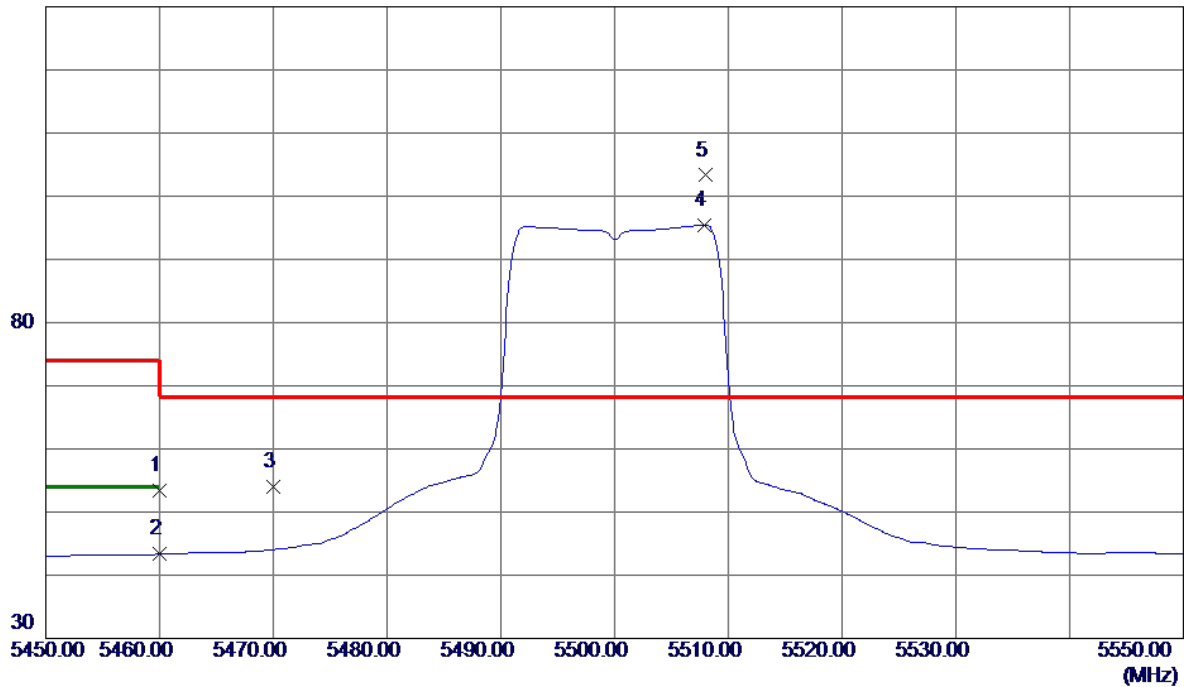


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 10.67                      | 42.68                   | 53.35                     | 74.00           | -20.65       | Peak     |          |
| 2   | 5460.0000    | 0.65                       | 42.68                   | 43.33                     | 54.00           | -10.67       | AVG      |          |
| 3   | 5470.0000    | 11.34                      | 42.73                   | 54.07                     | 68.30           | -14.23       | Peak     |          |
| 4   | 5507.9000    | 52.55                      | 42.90                   | 95.45                     | 999.00          | -903.55      | AVG      | No Limit |
| 5 * | 5508.0000    | 60.40                      | 42.90                   | 103.30                    | 68.30           | 35.00        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical


120 dBuV/m

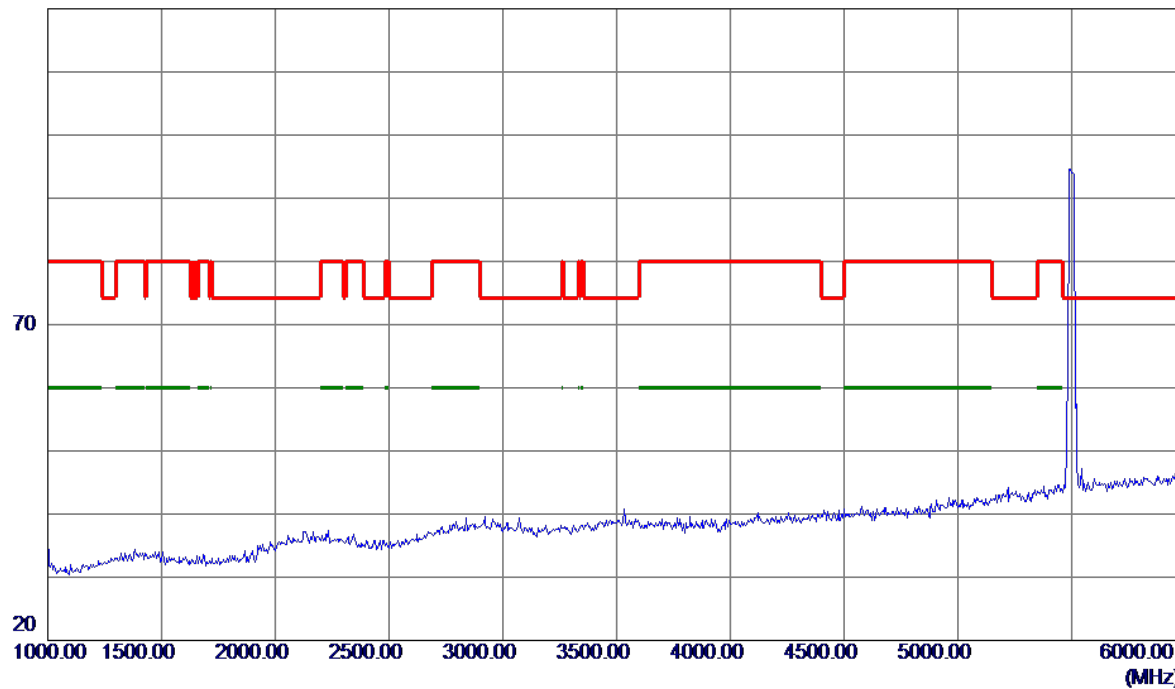

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical

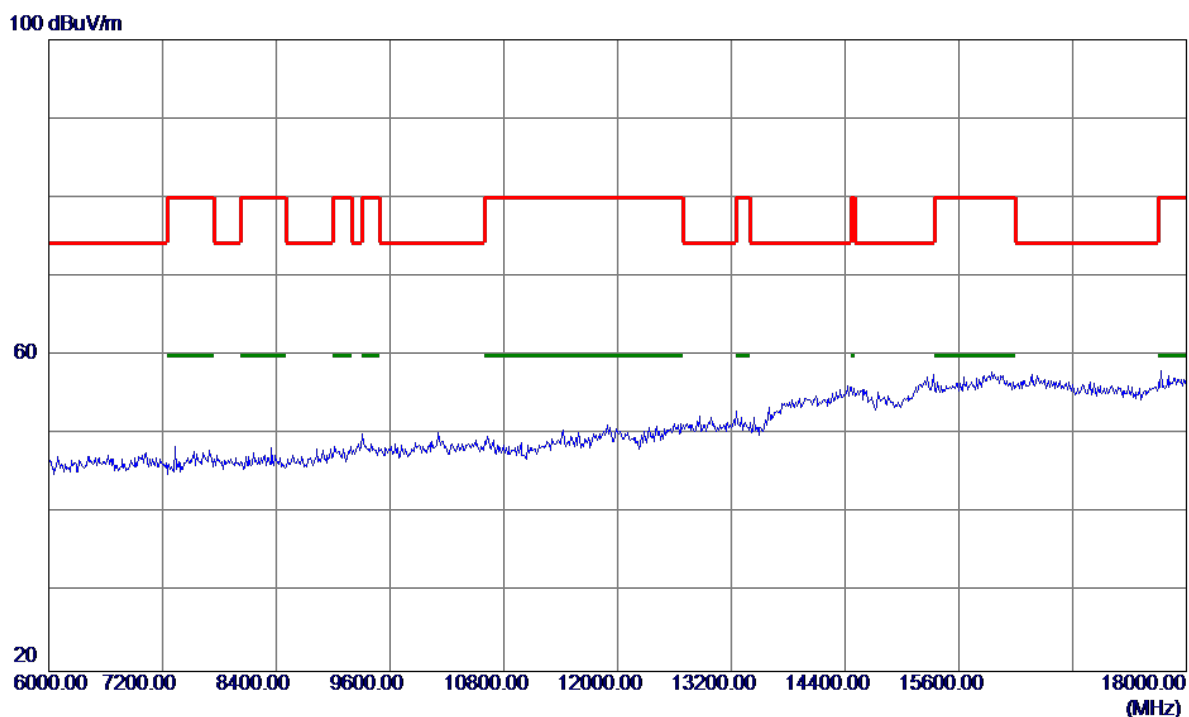


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical


100 dBuV/m

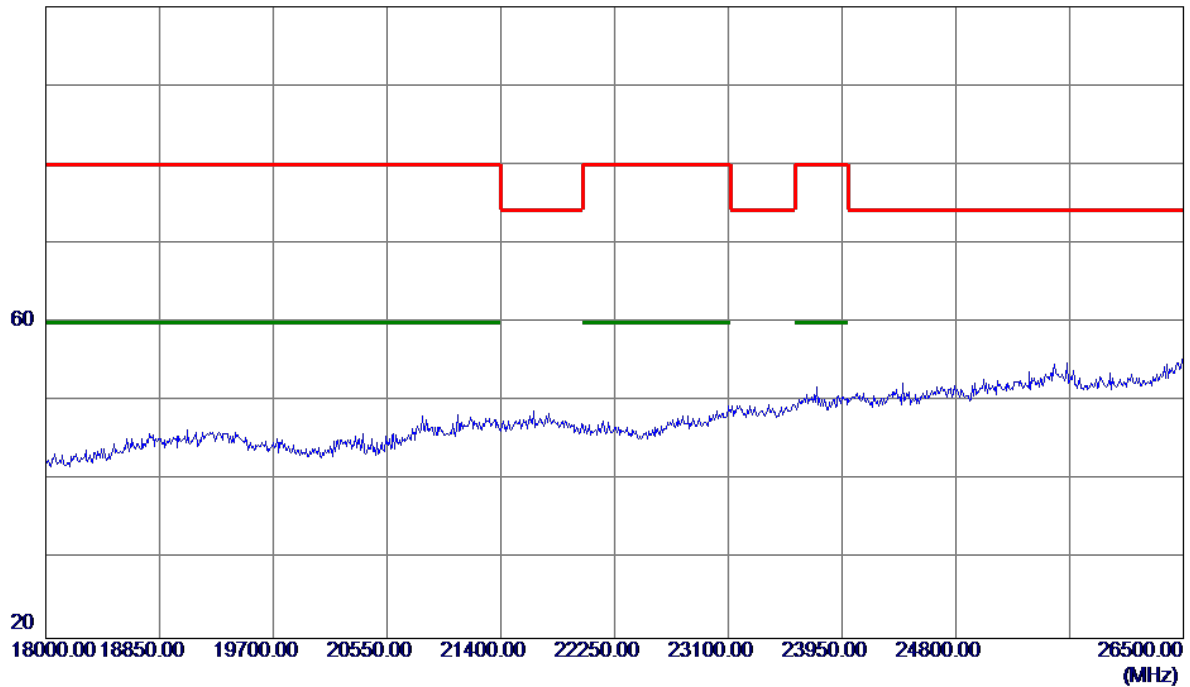

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Vertical

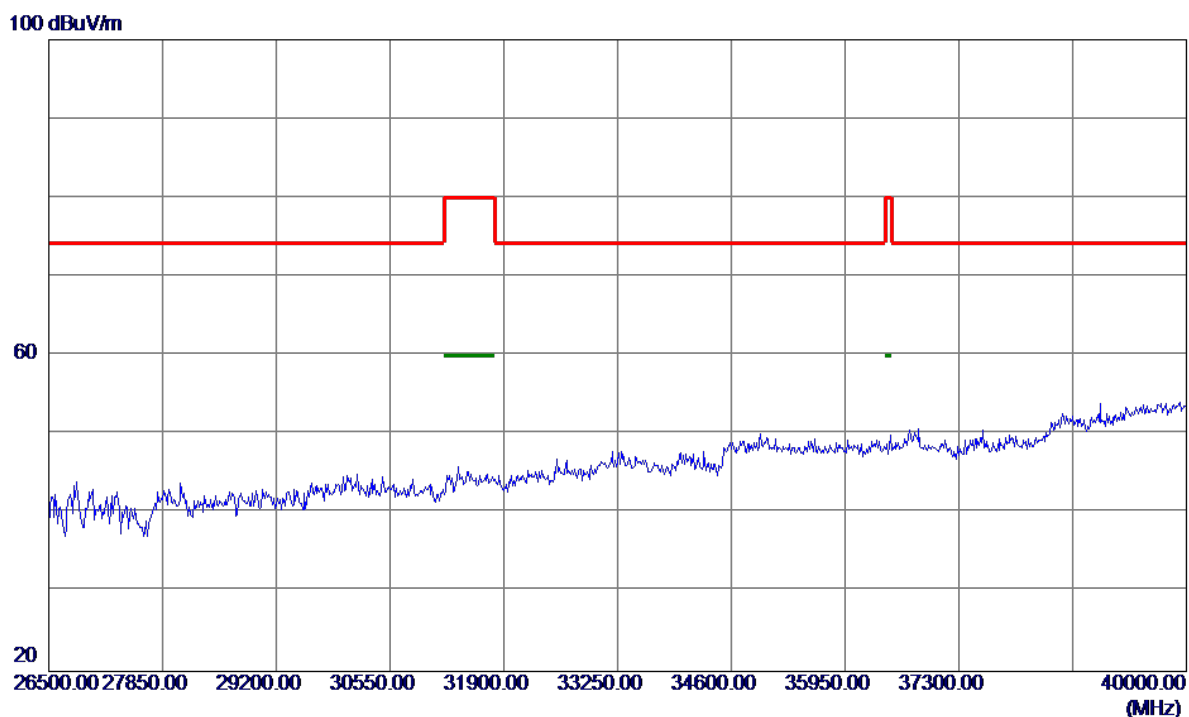


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal

130 dBuV/m

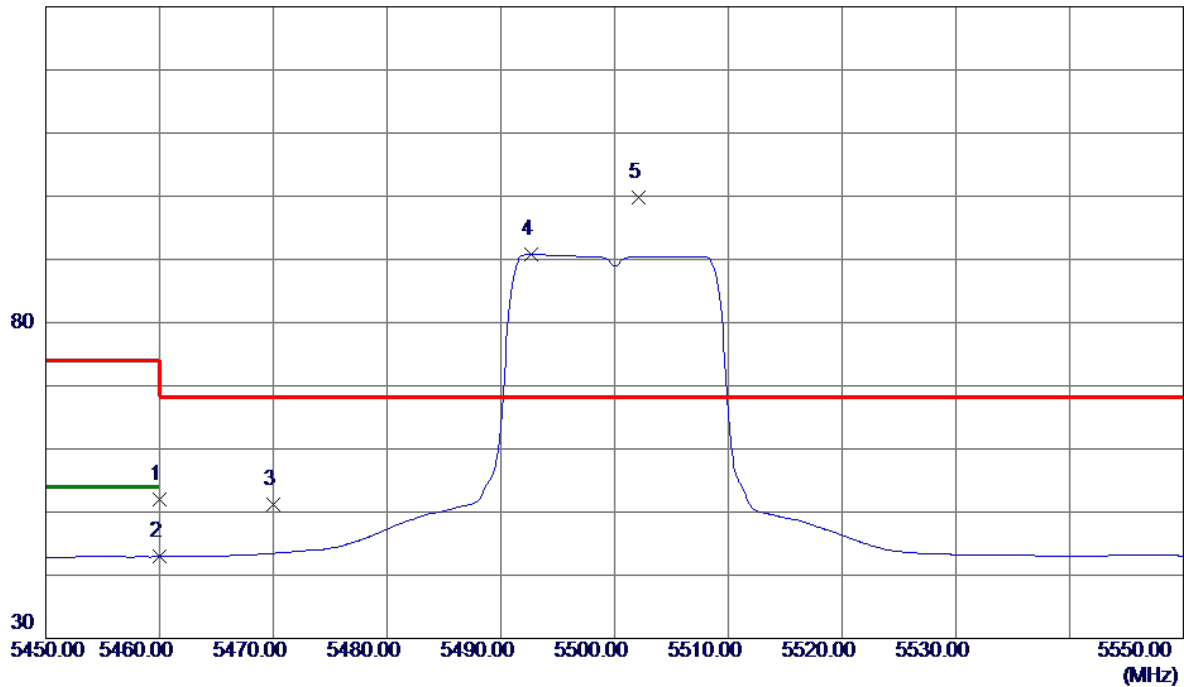


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 9.36                       | 42.68                   | 52.04                     | 74.00           | -21.96       | Peak     |          |
| 2   | 5460.0000    | 0.26                       | 42.68                   | 42.94                     | 54.00           | -11.06       | AVG      |          |
| 3   | 5470.0000    | 8.51                       | 42.73                   | 51.24                     | 68.30           | -17.06       | Peak     |          |
| 4   | 5492.7000    | 47.94                      | 42.84                   | 90.78                     | 999.00          | -908.22      | AVG      | No Limit |
| 5 * | 5502.1000    | 56.90                      | 42.89                   | 99.79                     | 68.30           | 31.49        | Peak     | No Limit |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |


# Horizontal

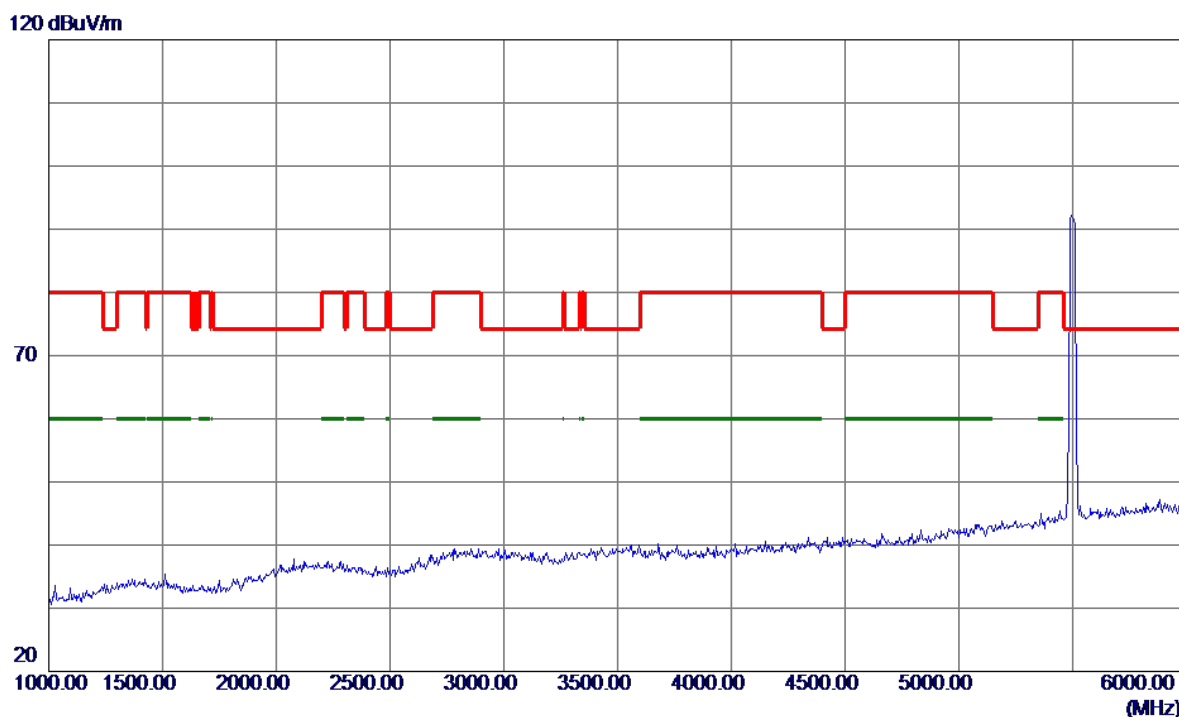

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal

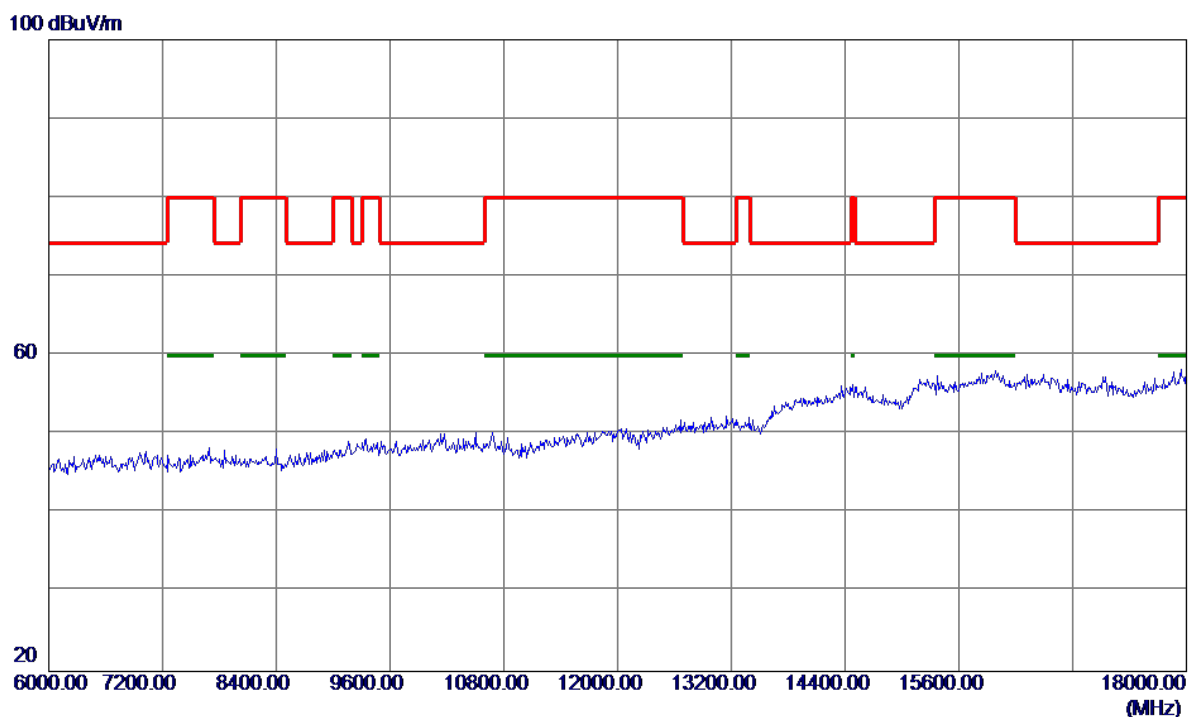


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal

100 dBuV/m

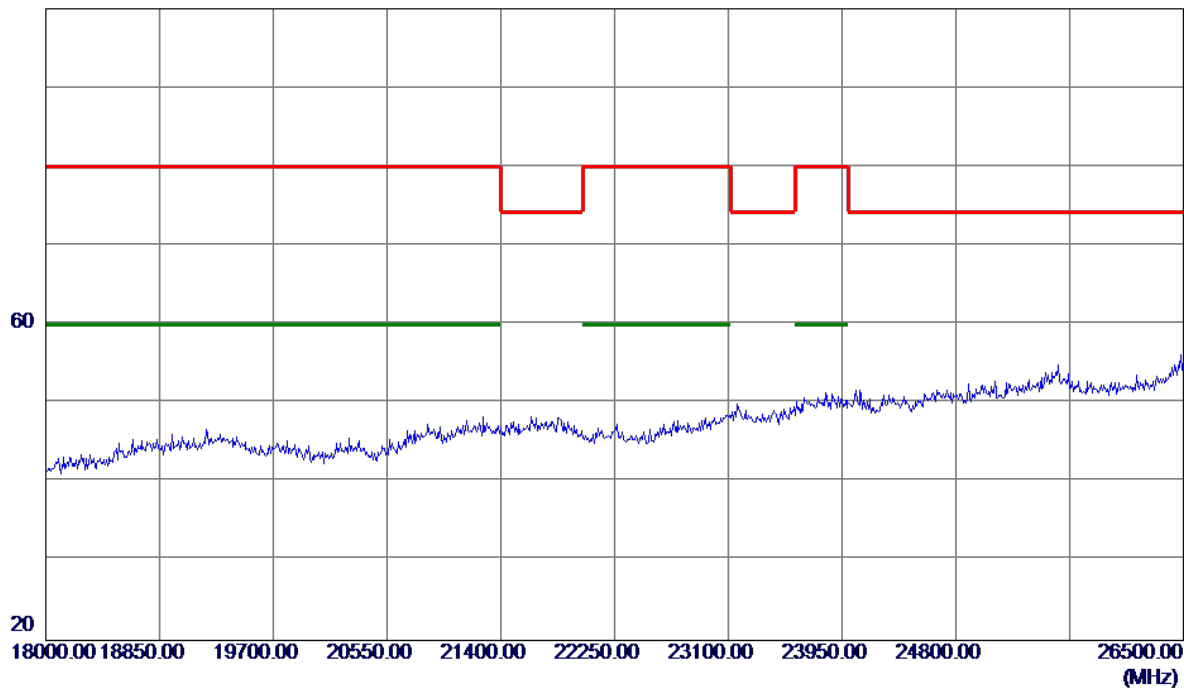

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5500MHz |

### Horizontal


100 dBuV/m



| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical

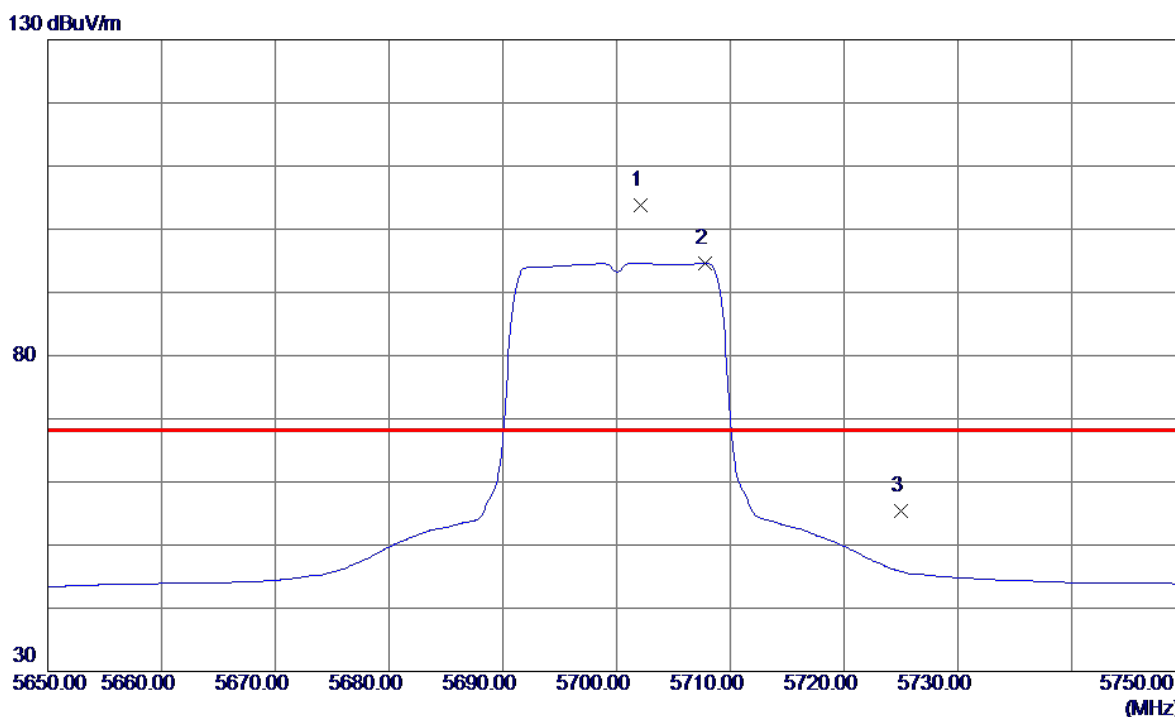


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5702.1000    | 60.26                      | 43.49                   | 103.75                    | 68.30           | 35.45        | Peak     | No Limit |
| 2   | 5707.8000    | 51.08                      | 43.51                   | 94.59                     | 999.00          | -904.41      | AVG      | No Limit |
| 3   | 5725.0000    | 11.83                      | 43.56                   | 55.39                     | 68.30           | -12.91       | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical

120 dBuV/m

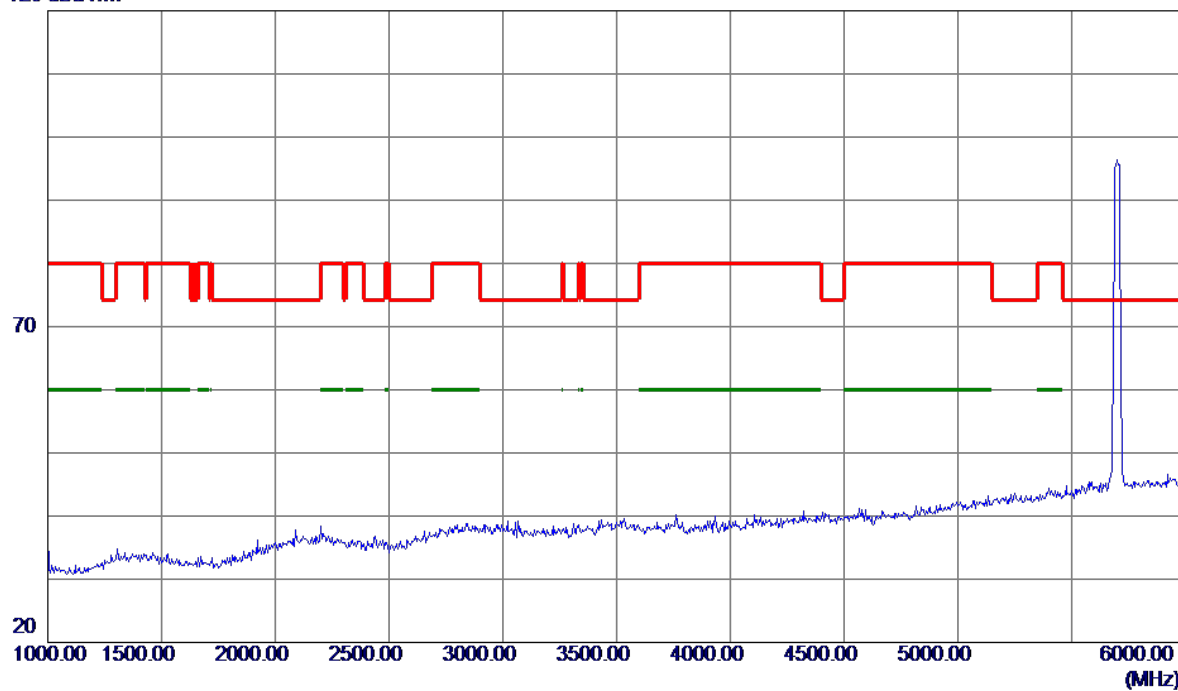


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical

100 dBuV/m

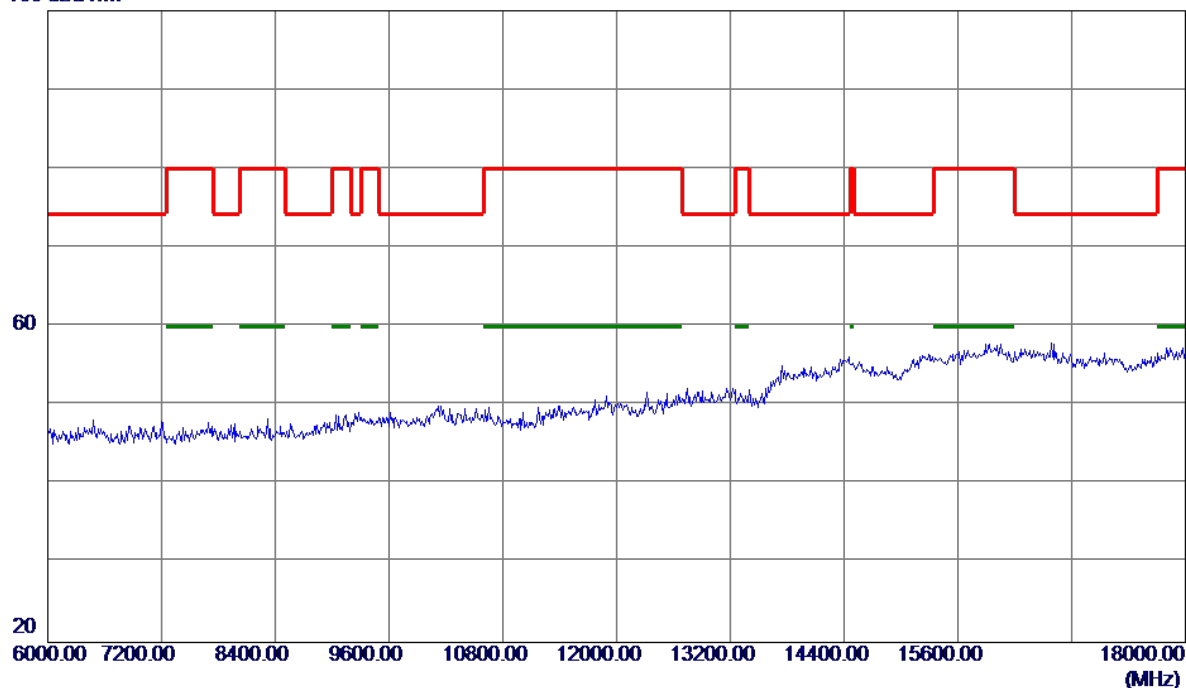


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical

100 dBuV/m

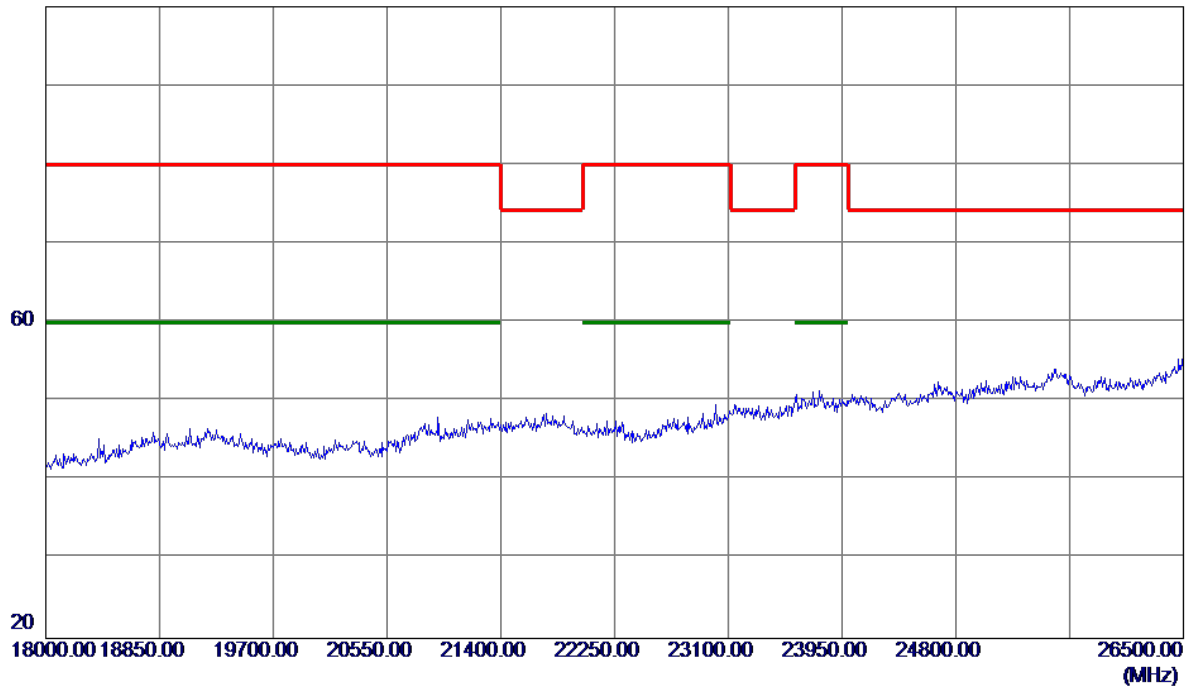


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Vertical

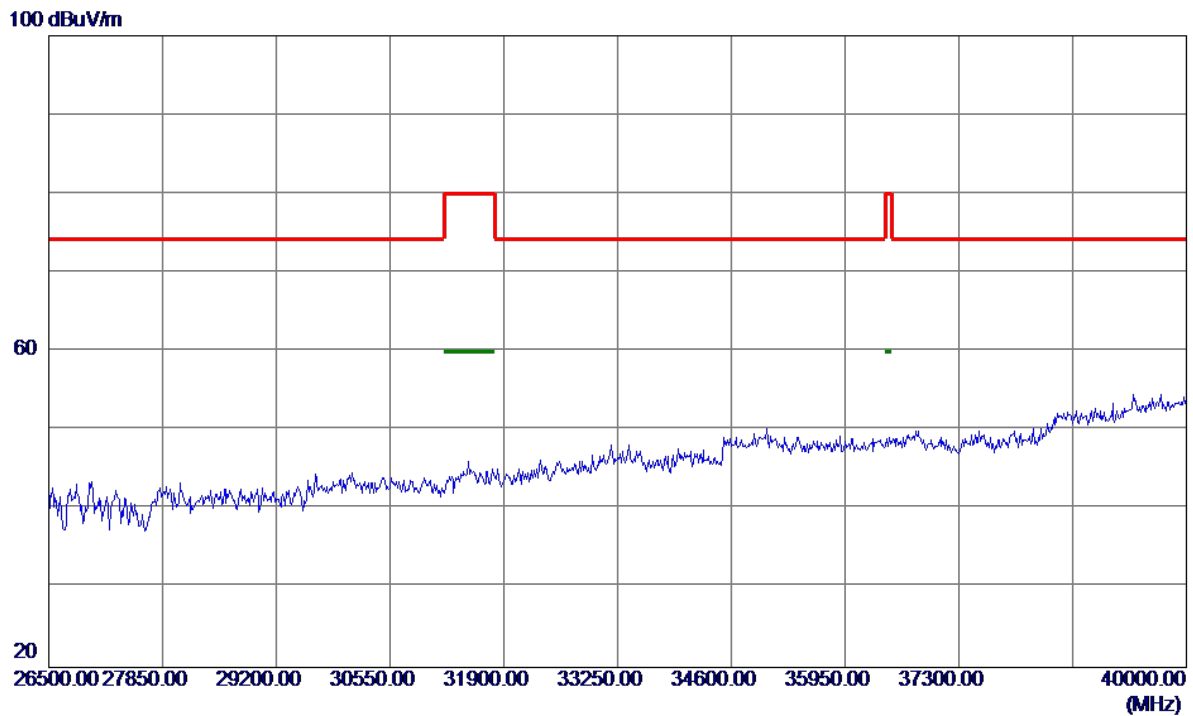


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal

130 dBuV/m

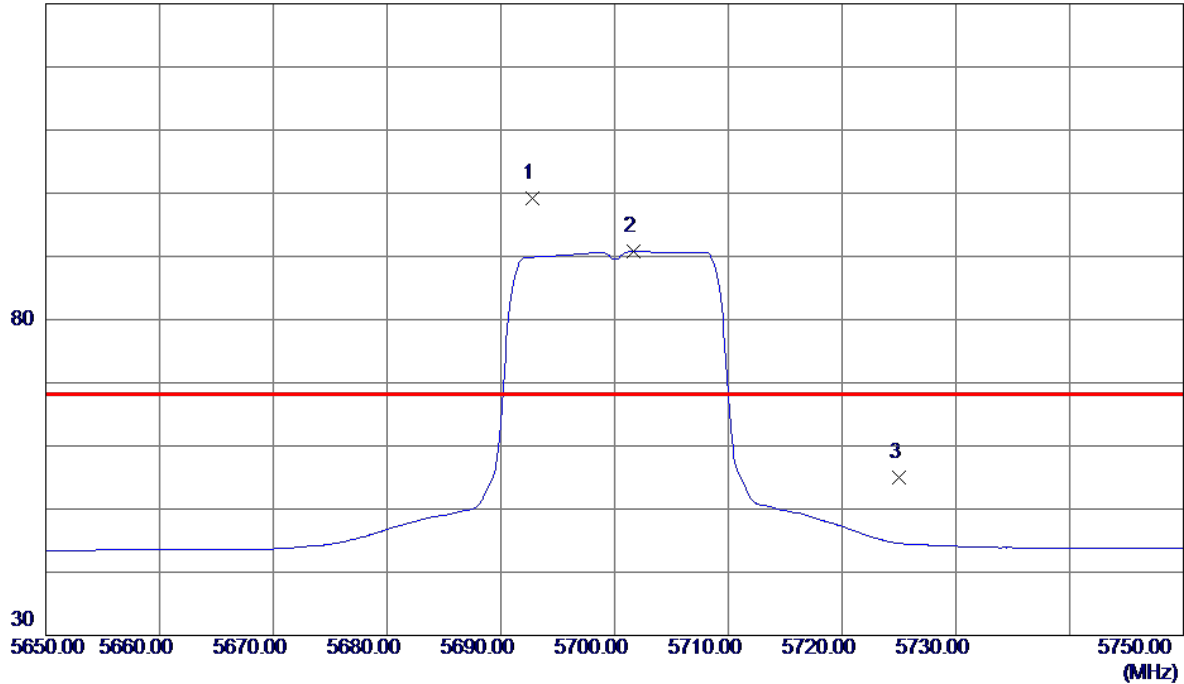


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5692.8000    | 55.66                      | 43.46                   | 99.12                     | 68.30           | 30.82        | Peak     | No Limit |
| 2   | 5701.7000    | 47.27                      | 43.49                   | 90.76                     | 999.00          | -908.24      | AVG      | No Limit |
| 3   | 5725.0000    | 11.45                      | 43.56                   | 55.01                     | 68.30           | -13.29       | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal


120 dBuV/m

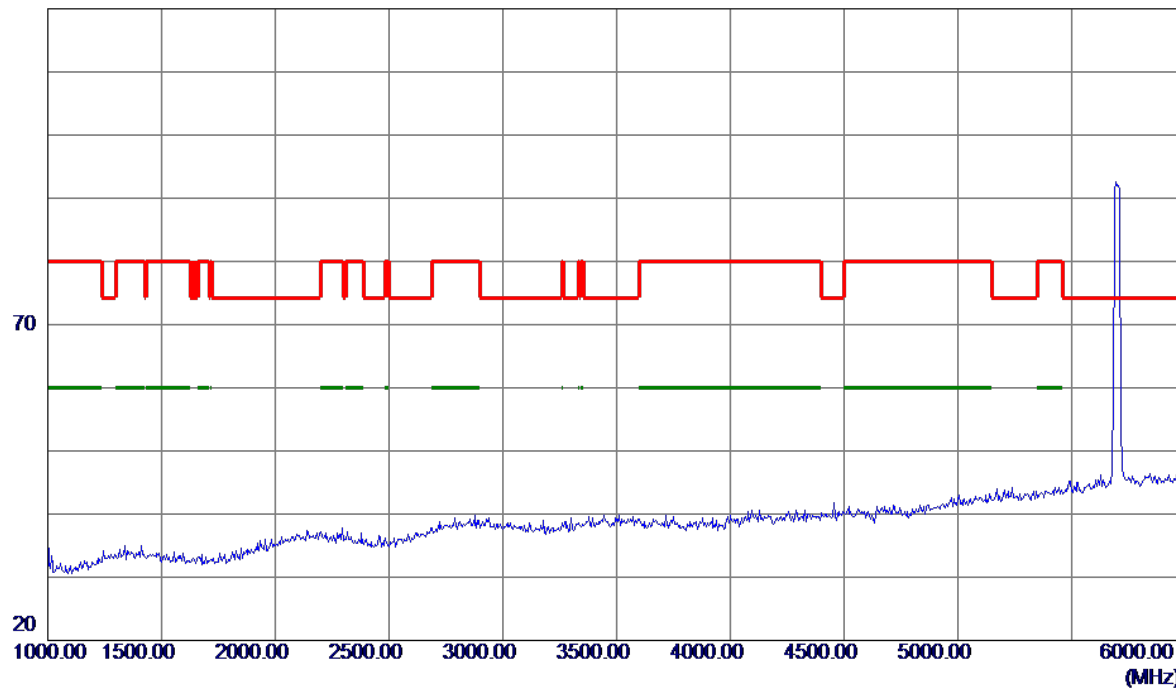

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal

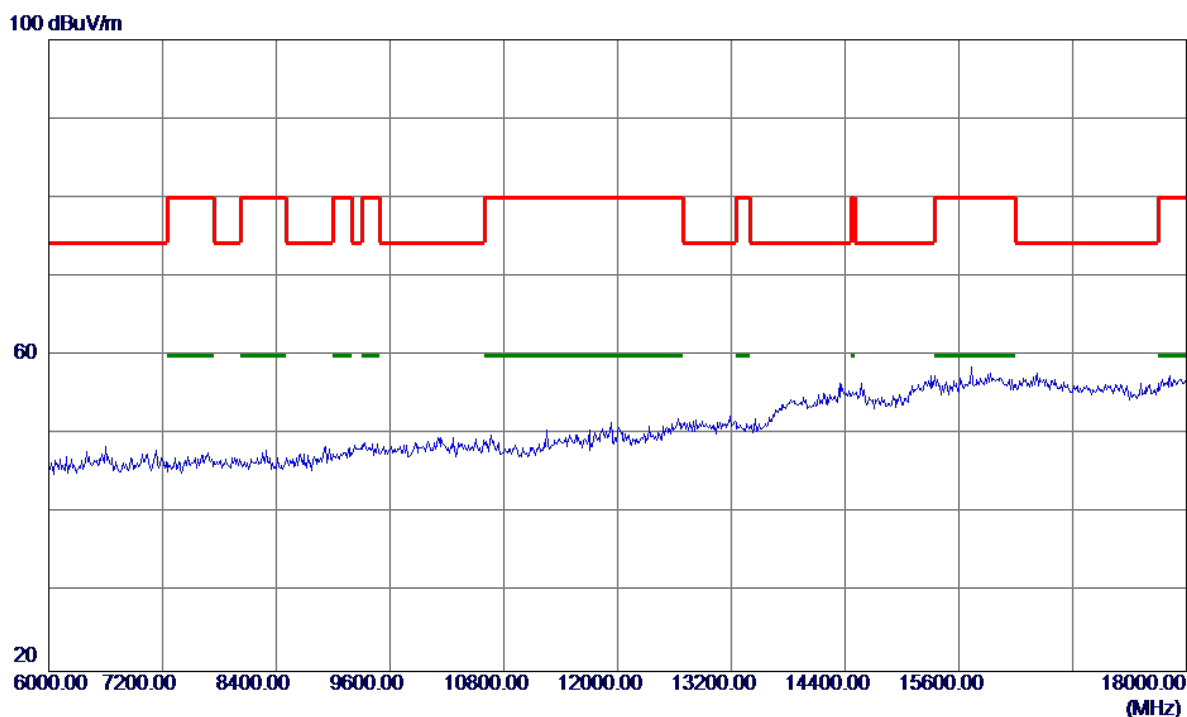


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal

100 dBuV/m

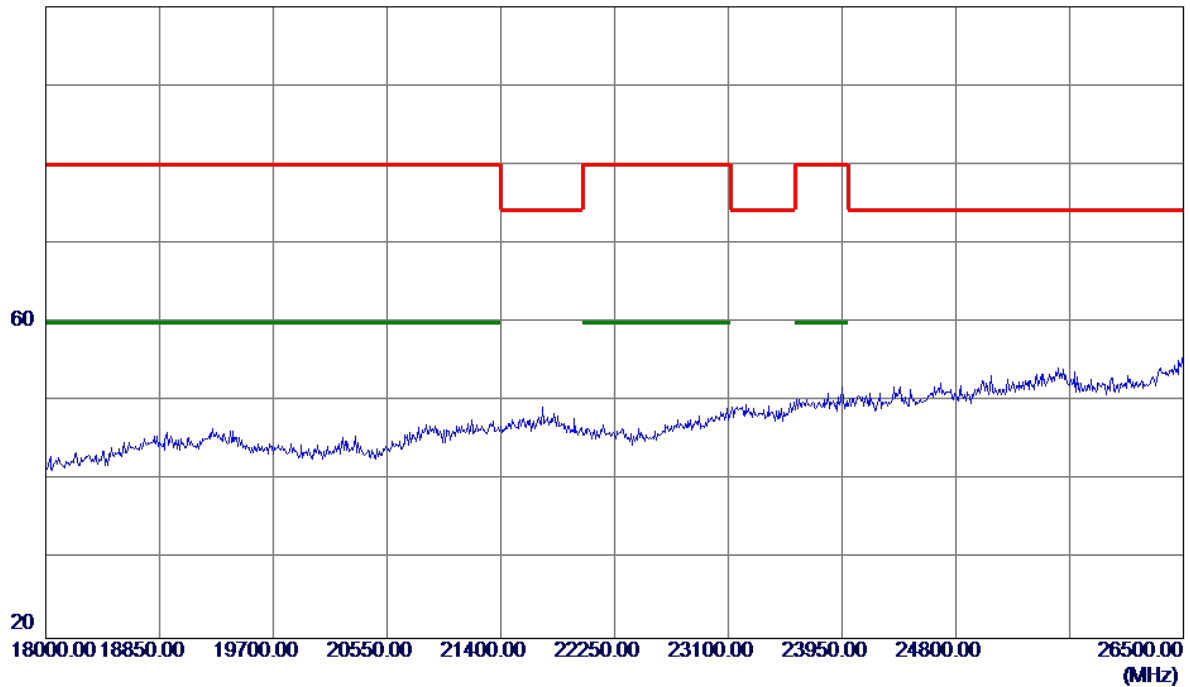


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N20 Mode 5700MHz |

### Horizontal

100 dBuV/m

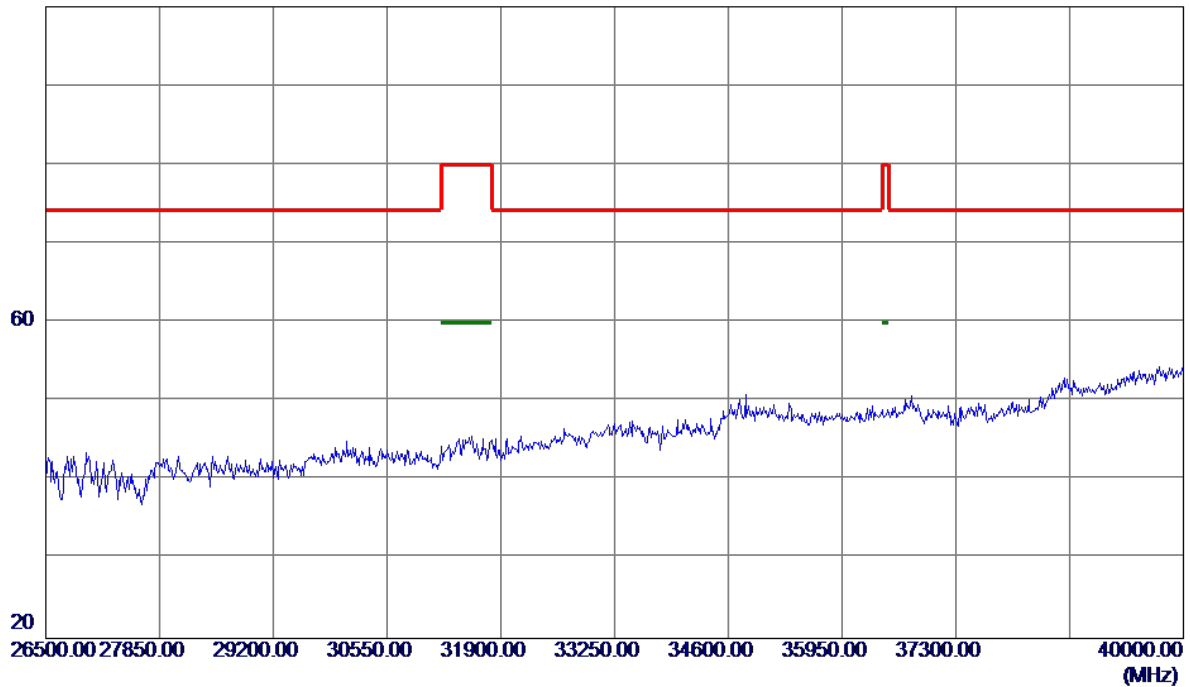


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Vertical

130 dBuV/m

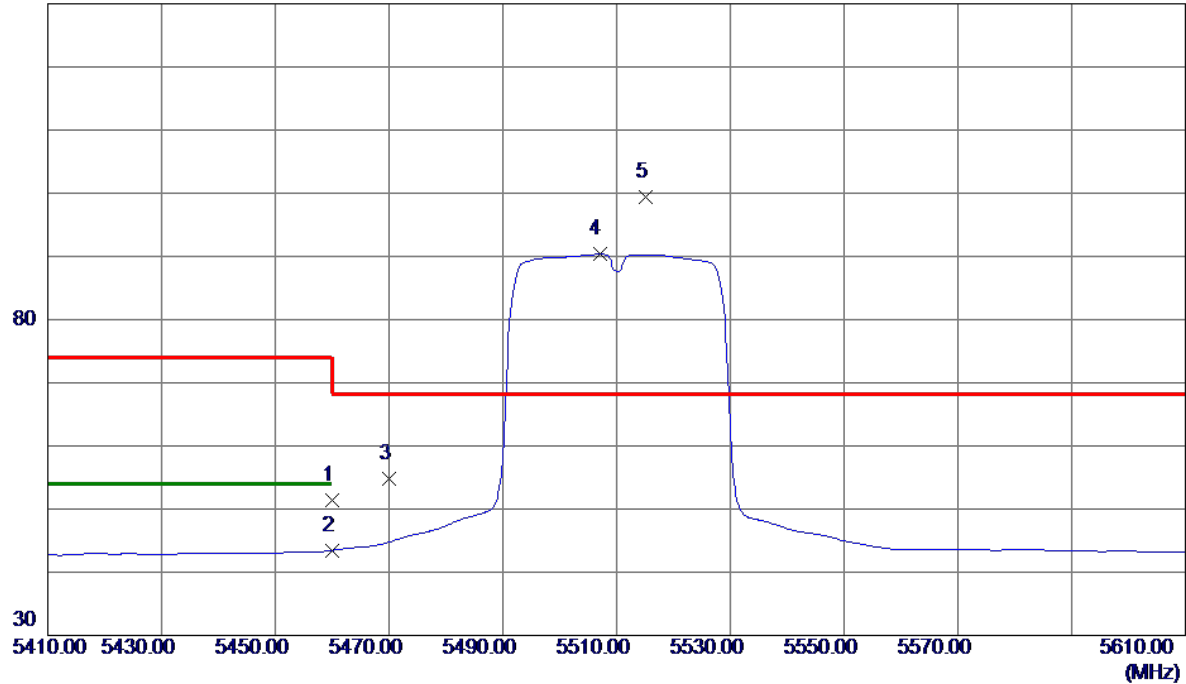


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 8.76                       | 42.68                   | 51.44                     | 74.00           | -22.56       | Peak     |          |
| 2   | 5460.0000    | 0.78                       | 42.68                   | 43.46                     | 54.00           | -10.54       | AVG      |          |
| 3   | 5470.0000    | 12.04                      | 42.73                   | 54.77                     | 68.30           | -13.53       | Peak     |          |
| 4   | 5507.0000    | 47.46                      | 42.90                   | 90.36                     | 999.00          | -908.64      | AVG      | No Limit |
| 5 * | 5515.2000    | 56.53                      | 42.93                   | 99.46                     | 68.30           | 31.16        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Vertical

120 dBuV/m

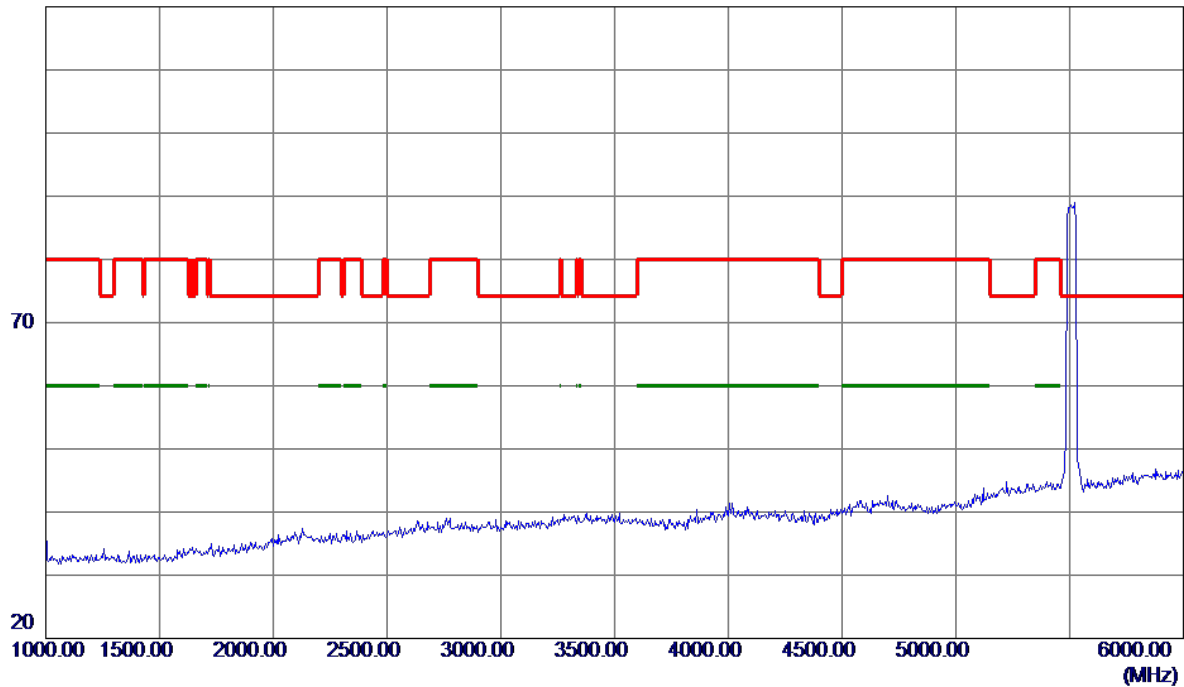


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Vertical

100 dBuV/m

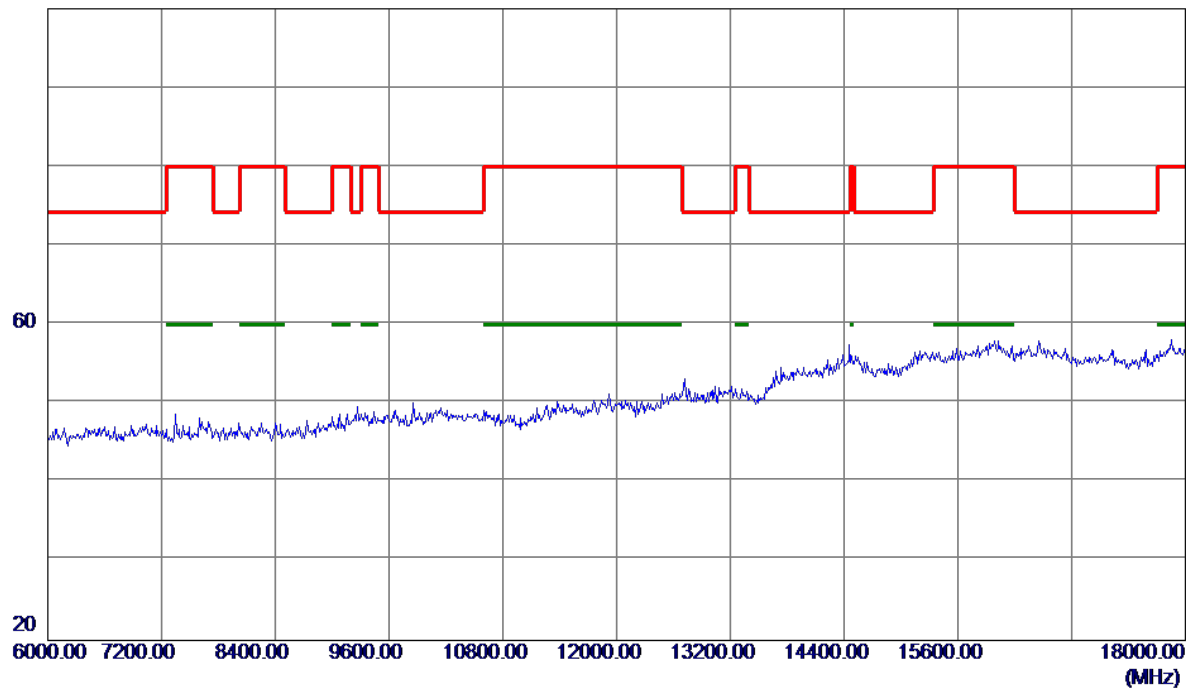


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

**Vertical**

100 dBuV/m

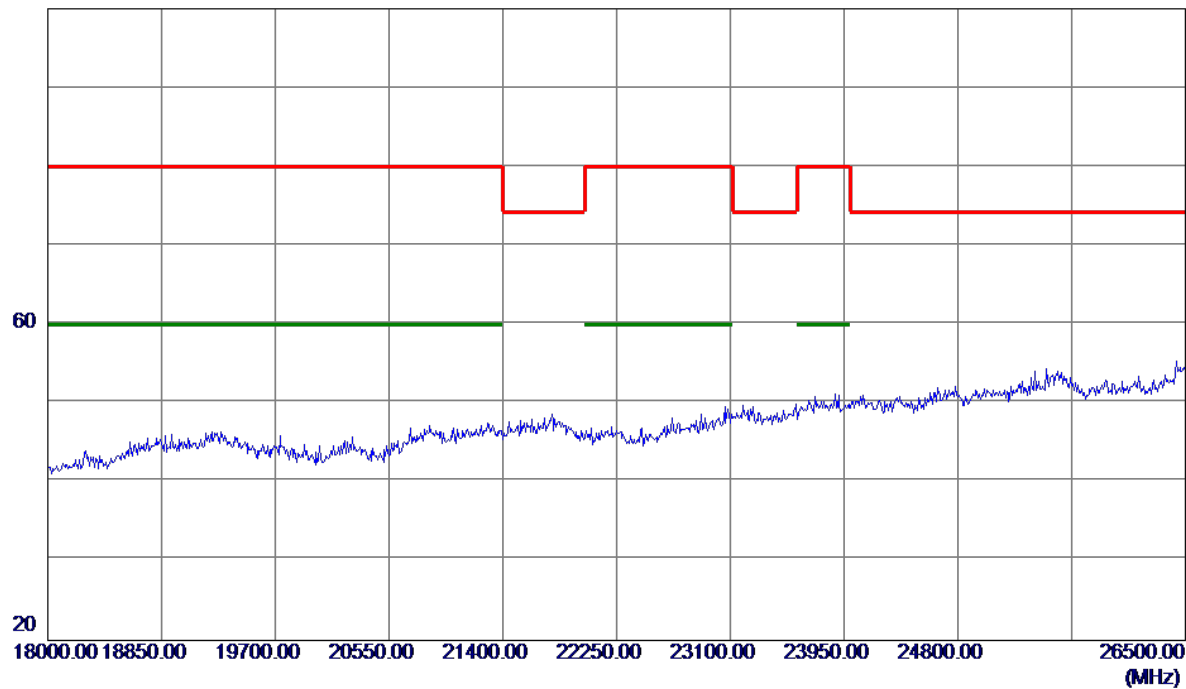


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Vertical


100 dBuV/m

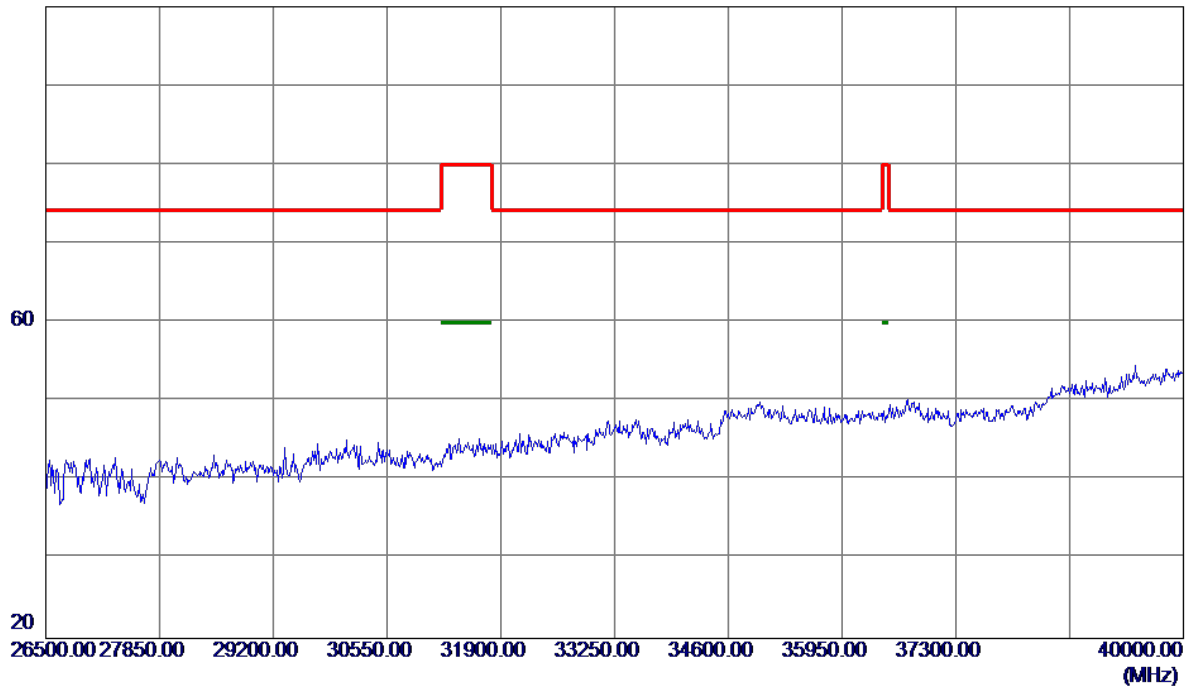

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal

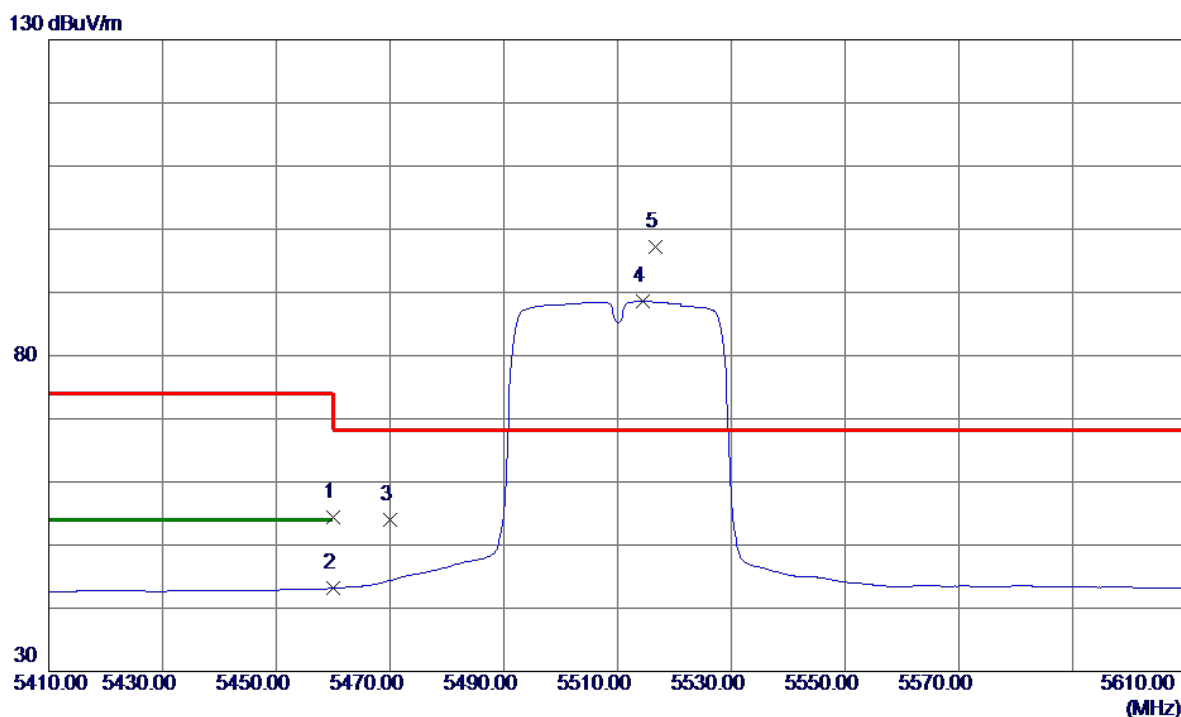


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 11.72                      | 42.68                   | 54.40                     | 74.00           | -19.60       | Peak     |          |
| 2   | 5460.0000    | 0.48                       | 42.68                   | 43.16                     | 54.00           | -10.84       | AVG      |          |
| 3   | 5470.0000    | 11.20                      | 42.73                   | 53.93                     | 68.30           | -14.37       | Peak     |          |
| 4   | 5514.4000    | 45.63                      | 42.92                   | 88.55                     | 999.00          | -910.45      | AVG      | No Limit |
| 5 * | 5516.6000    | 54.32                      | 42.93                   | 97.25                     | 68.30           | 28.95        | Peak     | No Limit |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal


120 dBuV/m

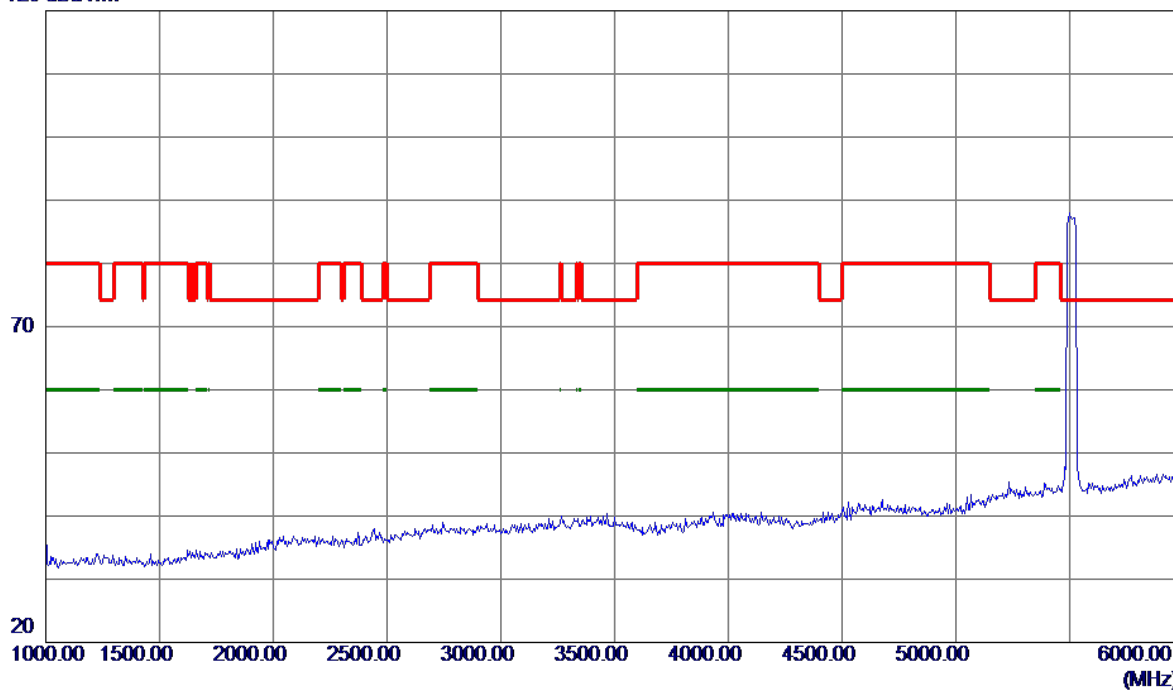

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal

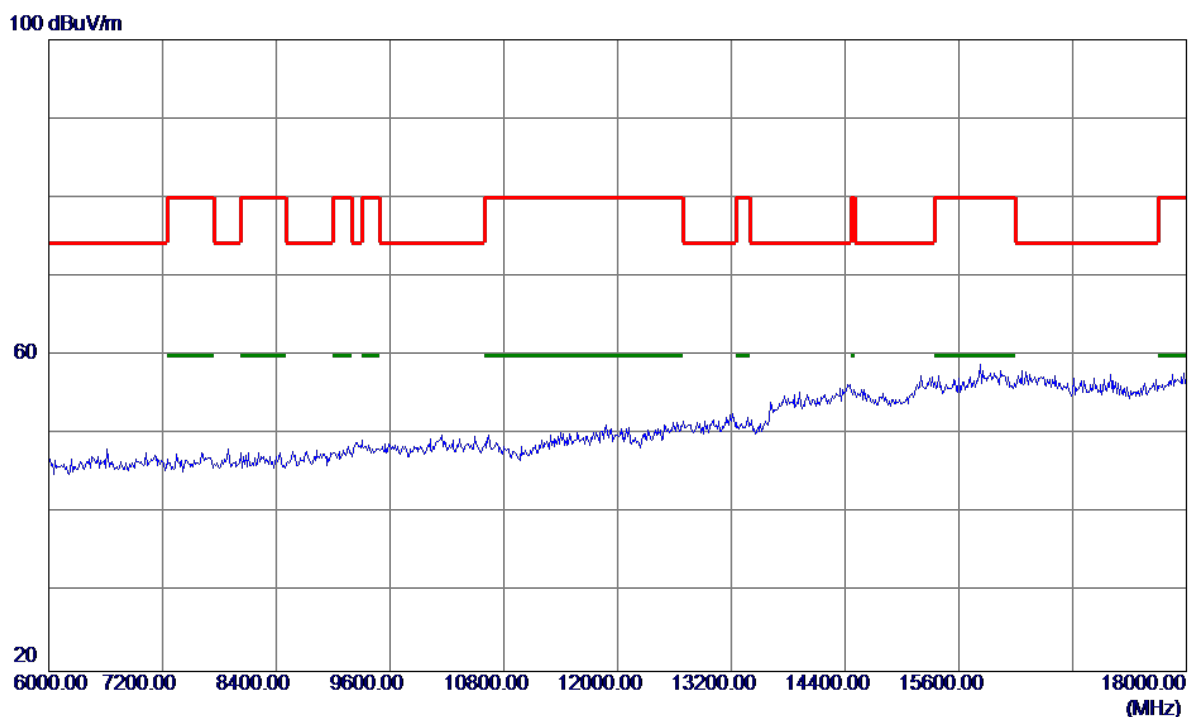


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal


100 dBuV/m

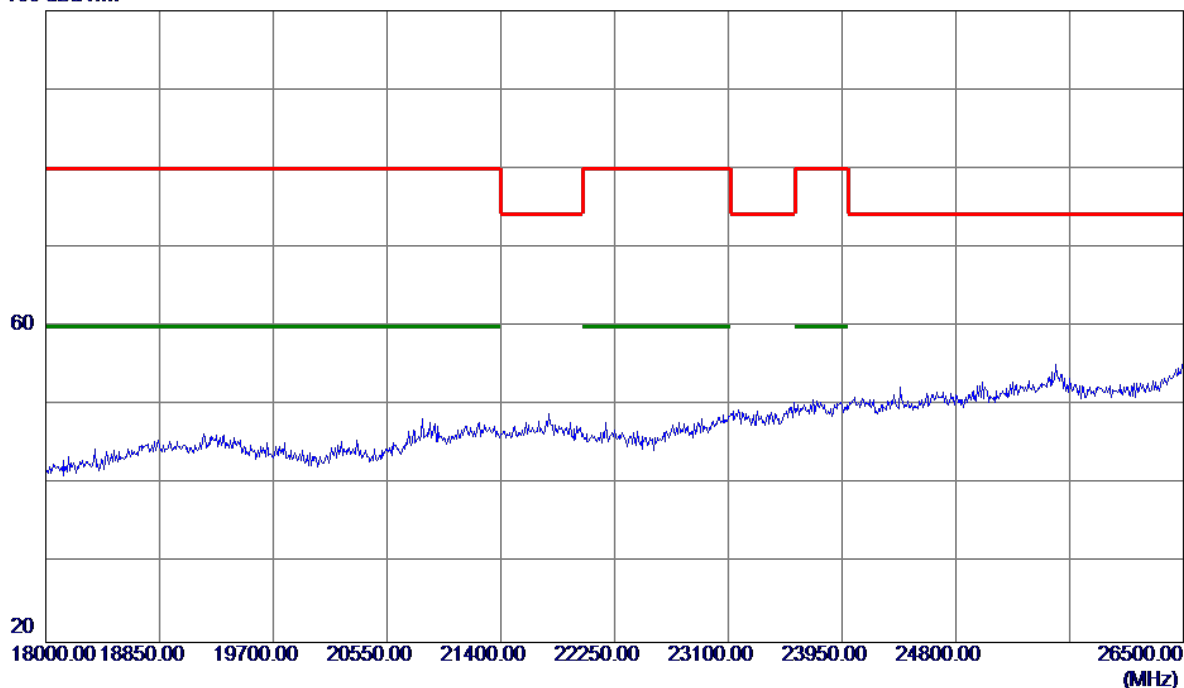

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5510MHz |

### Horizontal

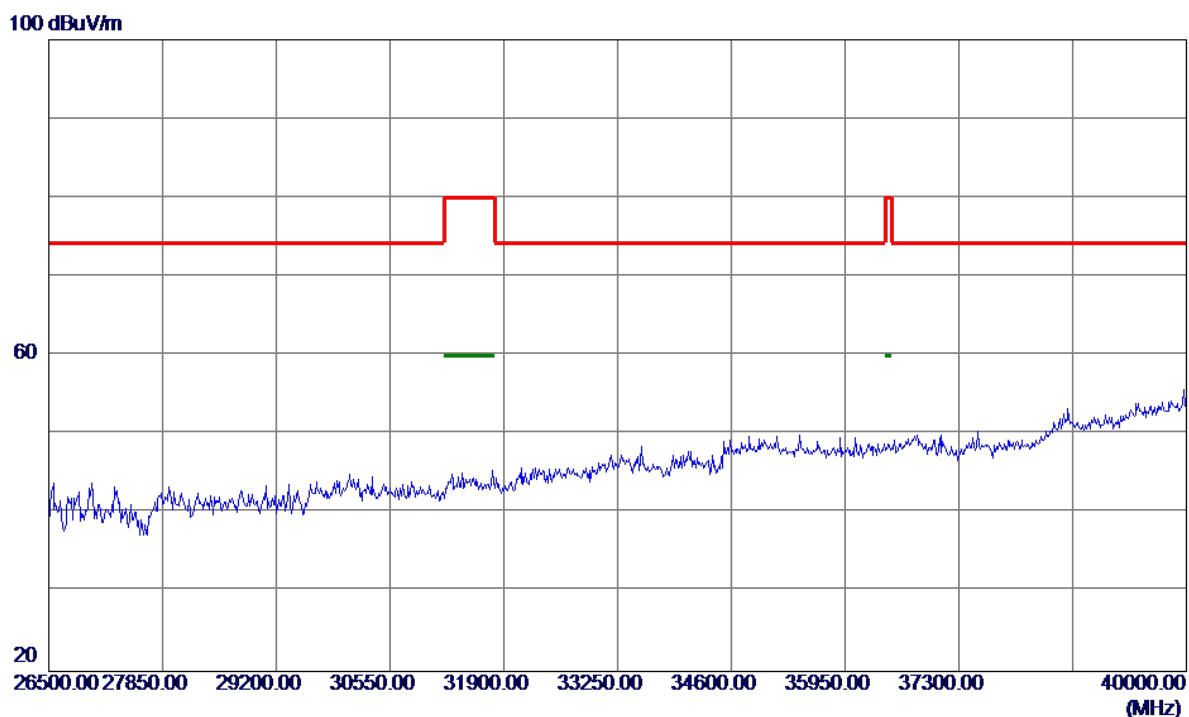


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical


130 dBuV/m

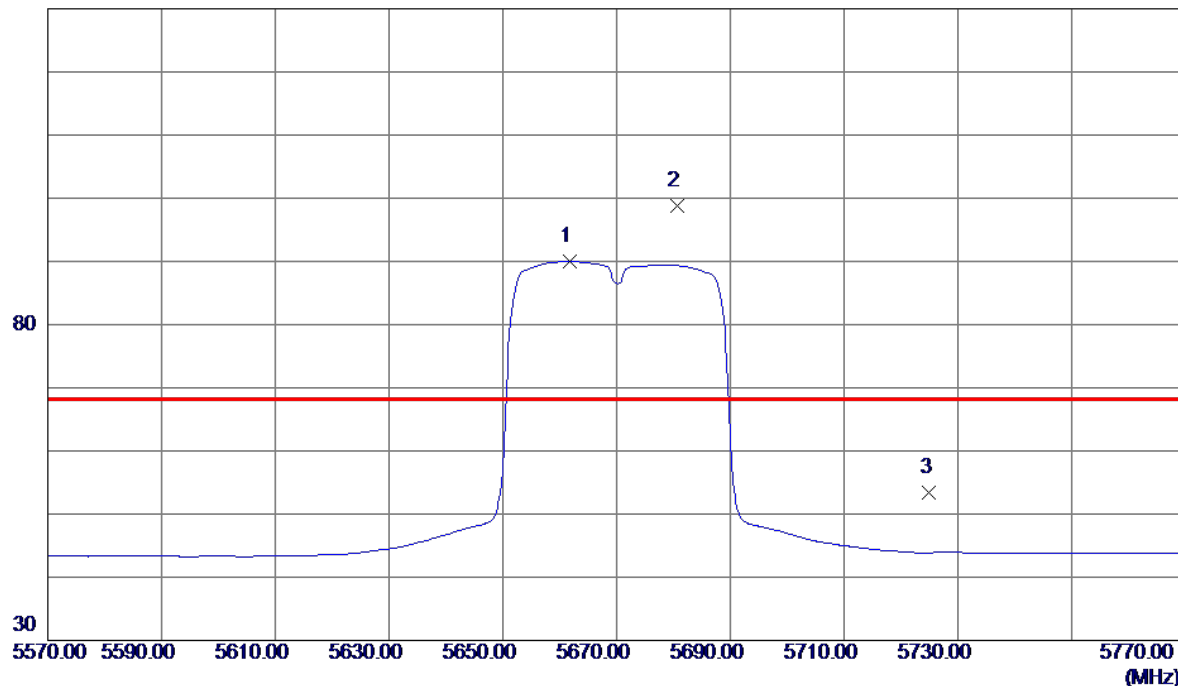

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5661.8000    | 46.62                      | 43.37                   | 89.99                     | 999.00          | -909.01      | AVG      | No Limit |
| 2 * | 5680.6000    | 55.40                      | 43.43                   | 98.83                     | 68.30           | 30.53        | Peak     | No Limit |
| 3   | 5725.0000    | 9.76                       | 43.56                   | 53.32                     | 68.30           | -14.98       | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |


### Vertical

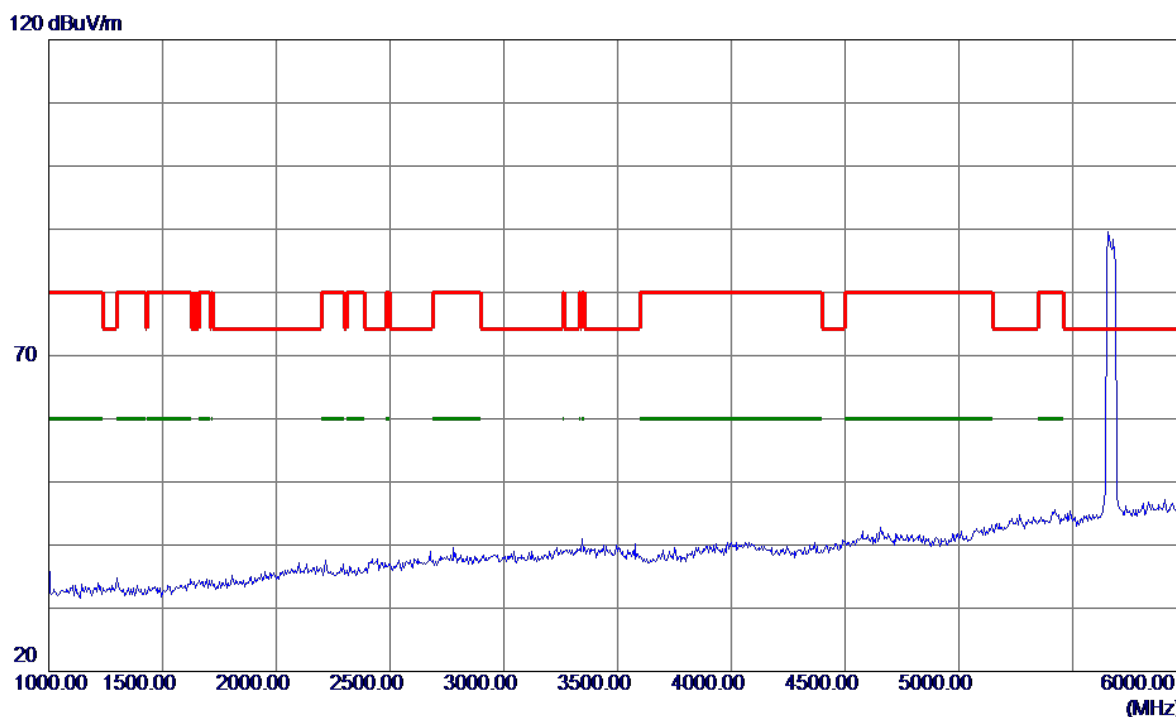

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical

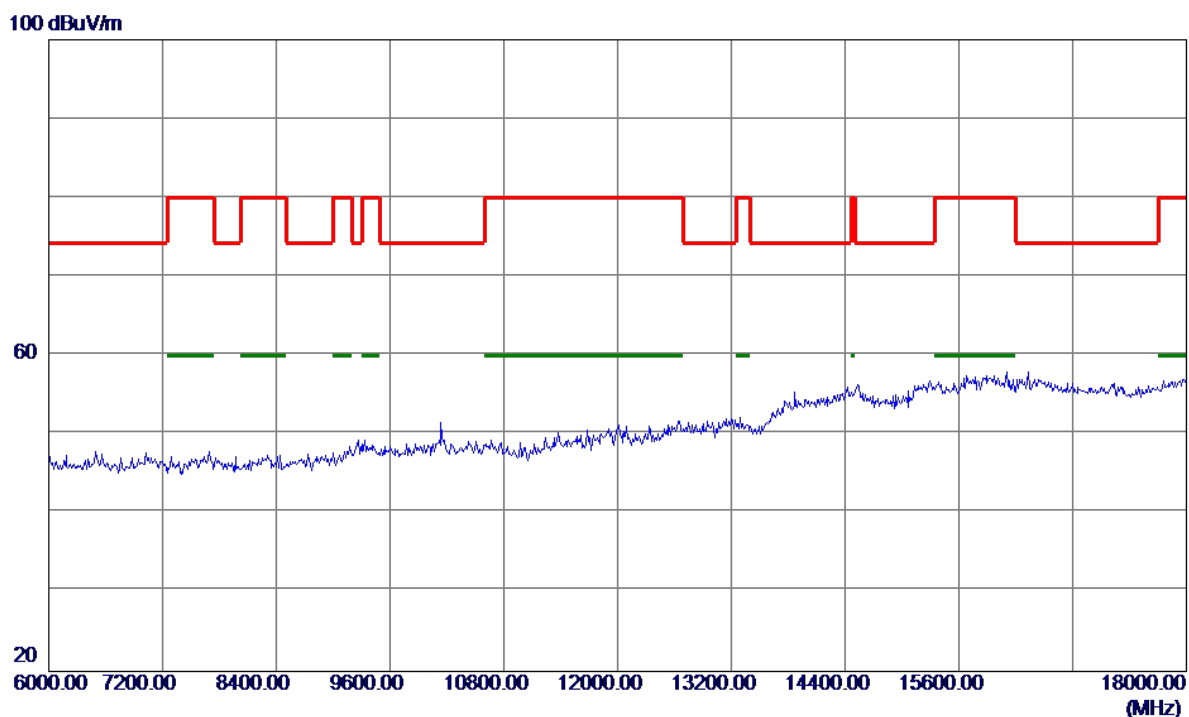


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical

100 dBuV/m

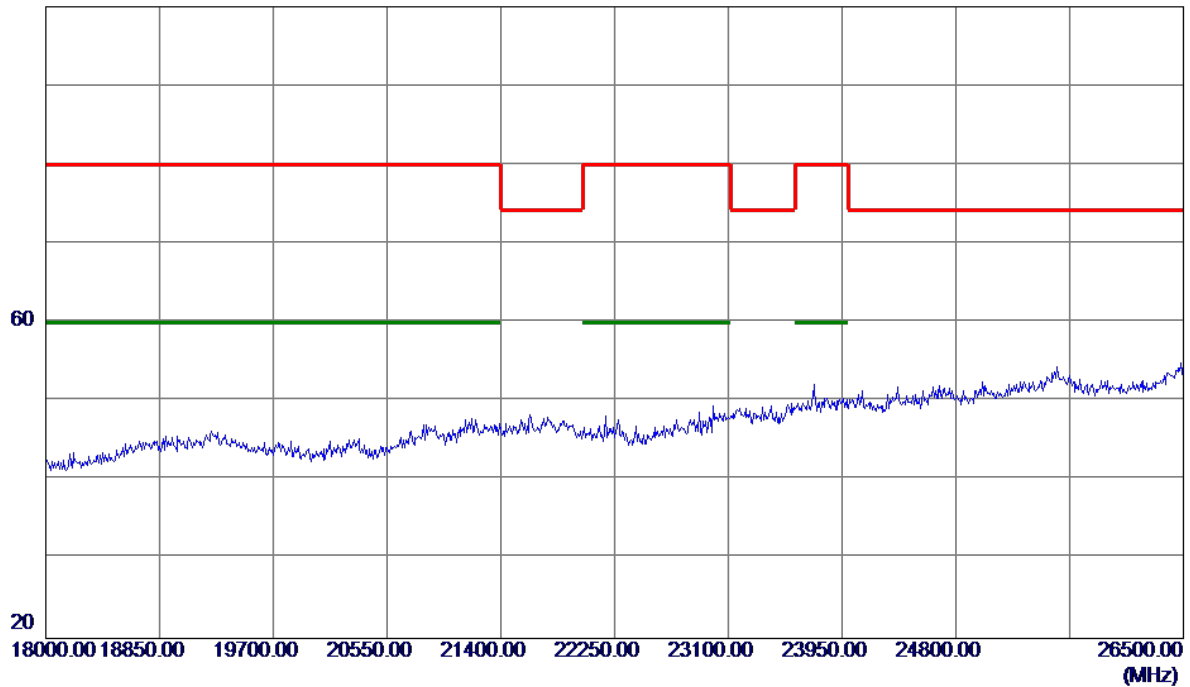

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Vertical

100 dBuV/m




| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal

130 dBuV/m

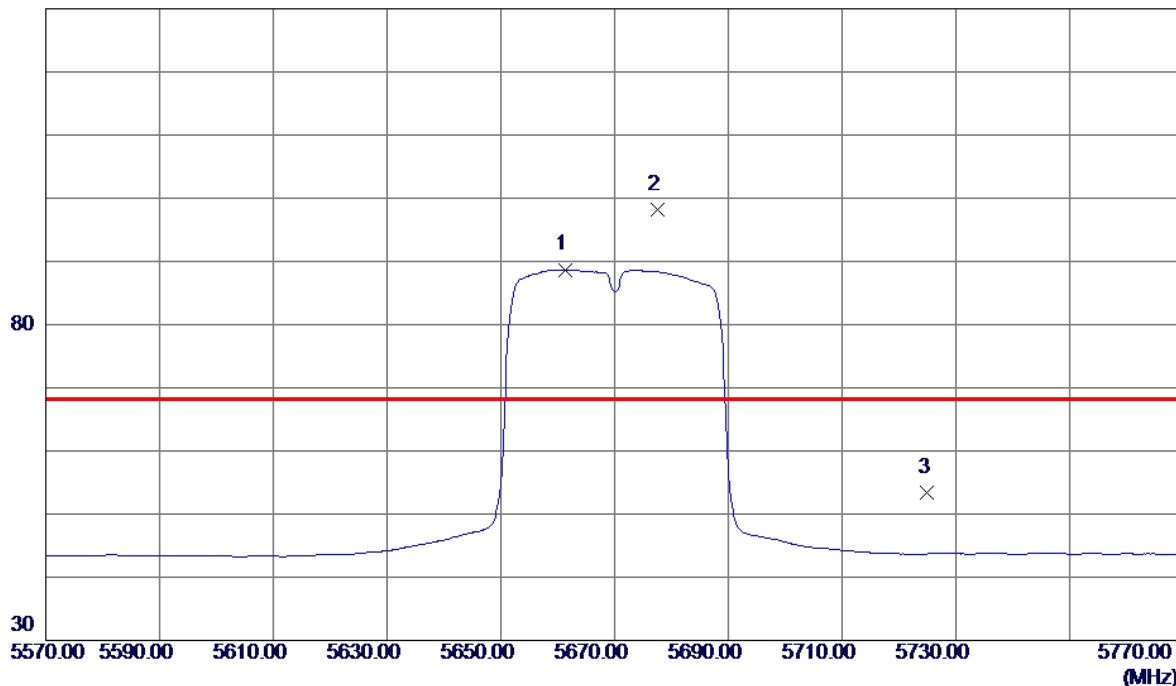


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5661.4000    | 45.33                      | 43.37                   | 88.70                     | 999.00          | -910.30      | AVG      | No Limit |
| 2 * | 5677.6000    | 54.86                      | 43.42                   | 98.28                     | 68.30           | 29.98        | Peak     | No Limit |
| 3   | 5725.0000    | 9.92                       | 43.56                   | 53.48                     | 68.30           | -14.82       | Peak     |          |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal

120 dBuV/m

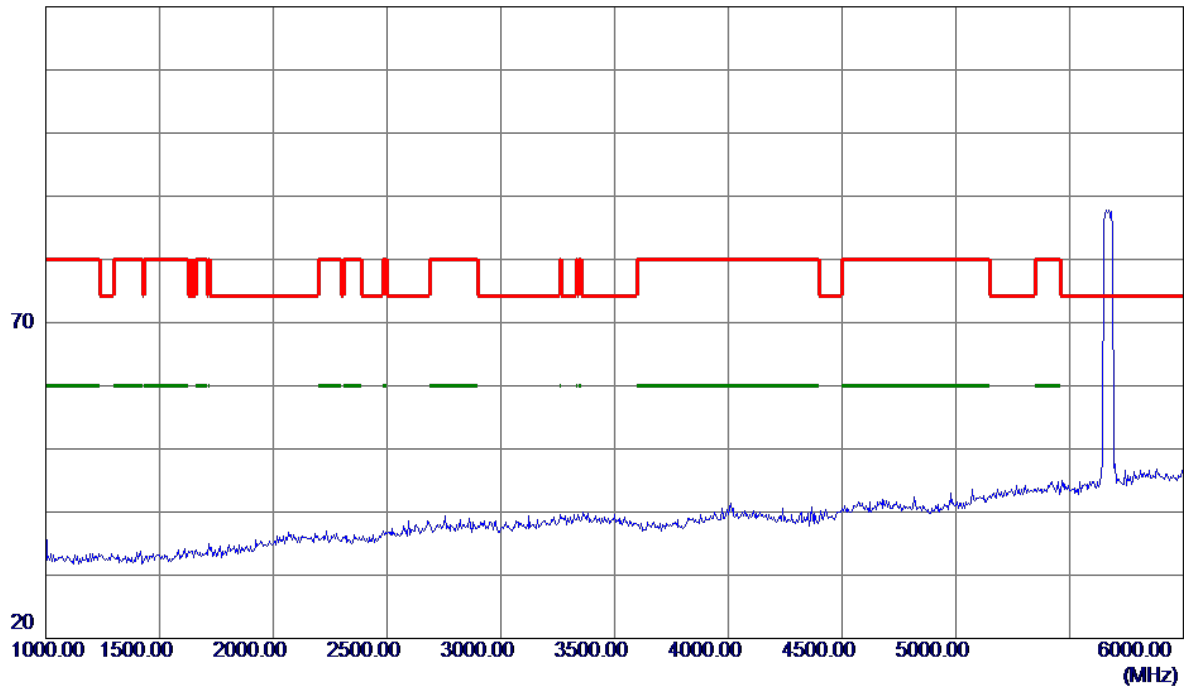


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal

100 dBuV/m

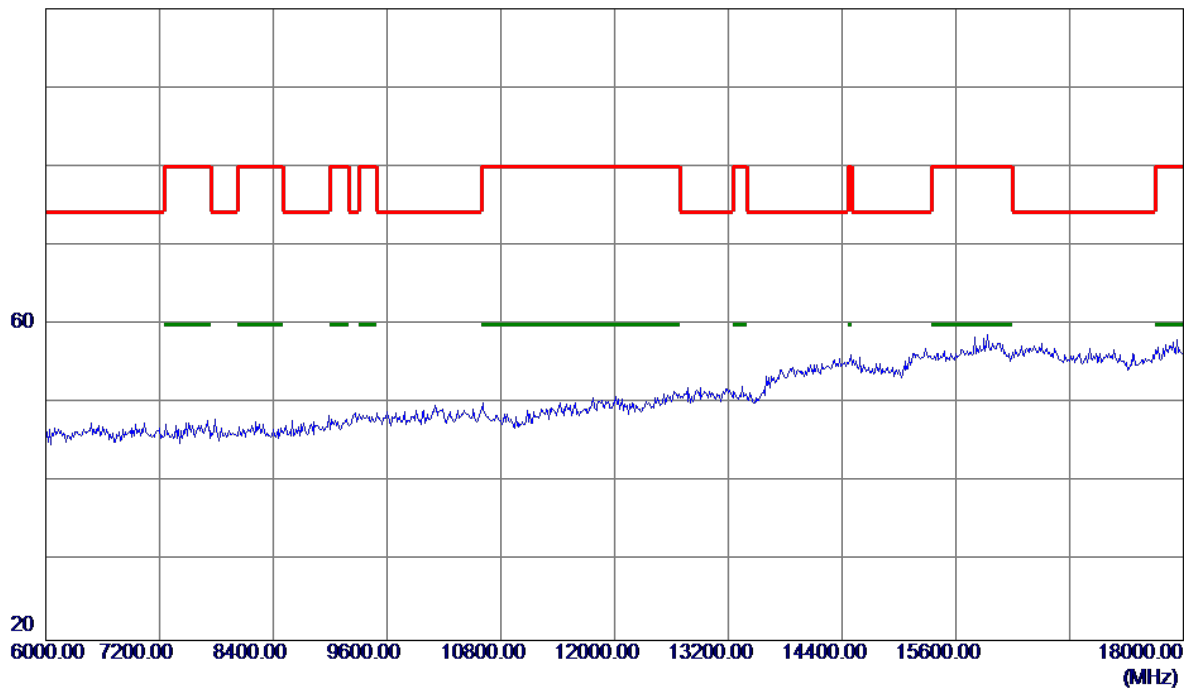


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |



|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal


100 dBuV/m

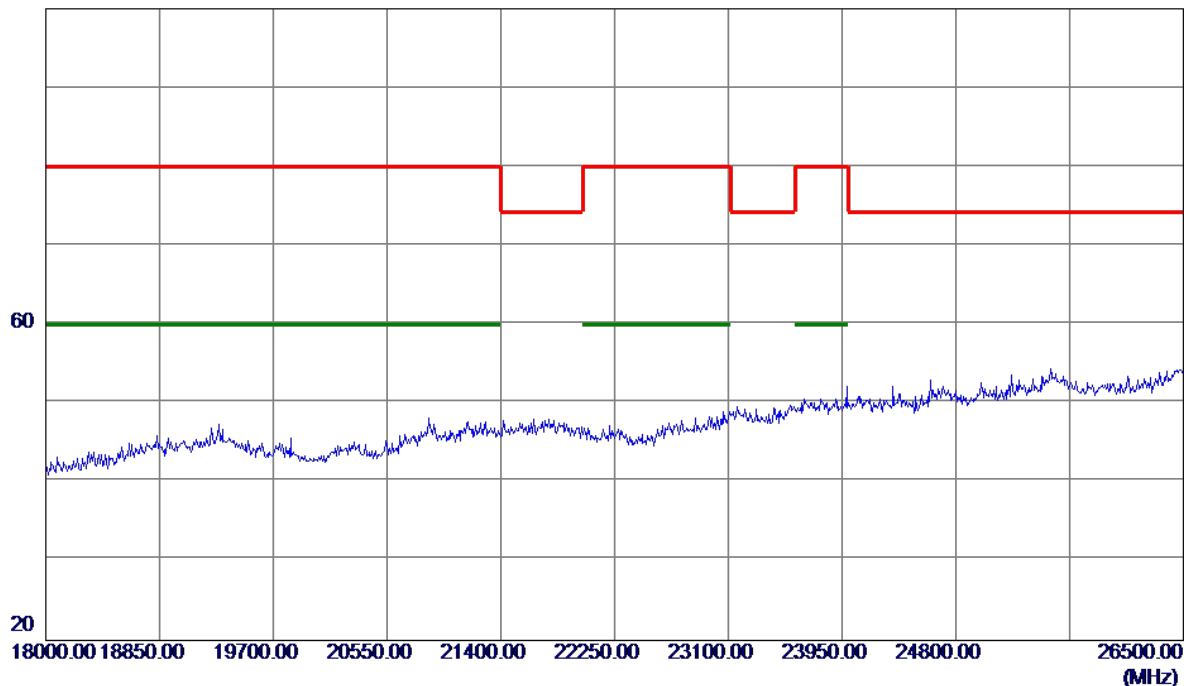

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                   |                              |
|-------------------|------------------------------|
| Orthogonal Axis : | X                            |
| Test Mode :       | UNII-2C/ TX N40 Mode 5670MHz |

### Horizontal

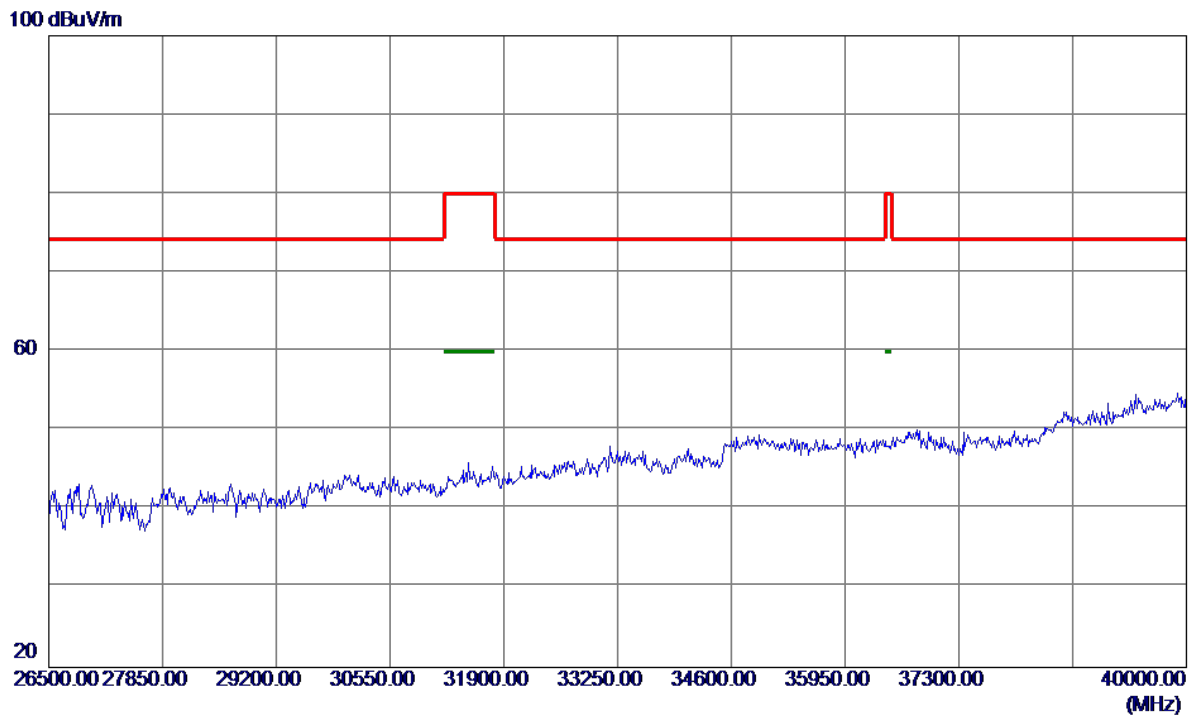


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Vertical

130 dBuV/m

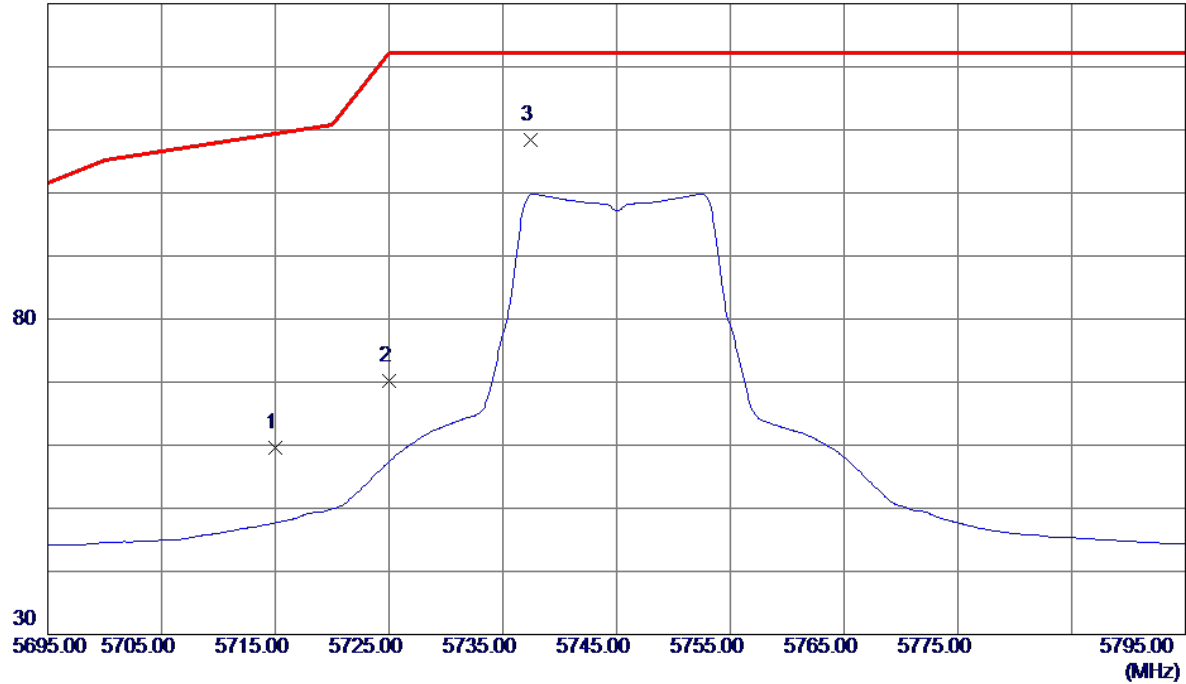


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 16.07                      | 43.53                   | 59.60                     | 109.40          | -49.80       | Peak     |         |
| 2   | 5725.0000    | 26.59                      | 43.56                   | 70.15                     | 122.20          | -52.05       | Peak     |         |
| 3 * | 5737.4000    | 64.81                      | 43.60                   | 108.41                    | 122.20          | -13.79       | Peak     |         |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Vertical

120 dBuV/m

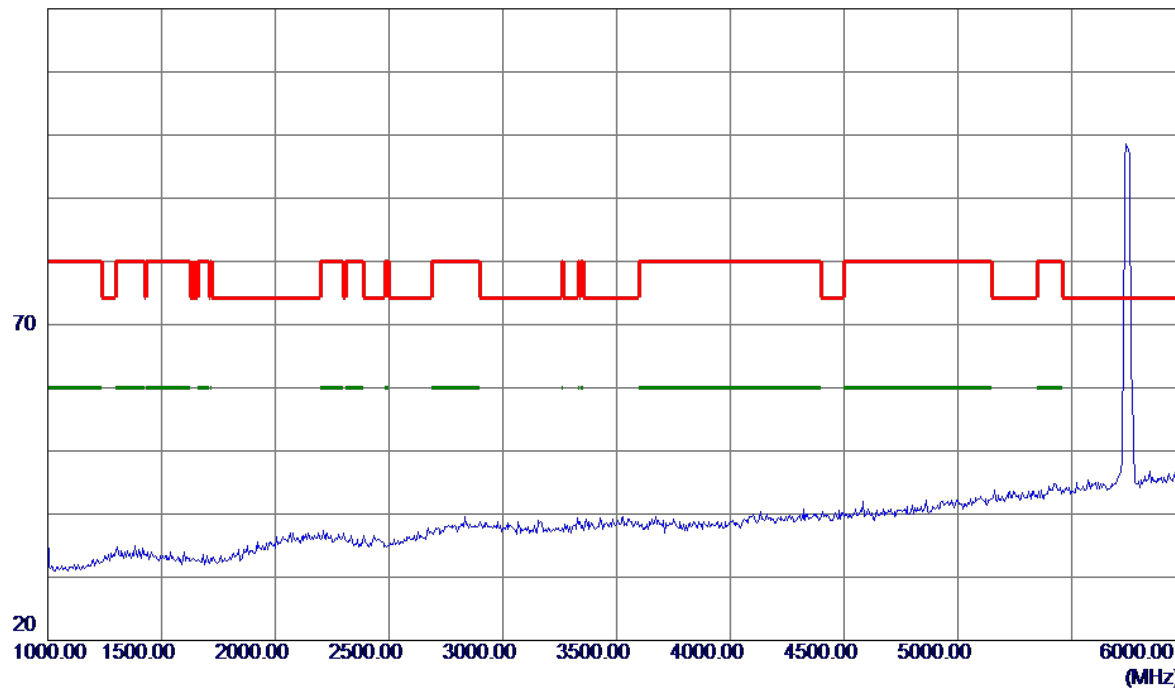


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Vertical

100 dBuV/m

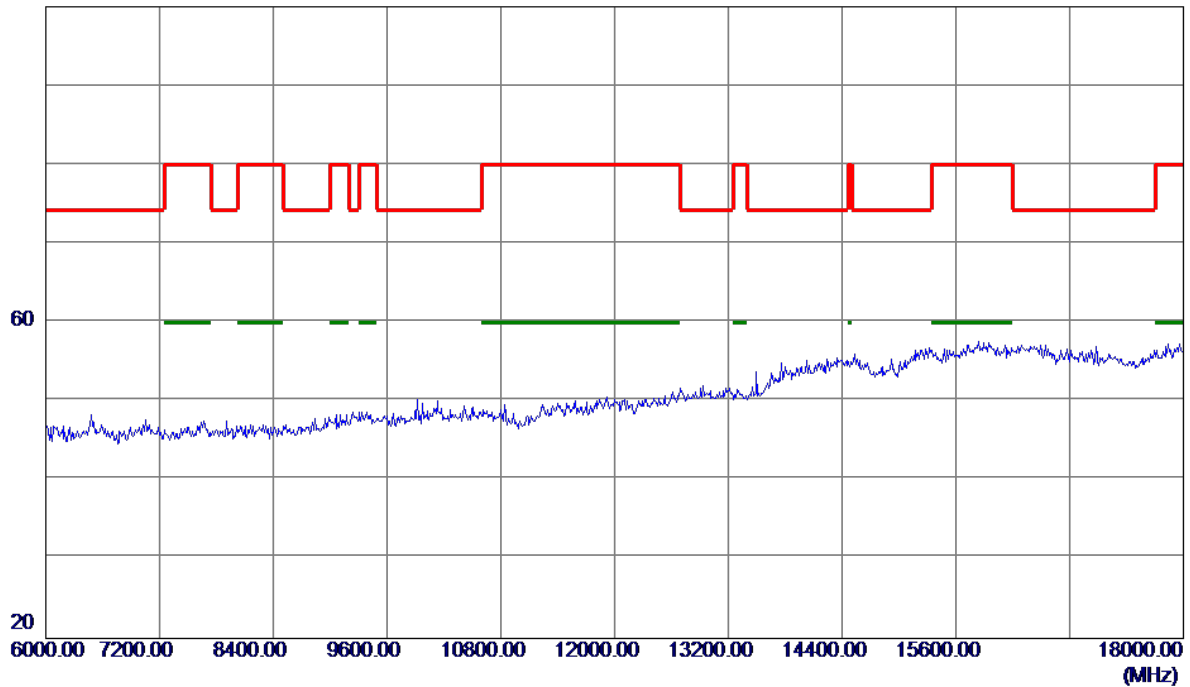


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Vertical

100 dBuV/m

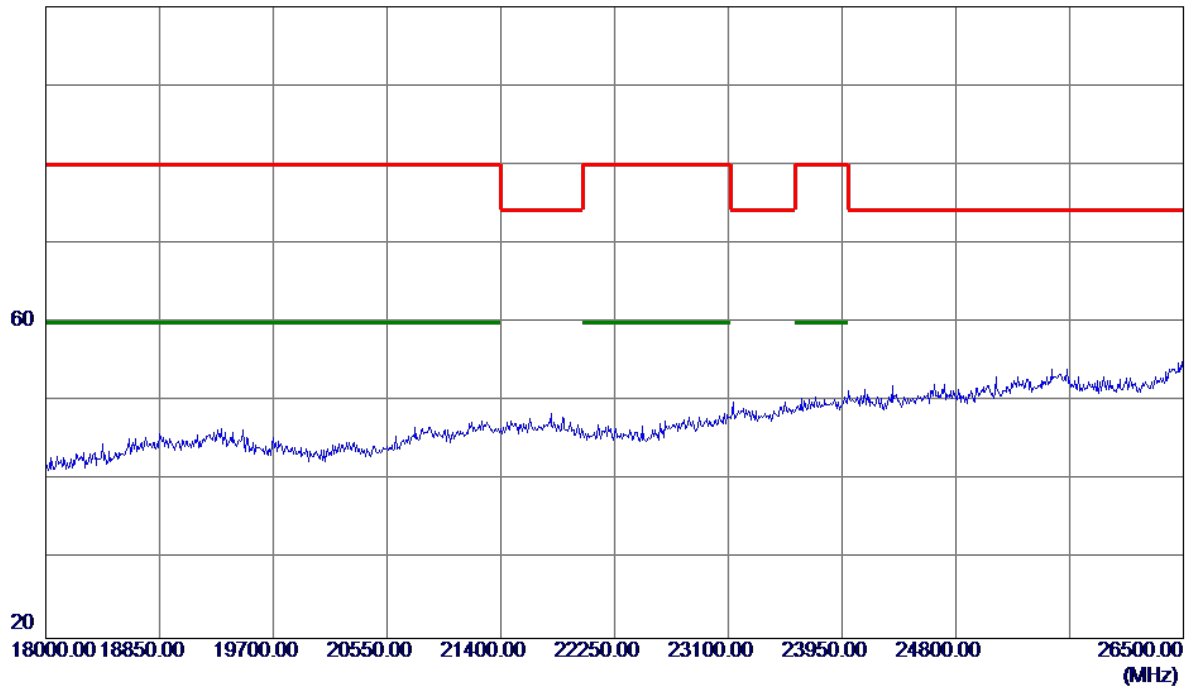

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Vertical


100 dBuV/m



| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Horizontal

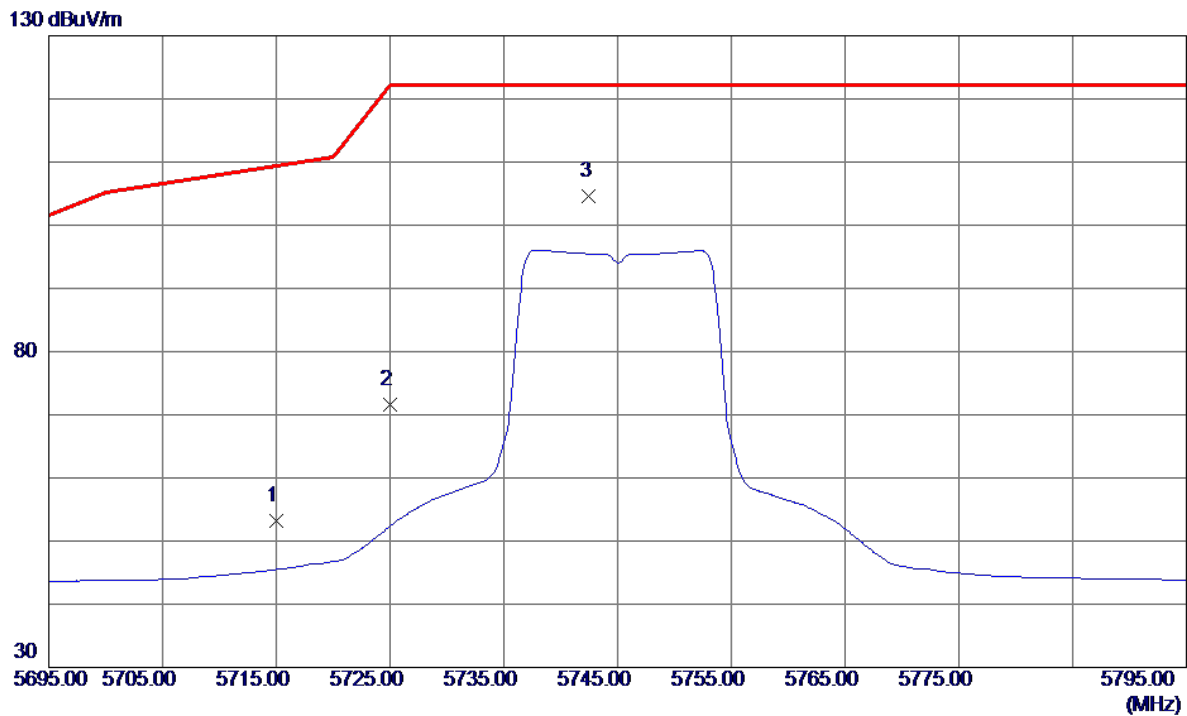


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 9.73                       | 43.53                   | 53.26                     | 109.40          | -56.14       | Peak     |         |
| 2   | 5725.0000    | 28.04                      | 43.56                   | 71.60                     | 122.20          | -50.60       | Peak     |         |
| 3 * | 5742.5000    | 60.90                      | 43.61                   | 104.51                    | 122.20          | -17.69       | Peak     |         |



|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Horizontal

120 dBuV/m

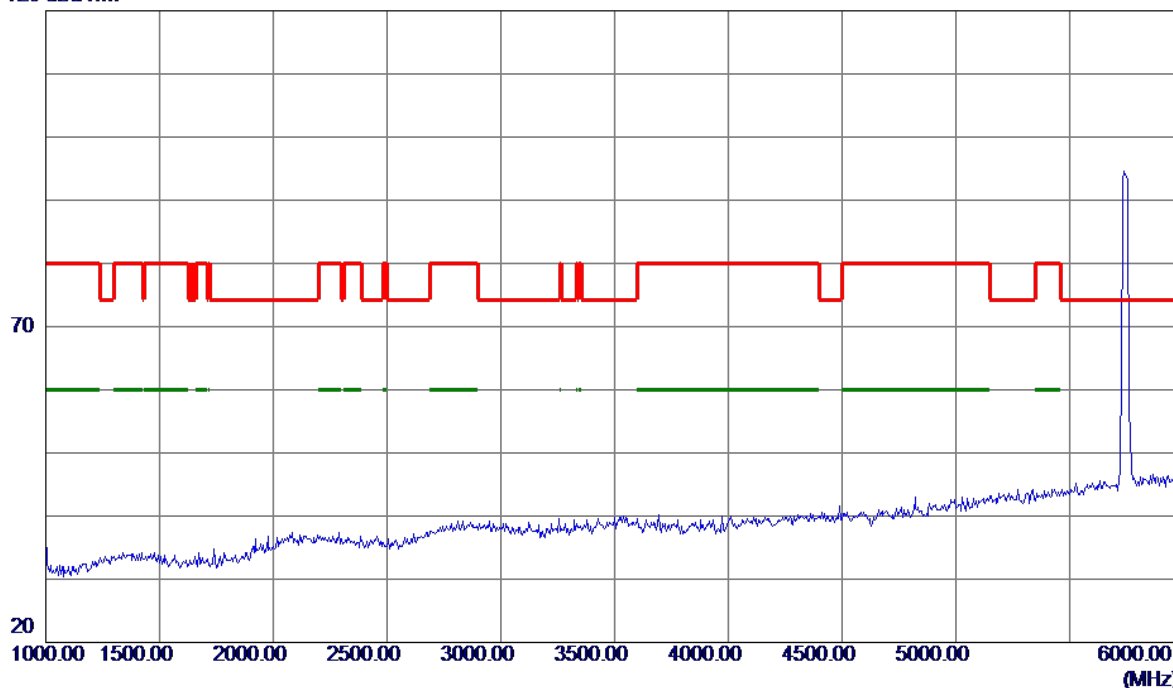


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |

|                  |                          |
|------------------|--------------------------|
| Orthogonal Axis: | X                        |
| Test Mode:       | UNII-3/TX A Mode 5745MHz |

### Horizontal

100 dBuV/m

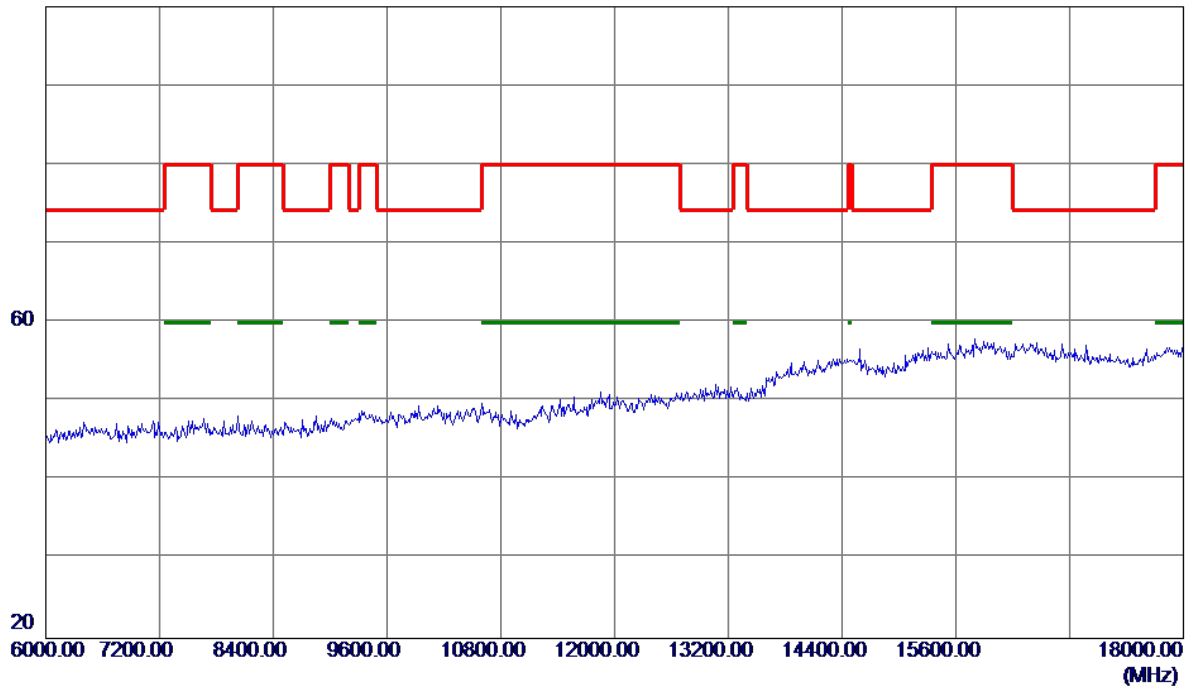

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz   | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |