

## TEST REPORT

**Product** : 233621 Trip Wireless Headphone  
**Trade mark** : 233621  
**Model/Type reference** : Trip  
**Serial Number** : N/A  
**Report Number** : EED32L00371601  
**FCC ID** : 2AN4C-1266  
**Date of Issue** : Mar. 04, 2020  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Shenzhen Grandsun Electronic Co., Ltd.**  
**Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*mark.chen.*

Mark Chen

Compiled by:

*Sunlight Sun*

Sunlight Sun

Reviewed by:

*Ware Xin*

Ware xin

Approved by:

*Sam Chuang*

Sam Chuang

Date:

Mar. 04, 2020



Check No.:3096323045

## 2 Version

Version No.	Date	Description
00	Aug. 16, 2018	Original
01	Mar. 04, 2020	1 Add TVS tube and resistance at USB PCBA and PCBA connector of main board, 2 Update charging current from 360mA to 320mA, 3 Change the power supply of MIC noise reduction chip from 3.3v to 3.0v, 4 Add electronic switch chip for speaker output, 5 Change the switch off circuit electronic, 6 Change product name and trademark

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.




## 4 Content

<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>13</b>
Appendix A): 20dB Occupied Bandwidth	15
Appendix B): Carrier Frequency Separation	23
Appendix C): Dwell Time	28
Appendix D): Hopping Channel Number	33
Appendix E): Conducted Peak Output Power	36
Appendix F): Band-edge for RF Conducted Emissions	41
Appendix G): RF Conducted Spurious Emissions	47
Appendix H): Pseudorandom Frequency Hopping Sequence	58
Appendix I): Antenna Requirement	59
Appendix J): AC Power Line Conducted Emission	60
Appendix K): Restricted bands around fundamental frequency (Radiated)	63
Appendix L): Radiated Spurious Emissions	80
<b>PHOTOGRAPHS OF TEST SETUP</b>	<b>86</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>89</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

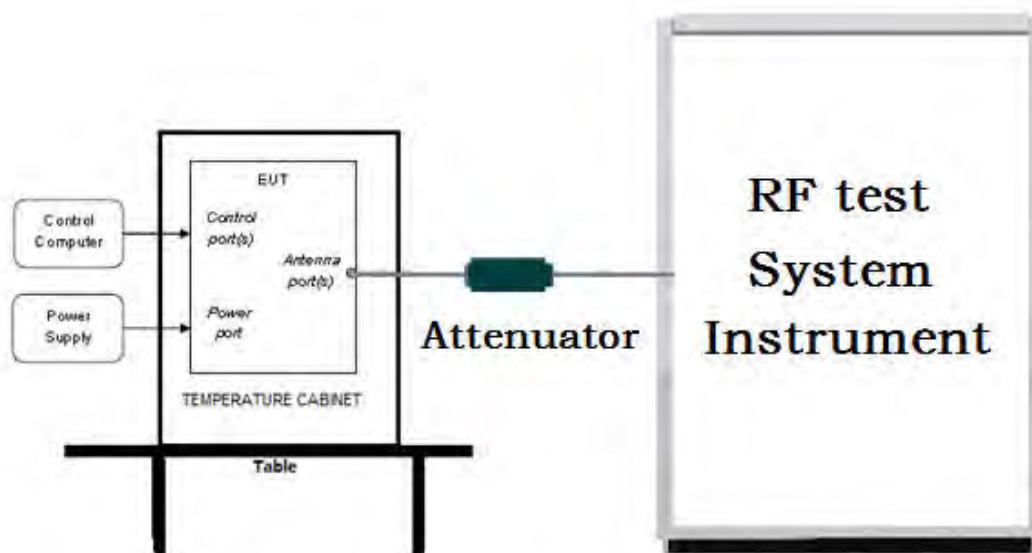

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

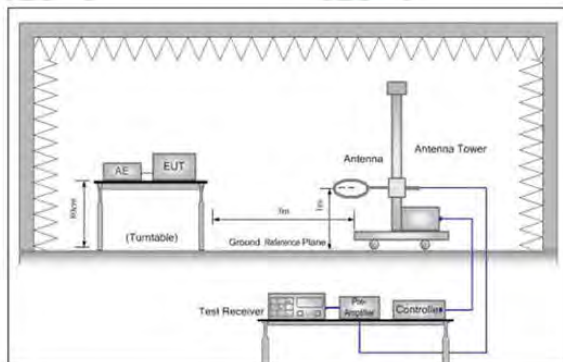


Figure 1. Below 30MHz

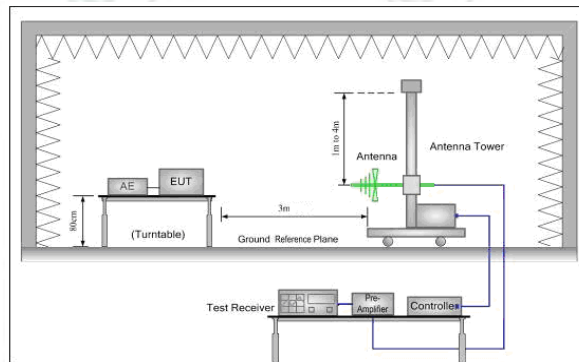


Figure 2. 30MHz to 1GHz


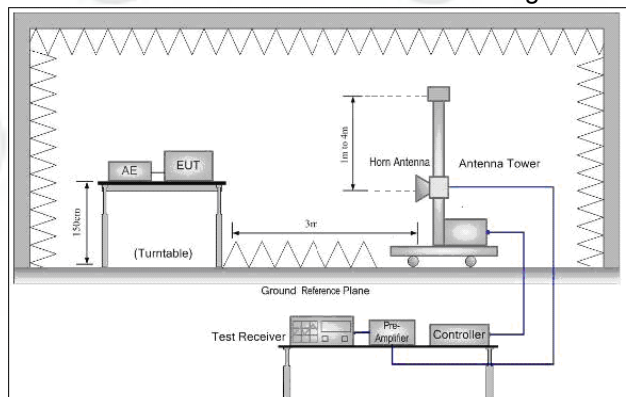


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

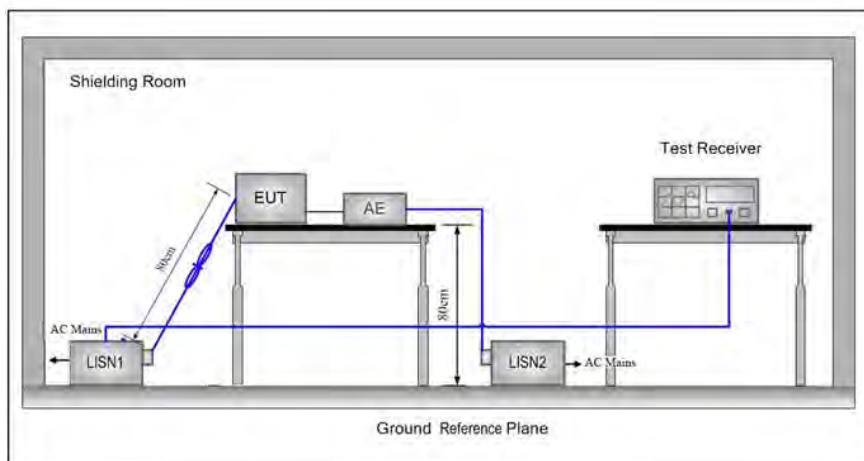

## 5.2 Test Environment

Operating Environment:	
Temperature:	23°C
Humidity:	54% RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz
TX mode:The EUT transmitted the continuous modulation test signal at the specific channel(s)				



## 6 General Information

### 6.1 Client Information

Applicant:	Shenzhen Grandsun Electronic Co., Ltd.
Address of Applicant:	Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen Grandsun Electronic Co., Ltd.
Address of Manufacturer:	Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen, China
Factory:	Shenzhen Grandsun Electronic Co., Ltd.
Address of Factory:	Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen, China

### 6.2 General Description of EUT

Product Name:	233621 Trip Wireless Headphone
Model No.(EUT):	Trip
Trade mark:	233621
EUT Supports Radios application:	BT 4.2 Single mode, 2402-2480MHz
Power Supply:	Battery: 3.7V, 720mAh
Sample Received Date:	Dec. 05, 2019
Sample tested Date:	Dec. 05, 2019 to Dec. 24, 2019

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	2.1+EDR						
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)						
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK						
Number of Channel:	79						
Hopping Channel Type:	Adaptive Frequency Hopping systems						
Test Power Grade:	DH5: power (Ext, Int ) 255,0 ; 2DH5: power (Ext, Int ) 255,20 ; 3DH5: power (Ext, Int ) 255,20						
Test Software of EUT:	Bluetest3						
Antenna Type:	PIFA type FPC antenna						
Antenna Gain:	2dBi						
Test Voltage:	DC 5V						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		



## 6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	serial number	Supplied by	Type
AE1	adapter	Shenzhen yiboyuan technology company	QC01	N/A	CTI	FCC
D	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	03-01-2019	02-29-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---



3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

## 8 Radio Technical Requirements Specification


### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BDR-1Mbps	2.892	3.7504	77.11%
EDR-3Mbps	2.907	3.751	77.50%

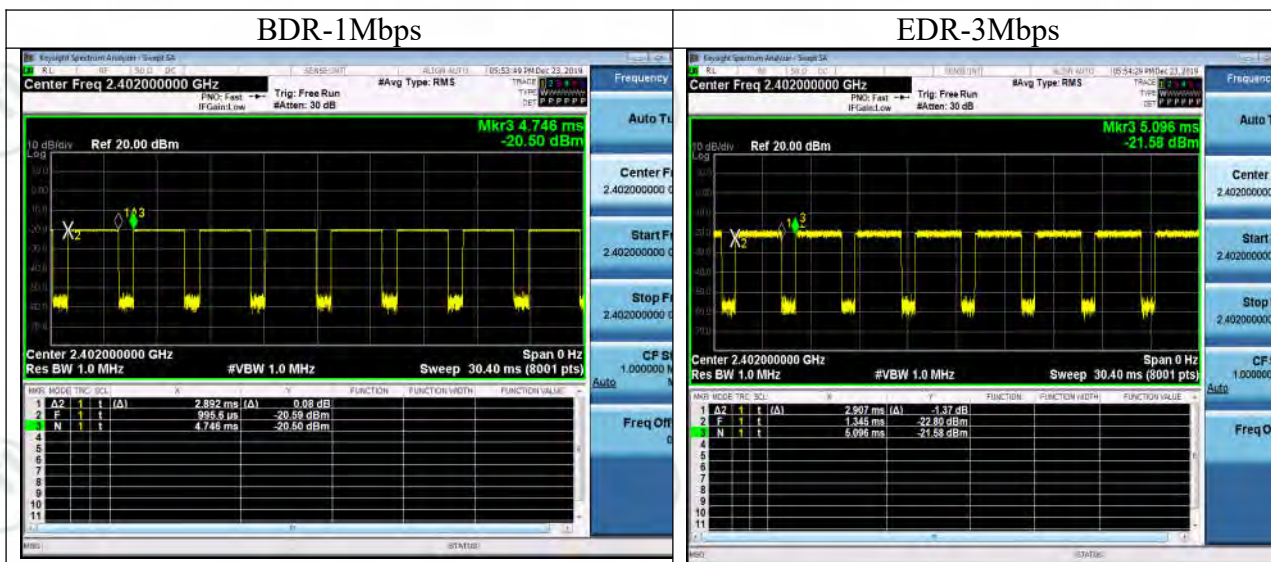



## Appendix A): 20dB Occupied Bandwidth

### Test Limit

According to §15.247(a) (1),

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100kHz, VBW = 300kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.

### Test Setup

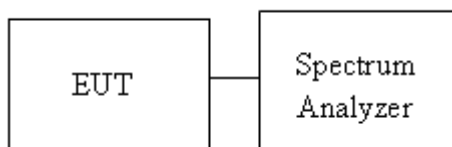

## Test Result

### 99% Bandwidth



Mode	Channel.	99% OBW [MHz]	Verdict
GFSK	LCH	0.87797	PASS
GFSK	MCH	0.86089	PASS
GFSK	HCH	0.85953	PASS
$\pi$ /4DQPSK	LCH	1.2229	PASS
$\pi$ /4DQPSK	MCH	1.2284	PASS
$\pi$ /4DQPSK	HCH	1.2252	PASS
8DPSK	LCH	1.1804	PASS
8DPSK	MCH	1.1834	PASS
8DPSK	HCH	1.1850	PASS

### 20 dB Bandwidth


Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	1.108	PASS
GFSK	MCH	1.115	PASS
GFSK	HCH	1.115	PASS
$\pi$ /4DQPSK	LCH	1.391	PASS
$\pi$ /4DQPSK	MCH	1.391	PASS
$\pi$ /4DQPSK	HCH	1.389	PASS
8DPSK	LCH	1.370	PASS
8DPSK	MCH	1.369	PASS
8DPSK	HCH	1.372	PASS

**Test Graph**  
99% Bandwidth

Graphs

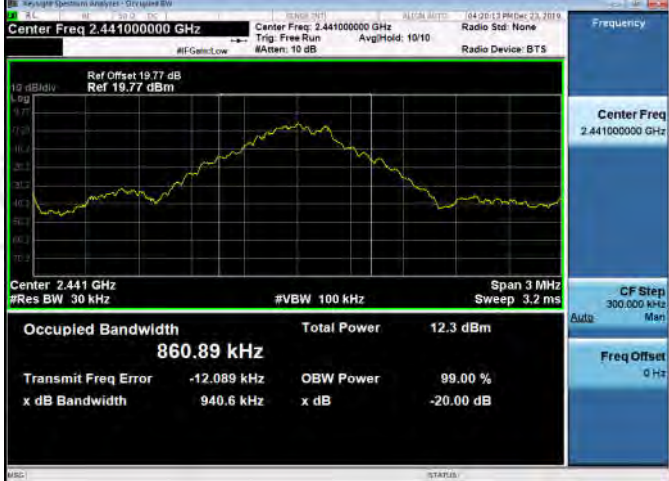GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

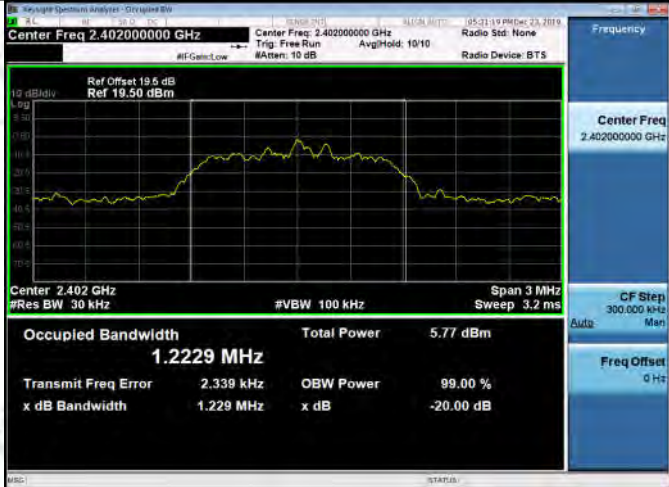

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	




8DPSK/LCH	 <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1804 MHz</p> <p>Total Power: 6.53 dBm</p> <p>Transmit Freq Error: -2.471 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.245 MHz</p> <p>x dB: -20.00 dB</p>
8DPSK/MCH	 <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1834 MHz</p> <p>Total Power: 9.10 dBm</p> <p>Transmit Freq Error: -3.093 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.250 MHz</p> <p>x dB: -20.00 dB</p>
8DPSK/HCH	 <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1850 MHz</p> <p>Total Power: 8.56 dBm</p> <p>Transmit Freq Error: -4.274 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.247 MHz</p> <p>x dB: -20.00 dB</p>



20 dB Bandwidth

Graphs	
GFSK/LCH	<p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 962.06 kHz</p> <p>Total Power 0.06 dBm</p> <p>Transmit Freq Error 13.855 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.108 MHz</p> <p>x dB -20.00 dB</p>
GFSK/MCH	<p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 958.20 kHz</p> <p>Total Power 9.67 dBm</p> <p>Transmit Freq Error -11.008 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.115 MHz</p> <p>x dB -20.00 dB</p>
GFSK/HCH	<p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 960.61 kHz</p> <p>Total Power 9.06 dBm</p> <p>Transmit Freq Error -13.214 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.115 MHz</p> <p>x dB -20.00 dB</p>

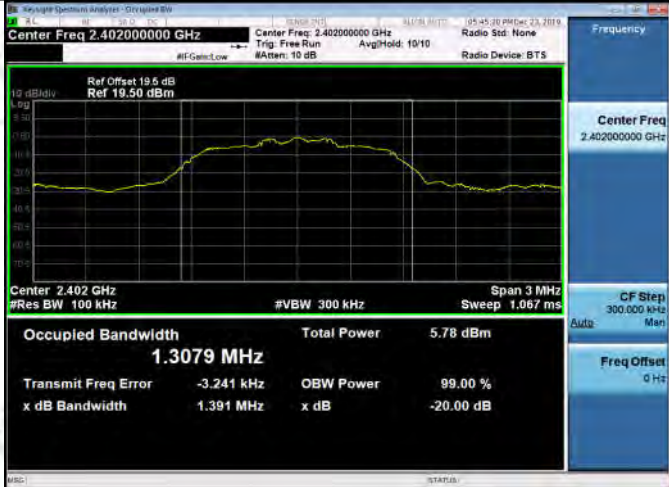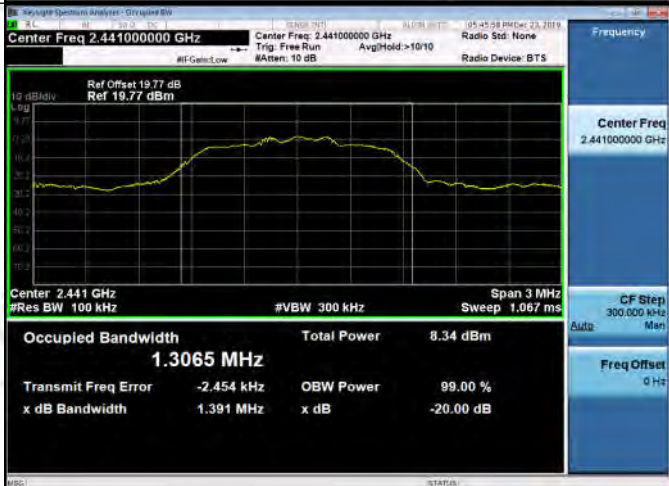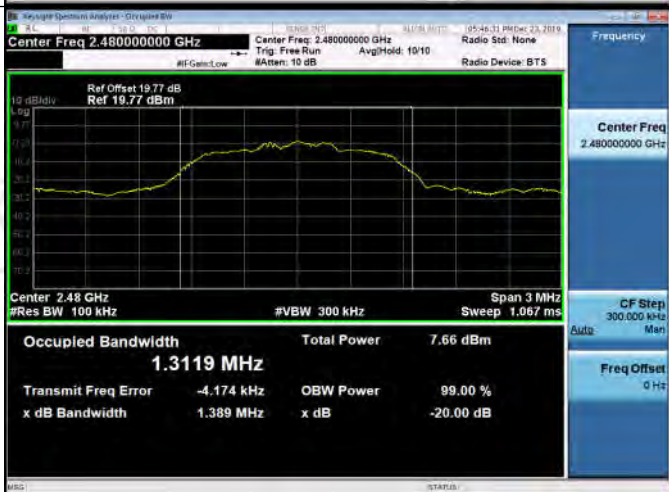

<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.3079 MHz</p> <p>Total Power 5.78 dBm</p> <p>Transmit Freq Error -3.241 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.391 MHz</p> <p>x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.3065 MHz</p> <p>Total Power 8.34 dBm</p> <p>Transmit Freq Error -2.454 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.391 MHz</p> <p>x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.3119 MHz</p> <p>Total Power 7.66 dBm</p> <p>Transmit Freq Error -4.174 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.389 MHz</p> <p>x dB -20.00 dB</p>

8DPSK/LCH	 <p>Center Freq 2.402000000 GHz</p> <p>Occupied Bandwidth 1.2677 MHz</p> <p>Total Power 6.07 dBm</p> <p>Transmit Freq Error -5.528 kHz</p> <p>OBW Power 99.00 %</p>
8DPSK/MCH	 <p>Center Freq 2.441000000 GHz</p> <p>Occupied Bandwidth 1.2676 MHz</p> <p>Total Power 8.59 dBm</p> <p>Transmit Freq Error -6.642 kHz</p> <p>OBW Power 99.00 %</p>
8DPSK/HCH	 <p>Center Freq 2.480000000 GHz</p> <p>Occupied Bandwidth 1.2714 MHz</p> <p>Total Power 8.03 dBm</p> <p>Transmit Freq Error -7.265 kHz</p> <p>OBW Power 99.00 %</p>

## Appendix B): Carrier Frequency Separation

### Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### Test Setup

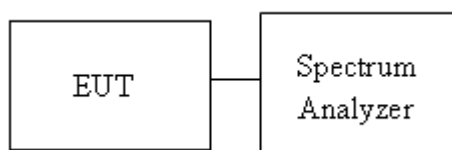





### Result Table




Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.044	PASS
GFSK	MCH	1.060	PASS
GFSK	HCH	1.016	PASS
$\pi/4$ DQPSK	LCH	0.950	PASS
$\pi/4$ DQPSK	MCH	0.982	PASS
$\pi/4$ DQPSK	HCH	1.082	PASS
8DPSK	LCH	1.008	PASS
8DPSK	MCH	1.014	PASS
8DPSK	HCH	1.184	PASS

## Test Graph

Graphs																																									
GFSK/LCH		<div><div><div>KeySight Spectrum Analyzer - Sweep 56</div><div>Center Freq 2.402500000 GHz</div><div>Ref Offset 19.6 dB Ref 19.50 dBm</div><div>ΔMkr1 1.044 MHz -0.491 dB</div><div>Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.403500 GHz Sweep 2.133 ms (1001 pts)</div><table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCAL</th><th>F</th><th>F</th><th>Δf</th><th>Δf</th><th>Δf</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.044 MHz</td><td>(Δ)</td><td>-0.491 dB</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.401 968 GHz</td><td></td><td>3.763 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.402500000 GHz</div><div>Start Freq 2.401500000 GHz</div><div>Stop Freq 2.403500000 GHz</div><div>CF Step 200.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION	1	Δ2	1	f	(Δ)	1.044 MHz	(Δ)	-0.491 dB						2	F	1	f	(Δ)	2.401 968 GHz		3.763 dBm					
MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION																													
1	Δ2	1	f	(Δ)	1.044 MHz	(Δ)	-0.491 dB																																		
2	F	1	f	(Δ)	2.401 968 GHz		3.763 dBm																																		
GFSK/MCH		<div><div><div>KeySight Spectrum Analyzer - Sweep 56</div><div>Center Freq 2.440500000 GHz</div><div>Ref Offset 19.77 dB Ref 19.77 dBm</div><div>ΔMkr1 1.060 MHz -0.642 dB</div><div>Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.441500 GHz Sweep 2.133 ms (1001 pts)</div><table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCAL</th><th>F</th><th>F</th><th>Δf</th><th>Δf</th><th>Δf</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.060 MHz</td><td>(Δ)</td><td>-0.642 dB</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.439 894 GHz</td><td></td><td>4.217 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.440500000 GHz</div><div>Start Freq 2.439500000 GHz</div><div>Stop Freq 2.441500000 GHz</div><div>CF Step 200.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION	1	Δ2	1	f	(Δ)	1.060 MHz	(Δ)	-0.642 dB						2	F	1	f	(Δ)	2.439 894 GHz		4.217 dBm					
MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION																													
1	Δ2	1	f	(Δ)	1.060 MHz	(Δ)	-0.642 dB																																		
2	F	1	f	(Δ)	2.439 894 GHz		4.217 dBm																																		
GFSK/HCH		<div><div><div>KeySight Spectrum Analyzer - Sweep 56</div><div>Center Freq 2.479500000 GHz</div><div>Ref Offset 19.77 dB Ref 19.77 dBm</div><div>ΔMkr1 1.016 MHz -0.232 dB</div><div>Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.480500 GHz Sweep 2.133 ms (1001 pts)</div><table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCAL</th><th>F</th><th>F</th><th>Δf</th><th>Δf</th><th>Δf</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th><th>FUNCTION</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.016 MHz</td><td>(Δ)</td><td>-0.232 dB</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.478 985 GHz</td><td></td><td>4.803 dBm</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.479500000 GHz</div><div>Start Freq 2.478500000 GHz</div><div>Stop Freq 2.480500000 GHz</div><div>CF Step 200.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION	1	Δ2	1	f	(Δ)	1.016 MHz	(Δ)	-0.232 dB						2	F	1	f	(Δ)	2.478 985 GHz		4.803 dBm					
MARK	MODE	TRIG	SCAL	F	F	Δf	Δf	Δf	FUNCTION	FUNCTION	FUNCTION	FUNCTION																													
1	Δ2	1	f	(Δ)	1.016 MHz	(Δ)	-0.232 dB																																		
2	F	1	f	(Δ)	2.478 985 GHz		4.803 dBm																																		

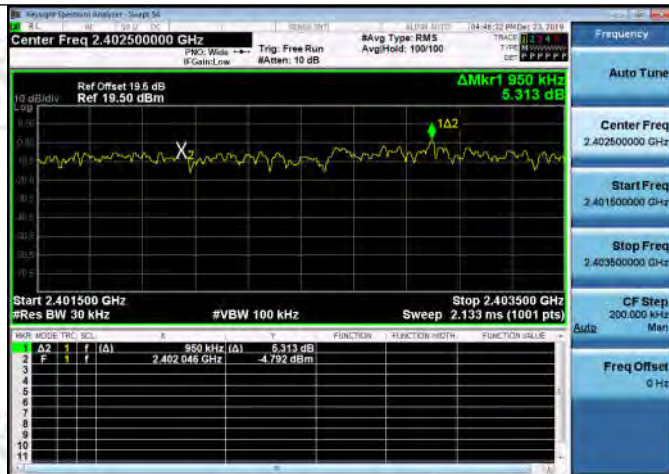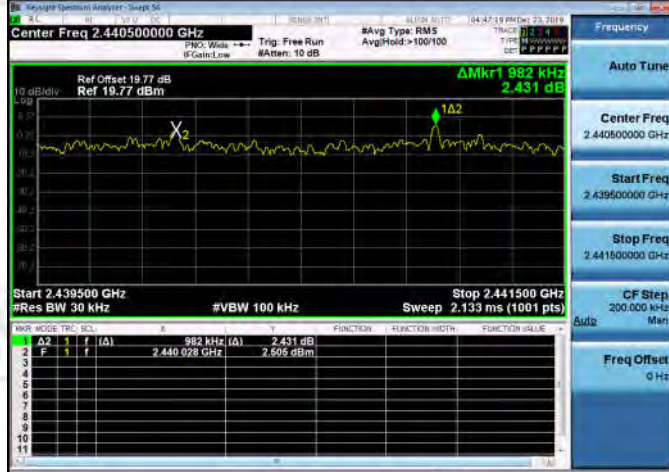$\pi/4$ DQPSK/LCH	 <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>ΔMkr1 950 kHz 5.313 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCN</th><th>F</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION METHOD</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>950 kHz</td><td>(Δ)</td><td></td><td>5.313 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 046 GHz</td><td></td><td></td><td>-4.792 dBm</td></tr></table>	MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE	1	Δ	1	f	(Δ)	950 kHz	(Δ)		5.313 dB	2	F	1	f		2.402 046 GHz			-4.792 dBm
MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	950 kHz	(Δ)		5.313 dB																				
2	F	1	f		2.402 046 GHz			-4.792 dBm																				
$\pi/4$ DQPSK/MCH	 <p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>ΔMkr1 982 kHz 2.431 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCN</th><th>F</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION METHOD</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>982 kHz</td><td>(Δ)</td><td></td><td>2.431 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.440 508 GHz</td><td></td><td></td><td>-2.505 dBm</td></tr></table>	MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE	1	Δ	1	f	(Δ)	982 kHz	(Δ)		2.431 dB	2	F	1	f		2.440 508 GHz			-2.505 dBm
MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	982 kHz	(Δ)		2.431 dB																				
2	F	1	f		2.440 508 GHz			-2.505 dBm																				
$\pi/4$ DQPSK/HCH	 <p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>ΔMkr1 1.082 MHz 2.606 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCN</th><th>F</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION METHOD</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.082 MHz</td><td>(Δ)</td><td></td><td>2.606 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.478 980 GHz</td><td></td><td></td><td>-2.665 dBm</td></tr></table>	MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE	1	Δ	1	f	(Δ)	1.082 MHz	(Δ)		2.606 dB	2	F	1	f		2.478 980 GHz			-2.665 dBm
MARK	MODE	TRC	SCN	F	Δ	FUNCTION	FUNCTION METHOD	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	1.082 MHz	(Δ)		2.606 dB																				
2	F	1	f		2.478 980 GHz			-2.665 dBm																				

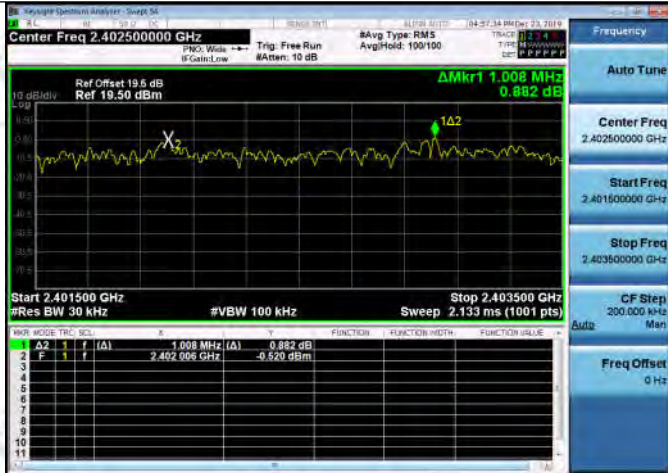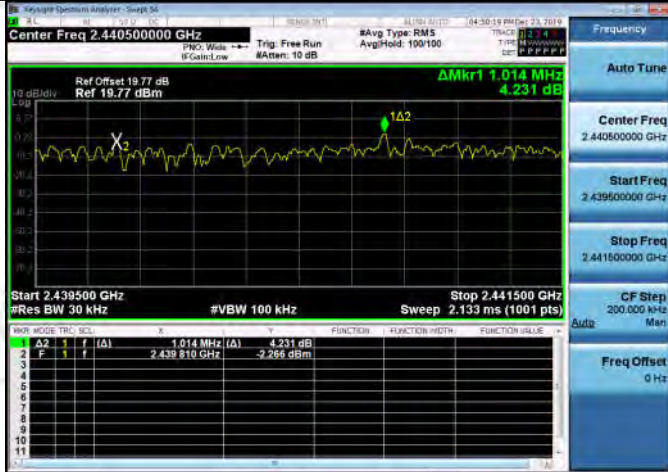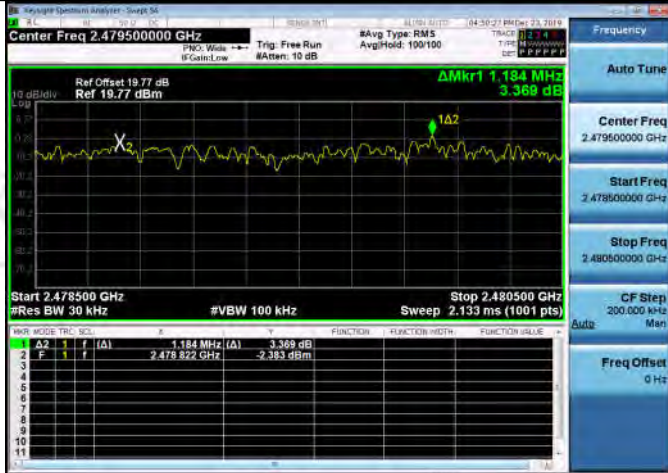

8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

## Appendix C): Dwell Time

### Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = auto

### Test Setup

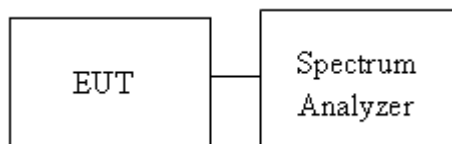


### Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.392667	320	0.126	0.31	PASS
GFSK	DH1	MCH	0.395200	320	0.126	0.32	PASS
GFSK	DH1	HCH	0.393933	320	0.126	0.32	PASS
GFSK	DH3	LCH	1.65046	160	0.264	0.66	PASS
GFSK	DH3	MCH	1.65046	160	0.264	0.66	PASS
GFSK	DH3	HCH	1.65047	160	0.264	0.66	PASS
GFSK	DH5	LCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	MCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	HCH	2.8796	106.7	0.307	0.77	PASS






## Test Graph

### Graphs

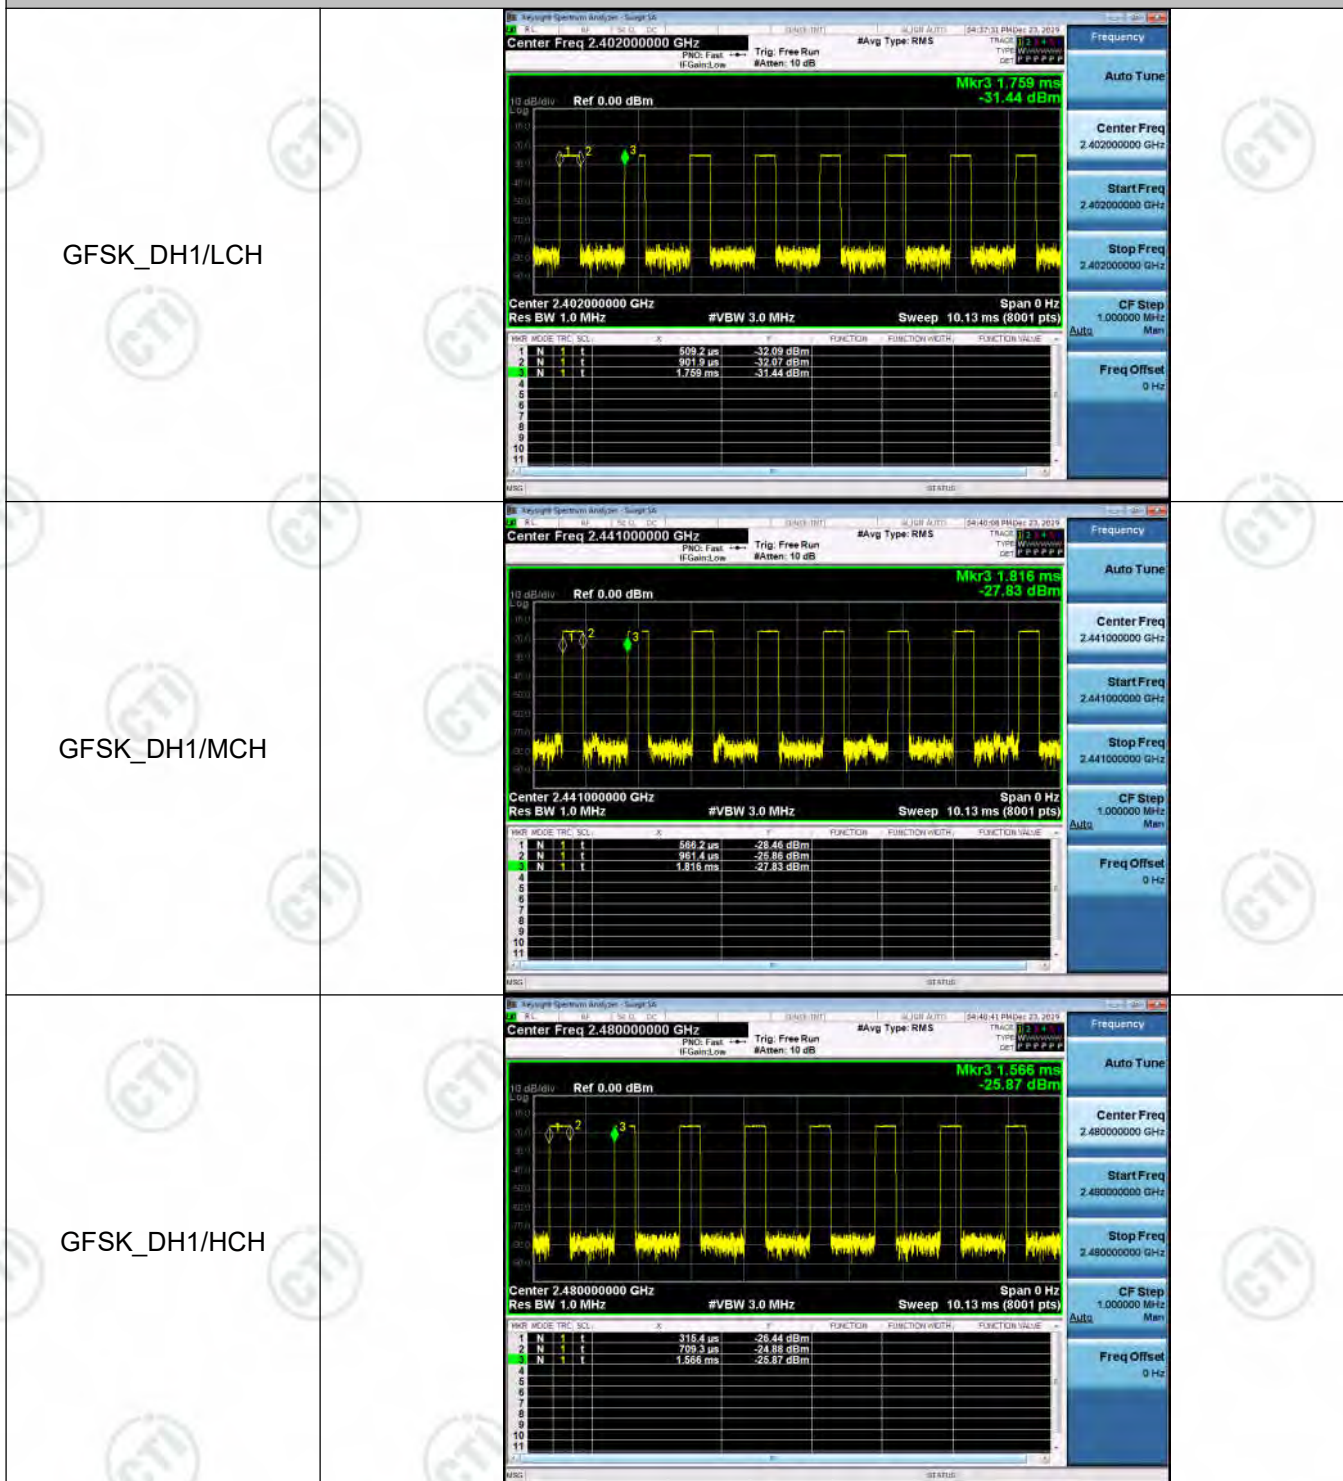

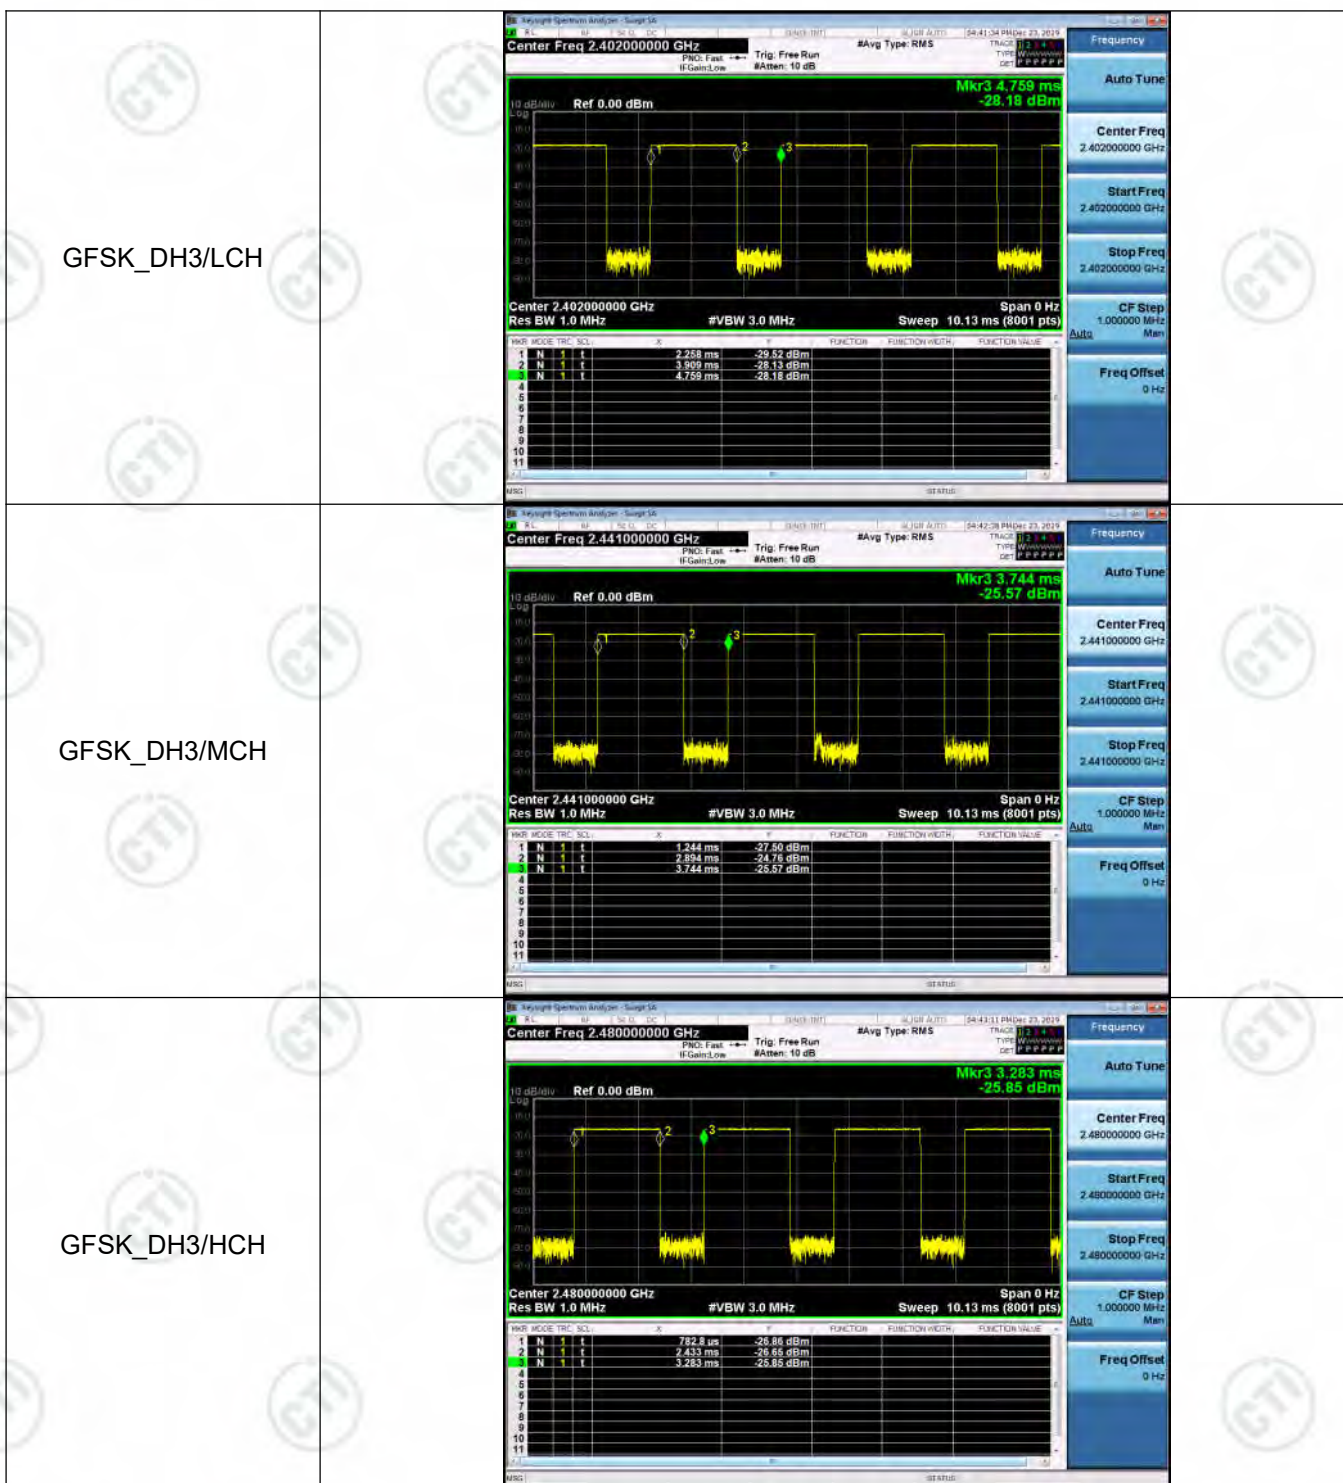

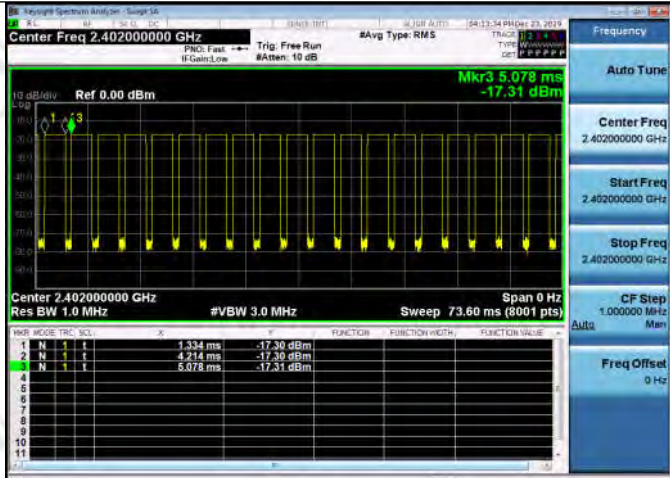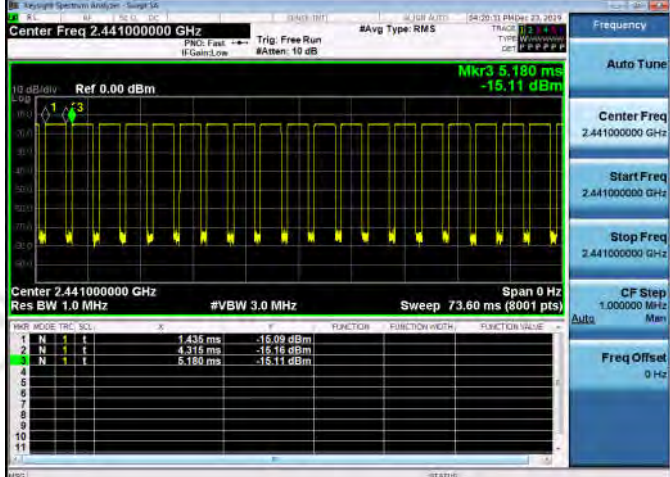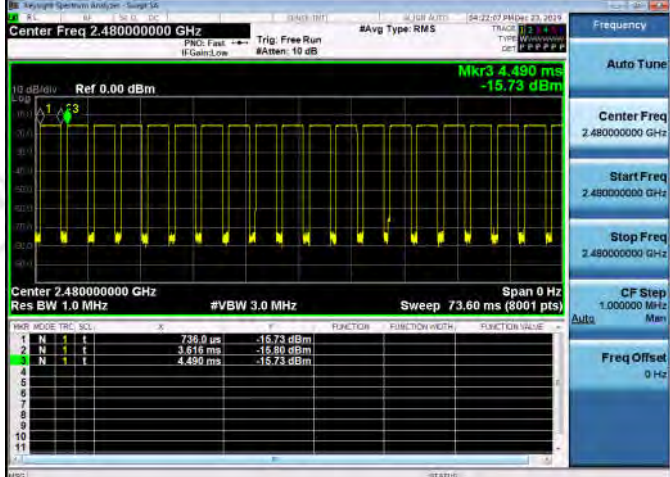

GFSK_DH5/LCH	 <p>Center Freq 2.402000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 5.078 ms -17.31 dBm</p> <p>Center 2.402000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.334 ms</td><td>-17.30 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.214 ms</td><td>-17.30 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.078 ms</td><td>-17.31 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.334 ms	-17.30 dBm				2	N	1	t	4.214 ms	-17.30 dBm				3	N	1	t	5.078 ms	-17.31 dBm			
MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.334 ms	-17.30 dBm																																
2	N	1	t	4.214 ms	-17.30 dBm																																
3	N	1	t	5.078 ms	-17.31 dBm																																
GFSK_DH5/MCH	 <p>Center Freq 2.441000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 5.180 ms -15.11 dBm</p> <p>Center 2.441000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.435 ms</td><td>-15.09 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.315 ms</td><td>-15.10 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.180 ms</td><td>-15.11 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.435 ms	-15.09 dBm				2	N	1	t	4.315 ms	-15.10 dBm				3	N	1	t	5.180 ms	-15.11 dBm			
MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.435 ms	-15.09 dBm																																
2	N	1	t	4.315 ms	-15.10 dBm																																
3	N	1	t	5.180 ms	-15.11 dBm																																
GFSK_DH5/HCH	 <p>Center Freq 2.480000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 4.490 ms -15.73 dBm</p> <p>Center 2.480000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>736.0 us</td><td>-15.73 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.615 ms</td><td>-15.80 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.490 ms</td><td>-15.73 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	736.0 us	-15.73 dBm				2	N	1	t	3.615 ms	-15.80 dBm				3	N	1	t	4.490 ms	-15.73 dBm			
MARK	MODE	TRIG	SCL	X	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	736.0 us	-15.73 dBm																																
2	N	1	t	3.615 ms	-15.80 dBm																																
3	N	1	t	4.490 ms	-15.73 dBm																																



## Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

### Test Setup

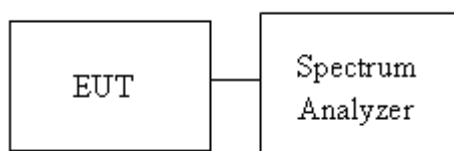

**Result Table**

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

## Test Graph

Graphs	
GFSK/Hop	
$\pi/4$ DQPSK/Hop	
8DPSK/Hop	



## Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

### Peak output power :

#### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

## Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

## Test Setup

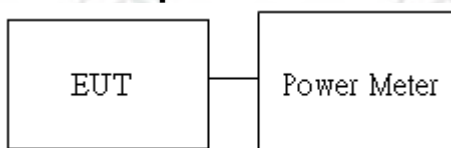

## Result Table


Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-0.418	PASS
GFSK	MCH	2.466	PASS
GFSK	HCH	1.590	PASS
$\pi/4$ DQPSK	LCH	-3.265	PASS
$\pi/4$ DQPSK	MCH	-0.516	PASS
$\pi/4$ DQPSK	HCH	-1.408	PASS
8DPSK	LCH	-2.422	PASS
8DPSK	MCH	0.311	PASS
8DPSK	HCH	-0.559	PASS

## Test Graph

Graphs	
GFSK/LCH	<p>Center Freq 2.402000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr1 2.402 244 375 GHz -0.418 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
GFSK/MCH	<p>Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.440 946 875 GHz 2.466 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>
GFSK/HCH	<p>Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.479 791 250 GHz 1.590 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>



<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

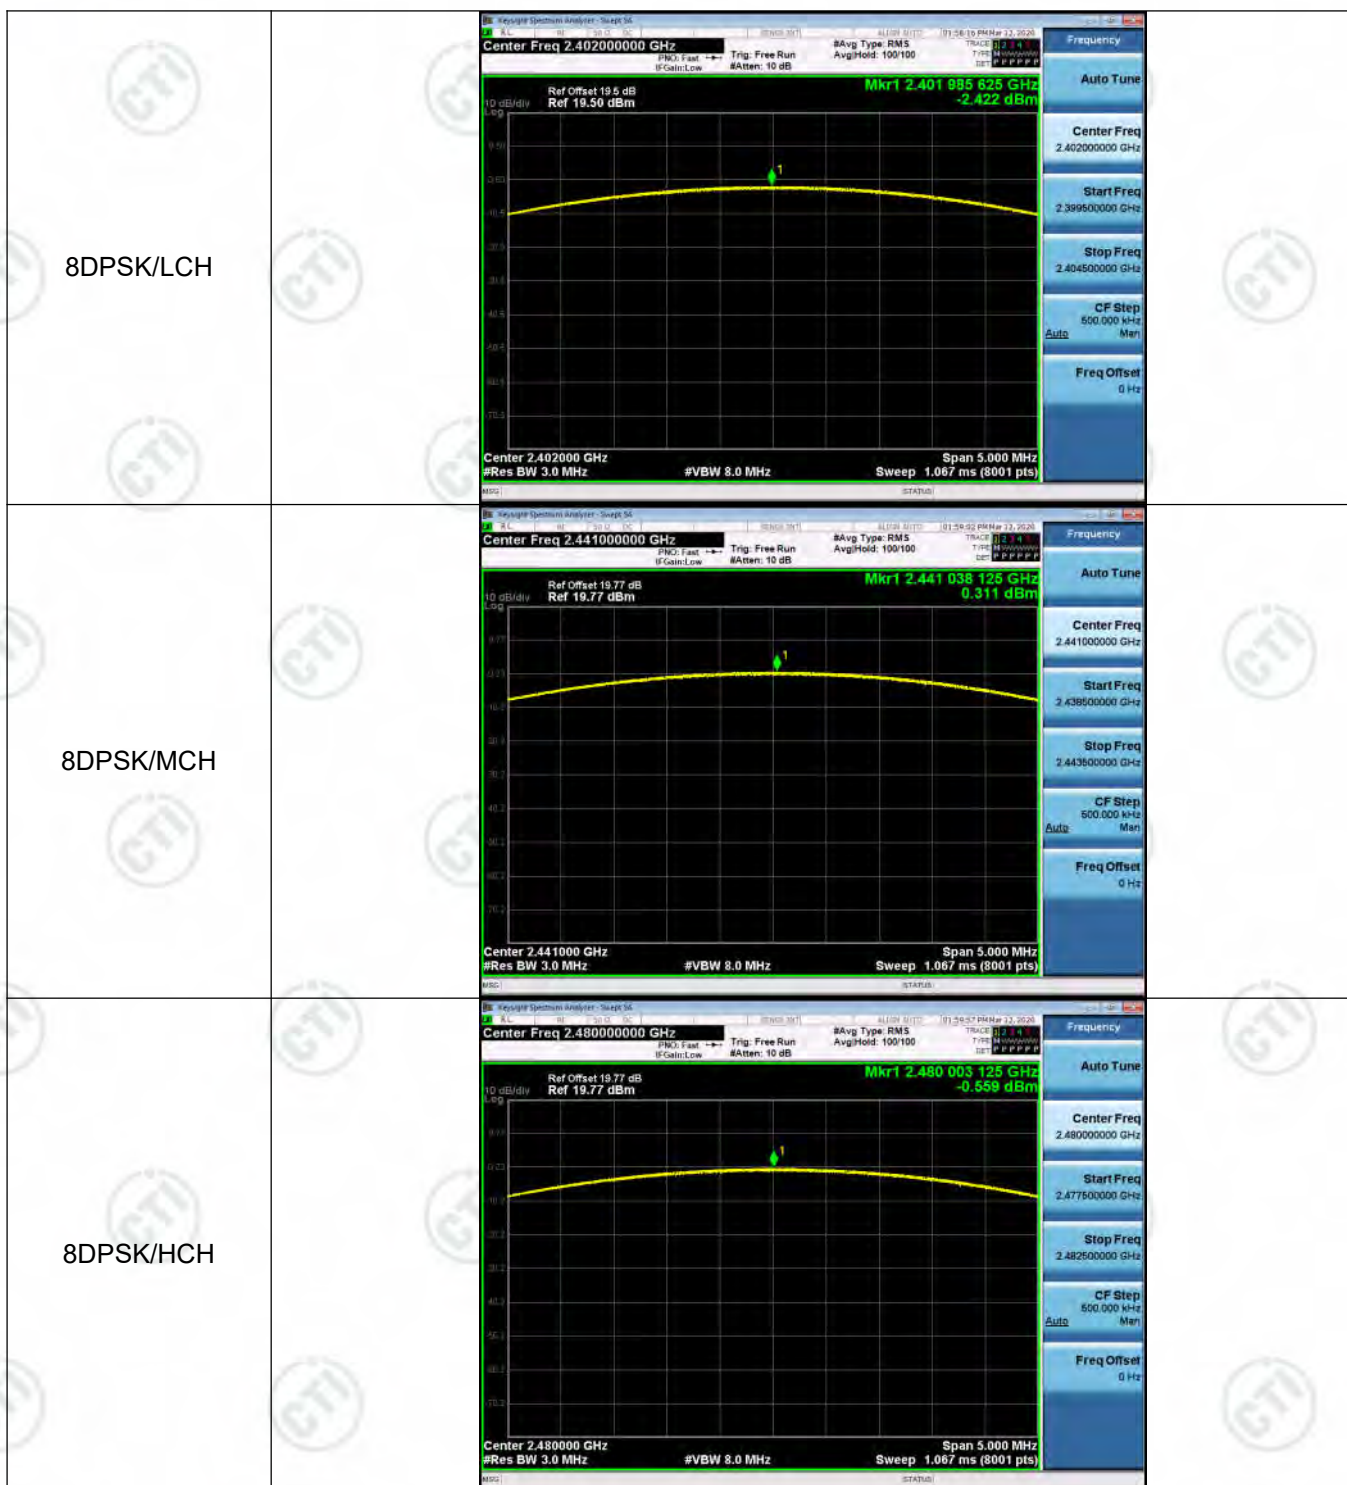

## Appendix F): Band-edge for RF Conducted Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.

### Test Setup

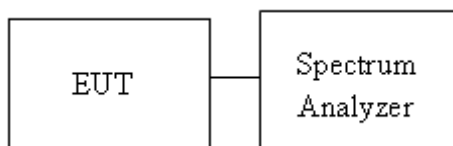






**Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	2.256	Off	-60.483	-17.74	PASS
			6.870	On	-57.687	-13.13	PASS
GFSK	HCH	2480	4.018	Off	-52.800	-15.98	PASS
			7.385	On	-52.064	-12.62	PASS
$\pi/4$ DQPSK	LCH	2402	-1.615	Off	-61.003	-21.62	PASS
			3.303	On	-59.828	-16.7	PASS
$\pi/4$ DQPSK	HCH	2480	0.355	Off	-54.297	-19.65	PASS
			4.784	On	-57.246	-15.22	PASS
8DPSK	LCH	2402	-1.284	Off	-60.094	-21.28	PASS
			2.816	On	-59.889	-17.18	PASS
8DPSK	HCH	2480	0.843	Off	-51.445	-19.16	PASS
			5.445	On	-57.881	-14.56	PASS

## Test Graph


Graphs																																														
GFSK/LCH/No Hop	<p>Center Freq 2.395000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Mkr4 2.389 532 5 GHz -60.483 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>F</th><th>A</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 170 0 GHz</td><td>-2.256 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-41.826 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-60.794 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 532 5 GHz</td><td>-60.483 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 170 0 GHz	-2.256 dBm				2	N	1	f	2.400 000 0 GHz	-41.826 dBm				3	N	1	f	2.390 000 0 GHz	-60.794 dBm				4	N	1	f	2.389 532 5 GHz	-60.483 dBm			
MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 170 0 GHz	-2.256 dBm																																									
2	N	1	f	2.400 000 0 GHz	-41.826 dBm																																									
3	N	1	f	2.390 000 0 GHz	-60.794 dBm																																									
4	N	1	f	2.389 532 5 GHz	-60.483 dBm																																									
GFSK/LCH/Hop	<p>Center Freq 2.397500000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Mkr4 2.388 050 GHz -57.687 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.400 ms (1001 pts)</p> <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>F</th><th>A</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.408 175 GHz</td><td>-6.370 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-41.850 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-59.608 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 050 GHz</td><td>-57.687 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.408 175 GHz	-6.370 dBm				2	N	1	f	2.400 000 GHz	-41.850 dBm				3	N	1	f	2.390 000 GHz	-59.608 dBm				4	N	1	f	2.388 050 GHz	-57.687 dBm			
MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.408 175 GHz	-6.370 dBm																																									
2	N	1	f	2.400 000 GHz	-41.850 dBm																																									
3	N	1	f	2.390 000 GHz	-59.608 dBm																																									
4	N	1	f	2.388 050 GHz	-57.687 dBm																																									
GFSK/HCH/No Hop	<p>Center Freq 2.487500000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Mkr4 2.483 941 GHz -52.600 dBm</p> <p>Start 2.47500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (8001 pts)</p> <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCN</th><th>F</th><th>A</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 009 GHz</td><td>-4.018 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-57.548 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-59.632 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483 941 GHz</td><td>-52.600 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 009 GHz	-4.018 dBm				2	N	1	f	2.483 500 GHz	-57.548 dBm				3	N	1	f	2.500 000 GHz	-59.632 dBm				4	N	1	f	2.483 941 GHz	-52.600 dBm			
MARK	MODE	TRIG	SCN	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 009 GHz	-4.018 dBm																																									
2	N	1	f	2.483 500 GHz	-57.548 dBm																																									
3	N	1	f	2.500 000 GHz	-59.632 dBm																																									
4	N	1	f	2.483 941 GHz	-52.600 dBm																																									

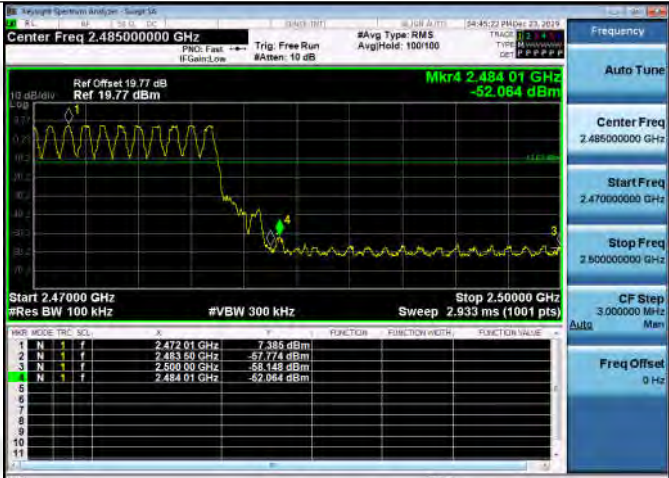

GFSK/HCH/Hop	 <table><tr><th>NO</th><th>MODE</th><th>TRF</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 01 GHz</td><td></td><td></td><td>-7.385 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td></td><td></td><td>-57.774 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td></td><td></td><td>-58.145 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.484 01 GHz</td><td></td><td></td><td>-52.064 dBm</td></tr></table>	NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 01 GHz			-7.385 dBm	2	N	1	f	2.483 50 GHz			-57.774 dBm	3	N	1	f	2.500 00 GHz			-58.145 dBm	4	N	1	f	2.484 01 GHz			-52.064 dBm
NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.472 01 GHz			-7.385 dBm																																		
2	N	1	f	2.483 50 GHz			-57.774 dBm																																		
3	N	1	f	2.500 00 GHz			-58.145 dBm																																		
4	N	1	f	2.484 01 GHz			-52.064 dBm																																		
$\pi/4$ DQPSK/LCH/No Hop	 <table><tr><th>NO</th><th>MODE</th><th>TRF</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 007 5 GHz</td><td></td><td></td><td>-1.615 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td></td><td></td><td>-35.205 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td></td><td></td><td>-61.832 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 345 0 GHz</td><td></td><td></td><td>-61.003 dBm</td></tr></table>	NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 007 5 GHz			-1.615 dBm	2	N	1	f	2.400 000 0 GHz			-35.205 dBm	3	N	1	f	2.390 000 0 GHz			-61.832 dBm	4	N	1	f	2.389 345 0 GHz			-61.003 dBm
NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.402 007 5 GHz			-1.615 dBm																																		
2	N	1	f	2.400 000 0 GHz			-35.205 dBm																																		
3	N	1	f	2.390 000 0 GHz			-61.832 dBm																																		
4	N	1	f	2.389 345 0 GHz			-61.003 dBm																																		
$\pi/4$ DQPSK/LCH/Hop	 <table><tr><th>NO</th><th>MODE</th><th>TRF</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 000 GHz</td><td></td><td></td><td>-3.303 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td></td><td></td><td>-32.134 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td></td><td></td><td>-61.855 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 625 GHz</td><td></td><td></td><td>-59.828 dBm</td></tr></table>	NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 000 GHz			-3.303 dBm	2	N	1	f	2.400 000 GHz			-32.134 dBm	3	N	1	f	2.390 000 GHz			-61.855 dBm	4	N	1	f	2.389 625 GHz			-59.828 dBm
NO	MODE	TRF	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.402 000 GHz			-3.303 dBm																																		
2	N	1	f	2.400 000 GHz			-32.134 dBm																																		
3	N	1	f	2.390 000 GHz			-61.855 dBm																																		
4	N	1	f	2.389 625 GHz			-59.828 dBm																																		





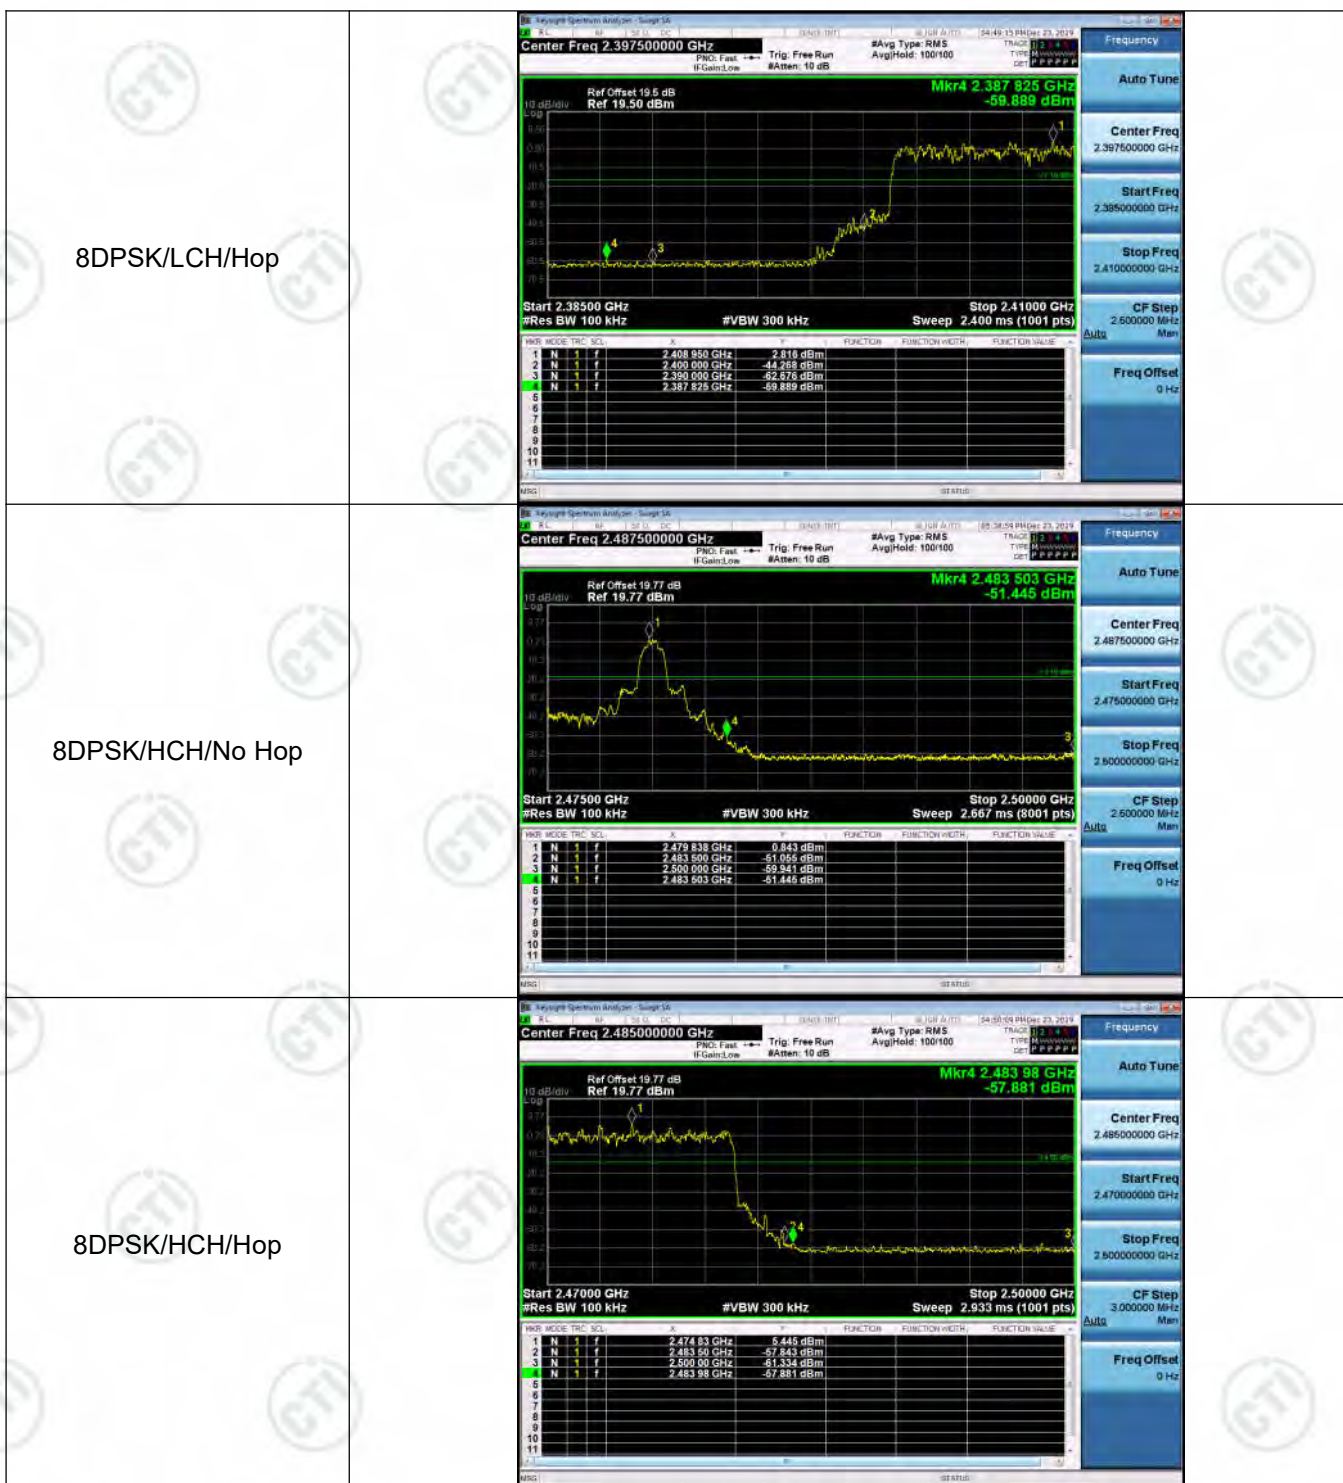



## Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

### Test Setup

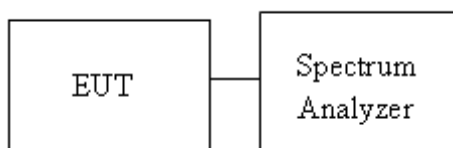



### Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	2.26	<Limit	PASS
GFSK	MCH	4.582	<Limit	PASS
GFSK	HCH	3.93	<Limit	PASS
$\pi/4$ DQPSK	LCH	-1.613	<Limit	PASS
$\pi/4$ DQPSK	MCH	0.955	<Limit	PASS
$\pi/4$ DQPSK	HCH	0.31	<Limit	PASS
8DPSK	LCH	-1.351	<Limit	PASS
8DPSK	MCH	1.286	<Limit	PASS
8DPSK	HCH	0.817	<Limit	PASS


## Test Graph










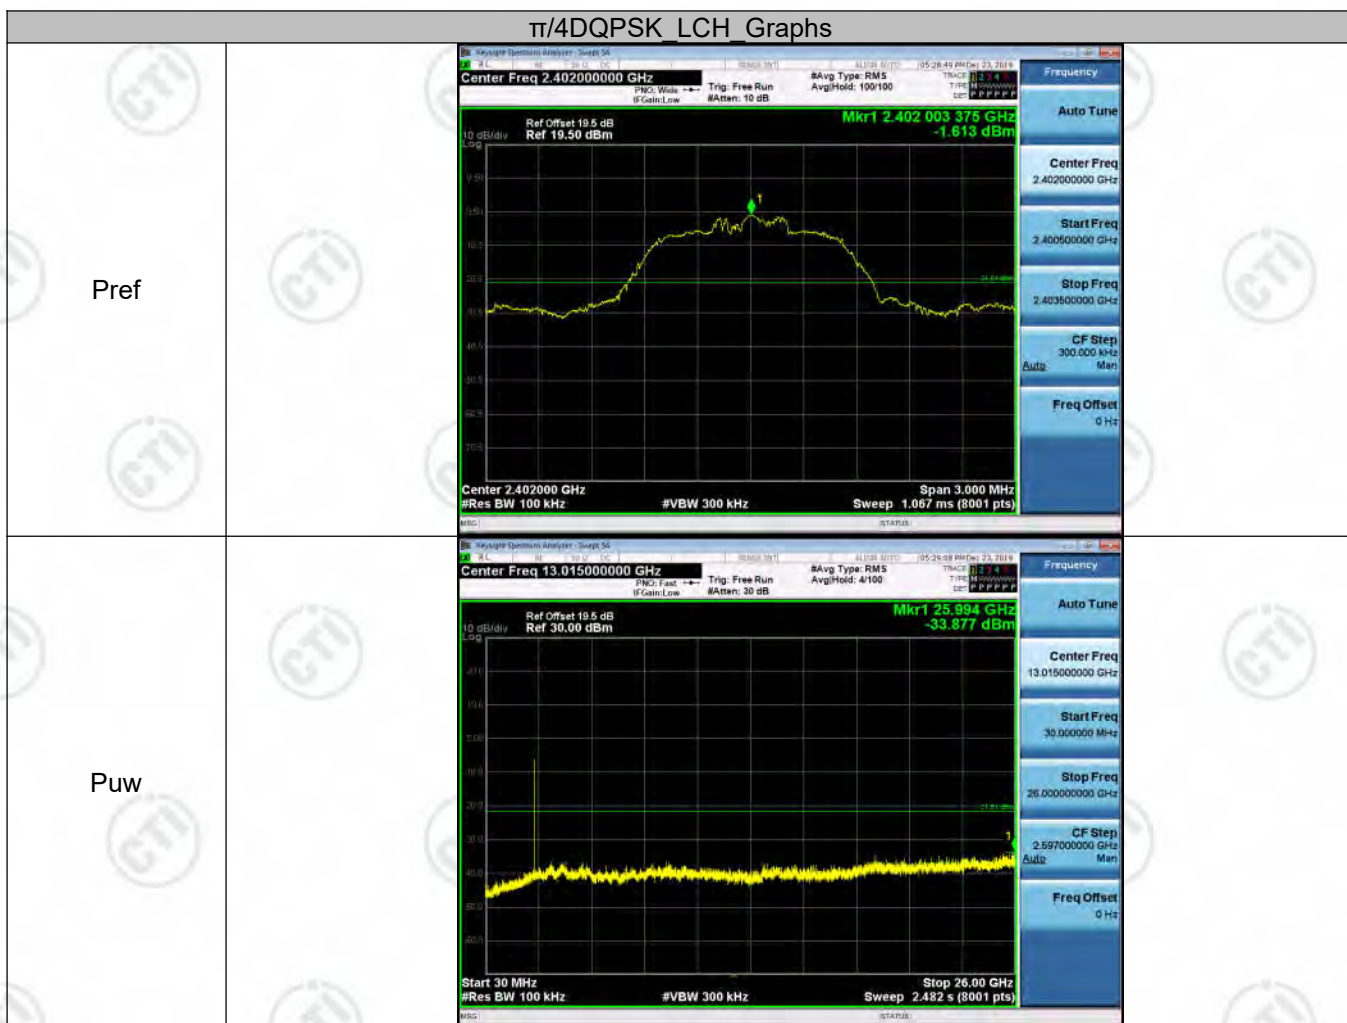








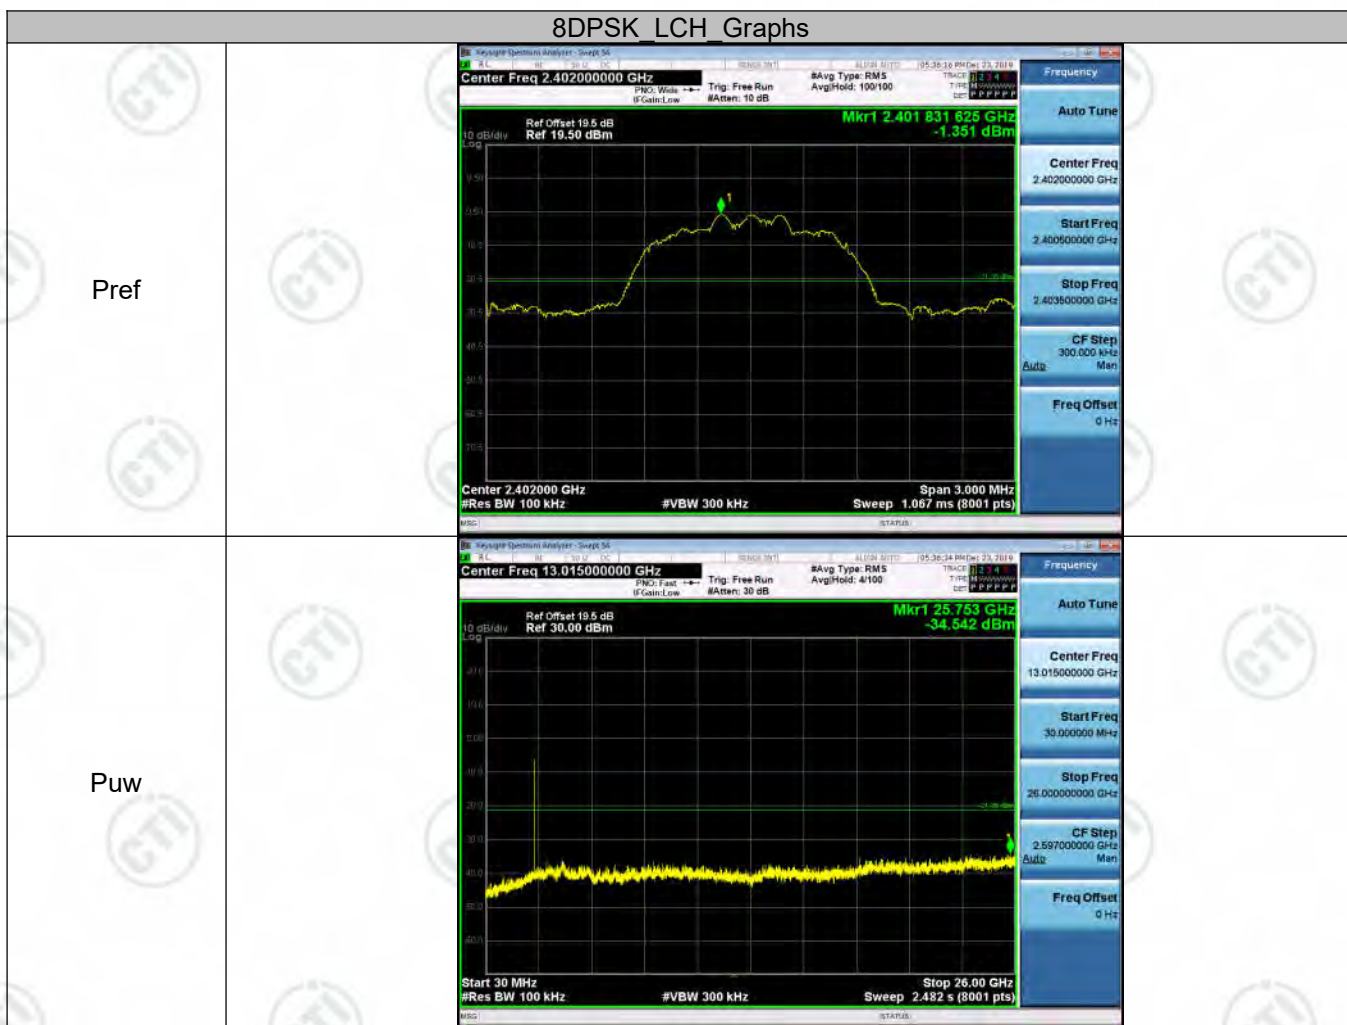





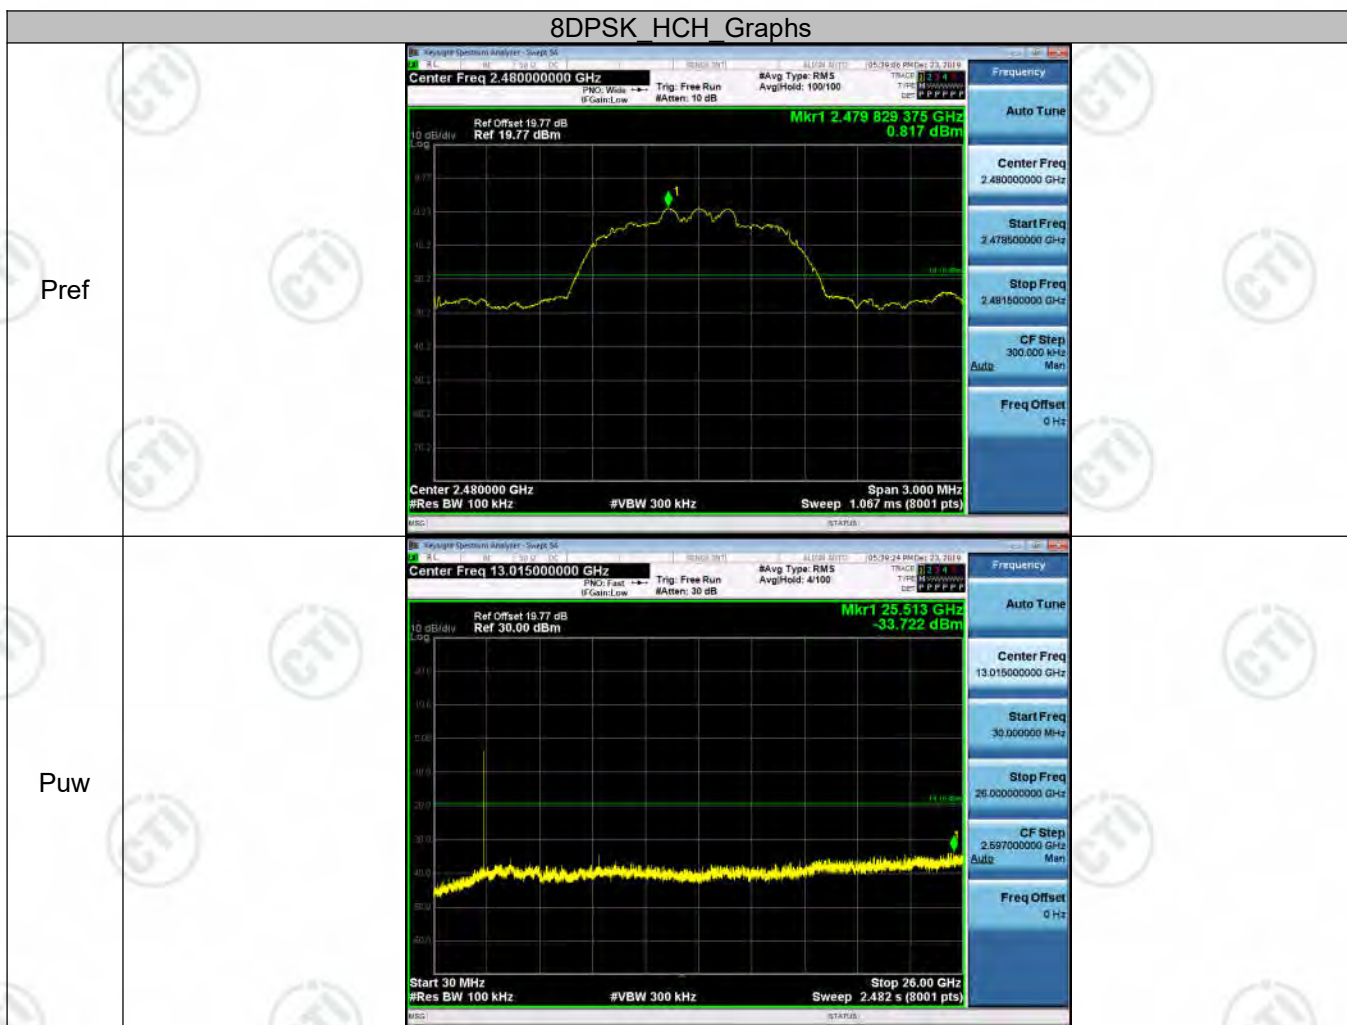

## Appendix H): Pseudorandom Frequency Hopping Sequence

<b>Test Requirement:</b>	<b>47 CFR Part 15C Section 15.247 (a)(1) requirement:</b>
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
<b>EUT Pseudorandom Frequency Hopping Sequence</b>	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="317 1048 1369 1196" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="397 1294 1383 1442" data-label="Figure"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	



## Appendix I): Antenna Requirement

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:



The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is 2dBi



## Appendix J): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet sTrip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

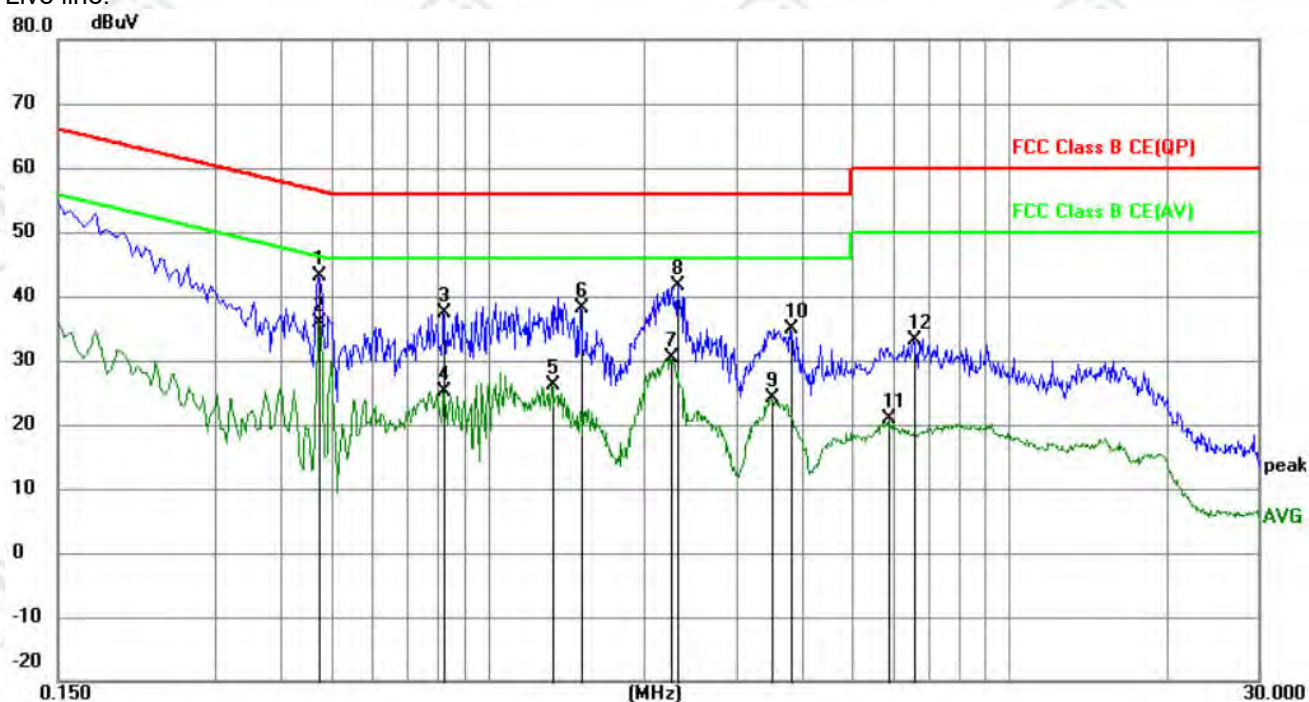

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4740	33.18	10.00	43.18	56.44	-13.26	QP	
2	*	0.4740	25.97	10.00	35.97	46.44	-10.47	AVG	
3		0.8250	27.55	9.91	37.46	56.00	-18.54	QP	
4		0.8250	15.26	9.91	25.17	46.00	-20.83	AVG	
5		1.3290	16.34	9.88	26.22	46.00	-19.78	AVG	
6		1.5090	28.18	9.87	38.05	56.00	-17.95	QP	
7		2.2380	20.66	9.83	30.49	46.00	-15.51	AVG	
8		2.3145	31.87	9.83	41.70	56.00	-14.30	QP	
9		3.4980	14.39	9.83	24.22	46.00	-21.78	AVG	
10		3.7995	25.08	9.83	34.91	56.00	-21.09	QP	
11		5.8695	11.02	9.84	20.86	50.00	-29.14	AVG	
12		6.5805	23.19	9.85	33.04	60.00	-26.96	QP	

Neutral line:

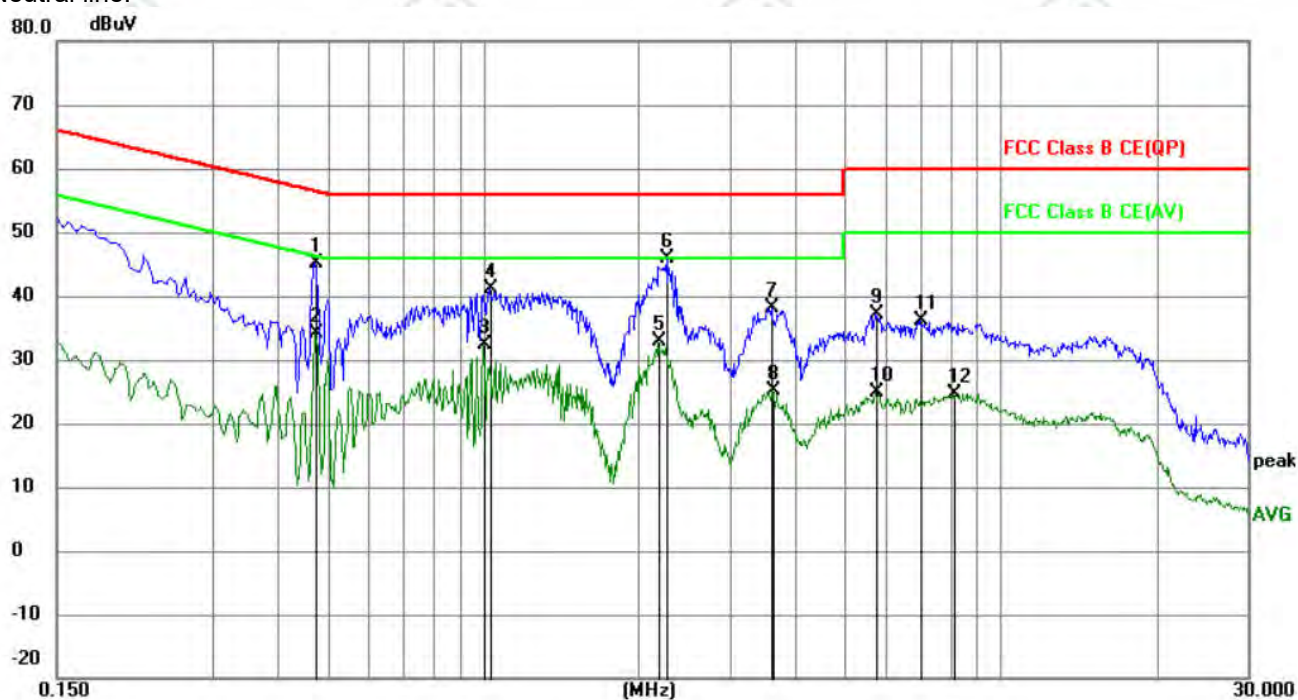

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4740	35.11	10.00	45.11	56.44	-11.33	QP	
2		0.4740	24.08	10.00	34.08	46.44	-12.36	AVG	
3		1.0005	22.53	9.91	32.44	46.00	-13.56	AVG	
4		1.0275	31.25	9.91	41.16	56.00	-14.84	QP	
5		2.1795	22.96	9.83	32.79	46.00	-13.21	AVG	
6	*	2.2695	36.02	9.83	45.85	56.00	-10.15	QP	
7		3.6060	28.22	9.83	38.05	56.00	-17.95	QP	
8		3.6240	15.33	9.83	25.16	46.00	-20.84	AVG	
9		5.7210	27.23	9.84	37.07	60.00	-22.93	QP	
10		5.7210	14.95	9.84	24.79	50.00	-25.21	AVG	
11		6.9900	26.36	9.85	36.21	60.00	-23.79	QP	
12		8.1195	14.83	9.89	24.72	50.00	-25.28	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.




## Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

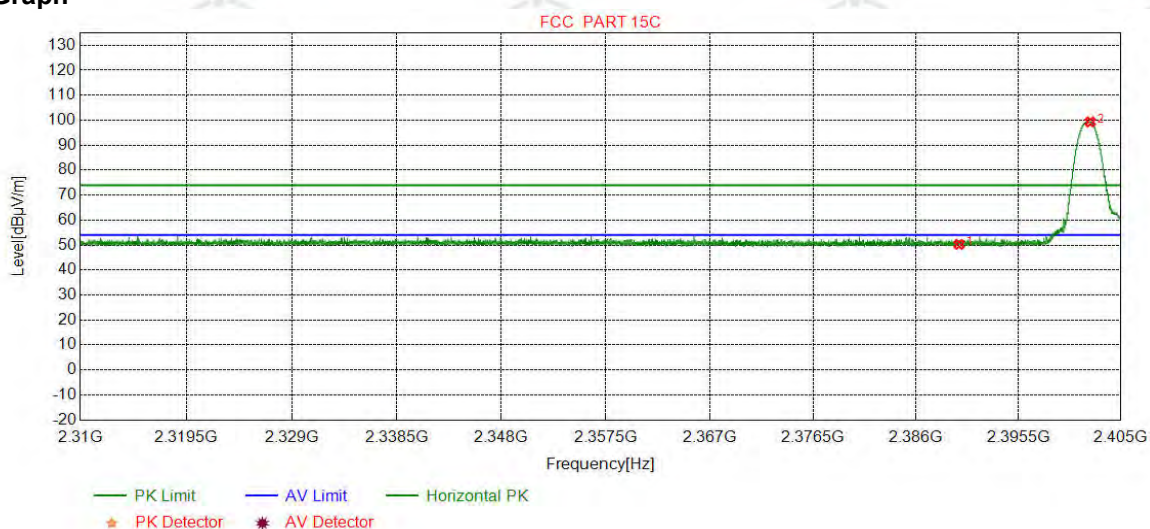

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.76	50.26	74.00	23.74	Pass	Horizontal
2	2402.1751	32.26	13.31	-43.12	96.84	99.29	74.00	-25.29	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		

### Test Graph

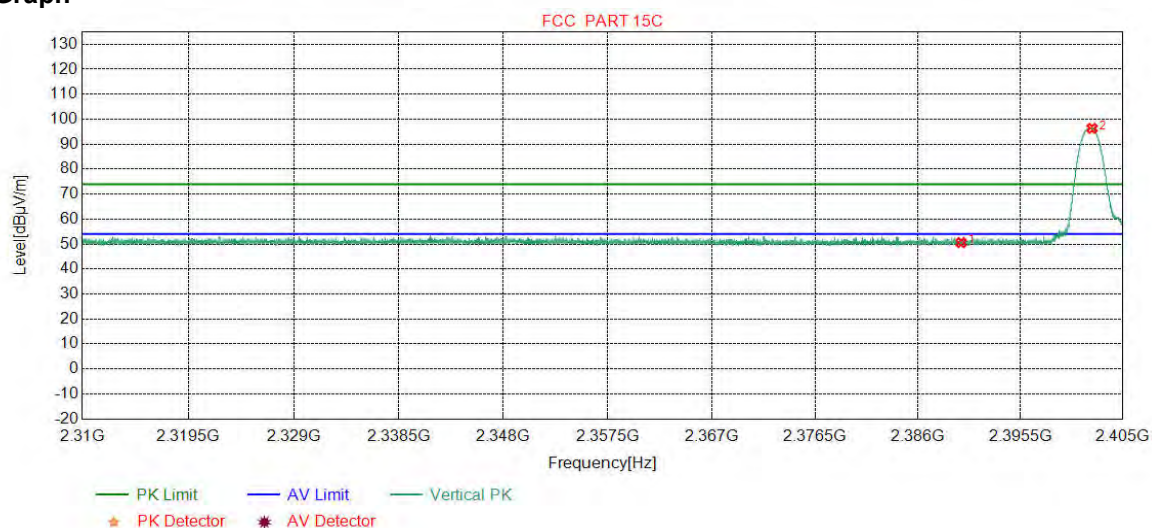


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.06	50.56	74.00	23.44	Pass	Vertical
2	2402.1561	32.26	13.31	-43.12	93.89	96.34	74.00	-22.34	Pass	Vertical



Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

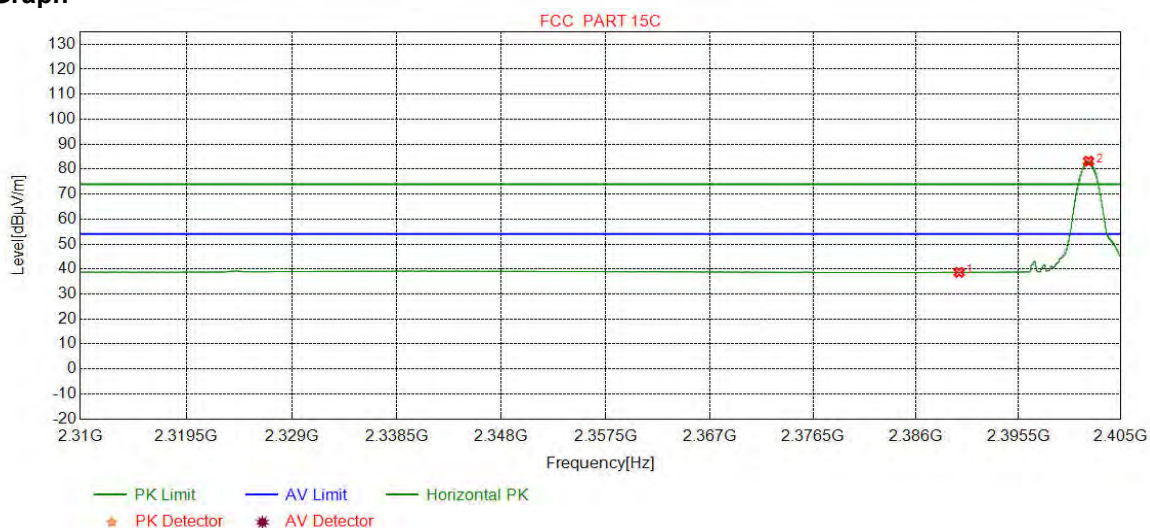

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.18	38.68	54.00	15.32	Pass	Horizontal
2	2402.0105	32.26	13.31	-43.12	80.74	83.19	54.00	-29.19	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

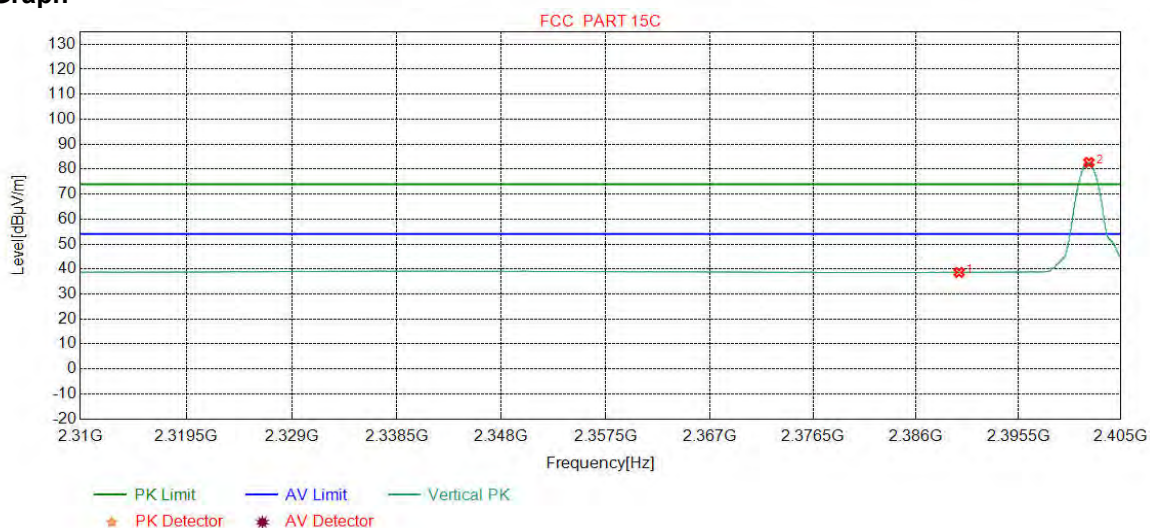

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.16	38.66	54.00	15.34	Pass	Vertical
2	2402.0421	32.26	13.31	-43.12	80.23	82.68	54.00	-28.68	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		

### Test Graph

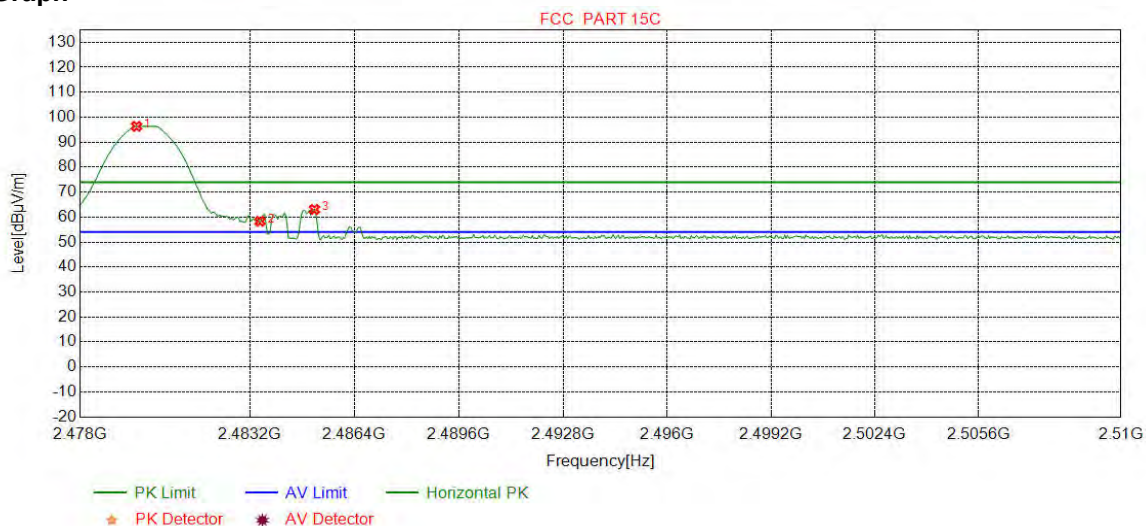


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7222	32.37	13.39	-43.10	93.69	96.35	74.00	-22.35	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	55.66	58.31	74.00	15.69	Pass	Horizontal
3	2485.1690	32.38	13.37	-43.11	60.42	63.06	74.00	10.94	Pass	Horizontal



Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

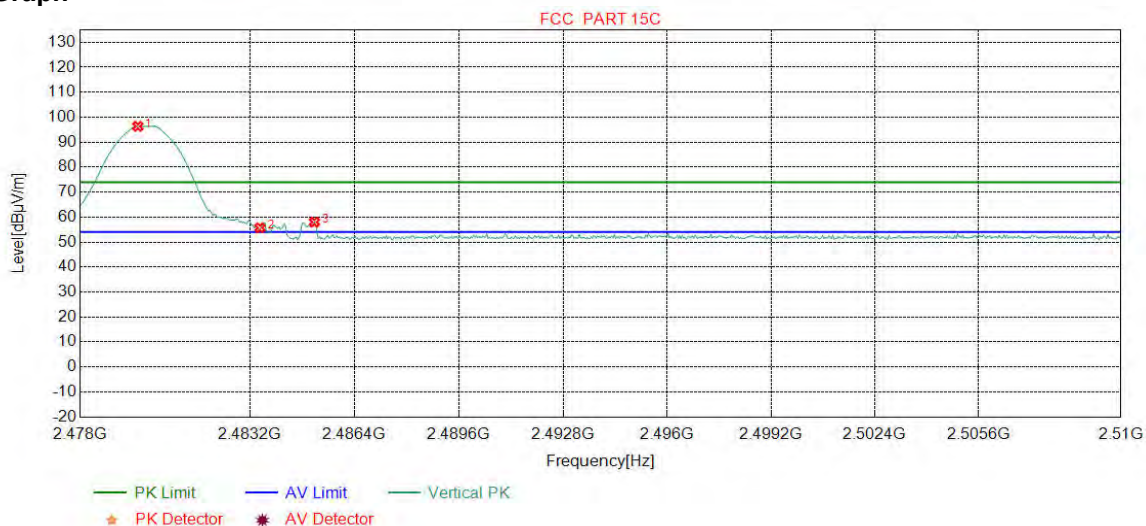

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-43.10	93.69	96.35	74.00	-22.35	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	53.06	55.71	74.00	18.29	Pass	Vertical
3	2485.1690	32.38	13.37	-43.11	55.35	57.99	74.00	16.01	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

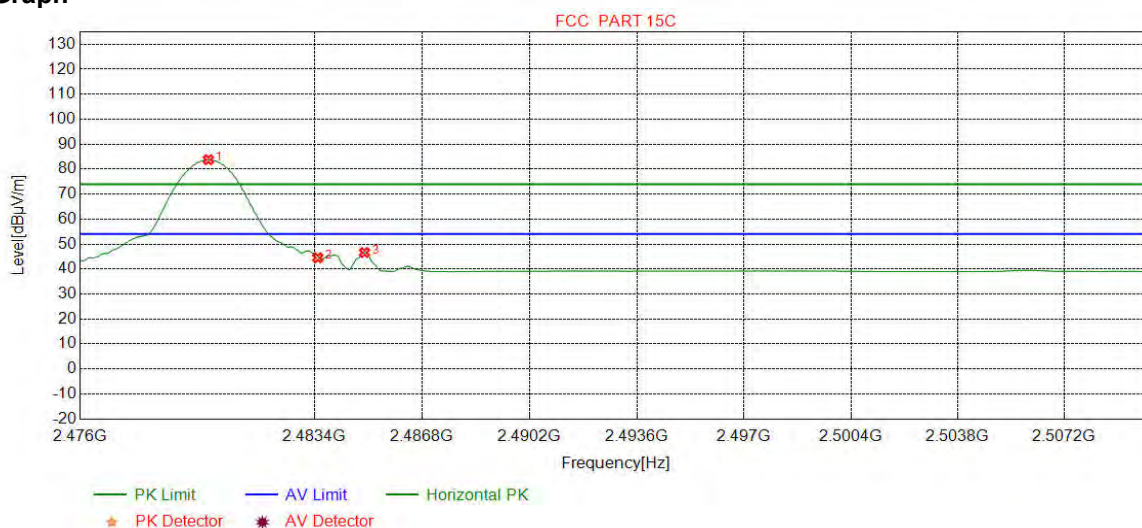

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	81.12	83.78	54.00	-29.78	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	41.88	44.53	54.00	9.47	Pass	Horizontal
3	2484.9787	32.38	13.37	-43.10	43.96	46.61	54.00	7.39	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

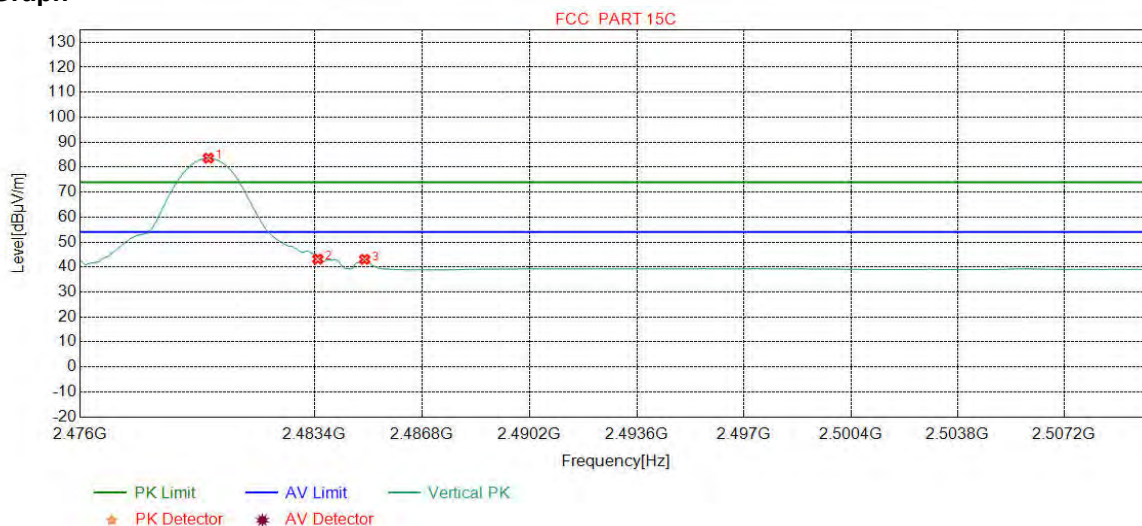


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	80.94	83.60	54.00	-29.60	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.52	43.17	54.00	10.83	Pass	Vertical
3	2484.9787	32.38	13.37	-43.10	40.45	43.10	54.00	10.90	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

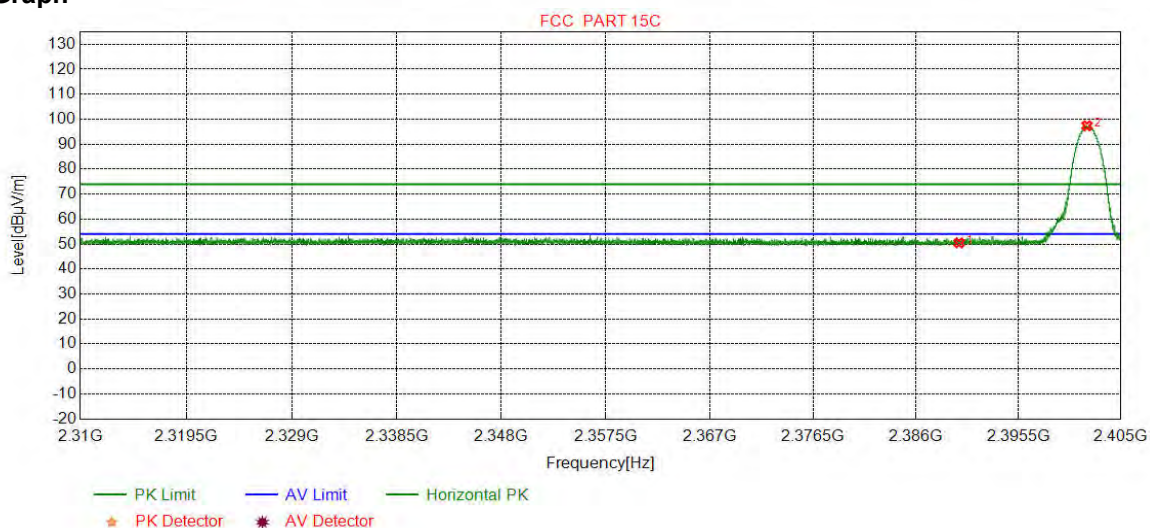

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.96	50.46	74.00	23.54	Pass	Horizontal
2	2401.8648	32.26	13.31	-43.12	94.92	97.37	74.00	-23.37	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

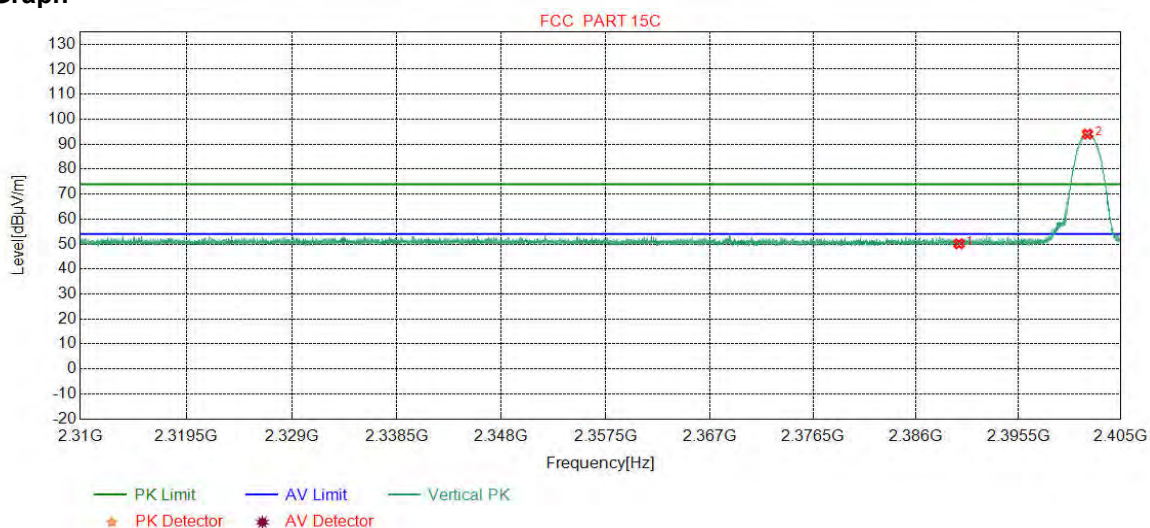

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.61	50.11	74.00	23.89	Pass	Vertical
2	2401.9091	32.26	13.31	-43.12	91.59	94.04	74.00	-20.04	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		

### Test Graph

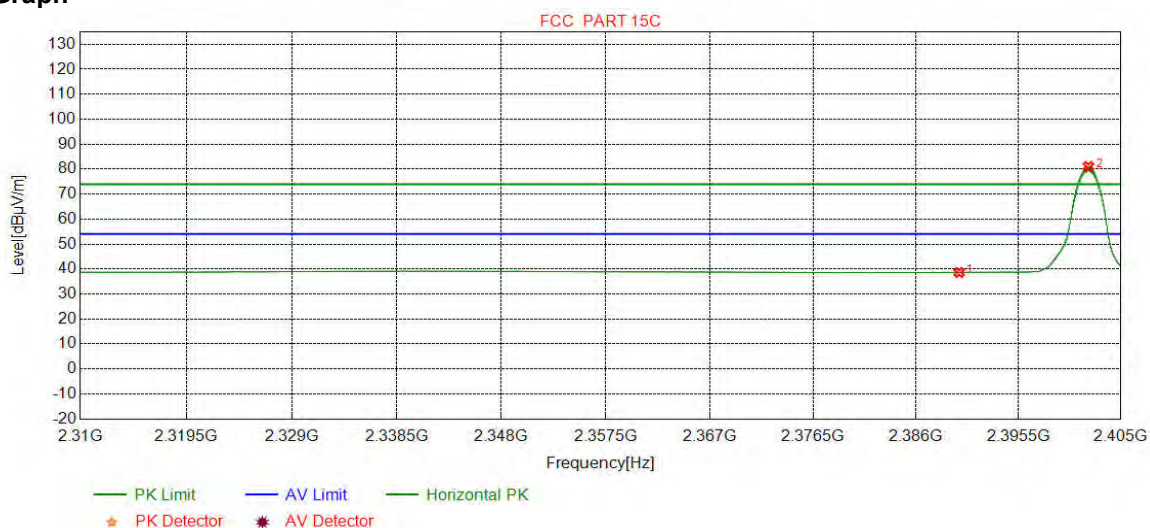


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.13	38.63	54.00	15.37	Pass	Horizontal
2	2401.9978	32.26	13.31	-43.12	78.61	81.06	54.00	-27.06	Pass	Horizontal



Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

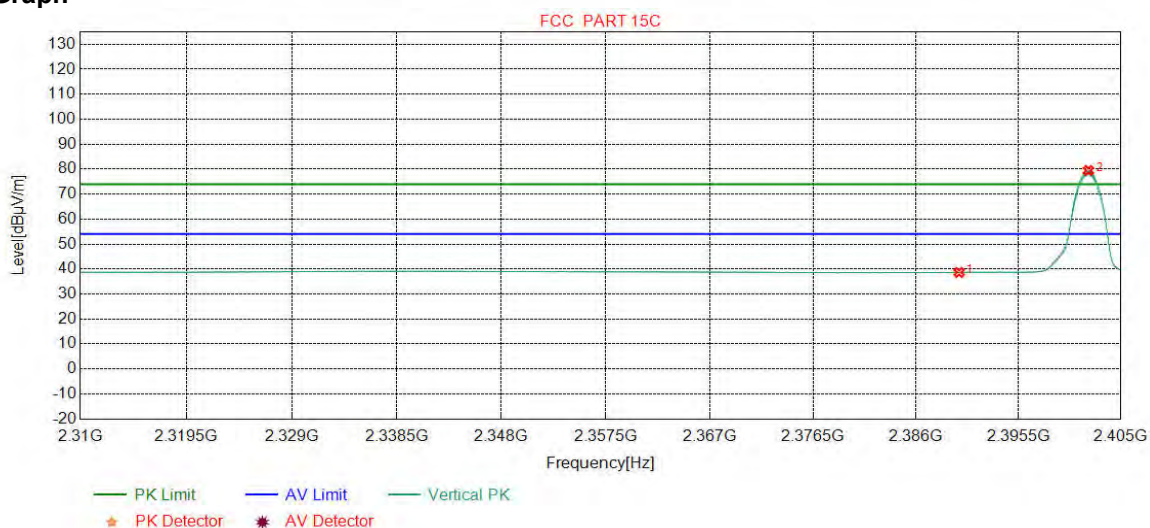

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.16	38.66	54.00	15.34	Pass	Vertical
2	2401.9978	32.26	13.31	-43.12	77.01	79.46	54.00	-25.46	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

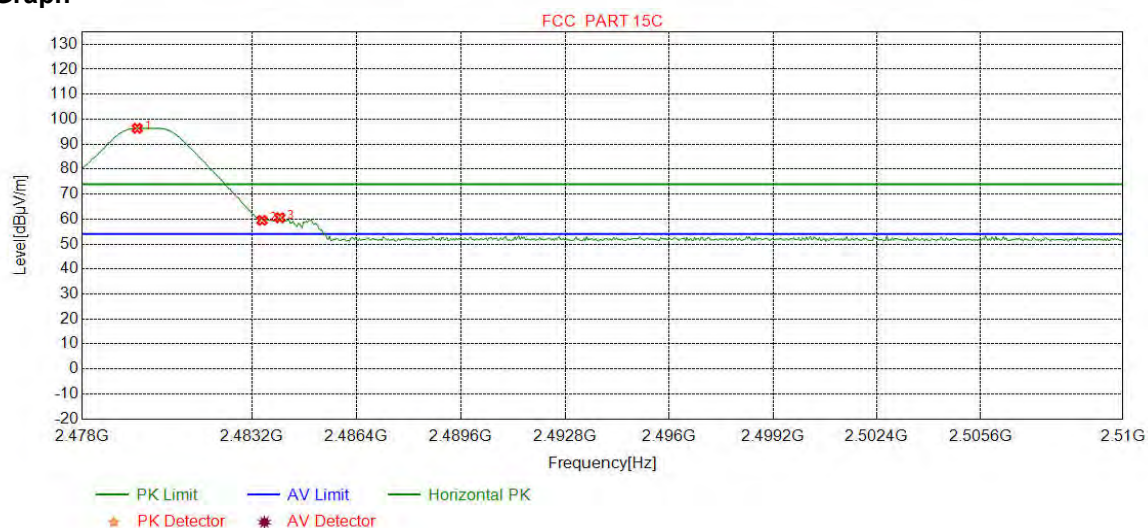

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.6821	32.37	13.39	-43.10	93.68	96.34	74.00	-22.34	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	56.84	59.49	74.00	14.51	Pass	Horizontal
3	2484.0476	32.38	13.37	-43.10	57.90	60.55	74.00	13.45	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		

### Test Graph

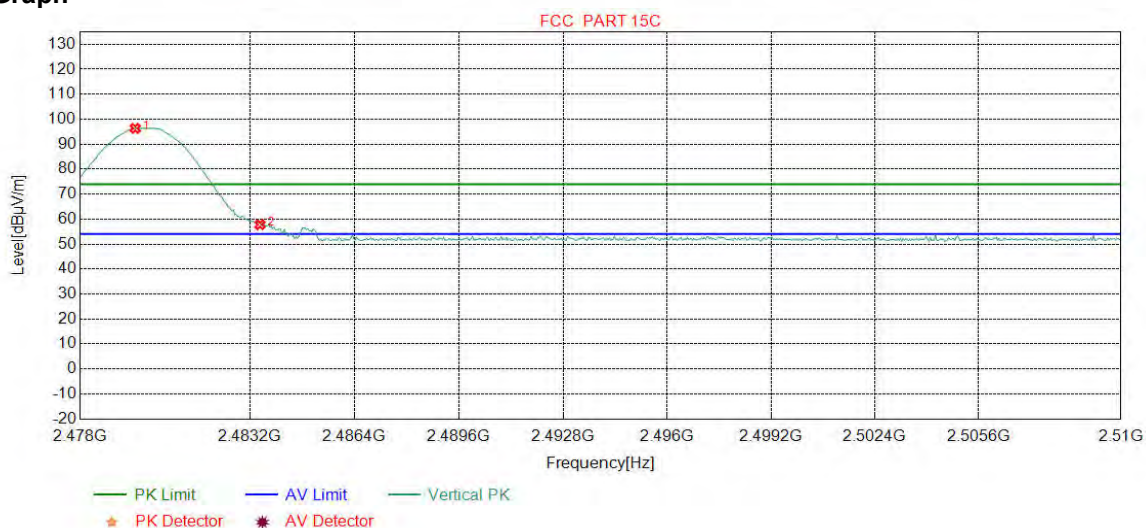


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.6821	32.37	13.39	-43.10	93.67	96.33	74.00	-22.33	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	55.11	57.76	74.00	16.24	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

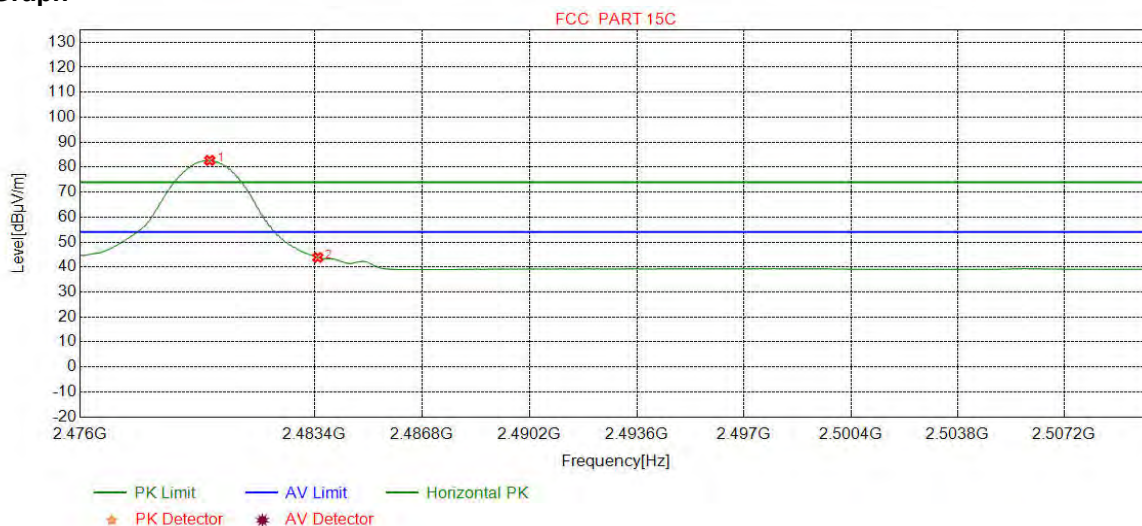

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0851	32.37	13.39	-43.10	80.03	82.69	54.00	-28.69	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	41.17	43.82	54.00	10.18	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

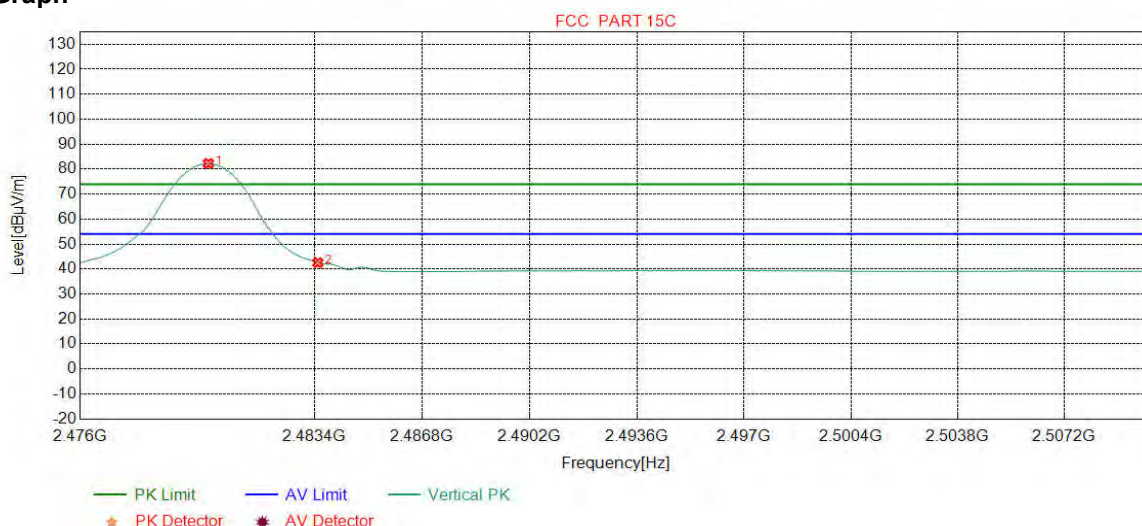

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	79.61	82.27	54.00	-28.27	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	39.90	42.55	54.00	11.45	Pass	Vertical

### Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				



### Radiated Spurious Emissions test Data:

Mode:			GFSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	44.3574	13.08	0.75	-31.66	40.13	22.30	40.00	17.70	Pass	H	PK
2	75.3035	7.99	1.01	-31.97	55.92	32.95	40.00	7.05	Pass	H	PK
3	325.0065	13.75	2.14	-31.79	44.44	28.54	46.00	17.46	Pass	H	PK
4	600.0290	19.00	2.96	-31.50	45.36	35.82	46.00	10.18	Pass	H	PK
5	844.9785	21.44	3.50	-31.82	41.78	34.90	46.00	11.10	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	41.57	36.92	54.00	17.08	Pass	H	PK
7	35.7236	10.93	0.66	-31.41	41.27	21.45	40.00	18.55	Pass	V	PK
8	54.3494	12.50	0.83	-31.97	39.13	20.49	40.00	19.51	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	44.51	25.41	43.50	18.09	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	44.20	28.30	46.00	17.70	Pass	V	PK
11	600.0290	19.00	2.96	-31.50	45.17	35.63	46.00	10.37	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	42.30	37.65	54.00	16.35	Pass	V	PK

Mode:			8DPSK Transmitting				Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	75.3035	7.99	1.01	-31.97	52.89	29.92	40.00	10.08	Pass	H	PK
2	83.9374	8.01	1.06	-31.98	49.92	27.01	40.00	12.99	Pass	H	PK
3	325.0065	13.75	2.14	-31.79	43.99	28.09	46.00	17.91	Pass	H	PK
4	451.7012	16.23	2.52	-31.88	40.28	27.15	46.00	18.85	Pass	H	PK
5	600.0290	19.00	2.96	-31.50	45.17	35.63	46.00	10.37	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	40.85	36.20	54.00	17.80	Pass	H	PK
7	54.9315	12.41	0.84	-31.96	39.60	20.89	40.00	19.11	Pass	V	PK
8	124.5845	8.51	1.31	-32.04	41.47	19.25	43.50	24.25	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	44.40	25.30	43.50	18.20	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	43.54	27.64	46.00	18.36	Pass	V	PK
11	600.0290	19.00	2.96	-31.50	45.03	35.49	46.00	10.51	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	42.44	37.79	54.00	16.21	Pass	V	PK

Mode:		GFSK Transmitting					Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2926.5927	33.08	4.39	-43.10	51.47	45.84	74.00	28.16	Pass	H	PK
2	3694.0463	33.56	4.25	-43.06	49.34	44.09	74.00	29.91	Pass	H	PK
3	4804.0000	34.50	4.55	-42.80	54.13	50.38	74.00	23.62	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	48.10	48.06	74.00	25.94	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	46.38	48.55	74.00	25.45	Pass	H	PK
6	12010.0000	39.31	7.60	-41.90	46.92	51.93	74.00	22.07	Pass	H	AV
7	2823.9824	32.92	4.24	-43.11	53.04	47.09	74.00	26.91	Pass	V	PK
8	3793.0529	33.63	4.37	-43.04	49.32	44.28	74.00	29.72	Pass	V	PK
9	4804.0000	34.50	4.55	-42.80	53.40	49.65	74.00	24.35	Pass	V	PK
10	7206.0000	36.31	5.81	-42.16	48.55	48.51	74.00	25.49	Pass	V	PK
11	9608.0000	37.64	6.63	-42.10	47.83	50.00	74.00	24.00	Pass	V	PK
12	12010.0000	39.31	7.60	-41.90	46.53	51.54	74.00	22.46	Pass	V	PK

Mode:		GFSK Transmitting					Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3189.0126	33.28	4.63	-43.10	51.12	45.93	74.00	28.07	Pass	H	PK
2	4030.0687	33.84	4.33	-42.99	49.85	45.03	74.00	28.97	Pass	H	PK
3	4882.0000	34.50	4.81	-42.80	52.41	48.92	74.00	25.08	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	47.95	48.09	74.00	25.91	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	47.19	49.51	74.00	24.49	Pass	H	PK
6	12205.0000	39.42	7.67	-41.89	46.10	51.30	74.00	22.70	Pass	H	PK
7	3038.0025	33.22	4.85	-43.10	50.06	45.03	74.00	28.97	Pass	V	PK
8	3994.0663	33.80	4.33	-43.00	55.83	50.96	74.00	23.04	Pass	V	PK
9	4882.0000	34.50	4.81	-42.80	51.44	47.95	74.00	26.05	Pass	V	PK
10	7323.0000	36.42	5.85	-42.13	47.48	47.62	74.00	26.38	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	47.42	49.74	74.00	24.26	Pass	V	PK
12	12205.0000	39.42	7.67	-41.89	46.02	51.22	74.00	22.78	Pass	V	PK

Mode:		GFSK Transmitting					Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3257.0171	33.30	4.47	-43.10	49.56	44.23	74.00	29.77	Pass	H	PK
2	4177.0785	34.05	4.49	-42.93	49.04	44.65	74.00	29.35	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	51.95	48.47	74.00	25.53	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	47.73	48.01	74.00	25.99	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	46.23	48.69	74.00	25.31	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	47.98	53.48	74.00	20.52	Pass	H	PK
7	3694.0463	33.56	4.25	-43.06	49.00	43.75	74.00	30.25	Pass	H	AV
8	4261.0841	34.17	4.49	-42.90	57.38	53.14	74.00	20.86	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	51.40	47.92	74.00	26.08	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	47.74	48.02	74.00	25.98	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	46.38	48.84	74.00	25.16	Pass	V	PK
12	12400.0000	39.54	7.86	-41.90	46.36	51.86	74.00	22.14	Pass	V	PK



Mode:		8DPSK Transmitting					Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2991.5992	33.19	4.52	-43.10	50.18	44.79	74.00	29.21	Pass	H	PK
2	4804.0000	34.50	4.55	-42.80	50.32	46.57	74.00	27.43	Pass	H	PK
3	6087.2058	35.82	5.25	-42.59	49.37	47.85	74.00	26.15	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	47.48	47.44	74.00	26.56	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	46.41	48.58	74.00	25.42	Pass	H	PK
6	12010.0000	39.31	7.60	-41.90	46.22	51.23	74.00	22.77	Pass	H	AV
7	3981.0654	33.78	4.33	-43.00	53.79	48.90	74.00	25.10	Pass	V	PK
8	4804.0000	34.50	4.55	-42.80	50.57	46.82	74.00	27.18	Pass	V	PK
9	7206.0000	36.31	5.81	-42.16	46.48	46.44	74.00	27.56	Pass	V	PK
10	8487.3658	36.59	6.47	-42.00	48.76	49.82	74.00	24.18	Pass	V	PK
11	9608.0000	37.64	6.63	-42.10	47.07	49.24	74.00	24.76	Pass	V	PK
12	12010.0000	39.31	7.60	-41.90	47.70	52.71	74.00	21.29	Pass	V	PK

Mode:		8DPSK Transmitting					Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3729.0486	33.58	4.30	-43.05	49.28	44.11	74.00	29.89	Pass	H	PK
2	4882.0000	34.50	4.81	-42.80	52.18	48.69	74.00	25.31	Pass	H	PK
3	7323.0000	36.42	5.85	-42.13	46.64	46.78	74.00	27.22	Pass	H	PK
4	9764.0000	37.71	6.71	-42.10	46.64	48.96	74.00	25.04	Pass	H	PK
5	11304.5536	38.78	7.34	-42.00	49.25	53.37	74.00	20.63	Pass	H	PK
6	12205.0000	39.42	7.67	-41.89	45.58	50.78	74.00	23.22	Pass	H	PK
7	4250.0833	34.15	4.51	-42.90	51.36	47.12	74.00	26.88	Pass	V	PK
8	4882.0000	34.50	4.81	-42.80	50.22	46.73	74.00	27.27	Pass	V	PK
9	7323.0000	36.42	5.85	-42.13	47.43	47.57	74.00	26.43	Pass	V	PK
10	8679.3786	36.99	6.22	-41.99	50.09	51.31	74.00	22.69	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	47.27	49.59	74.00	24.41	Pass	V	PK
12	12205.0000	39.42	7.67	-41.89	46.57	51.77	74.00	22.23	Pass	V	PK

Mode:		8DPSK Transmitting					Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3698.0465	33.56	4.24	-43.06	49.65	44.39	74.00	29.61	Pass	H	PK
2	4960.0000	34.50	4.82	-42.80	52.35	48.87	74.00	25.13	Pass	H	PK
3	6329.2219	35.87	5.46	-42.54	48.72	47.51	74.00	26.49	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	47.47	47.75	74.00	26.25	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	46.14	48.60	74.00	25.40	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	47.67	53.17	74.00	20.83	Pass	H	PK
7	3089.0059	33.24	4.74	-43.10	50.50	45.38	74.00	28.62	Pass	H	AV
8	4960.0000	34.50	4.82	-42.80	51.42	47.94	74.00	26.06	Pass	V	PK
9	6595.2397	35.94	5.51	-42.44	48.52	47.53	74.00	26.47	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	46.86	47.14	74.00	26.86	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	45.84	48.30	74.00	25.70	Pass	V	PK
12	12400.0000	39.54	7.86	-41.90	47.43	52.93	74.00	21.07	Pass	V	PK

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.