



RF TEST REPORT

Applicant Asiatelco Technologies Co.
FCC ID XYO-J912
Product LTE CPE
Brand ATEL
Model AOL-J912
Report No. R2111A0991-R4V1
Issue Date December 15, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 90S (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report	5
1.2. Test facility	5
1.3. Testing Location	5
2. General Description of Equipment under Test	6
2.3. Applicant and Manufacturer Information	6
2.4. General Information	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. RF Power Output and Effective Radiated Power	9
5.2. Radiates Spurious Emission	15
6. Main Test Instruments	20
ANNEX A: The EUT Appearance	21
ANNEX B: Test Setup Photos	22



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	December 3, 2021
Rev.1	Update description in Page 4.	December 15, 2021
Note: This revised report (Report No. R2111A0991-R4V1) supersedes and replaces the previously issued report (Report No. R2111A0991-R4). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Radiates Spurious Emission	2.1053 /90.691	PASS
Date of Testing: November 12, 2021 ~ November 29, 2021			
Date of Sample Received: November 9, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Only RF Power Output and Effective Radiated Power and Radiates Spurious Emission are tested for LTE CPE in this report. Other test items refer to the Module report (Report No.: FW8N2911; FCC ID: XMR201901EM12G).



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.3. Applicant and Manufacturer Information

Applicant	Asiatelco Technologies Co.
Applicant address	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China
Manufacturer	Asiatelco Technologies Co.
Manufacturer address	#68 HuaTuo Road, Building-8, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China

2.4. General Information

EUT Description			
Model	AOL-J912		
IMEI	869710030051985		
Hardware Version	J91-P1		
Software Version	CPE3_WT_J91_00_v1.0.3		
Power Supply	POE		
Antenna Type	Internal Antenna		
Antenna Gain	2 dBi		
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK, 16QAM, 64QAM;		
LTE Category	12		
Maximum E.R.P.	21.44 dBm		
Rated Power Supply Voltage	50 V		
Operating Voltage	Minimum: 48 V Maximum: 55 V		
Operating Temperature	Lowest: -30°C Highest: +60°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	814 ~ 824	859 ~ 869
EUT Accessory			
POE Injector	Manufacturer: KeTujia Model: PSE302G		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 90S (2020)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2020)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, Vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	O	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

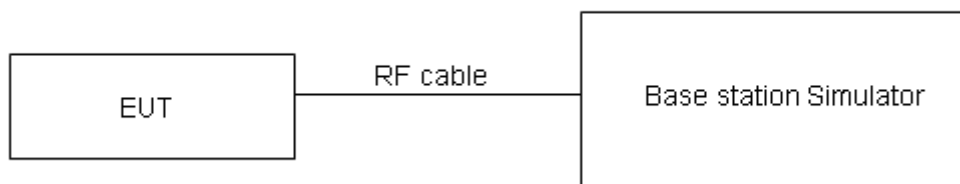

Limits

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Rule Part 90.635(b) specifies that “The maximum output power of the transmitter for mobile stations is 100 watts”.

Limit	≤ 100 W (50 dBm)
-------	------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB for RF power output, $k = 2$, $U = 1.19$ dB for ERP.

**Test Results**

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Maximum Output Power (dBm)	ERP (dBm)
LTE Band26	1.4	26697	1	#0	QPSK	21.19	21.04
LTE Band26	1.4	26697	1	#Mid	QPSK	21.27	21.12
LTE Band26	1.4	26697	1	#Max	QPSK	21.20	21.05
LTE Band26	1.4	26697	3	#0	QPSK	21.16	21.01
LTE Band26	1.4	26697	3	#Mid	QPSK	21.16	21.01
LTE Band26	1.4	26697	3	#Max	QPSK	21.16	21.01
LTE Band26	1.4	26697	6	#0	QPSK	20.13	19.98
LTE Band26	1.4	26697	1	#0	QAM16	20.26	20.11
LTE Band26	1.4	26697	1	#Mid	QAM16	20.34	20.19
LTE Band26	1.4	26697	1	#Max	QAM16	20.24	20.09
LTE Band26	1.4	26697	3	#0	QAM16	20.43	20.28
LTE Band26	1.4	26697	3	#Mid	QAM16	20.46	20.31
LTE Band26	1.4	26697	3	#Max	QAM16	20.49	20.34
LTE Band26	1.4	26697	6	#0	QAM16	19.27	19.12
LTE Band26	1.4	26740	1	#0	QPSK	21.26	21.11
LTE Band26	1.4	26740	1	#Mid	QPSK	21.36	21.21
LTE Band26	1.4	26740	1	#Max	QPSK	21.22	21.07
LTE Band26	1.4	26740	3	#0	QPSK	21.31	21.16
LTE Band26	1.4	26740	3	#Mid	QPSK	21.29	21.14
LTE Band26	1.4	26740	3	#Max	QPSK	21.28	21.13
LTE Band26	1.4	26740	6	#0	QPSK	20.33	20.18
LTE Band26	1.4	26740	1	#0	QAM16	20.51	20.36
LTE Band26	1.4	26740	1	#Mid	QAM16	20.60	20.45
LTE Band26	1.4	26740	1	#Max	QAM16	20.54	20.39
LTE Band26	1.4	26740	3	#0	QAM16	20.45	20.30
LTE Band26	1.4	26740	3	#Mid	QAM16	20.44	20.29
LTE Band26	1.4	26740	3	#Max	QAM16	20.43	20.28
LTE Band26	1.4	26740	6	#0	QAM16	19.39	19.24
LTE Band26	1.4	26783	1	#0	QPSK	21.51	21.36
LTE Band26	1.4	26783	1	#Mid	QPSK	21.57	21.42
LTE Band26	1.4	26783	1	#Max	QPSK	21.46	21.31
LTE Band26	1.4	26783	3	#0	QPSK	21.46	21.31
LTE Band26	1.4	26783	3	#Mid	QPSK	21.51	21.36
LTE Band26	1.4	26783	3	#Max	QPSK	21.41	21.26
LTE Band26	1.4	26783	6	#0	QPSK	20.49	20.34
LTE Band26	1.4	26783	1	#0	QAM16	20.42	20.27
LTE Band26	1.4	26783	1	#Mid	QAM16	20.45	20.30
LTE Band26	1.4	26783	1	#Max	QAM16	20.43	20.28



LTE Band26	1.4	26783	3	#0	QAM16	20.55	20.40
LTE Band26	1.4	26783	3	#Mid	QAM16	20.57	20.42
LTE Band26	1.4	26783	3	#Max	QAM16	20.55	20.40
LTE Band26	1.4	26783	6	#0	QAM16	19.59	19.44
LTE Band26	3	26705	1	#0	QPSK	21.13	20.98
LTE Band26	3	26705	1	#Mid	QPSK	21.23	21.08
LTE Band26	3	26705	1	#Max	QPSK	21.18	21.03
LTE Band26	3	26705	8	#0	QPSK	20.30	20.15
LTE Band26	3	26705	8	#Mid	QPSK	20.33	20.18
LTE Band26	3	26705	8	#Max	QPSK	20.28	20.13
LTE Band26	3	26705	15	#0	QPSK	20.43	20.28
LTE Band26	3	26705	1	#0	QAM16	20.58	20.43
LTE Band26	3	26705	1	#Mid	QAM16	20.66	20.51
LTE Band26	3	26705	1	#Max	QAM16	20.59	20.44
LTE Band26	3	26705	8	#0	QAM16	19.45	19.30
LTE Band26	3	26705	8	#Mid	QAM16	19.44	19.29
LTE Band26	3	26705	8	#Max	QAM16	19.41	19.26
LTE Band26	3	26705	15	#0	QAM16	19.44	19.29
LTE Band26	3	26740	1	#0	QPSK	21.34	21.19
LTE Band26	3	26740	1	#Mid	QPSK	21.30	21.15
LTE Band26	3	26740	1	#Max	QPSK	21.44	21.29
LTE Band26	3	26740	8	#0	QPSK	20.38	20.23
LTE Band26	3	26740	8	#Mid	QPSK	20.38	20.23
LTE Band26	3	26740	8	#Max	QPSK	20.47	20.32
LTE Band26	3	26740	15	#0	QPSK	20.50	20.35
LTE Band26	3	26740	1	#0	QAM16	20.65	20.50
LTE Band26	3	26740	1	#Mid	QAM16	20.61	20.46
LTE Band26	3	26740	1	#Max	QAM16	20.64	20.49
LTE Band26	3	26740	8	#0	QAM16	19.49	19.34
LTE Band26	3	26740	8	#Mid	QAM16	19.50	19.35
LTE Band26	3	26740	8	#Max	QAM16	19.57	19.42
LTE Band26	3	26740	15	#0	QAM16	19.52	19.37
LTE Band26	3	26775	1	#0	QPSK	21.54	21.39
LTE Band26	3	26775	1	#Mid	QPSK	21.59	21.44
LTE Band26	3	26775	1	#Max	QPSK	21.56	21.41
LTE Band26	3	26775	8	#0	QPSK	20.43	20.28
LTE Band26	3	26775	8	#Mid	QPSK	20.44	20.29
LTE Band26	3	26775	8	#Max	QPSK	20.53	20.38
LTE Band26	3	26775	15	#0	QPSK	20.59	20.44
LTE Band26	3	26775	1	#0	QAM16	20.46	20.31
LTE Band26	3	26775	1	#Mid	QAM16	20.53	20.38
LTE Band26	3	26775	1	#Max	QAM16	20.50	20.35
LTE Band26	3	26775	8	#0	QAM16	19.59	19.44



LTE Band26	3	26775	8	#Mid	QAM16	19.60	19.45
LTE Band26	3	26775	8	#Max	QAM16	19.66	19.51
LTE Band26	3	26775	15	#0	QAM16	19.71	19.56
LTE Band26	5	26715	1	#0	QPSK	21.24	21.09
LTE Band26	5	26715	1	#Mid	QPSK	21.37	21.22
LTE Band26	5	26715	1	#Max	QPSK	21.43	21.28
LTE Band26	5	26715	12	#0	QPSK	20.38	20.23
LTE Band26	5	26715	12	#Mid	QPSK	20.38	20.23
LTE Band26	5	26715	12	#Max	QPSK	20.44	20.29
LTE Band26	5	26715	25	#0	QPSK	20.53	20.38
LTE Band26	5	26715	1	#0	QAM16	20.60	20.45
LTE Band26	5	26715	1	#Mid	QAM16	20.73	20.58
LTE Band26	5	26715	1	#Max	QAM16	20.78	20.63
LTE Band26	5	26715	12	#0	QAM16	19.49	19.34
LTE Band26	5	26715	12	#Mid	QAM16	19.50	19.35
LTE Band26	5	26715	12	#Max	QAM16	19.56	19.41
LTE Band26	5	26715	25	#0	QAM16	19.60	19.45
LTE Band26	5	26740	1	#0	QPSK	21.39	21.24
LTE Band26	5	26740	1	#Mid	QPSK	21.45	21.30
LTE Band26	5	26740	1	#Max	QPSK	21.45	21.30
LTE Band26	5	26740	12	#0	QPSK	20.50	20.35
LTE Band26	5	26740	12	#Mid	QPSK	20.49	20.34
LTE Band26	5	26740	12	#Max	QPSK	20.54	20.39
LTE Band26	5	26740	25	#0	QPSK	20.56	20.41
LTE Band26	5	26740	1	#0	QAM16	20.59	20.44
LTE Band26	5	26740	1	#Mid	QAM16	20.71	20.56
LTE Band26	5	26740	1	#Max	QAM16	20.75	20.60
LTE Band26	5	26740	12	#0	QAM16	19.52	19.37
LTE Band26	5	26740	12	#Mid	QAM16	19.54	19.39
LTE Band26	5	26740	12	#Max	QAM16	19.58	19.43
LTE Band26	5	26740	25	#0	QAM16	19.62	19.47
LTE Band26	5	26765	1	#0	QPSK	21.41	21.26
LTE Band26	5	26765	1	#Mid	QPSK	21.43	21.28
LTE Band26	5	26765	1	#Max	QPSK	21.46	21.31
LTE Band26	5	26765	12	#0	QPSK	20.51	20.36
LTE Band26	5	26765	12	#Mid	QPSK	20.50	20.35
LTE Band26	5	26765	12	#Max	QPSK	20.54	20.39
LTE Band26	5	26765	25	#0	QPSK	20.64	20.49
LTE Band26	5	26765	1	#0	QAM16	20.72	20.57
LTE Band26	5	26765	1	#Mid	QAM16	20.81	20.66
LTE Band26	5	26765	1	#Max	QAM16	20.85	20.70
LTE Band26	5	26765	12	#0	QAM16	19.65	19.50
LTE Band26	5	26765	12	#Mid	QAM16	19.65	19.50



LTE Band26	5	26765	12	#Max	QAM16	19.72	19.57
LTE Band26	5	26765	25	#0	QAM16	19.71	19.56
LTE Band26	10	26740	1	#0	QPSK	21.23	21.08
LTE Band26	10	26740	1	#Mid	QPSK	21.31	21.16
LTE Band26	10	26740	1	#Max	QPSK	21.48	21.33
LTE Band26	10	26740	25	#0	QPSK	20.46	20.31
LTE Band26	10	26740	25	#Mid	QPSK	20.47	20.32
LTE Band26	10	26740	25	#Max	QPSK	20.47	20.32
LTE Band26	10	26740	50	#0	QPSK	20.54	20.39
LTE Band26	10	26740	1	#0	QAM16	20.60	20.45
LTE Band26	10	26740	1	#Mid	QAM16	20.72	20.57
LTE Band26	10	26740	1	#Max	QAM16	20.87	20.72
LTE Band26	10	26740	25	#0	QAM16	19.68	19.53
LTE Band26	10	26740	25	#Mid	QAM16	19.63	19.48
LTE Band26	10	26740	25	#Max	QAM16	19.64	19.49
LTE Band26	10	26740	50	#0	QAM16	19.61	19.46
LTE Band26	1.4	26697	1	#0	QAM64	19.83	19.68
LTE Band26	1.4	26697	1	#Mid	QAM64	19.95	19.80
LTE Band26	1.4	26697	1	#Max	QAM64	19.82	19.67
LTE Band26	1.4	26697	3	#0	QAM64	20.03	19.88
LTE Band26	1.4	26697	3	#Mid	QAM64	20.05	19.90
LTE Band26	1.4	26697	3	#Max	QAM64	20.05	19.90
LTE Band26	1.4	26697	6	#0	QAM64	18.90	18.75
LTE Band26	1.4	26740	1	#0	QAM64	20.12	19.97
LTE Band26	1.4	26740	1	#Mid	QAM64	20.24	20.09
LTE Band26	1.4	26740	1	#Max	QAM64	20.14	19.99
LTE Band26	1.4	26740	3	#0	QAM64	20.04	19.89
LTE Band26	1.4	26740	3	#Mid	QAM64	20.03	19.88
LTE Band26	1.4	26740	3	#Max	QAM64	20.04	19.89
LTE Band26	1.4	26740	6	#0	QAM64	19.01	18.86
LTE Band26	1.4	26783	1	#0	QAM64	20.04	19.89
LTE Band26	1.4	26783	1	#Mid	QAM64	20.09	19.94
LTE Band26	1.4	26783	1	#Max	QAM64	20.04	19.89
LTE Band26	1.4	26783	3	#0	QAM64	20.16	20.01
LTE Band26	1.4	26783	3	#Mid	QAM64	20.17	20.02
LTE Band26	1.4	26783	3	#Max	QAM64	20.12	19.97
LTE Band26	1.4	26783	6	#0	QAM64	19.15	19.00
LTE Band26	3	26705	1	#0	QAM64	20.16	20.01
LTE Band26	3	26705	1	#Mid	QAM64	20.26	20.11
LTE Band26	3	26705	1	#Max	QAM64	20.23	20.08
LTE Band26	3	26705	8	#0	QAM64	19.06	18.91
LTE Band26	3	26705	8	#Mid	QAM64	19.06	18.91
LTE Band26	3	26705	8	#Max	QAM64	19.01	18.86



LTE Band26	3	26705	15	#0	QAM64	19.04	18.89
LTE Band26	3	26740	1	#0	QAM64	20.25	20.10
LTE Band26	3	26740	1	#Mid	QAM64	20.18	20.03
LTE Band26	3	26740	1	#Max	QAM64	20.28	20.13
LTE Band26	3	26740	8	#0	QAM64	19.11	18.96
LTE Band26	3	26740	8	#Mid	QAM64	19.10	18.95
LTE Band26	3	26740	8	#Max	QAM64	19.17	19.02
LTE Band26	3	26740	15	#0	QAM64	19.10	18.95
LTE Band26	3	26775	1	#0	QAM64	20.11	19.96
LTE Band26	3	26775	1	#Mid	QAM64	20.12	19.97
LTE Band26	3	26775	1	#Max	QAM64	20.13	19.98
LTE Band26	3	26775	8	#0	QAM64	19.17	19.02
LTE Band26	3	26775	8	#Mid	QAM64	19.18	19.03
LTE Band26	3	26775	8	#Max	QAM64	19.24	19.09
LTE Band26	3	26775	15	#0	QAM64	19.29	19.14
LTE Band26	5	26715	1	#0	QAM64	20.21	20.06
LTE Band26	5	26715	1	#Mid	QAM64	20.32	20.17
LTE Band26	5	26715	1	#Max	QAM64	20.39	20.24
LTE Band26	5	26715	12	#0	QAM64	19.09	18.94
LTE Band26	5	26715	12	#Mid	QAM64	19.08	18.93
LTE Band26	5	26715	12	#Max	QAM64	19.16	19.01
LTE Band26	5	26715	25	#0	QAM64	19.22	19.07
LTE Band26	5	26740	1	#0	QAM64	20.20	20.05
LTE Band26	5	26740	1	#Mid	QAM64	20.29	20.14
LTE Band26	5	26740	1	#Max	QAM64	20.37	20.22
LTE Band26	5	26740	12	#0	QAM64	19.12	18.97
LTE Band26	5	26740	12	#Mid	QAM64	19.16	19.01
LTE Band26	5	26740	12	#Max	QAM64	19.19	19.04
LTE Band26	5	26740	25	#0	QAM64	19.20	19.05
LTE Band26	5	26765	1	#0	QAM64	20.36	20.21
LTE Band26	5	26765	1	#Mid	QAM64	20.41	20.26
LTE Band26	5	26765	1	#Max	QAM64	20.42	20.27
LTE Band26	5	26765	12	#0	QAM64	19.25	19.10
LTE Band26	5	26765	12	#Mid	QAM64	19.23	19.08
LTE Band26	5	26765	12	#Max	QAM64	19.29	19.14
LTE Band26	5	26765	25	#0	QAM64	19.31	19.16
LTE Band26	10	26740	1	#0	QAM64	20.23	20.08
LTE Band26	10	26740	1	#Mid	QAM64	20.32	20.17
LTE Band26	10	26740	1	#Max	QAM64	20.44	20.29
LTE Band26	10	26740	25	#0	QAM64	19.28	19.13
LTE Band26	10	26740	25	#Mid	QAM64	19.26	19.11
LTE Band26	10	26740	25	#Max	QAM64	19.27	19.12
LTE Band26	10	26740	50	#0	QAM64	19.25	19.10

5.2. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

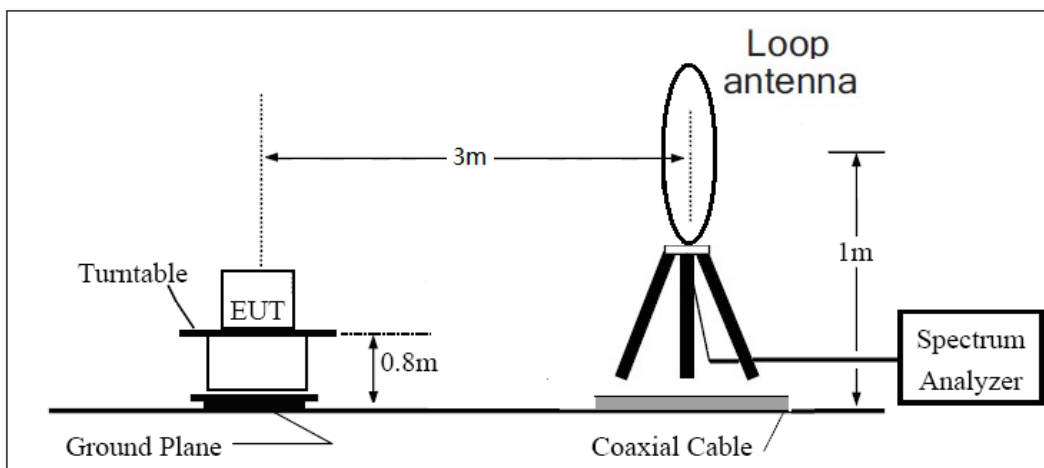

30MHz~1GHz

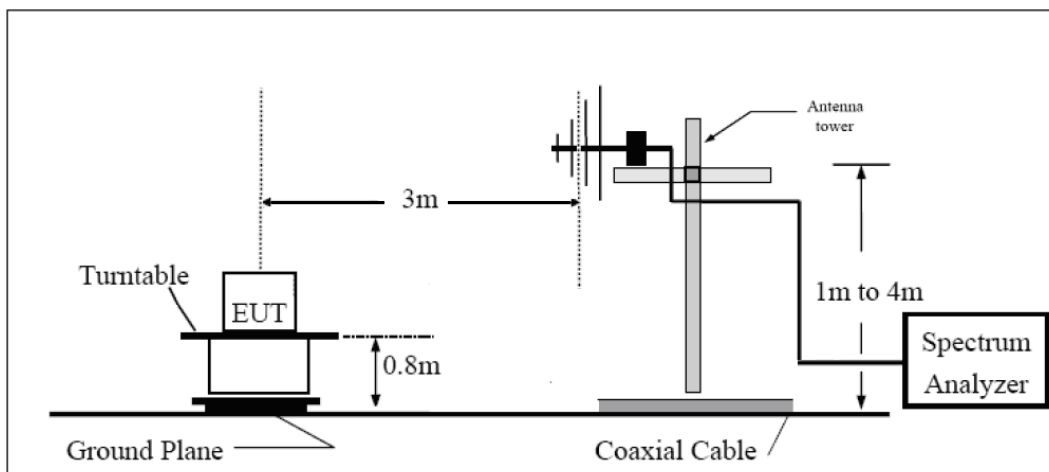

Above 1GHz

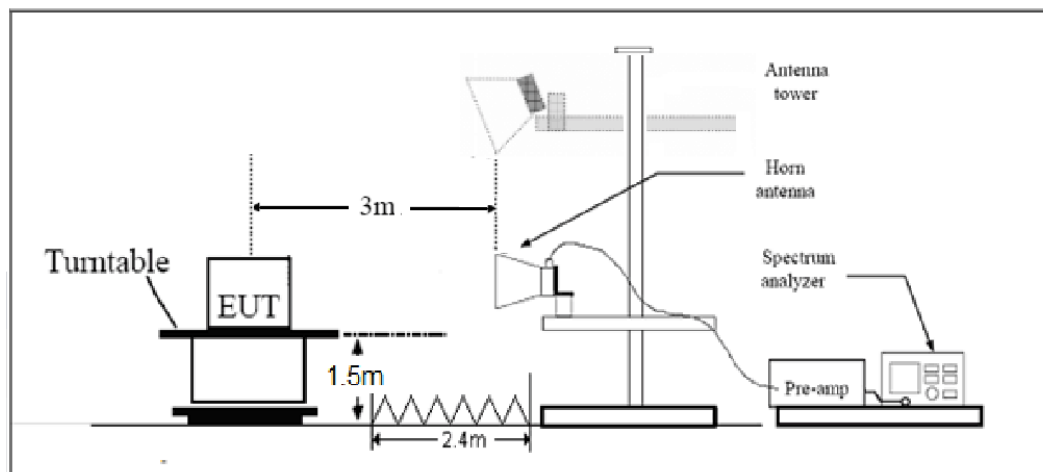



Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.6	-49.54	1.70	8.70	Vertical	-44.69	-13.00	31.69	90
3	2455.4	-43.31	2.30	12.00	Vertical	-35.76	-13.00	22.76	225
4	3276.0	-64.41	2.20	13.10	Vertical	-55.66	-13.00	42.66	45
5	4095.0	-62.61	3.00	12.50	Vertical	-55.26	-13.00	42.26	90
6	4914.0	-58.51	3.10	12.50	Vertical	-51.26	-13.00	38.26	135
7	5733.0	-56.89	3.40	12.50	Vertical	-49.94	-13.00	36.94	90
8	6552.0	-55.82	3.80	11.50	Vertical	-50.27	-13.00	37.27	0
9	7371.0	-53.89	4.20	12.20	Vertical	-48.04	-13.00	35.04	45
10	8190.0	-53.34	4.30	12.30	Vertical	-47.49	-13.00	34.49	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Vertical position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.9	-48.32	1.70	8.70	Vertical	-43.47	-13.00	30.47	45
3	2450.6	-44.05	2.30	12.00	Vertical	-36.50	-13.00	23.50	90
4	3276.0	-64.70	2.20	13.10	Vertical	-55.95	-13.00	42.95	135
5	4095.0	-62.41	3.00	12.50	Vertical	-55.06	-13.00	42.06	0
6	4914.0	-59.36	3.10	12.50	Vertical	-52.11	-13.00	39.11	45
7	5733.0	-57.61	3.40	12.50	Vertical	-50.66	-13.00	37.66	225
8	6552.0	-56.76	3.80	11.50	Vertical	-51.21	-13.00	38.21	90
9	7371.0	-53.87	4.20	12.20	Vertical	-48.02	-13.00	35.02	135
10	8190.0	-53.33	4.30	12.30	Vertical	-47.48	-13.00	34.48	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Vertical position.

LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1629.0	-48.62	1.70	8.70	Vertical	-43.77	-13.00	30.77	135
3	2443.0	-43.60	2.30	12.00	Vertical	-36.05	-13.00	23.05	225
4	3276.0	-64.37	2.20	13.10	Vertical	-55.62	-13.00	42.62	225
5	4095.0	-61.02	3.00	12.50	Vertical	-53.67	-13.00	40.67	90
6	4914.0	-59.38	3.10	12.50	Vertical	-52.13	-13.00	39.13	0
7	5733.0	-56.79	3.40	12.50	Vertical	-49.84	-13.00	36.84	135
8	6552.0	-56.25	3.80	11.50	Vertical	-50.70	-13.00	37.70	45
9	7371.0	-54.08	4.20	12.20	Vertical	-48.23	-13.00	35.23	0
10	8190.0	-53.51	4.30	12.30	Vertical	-47.66	-13.00	34.66	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	150415	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	GB44400275	2021-05-15	2022-05-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
RF Cable	Agilent	SMA 15cm	0001	2021-06-09	2021-12-08
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.