



RADIO EXPOSURE TEST REPORT

FCC ID : Z8H89FT0081

Equipment : 6084HH

Brand Name : Cambium Networks

Model Name : 6084HH


Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL 60008, USA

Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK

Standard : 47 CFR Part 2.1091

The product was received on Oct. 17, 2023, and testing was started from Oct. 17, 2023 and completed on Apr. 17, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

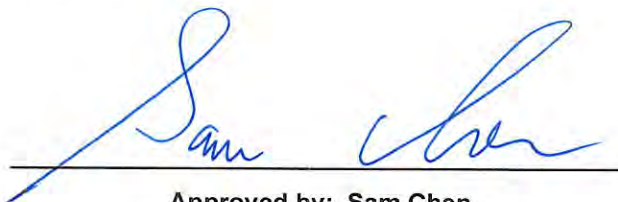

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Table for Radio Function	8
1.4 Table for Permissive Change	8
1.5 Accessories	8
1.6 Applicable Standards	8
1.7 Testing Location	9
2 Maximum Permissible Exposure	10
2.1 Limit of Maximum Permissible Exposure	10
2.2 MPE Calculation Method	10
2.3 MPE Exemption	11
2.4 Calculated Result and Limit.....	12

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A1_1 Ver1.1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Cathy Chiu



1 General Description

1.1 EUT General Information

RF General Information			
Frequency Range (MHz)	Ch. Bandwidth (MHz)	Operating Frequency (MHz)	Modulation Type
5150-5250 5725-5850	5	5156-5244 5731-5844	QPSK
	10	5155-5245 5730-5845	
	15	5158-5242 5733-5842	
	20	5160-5240 5735-5840	
	30	5165-5235 5740-5835	
	40	5170-5230 5745-5830	
5925-6425 6525-6875	5	5928-6422 6528-6872	QPSK
	40	5945-6405 6545-6855	



1.2 Antenna Information

Ant.	Port					Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	5GHz			6GHz						
	R1	R2	R1+R2	R1	R2					
1	-	1	3	-	1	Cambium	Canopy V 4X4 Array Antenna	Array	RP-SMA	Note1
2	-	2	4	-	2	Cambium	Canopy V 4X4 Array Antenna	Array	RP-SMA	
3	2	-	2	2	-	Cambium	Canopy V 4X4 Array Antenna	Array	RP-SMA	
4	1	-	1	1	-	Cambium	Canopy V 4X4 Array Antenna	Array	RP-SMA	

Note1:

Ant.	Port					Gain (dBi)	
	5GHz			6GHz		5GHz	6GHz
	R1	R2	R1+R2	R1	R2		
1	-	1	3	-	1	15.922	15.892
2	-	2	4	-	2	15.958	15.958
3	2	-	2	2	-	15.962	15.893
4	1	-	1	1	-	15.906	15.906

Note 2: The above information was declared by manufacturer.



Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ iGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}/N_{SS}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

Cross-Polarized Antenna

5G UNII-1 G1 = 15.962 dBi; G2 = 15.906 dBi;

5G UNII-3 G1 = 15.922 dBi; G2 = 15.958 dBi;

5G UNII-1 DG = 15.962 dBi

5G UNII-3 DG = 15.958 dBi

6E UNII-5 G1 = 15.893 dBi; G2 = 15.906 dBi;

6E UNII-7 G1 = 15.892 dBi; G2 = 15.958 dBi;

6E UNII-5 DG = 15.906 dBi

6E UNII-7 DG = 15.958 dBi

For 5GHz function:

For Radio 1 (R1) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For Radio 2 (R2) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

**For Radio 1 + Radio 2 (R1+R2) (2TX/2RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 6GHz function:**For Radio 1 (R1) (2TX/2RX):**

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For Radio 2 (R2) (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

1.3 Table for Radio Function

Radio (R)	Function
R1	Support 5GHz UNII 1 and 6GHz UNII 5
R2	Support 5GHz UNII 3 and 6GHz UNII 7

Note: The above information was declared by manufacturer.

1.4 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FA380235

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add the standard Power Access Point for 5MHz and 40MHz in UNII-5, UNII-7 through SW change. 2. Changing the distance for WLAN 5GHz to 32cm from 20cm.	MPE

1.5 Accessories

Wall bracket*1

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310



1.7 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 32 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= P_{th}.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance

R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.
Note: R is in meters, f is in MHz.	



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (dBm)	Distance (cm)	Option	TL ERP (dBm)	TL Ratio
5.2G;G7D	15.962	19.97	33.78	0.06	2421.029	36	B	3060.0	0.7915
5.8G;G7D	15.958	20.01	33.82	0.02	2421.029	36	B	3060.0	0.7915
6.2G;G7D	15.906	19.94	33.70	0.14	2421.029	36	C	2488.3	0.9733
6.7G;G7D	15.958	19.94	33.75	0.09	2421.029	36	C	2488.3	0.9733

————THE END————