



TEST REPORT

Product Name: Indoor/Out door WiFi AP/ bridge/CPE
FCC ID: 2A6IP-CPE920S
Trademark: DODOLINK
Model Number: CPE920S, CPE300S, CPE300D, CPE350D, CPE352S, CPE352D, CPE353S, CPE353D, CPE355S, CPE355D, CPE356S, CPE358S, CPE359S, CPE520S, CPE520GS, CPE550S, CPE550GS, CPE580S, CPE920S, CPE980S, CPE1200HS, CPE900HS, CPE1800HS, CPE2100HS, CPE3000HS
Prepared For: Shenzhen Kangda Xin Intelligent Network Technology Co., Ltd.
Address: Room 208, No. 151, polao village Dafu community, Guanlan street Longhua District, Shenzhen, China
Manufacturer: Shenzhen Kangda Xin Intelligent Network Technology Co., Ltd.
Address: Room 208, No. 151, polao village Dafu community, Guanlan street Longhua District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 24, 2024
Sample tested Date: Apr. 24, 2024 to May. 20, 2024
Issue Date: May. 20, 2024
Report No.: CTB240520006RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
9. CONDUCTED OUTPUT POWER	57
9.1 Block Diagram Of Test Setup	57
9.2 Limit	57
9.3 Test procedure	57
9.4 Test Result	58
10. 6DB OCCUPIED BANDWIDTH	59
10.1 Block Diagram Of Test Setup	59
10.2 Limit	59
10.3 Test procedure	59
10.4 Test Result	60
11. POWER SPECTRAL DENSITY	70
11.1 Block Diagram Of Test Setup	70
11.2 Limit	70

11.3	Test procedure	70
11.4	Test Result	71
12.	ANTENNA REQUIREMENT	80
13.	EUT TEST SETUP PHOTOGRAPHS	81

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240520006RFX	May. 20, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	CPE920S, CPE300S, CPE300D, CPE350D, CPE352S, CPE352D, CPE353S, CPE353D, CPE355S, CPE355D, CPE356S, CPE358S, CPE359S, CPE520S, CPE520GS, CPE550S, CPE550GS, CPE580S, CPE920S, CPE980S, CPE1200HS, CPE900HS, CPE1800HS, CPE2100HS, CPE3000HS
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: CPE920S
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 13.945dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 7.97dBi Ant2: 7.97dBi
Ratings:	Input: 100-240V, 50-60Hz Output: 24V/1A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 7.97dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.985dB,
So the directional gain for PSD is 11.955dBi

2) For power measurements,
The Array gain=0 dB for NANT≤4,
So the directional gain for Power measurements is 7.97dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05



12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
----	--------	------	--------------	---	---	---

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

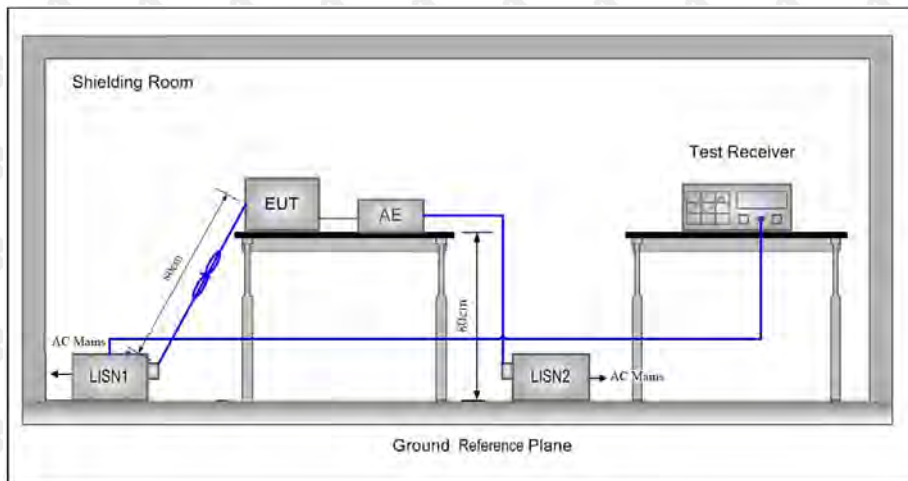

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

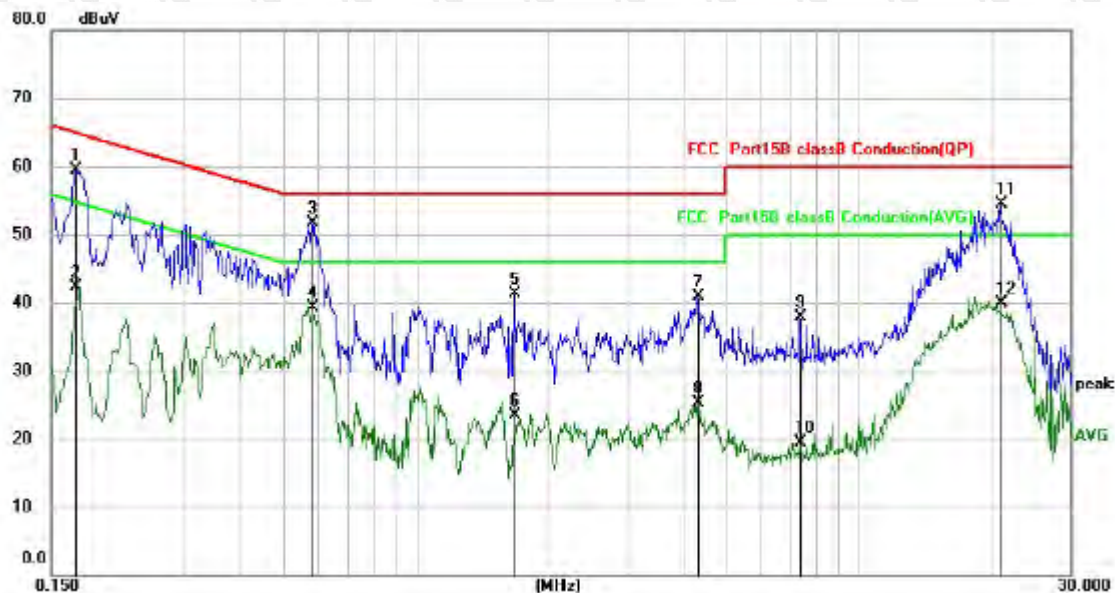

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1703	49.57	9.95	59.52	64.95	-5.43	QP
2		0.1703	32.31	9.95	42.26	54.95	-12.69	AVG
3	*	0.5820	41.71	10.00	51.71	56.00	-4.29	QP
4		0.5820	29.37	10.00	39.37	46.00	-6.63	AVG
5		1.6700	31.30	10.06	41.36	56.00	-14.64	QP
6		1.6700	13.42	10.06	23.48	46.00	-22.52	AVG
7		4.3180	30.55	10.31	40.86	56.00	-15.14	QP
8		4.3180	14.94	10.31	25.25	46.00	-20.75	AVG
9		7.3460	27.31	10.53	37.84	60.00	-22.16	QP
10		7.3460	9.06	10.53	19.59	50.00	-30.41	AVG
11		20.8700	43.70	10.85	54.55	60.00	-5.45	QP
12		20.8700	29.03	10.85	39.88	50.00	-10.12	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

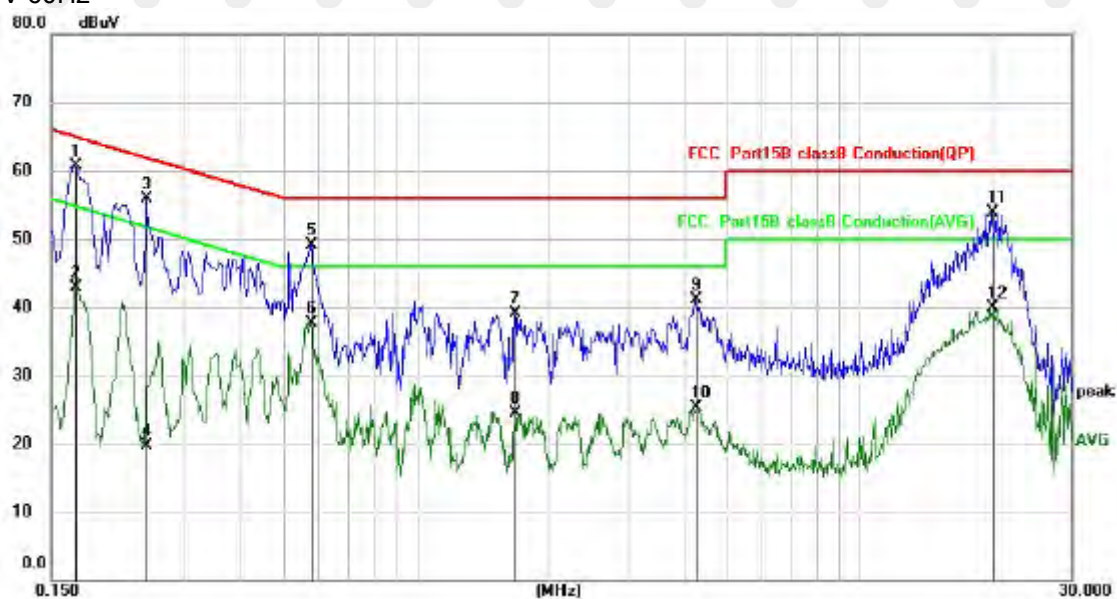

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	50.82	9.95	60.77	64.96	-4.19	QP
2		0.1700	32.93	9.95	42.88	54.96	-12.08	AVG
3		0.2460	45.88	9.96	55.84	61.89	-6.05	QP
4		0.2460	9.79	9.96	19.75	51.89	-32.14	AVG
5		0.5780	39.16	10.00	49.16	56.00	-6.84	QP
6		0.5780	27.69	10.00	37.69	46.00	-8.31	AVG
7		1.6660	29.01	10.06	39.07	56.00	-16.93	QP
8		1.6660	14.51	10.06	24.57	46.00	-21.43	AVG
9		4.2579	30.85	10.31	41.16	56.00	-14.84	QP
10		4.2579	14.99	10.31	25.30	46.00	-20.70	AVG
11		19.9019	43.13	10.82	53.95	60.00	-6.05	QP
12		19.9019	29.15	10.82	39.97	50.00	-10.03	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

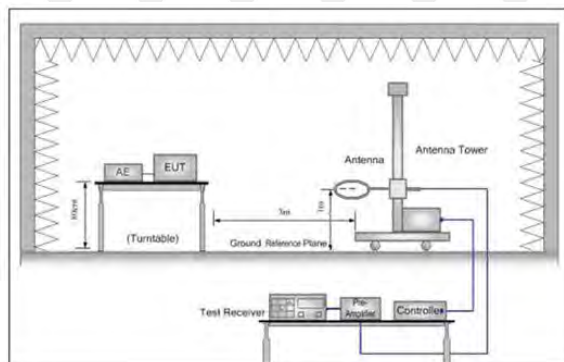


Figure 1. Below 30MHz

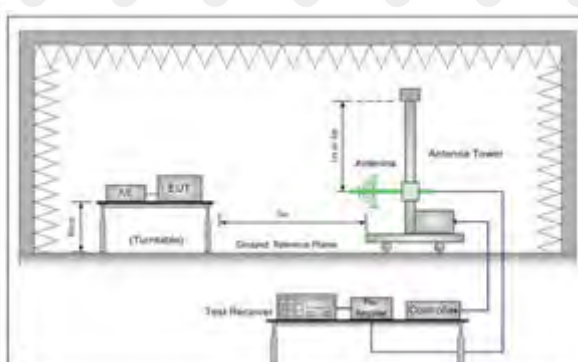


Figure 2. 30MHz to 1GHz

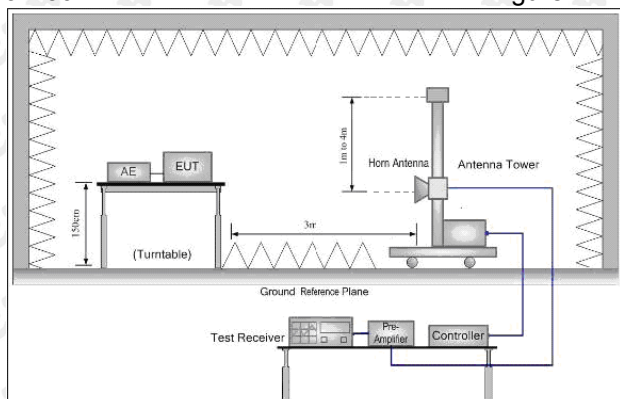


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	46.0970	41.10	-5.91	35.19	40.00	-4.81	QP
2	!	74.0052	43.46	-8.46	35.00	40.00	-5.00	QP
3	!	150.5377	40.99	-3.19	37.80	43.50	-5.70	QP
4		225.3078	45.52	-7.18	38.34	46.00	-7.66	QP
5		374.6225	41.99	-2.81	39.18	46.00	-6.82	QP
6	!	628.3745	37.26	3.17	40.43	46.00	-5.57	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.9006	41.53	-5.69	35.84	40.00	-4.16	QP
2	!	146.6303	41.16	-3.58	37.58	43.50	-5.92	QP
3	!	250.3011	47.52	-6.89	40.63	46.00	-5.37	QP
4	!	325.5958	44.89	-4.08	40.81	46.00	-5.19	QP
5	!	575.6342	39.49	2.00	41.49	46.00	-4.51	QP
6	!	876.7828	34.65	6.77	41.42	46.00	-4.58	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.14	-3.64	60.50	74	-13.50	peak
4824	50.79	-3.64	47.15	54	-6.85	AVG
7236	59.16	-0.95	58.21	74	-15.79	peak
7236	44.78	-0.95	43.83	54	-10.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.36	-3.64	61.72	74	-12.28	peak
4824	46.93	-3.64	43.29	54	-10.71	AVG
7236	58.54	-0.95	57.59	74	-16.41	peak
7236	43.08	-0.95	42.13	54	-11.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.85	-3.51	61.34	74	-12.66	peak
4874	48.00	-3.51	44.49	54	-9.51	AVG
7311	57.63	-0.82	56.81	74	-17.19	peak
7311	44.43	-0.82	43.61	54	-10.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.89	-3.51	59.38	74	-14.62	peak
4874	47.26	-3.51	43.75	54	-10.25	AVG
7311	58.52	-0.82	57.70	74	-16.30	peak
7311	43.76	-0.82	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.10	-3.43	60.67	74	-13.33	peak
4924	47.99	-3.43	44.56	54	-9.44	AVG
7386	59.81	-0.75	59.06	74	-14.94	peak
7386	43.41	-0.75	42.66	54	-11.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.37	-3.43	61.94	74	-12.06	peak
4924	47.92	-3.43	44.49	54	-9.51	AVG
7386	57.85	-0.75	57.10	74	-16.90	peak
7386	41.75	-0.75	41.00	54	-13.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.17	-3.64	60.53	74	-13.47	peak
4824	50.24	-3.64	46.60	54	-7.40	AVG
7236	57.41	-0.95	56.46	74	-17.54	peak
7236	44.64	-0.95	43.69	54	-10.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.85	-3.64	61.21	74	-12.79	peak
4824	49.01	-3.64	45.37	54	-8.63	AVG
7236	57.18	-0.95	56.23	74	-17.77	peak
7236	45.24	-0.95	44.29	54	-9.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.41	-3.51	60.90	74	-13.10	peak
4874	49.08	-3.51	45.57	54	-8.43	AVG
7311	59.91	-0.82	59.09	74	-14.91	peak
7311	44.87	-0.82	44.05	54	-9.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.09	-3.51	60.58	74	-13.42	peak
4874	47.25	-3.51	43.74	54	-10.26	AVG
7311	60.21	-0.82	59.39	74	-14.61	peak
7311	42.75	-0.82	41.93	54	-12.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.87	-3.43	59.44	74	-14.56	peak
4924	46.66	-3.43	43.23	54	-10.77	AVG
7386	58.95	-0.75	58.20	74	-15.80	peak
7386	43.76	-0.75	43.01	54	-10.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.69	-3.43	61.26	74	-12.74	peak
4924	45.89	-3.43	42.46	54	-11.54	AVG
7386	57.73	-0.75	56.98	74	-17.02	peak
7386	41.84	-0.75	41.09	54	-12.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.01	-3.64	62.37	74	-11.63	peak
4824	49.92	-3.64	46.28	54	-7.72	AVG
7236	56.73	-0.95	55.78	74	-18.22	peak
7236	46.08	-0.95	45.13	54	-8.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.74	-3.64	62.10	74	-11.90	peak
4824	48.78	-3.64	45.14	54	-8.86	AVG
7236	58.52	-0.95	57.57	74	-16.43	peak
7236	45.63	-0.95	44.68	54	-9.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.23	-3.51	60.72	74	-13.28	peak
4874	50.74	-3.51	47.23	54	-6.77	AVG
7311	59.70	-0.82	58.88	74	-15.12	peak
7311	45.15	-0.82	44.33	54	-9.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.74	-3.51	60.23	74	-13.77	peak
4874	49.36	-3.51	45.85	54	-8.15	AVG
7311	59.65	-0.82	58.83	74	-15.17	peak
7311	44.86	-0.82	44.04	54	-9.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.84	-3.43	61.41	74	-12.59	peak
4924	47.45	-3.43	44.02	54	-9.98	AVG
7386	57.35	-0.75	56.60	74	-17.40	peak
7386	43.59	-0.75	42.84	54	-11.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.75	-3.43	61.32	74	-12.68	peak
4924	46.35	-3.43	42.92	54	-11.08	AVG
7386	57.53	-0.75	56.78	74	-17.22	peak
7386	41.87	-0.75	41.12	54	-12.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.59	-3.63	60.96	74	-13.04	peak
4844	46.91	-3.63	43.28	54	-10.72	AVG
7266	58.80	-0.94	57.86	74	-16.14	peak
7266	45.60	-0.94	44.66	54	-9.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.21	-3.63	60.58	74	-13.42	peak
4844	48.38	-3.63	44.75	54	-9.25	AVG
7266	59.83	-0.94	58.89	74	-15.11	peak
7266	45.65	-0.94	44.71	54	-9.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.79	-3.51	60.28	74	-13.72	peak
4874	49.03	-3.51	45.52	54	-8.48	AVG
7311	59.85	-0.82	59.03	74	-14.97	peak
7311	45.27	-0.82	44.45	54	-9.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.35	-0.82	42.53	54	-11.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.37	-3.43	59.94	74	-14.06	peak
4904	47.95	-3.43	44.52	54	-9.48	AVG
7356	57.74	-0.75	56.99	74	-17.01	peak
7356	43.17	-0.75	42.42	54	-11.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.71	-3.43	61.28	74	-12.72	peak
4904	47.21	-3.43	43.78	54	-10.22	AVG
7356	57.40	-0.75	56.65	74	-17.35	peak
7356	42.76	-0.75	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.72	-5.81	51.91	74	-22.09	peak
2390	/	-5.81	/	54	/	AVG
2399	64.11	-5.84	58.27	74	-15.73	peak
2399	49.00	-5.84	43.16	54	-10.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.23	-5.81	50.42	74	-23.58	peak
2390	/	-5.81	/	54	/	AVG
2399	62.43	-5.84	56.59	74	-17.41	peak
2399	47.76	-5.84	41.92	54	-12.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.76	-5.65	51.11	74	-22.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.62	-5.65	49.97	74	-24.03	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.38	-5.81	52.57	74	-21.43	peak
2390	/	-5.81	/	54	/	AVG
2399	62.36	-5.84	56.52	74	-17.48	peak
2399	46.19	-5.84	40.35	54	-13.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.47	-5.81	50.66	74	-23.34	peak
2390	/	-5.81	/	54	/	AVG
2399	61.51	-5.84	55.67	74	-18.33	peak
2399	47.17	-5.84	41.33	54	-12.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.17	-5.65	50.52	74	-23.48	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.89	-5.65	52.24	74	-21.76	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.21	-5.81	50.40	74	-23.60	peak
2390	/	-5.81	/	54	/	AVG
2399	63.45	-5.84	57.61	74	-16.39	peak
2399	47.49	-5.84	41.65	54	-12.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.78	-5.81	49.97	74	-24.03	peak
2390	/	-5.81	/	54	/	AVG
2399	60.90	-5.84	55.06	74	-18.94	peak
2399	46.96	-5.84	41.12	54	-12.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.83	-5.65	50.18	74	-23.82	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.98	-5.65	50.33	74	-23.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.41	-5.81	52.60	74	-21.40	peak
2390	/	-5.81	/	54	/	AVG
2399	63.16	-5.84	57.32	74	-16.68	peak
2399	46.63	-5.84	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.10	-5.81	51.29	74	-22.71	peak
2390	/	-5.81	/	54	/	AVG
2399	60.79	-5.84	54.95	74	-19.05	peak
2399	47.08	-5.84	41.24	54	-12.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.76	-5.65	52.11	74	-21.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.51	-5.65	49.86	74	-24.14	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

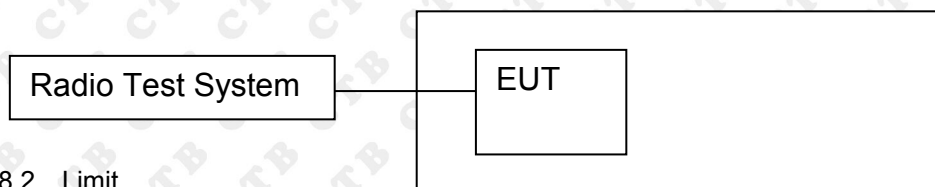

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs

802.11b/LCH

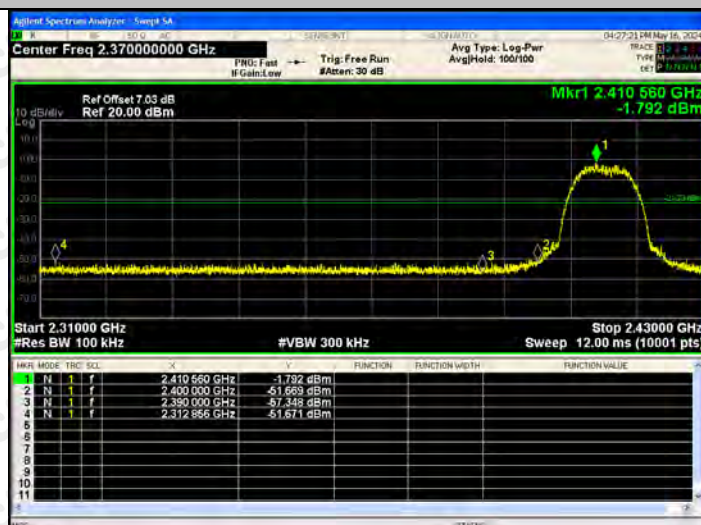

802.11b/HCH

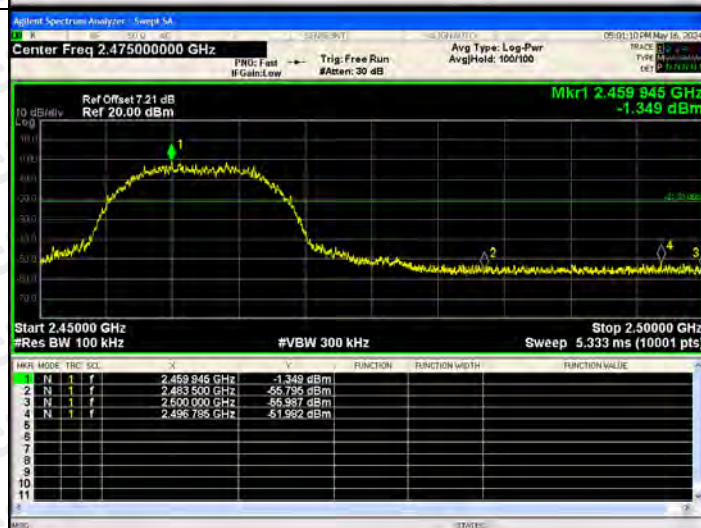


BAND EDGE Graphs

802.11g/LCH




802.11g/HCH

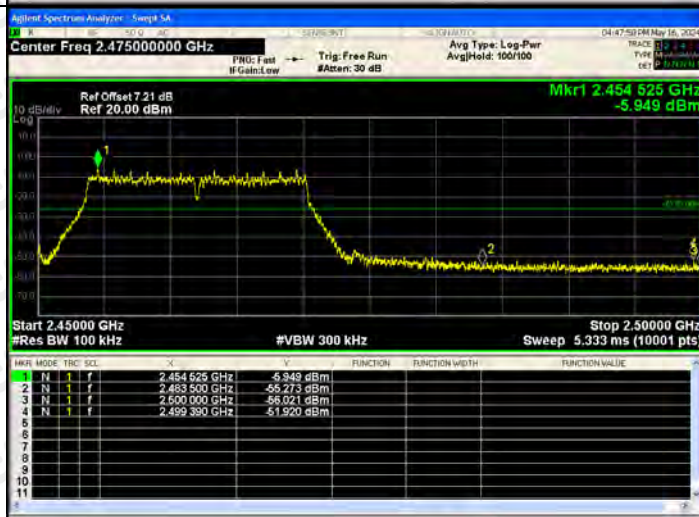

BAND EDGE Graphs

802.11n(HT20)/L
CH

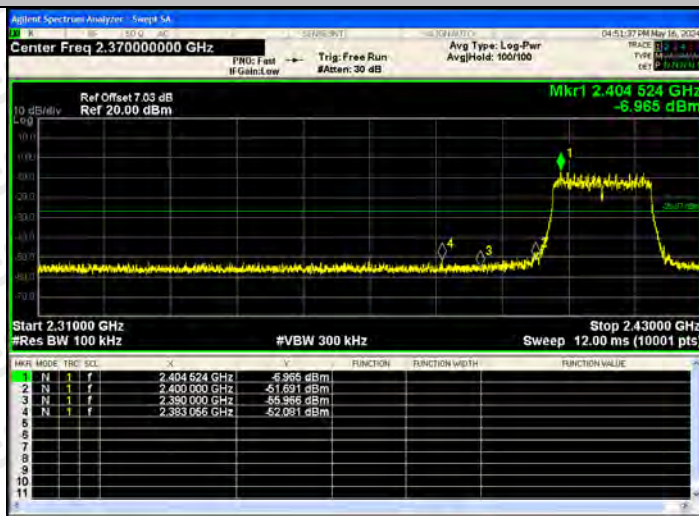

802.11n(HT20)/H
CH




BAND EDGE Graphs


802.11n(HT40)/L
CH




802.11n(HT40)/H
CH

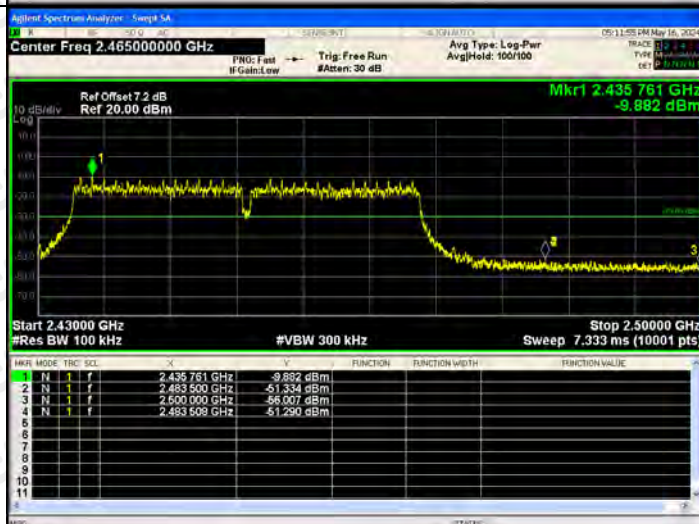



RF Conducted Spurious Emissions Graphs

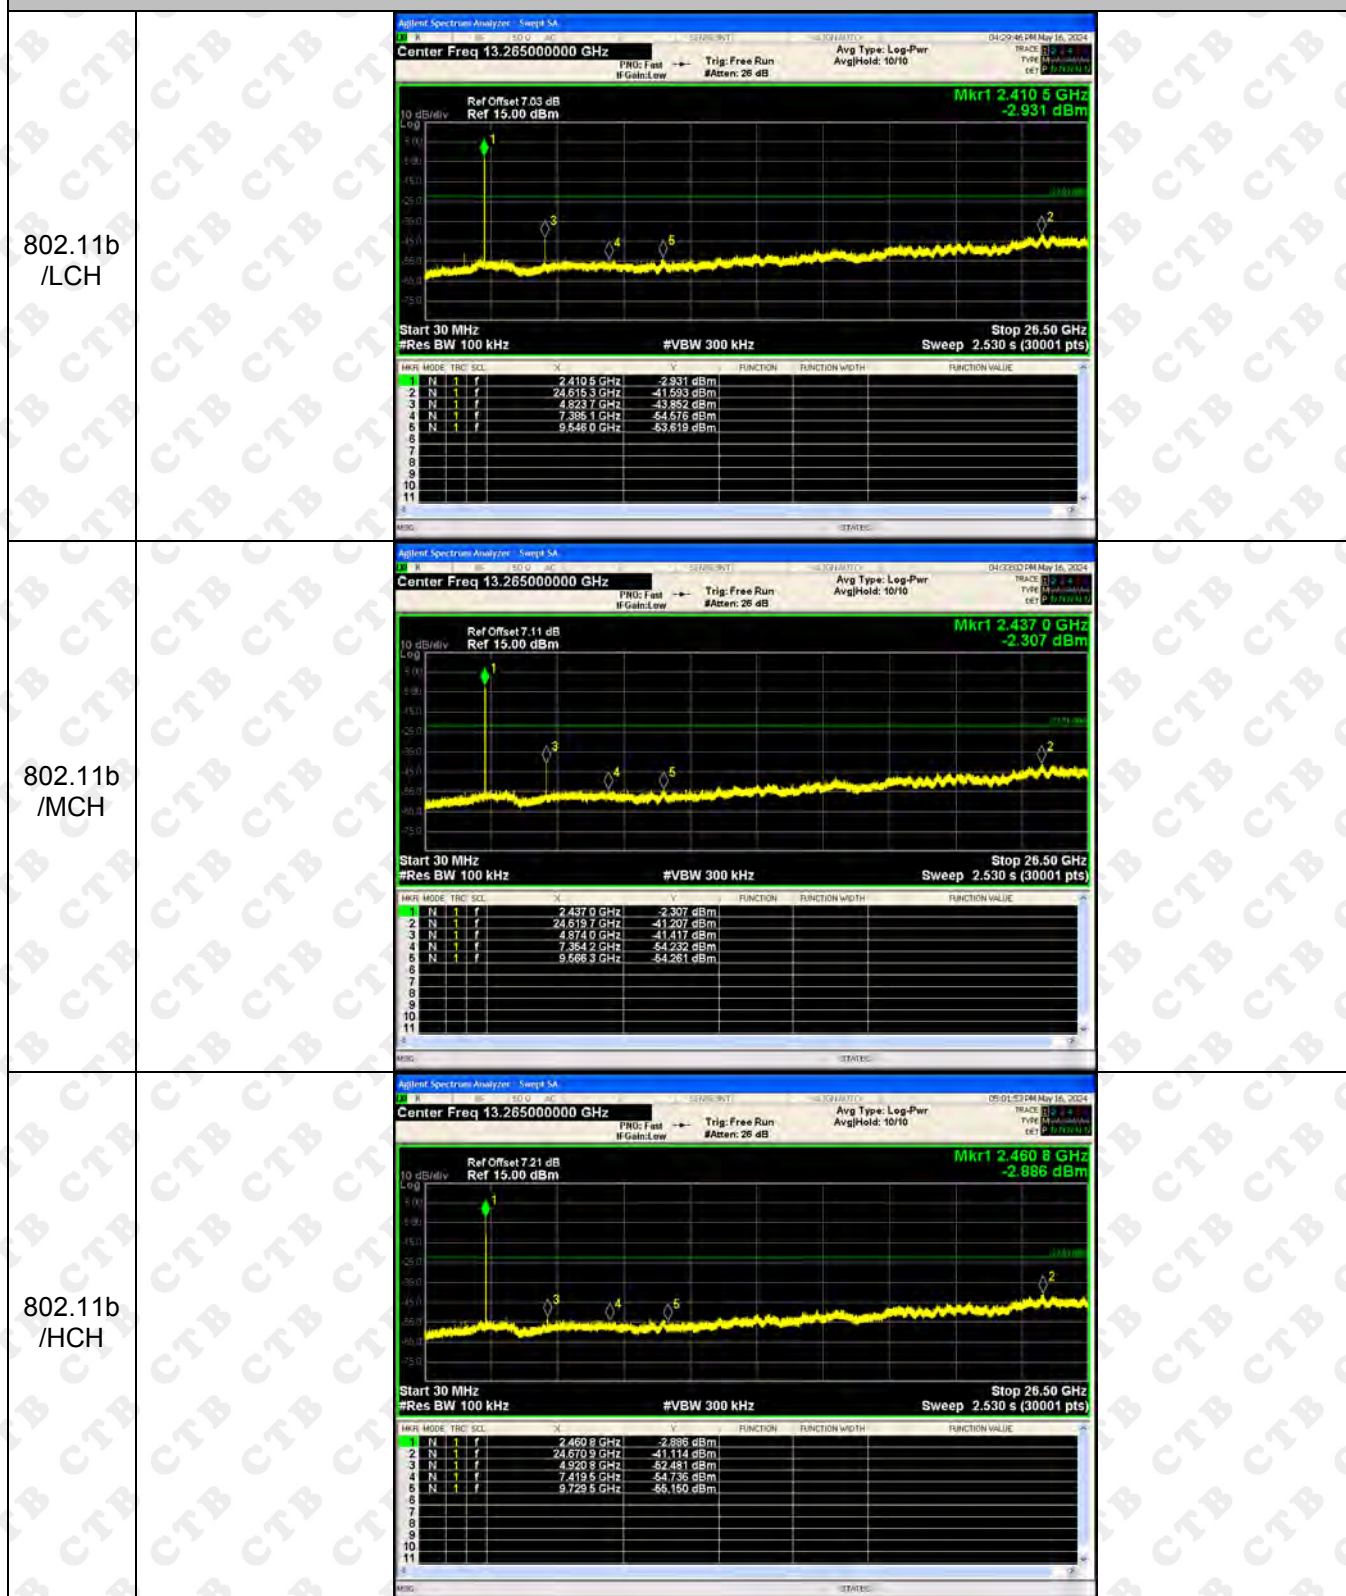

RF Conducted Spurious Emissions Graphs

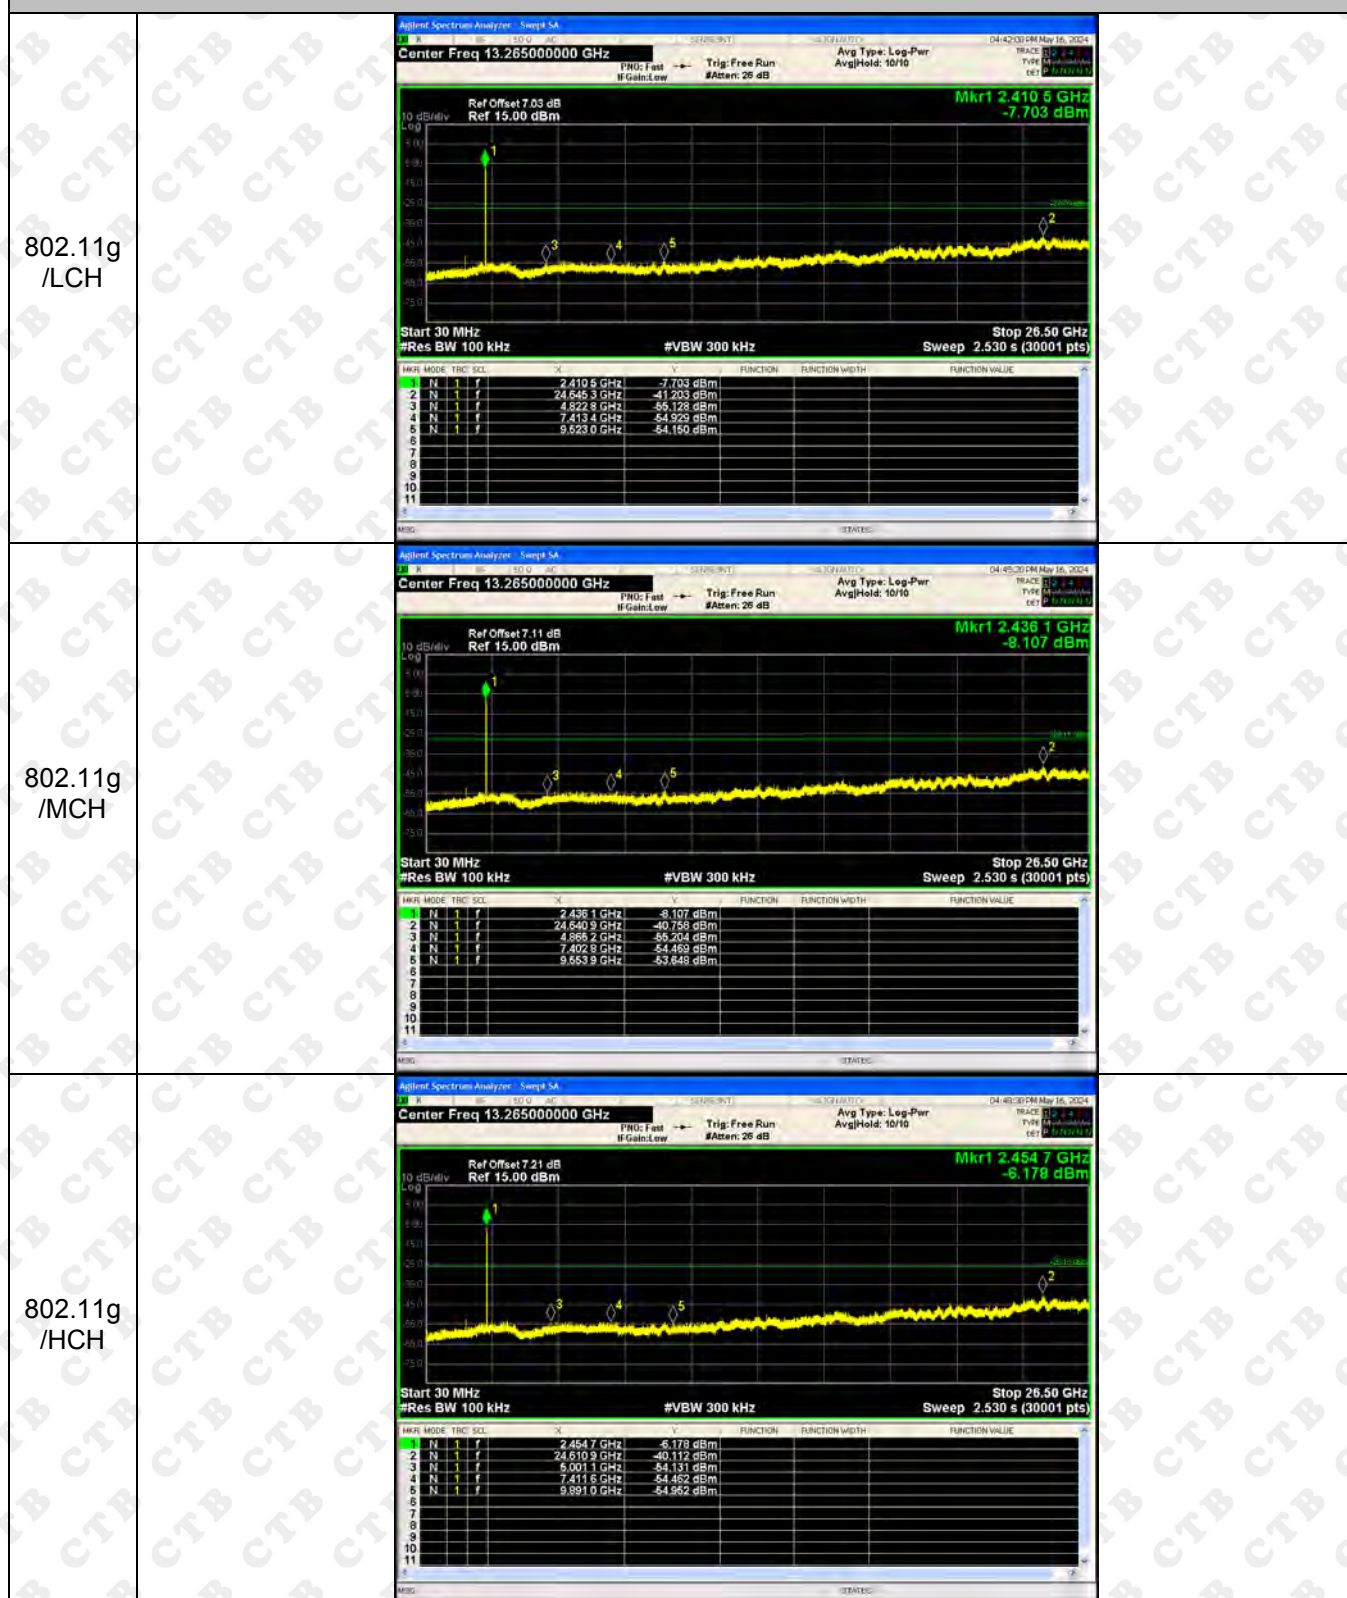

RF Conducted Spurious Emissions Graphs

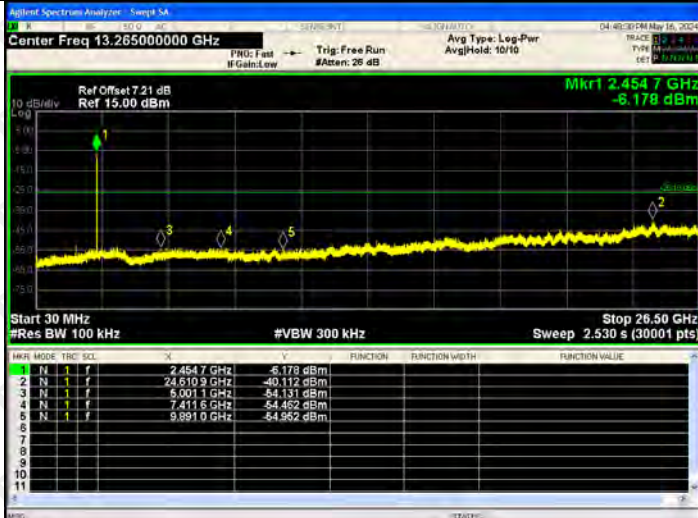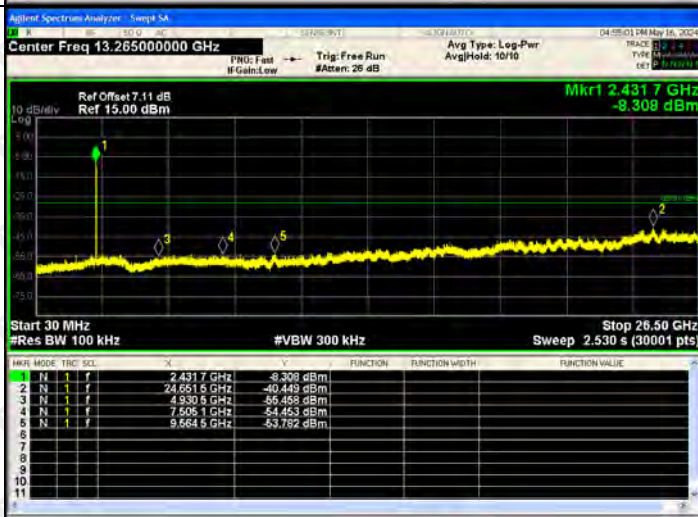
802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.454 7 GHz -6.178 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.454 7 GHz</td><td>-6.178 dBm</td></tr><tr><td>2</td><td>N</td><td>24.610 9 GHz</td><td>-40.112 dBm</td></tr><tr><td>3</td><td>N</td><td>5.001 1 GHz</td><td>-54.131 dBm</td></tr><tr><td>4</td><td>N</td><td>7.411 6 GHz</td><td>-54.482 dBm</td></tr><tr><td>5</td><td>N</td><td>9.991 0 GHz</td><td>-54.952 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.454 7 GHz	-6.178 dBm	2	N	24.610 9 GHz	-40.112 dBm	3	N	5.001 1 GHz	-54.131 dBm	4	N	7.411 6 GHz	-54.482 dBm	5	N	9.991 0 GHz	-54.952 dBm
Mkr	Mode	Freq	Power																						
1	N	2.454 7 GHz	-6.178 dBm																						
2	N	24.610 9 GHz	-40.112 dBm																						
3	N	5.001 1 GHz	-54.131 dBm																						
4	N	7.411 6 GHz	-54.482 dBm																						
5	N	9.991 0 GHz	-54.952 dBm																						
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.431 7 GHz -8.308 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.431 7 GHz</td><td>-8.308 dBm</td></tr><tr><td>2</td><td>N</td><td>24.661 5 GHz</td><td>-40.449 dBm</td></tr><tr><td>3</td><td>N</td><td>4.930 5 GHz</td><td>-55.458 dBm</td></tr><tr><td>4</td><td>N</td><td>7.505 1 GHz</td><td>-54.453 dBm</td></tr><tr><td>5</td><td>N</td><td>9.964 5 GHz</td><td>-53.792 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.431 7 GHz	-8.308 dBm	2	N	24.661 5 GHz	-40.449 dBm	3	N	4.930 5 GHz	-55.458 dBm	4	N	7.505 1 GHz	-54.453 dBm	5	N	9.964 5 GHz	-53.792 dBm
Mkr	Mode	Freq	Power																						
1	N	2.431 7 GHz	-8.308 dBm																						
2	N	24.661 5 GHz	-40.449 dBm																						
3	N	4.930 5 GHz	-55.458 dBm																						
4	N	7.505 1 GHz	-54.453 dBm																						
5	N	9.964 5 GHz	-53.792 dBm																						
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.463 5 GHz -7.163 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>N</td><td>2.463 5 GHz</td><td>-7.163 dBm</td></tr><tr><td>2</td><td>N</td><td>24.698 5 GHz</td><td>-40.995 dBm</td></tr><tr><td>3</td><td>N</td><td>4.888 1 GHz</td><td>-54.662 dBm</td></tr><tr><td>4</td><td>N</td><td>7.339 2 GHz</td><td>-55.243 dBm</td></tr><tr><td>5</td><td>N</td><td>9.998 1 GHz</td><td>-55.496 dBm</td></tr></table>	Mkr	Mode	Freq	Power	1	N	2.463 5 GHz	-7.163 dBm	2	N	24.698 5 GHz	-40.995 dBm	3	N	4.888 1 GHz	-54.662 dBm	4	N	7.339 2 GHz	-55.243 dBm	5	N	9.998 1 GHz	-55.496 dBm
Mkr	Mode	Freq	Power																						
1	N	2.463 5 GHz	-7.163 dBm																						
2	N	24.698 5 GHz	-40.995 dBm																						
3	N	4.888 1 GHz	-54.662 dBm																						
4	N	7.339 2 GHz	-55.243 dBm																						
5	N	9.998 1 GHz	-55.496 dBm																						

802.11n (HT40)/ LCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.25000000 GHz Ref Offset 7.05 dB Ref 15.00 dBm Mkr1 2.4061 GHz -9.874 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4061 GHz</td><td>-9.874 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6639 GHz</td><td>-41.145 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7972 GHz</td><td>-55.803 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.2678 GHz</td><td>-54.324 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5071 GHz</td><td>-54.489 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4061 GHz	-9.874 dBm				2	N	24.6639 GHz	-41.145 dBm				3	N	4.7972 GHz	-55.803 dBm				4	N	7.2678 GHz	-54.324 dBm				5	N	9.5071 GHz	-54.489 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4061 GHz	-9.874 dBm																																								
2	N	24.6639 GHz	-41.145 dBm																																								
3	N	4.7972 GHz	-55.803 dBm																																								
4	N	7.2678 GHz	-54.324 dBm																																								
5	N	9.5071 GHz	-54.489 dBm																																								
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.25000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.4194 GHz -11.179 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4194 GHz</td><td>-11.179 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.0353 GHz</td><td>-40.250 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7840 GHz</td><td>-55.777 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.3719 GHz</td><td>-54.052 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5788 GHz</td><td>-53.348 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4194 GHz	-11.179 dBm				2	N	25.0353 GHz	-40.250 dBm				3	N	4.7840 GHz	-55.777 dBm				4	N	7.3719 GHz	-54.052 dBm				5	N	9.5788 GHz	-53.348 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4194 GHz	-11.179 dBm																																								
2	N	25.0353 GHz	-40.250 dBm																																								
3	N	4.7840 GHz	-55.777 dBm																																								
4	N	7.3719 GHz	-54.052 dBm																																								
5	N	9.5788 GHz	-53.348 dBm																																								
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.25000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.4361 GHz -9.902 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4361 GHz</td><td>-9.902 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6639 GHz</td><td>-41.101 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.8040 GHz</td><td>-54.889 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.4990 GHz</td><td>-53.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.8210 GHz</td><td>-54.226 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4361 GHz	-9.902 dBm				2	N	24.6639 GHz	-41.101 dBm				3	N	4.8040 GHz	-54.889 dBm				4	N	7.4990 GHz	-53.647 dBm				5	N	9.8210 GHz	-54.226 dBm			
MKR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4361 GHz	-9.902 dBm																																								
2	N	24.6639 GHz	-41.101 dBm																																								
3	N	4.8040 GHz	-54.889 dBm																																								
4	N	7.4990 GHz	-53.647 dBm																																								
5	N	9.8210 GHz	-54.226 dBm																																								

ANT2:

BAND EDGE Graphs

802.11b/LCH

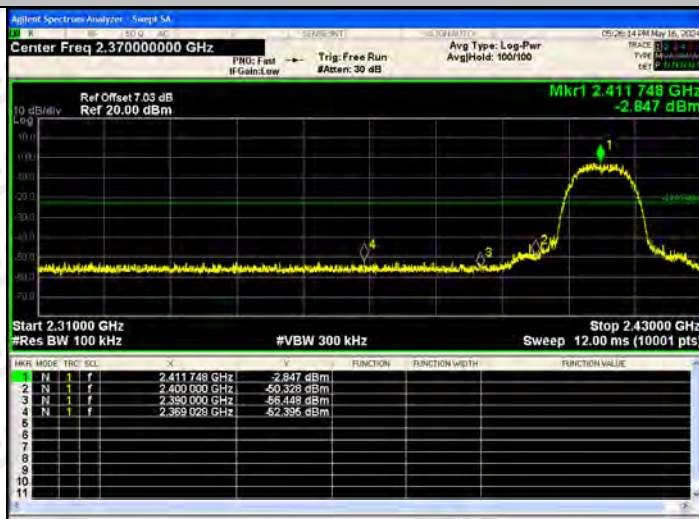


802.11b/HCH




BAND EDGE Graphs

802.11g/LCH

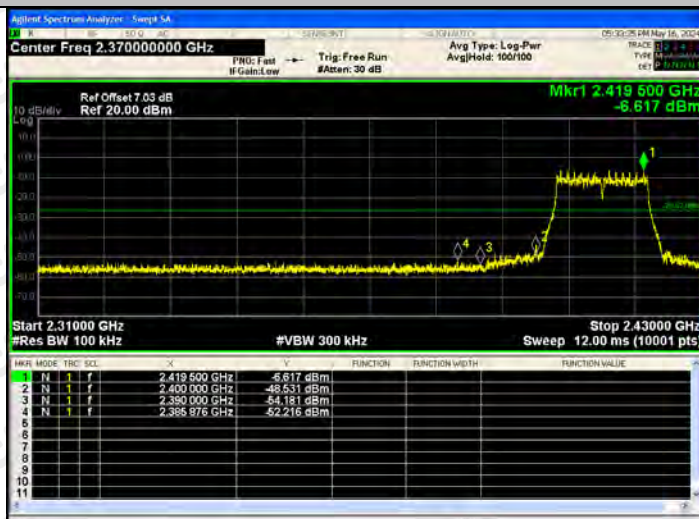


802.11g/HCH

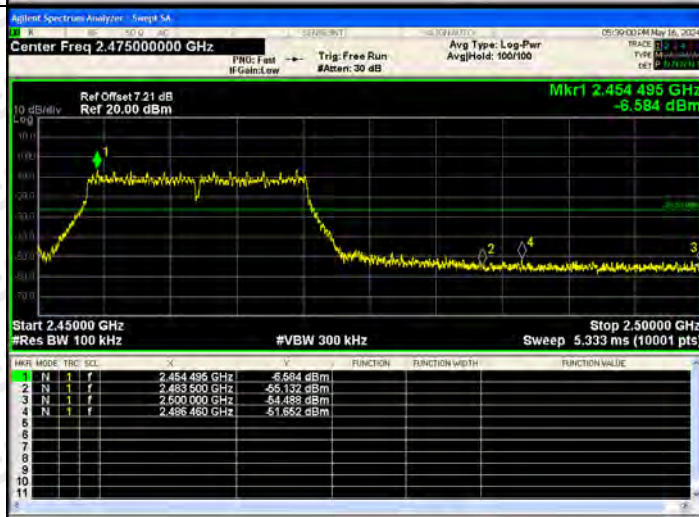


BAND EDGE Graphs

802.11n(HT20)/L
CH

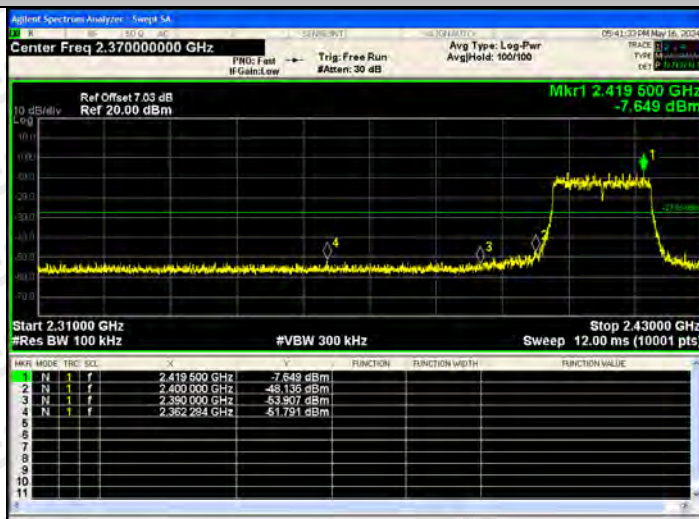


802.11n(HT20)/H
CH

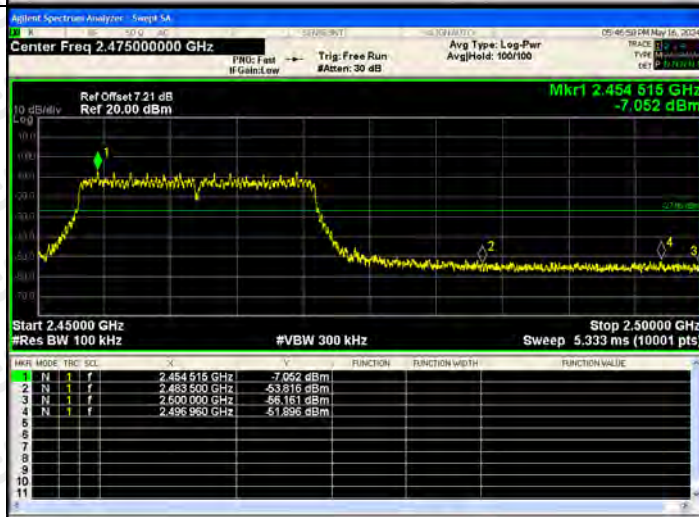

BAND EDGE Graphs


802.11n(HT40)/L
CH

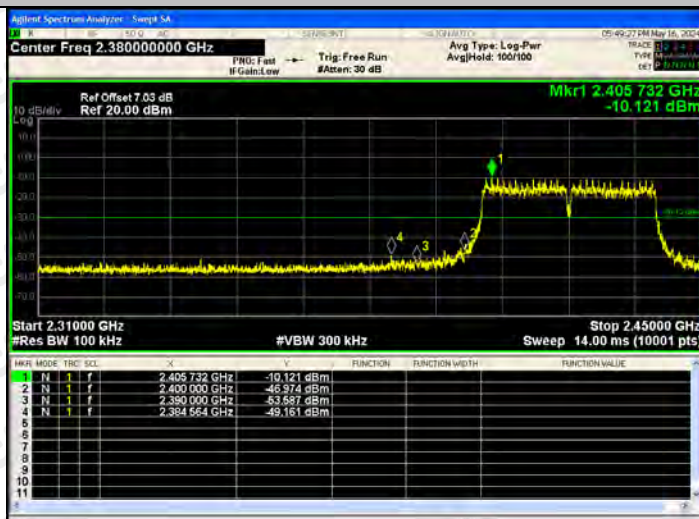


802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs

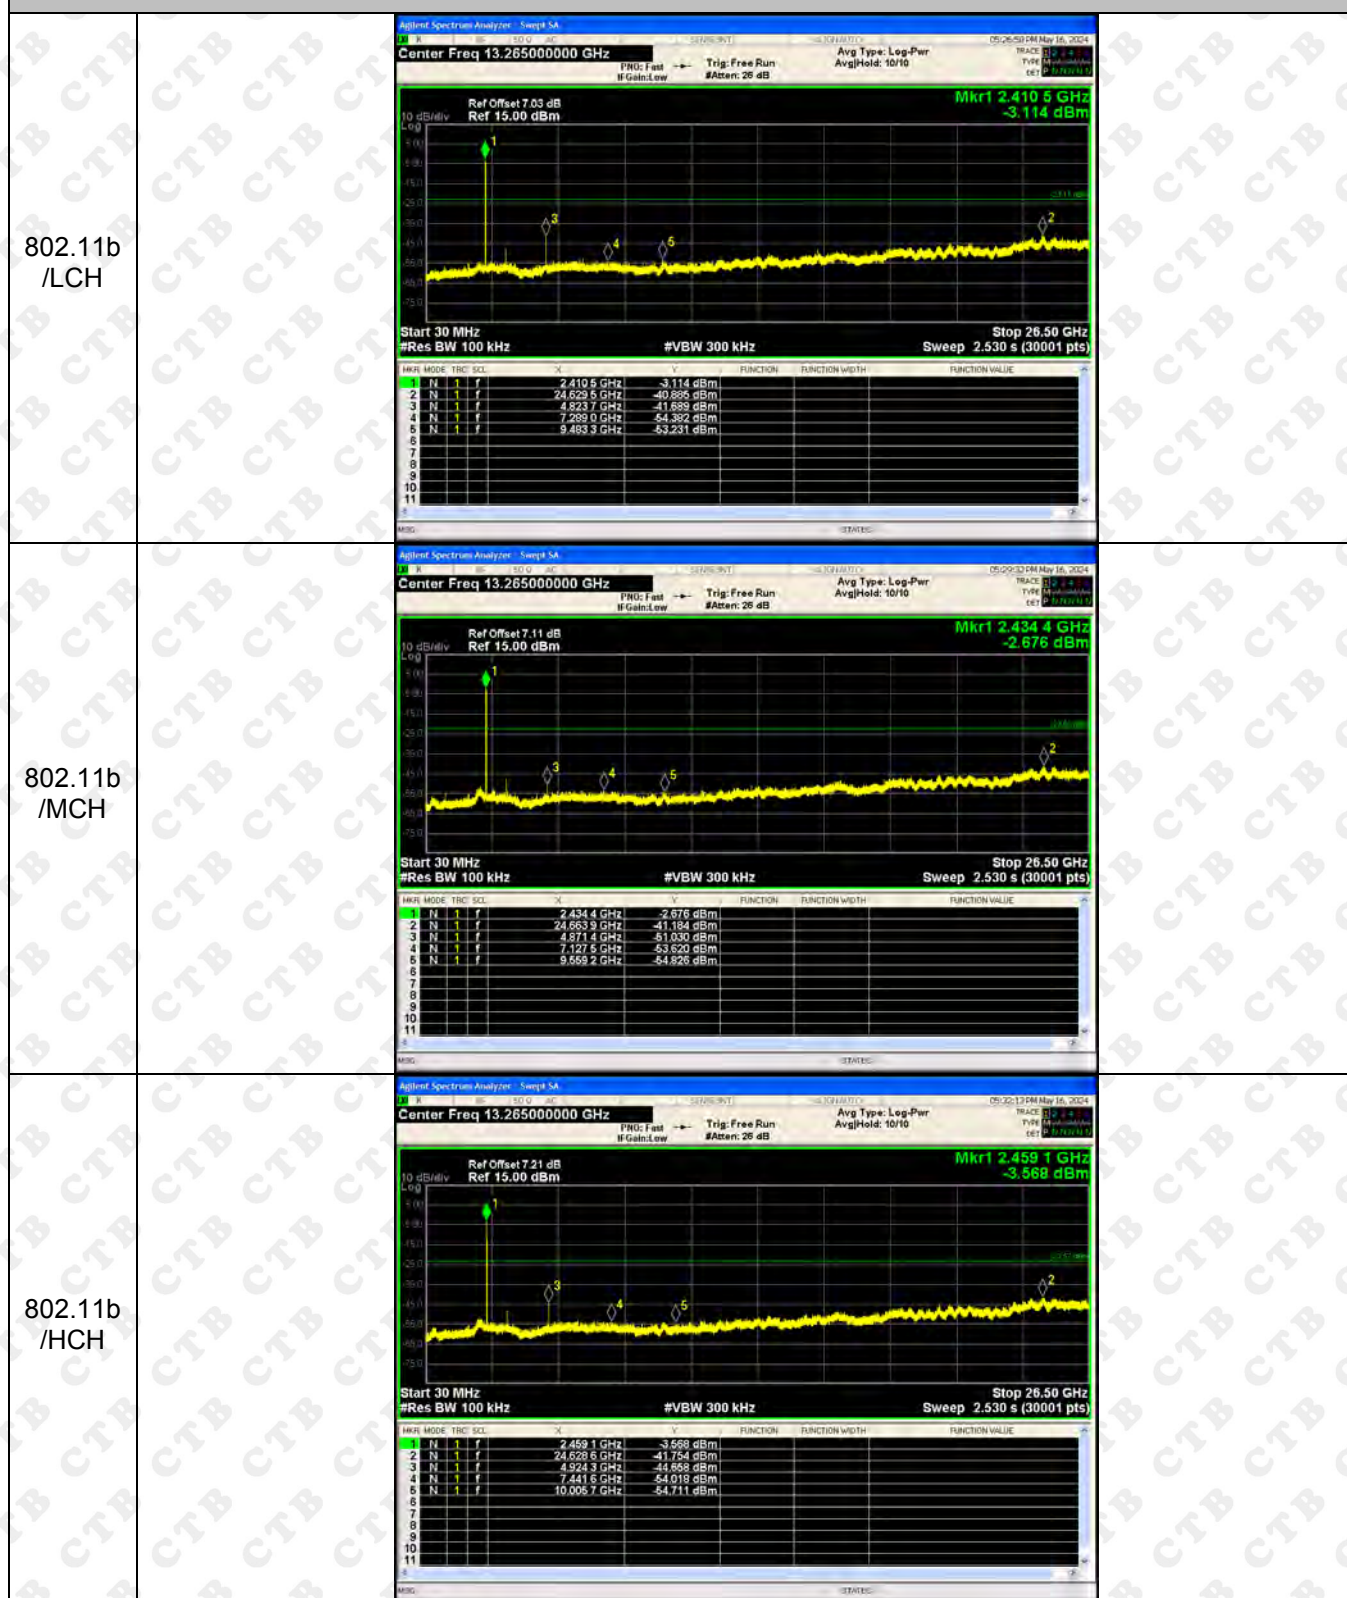


RF Conducted Spurious Emissions Graphs

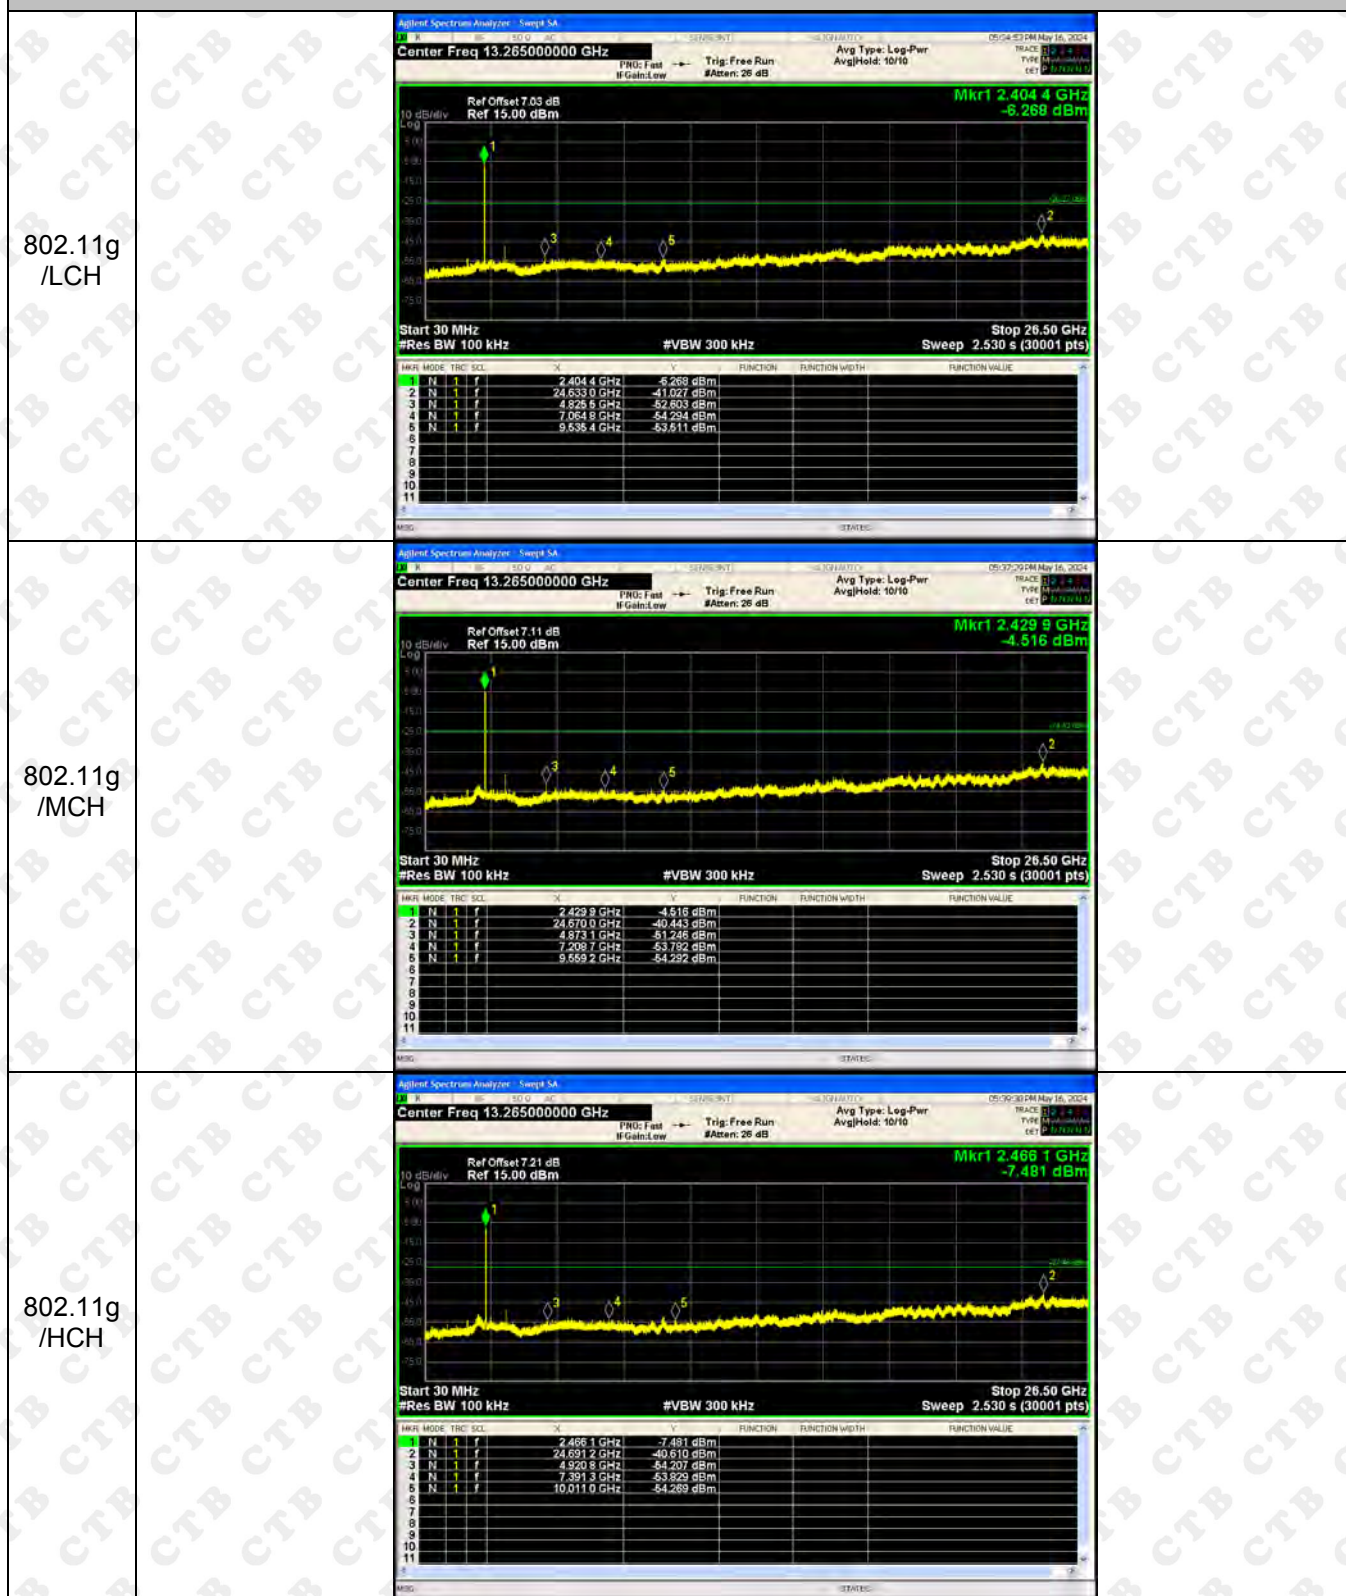

RF Conducted Spurious Emissions Graphs

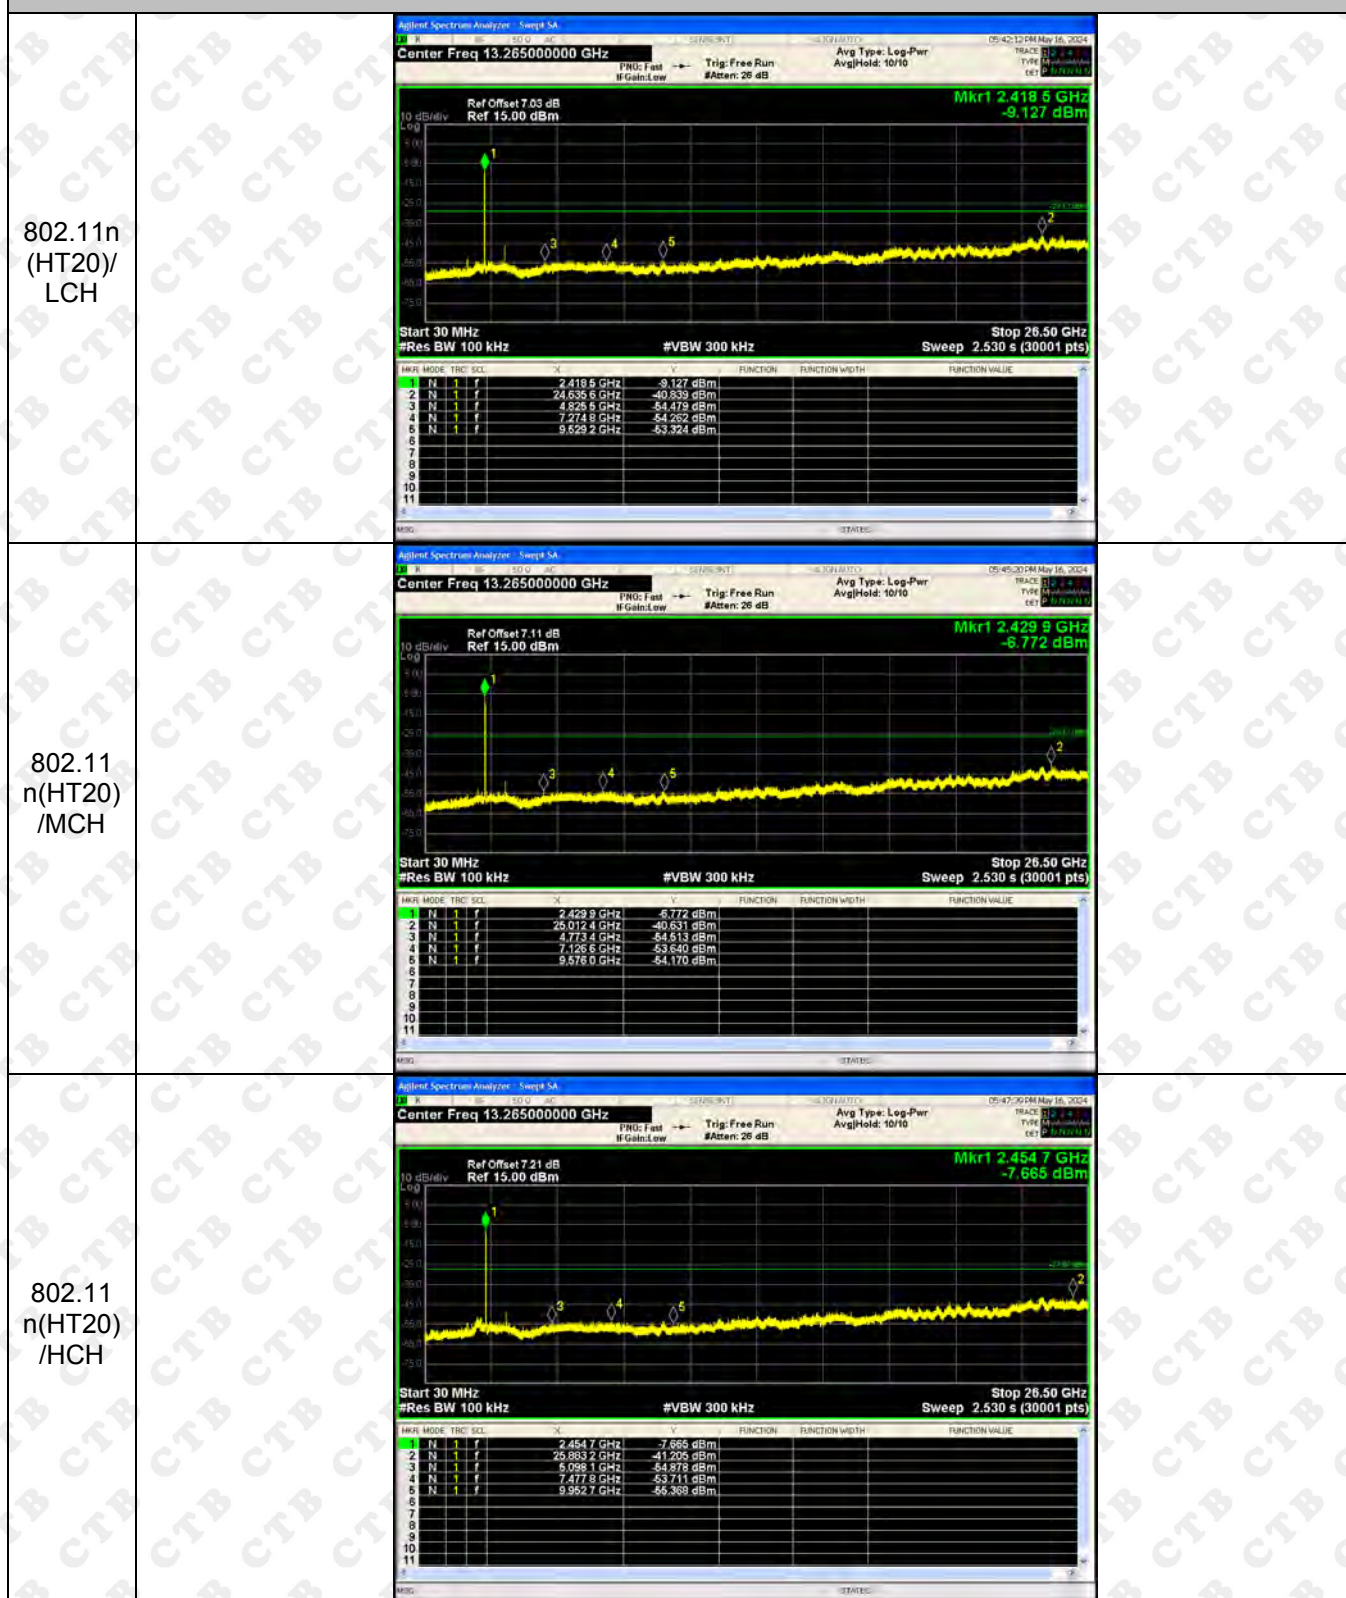

RF Conducted Spurious Emissions Graphs

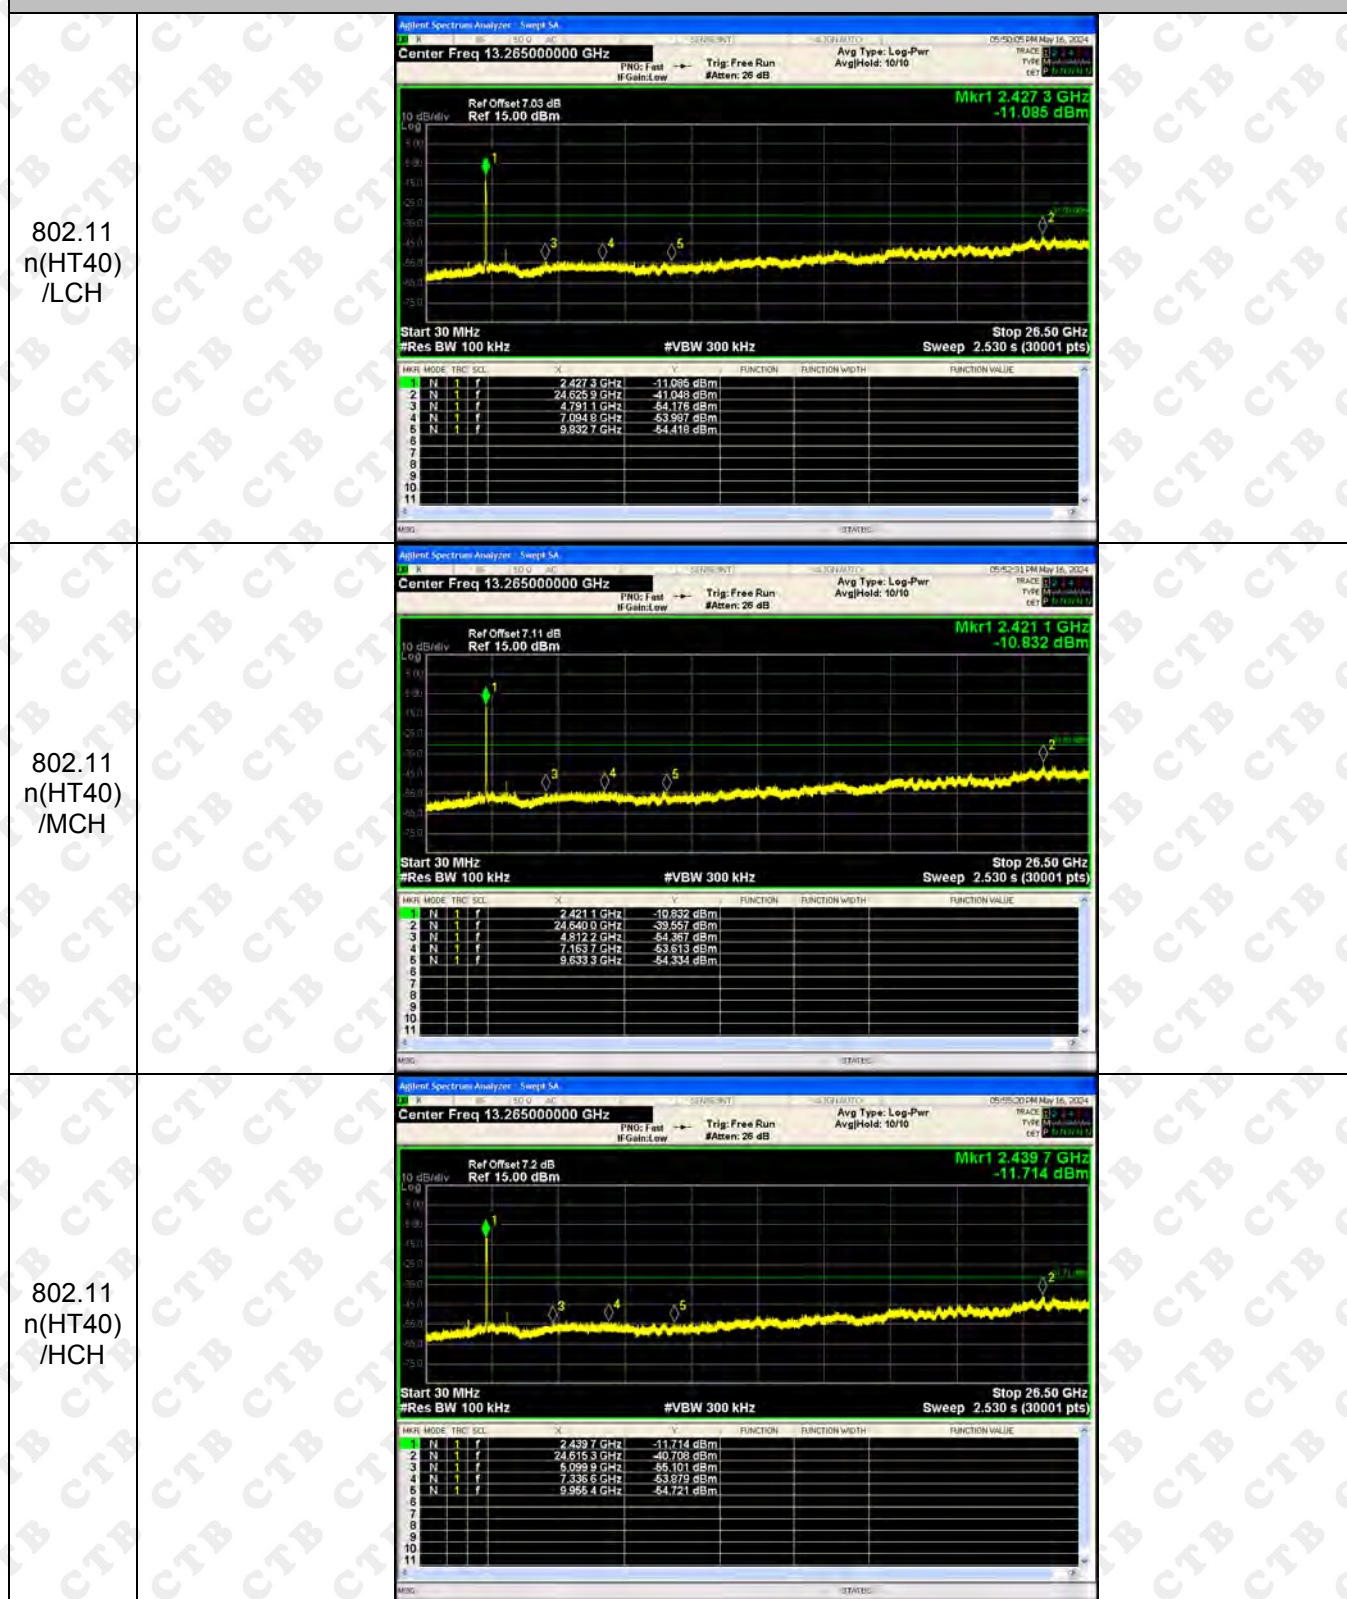

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.207	13.136	/	30
	MCH	13.486	13.945	/	30
	HCH	13.287	13.101	/	30
802.11g	LCH	11.109	11.461	/	30
	MCH	11.244	13.378	/	30
	HCH	11.675	11.476	/	30
802.11n(HT20)	LCH	10.522	10.409	13.476	30
	MCH	10.643	10.631	13.647	30
	HCH	10.963	10.423	13.712	30
802.11n(HT40)	LCH	9.925	9.877	12.911	30
	MCH	9.423	9.346	12.395	30
	HCH	9.8	9.838	12.829	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

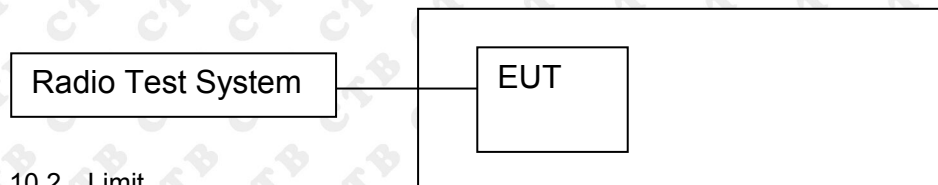

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.024	500	PASS
	MCH	8.653	500	PASS
	HCH	9.072	500	PASS
802.11g	LCH	16.447	500	PASS
	MCH	16.383	500	PASS
	HCH	16.45	500	PASS
802.11n(HT20)	LCH	17.598	500	PASS
	MCH	17.031	500	PASS
	HCH	17.488	500	PASS
802.11n(HT40)	LCH	35.768	500	PASS
	MCH	36.006	500	PASS
	HCH	35.823	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.844	500	PASS
	MCH	9.119	500	PASS
	HCH	9.11	500	PASS
802.11g	LCH	16.427	500	PASS
	MCH	16.419	500	PASS
	HCH	16.466	500	PASS
802.11n(HT20)	LCH	17.515	500	PASS
	MCH	17.545	500	PASS
	HCH	17.329	500	PASS
802.11n(HT40)	LCH	36.358	500	PASS
	MCH	36.057	500	PASS
	HCH	35.697	500	PASS

ANT1:


Test Graph:

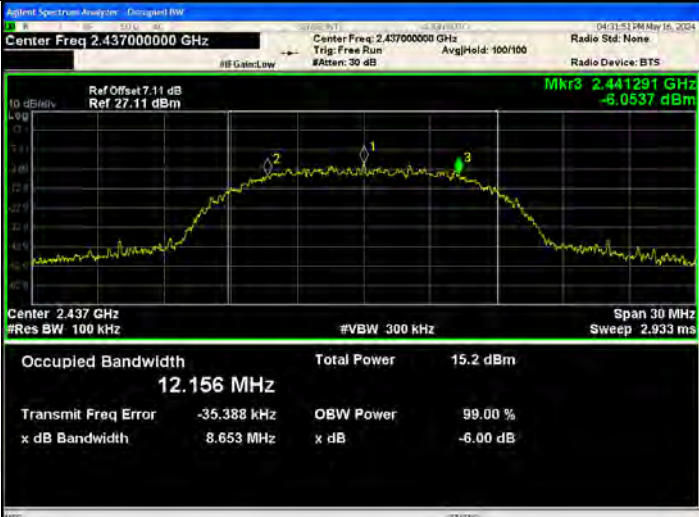Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.03 dB Ref: 27.03 dBm Mkr3: 2.416503 GHz -7.2979 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.084 MHz Total Power: 14.7 dBm Transmit Freq Error: -9.542 kHz OBW Power: 99.00 % x dB Bandwidth: 9.024 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.11 dB Ref: 27.11 dBm Mkr3: 2.441291 GHz -6.0537 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.156 MHz Total Power: 15.2 dBm Transmit Freq Error: -35.388 kHz OBW Power: 99.00 % x dB Bandwidth: 8.653 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.21 dB Ref: 27.21 dBm Mkr3: 2.466515 GHz -6.9401 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.106 MHz Total Power: 14.8 dBm Transmit Freq Error: -21.636 kHz OBW Power: 99.00 % x dB Bandwidth: 9.072 MHz x dB: -6.00 dB

802.11g/LCH



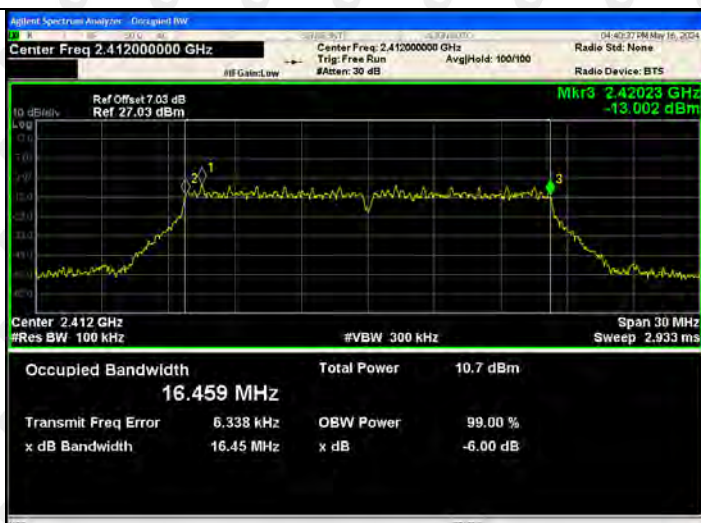





802.11g/MCH

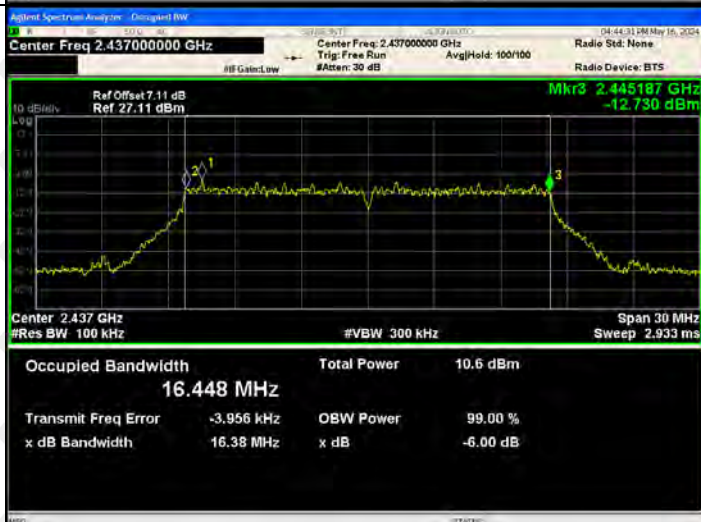

802.11g/HCH

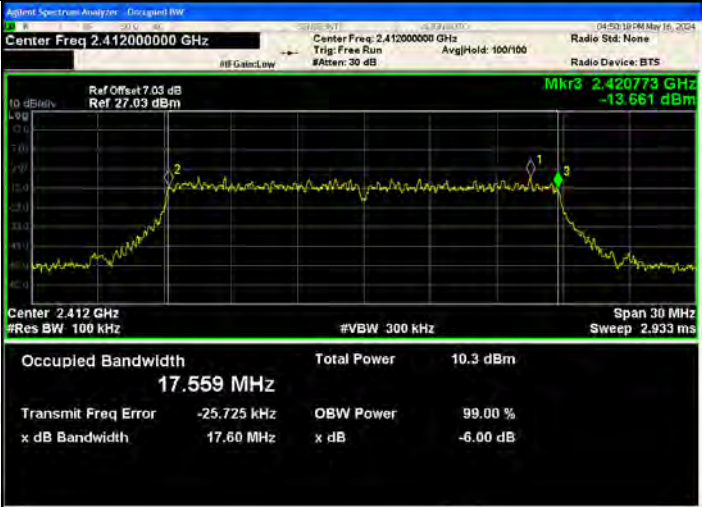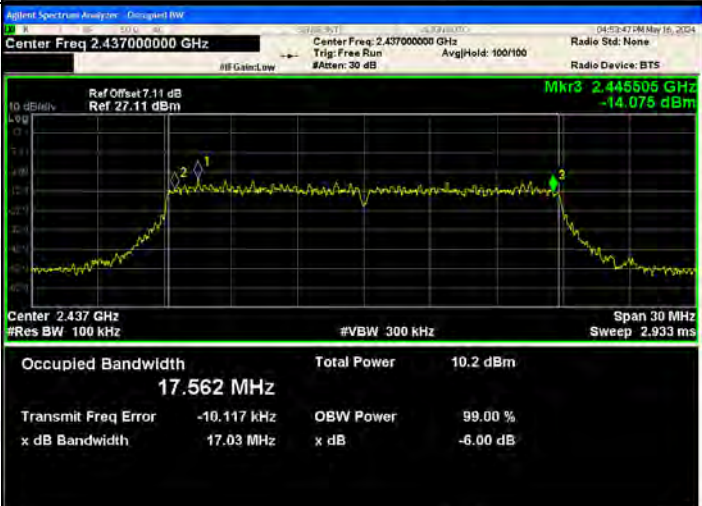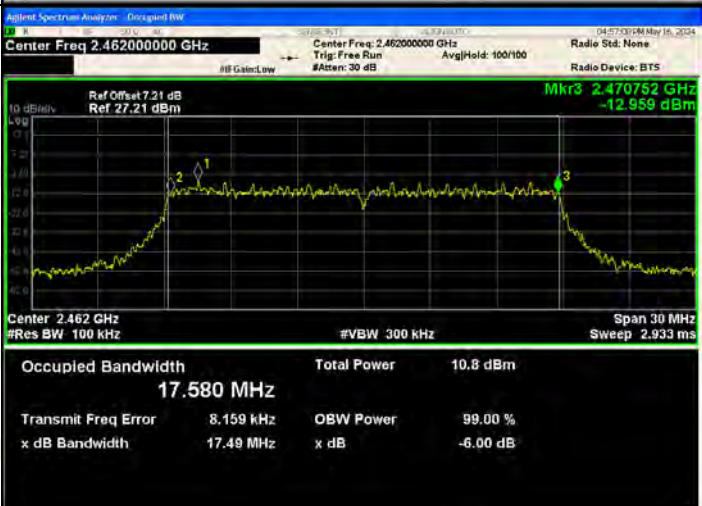


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420773 GHz -13.661 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.559 MHz Total Power 10.3 dBm Transmit Freq Error -25.725 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445505 GHz -14.075 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.562 MHz Total Power 10.2 dBm Transmit Freq Error -10.117 kHz OBW Power 99.00 % x dB Bandwidth 17.03 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470752 GHz -12.959 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.580 MHz Total Power 10.8 dBm Transmit Freq Error 8.159 kHz OBW Power 99.00 % x dB Bandwidth 17.49 MHz x dB -6.00 dB

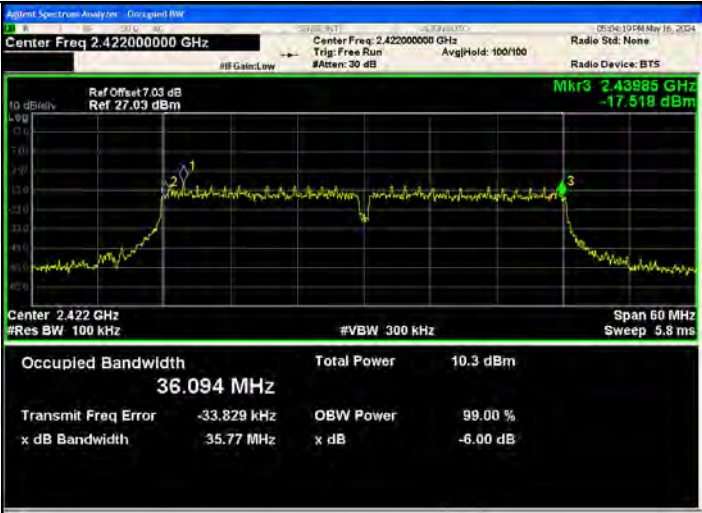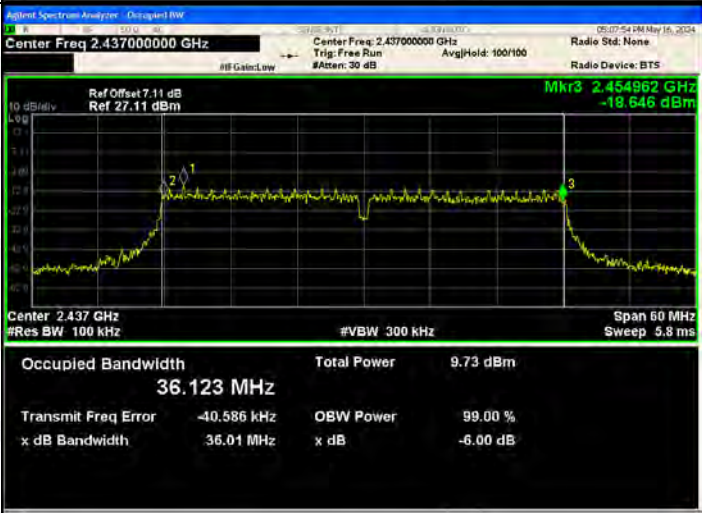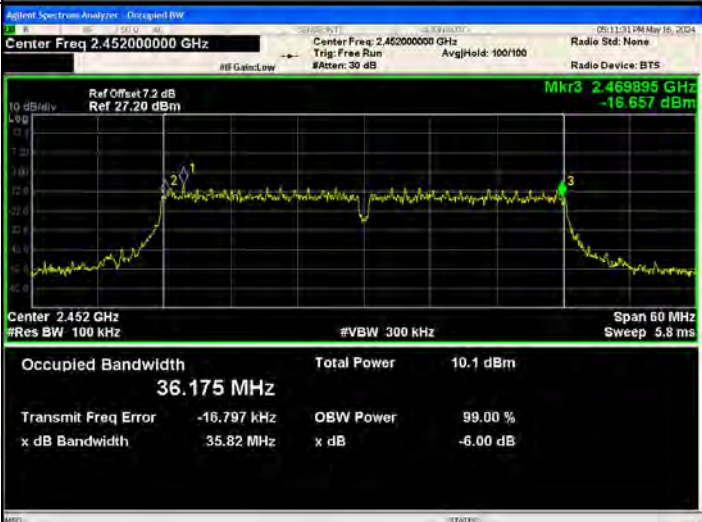
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.43985 GHz -17.518 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.094 MHz Total Power 10.3 dBm Transmit Freq Error -33.829 kHz OBW Power 99.00 % x dB Bandwidth 35.77 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.454962 GHz -18.646 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.123 MHz Total Power 9.73 dBm Transmit Freq Error -40.586 kHz OBW Power 99.00 % x dB Bandwidth 36.01 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Mkr3 2.469895 GHz -16.657 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.175 MHz Total Power 10.1 dBm Transmit Freq Error -16.797 kHz OBW Power 99.00 % x dB Bandwidth 35.82 MHz x dB -6.00 dB

ANT2:


Test Graph:

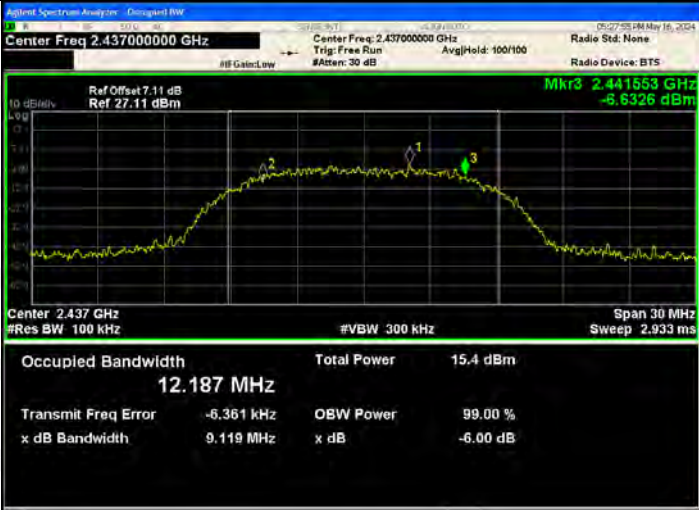Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Crossguard BW Center Freq: 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.03 dB Ref: 27.03 dBm Mkr3: 2.418415 GHz -8.0036 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.126 MHz Total Power: 14.8 dBm Transmit Freq Error: -7.225 kHz OBW Power: 99.00 % x dB Bandwidth: 8.844 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Crossguard BW Center Freq: 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.11 dB Ref: 27.11 dBm Mkr3: 2.441553 GHz -8.6326 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.187 MHz Total Power: 15.4 dBm Transmit Freq Error: -6.361 kHz OBW Power: 99.00 % x dB Bandwidth: 9.119 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Crossguard BW Center Freq: 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.21 dB Ref: 27.21 dBm Mkr3: 2.46652 GHz -8.7488 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 12.169 MHz Total Power: 14.5 dBm Transmit Freq Error: -34.619 kHz OBW Power: 99.00 % x dB Bandwidth: 9.110 MHz x dB: -6.00 dB

802.11g/LCH


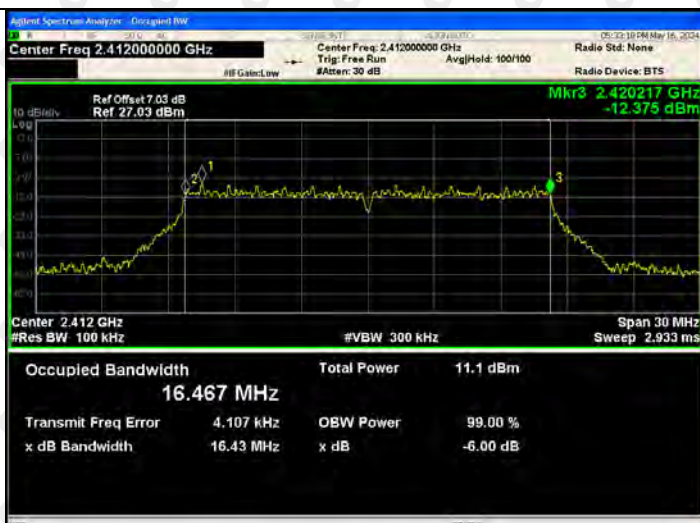





802.11g/MCH

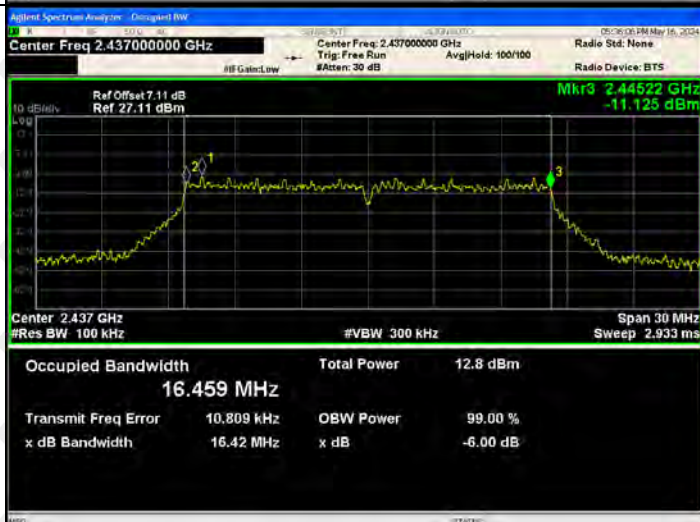

802.11g/HCH

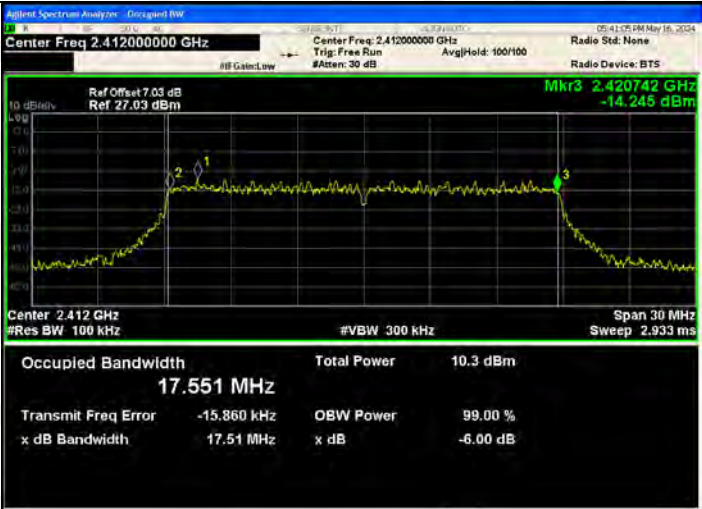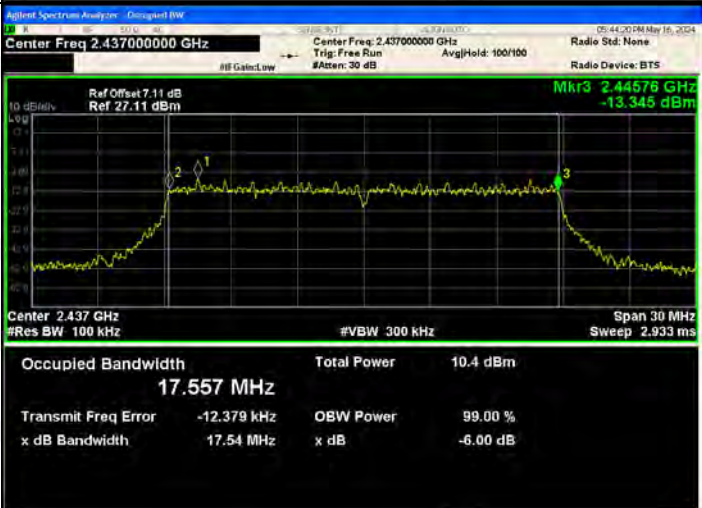


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420742 GHz -14.245 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.551 MHz Total Power 10.3 dBm Transmit Freq Error -15.860 kHz OBW Power 99.00 % x dB Bandwidth 17.51 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.44576 GHz -13.345 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.557 MHz Total Power 10.4 dBm Transmit Freq Error -12.379 kHz OBW Power 99.00 % x dB Bandwidth 17.54 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470658 GHz -14.432 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.580 MHz Total Power 10.3 dBm Transmit Freq Error -6.155 kHz OBW Power 99.00 % x dB Bandwidth 17.33 MHz x dB -6.00 dB

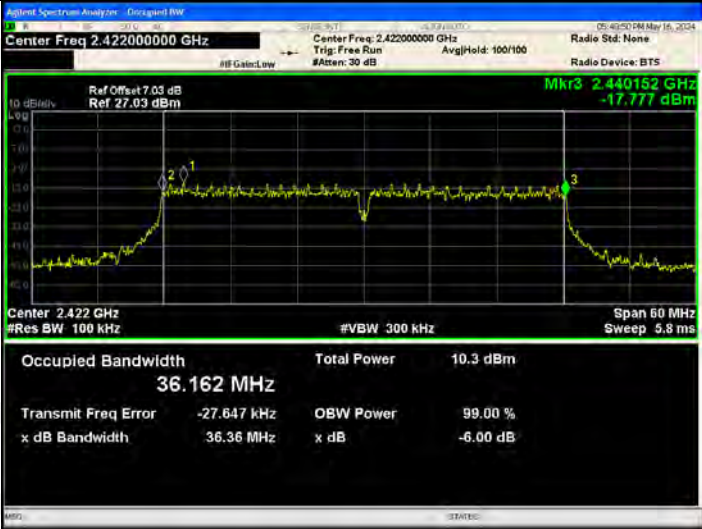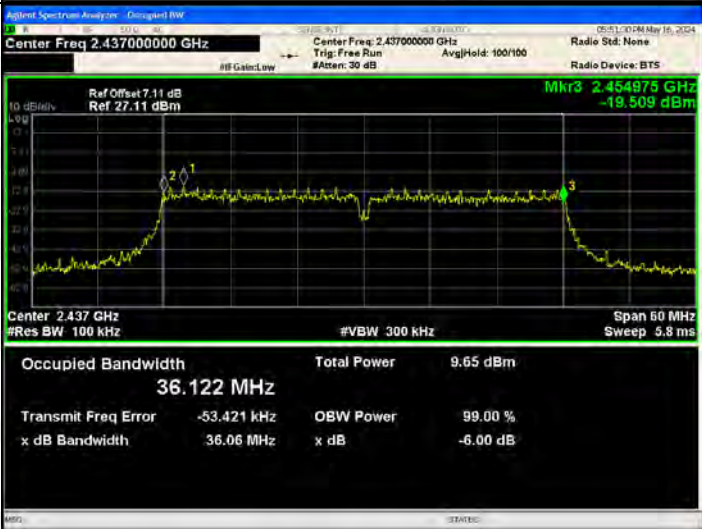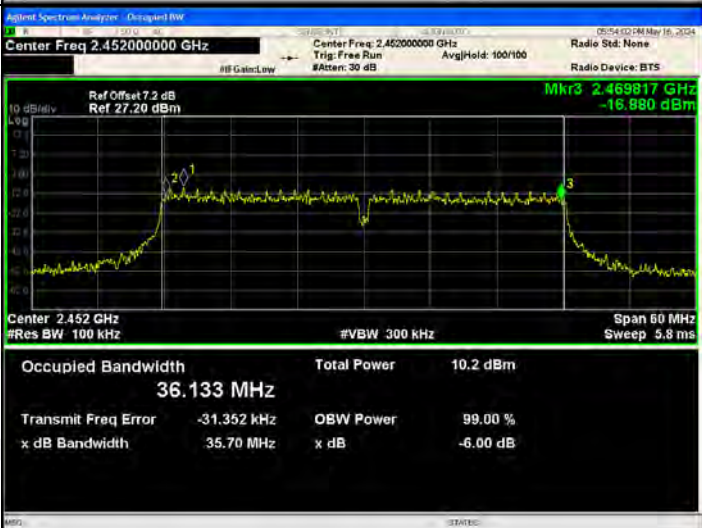802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.440152 GHz -17.777 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.162 MHz Total Power 10.3 dBm Transmit Freq Error -27.647 kHz OBW Power 99.00 % x dB Bandwidth 36.36 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.454975 GHz -19.509 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.122 MHz Total Power 9.65 dBm Transmit Freq Error -53.421 kHz OBW Power 99.00 % x dB Bandwidth 36.06 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Mkr3 2.469817 GHz -16.980 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.133 MHz Total Power 10.2 dBm Transmit Freq Error -31.352 kHz OBW Power 99.00 % x dB Bandwidth 35.70 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

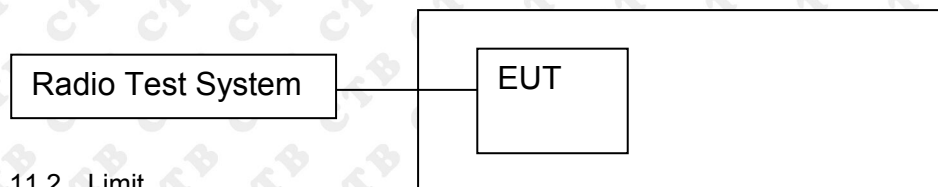

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-15.826	-15.75	/	8
	MCH	-16.614	-14.942	/	8
	HCH	-16.18	-16.954	/	8
802.11g	LCH	-23.839	-24.078	/	8
	MCH	-24.22	-21.803	/	8
	HCH	-22.381	-23.538	/	8
802.11n(H T20)	LCH	-23.828	-24.129	-20.966	8
	MCH	-24.781	-24.493	-21.624	8
	HCH	-24.001	-23.594	-20.782	8
802.11n(H T40)	LCH	-27.773	-27.761	-24.757	8
	MCH	-28.904	-27.242	-24.984	8
	HCH	-26.565	-26.858	-23.699	8

ANT1: Test Graph

Graphs

802.11b /LCH


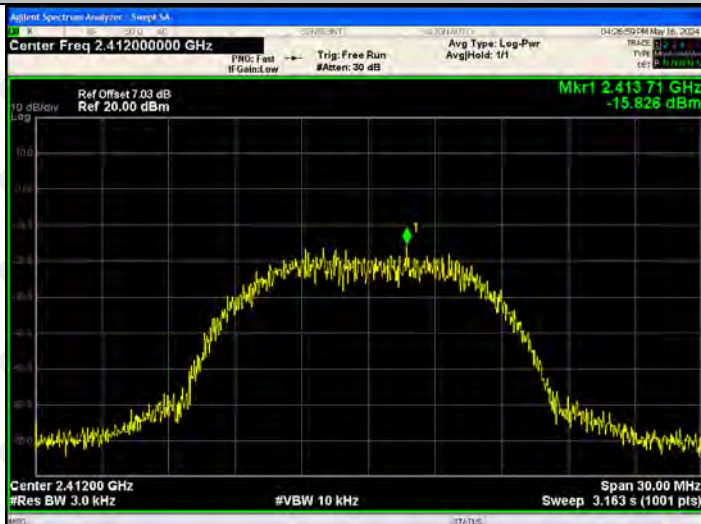




802.11b /MCH



802.11b/HCH

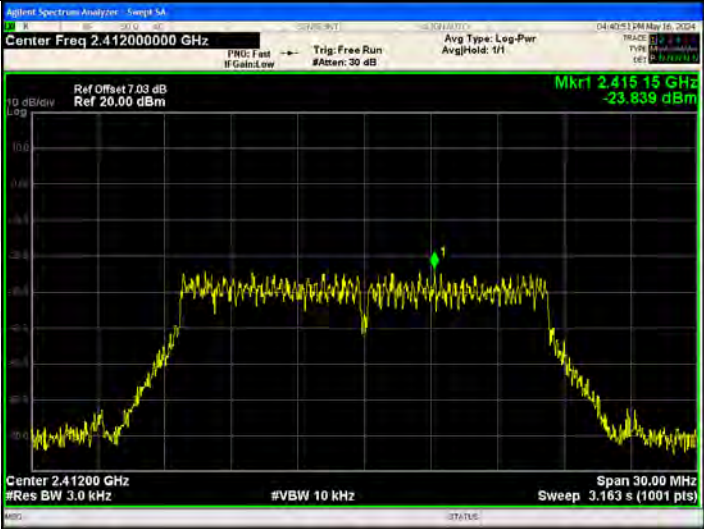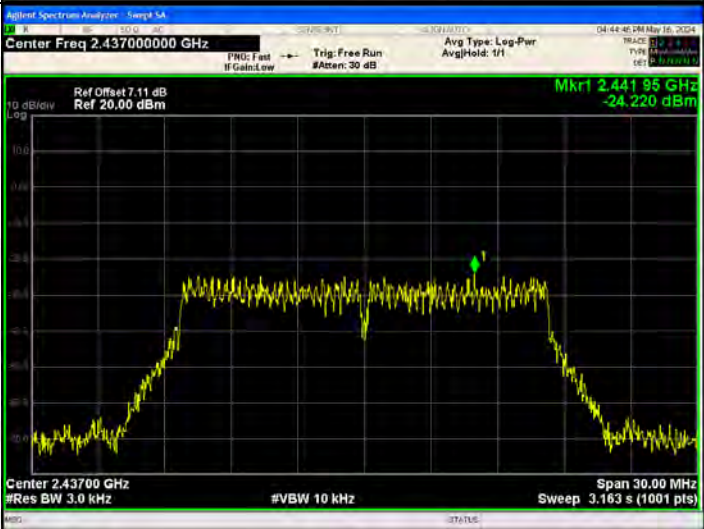

802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

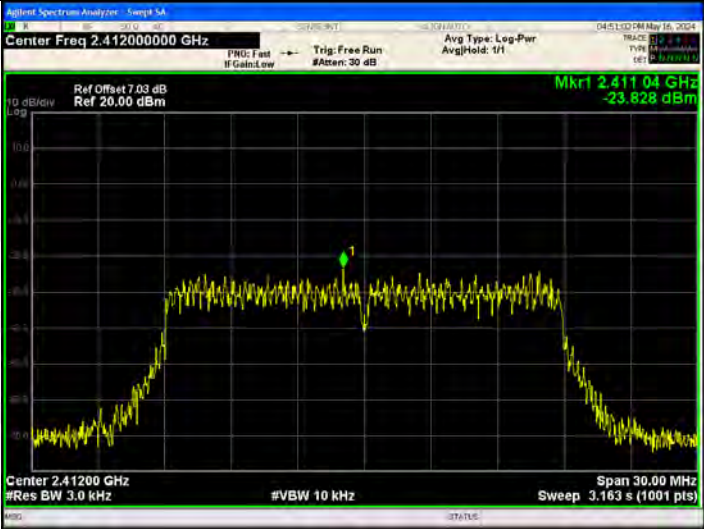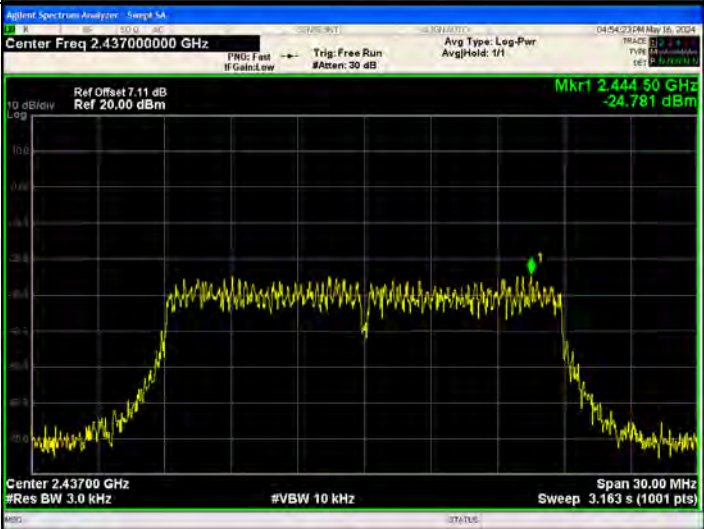
802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41104 GHz -23.828 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.44450 GHz -24.781 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.46986 GHz -24.001 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41702 GHz -27.773 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.42572 GHz -28.904 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.43568 GHz -26.565 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)


ANT 2: Test Graph

Graphs

802.11b /LCH

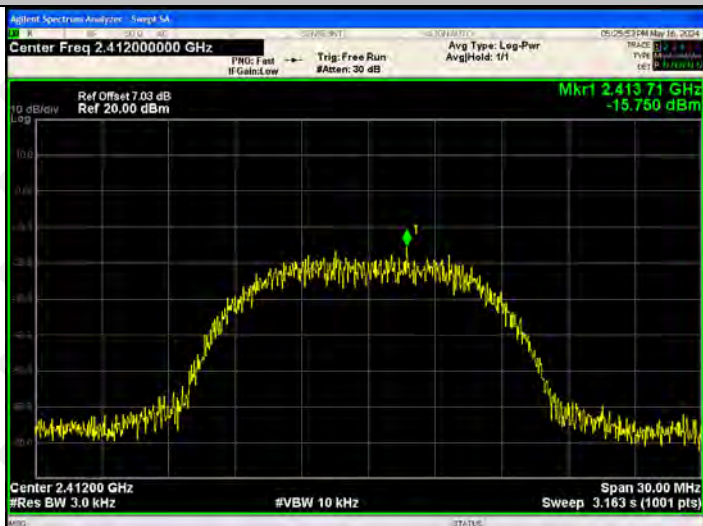




802.11b /MCH

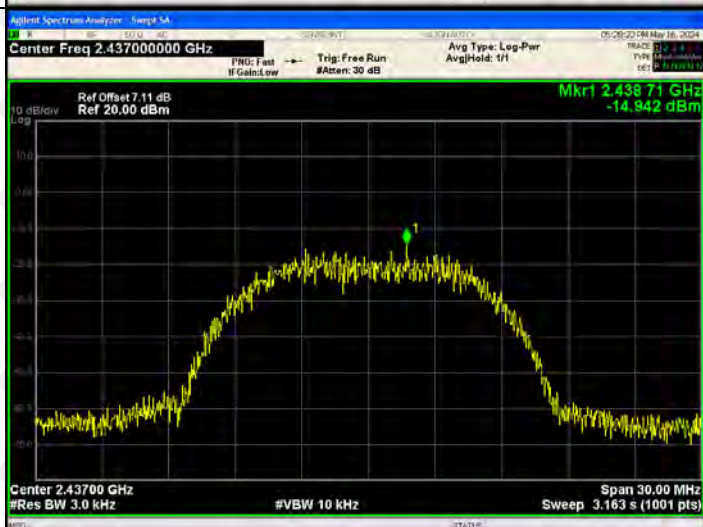


802.11b/HCH

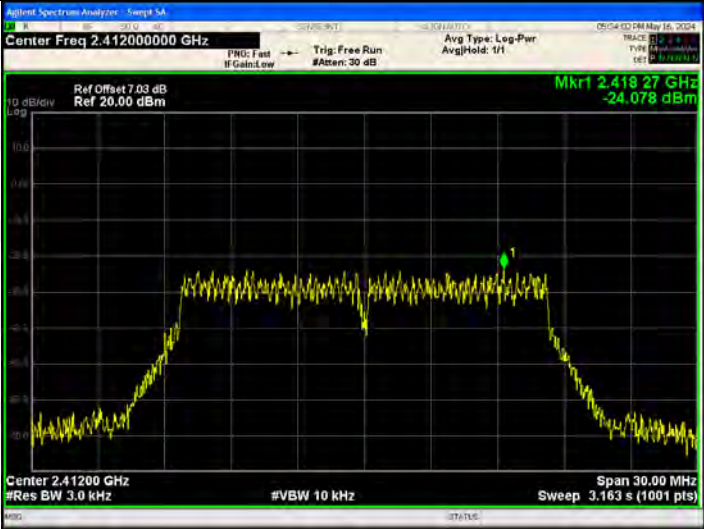

802.11g/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.418 27 GHz -24.078 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.433 88 GHz -21.803 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.462 90 GHz -23.538 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

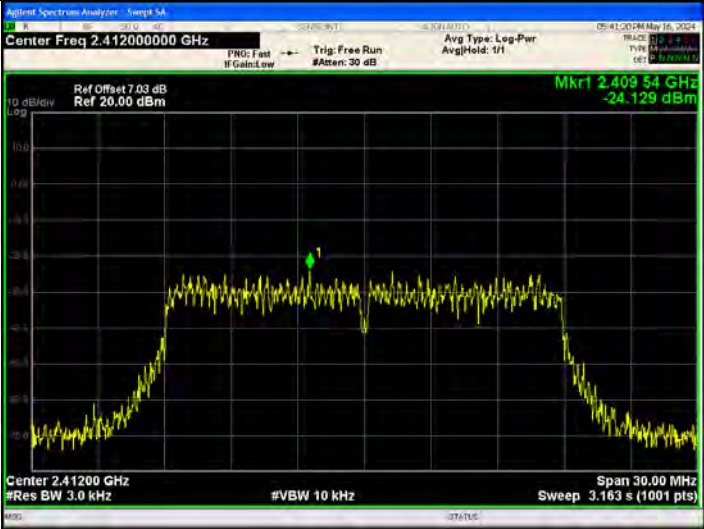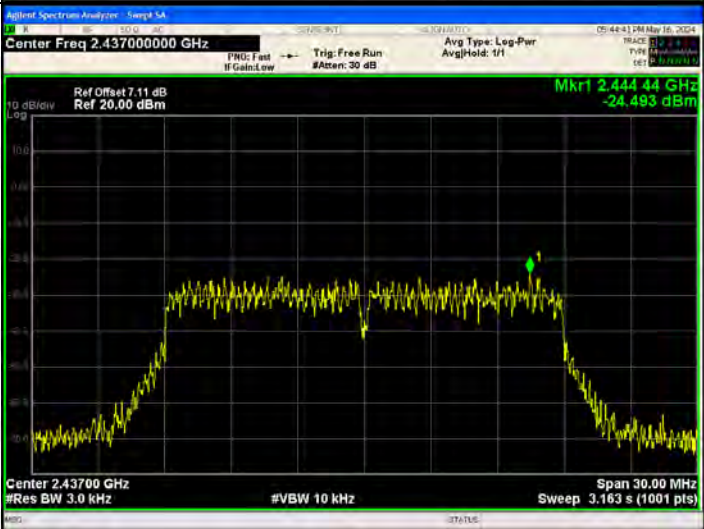802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

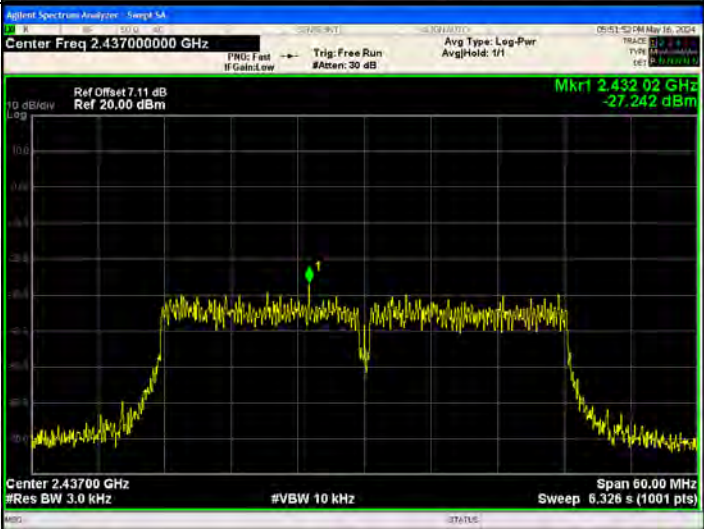802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.43076 GHz -27.761 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43202 GHz -27.242 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.44702 GHz -26.858 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is internal antenna and no consideration of replacement. The best case gain of the antenna is 7.97dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

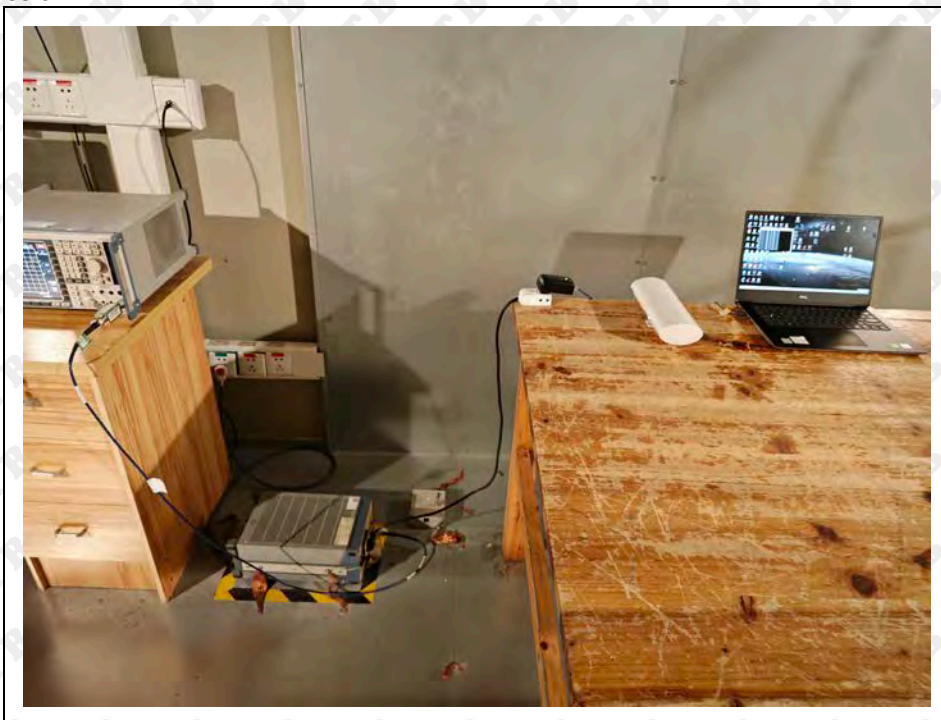

***** END OF REPORT *****