

Product specification

Quick Reference Date


	Antenna module on the system board	
Frequenc Range	2402 ~ 2480MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.35 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.35	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.68	
Maximum Power (dBm)	1.35(XY-plane)	
Minimum Power (dBm)	-0.48(XY-plane)	
Avg. Power (dBm)	-0.435(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	V ertical & Horizontal	
Company name	Shenzhen Boyun Technology Co., Ltd	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

The total length is 14mm

The total height is 5mm

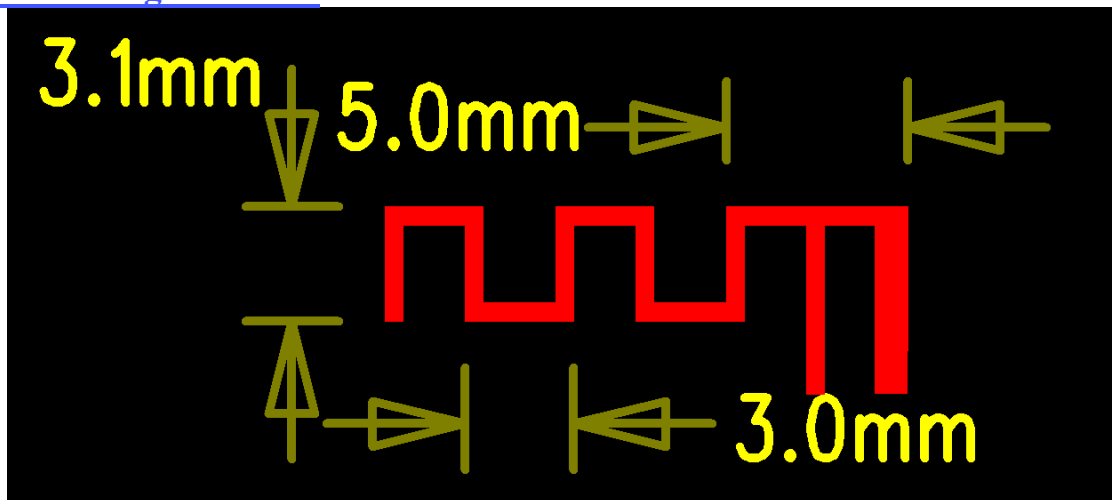


Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.88	1.1	-2.99	6 0.2 %


Return Loss

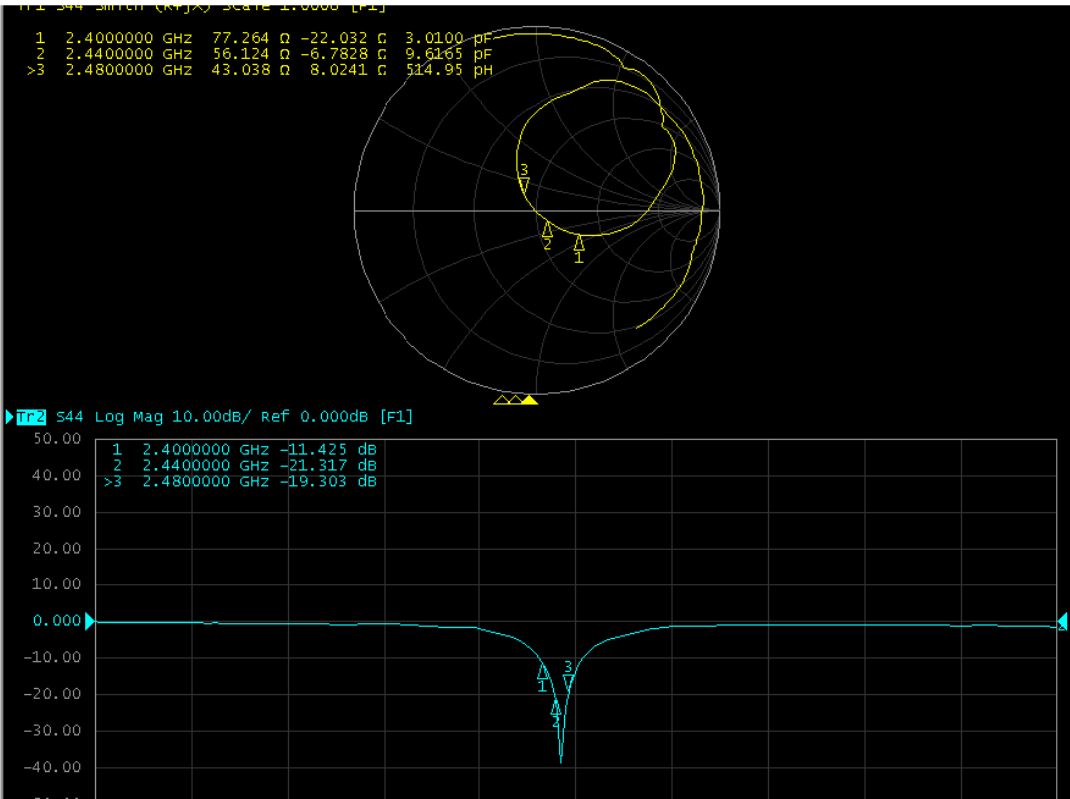

The Environment of Antenna Radiation Pattern

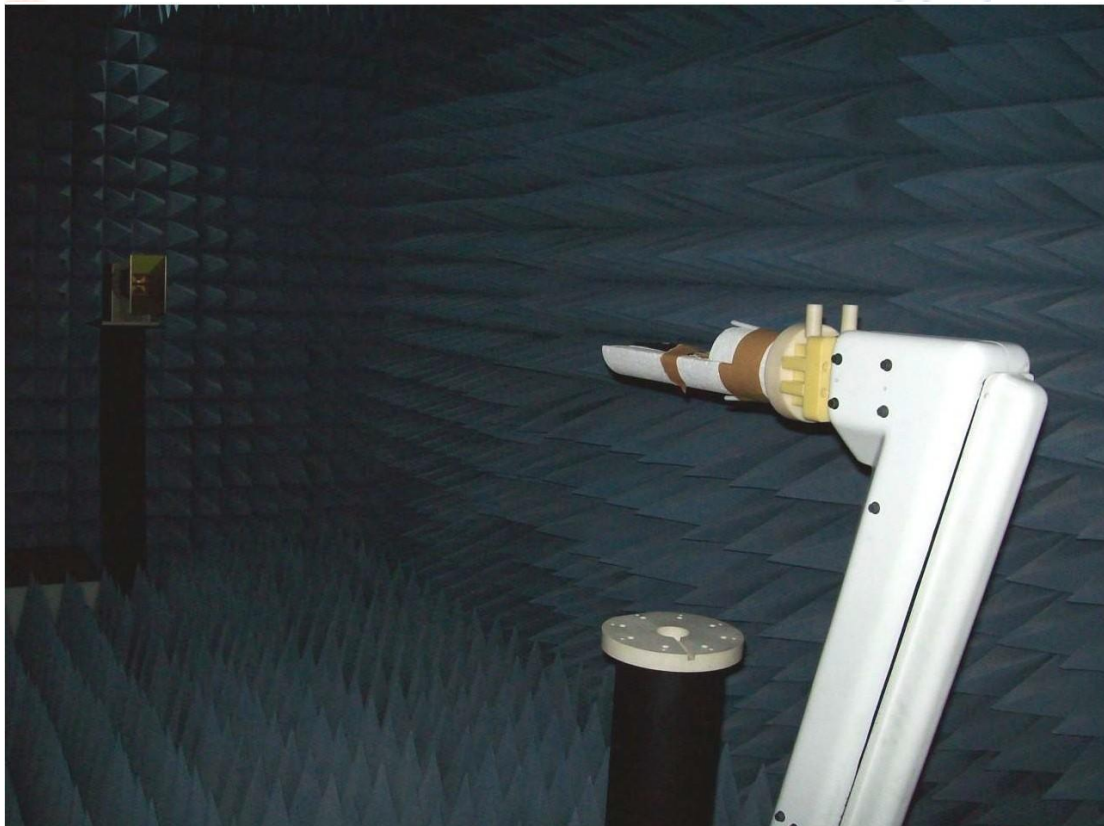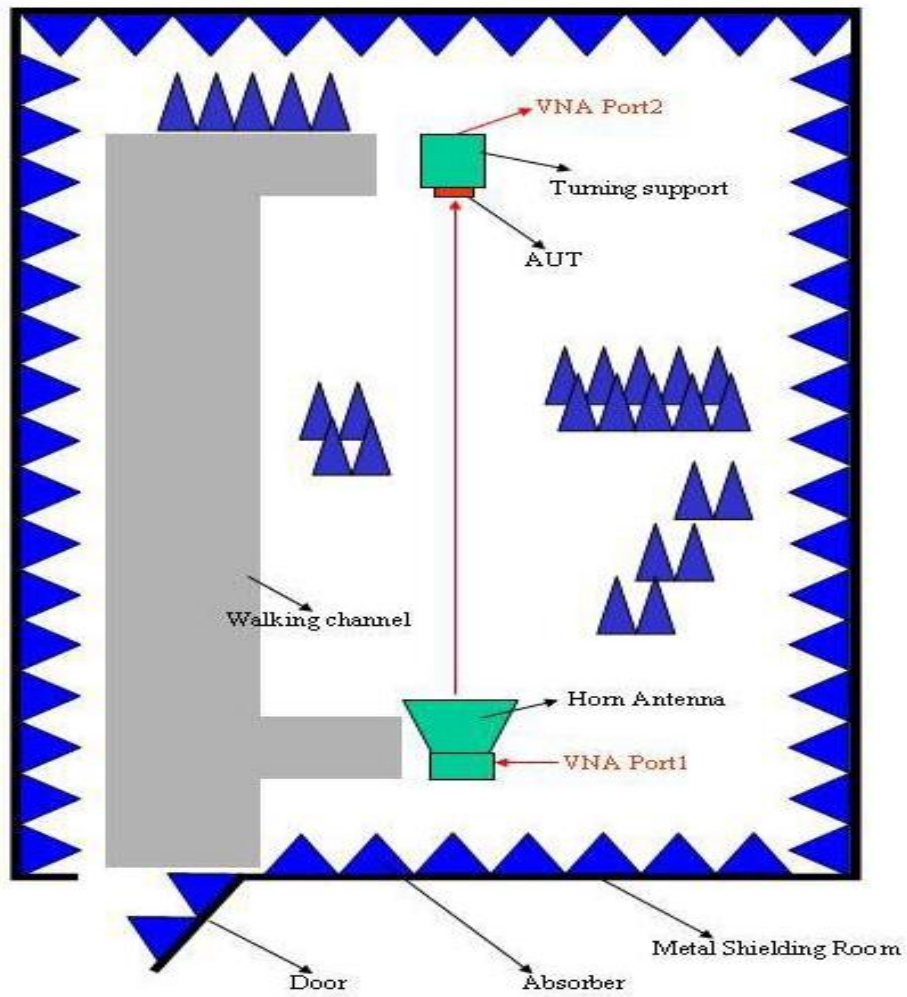


3D radiation pattern diagram

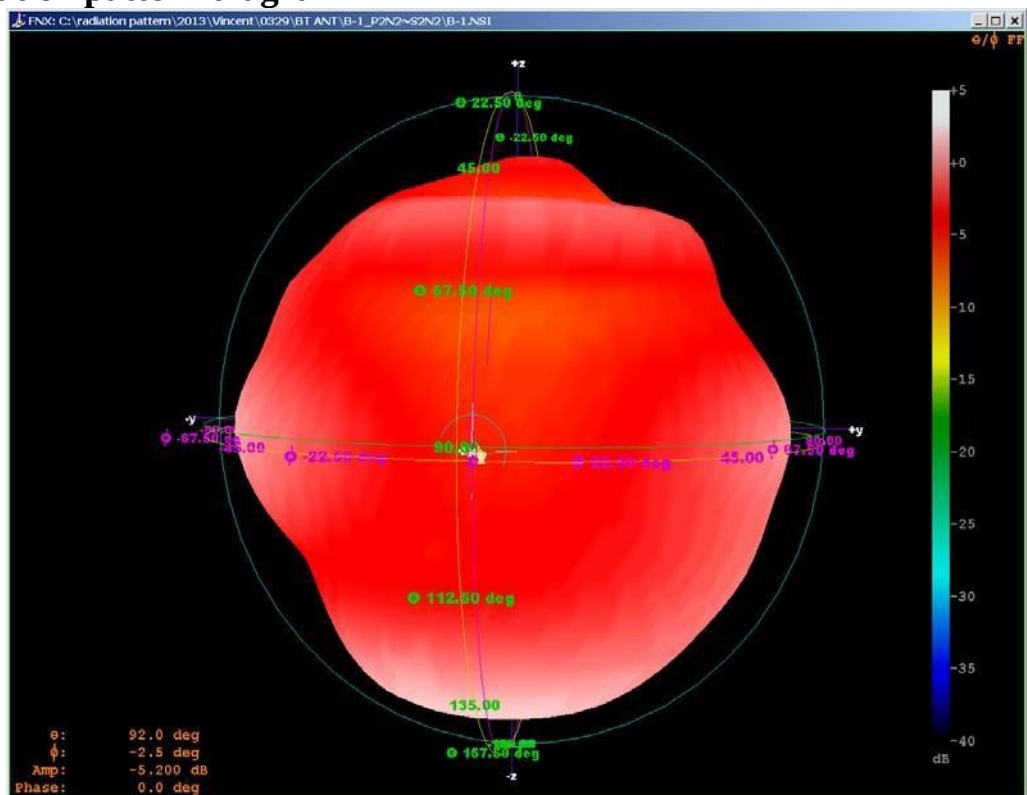


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dB; Plot AvgGain(H+V)= -0.48dB @2.44000 GHz

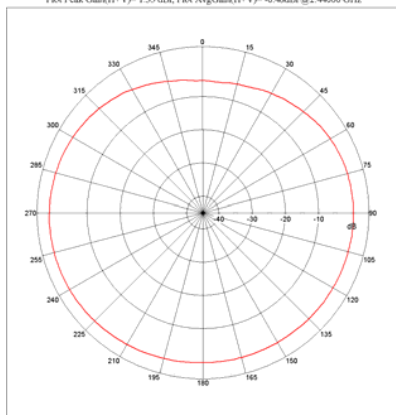

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.68 dB; Plot AvgGain(H+V)= -3.83dB @2.44000 GHz

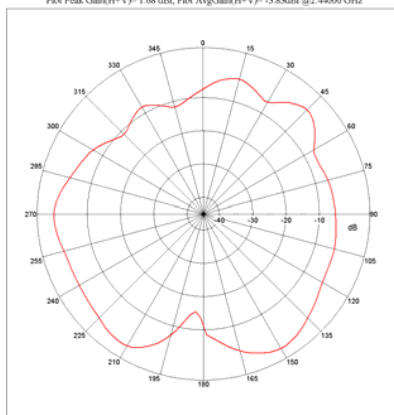

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dB; Plot AvgGain(H+V)= -2.99dB @2.44000 GHz

