

Inter**Lab**[®]

FCC Measurement/Technical Report on

125 kHz Transceiver Wireless Power Transfer

WMI2-15W-W205

FCC ID: QWY-WMI2W205W15
IC: 6588A-WMI2W205W15

Report Reference: MDE_PEIKER_1801_FCC03

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company
www.7layers.com

Table of Contents

1	Summary	3
1.1	Technical Report Summary	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary / Signatures	5
1.4	Revision History	6
2	Administrative Data	7
2.1	Testing Laboratory	7
2.2	Project Data	7
2.3	Applicant Data	7
2.4	Manufacturer Data	7
3	Test object Data	8
3.1	General EUT Description	8
3.2	EUT Main components	9
3.3	Ancillary Equipment	9
3.4	Auxiliary Equipment	9
3.5	EUT Setups	10
3.6	Operating Modes	10
3.7	Special software used for testing	10
3.8	Product labelling	10
4	Test Results	11
4.1	Spurious radiated emissions	11
4.2	Peak power output	17
4.3	Occupied bandwidth	19
5	Test equipment	22
6	Antenna Factors, Cable Loss and Sample Calculations	27
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	27
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	28
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	29
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	30
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	31
6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	32
7	Setup Drawings	33
8	Photo Report	33
9	Measurement uncertainty	34

1 Summary

1.1 Technical Report Summary

Type of Authorization

Certification for an intentional radiator: 125 kHz transmitter and tagging system

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-18 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J – Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 2.1049 Occupied bandwidth

§ 15.205 Restricted bands of operation

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Note:
ANSI C63.10-2013 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in sub-clause 1.3 Measurement Summary / Signatures.

1.2 FCC-IC Correlation Table

WPT Devices

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-216 Issue 2: 6.2.2.1 ICES-001 Issue 4: 4, 5, 7.1.1 CAN/CSA-CEI/IEC CISPR 11:04
Transmitter spurious radiated emissions	§ 15.209	RSS-216 Issue 2: 6.2.2.2 ICES-001 Issue 4: 4, 5, 7.1.1 CAN/CSA-CEI/IEC CISPR 11:04
Restricted Bands	§ 15.205	RSS-Gen Issue 5: 8.10 RSS-216 Issue 2: 6.2.3
Wanted Emission (Carrier)	§ 15.209	RSS-216 Issue 2: 6.2.2.2 ICES-001 Issue 4: 4, 5, 7.1.1 CAN/CSA-CEI/IEC CISPR 11:04
Other requirements, e.g. Transmitter frequency stability	–	RSS-Gen Issue 5: 6.11/8.11
Receiver spurious emissions	–	RSS-216 Issue 2: 6.2.2.1 ICES-001 Issue 4: 4, 5, 7.1.1 CAN/CSA-CEI/IEC CISPR 11:04
Occupied bandwidth	§ 2.1049	RSS-Gen Issue 5: 6.7

Notes:

This EUT is classified as WPT Transmitter Type 3 / Category I Radio Apparatus.

Precise / exhaustive versions of the Standards:

ICES-001: ICES-001, Issue 4, June 2006, updated November 2014

CISPR 11: CAN/CSA-CEI/IEC CISPR 11:04 (R2013): "This National Standard of Canada is equivalent to International Standard CEI/IEC CISPR 11:2003."

Publish date: 2004-06-01, Reaffirmed: 2013-09-11

Applied Standard: IEC CISPR 11:2003 + A1:2004, Edition 4.1, 2004-06

1.3 Measurement Summary / Signatures

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Radiated Emissions

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
WPT_act	Setup_01	Enclosure	passed

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Peak Output Power

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
WPT_act	Setup_01	Enclosure	passed

47 CFR Chapter I FCC Part 15, Subpart C §15.207

Conducted Emissions AC Power line

The measurement shall be performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
-	-	-	N/A (1)

47 CFR Chapter I FCC Part 2, Subpart J §2.1049

Occupied Bandwidth

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
WPT_act	Setup_01	Enclosure	performed

RSS-Gen 6.11 / 8.11

Frequency Stability

The measurement shall be performed according to ANSI C63.10

OP-Mode	Setup	Port	Final Result
-	-	-	N/A (2)

Notes:

N/A = Not applicable

(1) The EUT is DC powered. It is only intended for the use in vehicles.

(2) Not required per 8.11.

performed = no limit is applicable to the test result.

Different variants of the EUT are available:


- WMI2-15W-W205: Assembly with max. hardware integration, "worst-case" behaviour expected, integral or external NFC antenna can be selected for operation
- WMI2-15W-W205-M1: Variant without FAKRA

The results of this test report are obtained with the listed devices, please refer to sub-clauses 3.2–3.5.

1.4 Revision History

Version	Release date	Change Description	Version validity
initial	2019-10-17	--	valid

Responsible for
Accreditation Scope:



Responsible
for Test Report:



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

2 Administrative Data

2.1 Testing Laboratory

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 and IC(ISED) under the registration number: Site# 3699A-1

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
Responsible for accreditation scope: Dipl.-Ing. Marco Kullik
Report Template Version: 2019-10-08

2.2 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2019-10-17
Testing Period: 2019-07-31 to 2019-08-26

2.3 Applicant Data

Company Name: Peiker acoustic GmbH
Address: Max-Planck-Straße 28-32
61381 Friedrichsdorf
Germany
Contact Person: Mr. Marco Okhovat-Esfehani

2.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:

3 Test object Data

3.1 General EUT Description

Equipment under Test	Wireless Charging Module
Product Name	Wireless Mobile Interface2-15W
Type Designation:	WMI2-W15W-W205
Kind of Device:	125 kHz Transceiver Wireless Power Transfer
Voltage Type:	DC
Voltage level:	12 V nominal and tested voltage

3.1.1. General product description:

The EUT is a Wireless Charging Device which is intended to charge devices like mobile phones. It is capable to deliver a power of up to 15 W to a wireless charging receiver.

Two radio technologies are implemented:

1. Wireless charging transceiver operating at 125 kHz nominal frequency.
2. NFC transceiver operating at 13.56 MHz nominal frequency:
An integral or external (dedicated) antenna can be used.

The test setups incl. the auxiliaries are provided by the applicant.

For the test purpose, test cables have been used representing the cable harness that will be assembled later in the car with a length of approx. 1 m.

The auxiliaries are not subject of this test report but may impact test results.

The device is intended for professional installation only.

3.1.2. Specific product description for the EUT:

For a detailed description please refer to the documentation provided by the applicant.

3.1.3. The EUT provides the following ports:

- Enclosure
- DC/CAN connector
- Connector for either an external NFC antenna or a LED, depending on the variant
- Specific connectors to interconnect "peripherals" / units (which are not provided):
FAKRA output from passive antenna coupler, depending on the variant.

3.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1002020aa01)	WPT Transceiver	WMI2-15W-W205	0000521224	0000	RK46

Note: The short description is used to simplify the identification of the EUT in this test report.

3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
NFCEXTANT	External NFC antenna	peiker LP1456-3, Type-2	1088-111-000-00	HW-48-18	-

3.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Device	Type Designation	Serial No.	HW Status	SW Status
AUX 1	USB-CAN converter	VSCOM USB-CAN Plus	380101633	-	-
AUX 2	Laptop	Fujitsu Lifebook Model E782	DSCM004654	2012-08	Win7 Prof. Engl.
AUX 3	AC adapter of Laptop	Fujitsu FMV-AC330 FPCAC88	1231808A	2012.03	-
AUX 4	Wireless Power Receiver (WPT client)	NXP WPR1500-BUCK	35T6A1TR182409	-	-
AUX 5	Dummy Load FAKRA	50 ohm termination with Leoni Dacar 031 cable (1 m)	-	-	-
AUX 6	Dummy Load DC to simulate constant worst-case / maximum current of WPT client	1.66 ohm / 15 W (connected to AUX 4)	-	-	-

3.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A + NFCEXTANT + AUX 1 + AUX 2 + AUX 3 + AUX 4 + AUX 5 + AUX 6	EUT A with external antenna and ancillaries and auxiliaries, representative cables are connected to each connector

3.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
WPT_act	Maximum power is transferred from the EUT to AUX 4 + AUX 6	EUT is transmitting continuously at 125 kHz and information between the EUT and AUX 4 is exchanged by load modulation

3.7 Special software used for testing

EVTP Test Tool and Macros, provided by the applicant.

3.8 Product labelling

Please refer to the documentation of the applicant.

4 Test Results

4.1 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

4.1.1. Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. (Exploratory) Tests are performed at 2 orthogonal EUT orientations (vertical and horizontal) to determine the worst-case EUT orientation. In combination with the turntable rotation, emissions of at least 3 orthogonal axes are detected.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m (lowest part to ground)
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement will be performed with the following changed settings. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak besides 9–90 kHz and 110–490 kHz: Average and Peak
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated. It contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

4.1.2. Test Requirements / Limits

1) FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC §15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

2) RSS-216, 6.2.2.2, Radiated Emission Limits

The raw values obtained at the measurement distance are extrapolated to the FCC's definition distance. The limits defined in RSS-216 are calculated for these FCC's distances in order to include the limits directly in one measurement plot and to demonstrate if compliance is achieved. The verdict related to RSS-216 is basing on the margin which is constant for different distances and i.e. is not altered by these linear transformations.

Limits CISPR 11, table 3b for induction cooking (group 2) equipment:

Frequency in MHz	Limit (RSS-216) (dBµA/m) @3m	Measurement distance (m)	Limit (dBµV/m) @ FCC distance	Frequency in MHz
0.009 – 0.070	69	3	(40.5)@300m	0.009 – 0.070
0.070 – 0.1485	69 – 39 *)	3	(40.5 – 10.5)@300m	0.070 – 0.1485
0.1485 – 4.0	39 – 3 *)	3	(10.5 – -2.5)@300m	0.1485 – 0.49
			(37.5 – 14.5)@30m	0.49 – 4.0
4.0 – 30.0	3	3	(14.5)@30m	4.0 – 30.0

*) Decreasing linearly with logarithm of frequency

The alternate 60 cm loop test method and corresponding limits for small residential WPT devices is used for the tests in the frequency range 9 kHz – 30 MHz.

The measured field strength is extrapolated to the distance specified using the formula indicating that the field strength varies as the inverse distance square (40 dB per decade of distance), according to RSS-Gen, 6.5.

For fractal values of definition and reference distance the factor of $40 \cdot \text{LOG}_{10}(d_{\text{ref}}/d_{\text{def}})$ applies. Relation between electrical and magnetic field strength: $\text{dBµV} = \text{dBµA} + 51.5 \text{ dB}$.

Limits CISPR 11, table 4 for group 2 class B equipment (quasi-peak limits):

Frequency in MHz	Limit (RSS-216) (dBμV/m) @10m	Measurement distance (m)	Limit (dBμV/m) @ FCC distance
30 – 80.872	30	3	40.5@3m
80.872 – 81.848	50	3	60.5@3m
81.848 – 134.786	30	3	40.5@3m
134.786 – 136.414	50	3	60.5@3m
136.414 – 230	30	3	40.5@3m
230 – 1000	37	3	47.5@3m

Transformation of the limit at 10 m to the distance of 3 m: $20 \cdot \text{LOG}_{10}(10\text{m}/3\text{m}) = 10.5 \text{ dB}$

4.1.3. Test Protocol

Temperature: 26-27 °C
Air Pressure: 1005-1011 hPa
Humidity: 36-45 %

Measurement up to 30 MHz

Op. Mode		Setup		Port						
WPT_act		Setup_01		Enclosure						
Antenna orien- tation	EUT orien- tation	Fre- quency MHz	Corrected value dBµV / m			Limit dBµV / m	Limit dBµV / m	Limit dBµV / m	Margin dB	Margin dB
			QP	Peak	AV	QP	Peak	AV	QP/ Peak	AV
Vertical	Vertical	0.125	–	9.9	8.8	–	45.7	25.7	35.8	16.9
Vertical	Vertical	0.375	–	-11.7	-12.1	–	36.1	16.1	47.8	28.2
Vertical	Vertical	0.625	20.3	–	–	31.7	–	–	11.4	–


Measurement above 30 MHz

Op. Mode		Setup			Port					
WPT_act		Setup_01			Enclosure					
Antenna orien- tation	EUT orien- tation	Fre- quency MHz	Corrected value dBµV / m			Limit dBµV / m	Limit dBµV / m	Limit dBµV / m	Margin dB	Margin dB
			QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical	Vertical	35.88	31.4	—	—	40.0	—	—	8.6	—

Remark: None.


4.1.4. Measurement Plots (worst case)

Below 30 MHz

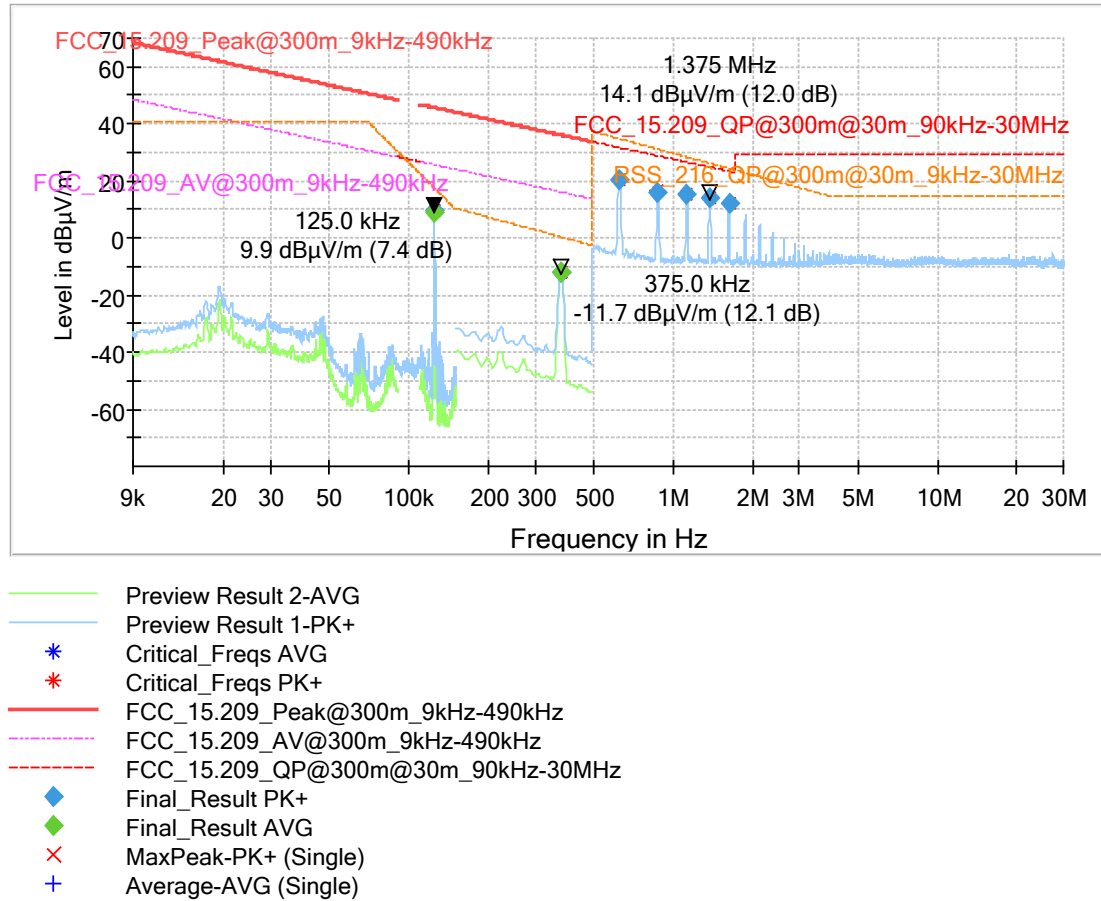

Note: The markers show the margin to the RSS-216 limit.

Above 30 MHz

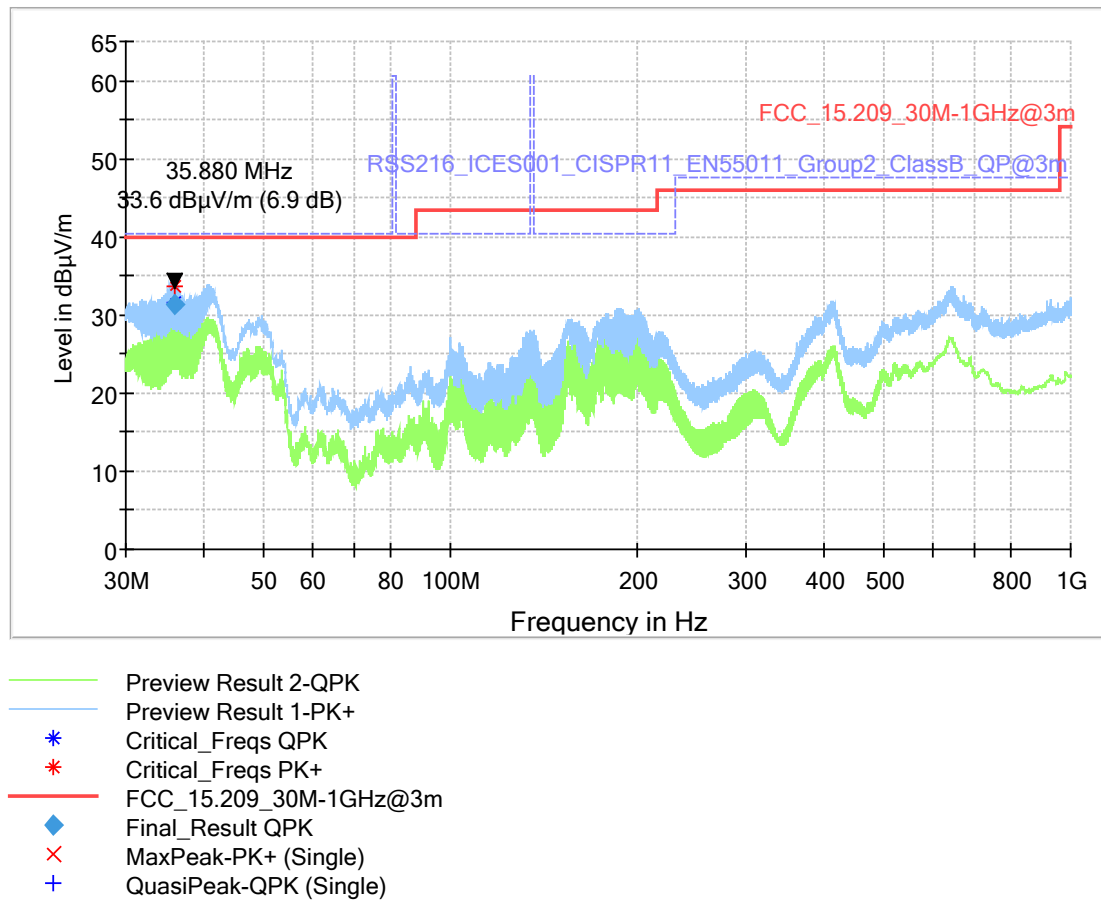

Note: The markers show the margin to the RSS-216 limit.

4.1.5. Test Equipment used

- Radiated Emissions

4.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

4.2.1. Test Description

Please refer to sub-clause 4.1.1.

4.2.2. Test Limits

Please refer to sub-clause 4.1.2.

4.2.3. Test Protocol


Temperature: 26 °C
Air Pressure: 1005 hPa
Humidity: 45 %

Op. Mode	Setup	Port
WPT_act	Setup_01	Enclosure

Antenna orientation	EUT orientation	Frequency kHz	Maximum radiated field strength at fundamental frequency (corrected) dBμV / m	Limit dBμV / m	Margin dB
Parallel	Vertical	125.00	AV = PK 9.9	AV 25.7	AV 15.8

4.2.4. Measurement Plot (worst case)

EUT A

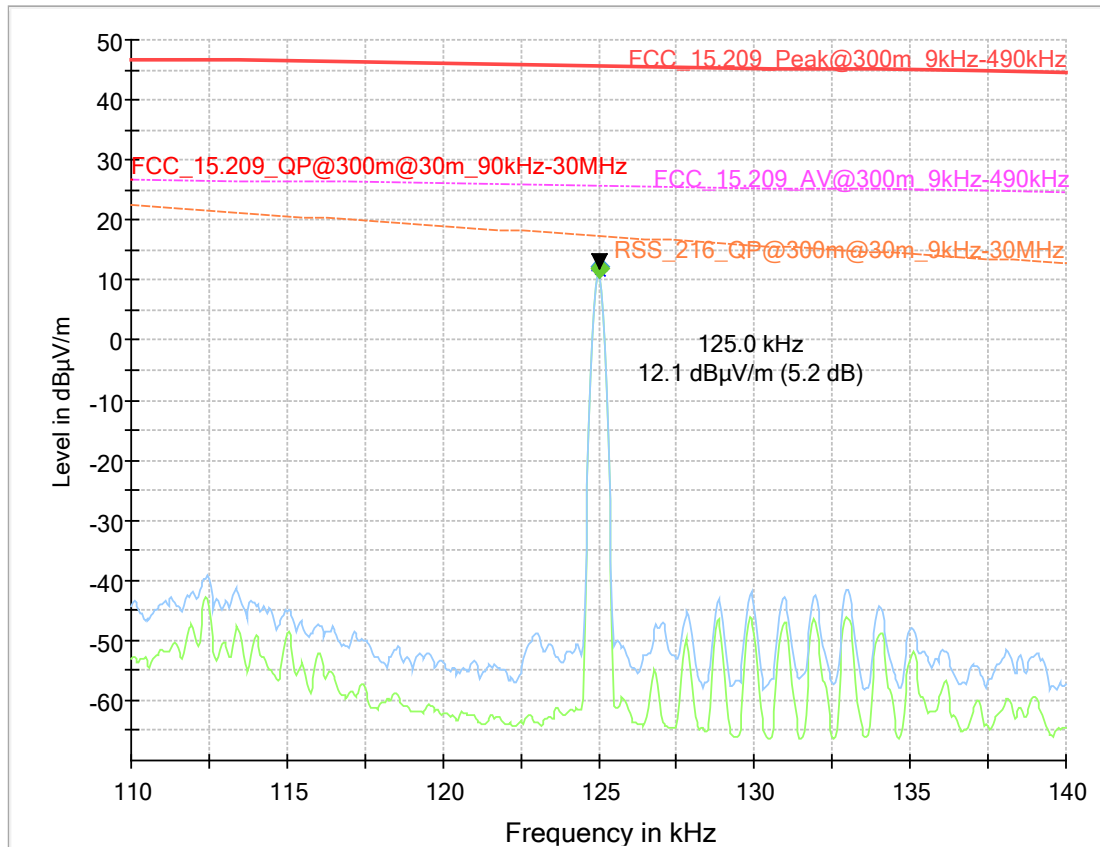

Note: The marker shows the margin to the RSS-216 limit.

4.2.5. Test Equipment used

- Radiated Emissions

4.3 Occupied bandwidth

Standard FCC Part 2, Subpart J, §2.1049

The test was performed according to: ANSI C63.10

4.3.1. Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth.

4.3.2. Test Requirements / Limits

FCC Part 15, Subpart C, §15.209 does not contain any requirement related to the bandwidth.

4.3.3. Test Protocol


Temperature: 24 °C
Air Pressure: 1009 hPa
Humidity: 46 %

Op. Mode	Setup	Port
WPT_act	Setup_01	Enclosure

20 dBc bandwidth	99% occupied bandwidth
1.37 kHz	1.28 kHz


4.3.4. Measurement Plot (worst case)

20 dBc Bandwidth

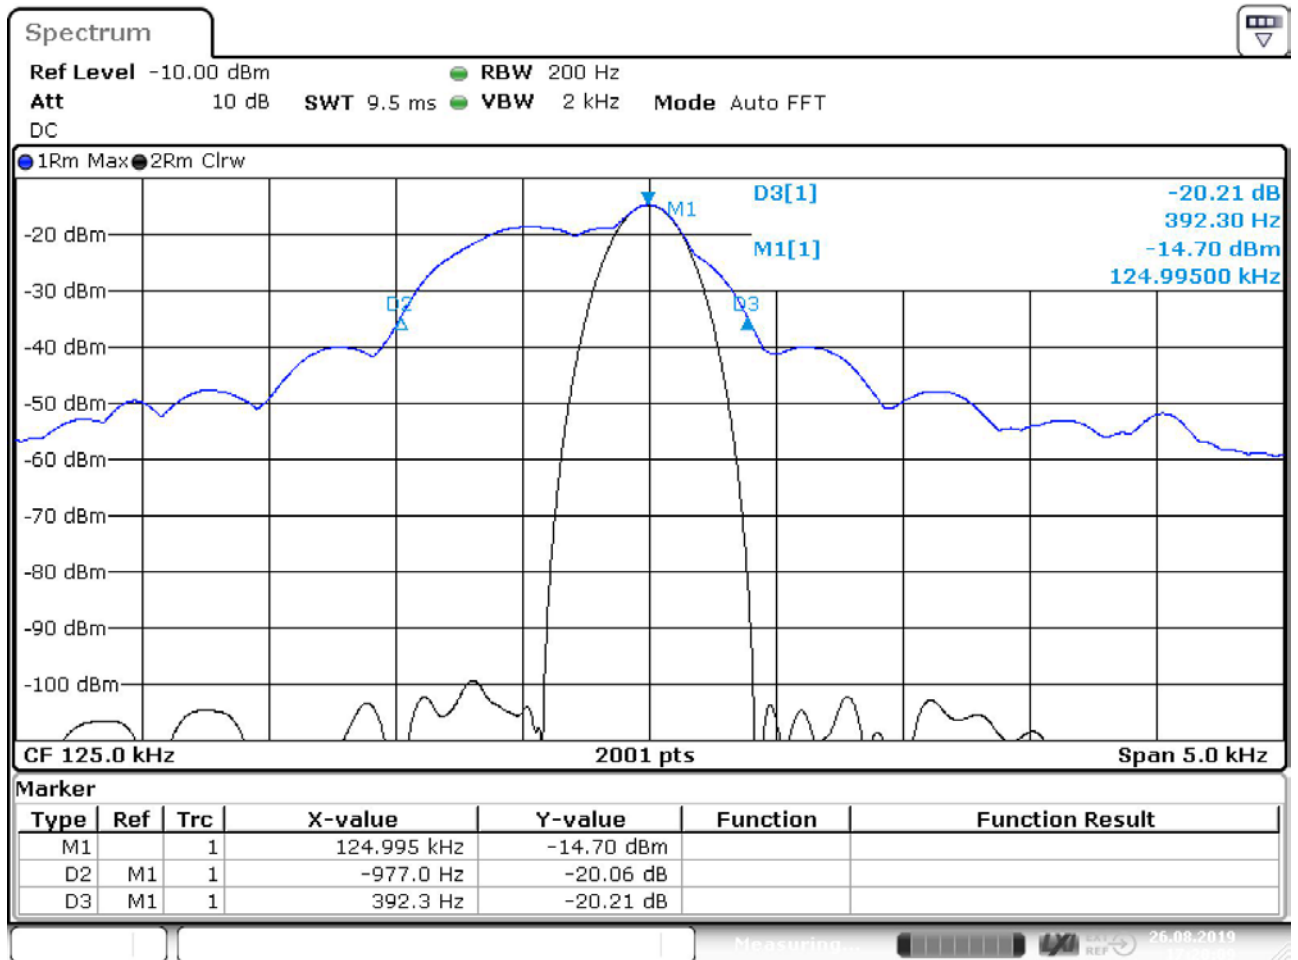

Date: 26.AUG.2019 17:20:09

99% Occupied Bandwidth

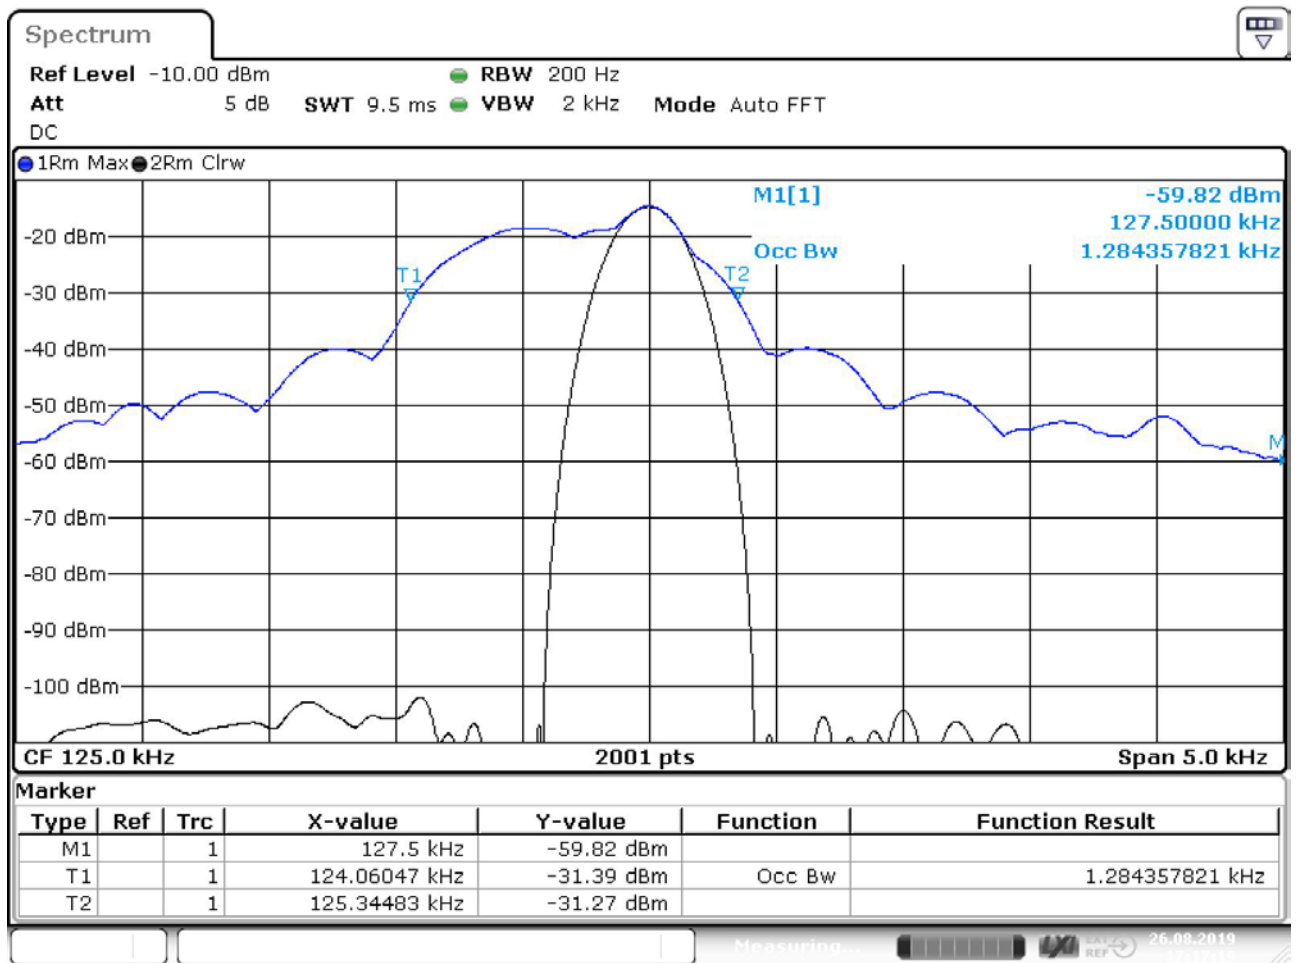

Date: 26.AUG.2019 17:17:20

4.3.5. Test Equipment used

- R&S TS8997

5 Test equipment

1

Radiated Emissions
Lab to perform radiated emission tests

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2018-10	2020-10
1.2	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515		
1.3	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13	Lufft Mess- und Regeltechnik GmbH	ID 13936	2019-05	2021-05
1.4	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-11
1.5	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia	none	2018-06	2020-06
1.6	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12
1.7	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03
1.8	SGH-05	Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz)	RPG-Radiometer Physics GmbH	075		
1.9	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2018-07	2021-07
1.10	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq			
1.11	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
1.12	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
1.13	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2018-06	2020-06
1.14	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.15	WRD1920/1980-5/22-5EESD	Tunable Band Reject Filter	Wainwright Instruments GmbH	11		
1.16	TDS 784C	Digital Oscilloscope [SA2] (Aux)	Tektronix	B021311		
1.17	foRS232 Unit 2	Fibre optic link RS232	PONTIS Messtechnik GmbH	4031516037		

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.18	PONTIS Con4101	PONTIS Camera Controller		6061510370		
1.19	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016	2019-08	2020-08
1.20	OLS-1 R	Fibre optic link USB 1.1	Ingenieurbüro Scheiba	018		
1.21	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002	2018-09	2021-09
1.22	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
1.23	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2019-02	2021-02
1.24	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
1.25	foRS232 Unit 1	Fibre optic link RS232	PONTIS Messtechnik GmbH	4021516036		
1.26	FSP3	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	836722/011		
1.27	SGH-19	Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)	RPG-Radiometer Physics GmbH	093		
1.28	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09		
1.29	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99		
1.30	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
1.31	foUSB-M Converter 2	Fibre optic link USB 2.0	PONTIS Messtechnik GmbH	4471520061		
1.32	WRCD1879.8-0.2/40-10EE	Notch Filter Ultra Stable	Wainwright Instruments GmbH	16		
1.33	Chroma 6404	AC Source	Chroma ATE INC.	64040001304		
1.34	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
1.35	TT 1.5 WI	Turn Table	Maturo GmbH	-		
1.36	HL 562 ULTRALOG	Biconical-log-per Antenna (30 MHz - 3 GHz)	Rohde & Schwarz GmbH & Co. KG	100609	2019-05	2022-05
1.37	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
1.38	foCAN (v 4.0)	Fibre optic link CAN	Audivo GmbH (PONTIS EMC)	492 1607 014		
1.39	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03
1.40	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
1.41	MA4985-XP-ET	Bore Sight Antenna Mast	innco systems GmbH	none		

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.42	SGH-08	Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)	RPG-Radiometer Physics GmbH	064		
1.43	A8455-4	4 Way Power Divider (SMA)		-		
1.44	SGH-12	Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)	RPG-Radiometer Physics GmbH	326		
1.45	Air compressor	Anechoic Chamber; 8.8m x 4.6 m x 4.05 m	JUN-AIR Deutschland GmbH	612582		
1.46	foEthernet_M	Fibre optic link Ethernet / Gb-LAN	PONTIS Messtechnik GmbH	4841516023		
1.47	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
1.48	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
1.49	OLS-1 M	Fibre optic link USB 1.1	Ingenieurbüro Scheiba	018		
1.50	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
1.51	Voltcraft M-3860M	Digital Multimeter 01 (Multimeter)	Conrad	IJ096055		
1.52	Opus10 THI (8152.00)	ThermoHygro Datalogger 12	Lufft Mess- und Regeltechnik GmbH	ID 12482	2019-06	2021-06
1.53	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2019-01	2020-01
1.54	foEthernet_M	Fibre optic link Ethernet / Gb-LAN	PONTIS Messtechnik GmbH	4841516022		
1.55	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
1.56	AS 620 P	Antenna Mast (pneumatic polarisation)	HD GmbH	620/37		
1.57	6005D (30 V / 5 A)	Laboratory Power Supply 120 V 60 Hz	Peaktech	81062045		
1.58	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709		
1.59	SGH-03	Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz)	RPG-Radiometer Physics GmbH	060		
1.60	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
1.61	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.62	Innco Systems CO3000	Controller for bore sight mast SAC	innco systems GmbH	CO3000/967/393 71016/L		
1.63	NRV-Z1	Sensor Head B	Rohde & Schwarz GmbH & Co. KG	827753/006	2019-08	2020-08
1.64	foCAN (v 4.0)	Fibre optic link CAN	Audivo GmbH (PONTIS EMC)	492 1607 013		
1.65	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
1.66	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
1.67	WRCA800/960-0.2/40-6EEK	Tunable Notch Filter	Wainwright Instruments GmbH	20		
1.68	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/11920 513		
1.69	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2018-07	2021-07
1.70	E4408B	Spectrum Analyser (9 kHz to 26.5 GHz)	Agilent Technologies Deutschland GmbH	MY45103714		

2 R&S TS8997
Lab to perform bandwidth test

Ref. No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
2.2	MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2019-08	2020-08
2.3	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
2.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
2.6	VT 4002	Temperature Chamber	Vötsch	58566002150010	2018-04	2020-04
2.7	A8455-4	4 Way Power Divider (SMA)		-		
2.8	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2019-06	2021-06
2.9	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2016-10	2019-10
2.10	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz	101158	2018-05	2021-05

The calibration interval is the time interval between "Last Calibration" and "Calibration Due".

6 Antenna Factors, Cable Loss and Sample Calculations

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

6.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)

Frequency		Corr.	LISN insertion loss ESH3- Z5	cable loss (incl. 10 dB atten- uator)
MHz		dB	dB	dB
0,15		10,1	0,1	10,0
5		10,3	0,1	10,2
7		10,5	0,2	10,3
10		10,5	0,2	10,3
12		10,7	0,3	10,4
14		10,7	0,3	10,4
16		10,8	0,4	10,4
18		10,9	0,4	10,5
20		10,9	0,4	10,5
22		11,1	0,5	10,6
24		11,1	0,5	10,6
26		11,2	0,5	10,7
28		11,2	0,5	10,7
30		11,3	0,5	10,8

Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

6.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)

Frequency	AF HFH-Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d _{Limit} (meas. distance (limit)	d _{used} (meas. distance (used)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
0,009	20,50	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,01	20,45	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,015	20,37	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,02	20,36	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,025	20,38	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,03	20,32	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,05	20,35	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,08	20,30	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,1	20,20	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,2	20,17	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,3	20,14	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,49	20,12	-79,6	0,1	0,1	0,1	0,1	-80	300	3
0,490001	20,12	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,5	20,11	-39,6	0,1	0,1	0,1	0,1	-40	30	3
0,8	20,10	-39,6	0,1	0,1	0,1	0,1	-40	30	3
1	20,09	-39,6	0,1	0,1	0,1	0,1	-40	30	3
2	20,08	-39,6	0,1	0,1	0,1	0,1	-40	30	3
3	20,06	-39,6	0,1	0,1	0,1	0,1	-40	30	3
4	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
5	20,05	-39,5	0,2	0,1	0,1	0,1	-40	30	3
6	20,02	-39,5	0,2	0,1	0,1	0,1	-40	30	3
8	19,95	-39,5	0,2	0,1	0,1	0,1	-40	30	3
10	19,83	-39,4	0,2	0,1	0,2	0,1	-40	30	3
12	19,71	-39,4	0,2	0,1	0,2	0,1	-40	30	3
14	19,54	-39,4	0,2	0,1	0,2	0,1	-40	30	3
16	19,53	-39,3	0,3	0,1	0,2	0,1	-40	30	3
18	19,50	-39,3	0,3	0,1	0,2	0,1	-40	30	3
20	19,57	-39,3	0,3	0,1	0,2	0,1	-40	30	3
22	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
24	19,61	-39,3	0,3	0,1	0,2	0,1	-40	30	3
26	19,54	-39,3	0,3	0,1	0,2	0,1	-40	30	3
28	19,46	-39,2	0,3	0,1	0,3	0,1	-40	30	3
30	19,73	-39,1	0,4	0,1	0,3	0,1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 \cdot \log(d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

6.3 Antenna R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency MHz	AF R&S HL562 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d_{Limit} (meas. distance (limit)) m	d_{used} (meas. distance (used)) m
30	18,6	0,6	0,29	0,04	0,23	0,02	0,0	3	3
50	6,0	0,9	0,39	0,09	0,32	0,08	0,0	3	3
100	9,7	1,2	0,56	0,14	0,47	0,08	0,0	3	3
150	7,9	1,6	0,73	0,20	0,59	0,12	0,0	3	3
200	7,6	1,9	0,84	0,21	0,70	0,11	0,0	3	3
250	9,5	2,1	0,98	0,24	0,80	0,13	0,0	3	3
300	11,0	2,3	1,04	0,26	0,89	0,15	0,0	3	3
350	12,4	2,6	1,18	0,31	0,96	0,13	0,0	3	3
400	13,6	2,9	1,28	0,35	1,03	0,19	0,0	3	3
450	14,7	3,1	1,39	0,38	1,11	0,22	0,0	3	3
500	15,6	3,2	1,44	0,39	1,20	0,19	0,0	3	3
550	16,3	3,5	1,55	0,46	1,24	0,23	0,0	3	3
600	17,2	3,5	1,59	0,43	1,29	0,23	0,0	3	3
650	18,1	3,6	1,67	0,34	1,35	0,22	0,0	3	3
700	18,5	3,6	1,67	0,42	1,41	0,15	0,0	3	3
750	19,1	4,1	1,87	0,54	1,46	0,25	0,0	3	3
800	19,6	4,1	1,90	0,46	1,51	0,25	0,0	3	3
850	20,1	4,4	1,99	0,60	1,56	0,27	0,0	3	3
900	20,8	4,7	2,14	0,60	1,63	0,29	0,0	3	3
950	21,1	4,8	2,22	0,60	1,66	0,33	0,0	3	3
1000	21,6	4,9	2,23	0,61	1,71	0,30	0,0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18,6	-9,9	0,29	0,04	0,23	0,02	-10,5	10	3
50	6,0	-9,6	0,39	0,09	0,32	0,08	-10,5	10	3
100	9,7	-9,2	0,56	0,14	0,47	0,08	-10,5	10	3
150	7,9	-8,8	0,73	0,20	0,59	0,12	-10,5	10	3
200	7,6	-8,6	0,84	0,21	0,70	0,11	-10,5	10	3
250	9,5	-8,3	0,98	0,24	0,80	0,13	-10,5	10	3
300	11,0	-8,1	1,04	0,26	0,89	0,15	-10,5	10	3
350	12,4	-7,9	1,18	0,31	0,96	0,13	-10,5	10	3
400	13,6	-7,6	1,28	0,35	1,03	0,19	-10,5	10	3
450	14,7	-7,4	1,39	0,38	1,11	0,22	-10,5	10	3
500	15,6	-7,2	1,44	0,39	1,20	0,19	-10,5	10	3
550	16,3	-7,0	1,55	0,46	1,24	0,23	-10,5	10	3
600	17,2	-6,9	1,59	0,43	1,29	0,23	-10,5	10	3
650	18,1	-6,9	1,67	0,34	1,35	0,22	-10,5	10	3
700	18,5	-6,8	1,67	0,42	1,41	0,15	-10,5	10	3
750	19,1	-6,3	1,87	0,54	1,46	0,25	-10,5	10	3
800	19,6	-6,3	1,90	0,46	1,51	0,25	-10,5	10	3
850	20,1	-6,0	1,99	0,60	1,56	0,27	-10,5	10	3
900	20,8	-5,8	2,14	0,60	1,63	0,29	-10,5	10	3
950	21,1	-5,6	2,22	0,60	1,66	0,33	-10,5	10	3
1000	21,6	-5,6	2,23	0,61	1,71	0,30	-10,5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.4 Antenna R&S HF907 (1 GHz – 18 GHz)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24,4	-19,4
2000	28,5	-17,4
3000	31,0	-16,1
4000	33,1	-14,7
5000	34,4	-13,7
6000	34,7	-12,7
7000	35,6	-11,0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0,99	0,31	-21,51	0,79		
1,44	0,44	-20,63	1,38		
1,87	0,53	-19,85	1,33		
2,41	0,67	-19,13	1,31		
2,78	0,86	-18,71	1,40		
2,74	0,90	-17,83	1,47		
2,82	0,86	-16,19	1,46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31,0	-23,4
4000	33,1	-23,3
5000	34,4	-21,7
6000	34,7	-21,2
7000	35,6	-19,8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0,47	1,87	0,53	-27,58	1,33	
0,56	2,41	0,67	-28,23	1,31	
0,61	2,78	0,86	-27,35	1,40	
0,58	2,74	0,90	-26,89	1,47	
0,66	2,82	0,86	-25,58	1,46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35,6	-57,3
8000	36,3	-56,3
9000	37,1	-55,3
10000	37,5	-56,2
11000	37,5	-55,3
12000	37,6	-53,7
13000	38,2	-53,5
14000	39,9	-56,3
15000	40,9	-54,1
16000	41,3	-54,1
17000	42,8	-54,4
18000	44,2	-54,7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0,56	1,28	-62,72	2,66	0,94	1,46
0,69	0,71	-61,49	2,84	1,00	1,53
0,68	0,65	-60,80	3,06	1,09	1,60
0,70	0,54	-61,91	3,28	1,20	1,67
0,80	0,61	-61,40	3,43	1,27	1,70
0,84	0,42	-59,70	3,53	1,26	1,73
0,83	0,44	-59,81	3,75	1,32	1,83
0,91	0,53	-63,03	3,91	1,40	1,77
0,98	0,54	-61,05	4,02	1,44	1,83
1,23	0,49	-61,51	4,17	1,51	1,85
1,36	0,76	-62,36	4,34	1,53	2,00
1,70	0,53	-62,88	4,41	1,55	1,91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40,2	-23,5	0,72	-35,85	6,20	2,81	2,65
18500	40,2	-23,2	0,69	-35,71	6,46	2,76	2,59
19000	40,2	-22,0	0,76	-35,44	6,69	3,15	2,79
19500	40,3	-21,3	0,74	-35,07	7,04	3,11	2,91
20000	40,3	-20,3	0,72	-34,49	7,30	3,07	3,05
20500	40,3	-19,9	0,78	-34,46	7,48	3,12	3,15
21000	40,3	-19,1	0,87	-34,07	7,61	3,20	3,33
21500	40,3	-19,1	0,90	-33,96	7,47	3,28	3,19
22000	40,3	-18,7	0,89	-33,57	7,34	3,35	3,28
22500	40,4	-19,0	0,87	-33,66	7,06	3,75	2,94
23000	40,4	-19,5	0,88	-33,75	6,92	3,77	2,70
23500	40,4	-19,3	0,90	-33,35	6,99	3,52	2,66
24000	40,4	-19,8	0,88	-33,99	6,88	3,88	2,58
24500	40,4	-19,5	0,91	-33,89	7,01	3,93	2,51
25000	40,4	-19,3	0,88	-33,00	6,72	3,96	2,14
25500	40,5	-20,4	0,89	-34,07	6,90	3,66	2,22
26000	40,5	-21,3	0,86	-35,11	7,02	3,69	2,28
26500	40,5	-21,1	0,90	-35,20	7,15	3,91	2,36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{Limit} (meas. distance (limit))	d _{used} (meas. distance (used))
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26,5	43,4	-11,2	4,4				-9,5	3	1
27,0	43,4	-11,2	4,4				-9,5	3	1
28,0	43,4	-11,1	4,5				-9,5	3	1
29,0	43,5	-11,0	4,6				-9,5	3	1
30,0	43,5	-10,9	4,7				-9,5	3	1
31,0	43,5	-10,8	4,7				-9,5	3	1
32,0	43,5	-10,7	4,8				-9,5	3	1
33,0	43,6	-10,7	4,9				-9,5	3	1
34,0	43,6	-10,6	5,0				-9,5	3	1
35,0	43,6	-10,5	5,1				-9,5	3	1
36,0	43,6	-10,4	5,1				-9,5	3	1
37,0	43,7	-10,3	5,2				-9,5	3	1
38,0	43,7	-10,2	5,3				-9,5	3	1
39,0	43,7	-10,2	5,4				-9,5	3	1
40,0	43,8	-10,1	5,5				-9,5	3	1

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7 Setup Drawings

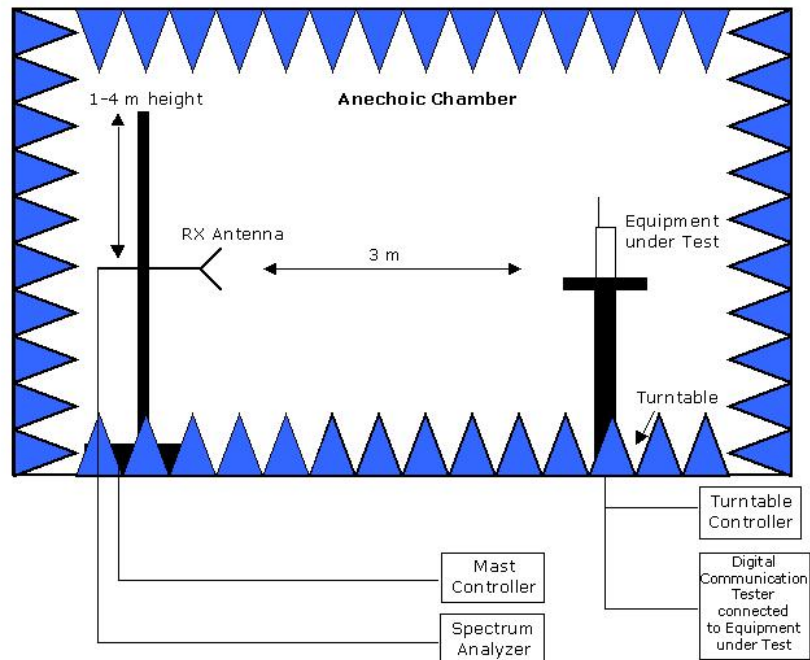

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces.


8 Photo Report

Photos are included in an external report.

9 Measurement uncertainty

Test Case	Parameter	Uncertainty
Peak power output	Fieldstrength	± 5.5 dB
Occupied bandwidth	Power Frequency:	± 2.9 dB ± 0.125 kHz
Spurious radiated emissions	Fieldstrength Frequency:	± 5.5 dB ± 11.2 kHz
AC Power Line	Power	± 3.4 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

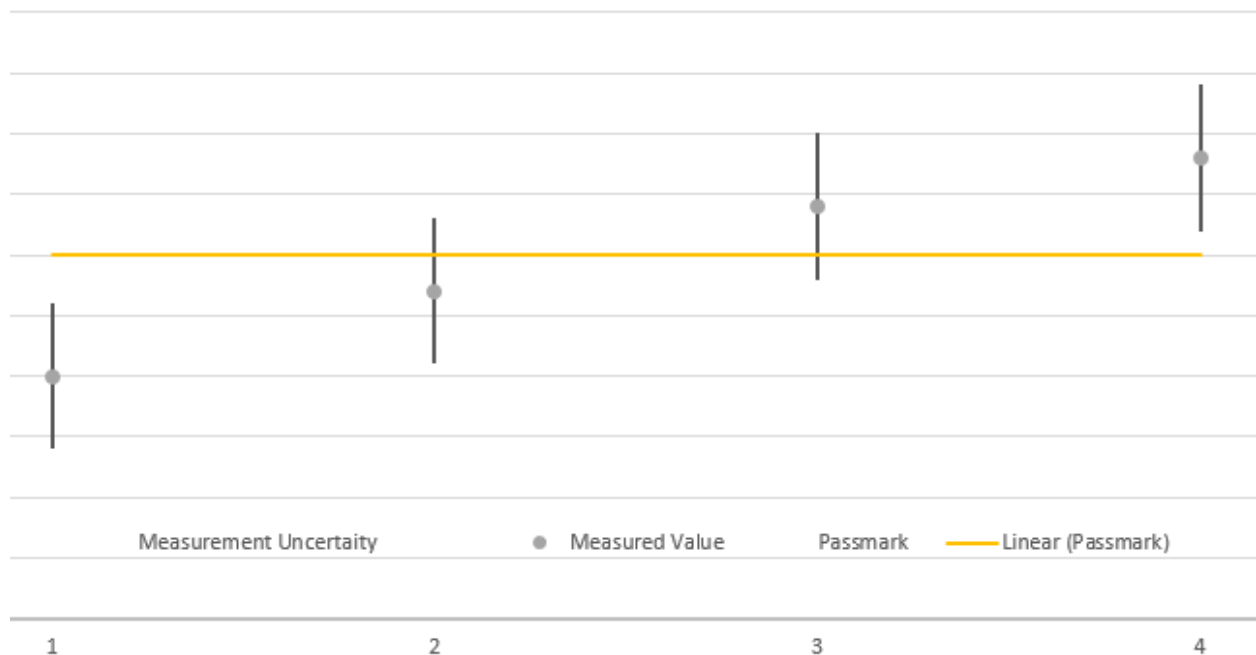

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.