

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

INDUSTRY CANADA RSS-247

Test Standard	FCC Part 15.247 and RSS-247 Issue 1
FCC ID	A4C-1000BA
ISED No.	10199A-1000BA
Trade name	Rand McNally
Product name	OverDryve™ 7c
Model No.	OD7C
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

The sample selected for test was production product and was provided by manufacturer.



Approved by:

A handwritten signature in black ink, appearing to read "Sam Chuang".

Sam Chuang
Manager

Reviewed by:

A handwritten signature in black ink, appearing to read "Ed Chiang".

Ed Chiang
Engineer

Revision History

Rev.	Issue Date	Revisions	Revised By
00	February 7, 2017	Initial Issue	Angel Cheng
01	March 24, 2017	1. Remove Remark in page 4. 2. Revise section 3.3 in page 12. 3. Revise section 4.2.4 in page 16. 4. Revised section 4.8.2 Duty Cycle in page 34. 5. Add Test Setup Photos in page 61, 62. 6. Revise section 1.3 Antenna Category in page 5.	Doris Chu

Table of contents

1. GENERAL INFORMATION.....	4
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION.....	5
1.3 ANTENNA INFORMATION.....	5
1.4 MEASUREMENT UNCERTAINTY	6
1.5 FACILITIES AND TEST LOCATION	6
1.6 INSTRUMENT CALIBRATION	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT	8
2. TEST SUMMERY	9
3. DESCRIPTION OF TEST MODES.....	10
3.1 THE WORST MODE OF OPERATING CONDITION.....	10
3.2 THE WORST MODE OF MEASUREMENT	11
3.3 EUT DUTY CYCLE	12
4. TEST RESULT	13
4.1 AC POWER LINE CONDUCTED EMISSION	13
4.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	16
4.3 OUTPUT POWER MEASUREMENT	19
4.4 FREQUENCY SEPARATION.....	21
4.5 NUMBER OF HOPPING	24
4.6 CONDUCTED BANDEGE AND SPURIOUS EMISSION	26
4.7 TIME OF OCCUPANCY (DWELL TIME)	31
4.8 RADIATION BANDEGE AND SPURIOUS EMISSION	33
APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	RM Acquisition, LLC 9855 Woods Drive Skokie, IL 60077 USA.
Equipment	OverDryve™ 7c
Model Name	OD7C
Model Discrepancy	N/A
EUT Functions	IEEE 802.11b/g/n+BT+GPS+FM
Received Date	Dec 28, 2016
Date of Test	Jan 02, 2017 ~ Jan 18, 2017
Output Power(W)	GFSK : 0.0056 (EIRP : 0.0105) 8DPSK : 0.0047 (EIRP : 0.0089)
Power Operation	<input type="checkbox"/> AC 120V/60Hz <input type="checkbox"/> Adapter(Not for sale) <input type="checkbox"/> PoE(Not for sale) <input checked="" type="checkbox"/> Host system <input checked="" type="checkbox"/> DC Type : <input checked="" type="checkbox"/> Battery <input checked="" type="checkbox"/> Car Charger <input type="checkbox"/> DC Power Supply <input type="checkbox"/> External DC adapter

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table A1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Category	<input type="checkbox"/> Integral: antenna permanently attached <input checked="" type="checkbox"/> External dedicated antennas <input type="checkbox"/> External Unique antenna connector
Antenna Type	<input type="checkbox"/> PIFA <input checked="" type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	2.75dBi

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

1. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
2. No.163-1, Jhongsheng Rd. Sindian City, Taipei County 23151, Taiwan.

Test site	Test Engineer	Remark
AC Conduction Room	Jim Lian	The AC conduction room test items was tested at Compliance Certification Services Inc. (Sindian Lab.) The test equipments were listed in page 7 and the test data, please refer page 14-15.
Radiation	Ed Chiang	
RF Conducted	Eric Lee	

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1012009	07/04/2016	07/03/2017
Power Sensor	Anritsu	MA2411B	917072	07/04/2016	07/03/2017
Spectrum Analyzer	R&S	FSV 40	101073	10/05/2016	10/04/2017
Thermostatic/Hrgrosatic Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/04/2016	05/03/2017
USB Wideband Power Sensor	Agilent	U2021XA	MY54250027	05/12/2016	05/11/2017
USB Wideband Power Sensor	Agilent	U2021XA	MY54260016	05/12/2016	05/11/2017
USB Wideband Power Sensor	Agilent	U2021XA	MY54260020	05/12/2016	05/11/2017
USB Wideband Power Sensor	Agilent	U2021XA	MY54260007	05/12/2016	05/11/2017

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Due	Cal Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/05/2016	12/04/2017
Bilog Antenna	Sunol Sciences	JB3	A030105	07/03/2016	07/02/2017
Pre-Amplifier	EMEC	EM330	60609	06/08/2016	06/07/2017
Horn Antenna	ETC	MCTD 1209	DRH13M02003	06/01/2016	05/31/2017
Pre-Amplifier	EMCI	EMC012635	980151	06/23/2016	06/22/2017
Antenna Tower	CCS	CC-A-5F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-5F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-5F	N/A	N.C.R	N.C.R
Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/02/2016	09/01/2017
Pre-Amplifier	EMEC	EM330	60609	06/08/2016	06/07/2017

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
BNC Cable	EMCI	CFD300-NL	BNC#B4	05/29/2016	05/28/2017
EMI Test Receiver	R&S	ESCI	101201	08/20/2016	08/19/2017
ISN	Teseq	ISN T800	29449	08/19/2016	08/18/2017
LISN	Schwarzbeck	NSLK 8127	8129-286	08/19/2016	08/18/2017
LISN(EUT)	Schwarzbeck	NSLK 8127	8127527	08/19/2016	08/18/2017
Pulse Limiter	R&S	ESH3-Z2	C3010026-2	08/23/2016	08/22/2017
Thermo-Hygro Meter	Wisewind	201A	No. 02	05/03/2016	05/02/2017
Current Sensor Probe	Teseq	CSP 9160A	73982	06/02/2016	06/01/2017
Capacitive Voltage Probe	Teseq	CVP 2200A	37925	10/26/2016	10/25/2017
Software	EZ-EMC				

Remark: Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT



EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB	DELL	PP19L	R33002	E2KWM3945ABG
2	Battery	YUASA	CMF 75D23L	N/A	N/A
3	PS/2 Mouse	hp	M-SBF96	FATSQ0C5BYJQKZ	DOC BSMI:R41126
4	PS/2 Keyboard	Genius	K639	N/A	DOC BSMI:T3A164
5	Microphone & Earphone	INTOPIC	LASS-288	N/A	N/A
6	Monitor	DELL	P2314t	CN-0HMJ1V-74445-46 S-156S	R43004
7	Host PC	DELL	T5810	8G5NKG2	N/A
8	Modem	GALILEO	AL-56ERM	0MERM04A0212	DOC
9	Printer	HP	SNPRB-1202 -01	CN54K182G9	R330D1

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01 v03r05, RSS-247 Issue 1 and RSS-GEN Issue 4.

1.9 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

2. TEST SUMMERY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
15.203	-	1.2	Antenna Requirement	Pass
15.207(a)	RSS-GEN 8.8	4.1	AC Conducted Emission	Pass
15.247(a)(1)	RSS-247(5.2)(1)	4.2	20 dB Bandwidth	Pass
-	RSS-GEN 6.6	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(1)	RSS-247(5.4)(2)	4.3	Output Power Measurement	Pass
15.247(a)(1)	RSS-247(5.1)(2)	4.4	Frequency Separation	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(4)	4.5	Number of Hopping	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Band Edge	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Emission	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(4)	4.7	Time of Occupancy	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Band Edge	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BR-1Mbps (DH5) $\pi/4$ -DQPSK for EDR-2Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)
Test Channel Frequencies	GFSK for BR-1Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz $\pi/4$-DQPSK for EDR-2Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

Worst Mode of Power			
Bluetooth Mode	Data Rate	Maximum Peak Conducted Output Power (dBm)	Worst Mode
BR(GFSK)	1 Mbps	7.46	V
EDR(8DPSK)	3 Mbps	6.73	V

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	120V/60Hz
Test Mode	Mode 1:EUT power by AC adapter via power cable.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	5V DC
Test Mode	Mode 1:EUT power by USB cable.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	12V DC and 5V DC
Test Mode	Mode 1:EUT power by 12V DC via car charger. Mode 2:EUT power by 5V DC via USB.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Vertical) were recorded in this report

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BR-1Mbps	2.9855	5.0145	59.53%	2.25
EDR-3Mbps	2.9565	5.0145	58.96%	2.29

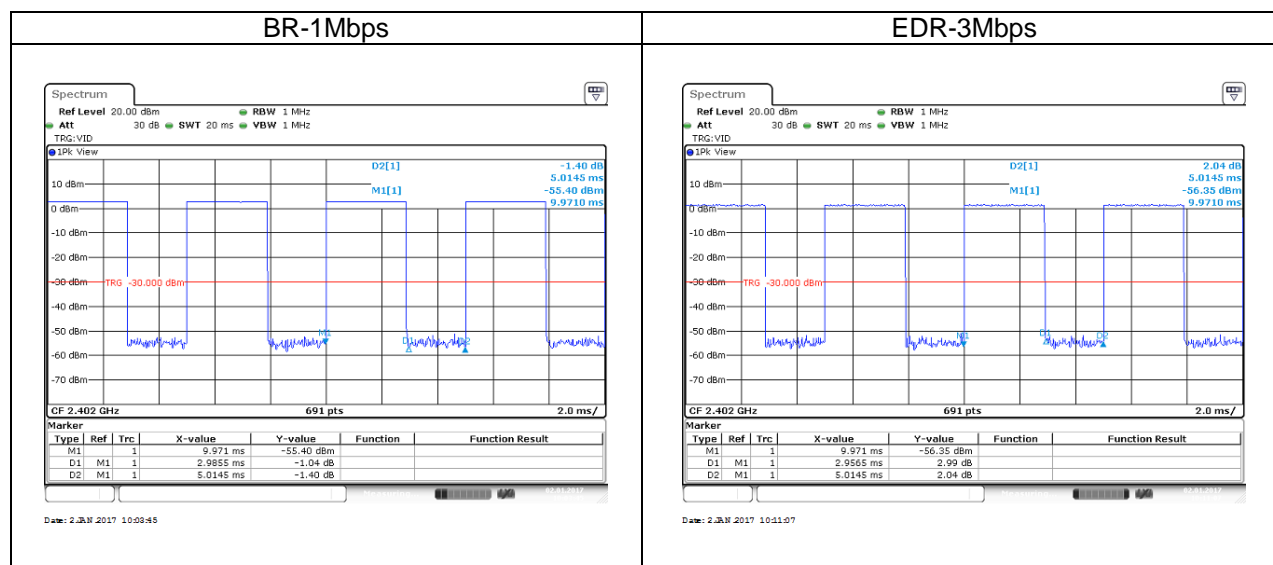

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a) and RSS-GEN section 8.8,

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

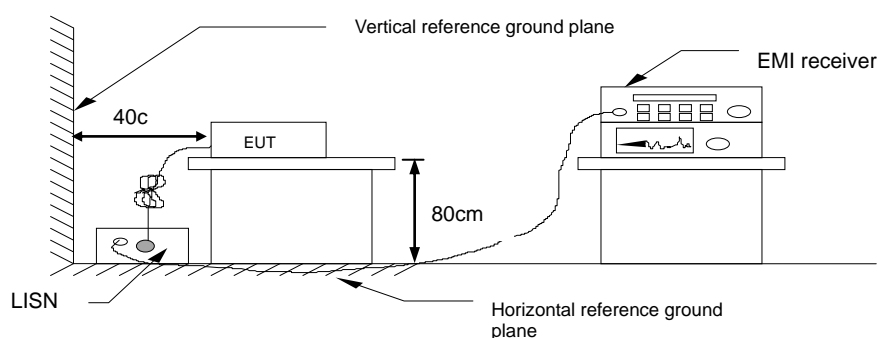


4.1.4 Test Result

PASS


Test Data

Test Mode	Mode 1	Temp/Hum	27(°C)/ 53%RH
Phase	Line	Test Date	Jan 03, 2017
Test Engineer	Jim Lian		

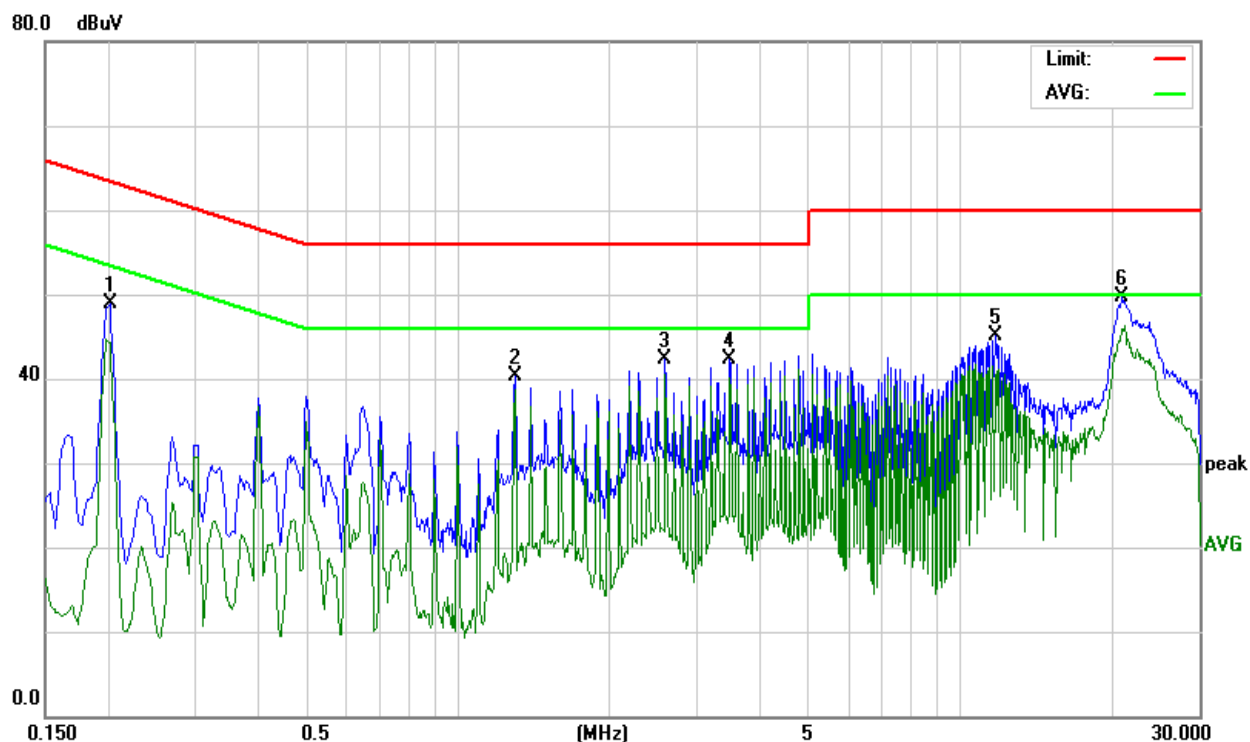

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dB)	Limit (dBuV)	Margin (dBuV)	Detector (dBuV)
0.2020	38.83	10.10	48.93	63.52	-14.59	peak
1.2980	30.21	10.17	40.38	56.00	-15.62	peak
2.5939	32.02	10.32	42.34	56.00	-13.66	peak
3.4900	32.07	10.33	42.40	56.00	-13.60	peak
11.7698	34.36	10.67	45.03	60.00	-14.97	peak
21.0457	38.52	11.22	49.74	60.00	-10.26	peak

Test Mode:	Mode 1	Temp/Hum	27(°C)/ 53%RH
Phase:	Neutral	Test Date	Jan 03, 2017
Test Engineer	Jim Lian		

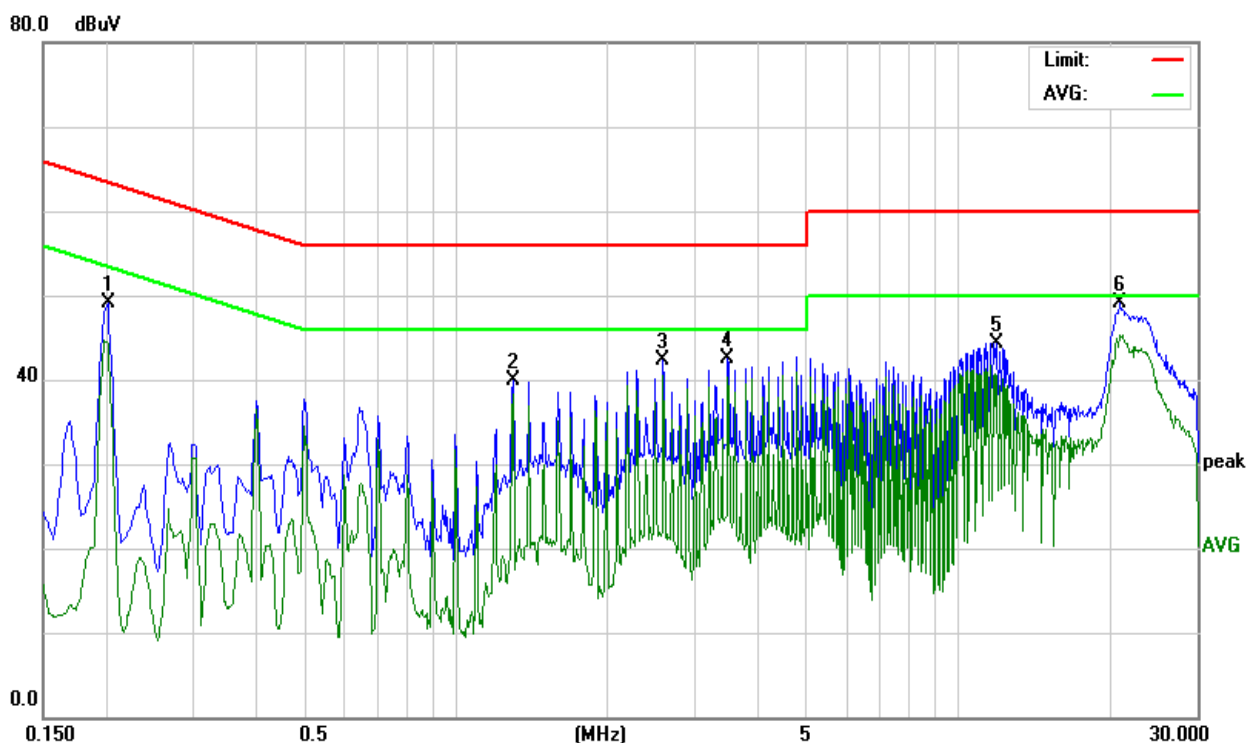

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dB)	Limit (dBuV)	Margin (dBuV)	Detector (dBuV)
0.2020	38.97	10.10	49.07	63.52	-14.45	peak
1.2980	29.79	10.17	39.96	56.00	-16.04	peak
2.5939	32.02	10.32	42.34	56.00	-13.66	peak
3.4900	32.20	10.33	42.53	56.00	-13.47	peak
11.9699	33.71	10.68	44.39	60.00	-15.61	peak
21.1460	37.86	11.24	49.10	60.00	-10.90	peak

4.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

According to §15.247(a) (1), RSS-247 section 5.2(1) and RSS-GEN 6.6,

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 20 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth in the test report.

4.2.3 Test Setup

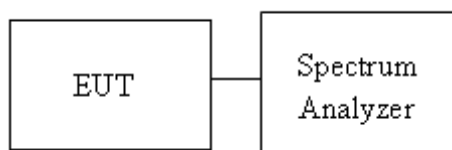


4.2.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (kHz)	20dB BW (MHz)
Low	2402	898.6975	1.0292
Mid	2441	898.6975	1.0209
High	2480	903.0390	0.9913


Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	1.1808	1.2913
Mid	2441	1.1722	1.2851
High	2480	1.1765	1.2903

Test Data

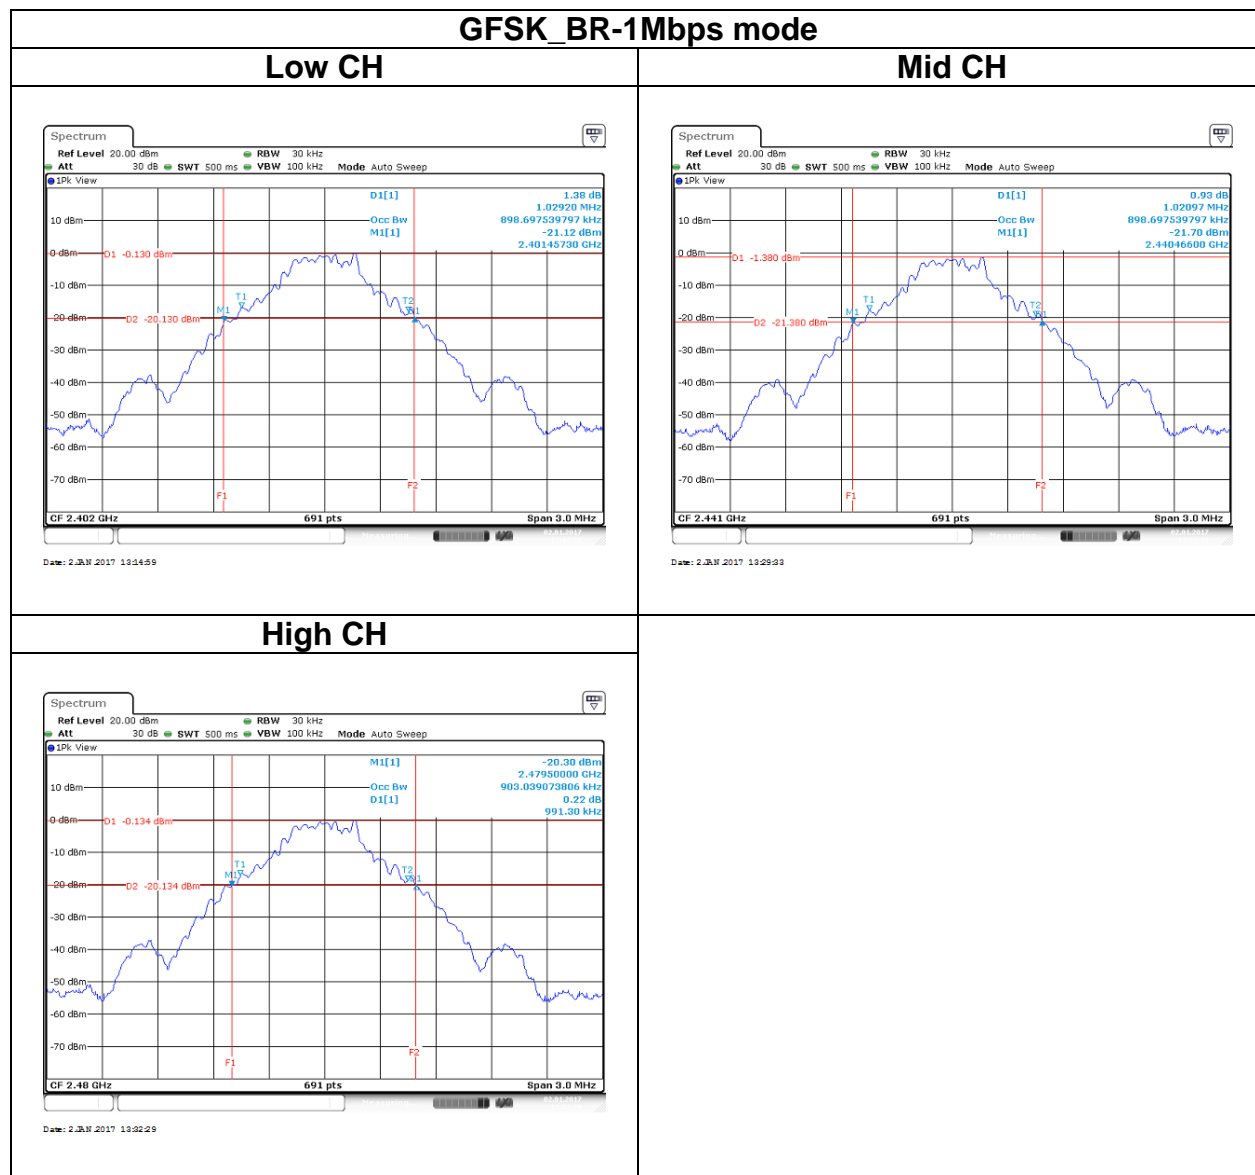


8DPSK_EDR-3Mbps mode

Low CH

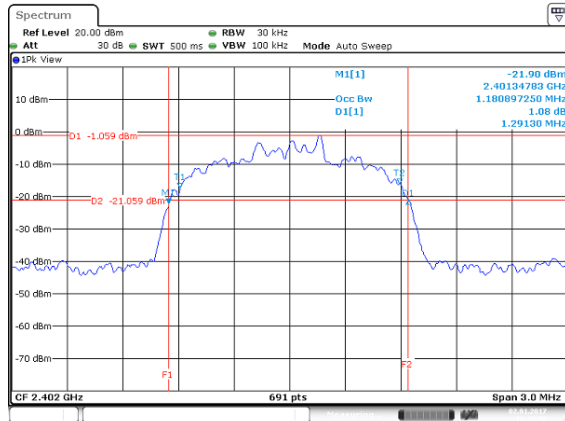


Date: 2.JAN 2017 10:55:0

Mid CH

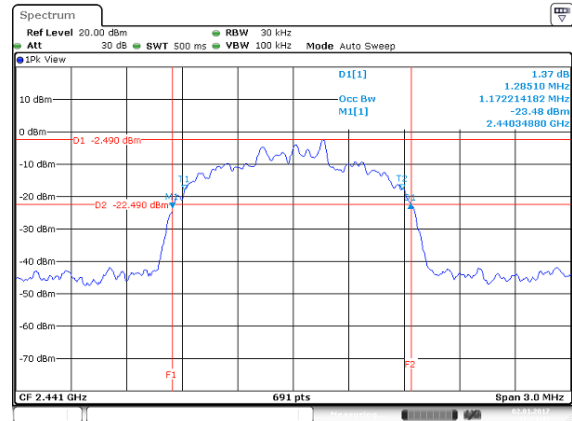

Date: 2.JAN 2017 12:24:45

High CH

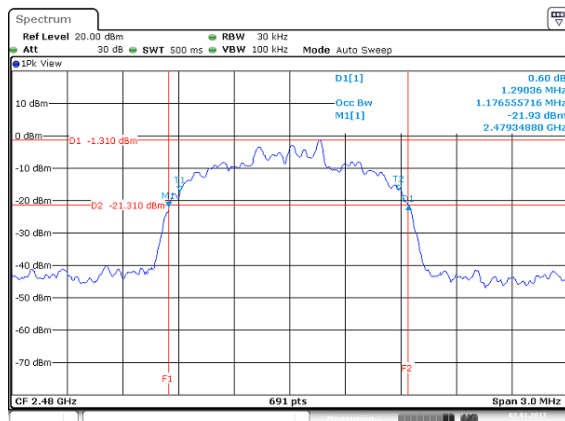

Date: 2.JAN 2017 12:26:26

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(1) and RSS-247 section 5.4(2)

Peak output power :

FCC

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

IC

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



4.3.4 Test Result

Peak output power :

BT								
Config.	CH	Freq. (MHz)	PK Power (dBm)	EIRP PK Power (dBm)	PK Power (W)	EIRP PK Power (W)	FCC/IC Limit (dBm)	IC EIRP Limit (dBm)
GFSK BR-1Mbps (DH5)	0	2402	6.32	9.07	0.0043	0.0081	21	27
	39	2441	4.91	7.66	0.0031	0.0058		
	78	2480	7.46	10.21	0.0056	0.0105		
8DPSK EDR-3Mbps (DH5)	0	2402	5.54	8.29	0.0036	0.0067		
	39	2441	4.27	7.02	0.0027	0.0050		
	78	2480	6.73	9.48	0.0047	0.0089		

Average output power :

BT			
Config.	CH	Freq. (MHz)	AV Power (dBm)
GFSK BR-1Mbps (DH5)	0	2402	3.88
	39	2441	2.47
	78	2480	5.07
8DPSK EDR-3Mbps (DH5)	0	2402	1.18
	39	2441	0.06
	78	2480	2.24

4.4 FREQUENCY SEPARATION

4.4.1 Test Limit

According to §15.247(a)(1) and RSS-247 section 5.1(2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

4.4.3 Test Setup




4.4.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (kHz)	Channel Separation Limits (MHz)	Result
Low	2402	998.60	0.6861	PASS
Mid	2441	998.40	0.6806	PASS
High	2480	998.60	0.6608	PASS


Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.8608	PASS
Mid	2441	0.9986	0.8567	PASS
High	2480	1.0029	0.8602	PASS

Test Data

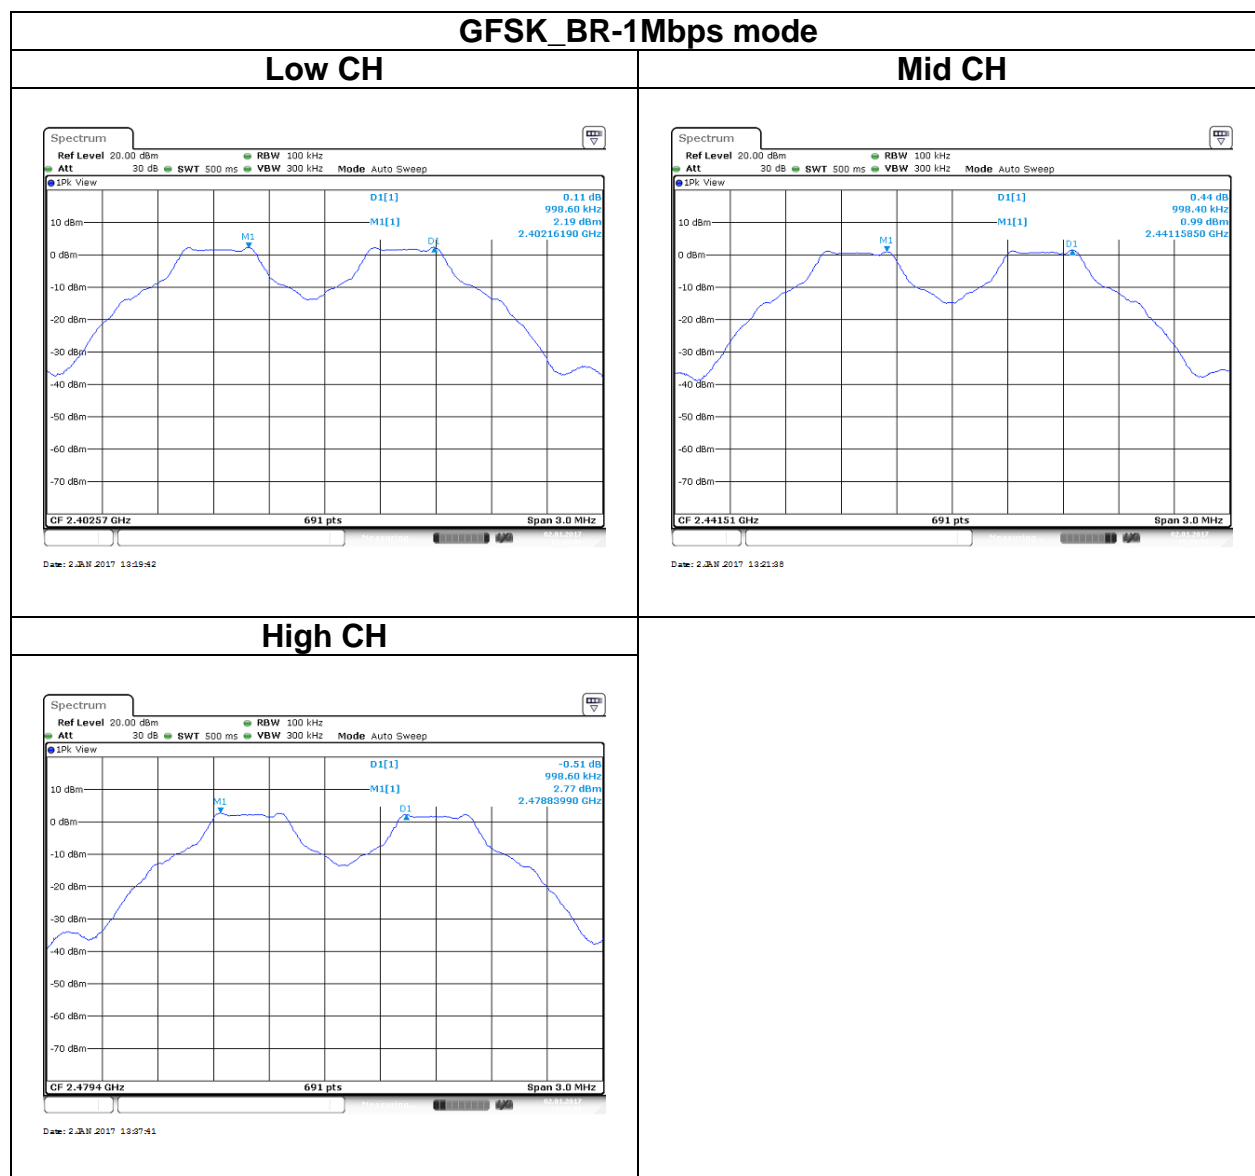


8DPSK_EDR-3Mbps mode


Low CH

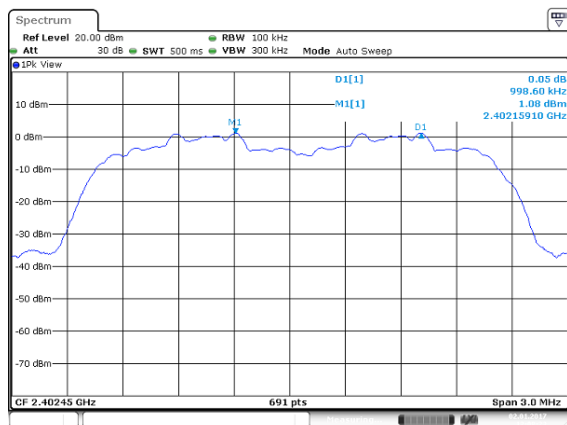

Mid CH

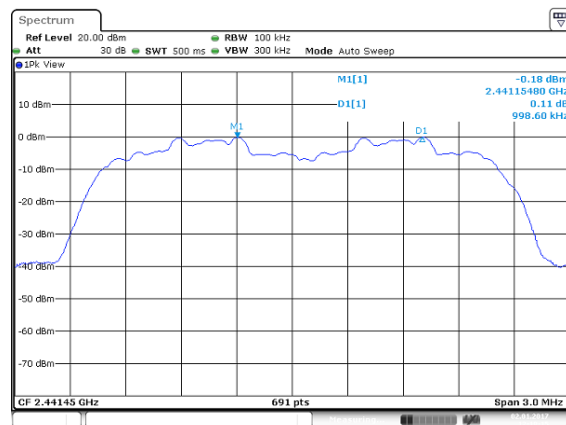

High CH

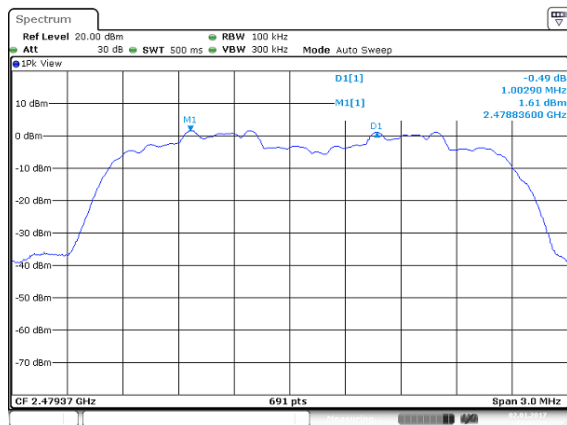

4.5 NUMBER OF HOPPING

4.5.1 Test Limit

According to §15.247(a)(1)(iii) and RSS-247 section 5.1(4)


Frequency hopping system in the 2400-2483.5MHz band shall use at least 15 channels.

4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

4.5.3 Test Setup




4.5.4 Test Result

Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	

REMARK:

The frequency spectrum was broken up in to two sub-range to clearly show all of the hopping frequencies. In the AFH mode, this device operation was using 20 channels, so the requirement for minimum number of hopping channels is satisfied

Test Data

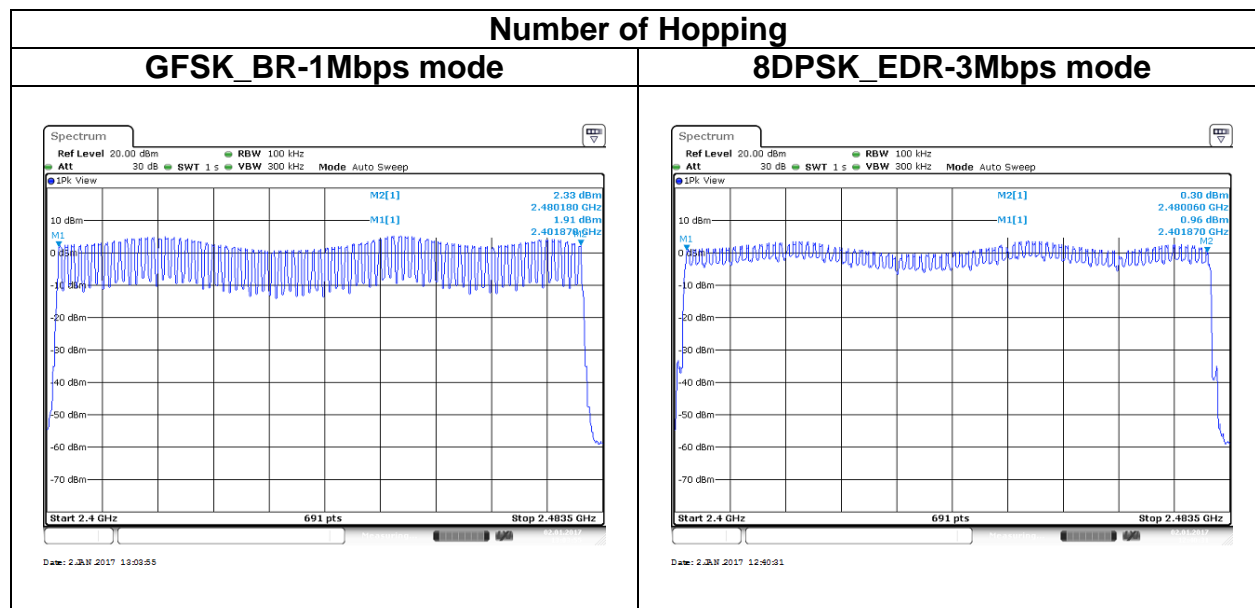

4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit


According to §15.247(d) and RSS-247 section 5.5

Limit	-20 dBc
-------	---------

4.6.2 Test Procedure



1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.



4.6.3 Test Setup


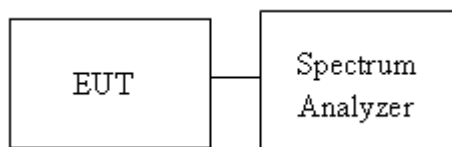




4.6.4 Test Result

Test Data

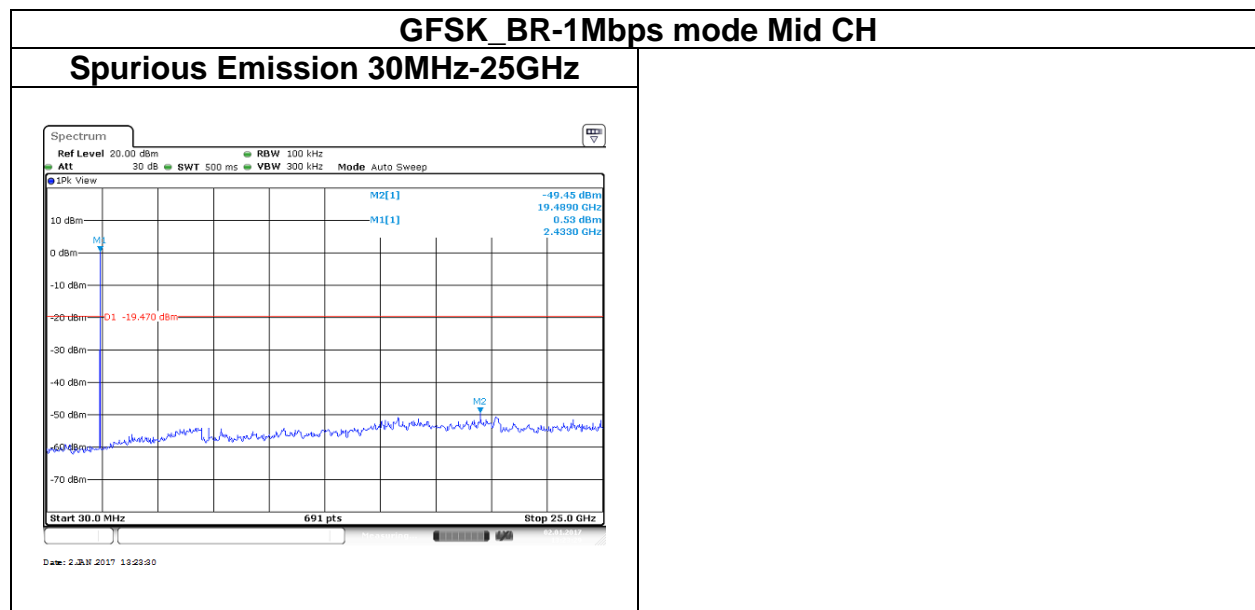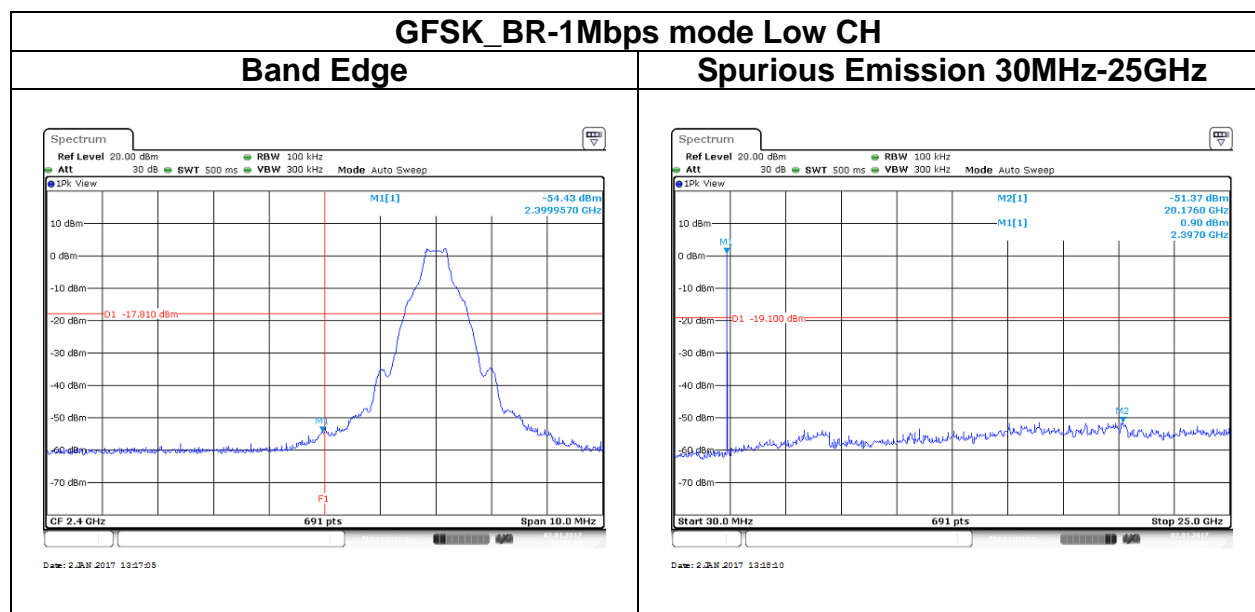

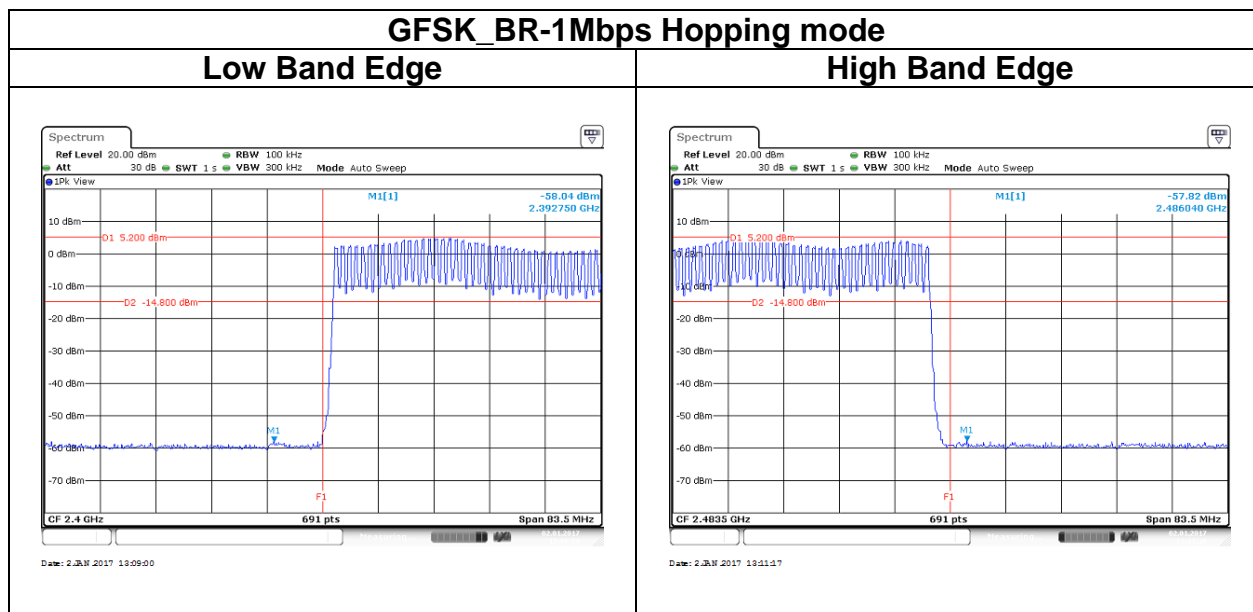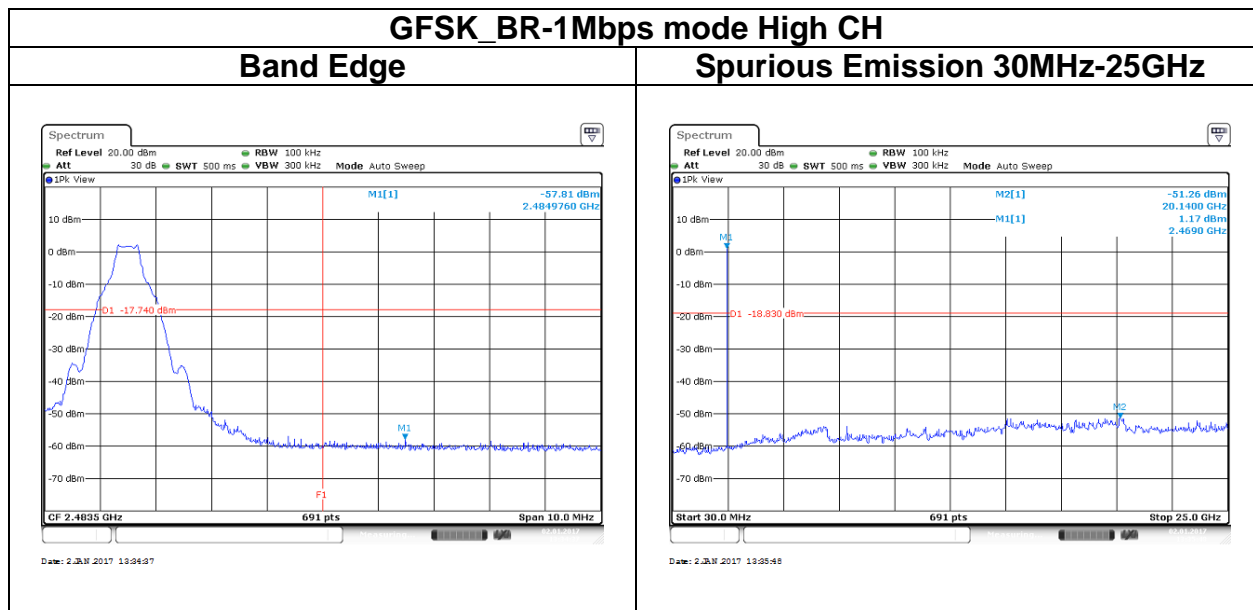

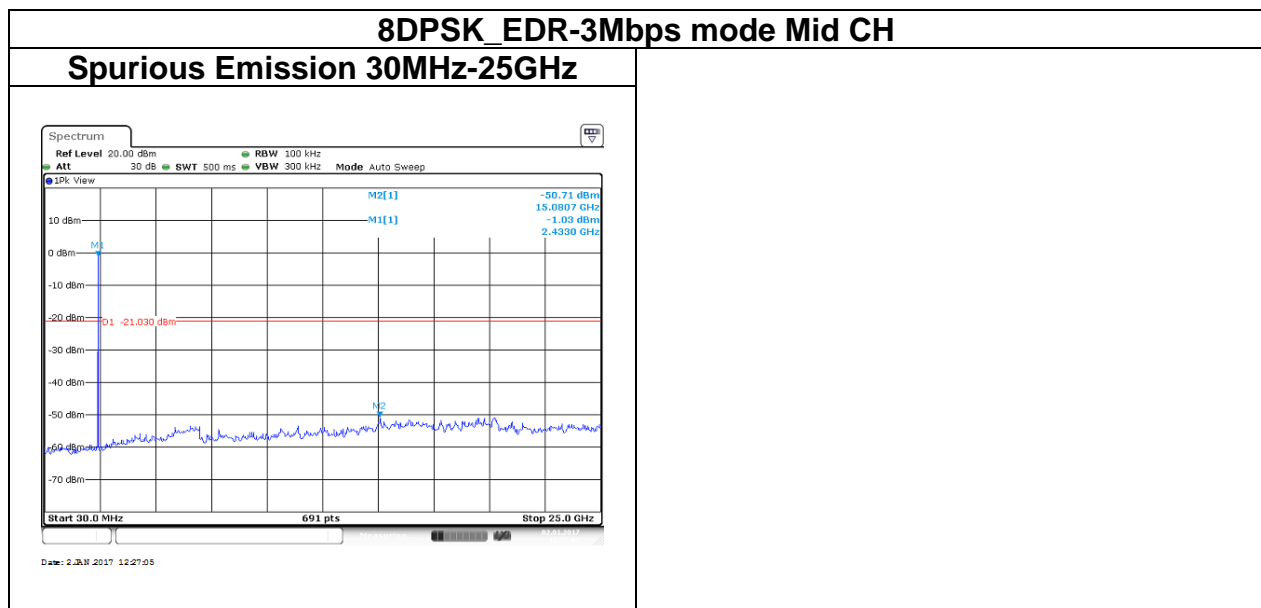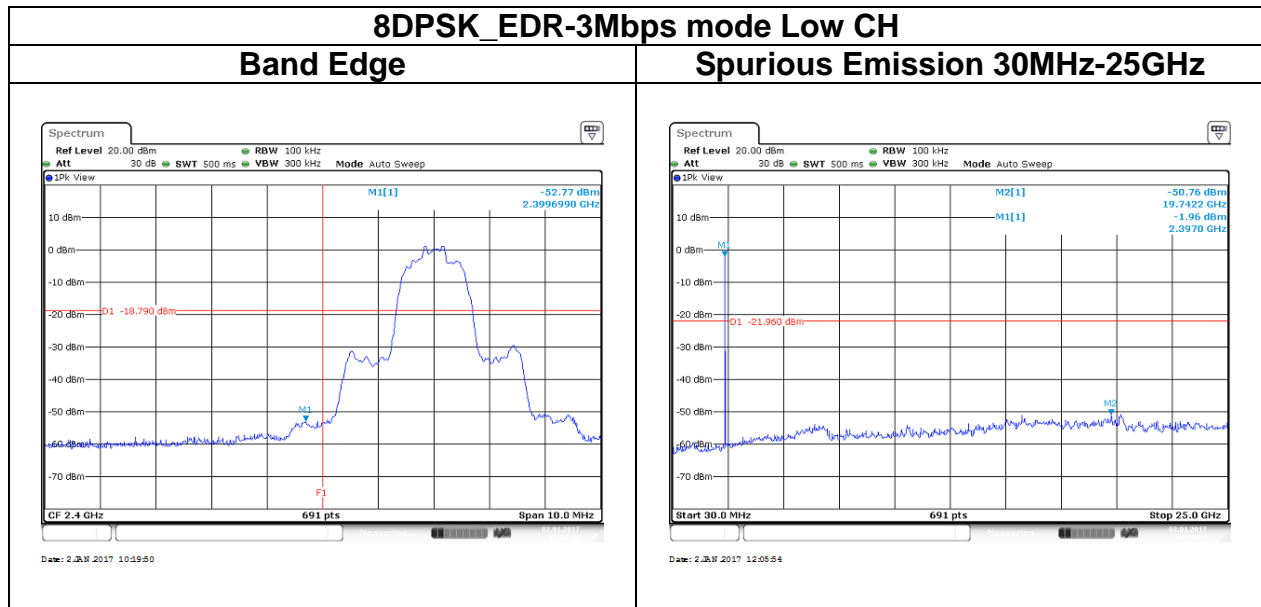

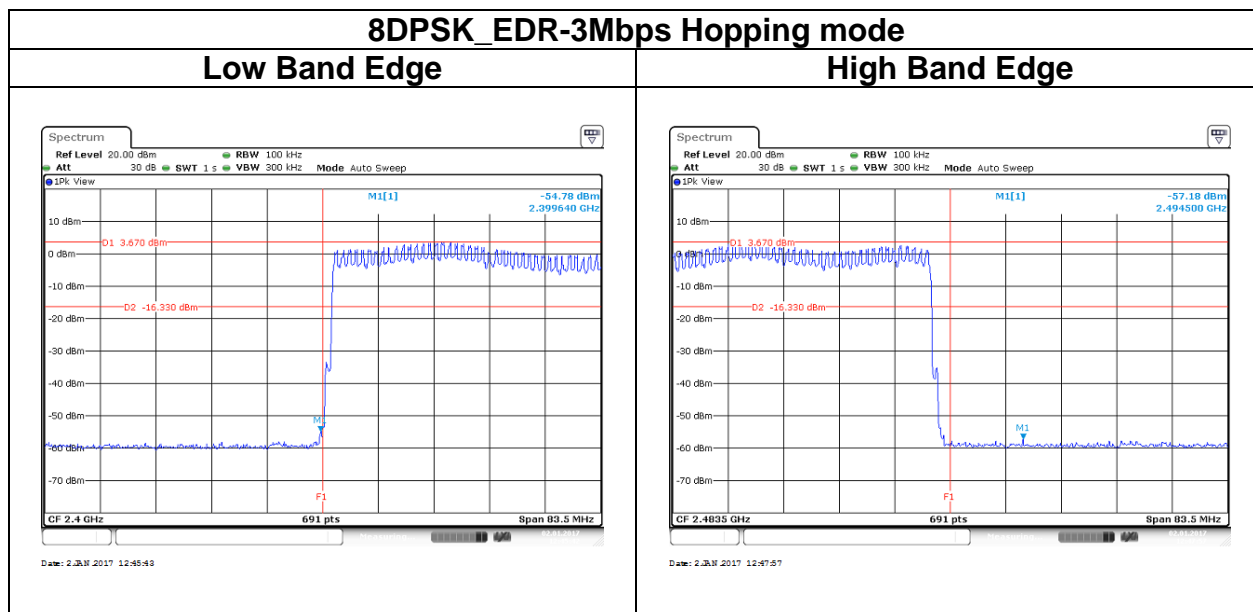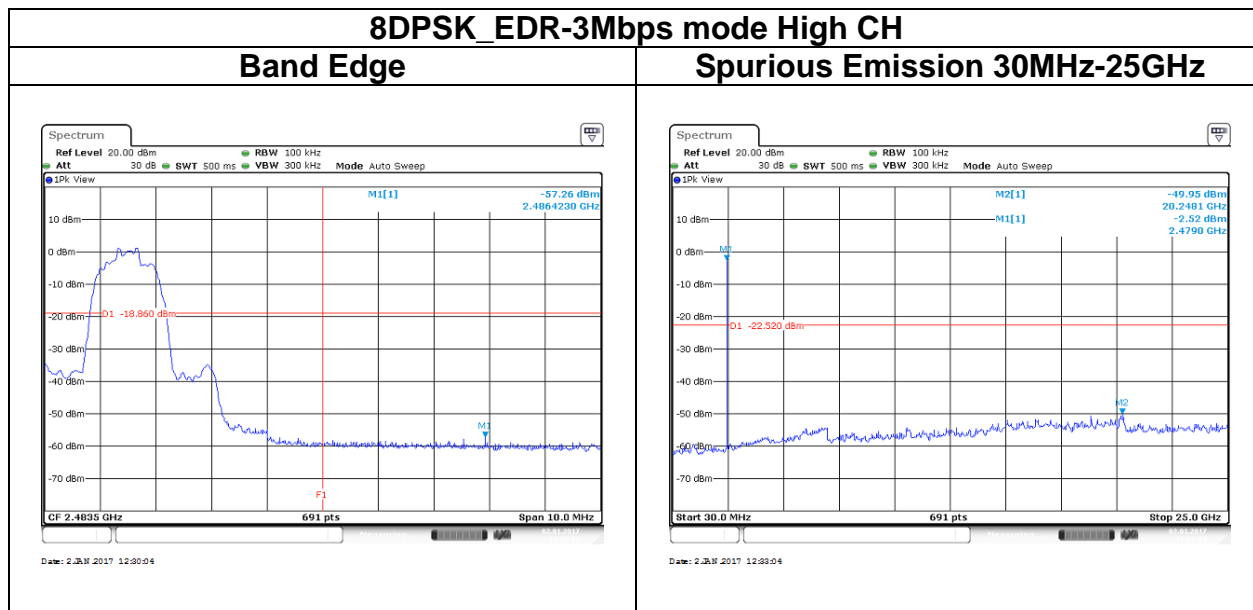

4.7 TIME OF OCCUPANCY (DWELL TIME)

4.7.1 Test Limit


According to §15.247(a)(1)(iii) and RSS-247 section 5.1(4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


4.7.3 Test Setup



4.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BR-1Mbps	2441	2.8841	79	106.67	0.3123	0.4	Pass
EDR-3Mbps	2441	2.8841	79	106.67	0.3123	0.4	
AFH: DH5	2441	2.8841	20	53.33	0.1561	0.4	
Non-AFH: DH5 Packet permit maximum $1600/79/6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$							
AFH: DH5 Packet permit maximum $800/20/6 = 6.666$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $6.666 * 0.4 * 20 = 53.33$							

Test Data

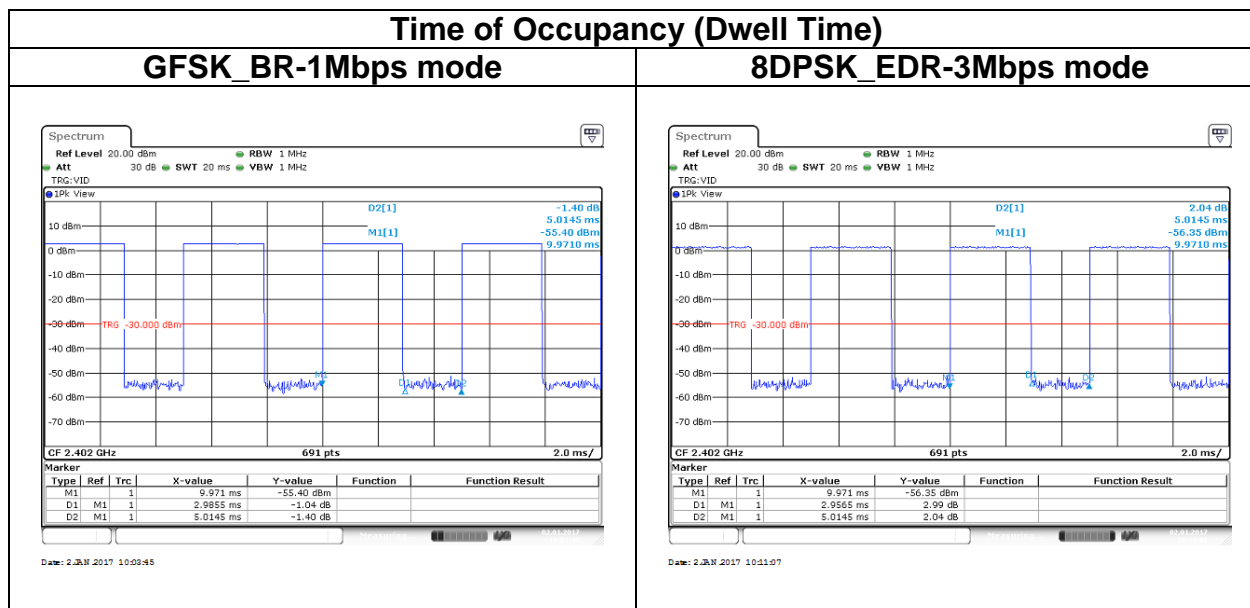

4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

4.8.2 Test Procedure


Test method Refer as KDB 558074 D01 v03r05, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. For harmonic, the worst case of output power was BR-1Mbps. Therefore only BR-1Mbps record in the report.
5. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
If Duty Cycle \geq 98%, VBW=10Hz.
If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	VBW
GFSK_BR-1Mbps	59.53 %	360Hz
8DPSK_EDR-3Mbps	58.96 %	360Hz

4.8.3 Test Setup


9kHz ~ 30MHz

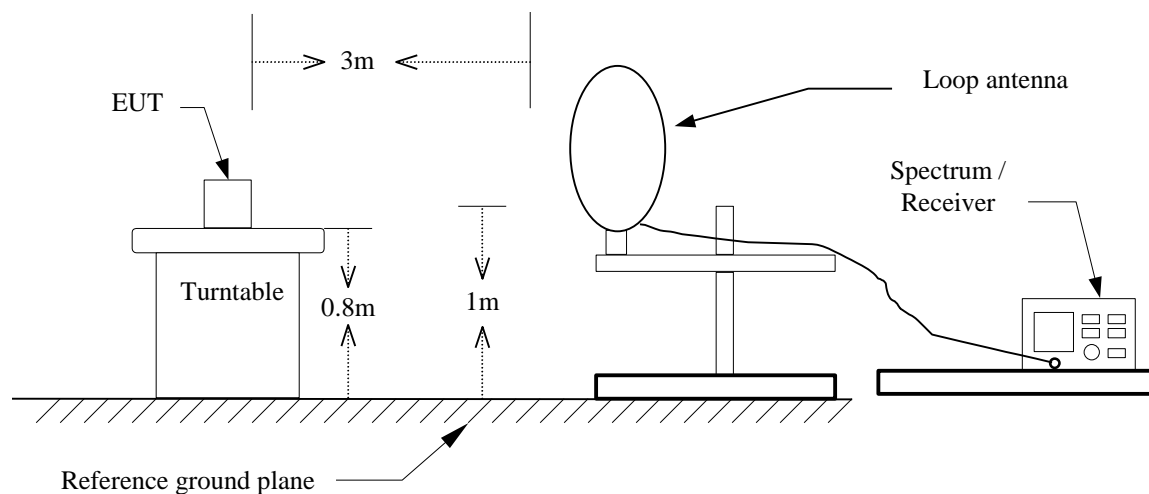


30MHz ~ 1GHz

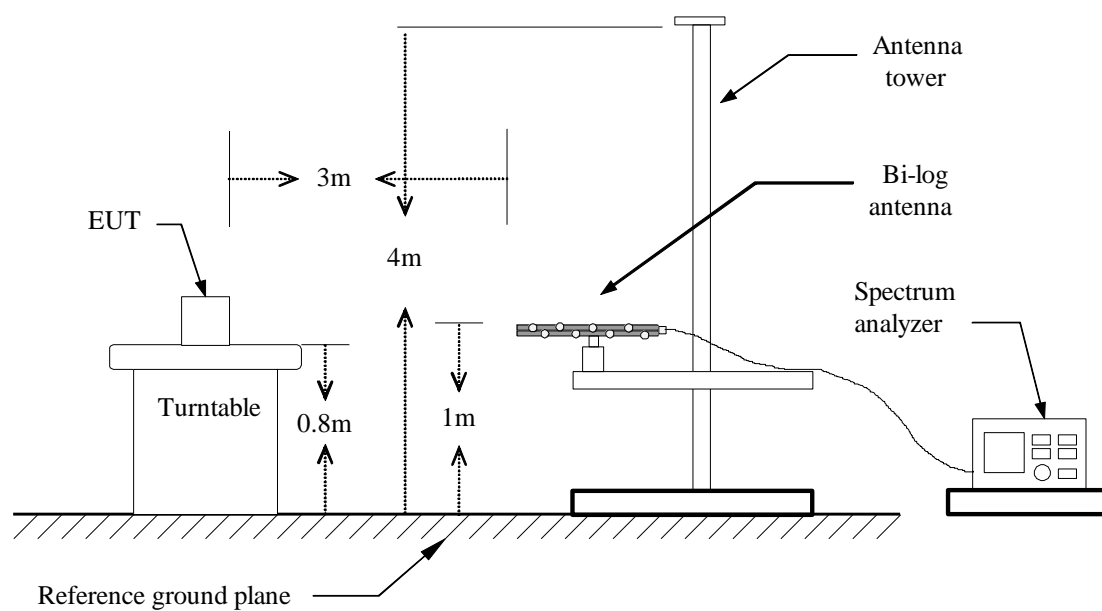

Above 1 GHz

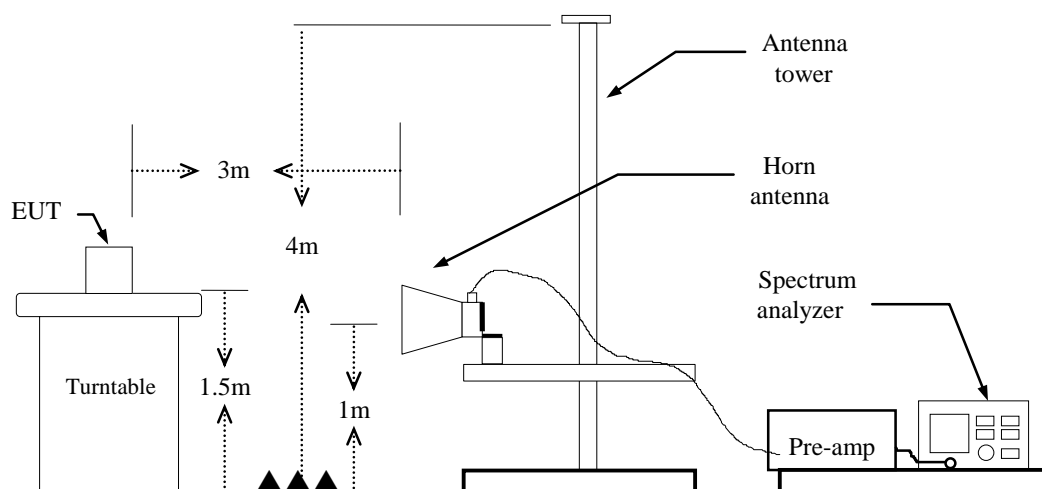


4.8.4 Test Result

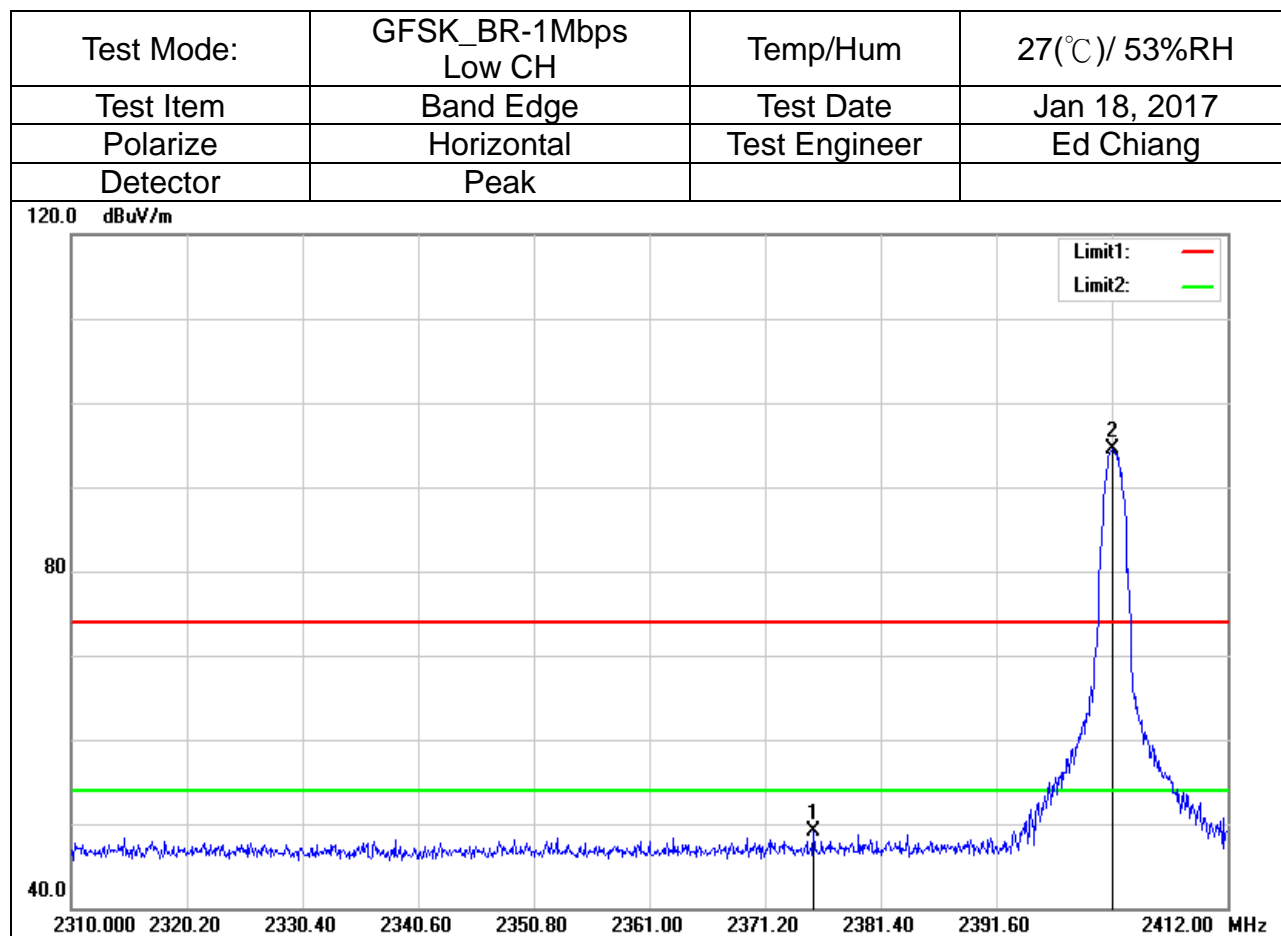Band Edge Test Data


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.484	51.77	-2.61	49.16	74.00	-24.84	peak
2	2401.800	96.89	-2.41	94.48	-	-	peak

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

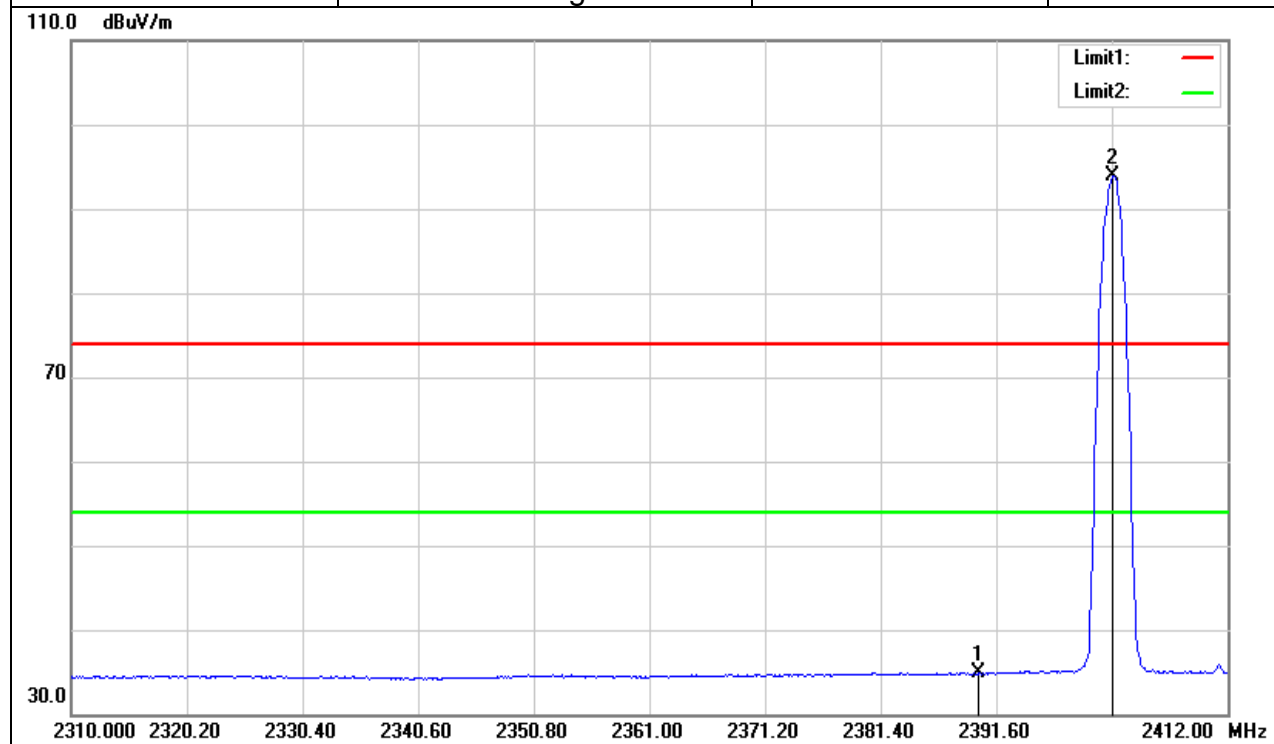


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	37.37	-2.49	34.88	54.00	-19.12	AVG
2	2401.902	96.36	-2.41	93.95	-	-	AVG


Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

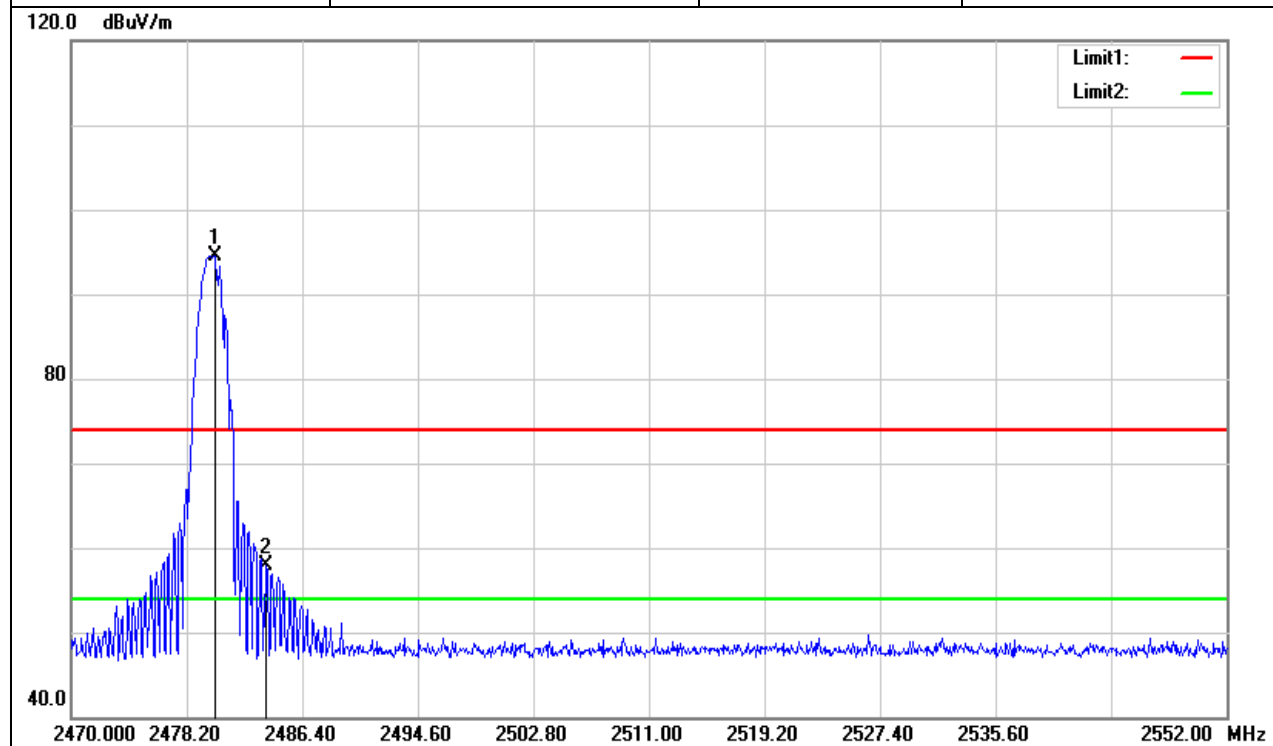

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.168	96.57	-2.03	94.54	-	-	peak
2	2483.858	59.90	-1.99	57.91	74.00	-16.09	peak

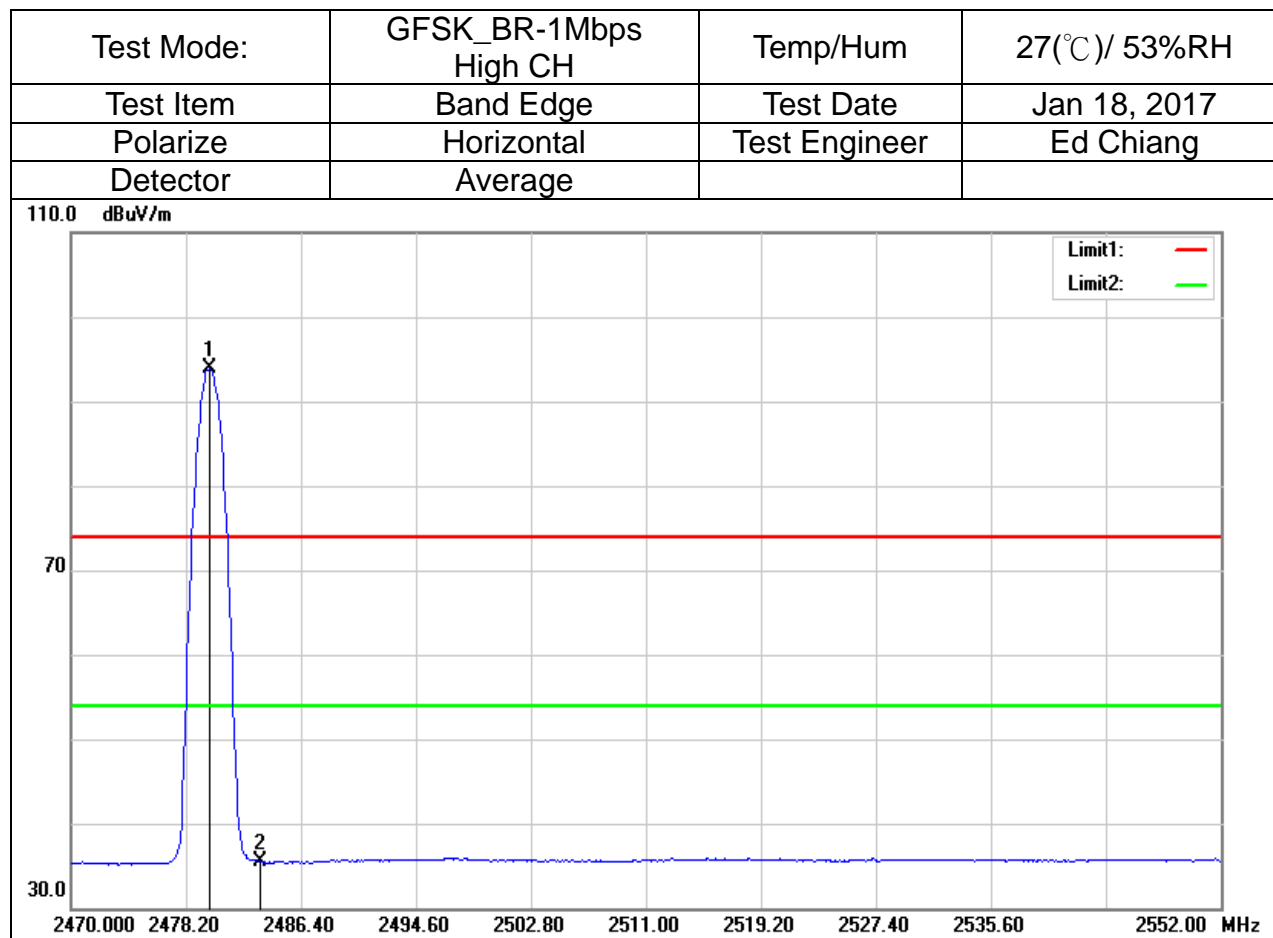


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.922	95.97	-2.03	93.94	-	-	AVG
2	2483.500	37.57	-1.99	35.58	54.00	-18.42	AVG

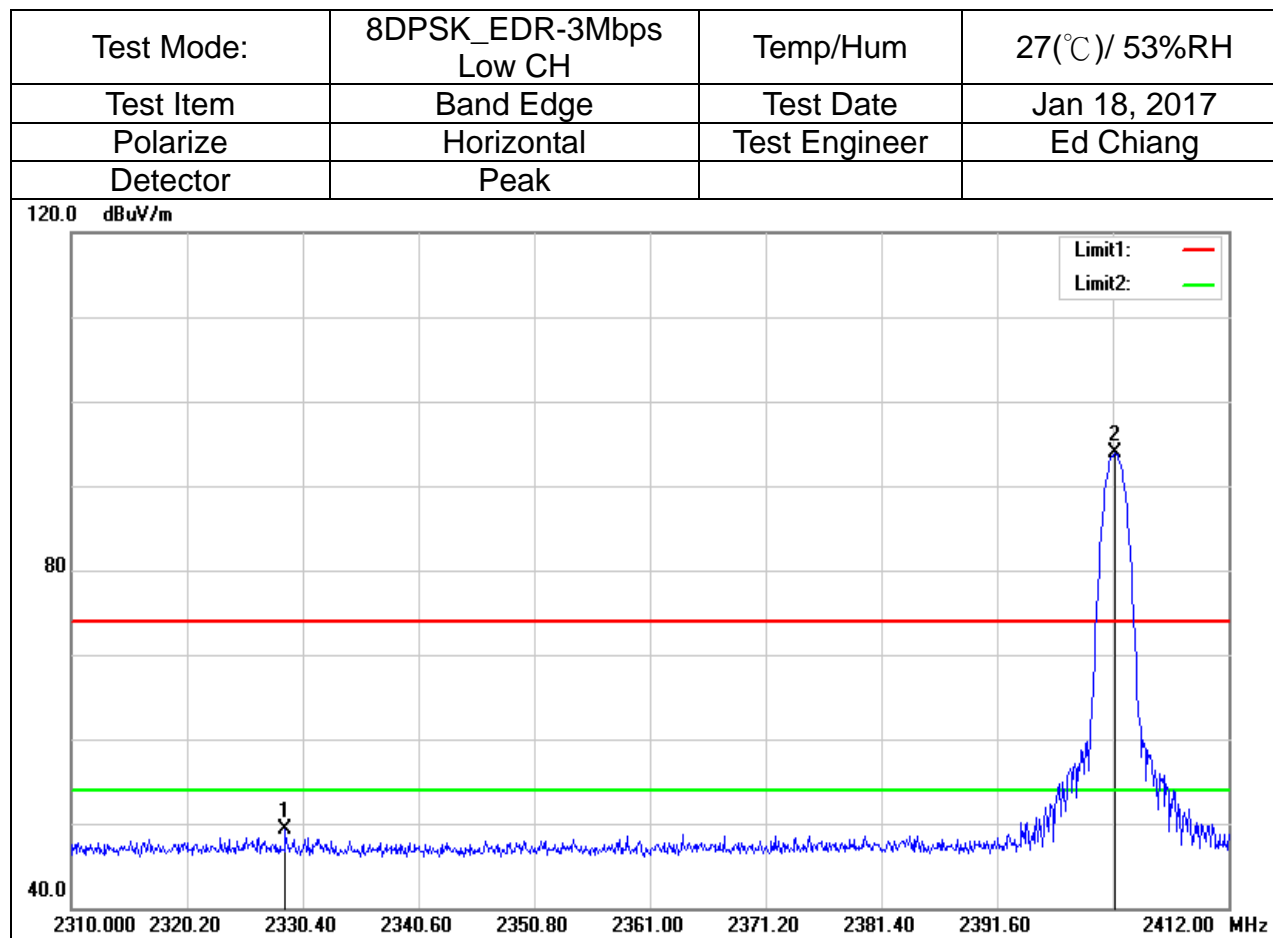


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2328.870	52.23	-2.94	49.29	74.00	-24.71	peak
2	2402.004	96.27	-2.41	93.86	-	-	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

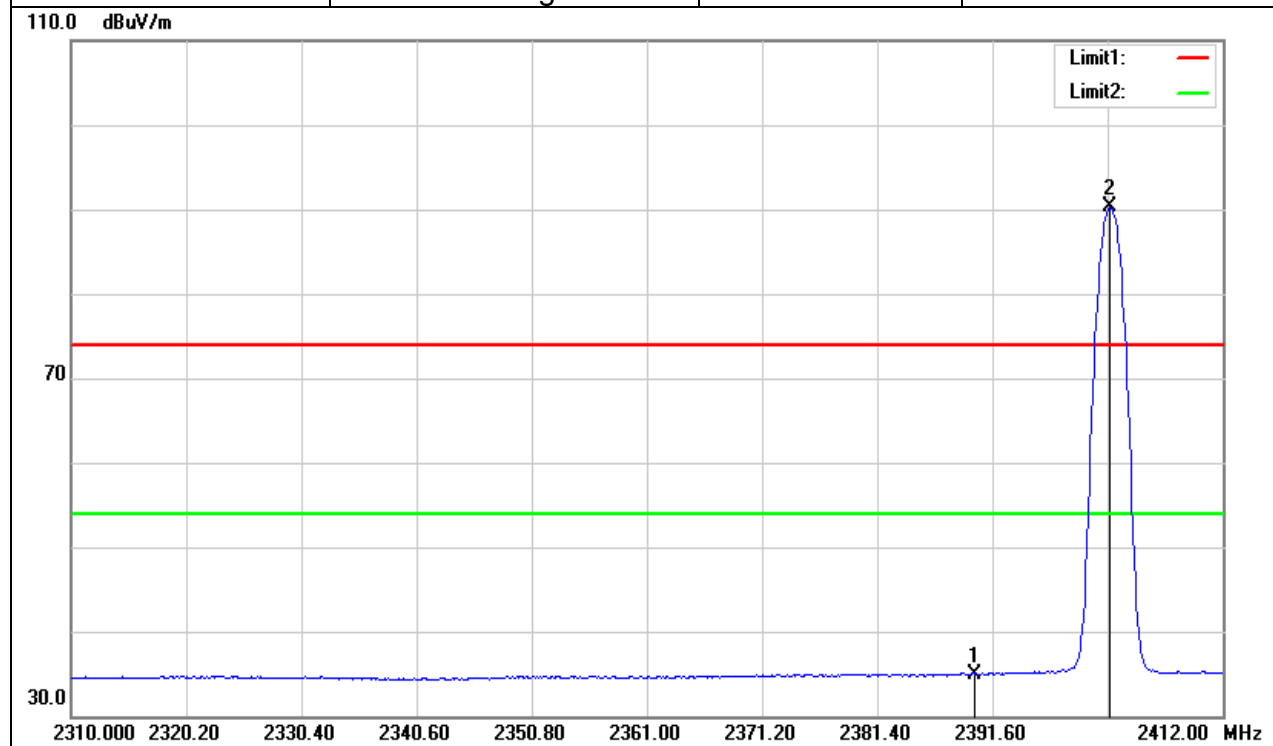


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	37.46	-2.49	34.97	54.00	-19.03	AVG
2	2402.004	92.66	-2.41	90.25	-	-	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

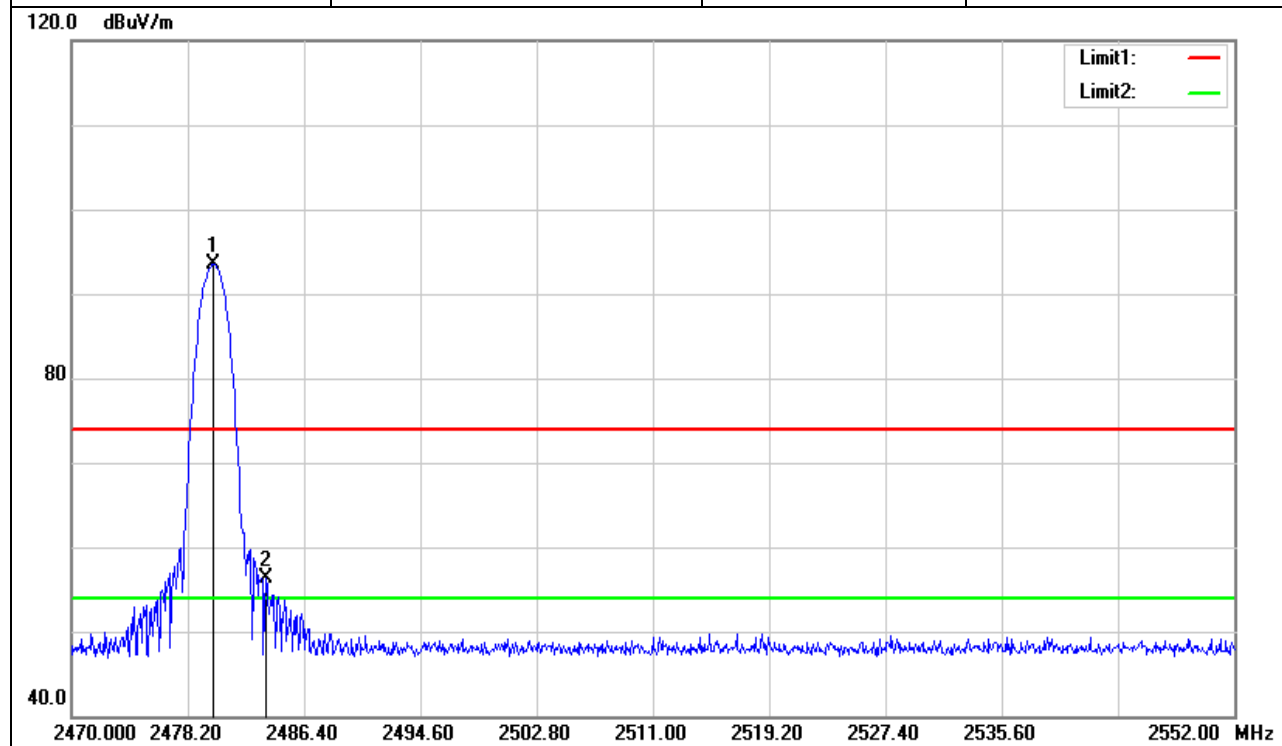

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	95.52	-2.03	93.49	-	-	peak
2	2483.694	58.37	-1.99	56.38	74.00	-17.62	peak


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

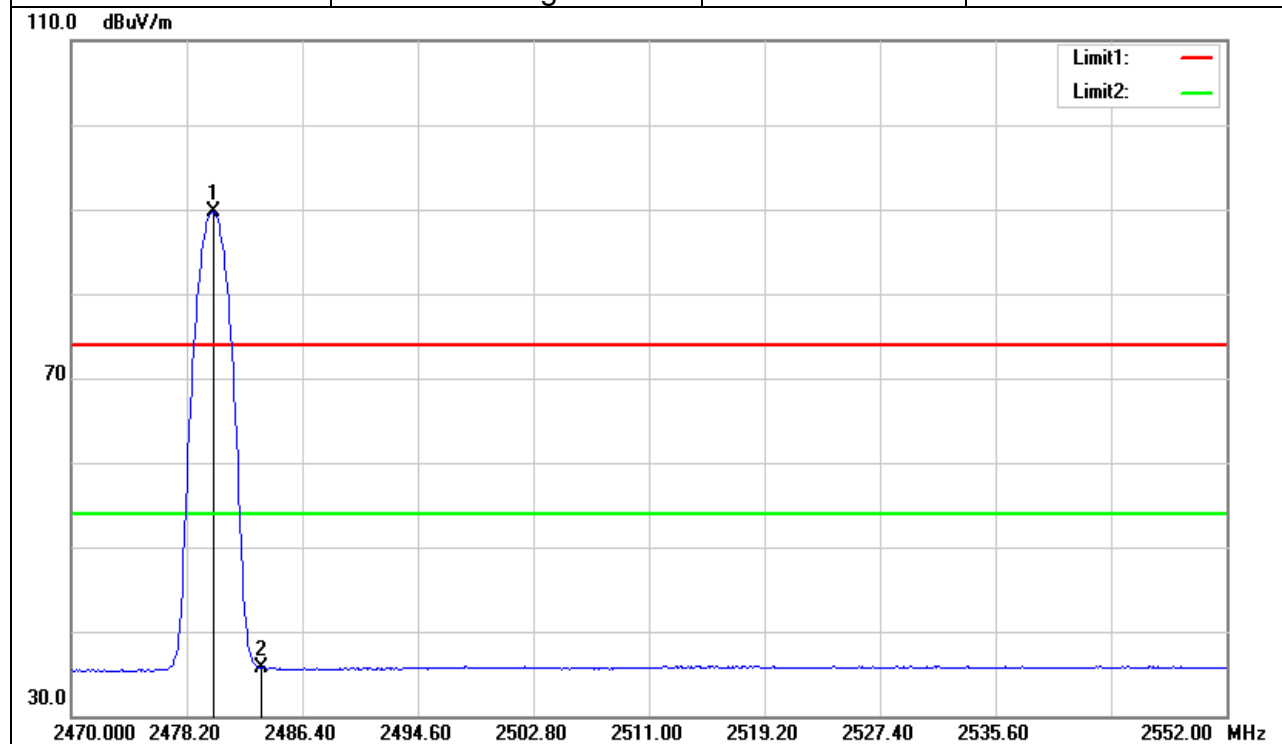

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	91.70	-2.03	89.67	-	-	AVG
2	2483.500	37.64	-1.99	35.65	54.00	-18.35	AVG


Below 1G Test Data

Test Mode:	BT Mode	Temp/Hum	27(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	Jan 17, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Qusi-peak		

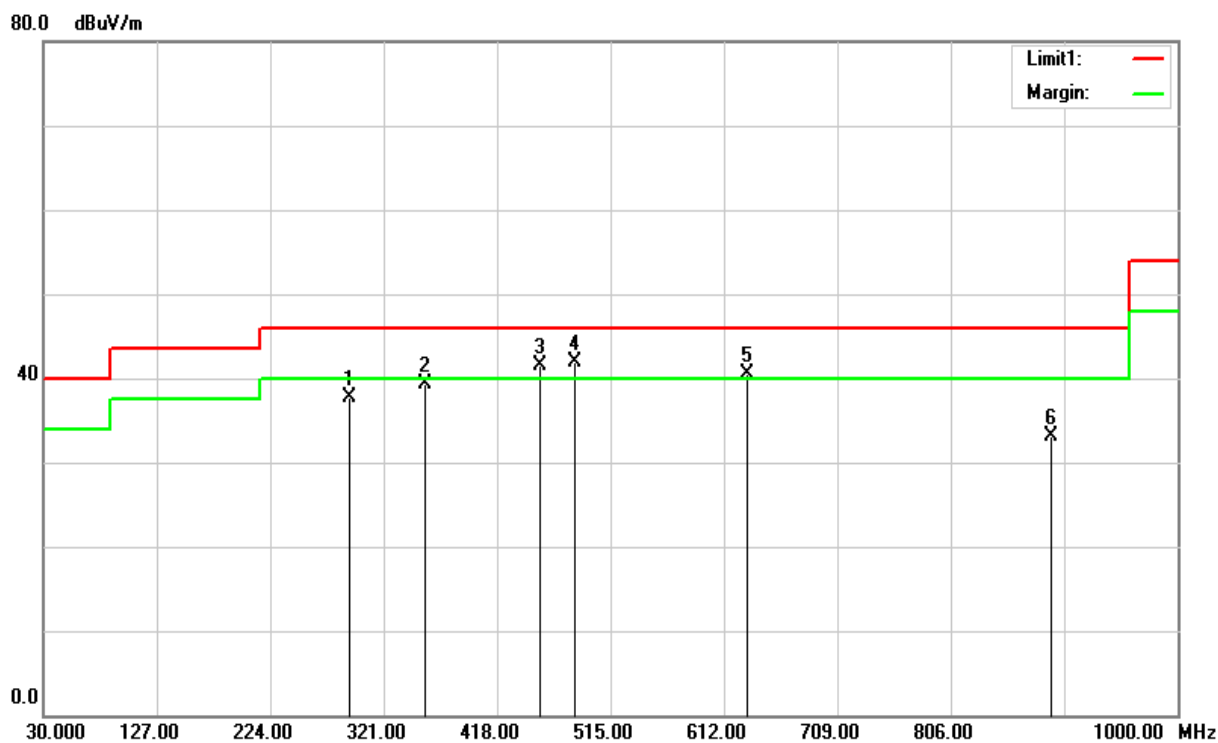

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
291.9000	52.01	-14.39	37.62	46.00	-8.38	peak
356.8900	52.07	-12.73	39.34	46.00	-6.66	peak
454.8600	51.68	-10.10	41.58	46.00	-4.42	QP
484.9300	51.35	-9.53	41.82	46.00	-4.18	QP
632.3700	47.40	-6.99	40.41	46.00	-5.59	QP
892.3300	36.46	-3.28	33.18	46.00	-12.82	peak


Test Mode:	BT Mode	Temp/Hum	27(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	Jan 17, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Qusi-peak		

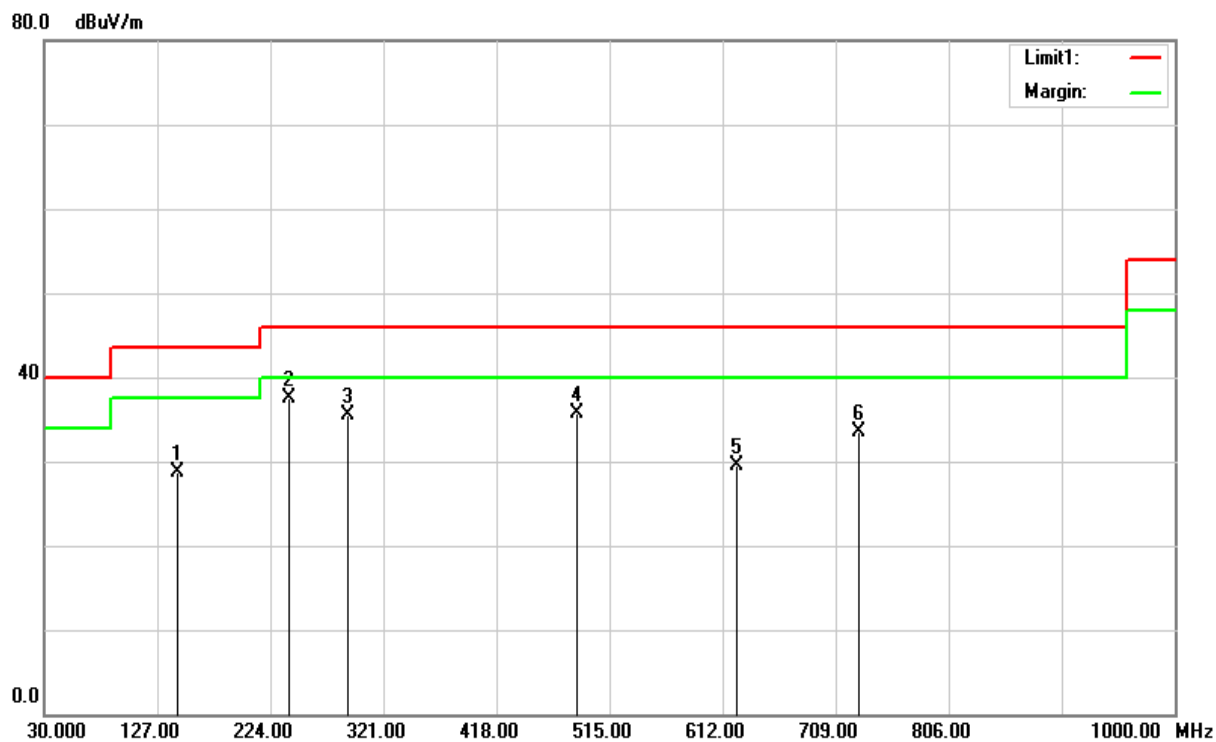

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
144.4600	44.52	-15.91	28.61	43.50	-14.89	peak
240.4900	54.09	-16.50	37.59	46.00	-8.41	peak
290.9300	50.00	-14.41	35.59	46.00	-10.41	peak
486.8700	45.16	-9.49	35.67	46.00	-10.33	peak
623.6400	36.70	-7.20	29.50	46.00	-16.50	peak
729.3700	38.84	-5.39	33.45	46.00	-12.55	peak

Above 1G Test Data


Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

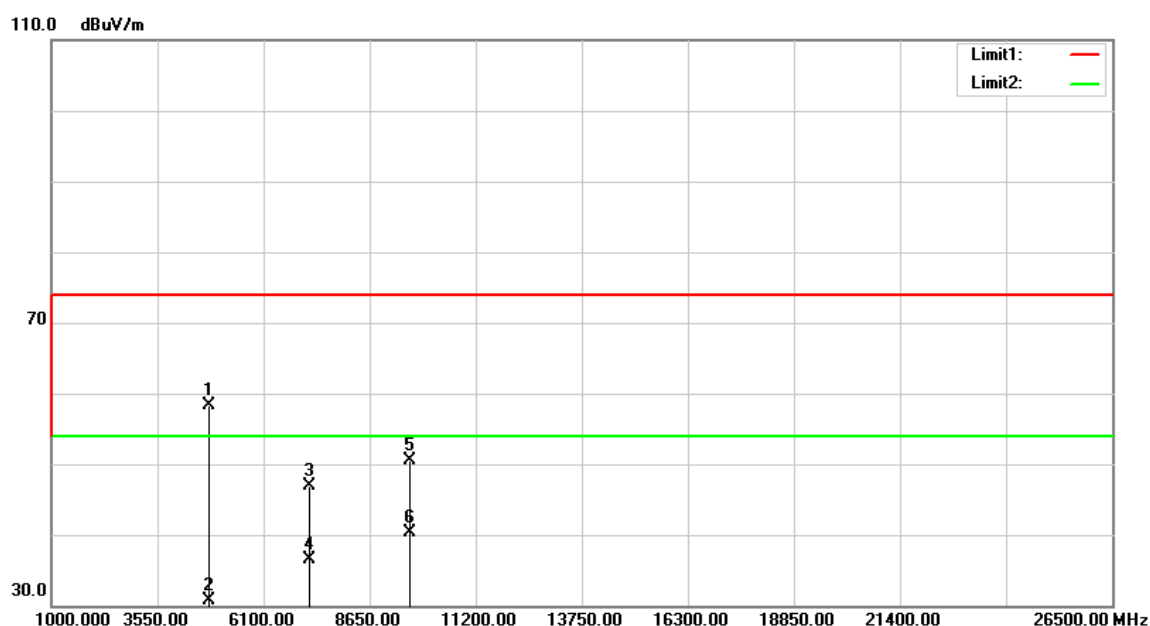


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4806.000	53.31	5.05	58.36	74.00	-15.64	peak
4806.000	25.64	5.05	30.69	54.00	-23.31	AVG
7206.000	34.21	12.62	46.83	74.00	-27.17	peak
7206.000	23.86	12.62	36.48	54.00	-17.52	AVG
9608.000	32.82	17.60	50.42	74.00	-23.58	peak
9608.000	22.71	17.60	40.31	54.00	-13.69	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

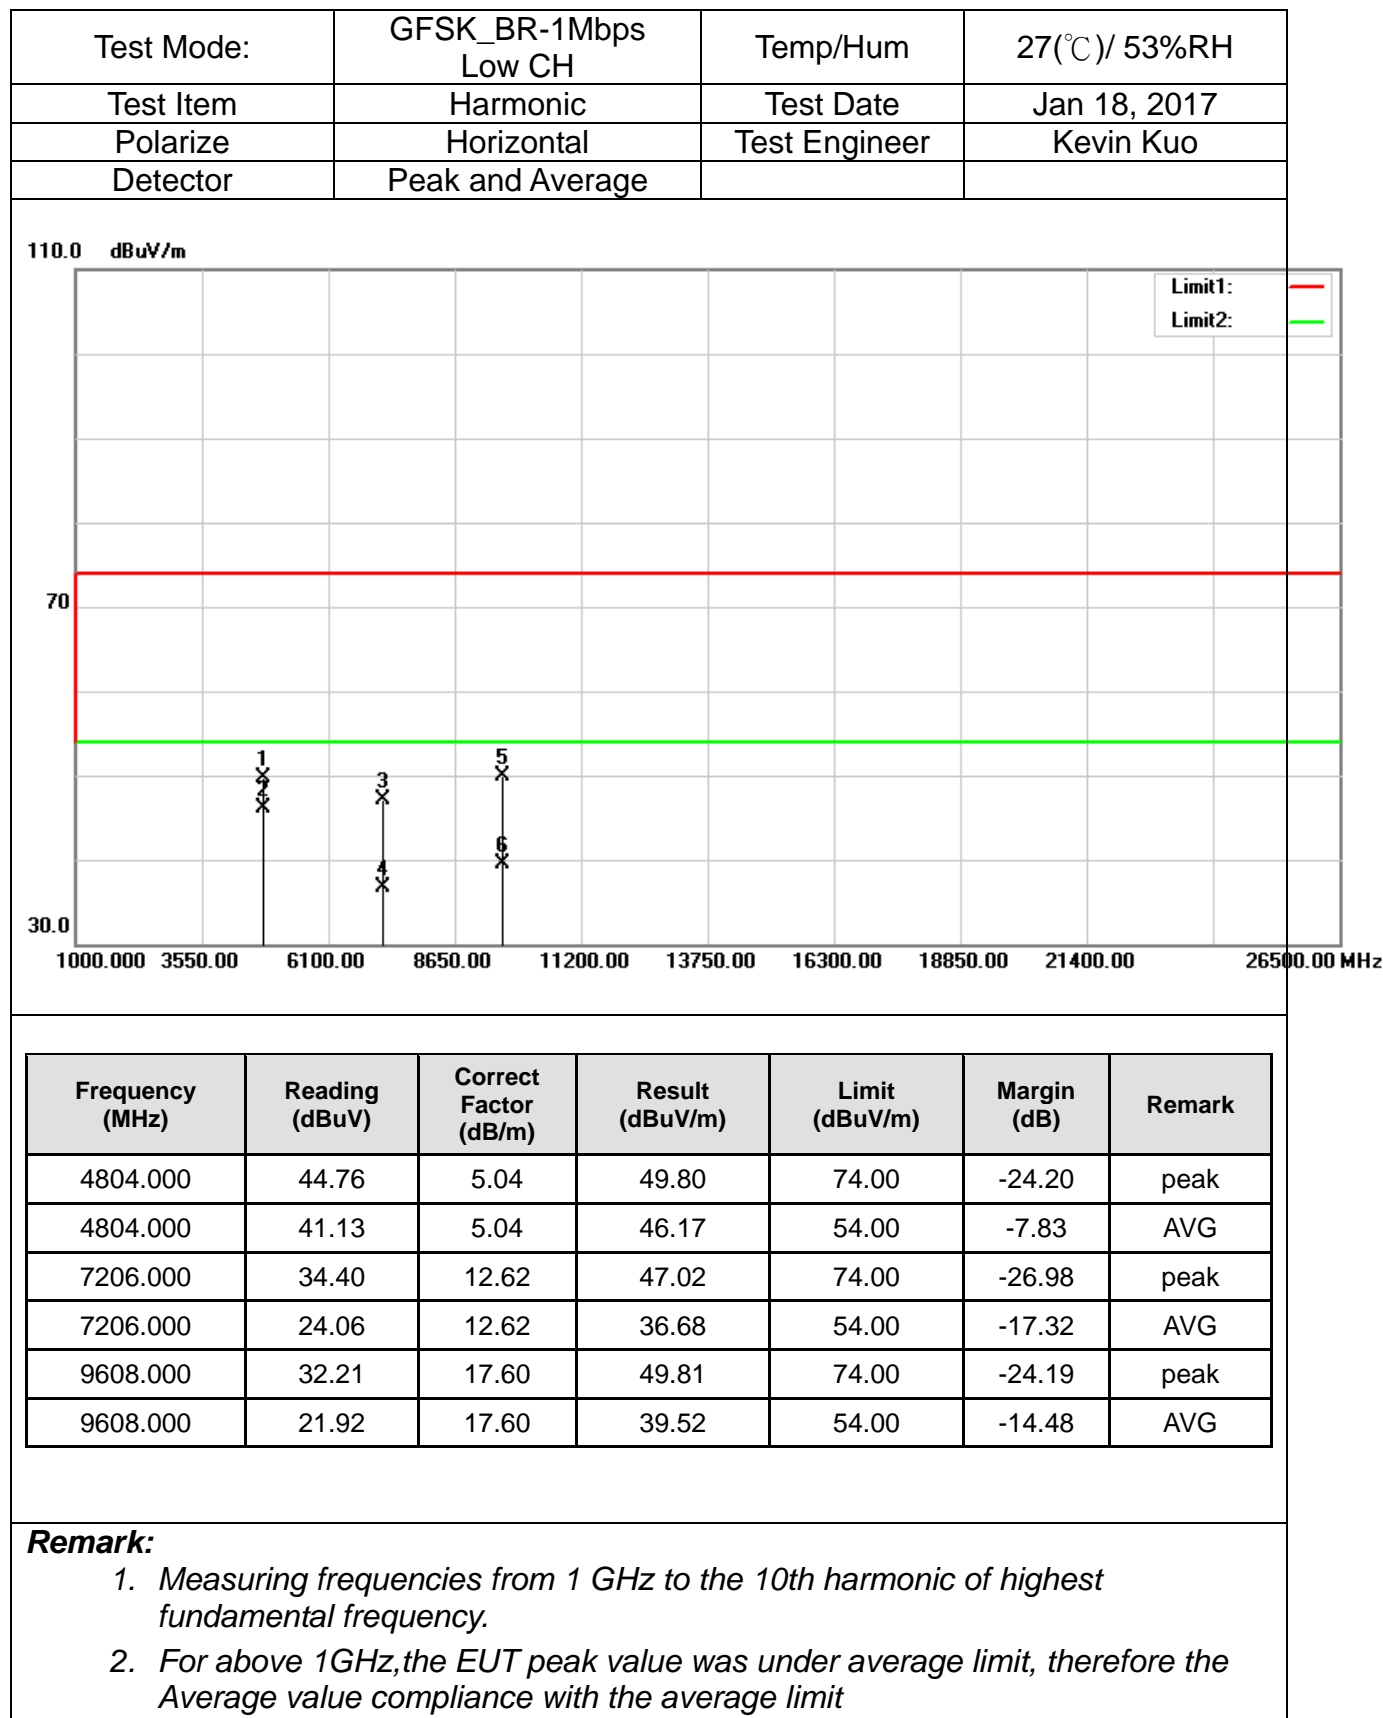


Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

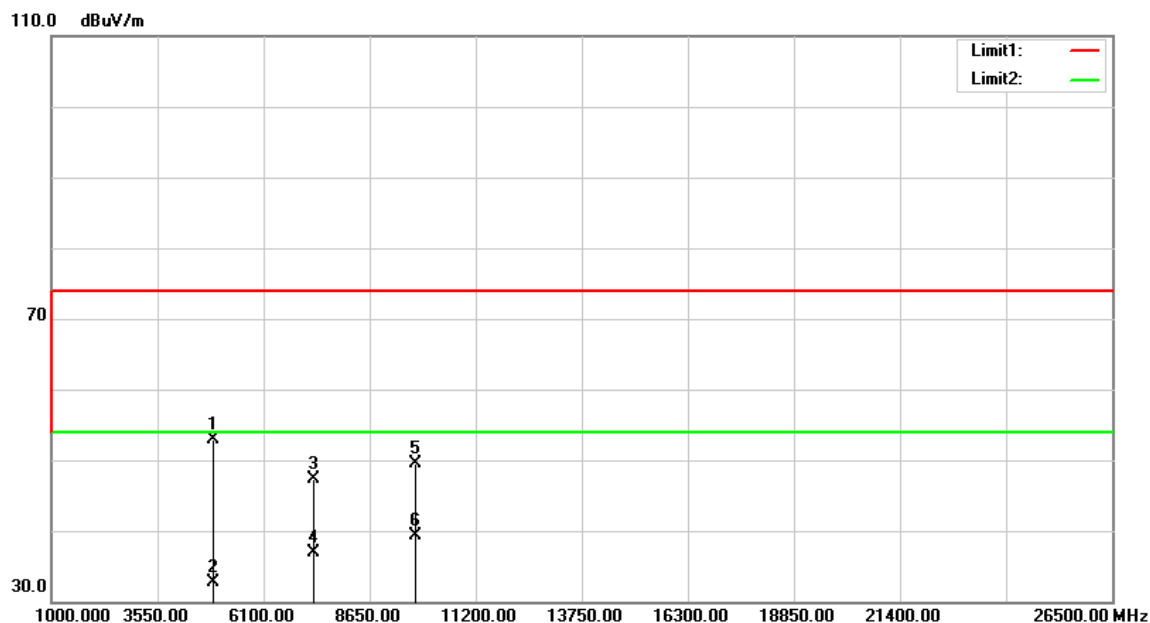


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	47.72	5.26	52.98	74.00	-21.02	peak
4883.000	27.38	5.26	32.64	54.00	-21.36	AVG
7323.000	34.34	12.98	47.32	74.00	-26.68	peak
7323.000	23.83	12.98	36.81	54.00	-17.19	AVG
9764.000	31.99	17.60	49.59	74.00	-24.41	peak
9764.000	21.67	17.60	39.27	54.00	-14.73	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

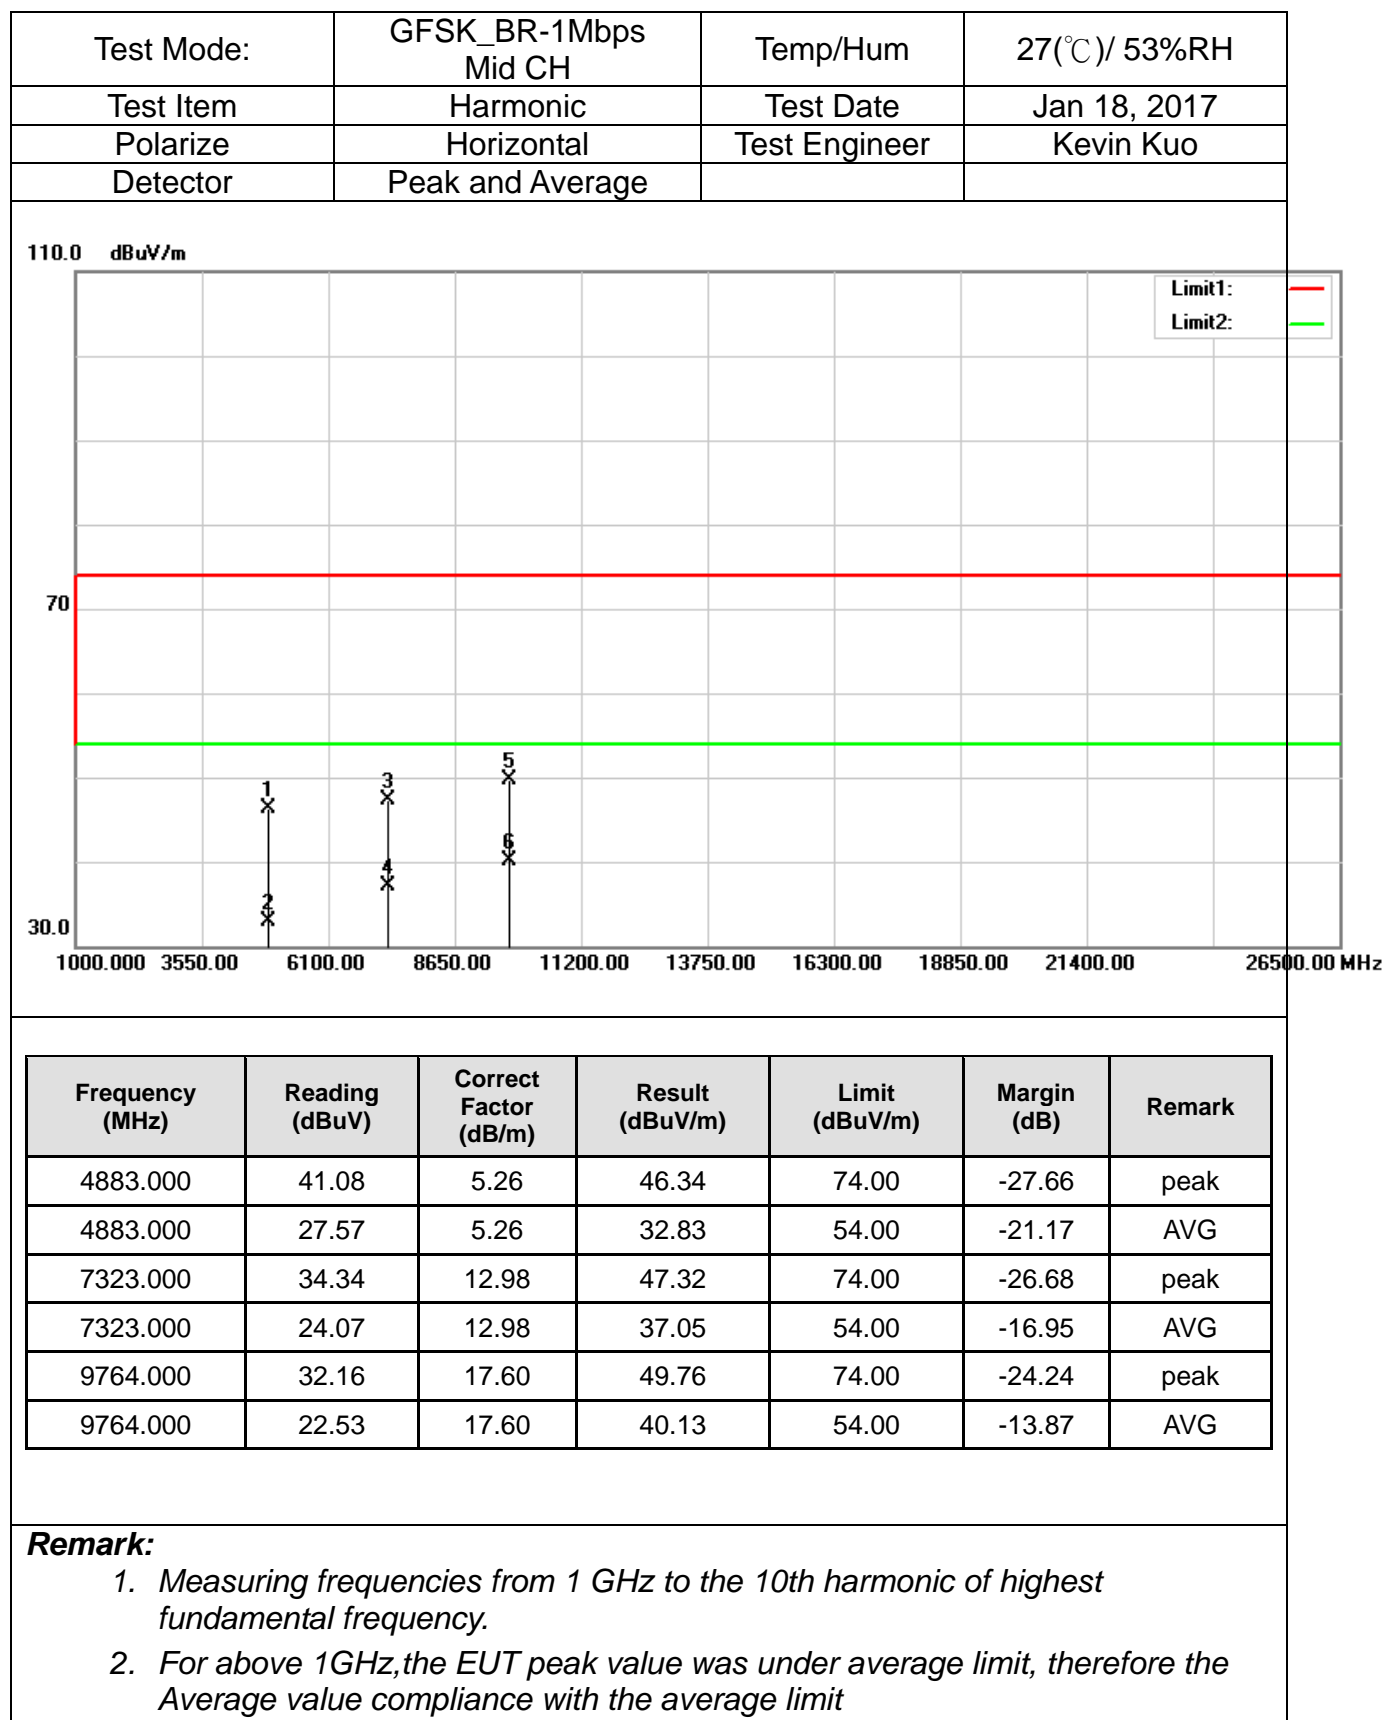

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

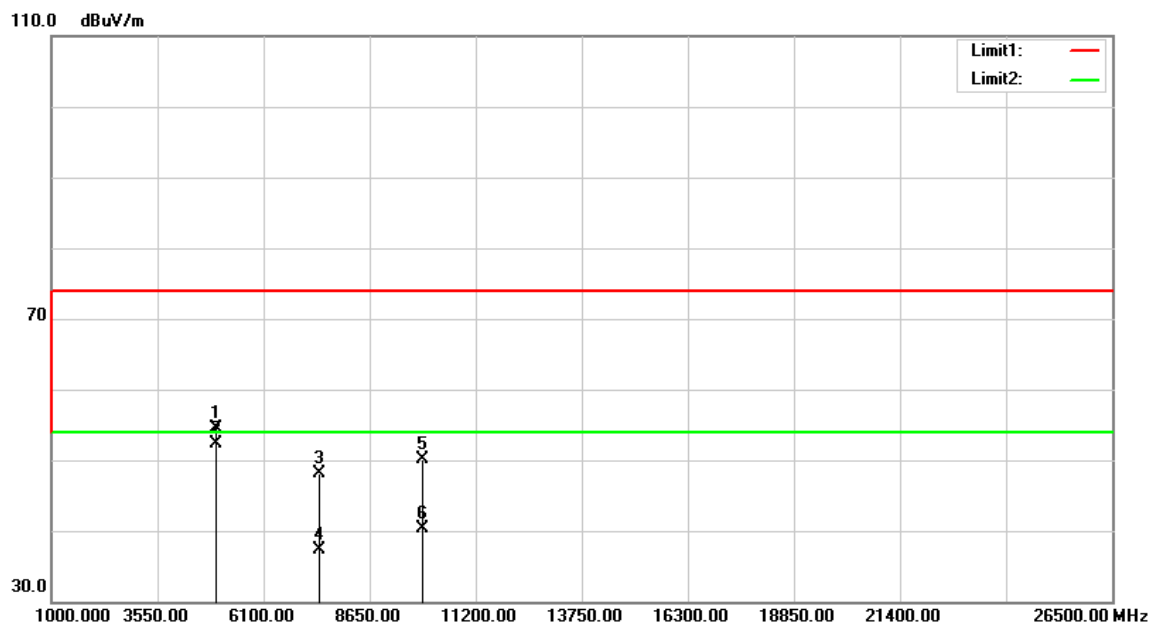


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	49.05	5.46	54.51	74.00	-19.49	peak
4960.000	46.79	5.46	52.25	54.00	-1.75	AVG
7440.000	34.80	13.33	48.13	74.00	-25.87	peak
7440.000	24.05	13.33	37.38	54.00	-16.62	AVG
9920.000	32.53	17.60	50.13	74.00	-23.87	peak
9920.000	22.67	17.60	40.27	54.00	-13.73	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Kevin Kuo
Detector	Peak and Average		

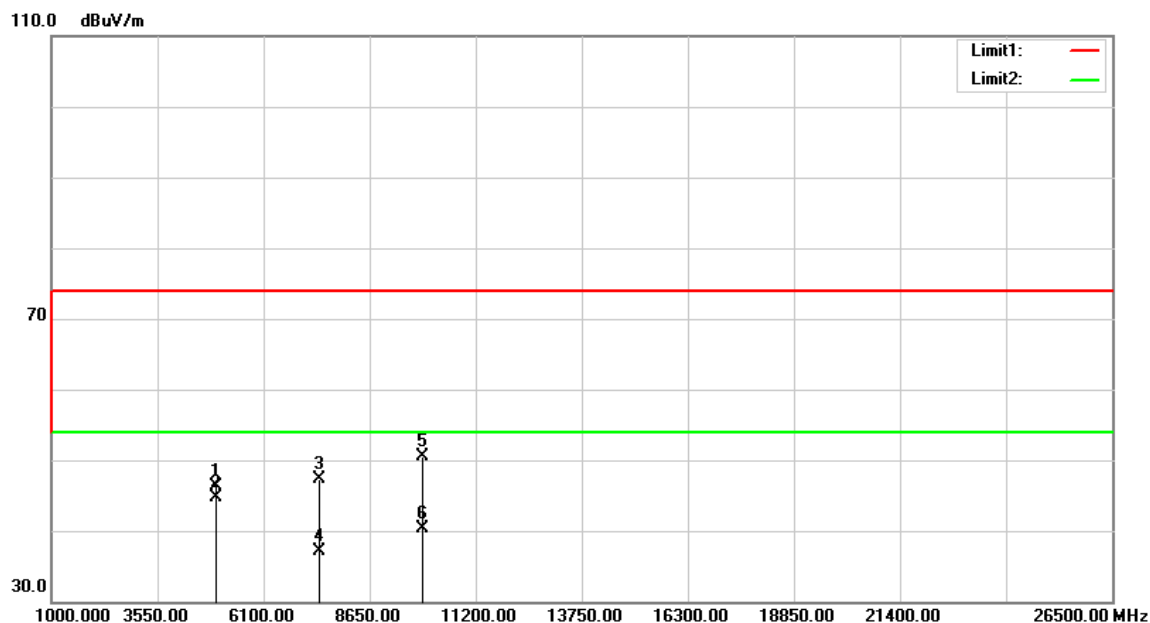


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	40.74	5.46	46.20	74.00	-27.80	peak
4960.000	39.28	5.46	44.74	54.00	-9.26	AVG
7440.000	34.01	13.33	47.34	74.00	-26.66	peak
7440.000	23.85	13.33	37.18	54.00	-16.82	AVG
9920.000	32.96	17.60	50.56	74.00	-23.44	peak
9920.000	22.62	17.60	40.22	54.00	-13.78	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	8DPSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

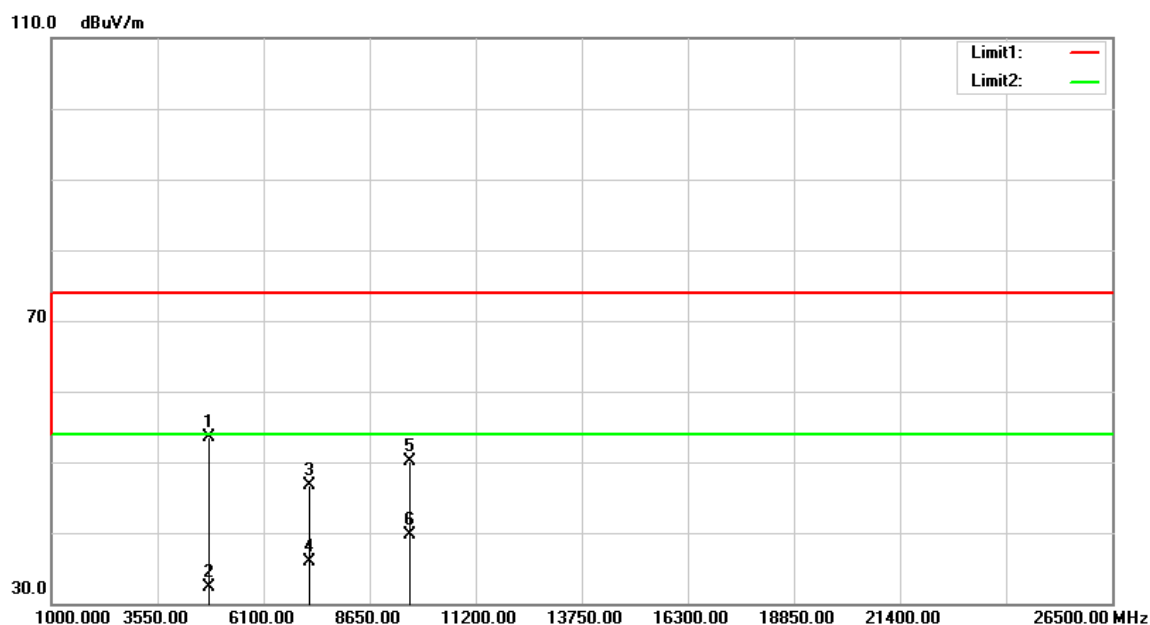


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4806.000	48.39	5.05	53.44	74.00	-20.56	peak
4806.000	27.23	5.05	32.28	54.00	-21.72	AVG
7206.000	34.15	12.62	46.77	74.00	-27.23	peak
7206.000	23.27	12.62	35.89	54.00	-18.11	AVG
9608.000	32.41	17.60	50.01	74.00	-23.99	peak
9608.000	22.07	17.60	39.67	54.00	-14.33	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	8DPSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Kevin Kuo
Detector	Peak and Average		

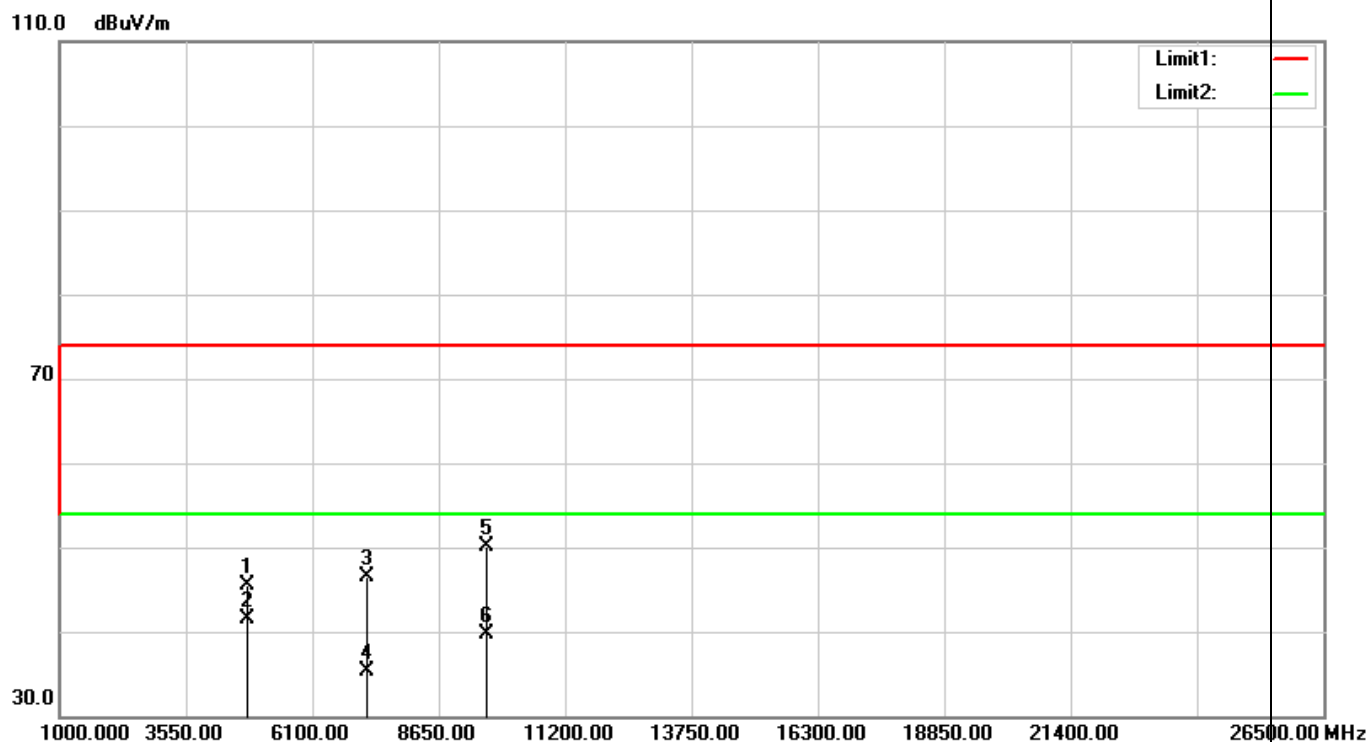


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	40.56	5.04	45.60	74.00	-28.40	peak
4804.000	36.43	5.04	41.47	54.00	-12.53	AVG
7206.000	33.94	12.62	46.56	74.00	-27.44	peak
7206.000	22.76	12.62	35.38	54.00	-18.62	AVG
9608.000	32.57	17.60	50.17	74.00	-23.83	peak
9608.000	22.12	17.60	39.72	54.00	-14.28	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit


Test Mode:	8DPSK_BR-1Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

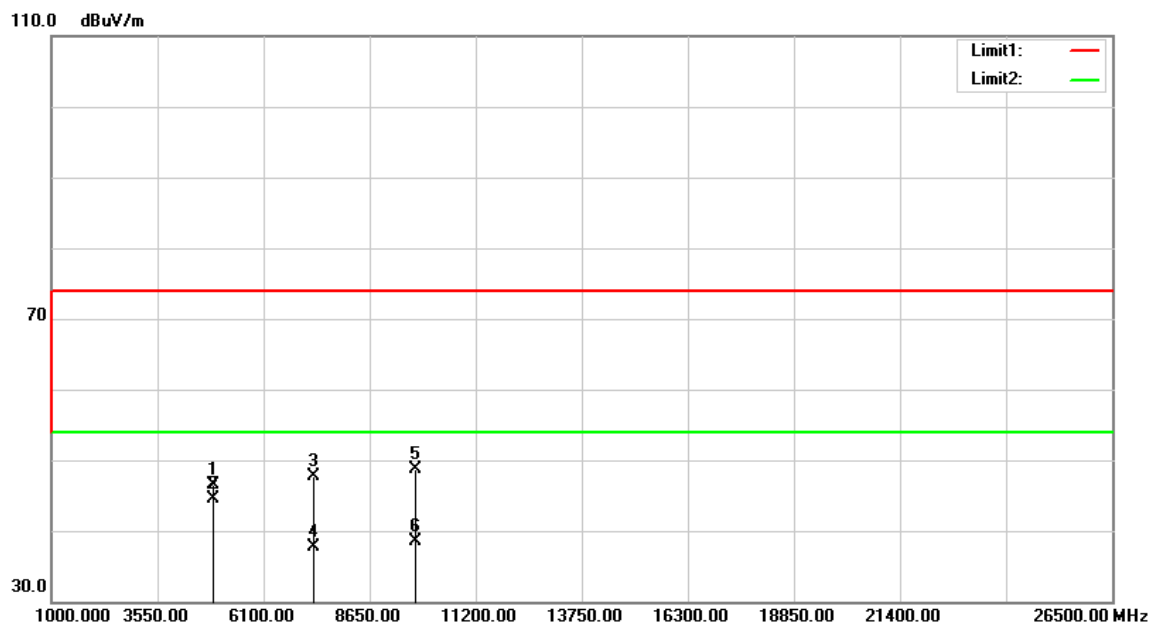


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	41.17	5.25	46.42	74.00	-27.58	peak
4882.000	39.33	5.25	44.58	54.00	-9.42	AVG
7323.000	34.80	12.98	47.78	74.00	-26.22	peak
7323.000	24.63	12.98	37.61	54.00	-16.39	AVG
9764.000	31.15	17.60	48.75	74.00	-25.25	peak
9764.000	20.93	17.60	38.53	54.00	-15.47	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

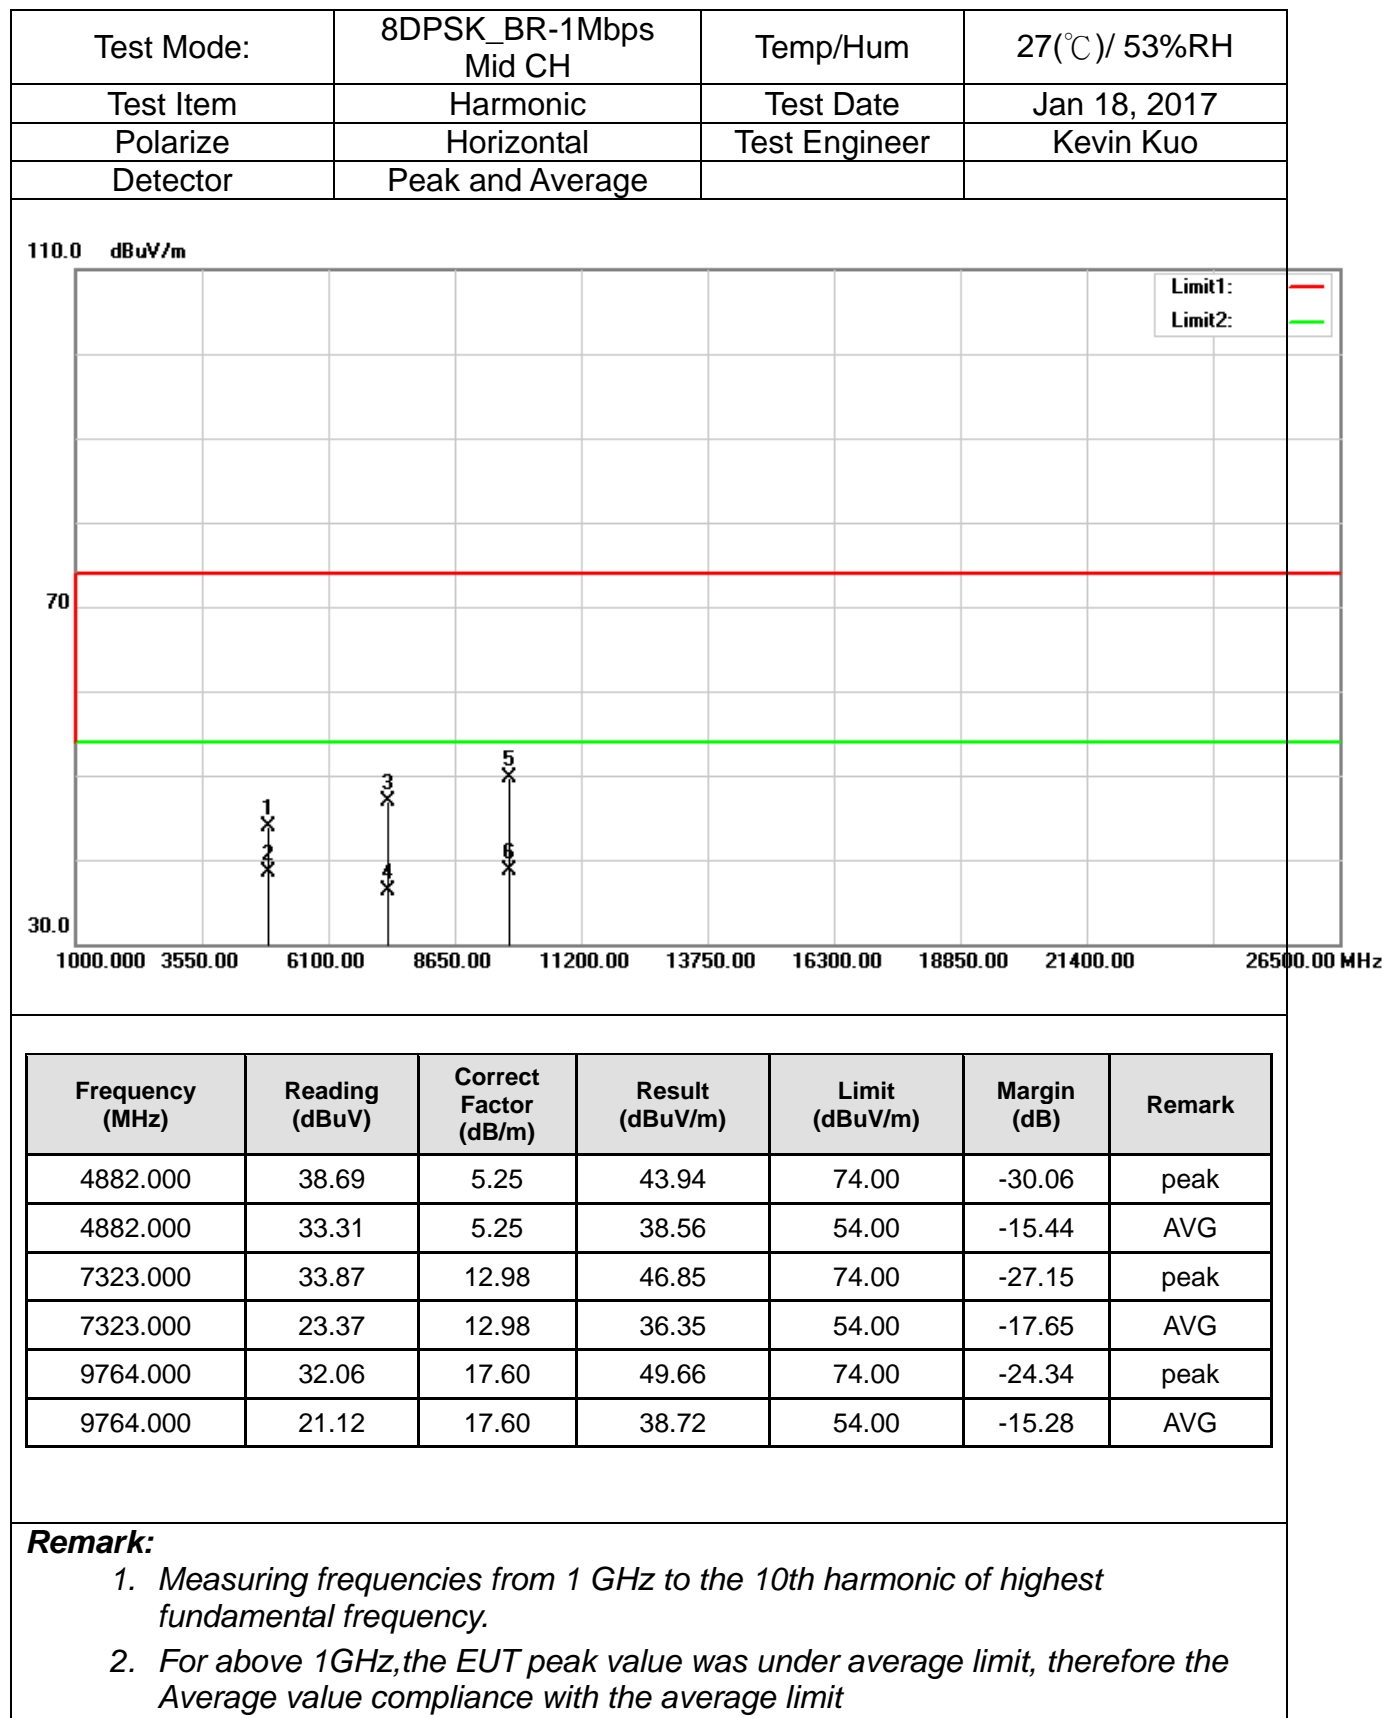

Test Mode:	8DPSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Vertical	Test Engineer	Kevin Kuo
Detector	Peak and Average		

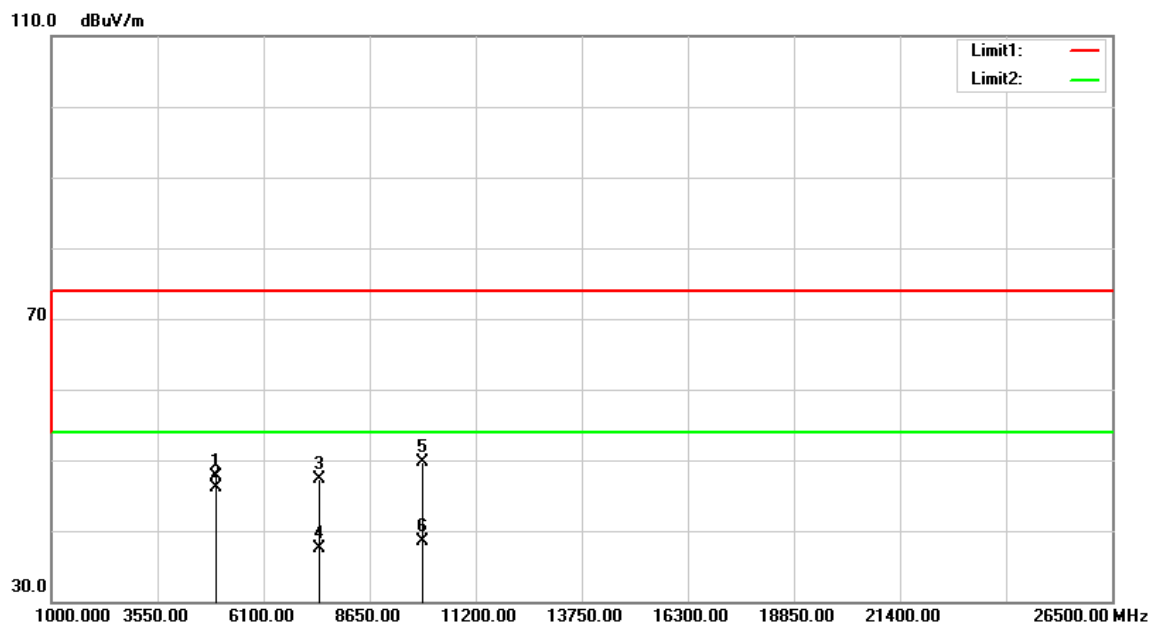


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	42.29	5.46	47.75	74.00	-26.25	peak
4960.000	40.66	5.46	46.12	54.00	-7.88	AVG
7440.000	34.01	13.33	47.34	74.00	-26.66	peak
7440.000	24.20	13.33	37.53	54.00	-16.47	AVG
9920.000	32.07	17.60	49.67	74.00	-24.33	peak
9920.000	20.82	17.60	38.42	54.00	-15.58	AVG

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	8DPSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	Jan 18, 2017
Polarize	Horizontal	Test Engineer	Kevin Kuo
Detector	Peak and Average		

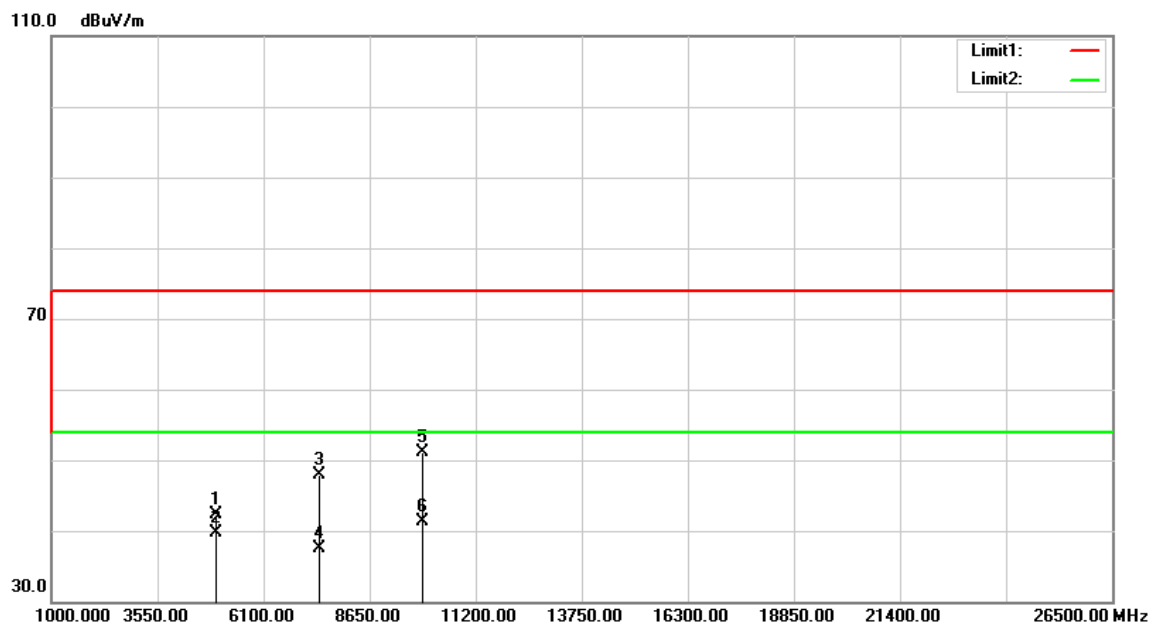

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.91	5.46	42.37	74.00	-31.63	peak
4960.000	34.16	5.46	39.62	54.00	-14.38	AVG
7440.000	34.56	13.33	47.89	74.00	-26.11	peak
7440.000	24.09	13.33	37.42	54.00	-16.58	AVG
9920.000	33.55	17.60	51.15	74.00	-22.85	peak
9920.000	23.67	17.60	41.27	54.00	-12.73	AVG

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit