



MPE TEST REPORT

Report Reference No..... : TRE1503016009 R/C.....:89420

FCC ID..... : 2AE6CEM8100U1

Applicant's name..... : Shenzhen Excera Technology Co., Ltd.

Address..... : Block K of 4F, Tower A of Junxiangda building,Zhongshanyuan WestRoad,Tongle Village,Nanshan,Shenzhen,China

Manufacturer.....: Shenzhen Excera Technology Co., Ltd.

Address.....: Block K of 4F, Tower A of Junxiangda building,Zhongshanyuan WestRoad,Tongle Village,Nanshan,Shenzhen,China

Test item description : Digital Mobile Radio

Trade Mark : EXCERA

Model/Type reference.....: EM8100 U1

Listed Model(s) : /

Standard : FCC Per 47 CFR 2.1091(b)
KDB447498 v05r02

Date of receipt of test sample.....: Mar 26, 2015

Date of testing.....: Mar 27, 2015- Apr 14, 2015

Date of issue.....: Apr 14, 2015

Result.....: PASS

Compiled by
(position+printed name+signature)...: File administrators Shayne Zhu

Shayne Zhu

Supervised by
(position+printed name+signature)...: Project Engineer Cary Luo

Cary Luo

Approved by
(position+printed name+signature)...: RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address.....: Bldg3, Hongfa Hi-tech Industrial Park, Genyu Road, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>SUMMARY</u>	<u>3</u>
1.1.	Client Information	3
1.2.	Product Description	3
1.3.	Test frequency list	4
1.4.	EUT operation mode	5
1.5.	EUT configuration	5
1.6.	Modifications	5
<u>2.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
2.1.	Address of the test laboratory	6
2.2.	Environmental conditions	6
2.3.	Statement of the measurement uncertainty	6
2.4.	Equipments Used during the Test	6
<u>3.</u>	<u>METHOD OF MEASUREMENT</u>	<u>7</u>
3.1.	Applicable Standard	7
3.2.	Limit	8
3.3.	Calculating the Safe Distance	8
3.4.	Measurement Procedure	10
3.5.	Test Results	10
3.6.	Conclusion	11
3.7.	Test Setup Photos of the EUT	11

1. SUMMARY

1.1. Client Information

Applicant:	Shenzhen Excera Technology Co., Ltd.
Address:	Block K of 4F, Tower A of Junxiangda building,Zhongshanyuan WestRoad,Tongle Village,Nanshan,Shenzhen,China
Manufacturer:	Shenzhen Excera Technology Co., Ltd.
Address:	Block K of 4F, Tower A of Junxiangda building,Zhongshanyuan WestRoad,Tongle Village,Nanshan,Shenzhen,China

1.2. Product Description

Name of EUT:	Digital Mobile Radio	
Trade mark:	EXCERA	
Model/Type reference:	EM8100 U1	
Listed Model(s):	/	
Power supply:	DC 13.6V	
Charger information:	/	
Adapter information:	/	
Operation Frequency Range:	From 400 MHz to 470 MHz	
Rated Output Power:	High Power:45 Watts(46.53dBm)/Low Power:5 Watts(36.99dBm)	
Modilation Type:	Analog Voice:	FM
	Digital Voice/Digital Data:	4FSK
Channel Separation:	Analog Voice:	12.5KHz
	Digital Voice/Digital Data:	12.5KHz
Emission Designator:	Analog Voice:	9K97F3E for 12.5KHz Channel Separation
	Digital Voice:	7K55FXW
	Digital Data:	7K55FXD
Support data rate	9.6kbps	
Antenna Type	External	
Maximum Transmitter Power	Analog	49.55W for 12.5 KHz Channel Separation
	Digital	50.12W for 12.5 KHz Channel Separation
Hard version:	E	
Soft version:	0.9.05.010	

Note: The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.

1.3. Test frequency list

Modulation Type	Channel Separation	Test Frequency (MHz)
Analog/FM	12.5kHz	406.5
		421.5
		450.5
		469.5
Digital/4FSK	12.5kHz	406.5
		421.5
		450.5
		469.5

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above listed frequency for testing.

1.4. EUT operation mode

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test mode No.	Description of operation mode	Additional information
Op 1	FM+BW12.5kHz+TX	The equipment is set with FM modulation and 12.5kHz bandwidth at maximum rated power for transmitter, powered by DC 13.60V
Op 2	4FSK+BW12.5kHz+TX	The equipment is set with 4FSK modulation and 12.5kHz bandwidth at maximum rated power for transmitter, powered by DC 13.60V

1.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

●	Power Cable	Length (m) :	3.00
		Shield :	Unshielded
		Detachable :	Undetachable
○	Multimeter	Manufacturer :	/
		Model No. :	/

1.6. Modifications

No modifications were implemented to meet testing criteria.

2. TEST ENVIRONMENT

2.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

2.4. Equipments Used during the Test

AC&DC Power Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Field Probe	AR	FW5004	300239	2014/11/1
Field Meter	AR	HI-605	00064170	2014/11/1

The calibration interval was one year.

3. Method of measurement

3.1. Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

IEEE Std C95.1: 2005: "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz".

FCC OET Bulletin 65, Edition 97-01: "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields".

FCC Supplement C to OET Bulletin 65, Edition 01-01: "Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emission".

IEEE Std C95.3: 2002: "IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields with Respect to Human Exposure to Such Fields, 100 kHz – 300 GHz",

KDB447498 v05r02: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies

3.2. Limit

FCC Part 2.1091:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f=frequency in MHz

*=Plane-wave equivalent power density

3.3. Calculating the Safe Distance

Before starting MPE measurements, we calculated the safe distance, R_{safe} using the following formula:

$$R_{\text{safe}} = \sqrt{\frac{P_{\text{max}} \cdot G_n \cdot \eta}{4\pi \cdot S}}$$

G_n : antenna gain (numeric)(EUT antenna gain=3.5dBi)

P_{max} : maximum power input to the antenna (W)

S : power density limit (W/m²) respectively

η : duty cycle (decimal number), for these measurements $\eta = 0.5$

The results of R_{safe} calculations:

FCC Part 2.1091:

Controlled RF Exposure

Op 1									
Test Frequency (MHz)	Output Power (1) (dBm)	Output Power (2) (W)	Tolerance (dB)	Output Power (3) (dBm)	Output Power (4) (W)	Output Power (5) (mW)	Antenna Gain (Numeric)	Power Density (mW/cm ²)	Safe Distance (m)
406.5	46.54	45.0817	1.00	47.54	56.7545	56754.46	2.2387	1.3550	0.61
421.5	46.62	45.9198	1.00	47.62	57.8096	57809.60	2.2387	1.4050	0.61
450.5	46.89	48.8652	1.00	47.89	61.5177	61517.69	2.2387	1.5017	0.60
469.5	46.95	49.5450	1.00	47.95	62.3735	62373.48	2.2387	1.5650	0.60

Op 2									
Test Frequency (MHz)	Output Power (dBm)	Output Power (2) (W)	Tolerance (dB)	Output Power (3) (dBm)	Output Power (4) (W)	Output Power (5) (mW)	Antenna Gain (Numeric)	Power Density (mW/cm ²)	Safe Distance (m)
406.5	46.54	45.0817	1.00	47.54	56.7545	56754.46	2.2387	1.3550	0.61
421.5	46.69	46.6659	1.00	47.69	58.7489	58748.94	2.2387	1.4050	0.61
450.5	46.97	49.7737	1.00	47.97	62.6614	62661.39	2.2387	1.5017	0.61
469.5	47.00	50.1187	1.00	48.00	63.0957	63095.73	2.2387	1.5650	0.60

Note: Output Power(1)=Measured power, Output Power(3)=Output Power(1)+Tolerance
 Output Power(5)= Output Power(2)*(Output Power(4)/Output Power(2))

Note:

Antenna Information:

Description	Gain	Mount Type	Model
vertically polarized	3.5dBi	Roof	TCTQ370-04V60Z

3.4. Measurement Procedure

1. Polarization of the EUT's antenna was vertical, which is its polarization in actual use.
2. The EUT at the chosen modulation was set to transmit at the chosen frequency at maximum RF power and at 50% duty cycle (50% duty cycle is simulated either by lowering the radio's power by 3dB or by using a 3 dB pad on the output of the radio). During preliminary measurements, we set the distance between the power density probe and the investigated EUT's antenna equal to the average calculated R_{safe} applicable either for controlled or uncontrolled environments.
3. Power density measurements were taken at different heights of the probe from the ground (0.1 to 2 meters) while rotating versus azimuth (from 0° to 360°) the antenna.
4. The azimuth between the probe and the antenna position corresponding to the highest MPE level was chosen as the "worst case" position for the final measurements.
5. For the final measurements, we adjusted the distance between the test probe and the tested antenna to the real safe distance, R_{real} , such that the measured highest power density in the "worst case" position was the same or slightly less than the test limit.
6. The measurement results of final measurements conducted at the chosen azimuth and different heights of the probe above the ground are shown in Section 13.
7. Average values of power density were calculated for the imaginary whole human body (0.1–2.0 m), for the lower part of the body (0.1–0.9 m) and for the upper part of the body (1.0–2.0 m).

3.5. Test Results

MPE Data:

Measuring Antenna Height (cm)	FCC Part 2.1091
	Controlled RF Exposure
	3.5dBi Antenna 61cm (mW/cm ²)
10	0.04
20	0.05
30	0.09
40	0.14
50	0.11
60	0.18
70	0.22
80	0.41
90	0.47
100	0.54
110	0.32
120	0.25
130	0.18
140	0.14
150	0.11
160	0.07
170	0.05
180	0.03
190	0.01
200	0.01

MPE for Body Parts:


Part of the body/averaging points (m)	FCC Part 2.1091
	Controlled RF Exposure
	3.5dBi Antenna 61cm (mW/cm ²)
Whole body (0.1 to 2.0)	0.12
Lower body (0.1 to 0.9)	0.26
Upper body (1.0 to 2.0)	0.10

3.6. Conclusion

1. The MPE measurements for controlled and uncontrolled environments shown in this report were conducted per the applicable FCC Rules, Regulations and Guidance, and determined the minimum safe distances between a user and the EUT antennas gain.
2. The measured MPE are below the maximum allowed limits.
3. The User Manual shall include RF radiation safety warnings and the following:

Antenna	Safe Distance, R_{safe} , (cm)
	FCC Part 2.1091
	Controlled RF Exposure
TCTQ370-04V60Z (3.5dBi)	61

3.7. Test Setup Photos of the EUT

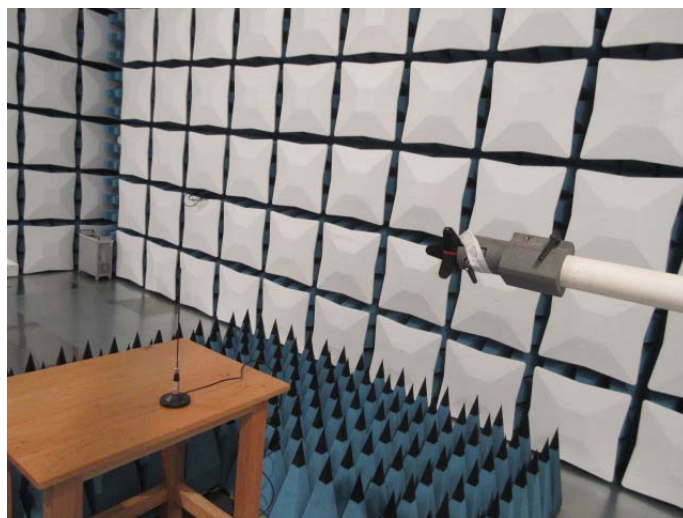

.....End of Report.....