

2. FPC touch+antenna appearance




3.3 Return loss

BT VSWR+ Return

	Resonance point rang(MHz)	frequency point(MHz)/Maximum return loss(dB)		
	2400-2500		2400	2500
		VSWR	3.01	2.45
		Return loss	-6	-8

3.4 无源效率

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	35.77	-4.47	-0.62
2410	40.56	-3.92	-0.09
2420	41.71	-3.8	0.01
2430	43.99	-3.57	0.22
2440	43.81	-3.58	0.11
2450	42.14	-3.75	-0.17
2460	41.6	-3.81	-0.34
2470	41.46	-3.82	-0.3
2480	40.14	-3.96	-0.3
2490	39.07	-4.08	-0.31
2500	37.71	-4.24	-0.4

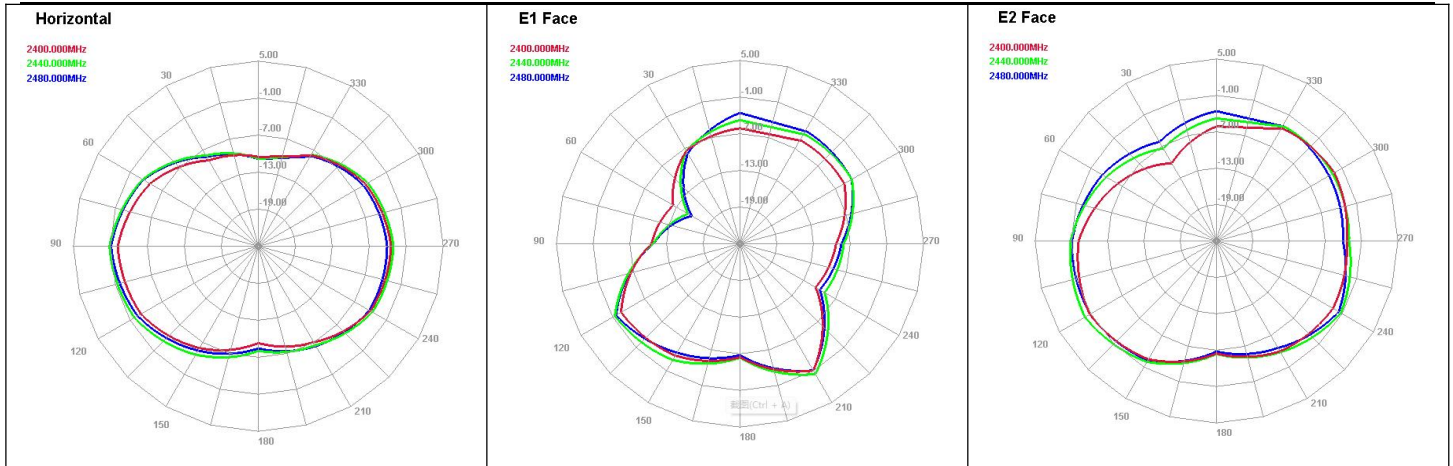

4. Appearance structure

4.1. FPC antenna material FPC

5. Remarks


(Electrical Performance Test Report)

In the electrical performance test report, the 3D darkroom data provided for manufacturers,
The following table format

Appendix 1: Structural Drawings

Appendix II (Electrical Performance Test Report)

FPC structural drawings

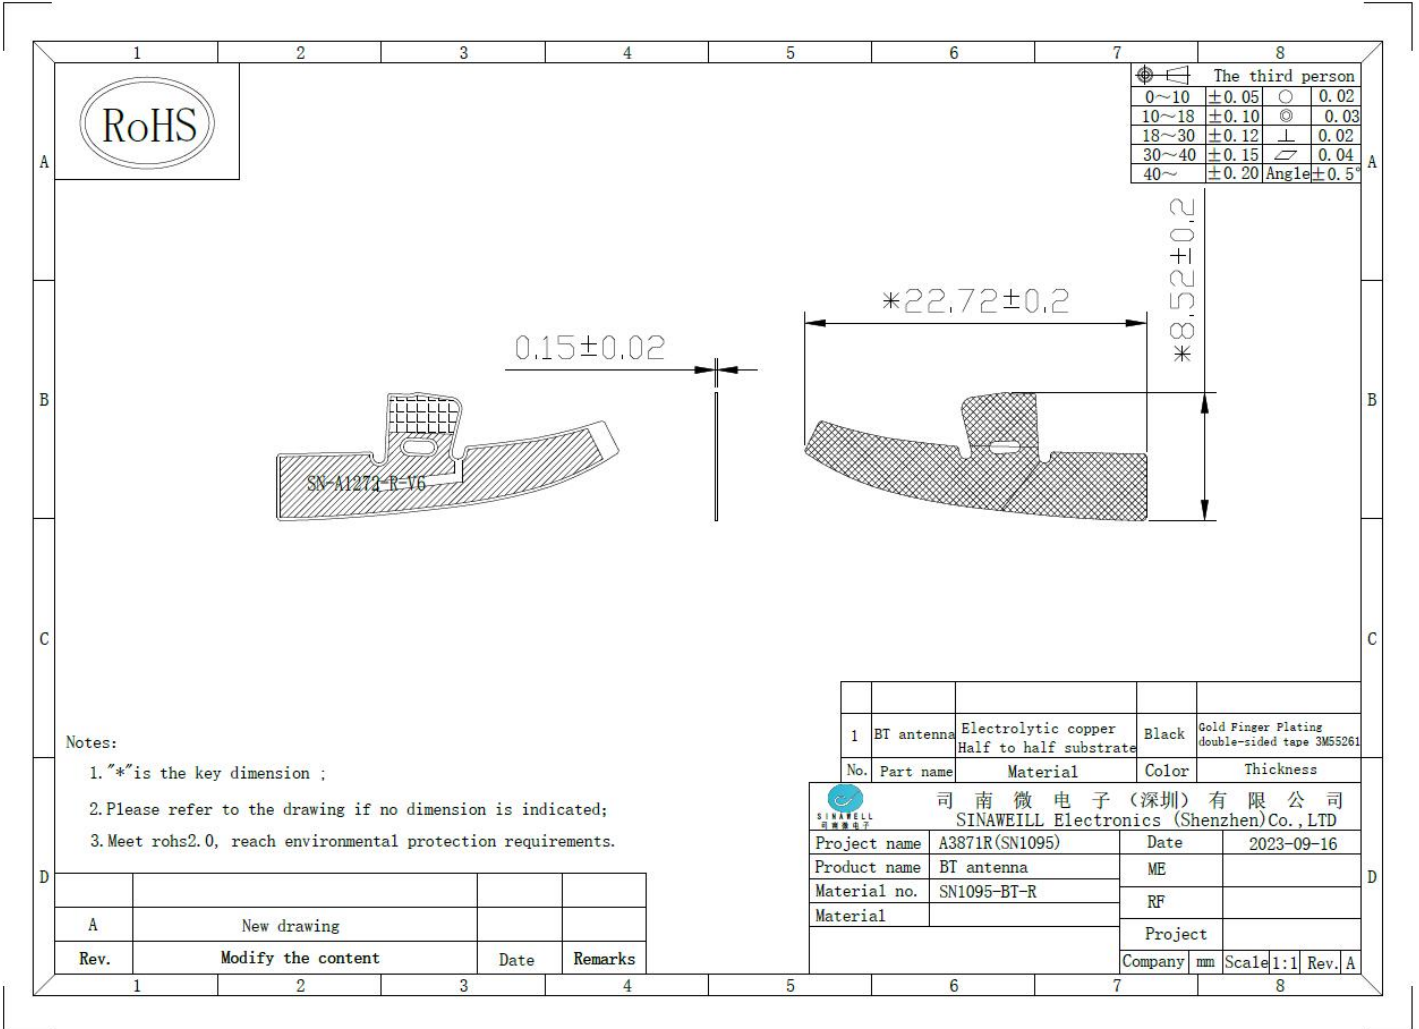

Key size

NO	measure(m m)	tolerance(m m)	remarks
1	22.72	±0.2	
2	8.52	±0.2	
3	0.1	±0.02	
4			
5			