



5.20.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD4 16QAM 10MHz, Channel = low

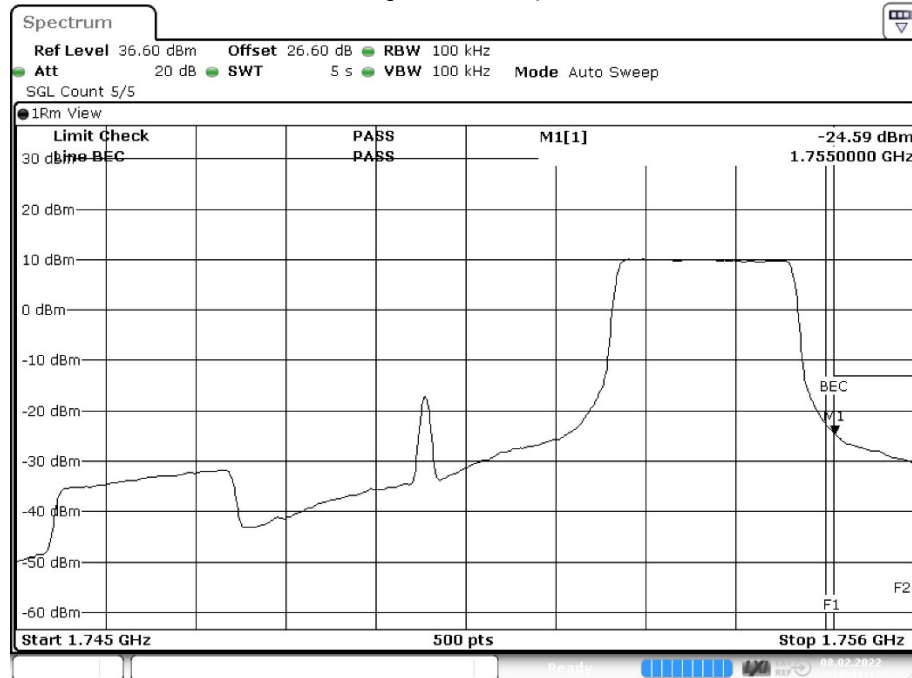


Date: 8.FEB.2022 18:41:13

LTE eFDD12 16QAM 10MHz, Channel = low

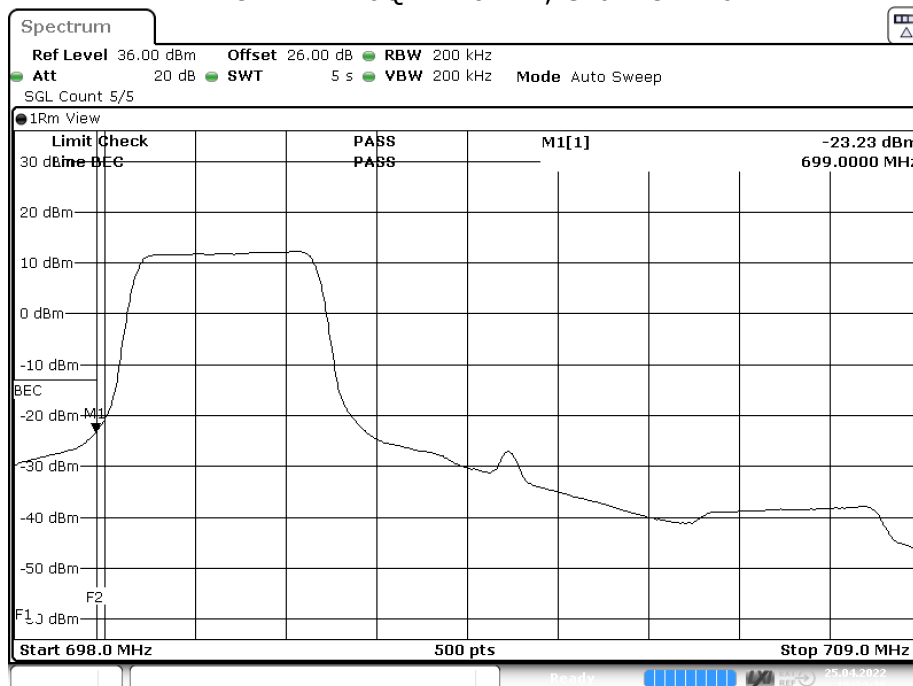


Date: 25.APR.2022 10:34:26

LTE eFDD13 QPSK 5MHz, Channel = low

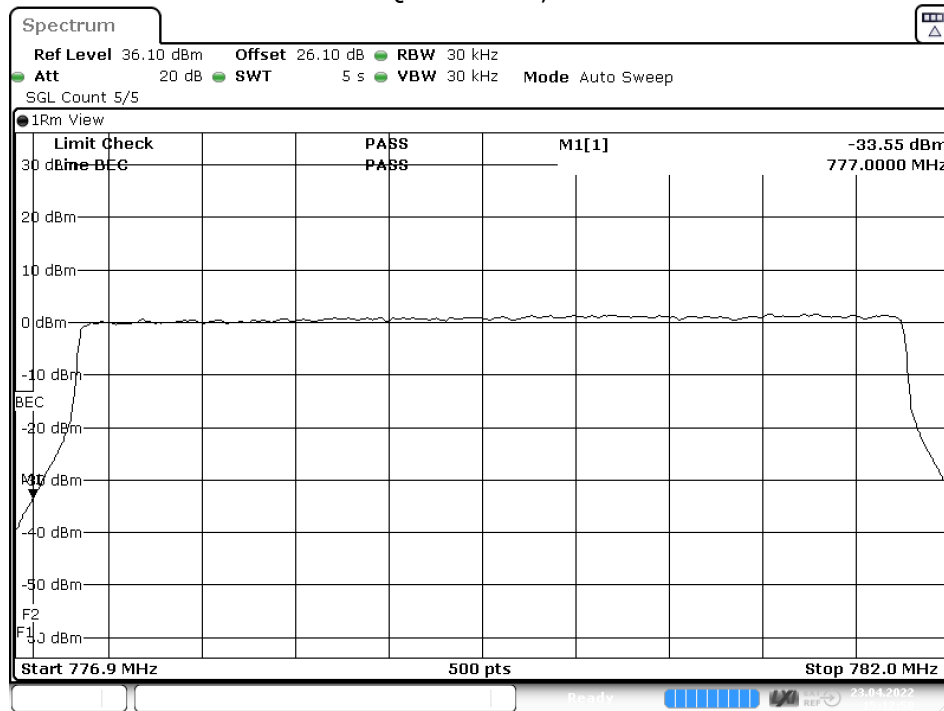


Date: 23.APR.2022 15:12:50

LTE eFDD66 QPSK 3MHz, Channel = low

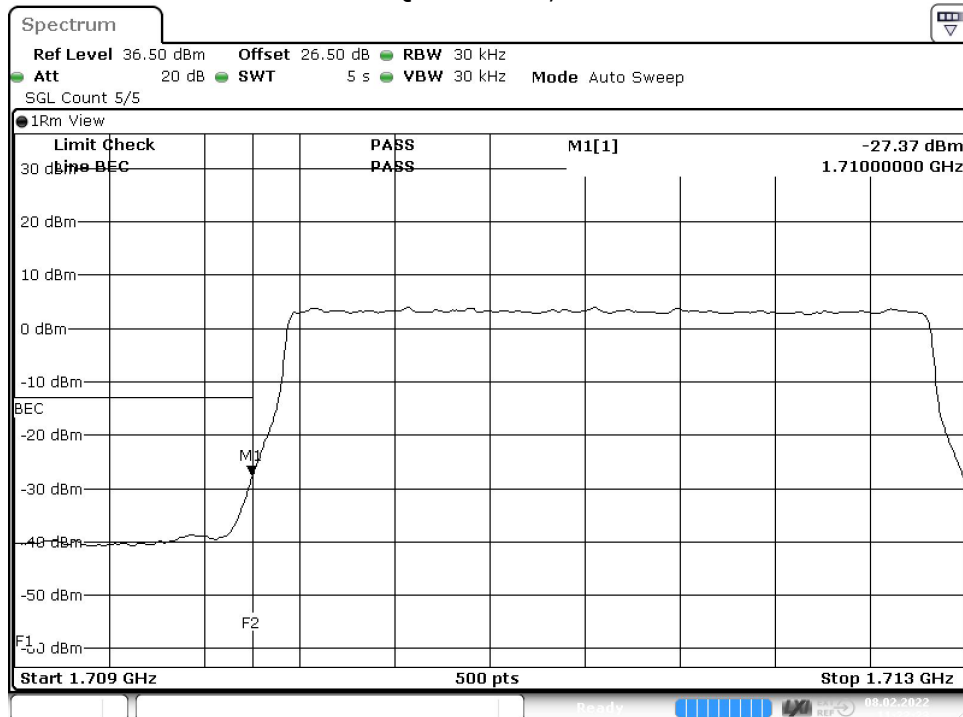

Date: 8.FEB.2022 11:22:23

LTE eFDD71 16QAM 10MHz, Channel = high

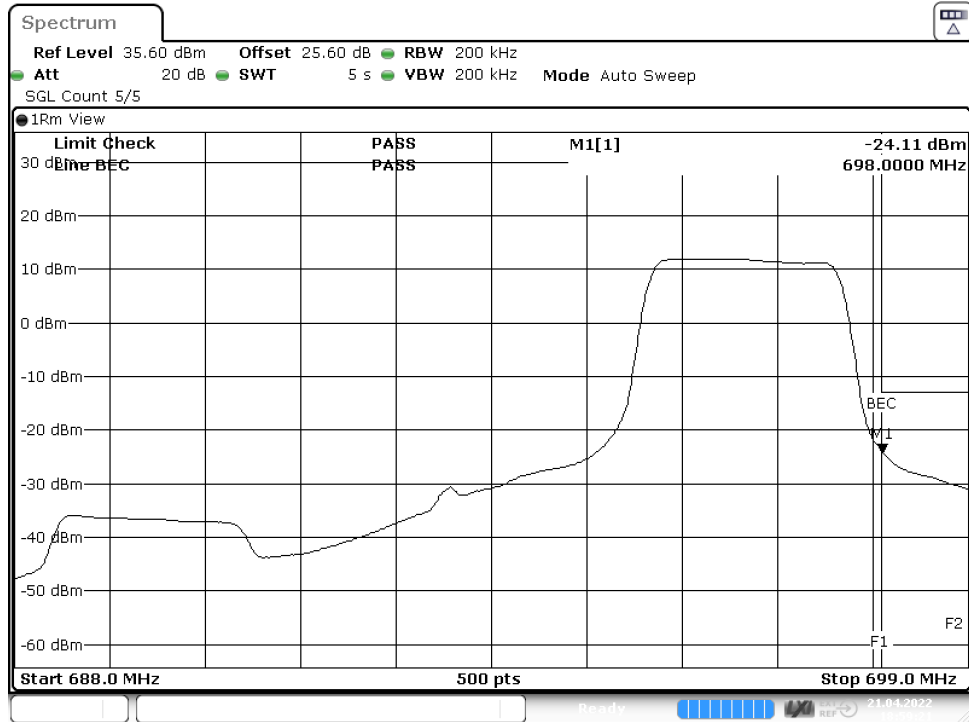

Date: 21.APR.2022 18:59:22

5.20.5 TEST EQUIPMENT USED

- Radio Lab

5.21 PEAK TO AVERAGE RATIO


Standard **FCC PART 27 Subpart C**

The test was performed according to:
ANSI C63.26: 2015

5.21.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance of the EUT to the peak-to-average limits and requirements of the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

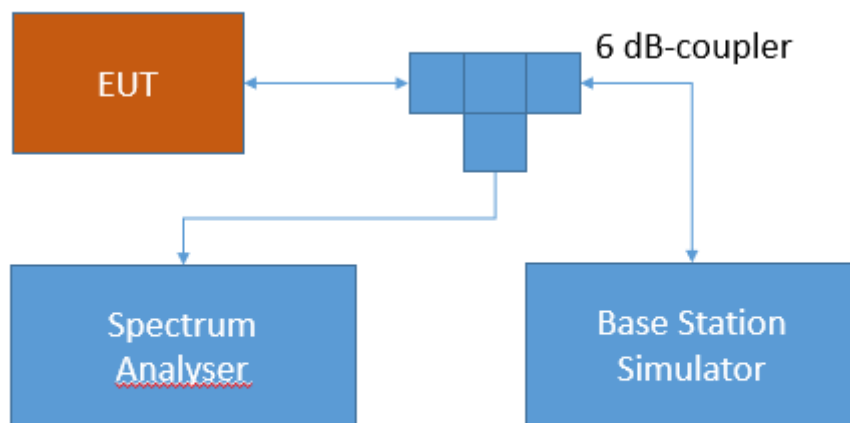

Test Setup FCC Part 22/24/27/90 Cellular;
Peak-average ratio

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyser settings can be directly found in the measurement diagrams. The internal CCDF (complementary cumulative distribution function) of the spectrum analyser is used for this measurement

5.21.2 TEST REQUIREMENTS / LIMITS

FCC Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 27.50 - Power limits and duty cycle

Band 13:

No applicable PAPR limit.

RSS-130; 4.6.1 General

The transmitter output power shall be measured in terms of average power. In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

Band 12:

No applicable PAPR limit.

RSS-130; 4.6.1 General

The transmitter output power shall be measured in terms of average power. In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

Band 4/66:

d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(5) Equipment employed must be authorized in accordance with the provisions of §24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

RSS-139; 6.5 Transmitter Output Power

In addition, the peak to average power ratio (PAPR) of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

Band 71:

No applicable PAPR limit.

RSS-130; 4.6.1 General

The transmitter output power shall be measured in terms of average power. In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

5.21.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Ressource Blocks | Bandwidth [MHz] | Peak to Average Ratio | Limit (IC) [dB] |
|-------------------|---------|------------------|-----------------|-----------------------|-----------------|
| LTE eFDD 4 QPSK | low | 6 | 1.4 | 5.22 | 13 |
| LTE eFDD 4 QPSK | mid | 6 | 1.4 | 5.59 | 13 |
| LTE eFDD 4 QPSK | high | 6 | 1.4 | 4.90 | 13 |
| LTE eFDD 4 16QAM | low | 6 | 1.4 | 6.12 | 13 |
| LTE eFDD 4 16QAM | mid | 6 | 1.4 | 6.43 | 13 |
| LTE eFDD 4 16QAM | high | 6 | 1.4 | 5.74 | 13 |
| LTE eFDD 12 QPSK | low | 6 | 1.4 | 5.39 | 13 |
| LTE eFDD 12 QPSK | mid | 6 | 1.4 | 5.33 | 13 |
| LTE eFDD 12 QPSK | high | 6 | 1.4 | 5.36 | 13 |
| LTE eFDD 12 16QAM | low | 6 | 1.4 | 6.23 | 13 |
| LTE eFDD 12 16QAM | mid | 6 | 1.4 | 6.14 | 13 |
| LTE eFDD 12 16QAM | high | 6 | 1.4 | 6.23 | 13 |
| LTE eFDD 13 QPSK | low | 25 | 5 | 5.19 | 13 |
| LTE eFDD 13 QPSK | mid | 25 | 5 | 5.22 | 13 |
| LTE eFDD 13 QPSK | high | 25 | 5 | 5.13 | 13 |
| LTE eFDD 13 16QAM | low | 25 | 5 | 6.03 | 13 |
| LTE eFDD 13 16QAM | mid | 25 | 5 | 6.03 | 13 |
| LTE eFDD 13 16QAM | high | 25 | 5 | 6.00 | 13 |
| LTE eFDD 66 QPSK | low | 6 | 1.4 | 5.22 | 13 |
| LTE eFDD 66 QPSK | mid | 6 | 1.4 | 5.22 | 13 |
| LTE eFDD 66 QPSK | high | 6 | 1.4 | 5.36 | 13 |
| LTE eFDD 66 16QAM | low | 6 | 1.4 | 6.06 | 13 |
| LTE eFDD 66 16QAM | mid | 6 | 1.4 | 6.06 | 13 |
| LTE eFDD 66 16QAM | high | 6 | 1.4 | 6.26 | 13 |
| LTE eFDD 71 QPSK | low | 25 | 5 | 5.10 | 13 |
| LTE eFDD 71 QPSK | mid | 25 | 5 | 5.33 | 13 |
| LTE eFDD 71 QPSK | high | 25 | 5 | 5.33 | 13 |
| LTE eFDD 71 16QAM | low | 25 | 5 | 6.00 | 13 |
| LTE eFDD 71 16QAM | mid | 25 | 5 | 6.17 | 13 |
| LTE eFDD 71 16QAM | high | 25 | 5 | 6.20 | 13 |

Remark: Please see next sub-clause for the measurement plot.


5.21.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD4 16QAM, Channel = mid

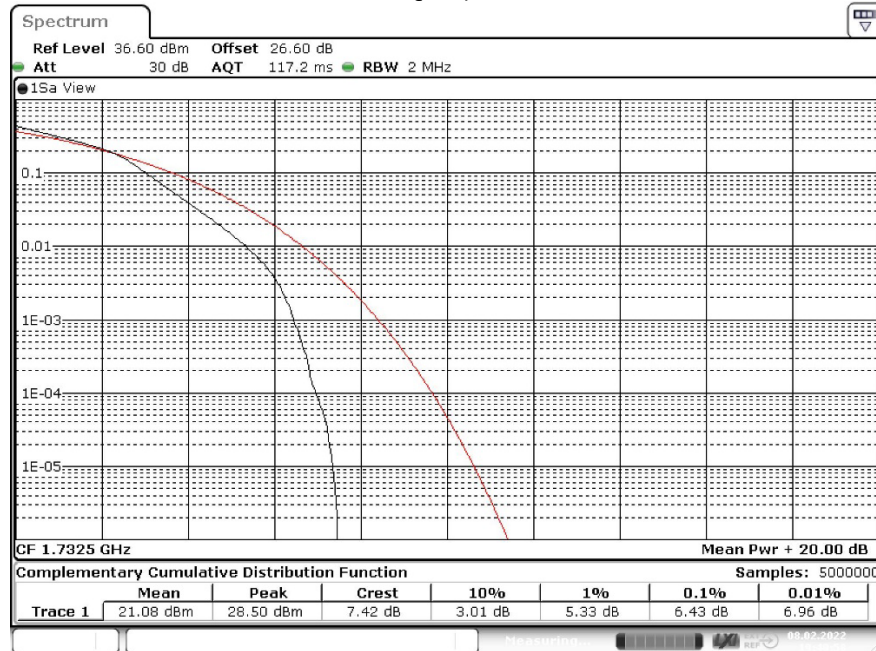

Date: 8.FEB.2022 19:40:58

LTE eFDD12 16QAM, Channel = low

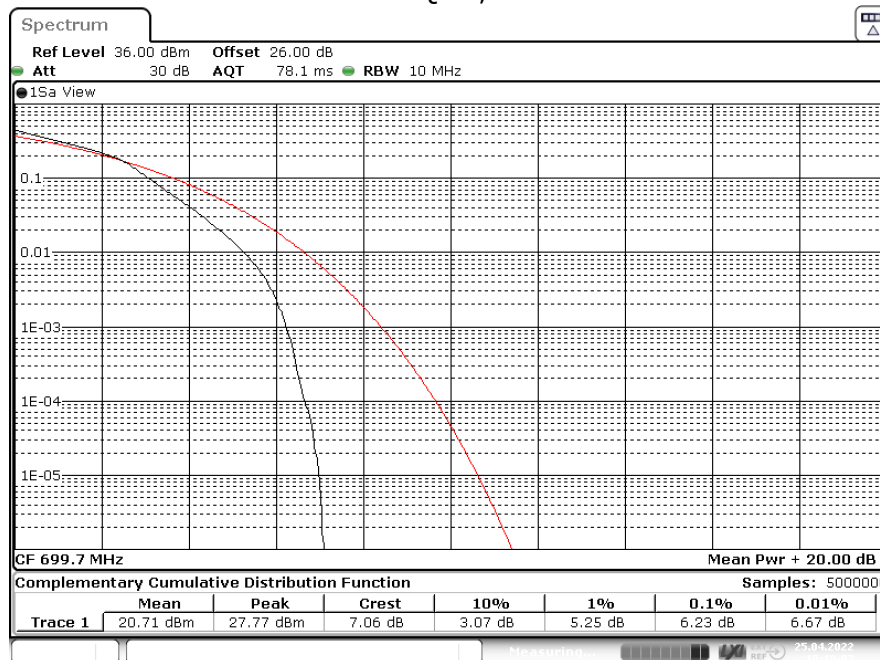

Date: 25.APR.2022 10:10:07

LTE eFDD13 16QAM, Channel = low




Date: 25.APR.2022 10:15:42

LTE eFDD66 16QAM, Channel = high



Date: 8.FEB.2022 19:43:04

LTE eFDD71 16QAM, Channel = high

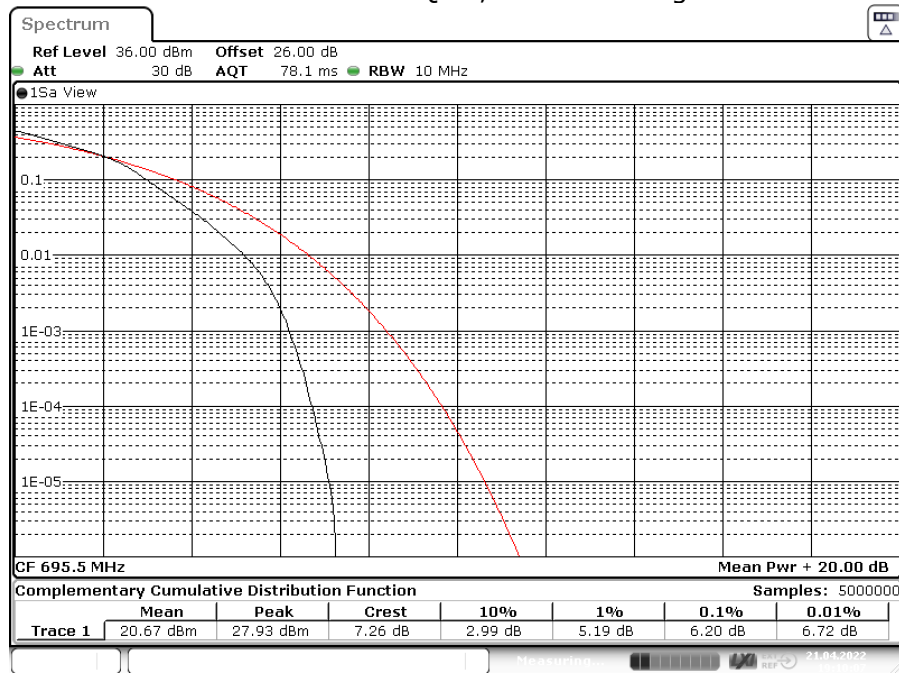

Date: 21.APR.2022 19:10:07

5.21.5 TEST EQUIPMENT USED

- Radio Lab

5.22 RF OUTPUT POWER


Standard **FCC PART 90 Subpart R**

The test was performed according to:
ANSI C63.26: 2015

5.22.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

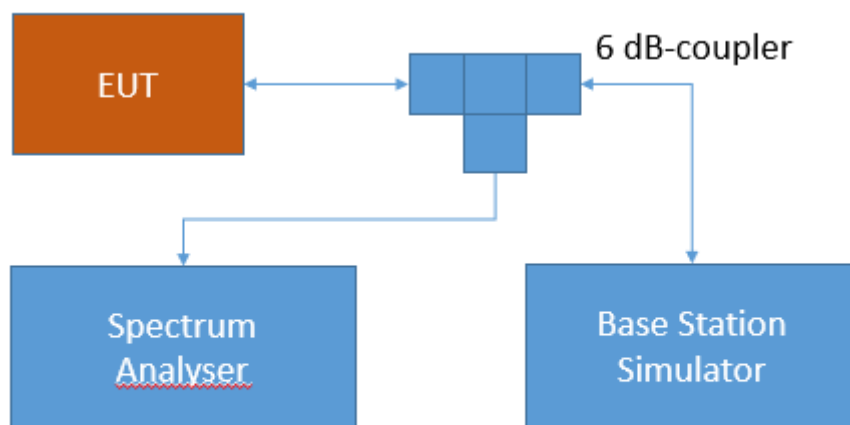

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.22.2 TEST REQUIREMENTS / LIMITS

Part 90; PRIVATE LAND MOBILE RADIO SERVICES

Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

§90.541 Transmitting power and antenna height limits.

(d) The transmitting power of a portable (hand-held) unit must not exceed 3 watts ERP.

RSS-140; 4.3 Transmitter Output Power

The equivalent radiated power (e.r.p.) for control and mobile equipment shall not exceed 30 W. The e.r.p. for portable equipment including handheld devices shall not exceed 3 W.

5.22.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Ressource Blocks | Bandwidth [MHz] | RMS Conducted Power [dBm] | FCC Limit [W] | IC Limit [W] | Maximum Antenna Gain FCC [dBi] | Maximum Antenna Gain IC [dBi] |
|-------------------|---------|------------------|-----------------|---------------------------|---------------|--------------|--------------------------------|-------------------------------|
| LTE eFDD 14 QPSK | low | 1 | 5 | 22.98 | 3 | 3 | 11.79 | 11.79 |
| LTE eFDD 14 QPSK | low | 12 | 5 | 21.84 | 3 | 3 | 12.93 | 12.93 |
| LTE eFDD 14 QPSK | low | 25 | 5 | 21.64 | 3 | 3 | 13.13 | 13.13 |
| LTE eFDD 14 QPSK | mid | 1 | 5 | 22.50 | 3 | 3 | 12.27 | 12.27 |
| LTE eFDD 14 QPSK | mid | 12 | 5 | 21.55 | 3 | 3 | 13.22 | 13.22 |
| LTE eFDD 14 QPSK | mid | 25 | 5 | 18.76 | 3 | 3 | 16.01 | 16.01 |
| LTE eFDD 14 QPSK | high | 1 | 5 | 22.75 | 3 | 3 | 12.02 | 12.02 |
| LTE eFDD 14 QPSK | high | 12 | 5 | 21.49 | 3 | 3 | 13.28 | 13.28 |
| LTE eFDD 14 QPSK | high | 25 | 5 | 21.67 | 3 | 3 | 13.10 | 13.10 |
| LTE eFDD 14 16QAM | low | 1 | 5 | 21.94 | 3 | 3 | 12.83 | 12.83 |
| LTE eFDD 14 16QAM | low | 25 | 5 | 20.63 | 3 | 3 | 14.14 | 14.14 |
| LTE eFDD 14 16QAM | mid | 1 | 5 | 21.30 | 3 | 3 | 13.47 | 13.47 |
| LTE eFDD 14 16QAM | mid | 25 | 5 | 20.55 | 3 | 3 | 14.22 | 14.22 |
| LTE eFDD 14 16QAM | high | 1 | 5 | 22.19 | 3 | 3 | 12.58 | 12.58 |
| LTE eFDD 14 16QAM | high | 25 | 5 | 19.57 | 3 | 3 | 15.20 | 15.20 |
| LTE eFDD 14 QPSK | mid | 1 | 10 | 22.94 | 3 | 3 | 11.83 | 11.83 |
| LTE eFDD 14 QPSK | mid | 50 | 10 | 22.01 | 3 | 3 | 12.76 | 12.76 |
| LTE eFDD 14 16QAM | mid | 1 | 10 | 21.89 | 3 | 3 | 12.88 | 12.88 |
| LTE eFDD 14 16QAM | mid | 12 | 10 | 22.01 | 3 | 3 | 12.76 | 12.76 |

Remark: Please see next sub-clause for the measurement plot.

5.22.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 QPSK 5 MHz, Channel = low

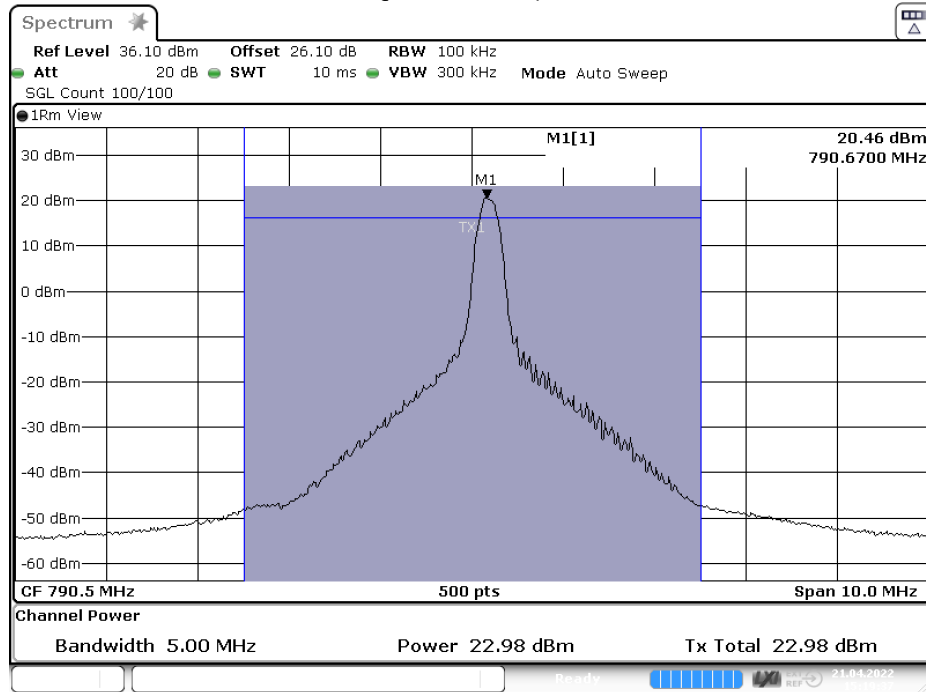

Date: 21.APR.2022 15:19:38

5.22.5 TEST EQUIPMENT USED

- Radio Lab

5.23 SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Standard **FCC PART 90 Subpart R**

The test was performed according to:
ANSI C63.26: 2015

5.23.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per § 2.1051 and RSS-GEN 6.13. The limit comes from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

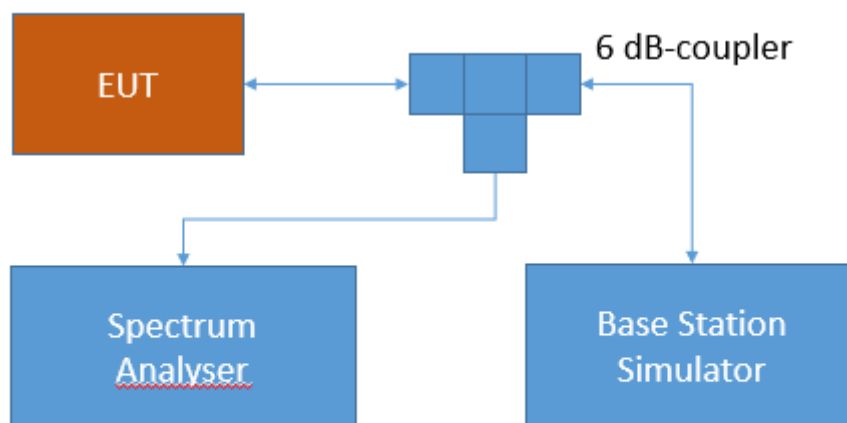

Test Setup FCC Part 22/24/27/90 Cellular;
Spurious Emissions at antenna terminal

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.23.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated

under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 90; PRIVATE LAND MOBILE RADIO SERVICES

Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

§90.543 – Emission limitations.

(a) The adjacent channel power (ACP) requirements for transmitters designed for various channel sizes are shown in the following tables. Mobile station requirements apply to handheld, car mounted and control station units. The tables specify a value for the ACP as a function of the displacement from the channel center frequency and measurement bandwidth. In the following tables, "(s)" indicates a swept measurement may be used.

RSS-140; 4.4 Transmitter unwanted emission limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

For any frequency between 769-775 MHz and 799-806 MHz:

$65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

5.23.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Detector | Trace | Resolution Bandwidth /kHz | Frequency /MHz | Peak Value /dBm | Limit /dBm | Margin to Limit /dB |
|------------------|---------|----------|---------|---------------------------|----------------|-----------------|------------|---------------------|
| LTE eFDD14 | low | rms | maxhold | 30 | 788.00 | -24.39 | -13 | 11.39 |
| LTE eFDD14 | mid | rms | maxhold | - | - | - | -13 | > 20 |
| LTE eFDD14 | hgh | rms | maxhold | 30 | 798.00 | -24.98 | -13 | 11.92 |

Remark: Please see next sub-clause for the measurement plot.

5.23.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 QPSK, Channel = low

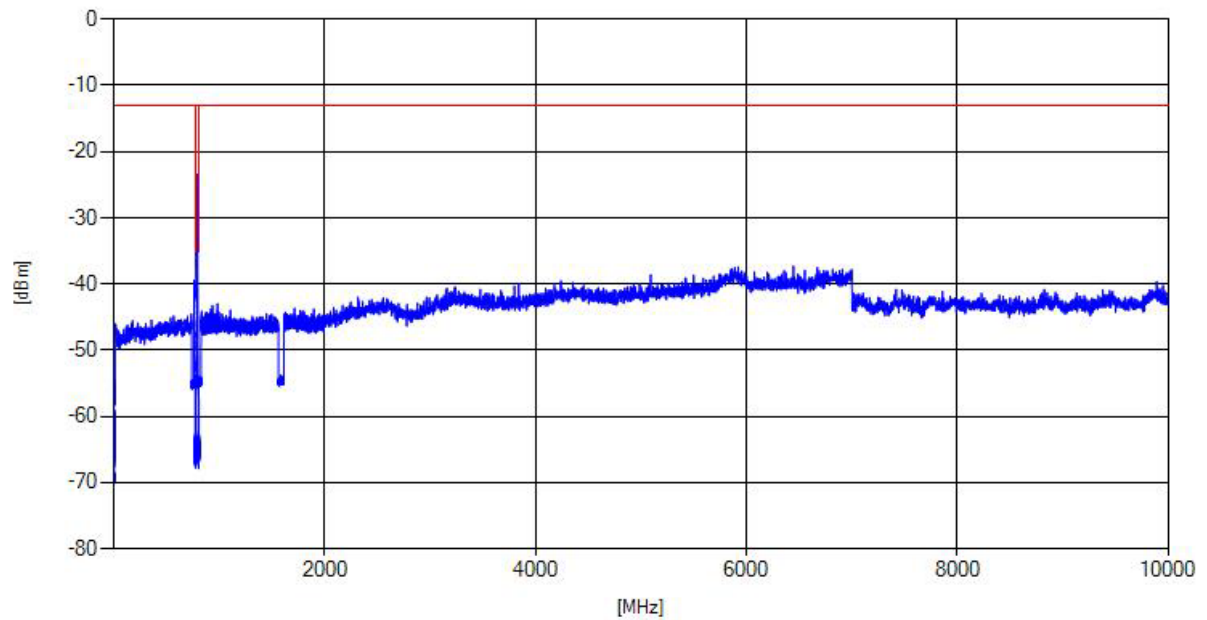

5.23.5 TEST EQUIPMENT USED

- Radio Lab

5.24 FIELD STRENGTH OF SPURIOUS RADIATION

Standard **FCC PART 90 Subpart R**


The test was performed according to:
ANSI C63.26: 2015

5.24.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements per § 2.1053 and RSS-GEN 6.13. The limit and requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.


The EUT was connected to the test setup according to the following diagram:

Frequency Range: 30 MHz – 1 GHz:

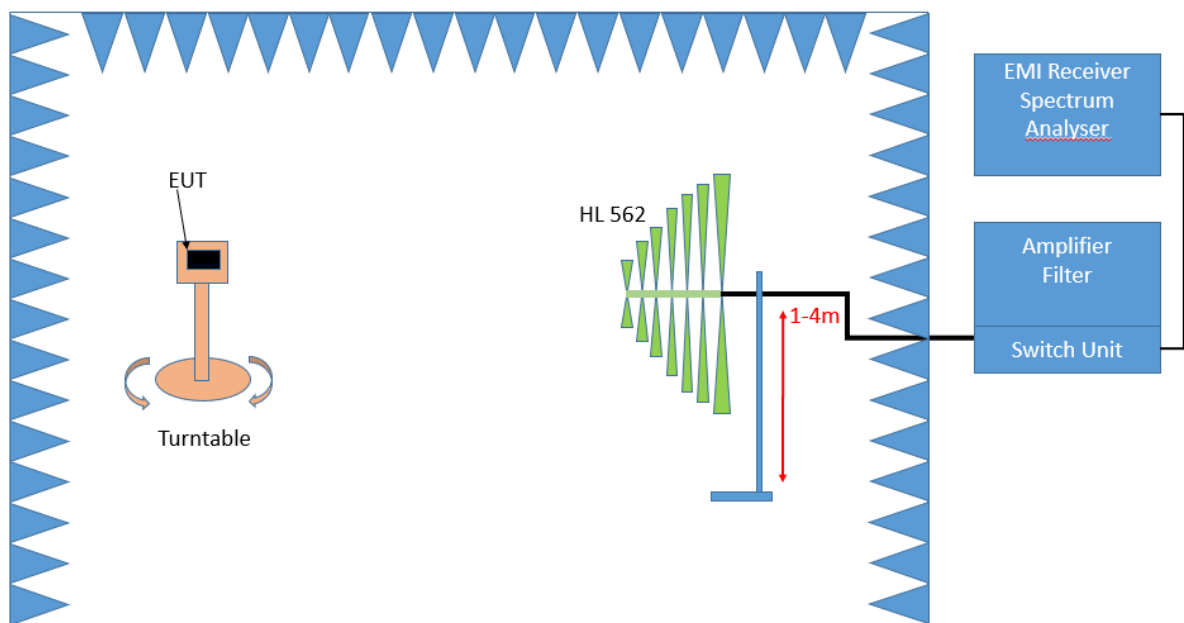

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Frequency Range: 1 GHz – 26.5 GHz

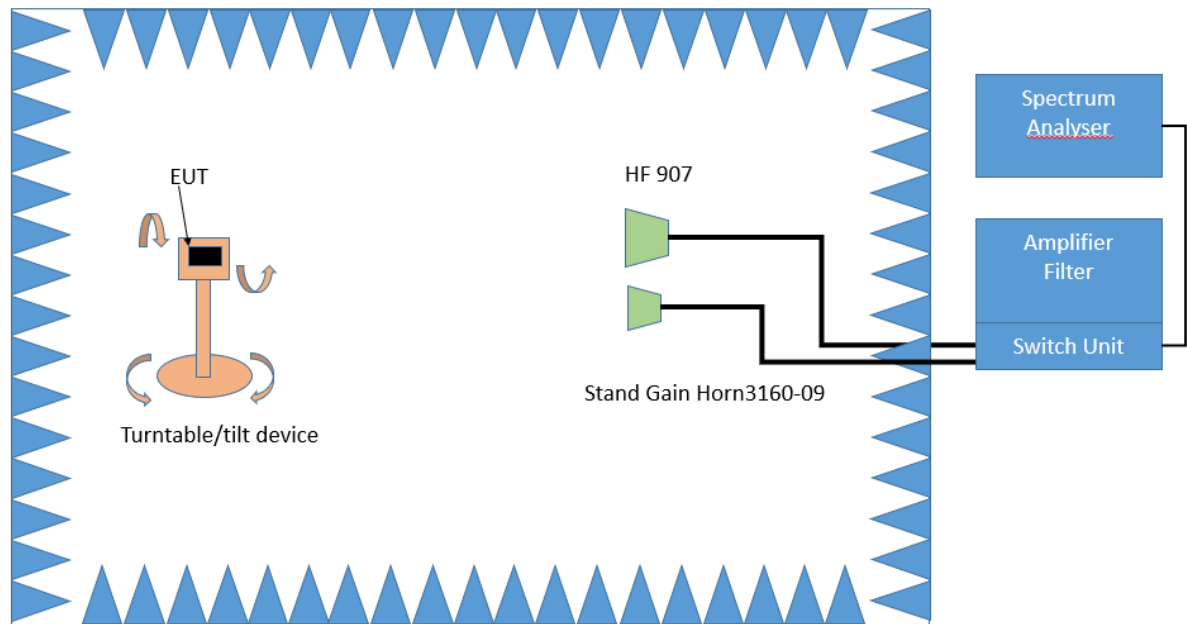

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

The test set-up was made in accordance to the general provisions of ANSI C63.26 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: coupled
- Turntable angle range: –180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360°. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be

recorded and adjusted. In this position, the antenna height will also slowly vary from 1 – 4 m. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: coupled
- Turntable angle range: 360°
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with RMS detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: RMQ
- Measured frequencies: in step 1 determined frequencies
- RBW: 100 kHz
- VBW: 300 kHz
- Sweep time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

- Antenna distance: 3 m
- Detector: Peak
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Polarisation: Horizontal + Vertical

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak,
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled

Step 3:

Spectrum analyser settings for step 3:

- Detector: RMS
- Measured frequencies: in step 1 determined frequencies
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep Time: 1 s

5.24.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1053; Measurement required: Field strength of spurious radiation:

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate.

Part 90; PRIVATE LAND MOBILE RADIO SERVICES**Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands****§90.543 – Emission limitations.**

(a) The adjacent channel power (ACP) requirements for transmitters designed for various channel sizes are shown in the following tables. Mobile station requirements apply to handheld, car mounted and control station units. The tables specify a value for the ACP as a function of the displacement from the channel center frequency and measurement bandwidth. In the following tables, "(s)" indicates a swept measurement may be used.

RSS-140; 4.4 Transmitter unwanted emission limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

For any frequency between 769-775 MHz and 799-806 MHz:

$65 + 10 \log(p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log(p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

5.24.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Detector | Trace | Resolution Bandwidth /kHz | Frequency /MHz | Peak Value /dBm | Limit /dBm | Margin to Limit /dB |
|------------------|---------|----------|---------|---------------------------|----------------|-----------------|------------|---------------------|
| LTE eFDD14 | low | rms | maxhold | 100 | 788.00 | -18.07 | -13 | 5.07 |
| LTE eFDD14 | mid | rms | maxhold | - | - | - | -13 | >20 |
| LTE eFDD14 | hgh | rms | maxhold | 100 | 798.00 | -20.58 | -13 | 7.58 |
| LTE eFDD14 | hgh | rms | maxhold | 100 | 799.51 | -49.92 | -46 | 3.92 |
| LTE eFDD14 | hgh | rms | maxhold | 100 | 801.73 | -55.79 | -46 | 9.79 |

Remark: Please see next sub-clause for the measurement plot.


5.24.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 QPSK, Channel = high
30 MHz – 1 GHz

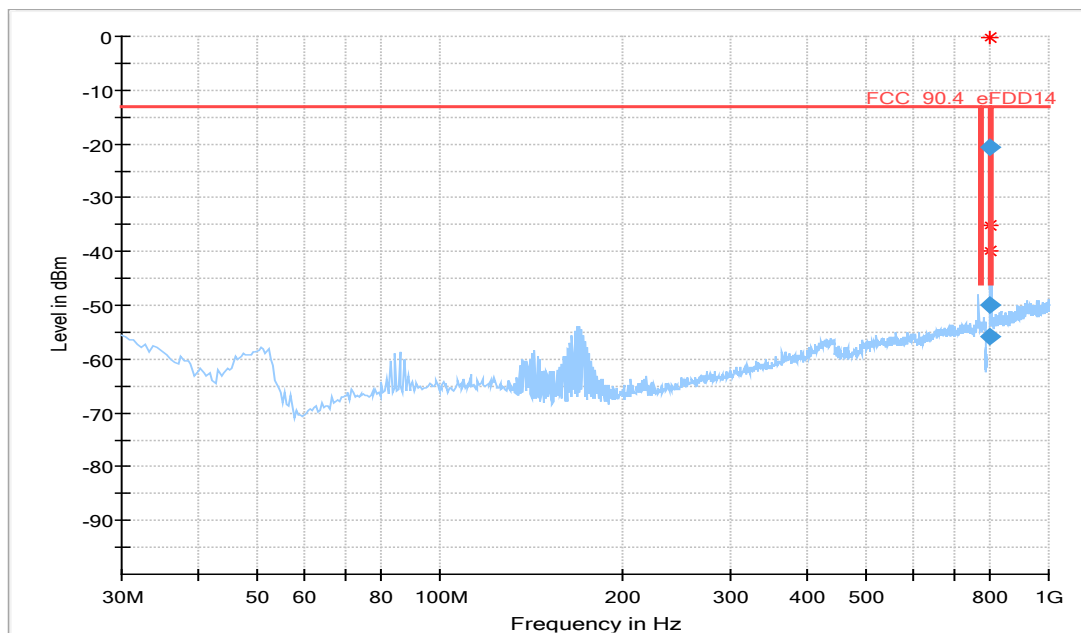

| Frequency (MHz) | RMS (dBm) | Limit (dBm) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|-----------|-------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 798.004400 | -20.58 | -13.00 | 7.58 | 1000.0 | 100.000 | 110.0 | H | -67.0 | -73.1 |
| 799.513300 | -49.92 | -46.00 | 3.92 | 1000.0 | 100.000 | 112.0 | H | -2.0 | -73.1 |
| 801.734200 | -55.79 | -46.00 | 9.79 | 1000.0 | 100.000 | 103.0 | H | 16.0 | -73.1 |

1 GHz – 10 GHz

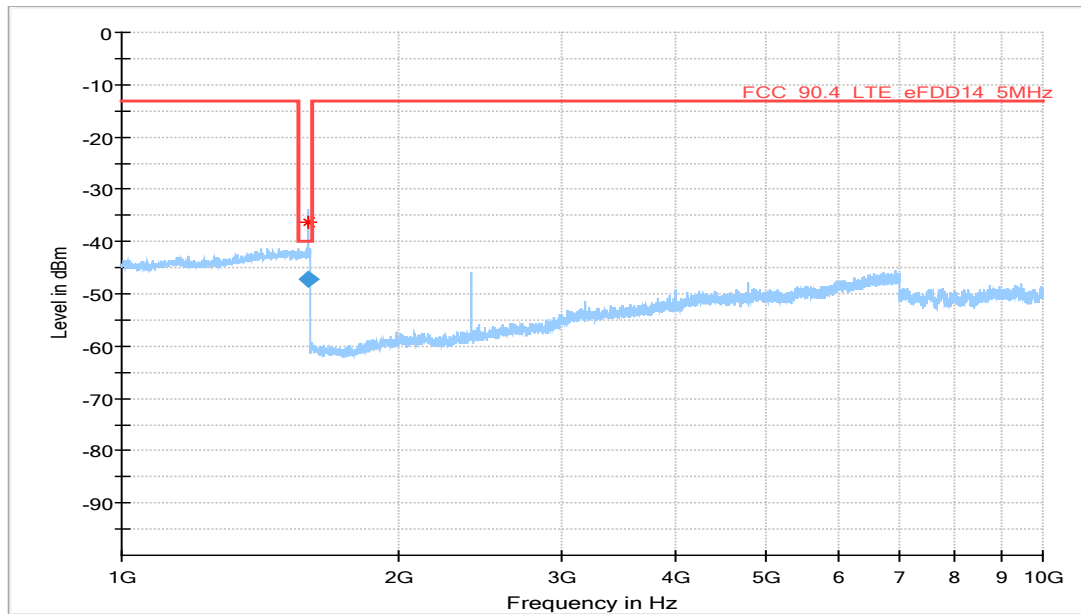

| Frequency (MHz) | RMS (dBm) | Limit (dBm) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) | Corr. (dB) |
|-----------------|-----------|-------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|------------|
| 1596.000 | -47.3 | -40.00 | 7.26 | 1000.0 | 1000.000 | 150.0 | V | -95.0 | 95.0 | -66.0 |

5.24.5 TEST EQUIPMENT USED

- Radiated Emissions

5.25 EMISSION AND OCCUPIED BANDWIDTH


Standard **FCC PART 90 Subpart R**

The test was performed according to:
ANSI C63.26: 2015

5.25.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per FCC §2.1049 and RSS-GEN 6.7. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setups according to the following diagram:

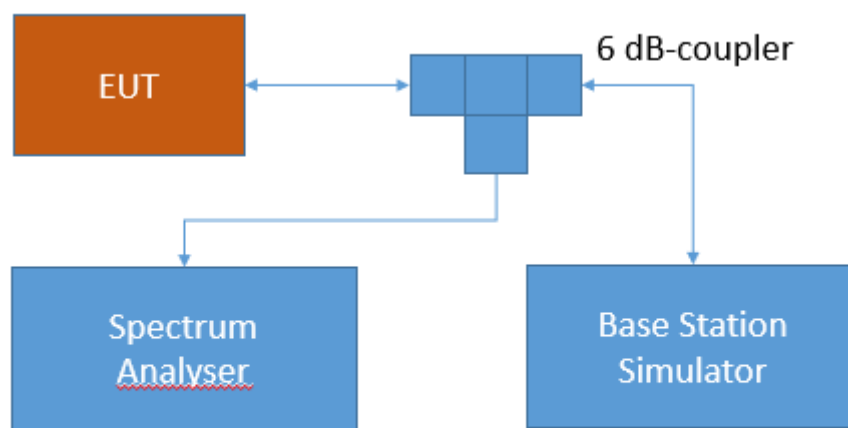

Test Setup FCC Part 22/24/27/90 Cellular;
Spurious Emissions at antenna terminal

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.25.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

RSS-GEN; 6.7 Occupied Bandwidth

The emission bandwidth (\times dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated \times dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least $3\times$ the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3\times$ RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the 99% occupied bandwidth.

5.25.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Ressource Blocks | Bandwidth [MHz] | Nominal BW [MHz] | 99 % BW [kHz] |
|-------------------|---------|------------------|-----------------|------------------|---------------|
| LTE eFDD 14 QPSK | low | 25 | 5 | 5 | 4500.00 |
| LTE eFDD 14 QPSK | mid | 25 | 5 | 5 | 4500.00 |
| LTE eFDD 14 QPSK | high | 25 | 5 | 5 | 4520.00 |
| LTE eFDD 14 16QAM | low | 25 | 5 | 5 | 4520.00 |
| LTE eFDD 14 16QAM | mid | 25 | 5 | 5 | 4500.00 |
| LTE eFDD 14 16QAM | high | 25 | 5 | 5 | 4520.00 |
| LTE eFDD 14 QPSK | mid | 50 | 10 | 10 | 8960.00 |
| LTE eFDD 14 16QAM | mid | 12 | 10 | 10 | 2400.00 |

Remark: Please see next sub-clause for the measurement plot.

5.25.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 QPSK 10 MHz, Channel = mid

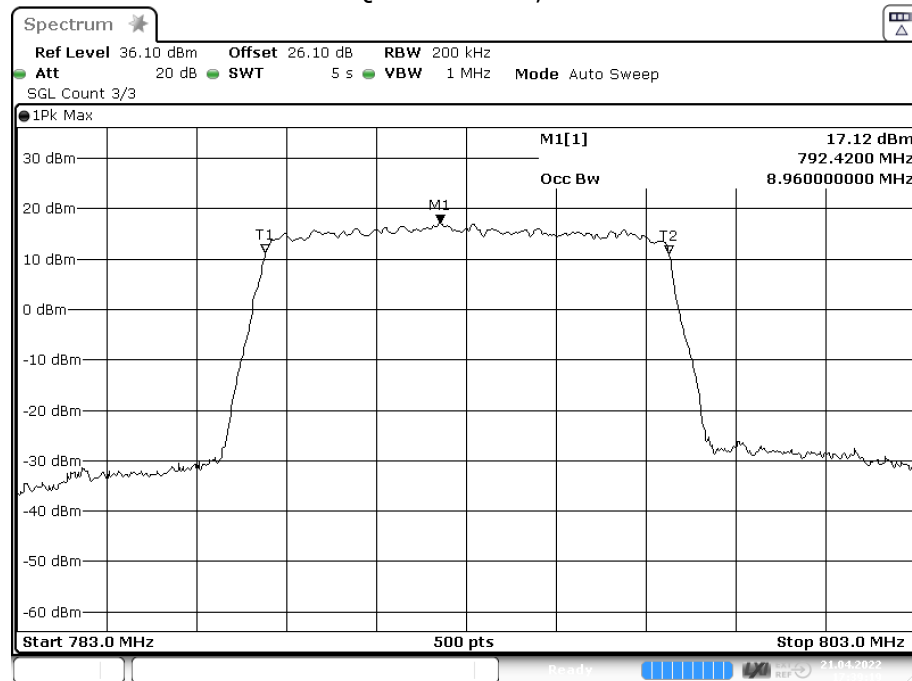

Date: 21.APR.2022 17:39:19

5.25.5 TEST EQUIPMENT USED

- Radio Lab

5.26 BAND EDGE


Standard **FCC PART 90 Subpart R**

The test was performed according to:
ANSI C63.26: 2015

5.26.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per § 2.1051 and RSS-GEN 6.13. The limit comes from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

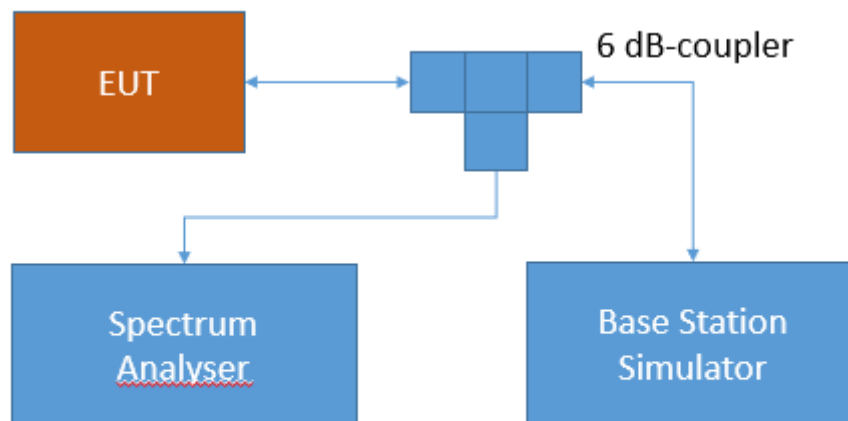

Test Setup FCC Part 22/24/27/90 Cellular;
Band edge compliance

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.26.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 90; PRIVATE LAND MOBILE RADIO SERVICES

Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

§90.543 – Emission limitations.

(a) The adjacent channel power (ACP) requirements for transmitters designed for various channel sizes are shown in the following tables. Mobile station requirements apply to handheld, car mounted and control station units. The tables specify a value for the ACP as a function of the displacement from the channel center frequency and measurement bandwidth. In the following tables, "(s)" indicates a swept measurement may be used.

RSS-140; 4.4 Transmitter unwanted emission limits

The power of any unwanted emission outside the bands 758-768 MHz and 788-798 MHz shall be attenuated below the transmitter output power P in dBW as follows, where p is the transmitter output power in watts:

For any frequency between 769-775 MHz and 799-806 MHz:

$65 + 10 \log (p)$, dB in a 6.25 kHz band for mobile and portable/hand-held equipment

For any frequency between 775-788 MHz, above 806 MHz, and below 758 MHz: $43 + 10 \log (p)$, dB in a bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency bands 758-768 MHz and 788-798 MHz, a resolution bandwidth of 30 kHz may be employed.

In addition, the equivalent isotropically radiated power (e.i.r.p.) of all emissions, including harmonics in the band 1559-1610 MHz, shall not exceed -70 dBW/MHz for wideband emissions, and -80 dBW/kHz for discrete emissions of less than 700 Hz bandwidth.

5.26.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Ressource Blocks | Bandwidth [MHz] | Peak [dBm] | Average [dBm] | RMS [dBm] | Limit /dBm | Margin to Limit /dB |
|------------------|---------|------------------|-----------------|------------|---------------|-----------|------------|---------------------|
| eFDD 14 QPSK | low | 25 | 5 | -21.86 | -35.76 | -33.03 | -13 | 20.03 |
| eFDD 14 QPSK | high | 25 | 5 | -21.12 | -36.29 | -33.20 | -13 | 20.20 |
| eFDD 14 16QAM | low | 25 | 5 | -23.65 | -37.58 | -34.58 | -13 | 21.58 |
| eFDD 14 16QAM | high | 25 | 5 | -22.70 | -37.92 | -34.50 | -13 | 21.50 |
| eFDD 14 QPSK | low | 50 | 10 | -28.95 | -41.63 | -39.35 | -13 | 26.35 |
| eFDD 14 QPSK | high | 50 | 10 | -29.72 | -41.84 | -39.48 | -13 | 26.48 |

Remark: Please see next sub-clause for the measurement plot.

5.26.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 QPSK 5MHz, Channel = low

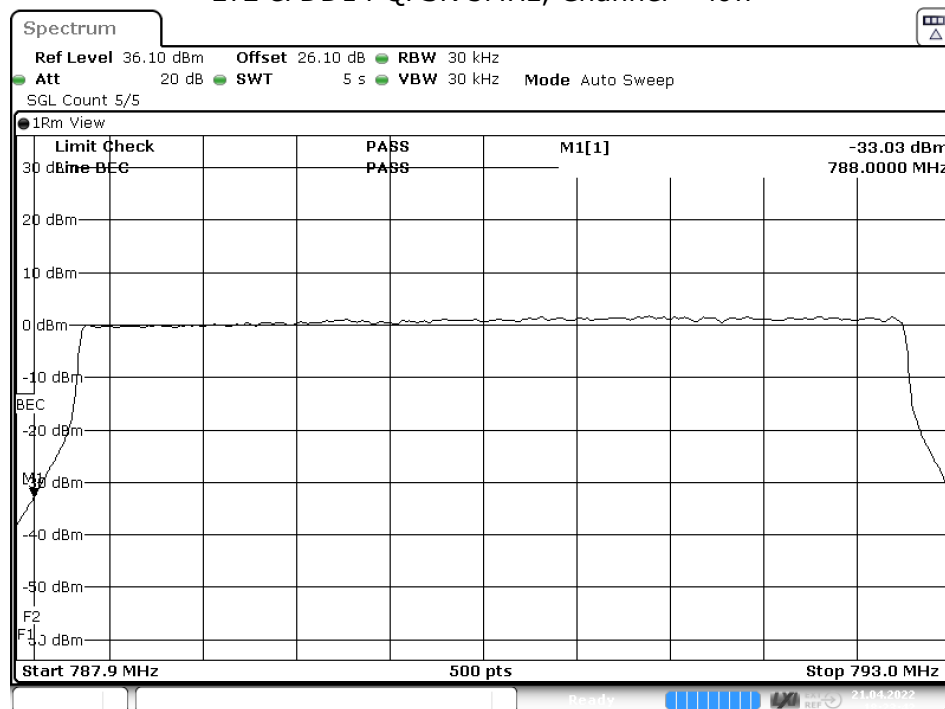

Date: 21.APR.2022 18:23:42

5.26.5 TEST EQUIPMENT USED

- Radio Lab

5.27 PEAK TO AVERAGE RATIO


Standard **FCC PART 90 Subpart R**

The test was performed according to:
ANSI C63.26: 2015

5.27.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance of the EUT to the peak-to-average limits and requirements of the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

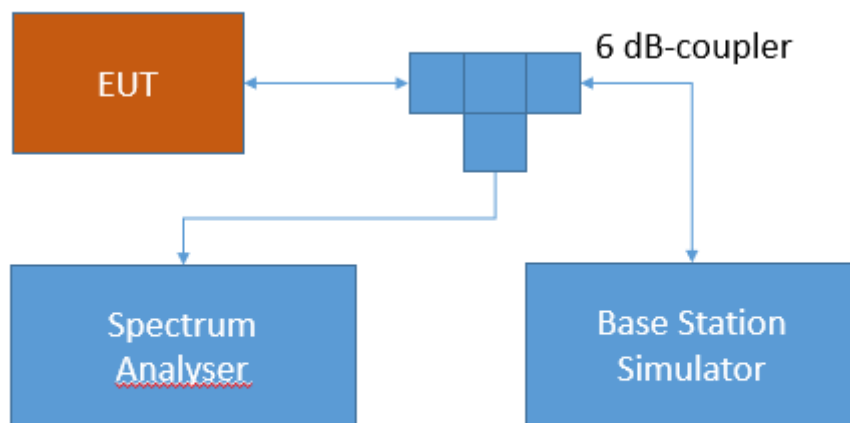

Test Setup FCC Part 22/24/27/90 Cellular;
Peak-average ratio

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams. The internal CCDF (complementary cumulative distribution function) of the spectrum analyser is used for this measurement

5.27.2 TEST REQUIREMENTS / LIMITS

Part 90; PRIVATE LAND MOBILE RADIO SERVICES

Subpart R—Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

§90.541 Transmitting power and antenna height limits.

(d) The transmitting power of a portable (hand-held) unit must not exceed 3 watts ERP.

RSS-140; 4.3 Transmitter Output Power

The equivalent radiated power (e.r.p.) for control and mobile equipment shall not exceed 30 W. The e.r.p. for portable equipment including handheld devices shall not exceed 3 W.

5.27.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 45 %

| Radio Technology | Channel | Ressource Blocks | Bandwidth [MHz] | Peak to Average Ratio | Limit (IC) [dB] |
|-------------------|---------|------------------|-----------------|-----------------------|-----------------|
| LTE eFDD 14 QPSK | low | 25 | 5 | 5.19 | 13 |
| LTE eFDD 14 QPSK | mid | 25 | 5 | 5.16 | 13 |
| LTE eFDD 14 QPSK | high | 25 | 5 | 5.22 | 13 |
| LTE eFDD 14 16QAM | low | 25 | 5 | 6.06 | 13 |
| LTE eFDD 14 16QAM | mid | 25 | 5 | 5.97 | 13 |
| LTE eFDD 14 16QAM | high | 25 | 5 | 6.03 | 13 |

Remark: Please see next sub-clause for the measurement plot.

5.27.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

LTE eFDD14 16QAM, Channel = low

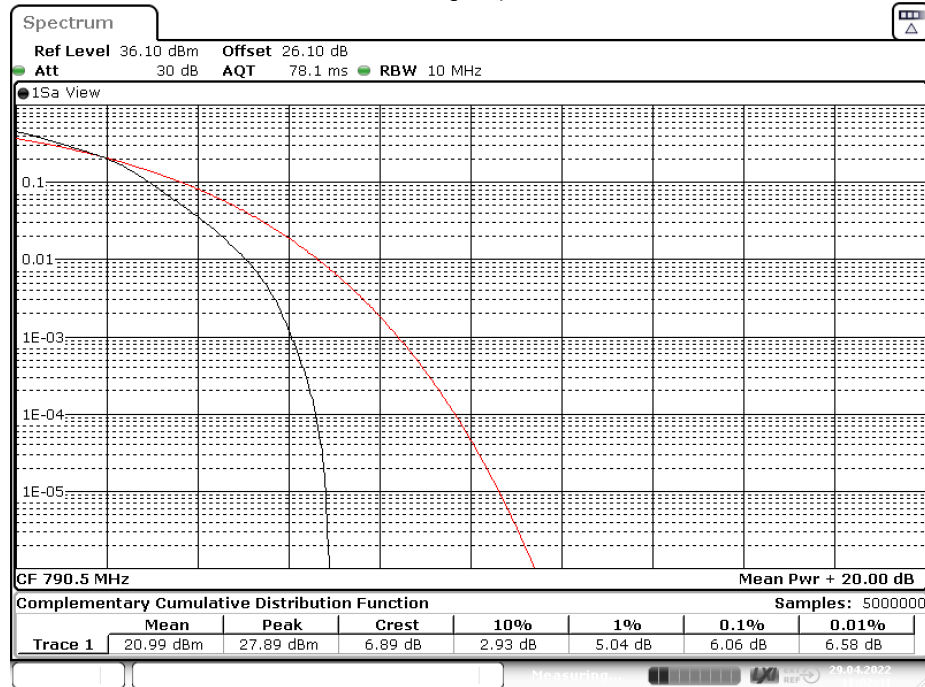

5.27.5 TEST EQUIPMENT USED

- Radio Lab

6 TEST EQUIPMENT

- 1 Radiated Emissions
Lab to perform radiated emission tests

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------|--|-------------------------------------|--------------------|------------------|-----------------|
| 1.1 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2021-11 | 2022-11 |
| 1.2 | N5000/NP | Filter for EUT, 2 Lines, 250 V, 16 A | ETS-LINDGREN | 241515 | | |
| 1.3 | ESW44 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 101603 | 2022-01 | 2024-01 |
| 1.4 | Anechoic Chamber 01 | SAC/FAR, 10.58 m x 6.38 m x 6.00 m | Frankonia | none | | |
| 1.5 | HL 562 ULTRALOG | Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals | Rohde & Schwarz GmbH & Co. KG | 830547/003 | 2021-09 | 2024-09 |
| 1.6 | AMF-7D00101800-30-10P-R | Broadband Amplifier 100 MHz - 18 GHz | Miteq | | | |
| 1.7 | 5HC2700/12750-1.5-KK | High Pass Filter | Trilithic | 9942012 | | |
| 1.8 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | | |
| 1.9 | Anechoic Chamber 03 | FAR, 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | 2021-04 | 2023-04 |
| 1.10 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2020-04 | 2022-04 |
| 1.11 | Opus10 THI (8152.00) | T/H Logger 10 | Lufft Mess- und Regeltechnik GmbH | 12488 | 2021-08 | 2023-08 |
| 1.12 | PONTIS Con4101 | PONTIS Camera Controller | | 6061510370 | | |
| 1.13 | NRVD | Power Meter | Rohde & Schwarz GmbH & Co. KG | 828110/016 | 2021-09 | 2022-09 |
| 1.14 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | | |
| 1.15 | FSW 43 | Spectrum Analyzer | Rohde & Schwarz | 103779 | 2021-06 | 2023-06 |
| 1.16 | EP 1200/B, NA/B1 | AC Source, Amplifier with integrated variable Oscillator | Spitzenberger & Spies GmbH & Co. KG | B6278 | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|--------------------------------|---|-------------------------------|----------------|------------------|-----------------|
| 1.17 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | | |
| 1.18 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright Instruments GmbH | 09 | | |
| 1.19 | DS 420S | Turn Table 2 m diameter | HD GmbH | 420/573/99 | | |
| 1.20 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | | |
| 1.21 | Temperature Chamber KWP 120/70 | Temperature Chamber Weiss 01 | Weiss | 59226012190010 | 2020-05 | 2022-05 |
| 1.22 | JS4-00102600-42-5A | Broadband Amplifier 30 MHz - 26 GHz | Miteq | 619368 | | |
| 1.23 | TT 1.5 WI (FW 30.10) | Turn Table | Maturo GmbH | - | | |
| 1.24 | HL 562 ULTRALOG | Biconical-log-per Antenna (30 MHz - 3 GHz) | Rohde & Schwarz GmbH & Co. KG | 100609 | 2019-05 | 2022-05 |
| 1.25 | HF 906 | Double-ridged horn | Rohde & Schwarz | 357357/001 | 2021-08 | 2024-08 |
| 1.26 | CMW500 | Callbox OIL-RE, SUW | Rohde & Schwarz GmbH & Co. KG | 155999-Ei | 2019-09 | 2022-09 |
| 1.27 | CMU 200 | "CMU1" Universal Radio Communication Tester | Rohde & Schwarz GmbH & Co. KG | 102366 | 2021-02 | 2024-02 |
| 1.28 | 3160-10 | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH | 00086675 | | |
| 1.29 | MA4985-XP-ET (FW 34.10 36.11) | Bore Sight Antenna Mast | innco systems GmbH | none | | |
| 1.30 | Temperature Chamber VT 4002 | Temperature Chamber Vötsch 03 | Vötsch | 58566002150010 | 2020-05 | 2022-05 |
| 1.31 | CMW500 | Callbox OIL-RE, SUA | Rohde & Schwarz GmbH & Co. KG | 163529-bw | 2020-07 | 2023-07 |
| 1.32 | CMW500 | Callbox OIL-RE, SUA-160 MHz | Rohde & Schwarz GmbH & Co. KG | 168927-cv | 2020-05 | 2023-05 |
| 1.33 | VLFX-650+ | Low Pass Filter DC650 MHz | Mini-Circuits | 15542 | | |
| 1.34 | JUN-AIR Mod. 6-15 | Air Compressor | JUN-AIR Deutschland GmbH | 612582 | | |
| 1.35 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | | |
| 1.36 | HFH2-Z2 | Loop Antenna + 3 Axis Tripod | Rohde & Schwarz GmbH & Co. KG | 829324/006 | 2021-01 | 2024-01 |
| 1.37 | Voltcraft M-3860M | Digital Multimeter 01 (Multimeter) | Conrad | IJ096055 | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|---------------------------------------|---------------------------------------|--|------------------------|------------------|-----------------|
| 1.38 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2021-01 | 2023-01 |
| 1.39 | SB4-100.OLD20-3T/10 Airwin 2 x 1.5 kW | Air compressor (oil-free) | airWin Kompressoren UG | 901/00503 | | |
| 1.40 | UNI-T UT195E | True RMS Digital Multimeter | UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD. | C190729561 | | |
| 1.41 | JS4-00101800-35-5P | Broadband Amplifier 30 MHz - 18 GHz | Miteq | 896037 | | |
| 1.42 | AS 620 P | Antenna Mast (pneumatic polarisation) | HD GmbH | 620/37 | | |
| 1.43 | CMW500 | Callbox OIL-RE, SUA-160 MHz | Rohde & Schwarz GmbH & Co. KG | 167766-By | 2019-07 | 2022-07 |
| 1.44 | 6005D (30 V / 5 A) | Laboratory Power Supply 120 V 60 Hz | PeakTech | 81062045 | | |
| 1.45 | TD1.5-10kg | EUT Tilt Device (Rohacell) | Maturo GmbH | TD1.5-10kg/024/3790709 | | |
| 1.46 | Innco Systems CO3000 | Controller for bore sight mast SAC | innco systems GmbH | CO3000/967/39371016/L | | |
| 1.47 | NRV-Z1 | Sensor Head B | Rohde & Schwarz GmbH & Co. KG | 827753/006 | 2021-09 | 2022-09 |
| 1.48 | HF 907-2 | Double-ridged horn | Rohde & Schwarz | 102817 | 2019-04 | 2022-04 |
| 1.49 | PAS 2.5 - 10 kg | Antenna Mast | Maturo GmbH | - | | |
| 1.50 | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz | Miteq | 2035324 | | |
| 1.51 | AM 4.0 | Antenna Mast 4 m | Maturo GmbH | AM4.0/180/11920513 | | |
| 1.52 | HF 907 | Double-ridged horn | Rohde & Schwarz | 102444 | 2021-09 | 2024-09 |
| 1.53 | EMC32 (Version 10.60.10) | Measurement-Software (FAC) | Rohde & Schwarz | - | - | - |
| 1.54 | EMC32 (Version 10.60.10) | Measurement-Software (SAC) | Rohde & Schwarz | | | |

2 Radio Lab Conducted Radio Test Lab

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------|--|---------------------|---------------|------------------|-----------------|
| 2.1 | 1575 | Broadband Resistive Power Divider DC to 40 GHz | API Weinschel, Inc. | 4070 | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|--------------------------------------|---------------------------------------|-----------------------------------|----------------|------------------|-----------------|
| 2.2 | FSV30 | Signal Analyzer 10 Hz - 30 GHz | Rohde & Schwarz | 103005 | 2020-05 | 2022-05 |
| 2.3 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2020-04 | 2022-04 |
| 2.4 | SMP03 | Signal Generator 2 GHz - 27 GHz | Rohde & Schwarz | 833680/003 | | |
| 2.5 | Temperature Chamber KWP 120/70 | Temperature Chamber Weiss 01 | Weiss | 59226012190010 | 2020-05 | 2022-05 |
| 2.6 | FSIQ26 | Signal Analyser 20 Hz to 26.5 GHz | Rohde & Schwarz GmbH & Co. KG | 840061/005 | 2021-07 | 2023-07 |
| 2.7 | Chroma 6404 | AC Source | Chroma ATE INC. | 64040001304 | | |
| 2.8 | EX520 | Digital Multimeter 07 | Extech Instruments Corp | 06110393 | 2020-04 | 2022-04 |
| 2.9 | Temperature Chamber VT 4002 | Temperature Chamber Vötsch 03 | Vötsch | 58566002150010 | 2020-05 | 2022-05 |
| 2.10 | A8455-4 | 4 Way Power Divider (SMA) | | - | | |
| 2.11 | Opus10 THI (8152.00) | T/H Logger 03 | Lufth Mess- und Regeltechnik GmbH | 7482 | 2021-09 | 2023-09 |
| 2.12 | FSU26 | Spectrum Analyser (20 Hz to 26.5 GHz) | Rohde & Schwarz GmbH & Co. KG | 100136 | | |
| 2.13 | Temperature Chamber VT 4002 | Temperature Chamber Vötsch 05 | Vötsch | 58566080550010 | 2020-05 | 2022-05 |
| 2.14 | Cellular RF-Solution (Version 1.6.2) | Measurement-Software | 7layers | - | - | - |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency | | Corr. | LISN insertion loss ESH3- Z5 | cable loss (incl. 10 dB atten- uator) |
|-----------|--|-------|--|--|
| MHz | | dB | dB | dB |
| 0.15 | | 10.1 | 0.1 | 10.0 |
| 5 | | 10.3 | 0.1 | 10.2 |
| 7 | | 10.5 | 0.2 | 10.3 |
| 10 | | 10.5 | 0.2 | 10.3 |
| 12 | | 10.7 | 0.3 | 10.4 |
| 14 | | 10.7 | 0.3 | 10.4 |
| 16 | | 10.8 | 0.4 | 10.4 |
| 18 | | 10.9 | 0.4 | 10.5 |
| 20 | | 10.9 | 0.4 | 10.5 |
| 22 | | 11.1 | 0.5 | 10.6 |
| 24 | | 11.1 | 0.5 | 10.6 |
| 26 | | 11.2 | 0.5 | 10.7 |
| 28 | | 11.2 | 0.5 | 10.7 |
| 30 | | 11.3 | 0.5 | 10.8 |

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency | AF | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-40 dB/decade) | d _{Limit} (meas. distance (limit)) | d _{used} (meas. distance (used)) |
|-----------|----------|-------|----------------------------------|-----------------------------------|-------------------------------|-------------------------------|-----------------------------------|--|--|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 0.009 | 20.50 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.01 | 20.45 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.015 | 20.37 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.02 | 20.36 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.025 | 20.38 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.03 | 20.32 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.05 | 20.35 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.08 | 20.30 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.1 | 20.20 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.2 | 20.17 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.3 | 20.14 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.49 | 20.12 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.490001 | 20.12 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.5 | 20.11 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.8 | 20.10 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 1 | 20.09 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 2 | 20.08 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 3 | 20.06 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 4 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 5 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 6 | 20.02 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 8 | 19.95 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 10 | 19.83 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 12 | 19.71 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 14 | 19.54 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 16 | 19.53 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 18 | 19.50 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 20 | 19.57 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 22 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 24 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 26 | 19.54 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 28 | 19.46 | -39.2 | 0.3 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |
| 30 | 19.73 | -39.1 | 0.4 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 distance correction = $-40 * \text{LOG}(d_{\text{Limit}}/d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

| Frequency | AF R&S HL562 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 30 | 18.6 | 0.6 |
| 50 | 6.0 | 0.9 |
| 100 | 9.7 | 1.2 |
| 150 | 7.9 | 1.6 |
| 200 | 7.6 | 1.9 |
| 250 | 9.5 | 2.1 |
| 300 | 11.0 | 2.3 |
| 350 | 12.4 | 2.6 |
| 400 | 13.6 | 2.9 |
| 450 | 14.7 | 3.1 |
| 500 | 15.6 | 3.2 |
| 550 | 16.3 | 3.5 |
| 600 | 17.2 | 3.5 |
| 650 | 18.1 | 3.6 |
| 700 | 18.5 | 3.6 |
| 750 | 19.1 | 4.1 |
| 800 | 19.6 | 4.1 |
| 850 | 20.1 | 4.4 |
| 900 | 20.8 | 4.7 |
| 950 | 21.1 | 4.8 |
| 1000 | 21.6 | 4.9 |

| cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d_{Limit} (meas. distance (limit)) | d_{used} (meas. distance (used)) |
|--|---|-------------------------------------|-------------------------------------|--|--|--|
| dB | dB | dB | dB | dB | m | m |
| 0.29 | 0.04 | 0.23 | 0.02 | 0.0 | 3 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | 0.0 | 3 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | 0.0 | 3 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | 0.0 | 3 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | 0.0 | 3 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | 0.0 | 3 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | 0.0 | 3 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | 0.0 | 3 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | 0.0 | 3 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | 0.0 | 3 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | 0.0 | 3 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | 0.0 | 3 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | 0.0 | 3 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | 0.0 | 3 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | 0.0 | 3 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | 0.0 | 3 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | 0.0 | 3 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | 0.0 | 3 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | 0.0 | 3 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | 0.0 | 3 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | 0.0 | 3 | 3 |

($d_{\text{Limit}} = 10 \text{ m}$)

| | | |
|------|------|------|
| 30 | 18.6 | -9.9 |
| 50 | 6.0 | -9.6 |
| 100 | 9.7 | -9.2 |
| 150 | 7.9 | -8.8 |
| 200 | 7.6 | -8.6 |
| 250 | 9.5 | -8.3 |
| 300 | 11.0 | -8.1 |
| 350 | 12.4 | -7.9 |
| 400 | 13.6 | -7.6 |
| 450 | 14.7 | -7.4 |
| 500 | 15.6 | -7.2 |
| 550 | 16.3 | -7.0 |
| 600 | 17.2 | -6.9 |
| 650 | 18.1 | -6.9 |
| 700 | 18.5 | -6.8 |
| 750 | 19.1 | -6.3 |
| 800 | 19.6 | -6.3 |
| 850 | 20.1 | -6.0 |
| 900 | 20.8 | -5.8 |
| 950 | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

| | | | | | | |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 $\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24.4 | -19.4 |
| 2000 | 28.5 | -17.4 |
| 3000 | 31.0 | -16.1 |
| 4000 | 33.1 | -14.7 |
| 5000 | 34.4 | -13.7 |
| 6000 | 34.7 | -12.7 |
| 7000 | 35.6 | -11.0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, atten- uator & pre-amp) | cable loss 4 (to receiver) | | |
|--|---|--|----------------------------------|--|--|
| dB | dB | dB | dB | | |
| 0.99 | 0.31 | -21.51 | 0.79 | | |
| 1.44 | 0.44 | -20.63 | 1.38 | | |
| 1.87 | 0.53 | -19.85 | 1.33 | | |
| 2.41 | 0.67 | -19.13 | 1.31 | | |
| 2.78 | 0.86 | -18.71 | 1.40 | | |
| 2.74 | 0.90 | -17.83 | 1.47 | | |
| 2.82 | 0.86 | -16.19 | 1.46 | | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31.0 | -23.4 |
| 4000 | 33.1 | -23.3 |
| 5000 | 34.4 | -21.7 |
| 6000 | 34.7 | -21.2 |
| 7000 | 35.6 | -19.8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, atten- uator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|---|--|---|--|----------------------------------|------------------------------|
| dB | dB | dB | dB | dB | |
| 0.47 | 1.87 | 0.53 | -27.58 | 1.33 | |
| 0.56 | 2.41 | 0.67 | -28.23 | 1.31 | |
| 0.61 | 2.78 | 0.86 | -27.35 | 1.40 | |
| 0.58 | 2.74 | 0.90 | -26.89 | 1.47 | |
| 0.66 | 2.82 | 0.86 | -25.58 | 1.46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35.6 | -57.3 |
| 8000 | 36.3 | -56.3 |
| 9000 | 37.1 | -55.3 |
| 10000 | 37.5 | -56.2 |
| 11000 | 37.5 | -55.3 |
| 12000 | 37.6 | -53.7 |
| 13000 | 38.2 | -53.5 |
| 14000 | 39.9 | -56.3 |
| 15000 | 40.9 | -54.1 |
| 16000 | 41.3 | -54.1 |
| 17000 | 42.8 | -54.4 |
| 18000 | 44.2 | -54.7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre- amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|---|-----------------------------------|----------------------------------|--|---|-------------------------------------|
| dB | dB | dB | dB | dB | dB |
| 0.56 | 1.28 | -62.72 | 2.66 | 0.94 | 1.46 |
| 0.69 | 0.71 | -61.49 | 2.84 | 1.00 | 1.53 |
| 0.68 | 0.65 | -60.80 | 3.06 | 1.09 | 1.60 |
| 0.70 | 0.54 | -61.91 | 3.28 | 1.20 | 1.67 |
| 0.80 | 0.61 | -61.40 | 3.43 | 1.27 | 1.70 |
| 0.84 | 0.42 | -59.70 | 3.53 | 1.26 | 1.73 |
| 0.83 | 0.44 | -59.81 | 3.75 | 1.32 | 1.83 |
| 0.91 | 0.53 | -63.03 | 3.91 | 1.40 | 1.77 |
| 0.98 | 0.54 | -61.05 | 4.02 | 1.44 | 1.83 |
| 1.23 | 0.49 | -61.51 | 4.17 | 1.51 | 1.85 |
| 1.36 | 0.76 | -62.36 | 4.34 | 1.53 | 2.00 |
| 1.70 | 0.53 | -62.88 | 4.41 | 1.55 | 1.91 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency | AF EMCO 3160-09 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (pre- amp) | cable loss 3 (inside chamber) | cable loss 4 (switch unit) | cable loss 5 (to receiver) |
|-----------|-----------------------|-------|--|----------------------------------|--|-------------------------------------|-------------------------------------|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB |
| 18000 | 40.2 | -23.5 | 0.72 | -35.85 | 6.20 | 2.81 | 2.65 |
| 18500 | 40.2 | -23.2 | 0.69 | -35.71 | 6.46 | 2.76 | 2.59 |
| 19000 | 40.2 | -22.0 | 0.76 | -35.44 | 6.69 | 3.15 | 2.79 |
| 19500 | 40.3 | -21.3 | 0.74 | -35.07 | 7.04 | 3.11 | 2.91 |
| 20000 | 40.3 | -20.3 | 0.72 | -34.49 | 7.30 | 3.07 | 3.05 |
| 20500 | 40.3 | -19.9 | 0.78 | -34.46 | 7.48 | 3.12 | 3.15 |
| 21000 | 40.3 | -19.1 | 0.87 | -34.07 | 7.61 | 3.20 | 3.33 |
| 21500 | 40.3 | -19.1 | 0.90 | -33.96 | 7.47 | 3.28 | 3.19 |
| 22000 | 40.3 | -18.7 | 0.89 | -33.57 | 7.34 | 3.35 | 3.28 |
| 22500 | 40.4 | -19.0 | 0.87 | -33.66 | 7.06 | 3.75 | 2.94 |
| 23000 | 40.4 | -19.5 | 0.88 | -33.75 | 6.92 | 3.77 | 2.70 |
| 23500 | 40.4 | -19.3 | 0.90 | -33.35 | 6.99 | 3.52 | 2.66 |
| 24000 | 40.4 | -19.8 | 0.88 | -33.99 | 6.88 | 3.88 | 2.58 |
| 24500 | 40.4 | -19.5 | 0.91 | -33.89 | 7.01 | 3.93 | 2.51 |
| 25000 | 40.4 | -19.3 | 0.88 | -33.00 | 6.72 | 3.96 | 2.14 |
| 25500 | 40.5 | -20.4 | 0.89 | -34.07 | 6.90 | 3.66 | 2.22 |
| 26000 | 40.5 | -21.3 | 0.86 | -35.11 | 7.02 | 3.69 | 2.28 |
| 26500 | 40.5 | -21.1 | 0.90 | -35.20 | 7.15 | 3.91 | 2.36 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency GHz | AF EMCO 3160-10 dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-20 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|-----------------------------------|-------------|--|---|---|---|--|--|--|
| 26.5 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 27.0 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 28.0 | 43.4 | -11.1 | 4.5 | | | | -9.5 | 3 | 1.0 |
| 29.0 | 43.5 | -11.0 | 4.6 | | | | -9.5 | 3 | 1.0 |
| 30.0 | 43.5 | -10.9 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 31.0 | 43.5 | -10.8 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 32.0 | 43.5 | -10.7 | 4.8 | | | | -9.5 | 3 | 1.0 |
| 33.0 | 43.6 | -10.7 | 4.9 | | | | -9.5 | 3 | 1.0 |
| 34.0 | 43.6 | -10.6 | 5.0 | | | | -9.5 | 3 | 1.0 |
| 35.0 | 43.6 | -10.5 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 36.0 | 43.6 | -10.4 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 37.0 | 43.7 | -10.3 | 5.2 | | | | -9.5 | 3 | 1.0 |
| 38.0 | 43.7 | -10.2 | 5.3 | | | | -9.5 | 3 | 1.0 |
| 39.0 | 43.7 | -10.2 | 5.4 | | | | -9.5 | 3 | 1.0 |
| 40.0 | 43.8 | -10.1 | 5.5 | | | | -9.5 | 3 | 1.0 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

| Test Case(s) | Parameter | Uncertainty |
|--|--------------------|--------------------------------|
| - Field strength of spurious radiation | Field Strength | ± 5.5 dB |
| - Emission and Occupied Bandwidth | Power Frequency | ± 2.9 dB ± 11.2 kHz |
| - RF Output Power - Peak to Average Ratio | Power | ± 2.2 dB |
| - Band Edge Compliance - Spurious Emissions at Antenna Terminal | Power Frequency | ± 2.2 dB ± 11.2 kHz |
| - Frequency Stability | Frequency | ± 25 Hz |

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

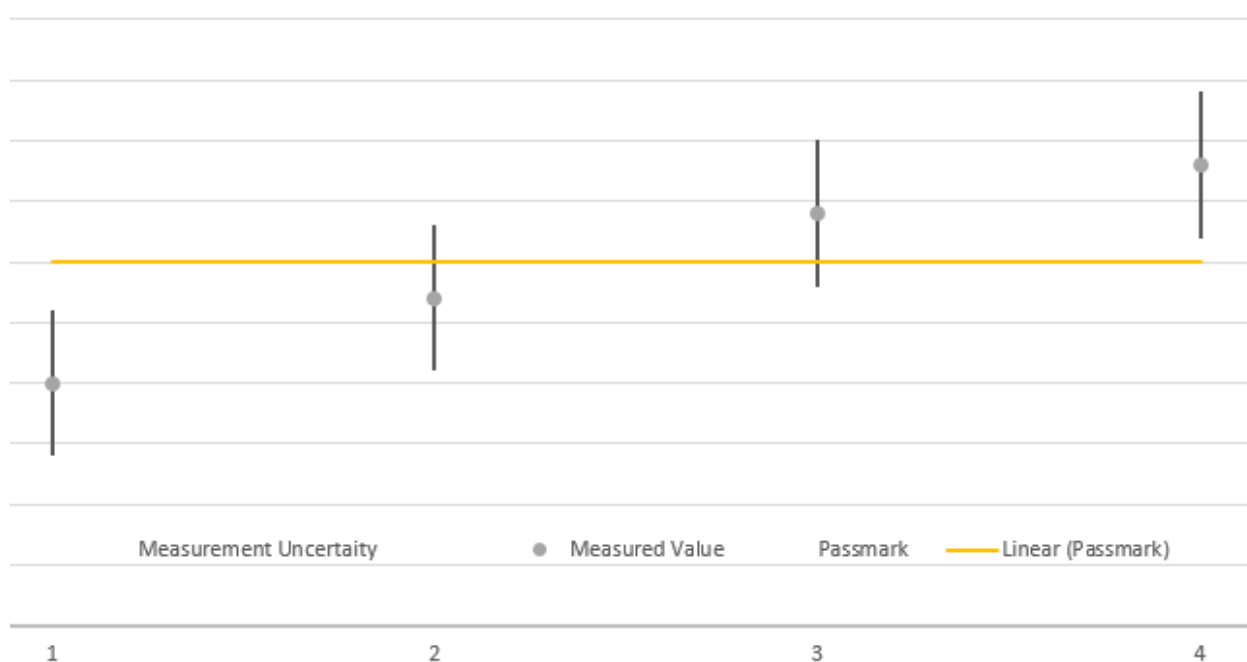

The verdicts in this test report are given according the above diagram:

| Case | Measured Value | Uncertainty Range | Verdict |
|------|-----------------|-------------------|---------|
| 1 | below pass mark | below pass mark | Passed |
| 2 | below pass mark | within pass mark | Passed |
| 3 | above pass mark | within pass mark | Failed |
| 4 | above pass mark | above pass mark | Failed |

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.