





**SK TECH CO., LTD.**

Page 1 of 16

Certificate of Compliance

Test Report No.:	SKTFCE-040406-032		
NVLAP CODE :	200220-0		
Applicant:	CORECESS Inc.		
Applicant Address:	Corecess Venture B/D 997-4, Daechi-dong, Kangnam-ku, Seoul, 135-280 South Korea		
Product:	ADSL Router		
FCC ID:	QB3CORECESS3115	Model No.:	Corecess3115
Receipt No.:	SKTEU04-0169	Date of receipt:	Mar. 15, 2004
Date of Issue:	Apr. 06, 2004		
Testing location:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Standards:	ANSI C63.4 / 2001		
Rule Parts:	FCC part 15 Subpart B		
Equipment Class :	Class B Digital Device Peripheral		
※ This device has shown compliance with the conducted emissions limits in 15.107, 15.207 or 18.307 adopted under FCC 02-157(ET Docket 98-80). The device may be marketed after July 11, 2005, and is not affected by the 15.37(j) or 18.123 transition provisions.			
Test Result:	The above mentioned product has been tested and passed.		
<div style="display: flex; justify-content: space-between;"> <div> Prepared by: Y.H.Kang  <hr style="width: 100%;"/> <div style="display: flex; justify-content: space-between;"><i>Signature</i> <i>Date</i></div> </div> <div> Tested by: J.S.Hyun/Engineer  <hr style="width: 100%;"/> <div style="display: flex; justify-content: space-between;"><i>Signature</i> <i>Date</i></div> </div> <div> Approved by: C.H.Jeong /Manager& Chief Engineer  <hr style="width: 100%;"/> <div style="display: flex; justify-content: space-between;"><i>Signature</i> <i>Date</i></div> </div> </div>			
Other Aspects :			
Abbreviations :	· OK, Pass = passed · Fail = failed · N/A = not applicable		
<div style="border: 1px solid black; padding: 10px;"> <p>☛ •This test report is not permitted to copy partly without our permission.</p> <p>•This test result is dependent on only equipment to be used.</p> <p>•This test result is based on a single evaluation of one sample of the above mentioned.</p> <p>•This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.</p> <p>• We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.</p> <div style="text-align: right; margin-top: 20px;">  NVLAP Lab. Code: 200220-0 </div> </div>			



» » Contents « «

Contents	2
List of Tables	2
List of Figures	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical Characteristics	5
3.2 Submitted Documents	5
4. Measurement Conditions	6
4.1 Modes of Operation	6
4.2 List of Peripherals	6
4.3 Type of Used cables	7
4.4 Test Setup	7
4.5 Uncertainty	8
5. EMISSION Test	11
5.1 Conducted Emissions	11
5.2 Radiated Emissions	15

» List of Tables

Table 1	List of test and measurement Equipment	4
Table 2	Test Data, Conducted Emissions	14
Table 3	Test Data, Radiated Emissions	16

» List of Figures

Figure 1	Spectral Diagram, LINE-PE	12
Figure 2	Spectral Diagram, Neutral-PE	13



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK Tech Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200220-0 and DATech for DAR-Registration No.:DAT-P-076/97-01



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

- **Conducted Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS10	862970/019	07.2004
Artificial Mains Network	ESH2-Z5	834549/011	08.2004
EMI Receiver	ESHS10	835871/002	10.2004
Artificial Mains Network	ESH3-Z5	836679/018	08.2004

- **Radiated Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESVS 10	825120/013	10.2004
EMI Receiver	ESVS 10	834468/008	10.2004
Spectrum Analyzer	R3361A	11730187	10.2004
Amplifier	8447F	3113A05153	08.2004
Log Periodic Antenna	UHALP9107	1819	10.2004
Biconical Antenna	BBA9106	91031626	10.2004
Open Site Cable	N/A	N/A	N/A
Antenna Turntable Driver	5907	N/A	N/A
Antenna Turntable controller	5906	N/A	N/A
Amp & Receiver connection cable	N/A	N/A	N/A
Amp & Spectrum connection cable	N/A	N/A	N/A
50 Ω Switcher	MP59B	6100214538	N/A

2.3 Test Date

Date of Application : Mar. 15 2004

Date of Test : Mar. 31, 2004 ~ Apr. 01, 2004

2.4 Test Environment

See each test item's description.



3. Description of the tested samples

The EUT is the ADSL Router.

3.1 Rating and Physical Characteristics

Interface	* Ethernet 10/100Base-TX Connector :RJ45, USB * ADSL Line Line Code : DMT (Discrete Multi-Tone) Downstream : Max 8Mbps Upstream : Max 1Mbps Connector : RJ-11
Environmental Conditions	Temperature : 0℃ ~ 50℃ Humidity : 5% ~ 90%
Power Requirements	Input:100~240VAC, 50-60Hz, DC9V/1A Power consumption:Max.4Watt

3.2 Submitted Documents

N/A



4. Measurement Conditions

The operating voltage of EUT(DC 9V, 1.0A) is supplied by the AC Adapter.

(AC Adapter Input Voltage : AC 120V, 60Hz)

4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

During all test, the PC send the ping signal to the CO equipment via the EUT.

The PC was connected with the EUT by RJ-45 interface, the EUT was connected with the CO equipment by RJ-11 interface.

4.2 List of Peripherals

Description	Manufacturer	Model Name	Serial No.	FCC ID
ADSL Router (EUT)	Corecess Inc.	Corecess3115	N/A	-
Adapter (for EUT)	N/A	ADS6818-1809 -W0910	N/A	-
Notebook PC	Compaq Korea	SERIES CA2001	4B19JNW740EW	-
Adapter (for Note PC)	Delta Electronics Inc.	ADP-45GB	9919360102	-
Printer	THAI TABUCHI ELECTRONIC Co., Ltd.	BJC-3000	N/A	-
CO Equipment	Corecess Inc.	DX6524T-DC	56Y2321611	




4.3 Type of Used Cables

Description	Length	Type of shield	Manufacturer	Remark
RJ-11 cable	2.2m	Non-Shield	None	For EUT
RJ-45 cable	3.1m	Non-Shield	None	For EUT
AC Adapter power cable	1.2m	Non-Shield	None	For EUT
USB cable	1.1m	Non-Shield	None	For Printer
Power cable	1.2m	Non-Shield	None	For CO Equipment
Power cable	1.2m	Non-Shield	None	For PC
AC Adapter power cable	1.2m	Non-Shield	None	For Note PC

4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

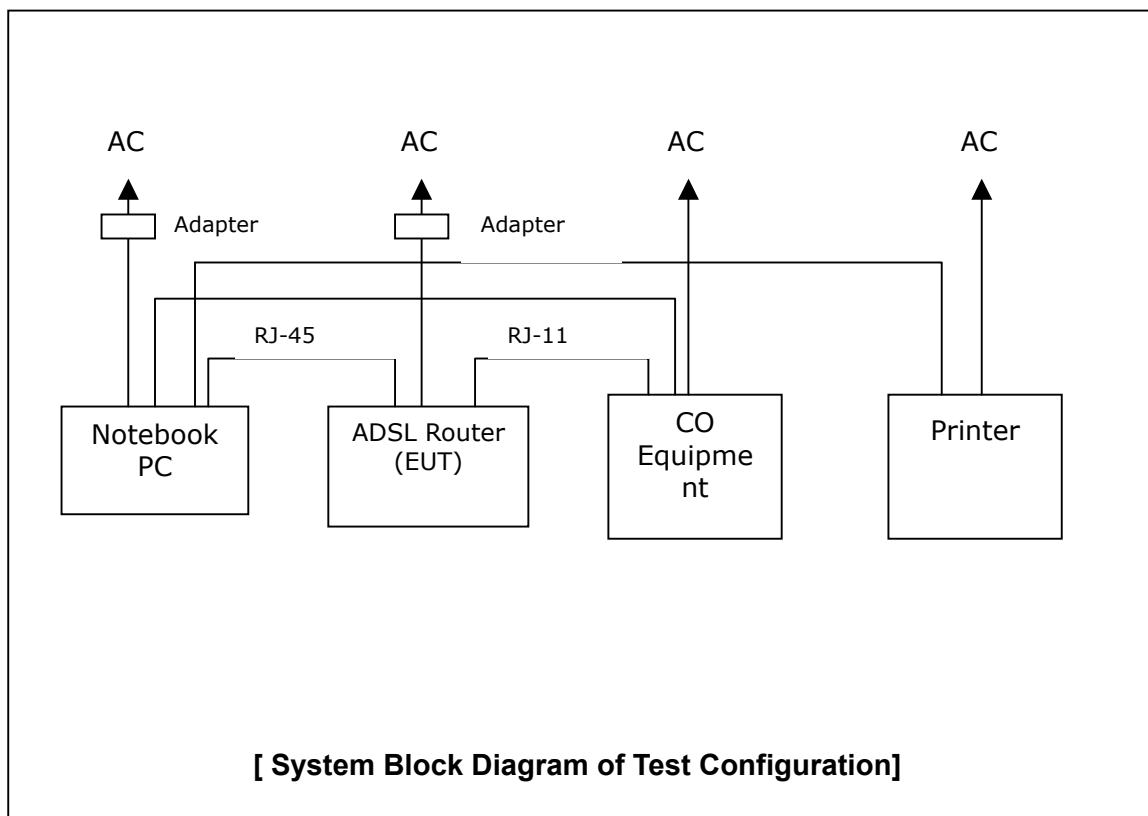



4.5 Uncertainty

1) Radiated disturbance

- ⊙ Horizontally polarized radiated disturbances from 30MHz to 1000MHz at a distance of 3m

Input quantity	Uncertainty of Xi		U(Xi) dB	Ci	Ciu(xi)	CISPR 16-4
	dB	Probability distribution function				
1) Receiver reading	±0.1	K =1	0.1	1	0.1	0.10
2) Attenuation: antenna-receiver	±0.18	K=2	0.09	1	0.09	0.05
3) Antenna factor	±1.5	K=2	0.75	1	0.75	1.00
RECEIVER CORRECTIONS:						
4) Sine wave voltage	±0.56	K=2	0.28	1	0.50	0.50
5) Pulse amplitude response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
6) Pulse repetition rate response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
7) Noise floor proximity	±0.5	K=2	0.25	1	0.25	0.25
8) AF frequency interpolation	±0.3	Rectangular (√3)	0.17	1	0.17	0.17
9) Balance	±0.3	Rectangular (√3)	0.17	1	0.17	0.53
10) AF height deviations	±0.5	Rectangular (√3)	0.29	1	0.29	0.29
11) Phase center location	±0.3	Rectangular (√3)	0.17	1	0.17	0.17
12) Directive difference	+1.0	Rectangular (√3)	0.29	1	0.29	0.29
13) Cross polarization	±0.9	Rectangular (√3)	0.52	1	0.52	0.52
14) Site corrections	±2.6	Rectangular (√3)	1.5	1	1.5	1.63
15) Mismatch (ant-receiver)	±1.06	U-shaped (√2)	0.75	1	0.75	0.67

Combined Uncertainty

$$Uc(xi) = \sqrt{(1)^2 + (2)^2 + (3)^2 + (4)^2 + (5)^2 + (6)^2 + (7)^2 + (8)^2 + (9)^2 + (10)^2 + (11)^2 + (12)^2 + (13)^2 + (14)^2 + (15)^2} = 2.37$$

Expanded Uncertainty

$$U = k \cdot Uc(xi) = 2 \cdot 2.37 = 4.74 \text{ dB} \quad (\text{The coverage factor } k = 2 \text{ yields approximately a 95\% level of confidence})$$



② **Vertically polarized radiated disturbances from 30MHz to 1000MHz at a distance of 3m**

Input quantity	Uncertainty of Xi		U(Xi) dB	Ci	Ciu(xi)	CISPR 16-4
	dB	Probability distribution function				
1) Receiver reading	±0.1	K =1	0.1	1	0.1	0.10
2) Attenuation: antenna-receiver	±0.18	K=2	0.09	1	0.09	0.05
3) Antenna factor	±1.5	K=2	0.75	1	0.75	1.00
RECEIVER CORRECTIONS:						
4) Sine wave voltage	±0.56	K=2	0.28	1	0.50	0.50
5) Pulse amplitude response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
6) Pulse repetition rate response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
7) Noise floor proximity	±0.5	K=2	0.25	1	0.25	0.25
8) AF frequency interpolation	±0.3	Rectangular (√3)	0.17	1	0.17	0.17
9) Balance	±0.9	Rectangular (√3)	0.52	1	0.52	0.52
10) AF height deviations	±0.3	Rectangular (√3)	0.17	1	0.17	0.17
11) phase center location	±0.3	Rectangular (√3)	0.17	1	0.17	0.17
12) directive difference	+1.0	Rectangular (√3)	0.29	1	0.29	0.29
13) cross polarization	±0.9	Rectangular (√3)	0.52	1	0.52	0.52
14) site corrections	±2.6	Rectangular (√3)	1.5	1	1.5	1.63
15) Mismatch (ant-receiver)	±1.06	U-shaped (√2)	0.75	1	0.75	0.67

Combined Uncertainty

$$Uc(xi) = \sqrt{(1)^2 + (2)^2 + (3)^2 + (4)^2 + (5)^2 + (6)^2 + (7)^2 + (8)^2 + (9)^2 + (10)^2 + (11)^2 + (12)^2 + (13)^2 + (14)^2 + (15)^2} = \mathbf{2.43}$$

Expanded Uncertainty

$$U = k \cdot Uc(xi) = 2 \cdot 2.43 = \mathbf{4.86dB}$$

(The coverage factor k =2 yields approximately a 95% level of confidence)

**2) Conducted disturbance**

⊙ **Conducted disturbance from 150KHz to 30MHz using a 50Ω/50uH AMN**

input quantity	Uncertainty of Xi		U(Xi) dB	Ci	Ciu(xi)	CISPR 16-4
	dB	Probability distribution function				
1) Receiver Reading	±0.1	K =1	0.1	1	0.1	0.10
2) Attenuation:AMN-receiver	±0.36	Triangular (√6)	0.15	1	0.15	0.05
RECEIVER CORRECTIONS:						
3) Sine wave voltage	±0.5	K=2	0.25	1	0.25	0.50
4) Pulse amplitude response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
5) Pulse repetition rate response	±1.5	Rectangular (√3)	0.87	1	0.87	0.87
6) AMN voltage division factor	±0.07	K=2	0.04	1	0.04	0.1
7) Mismatch : AMN-receiver	±0.55	U-shaped (√2)	0.39	1	0.39	0.53
8) AMN impedance	±1.52	Triangular (√6)	0.62	1	0.62	1.08

- 1)~8) For numbered comments, refer to following articles

Combined Uncertainty

$$Uc(xi) = \sqrt{(1)^2 + (2)^2 + (3)^2 + (4)^2 + (5)^2 + (6)^2 + (7)^2 + (8)^2} = \mathbf{1.47}$$

Expanded uncertainty

$$U = k \cdot Uc(xi) = 2 \cdot 1.47 = \mathbf{2.94dB}$$

The coverage factor $k = 2$ yields approximately a 95% level of confidence

⊙ **Refer**

- 1) receiver's resolution capacity
- 2) refer to the sub clause 11. of a calibration report
- 3) quoted from CISPR 16-4
- 4) refer to a calibration report
- 5) refer to CISPR 16-4 article 5. 7)
- 6) refer to a calibration report and a measured AMN impedance data



5. EMISSION Test

5.1 Conducted Emissions

Result:**Pass**

The line-conducted facility is located inside a 2.0M x 3.6M x 7.2M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1m x 1.5m wooden table 80cm high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14kHz-10GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**SK TECH CO., LTD.**

Page 12 of 16

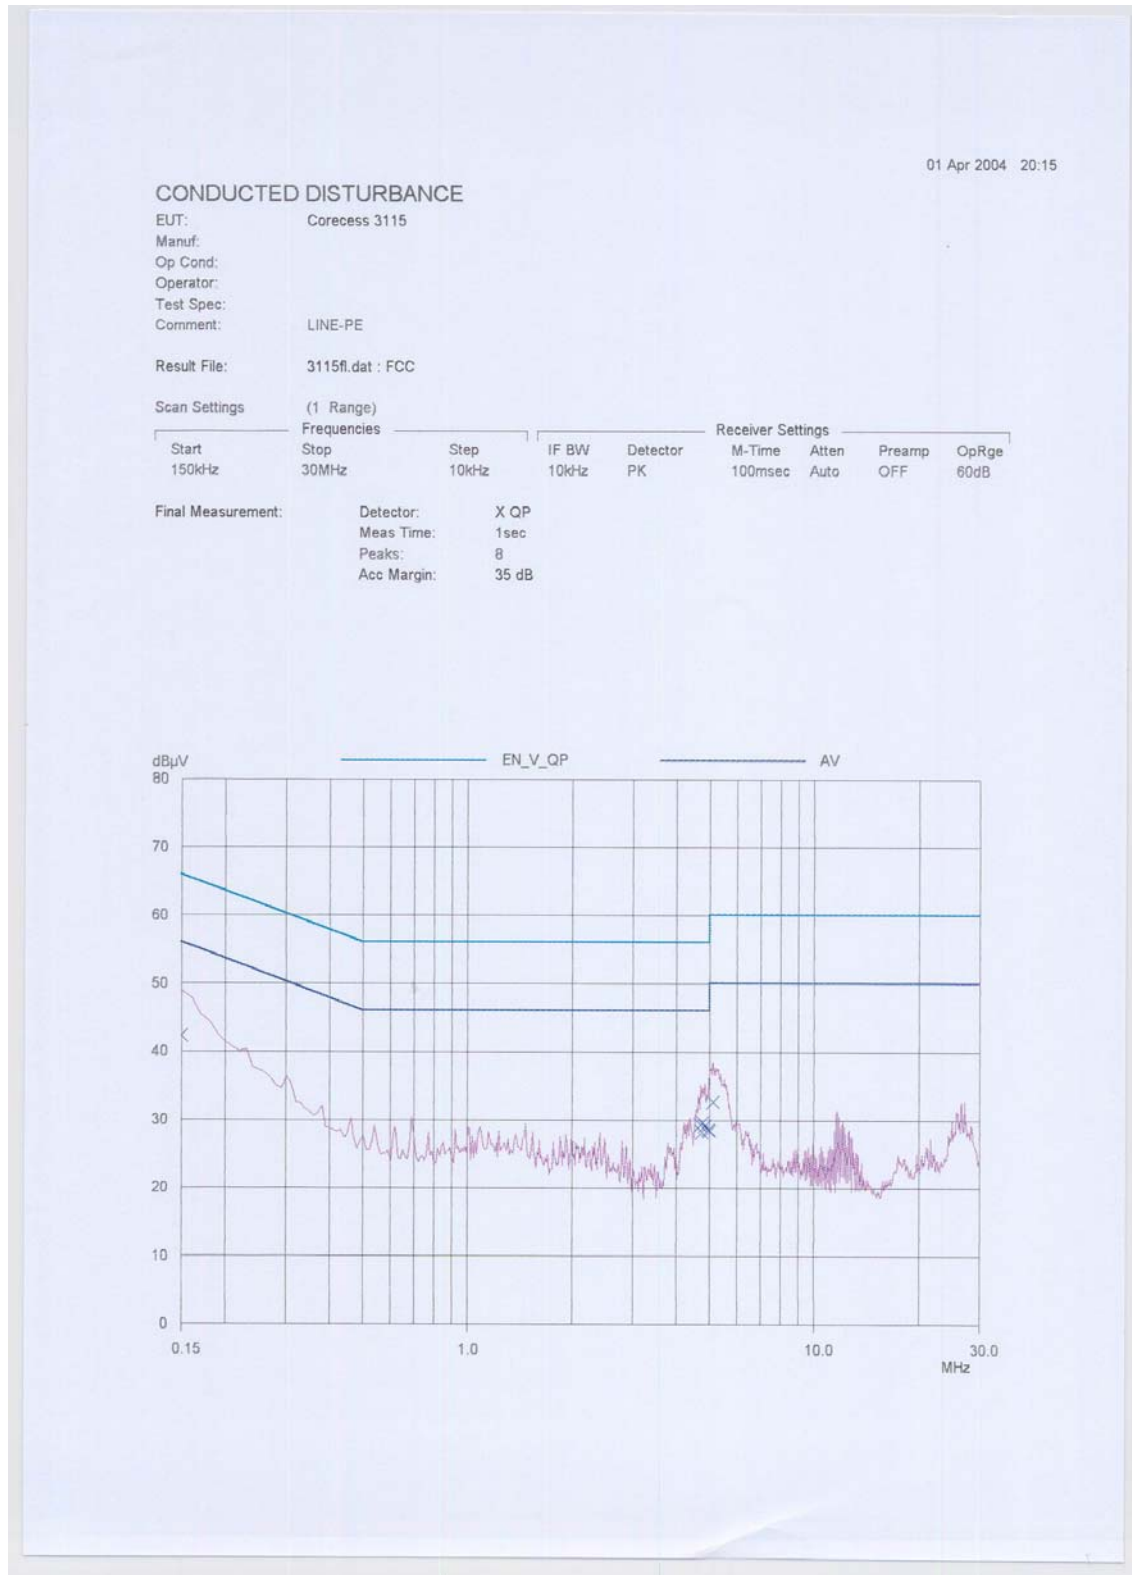
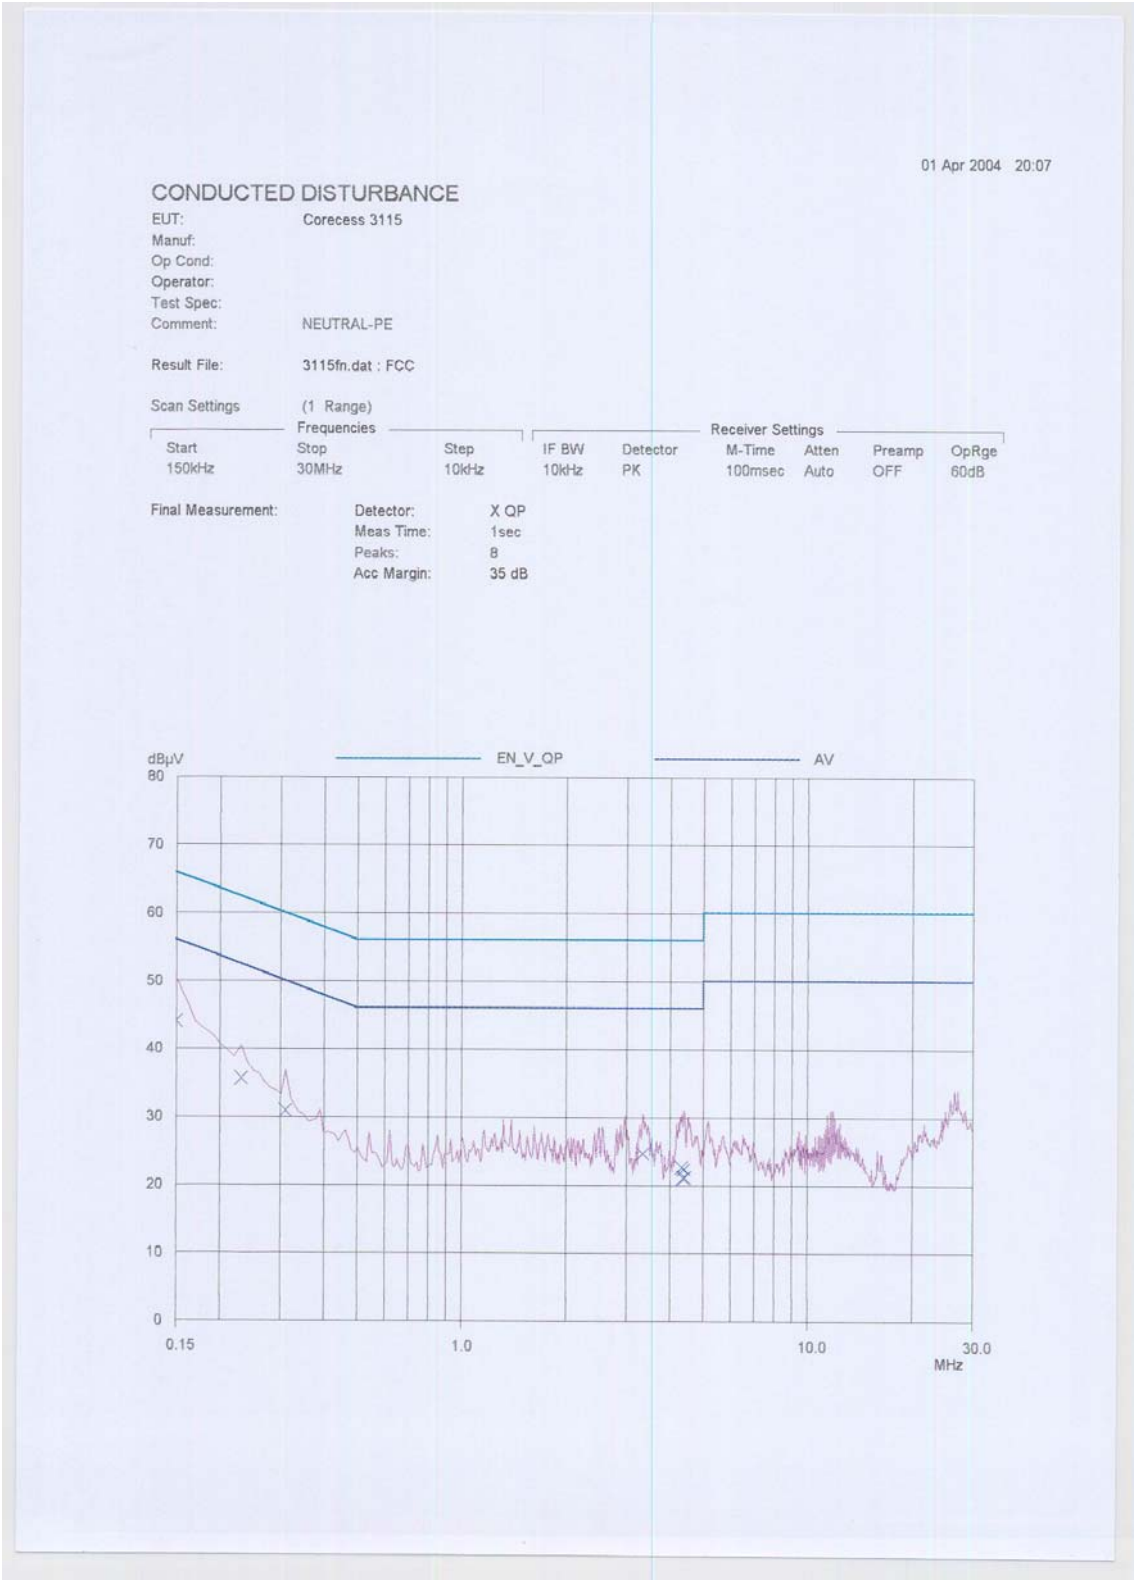
Figure 1 : Spectral Diagram, LINE - PE



Figure 2 : Spectral Diagram, NEUTRAL – PE



**Table 2: Test Data, Conducted Emissions****► LINE-PE**

Frequency (MHz)	Reading (dB μ V)	C/F (dB)	CL (dB)	Limit (dB μ V)	Margin (dB)
0.150	42.27	0.09	0.0	66.00	23.64
4.750	28.19	0.23	0.4	56.00	27.18
4.830	29.10	0.23	0.4	56.00	26.27
5.100	32.62	0.23	0.4	60.00	26.75

► NEUTRAL-PE

Frequency (MHz)	Reading (dB μ V)	C/F (dB)	CL (dB)	Limit (dB μ V)	Margin (dB)
0.150	43.99	0.13	0.0	66.00	21.88
0.230	35.60	0.13	0.1	62.45	26.62
3.340	24.58	0.17	0.3	56.00	30.95
4.380	22.31	0.24	0.4	56.00	33.05

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. C/F = Correction Factor
6. C/L = Cable Loss

♠ Margin Calculation

$$(6)\text{Margin} = (5)\text{Limit} - (4)\text{Actual}$$

$$[(4)\text{Actual} = (1)\text{Reading} + (2)\text{C/F} + (3)\text{C/L}]$$



5.2 Radiated Emissions

Result :**Pass**

Preliminary measurements were made indoors at 3 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.

**Table 3 : Test Data, Radiated Emissions**

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dBμV)	(2) AFCL (dB/m)	(3) Actual (dBμV/m)	(4) Limit (dBμV/m)	(5) Margin (dB)
300.00	H	1.4	185	22.1	19.4	41.5	46.0	4.5
700.00	H	1.1	176	11.9	28.1	40.0	46.0	6.0
777.23	H	1.1	180	10.4	29.6	40.0	46.0	6.0
847.87	H	1.0	175	9.6	30.3	39.9	46.0	6.1

Table. Radiated Measurements at 3-meters

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization

♠ Margin Calculation

$$(5)\text{Margin} = (4)\text{Limit} - (3)\text{Actual}$$

$$[(3)\text{Actual} = (1)\text{Reading} + (2)\text{AFCL}]$$