

## Appendix H): Pseudorandom Frequency Hopping Sequence

### Test Requirement:

47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

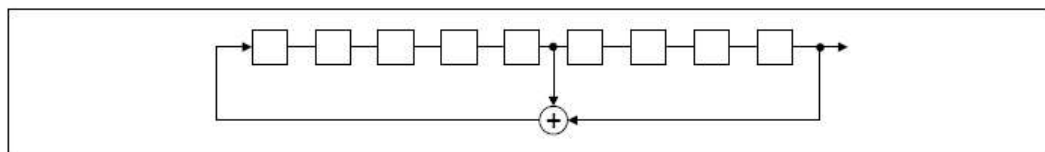

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

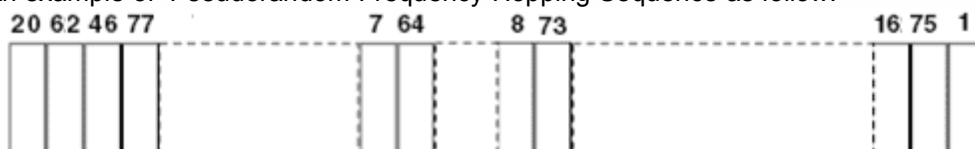

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



## Appendix I): Antenna Requirement

### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is Integral Antenna and no consideration of replacement. The best case gain of the antenna is 1dBi.

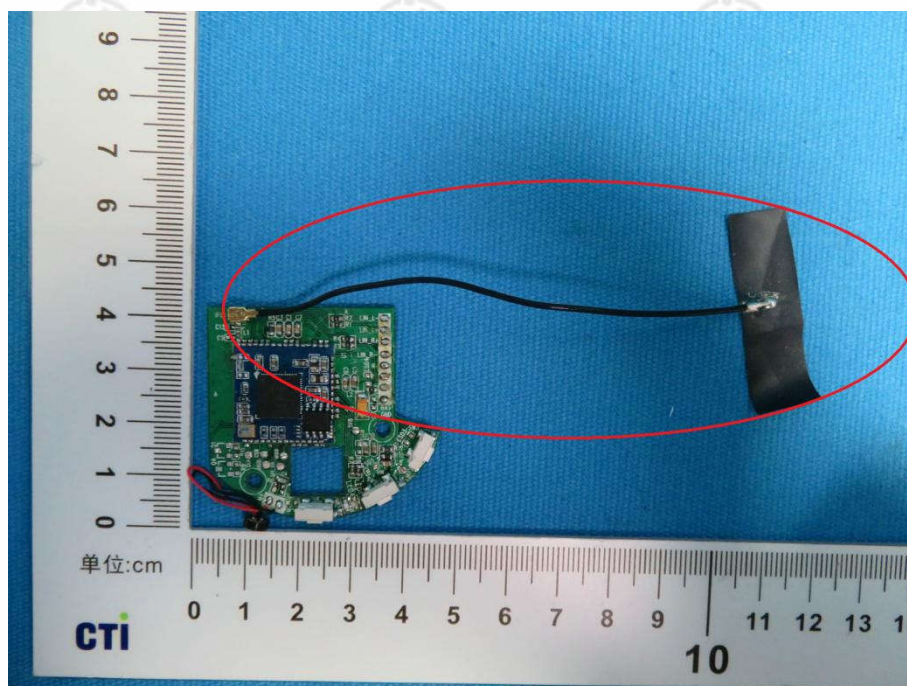

## Appendix J): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

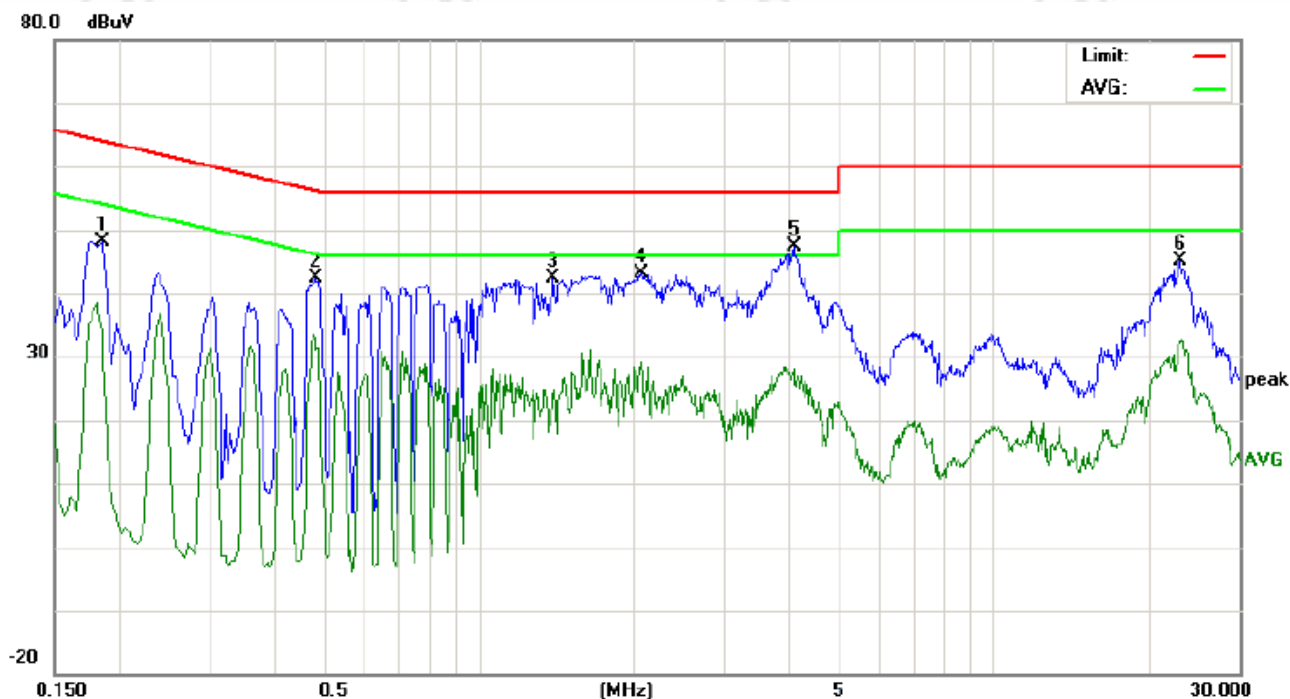


No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	42.92	35.31	31.06	9.73	52.65	45.04	40.79	64.57	54.57	-19.53	-13.78	P	
2	0.2420	35.35	25.41	25.77	9.74	45.09	35.15	35.51	62.02	52.02	-26.87	-16.51	P	
3	0.5460	32.10	20.35	17.80	9.73	41.83	30.08	27.53	56.00	46.00	-25.92	-18.47	P	
4	1.4100	31.81	21.65	16.44	9.66	41.47	31.31	26.10	56.00	46.00	-24.69	-19.90	P	
5	4.2180	35.67	26.31	15.26	9.65	45.32	35.96	24.91	56.00	46.00	-20.04	-21.09	P	
6	21.2500	35.03	28.52	23.01	10.16	45.19	38.68	33.17	60.00	50.00	-21.32	-16.83	P	



Neutral line:

80.0 dBuV

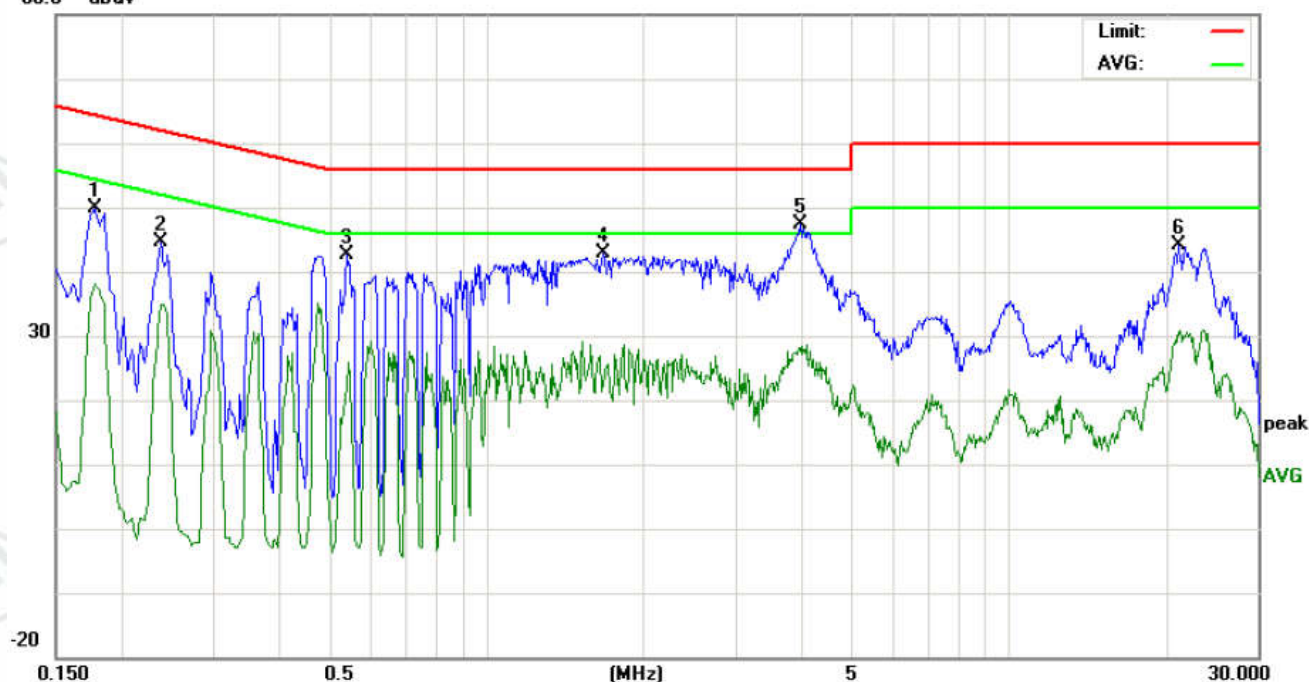

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	40.08	31.55	28.32	9.73	49.81	41.28	38.05	64.57	54.57	-23.29	-16.52	P	
2	0.2380	34.80	22.41	25.13	9.74	44.54	32.15	34.87	62.16	52.16	-30.01	-17.29	P	
3	0.5420	32.77	23.64	12.04	9.73	42.50	33.37	21.77	56.00	46.00	-22.63	-24.23	P	
4	1.6780	33.20	20.15	12.86	9.69	42.89	29.84	22.55	56.00	46.00	-26.16	-23.45	P	
5	3.9860	37.72	23.87	18.37	9.65	47.37	33.52	28.02	56.00	46.00	-22.48	-17.98	P	
6	21.2460	33.90	24.79	20.36	10.16	44.06	34.95	30.52	60.00	50.00	-25.05	-19.48	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.




## Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


**Test plot as follows:**

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

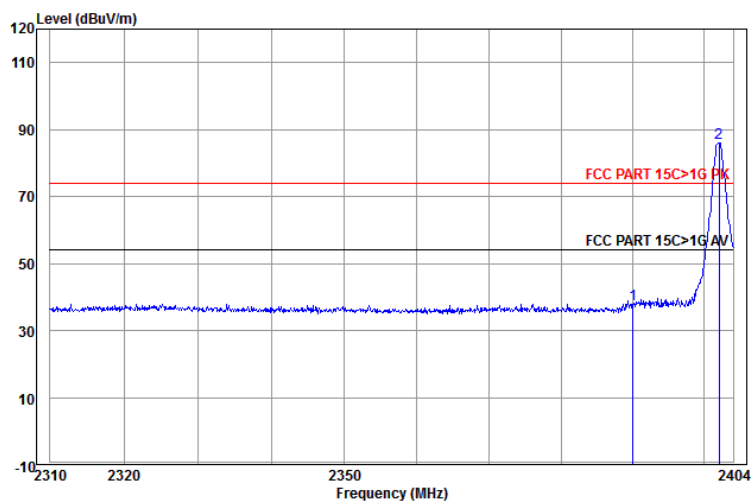


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	45.02	37.80	74.00	-36.20	Horizontal
2 pp	2402.083	32.56	4.31	44.04	93.23	86.06	74.00	12.06	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

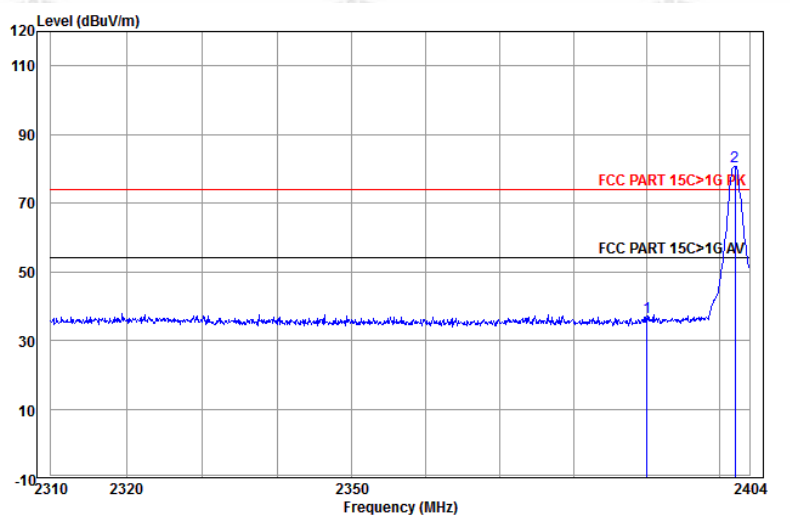


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	43.90	36.68	74.00	-37.32	Vertical
2 pp	2402.083	32.56	4.31	44.04	87.91	80.74	74.00	6.74	Vertical

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel:	Polarization: Horizontal	Remark: Peak

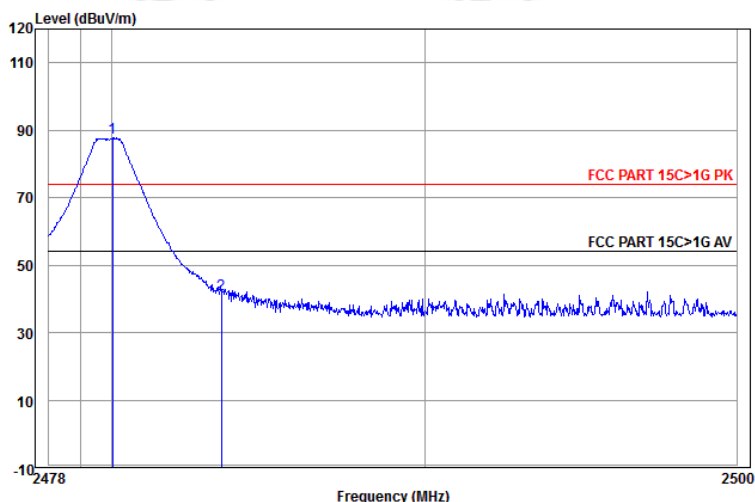


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.038	32.71	4.50	44.14	94.61	87.68	74.00	13.68	Horizontal
2	2483.500	32.71	4.51	44.14	48.44	41.52	74.00	-32.48	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

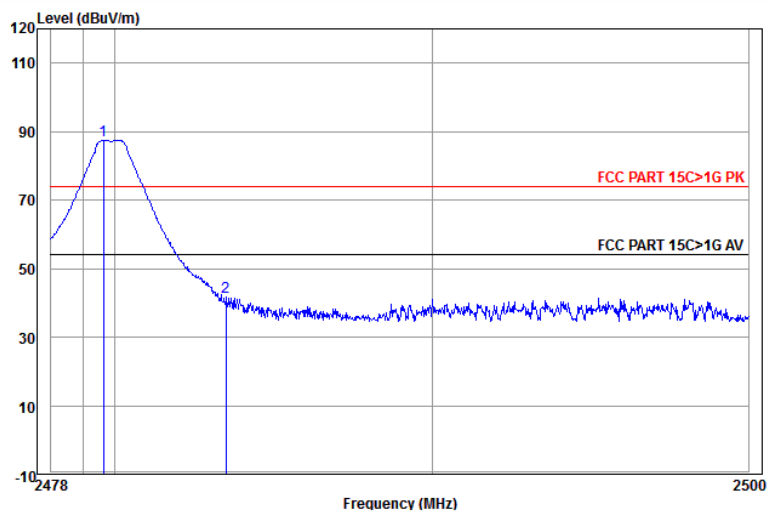


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.643	32.71	4.50	44.14	94.49	87.56	74.00	13.56	Vertical
2	2483.500	32.71	4.51	44.14	48.51	41.59	74.00	-32.41	Vertical

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

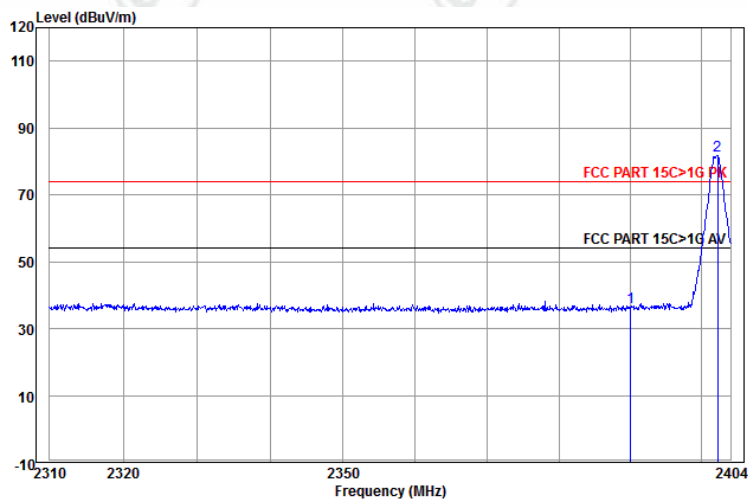

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	43.54	36.32	74.00	-37.68	Horizontal
2 pp	2402.179	32.56	4.31	44.04	88.89	81.72	74.00	7.72	Horizontal


Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

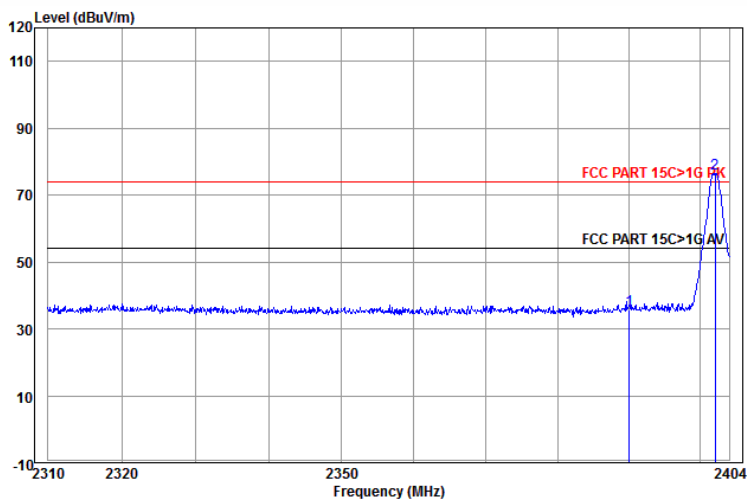

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	43.07	35.85	74.00	-38.15	Vertical
2 pp	2402.083	32.56	4.31	44.04	83.78	76.61	74.00	2.61	Vertical




Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

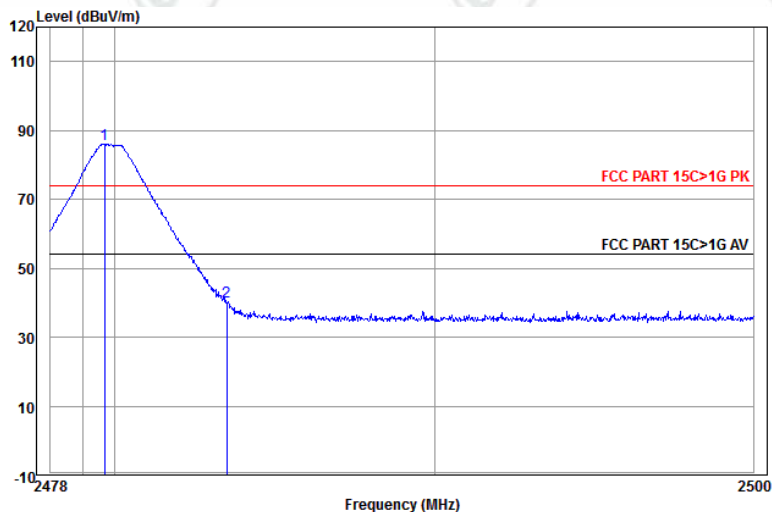

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.687	32.71	4.50	44.14	92.91	85.98	74.00	11.98	Horizontal
2	2483.500	32.71	4.51	44.14	47.26	40.34	74.00	-33.66	Horizontal


Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

Data: 22 File: D:\360安全浏览器下载\mille3\latest\SHENZHEN AONI ELECTRONIC CO,LTD.EM8 (57)

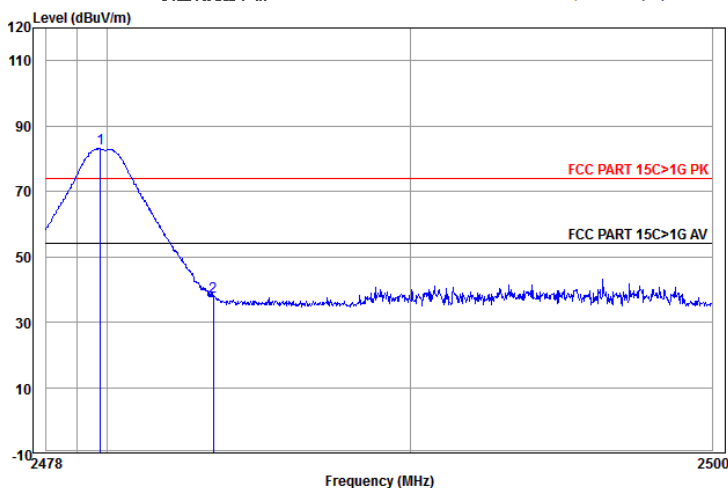


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.775	32.71	4.50	44.14	90.07	83.14	74.00	9.14	Vertical
2	2483.500	32.71	4.51	44.14	44.57	37.65	74.00	-36.35	Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

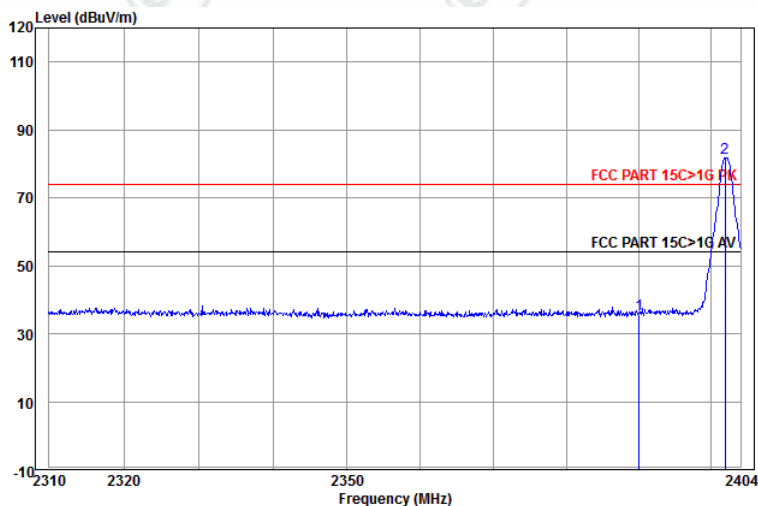


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	42.82	35.60	74.00	-38.40	Horizontal
2 pp	2401.891	32.56	4.31	44.04	88.93	81.76	74.00	7.76	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

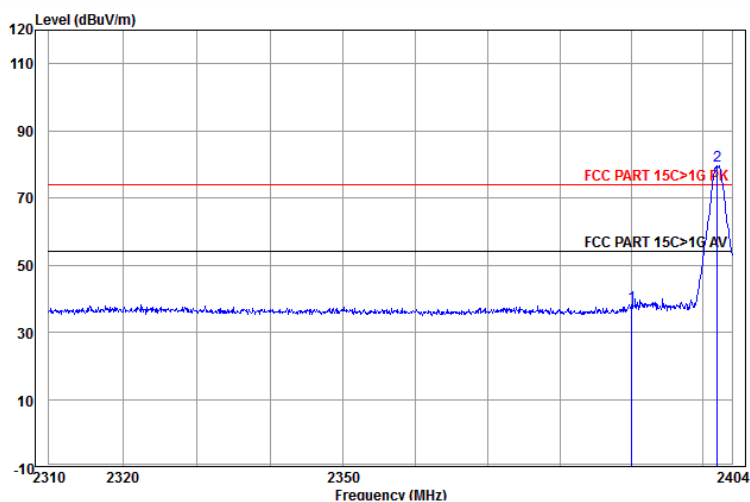


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	45.04	37.82	74.00	-36.18	Vertical
2 pp	2401.987	32.56	4.31	44.04	86.72	79.55	74.00	5.55	Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

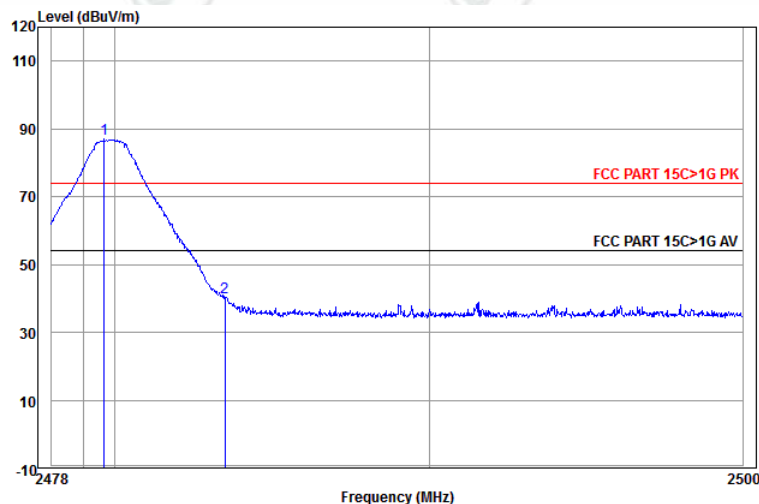

	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.665	32.71	4.50	44.14	93.85	86.92	74.00	12.92	Horizontal	
2	2483.500	32.71	4.51	44.14	47.37	40.45	74.00	-33.55	Horizontal	

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

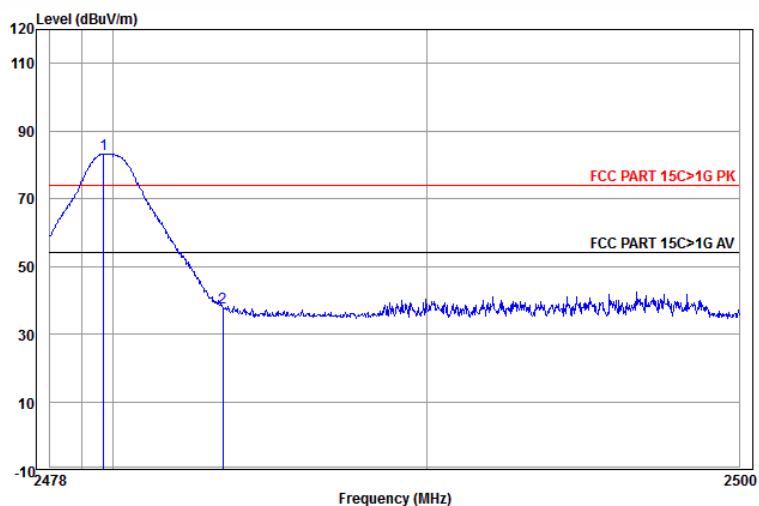

	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.709	32.71	4.50	44.14	90.21	83.28	74.00	9.28	Vertical	
2	2483.500	32.71	4.51	44.14	44.90	37.98	74.00	-36.02	Vertical	

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field

strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor



## Appendix L): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:


Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

# **Radiated Spurious Emissions test Data:** **Radiated Emission below 1GHz**


30MHz~1GHz (QP)

Test mode:	Transmitting	Horizontal
------------	--------------	------------

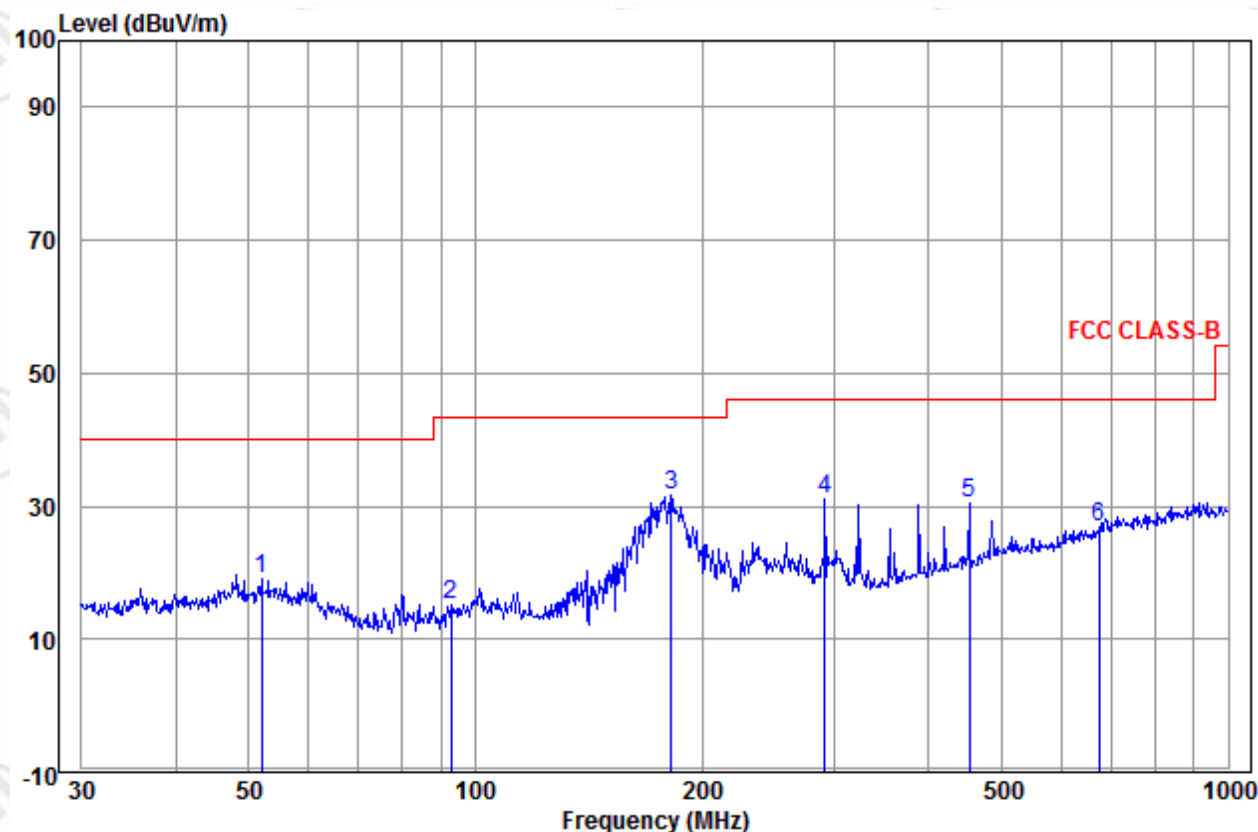

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	52.025	14.82	1.41	2.88	19.11	40.00	-20.89	Horizontal	
2	92.787	11.78	1.58	1.84	15.20	43.50	-28.30	Horizontal	
3 pp	181.920	10.97	2.00	18.79	31.76	43.50	-11.74	Horizontal	
4	291.036	13.32	2.38	15.41	31.11	46.00	-14.89	Horizontal	
5	452.720	17.17	3.00	10.17	30.34	46.00	-15.66	Horizontal	
6	672.845	20.11	3.72	3.08	26.91	46.00	-19.09	Horizontal	

Test mode:	Transmitting	Vertical
------------	--------------	----------

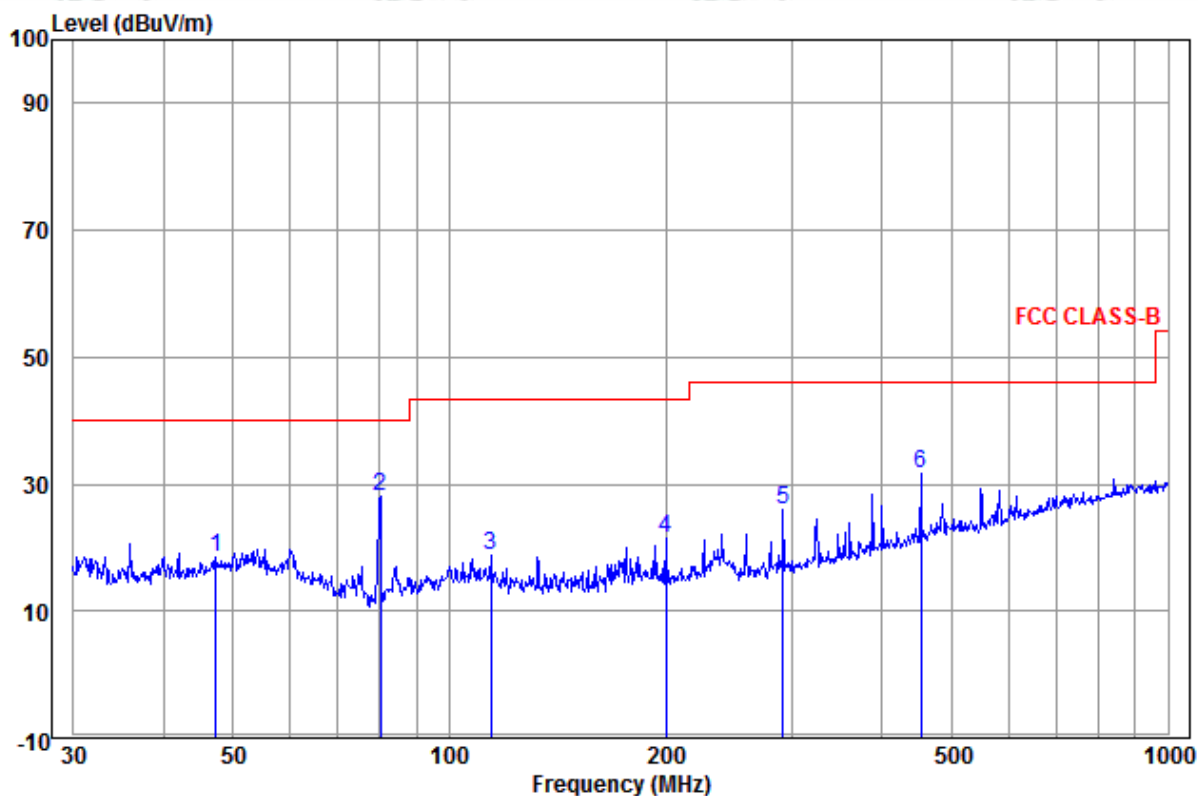

	Ant Freq	Ant Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	47.326	14.88	1.19	2.25	18.32	40.00	-21.68	Vertical	
2 pp	80.081	8.62	1.57	17.75	27.94	40.00	-12.06	Vertical	
3	114.114	12.06	1.57	5.05	18.68	43.50	-24.82	Vertical	
4	199.986	11.60	2.21	7.55	21.36	43.50	-22.14	Vertical	
5	291.036	13.32	2.38	10.29	25.99	46.00	-20.01	Vertical	
6	452.720	17.17	3.00	11.55	31.72	46.00	-14.28	Vertical	

**Transmitter Emission above 1GHz**

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1617.862	31.09	2.93	43.87	47.19	37.34	74	-36.66	Pass	H
2705.543	33.12	5.01	44.39	46.06	39.80	74	-34.20	Pass	H
3598.087	33.09	5.51	44.64	44.22	38.18	74	-35.82	Pass	H
4804.000	34.69	5.11	44.60	49.78	44.98	74	-29.02	Pass	H
7206.000	36.42	6.66	44.77	45.27	43.58	74	-30.42	Pass	H
9608.000	37.88	7.73	45.58	42.11	42.14	74	-31.86	Pass	H
1621.985	31.10	2.94	43.86	47.71	37.89	74	-36.11	Pass	V
2875.986	33.40	5.37	44.58	46.09	40.28	74	-33.72	Pass	V
3738.129	32.99	5.48	44.62	45.06	38.91	74	-35.09	Pass	V
4804.000	34.69	5.11	44.60	48.88	44.08	74	-29.92	Pass	V
7206.000	36.42	6.66	44.77	44.60	42.91	74	-31.09	Pass	V
9608.000	37.88	7.73	45.58	42.06	42.09	74	-31.91	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1617.862	31.09	2.93	43.87	46.18	36.33	74	-37.67	Pass	H
2861.381	33.38	5.34	44.56	46.11	40.27	74	-33.73	Pass	H
3728.625	33.00	5.48	44.62	42.48	36.34	74	-37.66	Pass	H
4882.000	34.85	5.08	44.60	53.83	49.16	74	-24.84	Pass	H
7323.000	36.43	6.77	44.87	47.16	45.49	74	-28.51	Pass	H
9764.000	38.05	7.60	45.55	44.94	45.04	74	-28.96	Pass	H
1642.761	31.13	2.95	43.84	45.74	35.98	74	-38.02	Pass	V
2861.381	33.38	5.34	44.56	46.02	40.18	74	-33.82	Pass	V
3815.033	32.93	5.47	44.62	42.37	36.15	74	-37.85	Pass	V
4882.000	34.85	5.08	44.60	51.37	46.70	74	-27.30	Pass	V
7323.000	36.43	6.77	44.87	45.86	44.19	74	-29.81	Pass	V
9764.000	38.05	7.60	45.55	43.66	43.76	74	-30.24	Pass	V



Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1837.456	31.46	3.11	43.65	45.07	35.99	74	-38.01	Pass	H
3184.25	33.43	5.58	44.68	44.13	38.46	74	-35.54	Pass	H
3943.392	32.84	5.45	44.60	42.76	36.45	74	-37.55	Pass	H
4960	35.02	5.05	44.60	51.80	47.27	74	-26.73	Pass	H
7440	36.45	6.88	44.97	44.80	43.16	74	-30.84	Pass	H
9920	38.22	7.47	45.52	42.66	42.83	74	-31.17	Pass	H
1402.92	30.68	2.73	44.11	46.57	35.87	74	-38.13	Pass	V
2825.193	33.32	5.27	44.52	44.13	38.20	74	-35.80	Pass	V
3983.75	32.81	5.44	44.60	44.14	37.79	74	-36.21	Pass	V
4960	35.02	5.05	44.60	52.10	47.57	74	-26.43	Pass	V
7440	36.45	6.88	44.97	44.92	43.28	74	-30.72	Pass	V
9920	38.22	7.47	45.52	41.78	41.95	74	-32.05	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1651.146	31.15	2.96	43.83	45.00	35.28	74	-38.72	Pass	H
2825.193	33.32	5.27	44.52	44.53	38.60	74	-35.40	Pass	H
3634.91	33.07	5.50	44.63	43.30	37.24	74	-36.76	Pass	H
4804.000	34.69	5.11	44.6	47.61	42.81	74	-31.19	Pass	H
7206.000	36.42	6.66	44.77	44.33	42.64	74	-31.36	Pass	H
9608.000	37.88	7.73	45.58	41.09	41.12	74	-32.88	Pass	H
1605.554	31.07	2.92	43.88	48.00	38.11	74	-35.89	Pass	V
2179.145	32.10	3.74	43.75	42.78	34.87	74	-39.13	Pass	V
3367.661	33.28	5.55	44.66	44.65	38.82	74	-35.18	Pass	V
4804.000	34.69	5.11	44.6	46.97	42.17	74	-31.83	Pass	V
7206.000	36.42	6.66	44.77	44.31	42.62	74	-31.38	Pass	V
9608.000	37.88	7.73	45.58	42.30	42.33	74	-31.67	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1809.605	31.41	3.09	43.67	44.85	35.68	74	-38.32	Pass	H
2726.283	33.15	5.06	44.42	43.88	37.67	74	-36.33	Pass	H
3943.392	32.84	5.45	44.60	43.03	36.72	74	-37.28	Pass	H
4882.000	34.85	5.08	44.60	52.83	48.16	74	-25.84	Pass	H
7323.000	36.43	6.77	44.87	46.16	44.49	74	-29.51	Pass	H
9764.000	38.05	7.60	45.55	45.94	46.04	74	-27.96	Pass	H
1605.554	31.07	2.92	43.88	45.6	35.71	74	-38.29	Pass	V
2726.283	33.15	5.06	44.42	43.77	37.56	74	-36.44	Pass	V
3570.714	33.12	5.51	44.64	43.49	37.48	74	-36.52	Pass	V
4882.000	34.85	5.08	44.60	50.37	45.70	74	-28.30	Pass	V
7323.000	36.43	6.77	44.87	43.86	42.19	74	-31.81	Pass	V
9764.000	38.05	7.60	45.55	41.66	41.76	74	-32.24	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1634.419	31.12	2.95	43.85	44.97	35.19	74	-38.81	Pass	H
3072.770	33.53	5.61	44.69	42.81	37.26	74	-36.74	Pass	H
3805.334	32.94	5.47	44.62	42.99	36.78	74	-37.22	Pass	H
4960.000	35.02	5.05	44.60	49.04	44.51	74	-29.49	Pass	H
7440.000	36.45	6.88	44.97	46.18	44.54	74	-29.46	Pass	H
9920.000	38.22	7.47	45.52	41.89	42.06	74	-31.94	Pass	H
1406.496	30.68	2.74	44.11	46.76	36.07	74	-37.93	Pass	V
2698.665	33.10	5.00	44.39	46.18	39.89	74	-34.11	Pass	V
3700.26	33.02	5.49	44.63	42.75	36.63	74	-37.37	Pass	V
4960.000	35.02	5.05	44.60	48.75	44.22	74	-29.78	Pass	V
7440.000	36.45	6.88	44.97	45.92	44.28	74	-29.72	Pass	V
9920.000	38.22	7.47	45.52	42.29	42.46	74	-31.54	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1417.277	30.71	2.75	44.10	45.73	35.09	74	-38.91	Pass	H
2854.107	33.37	5.33	44.55	44.90	39.05	74	-34.95	Pass	H
3709.691	33.01	5.49	44.63	43.13	37.00	74	-37.00	Pass	H
4804.000	34.69	5.11	44.60	50.16	45.36	74	-28.64	Pass	H
7206.000	36.42	6.66	44.77	45.56	43.87	74	-30.13	Pass	H
9608.000	37.88	7.73	45.58	42.05	42.08	74	-31.92	Pass	H
1634.419	31.12	2.95	43.85	46.97	37.19	74	-36.81	Pass	V
2846.851	33.35	5.31	44.54	44.71	38.83	74	-35.17	Pass	V
3463.291	33.2	5.53	44.65	43.7	37.78	74	-36.22	Pass	V
4804.000	34.69	5.11	44.60	52.42	47.62	74	-26.38	Pass	V
7206.000	36.42	6.66	44.77	47.23	45.54	74	-28.46	Pass	V
9608.000	37.88	7.73	45.58	42.11	42.14	74	-31.86	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1589.289	31.04	2.91	43.90	47.04	37.09	74	-36.91	Pass	H
2861.381	33.38	5.34	44.56	46.11	40.27	74	-33.73	Pass	H
3543.550	33.14	5.52	44.64	45.73	39.75	74	-34.25	Pass	H
4882.000	34.85	5.08	44.60	48.83	44.16	74	-29.84	Pass	H
7323.000	36.43	6.77	44.87	45.16	43.49	74	-30.51	Pass	H
9764.000	38.05	7.60	45.55	41.94	42.04	74	-31.96	Pass	H
1870.490	31.51	3.14	43.62	45.25	36.28	74	-37.72	Pass	V
2825.193	33.32	5.27	44.52	43.81	37.88	74	-36.12	Pass	V
3543.550	33.14	5.52	44.64	43.96	37.98	74	-36.02	Pass	V
4882.000	34.85	5.08	44.6	50.37	45.70	74	-28.30	Pass	V
7323.000	36.43	6.77	44.87	47.86	46.19	74	-27.81	Pass	V
9764.000	38.05	7.60	45.55	44.66	44.76	74	-29.24	Pass	V

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1646.948	31.14	2.96	43.84	46.22	36.48	74	-37.52	Pass	H
2875.986	33.40	5.37	44.58	44.55	38.74	74	-35.26	Pass	H
3873.749	32.89	5.46	44.61	42.45	36.19	74	-37.81	Pass	H
4960.000	35.02	5.05	44.60	49.19	44.66	74	-29.34	Pass	H
7440.000	36.45	6.88	44.97	41.77	40.13	74	-33.87	Pass	H
9920.000	38.22	7.47	45.52	42.42	42.59	74	-31.41	Pass	H
1842.139	31.46	3.11	43.64	45.55	36.48	74	-37.52	Pass	V
3057.166	33.55	5.61	44.69	43.62	38.09	74	-35.91	Pass	V
3844.279	32.91	5.46	44.61	42.73	36.49	74	-37.51	Pass	V
4960.000	35.02	5.05	44.60	48.23	43.70	74	-30.30	Pass	V
7440.000	36.45	6.88	44.97	44.45	42.81	74	-31.19	Pass	V
9920.000	38.22	7.47	45.52	41.76	41.93	74	-32.07	Pass	V

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




## PHOTOGRAPHS OF TEST SETUP


Test model No.: B021



**Radiated spurious emission Test Setup-1(Below 30MHz)**

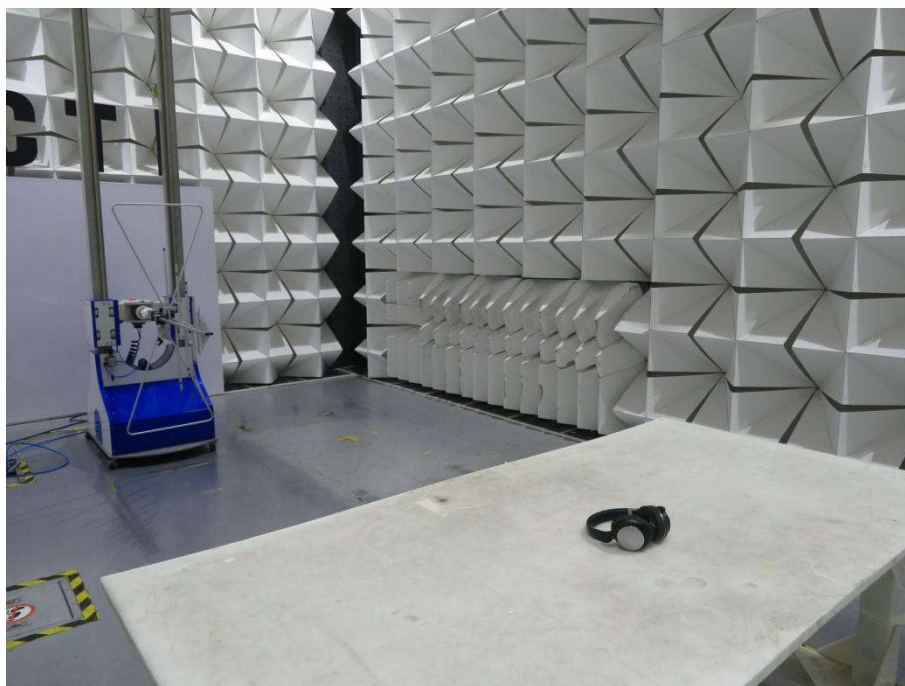

**Radiated spurious emission Test Setup-2(30MHz - 1GHz)**

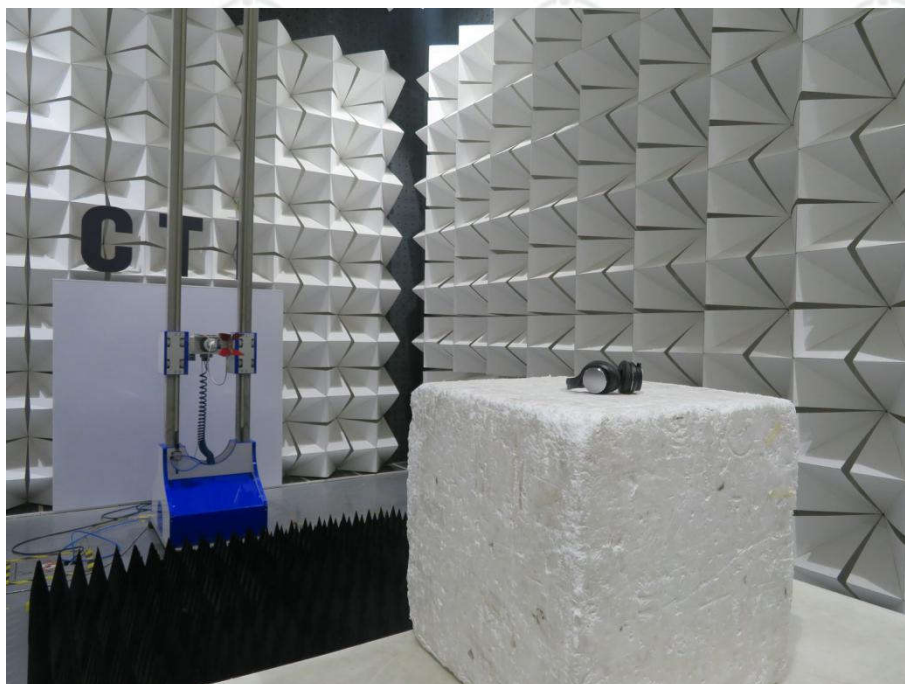

**Radiated spurious emission Test Setup-3(Above 1GHz)**



**Conducted Emissions Test Setup**




## APPENDIX 2 PHOTOGRAPHS OF EUT

Test model No.: B021



View of Product-1

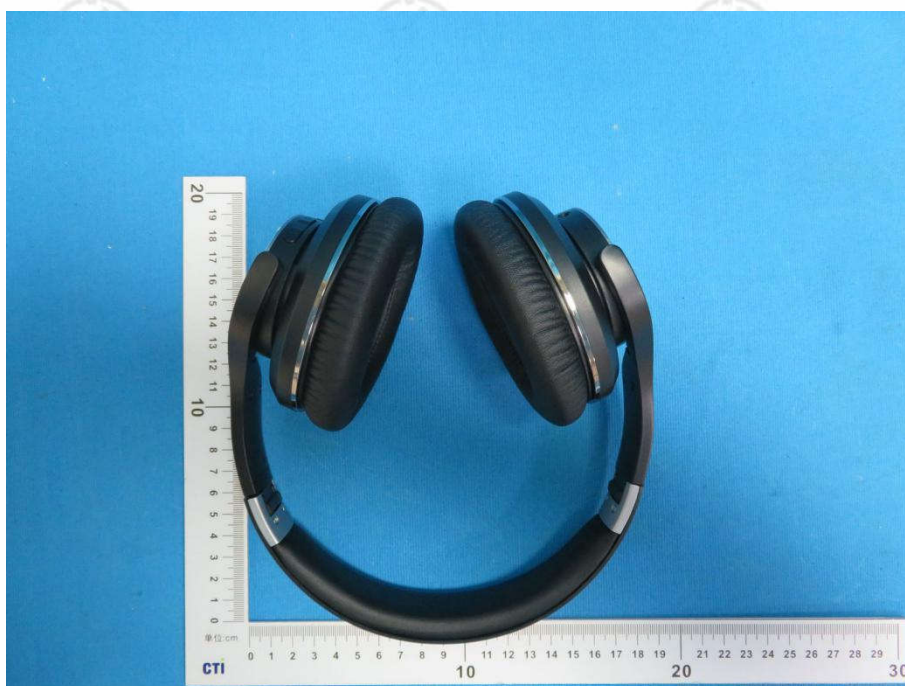

View of Product-2



View of Product-3



View of Product-4





View of Product-5



View of Product-6





View of Product-7



View of Product-8



View of Product-9




View of Product-10







View of Product-11

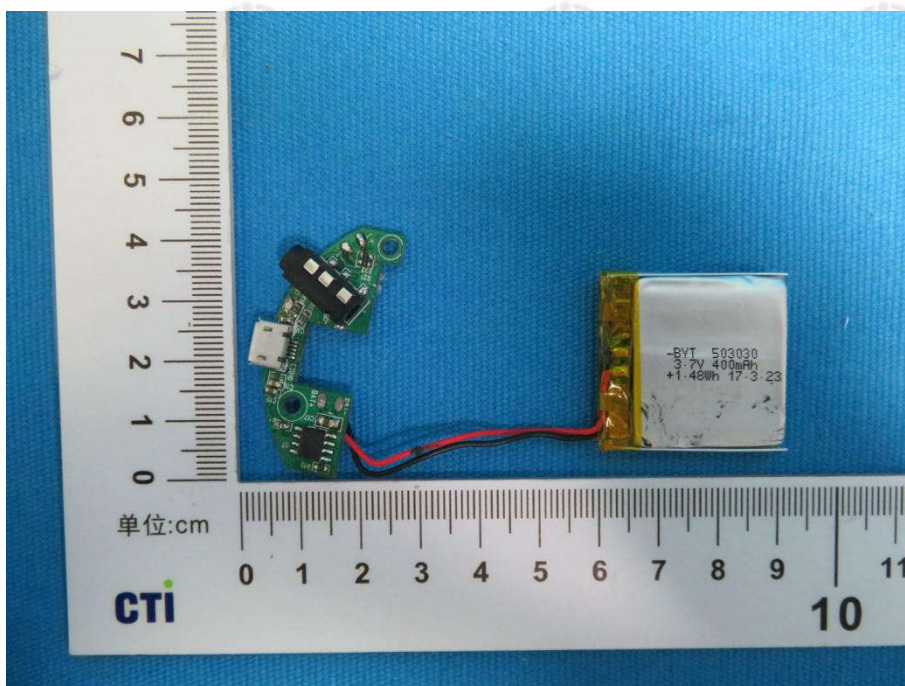

View of Product-12

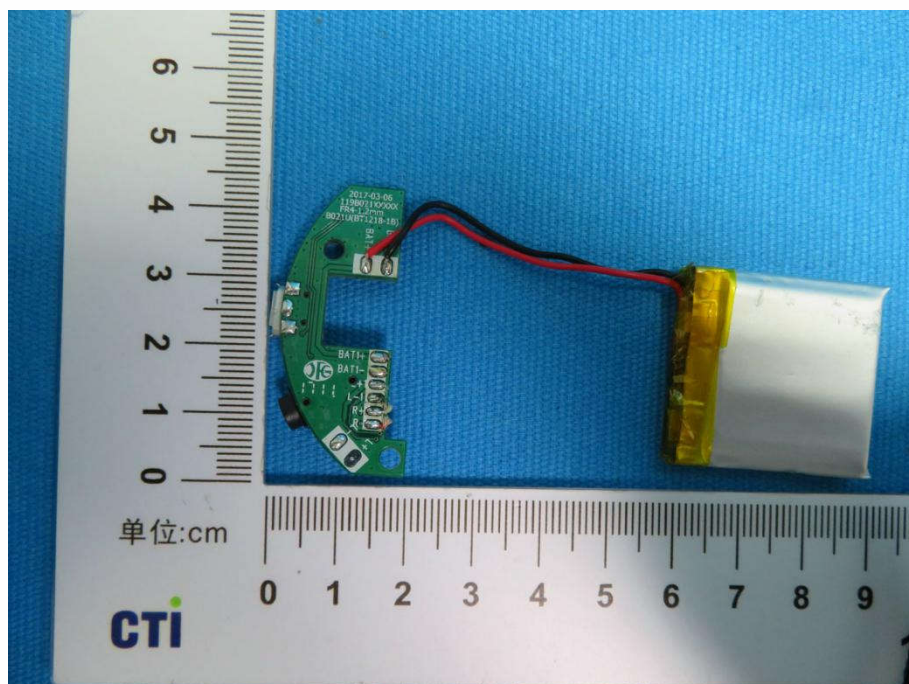


View of Product-13

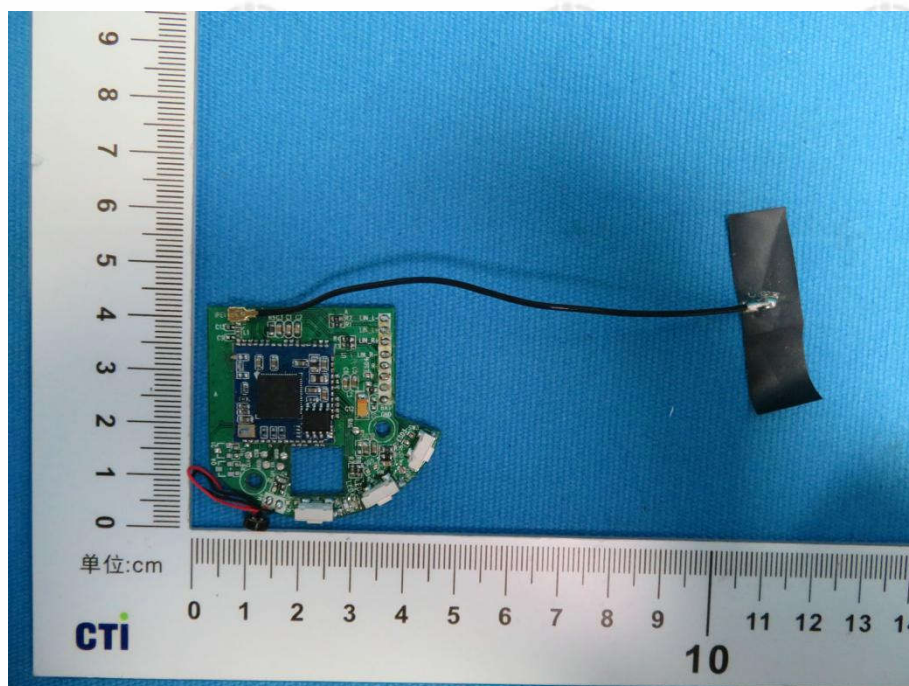


View of Product-14



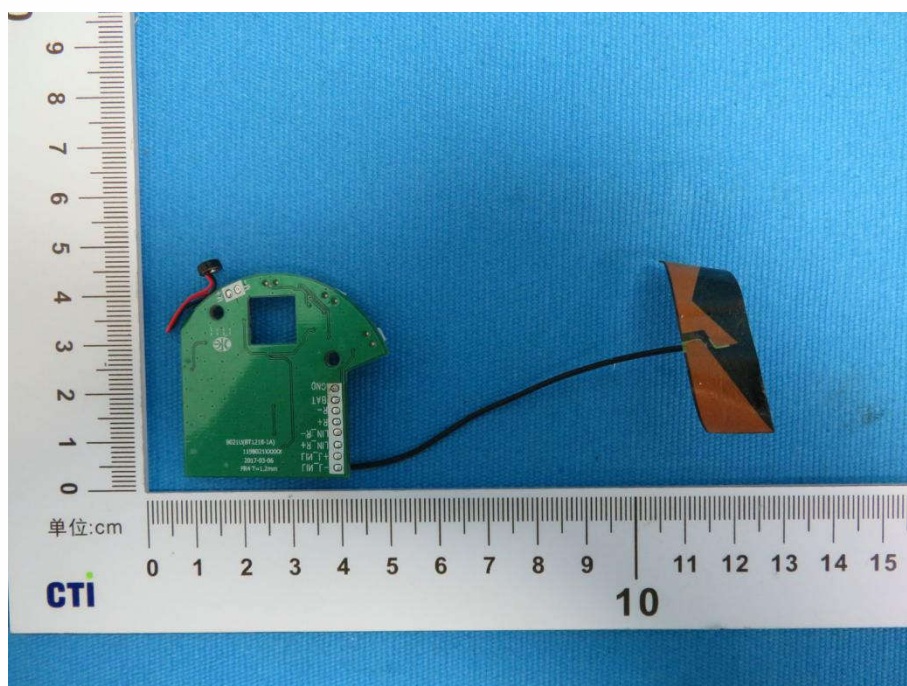


View of Product-15

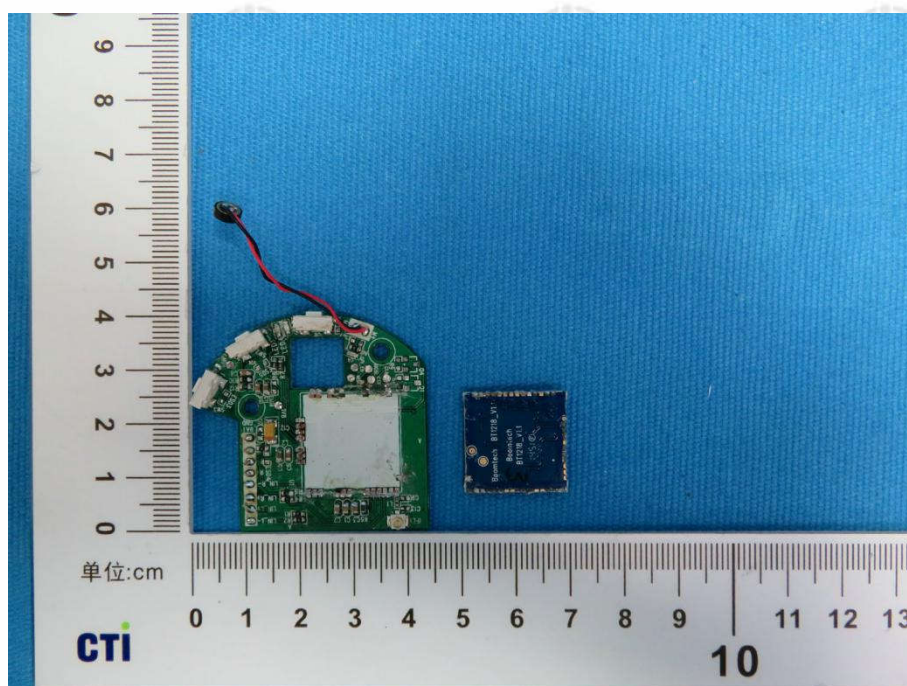


View of Product-16



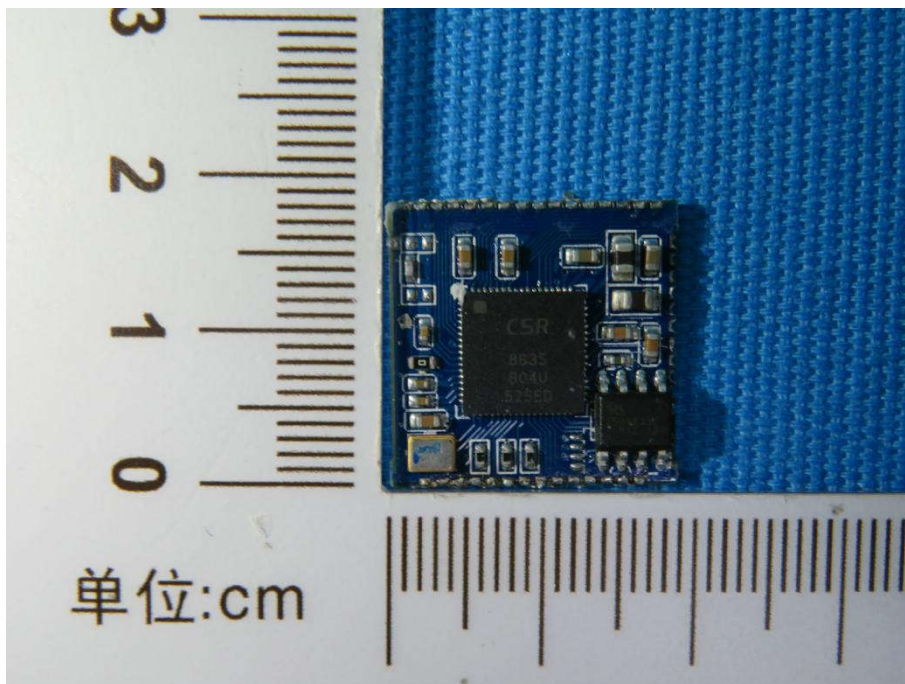

View of Product-17

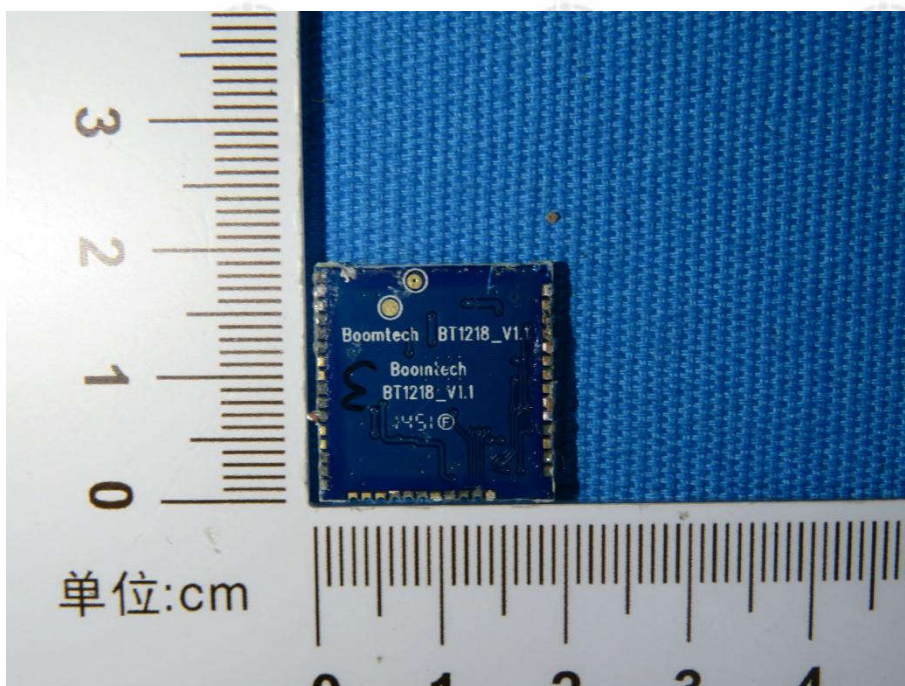

View of Product-18

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.