





TEST REPORT

APPLICANT : Hot Pepper, Inc.
PRODUCT NAME : 4G Smart Phone
MODEL NAME : HPP-L55
BRAND NAME : Hot Pepper
FCC ID : 2APD4-A95C
STANDARD(S) : 47CFR 2.1093
IEEE 1528-2013
RECEIPT DATE : 2019-12-10
TEST DATE : 2019-12-15 to 2019-12-27
ISSUE DATE : 2020-01-02

Edited by :


Stefan Sun (Test engineer)

Review by:


Pengfuwei (Auditor)

Approved by:


Anne Liu (Supervisor)

NOTE: 1.The report is invalid when there is no the approver signature and the special stamp for test report. 2.The test report shall not be reproduced except in full without prior written permission of the company. 3.The report copy is invalid when there is no the special stamp for test repor. 4.The altered report is invalid. 5.The entrust test is responsibility for the received sample only.



DIRECTORY

1. SAR Results Summary.....	5
2. Technical Information.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. Equipment Under Test (EUT) Description.....	6
2.3. Photographs of the EUT.....	7
3. Specific Absorption Rate (SAR).....	9
3.1. Introduction.....	9
3.2. SAR Definition.....	9
4. RF Exposure Limits.....	10
5. Applied Reference Documents.....	10
6. SAR Measurement System.....	11
6.1. E-Field Probe.....	12
6.2. Data Acquisition Electronics (DAE).....	13
6.3. Robot.....	14
6.4. Measurement Server.....	14
6.5. Phantom.....	15
7. Device Holder.....	16
7.1. Data Storage and Evaluation.....	16
7.2. Test Equipment List.....	18
8. Tissue Simulating Liquids.....	20
9. SAR System Verification.....	22
9.1. Purpose of System Performance check.....	22
9.2. System Setup.....	22
9.3. Validation Results.....	23



10. EUT Testing Position.....	25
10.1. Handset Reference Points.....	25
10.2. Positioning for Cheek / Touch.....	26
10.3. Positioning for Ear / 15° Tilt.....	26
10.4. SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom.....	27
10.5. Body-worn Configurations.....	27
10.6. Hotspot Mode Exposure Position Conditions.....	28
11. Measurement Procedures.....	29
11.1. Spatial Peak SAR Evaluation.....	29
11.2. Power Reference Measurement.....	30
11.3. Area Scan Procedures.....	30
11.4. Zoom Scan Procedures.....	31
11.5. SAR Averaged Methods.....	31
11.6. Power Drift Monitoring.....	31
12. SAR Test Procedure.....	32
12.1. General scan Requirements.....	32
12.2. Test procedure.....	33
12.3. Description of interpolation/extrapolation scheme.....	33
12.4. Wireless Router.....	34
13. SAR Test Configuration.....	35
14. Conducted RF Output Power.....	43
15. Hot-Spot Mode Evaluation Procedure.....	78
15.1. EUT Antenna Location.....	78
16. Block diagram of the tests to be performed.....	79
16.1. Head.....	79
16.2. Body.....	80
17. Test Results List.....	81
17.1. Test Guidance.....	81



17.2. Head SAR Data.....	83
17.3. Standalone Hotspot SAR Data.....	89
17.4. Body-worn SAR Data.....	96
17.5. Repeated SAR Measurement.....	100
18. Stand-alone SAR test Exclusion.....	101
19. Simultaneous Transmission Evaluation.....	102
20. Uncertainty Assessment.....	111
Annex A General Information.....	114
Annex B Test Setup Photos	
Annex C Plots of System Performance Check	
Annex D Plots of Maximum SAR Test Results	
Annex E DASY Calibration Certificate	

Change history			
Version	Date	Reason for change	Test engineer
1.0	2020-01-02	Original	Stefan Sun



1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

Frequency Band		Highest SAR Summary (1-g SAR,W/kg)		
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)
GSM	GSM850	0.311	0.525	0.525
	GSM1900	0.333	0.489	0.489
WCDMA	WCDMA Band II	0.416	0.750	0.750
	WCDMA Band IV	0.559	0.797	0.797
	WCDMA Band V	0.265	0.395	0.395
CDMA 2000	BC0	0.372	0.441	0.441
	BC1	0.458	0.798	0.798
	BC10	0.279	0.441	0.441
EVDO	BC0	0.253	0.288	0.288
	BC1	0.465	0.795	0.795
	BC10	0.275	0.381	0.381
LTE	LTE Band 2	0.649	0.746	0.780
	LTE Band 4	0.691	0.746	0.746
	LTE Band 5	0.581	0.573	0.573
	LTE Band 12	0.289	0.364	0.364
	LTE Band 13	0.342	0.455	0.455
	LTE Band 25	0.699	0.689	0.787
	LTE Band 26	0.441	0.615	0.615
	LTE Band 41	0.620	0.511	0.587
	LTE Band 66	0.654	0.687	0.687
	LTE Band 71	0.261	0.460	0.460
WLAN	2.4GHz WLAN	0.769	0.254	0.254
	5GHz WLAN	0.293	0.169	0.169
Highest Simultaneous Transmission		Head	Body-worn	Hotspot
WWAN + 2.4GHz WLAN		1.468	1.052	1.052
WWAN + 5GHz WLAN		0.992	0.967	0.967
Max Scaled SAR _{1g} (W/Kg):		Head:	0.769	Limit(W/kg): 1.6 W/kg
		Body-worn:	0.798	
		Hotspot:	0.798	



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	Hot Pepper, Inc.
Applicant Address:	5151 California Ave., Suite 100, Irvine 92617, USA
Manufacturer:	Hot Pepper, Inc.
Manufacturer Address:	5151 California Ave., Suite 100, Irvine 92617, USA

2.2. Equipment Under Test (EUT) Description

EUT Type:	4G Smart Phone
Hardware Version:	A95C_MAINBOARD_P3
Software Version:	HPP-L55-C1.0.0
Frequency Bands:	GSM 850: 824.2 MHz ~ 848.8 MHz GSM 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA 2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1850 MHz ~ 1910 MHz CDMA 2000 BC10: 806 MHz ~ 901 MHz FDD-LTE Band 2: 1850 MHz ~ 1910 MHz FDD-LTE Band 4: 1710 MHz ~ 1755 MHz FDD-LTE Band 5: 824 MHz ~ 849 MHz FDD-LTE Band 12: 699 MHz ~ 716 MHz FDD-LTE Band 13: 779.5 MHz ~ 784.5 MHz FDD-LTE Band 25: 1850 MHz ~ 1915 MHz FDD-LTE Band 26: 824 MHz ~ 849 MHz TDD-LTE Band 41: 2498 MHz ~ 2688 MHz FDD-LTE Band 66: 1710 MHz ~ 1780 MHz FDD-LTE Band 71: 665 MHz ~ 696 MHz WLAN 2.4GHz: 2412 MHz ~ 2472 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Modulation Mode:	GSM/GPRS: GMSK, EDGE: 8PSK WCDMA: QPSK/16QAM



	CDMA2000 1XRTT: QPSK CDMA2000 1XEV-DO: QPSK LTE: QPSK/16QAM/64QAM 802.11b: DSSS 802.11a/g/n-HT20/HT40/ac-VHT40/VHT80: OFDM Bluetooth BR+EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK Bluetooth LE: GFSK
Multi-slot Class:	GPRS: Multi-slot Class 12; EDGE: Multi-slot Class 12;
Operation Class:	Class B
Hotspot Mode:	Support
Antenna Type:	PIFA
Battery:	2200mAh 3.8V

Note: For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.

2.3. Photographs of the EUT

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa

Test frequency:	GSM 850MHz/1900MHz; WCDMA Band II/IV/V; CDMA 2000 BC0/BC1/BC10; EVDO BC0/BC1/BC10; FDD-LTE Band 2/4/5/12/13/25/26/66/71; TDD-LTE Band 41; WLAN 2.4GHz; WLAN 5GHz;
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) GSM 1900MHz Maximum output power(level 0) WCDMA Band II/IV/V (All Up Bits) CDMA 2000 BC0/BC1/BC10 (All Up Bits) EVDO BC0/BC1/BC10 (All Up Bits) FDD-LTE Band 2/4/5/12/13/25/26/66/71 (Maximum output power) TDD-LTE Band 41 (Maximum output power) WLAN 2.4GHz (Maximum output power) WLAN 5GHz (Maximum output power)



During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

For SAR testing, EUT is in GPRS mode. In GPRS link mode, its crest factor is 2, because EUT is set in GPRS multi-slot class 12 with 4 uplink slots. In WCDMA and WI-FI mode, its crest factor is 1.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radiofield. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure.

In general, occupational/controlled exposure limits are more than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and |E| is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



4. RF Exposure Limits

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.60W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.00W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08W/kg

Note:

1. This limit is according to recommendation 1999/519/EC, Annex II (Basic Restrictions)
2. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation)

5. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radio Frequency Radiation Exposure Evaluation: Portable Devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices :Measurement Techniques
3	KDB 447498 D01v06	General RF Exposure Guidance
4	KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters
5	KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz
6	KDB 865664 D02v01r02	RF Exposure Reporting
7	KDB 648474 D04v01r03	Handset SAR
8	KDB 941225 D01v03r01	3G SAR MEAUREMENT PROCEDURES
9	KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices
10	KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities

6. SAR Measurement System

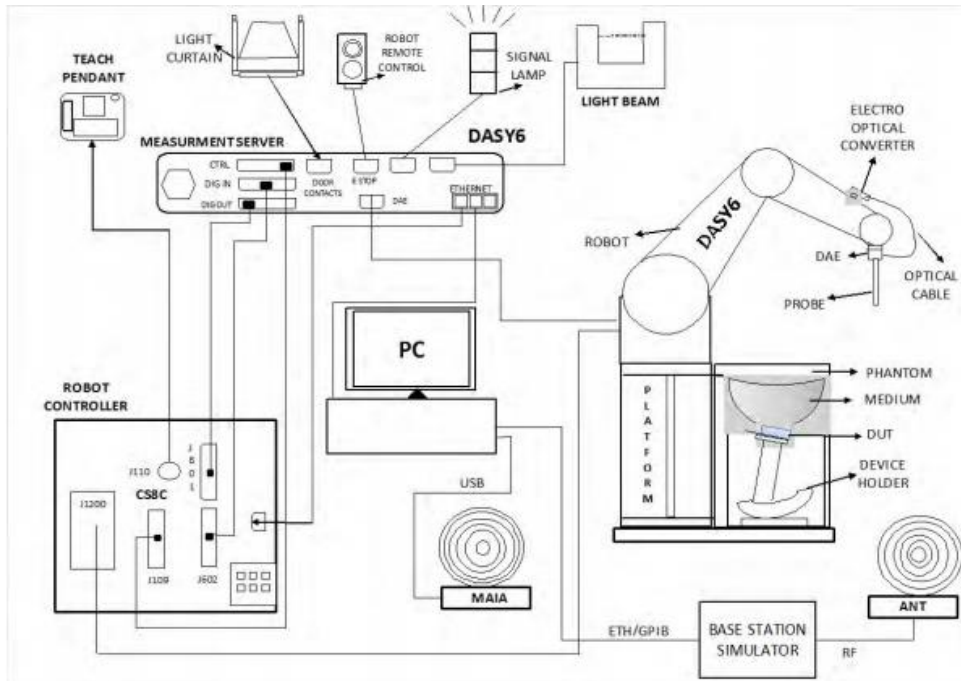


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot (Staubli TX/RX family, with its software especially configured for SPEAG) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A platform on which robot arm is mounted and phantom shells to be inserted in dedicated slots.
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win8.1/Win10 professional operating system and the cDASY6 V6.4 and

DASY5 V5.2 software. Please see 1.6 DASY6 Software Installation for detailed computer requirements.

- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1.E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

E-Field Probe Specification

Model	Ex3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario(e.g.,very strong gradient fields).Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

Fig 6.2 Photo of EX3DV4

E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4 or DAE3) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200 MOhm; the inputs are symmetric and floating. Common mode rejection is above 80 dB.



Fig 6.3 Photo of DAE

6.3. Robot

The DASY6 system uses the high-precision industrial robots TX60L from Stäubli SA (France). The TX robot family – the successor of the well-known RX robot family – continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance-free as all gears are direct drive, no belt drives)
- Jerk-free straight movements (brushless synchronous motors, no stepper motors)
- Low extremely low frequency (ELF) interference (motor control fields are shielded by the closed metallic construction)

The robots are controlled by the Stäubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided on CDs delivered with the robot. Paper manuals are available directly from Stäubli upon request



Fig 6.4 Robot

6.4. Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations.



Fig 6.5 Measurement Server

6.5. Phantom

The SAM-Twin phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas:

- 1) Left Head
- 2) Right Head
- 3) Flat Section

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Reference points on the phantoms (P1, P2, P3) are used to teach the absolute phantom position relative to the robot.

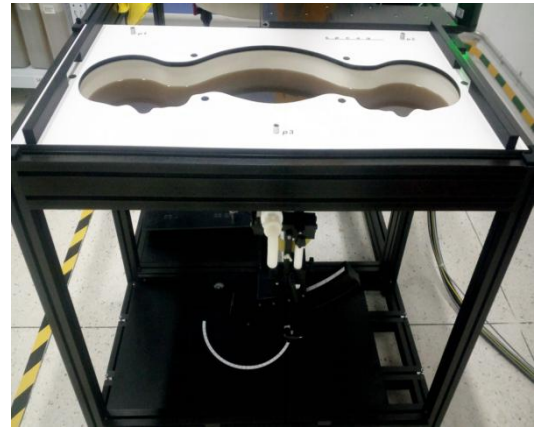


Fig 6.6 Photo of SAM Phantom

7. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce uncertainty in the SAR of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions at which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions described in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus, the device needs no repositioning when the angles are changed. The DASY device holder is constructed of low-loss polyoxymethylene (POM) material, which has the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered



Fig 7.1 Device Holder

7.1. Data Storage and Evaluation

Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With

- Vi = compensated signal of channel i, (i = x, y, z)
- Ui = input signal of channel i, (i = x, y, z)
- cf = crest factor of exciting field (DASY parameter)
- dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field
Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

7.2. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1173	2018.06.21	2021.06.20
SPEAG	835MHz System Validation Kit	D835V2	4d227	2018.06.22	2021.06.21
SPEAG	1750MHz System Validation Kit	D1750V2	1160	2018.06.25	2021.06.24
SPEAG	1900MHz System Validation Kit	D1900V2	5d221	2018.06.22	2021.06.21
SPEAG	2450MHz System Validation Kit	D2450V2	997	2018.06.26	2021.06.25
SPEAG	2600MHz System Validation Kit	D2600V2	1139	2018.06.25	2021.06.24
SPEAG	5GHz System Validation Kit	D5GHzV2	1176	2018.11.06	2021.11.05



SPEAG	Dosimetric E-Field Probe	EX3DV4	7445	2019.11.06	2020.11.05
SPEAG	Dosimetric E-Field Probe	EX3DV4	3748	2019.06.19	2020.06.18
SPEAG	Data Acquisition Electronics	DAE4	1516	2019.11.11	2020.11.10
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2019.11.03	2020.11.02
SPEAG	SAM Twin Phantom	QD 000 P41 AA	1922	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	124534	2019.04.17	2020.04.16
Agilent	Network Analyzer	E5071B	MY42404762	2019.04.15	2020.04.14
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2019.04.17	2020.04.16
Agilent	Power Sensor	N8482A	MY41090849	2019.11.23	2020.11.22
Agilent	Power Meter	E4416A	MY45102093	2019.11.23	2020.11.22
Anritsu	Power Sensor	MA2411B	N/A	2019.11.23	2020.11.22
Anritsu	Power Meter	NRVD	101066	2019.11.23	2020.11.22
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation1	351-218-010	N/A	NA	NA
THERMOMETER	Thermo meter	NT-312	N/A	2019.06.26	2020.06.25
N/A	Tissue Simulating Liquids	700-6000MHz	N/A	24H	

Note:

1. The calibration certificate of DASY can be referred to appendix E of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

8. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 5.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 5.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

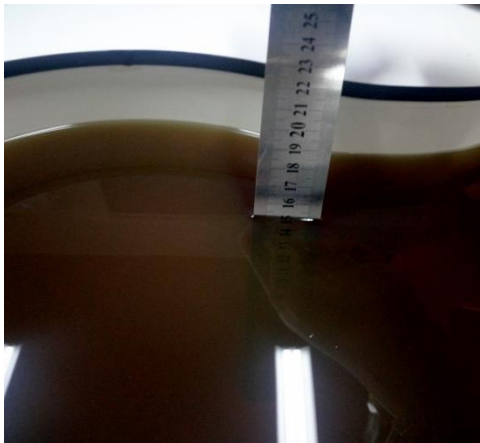


Fig 8.1 Photo of Liquid Height for Head SAR

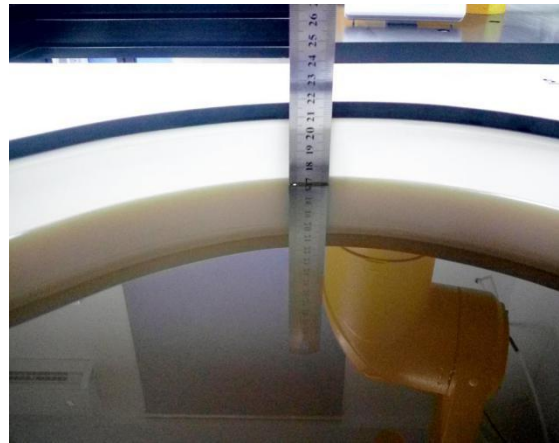


Fig 8.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5



Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

Note: Please refer to the validation results for dielectric parameters of each frequency band. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Date	Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)
2020.01.11	750	HSL	22.50	0.93	0.89	4.38	±5
2019.12.15	835	HSL	22.60	0.92	0.9	2.01	±5
2019.12.16	835	HSL	22.40	0.91	0.9	1.17	±5
2019.12.20	1750	HSL	22.30	1.38	1.4	-1.71	±5
2019.12.13	1900	HSL	22.10	1.35	1.4	-3.71	±5
2019.12.14	1900	HSL	22.20	1.40	1.4	0.00	±5
2019.12.22	2450	HSL	23.00	1.81	1.8	0.44	±5
2019.12.25	2600	HSL	23.10	1.94	1.96	-1.02	±5
2019.12.23	5250	HSL	22.70	4.71	4.71	0.00	±5
2019.12.24	5750	HSL	22.50	5.25	5.22	0.54	±5

Date	Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)
2020.01.11	750	HSL	22.50	41.04	41.9	-2.05	±5
2019.12.15	835	HSL	22.60	40.39	41.5	-2.67	±5
2019.12.16	835	HSL	22.40	41.55	41.5	0.12	±5
2019.12.20	1750	HSL	22.30	38.86	40	-2.85	±5
2019.12.13	1900	HSL	22.10	38.38	40	-4.05	±5
2019.12.14	1900	HSL	22.20	39.88	40	-0.30	±5
2019.12.22	2450	HSL	23.00	38.84	39.2	-0.92	±5
2019.12.25	2600	HSL	23.10	38.99	39	-0.03	±5
2019.12.23	5250	HSL	22.70	34.60	35.95	-3.76	±5
2019.12.24	5750	HSL	22.50	35.64	35.35	0.82	±5

9. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

9.1. Purpose of System Performance check


The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

9.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 9.1 Photo of Dipole Setup Fig

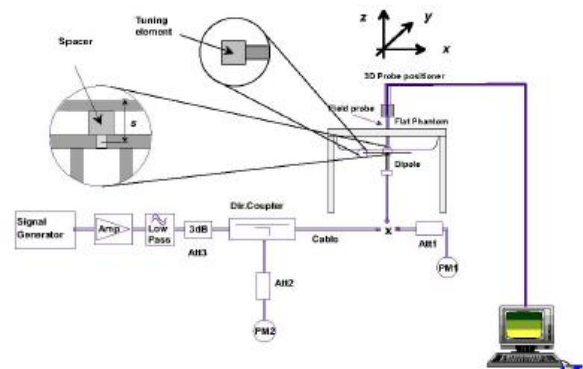

9.2 System Setup for System Evaluation



9.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

<Validation Setup>

Frequency (MHz) ²	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N
750	HSL	250	D750V3-	3748	1516
835	HSL	250	D835V2-	7445	1516
1750	HSL	250	D1750V2	7445	1516
1900	HSL	250	D1900V2	7445	1516
2450	HSL	250	D2450V2	7445	1516
2600	HSL	250	D2600V2-	7445	1516
5250	HSL	100	D5GHzV2-1176	7445	1516
5750	HSL	100	D5GHzV2-1176	7445	1516

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020.01.11	750	HSL	250	2.06	8.26	8.24	-0.24
2019.12.15	835	HSL	250	2.37	9.34	9.48	1.50
2019.12.16	835	HSL	250	2.25	9.34	9	-3.64
2019.12.20	1750	HSL	250	9.73	37.10	38.92	4.91
2019.12.13	1900	HSL	250	9.75	39.50	39	-1.27
2019.12.14	1900	HSL	250	10.1	39.50	40.4	2.28
2019.12.22	2450	HSL	250	13.2	52.90	52.8	-0.19
2019.12.25	2600	HSL	250	13.5	54.00	54	0.00
2019.12.23	5250	HSL	100	7.96	78.90	79.6	0.89
2019.12.24	5750	HSL	100	8.21	80.00	82.1	2.62



<10g SAR>

Date	Frequency (MHz) ²	Tissue Type	Input Power (mW)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg) ³	Normalized 10g SAR (W/kg)	Deviation (%)
2020.01.11	750	HSL	250	1.37	5.45	5.48	0.55
2019.12.15	835	HSL	250	1.52	6.07	6.08	0.16
2019.12.16	835	HSL	250	1.45	6.07	5.8	-4.45
2019.12.20	1750	HSL	250	5.22	20.00	20.88	4.40
2019.12.13	1900	HSL	250	5.07	20.60	20.28	-1.55
2019.12.14	1900	HSL	250	5.21	20.60	20.84	1.17
2019.12.22	2450	HSL	250	6.15	24.90	24.6	-1.20
2019.12.25	2600	HSL	250	6.12	24.50	24.48	-0.08
2019.12.23	5250	HSL	100	2.29	22.50	22.9	1.78
2019.12.24	5750	HSL	100	2.34	22.60	23.4	3.54

Note: System checks the specific test data please see Annex C

10. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

10.1. Handset Reference Points

The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 10.1 Illustration for Cheek Position

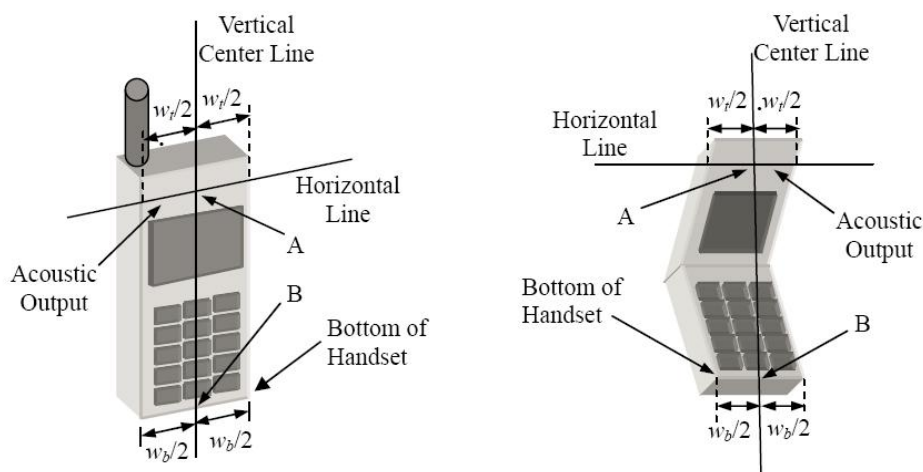


Fig. 10.2 Illustration for Handset Vertical and Horizontal Reference Lines

10.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

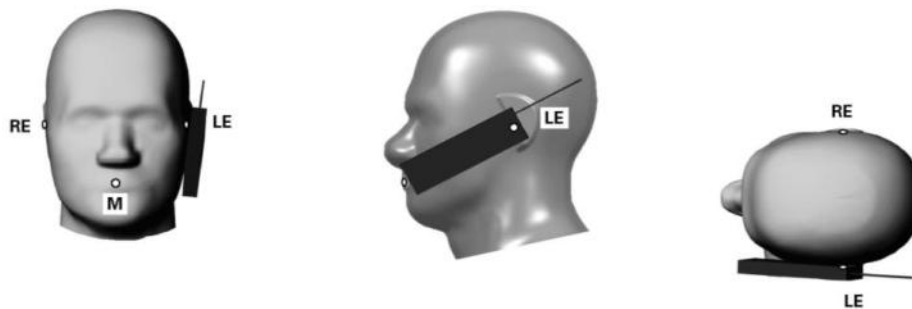


Fig 10.3 Illustration for Cheek Position

10.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig 10.4 Illustration for Tilted Position

10.4. SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

10.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

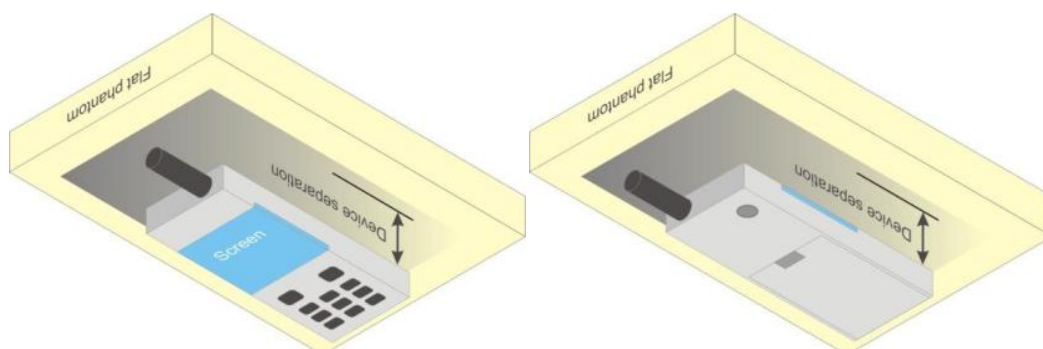


Fig 10.5 Illustration for Body-Worn Position

10.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

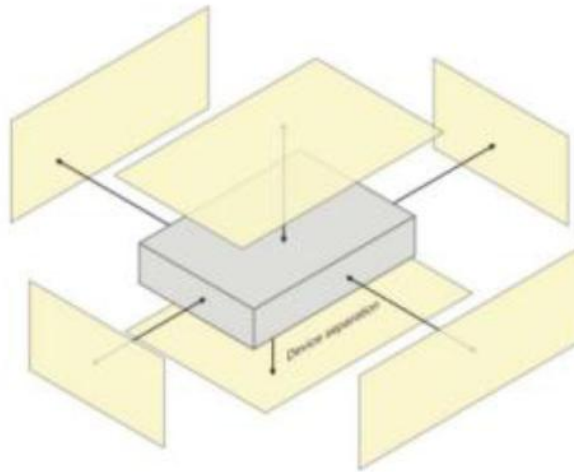


Fig 10.6 Illustrationfor Hotspot Position

11. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

11.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value. The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the

measured volume is aligned to the interpolated peak SAR value of a previously performed area scAnt.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

11.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

11.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

11.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

11.5. SAR Averaged Methods

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

11.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

12. SAR Test Procedure

12.1. General scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{4} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.2. Test procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

12.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.



12.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. SAR Test Configuration

<GSM Mode>

A summary of these settings are illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5)

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

Timeslot consignations:

Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

No. of Slots:	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation:	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle:	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor:	-9.03dB	-6.02dB	-4.26dB	-3.01dB

<WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

HSDPA Setup Configuration:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Setup Configuration:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

<LTE Mode>

LTE Target MPR level

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4	3.0	5	10	15	20	Target	MPR
	MHz	MHz	MHz	MHz	MHz	MHz	(dB)	(dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz
2	v	v	v	v	v	v
4	v	v	v	v	v	v
5	v	v	v	v	N/A	N/A
13	v	v	v	v	N/A	N/A

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 2 / 12 SAR test was covered by Band 25 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to

- qualify for the SAR test exclusion.
- b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
- a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.



<WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz Wi-Fi single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
5. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<WLAN 5GHz>

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test



configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.

2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B)U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures. When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C)OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test



configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

D) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction V applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



14. Conducted RF Output Power

GSM Conducted Power:

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	190	251		128	190	251	
Frequency (MHz)	824.2	836.6	848.8		824.2	836.6	848.8	
GSM 1 Tx slot	31.79	31.76	31.79	32.00	22.79	22.76	22.79	23.00
GPRS 1 Tx slot	31.80	31.76	31.80	32.00	22.80	22.76	22.80	23.00
GPRS 2 Tx slots	30.30	30.32	30.35	30.50	24.30	24.32	24.35	24.50
GPRS 3 Tx slots	28.32	28.35	28.39	28.50	24.06	24.09	24.13	24.24
GPRS 4 Tx slots	27.40	27.38	27.38	27.50	24.40	24.38	24.38	24.50
EDGE 1 Tx slot	25.60	25.77	25.93	26.00	16.60	16.77	16.93	17.00
EDGE 2 Tx slots	24.83	24.95	24.72	25.00	18.83	18.95	18.72	19.00
EDGE 3 Tx slots	22.61	22.72	22.61	23.00	18.35	18.46	18.35	18.74
EDGE 4 Tx slots	21.58	21.66	21.65	22.00	18.58	18.66	18.65	19.00

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.62	28.91	28.85	29.00	19.62	19.91	19.85	20.00
GPRS 1 Tx slot	28.42	28.01	28.19	28.50	19.42	19.01	19.19	19.50
GPRS 2 Tx slots	26.30	26.00	26.14	26.50	20.30	20.00	20.14	20.50
GPRS 3 Tx slots	24.43	23.91	24.06	24.50	20.17	19.65	19.80	20.24
GPRS 4 Tx slots	23.46	22.93	23.04	23.50	20.46	19.93	20.04	20.50
EDGE 1 Tx slot	24.14	23.16	23.28	24.50	15.14	14.16	14.28	15.50
EDGE 2 Tx slots	23.38	22.48	22.37	23.50	17.38	16.48	16.37	17.50
EDGE 3 Tx slots	20.85	20.26	20.69	21.00	16.59	16.00	16.43	16.74
EDGE 4 Tx slots	19.97	19.10	19.09	20.00	16.97	16.10	16.09	17.00

Timeslot consignations:

No. of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB


WCDMA Conducted Power:

Band	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel	9262	9400	9538		1312	1413	1513	
Rx Channel	9662	9800	9938		1537	1638	1738	
Frequency (MHz)	1852.4	1880	1907.6		1712.4	1732.6	1752.6	
AMR 12.2Kbps	21.01	21.06	21.11	21.50	21.54	21.51	21.46	22.00
RMC 12.2Kbps	21.46	21.20	21.04	21.50	21.63	21.71	21.76	22.00
HSDPA Subtest-1	20.48	20.22	20.07	20.50	20.57	20.36	20.17	21.00
HSDPA Subtest-2	19.93	19.53	19.48	20.00	20.07	19.94	19.44	20.50
HSDPA Subtest-3	18.98	18.75	18.60	19.00	19.23	18.84	18.71	19.50
HSDPA Subtest-4	18.91	18.75	18.67	19.00	18.72	18.91	18.76	19.00
HSUPA Subtest-1	19.98	19.83	19.55	20.00	20.45	20.47	20.15	20.50
HSUPA Subtest-2	20.26	20.12	19.97	20.50	20.56	20.65	20.71	21.00
HSUPA Subtest-3	18.98	19.01	18.58	19.50	19.21	19.45	19.28	19.50
HSUPA Subtest-4	20.37	20.17	20.00	20.50	20.66	20.73	20.77	21.00
HSUPA Subtest-5	19.69	19.45	19.46	20.00	20.03	20.05	20.07	20.50
HSPA+ (16QAM) Subtest-1	19.83	19.92	19.90	20.00	19.96	19.86	19.88	20.00

Band	WCDMA V			Tune-up Limit (dBm)
TX Channel	4132	4182	4233	
Rx Channel	4357	4407	4458	
Frequency (MHz)	826.4	836.4	846.6	
AMR 12.2Kbps	22.13	22.16	22.08	22.50
RMC 12.2Kbps	22.25	22.26	22.30	22.50
HSDPA Subtest-1	20.44	20.15	19.96	20.50
HSDPA Subtest-2	19.80	19.55	19.56	20.00
HSDPA Subtest-3	18.79	18.74	18.52	19.00
HSDPA Subtest-4	19.06	18.75	18.33	19.50
HSUPA Subtest-1	20.15	19.60	19.92	20.50
HSUPA Subtest-2	20.39	20.11	19.98	20.50
HSUPA Subtest-3	19.21	18.87	18.74	19.50
HSUPA Subtest-4	20.47	20.21	20.06	20.50
HSUPA Subtest-5	19.77	19.37	19.52	20.00
HSPA+ (16QAM) Subtest-1	19.50	19.64	19.49	20.00



CDMA 2000 & EVDO-0 Conducted Power:

Band	CDMA 2000 BC0			Tune-up	CDMA 2000 BC1			Tune-up
TX Channel	1013	384	777	Limit	25	600	1175	Limit
Frequency (MHz)	824.7	836.52	848.31	(dBm)	1851.25	1880	1908.75	(dBm)
RC1 SO55	23.80	23.83	23.68	24.00	23.40	23.48	23.67	24.00
RC3 SO55	24.04	23.95	23.88	24.50	23.45	23.42	23.65	24.00
RC3 SO32 (F+SCH)	23.15	23.20	23.11	23.50	23.45	23.46	23.61	24.00
RC3 SO32 (+SCH)	22.80	22.88	22.83	23.00	22.43	22.50	22.61	23.00
RTAP 153.6Kbps	23.61	23.62	23.64	24.00	22.78	22.89	23.47	23.5
RETAP 4096Bits	23.01	23.23	22.97	23.50	22.67	22.82	23.05	23.50

Band	CDMA 2000 BC10			Tune-up
TX Channel	476	580	684	Limit
Frequency (MHz)	817.9	820.5	823.1	(dBm)
RC1 SO55	24.65	24.80	24.63	25.00
RC3 SO55	23.35	23.57	23.34	24.00
RC3 SO32 (F+SCH)	23.92	23.94	23.90	24.00
RC3 SO32 (+SCH)	22.92	22.98	22.90	23.00
RTAP 153.6Kbps	23.55	23.71	23.40	24.00
RETAP 4096Bits	23.34	23.54	23.42	24.00



LTE Conducted Power:

<FDD LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.56	22.35	22.47	23
20	QPSK	1	49	22.87	22.78	22.85	
20	QPSK	1	99	22.27	22.41	22.50	
20	QPSK	50	0	21.83	21.74	21.67	22
20	QPSK	50	24	21.40	21.50	21.46	
20	QPSK	50	50	21.56	21.74	21.72	
20	QPSK	100	0	21.61	21.74	21.78	
20	16QAM	1	0	21.38	21.17	21.74	22.5
20	16QAM	1	49	21.59	21.67	22.11	
20	16QAM	1	99	21.14	21.26	21.76	
20	16QAM	50	0	20.55	20.74	20.83	21
20	16QAM	50	24	20.43	20.57	20.54	
20	16QAM	50	50	20.53	20.70	20.75	
20	16QAM	100	0	20.60	20.73	20.77	
20	64QAM	1	0	21.41	21.21	21.74	22.5
20	64QAM	1	49	21.66	21.62	22.19	
20	64QAM	1	99	21.16	21.23	21.77	
20	64QAM	50	0	20.56	20.75	20.83	21
20	64QAM	50	24	20.46	20.65	20.73	
20	64QAM	50	50	20.51	20.73	20.77	
20	64QAM	100	0	20.62	20.75	20.78	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.63	22.74	22.64	23
15	QPSK	1	37	22.61	22.80	22.73	
15	QPSK	1	74	22.45	22.68	22.69	
15	QPSK	36	0	21.79	21.83	21.85	22
15	QPSK	36	20	21.69	21.73	21.75	
15	QPSK	36	39	21.67	21.82	21.89	
15	QPSK	75	0	21.68	21.84	21.84	
15	16QAM	1	0	21.84	21.62	21.97	22.5



15	16QAM	1	37	21.77	21.78	22.08	
15	16QAM	1	74	21.67	21.68	22.03	
15	16QAM	36	0	20.70	20.76	20.83	
15	16QAM	36	20	20.60	20.66	20.73	21
15	16QAM	36	39	20.55	20.73	20.87	
15	16QAM	75	0	20.63	20.80	20.85	
15	64QAM	1	0	21.85	21.62	21.99	22.5
15	64QAM	1	37	21.76	21.81	22.11	
15	64QAM	1	74	21.69	21.69	22.03	
15	64QAM	36	0	20.69	20.75	20.82	21
15	64QAM	36	20	20.59	20.65	20.72	
15	64QAM	36	39	20.60	20.71	20.84	
15	64QAM	75	0	20.64	20.80	20.85	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.72	22.95	22.69	23
10	QPSK	1	25	22.78	22.93	22.76	
10	QPSK	1	49	22.49	22.75	22.74	
10	QPSK	25	0	21.70	21.83	21.88	22
10	QPSK	25	12	21.60	21.73	21.78	
10	QPSK	25	25	21.62	21.75	21.85	
10	QPSK	50	0	21.64	21.77	21.83	
10	16QAM	1	0	21.88	21.58	22.04	22.5
10	16QAM	1	25	21.94	21.72	22.12	
10	16QAM	1	49	21.72	21.62	22.10	
10	16QAM	25	0	20.69	20.74	20.93	21
10	16QAM	25	12	20.59	20.64	20.83	
10	16QAM	25	25	20.55	20.72	20.89	
10	16QAM	50	0	20.63	20.72	20.79	
10	64QAM	1	0	21.89	21.57	22.03	22.5
10	64QAM	1	25	21.94	21.70	22.19	
10	64QAM	1	49	21.71	21.59	22.09	
10	64QAM	25	0	20.57	20.77	20.91	21
10	64QAM	25	12	20.47	20.67	20.81	
10	64QAM	25	25	20.67	20.70	20.89	
10	64QAM	50	0	20.74	20.74	20.82	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	



5	QPSK	1	0	22.62	22.72	22.64	23
5	QPSK	1	12	22.72	22.64	22.79	
5	QPSK	1	24	22.55	22.54	22.68	
5	QPSK	12	0	21.70	21.72	21.87	22
5	QPSK	12	7	21.60	21.62	21.77	
5	QPSK	12	13	21.73	21.72	21.83	
5	QPSK	25	0	21.68	21.73	21.86	22.5
5	16QAM	1	0	21.78	21.81	21.98	
5	16QAM	1	12	21.86	21.95	22.17	
5	16QAM	1	24	21.70	21.85	22.02	21
5	16QAM	12	0	20.56	20.69	20.76	
5	16QAM	12	7	20.46	20.59	20.66	
5	16QAM	12	13	20.55	20.69	20.72	22.5
5	16QAM	25	0	20.61	20.71	20.87	
5	64QAM	1	0	21.80	21.83	21.99	
5	64QAM	1	12	21.88	21.97	22.18	21
5	64QAM	1	24	21.71	21.84	22.05	
5	64QAM	12	0	20.56	20.72	20.78	
5	64QAM	12	7	20.46	20.62	20.68	21
5	64QAM	12	13	20.60	20.68	20.76	
5	64QAM	25	0	20.60	20.72	20.85	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.72	22.72	22.74	23
3	QPSK	1	8	22.67	22.75	22.75	
3	QPSK	1	14	22.68	22.76	22.78	
3	QPSK	8	0	21.78	21.78	21.89	22
3	QPSK	8	4	21.68	21.68	21.79	
3	QPSK	8	7	21.80	21.75	21.86	
3	QPSK	15	0	21.67	21.69	21.83	22.5
3	16QAM	1	0	21.92	21.62	22.09	
3	16QAM	1	8	21.89	21.64	22.14	
3	16QAM	1	14	21.81	21.64	22.09	21
3	16QAM	8	0	20.70	20.72	20.85	
3	16QAM	8	4	20.60	20.62	20.75	
3	16QAM	8	7	20.65	20.71	20.89	22.5
3	16QAM	15	0	20.53	20.69	20.79	
3	64QAM	1	0	21.91	21.61	22.09	22.5



3	64QAM	1	8	21.87	21.64	22.11	21
3	64QAM	1	14	21.80	21.64	22.13	
3	64QAM	8	0	20.69	20.69	20.88	
3	64QAM	8	4	20.59	20.59	20.78	
3	64QAM	8	7	20.66	20.70	20.87	
3	64QAM	15	0	20.55	20.69	20.80	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	23.31	23.01	22.83	23.5
1.4	QPSK	1	3	23.32	22.85	23.01	
1.4	QPSK	1	5	22.90	22.60	22.82	
1.4	QPSK	3	0	22.67	22.66	22.87	23
1.4	QPSK	3	1	22.57	22.56	22.77	
1.4	QPSK	3	3	22.70	22.64	22.83	
1.4	QPSK	6	0	21.87	21.80	21.94	
1.4	16QAM	1	0	21.71	21.84	21.78	22.5
1.4	16QAM	1	3	21.89	22.18	21.93	
1.4	16QAM	1	5	21.71	21.87	21.78	
1.4	16QAM	3	0	21.84	21.69	21.85	22
1.4	16QAM	3	1	21.74	21.59	21.75	
1.4	16QAM	3	3	21.86	21.70	21.86	
1.4	16QAM	6	0	20.78	20.69	20.89	
1.4	64QAM	1	0	21.71	21.82	21.75	22.5
1.4	64QAM	1	3	21.99	22.04	21.93	
1.4	64QAM	1	5	21.70	21.87	21.77	
1.4	64QAM	3	0	21.85	21.71	21.84	22
1.4	64QAM	3	1	21.75	21.61	21.74	
1.4	64QAM	3	3	21.87	21.72	21.85	
1.4	64QAM	6	0	20.78	20.69	20.86	

<FDD LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	22.77	22.54	22.56	23
20	QPSK	1	49	22.80	22.98	22.96	
20	QPSK	1	99	22.54	22.54	22.47	



20	QPSK	50	0	21.93	21.80	21.99	22
20	QPSK	50	24	21.84	21.96	21.97	
20	QPSK	50	50	21.95	21.86	21.79	
20	QPSK	100	0	21.95	21.80	21.82	
20	16QAM	1	0	21.63	21.37	21.77	22.5
20	16QAM	1	49	21.97	21.73	22.19	
20	16QAM	1	99	21.42	21.32	21.69	
20	16QAM	50	0	20.90	20.86	20.92	21
20	16QAM	50	24	20.89	20.88	20.91	
20	16QAM	50	50	20.97	20.87	20.76	
20	16QAM	100	0	20.94	20.80	20.83	
20	64QAM	1	0	21.62	21.35	21.79	22.5
20	64QAM	1	49	21.91	21.80	22.17	
20	64QAM	1	99	21.46	21.33	21.72	
20	64QAM	50	0	20.86	20.82	20.90	21
20	64QAM	50	24	20.86	20.76	20.88	
20	64QAM	50	50	20.96	20.85	20.77	
20	64QAM	100	0	20.97	20.79	20.81	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	22.87	22.77	22.74	23
15	QPSK	1	37	22.89	22.90	22.80	
15	QPSK	1	74	22.68	22.81	22.67	
15	QPSK	36	0	22.05	21.90	22.06	22.5
15	QPSK	36	20	22.03	21.90	22.06	
15	QPSK	36	39	22.00	21.96	21.89	
15	QPSK	75	0	22.04	21.95	21.98	
15	16QAM	1	0	22.06	21.80	22.01	22.5
15	16QAM	1	37	22.12	21.93	22.06	
15	16QAM	1	74	21.94	21.81	21.96	
15	16QAM	36	0	21.02	20.83	20.97	21.5
15	16QAM	36	20	20.92	20.73	20.87	
15	16QAM	36	39	20.94	20.89	20.83	
15	16QAM	75	0	20.99	20.88	20.94	
15	64QAM	1	0	22.09	21.79	21.99	22.5
15	64QAM	1	37	22.12	21.91	22.07	
15	64QAM	1	74	21.94	21.80	21.96	
15	64QAM	36	0	21.02	20.82	20.99	21.5



15	64QAM	36	20	20.92	20.72	20.89	
15	64QAM	36	39	20.94	20.90	20.82	
15	64QAM	75	0	21.01	20.89	20.92	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.00	22.71	22.82	23.5
10	QPSK	1	25	23.06	22.87	22.89	
10	QPSK	1	49	22.86	22.77	22.72	
10	QPSK	25	0	22.02	21.85	21.96	22.5
10	QPSK	25	12	21.92	21.75	21.86	
10	QPSK	25	25	22.03	21.93	21.86	
10	QPSK	50	0	22.05	21.89	21.90	
10	16QAM	1	0	21.86	22.07	22.00	22.5
10	16QAM	1	25	21.96	22.20	22.09	
10	16QAM	1	49	21.75	22.07	21.95	
10	16QAM	25	0	21.00	20.92	20.94	21.5
10	16QAM	25	12	20.90	20.82	20.84	
10	16QAM	25	25	21.05	20.96	20.82	
10	16QAM	50	0	21.01	20.87	20.81	
10	64QAM	1	0	21.86	22.04	21.97	22.5
10	64QAM	1	25	21.98	22.18	22.05	
10	64QAM	1	49	21.75	22.03	21.94	
10	64QAM	25	0	21.02	20.91	20.94	21.5
10	64QAM	25	12	20.92	20.81	20.84	
10	64QAM	25	25	21.03	21.02	20.82	
10	64QAM	50	0	21.04	20.85	20.84	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	22.75	22.65	22.72	23
5	QPSK	1	12	22.84	22.80	22.83	
5	QPSK	1	24	22.68	22.66	22.67	
5	QPSK	12	0	21.95	21.79	21.86	22
5	QPSK	12	7	21.85	21.69	21.76	
5	QPSK	12	13	21.92	21.90	21.82	
5	QPSK	25	0	21.95	21.82	21.85	
5	16QAM	1	0	22.09	21.96	21.90	22.5
5	16QAM	1	12	22.20	22.13	22.02	
5	16QAM	1	24	22.04	22.01	21.92	



5	16QAM	12	0	20.95	20.76	20.74	21
5	16QAM	12	7	20.85	20.66	20.64	
5	16QAM	12	13	20.90	20.70	20.69	
5	16QAM	25	0	20.90	20.78	20.78	
5	64QAM	1	0	22.08	21.97	21.88	22.5
5	64QAM	1	12	22.21	22.13	21.99	
5	64QAM	1	24	22.06	21.97	21.90	
5	64QAM	12	0	20.93	20.75	20.75	21
5	64QAM	12	7	20.83	20.65	20.65	
5	64QAM	12	13	20.92	20.75	20.71	
5	64QAM	25	0	20.94	20.82	20.78	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	22.97	22.76	22.74	23
3	QPSK	1	8	22.97	22.74	22.74	
3	QPSK	1	14	22.96	22.73	22.75	
3	QPSK	8	0	21.99	21.83	21.86	22
3	QPSK	8	4	21.89	21.73	21.76	
3	QPSK	8	7	21.97	21.86	21.85	
3	QPSK	15	0	21.96	21.82	21.79	
3	16QAM	1	0	21.85	22.07	21.97	22.5
3	16QAM	1	8	21.86	22.09	21.93	
3	16QAM	1	14	21.85	22.07	21.94	
3	16QAM	8	0	20.93	20.82	20.80	21
3	16QAM	8	4	20.83	20.72	20.70	
3	16QAM	8	7	20.93	20.82	20.79	
3	16QAM	15	0	20.91	20.78	20.67	
3	64QAM	1	0	21.86	22.07	21.98	22.5
3	64QAM	1	8	21.87	22.06	21.96	
3	64QAM	1	14	21.88	22.04	21.95	
3	64QAM	8	0	20.96	20.84	20.82	21
3	64QAM	8	4	20.86	20.74	20.72	
3	64QAM	8	7	20.93	20.83	20.76	
3	64QAM	15	0	20.92	20.76	20.68	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	22.98	22.81	22.85	23.5
1.4	QPSK	1	3	23.16	22.88	23.03	



REPORT No. : XM19080032W08

1.4	QPSK	1	5	22.97	22.84	22.83	
1.4	QPSK	3	0	22.92	22.83	22.80	23
1.4	QPSK	3	1	22.82	22.73	22.70	
1.4	QPSK	3	3	22.95	22.81	22.81	
1.4	QPSK	6	0	22.03	21.87	21.92	
1.4	16QAM	1	0	21.93	21.72	21.79	22.5
1.4	16QAM	1	3	22.16	21.90	22.04	
1.4	16QAM	1	5	21.95	21.71	21.82	
1.4	16QAM	3	0	22.09	21.84	21.93	22.5
1.4	16QAM	3	1	21.99	21.74	21.83	
1.4	16QAM	3	3	22.11	21.81	21.97	
1.4	16QAM	6	0	21.00	20.82	20.86	
1.4	64QAM	1	0	21.94	21.67	21.77	22.5
1.4	64QAM	1	3	22.19	21.98	22.07	
1.4	64QAM	1	5	21.95	21.74	21.83	
1.4	64QAM	3	0	22.08	21.82	21.93	22.5
1.4	64QAM	3	1	21.98	21.72	21.83	
1.4	64QAM	3	3	22.11	21.78	21.97	
1.4	64QAM	6	0	21.00	20.83	20.88	

<FDD LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	23.00	23.06	23.04	23.5
10	QPSK	1	25	23.12	23.20	23.17	
10	QPSK	1	49	22.97	22.98	22.99	
10	QPSK	25	0	21.99	22.07	22.08	22.5
10	QPSK	25	12	21.96	21.97	21.94	
10	QPSK	25	25	22.06	22.00	21.99	
10	QPSK	50	0	22.02	22.00	22.04	
10	16QAM	1	0	22.20	22.11	21.93	22.5
10	16QAM	1	25	22.38	22.21	22.00	
10	16QAM	1	49	22.21	22.14	21.83	
10	16QAM	25	0	21.07	21.08	21.11	21.5
10	16QAM	25	12	21.01	21.05	21.08	
10	16QAM	25	25	21.12	21.01	20.95	



REPORT No. : XM19080032W08

10	16QAM	50	0	20.99	21.00	21.02	
10	64QAM	1	0	22.27	22.14	21.92	22.5
10	64QAM	1	25	22.36	22.29	21.96	
10	64QAM	1	49	22.18	22.17	21.81	
10	64QAM	25	0	21.10	21.07	21.04	21.5
10	64QAM	25	12	21.09	21.08	21.00	
10	64QAM	25	25	21.11	21.02	20.96	
10	64QAM	50	0	21.01	20.97	20.99	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.92	22.91	22.85	23.5
5	QPSK	1	12	23.00	23.02	22.99	
5	QPSK	1	24	22.92	22.91	22.83	
5	QPSK	12	0	22.01	21.98	22.00	22.5
5	QPSK	12	7	22.00	21.95	21.96	
5	QPSK	12	13	22.02	21.92	21.91	
5	QPSK	25	0	21.97	21.94	21.97	
5	16QAM	1	0	22.18	22.01	22.17	22.5
5	16QAM	1	12	22.25	22.15	22.23	
5	16QAM	1	24	22.16	22.04	22.13	
5	16QAM	12	0	20.90	20.92	20.99	21.5
5	16QAM	12	7	20.89	20.90	20.95	
5	16QAM	12	13	20.91	20.88	20.93	
5	16QAM	25	0	21.03	20.93	20.95	
5	64QAM	1	0	22.16	22.03	22.13	22.5
5	64QAM	1	12	22.24	22.12	22.23	
5	64QAM	1	24	22.17	22.06	22.13	
5	64QAM	12	0	20.89	20.93	21.02	21.5
5	64QAM	12	7	20.87	20.89	20.87	
5	64QAM	12	13	20.90	20.85	20.93	
5	64QAM	25	0	21.02	20.93	20.98	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	23.01	22.98	23.04	23.5
3	QPSK	1	8	23.01	22.89	23.06	
3	QPSK	1	14	22.95	22.96	23.04	
3	QPSK	8	0	22.01	21.98	22.06	22.5
3	QPSK	8	4	22.00	21.95	22.00	



3	QPSK	8	7	22.02	21.98	22.01	
3	QPSK	15	0	21.97	21.93	21.99	
3	16QAM	1	0	22.24	22.12	21.86	
3	16QAM	1	8	22.26	22.09	21.87	22.5
3	16QAM	1	14	22.22	22.09	21.82	
3	16QAM	8	0	20.98	20.92	21.02	
3	16QAM	8	4	21.00	20.95	21.00	21.5
3	16QAM	8	7	20.98	20.93	20.97	
3	16QAM	15	0	20.96	20.81	20.93	
3	64QAM	1	0	22.26	22.14	21.85	
3	64QAM	1	8	22.23	22.09	21.88	22.5
3	64QAM	1	14	22.22	22.10	21.82	
3	64QAM	8	0	21.00	20.93	21.01	
3	64QAM	8	4	21.06	20.94	21.00	21.5
3	64QAM	8	7	21.00	20.92	20.94	
3	64QAM	15	0	20.95	20.80	20.95	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	23.06	22.92	23.00	23.5
1.4	QPSK	1	3	23.15	23.16	23.16	
1.4	QPSK	1	5	23.09	22.88	22.95	
1.4	QPSK	3	0	23.06	22.93	22.98	23.5
1.4	QPSK	3	1	23.04	22.92	22.91	
1.4	QPSK	3	3	23.08	22.98	22.92	
1.4	QPSK	6	0	22.01	22.01	22.05	
1.4	16QAM	1	0	21.97	22.04	21.83	22.5
1.4	16QAM	1	3	22.27	22.28	22.00	
1.4	16QAM	1	5	21.99	22.06	21.82	
1.4	16QAM	3	0	22.15	21.95	21.94	22.5
1.4	16QAM	3	1	22.14	21.89	21.90	
1.4	16QAM	3	3	22.19	21.94	21.93	
1.4	16QAM	6	0	21.00	20.94	20.98	
1.4	64QAM	1	0	21.95	22.05	21.84	22.5
1.4	64QAM	1	3	22.09	22.25	21.99	
1.4	64QAM	1	5	21.97	22.05	21.83	
1.4	64QAM	3	0	22.16	21.94	21.93	22.5
1.4	64QAM	3	1	22.15	21.93	21.95	
1.4	64QAM	3	3	22.20	21.98	21.97	



1.4	64QAM	6	0	21.09	20.94	20.94	
-----	-------	---	---	-------	-------	-------	--

<FDD LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.39	22.08	22.16	22.5
10	QPSK	1	25	22.46	22.07	21.83	
10	QPSK	1	49	22.23	21.92	21.98	
10	QPSK	25	0	21.33	20.92	21.36	21.5
10	QPSK	25	12	21.25	21.16	21.30	
10	QPSK	25	25	21.21	20.95	21.21	
10	QPSK	50	0	21.43	20.94	21.20	
10	16QAM	1	0	21.26	20.88	21.12	22
10	16QAM	1	25	21.51	20.98	21.24	
10	16QAM	1	49	21.36	20.90	21.11	
10	16QAM	25	0	20.31	20.10	20.22	21.5
10	16QAM	25	12	20.15	20.24	20.25	
10	16QAM	25	25	20.50	20.04	20.15	
10	16QAM	50	0	21.02	20.08	20.21	
10	64QAM	1	0	21.35	20.75	21.22	22
10	64QAM	1	25	21.54	20.85	21.18	
10	64QAM	1	49	21.37	20.76	21.01	
10	64QAM	25	0	20.29	19.97	20.03	20.5
10	64QAM	25	12	20.30	20.08	20.00	
10	64QAM	25	25	20.42	20.10	20.06	
10	64QAM	50	0	20.34	19.85	20.03	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.17	21.79	22.27	22.5
5	QPSK	1	12	22.23	22.04	22.06	
5	QPSK	1	24	22.22	21.84	21.72	
5	QPSK	12	0	21.32	21.14	21.11	21.5
5	QPSK	12	7	21.30	21.13	21.10	
5	QPSK	12	13	21.31	21.11	21.10	
5	QPSK	25	0	21.46	21.13	21.14	
5	16QAM	1	0	21.32	21.10	20.82	21.5



5	16QAM	1	12	21.50	20.97	21.11	
5	16QAM	1	24	21.42	20.93	20.94	
5	16QAM	12	0	20.37	20.07	20.02	
5	16QAM	12	7	20.31	20.05	20.01	20.5
5	16QAM	12	13	20.46	20.01	19.99	
5	16QAM	25	0	20.49	20.06	20.05	
5	64QAM	1	0	21.36	20.96	21.02	21.5
5	64QAM	1	12	21.30	20.97	21.16	
5	64QAM	1	24	21.44	20.93	21.05	
5	64QAM	12	0	20.41	19.99	20.07	20.5
5	64QAM	12	7	20.42	20.00	20.04	
5	64QAM	12	13	20.47	19.90	20.01	
5	64QAM	25	0	20.45	19.94	20.09	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.34	22.01	22.68	23
3	QPSK	1	8	22.39	22.09	22.05	
3	QPSK	1	14	22.38	21.93	21.91	
3	QPSK	8	0	21.31	21.21	21.20	21.5
3	QPSK	8	4	21.30	21.20	21.15	
3	QPSK	8	7	21.34	21.24	21.03	
3	QPSK	15	0	21.31	21.16	21.12	
3	16QAM	1	0	21.20	21.28	21.51	22
3	16QAM	1	8	21.16	21.20	21.29	
3	16QAM	1	14	21.12	21.19	21.33	
3	16QAM	8	0	20.12	20.22	20.37	20.5
3	16QAM	8	4	20.10	20.15	20.26	
3	16QAM	8	7	20.11	20.22	20.32	
3	16QAM	15	0	20.28	19.96	20.23	
3	64QAM	1	0	20.93	21.06	21.56	22
3	64QAM	1	8	21.21	21.04	21.41	
3	64QAM	1	14	20.92	21.08	21.75	
3	64QAM	8	0	20.28	20.14	20.30	20.5
3	64QAM	8	4	20.25	20.13	20.24	
3	64QAM	8	7	20.31	20.15	20.25	
3	64QAM	15	0	20.28	20.04	20.18	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	



1.4	QPSK	1	0	22.27	22.27	22.33	23
1.4	QPSK	1	3	22.57	22.48	22.53	
1.4	QPSK	1	5	22.56	22.24	22.33	
1.4	QPSK	3	0	22.39	22.34	22.31	22.5
1.4	QPSK	3	1	22.37	22.33	22.30	
1.4	QPSK	3	3	22.40	22.31	22.32	
1.4	QPSK	6	0	21.43	21.40	21.31	
1.4	16QAM	1	0	21.39	21.41	21.07	22
1.4	16QAM	1	3	21.56	21.61	21.20	
1.4	16QAM	1	5	21.35	21.43	20.99	
1.4	16QAM	3	0	21.50	21.31	21.12	22
1.4	16QAM	3	1	21.46	21.27	21.09	
1.4	16QAM	3	3	21.55	21.30	21.10	
1.4	16QAM	6	0	20.54	20.40	20.29	
1.4	64QAM	1	0	21.32	21.39	21.06	22
1.4	64QAM	1	3	21.51	21.69	21.14	
1.4	64QAM	1	5	21.39	21.44	21.03	
1.4	64QAM	3	0	21.49	21.29	21.13	22
1.4	64QAM	3	1	21.46	21.28	21.15	
1.4	64QAM	3	3	21.52	21.31	21.14	
1.4	64QAM	6	0	20.54	20.39	20.33	

<FDD LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0	23.09			
10	QPSK	1	25	23.17			23.5
10	QPSK	1	49	22.97			
10	QPSK	25	0	22.10			
10	QPSK	25	12	22.06			22.5
10	QPSK	25	25	22.09			
10	QPSK	50	0	22.09			
10	16QAM	1	0	22.18			
10	16QAM	1	25	22.37			22.5
10	16QAM	1	49	22.13			
10	16QAM	25	0	21.17			21.5



REPORT No. : XM19080032W08

10	16QAM	25	12	21.16			
10	16QAM	25	25	21.19			
10	16QAM	50	0	21.11			
10	64QAM	1	0	22.16			22.5
10	64QAM	1	25	22.39			
10	64QAM	1	49	22.16			
10	64QAM	25	0	21.15			21.5
10	64QAM	25	12	21.14			
10	64QAM	25	25	21.20			
10	64QAM	50	0	21.14			
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	23.03	22.97	22.94	23.5
5	QPSK	1	12	23.14	23.02	23.02	
5	QPSK	1	24	22.96	22.88	22.88	
5	QPSK	12	0	22.06	22.07	21.97	22.5
5	QPSK	12	7	22.06	22.02	22.00	
5	QPSK	12	13	22.01	22.05	22.02	
5	QPSK	25	0	21.99	22.05	22.02	
5	16QAM	1	0	22.09	22.14	22.14	22.5
5	16QAM	1	12	22.22	22.26	22.25	
5	16QAM	1	24	22.08	22.16	22.08	
5	16QAM	12	0	20.91	21.06	20.91	21.5
5	16QAM	12	7	20.86	21.05	20.94	
5	16QAM	12	13	20.90	21.04	20.96	
5	16QAM	25	0	20.97	21.05	21.02	
5	64QAM	1	0	22.07	22.16	22.15	22.5
5	64QAM	1	12	22.19	22.28	22.25	
5	64QAM	1	24	22.07	22.14	22.07	
5	64QAM	12	0	20.96	21.04	20.93	21.5
5	64QAM	12	7	20.89	21.05	20.94	
5	64QAM	12	13	20.89	21.06	20.95	
5	64QAM	25	0	20.95	21.04	21.00	



<FDD LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	22.86	23.09	22.76	
20	QPSK	1	49	23.18	23.17	23.17	23.5
20	QPSK	1	99	22.58	22.69	22.83	
20	QPSK	50	0	22.07	22.04	22.06	
20	QPSK	50	24	22.03	21.96	21.99	22.5
20	QPSK	50	50	21.85	21.94	21.93	
20	QPSK	100	0	21.94	21.97	21.96	
20	16QAM	1	0	21.63	21.47	21.98	
20	16QAM	1	49	21.87	21.90	22.36	22.5
20	16QAM	1	99	21.44	21.48	21.96	
20	16QAM	50	0	20.96	21.21	21.20	
20	16QAM	50	24	20.83	21.18	21.04	21.5
20	16QAM	50	50	21.06	21.09	21.08	
20	16QAM	100	0	21.09	21.15	21.17	
20	64QAM	1	0	21.68	21.48	21.99	
20	64QAM	1	49	22.03	21.93	22.37	22.5
20	64QAM	1	99	21.45	21.48	21.99	
20	64QAM	50	0	21.14	21.23	21.23	
20	64QAM	50	24	21.19	21.20	21.19	21.5
20	64QAM	50	50	21.18	21.11	21.09	
20	64QAM	100	0	21.28	21.16	21.14	
Channel				26115	26340	26615	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	23.54	23.39	23.46	
15	QPSK	1	37	23.49	23.49	23.23	24
15	QPSK	1	74	23.26	23.38	23.06	
15	QPSK	36	0	22.50	22.51	22.13	
15	QPSK	36	20	22.48	22.47	22.12	23
15	QPSK	36	39	22.37	22.36	22.08	
15	QPSK	75	0	22.42	22.57	22.14	
15	16QAM	1	0	22.47	22.65	22.11	23
15	16QAM	1	37	22.42	22.45	22.26	



15	16QAM	1	74	22.30	22.40	22.16	
15	16QAM	36	0	21.49	21.64	21.21	22
15	16QAM	36	20	21.46	21.57	21.18	
15	16QAM	36	39	21.39	21.55	21.14	
15	16QAM	75	0	21.49	21.64	21.26	
15	64QAM	1	0	22.47	22.62	22.11	23
15	64QAM	1	37	22.42	22.53	22.26	
15	64QAM	1	74	22.29	22.51	22.16	
15	64QAM	36	0	21.50	21.48	21.20	22
15	64QAM	36	20	21.46	21.40	21.19	
15	64QAM	36	39	21.41	21.41	21.11	
15	64QAM	75	0	21.50	21.55	21.26	
Channel				26090	26340	26640	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	23.61	23.46	23.56	24
10	QPSK	1	25	23.66	23.63	23.80	
10	QPSK	1	49	23.43	23.47	23.65	
10	QPSK	25	0	22.45	22.60	22.39	23
10	QPSK	25	12	22.43	22.59	22.34	
10	QPSK	25	25	22.41	22.56	22.22	
10	QPSK	50	0	22.44	22.58	22.20	
10	16QAM	1	0	22.41	22.73	22.22	23
10	16QAM	1	25	22.43	22.92	22.53	
10	16QAM	1	49	22.23	22.73	22.28	
10	16QAM	25	0	21.52	21.77	21.45	22
10	16QAM	25	12	21.53	21.75	21.38	
10	16QAM	25	25	21.49	21.70	21.30	
10	16QAM	50	0	21.50	21.72	21.42	
10	64QAM	1	0	22.40	22.75	22.39	23
10	64QAM	1	25	22.38	22.92	22.61	
10	64QAM	1	49	22.22	22.74	22.21	
10	64QAM	25	0	21.49	21.77	21.36	22
10	64QAM	25	12	21.45	21.76	21.39	
10	64QAM	25	25	21.46	21.75	21.41	
10	64QAM	50	0	21.48	21.69	21.33	
Channel				26065	26340	26665	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1912.5	
5	QPSK	1	0	23.32	23.37	23.57	24



5	QPSK	1	12	23.39	23.49	23.73	
5	QPSK	1	24	23.15	23.39	23.54	
5	QPSK	12	0	22.43	22.53	22.25	
5	QPSK	12	7	22.42	22.52	22.24	23
5	QPSK	12	13	22.42	22.47	22.19	
5	QPSK	25	0	22.47	22.54	22.15	
5	16QAM	1	0	22.66	22.64	22.22	23
5	16QAM	1	12	22.69	22.76	22.40	
5	16QAM	1	24	22.53	22.66	22.22	
5	16QAM	12	0	21.49	21.59	21.28	22
5	16QAM	12	7	21.46	21.50	21.23	
5	16QAM	12	13	21.51	21.58	21.19	
5	16QAM	25	0	21.51	21.67	21.31	
5	64QAM	1	0	22.63	22.67	22.21	23
5	64QAM	1	12	22.67	22.78	22.32	
5	64QAM	1	24	22.55	22.66	22.18	
5	64QAM	12	0	21.52	21.59	21.29	22
5	64QAM	12	7	21.49	21.54	21.23	
5	64QAM	12	13	21.51	21.58	21.16	
5	64QAM	25	0	21.52	21.65	21.28	
Channel				26055	26340	26675	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1913.5	
3	QPSK	1	0	23.59	23.48	23.62	24
3	QPSK	1	8	23.58	23.41	23.63	
3	QPSK	1	14	23.56	23.46	23.71	
3	QPSK	8	0	22.48	22.49	22.67	23
3	QPSK	8	4	22.46	22.48	22.67	
3	QPSK	8	7	22.48	22.52	22.71	
3	QPSK	15	0	22.45	22.49	22.62	
3	16QAM	1	0	22.41	22.75	22.74	23
3	16QAM	1	8	22.39	22.76	22.71	
3	16QAM	1	14	22.32	22.77	22.64	
3	16QAM	8	0	21.54	21.56	21.44	22
3	16QAM	8	4	21.53	21.40	21.43	
3	16QAM	8	7	21.54	21.57	21.61	
3	16QAM	15	0	21.51	21.53	21.39	
3	64QAM	1	0	22.40	22.77	22.60	23
3	64QAM	1	8	22.38	22.76	22.51	



3	64QAM	1	14	22.35	22.78	22.45	
3	64QAM	8	0	21.52	21.59	21.55	
3	64QAM	8	4	21.50	21.57	21.50	
3	64QAM	8	7	21.54	21.59	21.46	
3	64QAM	15	0	21.53	21.54	21.50	
Channel				26047	26340	26683	Tune-up limit
Frequency (MHz)				1850.7	1880	1914.3	(dBm)
1.4	QPSK	1	0	23.53	23.39	23.67	
1.4	QPSK	1	3	23.67	23.58	23.94	
1.4	QPSK	1	5	23.49	23.39	23.73	
1.4	QPSK	3	0	23.50	23.51	23.67	
1.4	QPSK	3	1	23.48	23.46	23.60	
1.4	QPSK	3	3	23.44	23.47	23.62	
1.4	QPSK	6	0	22.42	22.41	22.55	
1.4	16QAM	1	0	22.45	22.61	22.42	
1.4	16QAM	1	3	22.65	22.74	22.54	
1.4	16QAM	1	5	22.41	22.60	22.38	
1.4	16QAM	3	0	22.57	22.46	22.43	
1.4	16QAM	3	1	22.56	22.45	22.40	
1.4	16QAM	3	3	22.57	22.47	22.42	
1.4	16QAM	6	0	21.53	21.48	21.40	
1.4	64QAM	1	0	22.43	22.58	22.33	
1.4	64QAM	1	3	22.63	22.74	22.61	
1.4	64QAM	1	5	22.36	22.58	22.16	
1.4	64QAM	3	0	22.56	22.47	22.22	
1.4	64QAM	3	1	22.55	22.45	22.20	
1.4	64QAM	3	3	22.57	22.48	22.17	
1.4	64QAM	6	0	21.50	21.48	21.37	

<FDD LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.67	22.61	22.64	
15	QPSK	1	37	22.64	22.65	22.73	
15	QPSK	1	74	22.52	22.59	22.72	
15	QPSK	36	0	21.70	21.69	21.84	



REPORT No. : XM19080032W08

15	QPSK	36	20	21.69	21.75	21.62	
15	QPSK	36	39	21.70	21.74	21.71	
15	QPSK	75	0	21.67	21.70	21.80	
15	16QAM	1	0	21.88	21.74	21.59	22
15	16QAM	1	37	21.85	21.77	21.67	
15	16QAM	1	74	21.77	21.71	21.54	
15	16QAM	36	0	20.65	20.59	20.70	21
15	16QAM	36	20	20.64	20.67	20.60	
15	16QAM	36	39	20.62	20.61	20.63	
15	16QAM	75	0	20.66	20.65	20.77	
15	64QAM	1	0	21.92	21.71	21.59	22
15	64QAM	1	37	21.91	21.78	21.68	
15	64QAM	1	74	21.79	21.69	21.58	
15	64QAM	36	0	20.60	20.63	20.73	21
15	64QAM	36	20	20.56	20.53	20.64	
15	64QAM	36	39	20.63	20.60	20.59	
15	64QAM	75	0	20.64	20.67	20.74	
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	22.78	22.69	22.73	23
10	QPSK	1	25	22.83	22.78	22.81	
10	QPSK	1	49	22.69	22.70	22.77	
10	QPSK	25	0	21.66	21.66	21.69	22
10	QPSK	25	12	21.53	21.64	21.59	
10	QPSK	25	25	21.61	21.63	21.62	
10	QPSK	50	0	21.66	21.67	21.67	
10	16QAM	1	0	21.97	21.82	21.54	22
10	16QAM	1	25	22.00	21.90	21.63	
10	16QAM	1	49	21.90	21.78	21.53	
10	16QAM	25	0	20.69	20.63	20.72	21
10	16QAM	25	12	20.53	20.59	20.68	
10	16QAM	25	25	20.71	20.69	20.60	
10	16QAM	50	0	20.63	20.62	20.68	
10	64QAM	1	0	22.00	21.81	21.52	22.5
10	64QAM	1	25	22.12	21.89	21.65	
10	64QAM	1	49	21.92	21.80	21.51	
10	64QAM	25	0	20.73	20.65	20.76	21
10	64QAM	25	12	20.69	20.60	20.75	



10	64QAM	25	25	20.69	20.64	20.58	
10	64QAM	50	0	20.68	20.65	20.65	
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.66	22.56	22.51	23
5	QPSK	1	12	22.69	22.66	22.67	
5	QPSK	1	24	22.62	22.56	22.57	
5	QPSK	12	0	21.62	21.68	21.71	22
5	QPSK	12	7	21.58	21.65	21.70	
5	QPSK	12	13	21.68	21.64	21.59	
5	QPSK	25	0	21.71	21.63	21.68	
5	16QAM	1	0	21.90	21.71	21.85	22
5	16QAM	1	12	21.95	21.83	21.91	
5	16QAM	1	24	21.85	21.71	21.79	
5	16QAM	12	0	20.61	20.57	20.73	21
5	16QAM	12	7	20.65	20.54	20.71	
5	16QAM	12	13	20.71	20.59	20.62	
5	16QAM	25	0	20.72	20.64	20.65	
5	64QAM	1	0	21.91	21.71	21.81	22
5	64QAM	1	12	21.96	21.82	21.92	
5	64QAM	1	24	21.86	21.71	21.80	
5	64QAM	12	0	20.61	20.56	20.68	21
5	64QAM	12	7	20.57	20.52	20.65	
5	64QAM	12	13	20.65	20.57	20.60	
5	64QAM	25	0	20.72	20.65	20.64	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.76	22.62	22.76	23
3	QPSK	1	8	22.71	22.61	22.78	
3	QPSK	1	14	22.65	22.71	22.86	
3	QPSK	8	0	21.71	21.64	21.74	22
3	QPSK	8	4	21.68	21.65	21.70	
3	QPSK	8	7	21.73	21.71	21.73	
3	QPSK	15	0	21.69	21.66	21.68	
3	16QAM	1	0	21.94	21.76	21.52	22
3	16QAM	1	8	21.94	21.77	21.60	
3	16QAM	1	14	21.95	21.80	21.54	
3	16QAM	8	0	20.69	20.62	20.68	21



3	16QAM	8	4	20.68	20.54	20.67	
3	16QAM	8	7	20.72	20.64	20.70	
3	16QAM	15	0	20.65	20.55	20.61	
3	64QAM	1	0	21.99	21.81	21.51	22
3	64QAM	1	8	21.96	21.78	21.57	
3	64QAM	1	14	21.89	21.77	21.55	
3	64QAM	8	0	20.70	20.62	20.71	21
3	64QAM	8	4	20.67	20.60	20.70	
3	64QAM	8	7	20.71	20.64	20.69	
3	64QAM	15	0	20.65	20.56	20.62	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.80	22.57	22.70	23
1.4	QPSK	1	3	22.99	22.76	22.98	
1.4	QPSK	1	5	22.76	22.55	22.75	
1.4	QPSK	3	0	22.75	22.64	22.74	23
1.4	QPSK	3	1	22.73	22.60	22.71	
1.4	QPSK	3	3	22.74	22.59	22.70	
1.4	QPSK	6	0	21.72	21.59	21.70	
1.4	16QAM	1	0	21.63	21.70	21.49	22
1.4	16QAM	1	3	21.92	21.92	21.67	
1.4	16QAM	1	5	21.59	21.70	21.50	
1.4	16QAM	3	0	21.85	21.60	21.62	22
1.4	16QAM	3	1	21.84	21.59	21.60	
1.4	16QAM	3	3	21.87	21.60	21.61	
1.4	16QAM	6	0	20.72	20.58	20.62	
1.4	64QAM	1	0	21.67	21.73	21.50	22
1.4	64QAM	1	3	21.91	21.97	21.68	
1.4	64QAM	1	5	21.69	21.70	21.52	
1.4	64QAM	3	0	21.85	21.60	21.60	22
1.4	64QAM	3	1	21.86	21.59	21.61	
1.4	64QAM	3	3	21.89	21.61	21.62	
1.4	64QAM	6	0	20.73	20.55	20.61	



<FDD LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power Low Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	24.56	24.68	24.91	25.08	25.10	
20	QPSK	1	49	24.71	24.73	25.37	25.30	25.32	25.5
20	QPSK	1	99	24.28	24.82	25.03	24.98	24.93	
20	QPSK	50	0	24.63	25.09	25.26	25.16	25.18	
20	QPSK	50	24	24.60	25.06	25.10	25.00	24.90	25.5
20	QPSK	50	50	24.50	25.08	25.18	25.18	25.07	
20	QPSK	100	0	24.55	25.01	25.16	25.15	25.15	
20	16QAM	1	0	24.60	24.73	24.74	24.71	24.68	
20	16QAM	1	49	24.73	25.11	25.21	25.04	25.02	25.5
20	16QAM	1	99	24.34	24.87	24.91	24.52	24.52	
20	16QAM	50	0	24.54	24.99	25.01	25.14	25.14	
20	16QAM	50	24	24.55	24.64	24.91	25.06	24.94	25.5
20	16QAM	50	50	24.43	24.78	25.06	25.06	25.06	
20	16QAM	100	0	24.50	24.98	25.09	25.09	25.09	
20	64QAM	1	0	24.61	24.72	24.74	24.71	24.70	
20	64QAM	1	49	24.73	24.90	25.21	25.04	25.03	25.5
20	64QAM	1	99	24.32	24.47	24.89	24.87	24.52	
20	64QAM	50	0	24.57	24.72	25.02	25.08	25.14	
20	64QAM	50	24	24.55	24.62	25.00	25.00	24.96	25.5
20	64QAM	50	50	24.44	24.56	25.05	25.05	25.04	
20	64QAM	100	0	24.51	24.57	25.09	25.10	25.10	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	24.66	24.71	25.01	25.32	25.37	
15	QPSK	1	37	24.55	24.92	25.15	25.36	25.39	25.5
15	QPSK	1	74	24.39	24.61	25.11	25.15	25.20	
15	QPSK	36	0	24.71	24.99	25.19	25.28	24.97	
15	QPSK	36	20	24.76	24.92	24.86	25.16	25.06	25.5
15	QPSK	36	39	24.62	24.75	25.25	25.26	25.26	
15	QPSK	75	0	24.69	25.01	25.24	25.25	25.26	
15	16QAM	1	0	24.89	24.91	24.99	25.06	25.21	
15	16QAM	1	37	24.78	24.90	25.17	25.26	25.27	25.5



REPORT No. : XM19080032W08

15	16QAM	1	74	24.63	25.09	25.14	25.08	25.07	
15	16QAM	36	0	24.65	25.00	25.08	25.20	25.25	25.5
15	16QAM	36	20	24.59	24.90	25.10	24.90	25.18	
15	16QAM	36	39	24.52	24.58	25.16	25.15	25.14	
15	16QAM	75	0	24.63	25.07	25.14	25.21	25.22	
15	64QAM	1	0	24.89	24.95	24.98	25.06	25.23	25.5
15	64QAM	1	37	24.80	24.99	25.16	25.20	25.25	
15	64QAM	1	74	24.63	25.04	25.11	25.07	25.07	
15	64QAM	36	0	24.68	24.82	25.08	25.08	25.23	25.5
15	64QAM	36	20	24.67	24.80	25.14	25.06	25.21	
15	64QAM	36	39	24.53	24.58	25.15	25.15	25.14	
15	64QAM	75	0	24.62	24.98	25.14	25.14	25.17	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	24.72	25.03	25.13	25.25	25.33	25.5
10	QPSK	1	25	24.86	25.27	25.38	25.43	25.48	
10	QPSK	1	49	24.51	24.73	25.21	25.19	25.19	
10	QPSK	25	0	24.67	25.10	25.17	25.21	25.27	25.5
10	QPSK	25	12	24.65	25.06	25.16	25.20	25.14	
10	QPSK	25	25	24.63	24.96	25.21	25.21	25.18	
10	QPSK	50	0	24.61	24.96	25.16	25.20	25.21	
10	16QAM	1	0	24.96	25.00	25.13	25.15	25.15	25.5
10	16QAM	1	25	25.06	25.20	25.38	25.33	25.31	
10	16QAM	1	49	24.73	24.92	25.20	25.07	25.03	
10	16QAM	25	0	24.68	24.88	25.14	25.20	25.22	25.5
10	16QAM	25	12	24.66	24.86	25.10	25.15	25.20	
10	16QAM	25	25	24.60	24.64	25.15	25.15	25.13	
10	16QAM	50	0	24.57	25.01	25.07	25.10	25.12	
10	64QAM	1	0	25.02	25.05	25.11	25.14	25.14	25.5
10	64QAM	1	25	25.06	25.37	25.37	25.32	25.32	
10	64QAM	1	49	24.72	25.16	25.20	25.15	25.02	
10	64QAM	25	0	24.69	24.80	25.11	25.13	25.19	25.5
10	64QAM	25	12	24.66	24.80	25.07	25.09	25.18	
10	64QAM	25	25	24.60	24.78	25.14	25.14	25.13	
10	64QAM	50	0	24.55	24.76	25.05	25.11	25.15	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	24.64	24.84	25.05	25.06	25.06	25.5



REPORT No. : XM19080032W08

5	QPSK	1	12	24.77	25.07	25.23	25.22	25.19	
5	QPSK	1	24	24.54	24.72	25.11	25.09	25.02	
5	QPSK	12	0	24.66	25.09	25.13	25.14	25.20	
5	QPSK	12	7	24.65	25.07	25.09	25.10	25.13	25.5
5	QPSK	12	13	24.62	25.15	25.16	25.15	25.13	
5	QPSK	25	0	24.65	25.12	25.13	25.15	25.16	
5	16QAM	1	0	24.90	25.02	25.09	25.11	25.33	25.5
5	16QAM	1	12	25.00	25.19	25.25	25.35	25.46	
5	16QAM	1	24	24.79	25.08	25.14	25.27	25.28	
5	16QAM	12	0	24.55	24.65	24.97	25.12	25.12	25.5
5	16QAM	12	7	24.54	24.64	24.95	25.10	25.05	
5	16QAM	12	13	24.50	24.63	25.00	25.01	25.07	
5	16QAM	25	0	24.61	24.68	25.02	25.09	25.10	25.5
5	64QAM	1	0	24.88	25.02	25.09	25.32	25.33	
5	64QAM	1	12	25.00	25.20	25.23	25.29	25.45	
5	64QAM	1	24	24.79	24.80	25.13	25.14	25.26	25.5
5	64QAM	12	0	24.56	24.94	24.96	25.09	25.16	
5	64QAM	12	7	24.54	24.91	24.92	25.07	25.14	
5	64QAM	12	13	24.49	24.49	25.00	25.05	25.11	25.5
5	64QAM	25	0	24.60	24.69	25.03	25.05	25.11	

<FDD LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	21.87	22.04	21.85	22.5
20	QPSK	1	49	22.28	22.34	22.27	
20	QPSK	1	99	21.89	21.86	21.84	
20	QPSK	50	0	21.03	21.22	21.25	21.5
20	QPSK	50	24	21.20	21.08	21.20	
20	QPSK	50	50	21.21	21.13	21.22	
20	QPSK	100	0	21.09	21.17	21.26	21.5
20	16QAM	1	0	21.06	20.80	20.69	
20	16QAM	1	49	21.48	21.18	21.10	
20	16QAM	1	99	21.03	20.78	20.68	20.5
20	16QAM	50	0	20.04	20.19	20.30	



20	16QAM	50	24	20.18	20.29	20.24	
20	16QAM	50	50	20.27	20.13	20.26	
20	16QAM	100	0	20.12	20.16	20.25	
20	64QAM	1	0	21.06	20.80	20.68	21.5
20	64QAM	1	49	21.43	21.18	21.06	
20	64QAM	1	99	21.02	20.77	20.67	
20	64QAM	50	0	20.03	20.15	20.30	20.5
20	64QAM	50	24	20.10	20.13	20.13	
20	64QAM	50	50	20.27	20.08	20.26	
20	64QAM	100	0	20.13	20.15	20.22	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	22.02	22.10	22.14	22.5
15	QPSK	1	37	22.10	22.09	22.29	
15	QPSK	1	74	22.00	22.00	22.09	
15	QPSK	36	0	21.17	21.26	21.31	21.5
15	QPSK	36	20	21.19	21.26	21.30	
15	QPSK	36	39	21.23	21.23	21.34	
15	QPSK	75	0	21.20	21.27	21.34	
15	16QAM	1	0	21.25	21.24	21.22	21.5
15	16QAM	1	37	21.41	21.36	21.31	
15	16QAM	1	74	21.25	21.25	21.14	
15	16QAM	36	0	20.11	20.20	20.26	20.5
15	16QAM	36	20	20.10	20.19	20.25	
15	16QAM	36	39	20.17	20.16	20.24	
15	16QAM	75	0	20.18	20.23	20.31	
15	64QAM	1	0	21.25	21.20	21.20	21.5
15	64QAM	1	37	21.39	21.32	21.30	
15	64QAM	1	74	21.28	21.21	21.14	
15	64QAM	36	0	20.11	20.22	20.28	20.5
15	64QAM	36	20	20.10	20.20	20.24	
15	64QAM	36	39	20.20	20.16	20.26	
15	64QAM	75	0	20.18	20.23	20.30	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	22.06	22.16	22.18	22.5
10	QPSK	1	25	22.14	22.25	22.33	
10	QPSK	1	49	22.05	22.05	22.19	



10	QPSK	25	0	21.11	21.20	21.27	21.5
10	QPSK	25	12	21.10	21.17	21.26	
10	QPSK	25	25	21.17	21.17	21.25	
10	QPSK	50	0	21.15	21.15	21.28	
10	16QAM	1	0	21.34	21.27	21.05	21.5
10	16QAM	1	25	21.42	21.41	21.18	
10	16QAM	1	49	21.32	21.30	21.05	
10	16QAM	25	0	20.19	20.20	20.28	20.5
10	16QAM	25	12	20.14	20.17	20.24	
10	16QAM	25	25	20.26	20.20	20.25	
10	16QAM	50	0	20.16	20.12	20.25	
10	64QAM	1	0	21.32	21.31	21.09	21.5
10	64QAM	1	25	21.36	21.42	21.18	
10	64QAM	1	49	21.32	21.33	21.08	
10	64QAM	25	0	20.20	20.23	20.25	20.5
10	64QAM	25	12	20.16	20.20	20.22	
10	64QAM	25	25	20.27	20.21	20.24	
10	64QAM	50	0	20.17	20.14	20.26	
Channel				131997	132322	132647	Tune-up limit
Frequency (MHz)				1712.5	1745	1777.5	(dBm)
5	QPSK	1	0	21.99	22.01	22.00	22.5
5	QPSK	1	12	22.07	22.13	22.09	
5	QPSK	1	24	21.95	21.97	21.98	
5	QPSK	12	0	21.01	21.19	21.14	21.5
5	QPSK	12	7	21.00	21.16	21.11	
5	QPSK	12	13	21.00	21.12	21.16	
5	QPSK	25	0	21.02	21.16	21.18	
5	16QAM	1	0	21.26	21.24	21.33	21.5
5	16QAM	1	12	21.35	21.38	21.46	
5	16QAM	1	24	21.21	21.24	21.29	
5	16QAM	12	0	19.94	20.09	20.19	20.5
5	16QAM	12	7	19.98	20.08	20.18	
5	16QAM	12	13	19.96	20.05	20.17	
5	16QAM	25	0	20.06	20.12	20.19	
5	64QAM	1	0	21.27	21.22	21.29	21.5
5	64QAM	1	12	21.34	21.31	21.43	
5	64QAM	1	24	21.26	21.21	21.32	
5	64QAM	12	0	19.99	20.08	20.21	20.5



REPORT No. : XM19080032W08

5	64QAM	12	7	20.00	20.05	20.16	
5	64QAM	12	13	19.97	20.05	20.16	
5	64QAM	25	0	20.04	20.13	20.18	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	22.08	22.06	22.16	22.5
3	QPSK	1	8	22.04	22.07	22.22	
3	QPSK	1	14	22.00	22.07	22.18	
3	QPSK	8	0	21.05	21.16	21.18	21.5
3	QPSK	8	4	21.00	21.11	21.09	
3	QPSK	8	7	21.01	21.16	21.19	
3	QPSK	15	0	21.00	21.10	21.14	
3	16QAM	1	0	21.35	21.31	21.03	21.5
3	16QAM	1	8	21.32	21.27	21.08	
3	16QAM	1	14	21.29	21.29	21.07	
3	16QAM	8	0	20.03	20.11	20.22	20.5
3	16QAM	8	4	20.00	20.10	20.16	
3	16QAM	8	7	19.99	20.12	20.19	
3	16QAM	15	0	19.95	19.98	20.15	
3	64QAM	1	0	21.36	21.31	21.01	21.5
3	64QAM	1	8	21.30	21.30	21.05	
3	64QAM	1	14	21.27	21.25	21.04	
3	64QAM	8	0	20.05	20.11	20.17	20.5
3	64QAM	8	4	20.01	20.09	20.15	
3	64QAM	8	7	20.00	20.11	20.17	
3	64QAM	15	0	19.95	20.01	20.17	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	22.50	22.43	22.36	23
1.4	QPSK	1	3	22.73	22.68	22.27	
1.4	QPSK	1	5	22.54	22.32	22.12	
1.4	QPSK	3	0	22.48	22.26	22.13	23
1.4	QPSK	3	1	22.50	22.19	22.08	
1.4	QPSK	3	3	22.53	22.15	22.10	
1.4	QPSK	6	0	21.58	21.31	21.20	
1.4	16QAM	1	0	21.49	21.38	21.05	22
1.4	16QAM	1	3	21.80	21.64	21.15	
1.4	16QAM	1	5	21.53	21.61	21.05	



1.4	16QAM	3	0	21.51	21.42	21.13	22
1.4	16QAM	3	1	21.43	21.35	21.09	
1.4	16QAM	3	3	21.64	21.43	21.12	
1.4	16QAM	6	0	20.52	20.56	20.16	
1.4	64QAM	1	0	21.47	21.51	21.04	22
1.4	64QAM	1	3	21.55	21.83	21.17	
1.4	64QAM	1	5	21.24	21.51	21.04	
1.4	64QAM	3	0	21.38	21.25	21.14	21.5
1.4	64QAM	3	1	21.22	21.12	21.06	
1.4	64QAM	3	3	21.23	21.34	21.05	
1.4	64QAM	6	0	20.28	20.50	20.17	

<FDD LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133322	133372	
Frequency (MHz)				673	683	688	
20	QPSK	1	0	22.52	22.71	22.76	23.5
20	QPSK	1	49	22.71	23.22	23.12	
20	QPSK	1	99	22.23	22.78	22.60	
20	QPSK	50	0	22.57	22.92	22.85	23
20	QPSK	50	24	22.69	22.60	22.54	
20	QPSK	50	50	22.44	22.91	22.69	
20	QPSK	100	0	22.52	22.91	22.83	
20	16QAM	1	0	22.56	22.56	22.34	23.5
20	16QAM	1	49	22.73	23.04	22.69	
20	16QAM	1	99	22.24	22.63	22.20	
20	16QAM	50	0	22.53	22.79	22.79	23
20	16QAM	50	24	22.46	22.43	22.52	
20	16QAM	50	50	22.37	22.80	22.68	
20	16QAM	100	0	22.49	22.84	22.77	
20	64QAM	1	0	22.25	22.34	22.40	23
20	64QAM	1	49	22.06	22.28	22.27	
20	64QAM	1	99	22.72	22.93	22.13	
20	64QAM	50	0	22.19	22.20	21.85	23
20	64QAM	50	24	21.80	22.60	22.78	
20	64QAM	50	50	22.12	21.75	21.93	



REPORT No. : XM19080032W08

20	64QAM	100	0	21.98	22.72	22.47	
Channel				133197	133297	133397	Tune-up limit (dBm)
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	22.06	22.55	22.70	23.5
15	QPSK	1	37	22.65	22.59	23.05	
15	QPSK	1	74	22.23	22.02	22.42	
15	QPSK	36	0	22.33	22.36	22.31	23
15	QPSK	36	20	21.96	22.27	22.50	
15	QPSK	36	39	22.21	22.43	22.61	
15	QPSK	75	0	22.16	22.75	22.25	
15	16QAM	1	0	22.03	22.10	22.01	23
15	16QAM	1	37	22.36	22.90	22.61	
15	16QAM	1	74	21.95	21.84	21.95	
15	16QAM	36	0	22.46	22.25	22.78	23
15	16QAM	36	20	22.35	22.43	22.51	
15	16QAM	36	39	22.04	22.33	22.56	
15	16QAM	75	0	22.22	22.31	22.64	
15	64QAM	1	0	21.94	22.48	22.27	23
15	64QAM	1	37	22.40	22.87	22.06	
15	64QAM	1	74	22.18	22.17	22.12	
15	64QAM	36	0	22.49	21.98	22.32	23
15	64QAM	36	20	21.97	22.38	22.36	
15	64QAM	36	39	22.13	22.68	22.60	
15	64QAM	75	0	22.41	22.28	22.50	
Channel				133172	133297	133422	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	
10	QPSK	1	0	21.71	22.48	22.24	23.5
10	QPSK	1	25	22.32	22.57	23.04	
10	QPSK	1	49	21.84	21.95	22.28	
10	QPSK	25	0	22.43	22.85	22.23	23
10	QPSK	25	12	22.18	21.66	21.94	
10	QPSK	25	25	22.18	22.54	22.07	
10	QPSK	50	0	21.79	21.95	22.62	
10	16QAM	1	0	22.11	22.49	22.21	23
10	16QAM	1	25	22.66	22.59	22.09	
10	16QAM	1	49	21.74	22.39	21.31	
10	16QAM	25	0	22.24	22.01	22.47	23
10	16QAM	25	12	22.07	21.74	21.35	



10	16QAM	25	25	22.08	22.51	22.63	
10	16QAM	50	0	21.81	22.42	22.09	
10	64QAM	1	0	22.29	22.18	21.76	23
10	64QAM	1	25	22.52	22.86	22.64	
10	64QAM	1	49	21.44	22.62	22.09	
10	64QAM	25	0	22.38	22.48	22.44	23
10	64QAM	25	12	22.39	22.24	21.99	
10	64QAM	25	25	22.34	22.33	22.07	
10	64QAM	50	0	22.05	22.19	22.71	
Channel				133147	133297	133447	Tune-up limit (dBm)
Frequency (MHz)				665.5	680.5	695.5	
5	QPSK	1	0	22.49	22.07	22.59	23.5
5	QPSK	1	12	22.29	22.69	23.05	
5	QPSK	1	24	22.04	22.32	22.39	
5	QPSK	12	0	22.17	22.32	22.10	23
5	QPSK	12	7	22.53	22.46	22.05	
5	QPSK	12	13	22.14	22.68	22.56	
5	QPSK	25	0	21.98	22.60	22.30	
5	16QAM	1	0	22.36	22.46	22.23	23
5	16QAM	1	12	21.94	22.80	22.61	
5	16QAM	1	24	21.84	22.44	22.10	
5	16QAM	12	0	22.15	22.69	22.48	23
5	16QAM	12	7	22.34	22.38	22.21	
5	16QAM	12	13	21.57	22.30	21.93	
5	16QAM	25	0	21.81	22.53	22.59	
5	64QAM	1	0	22.50	22.05	21.97	23
5	64QAM	1	12	22.29	22.93	22.55	
5	64QAM	1	24	21.93	22.57	22.00	
5	64QAM	12	0	22.48	22.33	22.73	23
5	64QAM	12	7	22.15	22.28	22.42	
5	64QAM	12	13	22.32	22.73	21.92	
5	64QAM	25	0	22.39	22.66	22.00	



Bluetooth Conducted Power:

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	4.125	5.16	5.114
	CH 39	2441	5.1	4.44	4.321
	CH 78	2480	4.16	3.55	3.501
Tune-up Limit			5.5	5.5	5.5

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	6.13
	CH 19	2440	5.68
	CH 39	2480	5.52
Tune-up Limit			6.5

WLAN Conducted Power:

2.4GHz WLAN:

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11b 1Mbps	CH 1	2412	17.29	17.50	17	100.00
		CH 6	2437	17.64	18.00	17	
		CH 11	2462	17.03	17.50	17	
		CH12	2467	16.48	16.50	18	
		CH13	2472	15.89	16.00	18	
	802.11g 6Mbps	CH 1	2412	16.66	17.00	15	100.00
		CH 6	2437	16.81	17.00	15	
		CH 11	2462	16.49	17.00	15	
		CH12	2467	16.08	16.50	15	
		CH13	2472	16.10	16.50	15	
	802.11n-HT20 MCS0	CH 1	2412	17.25	17.50	15	100.00
		CH 6	2437	17.88	18.00	15	
		CH 11	2462	16.96	17.00	15	
		CH12	2467	16.30	16.50	15	
		CH13	2472	15.99	16.00	15	
	802.11n-HT40 MCS0	CH 3	2422	15.32	15.50	14.5	100.00
		CH 6	2437	14.94	15.00	14.5	
		CH 9	2452	15.29	15.50	14.5	

**5GHz WLAN:****<5.2GHz WLAN>**

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11a 6Mbps	CH 36	5180	12.31	12.50	12	100.00
		CH 44	5220	12.07	12.50	12	
		CH 48	5240	12.01	12.50	12	
	802.11n-HT20 MCS0	CH 36	5180	12.19	12.50	12	100.00
		CH 44	5220	12.00	12.00	12	
		CH 48	5240	11.95	12.00	12	
	802.11n-HT40 MCS0	CH 38	5190	12.39	12.50	12	100.00
		CH 46	5230	12.07	12.50	12	

<5.3GHz WLAN>


5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11a 6Mbps	CH 52	5260	11.43	11.50	12	100.00
		CH 60	5300	12.60	13.00	12	
		CH 64	5320	11.80	12.00	12	
	802.11n-HT20 MCS0	CH 52	5260	11.16	11.50	12	100.00
		CH 60	5300	11.06	11.50	12	
		CH 64	5320	11.52	12.00	12	
	802.11n-HT40 MCS0	CH 54	5270	11.65	12.00	12	100.00
		CH 62	5310	11.70	12.00	12	
		CH 62	5310	11.43	11.50	12	

<5.8GHz WLAN>

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
	802.11a MCS0	CH 149	5745	12.08	12.50	12	100.00
		CH 157	5785	12.08	12.50	12	
		CH 165	5825	12.32	12.50	12	
	802.11n-HT20 MCS0	CH 149	5745	12.13	12.50	12	100.00
		CH 157	5785	12.00	12.00	12	
		CH 165	5825	12.10	12.50	12	
	802.11n-HT40 MCS0	CH 151	5755	11.90	12.00	12	100.00
		CH 159	5795	12.38	12.50	12	

15. Hot-Spot Mode Evaluation Procedure

15.1. EUT Antenna Location

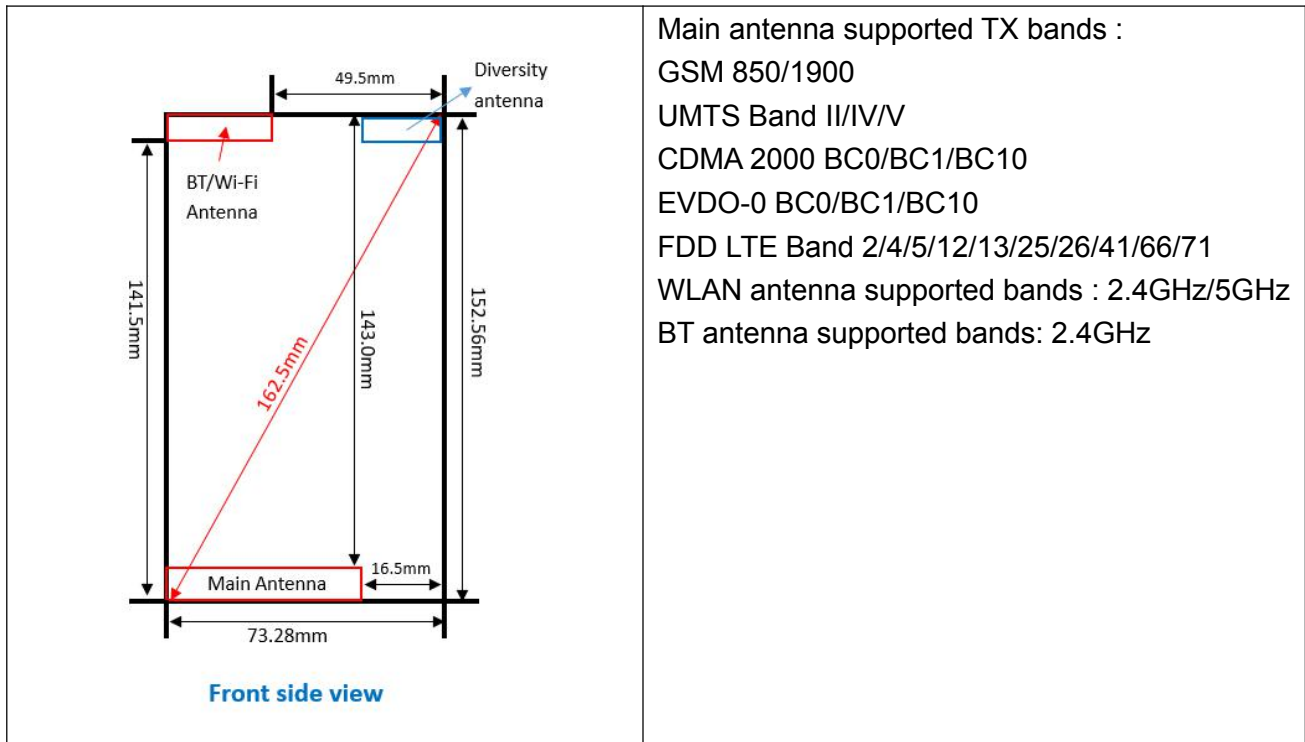

Hotspot Evaluation:


Assessment	Hotspot side for SARTest distance: 10mm					
Antennas	Back	Front	Top	Bottom	Left edge	Right edge
WWAN Main Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN/BT Main Antenna	Yes	Yes	Yes	No	Yes	No

Note :

1. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
2. Head/Body-worn/Hotspot mode SAR assessments are required.
3. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
4. For Main antenna, SAR measurements at Top side are not required since the distance between DUT and flat phantom $> 25\text{mm}$.
5. For WLAN&BT antenna, SAR measurements Bottom side and Left side are not required since the distance between DUT and flat phantom $> 25\text{mm}$.
6. For the Diversity antenna, it supports RX only, SAR is not required.

16. Block diagram of the tests to be performed

16.1. Head

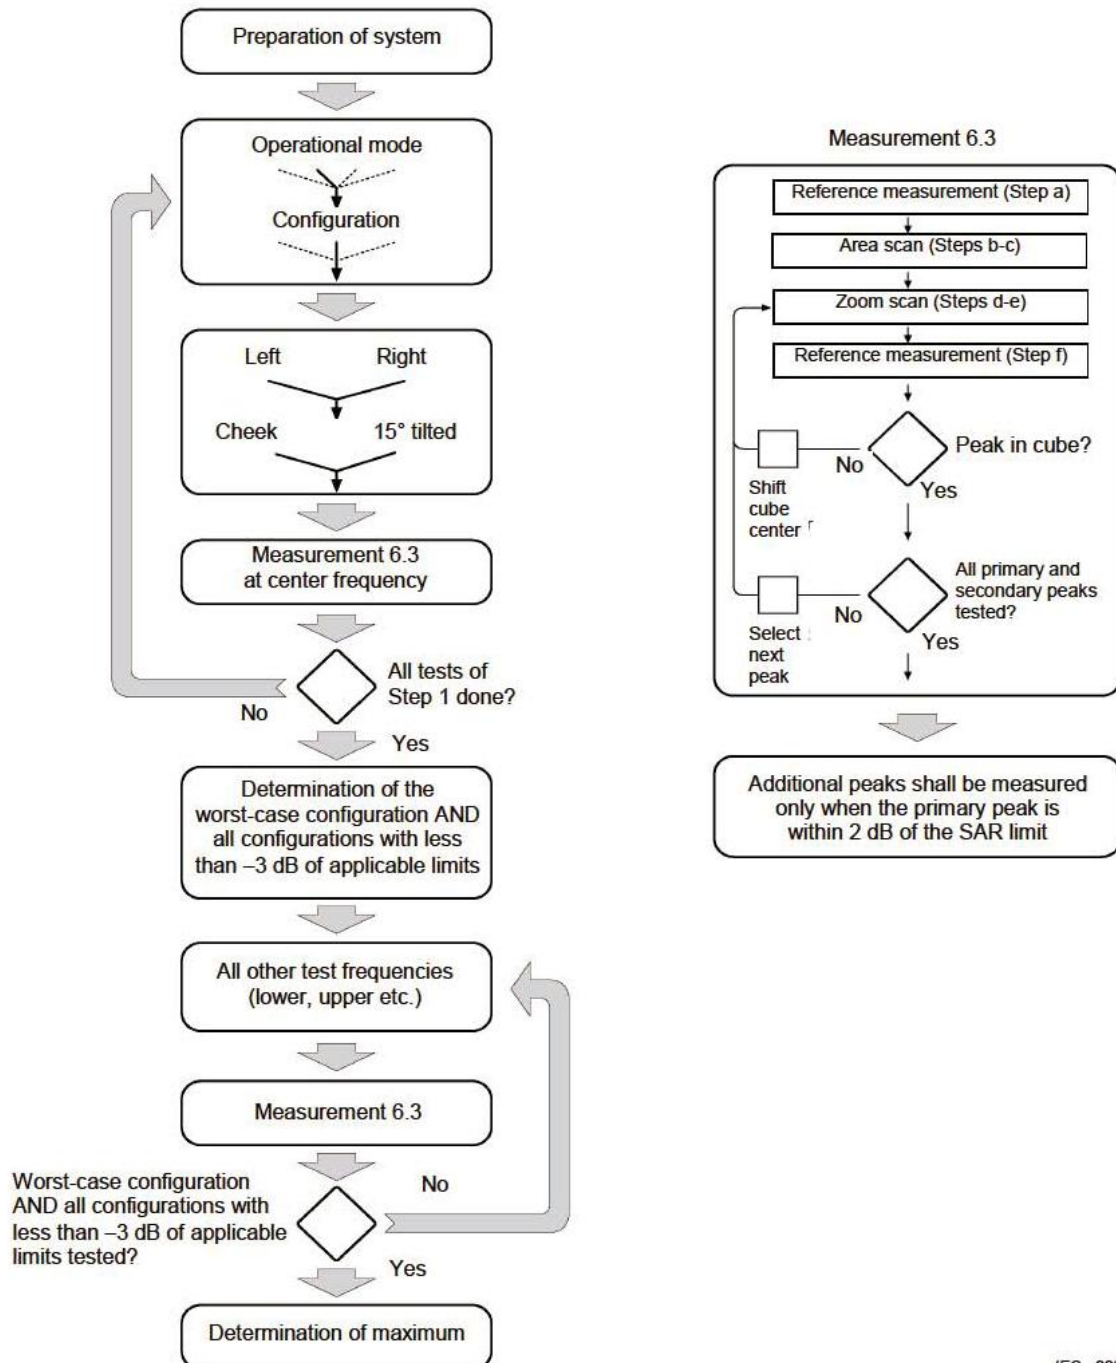

IEC 228/05

16.2. Body

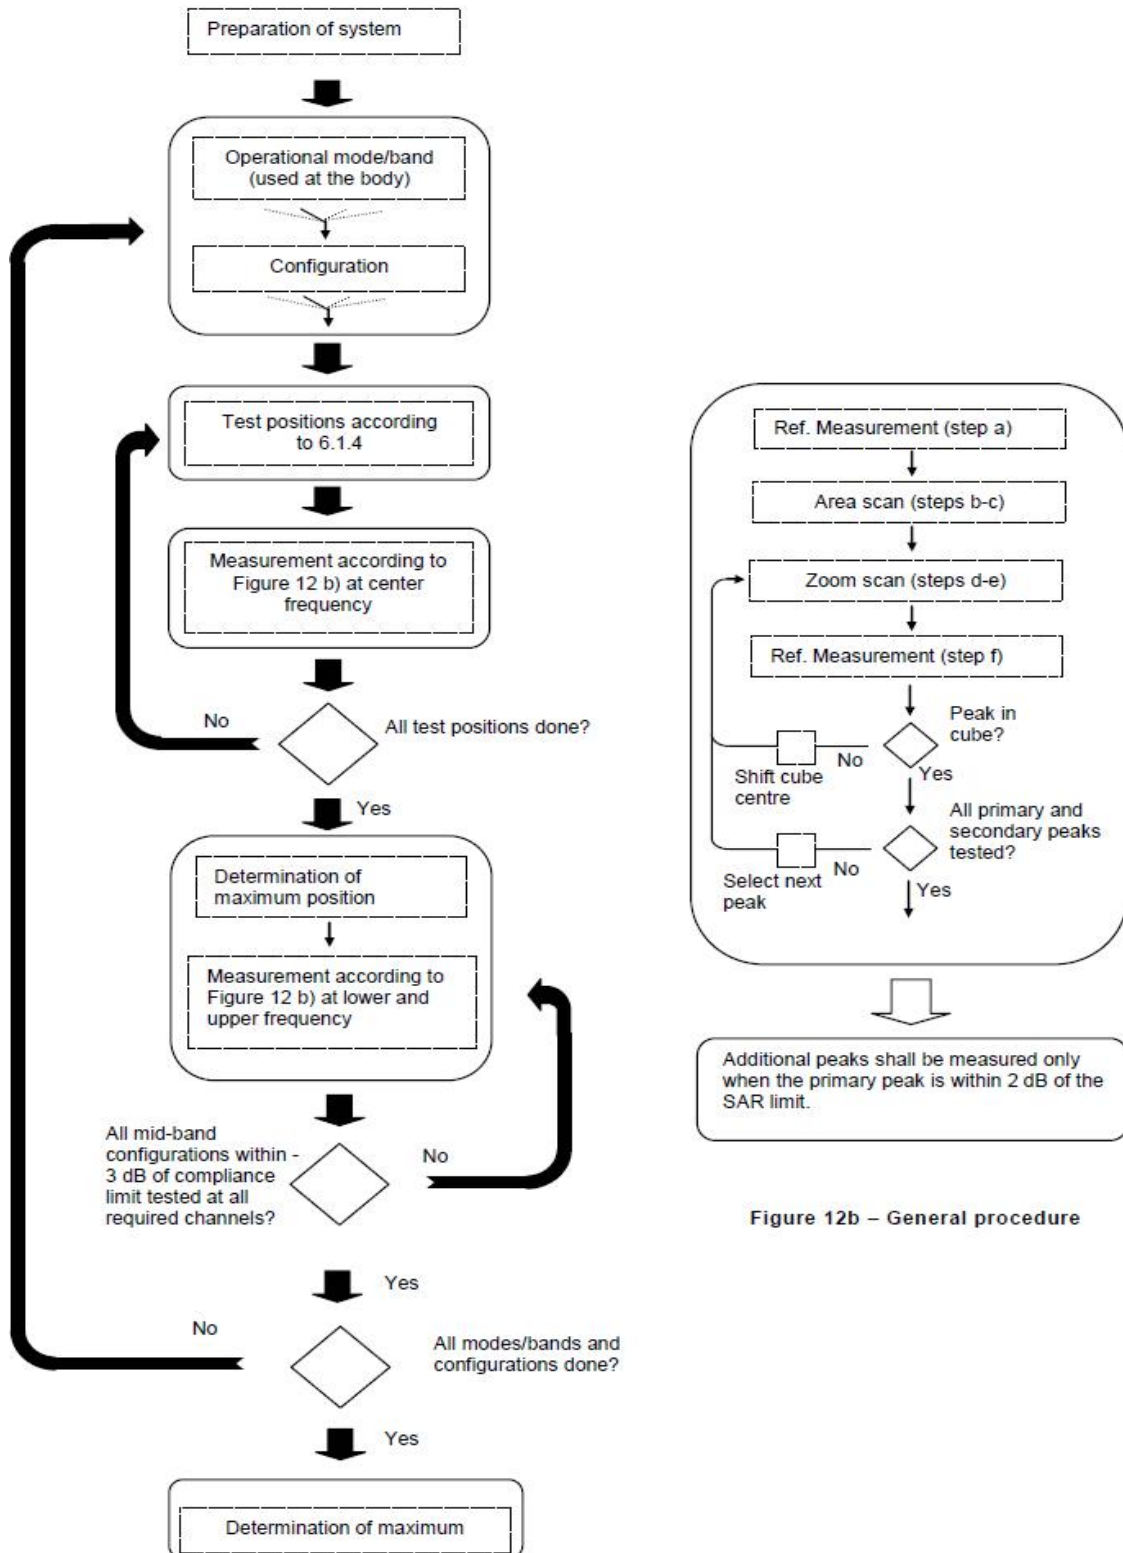


Figure 12b – General procedure

17. Test Results List

17.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02,a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies



established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.



17.2. Head SAR Data

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1#	GSM850	GPRS(4 TX slots)	Right Cheek	128	27.4	27.5	1.023	0.304	0.311
	GSM850	GPRS(4 TX slots)	Right Tilt	128	27.4	27.5	1.023	0.159	0.163
	GSM850	GPRS(4 TX slots)	Left Cheek	128	27.4	27.5	1.023	0.277	0.283
	GSM850	GPRS(4 TX slots)	Left Tilt	128	27.4	27.5	1.023	0.146	0.149
	GSM1900	GPRS(4 TX slots)	Right Cheek	512	23.46	23.50	1.009	0.209	0.211
	GSM1900	GPRS(4 TX slots)	Right Tilt	512	23.46	23.50	1.009	0.152	0.153
2#	GSM1900	GPRS(4 TX slots)	Left Cheek	512	23.46	23.50	1.009	0.330	0.333
	GSM1900	GPRS(4 TX slots)	Left Tilt	512	23.46	23.50	1.009	0.154	0.155

<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9262	21.46	21.5	1.009	0.232	0.234
	WCDMA Band II	RMC 12.2Kbps	Right Tilt	9262	21.46	21.5	1.009	0.214	0.216
3#	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	21.46	21.5	1.009	0.412	0.416
	WCDMA Band II	RMC 12.2Kbps	Left Tilt	9262	21.46	21.5	1.009	0.187	0.189
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1513	21.76	22	1.057	0.334	0.353
	WCDMA Band IV	RMC 12.2Kbps	Right Tilt	1513	21.76	22	1.057	0.263	0.278
4#	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	21.76	22	1.057	0.529	0.559
	WCDMA Band IV	RMC 12.2Kbps	Left Tilt	1513	21.76	22	1.057	0.254	0.268
5#	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	22.3	22.5	1.047	0.253	0.265
	WCDMA Band V	RMC 12.2Kbps	Right Tilt	4233	22.3	22.5	1.047	0.130	0.136
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4233	22.3	22.5	1.047	0.212	0.222
	WCDMA Band V	RMC 12.2Kbps	Left Tilt	4233	22.3	22.5	1.047	0.110	0.115



<CDMA 2000>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
6#	CDMA2000 BC0	RC3 SO55	Right Cheek	1013	24.04	24.5	1.112	0.335	0.372
	CDMA2000 BC0	RC3 SO55	Right Tilt	1013	24.04	24.5	1.112	0.234	0.260
	CDMA2000 BC0	RC3 SO55	Left Cheek	1013	24.04	24.5	1.112	0.325	0.361
	CDMA2000 BC0	RC3 SO55	Left Tilt	1013	24.04	24.5	1.112	0.260	0.289
	CDMA2000 BC1	RC1 SO55	Right Cheek	1175	23.48	23.5	1.005	0.237	0.238
	CDMA2000 BC1	RC1 SO55	Right Tilt	1175	23.48	23.5	1.005	0.145	0.146
7#	CDMA2000 BC1	RC1 SO55	Left Cheek	1175	23.48	23.5	1.005	0.456	0.458
	CDMA2000 BC1	RC1 SO55	Left Tilt	1175	23.48	23.5	1.005	0.189	0.190
8#	CDMA2000 BC10	RC1 SO55	Right Cheek	580	24.8	25	1.047	0.266	0.279
	CDMA2000 BC10	RC1 SO55	Right Tilt	580	24.8	25	1.047	0.161	0.169
	CDMA2000 BC10	RC1 SO55	Left Cheek	580	24.8	25	1.047	0.266	0.279
	CDMA2000 BC10	RC1 SO55	Left Tilt	580	24.8	25	1.047	0.137	0.143

<EVDO-0>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
9#	EVDO-0 BC0	RTAP	Right Cheek	777	23.64	24	1.086	0.233	0.253
	EVDO-0 BC0	RTAP	Right Tilt	777	23.64	24	1.086	0.160	0.174
	EVDO-0 BC0	RTAP	Left Cheek	777	23.64	24	1.086	0.098	0.107
	EVDO-0 BC0	RTAP	Left Tilt	777	23.64	24	1.086	0.047	0.051
	EVDO-0 BC1	RTAP	Right Cheek	1175	23.47	23.5	1.007	0.310	0.312
	EVDO-0 BC1	RTAP	Right Tilt	1175	23.47	23.5	1.007	0.192	0.193
10#	EVDO-0 BC1	RTAP	Left Cheek	1175	23.47	23.5	1.007	0.462	0.465
	EVDO-0 BC1	RTAP	Left Tilt	1175	23.47	23.5	1.007	0.132	0.133
11#	EVDO-0 BC10	RTAP	Right Cheek	580	23.71	24	1.069	0.257	0.275
	EVDO-0 BC10	RTAP	Right Tilt	580	23.71	24	1.069	0.086	0.092



	EVDO-0 BC10	RTAP	Left Cheek	580	23.71	24	1.069	0.130	0.139
	EVDO-0 BC10	RTAP	Left Tilt	580	23.71	24	1.069	0.063	0.067

<FDD-LTE>

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20MHz	QPSK1RB#49	Right Cheek	18700	22.87	23	1.030	0.366	0.377
	LTE Band 2	20MHz	QPSK1RB#49	Right Tilt	18700	22.87	23	1.030	0.354	0.365
12#	LTE Band 2	20MHz	QPSK1RB#49	Left Cheek	18700	22.87	23	1.030	0.630	0.649
	LTE Band 2	20MHz	QPSK1RB#49	Left Tilt	18700	22.87	23	1.030	0.283	0.292
	LTE Band 2	20MHz	QPSK50RB#0	Right Cheek	18700	21.83	22	1.040	0.275	0.286
	LTE Band 2	20MHz	QPSK50RB#0	Right Tilt	18700	21.83	22	1.040	0.244	0.254
13#	LTE Band 2	20MHz	QPSK50RB#0	Left Cheek	18700	21.83	22	1.040	0.451	0.469
	LTE Band 2	20MHz	QPSK50RB#0	Left Tilt	18700	21.83	22	1.040	0.194	0.202
	LTE Band 4	20MHz	QPSK1RB#49	Right Cheek	20175	22.98	23.00	1.005	0.449	0.451
	LTE Band 4	20MHz	QPSK1RB#49	Right Tilt	20175	22.98	23.00	1.005	0.273	0.274
14#	LTE Band 4	20MHz	QPSK1RB#49	Left Cheek	20175	22.98	23.00	1.005	0.688	0.691
	LTE Band 4	20MHz	QPSK1RB#49	Left Tilt	20175	22.98	23.00	1.005	0.315	0.316
	LTE Band 4	20MHz	QPSK50RB#0	Right Cheek	20300	21.99	22.00	1.002	0.364	0.365
	LTE Band 4	20MHz	QPSK50RB#0	Right Tilt	20300	21.99	22.00	1.002	0.246	0.247
15#	LTE Band 4	20MHz	QPSK50RB#0	Left Cheek	20300	21.99	22.00	1.002	0.543	0.544
	LTE Band 4	20MHz	QPSK50RB#0	Left Tilt	20300	21.99	22.00	1.002	0.244	0.245
16#	LTE Band 5	10MHz	QPSK1RB#25	Right Cheek	20525	23.2	23.5	1.072	0.542	0.581
	LTE Band 5	10MHz	QPSK1RB#25	Right Tilt	20525	23.2	23.5	1.072	0.312	0.334
	LTE Band 5	10MHz	QPSK1RB#25	Left Cheek	20525	23.2	23.5	1.072	0.454	0.486
	LTE Band 5	10MHz	QPSK1RB#25	Left Tilt	20525	23.2	23.5	1.072	0.264	0.283
17#	LTE Band 5	10MHz	QPSK25RB#0	Right Cheek	20600	22.08	22.5	1.102	0.430	0.474
	LTE Band 5	10MHz	QPSK25RB#0	Right Tilt	20600	22.08	22.5	1.102	0.254	0.280
	LTE Band 5	10MHz	QPSK25RB#0	Left Cheek	20600	22.08	22.5	1.102	0.353	0.389



	LTE Band 5	10MHz	QPSK25RB#0	Left Tilt	20600	22.08	22.5	1.102	0.208	0.229
	LTE Band 12	10MHz	QPSK1RB#25	Right Cheek	23060	22.46	22.50	1.009	0.283	0.286
	LTE Band 12	10MHz	QPSK1RB#25	Right Tilt	23060	22.46	22.50	1.009	0.185	0.187
18#	LTE Band 12	10MHz	QPSK1RB#25	Left Cheek	23060	22.46	22.50	1.009	0.286	0.289
	LTE Band 12	10MHz	QPSK1RB#25	Left Tilt	23060	22.46	22.50	1.009	0.164	0.166
	LTE Band 12	10MHz	QPSK25RB#0	Right Cheek	23130	21.36	21.50	1.033	0.212	0.219
	LTE Band 12	10MHz	QPSK25RB#0	Right Tilt	23130	21.36	21.50	1.033	0.132	0.136
19#	LTE Band 12	10MHz	QPSK25RB#0	Left Cheek	23130	21.36	21.50	1.033	0.212	0.219
	LTE Band 12	10MHz	QPSK25RB#0	Left Tilt	23130	21.36	21.50	1.033	0.119	0.123
20#	LTE Band 13	10MHz	QPSK1RB#25	Right Cheek	23230	23.17	23.50	1.079	0.317	0.342
	LTE Band 13	10MHz	QPSK1RB#25	Right Tilt	23230	23.17	23.50	1.079	0.207	0.223
	LTE Band 13	10MHz	QPSK1RB#25	Left Cheek	23230	23.17	23.50	1.079	0.194	0.209
	LTE Band 13	10MHz	QPSK1RB#25	Left Tilt	23230	23.17	23.50	1.079	0.120	0.129
21#	LTE Band 13	10MHz	QPSK25RB#0	Right Cheek	23230	22.10	22.50	1.096	0.256	0.281
	LTE Band 13	10MHz	QPSK25RB#0	Right Tilt	23230	22.10	22.50	1.096	0.167	0.183
	LTE Band 13	10MHz	QPSK25RB#0	Left Cheek	23230	22.10	22.50	1.096	0.159	0.174
	LTE Band 13	10MHz	QPSK25RB#0	Left Tilt	23230	22.10	22.50	1.096	0.090	0.099
	LTE Band 25	20MHz	QPSK1RB#49	Right Cheek	26140	23.18	23.50	1.076	0.412	0.444
	LTE Band 25	20MHz	QPSK1RB#49	Right Tilt	26140	23.18	23.50	1.076	0.362	0.390
22#	LTE Band 25	20MHz	QPSK1RB#49	Left Cheek	26140	23.18	23.50	1.076	0.649	0.699
	LTE Band 25	20MHz	QPSK1RB#49	Left Tilt	26140	23.18	23.50	1.076	0.302	0.325
	LTE Band 25	20MHz	QPSK50RB#0	Right Cheek	26140	22.07	22.50	1.104	0.289	0.319
	LTE Band 25	20MHz	QPSK50RB#0	Right Tilt	26140	22.07	22.50	1.104	0.260	0.287
23	LTE Band 25	20MHz	QPSK50RB#0	Left Cheek	26140	22.07	22.50	1.104	0.453	0.500
	LTE Band 25	20MHz	QPSK50RB#0	Left Tilt	26140	22.07	22.50	1.104	0.182	0.201
24#	LTE Band 26	15MHz	QPSK1RB#37	Right Cheek	26965	22.73	23.00	1.064	0.414	0.441
	LTE Band 26	15MHz	QPSK1RB#37	Right Tilt	26965	22.73	23.00	1.064	0.277	0.295
	LTE Band 26	15MHz	QPSK1RB#37	Left Cheek	26965	22.73	23.00	1.064	0.278	0.296



REPORT No. : XM19080032W08

	LTE Band 26	15MHz	QPSK1RB#37	Left Tilt	26965	22.73	23.00	1.064	0.151	0.161
25#	LTE Band 26	15MHz	QPSK36RB#0	Right Cheek	26965	21.84	22.00	1.038	0.339	0.352
	LTE Band 26	15MHz	QPSK36RB#0	Right Tilt	26965	21.84	22.00	1.038	0.218	0.226
	LTE Band 26	15MHz	QPSK36RB#0	Left Cheek	26965	21.84	22.00	1.038	0.294	0.305
	LTE Band 26	15MHz	QPSK36RB#0	Left Tilt	26965	21.84	22.00	1.038	0.165	0.171
	LTE Band 66	20MHz	QPSK1RB#49	Right Cheek	132322	22.34	22.5	1.038	0.441	0.458
	LTE Band 66	20MHz	QPSK1RB#49	Right Tilt	132322	22.34	22.5	1.038	0.256	0.266
26#	LTE Band 66	20MHz	QPSK1RB#49	Left Cheek	132322	22.34	22.5	1.038	0.630	0.654
	LTE Band 66	20MHz	QPSK1RB#49	Left Tilt	132322	22.34	22.5	1.038	0.314	0.326
	LTE Band 66	20MHz	QPSK50RB#0	Right Cheek	132572	21.25	21.5	1.059	0.384	0.407
	LTE Band 66	20MHz	QPSK50RB#0	Right Tilt	132572	21.25	21.5	1.059	0.234	0.248
27#	LTE Band 66	20MHz	QPSK50RB#0	Left Cheek	132572	21.25	21.5	1.059	0.519	0.550
	LTE Band 66	20MHz	QPSK50RB#0	Left Tilt	132572	21.25	21.5	1.059	0.253	0.268
28#	LTE Band 71	20MHz	QPSK1RB#49	Right Cheek	133322	23.22	23.5	1.067	0.245	0.261
	LTE Band 71	20MHz	QPSK1RB#49	Right Tilt	133322	23.22	23.5	1.067	0.135	0.144
	LTE Band 71	20MHz	QPSK1RB#49	Left Cheek	133322	23.22	23.5	1.067	0.239	0.255
	LTE Band 71	20MHz	QPSK1RB#49	Left Tilt	133322	23.22	23.5	1.067	0.197	0.210
29#	LTE Band 71	20MHz	QPSK50RB#0	Right Cheek	133322	22.92	23	1.019	0.199	0.203
	LTE Band 71	20MHz	QPSK50RB#0	Right Tilt	133322	22.92	23	1.019	0.120	0.122
	LTE Band 71	20MHz	QPSK50RB#0	Left Cheek	133322	22.92	23	1.019	0.194	0.198
	LTE Band 71	20MHz	QPSK50RB#0	Left Tilt	133322	22.92	23	1.019	0.117	0.119

<TDD-LTE>

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20MHz	QPSK1RB#49	Right Cheek	40620	25.37	25.5	1.030	62.89	1.006	0.365	0.378
	LTE Band 41	20MHz	QPSK1RB#49	Right Tilt	40620	25.37	25.5	1.030	62.89	1.006	0.292	0.303
30#	LTE Band 41	20MHz	QPSK1RB#49	Left Cheek	40620	25.37	25.5	1.030	62.89	1.006	0.598	0.620
	LTE Band 41	20MHz	QPSK1RB#49	Left Tilt	40620	25.37	25.5	1.030	62.89	1.006	0.176	0.182



	LTE Band 41	20MHz	QPSK50RB#0	Right Cheek	40620	25.26	25.5	1.057	62.89	1.006	0.341	0.363
	LTE Band 41	20MHz	QPSK50RB#0	Right Tilt	40620	25.26	25.5	1.057	62.89	1.006	0.269	0.286
31#	LTE Band 41	20MHz	QPSK50RB#0	Left Cheek	40620	25.26	25.5	1.057	62.89	1.006	0.553	0.588
	LTE Band 41	20MHz	QPSK50RB#0	Left Tilt	40620	25.26	25.5	1.057	62.89	1.006	0.161	0.171

<2.4G WLAN>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
32#	WLAN2.4GHz	802.11n20	Right Cheek	6	17.88	18.00	1.028	0.748	0.769
	WLAN2.4GHz	802.11n20	Right Tilt	6	17.88	18.00	1.028	0.481	0.494
	WLAN2.4GHz	802.11n20	Left Cheek	6	17.88	18.00	1.028	0.378	0.389
	WLAN2.4GHz	802.11n20	Left Tilt	6	17.88	18.00	1.028	0.255	0.262

<5G WLAN>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
Band 1									
33#	WLAN5GHz	802.11n40	Right Cheek	38	12.39	12.5	1.026	0.286	0.293
	WLAN5GHz	802.11n40	Right Tilt	38	12.39	12.5	1.026	0.263	0.270
	WLAN5GHz	802.11n40	Left Cheek	38	12.39	12.5	1.026	0.138	0.142
	WLAN5GHz	802.11n40	Left Tilt	38	12.39	12.5	1.026	0.129	0.132
Band 2									
34#	WLAN5GHz	802.11a	Right Cheek	60	12.6	13	1.096	0.228	0.250
	WLAN5GHz	802.11a	Right Tilt	60	12.6	13	1.096	0.172	0.189
	WLAN5GHz	802.11a	Left Cheek	60	12.6	13	1.096	0.104	0.114
	WLAN5GHz	802.11a	Left Tilt	60	12.6	13	1.096	0.100	0.109
Band 4									
35#	WLAN5GHz	802.11n40	Right Cheek	159	12.38	12.5	1.028	0.176	0.181
	WLAN5GHz	802.11n40	Right Tilt	159	12.38	12.5	1.028	0.129	0.133
	WLAN5GHz	802.11n40	Left Cheek	159	12.38	12.5	1.028	0.117	0.120
	WLAN5GHz	802.11n40	Left Tilt	159	12.38	12.5	1.028	0.083	0.085

Note: The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor.



17.3. Standalone Hotspot SAR Data

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 TX slots)	Front Side	128	27.4	27.5	1.023	0.390	0.399
36#	GSM850	GPRS(4 TX slots)	Back Side	128	27.4	27.5	1.023	0.513	0.525
	GSM850	GPRS(4 TX slots)	Right Side	128	27.4	27.5	1.023	0.300	0.307
	GSM850	GPRS(4 TX slots)	Left Side	128	27.4	27.5	1.023	0.423	0.433
	GSM850	GPRS(4 TX slots)	Bottom Side	128	27.4	27.5	1.023	0.125	0.128
	GSM1900	GPRS(4 TX slots)	Front Side	512	23.46	23.50	1.009	0.454	0.458
37#	GSM1900	GPRS(4 TX slots)	Back Side	512	23.46	23.50	1.009	0.485	0.489
	GSM1900	GPRS(4 TX slots)	Right Side	512	23.46	23.50	1.009	0.076	0.077
	GSM1900	GPRS(4 TX slots)	Left Side	512	23.46	23.50	1.009	0.177	0.179
	GSM1900	GPRS(4 TX slots)	Bottom Side	512	23.46	23.50	1.009	0.336	0.339

<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38#	WCDMA Band II	RMC 12.2Kbps	Front Side	9262	21.46	21.5	1.009	0.743	0.750
	WCDMA Band II	RMC 12.2Kbps	Back Side	9262	21.46	21.5	1.009	0.609	0.615
	WCDMA Band II	RMC 12.2Kbps	Right Side	9262	21.46	21.5	1.009	0.189	0.191
	WCDMA Band II	RMC 12.2Kbps	Left Side	9262	21.46	21.5	1.009	0.367	0.370
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	9262	21.46	21.5	1.009	0.436	0.440
39#	WCDMA Band IV	RMC 12.2Kbps	Front Side	1513	21.76	22	1.057	0.754	0.797
	WCDMA Band IV	RMC 12.2Kbps	Back Side	1513	21.76	22	1.057	0.583	0.616
	WCDMA Band IV	RMC 12.2Kbps	Right Side	1513	21.76	22	1.057	0.234	0.247
	WCDMA Band IV	RMC 12.2Kbps	Left Side	1513	21.76	22	1.057	0.471	0.498
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	1513	21.76	22	1.057	0.396	0.418
	WCDMA Band V	RMC 12.2Kbps	Front Side	4233	22.3	22.5	1.047	0.250	0.262
40#	WCDMA Band V	RMC 12.2Kbps	Back Side	4233	22.3	22.5	1.047	0.377	0.395



	WCDMA Band V	RMC 12.2Kbps	Right Side	4233	22.3	22.5	1.047	0.297	0.311
	WCDMA Band V	RMC 12.2Kbps	Left Side	4233	22.3	22.5	1.047	0.314	0.329
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	4233	22.3	22.5	1.047	0.107	0.112

<CDMA 2000>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0	RC3 SO55	Front Side	1013	24.04	24.5	1.112	0.288	0.320
41#	CDMA2000 BC0	RC3 SO55	Back Side	1013	24.04	24.5	1.112	0.397	0.441
	CDMA2000 BC0	RC3 SO55	Right Side	1013	24.04	24.5	1.112	0.265	0.295
	CDMA2000 BC0	RC3 SO55	Left Side	1013	24.04	24.5	1.112	0.280	0.311
	CDMA2000 BC0	RC3 SO55	Bottom Side	1013	24.04	24.5	1.112	0.103	0.115
42#	CDMA2000 BC1	RC1 SO55	Front Side	1175	23.48	23.5	1.005	0.794	0.798
	CDMA2000 BC1	RC1 SO55	Back Side	1175	23.48	23.5	1.005	0.476	0.478
	CDMA2000 BC1	RC1 SO55	Right Side	1175	23.48	23.5	1.005	0.192	0.193
	CDMA2000 BC1	RC1 SO55	Left Side	1175	23.48	23.5	1.005	0.373	0.375
	CDMA2000 BC1	RC1 SO55	Bottom Side	1175	23.48	23.5	1.005	0.542	0.545
	CDMA2000 BC10	RC1 SO55	Front Side	580	24.8	25	1.047	0.303	0.317
43#	CDMA2000 BC10	RC1 SO55	Back Side	580	24.8	25	1.047	0.421	0.441
	CDMA2000 BC10	RC1 SO55	Right Side	580	24.8	25	1.047	0.264	0.276
	CDMA2000 BC10	RC1 SO55	Left Side	580	24.8	25	1.047	0.279	0.292
	CDMA2000 BC10	RC1 SO55	Bottom Side	580	24.8	25	1.047	0.095	0.099

<EVDO>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	EVDO-0 BC0	RTAP 153.6Kbps	Front Side	777	23.64	24	1.086	0.236	0.256
44#	EVDO-0 BC0	RTAP 153.6Kbps	Back Side	777	23.64	24	1.086	0.265	0.288
	EVDO-0 BC0	RTAP 153.6Kbps	Right Side	777	23.64	24	1.086	0.212	0.230
	EVDO-0 BC0	RTAP 153.6Kbps	Left Side	777	23.64	24	1.086	0.235	0.255
	EVDO-0 BC0	RTAP 153.6Kbps	Bottom Side	777	23.64	24	1.086	0.101	0.110
45#	EVDO-0 BC1	RTAP 153.6Kbps	Front Side	1175	23.47	23.5	1.007	0.790	0.795



	EVDO-0 BC1	RTAP 153.6Kbps	Back Side	1175	23.47	23.5	1.007	0.718	0.723
	EVDO-0 BC1	RTAP 153.6Kbps	Right Side	1175	23.47	23.5	1.007	0.209	0.210
	EVDO-0 BC1	RTAP 153.6Kbps	Left Side	1175	23.47	23.5	1.007	0.406	0.409
	EVDO-0 BC1	RTAP 153.6Kbps	Bottom Side	1175	23.47	23.5	1.007	0.521	0.525
	EVDO-0 BC10	RTAP 153.6Kbps	Front Side	580	23.71	24	1.069	0.274	0.293
46#	EVDO-0 BC10	RTAP 153.6Kbps	Back Side	580	23.71	24	1.069	0.356	0.381
	EVDO-0 BC10	RTAP 153.6Kbps	Right Side	580	23.71	24	1.069	0.292	0.312
	EVDO-0 BC10	RTAP 153.6Kbps	Left Side	580	23.71	24	1.069	0.308	0.329
	EVDO-0 BC10	RTAP 153.6Kbps	Bottom Side	580	23.71	24	1.069	0.094	0.100

<FDD-LTE >

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20MHz	QPSK1RB#49	Front Side	18700	22.87	23	1.030	0.724	0.746
	LTE Band 2	20MHz	QPSK1RB#49	Back Side	18700	22.87	23	1.030	0.674	0.694
	LTE Band 2	20MHz	QPSK1RB#49	Right Side	18700	22.87	23	1.030	0.190	0.196
	LTE Band 2	20MHz	QPSK1RB#49	Left Side	18700	22.87	23	1.030	0.369	0.380
47#	LTE Band 2	20MHz	QPSK1RB#49	Bottom Side	18700	22.87	23	1.030	0.757	0.780
48#	LTE Band 2	20MHz	QPSK50RB#0	Front Side	18700	21.83	22	1.040	0.555	0.577
	LTE Band 2	20MHz	QPSK50RB#0	Back Side	18700	21.83	22	1.040	0.514	0.535
	LTE Band 2	20MHz	QPSK50RB#0	Right Side	18700	21.83	22	1.040	0.143	0.149
	LTE Band 2	20MHz	QPSK50RB#0	Left Side	18700	21.83	22	1.040	0.279	0.290
	LTE Band 2	20MHz	QPSK50RB#0	Bottom Side	18700	21.83	22	1.040	0.536	0.557
49#	LTE Band 4	20MHz	QPSK1RB#0	Front Side	20175	22.98	23.00	1.005	0.743	0.746
	LTE Band 4	20MHz	QPSK1RB#0	Back Side	20175	22.98	23.00	1.005	0.573	0.576
	LTE Band 4	20MHz	QPSK1RB#0	Right Side	20175	22.98	23.00	1.005	0.231	0.232
	LTE Band 4	20MHz	QPSK1RB#0	Left Side	20175	22.98	23.00	1.005	0.464	0.466
	LTE Band 4	20MHz	QPSK1RB#0	Bottom Side	20175	22.98	23.00	1.005	0.627	0.630
50#	LTE Band 4	20MHz	QPSK50RB#0	Front Side	20300	21.99	22.00	1.002	0.587	0.588
	LTE Band 4	20MHz	QPSK50RB#0	Back Side	20300	21.99	22.00	1.002	0.456	0.457
	LTE Band 4	20MHz	QPSK50RB#0	Right Side	20300	21.99	22.00	1.002	0.177	0.177



	LTE Band 4	20MHz	QPSK50RB#0	Left Side	20300	21.99	22.00	1.002	0.354	0.355
	LTE Band 4	20MHz	QPSK50RB#0	Bottom Side	20300	21.99	22.00	1.002	0.496	0.497
	LTE Band 5	10MHz	QPSK1RB#25	Front Side	20525	23.2	23.5	1.072	0.422	0.452
51#	LTE Band 5	10MHz	QPSK1RB#25	Back Side	20525	23.2	23.5	1.072	0.535	0.573
	LTE Band 5	10MHz	QPSK1RB#25	Right Side	20525	23.2	23.5	1.072	0.295	0.316
	LTE Band 5	10MHz	QPSK1RB#25	Left Side	20525	23.2	23.5	1.072	0.311	0.333
	LTE Band 5	10MHz	QPSK1RB#25	Bottom Side	20525	23.2	23.5	1.072	0.149	0.160
	LTE Band 5	10MHz	QPSK25RB#25	Front Side	20600	22.08	22.5	1.102	0.351	0.387
52#	LTE Band 5	10MHz	QPSK25RB#25	Back Side	20600	22.08	22.5	1.102	0.394	0.434
	LTE Band 5	10MHz	QPSK25RB#25	Right Side	20600	22.08	22.5	1.102	0.235	0.259
	LTE Band 5	10MHz	QPSK25RB#25	Left Side	20600	22.08	22.5	1.102	0.234	0.258
	LTE Band 5	10MHz	QPSK25RB#25	Bottom Side	20600	22.08	22.5	1.102	0.131	0.144
	LTE Band 12	10MHz	QPSK1RB#25	Front Side	23060	22.46	22.50	1.009	0.321	0.324
53#	LTE Band 12	10MHz	QPSK1RB#25	Back Side	23060	22.46	22.50	1.009	0.361	0.364
	LTE Band 12	10MHz	QPSK1RB#25	Right Side	23060	22.46	22.50	1.009	0.023	0.024
	LTE Band 12	10MHz	QPSK1RB#25	Left Side	23060	22.46	22.50	1.009	0.044	0.044
	LTE Band 12	10MHz	QPSK1RB#25	Bottom Side	23060	22.46	22.50	1.009	0.098	0.099
	LTE Band 12	10MHz	QPSK25RB#0	Front Side	23130	21.36	21.50	1.033	0.209	0.216
54#	LTE Band 12	10MHz	QPSK25RB#0	Back Side	23130	21.36	21.50	1.033	0.283	0.292
	LTE Band 12	10MHz	QPSK25RB#0	Right Side	23130	21.36	21.50	1.033	0.023	0.024
	LTE Band 12	10MHz	QPSK25RB#0	Left Side	23130	21.36	21.50	1.033	0.056	0.058
	LTE Band 12	10MHz	QPSK25RB#0	Bottom Side	23130	21.36	21.50	1.033	0.075	0.078
	LTE Band 13	10MHz	QPSK1RB#25	Front Side	23230	23.17	23.50	1.079	0.272	0.293
55#	LTE Band 13	10MHz	QPSK1RB#25	Back Side	23230	23.17	23.50	1.079	0.422	0.455
	LTE Band 13	10MHz	QPSK1RB#25	Right Side	23230	23.17	23.50	1.079	0.025	0.026
	LTE Band 13	10MHz	QPSK1RB#25	Left Side	23230	23.17	23.50	1.079	0.046	0.049
	LTE Band 13	10MHz	QPSK1RB#25	Bottom Side	23230	23.17	23.50	1.079	0.107	0.115
	LTE Band 13	10MHz	QPSK25RB#0	Front Side	23230	22.10	22.50	1.096	0.226	0.248
56#	LTE Band 13	10MHz	QPSK25RB#0	Back Side	23230	22.10	22.50	1.096	0.338	0.371



REPORT No. : XM19080032W08

	LTE Band 13	10MHz	QPSK25RB#0	Right Side	23230	22.10	22.50	1.096	0.025	0.027
	LTE Band 13	10MHz	QPSK25RB#0	Left Side	23230	22.10	22.50	1.096	0.058	0.064
	LTE Band 13	10MHz	QPSK25RB#0	Bottom Side	23230	22.10	22.50	1.096	0.081	0.088
	LTE Band 25	20MHz	QPSK1RB#49	Front Side	26140	23.18	23.50	1.076	0.640	0.689
	LTE Band 25	20MHz	QPSK1RB#49	Back Side	26140	23.18	23.50	1.076	0.613	0.660
	LTE Band 25	20MHz	QPSK1RB#49	Right Side	26140	23.18	23.50	1.076	0.189	0.203
	LTE Band 25	20MHz	QPSK1RB#49	Left Side	26140	23.18	23.50	1.076	0.367	0.395
57#	LTE Band 25	20MHz	QPSK1RB#49	Bottom Side	26140	23.18	23.50	1.076	0.731	0.787
	LTE Band 25	20MHz	QPSK50RB#0	Front Side	26140	22.07	22.50	1.104	0.490	0.541
	LTE Band 25	20MHz	QPSK50RB#0	Back Side	26140	22.07	22.50	1.104	0.464	0.512
	LTE Band 25	20MHz	QPSK50RB#0	Right Side	26140	22.07	22.50	1.104	0.151	0.167
	LTE Band 25	20MHz	QPSK50RB#0	Left Side	26140	22.07	22.50	1.104	0.294	0.325
58#	LTE Band 25	20MHz	QPSK50RB#0	Bottom Side	26140	22.07	22.50	1.104	0.517	0.571
	LTE Band 26	15MHz	QPSK1RB#37	Front Side	26965	22.73	23.00	1.064	0.445	0.474
59#	LTE Band 26	15MHz	QPSK1RB#37	Back Side	26965	22.73	23.00	1.064	0.578	0.615
	LTE Band 26	15MHz	QPSK1RB#37	Right Side	26965	22.73	23.00	1.064	0.296	0.315
	LTE Band 26	15MHz	QPSK1RB#37	Left Side	26965	22.73	23.00	1.064	0.313	0.333
	LTE Band 26	15MHz	QPSK1RB#37	Bottom Side	26965	22.73	23.00	1.064	0.147	0.156
	LTE Band 26	15MHz	QPSK36RB#0	Front Side	26965	21.84	22.00	1.038	0.337	0.350
60#	LTE Band 26	15MHz	QPSK36RB#0	Back Side	26965	21.84	22.00	1.038	0.474	0.492
	LTE Band 26	15MHz	QPSK36RB#0	Right Side	26965	21.84	22.00	1.038	0.216	0.224
	LTE Band 26	15MHz	QPSK36RB#0	Left Side	26965	21.84	22.00	1.038	0.233	0.242
	LTE Band 26	15MHz	QPSK36RB#0	Bottom Side	26965	21.84	22.00	1.038	0.127	0.132
61#	LTE Band 66	20MHz	QPSK1RB#49	Front Side	132322	22.34	22.5	1.038	0.662	0.687
	LTE Band 66	20MHz	QPSK1RB#49	Back Side	132322	22.34	22.5	1.038	0.585	0.607
	LTE Band 66	20MHz	QPSK1RB#49	Right Side	132322	22.34	22.5	1.038	0.234	0.243
	LTE Band 66	20MHz	QPSK1RB#49	Left Side	132322	22.34	22.5	1.038	0.470	0.488
	LTE Band 66	20MHz	QPSK1RB#49	Bottom Side	132322	22.34	22.5	1.038	0.644	0.668
62#	LTE Band 66	20MHz	QPSK50RB#0	Front Side	132572	21.25	21.5	1.059	0.585	0.620



REPORT No. : XM19080032W08

	LTE Band 66	20MHz	QPSK50RB#0	Back Side	132572	21.25	21.5	1.059	0.469	0.497
	LTE Band 66	20MHz	QPSK50RB#0	Right Side	132572	21.25	21.5	1.059	0.179	0.190
	LTE Band 66	20MHz	QPSK50RB#0	Left Side	132572	21.25	21.5	1.059	0.364	0.386
	LTE Band 66	20MHz	QPSK50RB#0	Bottom Side	132572	21.25	21.5	1.059	0.499	0.529
	LTE Band 71	20MHz	QPSK1RB#49	Front Side	133322	23.22	23.5	1.067	0.294	0.314
63#	LTE Band 71	20MHz	QPSK1RB#49	Back Side	133322	23.22	23.5	1.067	0.431	0.460
	LTE Band 71	20MHz	QPSK1RB#49	Right Side	133322	23.22	23.5	1.067	0.016	0.017
	LTE Band 71	20MHz	QPSK1RB#49	Left Side	133322	23.22	23.5	1.067	0.061	0.065
	LTE Band 71	20MHz	QPSK1RB#49	Bottom Side	133322	23.22	23.5	1.067	0.074	0.079
	LTE Band 71	20MHz	QPSK50RB#0	Front Side	133322	22.92	23	1.019	0.249	0.254
64#	LTE Band 71	20MHz	QPSK50RB#0	Back Side	133322	22.92	23	1.019	0.345	0.351
	LTE Band 71	20MHz	QPSK50RB#0	Right Side	133322	22.92	23	1.019	0.016	0.016
	LTE Band 71	20MHz	QPSK50RB#0	Left Side	133322	22.92	23	1.019	0.059	0.060
	LTE Band 71	20MHz	QPSK50RB#0	Bottom Side	133322	22.92	23	1.019	0.051	0.052

<TDD-LTE>

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20MHz	QPSK1RB#49	Front Side	40620	25.37	25.5	1.030	62.89	1.006	0.493	0.511
	LTE Band 41	20MHz	QPSK1RB#49	Back Side	40620	25.37	25.5	1.030	62.89	1.006	0.317	0.329
	LTE Band 41	20MHz	QPSK1RB#49	Right Side	40620	25.37	25.5	1.030	62.89	1.006	0.390	0.404
	LTE Band 41	20MHz	QPSK1RB#49	Left Side	40620	25.37	25.5	1.030	62.89	1.006	0.015	0.015
65#	LTE Band 41	20MHz	QPSK1RB#49	Bottom Side	40620	25.37	25.5	1.030	62.89	1.006	0.665	0.689
	LTE Band 41	20MHz	QPSK50RB#0	Front Side	40620	25.26	25.5	1.057	62.89	1.006	0.389	0.414
	LTE Band 41	20MHz	QPSK50RB#0	Back Side	40620	25.26	25.5	1.057	62.89	1.006	0.303	0.322
	LTE Band 41	20MHz	QPSK50RB#0	Right Side	40620	25.26	25.5	1.057	62.89	1.006	0.362	0.385
	LTE Band 41	20MHz	QPSK50RB#0	Left Side	40620	25.26	25.5	1.057	62.89	1.006	0.014	0.015
66#	LTE Band 41	20MHz	QPSK50RB#0	Bottom Side	40620	25.26	25.5	1.057	62.89	1.006	0.552	0.587



<2.4G WLAN >

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
67#	WLAN2.4GHz	802.11n20	Front Side	6	17.88	18	1.028	0.247	0.254
	WLAN2.4GHz	802.11n20	Back Side	6	17.88	18	1.028	0.179	0.184
	WLAN2.4GHz	802.11n20	Left Side	6	17.88	18	1.028	0.113	0.116
	WLAN2.4GHz	802.11n20	Top Side	6	17.88	18	1.028	0.029	0.030

<5G WLAN >

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
Band 1									
	WLAN5GHz	802.11n40	Front Side	38	12.39	12.5	1.026	0.102	0.105
	WLAN5GHz	802.11n40	Back Side	38	12.39	12.5	1.026	0.108	0.111
	WLAN5GHz	802.11n40	Left Side	38	12.39	12.5	1.026	0.063	0.064
68#	WLAN5GHz	802.11n40	Top Side	38	12.39	12.5	1.026	0.120	0.123
	WLAN5GHz	802.11n20	Front Side	60	12.6	13	1.096	0.099	0.109
69#	WLAN5GHz	802.11n20	Back Side	60	12.6	13	1.096	0.132	0.145
	WLAN5GHz	802.11n20	Left Side	60	12.6	13	1.096	0.068	0.074
	WLAN5GHz	802.11n20	Top Side	60	12.6	13	1.096	0.128	0.140
	WLAN5GHz	802.11n40	Front Side	159	12.38	12.5	1.028	0.070	0.072
70#	WLAN5GHz	802.11n40	Back Side	159	12.38	12.5	1.028	0.164	0.169
	WLAN5GHz	802.11n40	Left Side	159	12.38	12.5	1.028	0.080	0.083
	WLAN5GHz	802.11n40	Top Side	159	12.38	12.5	1.028	0.102	0.105

Note: The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor.



17.4. Body-worn SAR Data

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 TX slots)	Front Side	128	27.4	27.5	1.023	0.390	0.399
	GSM850	GPRS(4 TX slots)	Back Side	128	27.4	27.5	1.023	0.513	0.525
	GSM1900	GPRS(4 TX slots)	Front Side	512	23.46	23.50	1.009	0.454	0.458
	GSM1900	GPRS(4 TX slots)	Back Side	512	23.46	23.50	1.009	0.485	0.489

<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band II	RMC 12.2Kbps	Front Side	9262	21.46	21.5	1.009	0.743	0.750
	WCDMA Band II	RMC 12.2Kbps	Back Side	9262	21.46	21.5	1.009	0.609	0.615
	WCDMA Band IV	RMC 12.2Kbps	Front Side	1513	21.76	22	1.057	0.754	0.797
	WCDMA Band IV	RMC 12.2Kbps	Back Side	1513	21.76	22	1.057	0.583	0.616
	WCDMA Band V	RMC 12.2Kbps	Front Side	4233	22.3	22.5	1.047	0.250	0.262
	WCDMA Band V	RMC 12.2Kbps	Back Side	4233	22.3	22.5	1.047	0.377	0.395

<CDMA 2000>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0	RC3 SO55	Front Side	1013	24.04	24.5	1.112	0.288	0.320
	CDMA2000 BC0	RC3 SO55	Back Side	1013	24.04	24.5	1.112	0.397	0.441
	CDMA2000 BC1	RC1 SO55	Front Side	1175	23.48	23.5	1.005	0.794	0.798
	CDMA2000 BC1	RC1 SO55	Back Side	1175	23.48	23.5	1.005	0.476	0.478
	CDMA2000 BC10	RC1 SO55	Front Side	580	24.8	25	1.047	0.303	0.317
	CDMA2000 BC10	RC1 SO55	Back Side	580	24.8	25	1.047	0.421	0.441



<EVDO>

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	EVDO-0 BC0	RTAP 153.6Kbps	Front Side	777	23.64	24	1.086	0.236	0.256
	EVDO-0 BC0	RTAP 153.6Kbps	Back Side	777	23.64	24	1.086	0.265	0.288
	EVDO-0 BC1	RTAP 153.6Kbps	Front Side	1175	23.47	23.5	1.007	0.790	0.795
	EVDO-0 BC1	RTAP 153.6Kbps	Back Side	1175	23.47	23.5	1.007	0.718	0.723
	EVDO-0 BC10	RTAP 153.6Kbps	Front Side	580	23.71	24	1.069	0.274	0.293
	EVDO-0 BC10	RTAP 153.6Kbps	Back Side	580	23.71	24	1.069	0.356	0.381

<FDD-LTE >

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20MHz	QPSK1RB#49	Front Side	18700	22.87	23	1.030	0.724	0.746
	LTE Band 2	20MHz	QPSK1RB#49	Back Side	18700	22.87	23	1.030	0.674	0.694
	LTE Band 2	20MHz	QPSK50RB#0	Front Side	18700	21.83	22	1.040	0.555	0.577
	LTE Band 2	20MHz	QPSK50RB#0	Back Side	18700	21.83	22	1.040	0.514	0.535
	LTE Band 4	20MHz	QPSK1RB#0	Front Side	20175	22.98	23.00	1.005	0.743	0.746
	LTE Band 4	20MHz	QPSK1RB#0	Back Side	20175	22.98	23.00	1.005	0.573	0.576
	LTE Band 4	20MHz	QPSK50RB#0	Front Side	20300	21.99	22.00	1.002	0.587	0.588
	LTE Band 4	20MHz	QPSK50RB#0	Back Side	20300	21.99	22.00	1.002	0.456	0.457
	LTE Band 5	10MHz	QPSK1RB#25	Front Side	20525	23.2	23.5	1.072	0.422	0.452
	LTE Band 5	10MHz	QPSK1RB#25	Back Side	20525	23.2	23.5	1.072	0.535	0.573
	LTE Band 5	10MHz	QPSK25RB#25	Front Side	20600	22.08	22.5	1.102	0.351	0.387
	LTE Band 5	10MHz	QPSK25RB#25	Back Side	20600	22.08	22.5	1.102	0.394	0.434
	LTE Band 12	10MHz	QPSK1RB#25	Front Side	23060	22.46	22.50	1.009	0.290	0.293



	LTE Band 12	10MHz	QPSK1RB#25	Back Side	23060	22.46	22.50	1.009	0.323	0.326
	LTE Band 12	10MHz	QPSK25RB#0	Front Side	23130	21.36	21.50	1.033	0.189	0.195
	LTE Band 12	10MHz	QPSK25RB#0	Back Side	23130	21.36	21.50	1.033	0.252	0.260
	LTE Band 13	10MHz	QPSK1RB#25	Front Side	23230	23.17	23.50	1.079	0.205	0.221
	LTE Band 13	10MHz	QPSK1RB#25	Back Side	23230	23.17	23.50	1.079	0.391	0.422
	LTE Band 13	10MHz	QPSK25RB#0	Front Side	23230	22.10	22.50	1.096	0.260	0.285
	LTE Band 13	10MHz	QPSK25RB#0	Back Side	23230	22.10	22.50	1.096	0.313	0.343
	LTE Band 25	20MHz	QPSK1RB#49	Front Side	26140	23.18	23.50	1.076	0.640	0.689
	LTE Band 25	20MHz	QPSK1RB#49	Back Side	26140	23.18	23.50	1.076	0.613	0.660
	LTE Band 25	20MHz	QPSK50RB#0	Front Side	26140	22.07	22.50	1.104	0.490	0.541
	LTE Band 25	20MHz	QPSK50RB#0	Back Side	26140	22.07	22.50	1.104	0.464	0.512
	LTE Band 26	15MHz	QPSK1RB#37	Front Side	26965	22.73	23.00	1.064	0.445	0.474
	LTE Band 26	15MHz	QPSK1RB#37	Back Side	26965	22.73	23.00	1.064	0.578	0.615
	LTE Band 26	15MHz	QPSK36RB#0	Front Side	26965	21.84	22.00	1.038	0.337	0.350
	LTE Band 26	15MHz	QPSK36RB#0	Back Side	26965	21.84	22.00	1.038	0.474	0.492
	LTE Band 66	20MHz	QPSK1RB#49	Front Side	132322	22.34	22.5	1.038	0.662	0.687
	LTE Band 66	20MHz	QPSK1RB#49	Back Side	132322	22.34	22.5	1.038	0.585	0.607
	LTE Band 66	20MHz	QPSK50RB#0	Front Side	132572	21.25	21.5	1.059	0.585	0.620
	LTE Band 66	20MHz	QPSK50RB#0	Back Side	132572	21.25	21.5	1.059	0.469	0.497
	LTE Band 71	20MHz	QPSK1RB#49	Front Side	133322	23.22	23.5	1.067	0.261	0.278
	LTE Band 71	20MHz	QPSK1RB#49	Back Side	133322	23.22	23.5	1.067	0.385	0.411
	LTE Band 71	20MHz	QPSK50RB#0	Front Side	133322	22.92	23	1.019	0.222	0.226
	LTE Band 71	20MHz	QPSK50RB#0	Back Side	133322	22.92	23	1.019	0.309	0.315



<TDD-LTE>

Plot No.	Band	BW (MHz)	Modulation RB/offset	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20MHz	QPSK1RB#49	Front Side	40620	25.37	25.5	1.030	62.89	1.006	0.493	0.511
	LTE Band 41	20MHz	QPSK1RB#49	Back Side	40620	25.37	25.5	1.030	62.89	1.006	0.317	0.329
	LTE Band 41	20MHz	QPSK50RB#0	Front Side	40620	25.26	25.5	1.057	62.89	1.006	0.389	0.414
	LTE Band 41	20MHz	QPSK50RB#0	Back Side	40620	25.26	25.5	1.057	62.89	1.006	0.303	0.322

<2.4G WLAN >

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11n20	Front Side	6	17.88	18	1.028	0.247	0.254
#31	WLAN2.4GHz	802.11n20	Back Side	6	17.88	18	1.028	0.179	0.184

<5G WLAN >

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
Band 1									
	WLAN5GHz	802.11n40	Front Side	38	12.39	12.5	1.026	0.102	0.105
#32	WLAN5GHz	802.11n40	Back Side	38	12.39	12.5	1.026	0.108	0.111
Band 2									
	WLAN5GHz	802.11n20	Front Side	60	12.6	13	1.096	0.099	0.109
#33	WLAN5GHz	802.11n20	Back Side	60	12.6	13	1.096	0.132	0.145
Band 4									
	WLAN5GHz	802.11n40	Front Side	159	12.38	12.5	1.028	0.070	0.072
#34	WLAN5GHz	802.11n40	Back Side	159	12.38	12.5	1.028	0.164	0.169

Note: The WLAN Reported 1g SAR (W/kg) has been calculated together with the duty cycle scaling factor.



17.5. Repeated SAR Measurement

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

18. Stand-alone SAR test Exclusion

Per KDB 447498 D01v06 4.3.1)

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,

Where f (GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine

<Bluetooth Estimated >

Maximum tune-up tolerance (dBm)	Maximum tune-up tolerance (mW)	Minimum Distance(mm)	Frequency (GHz)	Estimated value	Test threshold
6.5	4.47	10	2.402	0.69	3.0

The Estimated value $0.69 \leq$ Test threshold 3.0, so Bluetooth no needs to be tested.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$, for test separation distances ≤ 50 mm;

Where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

<Bluetooth Estimated SAR Calculation >

Mode	Max. tune-up Power (dBm)	Exposure Position	Body
		Test Distance (mm)	10
Bluetooth	6.5	Estimated SAR (W/kg)	0.092

Note: Held-to ear configuration are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission.

19. Simultaneous Transmission Evaluation

Simultaneous Evaluation:

No.	Simultaneous transmission Condition	Head	Body-worn	Hotspot
1	WWAN + WLAN 2.4GHz	Yes	Yes	Yes
2	WWAN + WLAN 5GHz	Yes	Yes	Yes

Note:

1. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
2. The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
3. GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and data transmission simultaneously.
4. Simultaneous Transmission SAR evaluation is not required for BT and Wi-Fi , because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
5. Per KDB 447498D01v06, Simultaneous Transmission SAR Evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(SAR1 + SAR2) \wedge 1.5/R_i \leq 0.04$,
 R_i is the separation distance between the peak SAR locations for the antenna pair in mm.



<Head Simultaneous Transmission>

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.311	0.769	0.293	1.080	0.604
		Right Tilt	0.163	0.494	0.270	0.657	0.433
		Left Cheek	0.283	0.389	0.142	0.672	0.425
		Left Tilt	0.149	0.262	0.132	0.411	0.281
	GSM1900	Right Cheek	0.211	0.769	0.293	0.980	0.504
		Right Tilt	0.153	0.494	0.270	0.647	0.423
		Left Cheek	0.333	0.389	0.142	0.722	0.475
		Left Tilt	0.155	0.262	0.132	0.417	0.287
WCDMA	WCDMA Band II	Right Cheek	0.234	0.769	0.293	1.003	0.527
		Right Tilt	0.216	0.494	0.270	0.710	0.486
		Left Cheek	0.416	0.389	0.142	0.805	0.558
		Left Tilt	0.189	0.262	0.132	0.451	0.321
	WCDMA Band IV	Right Cheek	0.353	0.769	0.293	1.122	0.646
		Right Tilt	0.278	0.494	0.270	0.772	0.548
		Left Cheek	0.559	0.389	0.142	0.948	0.701
		Left Tilt	0.268	0.262	0.132	0.530	0.400
	WCDMA Band V	Right Cheek	0.265	0.769	0.293	1.034	0.558
		Right Tilt	0.136	0.494	0.270	0.630	0.406
		Left Cheek	0.222	0.389	0.142	0.611	0.364
		Left Tilt	0.115	0.262	0.132	0.377	0.247
CDMA 2000	CDMA 2000 BC0	Right Cheek	0.372	0.769	0.293	1.141	0.665
		Right Tilt	0.260	0.494	0.270	0.754	0.530
		Left Cheek	0.361	0.389	0.142	0.750	0.503
		Left Tilt	0.289	0.262	0.132	0.551	0.421
	CDMA 2000 BC1	Right Cheek	0.238	0.769	0.293	1.007	0.531
		Right Tilt	0.146	0.494	0.270	0.640	0.416
		Left Cheek	0.458	0.389	0.142	0.847	0.600
		Left Tilt	0.190	0.262	0.132	0.452	0.322
	CDMA 2000 BC10	Right Cheek	0.279	0.769	0.293	1.048	0.572
		Right Tilt	0.169	0.494	0.270	0.663	0.439
		Left Cheek	0.279	0.389	0.142	0.668	0.421
		Left Tilt	0.143	0.262	0.132	0.405	0.275



EVDO	EVDO BC0	Right Cheek	0.253	0.769	0.293	1.022	0.546
		Right Tilt	0.174	0.494	0.270	0.668	0.444
		Left Cheek	0.107	0.389	0.142	0.496	0.249
		Left Tilt	0.051	0.262	0.132	0.313	0.183
	EVDO BC1	Right Cheek	0.312	0.769	0.293	1.081	0.605
		Right Tilt	0.193	0.494	0.270	0.687	0.463
		Left Cheek	0.465	0.389	0.142	0.854	0.607
		Left Tilt	0.133	0.262	0.132	0.395	0.265
	EVDO BC10	Right Cheek	0.275	0.769	0.293	1.044	0.568
		Right Tilt	0.092	0.494	0.270	0.586	0.362
		Left Cheek	0.139	0.389	0.142	0.528	0.281
		Left Tilt	0.067	0.262	0.132	0.329	0.199
LTE	LTE Band 2	Right Cheek	0.377	0.769	0.293	1.146	0.670
		Right Tilt	0.365	0.494	0.270	0.859	0.635
		Left Cheek	0.649	0.389	0.142	1.038	0.791
		Left Tilt	0.292	0.262	0.132	0.554	0.424
	LTE Band 4	Right Cheek	0.451	0.769	0.293	1.220	0.744
		Right Tilt	0.274	0.494	0.270	0.768	0.544
		Left Cheek	0.691	0.389	0.142	1.080	0.833
		Left Tilt	0.316	0.262	0.132	0.578	0.448
	LTE Band 5	Right Cheek	0.581	0.769	0.293	1.350	0.874
		Right Tilt	0.334	0.494	0.270	0.828	0.604
		Left Cheek	0.486	0.389	0.142	0.875	0.628
		Left Tilt	0.283	0.262	0.132	0.545	0.415
	LTE Band 12	Right Cheek	0.286	0.769	0.293	1.055	0.579
		Right Tilt	0.187	0.494	0.270	0.681	0.457
		Left Cheek	0.289	0.389	0.142	0.678	0.431
		Left Tilt	0.166	0.262	0.132	0.428	0.298
	LTE Band 13	Right Cheek	0.342	0.769	0.293	1.111	0.635
		Right Tilt	0.223	0.494	0.270	0.717	0.493
		Left Cheek	0.209	0.389	0.142	0.598	0.351
		Left Tilt	0.129	0.262	0.132	0.391	0.261
	LTE Band 25	Right Cheek	0.444	0.769	0.293	1.213	0.737
		Right Tilt	0.390	0.494	0.270	0.884	0.660
		Left Cheek	0.699	0.389	0.142	1.088	0.841
		Left Tilt	0.325	0.262	0.132	0.587	0.457
	LTE Band 26	Right Cheek	0.441	0.769	0.293	1.210	0.734
		Right Tilt	0.295	0.494	0.270	0.789	0.565



		Left Cheek	0.305	0.389	0.142	0.694	0.447
		Left Tilt	0.171	0.262	0.132	0.433	0.303
	LTE Band 41	Right Cheek	0.378	0.769	0.293	1.147	0.671
		Right Tilt	0.303	0.494	0.270	0.797	0.573
		Left Cheek	0.620	0.389	0.142	1.009	0.762
		Left Tilt	0.182	0.262	0.132	0.444	0.314
	LTE Band 66	Right Cheek	0.458	0.769	0.293	1.227	0.751
		Right Tilt	0.266	0.494	0.270	0.760	0.536
		Left Cheek	0.654	0.389	0.142	1.043	0.796
		Left Tilt	0.326	0.262	0.132	0.588	0.458
	LTE Band 71	Right Cheek	0.261	0.769	0.293	1.030	0.554
		Right Tilt	0.144	0.494	0.270	0.638	0.414
		Left Cheek	0.255	0.389	0.142	0.644	0.397
		Left Tilt	0.210	0.262	0.132	0.472	0.342

<Hotspot Simultaneous Transmission>

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front Side	0.399	0.254	0.109	0.653	0.508
		Back Side	0.525	0.184	0.169	0.709	0.694
		Right Side	0.307	0.000	0.000	0.307	0.307
		Left Side	0.433	0.116	0.083	0.549	0.516
		Bottom Side	0.128	0.000	0.000	0.128	0.128
		Top Side	0.000	0.030	0.140	0.030	0.140
	GSM1900	Front Side	0.458	0.254	0.109	0.712	0.567
		Back Side	0.489	0.184	0.169	0.673	0.658
		Right Side	0.077	0.000	0.000	0.077	0.077
		Left Side	0.179	0.116	0.083	0.295	0.262
		Bottom Side	0.339	0.000	0.000	0.339	0.339
		Top Side	0.000	0.030	0.140	0.030	0.140
WCDMA	WCDMA Band II	Front Side	0.750	0.254	0.109	1.004	0.859
		Back Side	0.615	0.184	0.169	0.799	0.784
		Right Side	0.191	0.000	0.000	0.191	0.191
		Left Side	0.370	0.116	0.083	0.486	0.453
		Bottom Side	0.440	0.000	0.000	0.440	0.440



	WCDMA Band IV	Top Side	0.000	0.030	0.140	0.030	0.140
		Front Side	0.797	0.254	0.109	1.051	0.906
		Back Side	0.616	0.184	0.169	0.800	0.785
		Right Side	0.247	0.000	0.000	0.247	0.247
		Left Side	0.498	0.116	0.083	0.614	0.581
		Bottom Side	0.418	0.000	0.000	0.418	0.418
		Top Side	0.000	0.030	0.140	0.030	0.140
	WCDMA Band V	Front Side	0.262	0.254	0.109	0.516	0.371
		Back Side	0.395	0.184	0.169	0.579	0.564
		Right Side	0.311	0.000	0.000	0.311	0.311
		Left Side	0.329	0.116	0.083	0.445	0.412
		Bottom Side	0.112	0.000	0.000	0.112	0.112
		Top Side	0.000	0.030	0.140	0.030	0.140
		Top Side	0.000	0.030	0.140	0.030	0.140
CDMA 2000	CDMA 2000 BC0	Front Side	0.320	0.254	0.109	0.574	0.429
		Back Side	0.441	0.184	0.169	0.625	0.610
		Right Side	0.295	0.000	0.000	0.295	0.295
		Left Side	0.311	0.116	0.083	0.427	0.394
		Bottom Side	0.115	0.000	0.000	0.115	0.115
		Top Side	0.000	0.030	0.140	0.030	0.140
	CDMA 2000 BC1	Front Side	0.798	0.254	0.109	1.052	0.907
		Back Side	0.478	0.184	0.169	0.662	0.647
		Right Side	0.193	0.000	0.000	0.193	0.193
		Left Side	0.375	0.116	0.083	0.491	0.458
		Bottom Side	0.545	0.000	0.000	0.545	0.545
		Top Side	0.000	0.030	0.140	0.030	0.140
	CDMA 2000 BC10	Front Side	0.317	0.254	0.109	0.571	0.426
		Back Side	0.441	0.184	0.169	0.625	0.610
		Right Side	0.276	0.000	0.000	0.276	0.276
		Left Side	0.292	0.116	0.083	0.408	0.375
		Bottom Side	0.099	0.000	0.000	0.099	0.099
		Top Side	0.000	0.030	0.140	0.030	0.140
EVDO	EVDO BC0	Front Side	0.256	0.254	0.109	0.510	0.365
		Back Side	0.288	0.184	0.169	0.472	0.457
		Right Side	0.230	0.000	0.000	0.230	0.230
		Left Side	0.255	0.116	0.083	0.371	0.338
		Bottom Side	0.110	0.000	0.000	0.110	0.110
		Top Side	0.000	0.030	0.140	0.030	0.140
		Top Side	0.000	0.030	0.140	0.030	0.140
	EVDO	Front Side	0.795	0.254	0.109	1.049	0.904



	BC1	Back Side	0.723	0.184	0.169	0.907	0.892
		Right Side	0.210	0.000	0.000	0.210	0.210
		Left Side	0.409	0.116	0.083	0.525	0.492
		Bottom Side	0.525	0.000	0.000	0.525	0.525
		Top Side	0.000	0.030	0.140	0.030	0.140
	EVDO BC10	Front Side	0.293	0.254	0.109	0.547	0.402
		Back Side	0.381	0.184	0.169	0.565	0.550
		Right Side	0.312	0.000	0.000	0.312	0.312
		Left Side	0.329	0.116	0.083	0.445	0.412
		Bottom Side	0.100	0.000	0.000	0.100	0.100
		Top Side	0.000	0.030	0.140	0.030	0.140
LTE	LTE Band 2	Front Side	0.746	0.254	0.109	1.000	0.855
		Back Side	0.694	0.184	0.169	0.878	0.863
		Right Side	0.196	0.000	0.000	0.196	0.196
		Left Side	0.380	0.116	0.083	0.496	0.463
		Bottom Side	0.780	0.000	0.000	0.780	0.780
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 4	Front Side	0.746	0.254	0.109	1.000	0.855
		Back Side	0.576	0.184	0.169	0.760	0.745
		Right Side	0.232	0.000	0.000	0.232	0.232
		Left Side	0.466	0.116	0.083	0.582	0.549
		Bottom Side	0.630	0.000	0.000	0.630	0.630
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 5	Front Side	0.452	0.254	0.109	0.706	0.561
		Back Side	0.573	0.184	0.169	0.757	0.742
		Right Side	0.316	0.000	0.000	0.316	0.316
		Left Side	0.333	0.116	0.083	0.449	0.416
		Bottom Side	0.160	0.000	0.000	0.160	0.160
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 12	Front Side	0.324	0.254	0.109	0.578	0.433
		Back Side	0.364	0.184	0.169	0.548	0.533
		Right Side	0.024	0.000	0.000	0.024	0.024
		Left Side	0.058	0.116	0.083	0.174	0.141
		Bottom Side	0.078	0.000	0.000	0.078	0.078
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 13	Front Side	0.293	0.254	0.109	0.547	0.402
		Back Side	0.455	0.184	0.169	0.639	0.624
		Right Side	0.027	0.000	0.000	0.027	0.027



		Left Side	0.064	0.116	0.083	0.180	0.147
		Bottom Side	0.115	0.000	0.000	0.115	0.115
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 25	Front Side	0.689	0.254	0.109	0.943	0.798
		Back Side	0.660	0.184	0.169	0.844	0.829
		Right Side	0.203	0.000	0.000	0.203	0.203
		Left Side	0.395	0.116	0.083	0.511	0.478
		Bottom Side	0.787	0.000	0.000	0.787	0.787
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 26	Front Side	0.474	0.254	0.109	0.728	0.583
		Back Side	0.615	0.184	0.169	0.799	0.784
		Right Side	0.315	0.000	0.000	0.315	0.315
		Left Side	0.333	0.116	0.083	0.449	0.416
		Bottom Side	0.156	0.000	0.000	0.156	0.156
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 41	Front Side	0.511	0.254	0.109	0.765	0.620
		Back Side	0.329	0.184	0.169	0.513	0.498
		Right Side	0.404	0.000	0.000	0.404	0.404
		Left Side	0.015	0.116	0.083	0.131	0.098
		Bottom Side	0.689	0.000	0.000	0.689	0.689
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 66	Front Side	0.687	0.254	0.109	0.941	0.796
		Back Side	0.607	0.184	0.169	0.791	0.776
		Right Side	0.243	0.000	0.000	0.243	0.243
		Left Side	0.488	0.116	0.083	0.604	0.571
		Bottom Side	0.668	0.000	0.000	0.668	0.668
		Top Side	0.000	0.030	0.140	0.030	0.140
	LTE Band 71	Front Side	0.314	0.254	0.109	0.568	0.423
		Back Side	0.460	0.184	0.169	0.644	0.629
		Right Side	0.017	0.000	0.000	0.017	0.017
		Left Side	0.065	0.116	0.083	0.181	0.148
		Bottom Side	0.079	0.000	0.000	0.079	0.079
		Top Side	0.000	0.030	0.140	0.030	0.140



<Body-worn Simultaneous Transmission>

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front Side	0.399	0.254	0.109	0.653	0.508
	Back Side	0.525	0.184	0.169	0.709	0.694
GSM1900	Front Side	0.458	0.254	0.109	0.712	0.567
	Back Side	0.489	0.184	0.169	0.673	0.658
WCDMA II	Front Side	0.750	0.254	0.109	1.004	0.859
	Back Side	0.615	0.184	0.169	0.799	0.784
WCDMA IV	Front Side	0.797	0.254	0.109	1.051	0.906
	Back Side	0.616	0.184	0.169	0.800	0.785
WCDMA V	Front Side	0.262	0.254	0.109	0.516	0.371
	Back Side	0.395	0.184	0.169	0.579	0.564
CDMA2000 BC0	Front Side	0.320	0.254	0.109	0.574	0.429
	Back Side	0.441	0.184	0.169	0.625	0.610
CDMA2000 BC1	Front Side	0.798	0.254	0.109	1.052	0.907
	Back Side	0.478	0.184	0.169	0.662	0.647
CDMA2000 BC10	Front Side	0.317	0.254	0.109	0.571	0.426
	Back Side	0.441	0.184	0.169	0.625	0.610
EVDO-0 BC0	Front Side	0.256	0.254	0.109	0.510	0.365
	Back Side	0.288	0.184	0.169	0.472	0.457
EVDO-0 BC1	Front Side	0.795	0.254	0.109	1.049	0.904
	Back Side	0.723	0.184	0.169	0.907	0.892
EVDO-0 BC10	Front Side	0.293	0.254	0.109	0.547	0.402
	Back Side	0.381	0.184	0.169	0.565	0.550
LTE Band 2	Front Side	0.746	0.254	0.109	1.000	0.855
	Back Side	0.694	0.184	0.169	0.878	0.863
LTE Band 4	Front Side	0.746	0.254	0.109	1.000	0.855
	Back Side	0.576	0.184	0.169	0.760	0.745
LTE Band 5	Front Side	0.452	0.254	0.109	0.706	0.561
	Back Side	0.573	0.184	0.169	0.757	0.742
LTE Band 12	Front Side	0.324	0.254	0.109	0.578	0.433
	Back Side	0.364	0.184	0.169	0.548	0.533
LTE Band 13	Front Side	0.293	0.254	0.109	0.547	0.402
	Back Side	0.455	0.184	0.169	0.639	0.624



REPORT No. : XM19080032W08

LTE Band 25	Front Side	0.689	0.254	0.109	0.943	0.798
	Back Side	0.660	0.184	0.169	0.844	0.829
LTE Band 26	Front Side	0.474	0.254	0.109	0.728	0.583
	Back Side	0.615	0.184	0.169	0.799	0.784
LTE Band 41	Front Side	0.511	0.254	0.109	0.765	0.620
	Back Side	0.329	0.184	0.169	0.513	0.498
LTE Band 66	Front Side	0.687	0.254	0.109	0.941	0.796
	Back Side	0.607	0.184	0.169	0.791	0.776
LTE Band 71	Front Side	0.314	0.254	0.109	0.568	0.423
	Back Side	0.460	0.184	0.169	0.644	0.629

20. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

Table 8.1. Standard Uncertainty for Assumed Distribution

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.5%	12.5%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.1 %	25.1%



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Kehu-Morlab Test Laboratory
Department:	Morlab Laboratory
Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) China
Responsible Test Lab Manager:	Di Dehai
Telephone:	+86-592-5612050
Facsimile:	+86-592-5612095

2. Identification of the Responsible Testing Location

Name:	Kehu-Morlab Test Laboratory
Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) China

***** END OF MAIN REPORT *****