



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISMAR-LX1AM
Product Smart Phone
Model MAR-LX1Am
Report No. R1905H0093-R1
Issue Date May 20, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 22H (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	9
4. Test Configuration	10
5. Test Case Results	11
5.1. RF Power Output	11
5.2. Effective Radiated Power	13
5.3. Occupied Bandwidth	16
5.4. Band Edge Compliance	20
5.5. Peak-to-Average Power Ratio (PAPR)	23
5.6. Frequency Stability	25
5.7. Spurious Emissions at Antenna Terminals	28
5.8. Radiates Spurious Emission	31
6. Main Test Instruments	36

Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			
Date of Testing: May 7, 2019 ~ May 19, 2019			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen 518129 P.R.China
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen 518129 P.R.China

General Information

EUT Description			
Model	MAR-LX1Am		
SN	76YDU19415000080		
Hardware Version	HL4MARLM		
Software Version	9.0.1.152(SP2C900E140R1P6)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	GSM 850: -3.6dBi WCDMA Band V: -3.6dBi		
Test Mode(s)	GSM 850; WCDMA Band V		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA) BPSK, QPSK,16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	24		
HSUPA UE Category	6		
Maximum E.R.P.	GSM 850:	23.56dBm	
	WCDMA Band V:	14.09dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.6V Maximum: 4.35V		
Extreme Temperature	Lowest: 0°C Highest: +35°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
EUT Accessory			
Adapter 1	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-090200EH0		
Adapter 2	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-090200BH0		
Adapter 3	Manufacturer: Huawei Technologies Co., Ltd.		



	Model: HW-090200AH0
Adapter 4	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-090200UH0
Adapter 5	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-059200EHQ
Adapter 6	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-090200UH1
Adapter 7	Manufacturer: Huawei Technologies Co., Ltd. Model: HW-090200IH0
Battery 1	Manufacturer: Huawei Technologies Co., Ltd. (Sunwoda Electronic CO., LTD) Model: HB356687ECW
Battery 2	Manufacturer: Huawei Technologies Co., Ltd. (Huizhou Desay Battcry Co., Ltd) Model: HB356687ECW
Battery 3	Manufacturer: Huawei Technologies Co., Ltd. (SCUD (FUJIAN) Electronics Co., Ltd) Model: HB356687ECW
Earphone 1	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co., LTD. Model: MEND1532B528A02
Earphone 2	Manufacturer: Boluo County Quancheng Electronic Co., Ltd. Model: 1293-3283-3.5mm-322
Earphone 3	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: EPAB542-2WH05-DH
Earphone 4	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co., LTD. Model: MEND1532B528B00
Earphone 5	Manufacturer: Boluo County Quancheng Electronic Co., Ltd. Model: 1293-3283-3.5mm-336
Earphone 6	Manufacturer: Hong Fu Jin Precision Industry (Shenzhen) Co., LTD. Model: EPAB542-2WH06-DH
USB Cable 1	Manufacturer: HUIZHOU DEHONG TECHNOLOGY CO.,LTD. Model: 330-50507
USB Cable 2	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: CUDU01B-HC295-EH
USB Cable 3	Manufacturer: NingBo Broad Telecommunication Co.,Ltd. Model: WA0020
USB Cable 4	Manufacturer: LUXSHARE Precision Industry Co., Ltd. Model: L99UC131-CS-H
USB Cable 5	Manufacturer: Freeport Resources Enterprises (Jiangxi) Co.,Ltd



	Model: 18-93C2CHO-001HF
USB Cable 6	Manufacturer: Dongguan Mingji Electronics Technology Group Co.,Ltd Model: 203-1572-0
<p>Note: The information of the EUT is declared by the manufacturer.</p> <p>2. There is more than one Adapter, one USB cable, one Battery and Earphone, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 1, USB cable 3/ Battery 1/ Earphone 2) will be recorded in this report.</p>	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2018)

FCC CFR 47 Part 22H (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Effective Radiated Power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

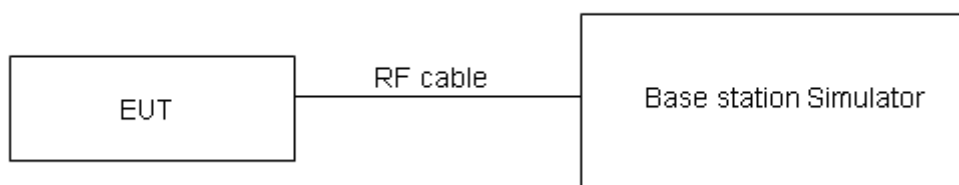

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.08	32.02	31.98
GPRS/EGPRS (GMSK)	1TXslot	31.81	31.93	32.04
	2TXslots	28.58	28.66	28.75
	3TXslots	26.59	26.72	26.79
	4TXslots	25.32	25.33	25.36
EGPRS (8PSK)	1TXslot	25.03	25.11	25.08
	2TXslots	22.22	22.24	22.06
	3TXslots	19.88	19.95	19.92
	4TXslots	18.81	19.10	18.53

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC	12.2k	23.70	23.64	23.66
HSDPA	Sub - Test 1	23.12	23.06	23.08
	Sub - Test 2	22.91	22.95	22.97
	Sub - Test 3	22.50	22.44	22.46
	Sub - Test 4	22.59	22.53	22.55
HSUPA	Sub - Test 1	22.08	22.02	22.04
	Sub - Test 2	22.07	22.01	22.03
	Sub - Test 3	22.55	22.50	22.52
	Sub - Test 4	22.04	21.99	22.01
	Sub - Test 5	23.03	22.98	23.00
DC-HSDPA	Sub - Test 1	22.84	22.80	22.80
	Sub - Test 2	22.83	22.79	22.79
	Sub - Test 3	22.41	22.28	22.30
	Sub - Test 4	22.40	22.27	22.29

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

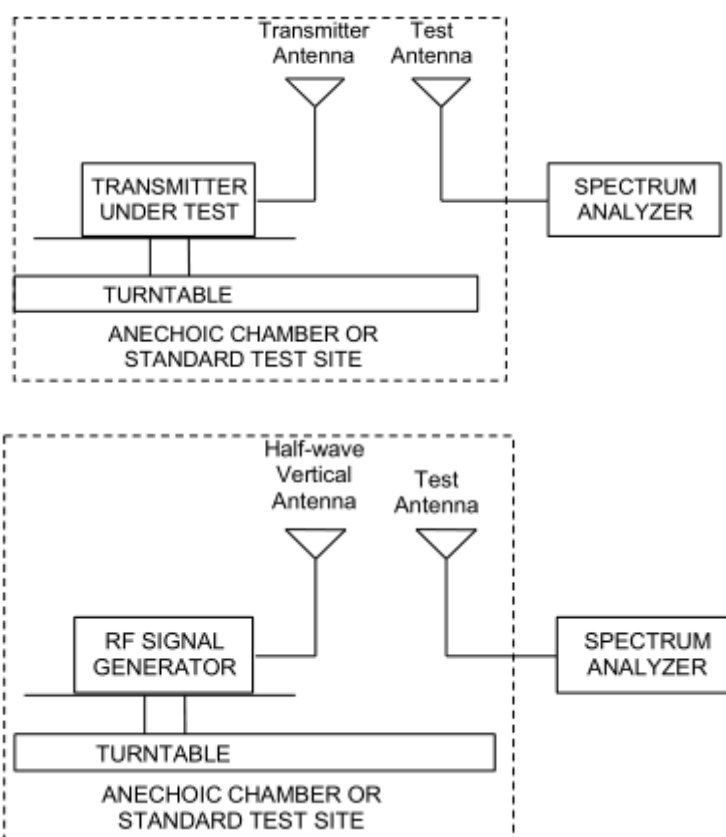

Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	Low	824.2	Horizontal	23.56	38.45	Pass
	Mid	836.6	Horizontal	22.99	38.45	Pass
	High	848.8	Horizontal	21.92	38.45	Pass
GPRS 850	Low	824.2	Horizontal	22.71	38.45	Pass
	Mid	836.6	Horizontal	22.32	38.45	Pass
	High	848.8	Horizontal	21.35	38.45	Pass
EGPRS 850	Low	824.2	Horizontal	21.20	38.45	Pass
	Mid	836.6	Horizontal	21.33	38.45	Pass
	High	848.8	Horizontal	20.61	38.45	Pass
WCDMA Band V	Low	826.4	Horizontal	13.58	38.45	Pass
	Mid	836.6	Horizontal	14.02	38.45	Pass
	High	846.6	Horizontal	14.09	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

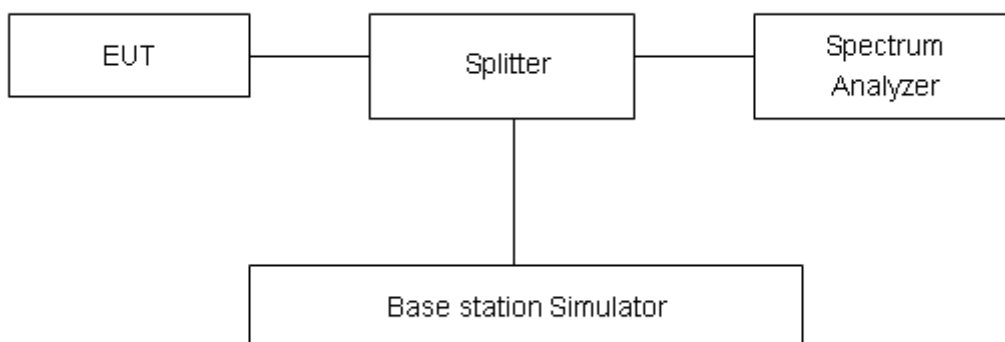

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result


Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GSM)	128	824.2	0.24266	0.3100
	190	836.6	0.24625	0.3125
	251	848.8	0.24582	0.3108
GPRS 850 (GMSK)	128	824.2	0.24326	0.3145
	190	836.6	0.24392	0.3111
	251	848.8	0.24435	0.3118
EGPRS 850 (8-PSK)	128	824.2	0.24526	0.3128
	190	836.6	0.24272	0.3150
	251	848.8	0.24150	0.3166
WCDMA Band V (RMC)	4132	826.4	4.1462	4.681
	4183	836.6	4.1781	4.706
	4233	846.6	4.1694	4.674




GSM 850 CH-Low




GSM 850 GPRS CH-Low

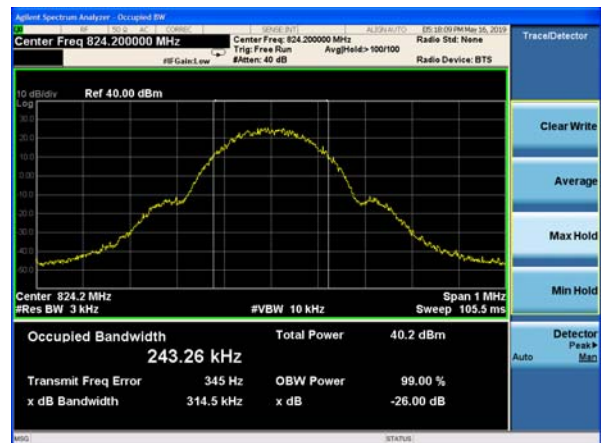

GSM 850 CH-Middle

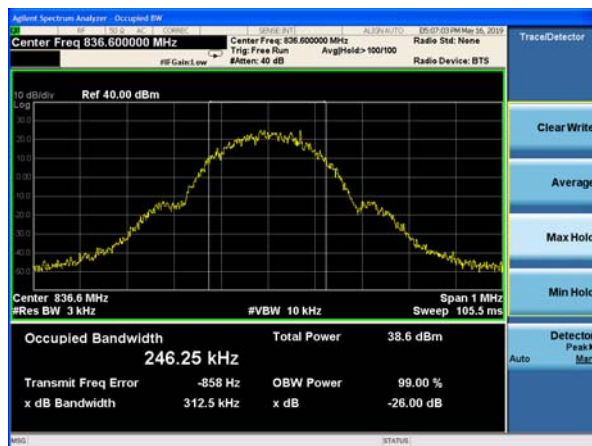


GSM 850 GPRS CH-Middle

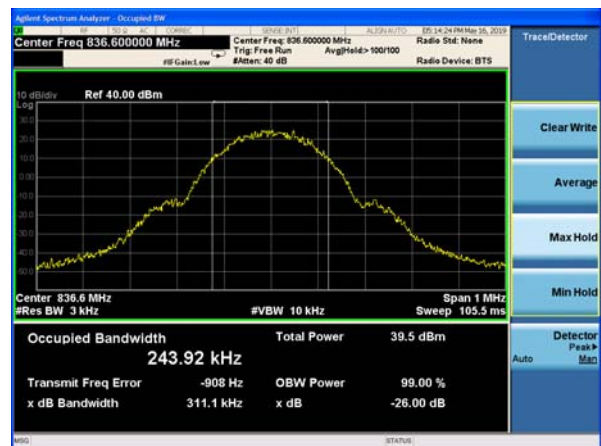

GSM 850 CH-High



GSM 850 GPRS CH-High

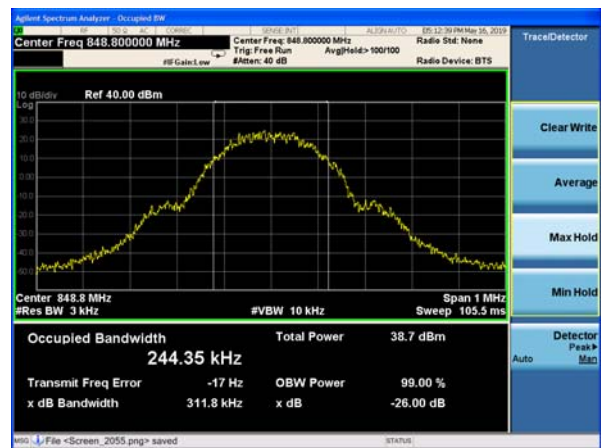




GSM 850 EGPRS CH-Low




WCDMA Band V CH-Low

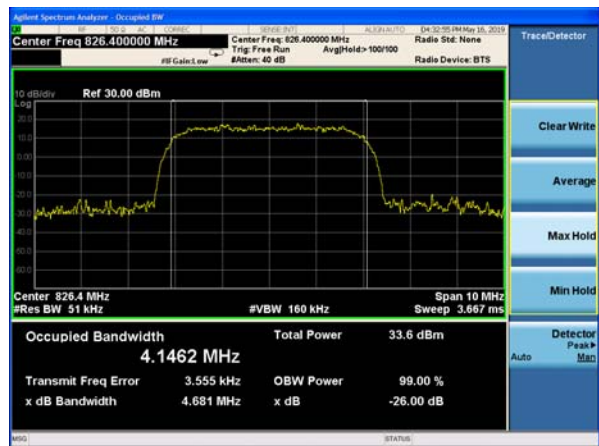

GSM 850 EGPRS CH-Middle




WCDMA Band V CH-Middle

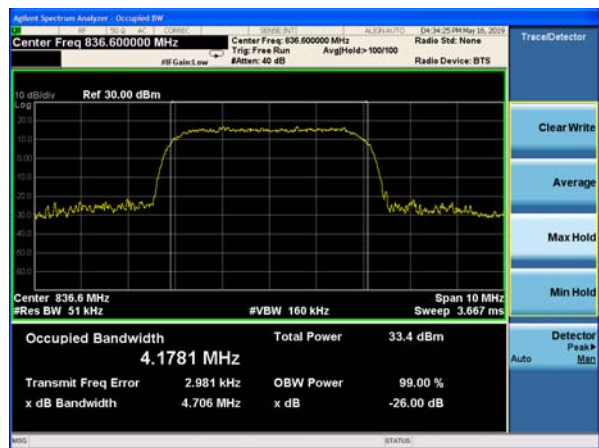

GSM 850 EGPRS CH-High



WCDMA Band V CH-High

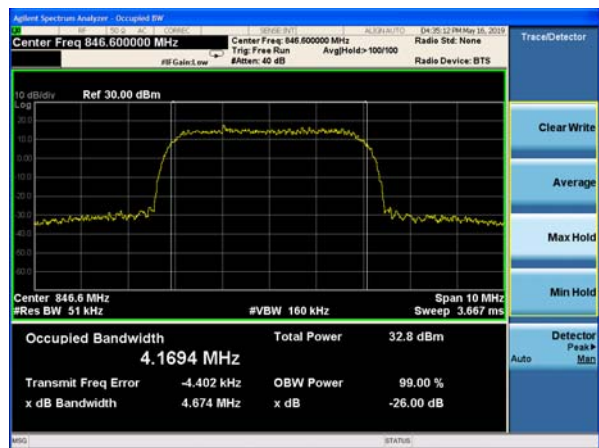

5.4. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,

Spectrum analyzer plots are included on the following pages.

Test Setup

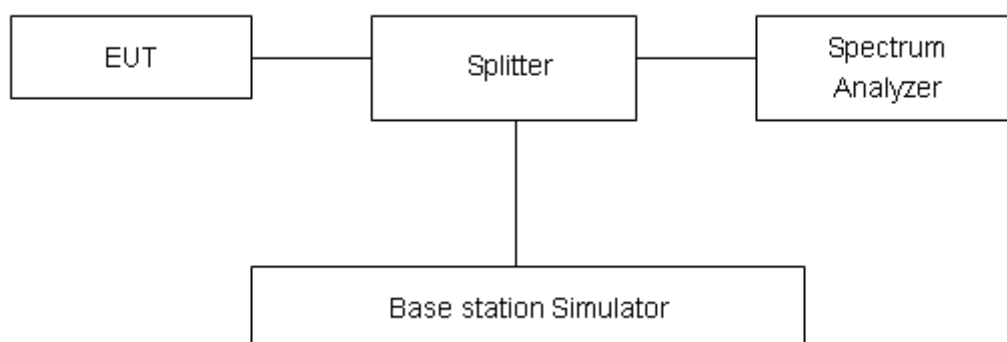

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.




Test Result:


GSM 850 CH-Low



GSM 850 CH-High

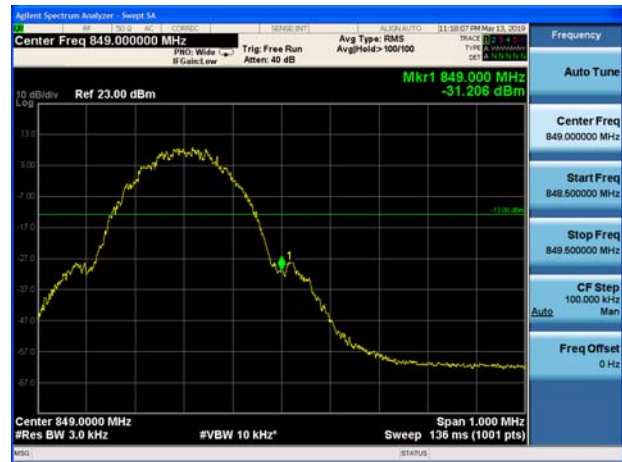


GSM 850 GPRS CH-Low

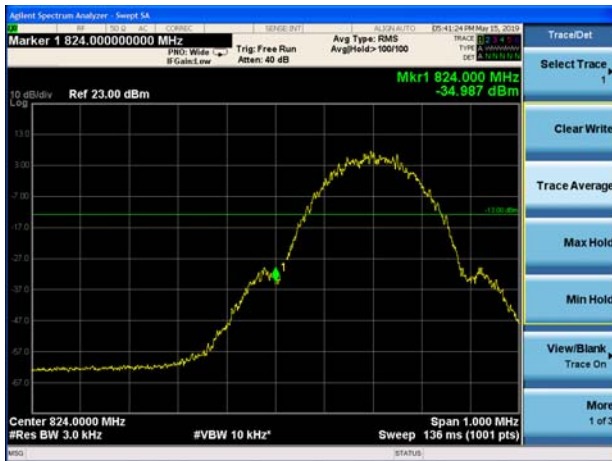

GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low

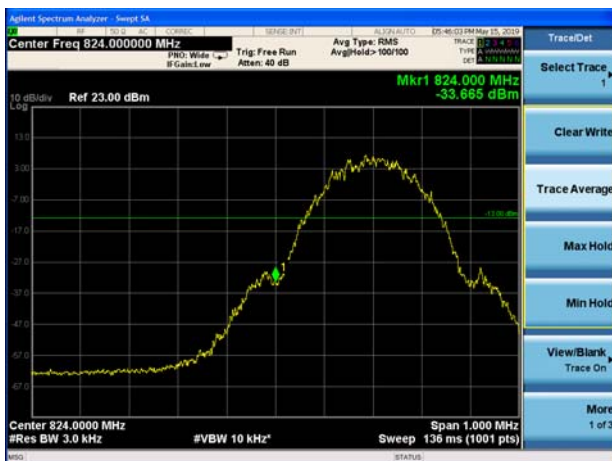

GSM 850 EGPRS CH-High





WCDMA Band V CH-Low



WCDMA Band V CH-High



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

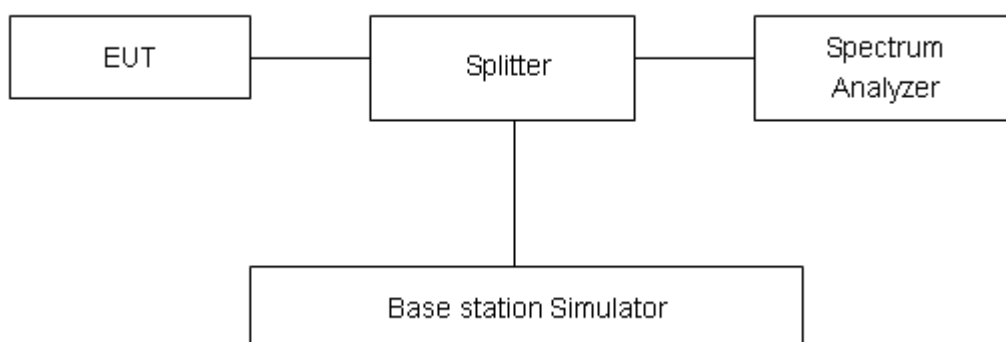

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GSM)	128	824.2	33.34	32.08	1.26	≤13	PASS
	190	836.6	33.26	32.02	1.24	≤13	PASS
	251	848.8	33.23	31.98	1.25	≤13	PASS
GPRS 850 (GMSK)	128	824.2	33.04	31.81	1.23	≤13	PASS
	190	836.6	33.21	31.93	1.28	≤13	PASS
	251	848.8	33.31	32.04	1.27	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	26.26	25.03	1.23	≤13	PASS
	190	836.6	26.36	25.11	1.25	≤13	PASS
	251	848.8	26.30	25.08	1.22	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	27.36	24.43	2.93	≤13	PASS
	4183	836.6	27.29	24.45	2.84	≤13	PASS
	4233	846.6	27.26	24.45	2.81	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.35 V, with a nominal voltage of 3.8V.

Test setup

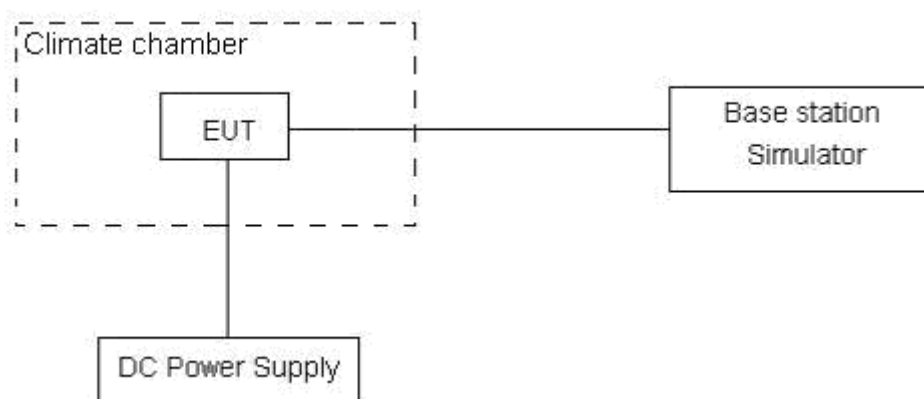

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

GSM850						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25℃)	Normal	11.04	8.88	0.00587	0.00472	PASS
Extreme (55℃)		15.85	11.55	0.00843	0.00614	PASS
Extreme (50℃)		17.90	1.05	0.00952	0.00056	PASS
Extreme (40℃)		9.81	1.70	0.00522	0.00091	PASS
Extreme (30℃)		5.91	13.94	0.00314	0.00742	PASS
Extreme (20℃)		1.19	2.99	0.00063	0.00159	PASS
Extreme (10℃)		5.43	1.22	0.00289	0.00065	PASS
Extreme (0℃)		14.00	5.48	0.00745	0.00292	PASS
Extreme (-10℃)		3.48	8.42	0.00185	0.00448	PASS
Extreme (-20℃)		2.75	11.38	0.00146	0.00605	PASS
Extreme (-30℃)		10.18	11.07	0.00542	0.00589	PASS
25℃	LV	7.52	4.15	0.00400	0.00220	PASS
	HV	3.13	3.09	0.00166	0.00164	PASS

WCDMA Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	8.29	12.22	0.00441	0.00650	PASS
Extreme (55℃)		7.15	10.41	0.00380	0.00554	PASS
Extreme (50℃)		8.41	15.36	0.00448	0.00817	PASS
Extreme (40℃)		2.63	4.77	0.00140	0.00254	PASS
Extreme (30℃)		5.02	1.32	0.00267	0.00070	PASS
Extreme (20℃)		3.23	1.61	0.00172	0.00086	PASS
Extreme (10℃)		10.83	16.03	0.00576	0.00853	PASS
Extreme (0℃)		5.55	8.05	0.00295	0.00428	PASS
Extreme (-10℃)		7.80	6.10	0.00415	0.00325	PASS
Extreme (-20℃)		11.67	3.54	0.00621	0.00188	PASS
Extreme (-30℃)		13.32	11.90	0.00708	0.00633	PASS
25℃	LV	5.75	3.12	0.00306	0.00166	PASS
	HV	9.90	7.54	0.00526	0.00401	PASS

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

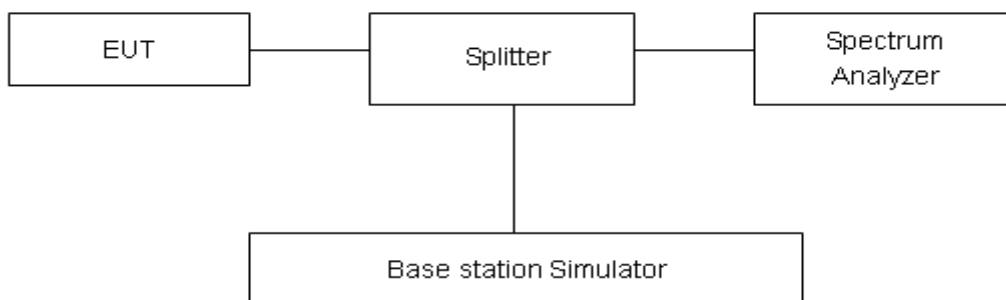

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

GSM 850 CH-Low 30MHz ~ 1GHz

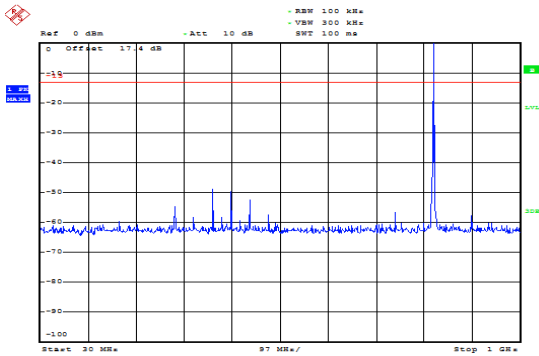


Date: 14.MAY.2019 15:30:58

GSM 850 CH-Low 1GHz ~ 9GHz

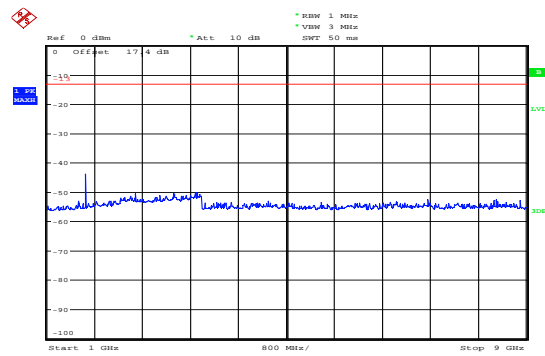


Date: 14.MAY.2019 15:36:40

GSM 850 CH-Middle 30MHz ~ 1GHz

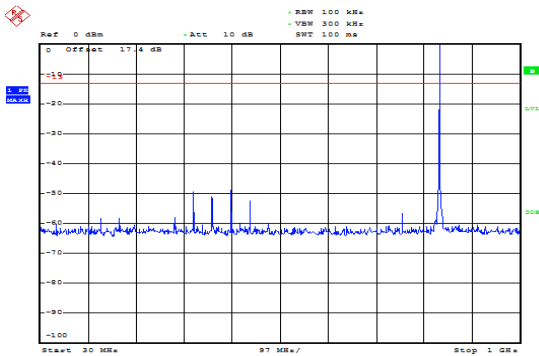


Date: 14.MAY.2019 15:29:57

GSM 850 CH-Middle 1GHz ~ 9GHz

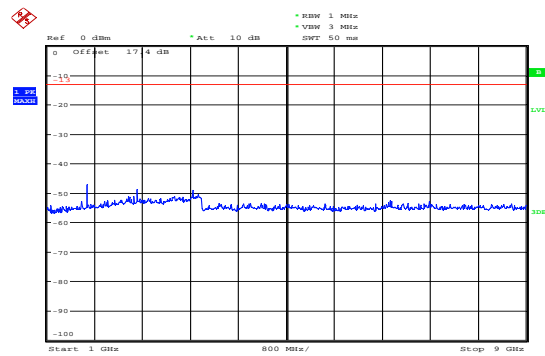


Date: 14.MAY.2019 15:36:11

GSM 850 CH-High 30MHz ~ 1GHz

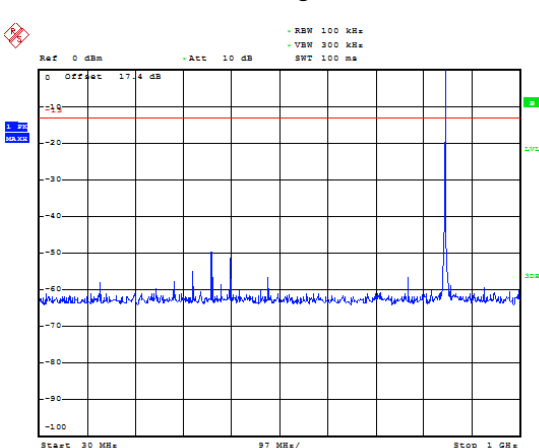


Date: 14.MAY.2019 15:31:29

GSM 850 CH-High 1GHz ~ 9GHz

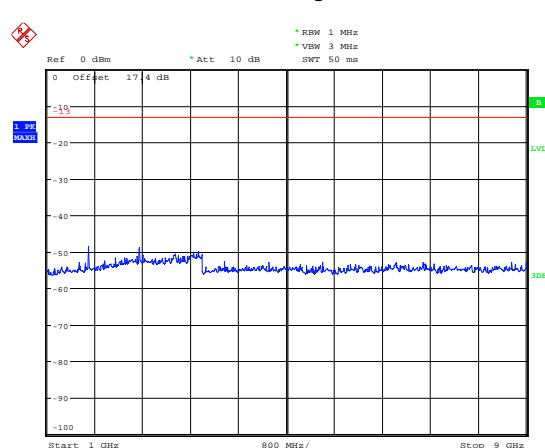


Date: 14.MAY.2019 15:35:41

WCDMA Band V CH-Low 30MHz ~ 1GHz

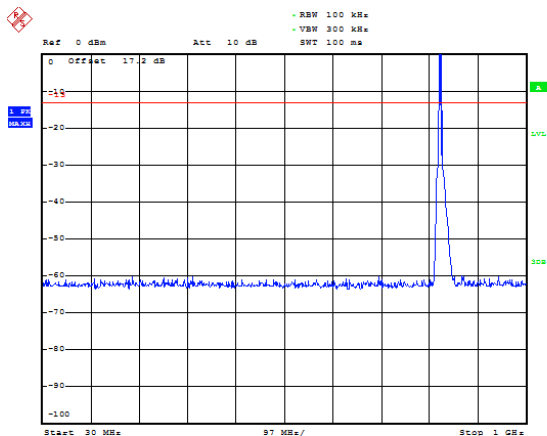


Date: 14.MAY.2019 21:15:58

WCDMA Band V CH-Low 1GHz ~ 9GHz

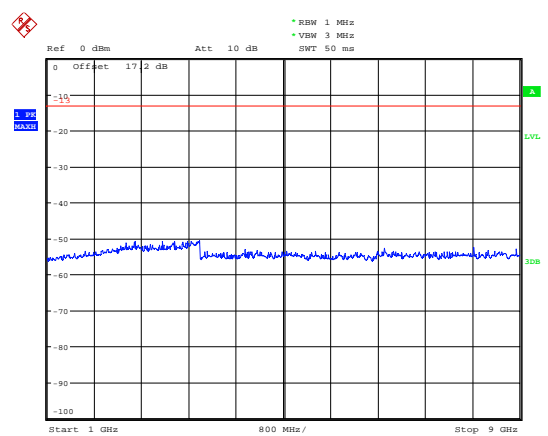


Date: 14.MAY.2019 21:32:16

WCDMA Band V CH-Middle 30MHz ~ 1GHz

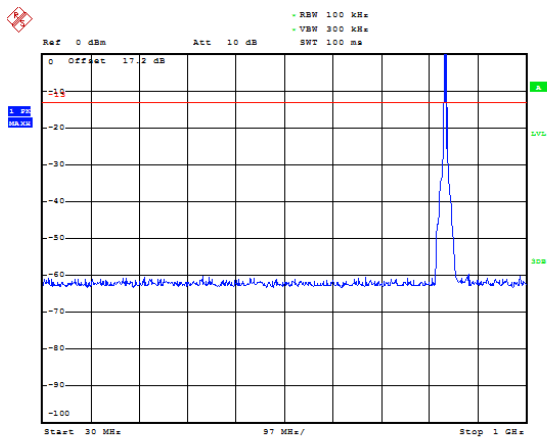


Date: 14.MAY.2019 21:17:04

WCDMA Band V CH-Middle 1GHz ~ 9GHz

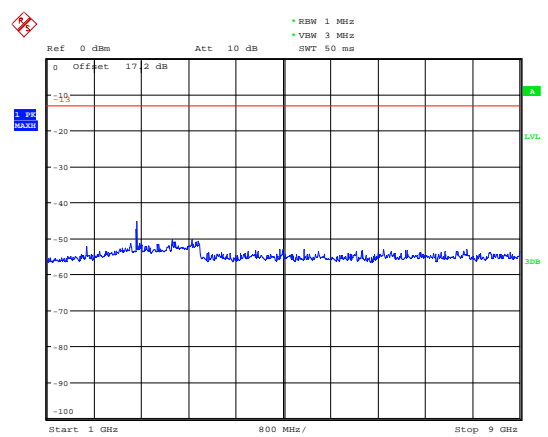


Date: 14.MAY.2019 21:31:37

WCDMA Band V CH-High 30MHz ~ 1GHz

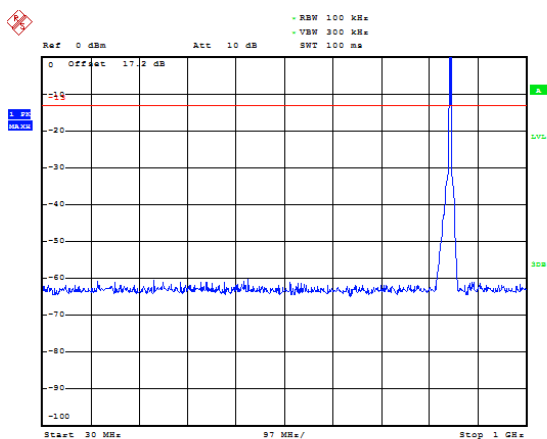

Date: 14.MAY.2019 21:19:42

WCDMA Band V CH-High 1GHz ~ 9GHz

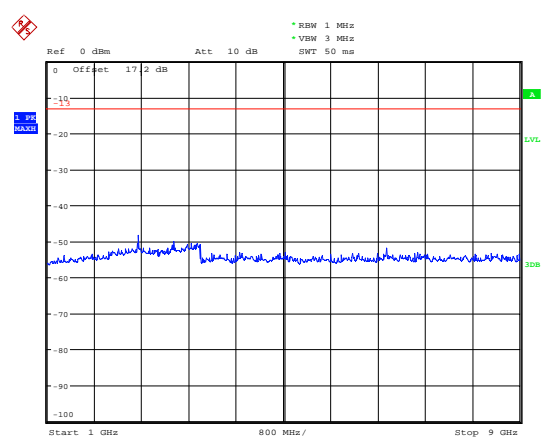

Date: 14.MAY.2019 21:31:08

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

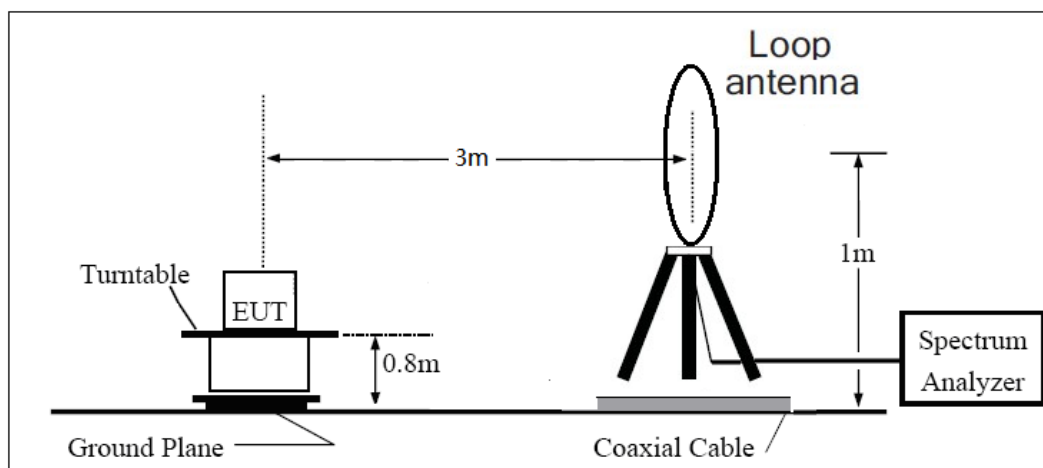

30MHz ~ 1GHz

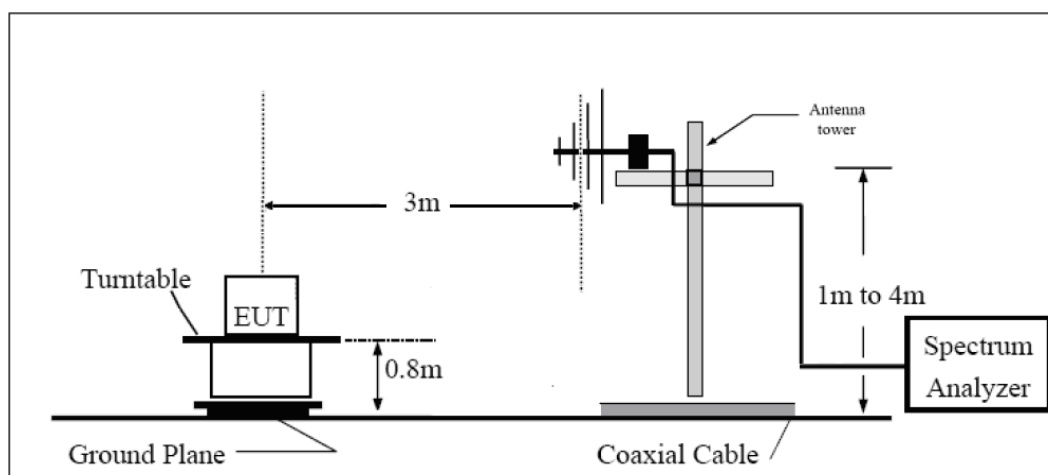

Above 1GHz

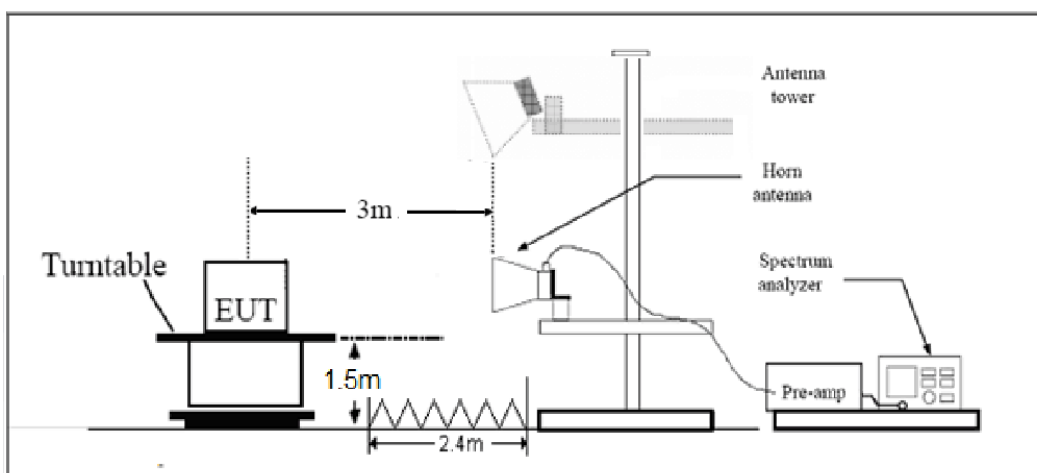



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Main antenna

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673	-64.11	2.00	10.75	Horizontal	-57.51	-13.00	44.51	45
3	2498	-51.16	2.51	11.05	Horizontal	-44.77	-13.00	31.77	315
4	3346	-63.91	4.20	11.15	Horizontal	-59.11	-13.00	46.11	180
5	4183	-57.57	5.20	11.15	Horizontal	-53.77	-13.00	40.77	45
6	5020	-58.26	5.50	11.95	Horizontal	-53.96	-13.00	40.96	0
7	5856	-59.59	5.70	13.55	Horizontal	-53.89	-13.00	40.89	45
8	6693	-56.90	6.30	13.75	Horizontal	-51.60	-13.00	38.60	315
9	7529	-55.13	6.80	13.85	Horizontal	-50.23	-13.00	37.23	90
10	8366	-54.11	6.90	14.25	Horizontal	-48.91	-13.00	35.91	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-68.45	2.00	10.75	Horizontal	-61.85	-13.00	48.85	135
3	2509.8	-65.26	2.51	11.05	Horizontal	-58.87	-13.00	45.87	315
4	3346.4	-64.04	4.20	11.15	Horizontal	-59.24	-13.00	46.24	225
5	4183.0	-60.50	5.20	11.15	Horizontal	-56.70	-13.00	43.70	225
6	5019.6	-57.31	5.50	11.95	Horizontal	-53.01	-13.00	40.01	0
7	5856.2	-59.14	5.70	13.55	Horizontal	-53.44	-13.00	40.44	45
8	6692.8	-56.66	6.30	13.75	Horizontal	-51.36	-13.00	38.36	180
9	7529.4	-55.26	6.80	13.85	Horizontal	-50.36	-13.00	37.36	90
10	8366.0	-55.19	6.90	14.25	Horizontal	-49.99	-13.00	36.99	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

Second antenna

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.4	-62.94	2.00	10.75	Horizontal	-56.34	-13.00	43.34	270
3	2509.9	-51.81	2.51	11.05	Horizontal	-45.42	-13.00	32.42	0
4	3346.4	-61.13	4.20	11.15	Horizontal	-56.33	-13.00	43.33	0
5	4183.0	-57.93	5.20	11.15	Horizontal	-54.13	-13.00	41.13	90
6	5019.6	-57.33	5.50	11.95	Horizontal	-53.03	-13.00	40.03	45
7	5856.2	-58.03	5.70	13.55	Horizontal	-52.33	-13.00	39.33	225
8	6692.8	-55.40	6.30	13.75	Horizontal	-50.10	-13.00	37.10	315
9	7529.4	-53.75	6.80	13.85	Horizontal	-48.85	-13.00	35.85	0
10	8366.0	-51.70	6.90	14.25	Horizontal	-46.50	-13.00	33.50	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-69.46	2.00	10.75	Horizontal	-62.86	-13.00	49.86	135
3	2509.8	-64.83	2.51	11.05	Horizontal	-58.44	-13.00	45.44	180
4	3346.4	-61.52	4.20	11.15	Horizontal	-56.72	-13.00	43.72	0
5	4183.0	-59.95	5.20	11.15	Horizontal	-56.15	-13.00	43.15	315
6	5019.6	-57.45	5.50	11.95	Horizontal	-53.15	-13.00	40.15	225
7	5856.2	-57.94	5.70	13.55	Horizontal	-52.24	-13.00	39.24	45
8	6692.8	-55.44	6.30	13.75	Horizontal	-50.14	-13.00	37.14	0
9	7529.4	-53.71	6.80	13.85	Horizontal	-48.81	-13.00	35.81	315
10	8366.0	-53.07	6.90	14.25	Horizontal	-47.87	-13.00	34.87	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	2019-03-15	2019-06-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****