
REPORT ON

Radio testing of the VERTEX STANDARD VX-2100-G7-45 / VX-2200-G7-45
In accordance with ANSI/TIA/EIA-603, RSS-119

Report number TA000325

May 2006

GENERAL INFORMATION

MODEL NAME:	VX-2100-G7-45 / VX-2200-G7-45	
FCC ID:	K6610614740	
MANUFACTURER:	Vertex Standard Co., Ltd.	
TRADE NAME:	VERTEX STANDARD	
EUT DESCRIPTION:	VHF FM Transceiver	
SERIAL NUMBER:	6F000001	
VOLTAGE REQUIREMENTS:	13.6	[V]
	DC	
NUMBER OF CHANNELS:	501	
SPECIFICATION ARE REFERENCED:	ANSI/TIA/EIA-603	
	RSS-119	

TRANSMITTERS

TYPE OF EMISSION:	16K0F3E , 11K0F3E	
FREQUENCY RANGE:	450 to 512	[MHz]
POWER OUTPUT RATING:	10 to 45	[W]
	<input type="checkbox"/> Switchable	
	<input checked="" type="checkbox"/> Variable	
	<input type="checkbox"/> N/A	
MAXIMUM POWER RATING:	300	[W]
INPUT IMPEDANCE (MIC):	600	[Ω]
OUTPUT IMPEDANCE (RF):	50	[Ω]
Collector Voltage:	13.6	[V]
Collector Current:	10	[A]

RECEIVERS

FREQUENCY RANGE:	450 to 512	[MHz]
INTERMEDIATE FREQUENCIES:	1st -67.65	[MHz]
	2nd -450	[kHz]
INPUT IMPEDANCE (RF):	50	[Ω]
OUTPUT IMPEDANCE (SP):	4	[Ω]
AUDIO OUTPUT POWER:	12	[W]

This report was prepared by Vertex Standard Co., Ltd.

Test performed by M.Kurihara

Date 01 / May /2006

VX-2100-G7-45 / VX-2200-G7-45 Channel Settings

CH No.	Shown on LCD	Transmit Frequency [MHz]	Receive Frequency [MHz]	CH Spacing	Power	
					High	Low
1	450WH	450.000	450.000	25k	45W	
2	481WH	481.000	481.000	25k	45W	
3	512WH	512.000	512.000	25k	45W	
4	450NH	450.000	450.000	12.5k	45W	
5	481NH	481.000	481.000	12.5k	45W	
6	512NH	512.000	512.000	12.5k	45W	
7	450WL	450.000	450.000	25k		10W
8	481WL	481.000	481.000	25k		10W
9	512WL	512.000	512.000	25k		10W
10	450NL	450.000	450.000	12.5k		10W
11	481NL	481.000	481.000	12.5k		10W
12	512NL	512.000	512.000	12.5k		10W
13						
14						
15						
16						
17						
18						
19						
20						

NAME OF TEST: R.F. Power Output (Conducted)
SPECIFICATION: 47 CFR 2.1046 (a)
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the modulated output power was measured by means of an R.F. power meter.
2. Measurement accuracy is $\pm 4\%$


MEASUREMENT RESULTS

NOMINAL, MHz	CHANNEL	R.F. POWER, WATTS	
		LOW	HIGH
450.000	1	9.500	45.000
481.000	2	9.500	45.000
512.000	3	10.000	45.000

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R.F. POWER OUTPUT

TEST 2: FREQUENCY STABILITY

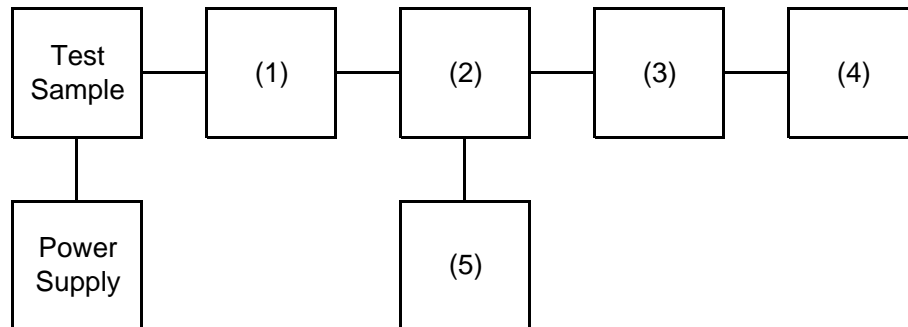

Instruments	Description	Serial Number
(1) COAXIAL ATTENUATOR	WEINSCHALL 49-10-43	***
(2) RF COUPLER	ADVANTEST TR4153	***
(3) POWER SENSOR	Agilent 8482B	***
(4) POWER METER	Agilent 8901B POWER MODE	***
(5) FREQUENCY COUNTER	Agilent 8901B FREQUENCY MODI	***

NAME OF TEST: Unwanted Emissions (Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20dB below the permissible value need not be specified.

3. **MEASUREMENT RESULTS:**

FREQUENCY OF CARRIER, MHz = 450 , 481 , 512
SPECTRUM SEARCHED, GHz = 0 to 10 x Fc
MAXIMUM RESPONSE, Hz = 2500
ALL OTHER EMISSIONS = >= 20dB BELOW LIMIT

TRANSMITTER SPURIOUS EMISSION

TEST 1: OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
TEST 2: OUT-OF-BAND SPURIOUS

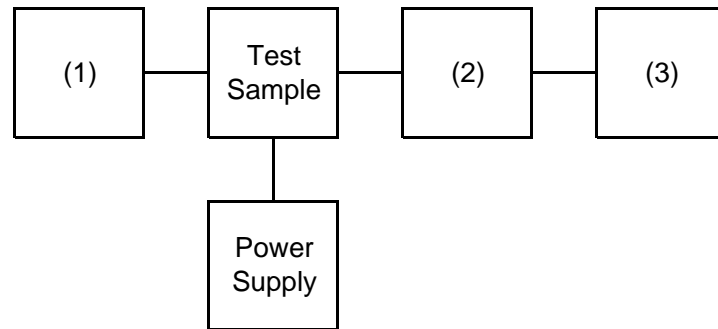

Instruments	Description	Serial Number
(1) AUDIO GENERATOR	Agilent 8903B	***
(2) COAXIAL ATTENUATOR	WEINSCHALL 49-10-43	***
(2) COAXIAL ATTENUATOR	Agilent 8498A	***
(3) SPECTRUM ANALYZER	ADVANTEST TR4173	***

NAME OF TEST: Unwanted Emissions (Conducted)

LIMIT'S), dBc: $-(50+10\times\text{LOG}(P)) = -67$ (45 Watts)
 $-(50+10\times\text{LOG}(P)) = -60$ (10 Watts)

High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
450.0000	900.0000	-34.0	-80.5	14.0
481.0000	962.0000	-32.5	-79.0	12.5
512.0000	1024.0000	-38.7	-85.2	18.7
481.0000	4329.0000	-31.6	-78.1	11.6

NAME OF TEST: Unwanted Emissions (Conducted)

LIMIT'S), dBc: $-(50+10\times\text{LOG}(P)) = -67$ (45 Watts)
 $-(50+10\times\text{LOG}(P)) = -60$ (10 Watts)

Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
450.0000	1800.0000	-42.4	-82.4	22.4


NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053 (a)
GUIDE: ANSI/TIA/EIA-603, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of measurement


- A) Connect the equipment as illustrated.
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth $\leq 3\text{kHz}$
 - 2) Video Bandwidth $\geq 10\text{kHz}$
 - 3) Sweep Speed $\leq 2000\text{Hz/second}$
 - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

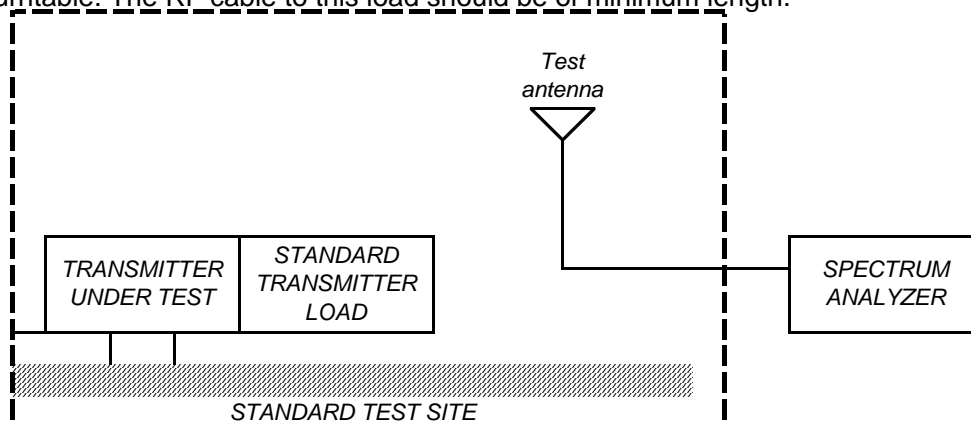

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity.

NAME OF TEST: Field Strength of Spurious Radiation

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically

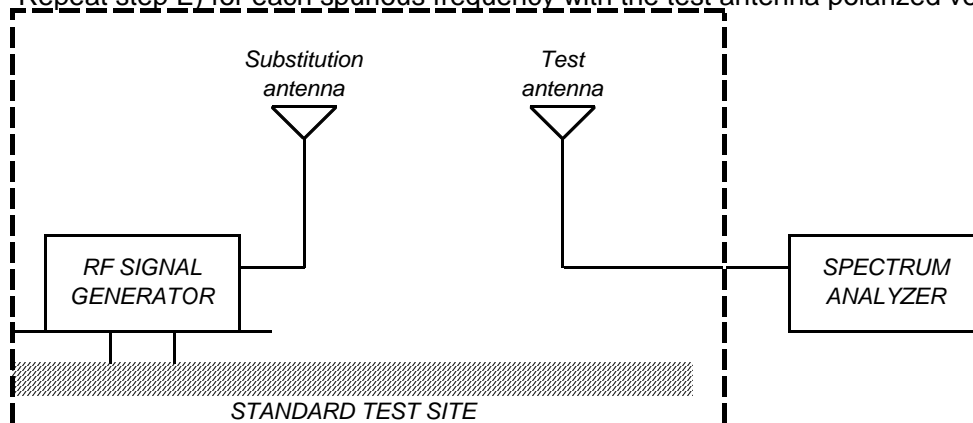

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3m above the ground.
- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previous recorded maximum reading for the set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in step J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB = $10\log(\text{TX power in watts}/0.001)$ - the levels in step L)

NAME OF TEST: Field Strength of Spurious Radiation

Note: It is permissible that other antennas provided can be referenced to a dipole.

Instruments	Description	Serial Number
TRANSDUCER	Schaffner-Chase CBL6143	***
TRANSDUCER	EMCO 3115	***
AMPLIFIER	Agilent 8447D	***
AMPLIFIER	Agilent 8449B	***
SPECTRUM ANALYZER	Agilent 8561B	***

NAME OF TEST: Field Strength of Spurious Radiation

LIMIT'S), dBc: $-(50+10 \times \text{LOG}(P)) = -67$ (45 Watts)
 $-(50+10 \times \text{LOG}(P)) = -60$ (10 Watts)

High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	C.F., dB	ERP, dBm	ERP, dBc
450.0000	900.0000	49.8	30.8	-26.4	-72.9
512.0000	1024.0000	73.9	-2.4	-35.5	-82.0
512.0000	1536.0000	65.6	2.6	-38.8	-85.3
450.0000	1800.0000	66.9	4.0	-36.1	-82.6
481.0000	1924.0000	65.5	5.0	-36.5	-83.0
481.0000	2405.0000	60.6	12.0	-34.4	-80.9
512.0000	2560.0000	60.1	9.3	-37.6	-84.1
450.0000	2700.0000	56.2	11.1	-39.7	-86.2
481.0000	2886.0000	61.9	13.3	-31.8	-78.3
512.0000	3072.0000	56.7	14.3	-36.0	-82.5
450.0000	3150.0000	62.6	15.8	-28.6	-75.1
481.0000	3367.0000	62.9	17.5	-26.6	-73.1
512.0000	3584.0000	62.4	17.2	-27.4	-73.9
481.0000	3848.0000	54.2	21.0	-31.8	-78.3

NAME OF TEST: Field Strength of Spurious Radiation

LIMIT'S), dBc: $-(50+10 \times \text{LOG}(P)) = -67$ (45 Watts)
 $-(50+10 \times \text{LOG}(P)) = -60$ (10 Watts)

Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	C.F., dB	ERP, dBm	ERP, dBc
450.0000	900.0000	45.7	30.8	-30.5	-70.5



<u>NAME OF TEST:</u>	Emission Masks (Occupied Bandwidth)
<u>SPECIFICATION:</u>	47 CFR 2.1049 (c) (1)
<u>GUIDE:</u>	ANSI/TIA/EIA-603, Paragraph 2.2.11
<u>TEST EQUIPMENT:</u>	As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the spectrum analyzer connected.
2. For EUT's supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.5$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUT's supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The occupied bandwidth was measured with the spectrum analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

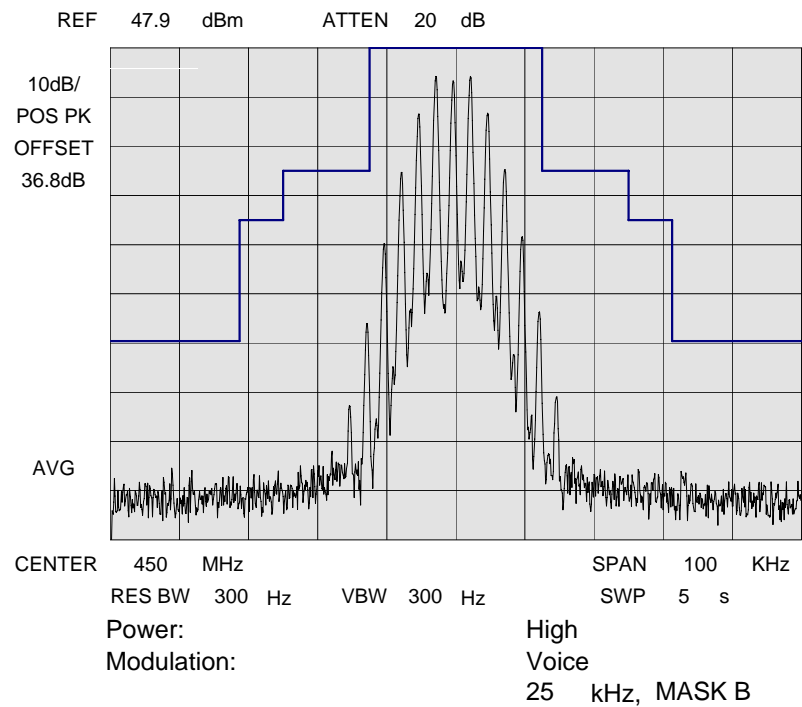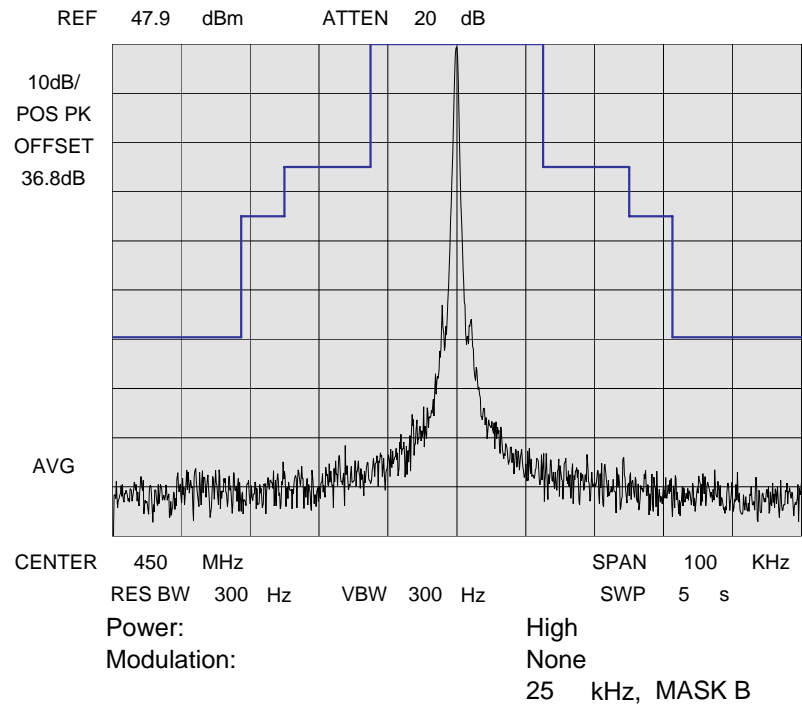



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

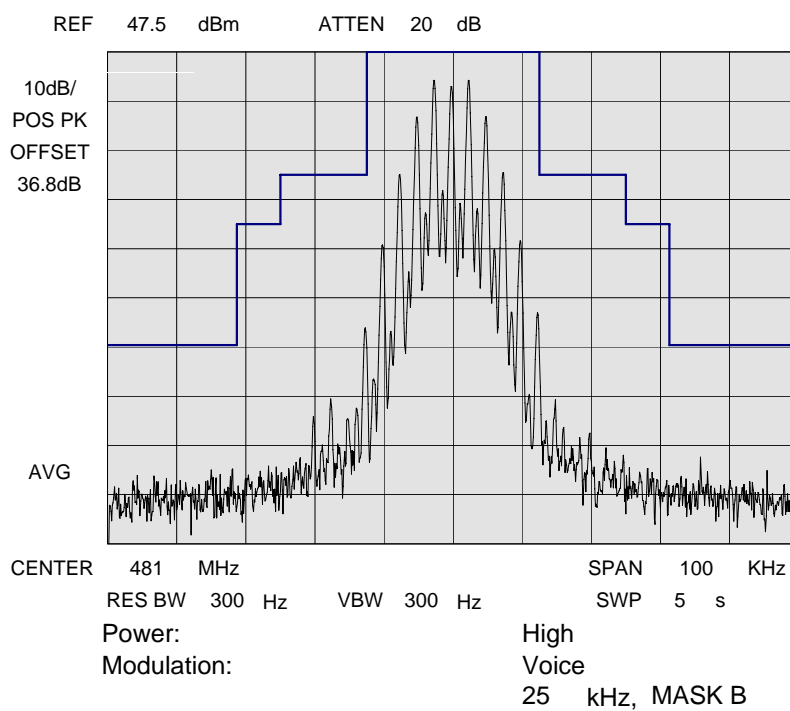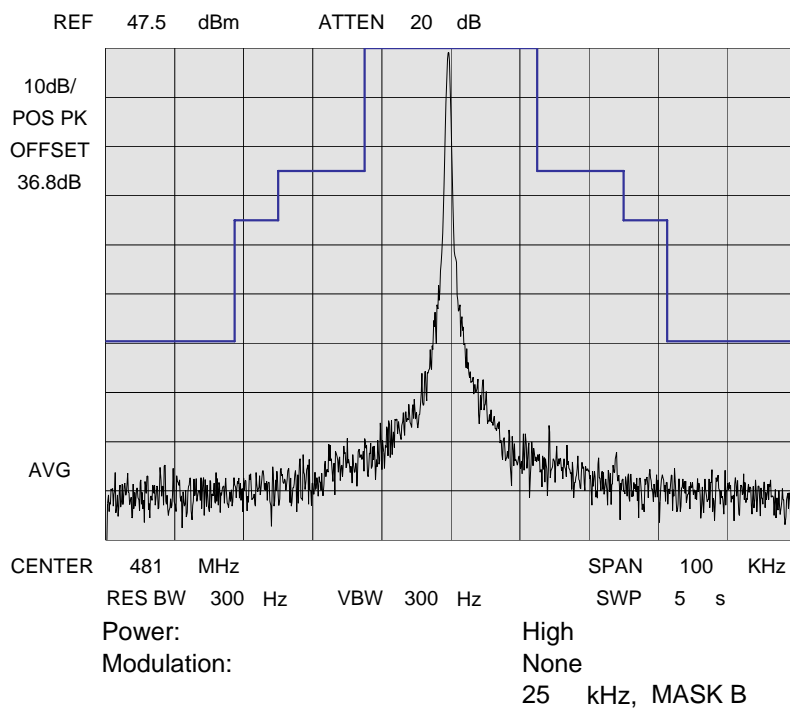



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

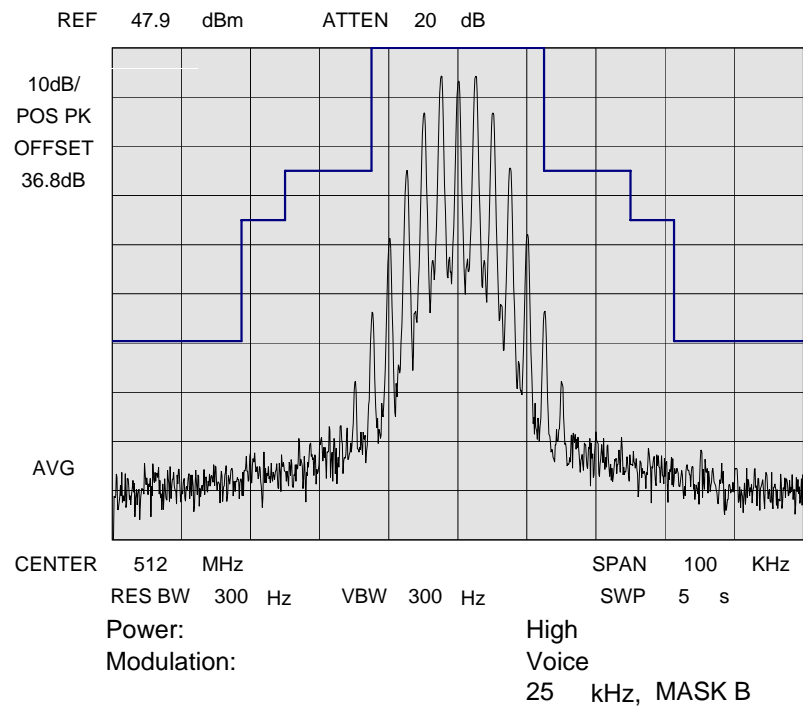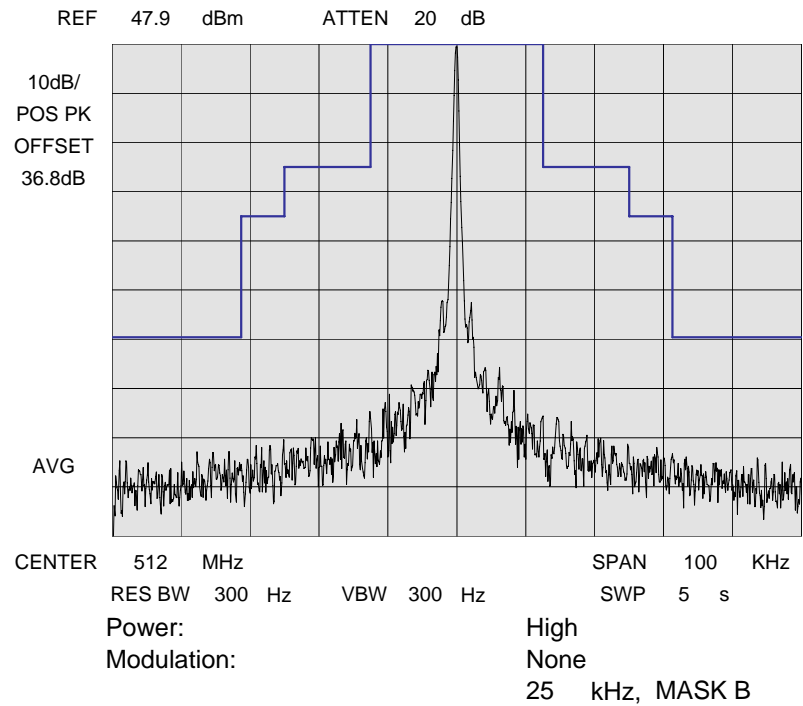



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

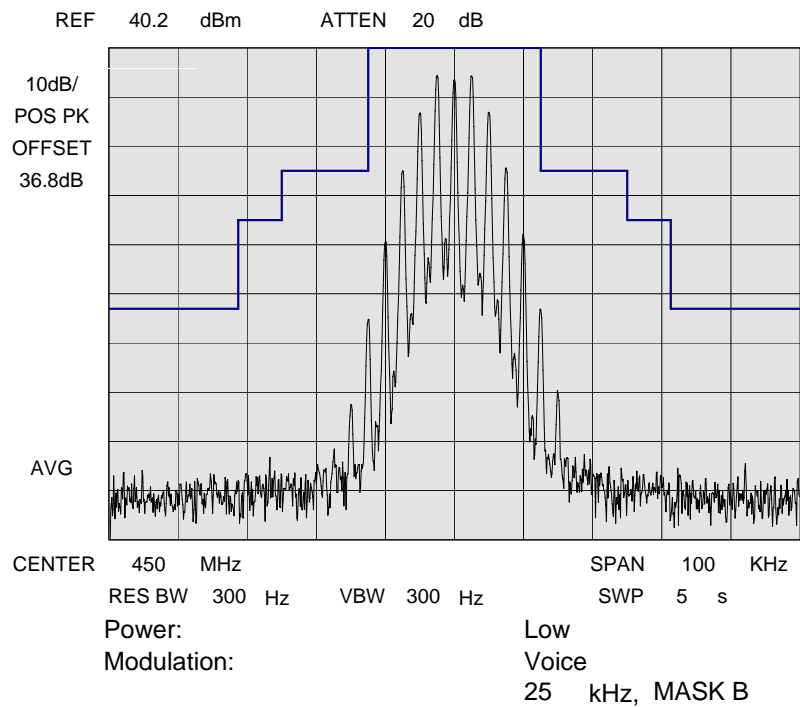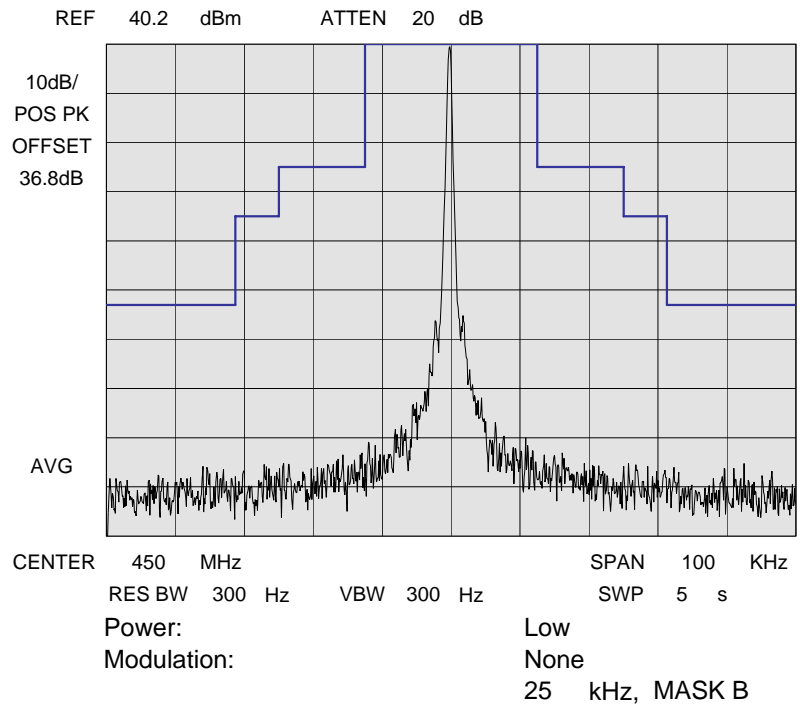



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

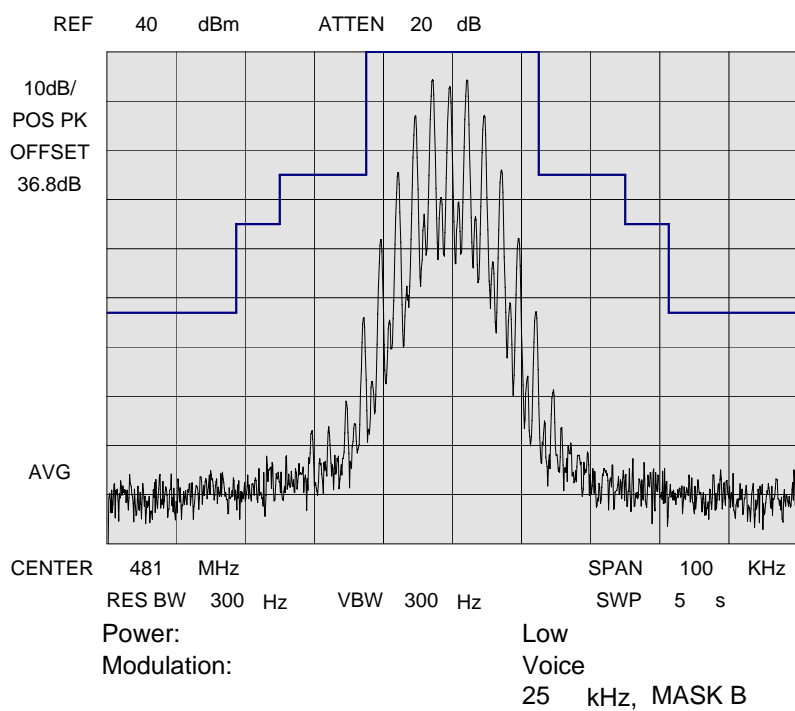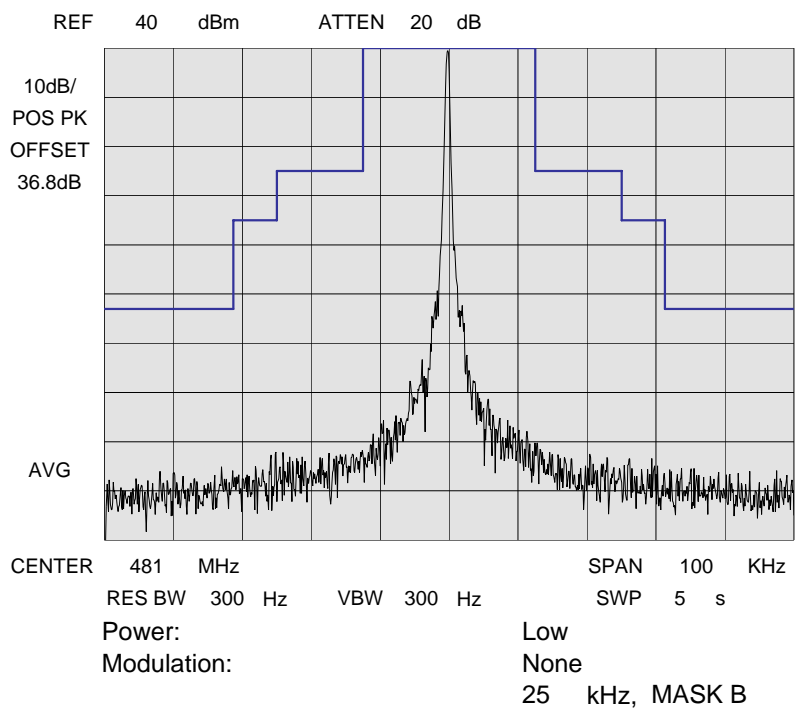



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

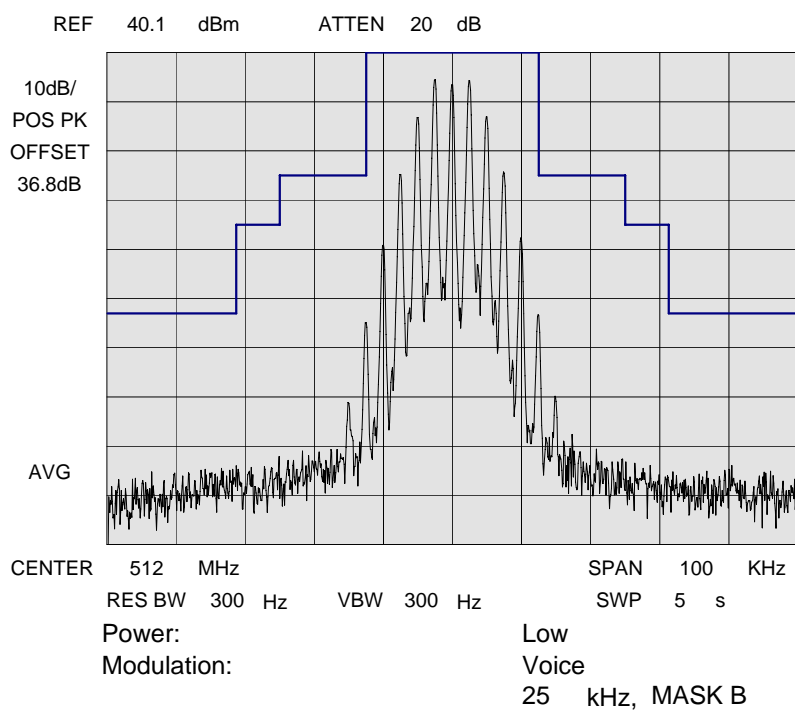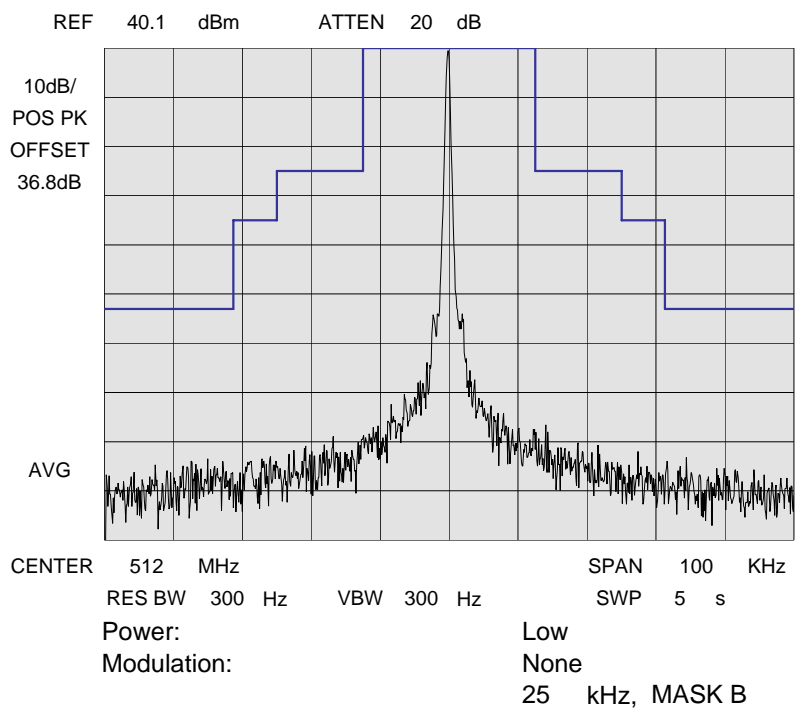



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

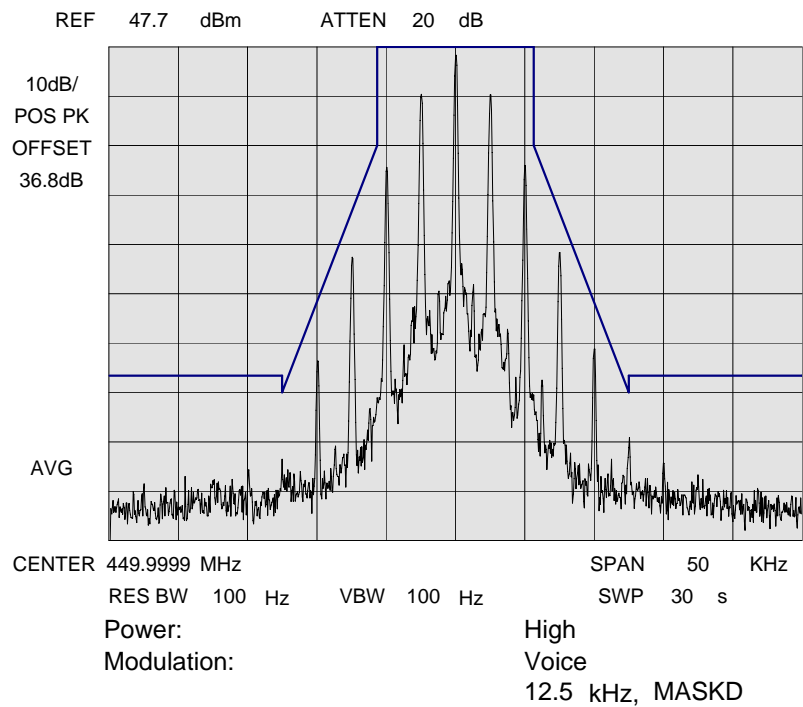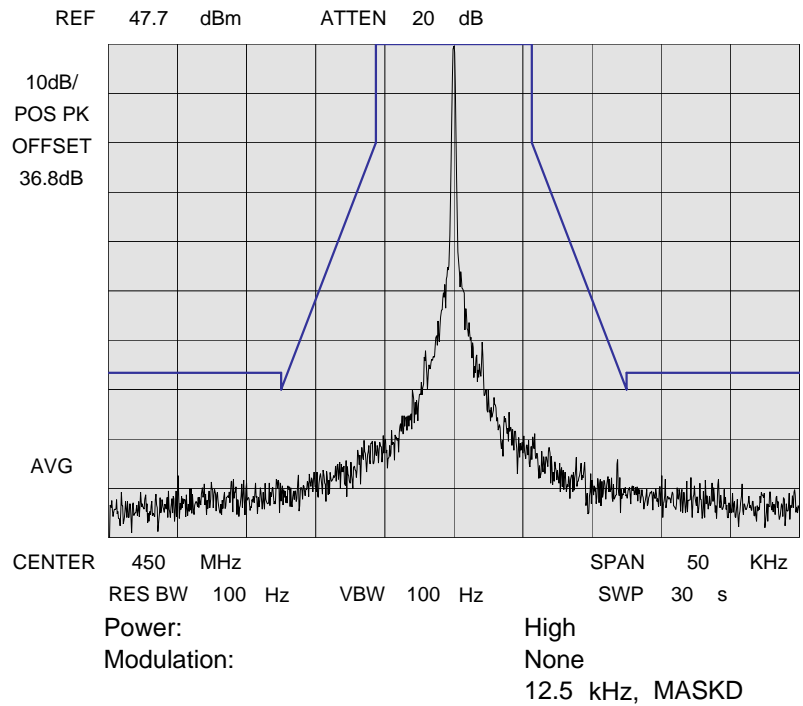



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

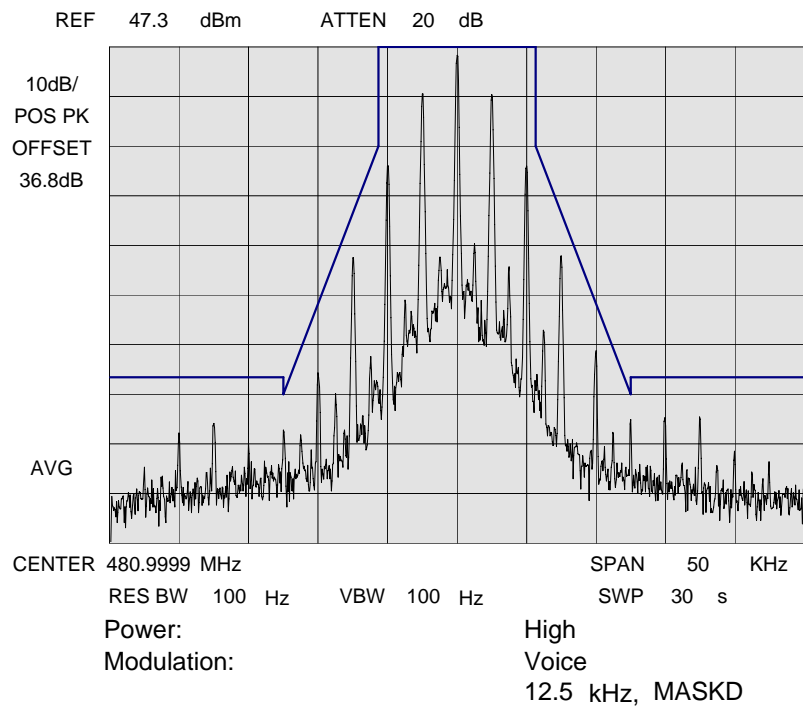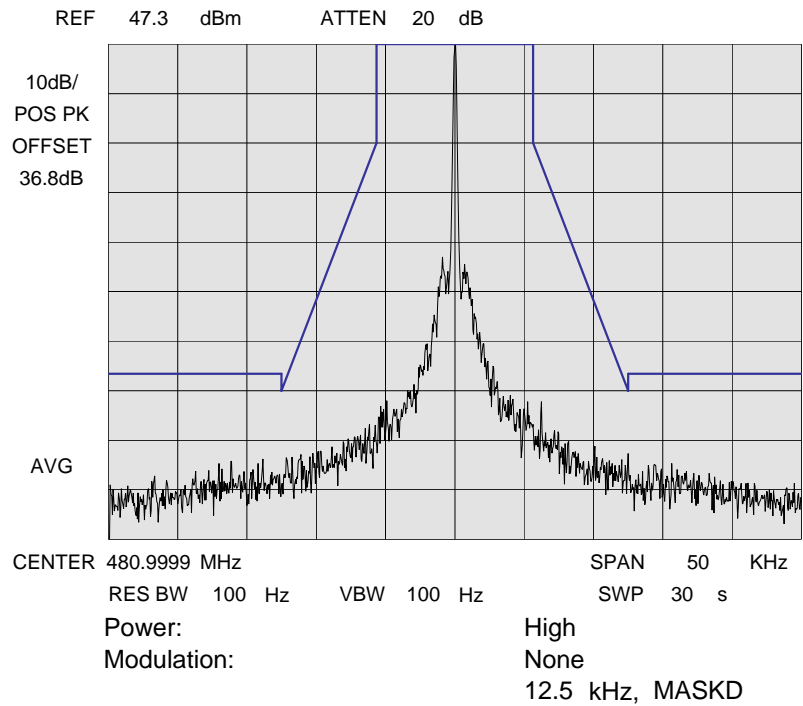



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 1 : High Power

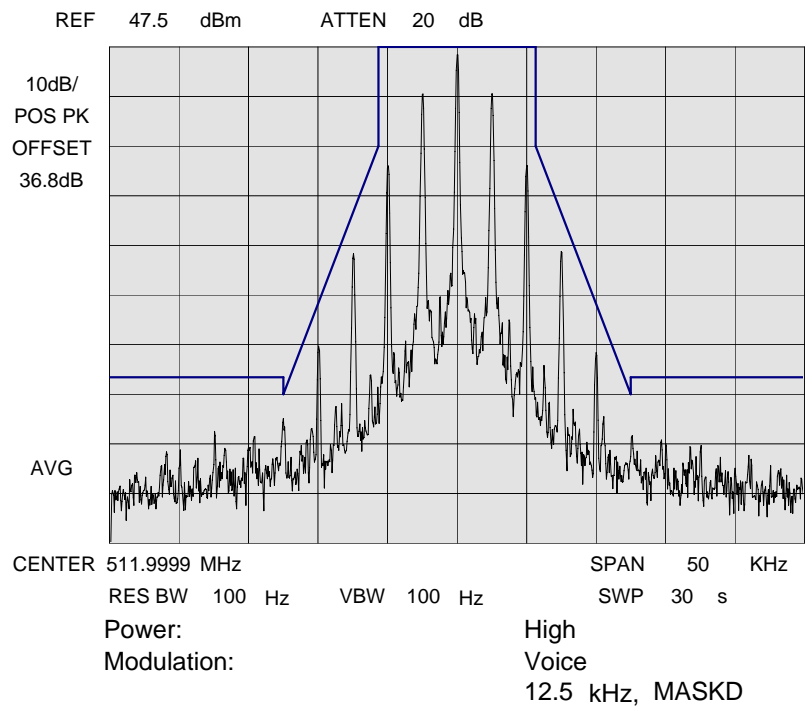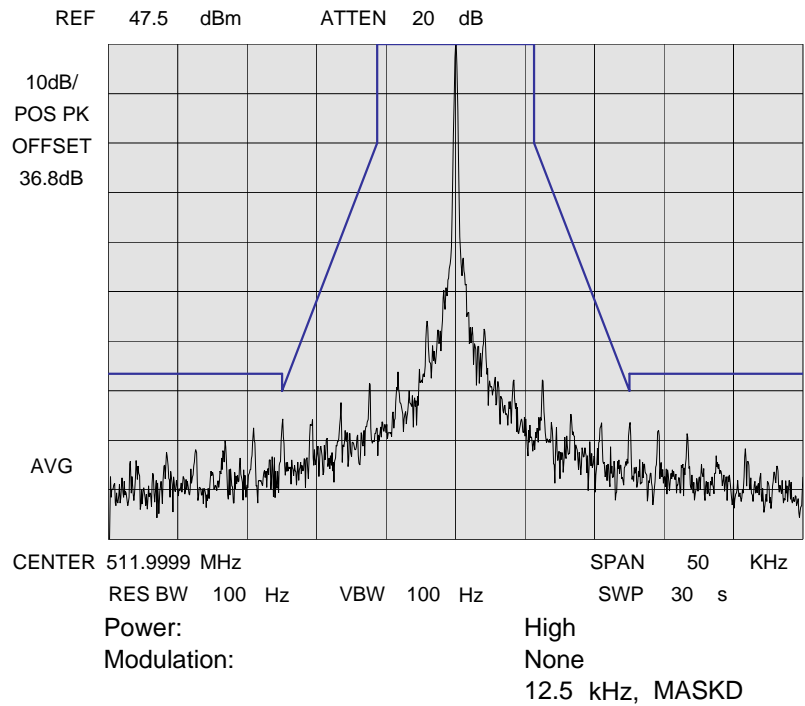



NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

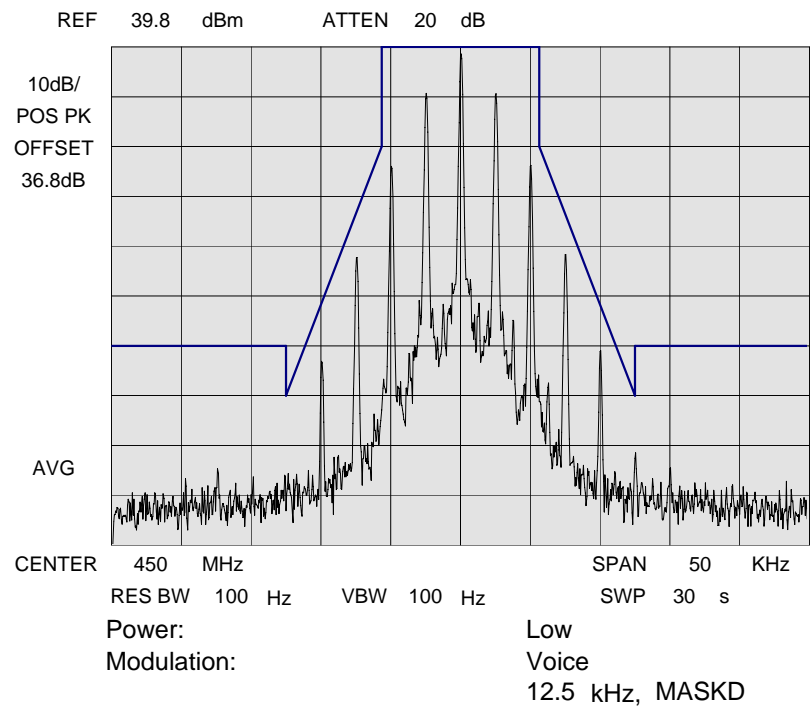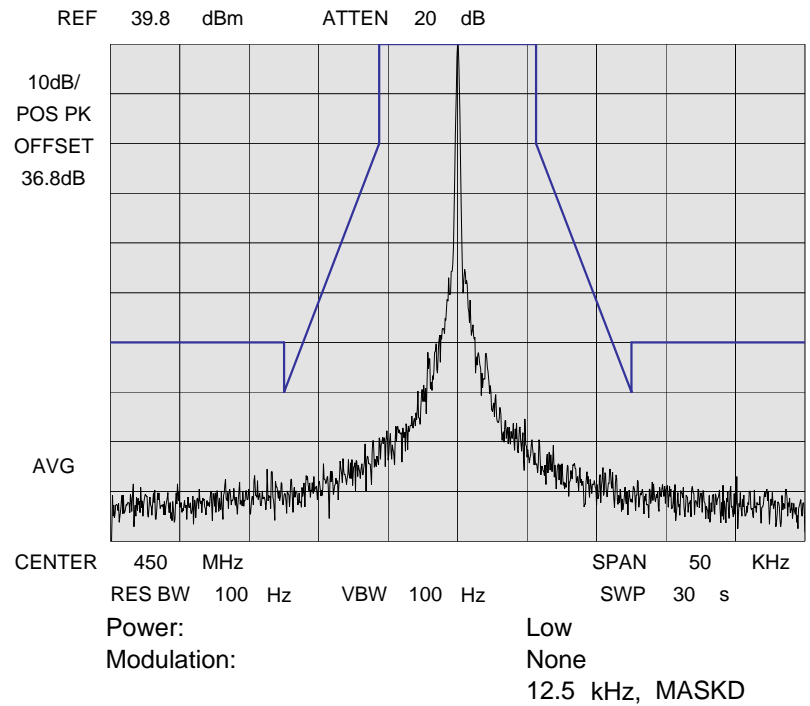



NAME OF TEST: Emission Masks (Occupied Bandwidth)


STATE: 2 : Low Power

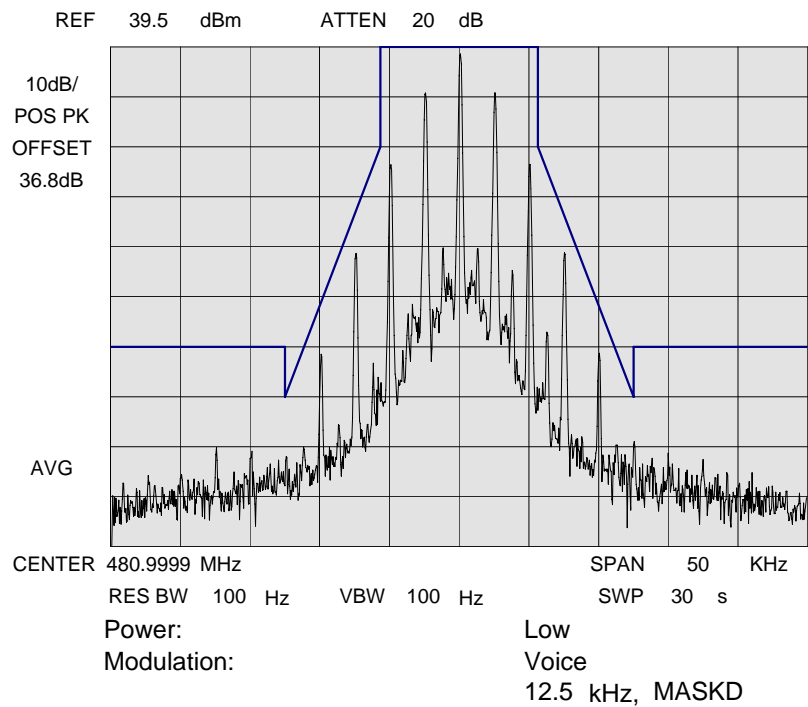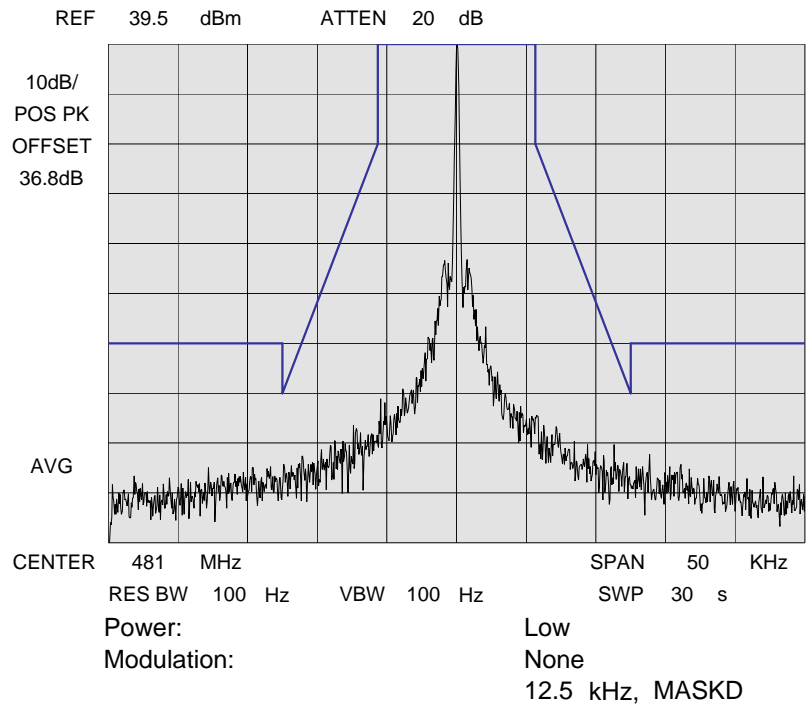

NAME OF TEST: Emission Masks (Occupied Bandwidth)

STATE: 2 : Low Power

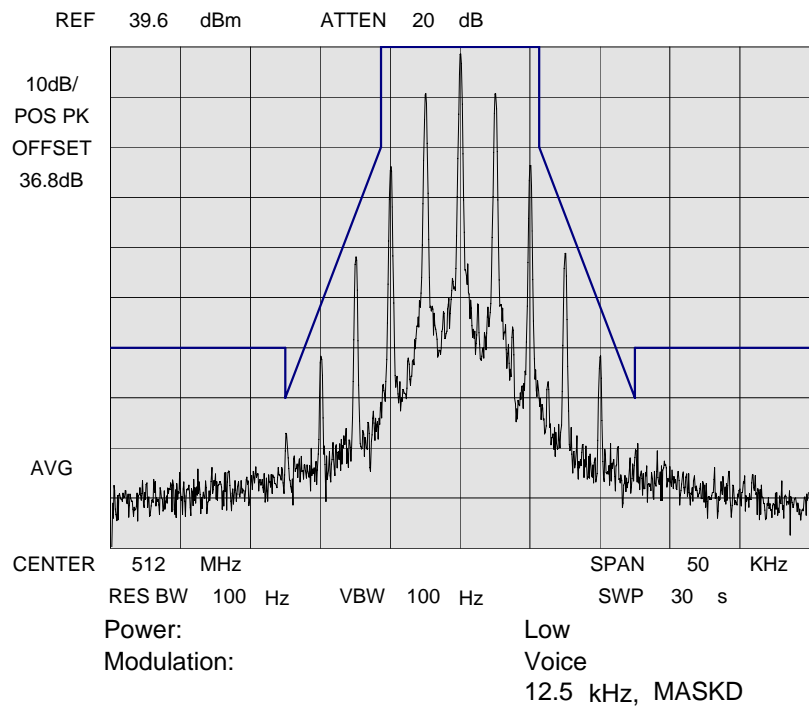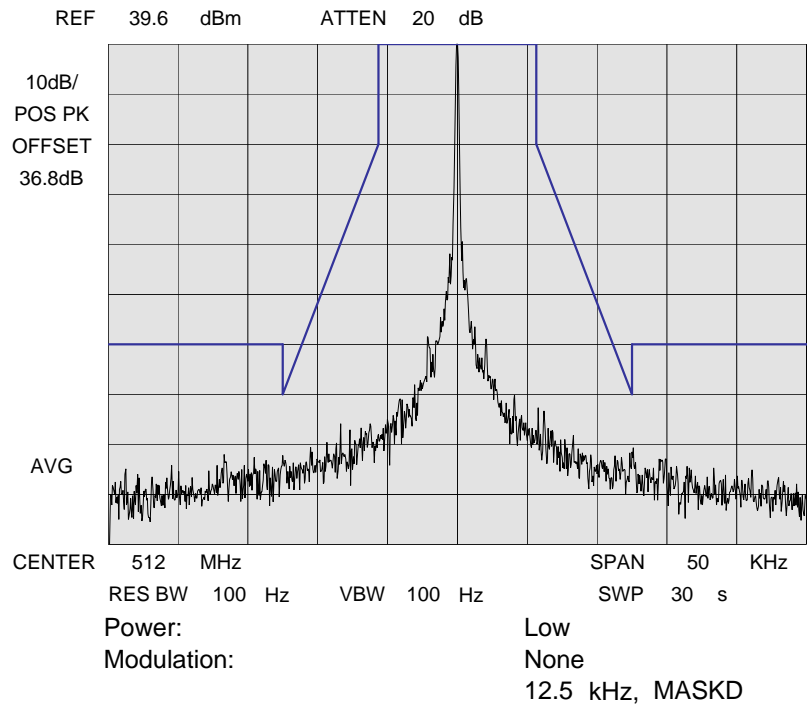


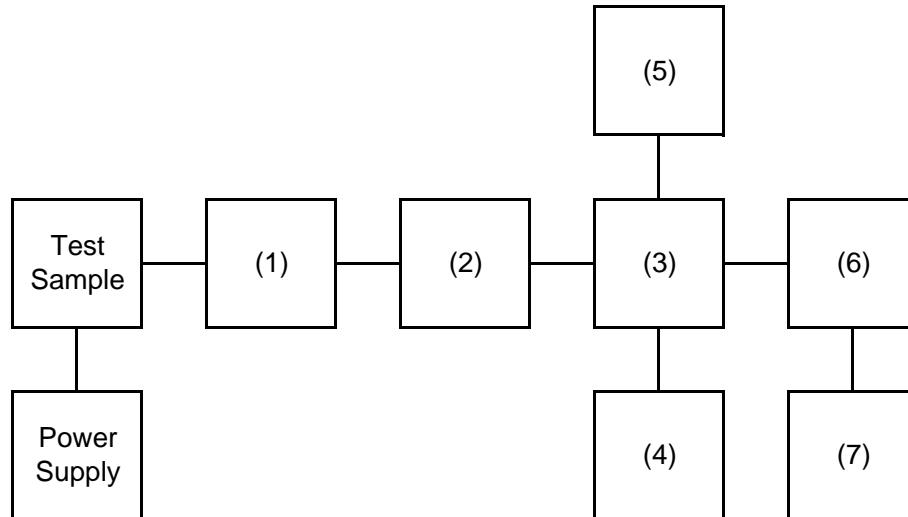TRANSIENT FREQUENCY BEHAVIOR

Instruments	Description	Serial Number
(1) COAXIAL ATTENUATOR	WEINSCHALL 49-10-43	***
(2) COAXIAL ATTENUATOR	WEINSCHALL 49-10-43	***
(3) COMBINER	IWATSU B-504D	***
(4) CRYSTAL DETECTOR	Agilent 8470B	***
(5) RF SIGNAL GENERATOR	Agilent 8642B	***
(5) MODULATION ANALYZER	Agilent 8901B	***
(5) SCOPE	Agilent 54504A	***

NAME OF TEST: Transient Frequency Behaviour


STATE: 1 : High Power

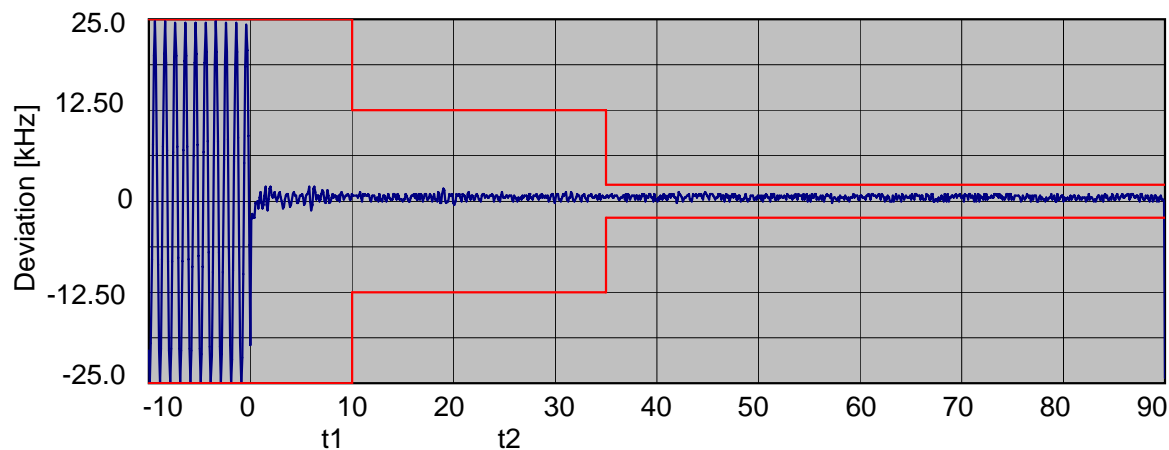

Model Name: VX-2200-G7-45
 Serial Number: 6G000001
 Test Frequency: 450
 Channel Spacing: 25

Time [ms]

Type: Mobile/Portable
 Trigger Direction: Rise
 Ref. Standard: EIA

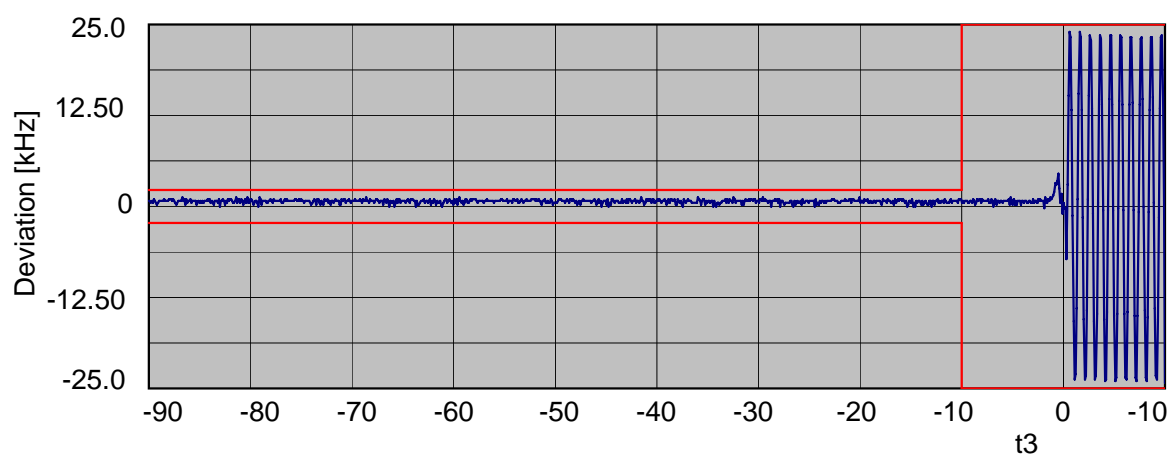


Model Name: VX-2200-G7-45
 Serial Number: 6G000001
 Test Frequency: 450
 Channel Spacing: 25

Time [ms]


Type: Mobile/Portable
 Trigger Direction: Fall
 Ref. Standard: EIA

NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

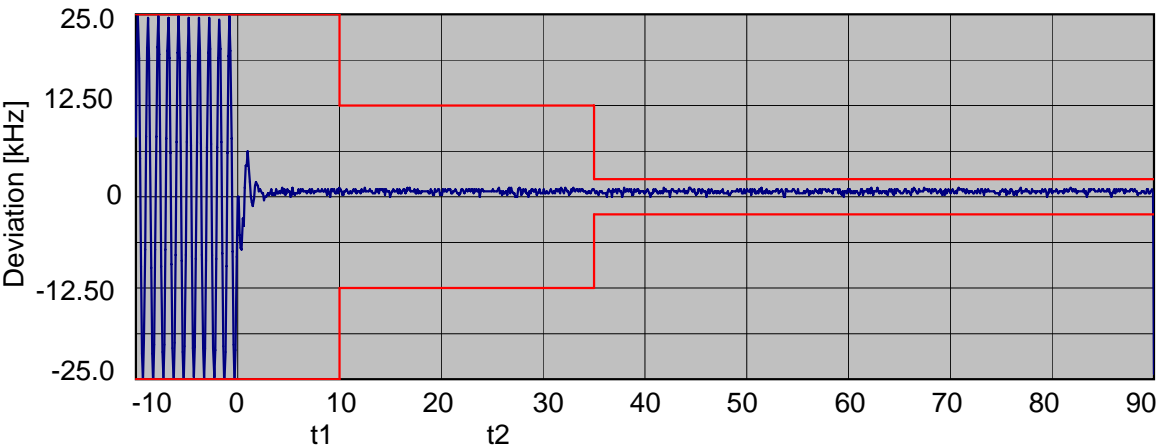


Model Name:	VX-2200-G7-45	Type:	Mobile/Portable
Serial Number:	6G000001	Trigger Direction:	Rise
Test Frequency:	481		
Channel Spacing:	25	Ref. Standard	EIA

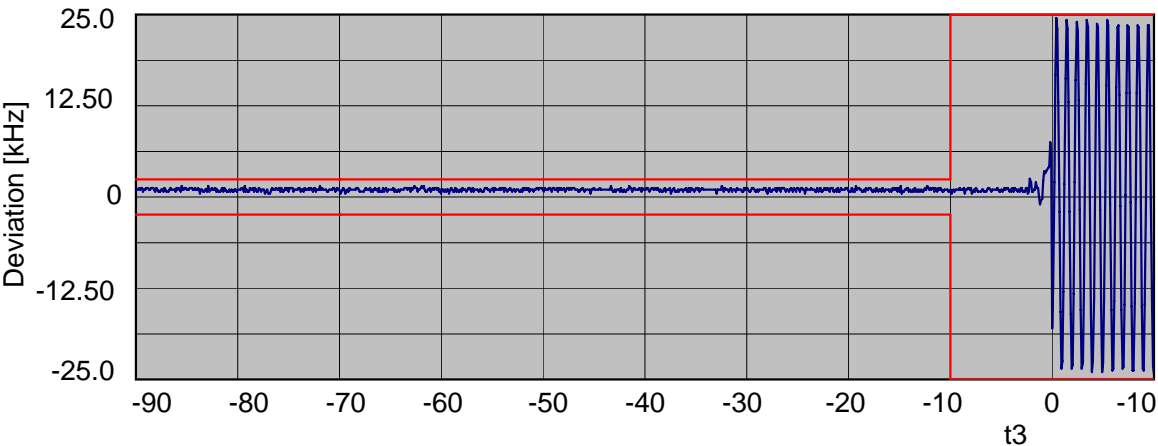

Model Name:	VX-2200-G7-45	Type:	Mobile/Portable
Serial Number:	6G000001	Trigger Direction:	Fall
Test Frequency:	481		
Channel Spacing:	25	Ref. Standard	EIA

NAME OF TEST: Transient Frequency Behaviour


STATE: 1 : High Power

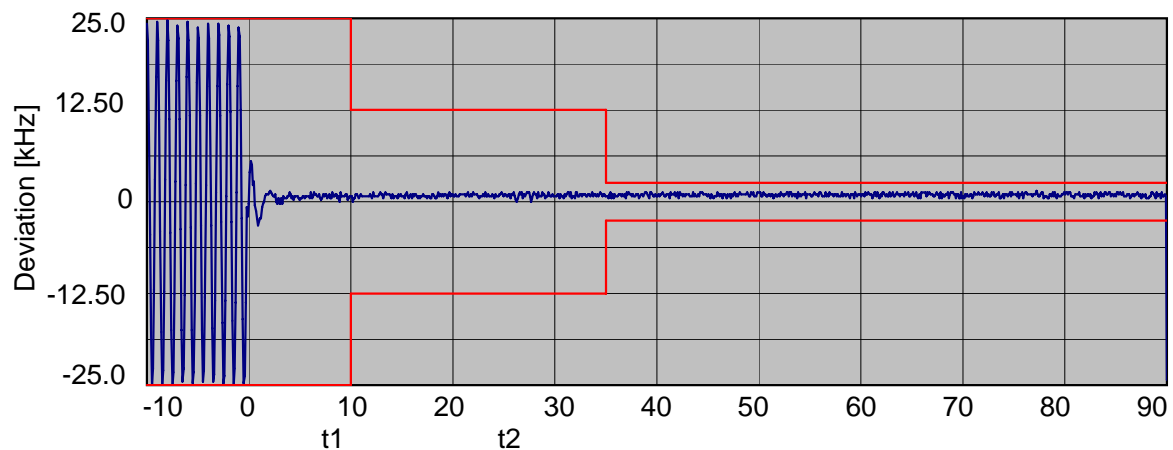

Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	512
Channel Spacing:	25

Time [ms]

Type:	Mobile/Portable
Trigger Direction:	Rise
Ref. Standard	EIA

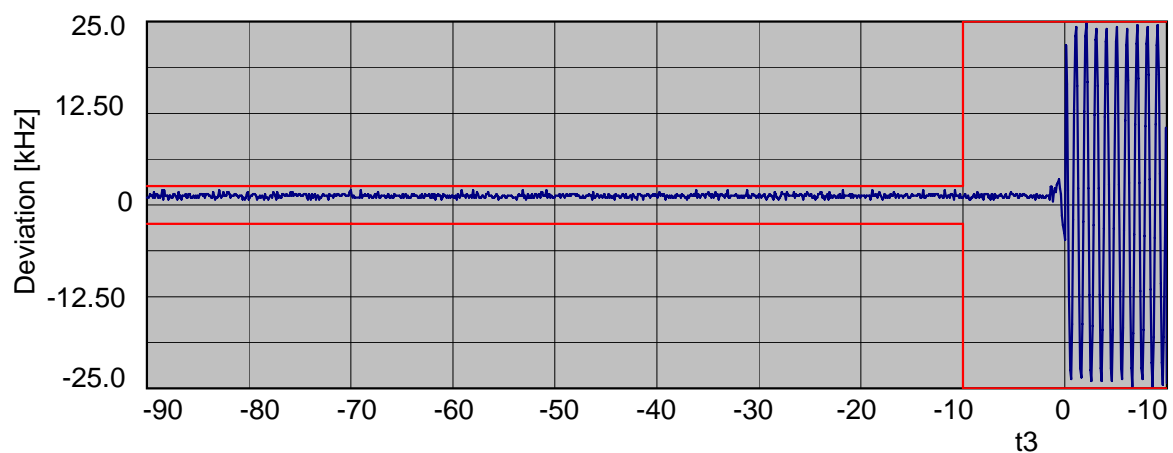


Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	512
Channel Spacing:	25

Time [ms]

Type:	Mobile/Portable
Trigger Direction:	Fall
Ref. Standard	EIA


NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

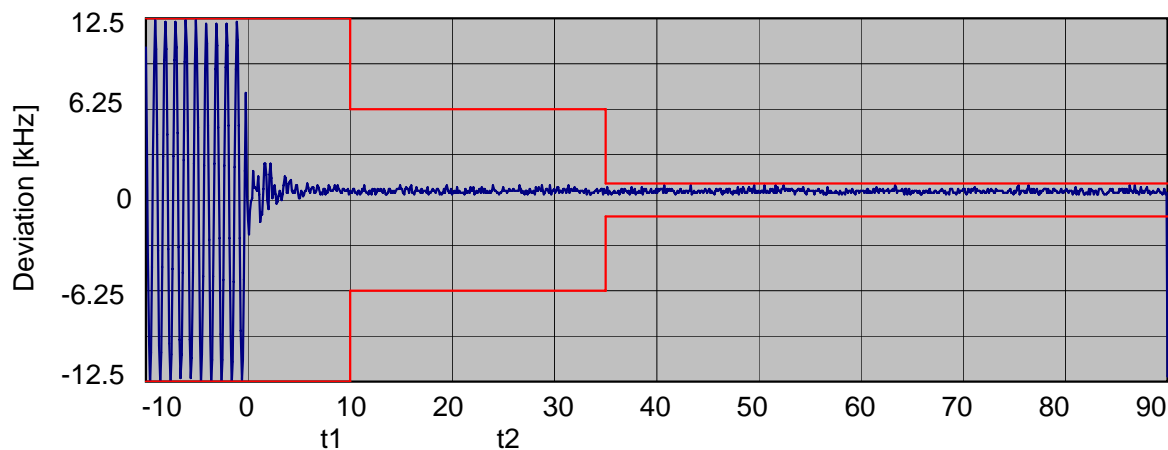

Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	450
Channel Spacing:	12.5

Type:	Mobile/Portable
Trigger Direction:	Rise
Ref. Standard	EIA

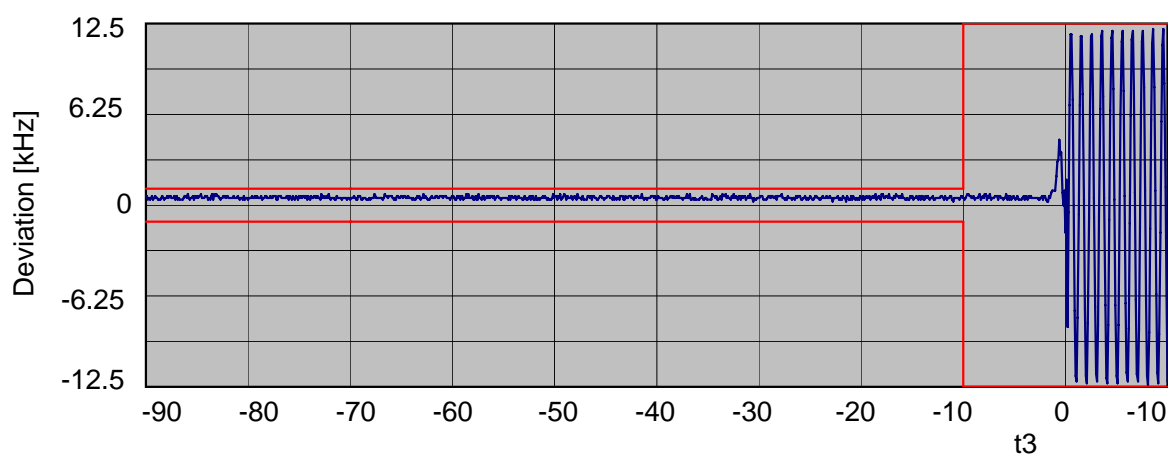


Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	450
Channel Spacing:	12.5

Type:	Mobile/Portable
Trigger Direction:	Fall
Ref. Standard	EIA

NAME OF TEST: Transient Frequency Behaviour


STATE: 1 : High Power

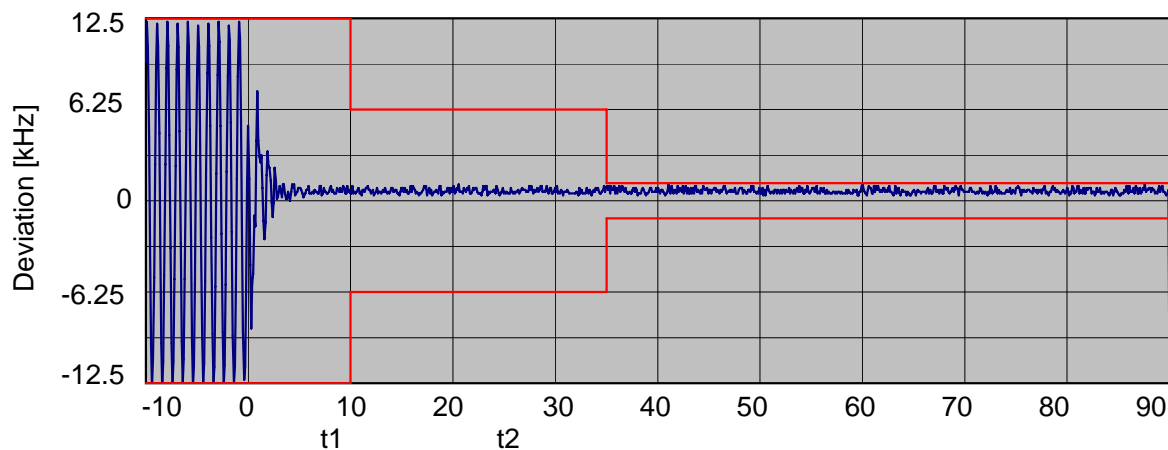

Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	481
Channel Spacing:	12.5

Time [ms]

Type:	Mobile/Portable
Trigger Direction:	Rise
Ref. Standard	EIA

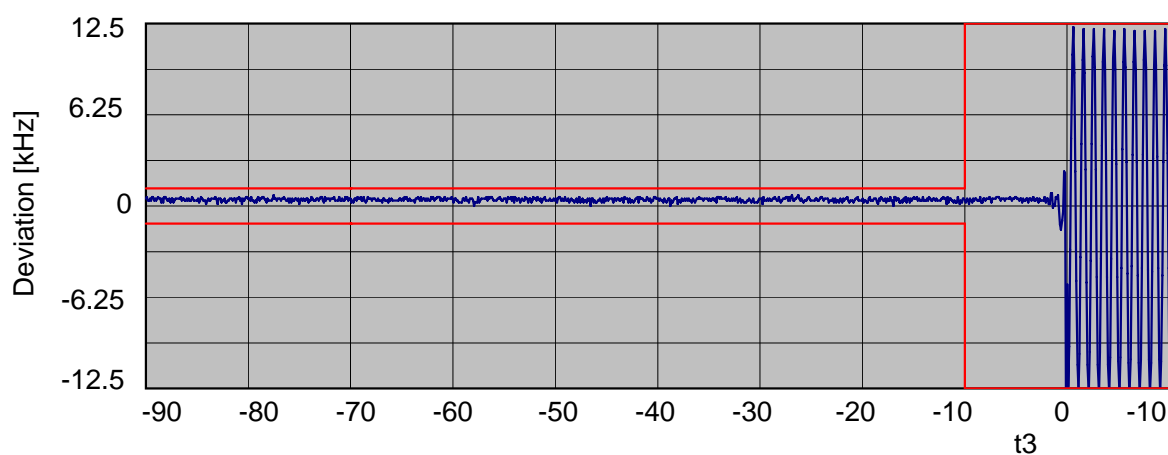


Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	481
Channel Spacing:	12.5

Time [ms]

Type:	Mobile/Portable
Trigger Direction:	Fall
Ref. Standard	EIA


NAME OF TEST: Transient Frequency Behaviour

STATE: 1 : High Power

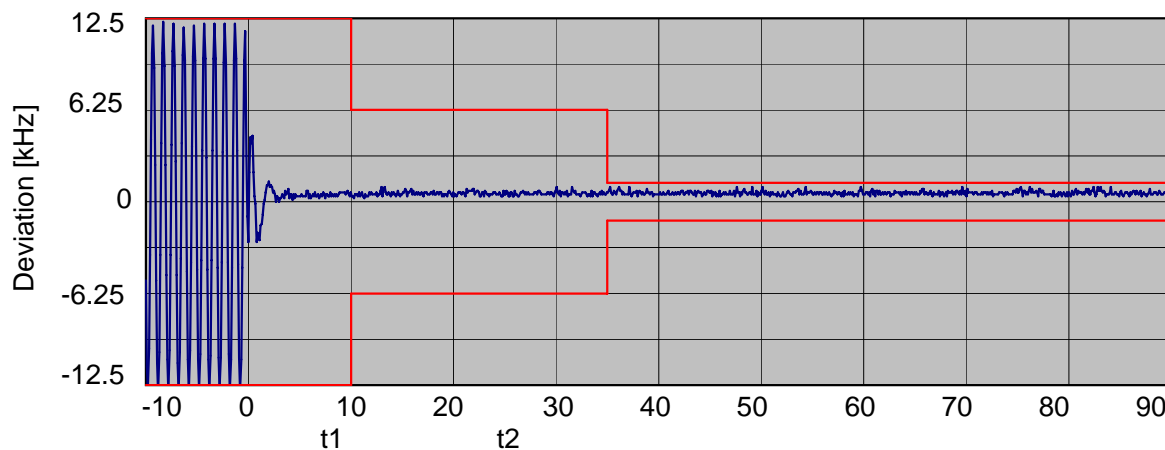

Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	512
Channel Spacing:	12.5

Type:	Mobile/Portable
Trigger Direction:	Rise
Ref. Standard	EIA

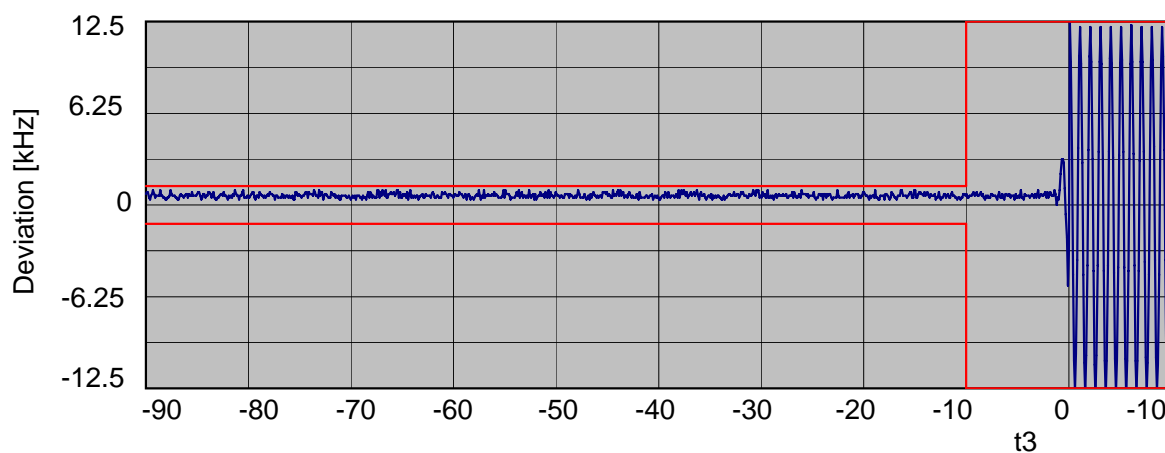

Model Name:	VX-2200-G7-45
Serial Number:	6G000001
Test Frequency:	512
Channel Spacing:	12.5

Type:	Mobile/Portable
Trigger Direction:	Fall
Ref. Standard	EIA


NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: 47 CFR 2.1047 (a)
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.15
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input of the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP



TEST A: MODULATION CAPABILITY / DISTORTION
 TEST B: AUDIO FREQUENCY RESPONSE
 TEST C: HUM AND NOISE LEVEL
 TEST D: RESPONSE OF LOW PASS FILTER
 TEST E: MODULATION KIMITING

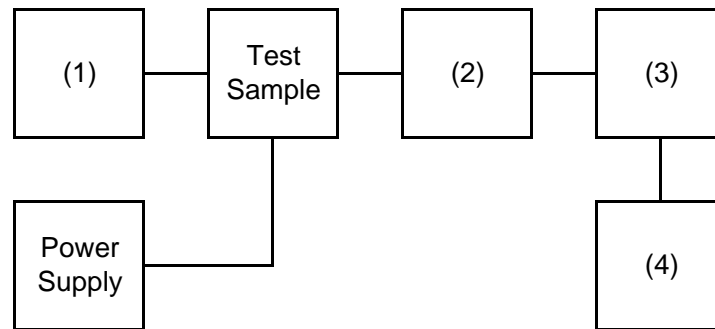

Instruments	Description	Serial Number
(1) AUDIO GENERATOR	Agilent 8903B	***
(2) COAXIAL ATTENUATOR	Agilent 8498A	***
(3) MODULATION ANALYZER	Agilent 8901B	***
(4) AUDIO ANALYZER	Agilent 8903B	***

NAME OF TEST: Audio Low Pass Filter (Voice Input)

STATE: 0 : General

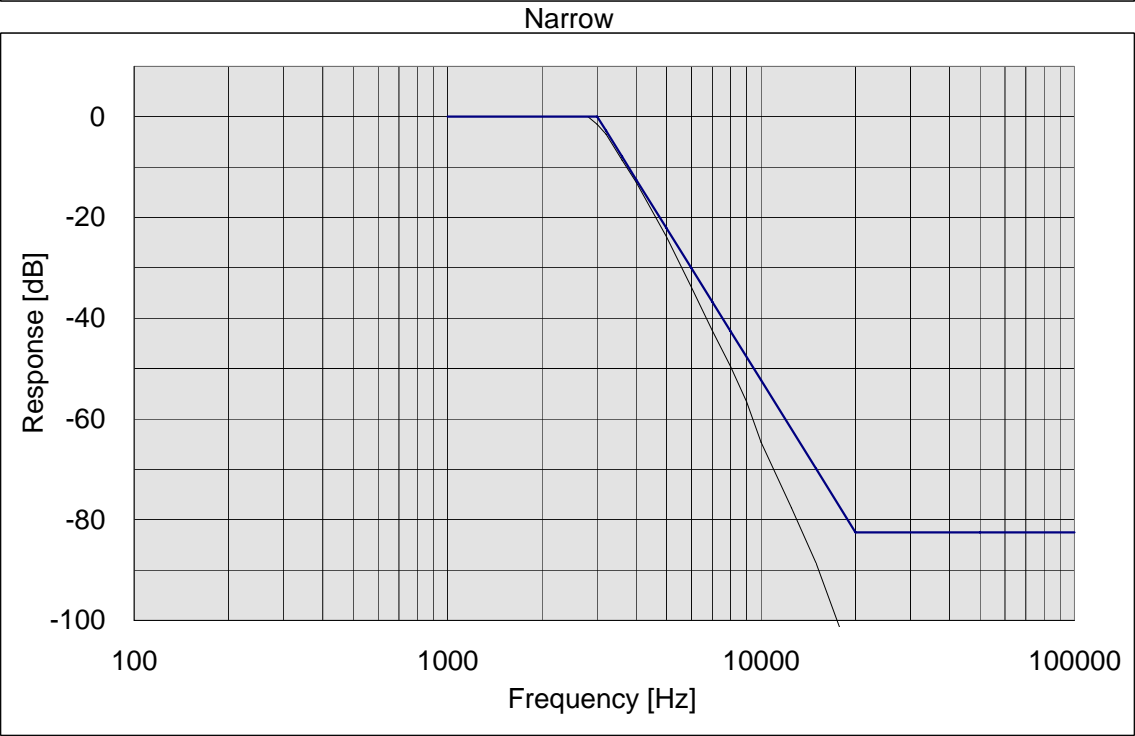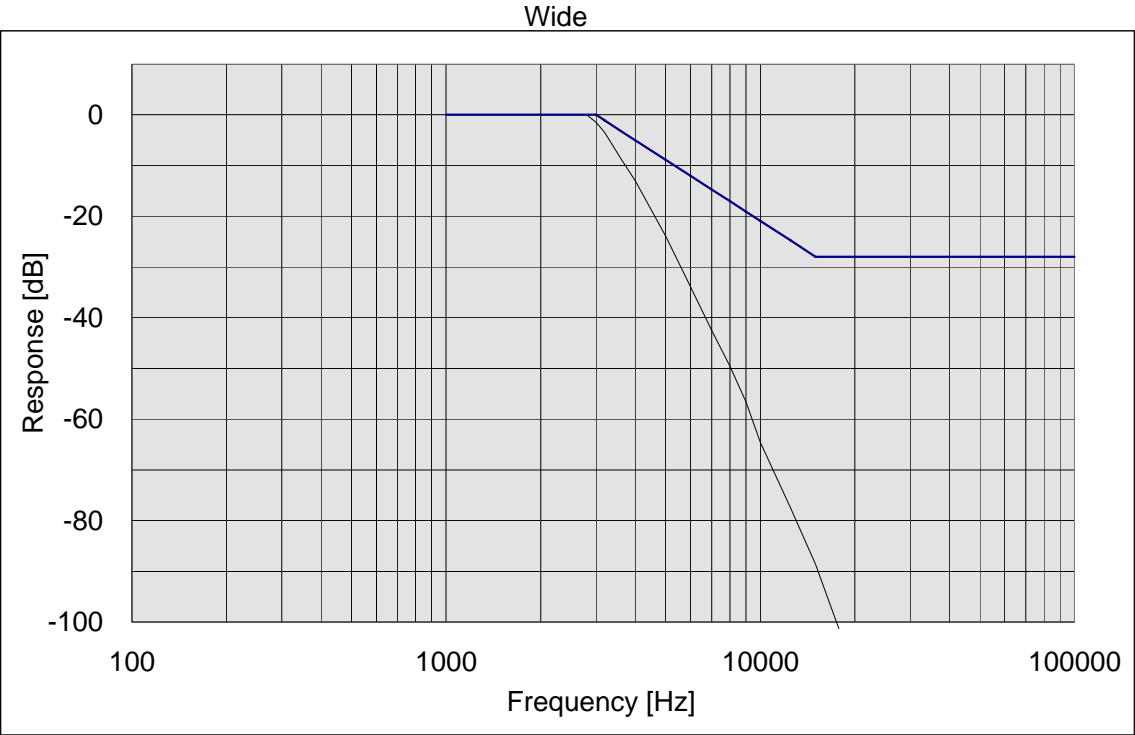


NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047 (a)
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1kHz, and this point was taken as the 0dB reference level.
4. Which input levels hold constant and below limiting at all frequencies, the audio signal generator was varied from 100Hz to 5kHz.
5. The response in dB relative to 1kHz was then measured, using the Agilent 8901B modulation analyzer.
6. MEASUREMENT RESULTS: ATTACHED

NAME OF TEST: Audio Frequency Response

STATE: 0 : General

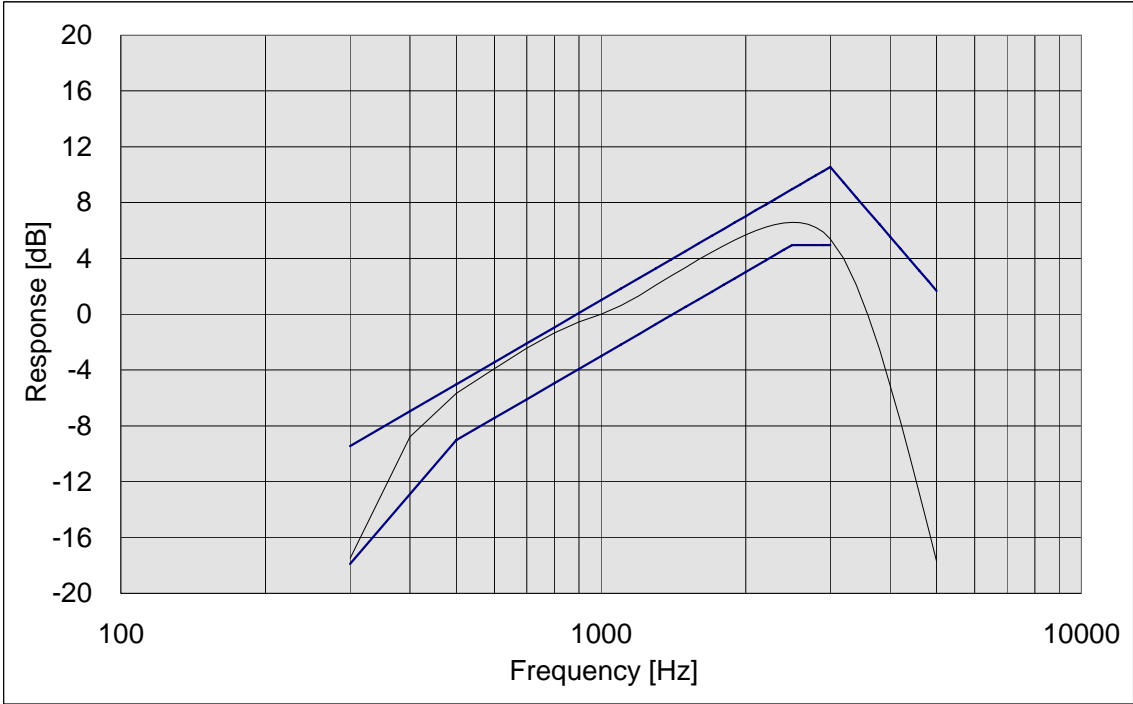

PEAK AUDIO FREQUENCY : 2500 [Hz]

<u>NAME OF TEST:</u>	Modulation Limiting
<u>SPECIFICATION:</u>	47 CFR 2.1047 (b)
<u>GUIDE:</u>	ANSI/TIA/EIA-603, Paragraph 2.2.3
<u>TEST EQUIPMENT:</u>	As per previous page


MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit".
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an Agilent 8901B modulation analyzer
3. The input level was varied from 30% modulation ($\pm 1.5\text{kHz}$ deviation) to at least 20dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED


NAME OF TEST: Modulation Limiting

STATE: 0 : General
Positive Peak Wide

0 dB = 6.3 [mV]

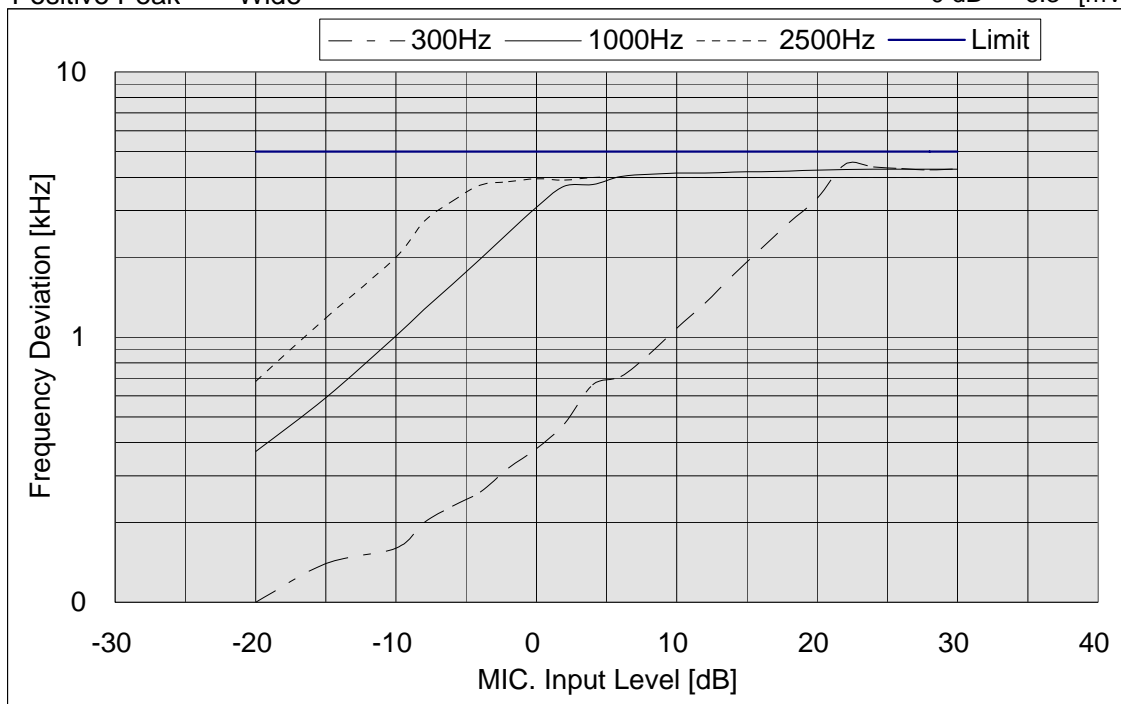


Negative Peak Wide

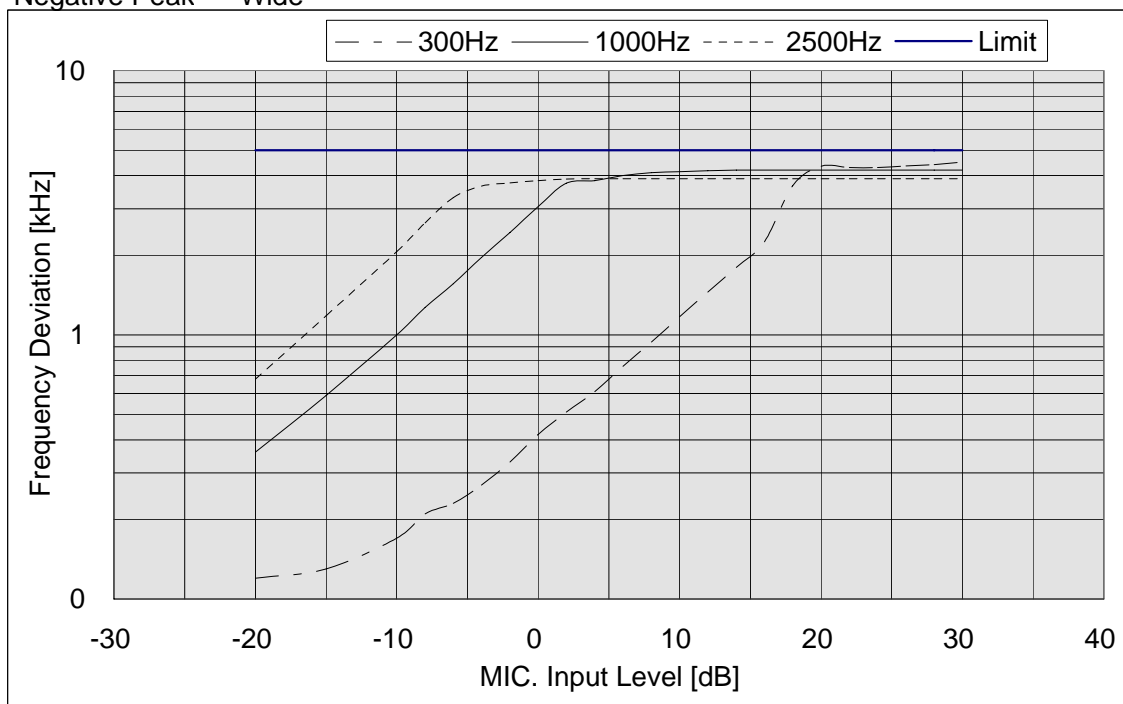


NAME OF TEST: Modulation Limiting

STATE: 0 : General
Positive Peak Narrow

0 dB = 6.3 [mV]

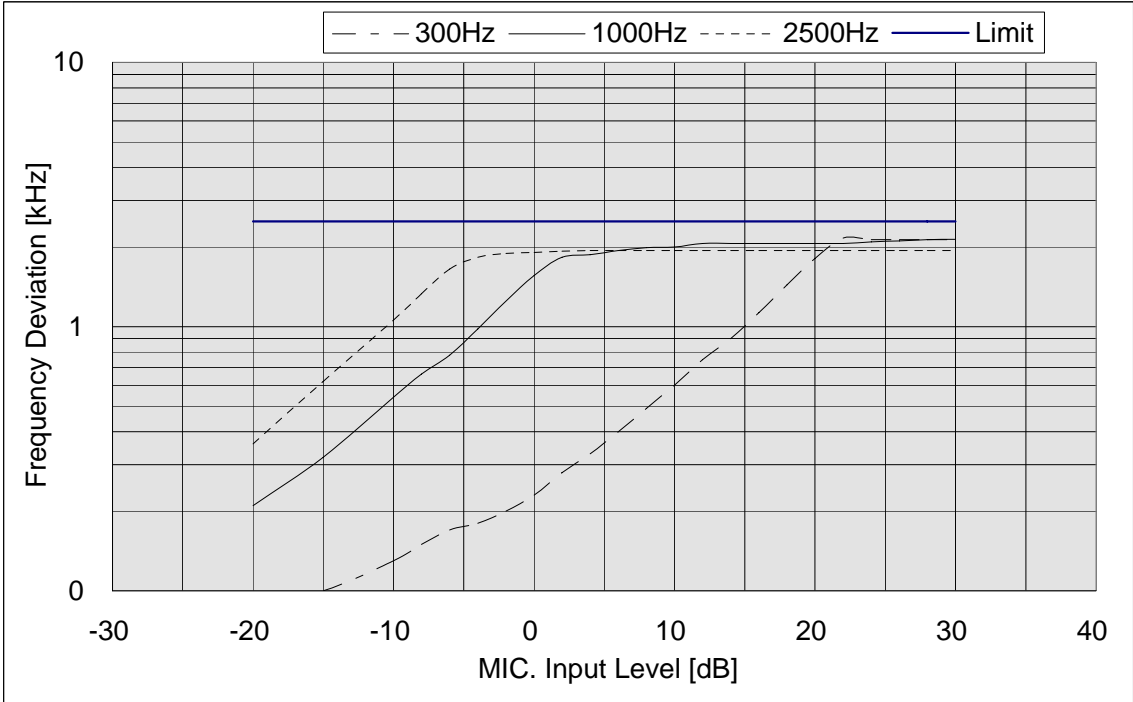

Negative Peak Narrow

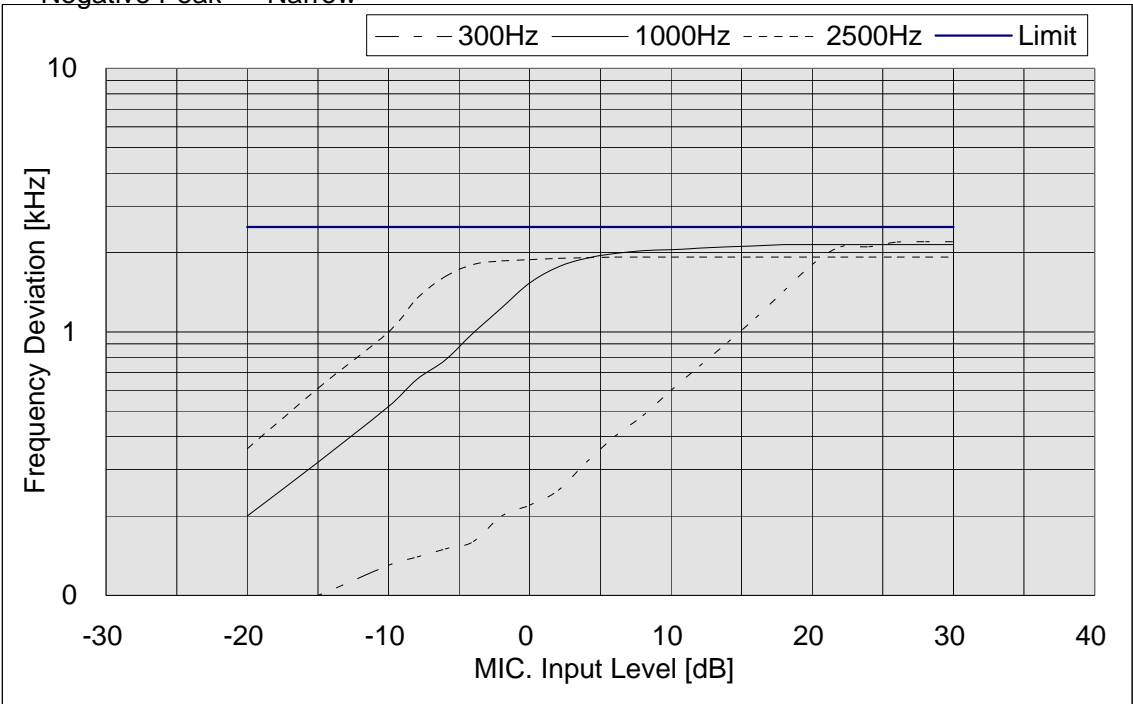


<u>NAME OF TEST:</u>	Frequency Stability (Temperature Variation)
<u>SPECIFICATION:</u>	47 CFR 2.1055 (a) (1)
<u>GUIDE:</u>	ANSI/TIA/EIA-603, Paragraph 2.2.2
<u>TEST CONDITIONS:</u>	As indicated
<u>TEST EQUIPMENT:</u>	As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP


TEST A: OPERATIONAL STABILITY
 TEST B: CARRIER FREQUENCY STABILITY
 TEST C: OPERATIONAL PERFORMANCE STABILITY
 TEST D: HUMIDITY
 TEST E: VIBRATION
 TEST F: ENVIRONMENTAL TEMPERATURE
 TEST G: FREQUENCY STABILITY, TEMPERATURE VARIATION
 TEST H: FREQUENCY STABILITY, VOLTAGE VARIATION

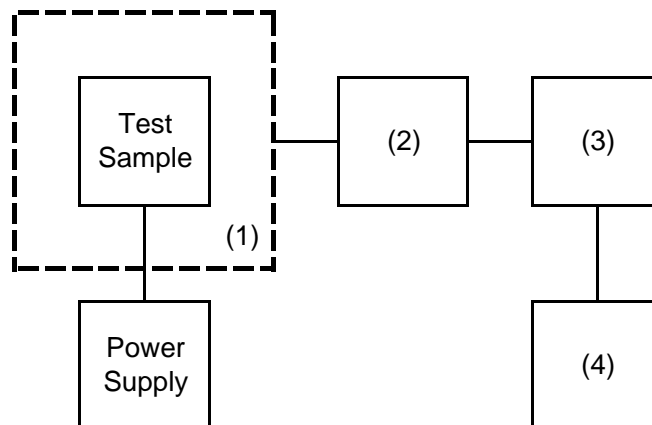

Instruments	Description	Serial Number
(1) TEMPERATURE CHAMBER	ETAC FX4100	***
(2) COAXIAL ATTENUATOR	Weinschel 53-30-33	***
(3) POWER METER	Agilent 436A	***
(4) FREQUENCY COUNTER	Agilent 8901B FREQUENCY MODI	***

NAME OF TEST: Frequency Stability (Temperature Variation)

STATE: 0 : General

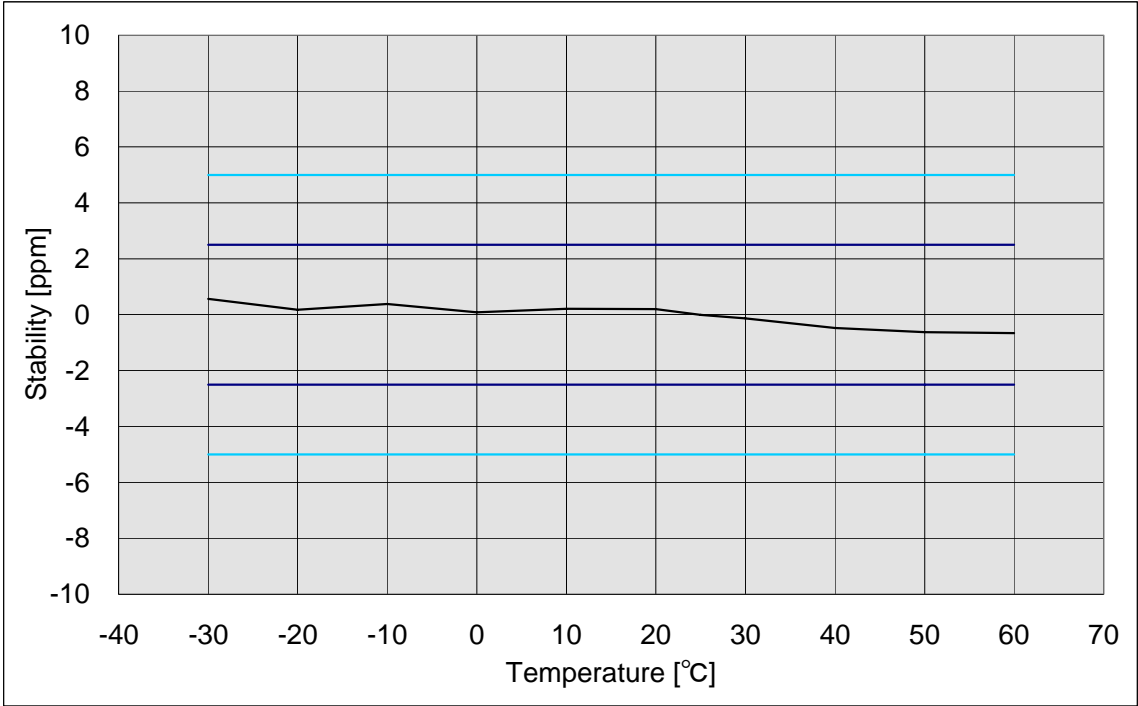

NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055 (b)
GUIDE: ANSI/TIA/EIA-603, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT was placed in a temperature chamber at $25\pm5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

STATE: 0 : General

LIMIT', ppm = 2.5
 LIMIT', Hz = 1203

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.56	481.000109	109	0.23
100	13.60	481.000137	137	0.28
115	15.64	481.000090	90	0.19

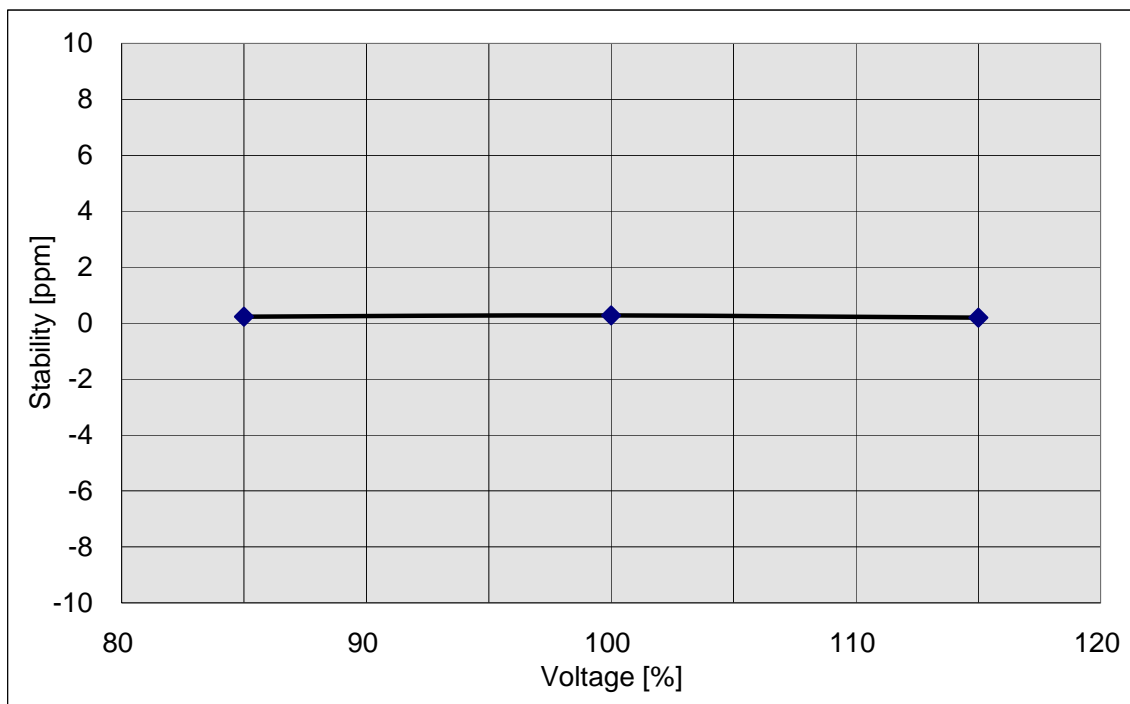

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth
SPECIFICATION: 47 CFR 2.202 (g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
MAXIMUM DEVIATION (D), kHz = 5
CONSTANT FACTOR (K) = 1
NECESSARY BANDWIDTH (BN), kHz = $(2 \times M) + (2 \times D \times K)$
= 16

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
MAXIMUM DEVIATION (D), kHz = 3
CONSTANT FACTOR (K) = 1
NECESSARY BANDWIDTH (BN), kHz = $(2 \times M) + (2 \times D \times K)$
= 11

NAME OF TEST: Receiver Spurious Emissions (Conducted)

STATE: 0 : General

All other emissions in the required measurement range were more than 20dB below the required limits.

MEASUREMENT RESULTS

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, nW
481.000	413.350	-69.2	0.1202
512.000	444.350	-64.0	0.3981
481.000	1653.400	-76.4	0.0229
512.000	1777.400	-65.8	0.2630
512.000	2666.100	-77.0	0.0200
450.000	2676.450	-75.0	0.0316

NAME OF TEST: Receiver Spurious Emissions (Radiated)

STATE: 0 : General

All other emissions in the required measurement range were more than 20dB below the required limits.

MEASUREMENT RESULTS

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBuV	@m	CF, dB	uV/m
450.000	382.350	31.3	3	-4.4	35.7
481.000	413.350	36.0	3	-3.7	39.7
512.000	444.350	33.3	3	-3.9	37.2
512.000	888.700	37.2	3	-2.1	39.3
512.000	1777.400	42.1	3	-5.2	47.3
450.000	3058.800	47.9	3	3.3	44.6
512.000	3110.450	48.6	3	3.9	44.7