



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Wireless Earphones
BRAND NAME : Motorola
MODEL NAME : XT2441-1
FCC ID : IHDT6AB1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Dec. 09, 2023 ~ Dec. 18, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
1.9 Specification of Accessory.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement.....	14
3.4 20dB and 99% Bandwidth Measurement	15
3.5 Output Power Measurement.....	16
3.6 Conducted Band Edges Measurement.....	17
3.7 Conducted Spurious Emission Measurement	18
3.8 Radiated Band Edges and Spurious Emission Measurement	19
3.9 AC Conducted Emission Measurement.....	23
3.10 Antenna Requirements.....	25
4 LIST OF MEASURING EQUIPMENT.....	26
5 MEASUREMENT UNCERTAINTY	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N2901A	Rev. 01	Initial issue of report	Dec. 26, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.25 dB at 46.00 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 18.83 dB at 0.644 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Earphones
Brand Name	Motorola
Model Name	XT2441-1
FCC ID	IHDT6AB1
SN Code	Conducted: FFLTL231126000887/FFLTR231126000961 Conduction: FFLTL231126000634/FFLTR231126000805 Radiation: FFLTL231126000822/FFLTR231126000734
HW Version	DVT
SW Version	moto_buds_600 stereo
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 12.99 dBm (0.0199 W) Bluetooth EDR (2Mbps) : 13.00 dBm (0.0200 W) Bluetooth EDR (3Mbps) : 13.03 dBm (0.0201 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.857MHz Bluetooth EDR (2Mbps) : 1.136MHz Bluetooth EDR (3Mbps) : 1.109MHz
Antenna Type / Gain	FPC Antenna type with gain -8.56 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Accessories Information				
Battery 1	Brand Name	Chongqing VDL Electronics Co., LTD.	Model Name	1054PF4C1
Battery 2	Brand Name	Chongqing VDL Electronics Co., LTD.	Model Name	721833PF5
USB Cable	Brand Name	Jieye	Model Name	JY-C03-411



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : Bluetooth TX + USB Cable (Charging from Adapter)		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Notebook .			

2.3 Connection Diagram of Test System

AC Conducted Emission:

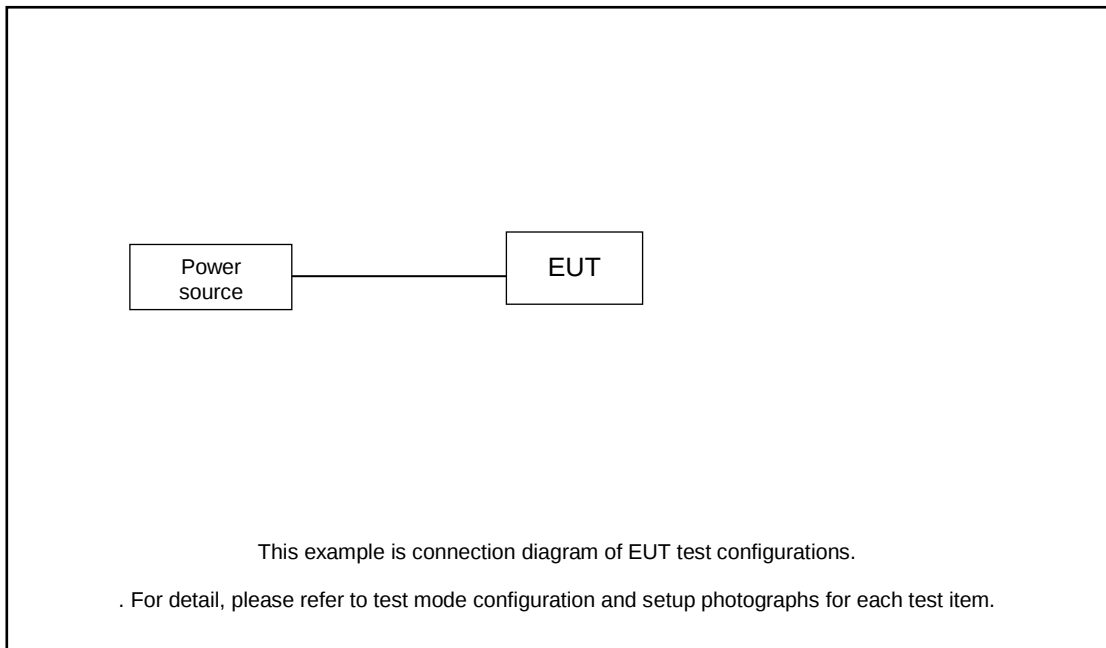

Radiated Emission:

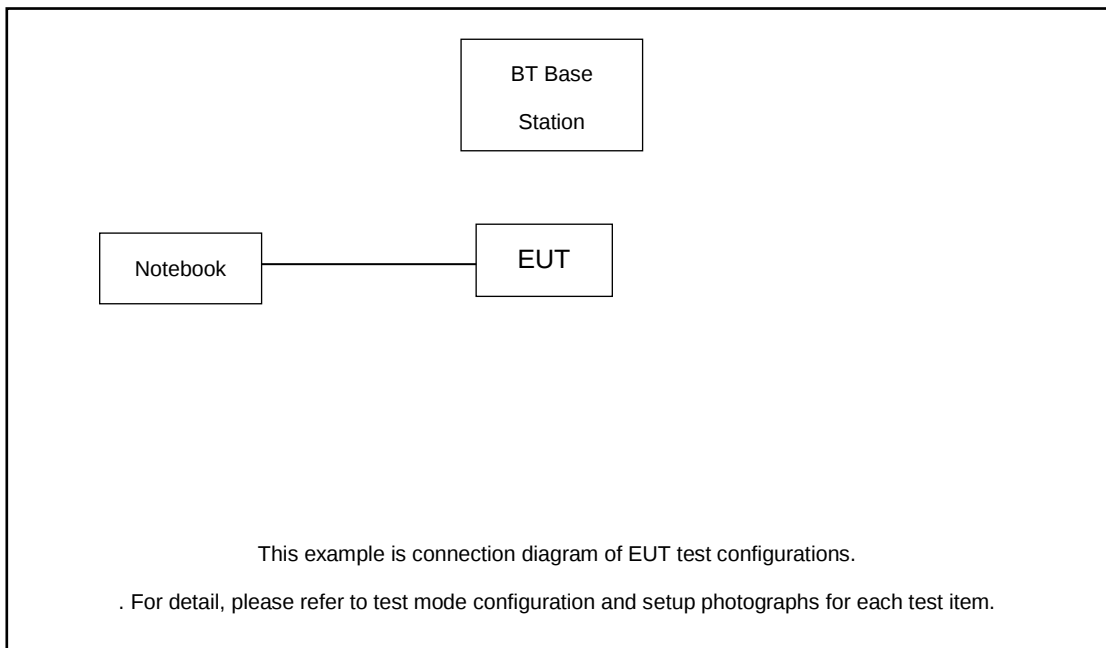

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Adapter	MOTO	MC-101	N/A	N/A	N/A
3.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8m

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.89 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 1.89 + 10 = 11.89 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup



3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

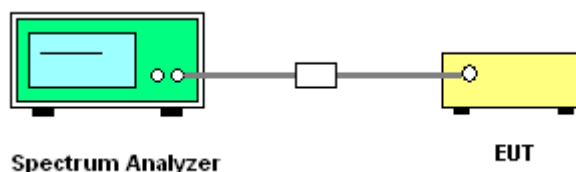

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

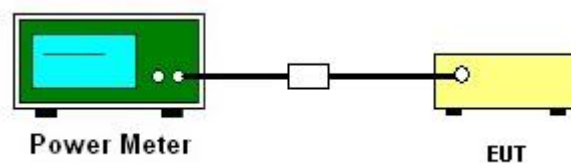

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

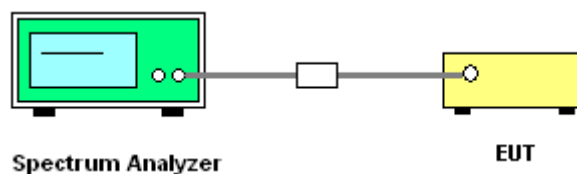

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

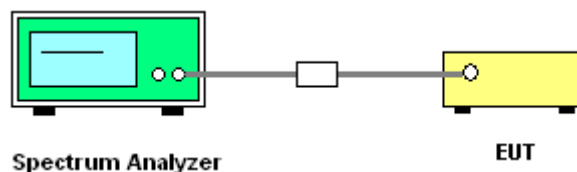

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

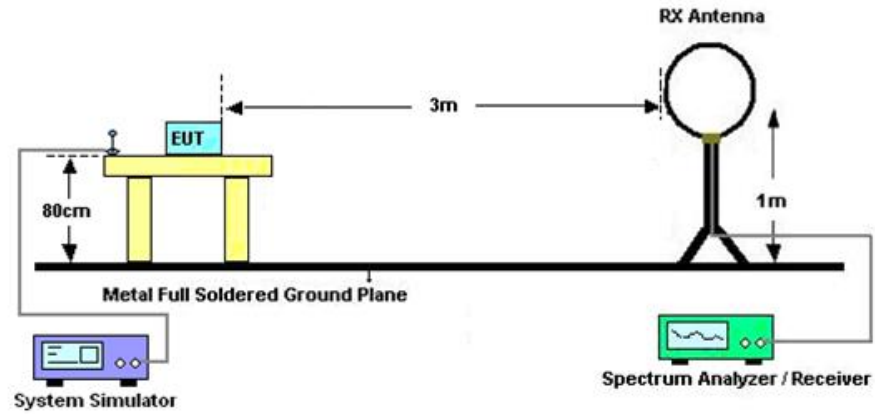

For radiated emissions from 30MHz to 1GHz

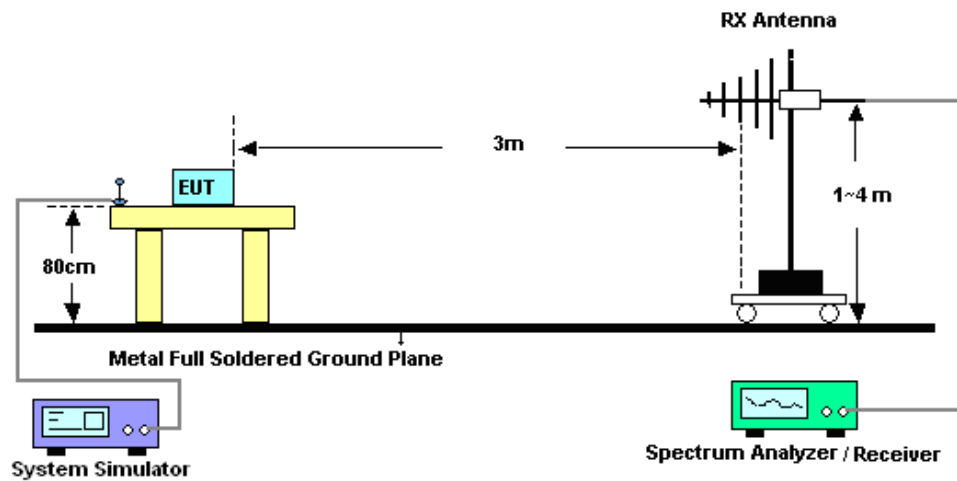

For radiated emissions above 1GHz

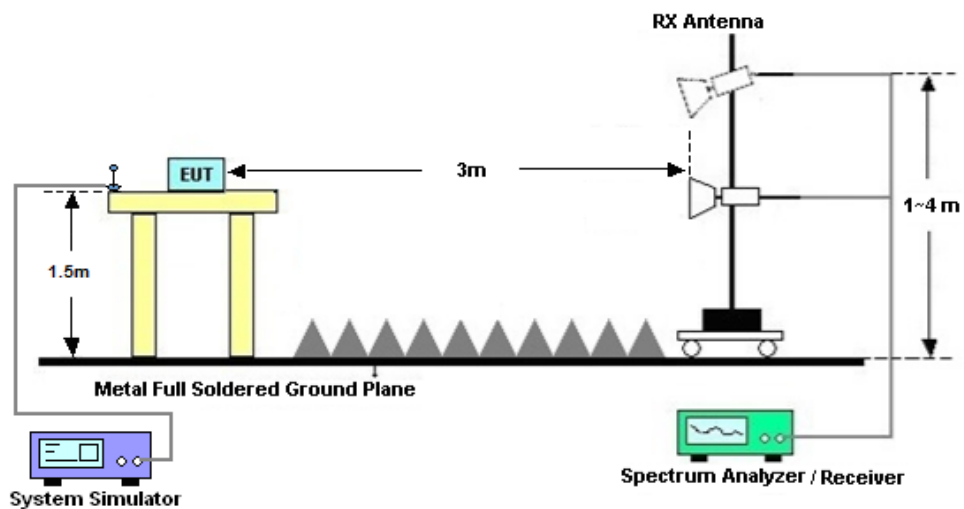



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

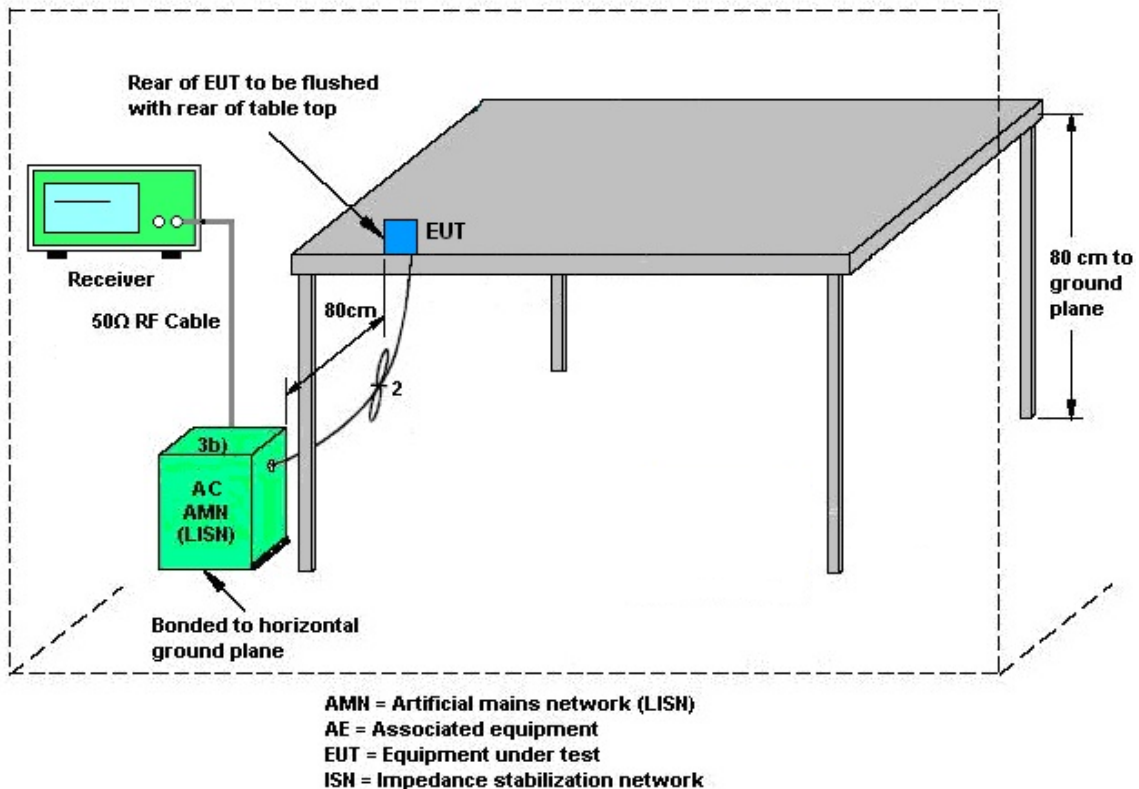

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz;Max 30dBm	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz~1GHz	Aug. 12, 2023	Dec. 18, 2023	Aug. 11, 2024	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Mar. 18, 2023	Dec. 18, 2023	Mar. 17, 2024	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Dec. 18, 2023	Jan. 07, 2024	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 10, 2023	Dec. 18, 2023	Oct. 09, 2024	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2023	Dec. 18, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 18, 2023	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 18, 2023	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 18, 2023	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Dec. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Dec. 12, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Dec. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Dec. 12, 2023	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Dec. 09, 2023	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Dec. 09, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Dec. 09, 2023	Jan. 04, 2024	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.32 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

According Standard: ■Part15C

Test Date: 2023.12.09

Test Engineer: Gene Wang


20dB Emission Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.51	2402.46	---	---
		2441	0.95	2440.49	2441.44	---	---
		2480	0.95	2479.49	2480.44	---	---
2DH1	Ant1	2402	1.22	2401.34	2402.56	---	---
		2441	1.22	2440.34	2441.56	---	---
		2480	1.22	2479.34	2480.56	---	---
3DH1	Ant1	2402	1.21	2401.37	2402.59	---	---
		2441	1.21	2440.37	2441.59	---	---
		2480	1.21	2479.37	2480.59	---	---





Test Graphs

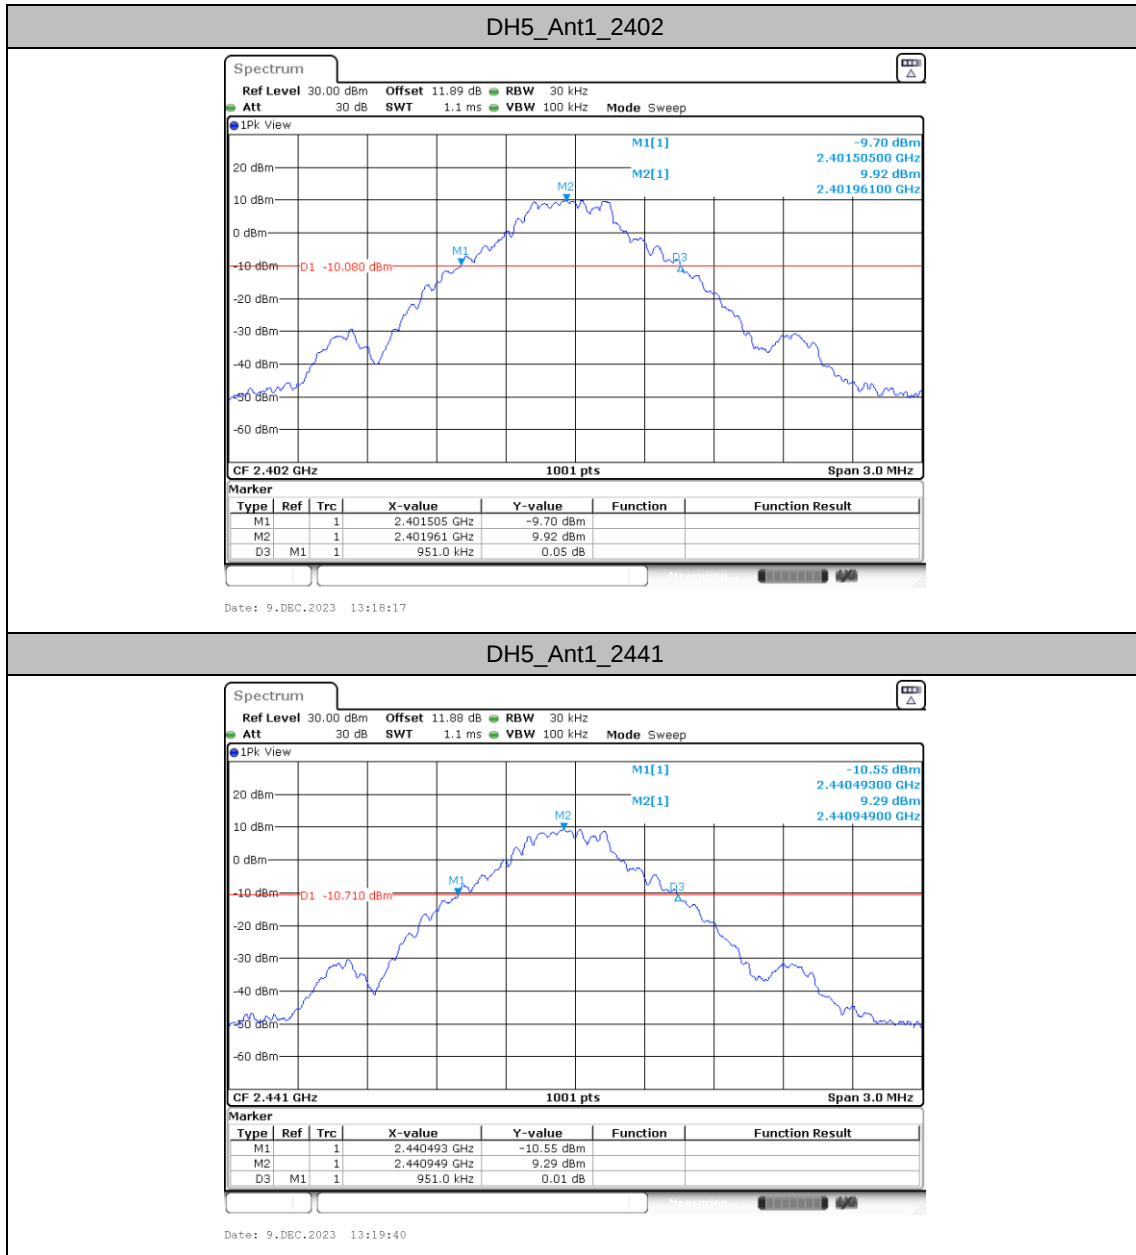

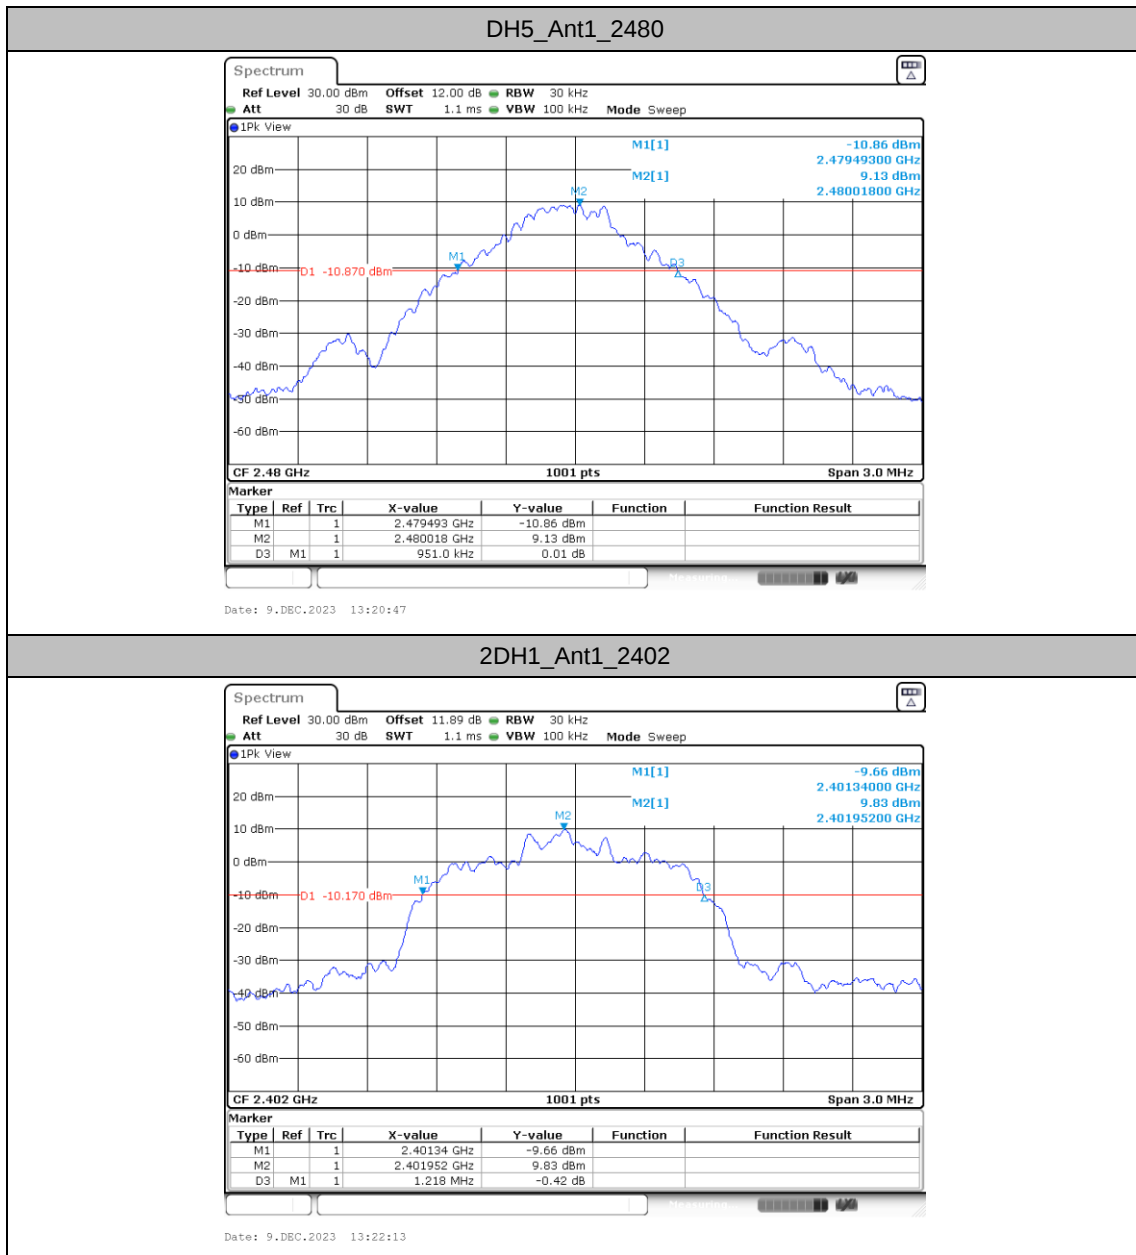

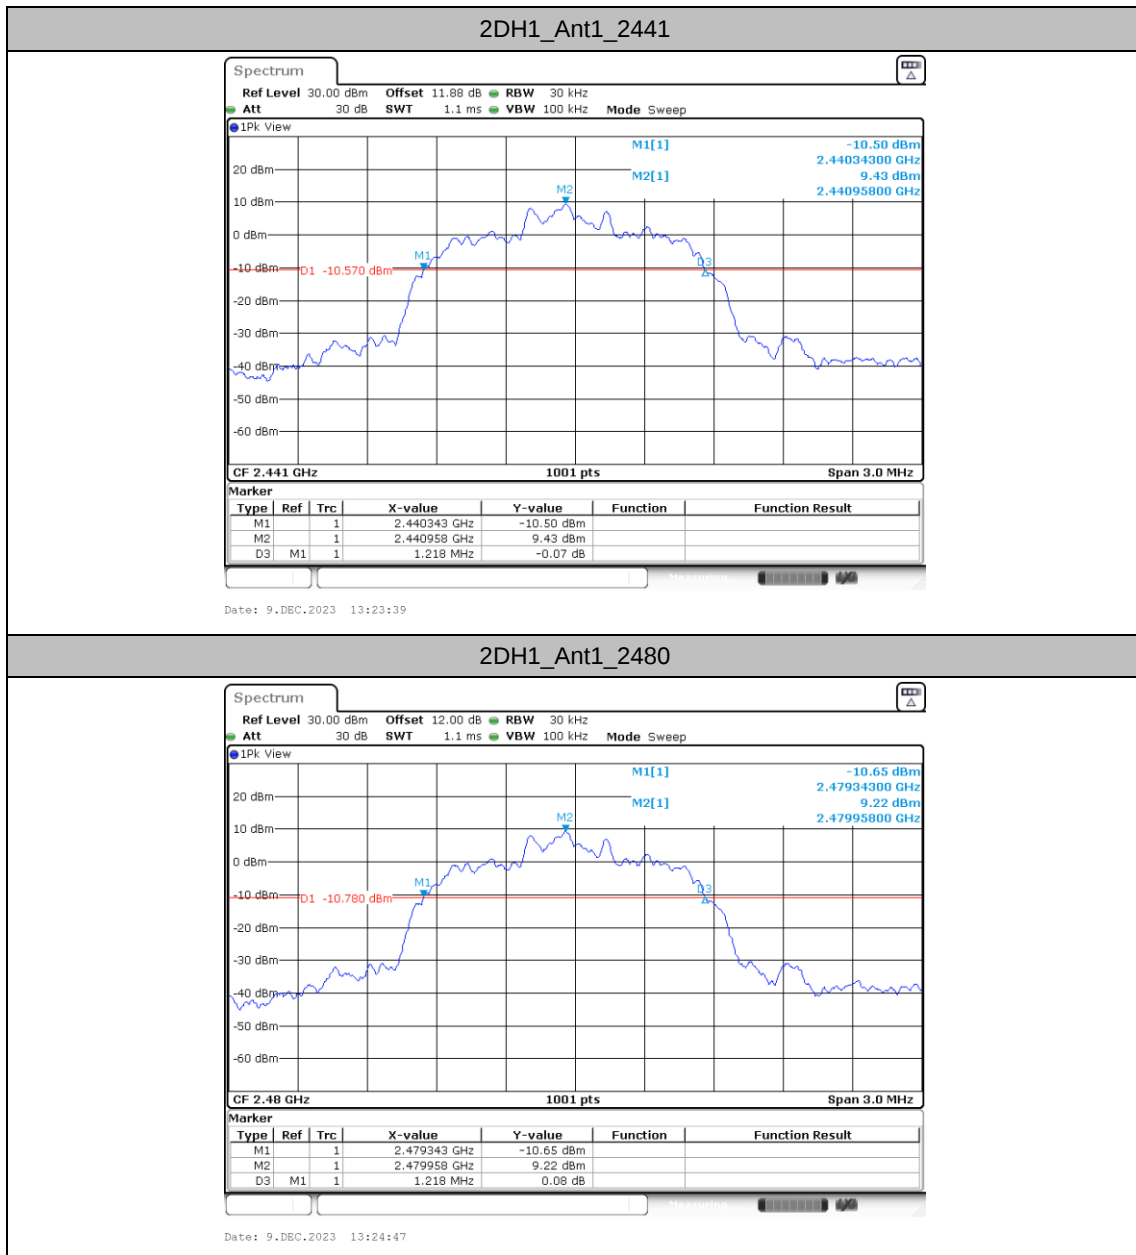

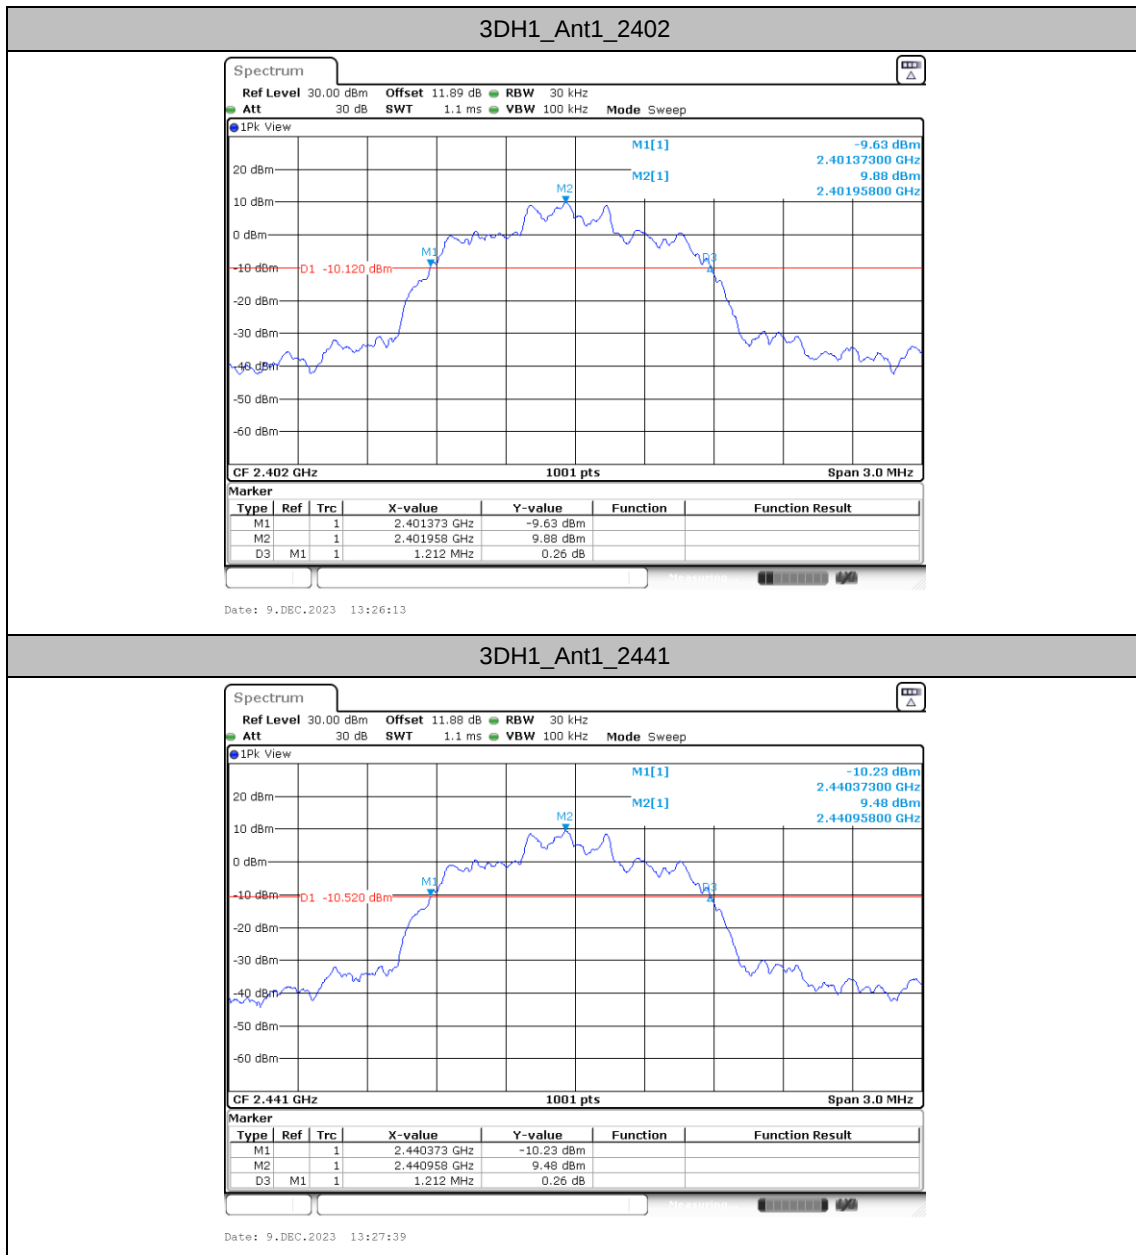

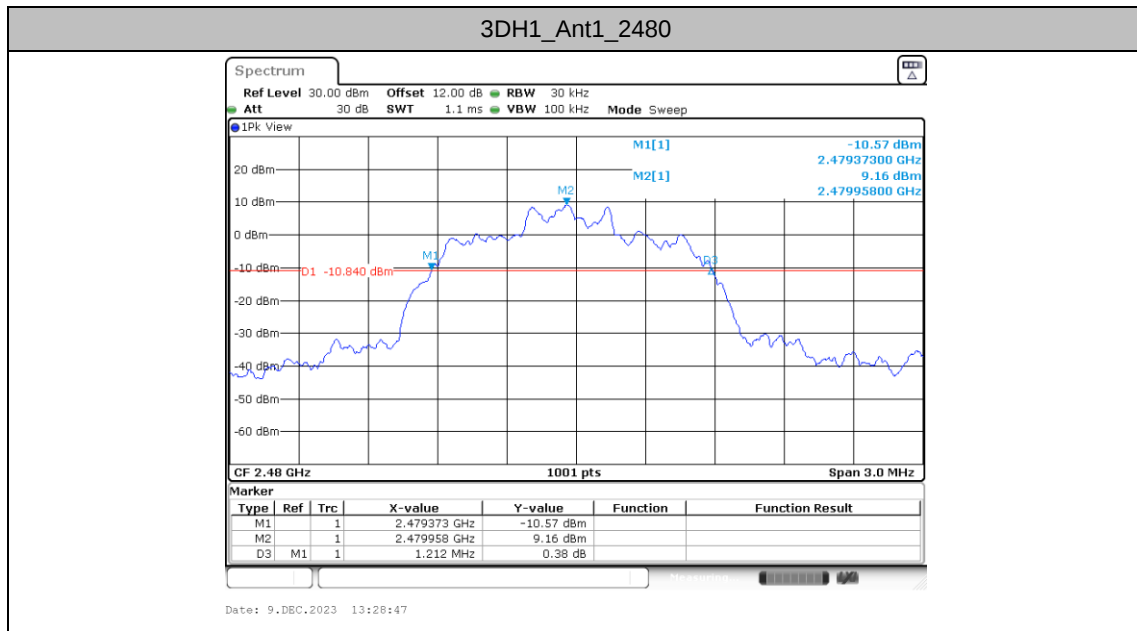




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.854	2401.5355	2402.3896	---	---
		2441	0.854	2440.5325	2441.3866	---	---
		2480	0.857	2479.5295	2480.3866	---	---
2DH1	Ant1	2402	1.136	2401.3916	2402.5275	---	---
		2441	1.133	2440.3946	2441.5275	---	---
		2480	1.136	2479.3946	2480.5305	---	---
3DH1	Ant1	2402	1.109	2401.4216	2402.5305	---	---
		2441	1.106	2440.4246	2441.5305	---	---
		2480	1.106	2479.4246	2480.5305	---	---





Test Graphs

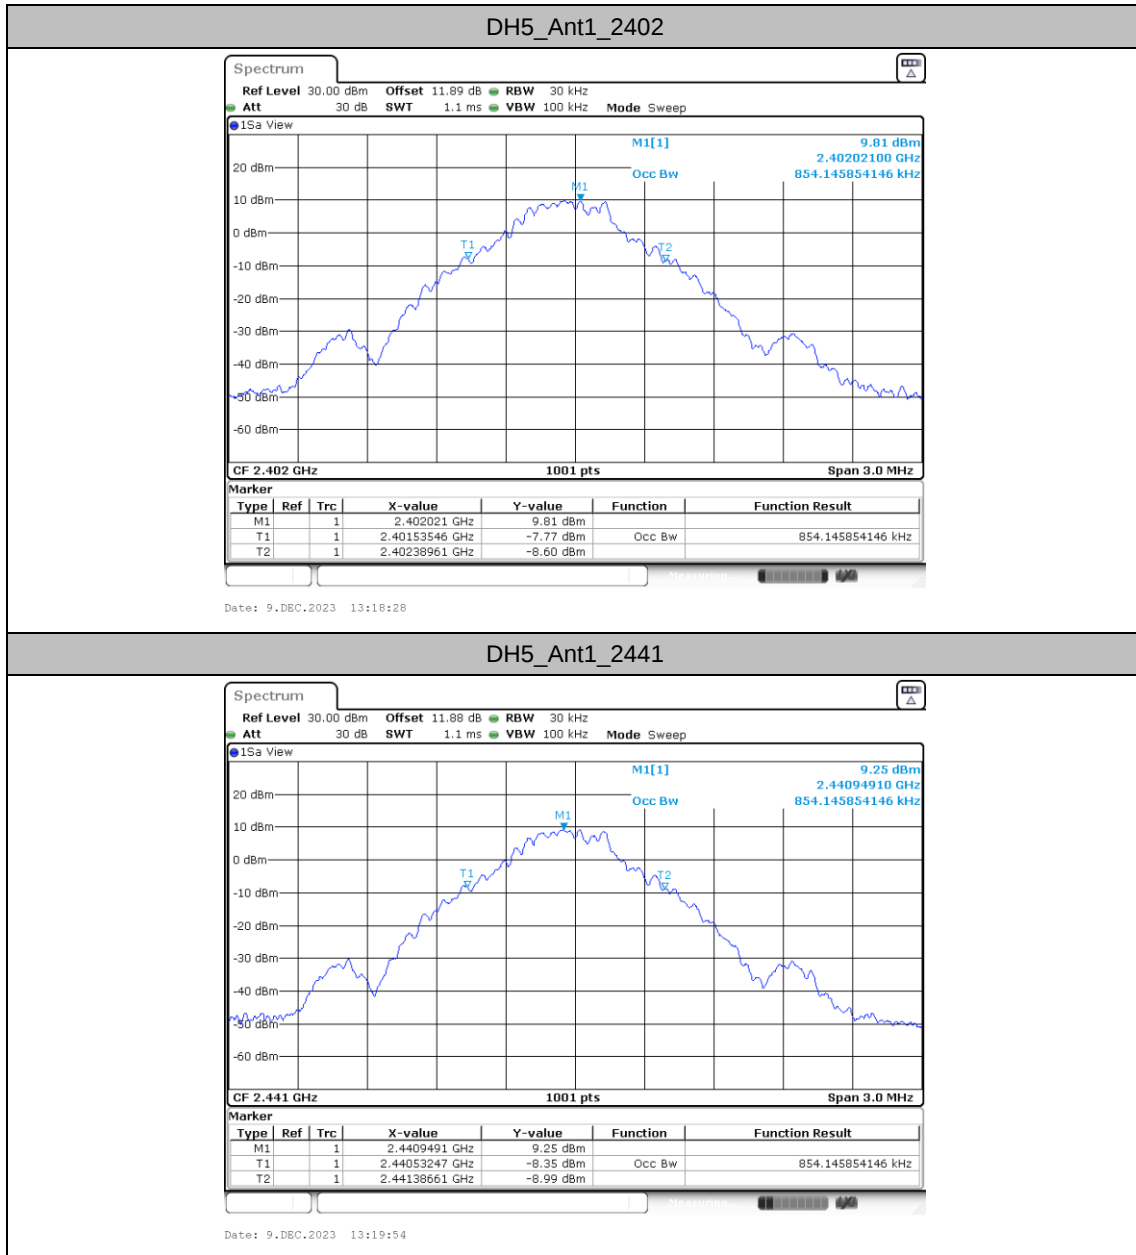

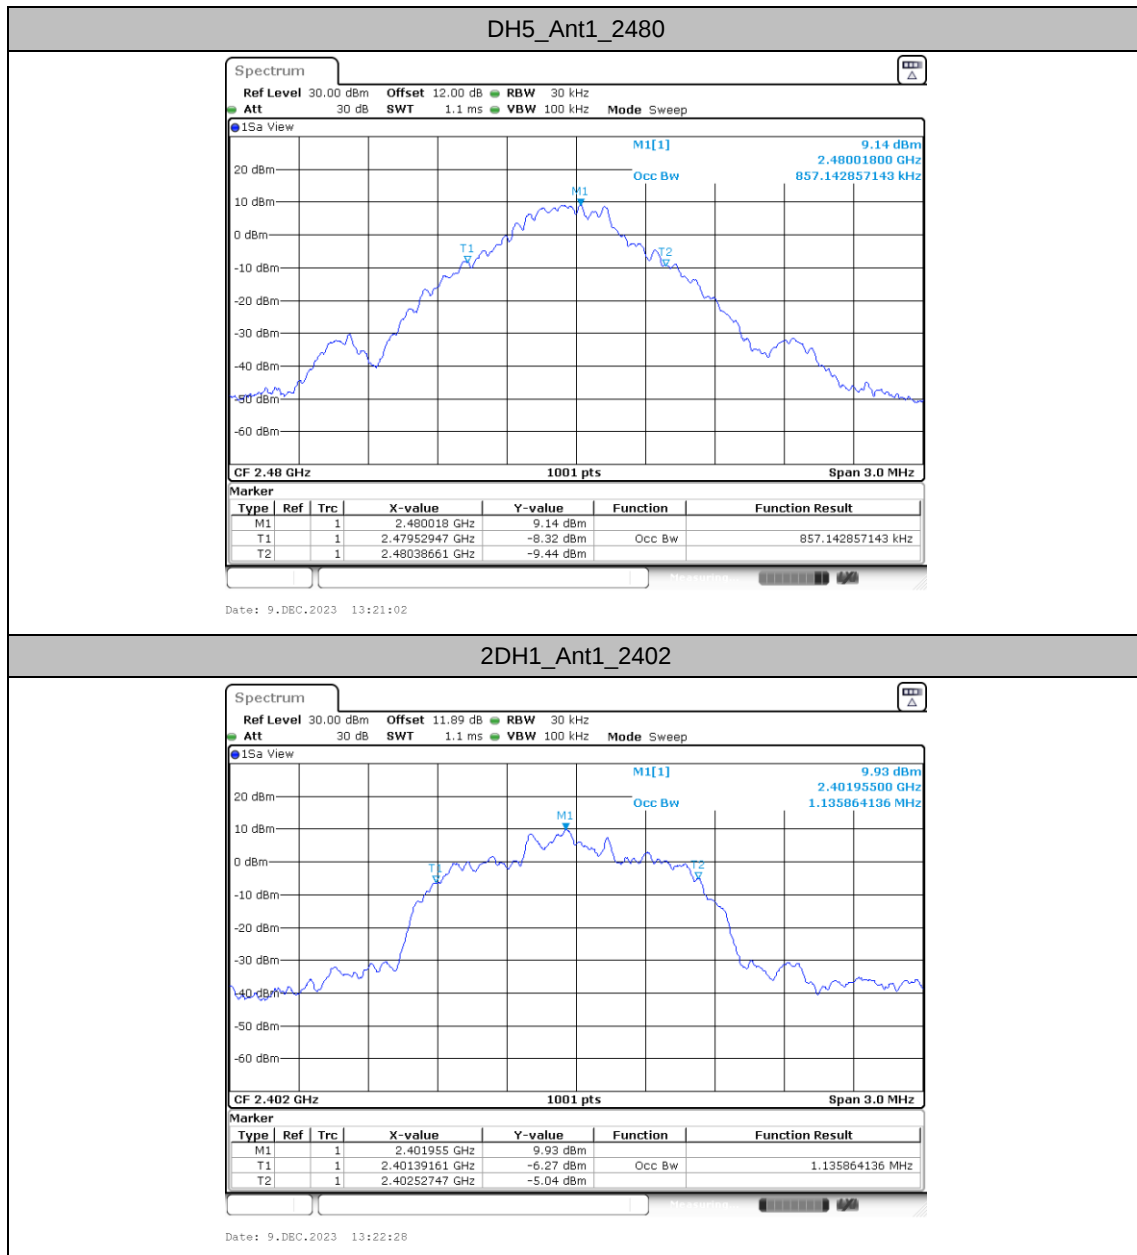

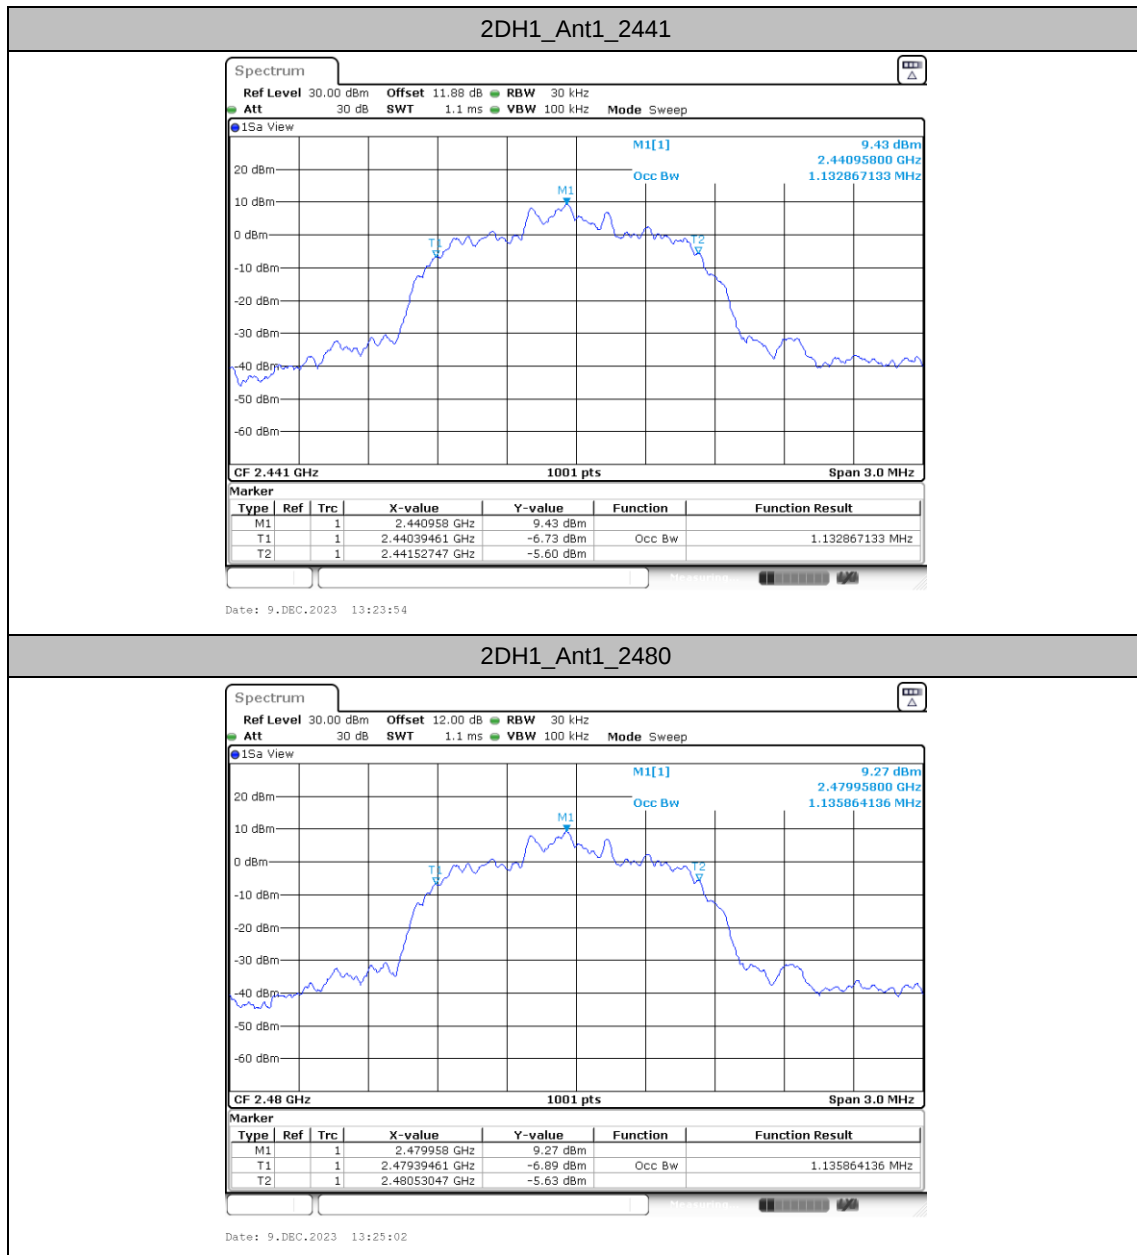

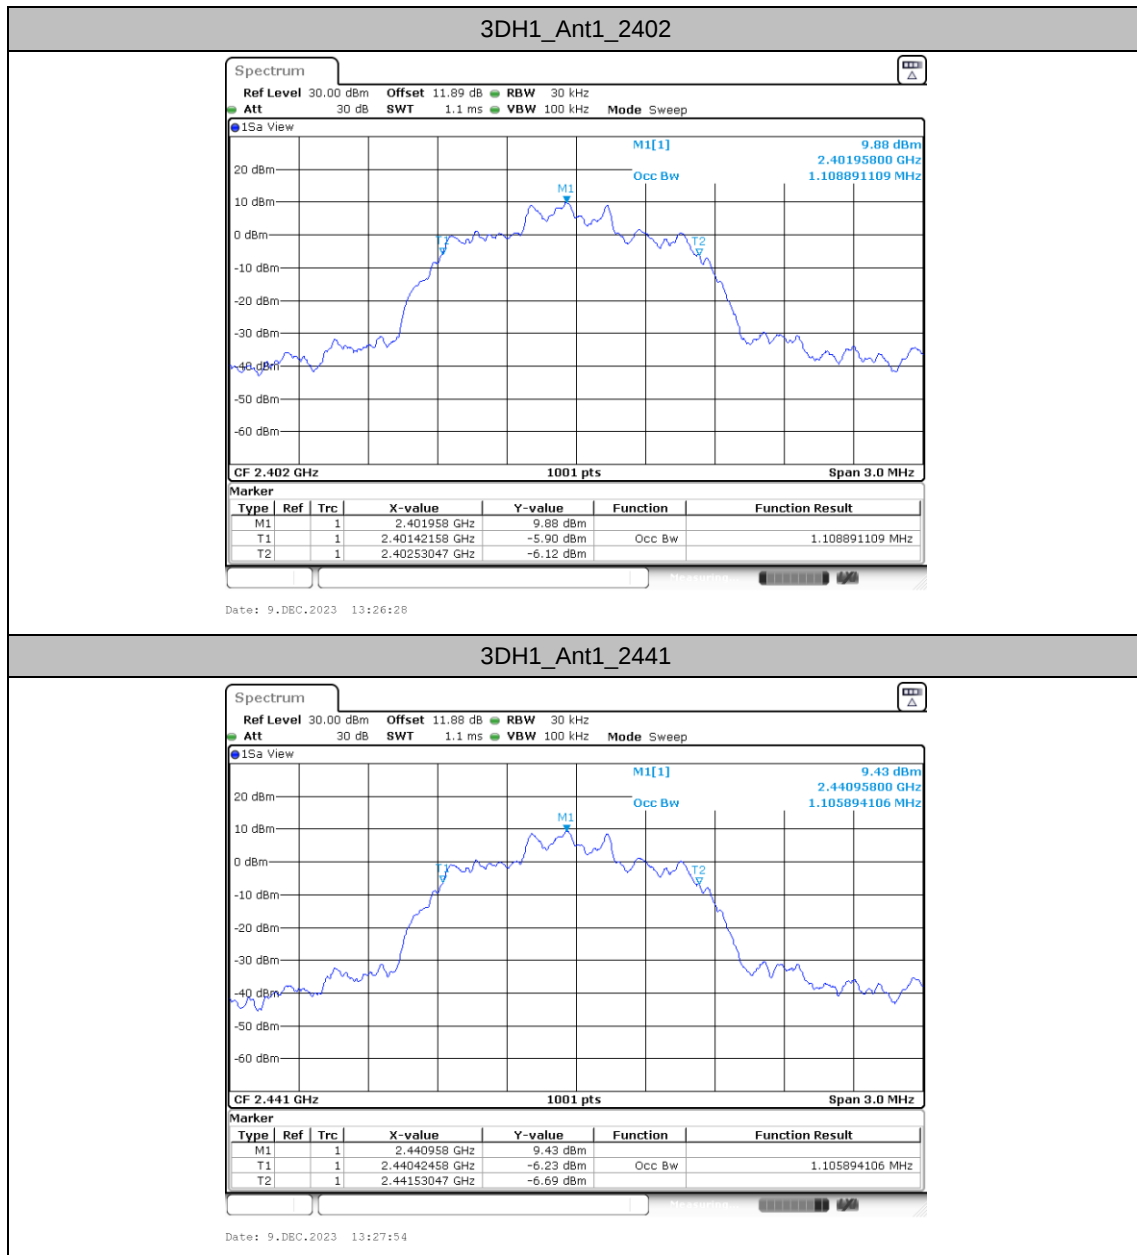

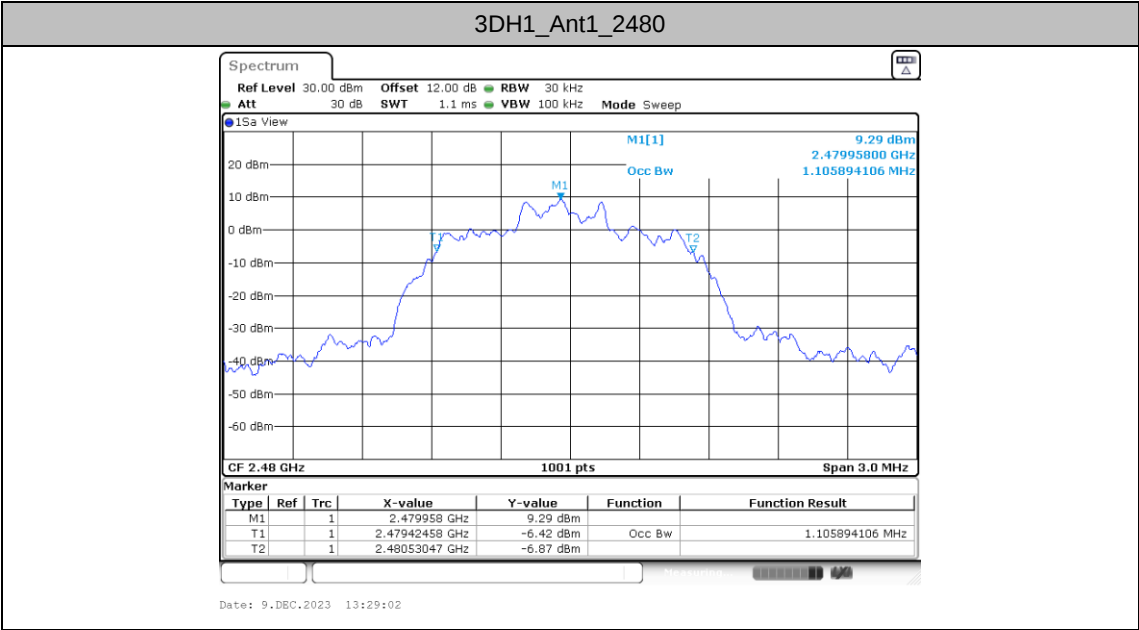

Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Power (dBm)	Power Limit (dBm)	Pass/Fail
DH5	Ant1	0	12.64	20.97	Pass
		39	12.99	20.97	Pass
		78	12.44	20.97	Pass
2DH5	Ant1	0	12.42	20.97	Pass
		39	13.00	20.97	Pass
		78	12.38	20.97	Pass
3DH5	Ant1	0	12.50	20.97	Pass
		39	13.03	20.97	Pass
		78	12.42	20.97	Pass


Carrier frequency separation

Test Result


TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.996	≥0.633	PASS
		2441	1.009	≥0.633	PASS
		2480	1	≥0.633	PASS
2DH1	Ant1	2402	0.996	≥0.813	PASS
		2441	1.33	≥0.813	PASS
		2480	1.335	≥0.813	PASS
3DH1	Ant1	2402	0.996	≥0.807	PASS
		2441	1.009	≥0.807	PASS
		2480	1.013	≥0.807	PASS





Test Graphs

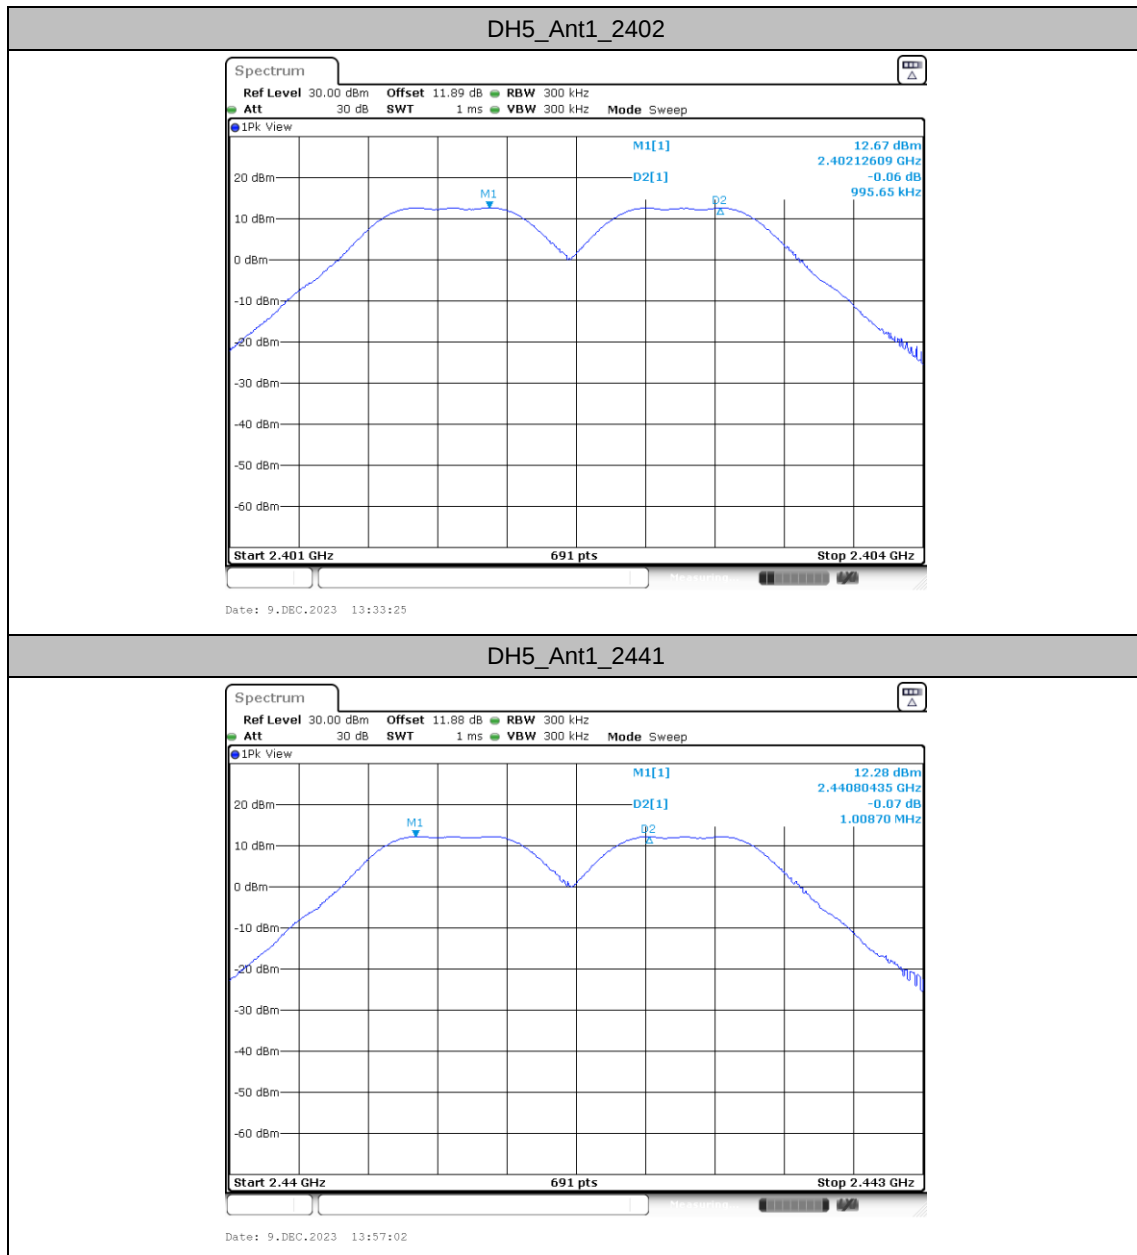



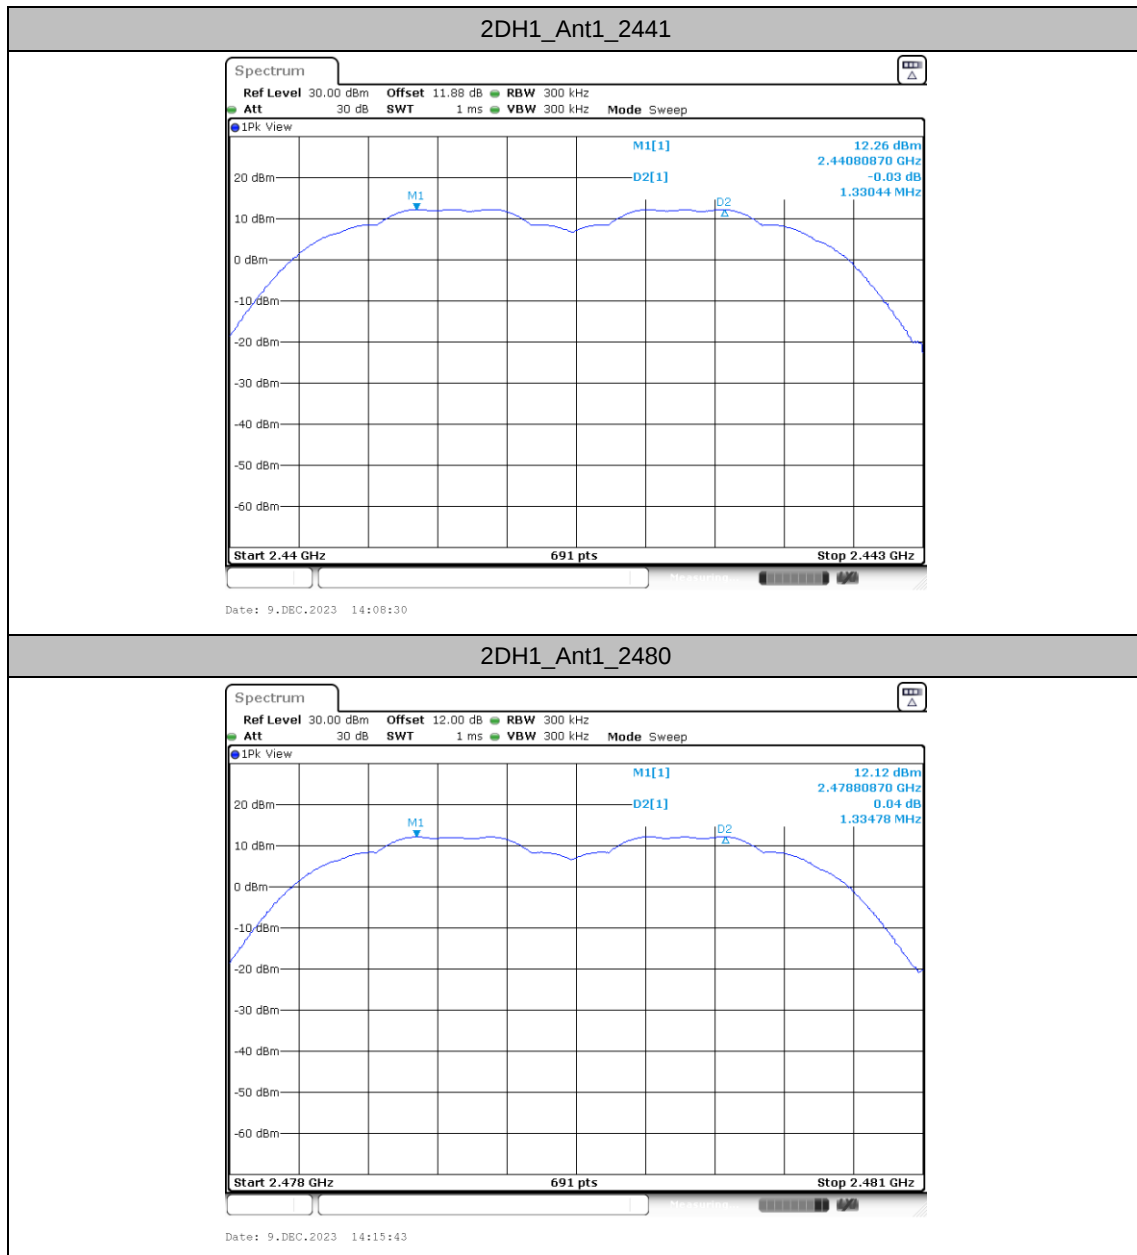

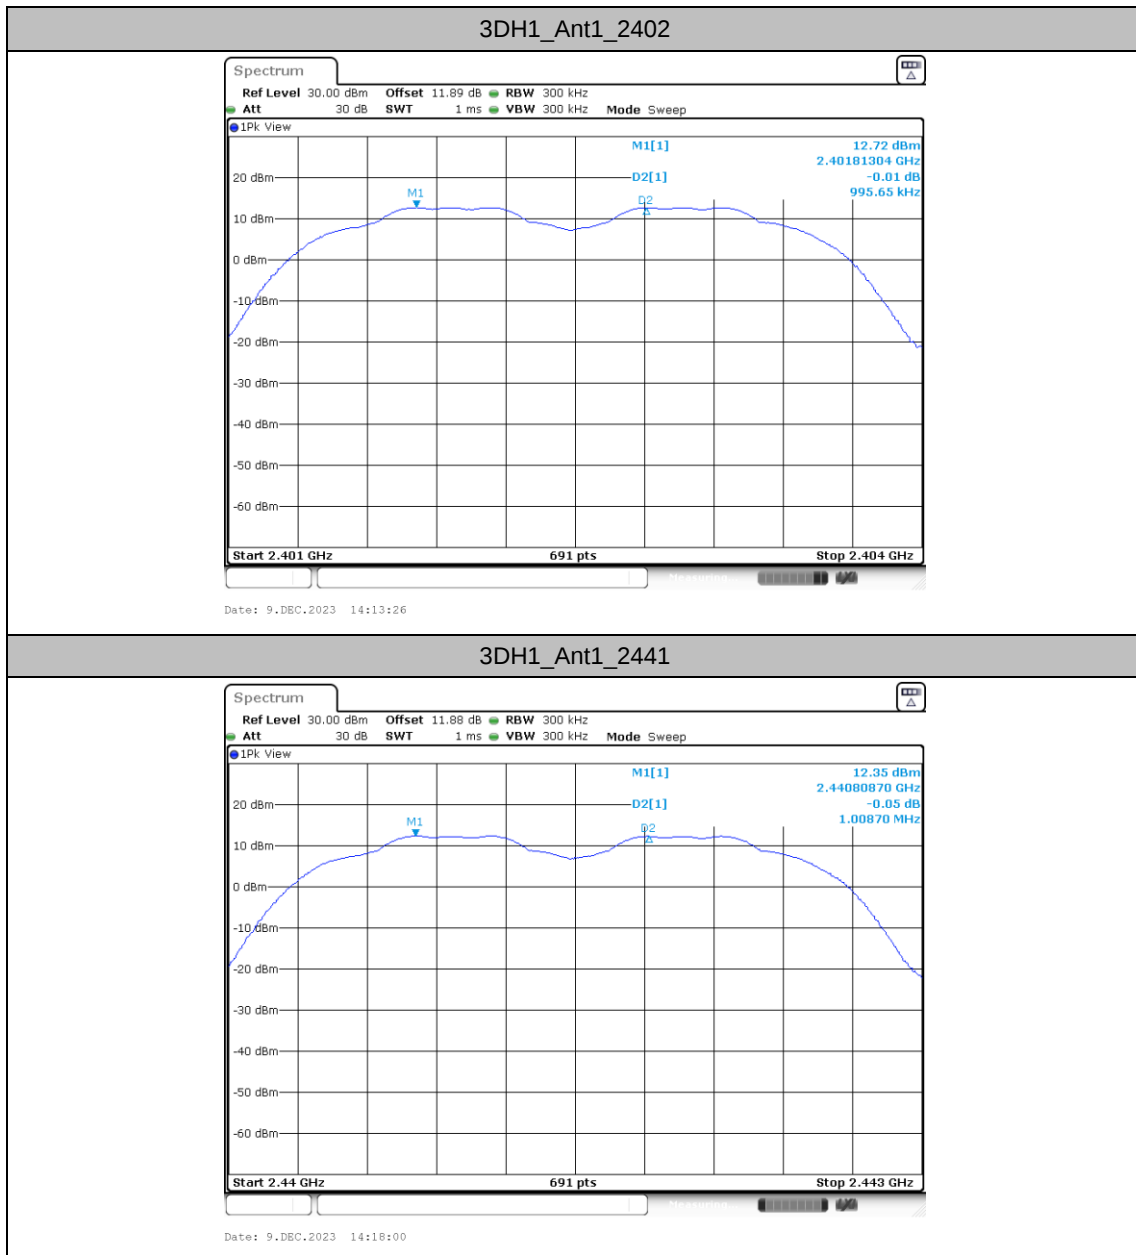

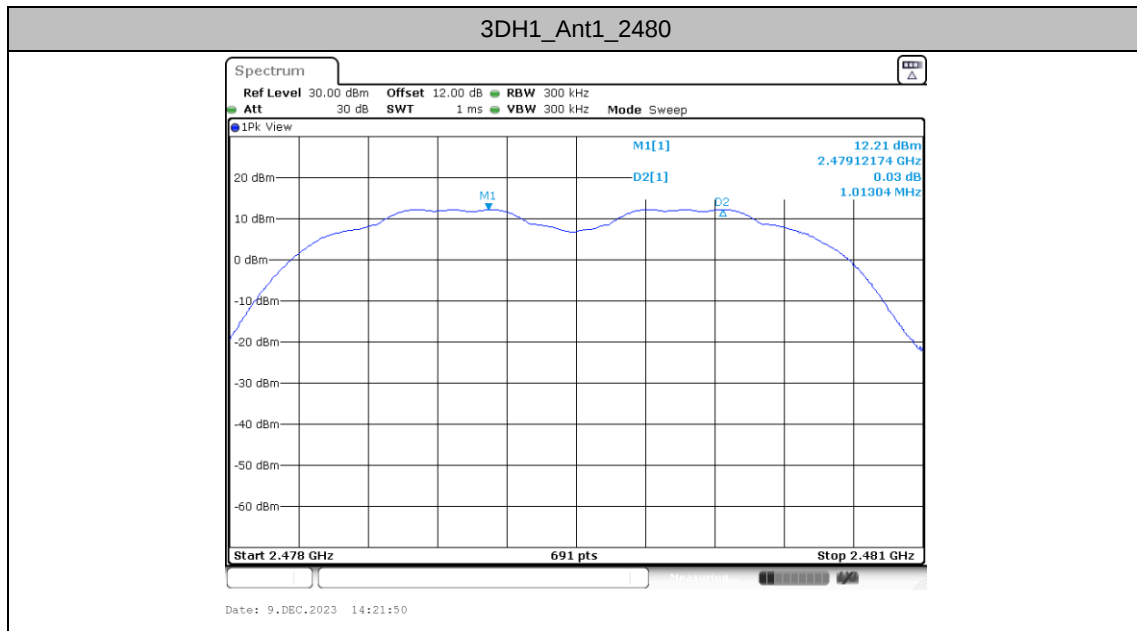



Time of occupancy

Test Result

TestMode	Antenna	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	Ant1	79	106.67	2.9043	0.31	0.4	Pass
AFH	Ant1	20	53.33	2.9043	0.15	0.4	Pass


Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS



Test Graphs

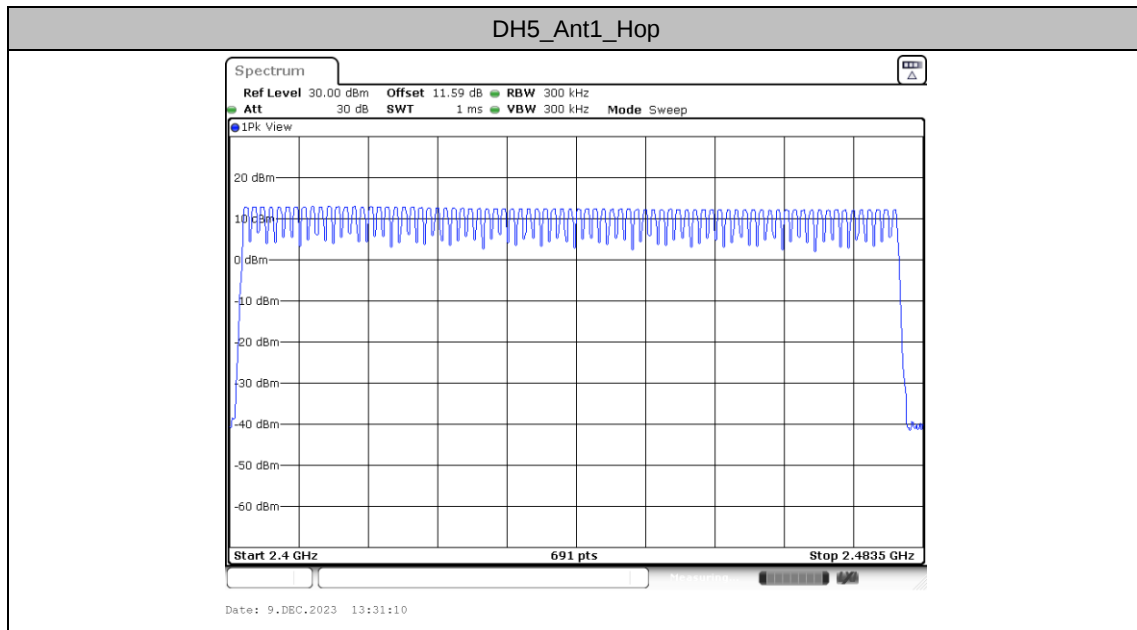


Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	12.56	-44.52	≤ -7.44	PASS
		High	2480	11.89	-44.37	≤ -8.11	PASS
		Low	Hop_2402	12.15	-44.13	≤ -7.85	PASS
		High	Hop_2480	11.53	-43.73	≤ -8.47	PASS
2DH1	Ant1	Low	2402	12.67	-37.12	≤ -7.33	PASS
		High	2480	11.97	-44.36	≤ -8.03	PASS
		Low	Hop_2402	12.31	-44.42	≤ -7.69	PASS
		High	Hop_2480	12.03	-44.2	≤ -7.97	PASS
3DH1	Ant1	Low	2402	12.65	-43.87	≤ -7.35	PASS
		High	2480	12.06	-43.98	≤ -7.94	PASS
		Low	Hop_2402	12.35	-44.7	≤ -7.65	PASS
		High	Hop_2480	11.96	-42.8	≤ -8.04	PASS





Test Graphs

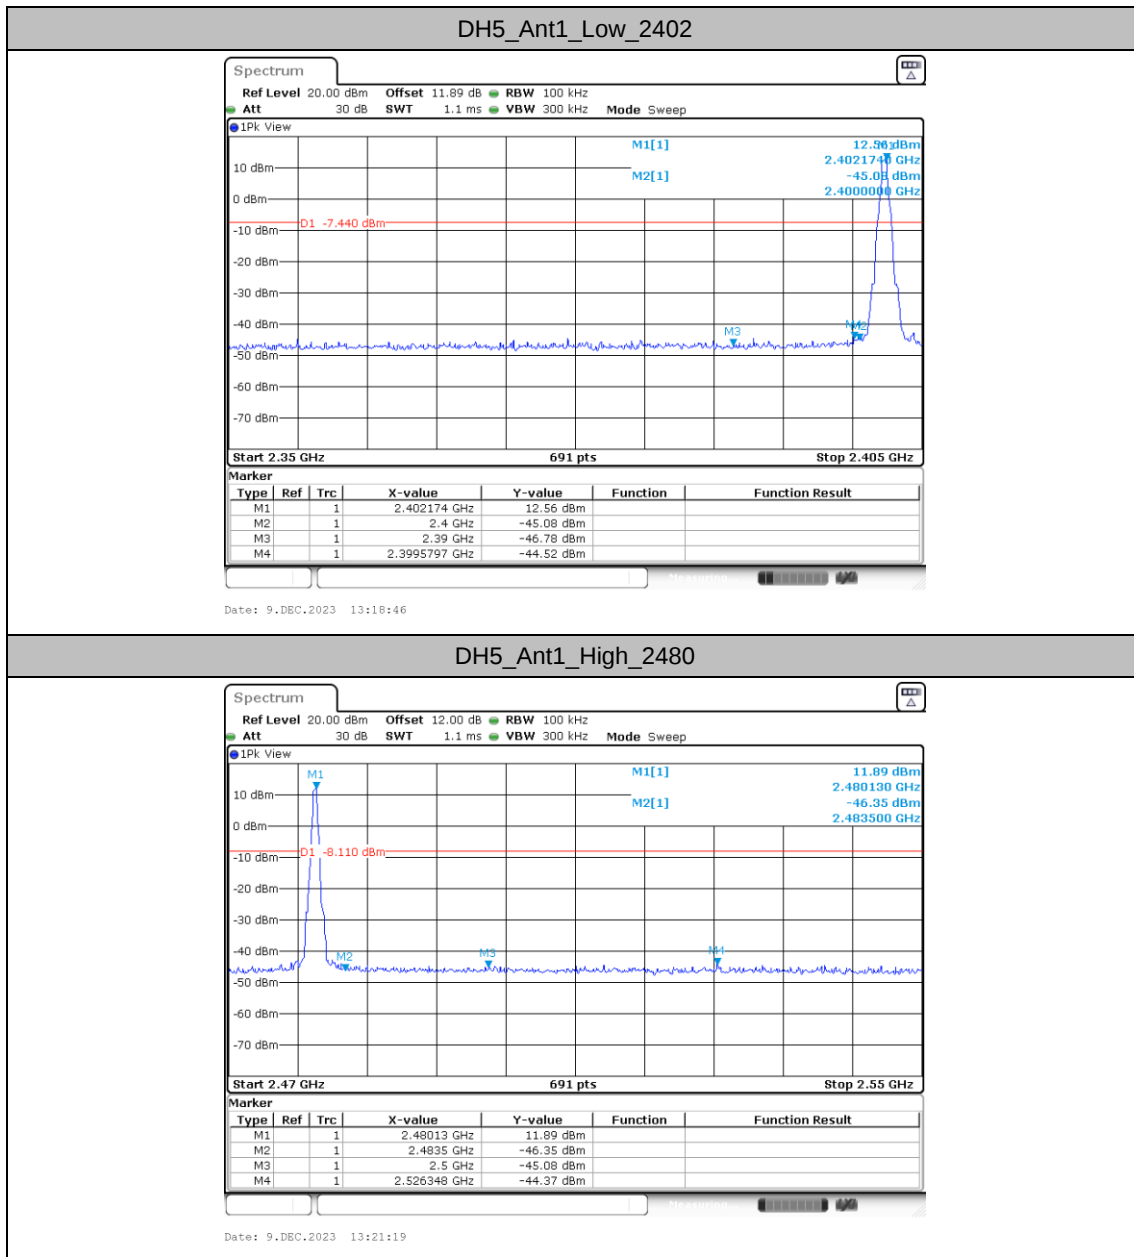


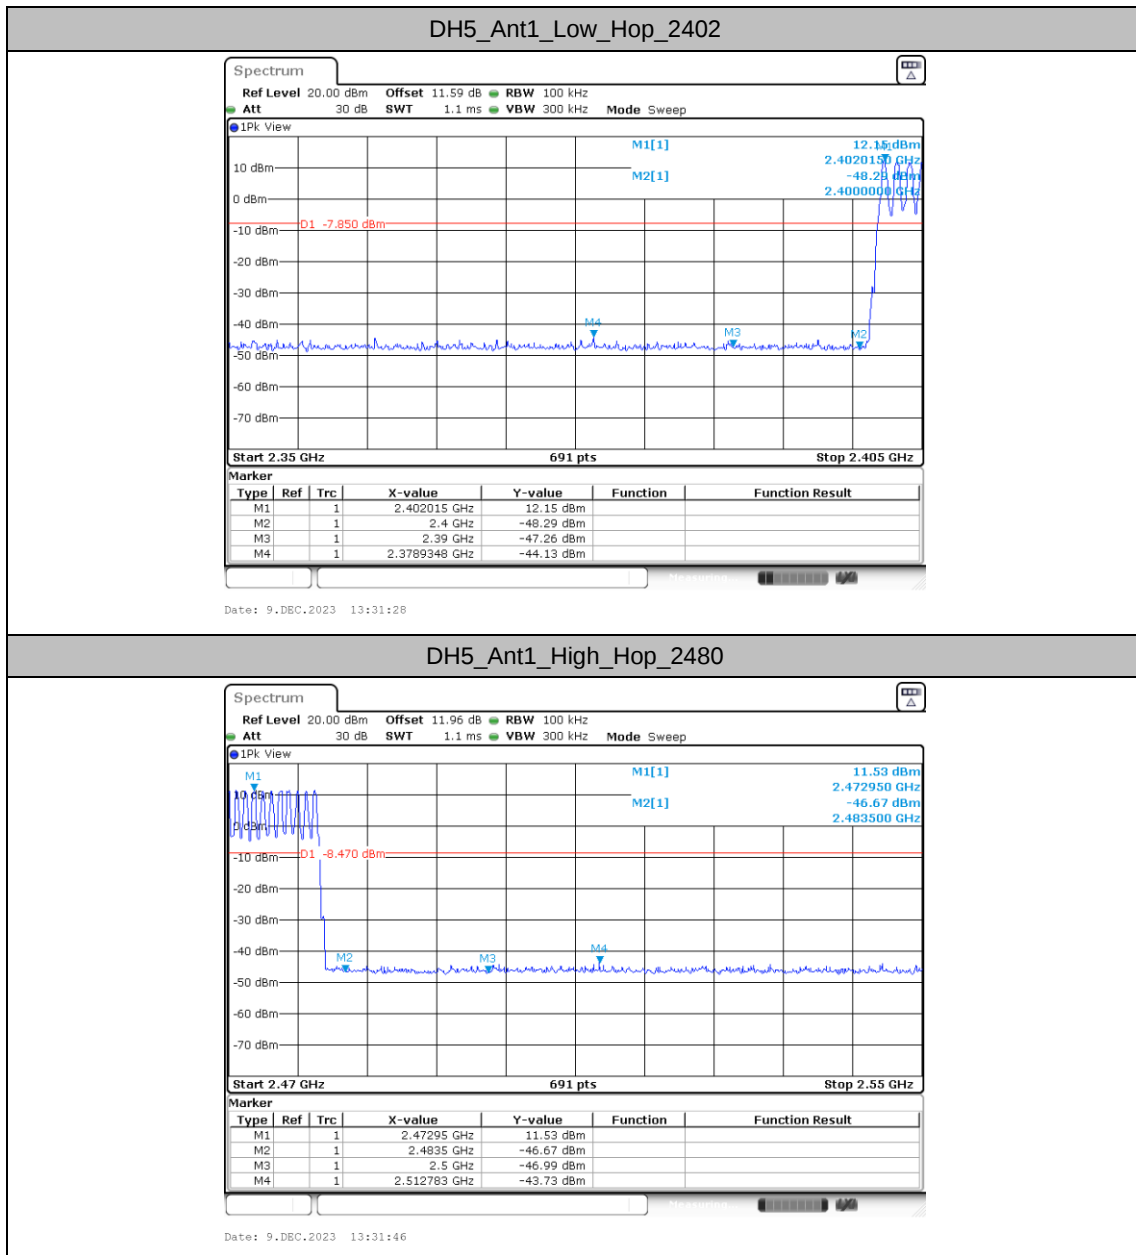

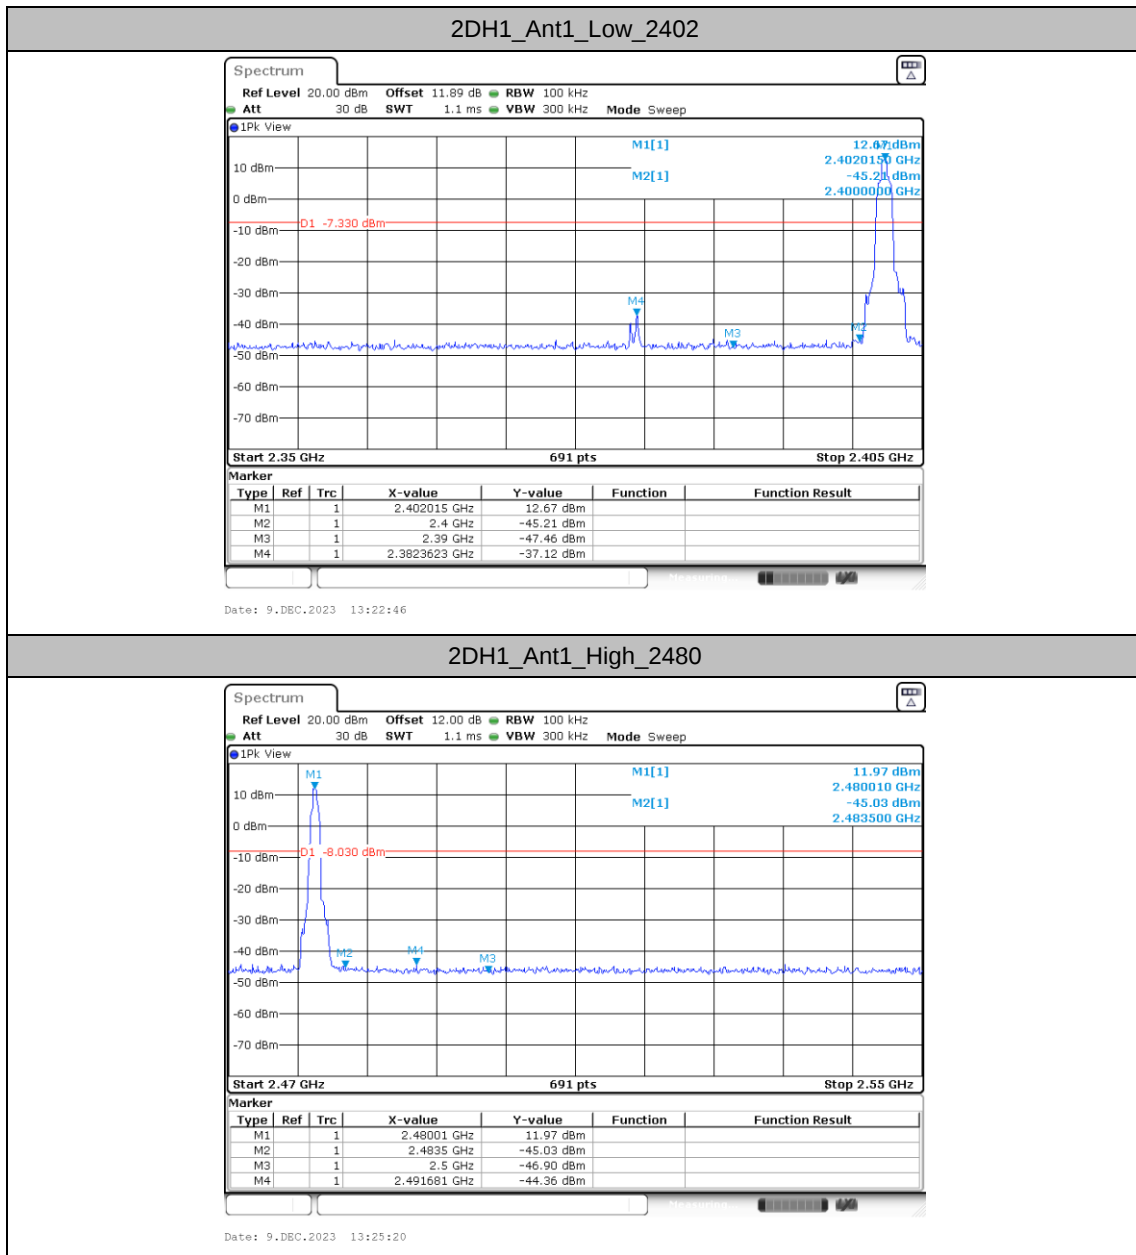

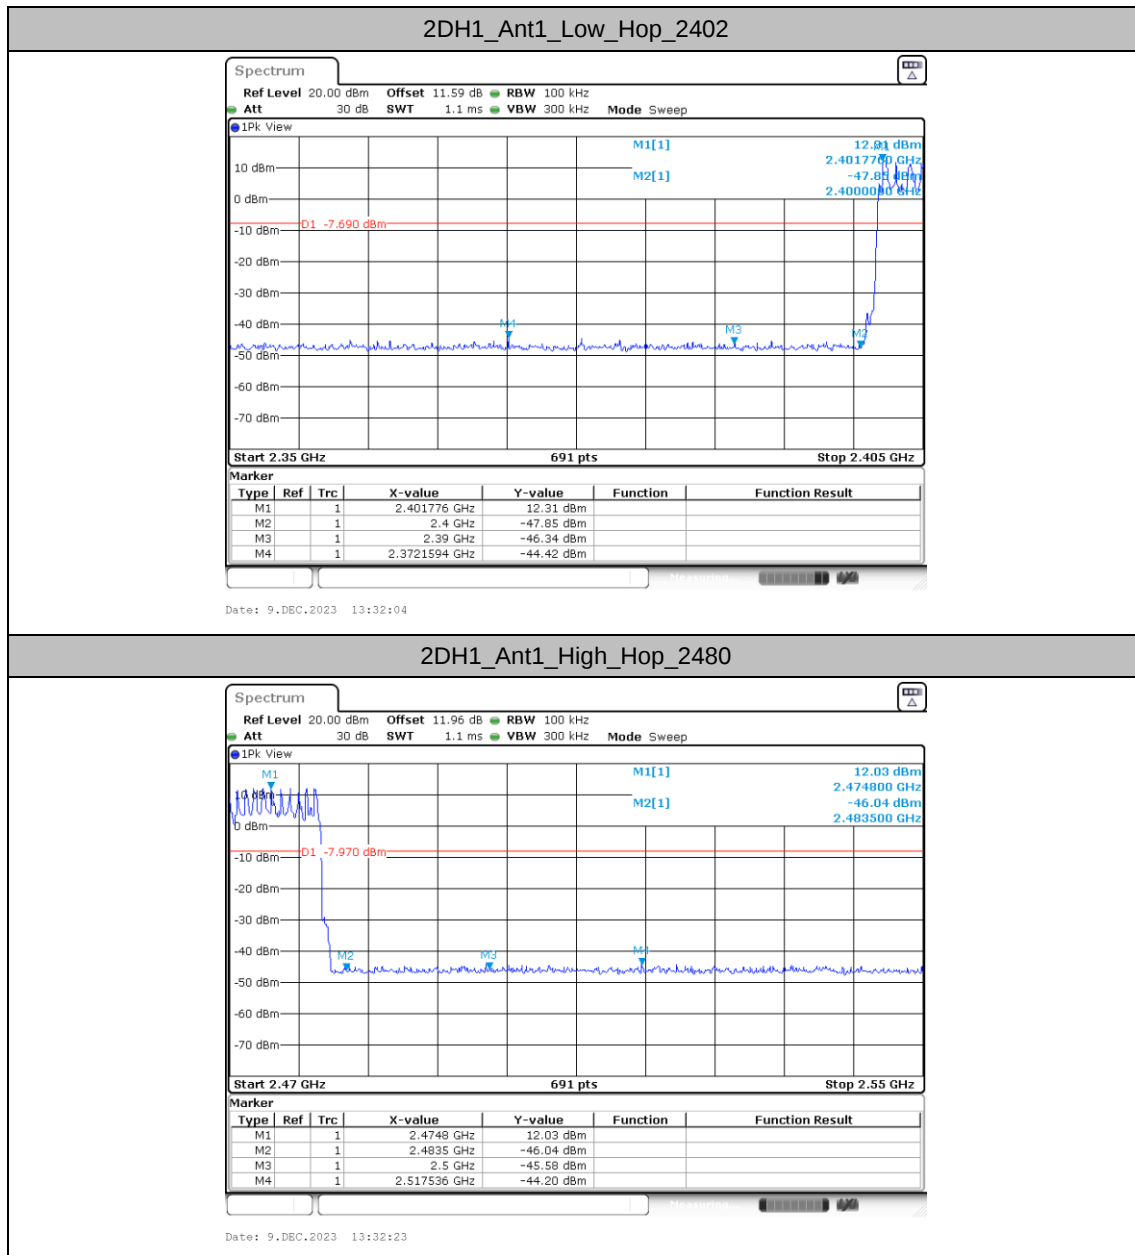

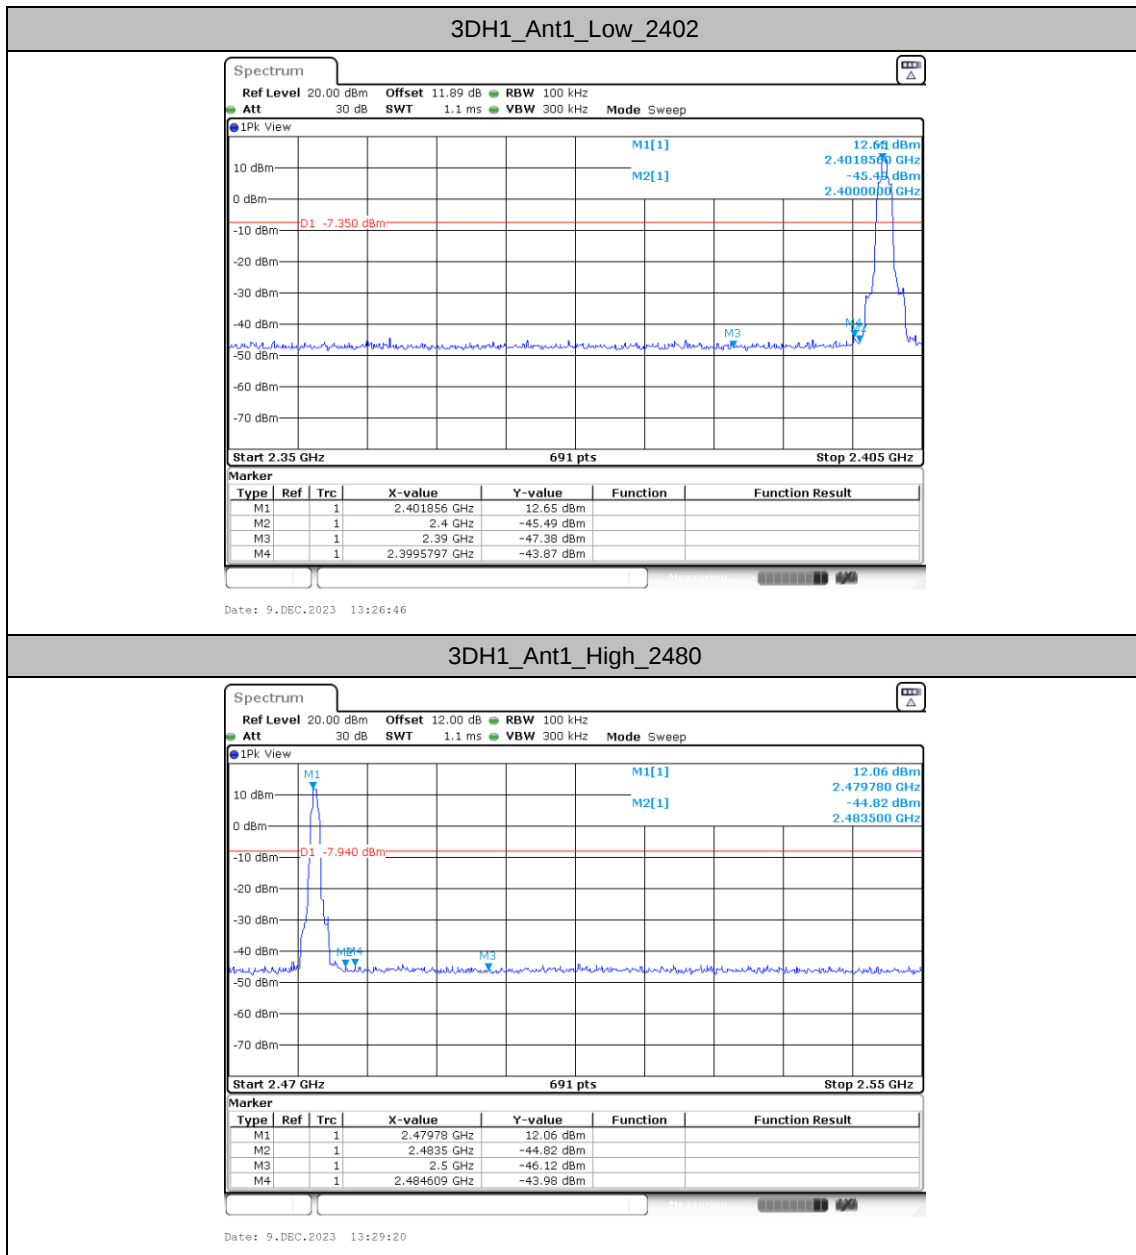

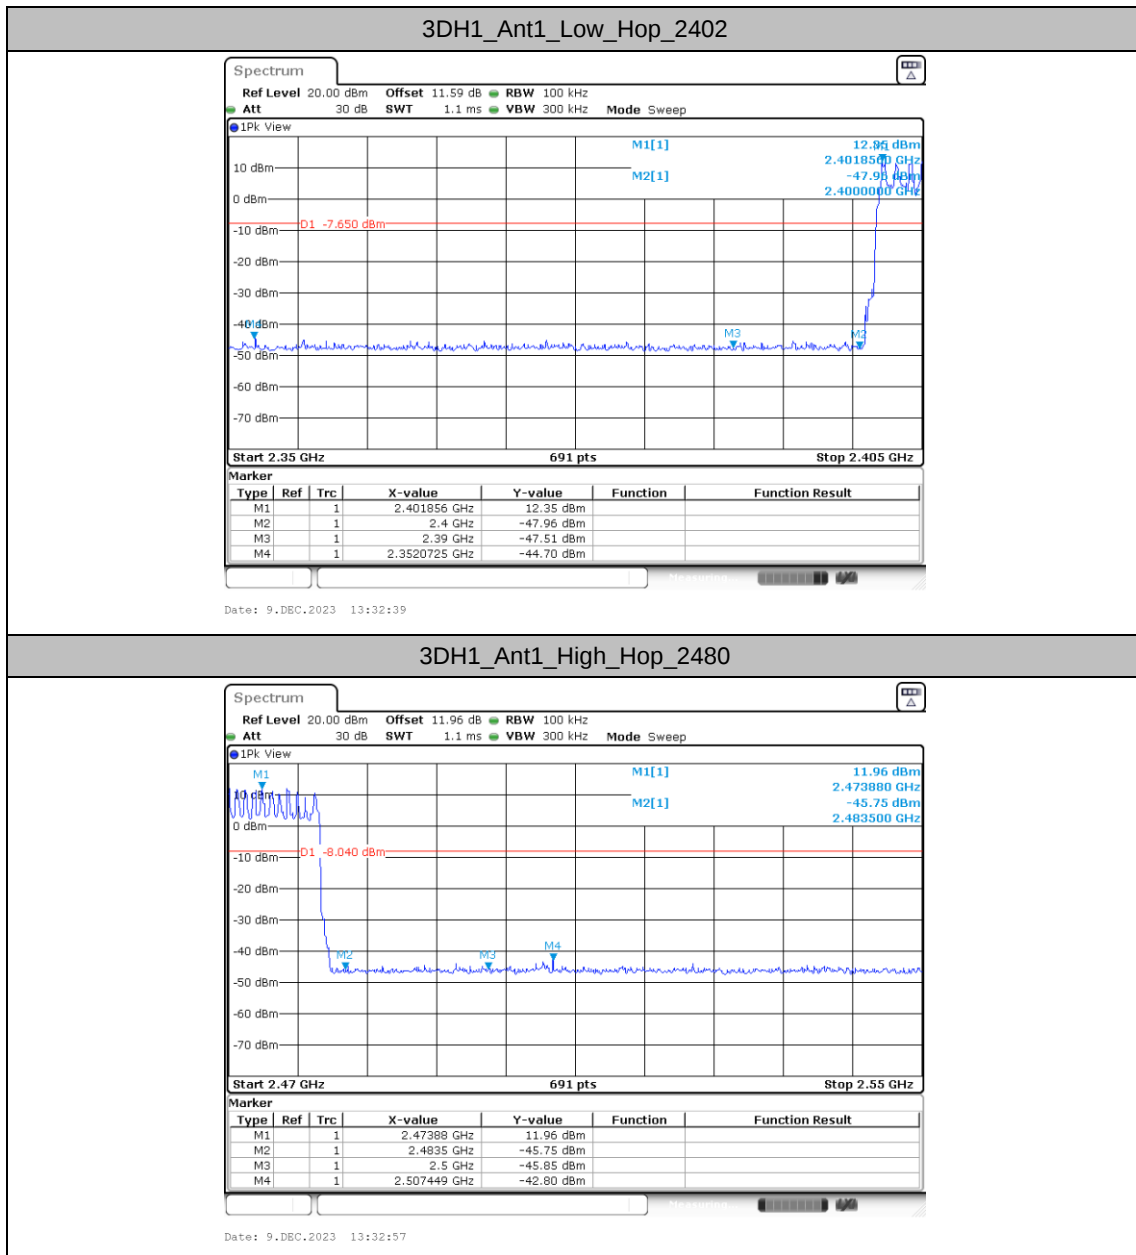


Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	12.50	12.50	---	PASS
			30~1000	12.50	-45.69	≤-7.5	PASS
			1000~26500	12.50	-37.53	≤-7.5	PASS
		2441	Reference	11.98	11.98	---	PASS
			30~1000	11.98	-46.16	≤-8.02	PASS
			1000~26500	11.98	-37.25	≤-8.02	PASS
		2480	Reference	11.89	11.89	---	PASS
			30~1000	11.89	-45.47	≤-8.11	PASS
			1000~26500	11.89	-37.13	≤-8.11	PASS
2DH1	Ant1	2402	Reference	12.50	12.50	---	PASS
			30~1000	12.50	-46.22	≤-7.5	PASS
			1000~26500	12.50	-36.98	≤-7.5	PASS
		2441	Reference	12.02	12.02	---	PASS
			30~1000	12.02	-46.08	≤-7.98	PASS
			1000~26500	12.02	-37.45	≤-7.98	PASS
		2480	Reference	11.87	11.87	---	PASS
			30~1000	11.87	-45.6	≤-8.13	PASS
			1000~26500	11.87	-37.4	≤-8.13	PASS
3DH1	Ant1	2402	Reference	12.62	12.62	---	PASS
			30~1000	12.62	-46.47	≤-7.38	PASS
			1000~26500	12.62	-36.84	≤-7.38	PASS
		2441	Reference	12.14	12.14	---	PASS
			30~1000	12.14	-46.41	≤-7.86	PASS
			1000~26500	12.14	-36.52	≤-7.86	PASS
		2480	Reference	12.05	12.05	---	PASS
			30~1000	12.05	-46.63	≤-7.95	PASS
			1000~26500	12.05	-37.28	≤-7.95	PASS





Test Graphs

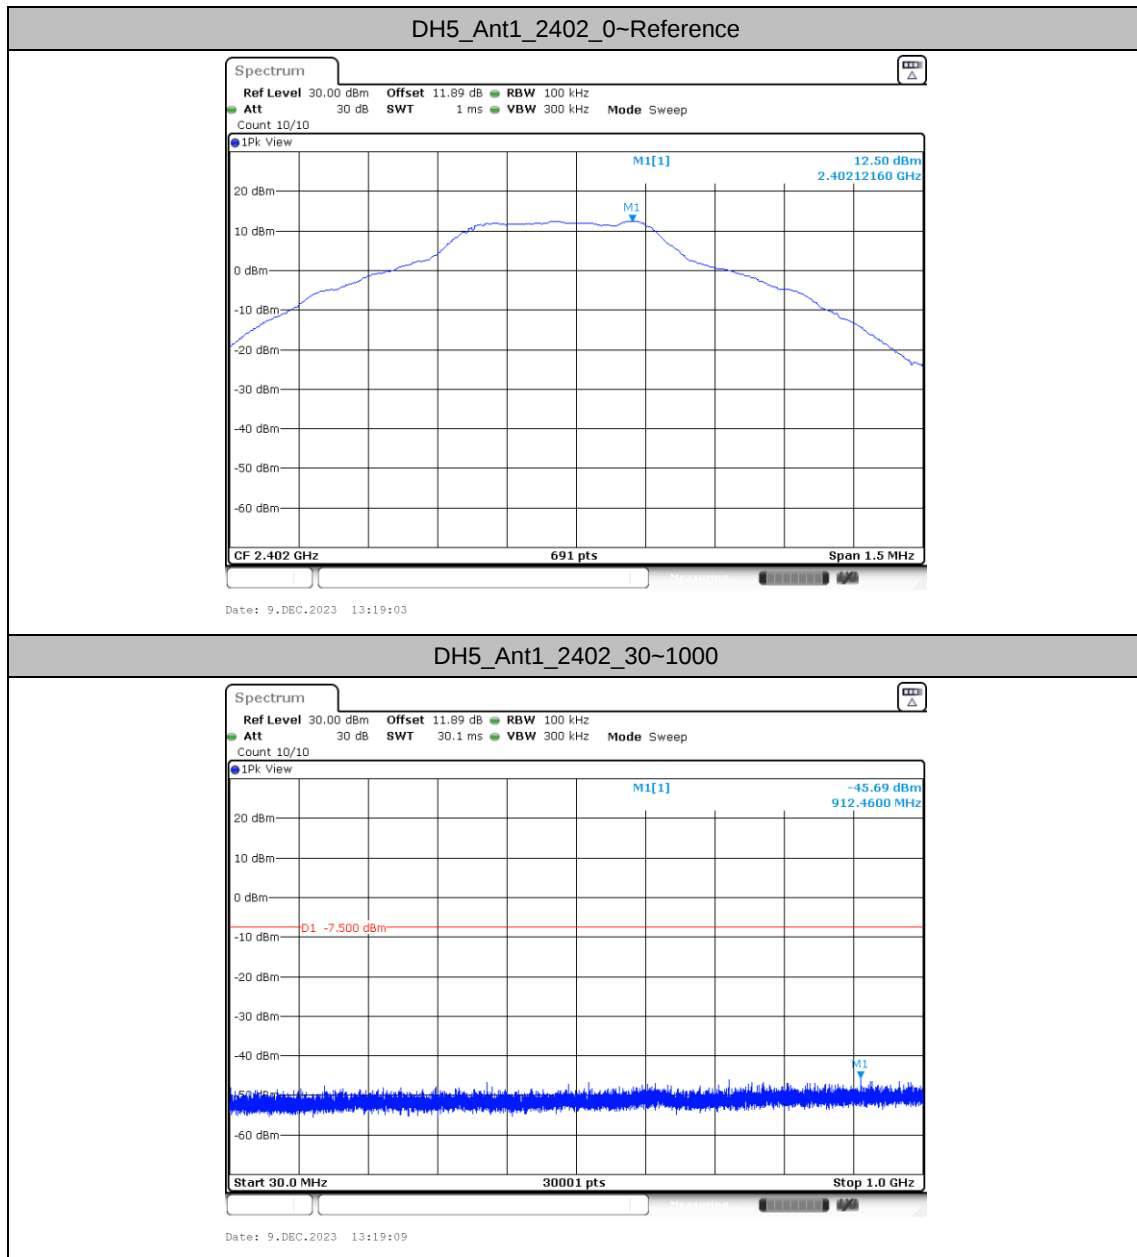


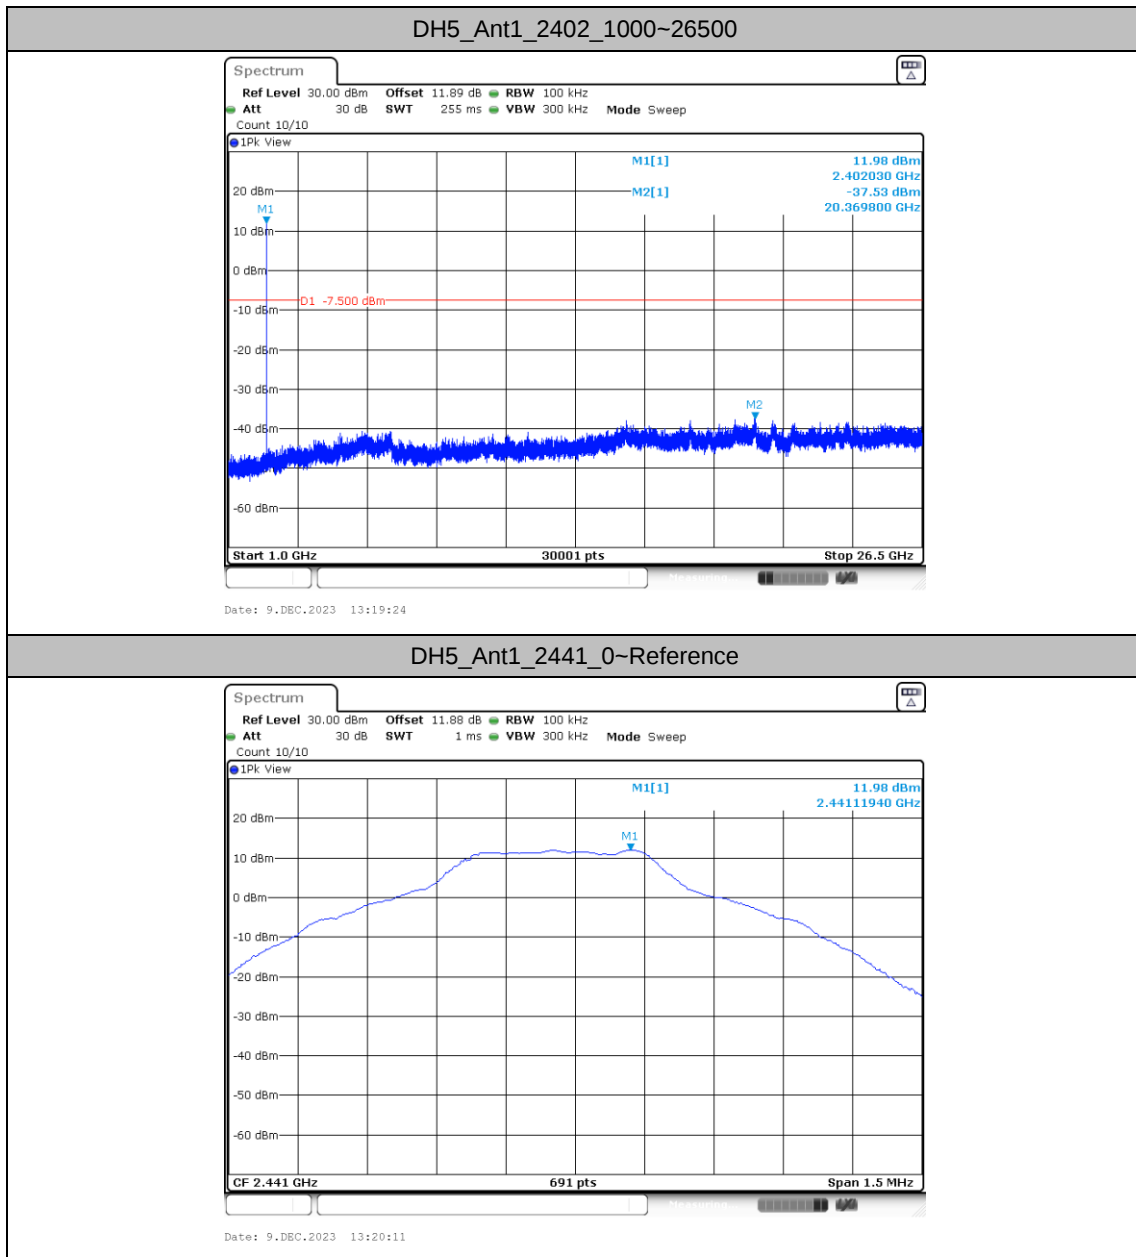


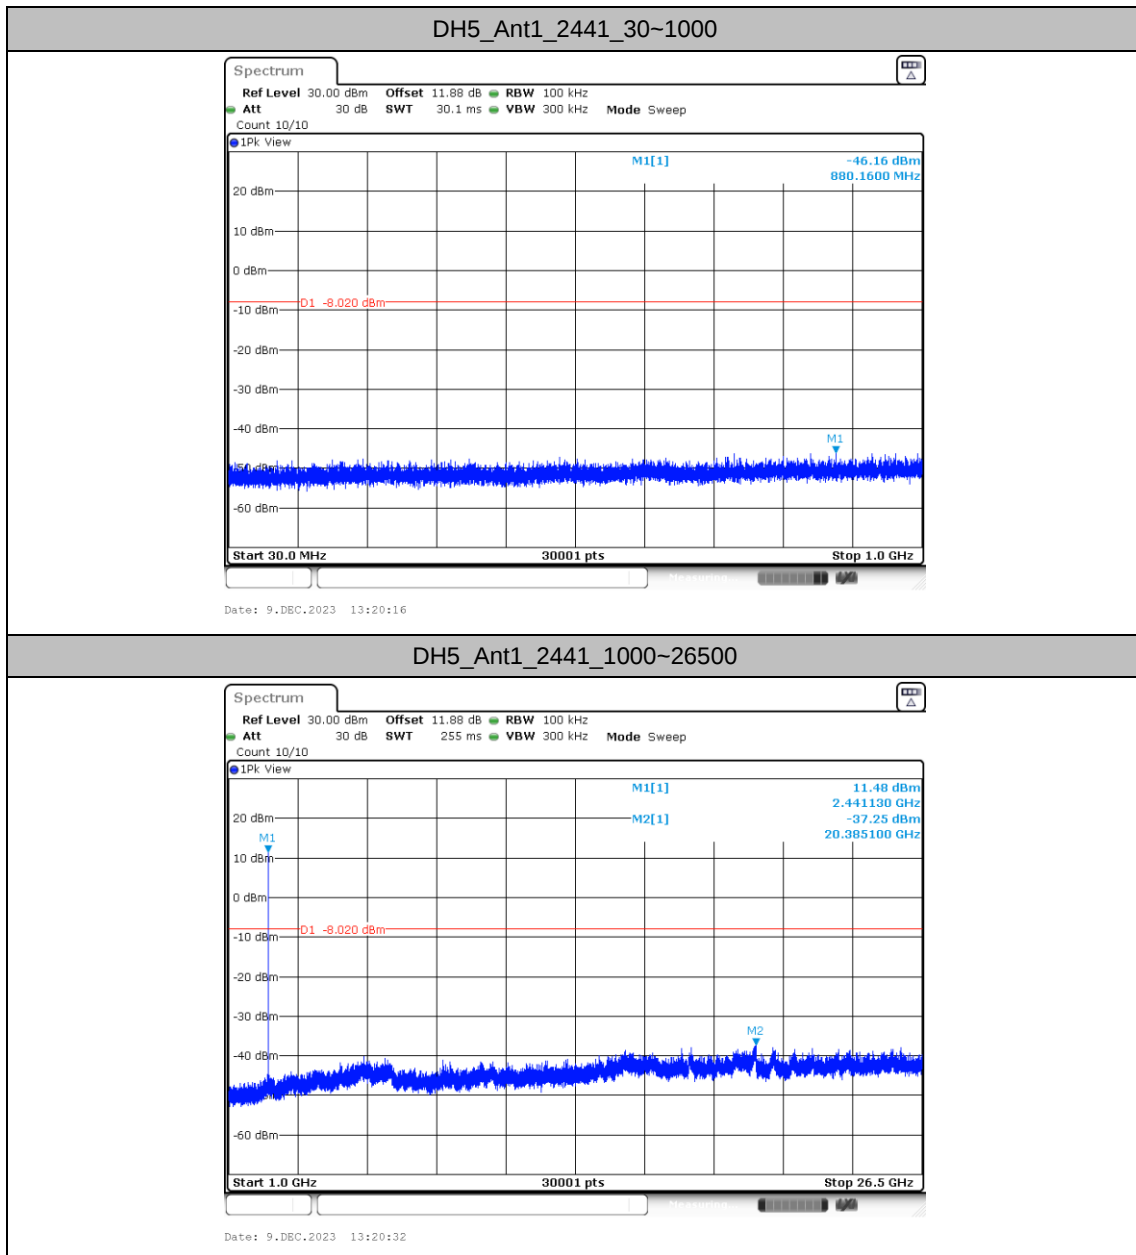


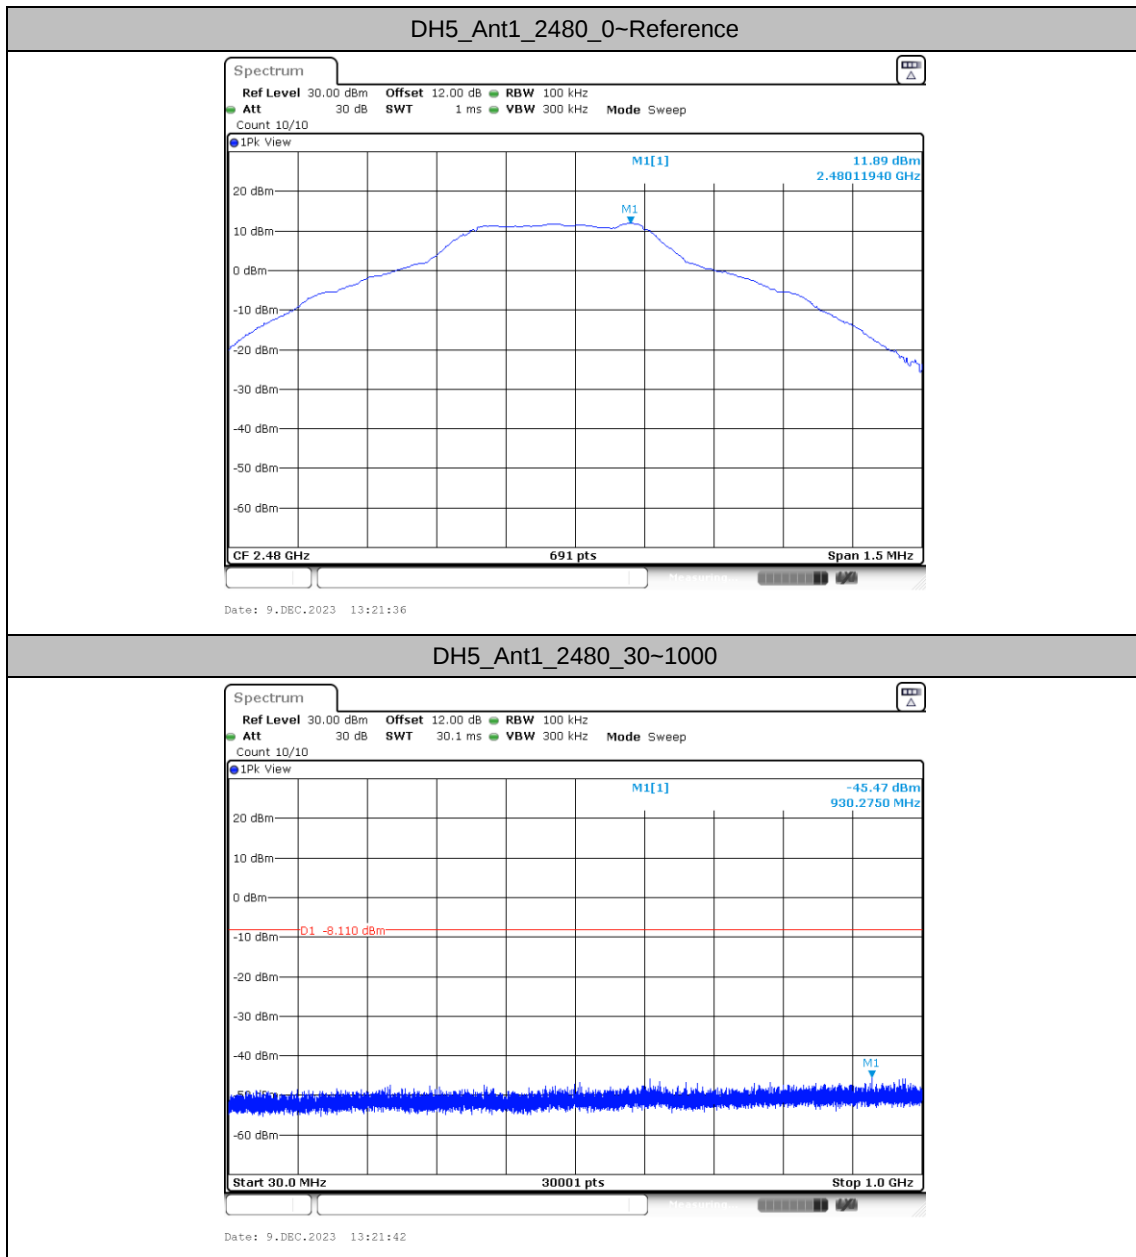


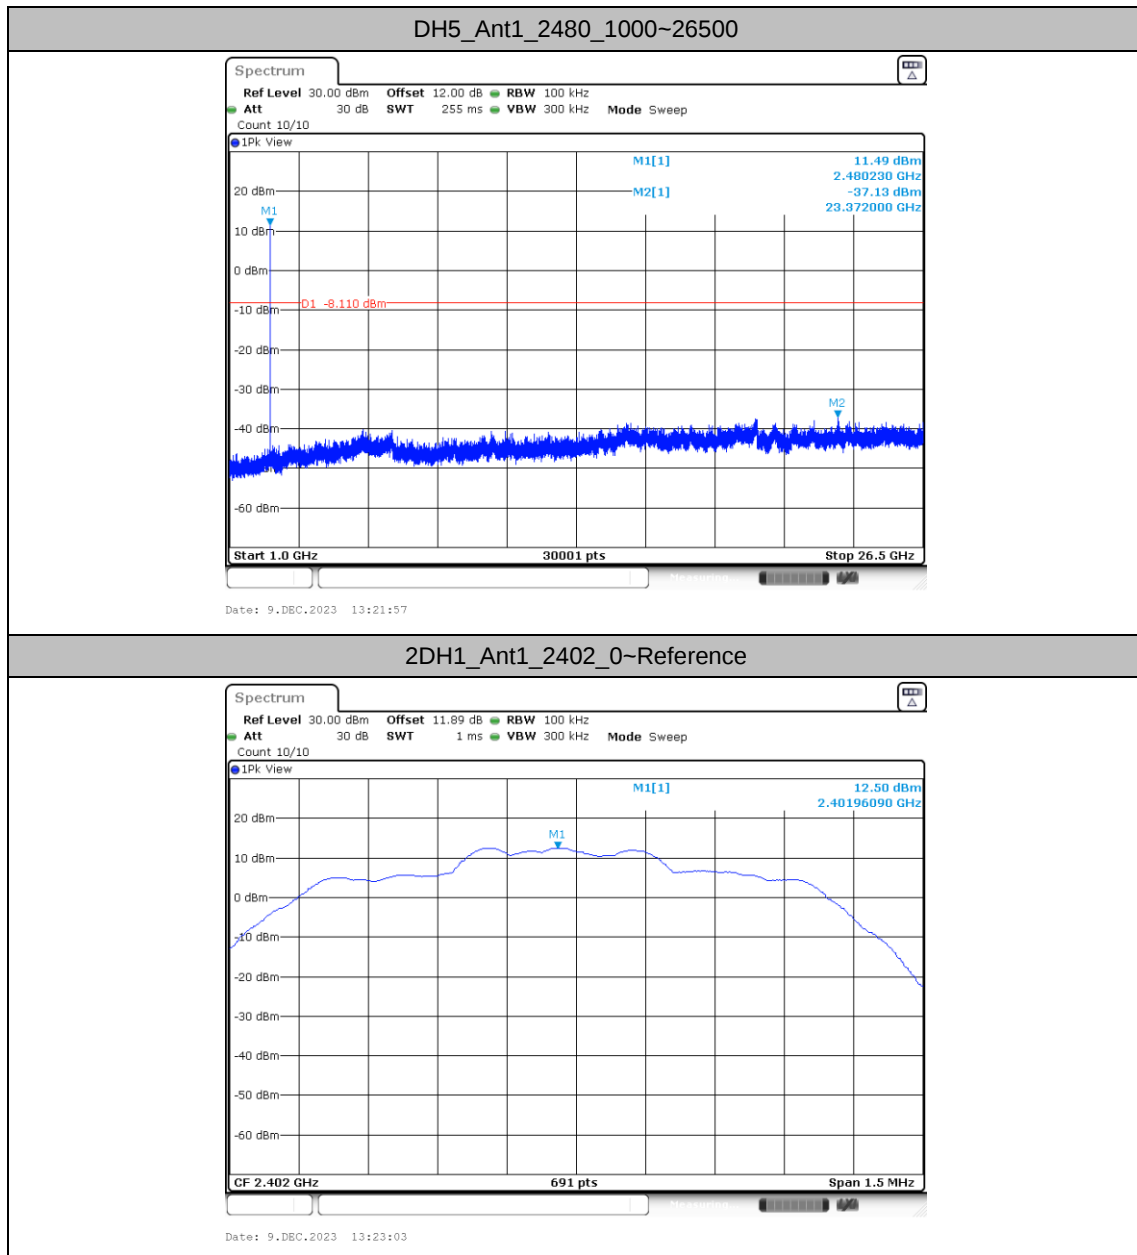


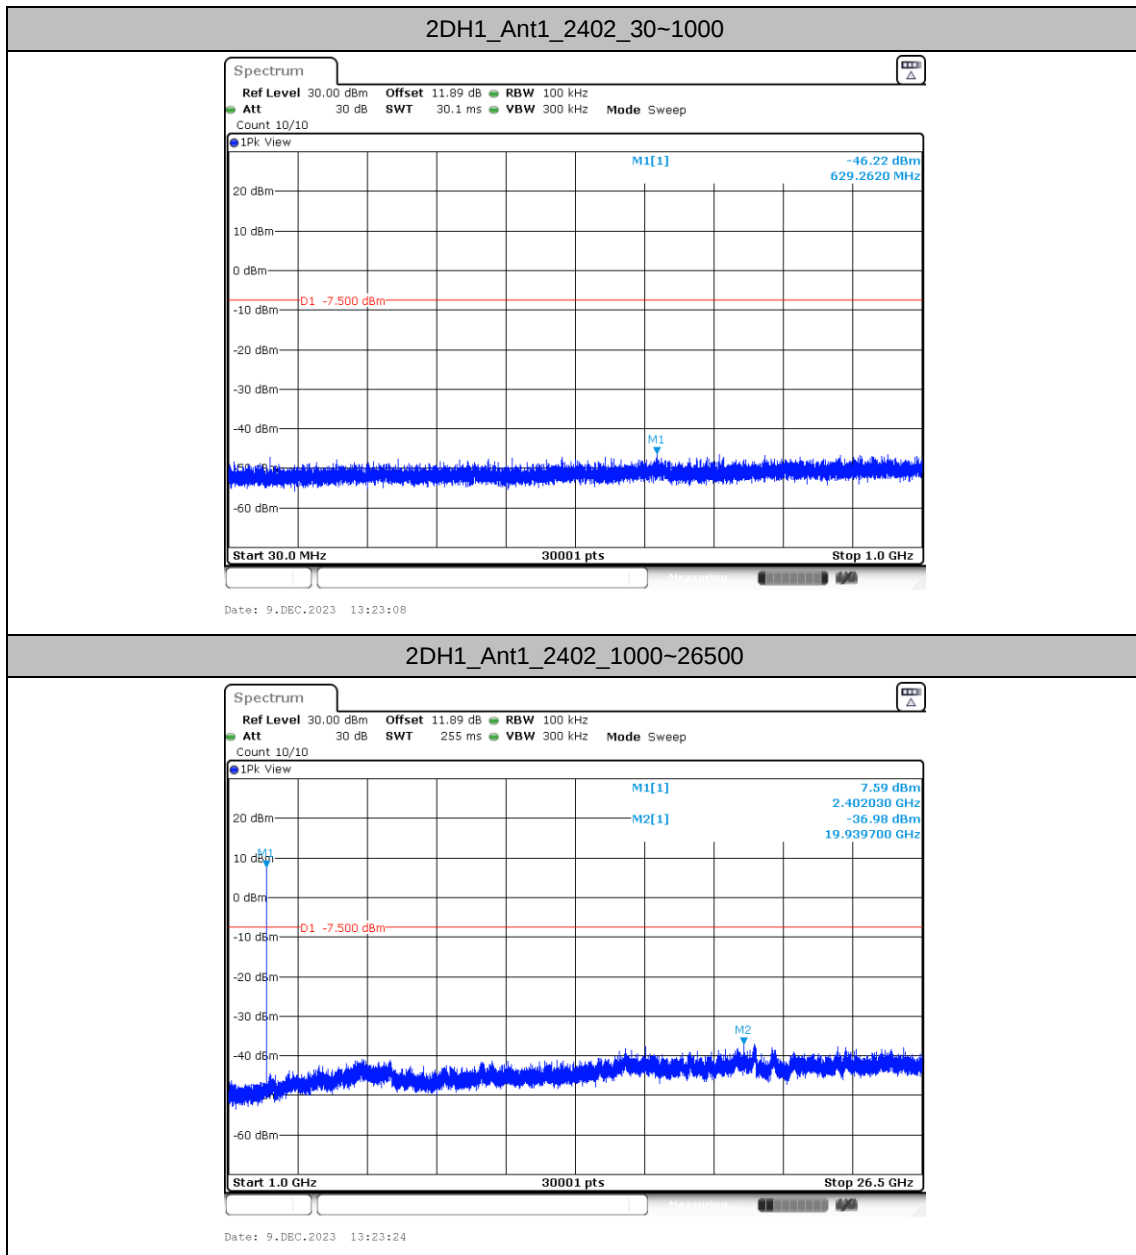


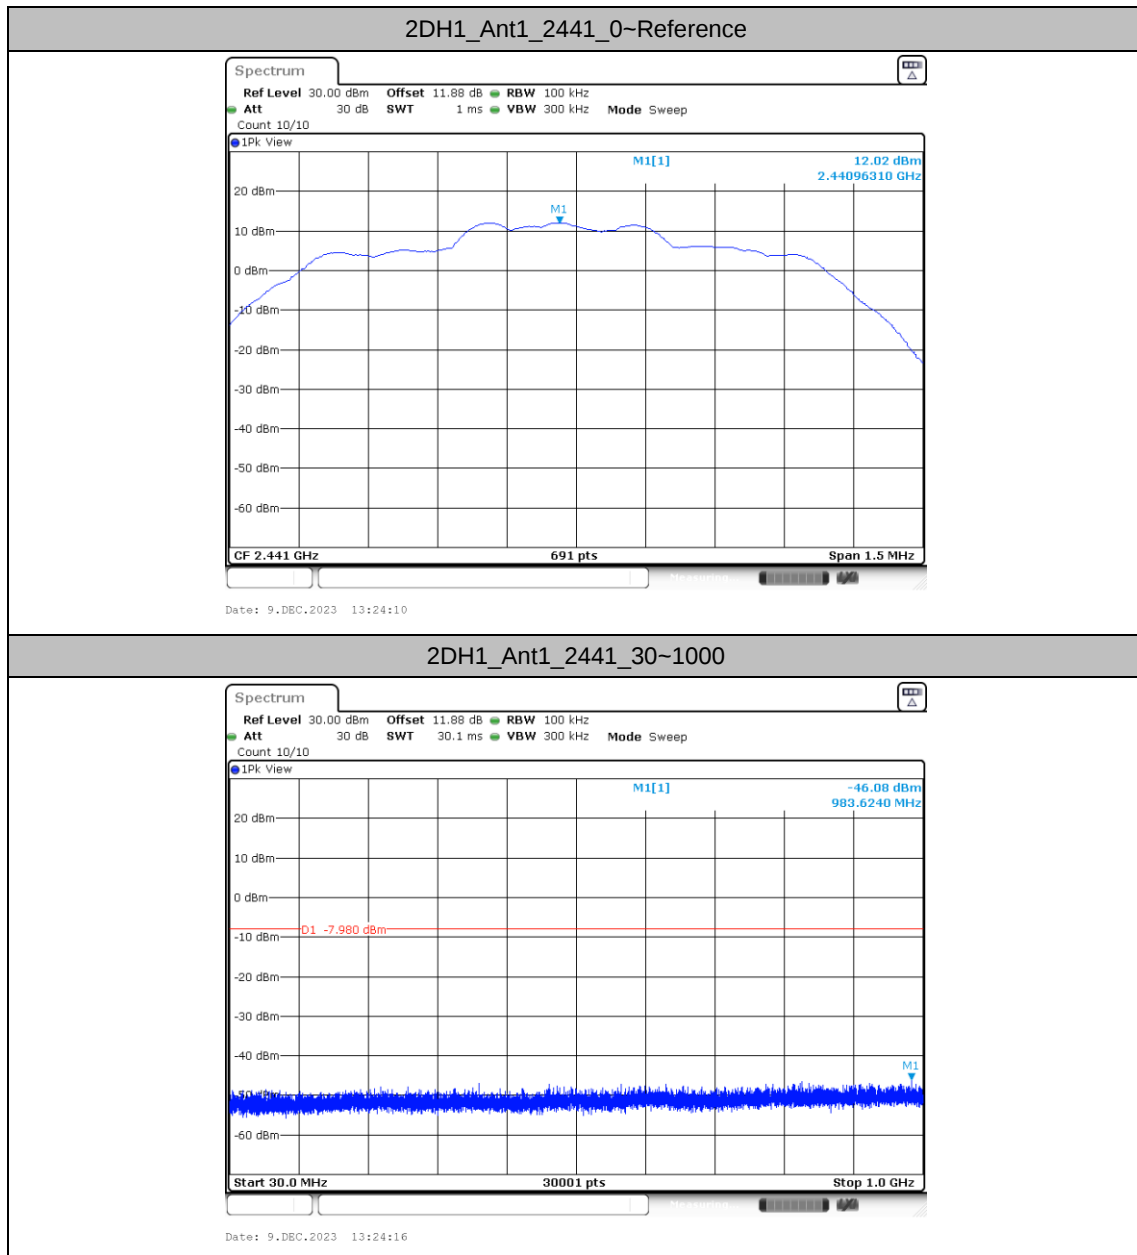


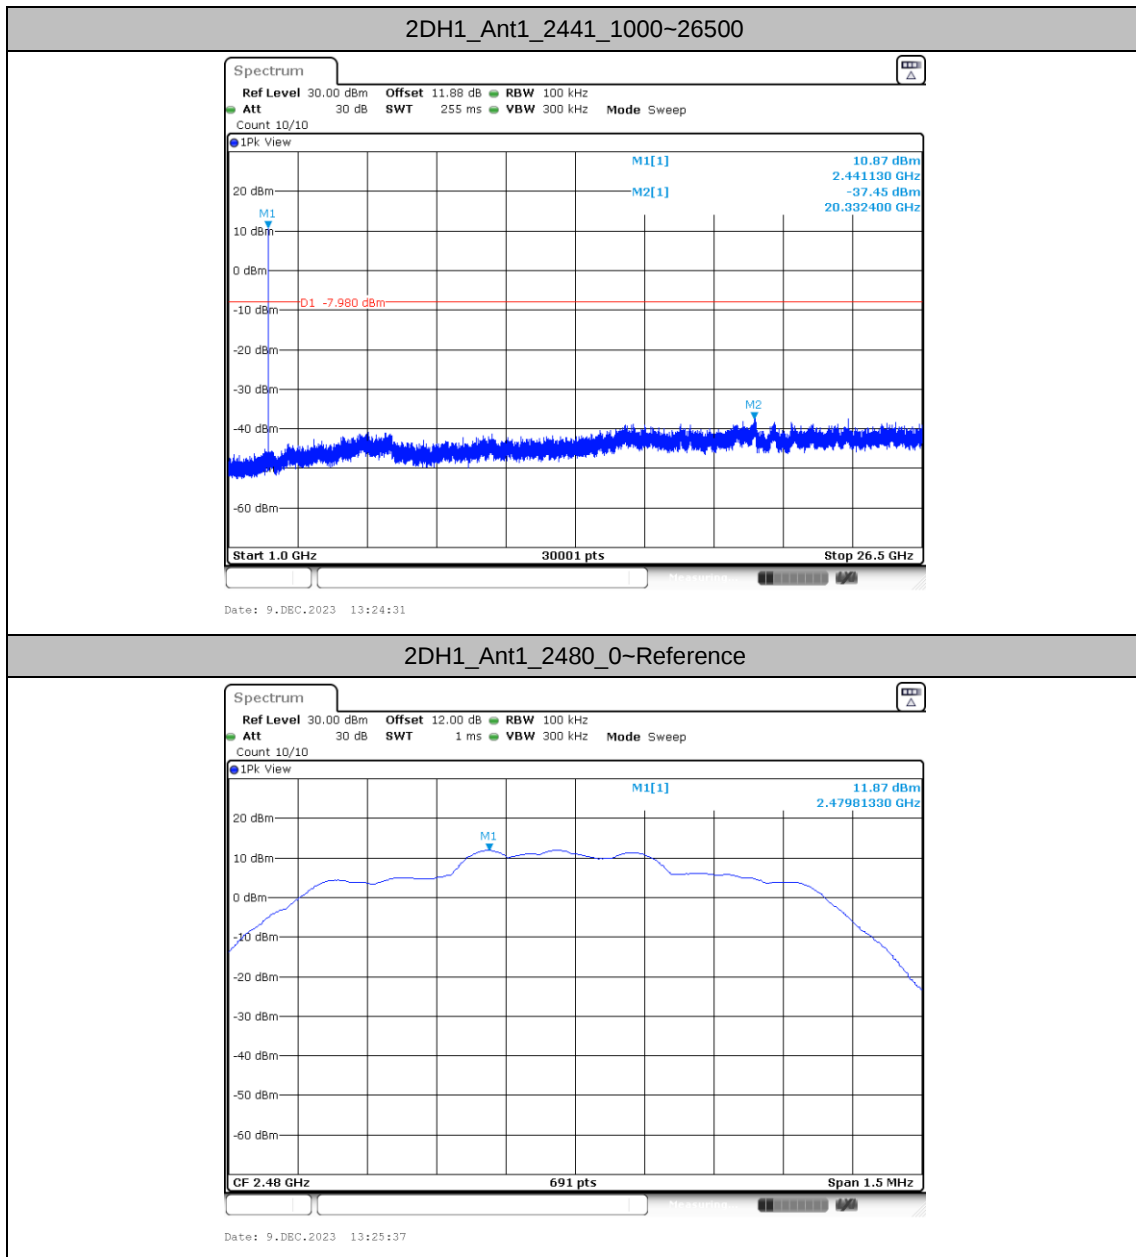


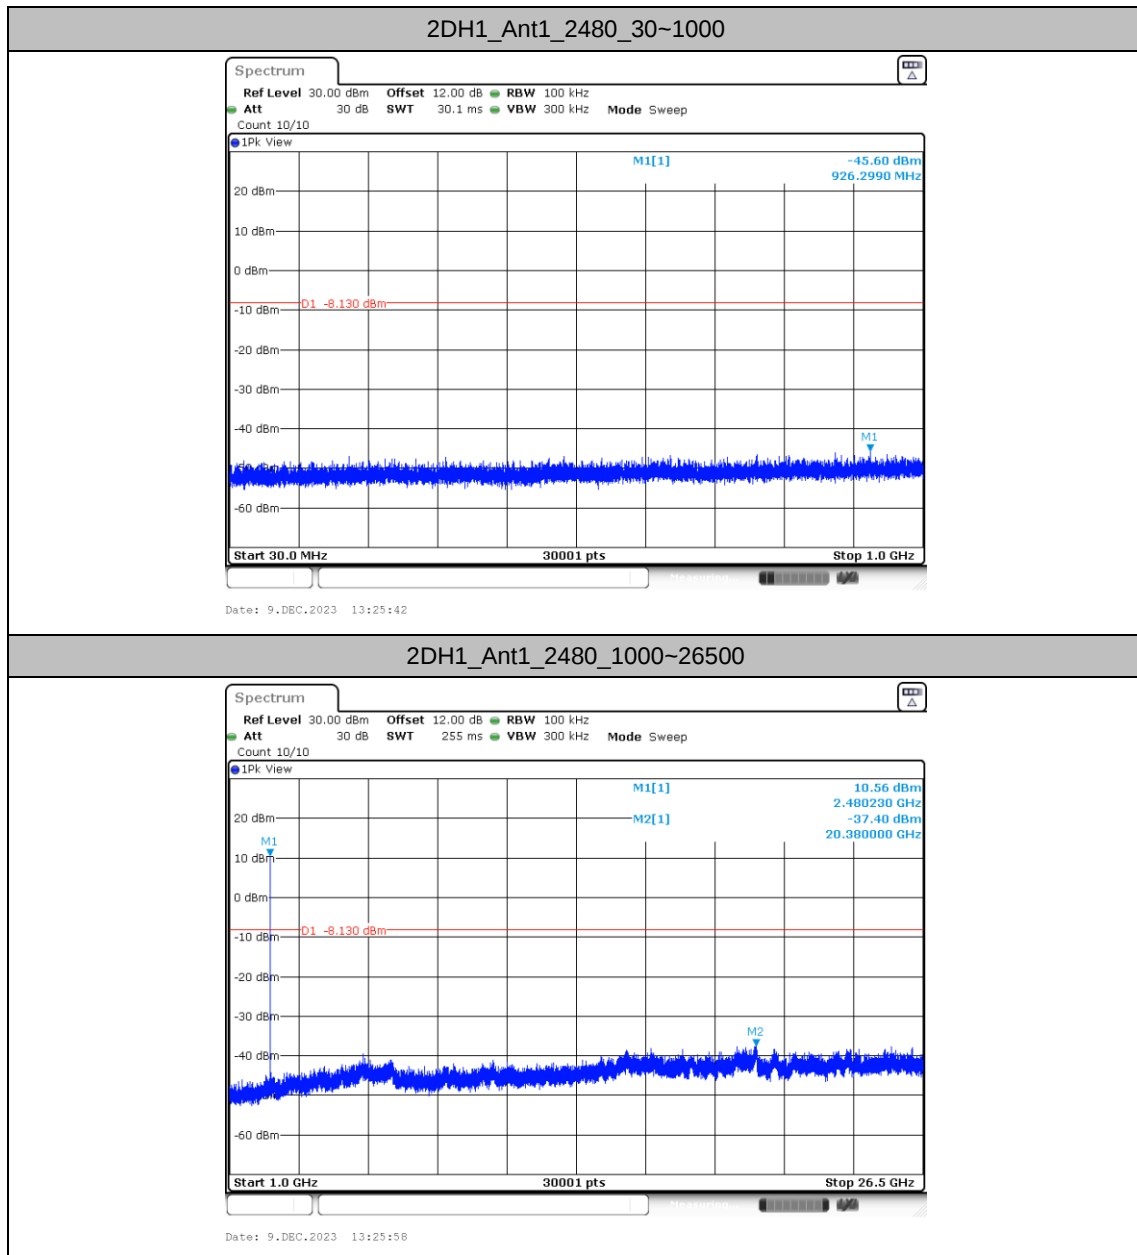


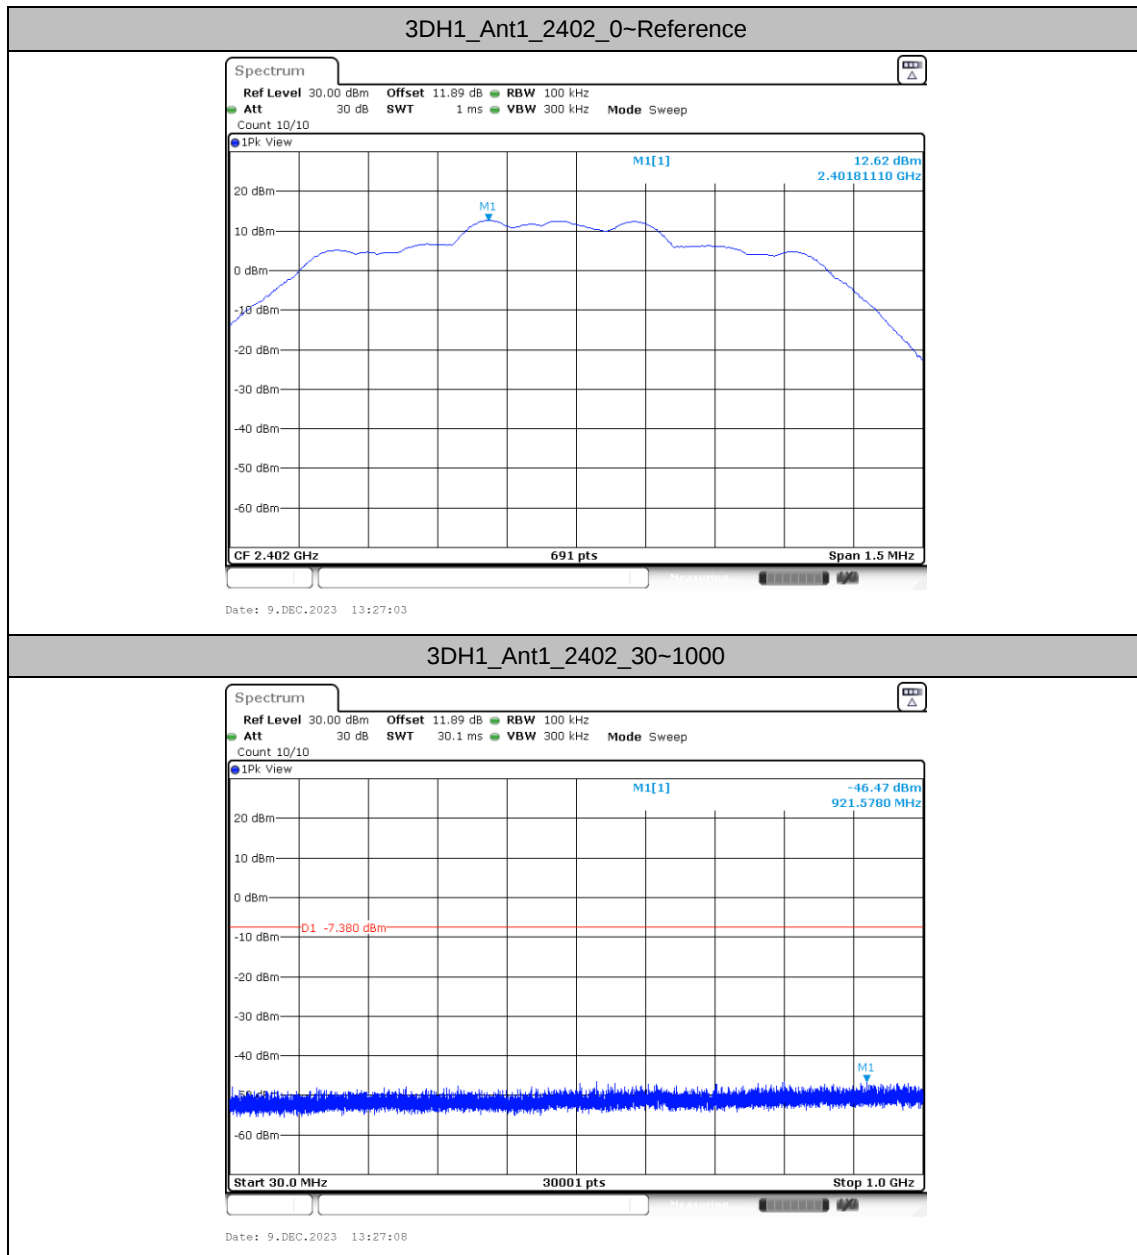

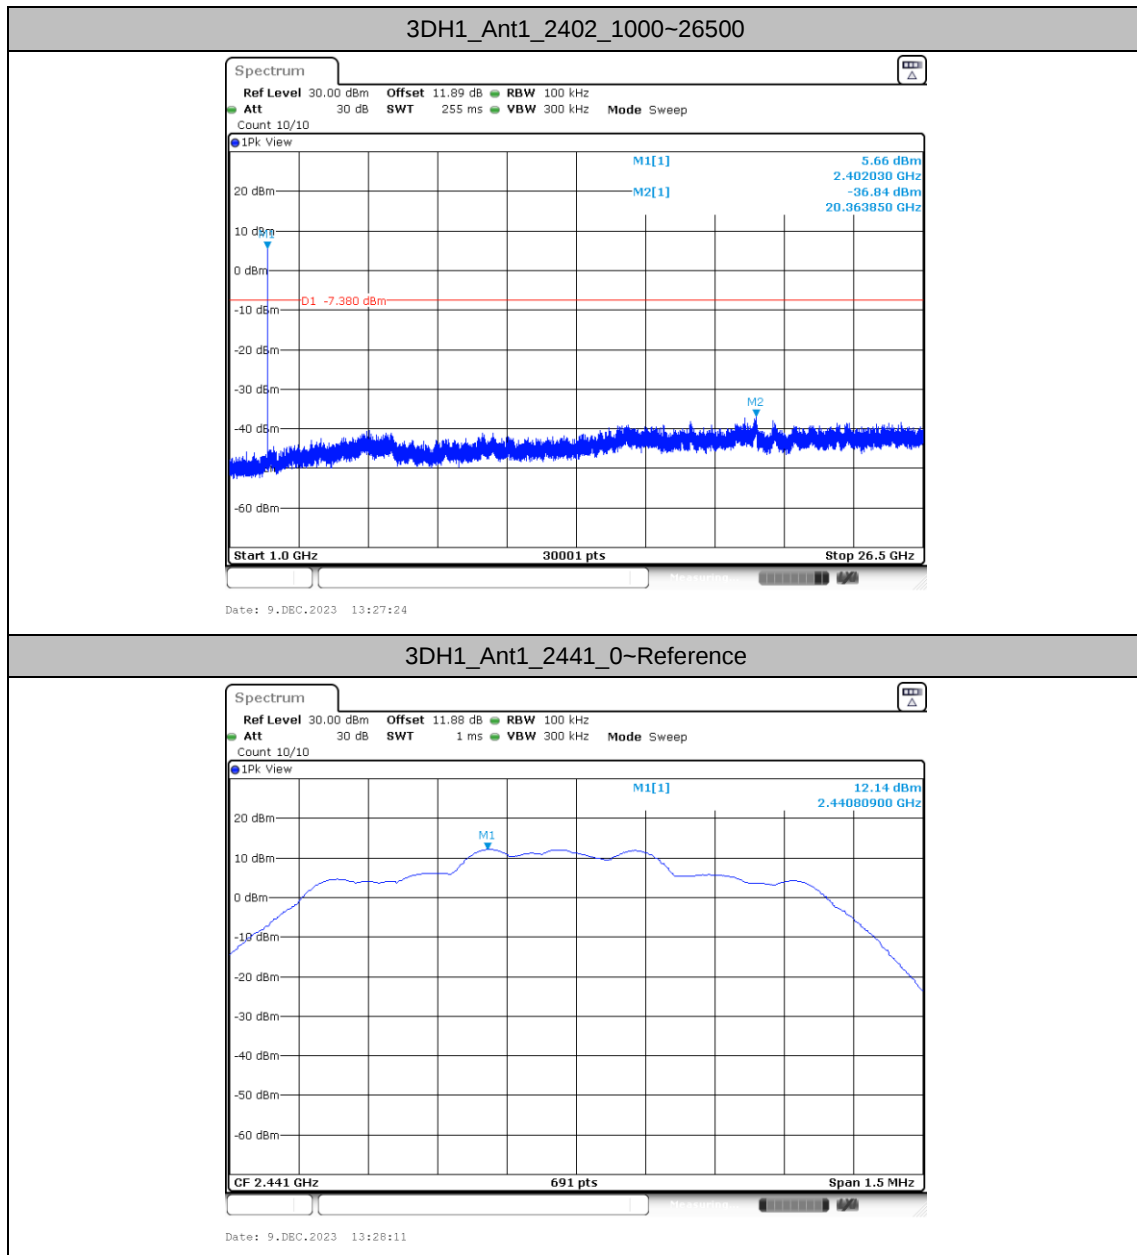

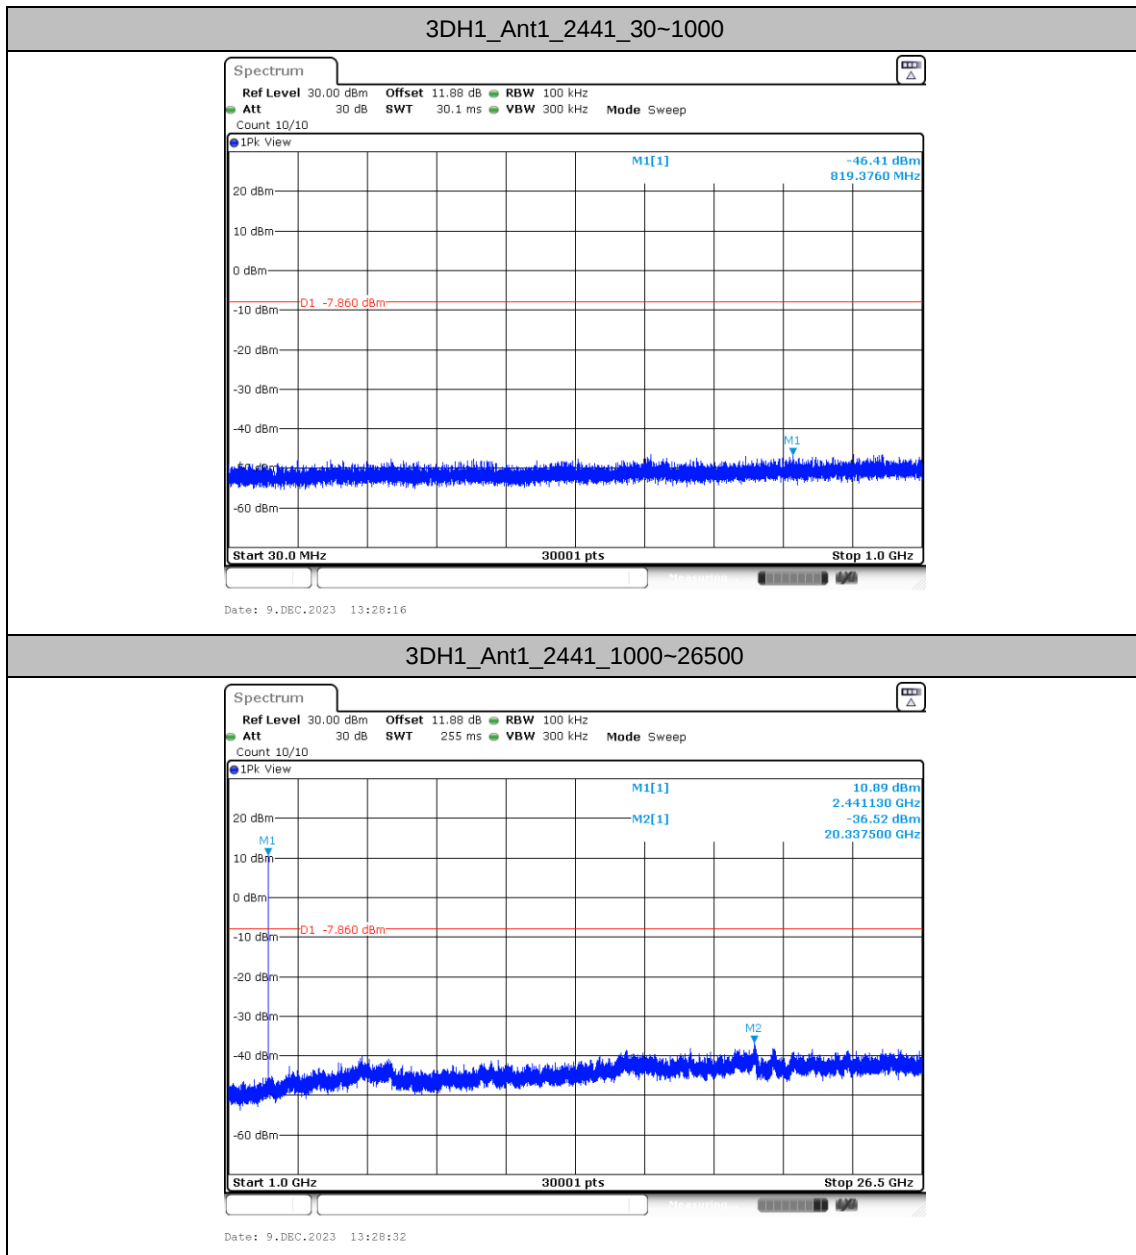


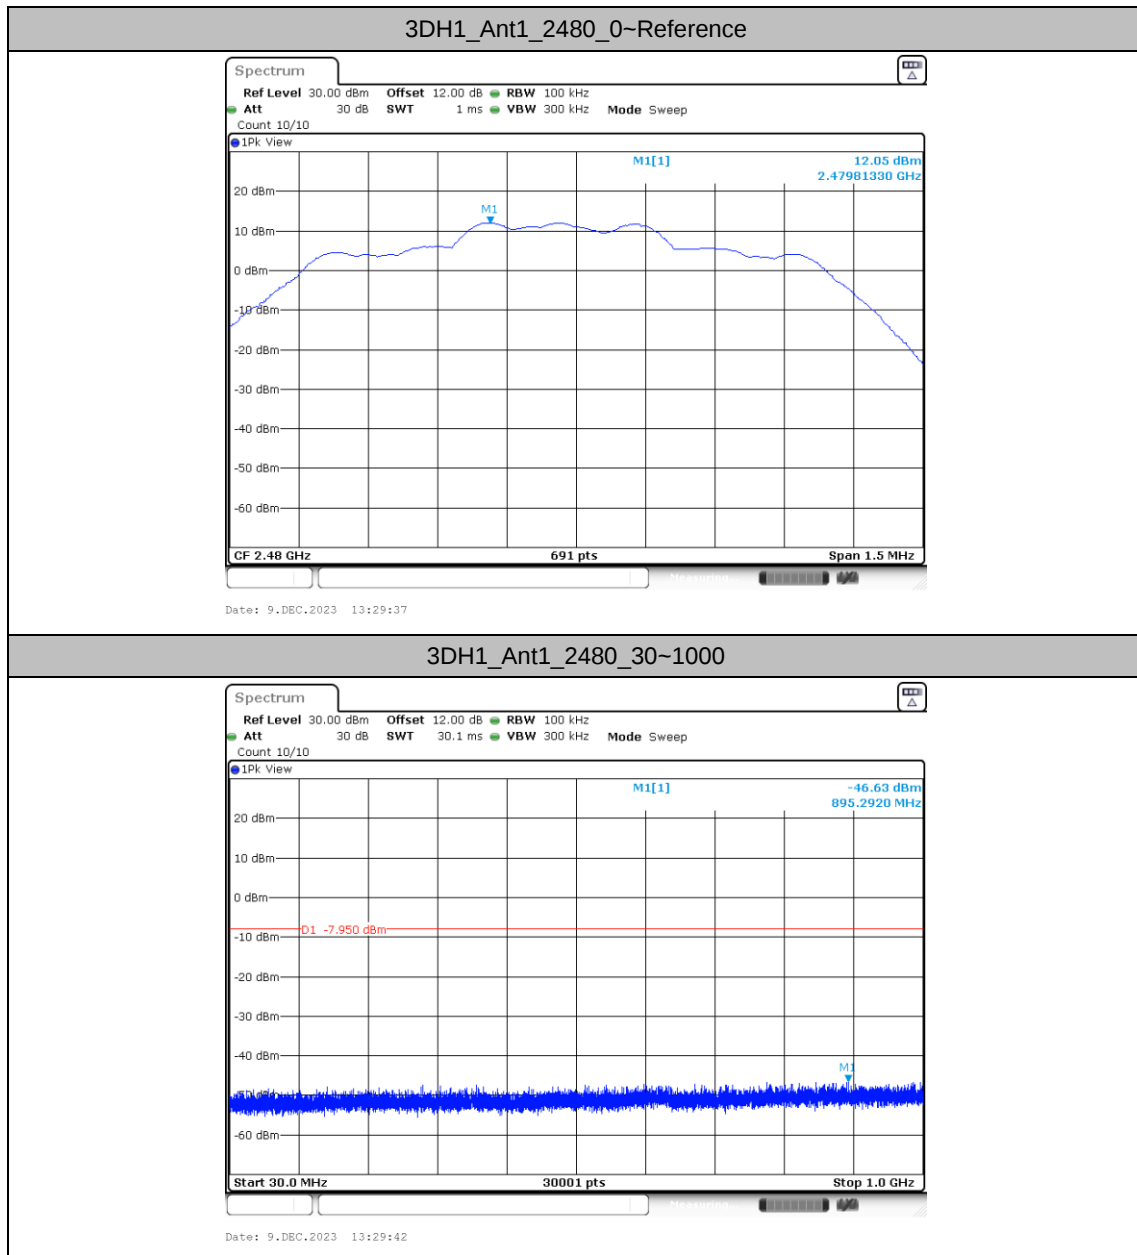

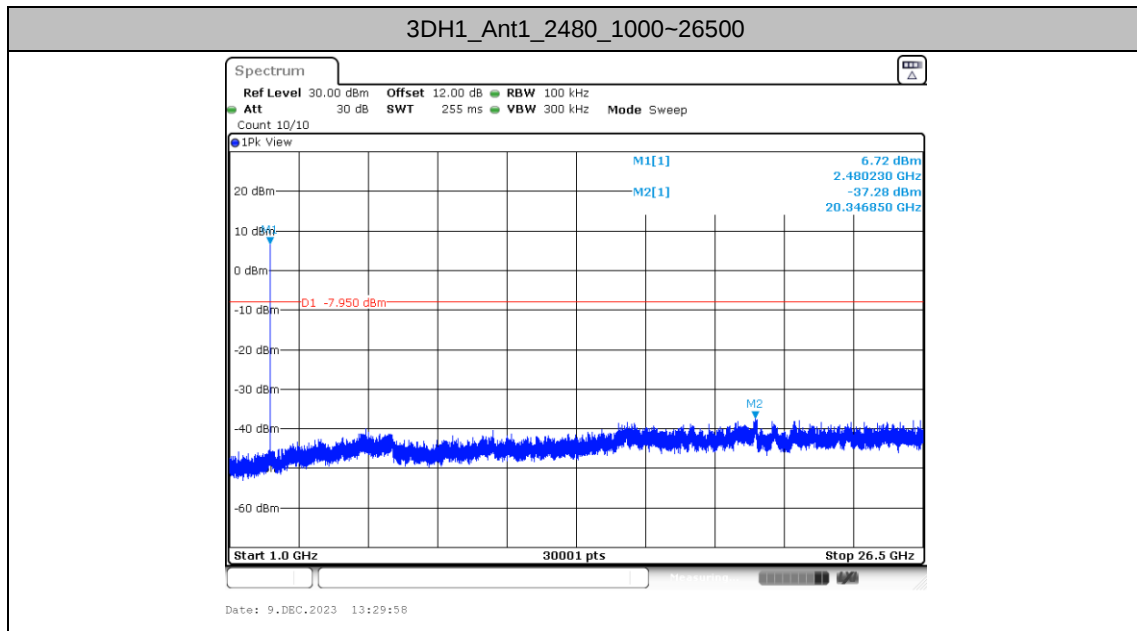




Appendix B. AC Conducted Emission Test Results

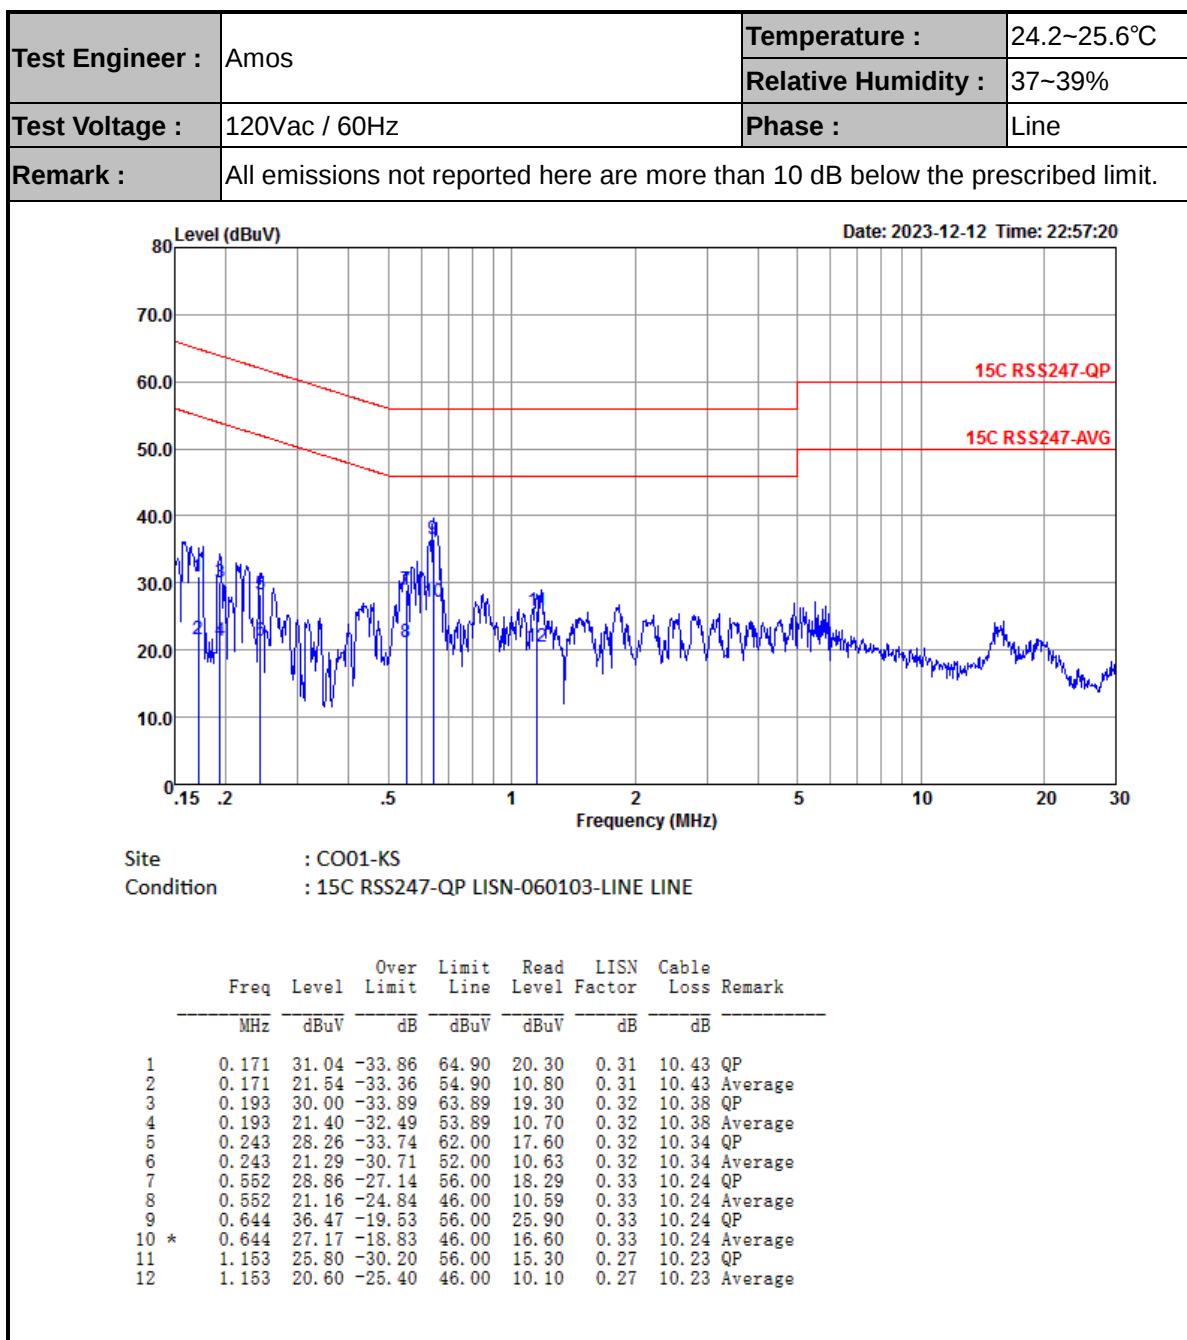



Test Engineer :	Amos	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

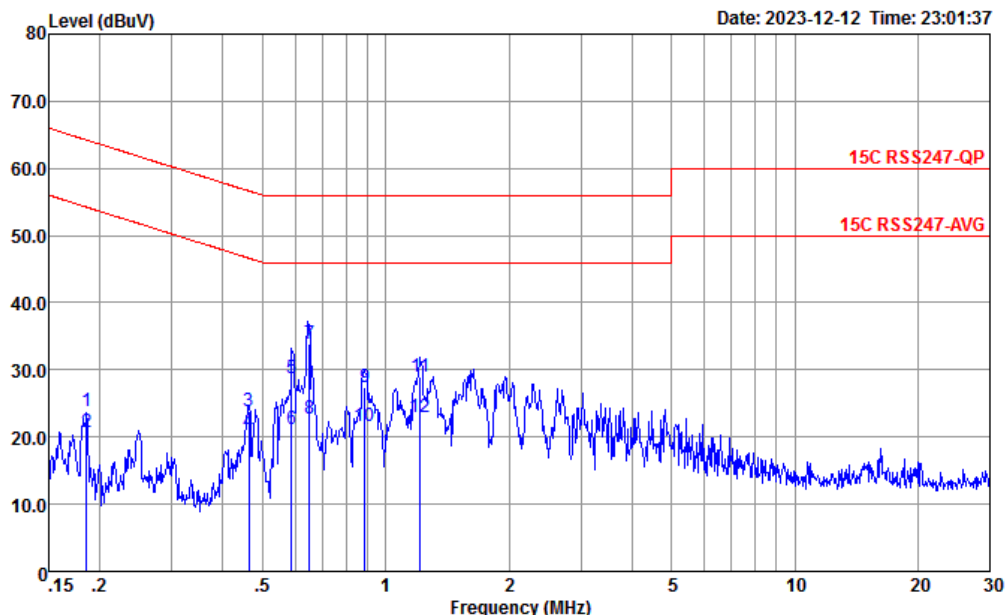

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060103-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.185	23.76	-40.48	64.24	13.10	0.27	10.39	QP
2	0.185	20.76	-33.48	54.24	10.10	0.27	10.39	Average
3	0.464	23.83	-32.80	56.63	13.30	0.28	10.25	QP
4	0.464	20.73	-26.90	46.63	10.20	0.28	10.25	Average
5	0.589	28.83	-27.17	56.00	18.30	0.29	10.24	QP
6	0.589	21.23	-24.77	46.00	10.70	0.29	10.24	Average
7 *	0.651	33.84	-22.16	56.00	23.30	0.30	10.24	QP
8	0.651	22.84	-23.16	46.00	12.30	0.30	10.24	Average
9	0.890	27.47	-28.53	56.00	16.89	0.34	10.24	QP
10	0.890	21.67	-24.33	46.00	11.09	0.34	10.24	Average
11	1.216	28.88	-27.12	56.00	18.30	0.35	10.23	QP
12	1.216	22.98	-23.02	46.00	12.40	0.35	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	41~42%
		Temperature :	22~23℃



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-
Mode 2	2400-2483.5	1	Bluetooth BR_GFSK	39	2441	1Mbps	-
Mode 3	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	-
Mode 3	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2326.25	55.09	74.00	-18.91	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	44.31	74.00	-29.69	H	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	52.05	74.00	-21.95	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.54	57.05	74.00	-16.95	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	50.33	74.00	-23.67	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	855.47	32.75	46.00	-13.25	H	PEAK	Pass	LF

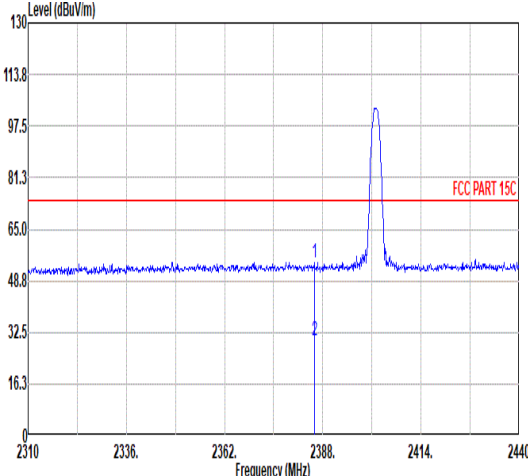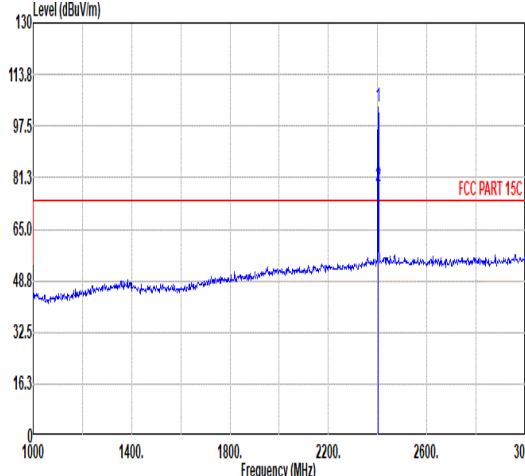

Mode	1																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2385.79</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>38.35</td><td>32.37</td><td>8.86</td><td>30.93</td></tr><tr><td>2</td><td>2385.79</td><td>29.86</td><td>54.00</td><td>-24.14</td><td>13.56</td><td>32.37</td><td>8.86</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93	2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>103.41</td><td>-----</td><td>-----</td><td>87.01</td><td>32.40</td><td>8.93</td><td>30.93</td></tr><tr><td>2</td><td>2402.00</td><td>78.62</td><td>-----</td><td>-----</td><td>62.22</td><td>32.40</td><td>8.93</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93	2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93																																																																																														
2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93																																																																																														
2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2385.79</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>38.35</td><td>32.37</td><td>8.86</td><td>30.93</td></tr><tr><td>2</td><td>2385.79</td><td>29.86</td><td>54.00</td><td>-24.14</td><td>13.56</td><td>32.37</td><td>8.86</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93	2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>103.41</td><td>-----</td><td>-----</td><td>87.01</td><td>32.40</td><td>8.93</td><td>30.93</td></tr><tr><td>2</td><td>2402.00</td><td>78.62</td><td>-----</td><td>-----</td><td>62.22</td><td>32.40</td><td>8.93</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93	2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93																																																																																														
2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93																																																																																														
2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2385.79</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>38.35</td><td>32.37</td><td>8.86</td><td>30.93</td></tr><tr><td>2</td><td>2385.79</td><td>29.86</td><td>54.00</td><td>-24.14</td><td>13.56</td><td>32.37</td><td>8.86</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93	2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>103.41</td><td>-----</td><td>-----</td><td>87.01</td><td>32.40</td><td>8.93</td><td>30.93</td></tr><tr><td>2</td><td>2402.00</td><td>78.62</td><td>-----</td><td>-----</td><td>62.22</td><td>32.40</td><td>8.93</td><td>30.93</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93	2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2385.79	54.65	74.00	-19.35	38.35	32.37	8.86	30.93																																																																																														
2	2385.79	29.86	54.00	-24.14	13.56	32.37	8.86	30.93																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	2402.00	103.41	-----	-----	87.01	32.40	8.93	30.93																																																																																														
2	2402.00	78.62	-----	-----	62.22	32.40	8.93	30.93																																																																																														



















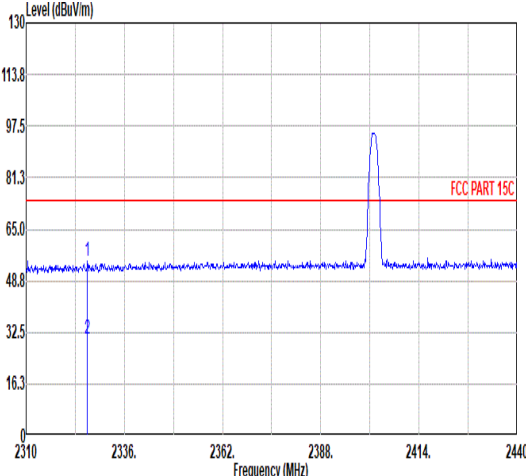
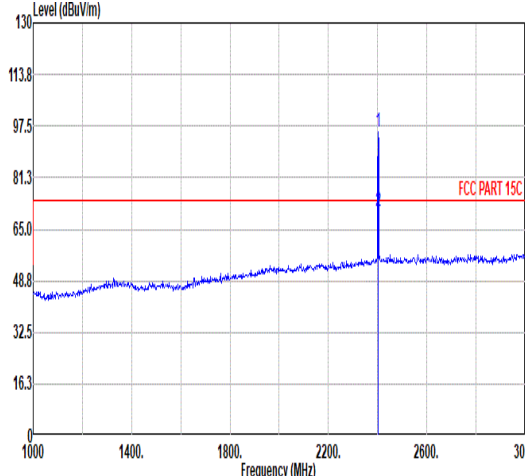


Mode	1																																																																																																																								
	Band Edge																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																								
ANT	1																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																		
Peak																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2326.25</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>39.36</td><td>32.11</td><td>8.56</td><td>30.94</td><td>6.00</td><td>249</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2326.25</td><td>30.30</td><td>74.00</td><td>-43.70</td><td>14.57</td><td>32.11</td><td>8.56</td><td>30.94</td><td>6.00</td><td>249</td><td>157</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2326.25	55.09	74.00	-18.91	39.36	32.11	8.56	30.94	6.00	249	157	PEAK	2	2326.25	30.30	74.00	-43.70	14.57	32.11	8.56	30.94	6.00	249	157	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>95.43</td><td>-----</td><td>-----</td><td>79.03</td><td>32.40</td><td>8.93</td><td>30.93</td><td>6.00</td><td>249</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>70.64</td><td>-----</td><td>-----</td><td>54.24</td><td>32.40</td><td>8.93</td><td>30.93</td><td>6.00</td><td>249</td><td>157</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.43	-----	-----	79.03	32.40	8.93	30.93	6.00	249	157	PEAK	2	2402.00	70.64	-----	-----	54.24	32.40	8.93	30.93	6.00	249	157	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2326.25	55.09	74.00	-18.91	39.36	32.11	8.56	30.94	6.00	249	157	PEAK																																																																																																													
2	2326.25	30.30	74.00	-43.70	14.57	32.11	8.56	30.94	6.00	249	157	AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2402.00	95.43	-----	-----	79.03	32.40	8.93	30.93	6.00	249	157	PEAK																																																																																																													
2	2402.00	70.64	-----	-----	54.24	32.40	8.93	30.93	6.00	249	157	AVERAGE																																																																																																													



Mode	1																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																					
ANT	1																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>44.31</td><td>74.00</td><td>-29.69</td><td>63.41</td><td>34.29</td><td>12.30</td><td>65.69</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>7206.00</td><td>52.67</td><td>82.54</td><td>-29.87</td><td>66.74</td><td>35.00</td><td>14.66</td><td>64.53</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr></table>													Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	44.31	74.00	-29.69	63.41	34.29	12.30	65.69	0.00	--	-- PEAK	2	7206.00	52.67	82.54	-29.87	66.74	35.00	14.66	64.53	0.00	--	-- PEAK
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	4804.00	44.31	74.00	-29.69	63.41	34.29	12.30	65.69	0.00	--	-- PEAK																																																											
2	7206.00	52.67	82.54	-29.87	66.74	35.00	14.66	64.53	0.00	--	-- PEAK																																																											
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>42.94</td><td>74.00</td><td>-31.06</td><td>62.04</td><td>34.29</td><td>12.30</td><td>65.69</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>7206.00</td><td>46.69</td><td>76.84</td><td>-30.15</td><td>60.76</td><td>35.00</td><td>14.66</td><td>64.53</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr></table>													Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4804.00	42.94	74.00	-31.06	62.04	34.29	12.30	65.69	0.00	--	-- PEAK	2	7206.00	46.69	76.84	-30.15	60.76	35.00	14.66	64.53	0.00	--	-- PEAK	
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	4804.00	42.94	74.00	-31.06	62.04	34.29	12.30	65.69	0.00	--	-- PEAK																																																											
2	7206.00	46.69	76.84	-30.15	60.76	35.00	14.66	64.53	0.00	--	-- PEAK																																																											

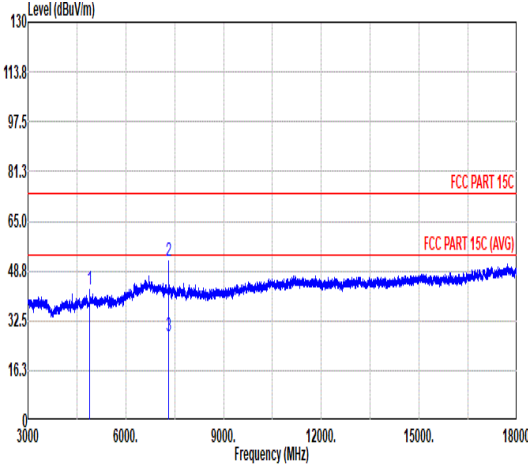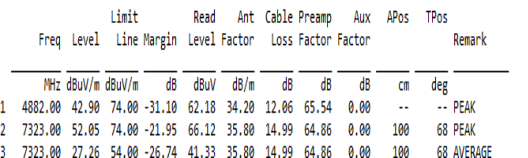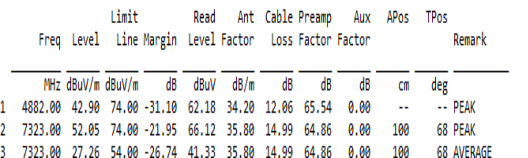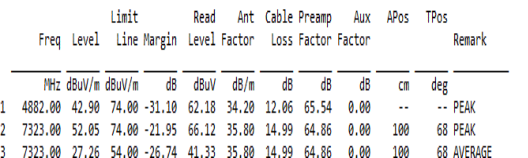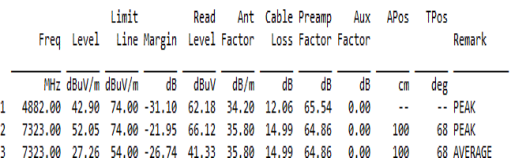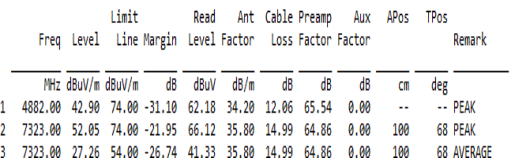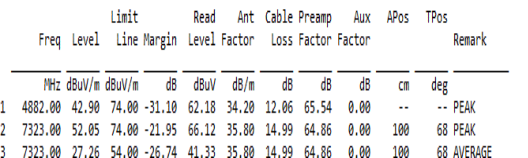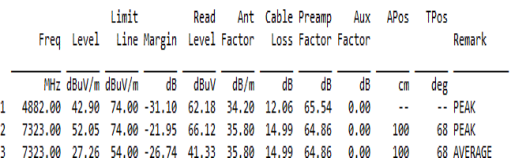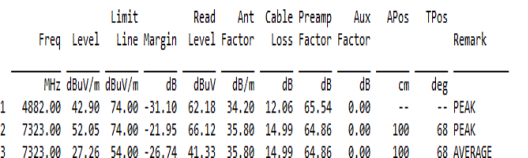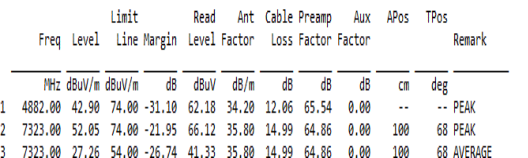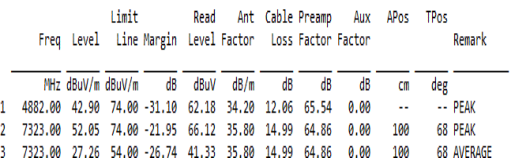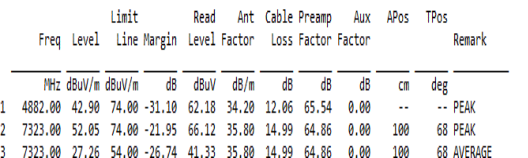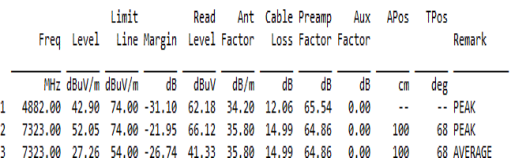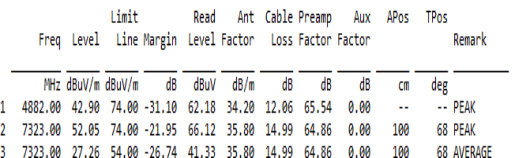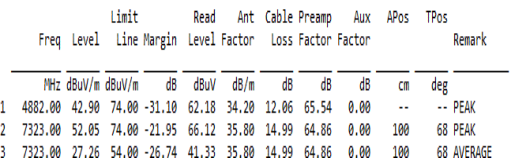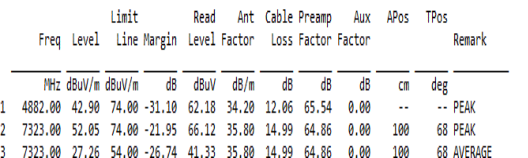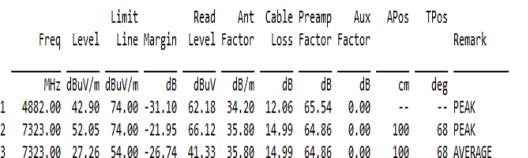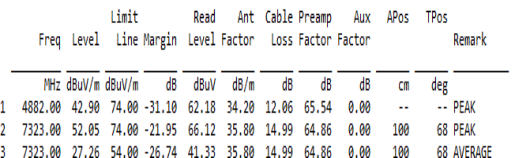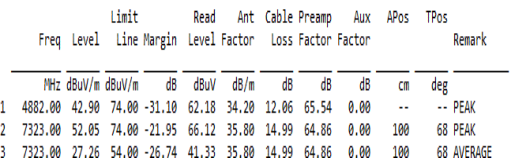
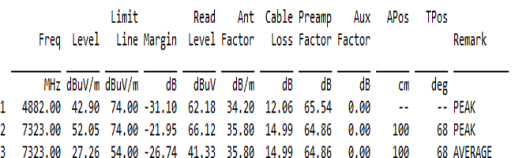


Mode	2																																																																													
	Harmonic																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal																																																																													
Peak Avg																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>62.18</td><td>34.20</td><td>12.06</td><td>65.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>66.12</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 PEAK</td></tr><tr><td>3</td><td>7323.00</td><td>27.26</td><td>54.00</td><td>-26.74</td><td>41.33</td><td>35.00</td><td>14.99</td><td>64.86</td><td>0.00</td><td>100</td><td>68 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK	2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK	3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	4882.00	42.90	74.00	-31.10	62.18	34.20	12.06	65.54	0.00	--	PEAK																																																																			
2	7323.00	52.05	74.00	-21.95	66.12	35.00	14.99	64.86	0.00	100	68 PEAK																																																																			
3	7323.00	27.26	54.00	-26.74	41.33	35.00	14.99	64.86	0.00	100	68 AVERAGE																																																																			
																																																																														
<table><tr><th></th><th></th></tr></table>																																																																														







Mode	3																																																																				
	Band Edge																																																																				
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.54</td><td>57.05</td><td>74.00</td><td>-16.95</td><td>40.74</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>144</td><td>121</td><td>PEAK</td></tr><tr><td>2</td><td>2483.54</td><td>32.26</td><td>54.00</td><td>-21.74</td><td>15.95</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>144</td><td>121</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	57.05	74.00	-16.95	40.74	32.40	8.88	30.97	6.00	144	121	PEAK	2	2483.54	32.26	54.00	-21.74	15.95	32.40	8.88	30.97	6.00	144	121	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2483.54	57.05	74.00	-16.95	40.74	32.40	8.88	30.97	6.00	144	121	PEAK																																																									
2	2483.54	32.26	54.00	-21.74	15.95	32.40	8.88	30.97	6.00	144	121	AVERAGE																																																									
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>104.18</td><td>-----</td><td>-----</td><td>87.87</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>144</td><td>121</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>79.39</td><td>-----</td><td>-----</td><td>63.08</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>144</td><td>121</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.18	-----	-----	87.87	32.40	8.88	30.97	6.00	144	121	PEAK	2	2480.00	79.39	-----	-----	63.08	32.40	8.88	30.97	6.00	144	121	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2480.00	104.18	-----	-----	87.87	32.40	8.88	30.97	6.00	144	121	PEAK																																																									
2	2480.00	79.39	-----	-----	63.08	32.40	8.88	30.97	6.00	144	121	AVERAGE																																																									

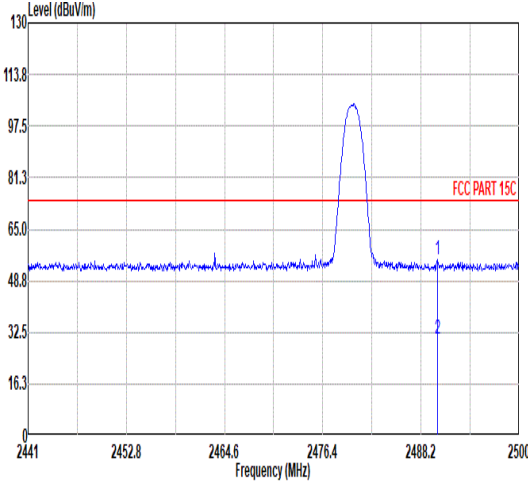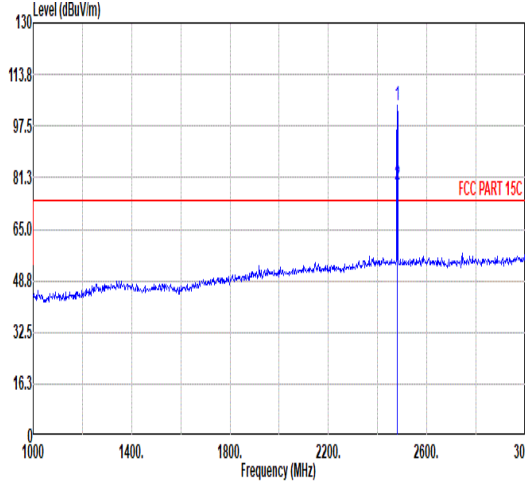

Mode	3																																																																					
	Band Edge																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																					
ANT	1																																																																					
Pol.	Vertical																																																																					
Peak																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2490.15</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>39.04</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>172</td><td>312 PEAK</td></tr><tr><td>2</td><td>2490.15</td><td>30.56</td><td>54.00</td><td>-23.44</td><td>14.25</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>172</td><td>312 AVERAGE</td></tr></table>													Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2490.15	55.35	74.00	-18.65	39.04	32.40	8.88	30.97	6.00	172	312 PEAK	2	2490.15	30.56	54.00	-23.44	14.25	32.40	8.88	30.97	6.00	172	312 AVERAGE
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	2490.15	55.35	74.00	-18.65	39.04	32.40	8.88	30.97	6.00	172	312 PEAK																																																											
2	2490.15	30.56	54.00	-23.44	14.25	32.40	8.88	30.97	6.00	172	312 AVERAGE																																																											
Fundamental																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>103.93</td><td>-----</td><td>87.62</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>172</td><td>312 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>79.14</td><td>-----</td><td>62.83</td><td>32.40</td><td>8.88</td><td>30.97</td><td>6.00</td><td>172</td><td>312 AVERAGE</td></tr></table>													Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	103.93	-----	87.62	32.40	8.88	30.97	6.00	172	312 PEAK	2	2480.00	79.14	-----	62.83	32.40	8.88	30.97	6.00	172	312 AVERAGE		
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	2480.00	103.93	-----	87.62	32.40	8.88	30.97	6.00	172	312 PEAK																																																												
2	2480.00	79.14	-----	62.83	32.40	8.88	30.97	6.00	172	312 AVERAGE																																																												

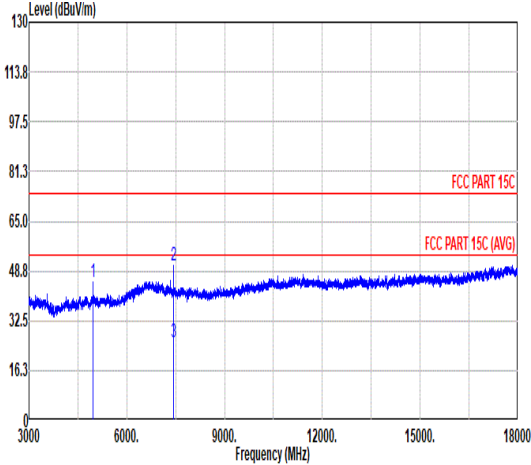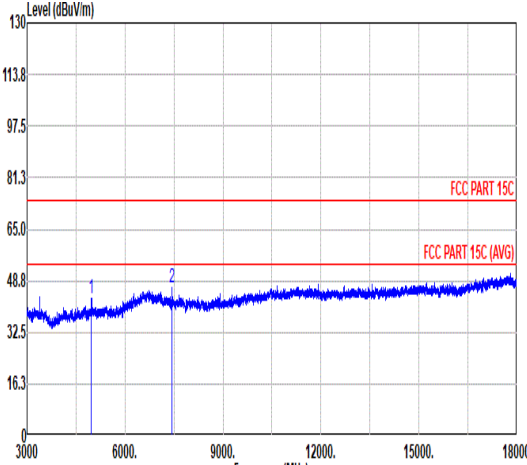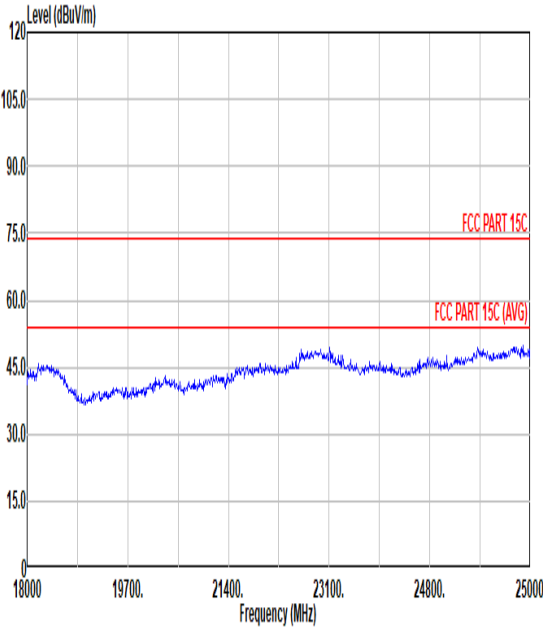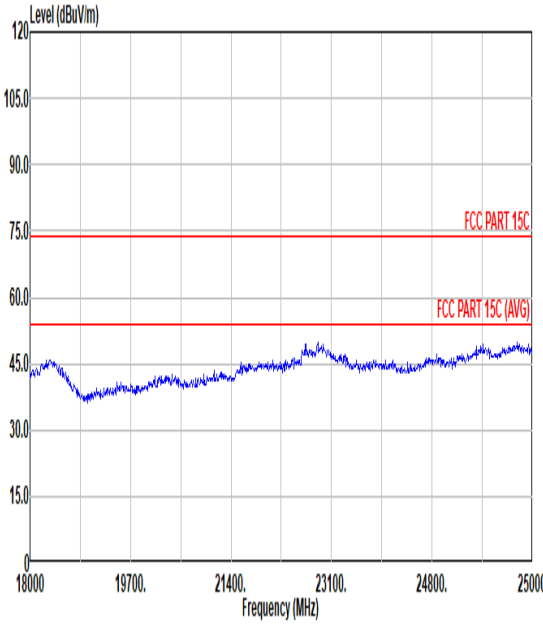


Mode	3																																																																						
	Harmonic																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal																																																																						
Peak Avg																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>44.99</td><td>74.00</td><td>-29.01</td><td>64.14</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr><tr><td>2 7440.00</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>64.40</td><td>35.80</td><td>15.32</td><td>65.19</td><td>0.00</td><td>100 55 PEAK</td></tr><tr><td>3 7440.00</td><td>25.54</td><td>54.00</td><td>-28.46</td><td>39.61</td><td>35.80</td><td>15.32</td><td>65.19</td><td>0.00</td><td>100 55 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	44.99	74.00	-29.01	64.14	34.24	12.01	65.40	0.00	-- PEAK	2 7440.00	50.33	74.00	-23.67	64.40	35.80	15.32	65.19	0.00	100 55 PEAK	3 7440.00	25.54	54.00	-28.46	39.61	35.80	15.32	65.19	0.00	100 55 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 4960.00	44.99	74.00	-29.01	64.14	34.24	12.01	65.40	0.00	-- PEAK																																																														
2 7440.00	50.33	74.00	-23.67	64.40	35.80	15.32	65.19	0.00	100 55 PEAK																																																														
3 7440.00	25.54	54.00	-28.46	39.61	35.80	15.32	65.19	0.00	100 55 AVERAGE																																																														
Peak Avg																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>62.36</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr><tr><td>2 7440.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>60.62</td><td>35.80</td><td>15.32</td><td>65.19</td><td>0.00</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	43.21	74.00	-30.79	62.36	34.24	12.01	65.40	0.00	-- PEAK	2 7440.00	46.55	74.00	-27.45	60.62	35.80	15.32	65.19	0.00	-- PEAK										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 4960.00	43.21	74.00	-30.79	62.36	34.24	12.01	65.40	0.00	-- PEAK																																																														
2 7440.00	46.55	74.00	-27.45	60.62	35.80	15.32	65.19	0.00	-- PEAK																																																														
Peak																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>64.14</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr><tr><td>2 2480.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>64.14</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK	2 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK																																																														
2 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK																																																														
Peak																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>64.14</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr><tr><td>2 2480.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>64.14</td><td>34.24</td><td>12.01</td><td>65.40</td><td>0.00</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK	2 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK																																																														
2 2480.00	45.00	74.00	-29.00	64.14	34.24	12.01	65.40	0.00	-- PEAK																																																														




Mode	3																																																																																																																																																																																		
	LF																																																																																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																		
ANT	1																																																																																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																																																																																	
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C and a blue line for the measured signal. Six peaks are identified and numbered 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>128.21</td><td>16.23</td><td>-27.27</td><td>43.50</td><td>29.53</td><td>17.27</td><td>1.59</td><td>32.16</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>268.86</td><td>18.67</td><td>-27.33</td><td>46.00</td><td>28.56</td><td>19.94</td><td>2.35</td><td>32.18</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>427.78</td><td>22.83</td><td>-23.17</td><td>46.00</td><td>29.78</td><td>22.28</td><td>3.01</td><td>32.24</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>563.58</td><td>28.71</td><td>-17.29</td><td>46.00</td><td>31.25</td><td>26.31</td><td>3.45</td><td>32.30</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>747.88</td><td>28.72</td><td>-17.28</td><td>46.00</td><td>29.25</td><td>27.78</td><td>3.99</td><td>32.30</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>855.47</td><td>32.75</td><td>-13.25</td><td>46.00</td><td>31.95</td><td>28.93</td><td>4.25</td><td>32.38</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	128.21	16.23	-27.27	43.50	29.53	17.27	1.59	32.16	---	Peak	2	268.86	18.67	-27.33	46.00	28.56	19.94	2.35	32.18	---	Peak	3	427.78	22.83	-23.17	46.00	29.78	22.28	3.01	32.24	---	Peak	4	563.58	28.71	-17.29	46.00	31.25	26.31	3.45	32.30	---	Peak	5	747.88	28.72	-17.28	46.00	29.25	27.78	3.99	32.30	---	Peak	6	855.47	32.75	-13.25	46.00	31.95	28.93	4.25	32.38	---	Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red line for FCC PART 15C and a blue line for the measured signal. Six peaks are identified and numbered 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>116.33</td><td>17.48</td><td>-26.02</td><td>43.50</td><td>30.99</td><td>17.10</td><td>1.56</td><td>32.17</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>259.89</td><td>20.49</td><td>-25.51</td><td>46.00</td><td>30.44</td><td>19.88</td><td>2.35</td><td>32.18</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>429.64</td><td>22.48</td><td>-23.52</td><td>46.00</td><td>29.36</td><td>22.34</td><td>3.02</td><td>32.24</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>556.71</td><td>25.47</td><td>-20.53</td><td>46.00</td><td>28.32</td><td>26.02</td><td>3.43</td><td>32.30</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>742.95</td><td>29.18</td><td>-16.90</td><td>46.00</td><td>29.77</td><td>27.65</td><td>3.97</td><td>32.29</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>930.16</td><td>30.72</td><td>-15.28</td><td>46.00</td><td>28.73</td><td>29.75</td><td>4.44</td><td>32.20</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	116.33	17.48	-26.02	43.50	30.99	17.10	1.56	32.17	---	Peak	2	259.89	20.49	-25.51	46.00	30.44	19.88	2.35	32.18	---	Peak	3	429.64	22.48	-23.52	46.00	29.36	22.34	3.02	32.24	---	Peak	4	556.71	25.47	-20.53	46.00	28.32	26.02	3.43	32.30	---	Peak	5	742.95	29.18	-16.90	46.00	29.77	27.65	3.97	32.29	---	Peak	6	930.16	30.72	-15.28	46.00	28.73	29.75	4.44	32.20	---	Peak
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																										
1	128.21	16.23	-27.27	43.50	29.53	17.27	1.59	32.16	---	Peak																																																																																																																																																																									
2	268.86	18.67	-27.33	46.00	28.56	19.94	2.35	32.18	---	Peak																																																																																																																																																																									
3	427.78	22.83	-23.17	46.00	29.78	22.28	3.01	32.24	---	Peak																																																																																																																																																																									
4	563.58	28.71	-17.29	46.00	31.25	26.31	3.45	32.30	---	Peak																																																																																																																																																																									
5	747.88	28.72	-17.28	46.00	29.25	27.78	3.99	32.30	---	Peak																																																																																																																																																																									
6	855.47	32.75	-13.25	46.00	31.95	28.93	4.25	32.38	---	Peak																																																																																																																																																																									
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	116.33	17.48	-26.02	43.50	30.99	17.10	1.56	32.17	---	Peak																																																																																																																																																																									
2	259.89	20.49	-25.51	46.00	30.44	19.88	2.35	32.18	---	Peak																																																																																																																																																																									
3	429.64	22.48	-23.52	46.00	29.36	22.34	3.02	32.24	---	Peak																																																																																																																																																																									
4	556.71	25.47	-20.53	46.00	28.32	26.02	3.43	32.30	---	Peak																																																																																																																																																																									
5	742.95	29.18	-16.90	46.00	29.77	27.65	3.97	32.29	---	Peak																																																																																																																																																																									
6	930.16	30.72	-15.28	46.00	28.73	29.75	4.44	32.20	---	Peak																																																																																																																																																																									

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 00

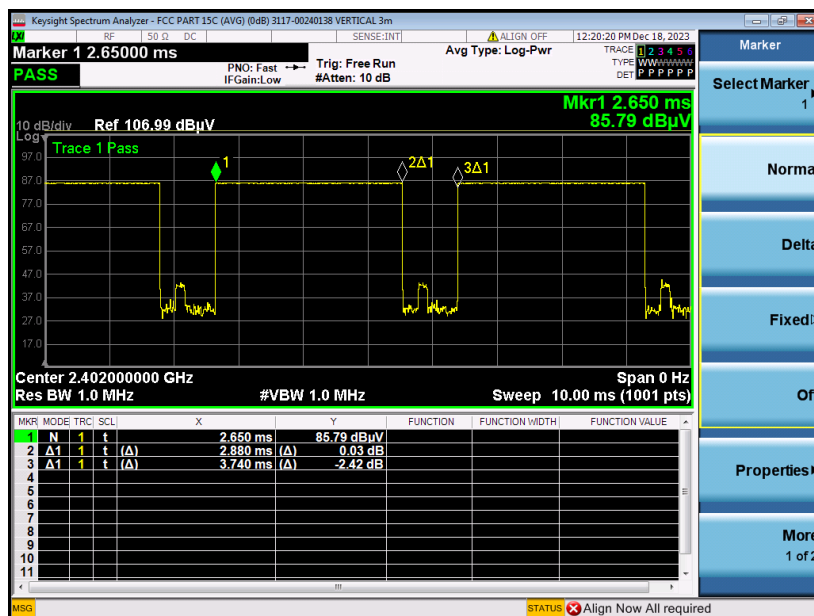

3DH5 on time (Count Pulses) Plot on Channel 00

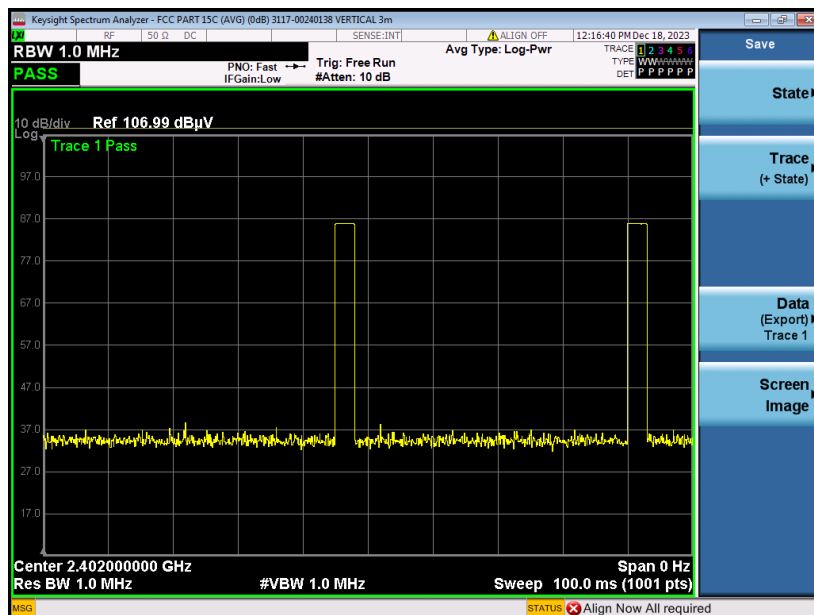

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.