


Site: AC1	Time: 2020/07/23 - 03:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

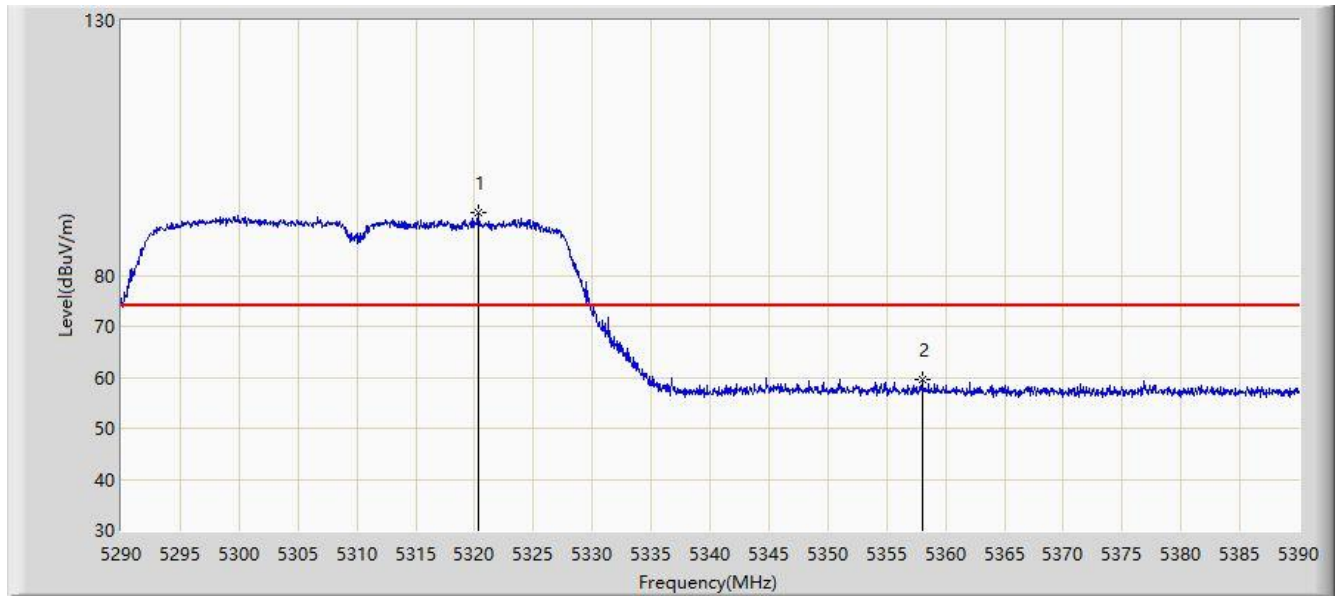


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.300	92.213	86.056	N/A	N/A	6.158	PK
2			5358.000	59.514	53.274	-14.486	74.000	6.239	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

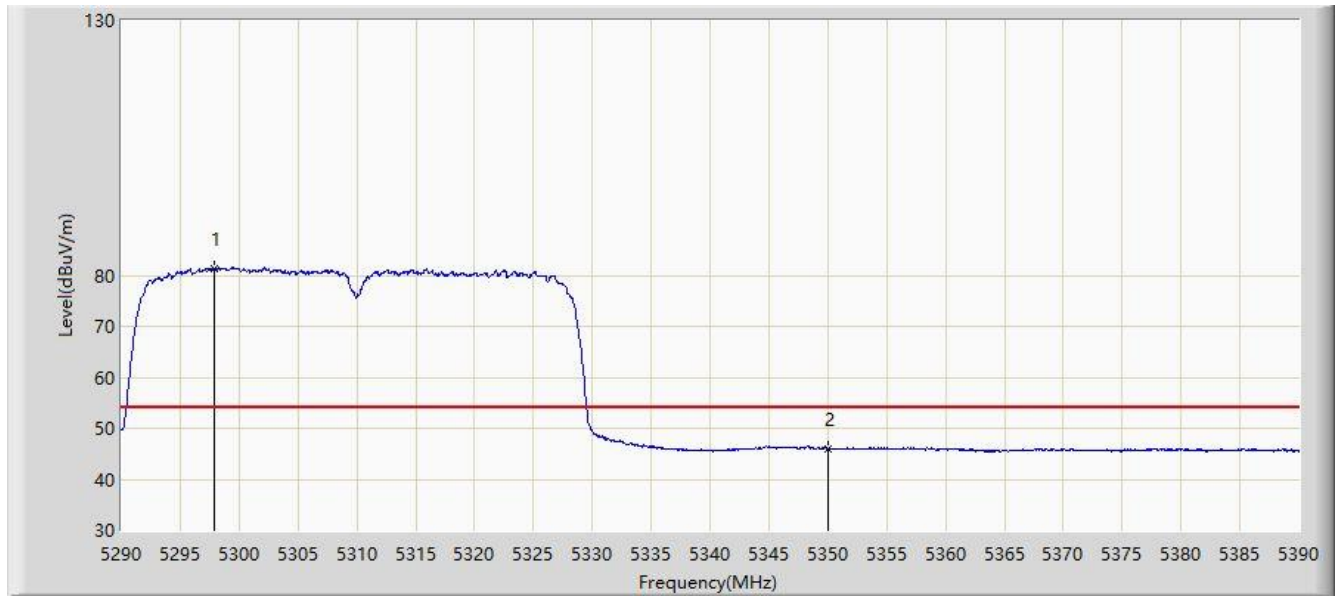


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.950	81.415	75.461	N/A	N/A	5.954	AV
2			5350.000	46.005	39.547	-7.995	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

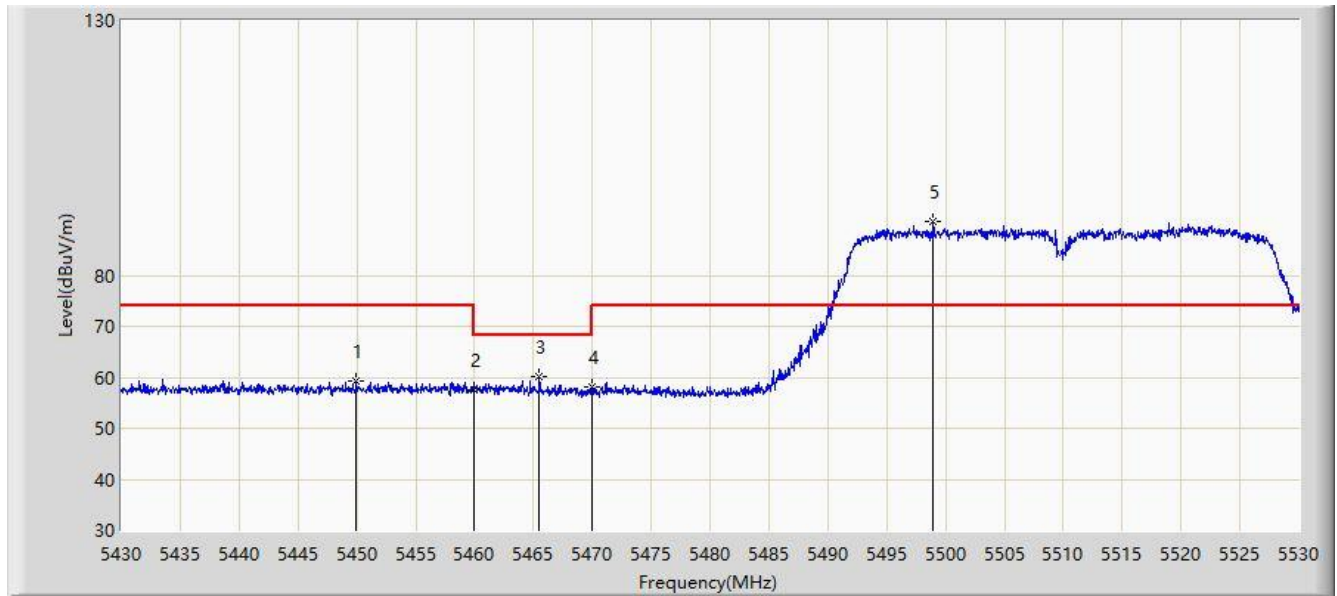


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.950	59.353	52.897	-14.647	74.000	6.456	PK
2			5460.000	57.523	51.037	-16.477	74.000	6.486	PK
3			5465.500	60.021	53.514	-8.179	68.200	6.507	PK
4			5470.000	58.117	51.592	-10.083	68.200	6.524	PK
5		*	5498.950	90.537	84.026	N/A	N/A	6.511	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

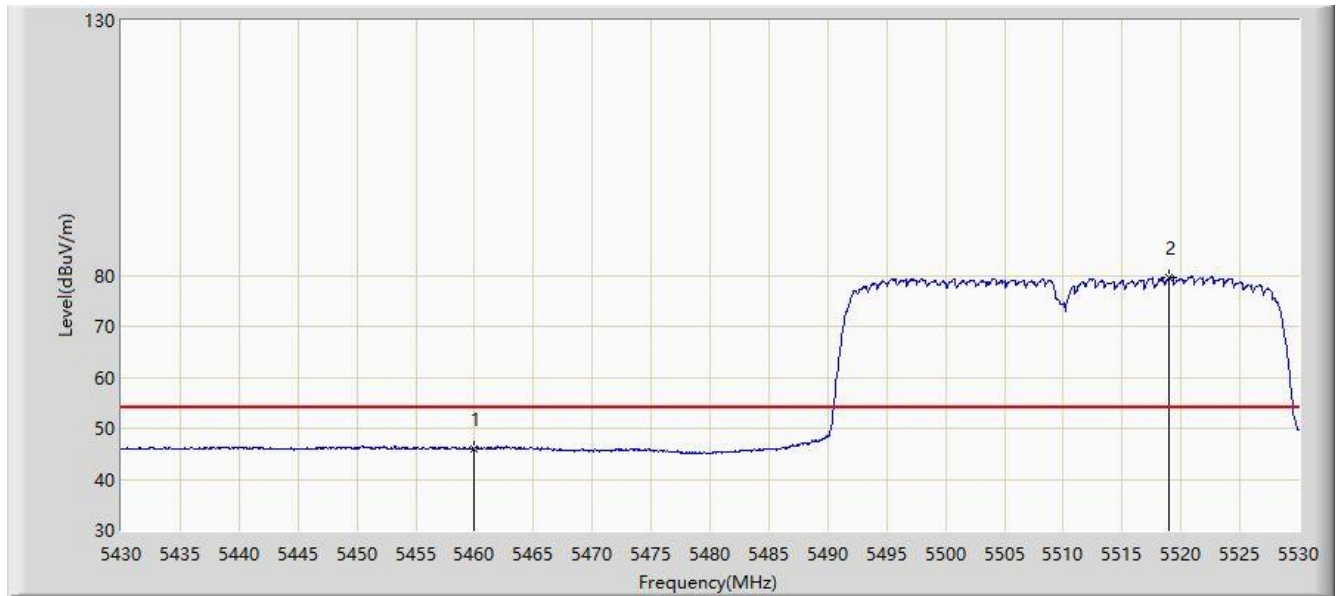


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.030	39.544	-7.970	54.000	6.486	AV
2		*	5519.000	79.597	73.214	N/A	N/A	6.383	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

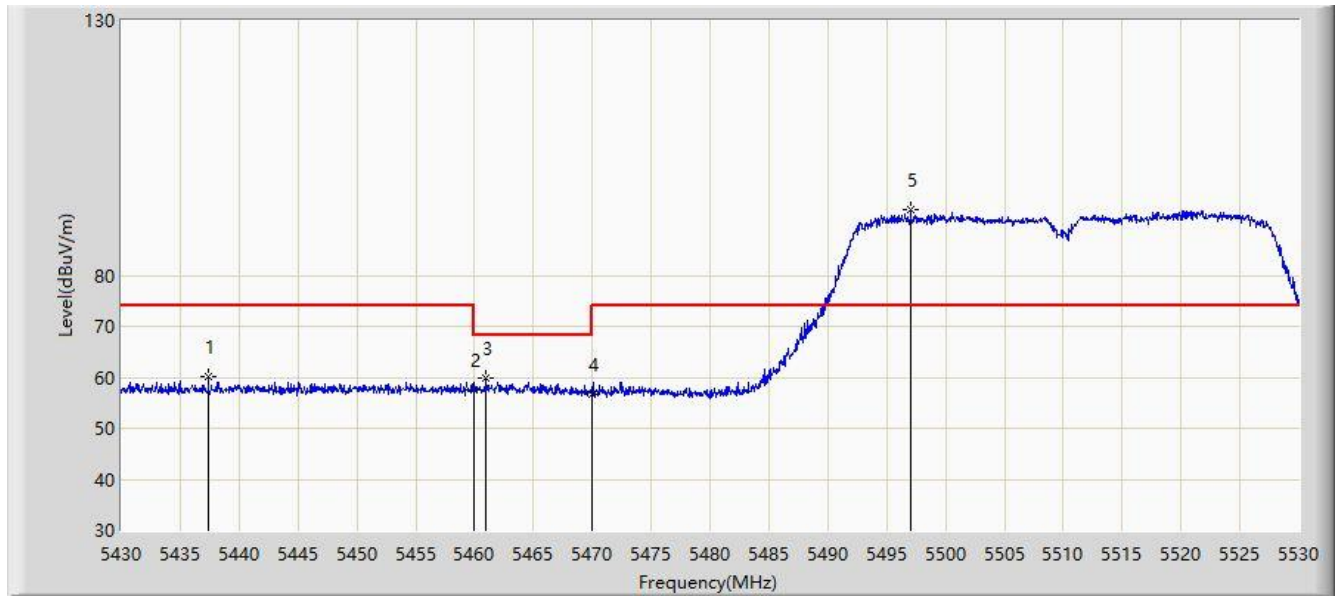


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5437.400	60.131	53.709	-13.869	74.000	6.422	PK
2			5460.000	57.526	51.040	-16.474	74.000	6.486	PK
3			5461.000	59.857	53.367	-8.343	68.200	6.490	PK
4			5470.000	56.651	50.126	-11.549	68.200	6.524	PK
5		*	5497.050	92.802	86.299	N/A	N/A	6.502	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

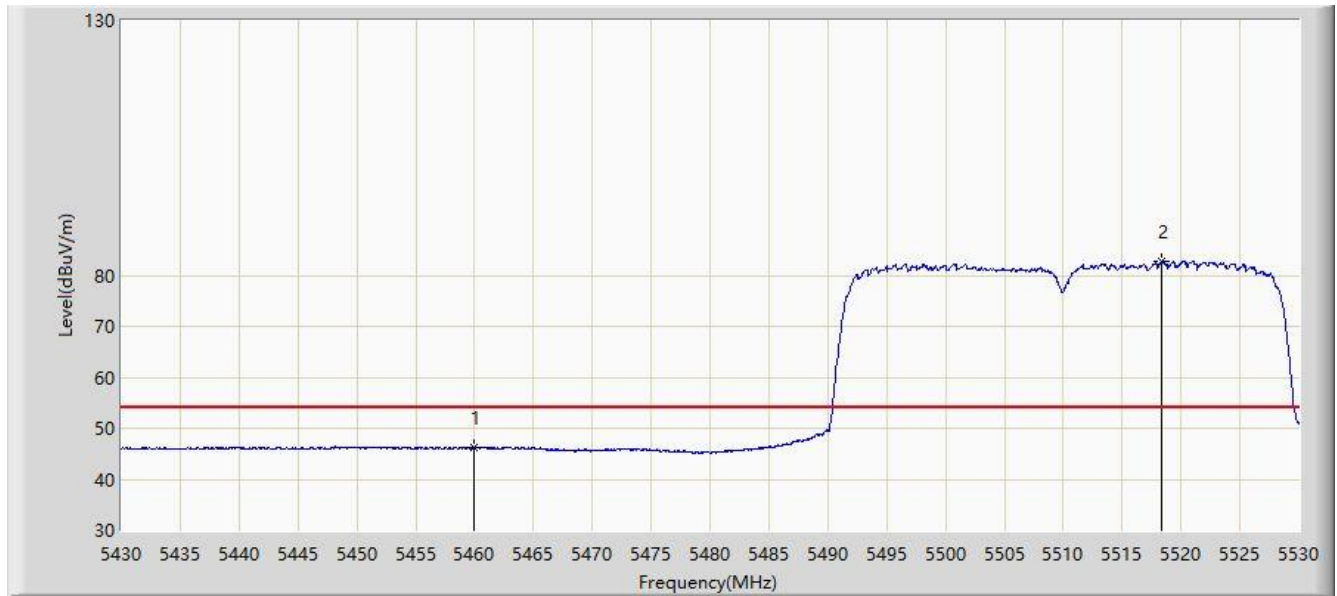


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.122	39.636	-7.878	54.000	6.486	AV
2		*	5518.400	82.702	76.314	N/A	N/A	6.388	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

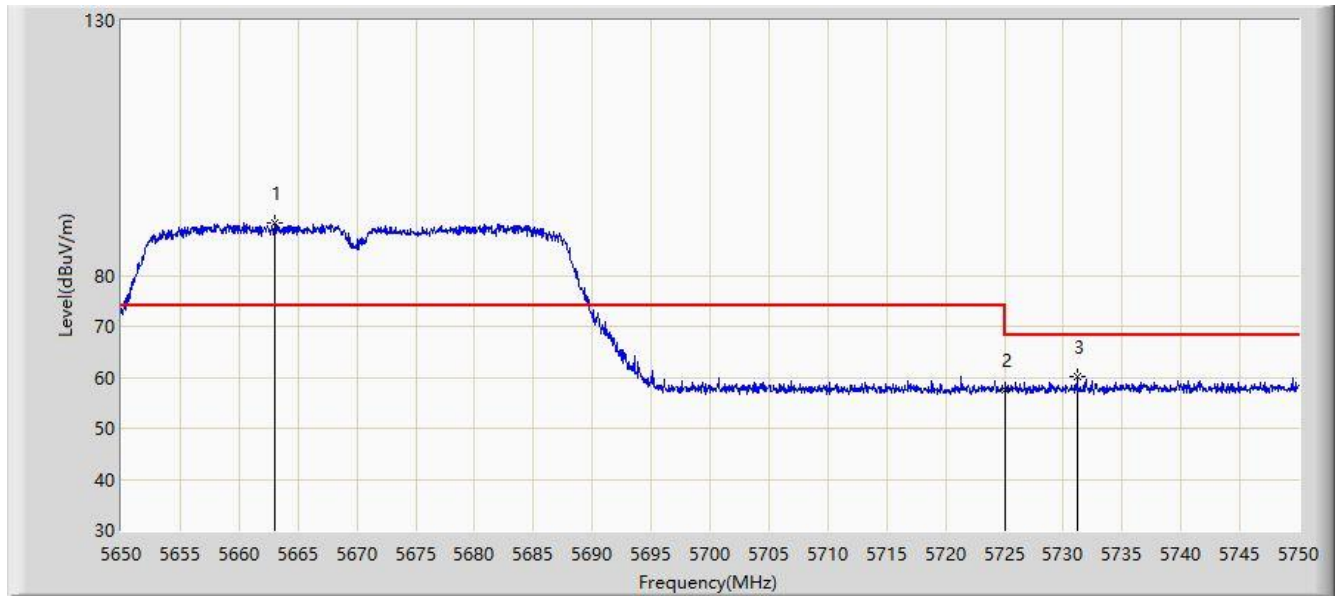


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.050	90.428	84.038	N/A	N/A	6.390	PK
2			5725.000	57.592	51.168	-10.608	68.200	6.424	PK
3			5731.150	60.055	53.514	-8.145	68.200	6.541	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

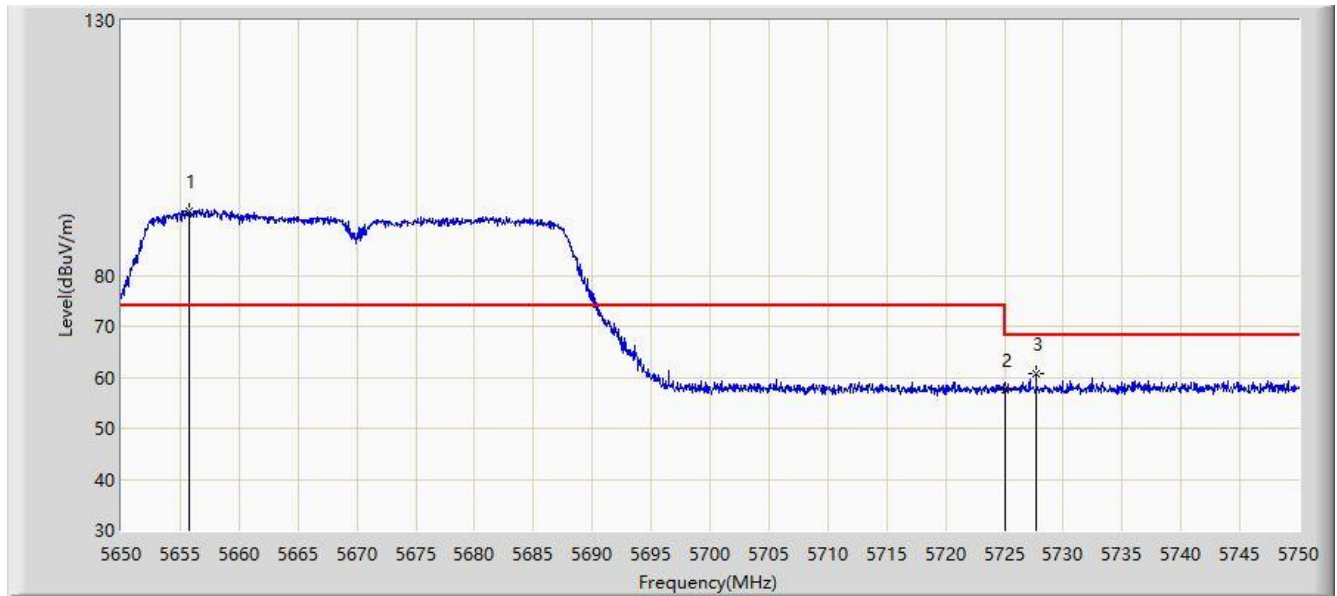


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5655.750	92.710	86.351	N/A	N/A	6.359	PK
2			5725.000	57.473	51.049	-10.727	68.200	6.424	PK
3			5727.700	60.675	54.198	-7.525	68.200	6.477	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:42
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

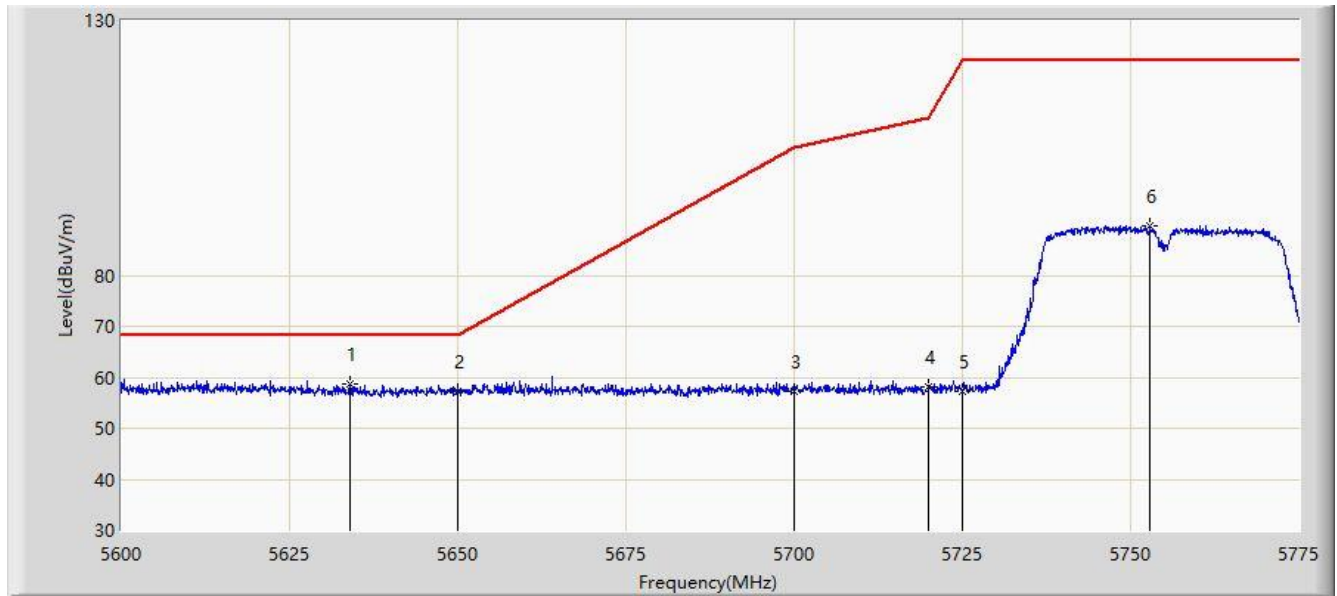


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.950	58.730	52.680	-9.470	68.200	6.050	PK
2			5650.000	57.290	51.031	-10.910	68.200	6.258	PK
3			5700.000	57.353	50.928	-47.847	105.200	6.426	PK
4			5720.000	58.100	51.715	-52.700	110.800	6.386	PK
5			5725.000	57.176	50.752	-65.024	122.200	6.424	PK
6			5752.862	89.825	83.009	N/A	N/A	6.815	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

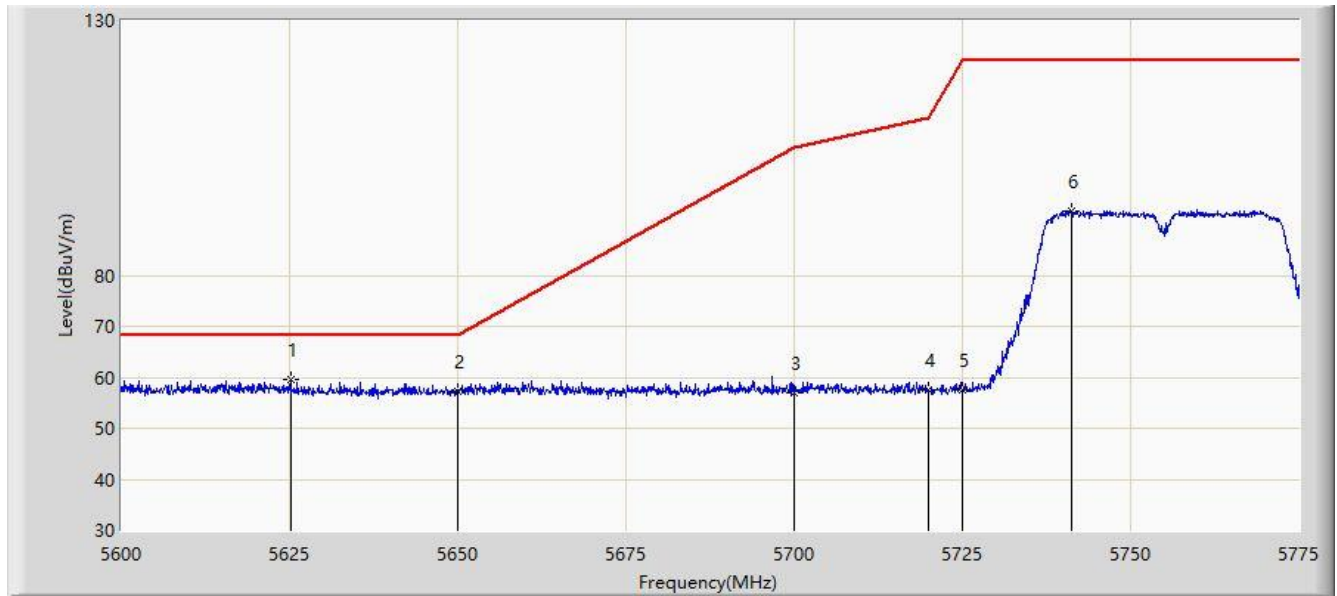


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.112	59.572	53.317	-8.628	68.200	6.255	PK
2			5650.000	57.305	51.046	-10.895	68.200	6.258	PK
3			5700.000	56.812	50.387	-48.388	105.200	6.426	PK
4			5720.000	57.399	51.014	-53.401	110.800	6.386	PK
5			5725.000	57.470	51.046	-64.730	122.200	6.424	PK
6			5741.312	92.582	85.853	N/A	N/A	6.728	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:44
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

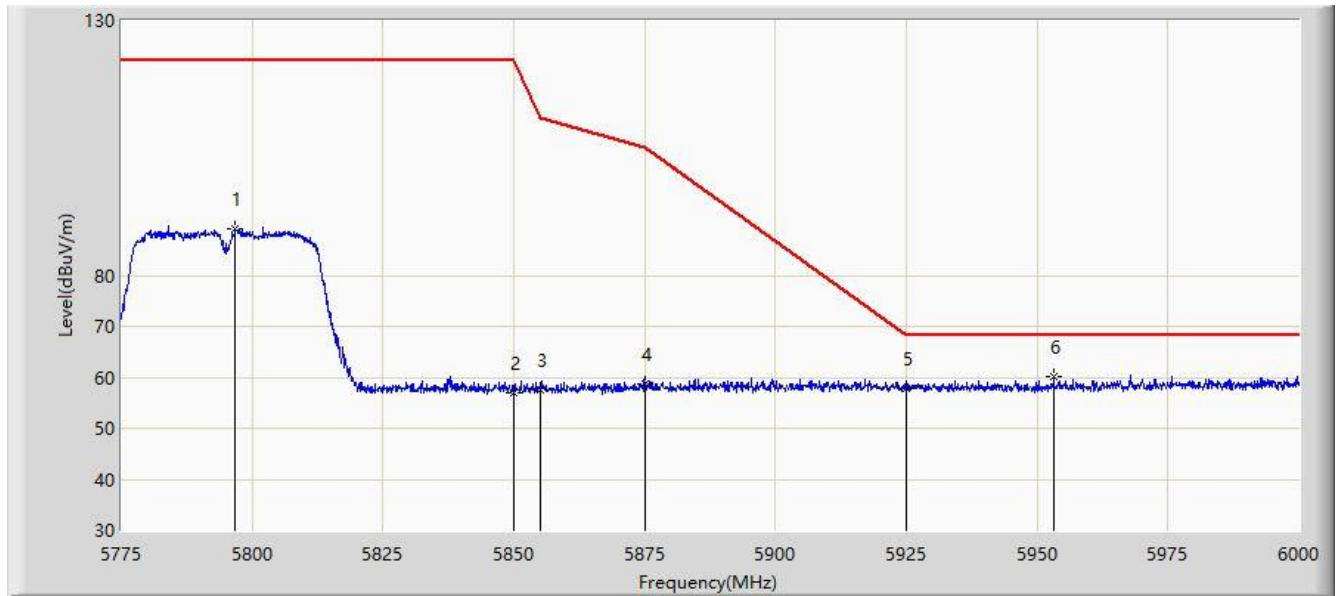


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5796.712	89.179	82.446	N/A	N/A	6.734	PK
2			5850.000	57.049	50.241	-65.151	122.200	6.808	PK
3			5855.000	57.576	50.756	-53.224	110.800	6.820	PK
4			5875.000	58.754	51.836	-46.446	105.200	6.918	PK
5			5925.000	57.704	50.607	-10.496	68.200	7.097	PK
6		*	5953.200	60.154	53.106	-8.046	68.200	7.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:46
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

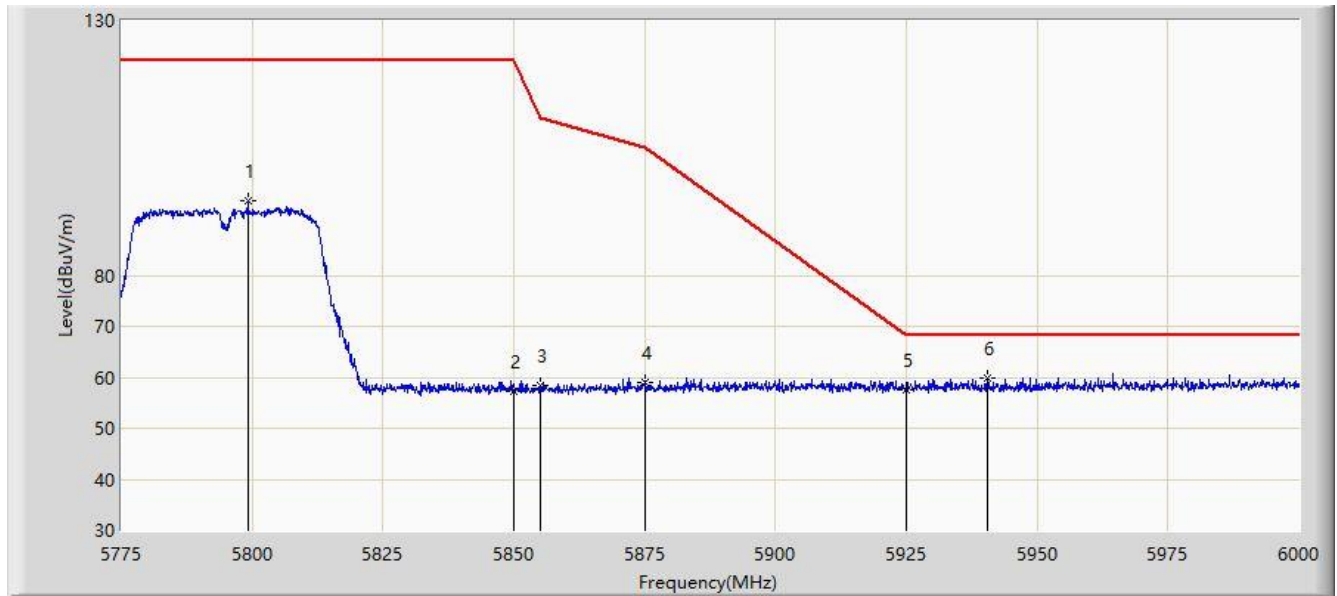


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5799.187	94.555	87.811	N/A	N/A	6.744	PK
2			5850.000	57.215	50.407	-64.985	122.200	6.808	PK
3			5855.000	58.444	51.624	-52.356	110.800	6.820	PK
4			5875.000	59.051	52.133	-46.149	105.200	6.918	PK
5			5925.000	57.662	50.565	-10.538	68.200	7.097	PK
6		*	5940.375	59.878	52.689	-8.322	68.200	7.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

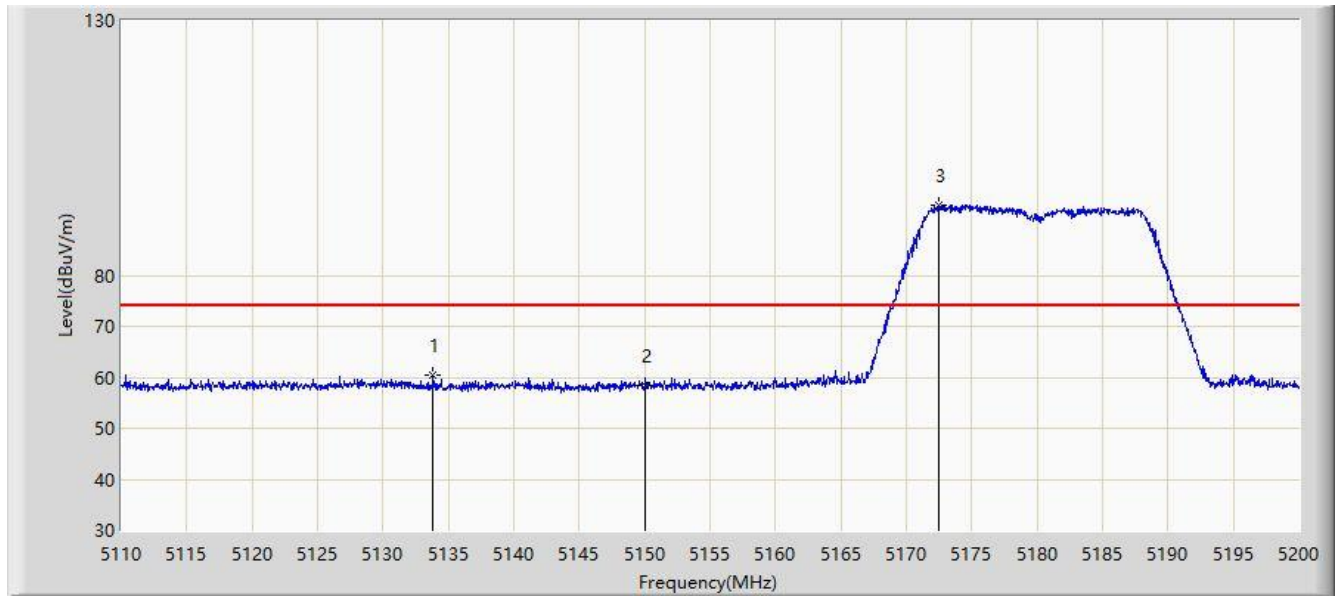


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.850	60.445	53.742	-13.555	74.000	6.703	PK
2			5150.000	58.287	51.835	-15.713	74.000	6.452	PK
3		*	5172.460	93.890	87.426	N/A	N/A	6.465	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

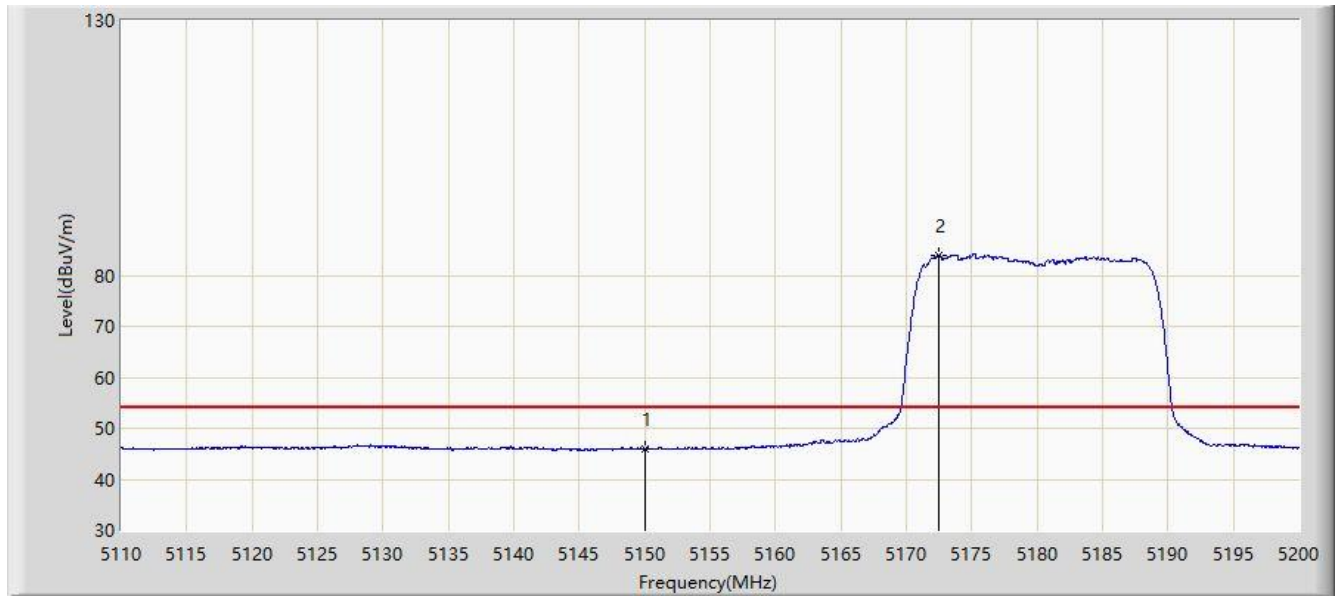


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.958	39.506	-8.042	54.000	6.452	AV
2		*	5172.460	83.901	77.437	N/A	N/A	6.465	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

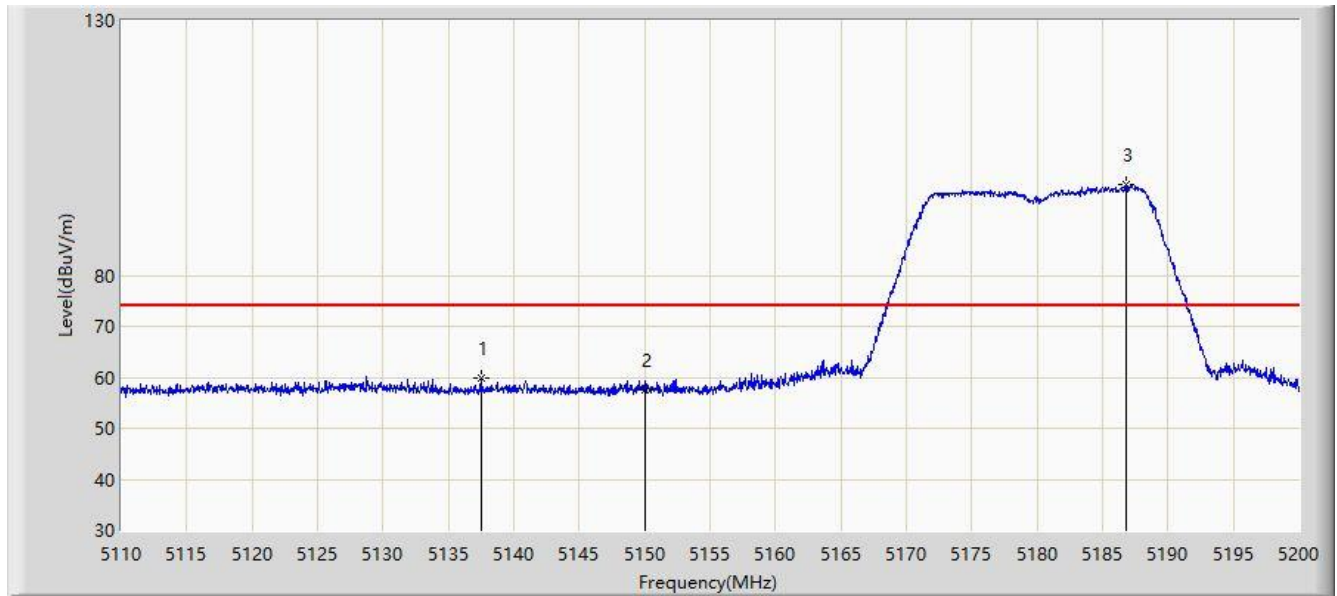


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.495	59.821	53.182	-14.179	74.000	6.639	PK
2			5150.000	57.567	51.115	-16.433	74.000	6.452	PK
3		*	5186.860	97.840	91.350	N/A	N/A	6.490	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

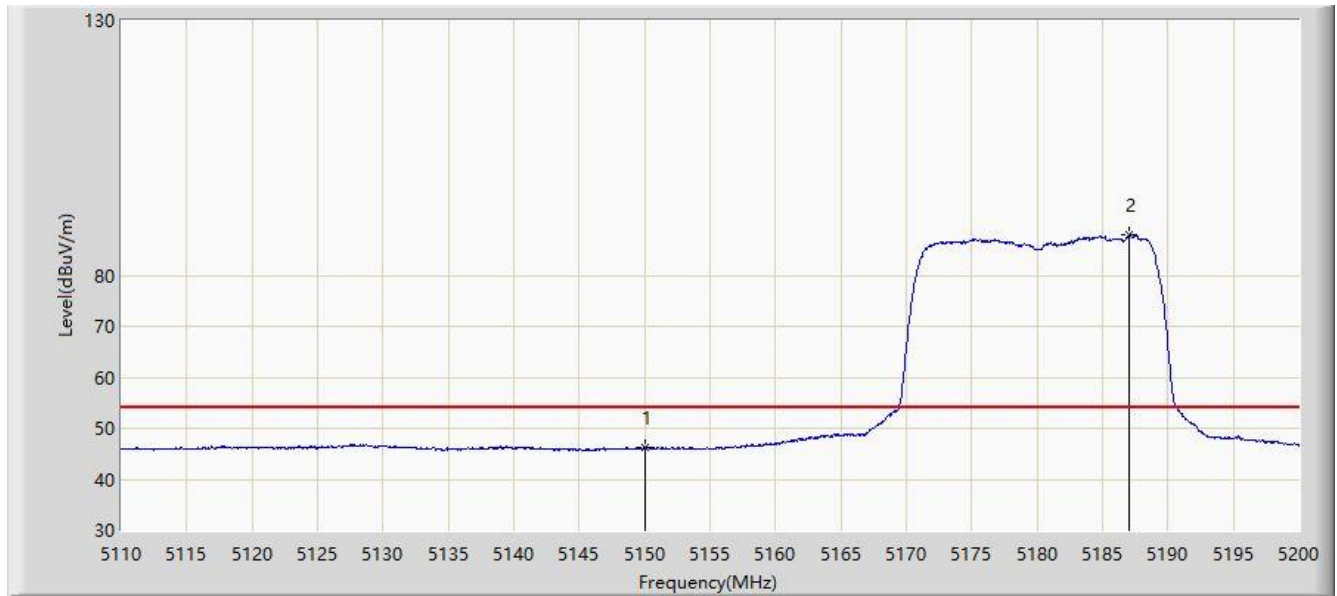


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.273	39.821	-7.727	54.000	6.452	AV
2		*	5187.085	87.994	81.507	N/A	N/A	6.488	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

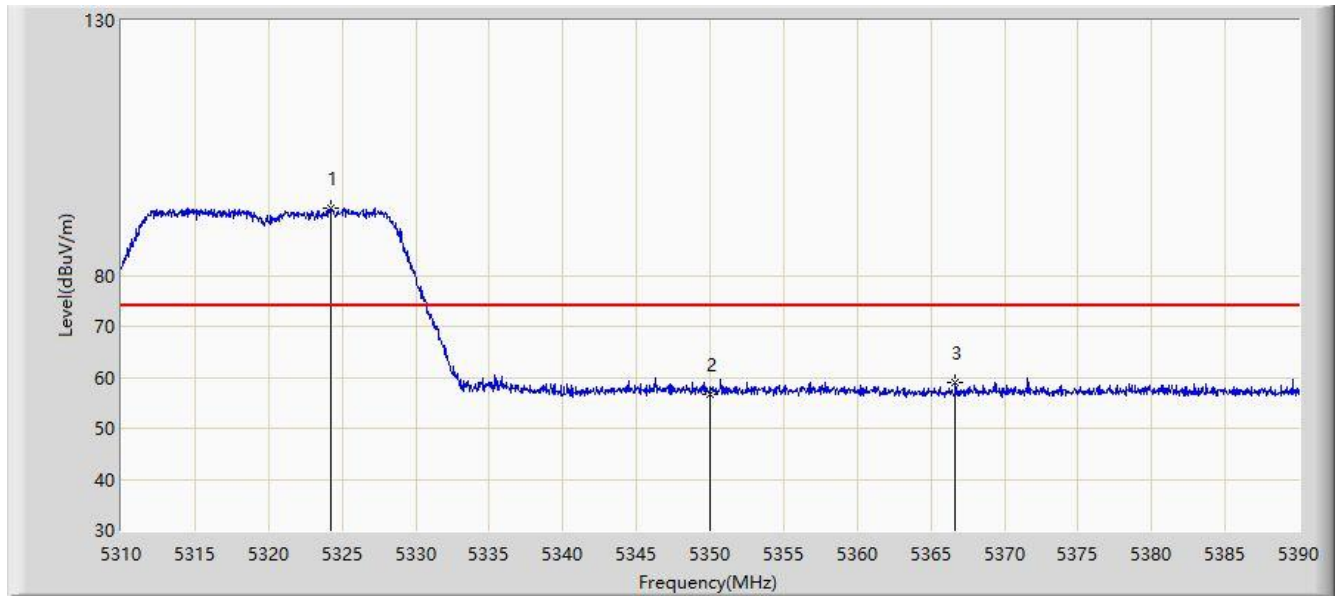


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.200	93.069	86.812	N/A	N/A	6.257	PK
2			5350.000	56.725	50.267	-17.275	74.000	6.458	PK
3			5366.640	59.103	52.997	-14.897	74.000	6.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

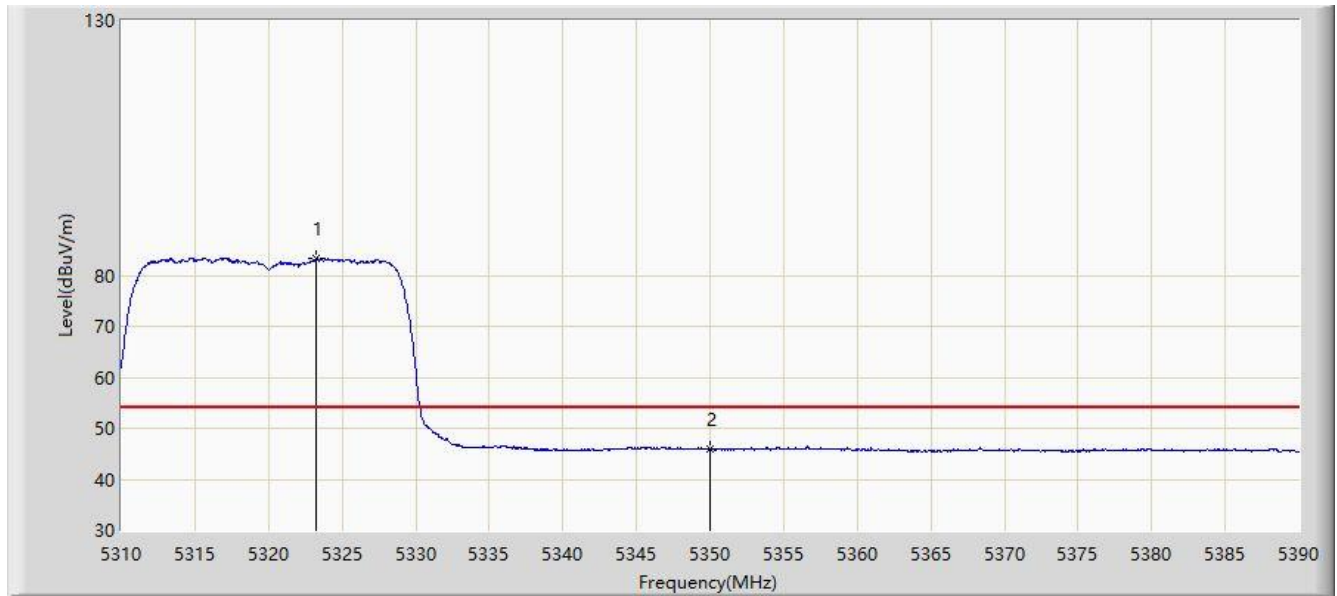


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.240	83.282	77.050	N/A	N/A	6.232	AV
2			5350.000	45.902	39.444	-8.098	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

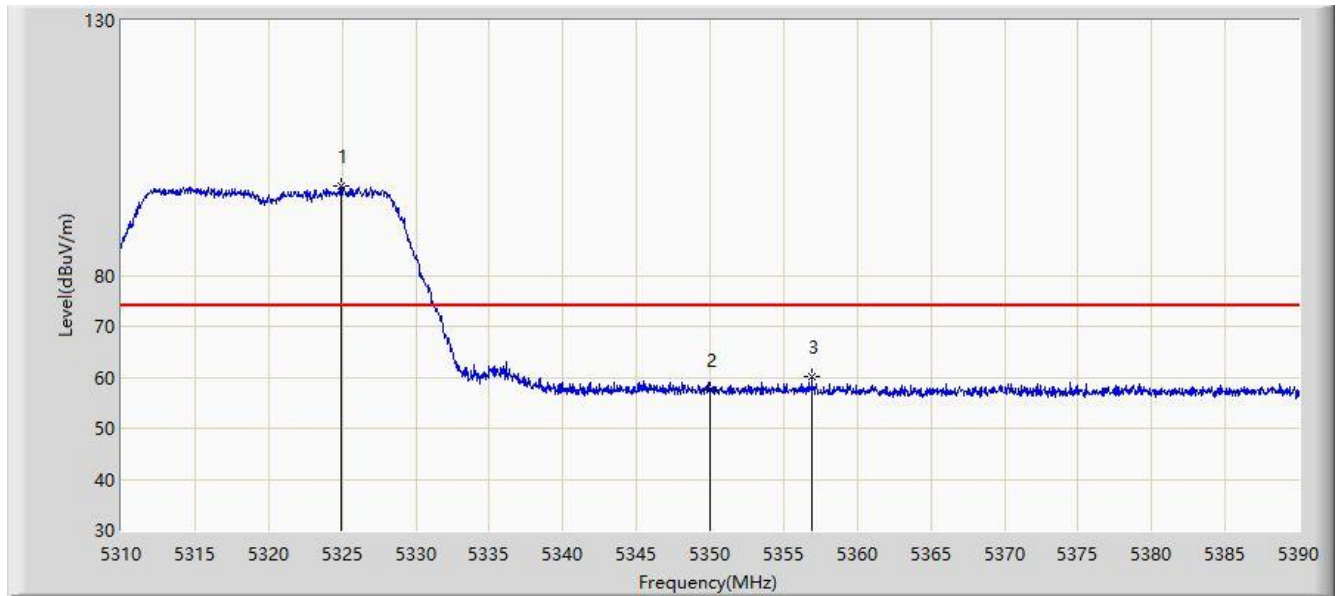


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.920	97.444	91.169	N/A	N/A	6.275	PK
2			5350.000	57.461	51.003	-16.539	74.000	6.458	PK
3			5356.920	60.066	53.798	-13.934	74.000	6.268	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 03:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

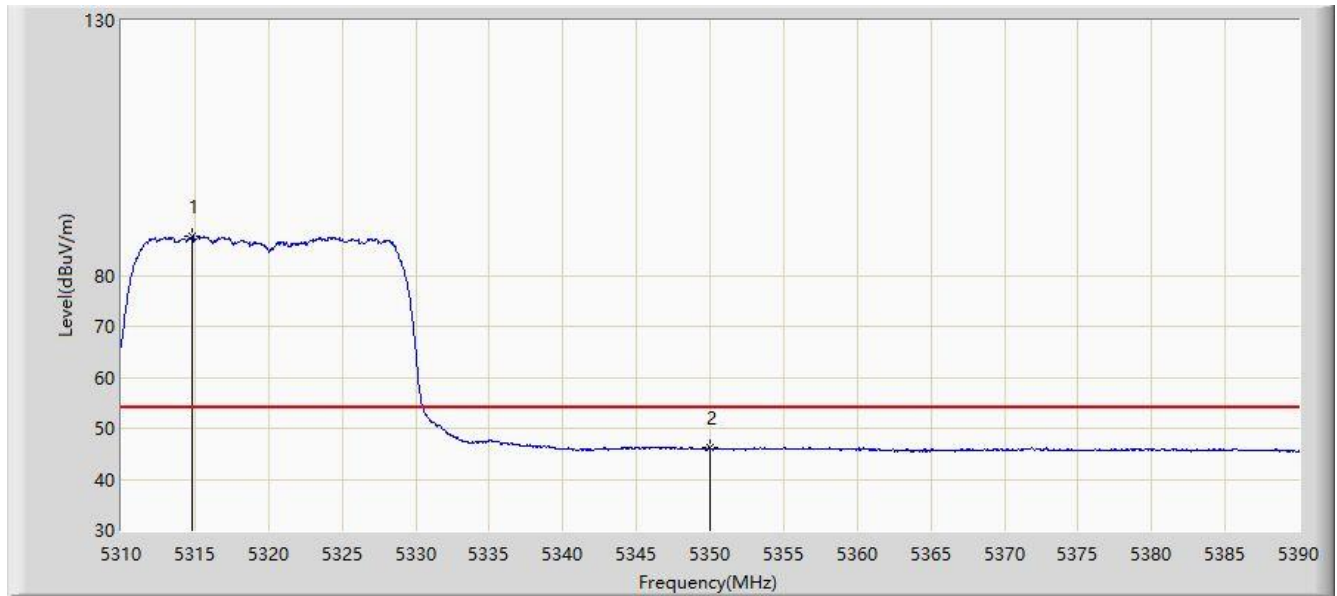


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	87.640	81.609	N/A	N/A	6.031	AV
2			5350.000	46.140	39.682	-7.860	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

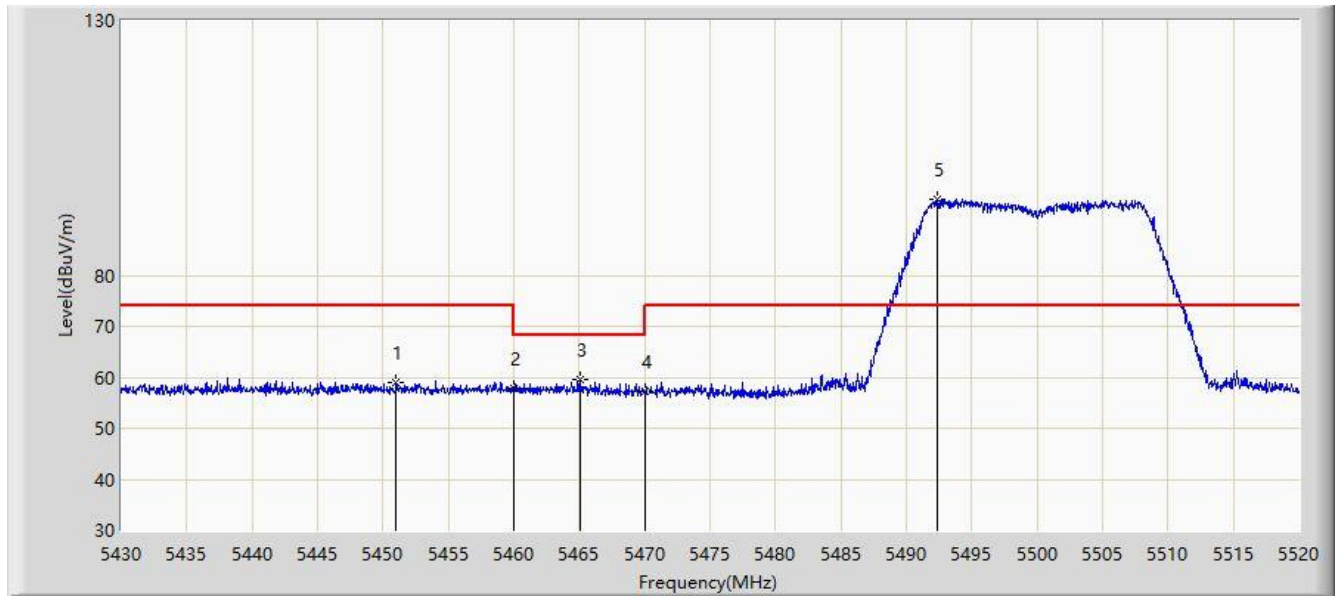


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.015	58.881	52.422	-15.119	74.000	6.459	PK
2			5460.000	57.759	51.273	-16.241	74.000	6.486	PK
3			5465.055	59.630	53.124	-8.570	68.200	6.506	PK
4			5470.000	57.370	50.845	-10.830	68.200	6.524	PK
5		*	5492.415	94.809	88.326	N/A	N/A	6.482	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

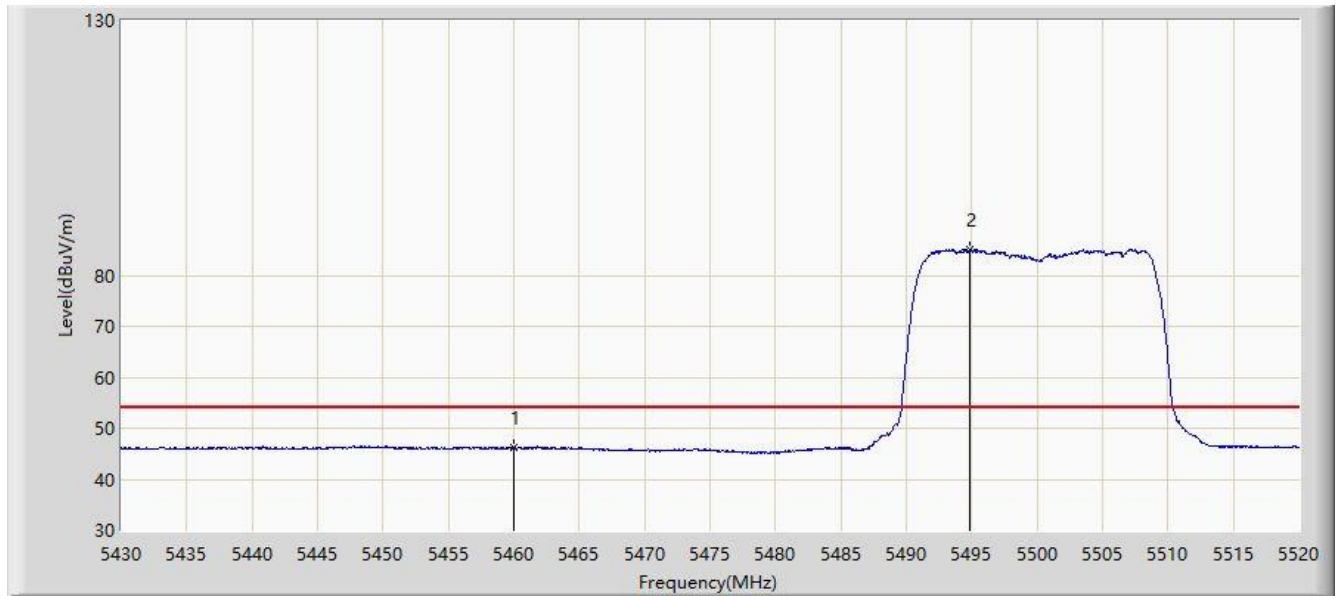


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.119	39.633	-7.881	54.000	6.486	AV
2		*	5494.890	85.181	78.688	N/A	N/A	6.493	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

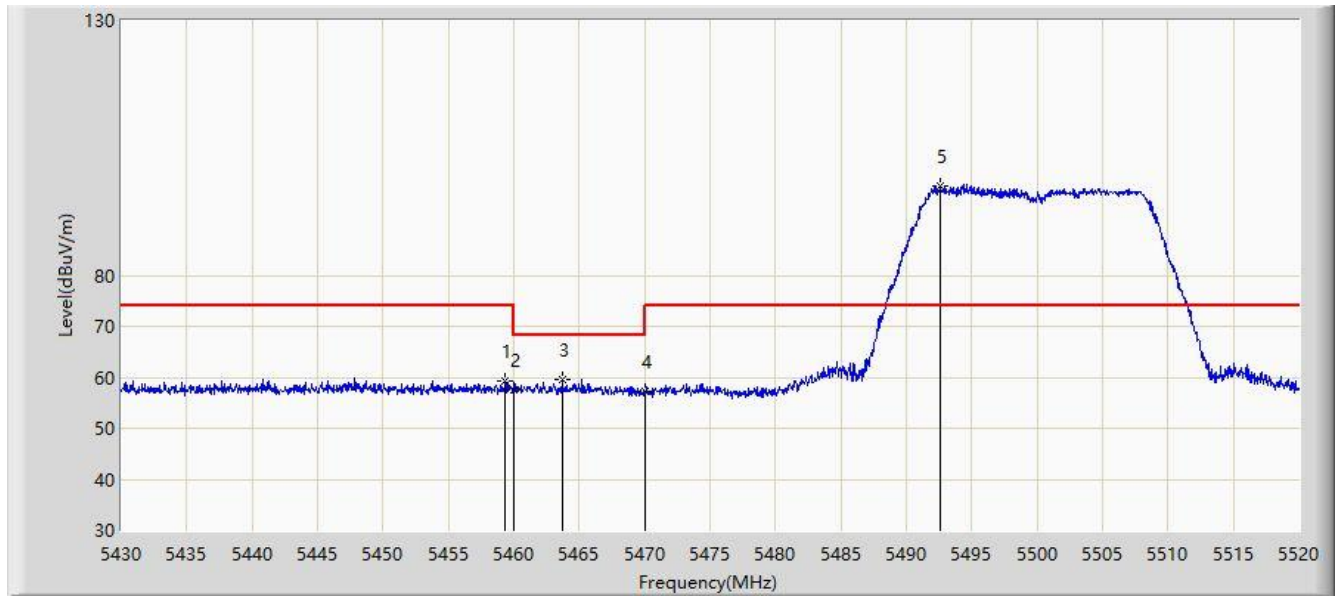


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.340	59.416	52.933	-14.584	74.000	6.483	PK
2			5460.000	57.575	51.089	-16.425	74.000	6.486	PK
3			5463.705	59.505	53.005	-8.695	68.200	6.500	PK
4			5470.000	57.257	50.732	-10.943	68.200	6.524	PK
5		*	5492.595	97.590	91.107	N/A	N/A	6.484	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

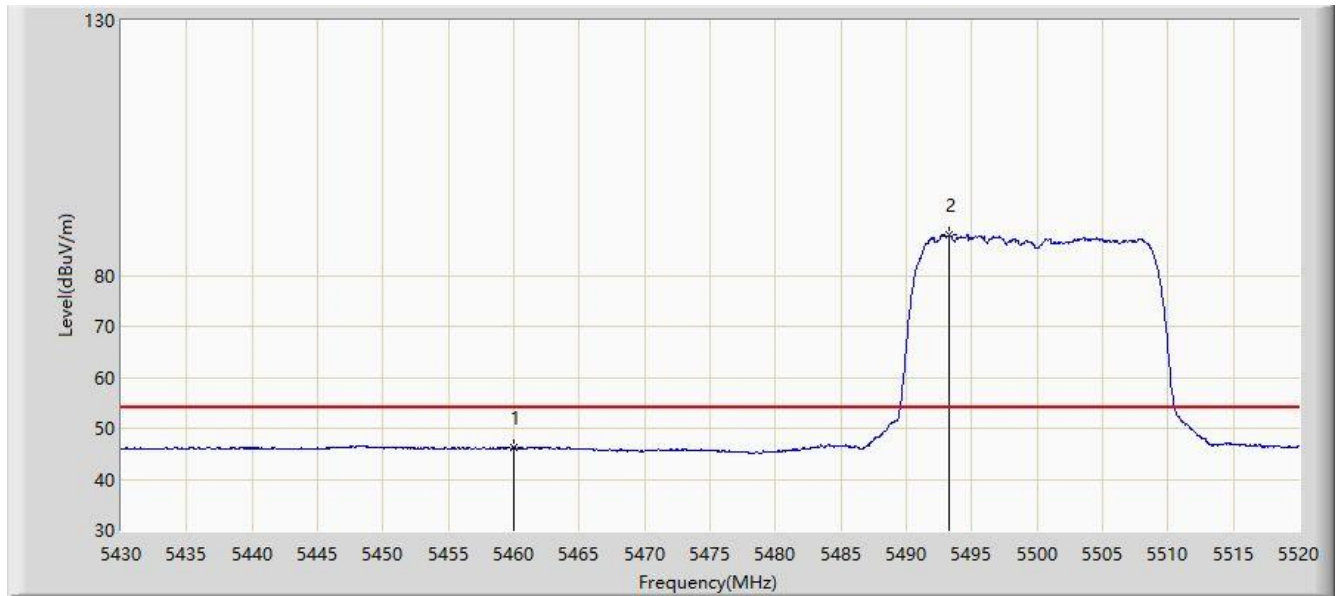


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.344	39.858	-7.656	54.000	6.486	AV
2		*	5493.270	87.925	81.439	N/A	N/A	6.486	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

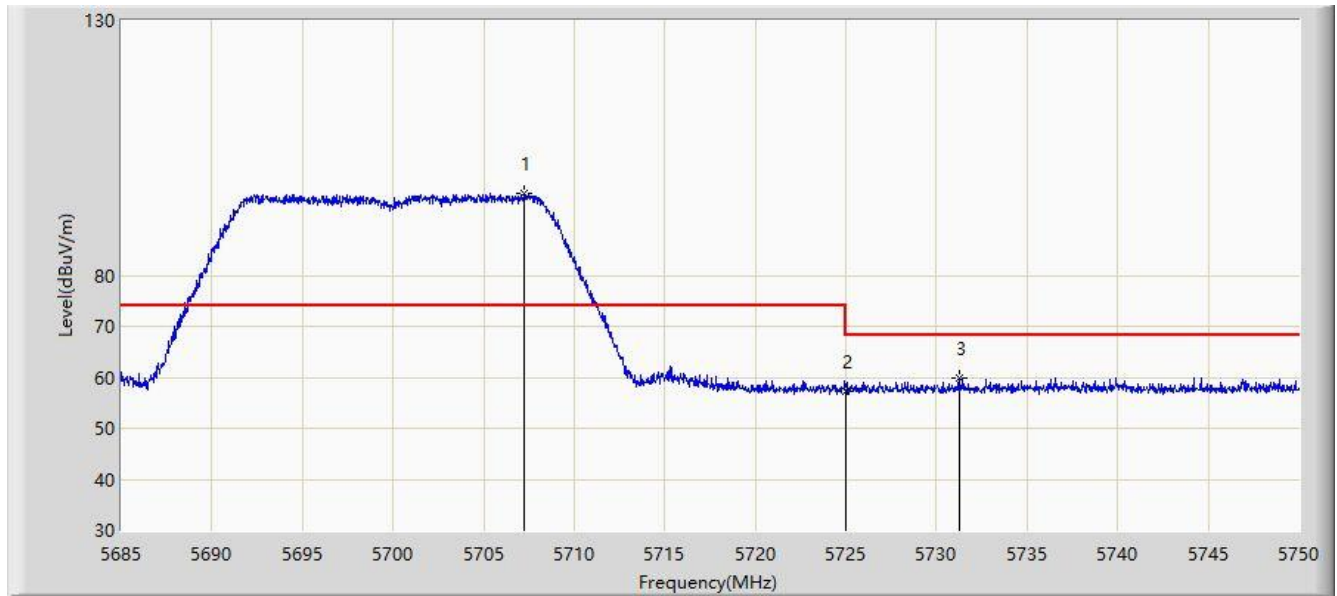


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.230	96.053	89.627	N/A	N/A	6.426	PK
2			5725.000	57.352	50.928	-10.848	68.200	6.424	PK
3			5731.280	59.881	53.338	-8.319	68.200	6.543	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

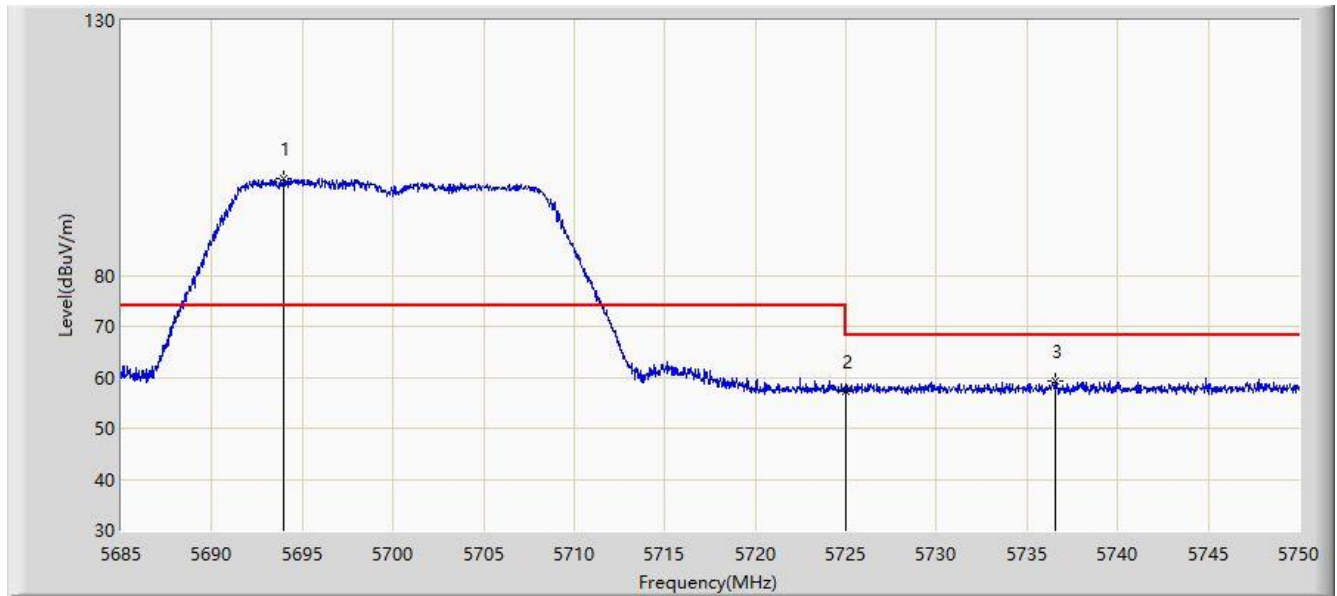


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.937	98.929	92.546	N/A	N/A	6.383	PK
2			5725.000	57.132	50.708	-11.068	68.200	6.424	PK
3			5736.578	59.360	52.718	-8.840	68.200	6.641	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:07
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

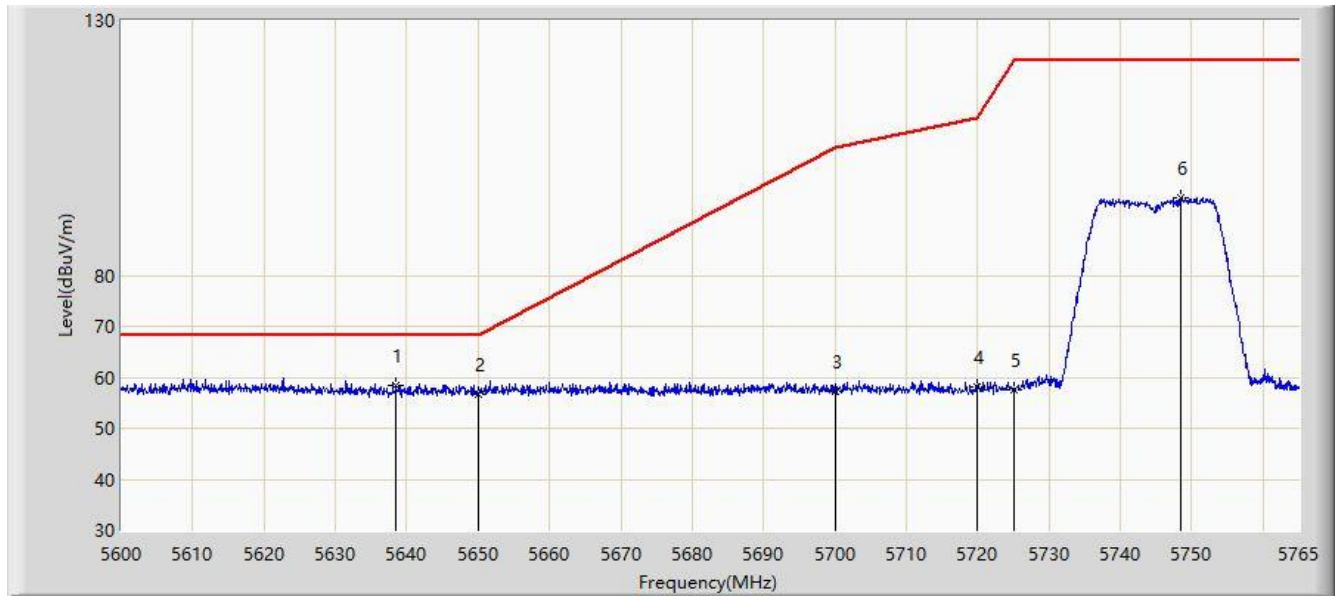


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.527	58.514	52.450	-9.686	68.200	6.064	PK
2			5650.000	56.694	50.435	-11.506	68.200	6.258	PK
3			5700.000	57.167	50.742	-48.033	105.200	6.426	PK
4			5720.000	58.225	51.840	-52.575	110.800	6.386	PK
5			5725.000	57.442	51.018	-64.758	122.200	6.424	PK
6			5748.500	95.227	88.439	N/A	N/A	6.788	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:08
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

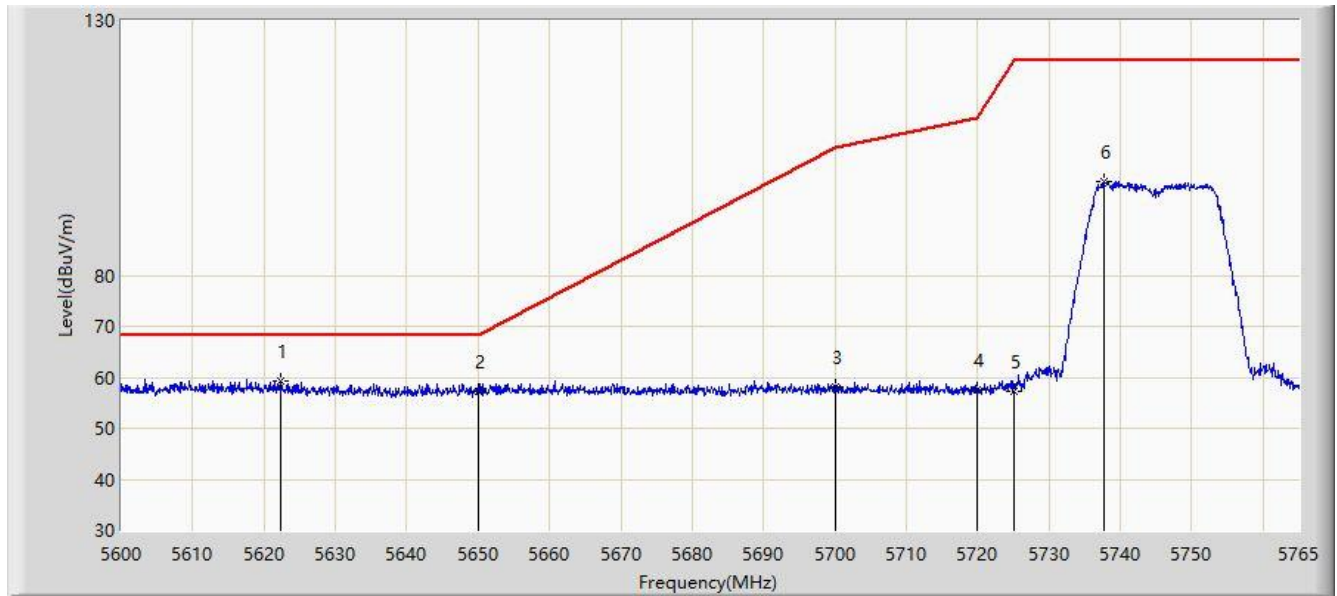


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.357	59.142	52.813	-9.058	68.200	6.330	PK
2			5650.000	57.312	51.053	-10.888	68.200	6.258	PK
3			5700.000	58.214	51.789	-46.986	105.200	6.426	PK
4			5720.000	57.401	51.016	-53.399	110.800	6.386	PK
5			5725.000	57.327	50.903	-64.873	122.200	6.424	PK
6			5737.610	98.515	91.854	N/A	N/A	6.661	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:10
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

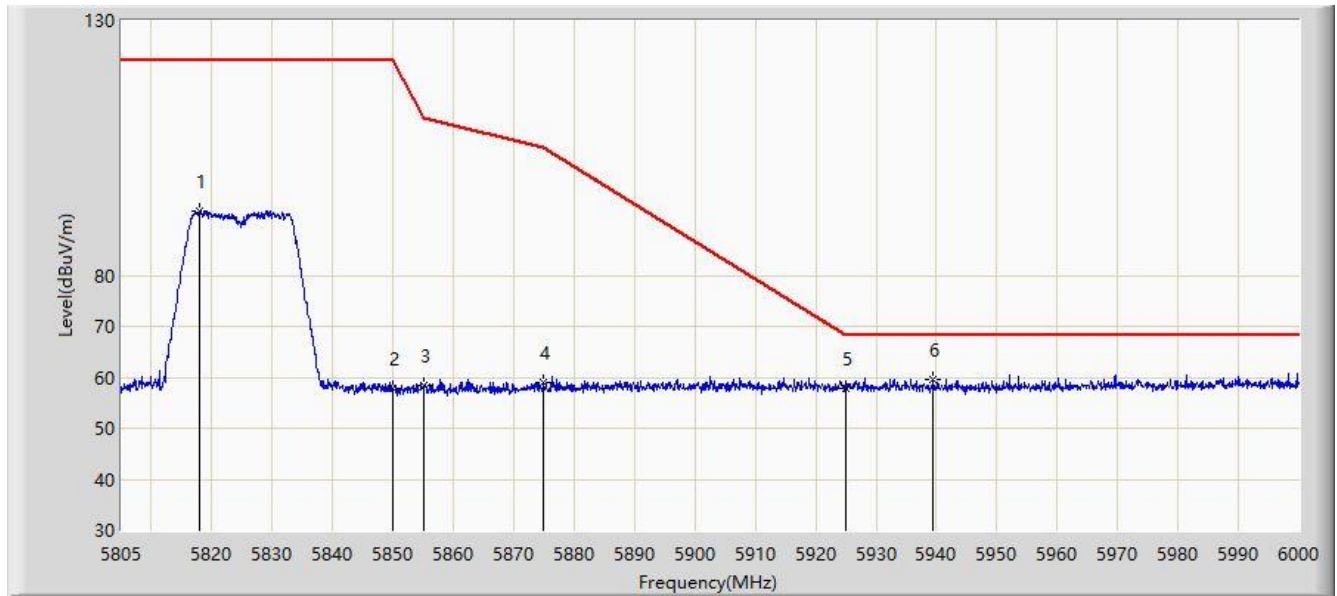


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.967	92.588	85.667	N/A	N/A	6.920	PK
2			5850.000	57.726	50.918	-64.474	122.200	6.808	PK
3			5855.000	58.336	51.516	-52.464	110.800	6.820	PK
4			5875.000	59.041	52.123	-46.159	105.200	6.918	PK
5			5925.000	57.884	50.787	-10.316	68.200	7.097	PK
6		*	5939.453	59.636	52.435	-8.564	68.200	7.202	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:11
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

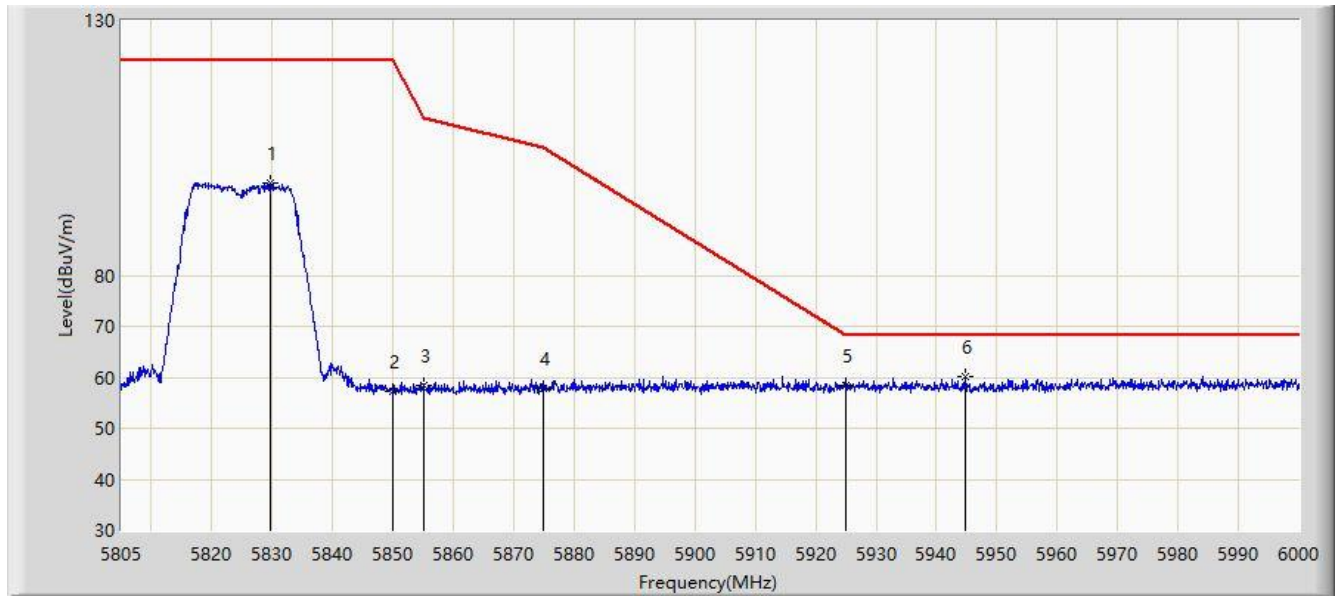


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5829.570	98.183	91.103	N/A	N/A	7.079	PK
2			5850.000	57.324	50.516	-64.876	122.200	6.808	PK
3			5855.000	58.460	51.640	-52.340	110.800	6.820	PK
4			5875.000	57.762	50.844	-47.438	105.200	6.918	PK
5			5925.000	58.513	51.416	-9.687	68.200	7.097	PK
6		*	5944.815	60.246	53.117	-7.954	68.200	7.128	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

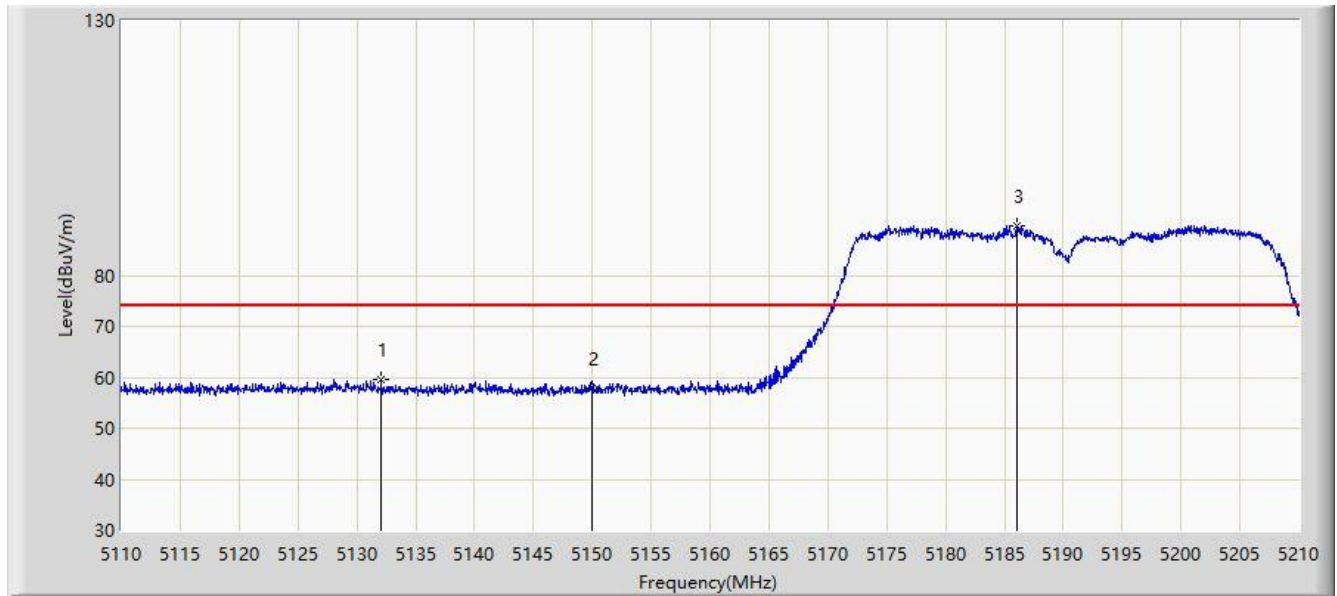


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.100	59.702	52.969	-14.298	74.000	6.733	PK
2			5150.000	57.686	51.234	-16.314	74.000	6.452	PK
3		*	5186.100	89.795	83.295	N/A	N/A	6.501	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

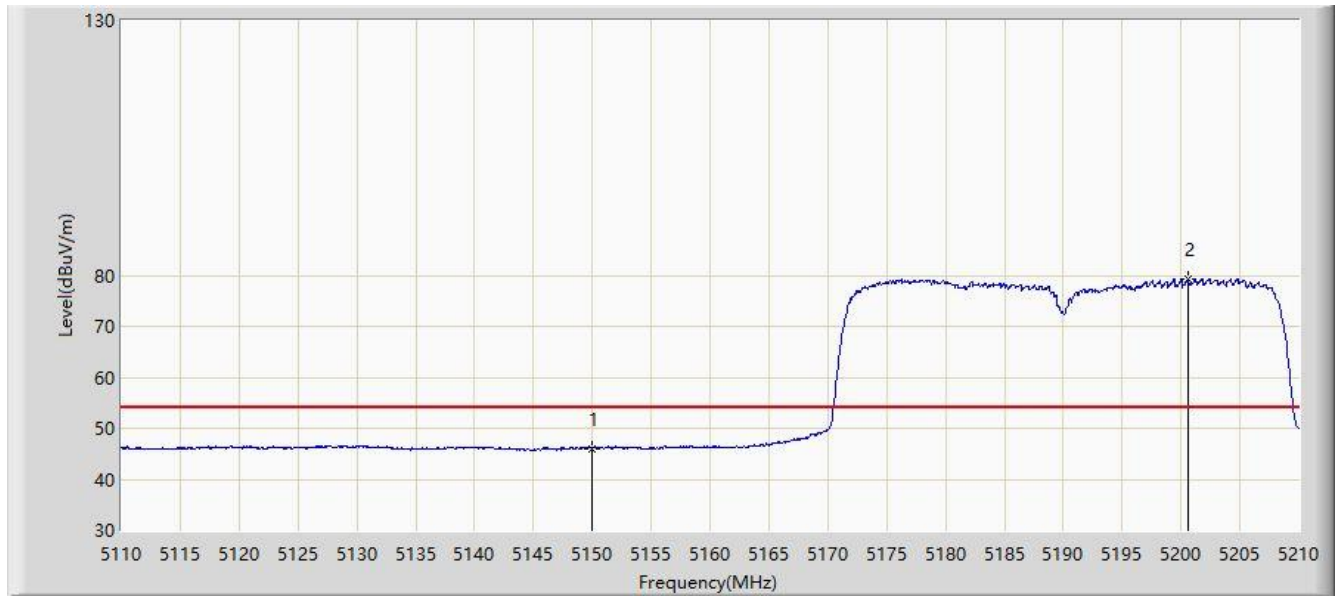


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.034	39.582	-7.966	54.000	6.452	AV
2		*	5200.600	79.268	72.940	N/A	N/A	6.329	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

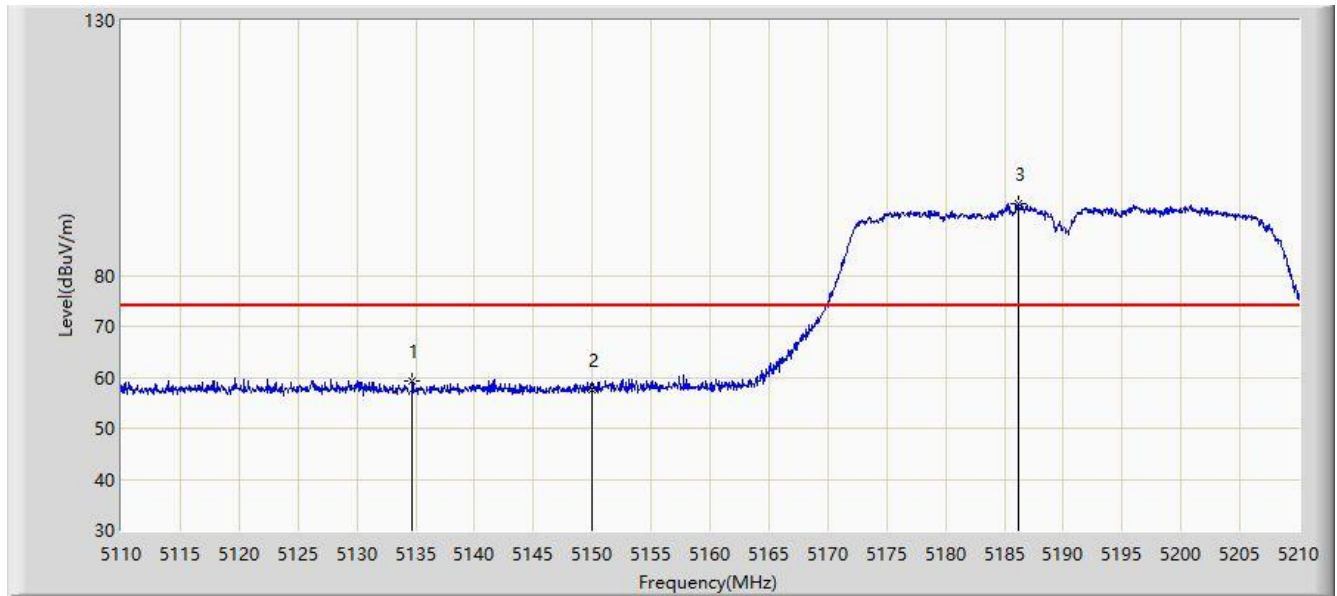


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.700	59.147	52.459	-14.853	74.000	6.688	PK
2			5150.000	57.573	51.121	-16.427	74.000	6.452	PK
3		*	5186.150	94.144	87.645	N/A	N/A	6.500	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

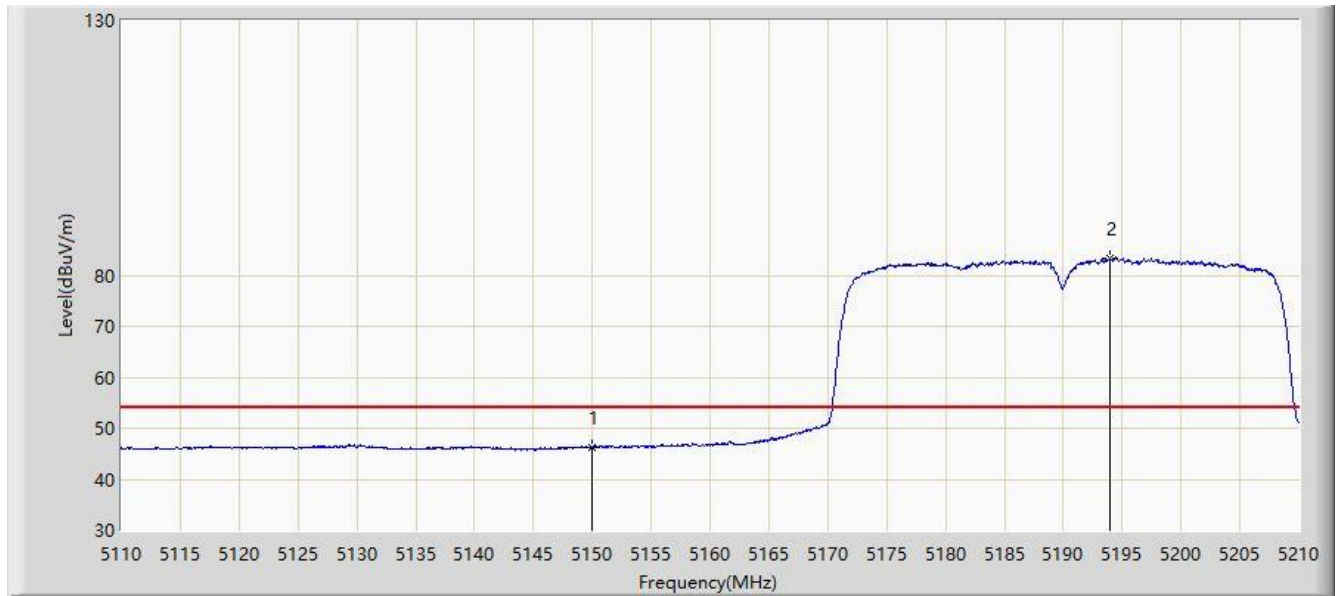


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.323	39.871	-7.677	54.000	6.452	AV
2		*	5193.950	83.283	76.883	N/A	N/A	6.400	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

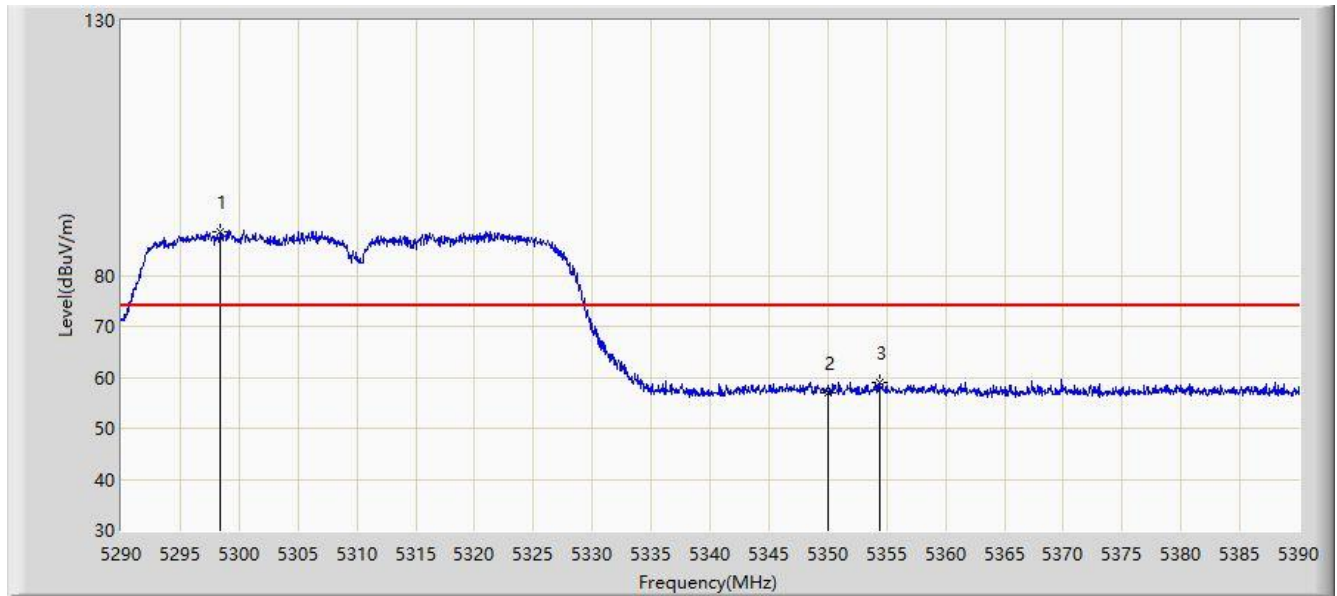


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.450	88.693	82.738	N/A	N/A	5.955	PK
2			5350.000	57.093	50.635	-16.907	74.000	6.458	PK
3			5354.450	58.936	52.605	-15.064	74.000	6.331	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

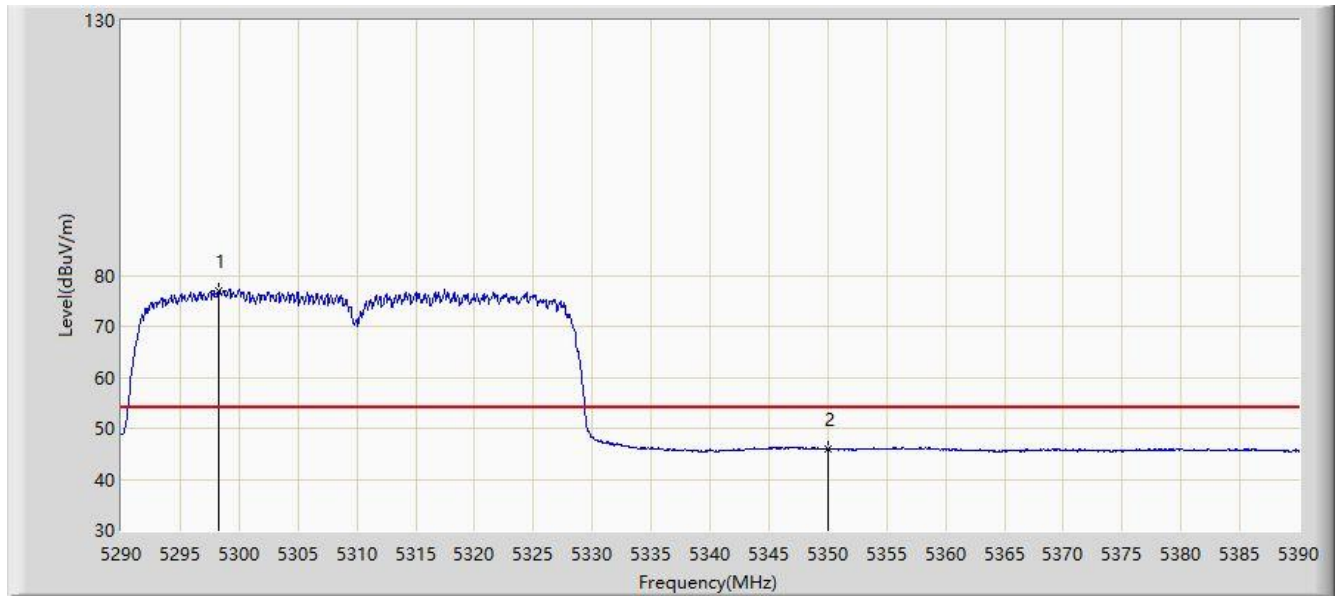


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.300	77.059	71.104	N/A	N/A	5.954	AV
2			5350.000	45.829	39.371	-8.171	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

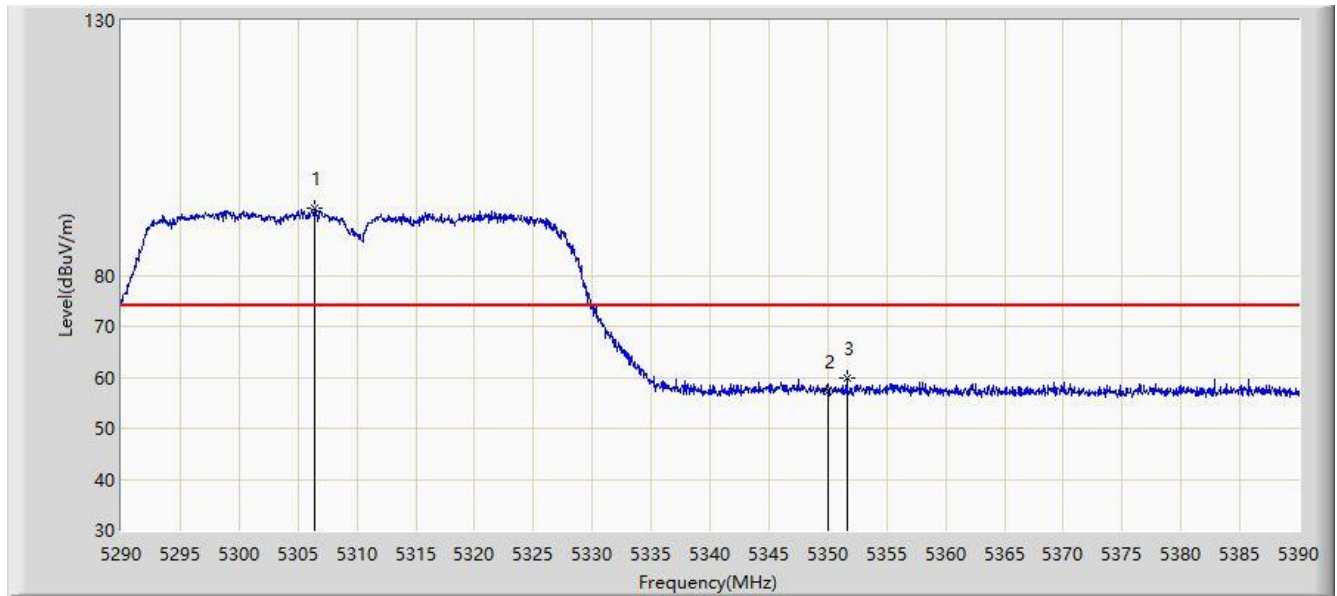


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.400	93.221	87.284	N/A	N/A	5.937	PK
2			5350.000	57.374	50.916	-16.626	74.000	6.458	PK
3			5351.600	59.848	53.441	-14.152	74.000	6.407	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

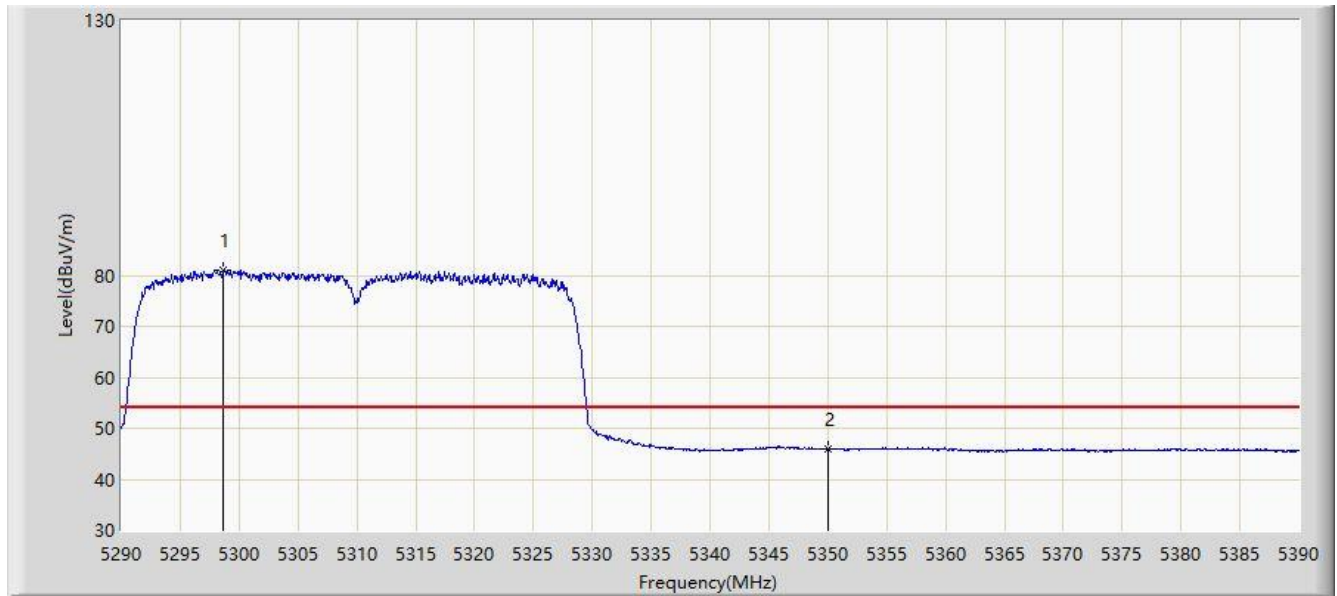


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.700	81.119	75.163	N/A	N/A	5.956	AV
2			5350.000	45.939	39.481	-8.061	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

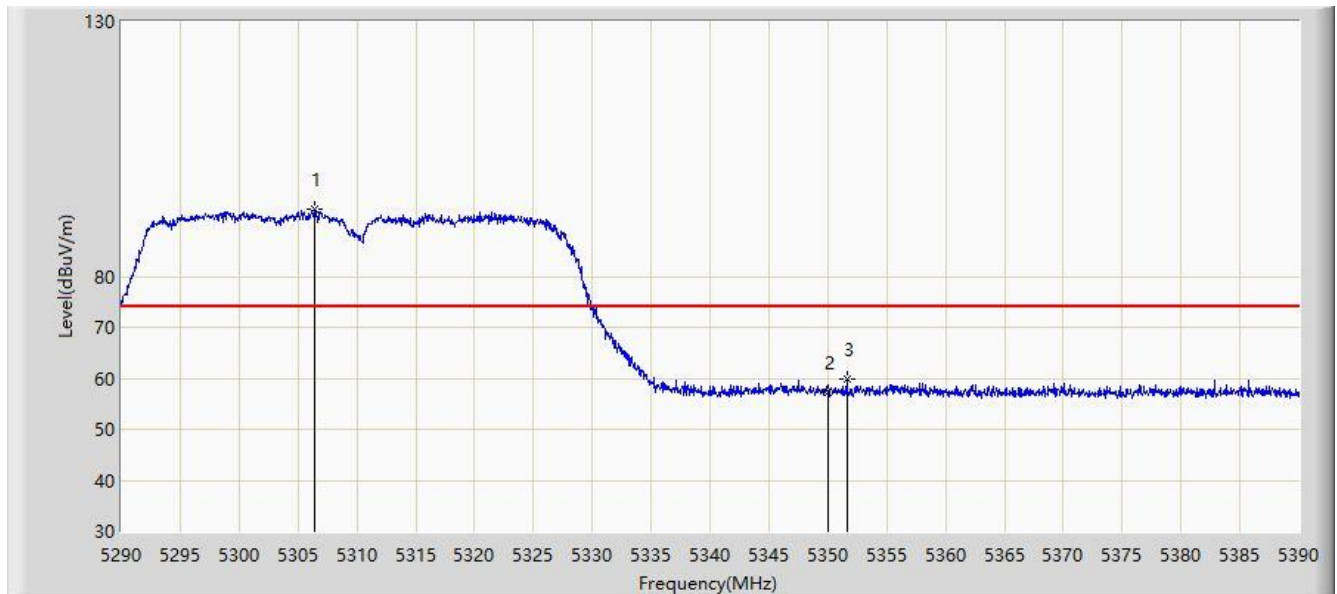


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.400	93.221	87.284	N/A	N/A	5.937	PK
2			5350.000	57.374	50.916	-16.626	74.000	6.458	PK
3			5351.600	59.848	53.441	-14.152	74.000	6.407	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

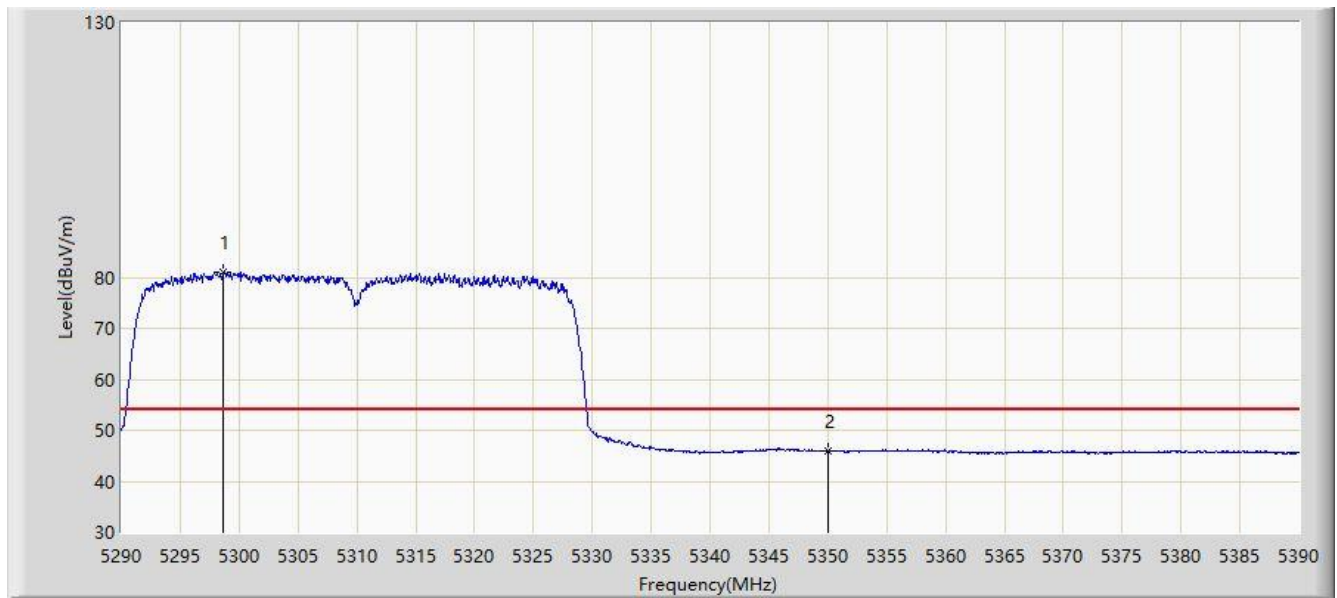


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.700	81.119	75.163	N/A	N/A	5.956	AV
2			5350.000	45.939	39.481	-8.061	54.000	6.458	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

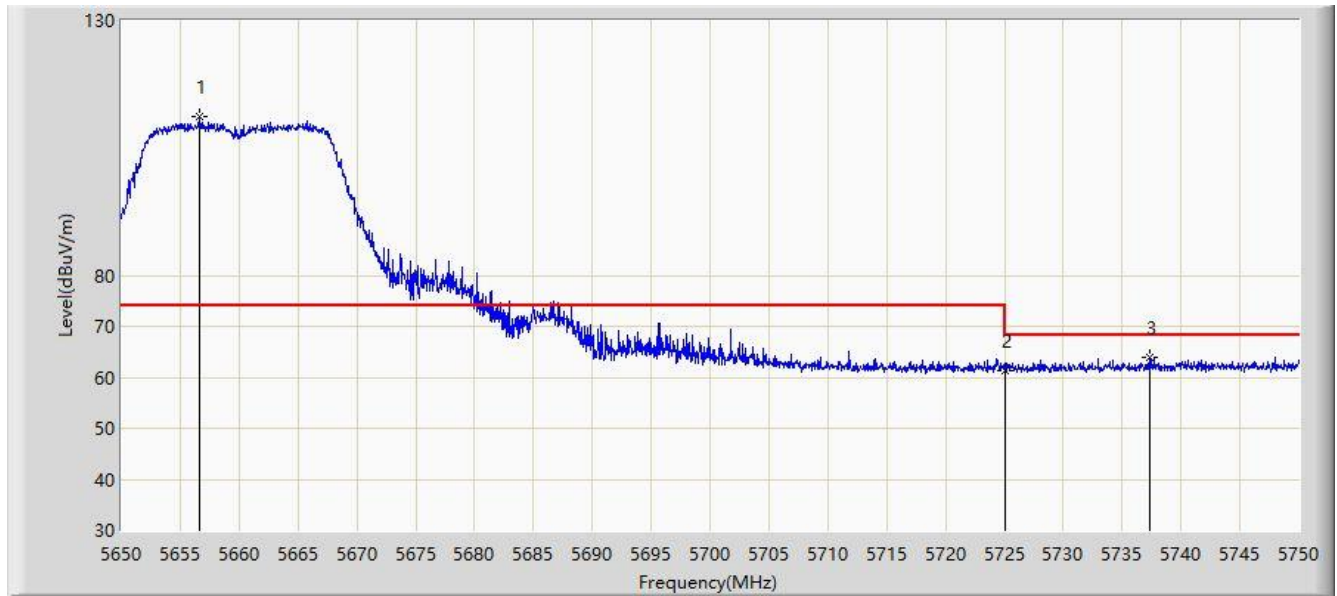


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.600	111.044	104.671	N/A	N/A	6.373	PK
2			5725.000	61.227	54.803	-6.973	68.200	6.424	PK
3			5737.300	64.016	57.361	-4.184	68.200	6.655	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

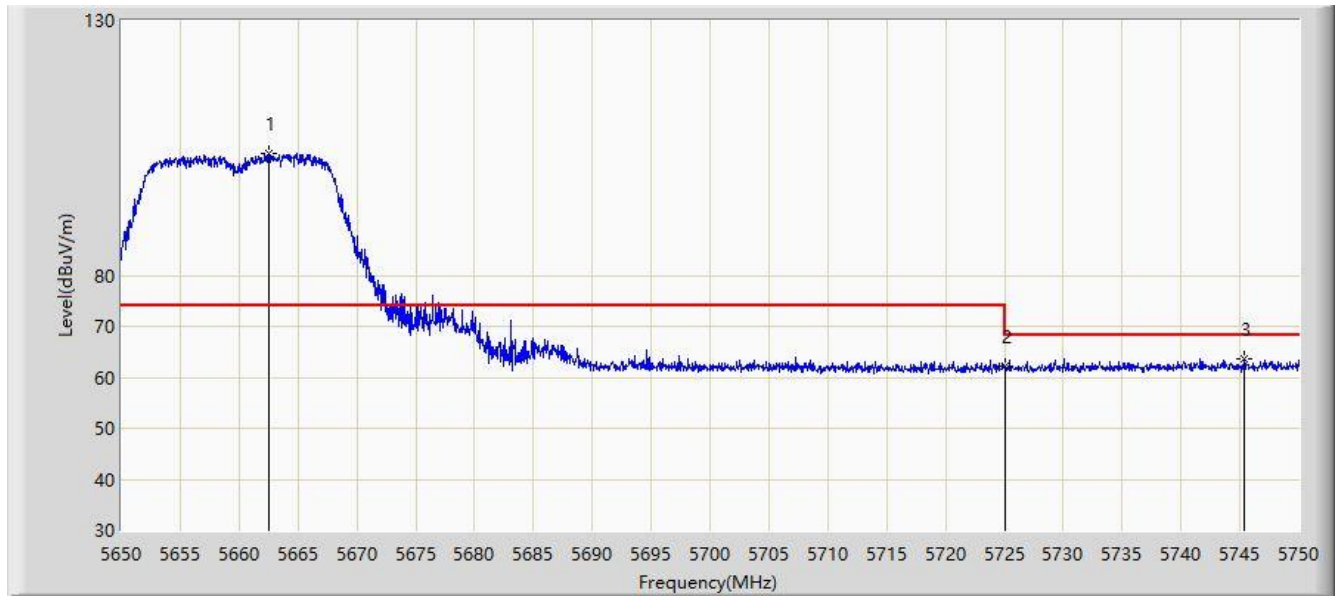


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.500	103.874	97.483	N/A	N/A	6.390	PK
2			5725.000	62.179	55.755	-6.021	68.200	6.424	PK
3			5745.400	63.761	56.993	-4.439	68.200	6.768	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:19
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

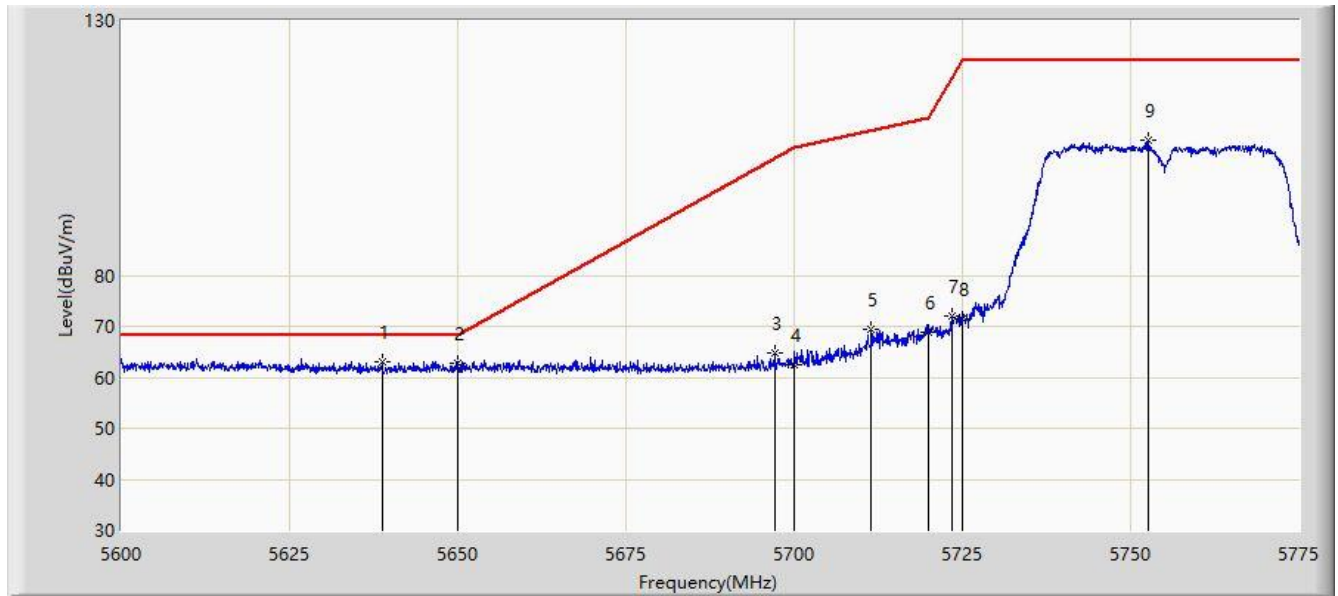


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.763	63.090	57.025	-5.110	68.200	6.065	PK
2			5650.000	62.800	56.541	-5.400	68.200	6.258	PK
3			5697.125	64.704	58.298	-38.378	103.081	6.405	PK
4			5700.000	62.581	56.156	-42.619	105.200	6.426	PK
5			5711.388	69.430	63.036	-38.961	108.391	6.394	PK
6			5720.000	68.708	62.323	-42.092	110.800	6.386	PK
7			5723.462	72.063	65.672	-46.632	118.694	6.391	PK
8			5725.000	71.469	65.045	-50.731	122.200	6.424	PK
9			5752.600	106.614	99.800	N/A	N/A	6.814	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:22
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

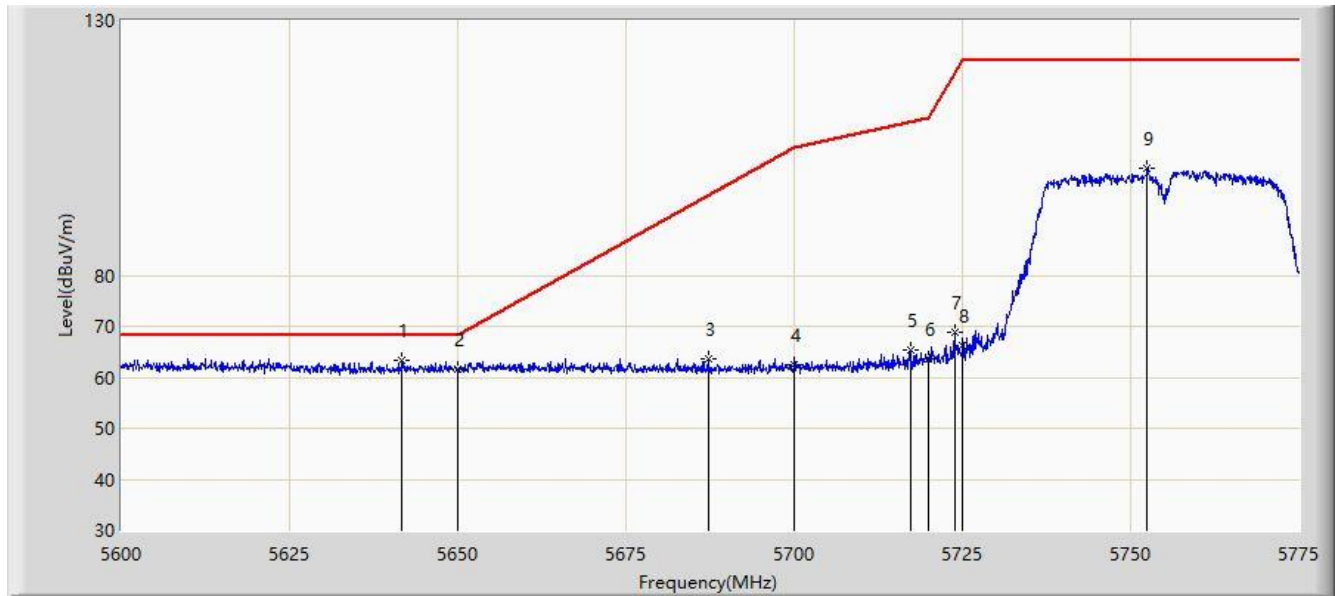


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.737	63.310	57.223	-4.890	68.200	6.087	PK
2			5650.000	61.516	55.257	-6.684	68.200	6.258	PK
3			5687.237	63.726	57.427	-32.061	95.786	6.300	PK
4			5700.000	62.442	56.017	-42.758	105.200	6.426	PK
5			5717.250	65.263	58.875	-44.768	110.031	6.388	PK
6			5720.000	63.493	57.108	-47.307	110.800	6.386	PK
7			5723.900	68.945	62.545	-50.748	119.693	6.400	PK
8			5725.000	66.213	59.789	-55.987	122.200	6.424	PK
9			5752.513	100.994	94.180	N/A	N/A	6.814	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:23
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

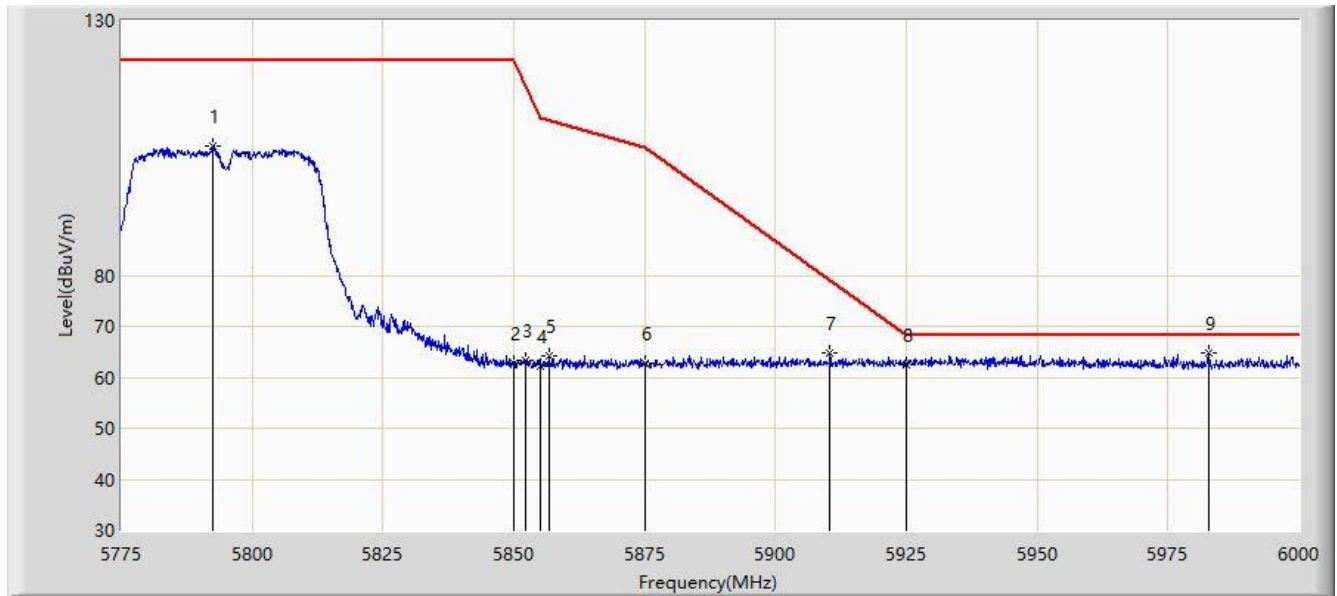


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.437	105.454	98.736	N/A	N/A	6.718	PK
2			5850.000	62.841	56.033	-59.359	122.200	6.808	PK
3			5852.288	63.395	56.582	-53.587	116.982	6.814	PK
4			5855.000	62.045	55.225	-48.755	110.800	6.820	PK
5			5856.675	64.250	57.426	-46.081	110.330	6.824	PK
6			5875.000	62.612	55.694	-42.588	105.200	6.918	PK
7			5910.450	64.760	57.651	-14.175	78.935	7.108	PK
8			5925.000	62.455	55.358	-5.745	68.200	7.097	PK
9		*	5982.900	64.834	57.889	-3.366	68.200	6.945	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:25
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diaio
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

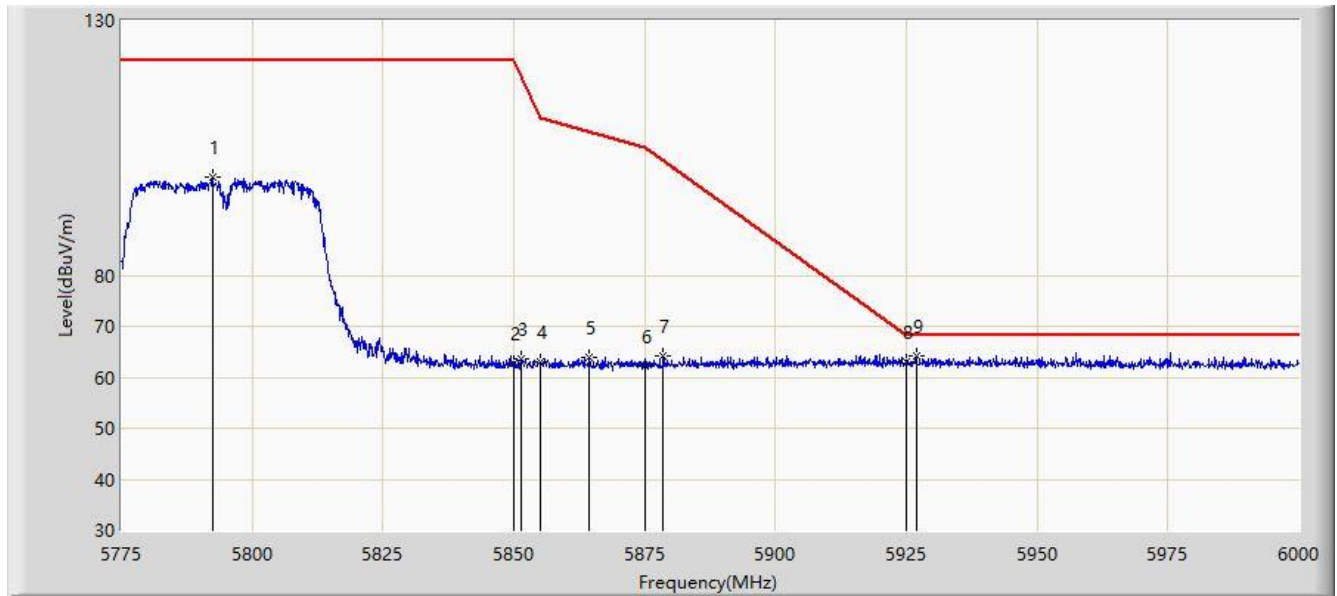


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.437	99.382	92.664	N/A	N/A	6.718	PK
2			5850.000	62.707	55.899	-59.493	122.200	6.808	PK
3			5851.500	63.501	56.689	-55.278	118.779	6.812	PK
4			5855.000	62.952	56.132	-47.848	110.800	6.820	PK
5			5864.437	64.003	57.136	-44.152	108.155	6.867	PK
6			5875.000	62.116	55.198	-43.084	105.200	6.918	PK
7			5878.612	64.305	57.378	-38.211	102.517	6.927	PK
8			5925.000	62.961	55.864	-5.239	68.200	7.097	PK
9		*	5926.875	64.068	56.948	-4.132	68.200	7.121	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 13:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

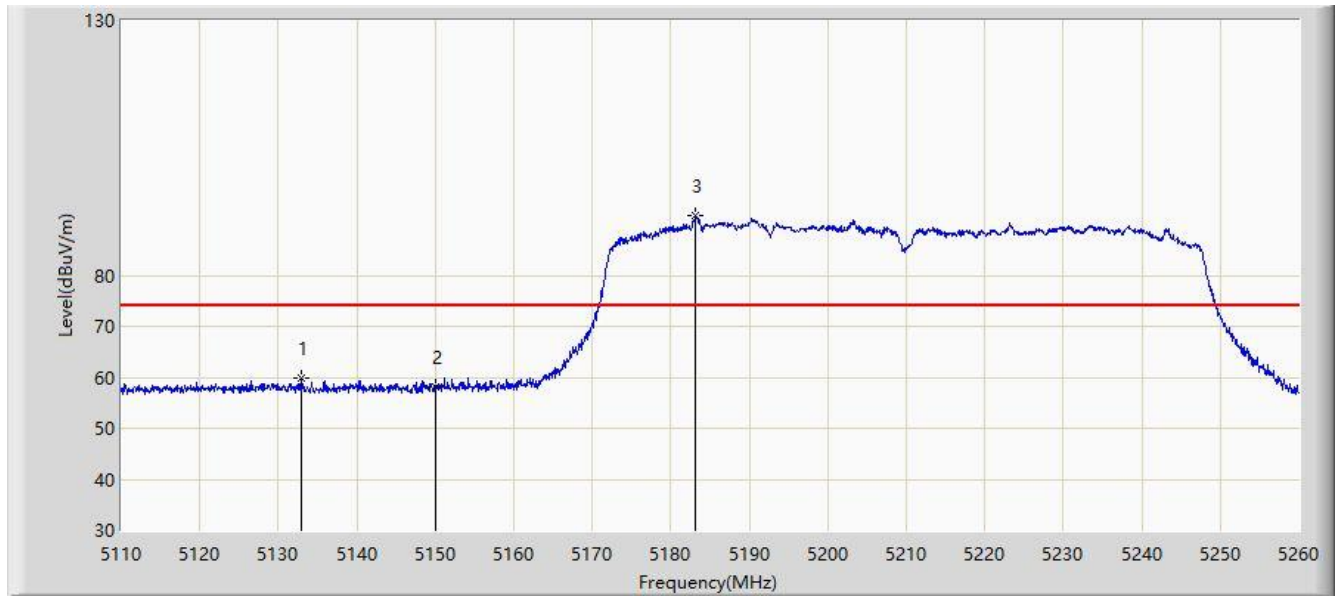


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.875	59.950	53.230	-14.050	74.000	6.720	PK
2			5150.000	58.170	51.718	-15.830	74.000	6.452	PK
3		*	5183.200	91.635	85.106	N/A	N/A	6.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

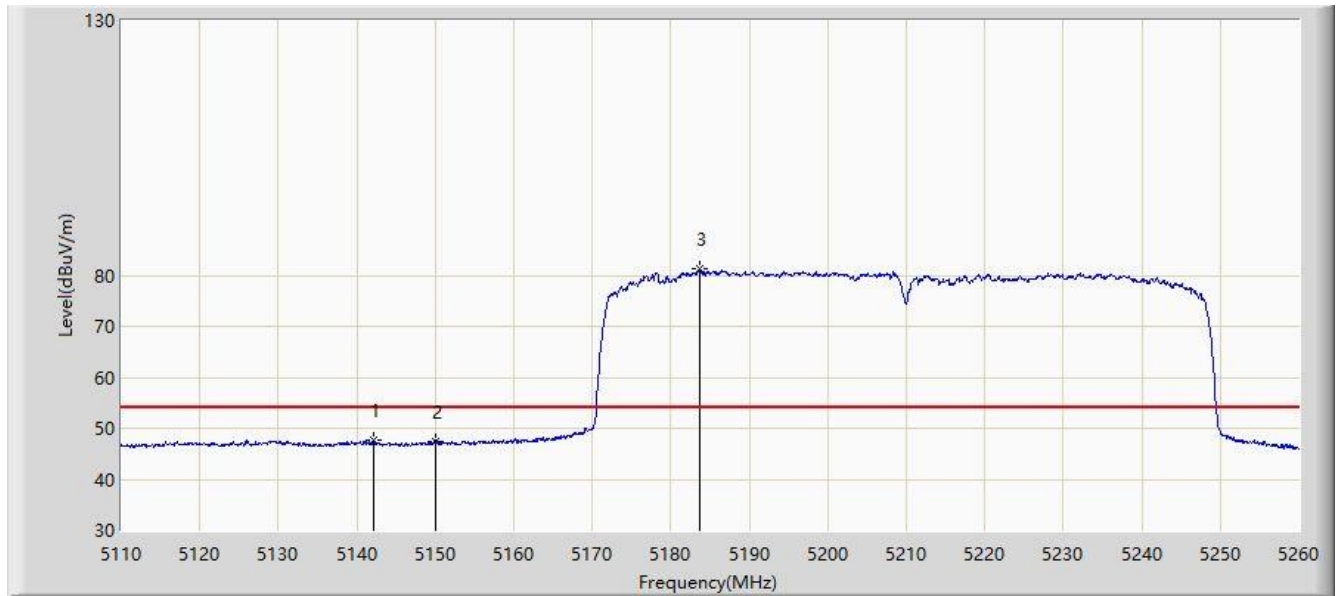

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.100	47.671	41.114	-6.329	54.000	6.557	AV
2			5150.000	47.504	41.052	-6.496	54.000	6.452	AV
3		*	5183.650	81.402	74.873	N/A	N/A	6.530	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.775	47.333	40.682	-6.667	54.000	6.651	AV
2			5150.000	46.837	40.385	-7.163	54.000	6.452	AV
3		*	5234.425	75.196	69.088	N/A	N/A	6.108	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

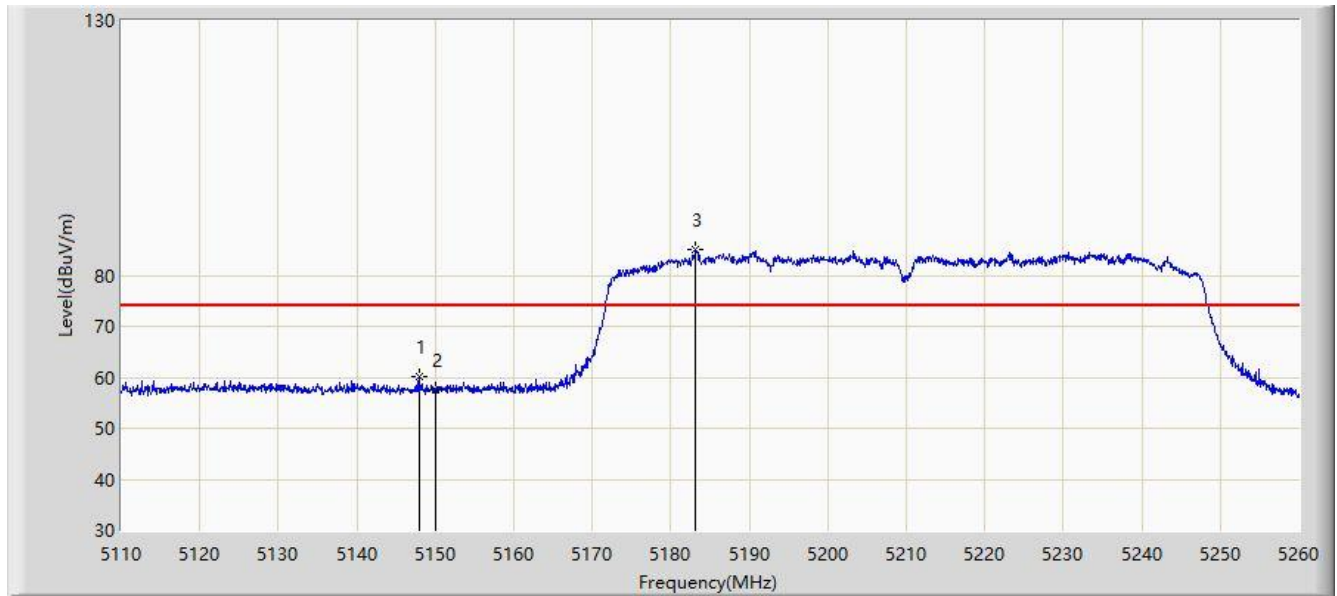


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.950	60.061	53.606	-13.939	74.000	6.455	PK
2			5150.000	57.485	51.033	-16.515	74.000	6.452	PK
3		*	5183.200	84.964	78.435	N/A	N/A	6.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

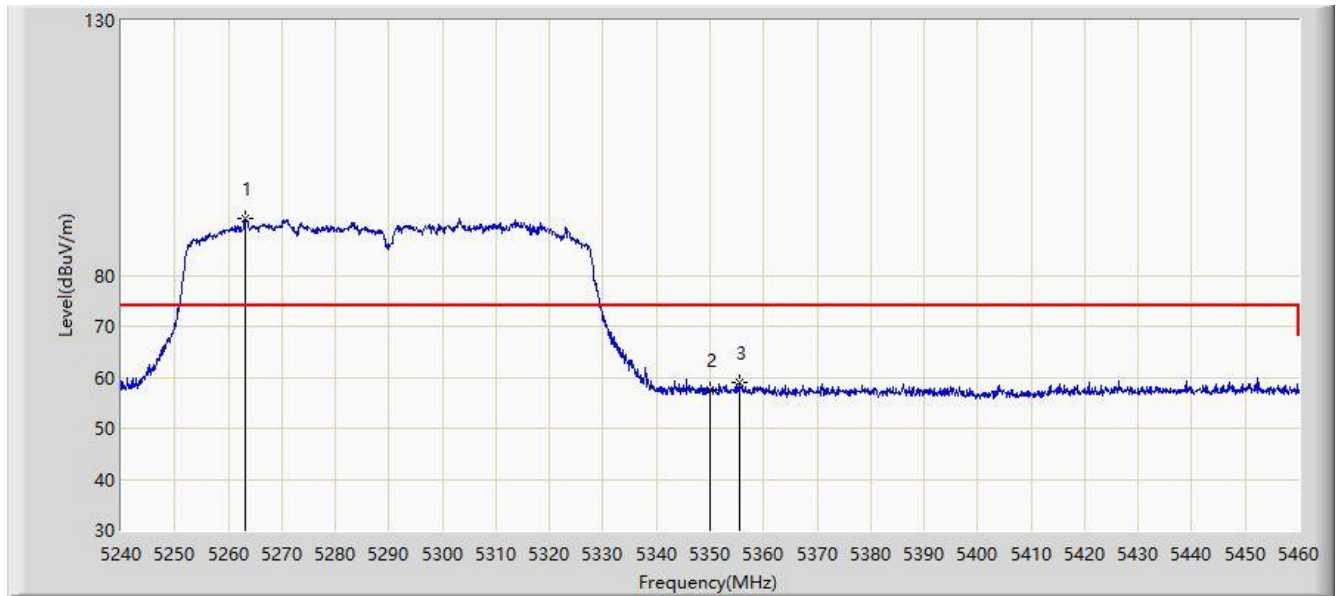


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5263.100	91.187	85.036	N/A	N/A	6.151	PK
2			5350.000	57.464	51.006	-16.536	74.000	6.458	PK
3			5355.390	58.890	52.583	-15.110	74.000	6.307	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

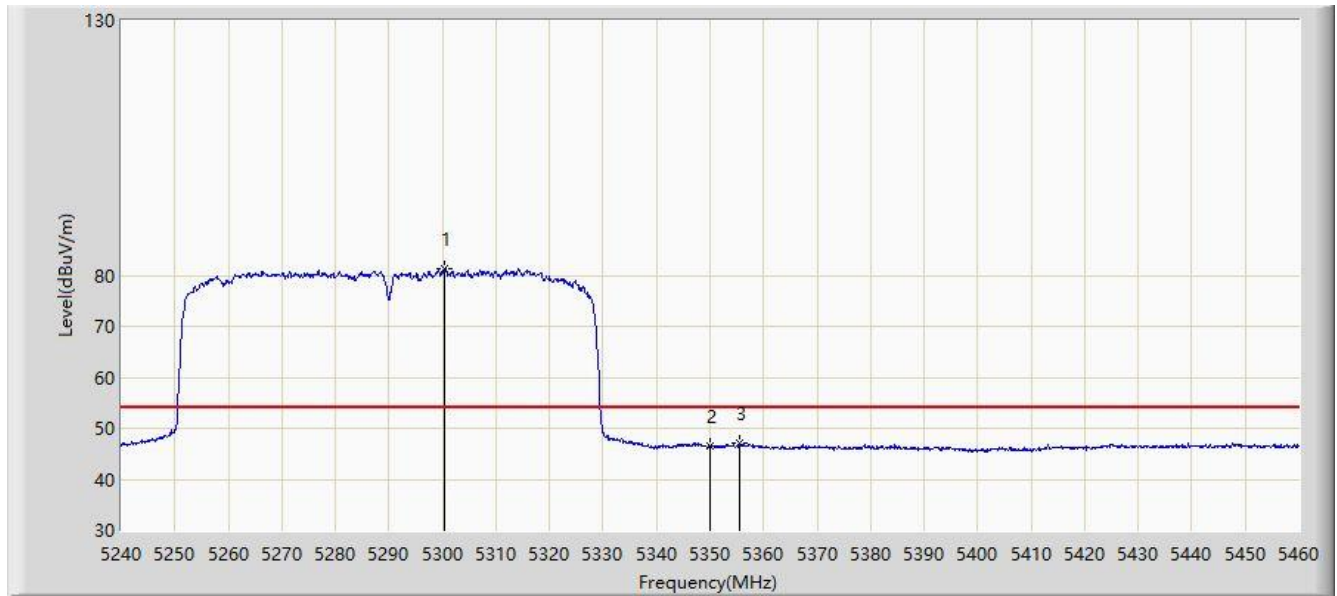


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5300.500	81.273	75.312	N/A	N/A	5.961	AV
2			5350.000	46.633	40.175	-7.367	54.000	6.458	AV
3			5355.500	47.070	40.766	-6.930	54.000	6.304	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

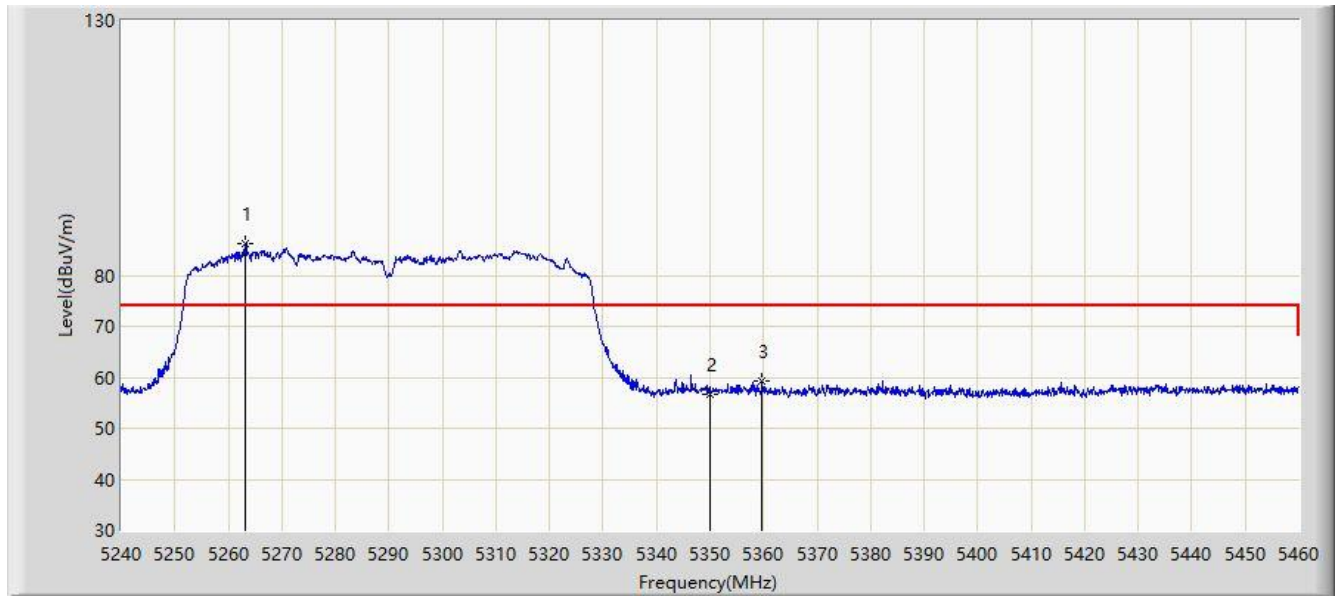


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5263.210	86.132	79.983	N/A	N/A	6.149	PK
2			5350.000	56.752	50.294	-17.248	74.000	6.458	PK
3			5359.680	59.147	52.951	-14.853	74.000	6.196	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

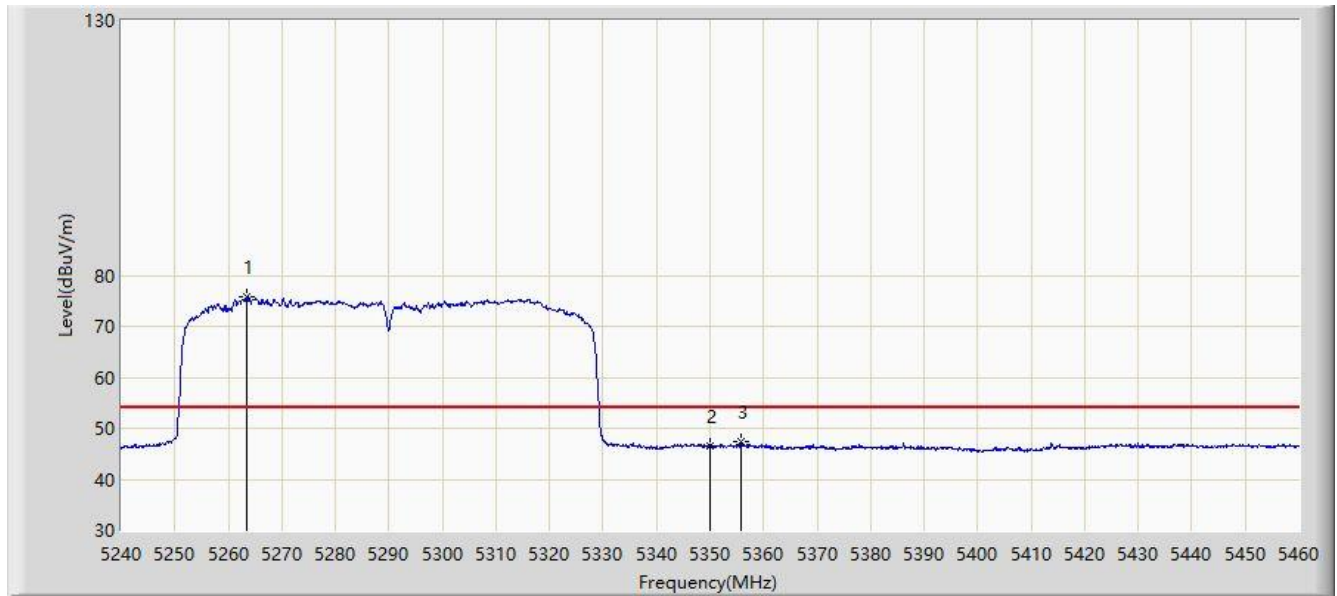


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5263.540	75.898	69.755	N/A	N/A	6.143	AV
2			5350.000	46.437	39.979	-7.563	54.000	6.458	AV
3			5355.830	47.400	41.104	-6.600	54.000	6.296	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

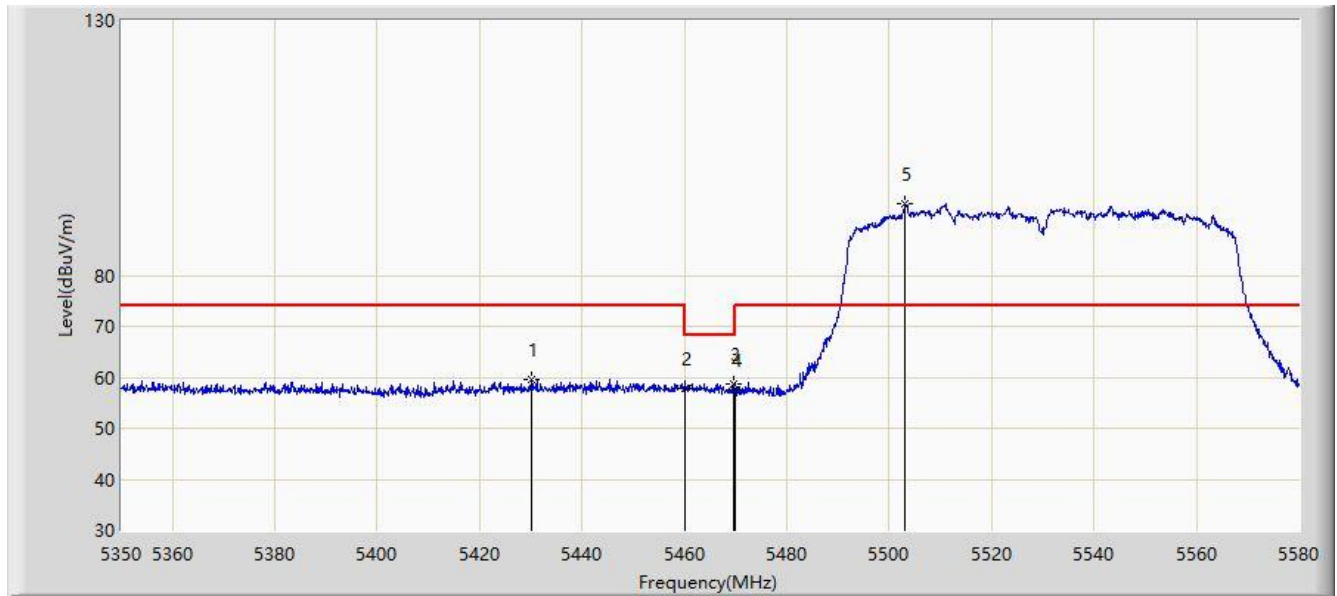


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5430.155	59.525	53.047	-14.475	74.000	6.478	PK
2			5460.000	57.902	51.416	-16.098	74.000	6.486	PK
3			5469.485	58.720	52.197	-9.480	68.200	6.523	PK
4			5470.000	57.531	51.006	-10.669	68.200	6.524	PK
5		*	5503.180	94.053	87.524	N/A	N/A	6.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

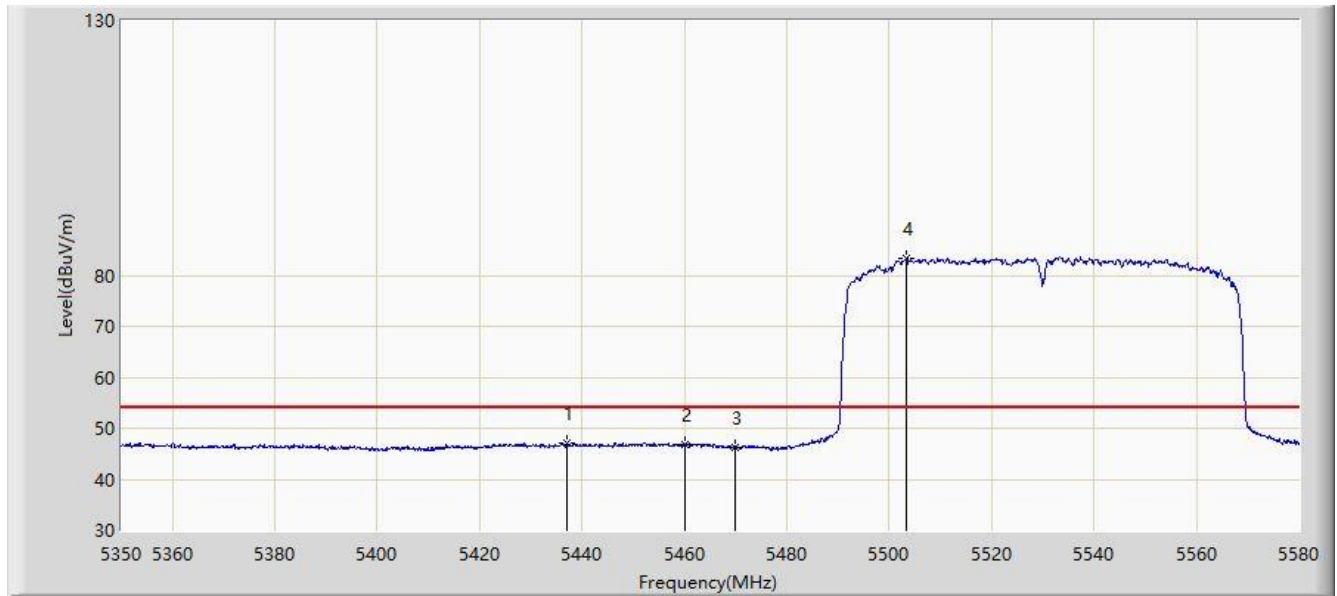


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5437.170	46.975	40.554	-7.025	54.000	6.421	AV
2			5460.000	46.783	40.297	-7.217	54.000	6.486	AV
3			5470.000	46.328	39.803	-7.672	54.000	6.524	AV
4		*	5503.410	83.454	76.924	N/A	N/A	6.530	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

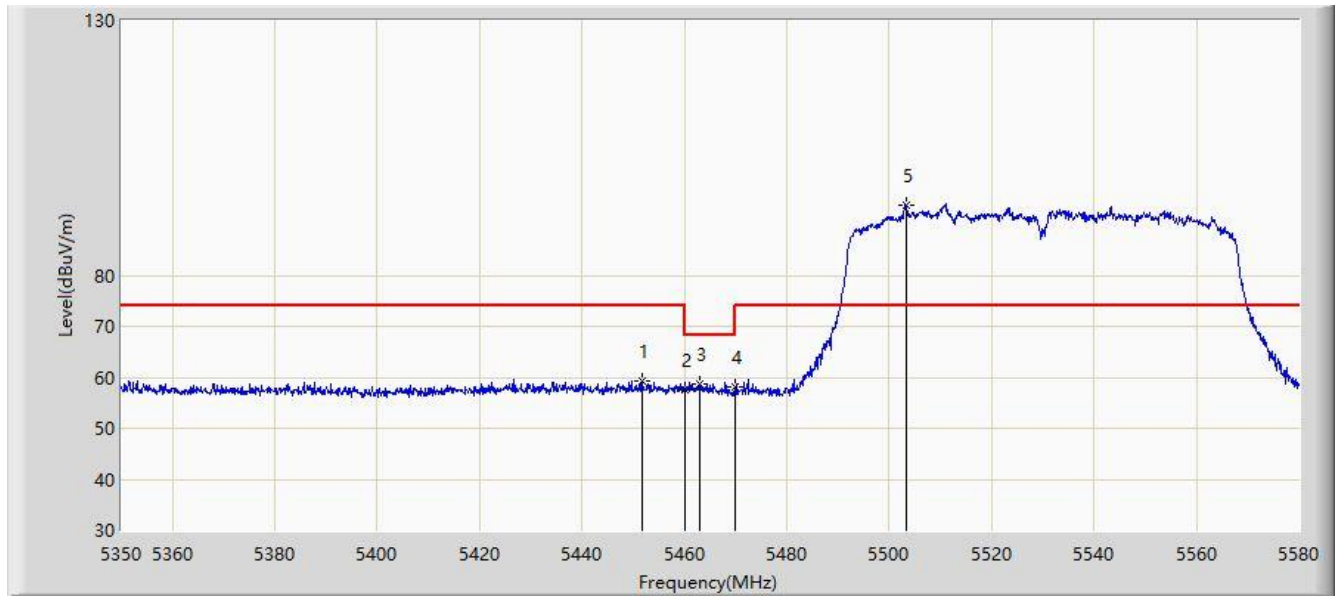


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.775	59.324	52.863	-14.676	74.000	6.461	PK
2			5460.000	57.679	51.193	-16.321	74.000	6.486	PK
3			5462.930	58.792	52.295	-9.408	68.200	6.497	PK
4			5470.000	58.100	51.575	-10.100	68.200	6.524	PK
5		*	5503.295	93.829	87.299	N/A	N/A	6.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

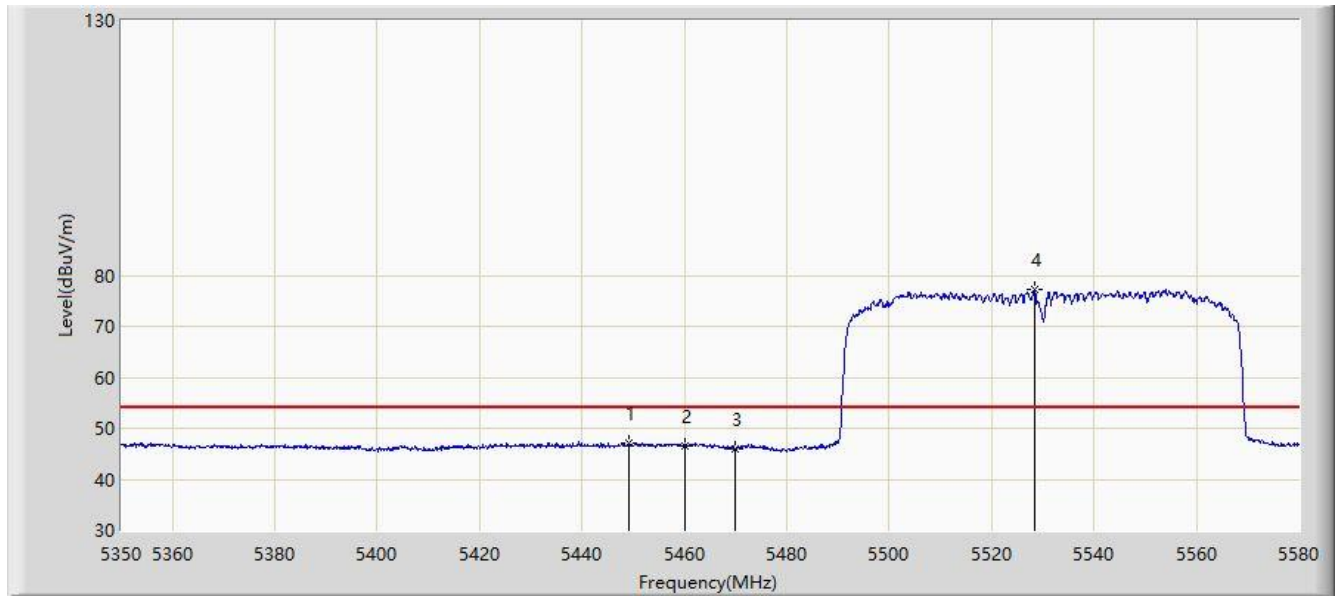


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.015	47.130	40.677	-6.870	54.000	6.453	AV
2			5460.000	46.649	40.163	-7.351	54.000	6.486	AV
3			5470.000	46.064	39.539	-7.936	54.000	6.524	AV
4		*	5528.365	77.245	70.801	N/A	N/A	6.444	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

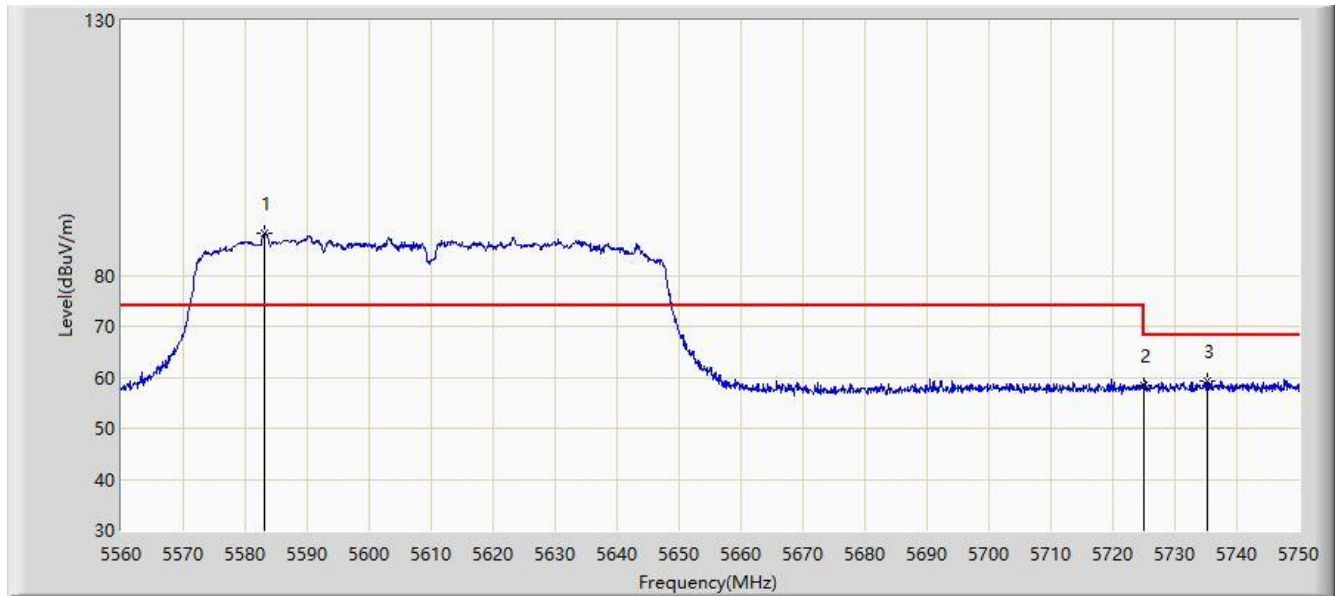


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.180	88.285	81.640	N/A	N/A	6.645	PK
2			5725.000	58.480	52.056	-9.720	68.200	6.424	PK
3			5735.180	59.215	52.599	-8.985	68.200	6.616	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

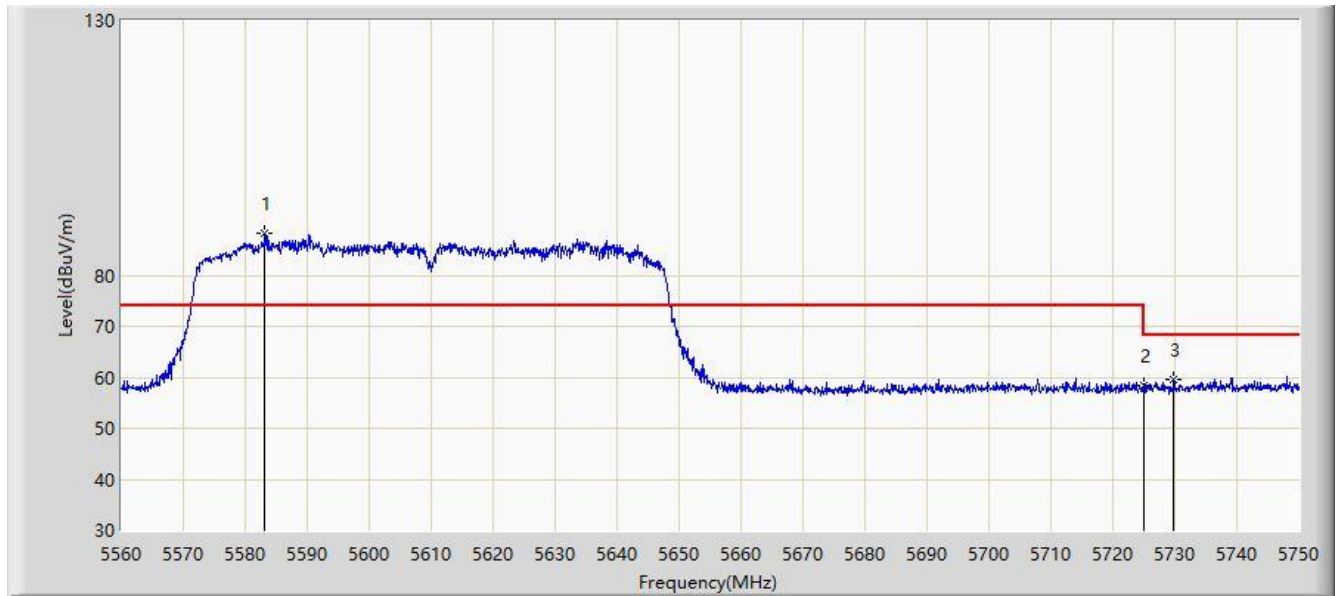


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.180	88.212	81.567	N/A	N/A	6.645	PK
2			5725.000	58.494	52.070	-9.706	68.200	6.424	PK
3			5729.860	59.670	53.153	-8.530	68.200	6.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:37
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

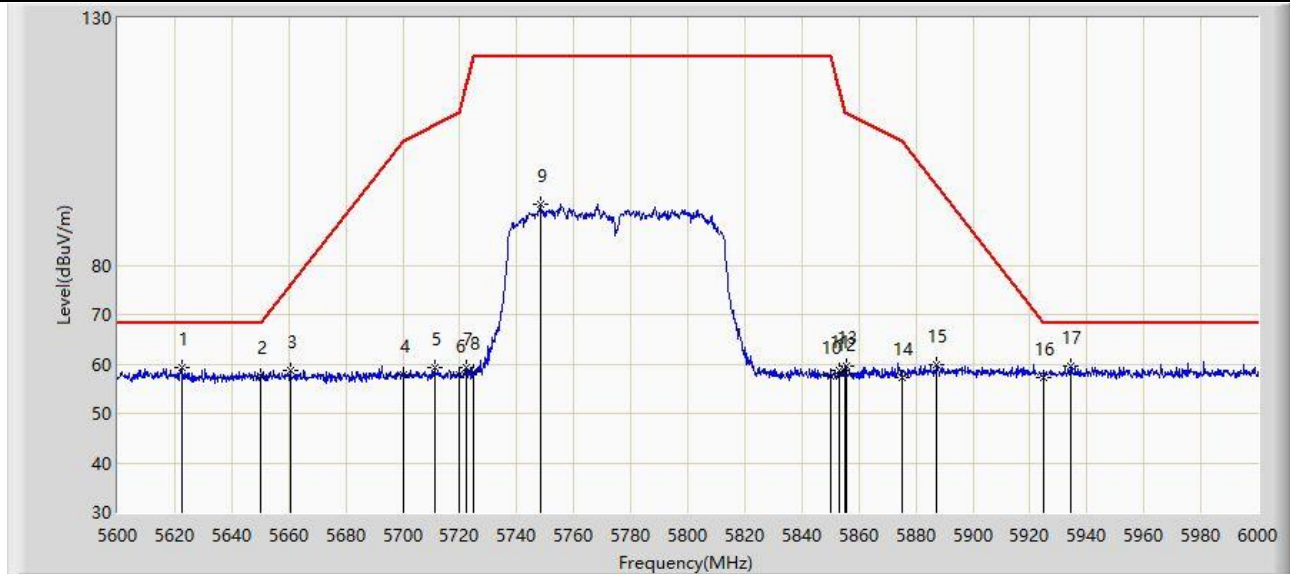


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5622.800	59.281	52.964	-8.919	68.200	6.317	PK
2			5650.000	57.655	51.396	-10.545	68.200	6.258	PK
3			5660.600	58.735	52.342	-17.336	76.071	6.393	PK
4			5700.000	57.877	51.452	-47.323	105.200	6.426	PK
5			5711.200	59.318	52.924	-49.020	108.338	6.394	PK
6			5720.000	57.729	51.344	-53.071	110.800	6.386	PK
7			5722.400	59.158	52.775	-57.115	116.273	6.384	PK
8			5725.000	58.277	51.853	-63.923	122.200	6.424	PK
9			5748.200	92.433	85.647	N/A	N/A	6.786	PK
10			5850.000	57.539	50.731	-64.661	122.200	6.808	PK
11			5853.000	58.785	51.970	-56.574	115.359	6.814	PK
12			5855.000	58.149	51.329	-52.651	110.800	6.820	PK
13			5855.600	59.473	52.652	-51.159	110.632	6.822	PK
14			5875.000	57.375	50.457	-47.825	105.200	6.918	PK
15			5887.200	59.919	52.978	-36.224	96.143	6.940	PK
16			5925.000	57.325	50.228	-10.875	68.200	7.097	PK
17		*	5934.400	59.670	52.485	-8.530	68.200	7.185	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/07/23 - 14:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Dillon Diao
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

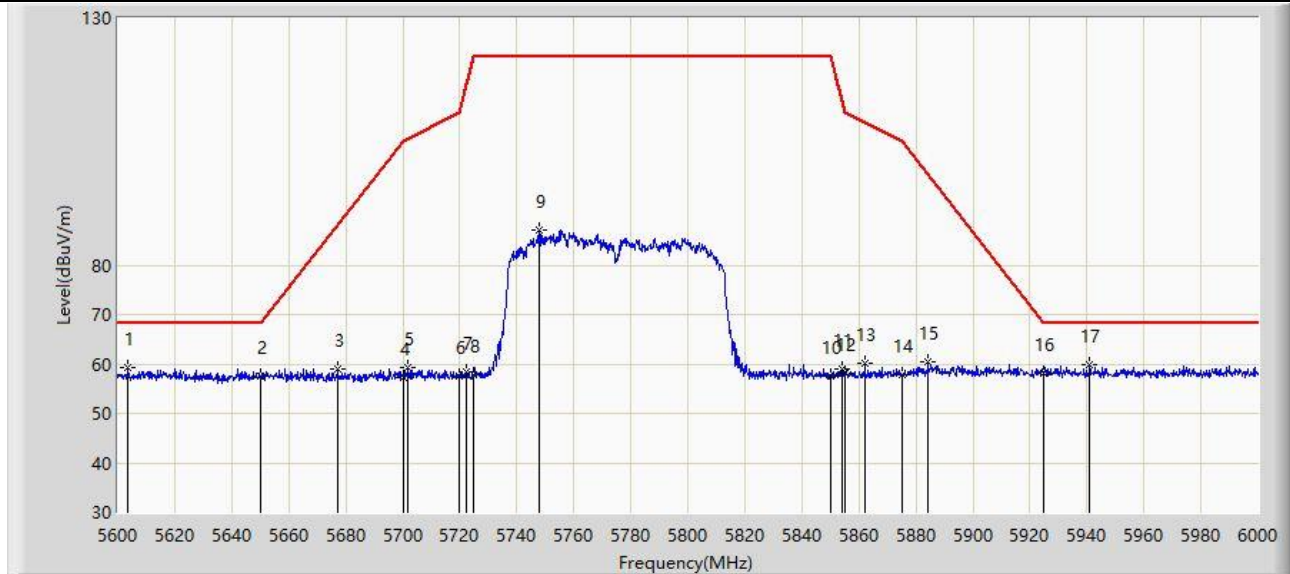

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5603.600	59.206	52.655	-8.994	68.200	6.551	PK
2			5650.000	57.555	51.296	-10.645	68.200	6.258	PK
3			5677.200	58.934	52.599	-29.434	88.368	6.335	PK
4			5700.000	57.379	50.954	-47.821	105.200	6.426	PK
5			5701.800	59.326	52.888	-46.379	105.705	6.438	PK
6			5720.000	57.501	51.116	-53.299	110.800	6.386	PK
7			5722.400	58.477	52.094	-57.796	116.273	6.384	PK
8			5725.000	57.863	51.439	-64.337	122.200	6.424	PK
9			5747.800	86.995	80.212	N/A	N/A	6.783	PK
10			5850.000	57.596	50.788	-64.604	122.200	6.808	PK
11			5854.200	58.959	52.141	-53.664	112.623	6.818	PK
12			5855.000	58.213	51.393	-52.587	110.800	6.820	PK
13			5862.200	60.250	53.411	-48.532	108.782	6.838	PK
14			5875.000	57.818	50.900	-47.382	105.200	6.918	PK
15			5884.200	60.322	53.390	-38.046	98.368	6.933	PK
16			5925.000	57.992	50.895	-10.208	68.200	7.097	PK
17		*	5941.000	59.811	52.631	-8.389	68.200	7.180	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

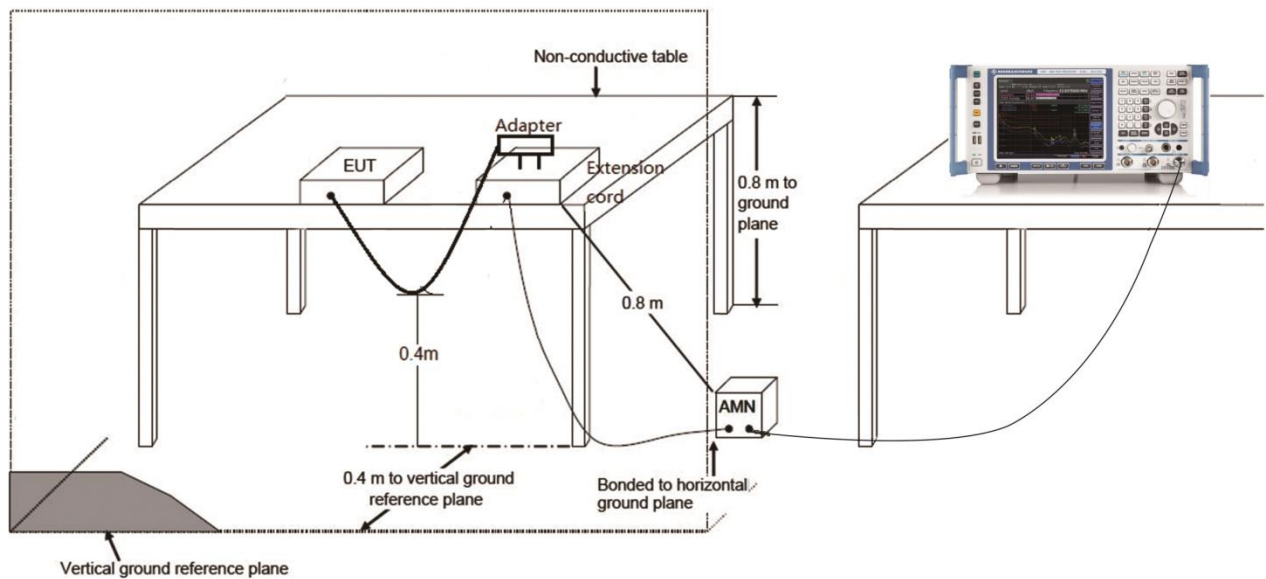

7.10.3.Test Result

Site: SR2	Time: 2020/07/27 - 18:00
Limit: FCC_Part15.207_CE_AC Power	Engineer: Antony Yang
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

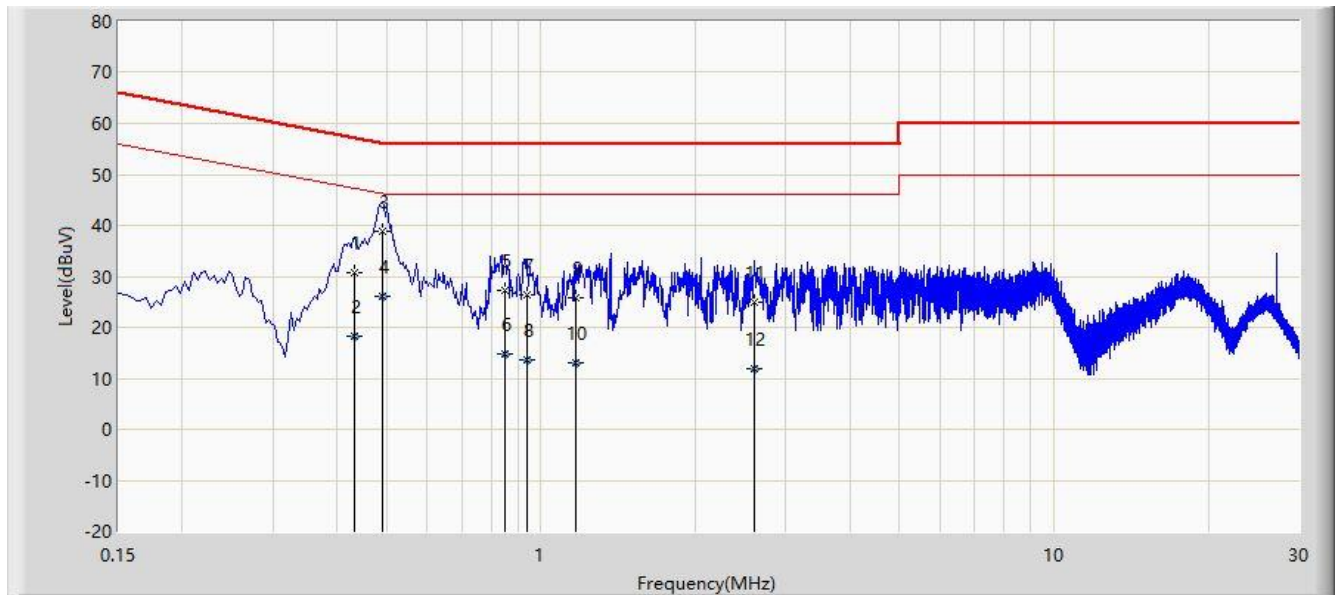


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.434	30.754	21.030	-26.422	57.176	9.723	QP
2			0.434	18.236	8.513	-28.940	47.176	9.723	AV
3		*	0.490	38.874	29.140	-17.294	56.168	9.734	QP
4			0.490	26.137	16.403	-20.030	46.168	9.734	AV
5			0.850	27.371	17.567	-28.629	56.000	9.803	QP
6			0.850	14.675	4.872	-31.325	46.000	9.803	AV
7			0.942	26.495	16.682	-29.505	56.000	9.813	QP
8			0.942	13.547	3.735	-32.453	46.000	9.813	AV
9			1.166	25.895	16.033	-30.105	56.000	9.861	QP
10			1.166	12.965	3.104	-33.035	46.000	9.861	AV
11			2.610	24.788	14.938	-31.212	56.000	9.850	QP
12			2.610	11.927	2.077	-34.073	46.000	9.850	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/07/27 - 19:14
Limit: FCC_Part15.207_CE_AC Power	Engineer: Antony Yang
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Tablet	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

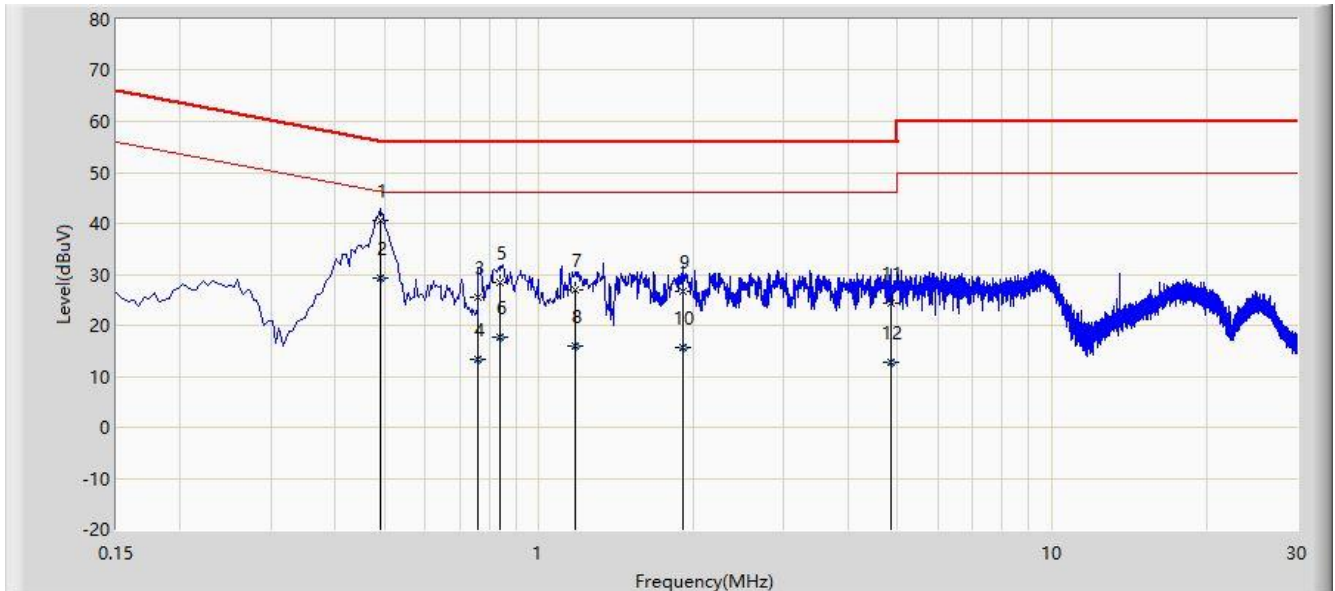

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.490	40.553	30.898	-15.615	56.168	9.654	QP
2			0.490	29.275	19.621	-16.893	46.168	9.654	AV
3			0.762	25.466	15.799	-30.534	56.000	9.667	QP
4			0.762	13.233	3.566	-32.767	46.000	9.667	AV
5			0.842	28.335	18.667	-27.665	56.000	9.668	QP
6			0.842	17.560	7.892	-28.440	46.000	9.668	AV
7			1.178	26.877	17.143	-29.123	56.000	9.735	QP
8			1.178	15.898	6.163	-30.102	46.000	9.735	AV
9			1.906	26.587	16.819	-29.413	56.000	9.768	QP
10			1.906	15.794	6.026	-30.206	46.000	9.768	AV
11			4.854	24.379	14.301	-31.621	56.000	10.079	QP
12			4.854	12.705	2.627	-33.295	46.000	10.079	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2001RSU044-UT” file.

Appendix B-EUT Photograph

Refer to “2001RSU044-UE” file.