

FCC Test Report

Report No.: RFBFPI-WTW-P21123561

FCC ID: SWX-AF60LR

Test Model: AF60-LR

Received Date: 2022/1/6

Test Date: 2022/1/6 ~ 2022/1/24

Issued Date: 2022/2/18

Applicant: Ubiquiti Inc.

Address: 685 Third Avenue, New York, New York 10017 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022 for Test Location (1)
736135 / TW0004 for Test Location (2)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	12
3.4 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission Measurement	15
4.1.1 Limits of Radiated Emission Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures	18
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results (Mode 1)	22
4.1.8 Test Results (Mode 2)	46
4.2 Conducted Emission Measurement	70
4.2.1 Limits of Conducted Emission Measurement	70
4.2.2 Test Instruments	70
4.2.3 Test Procedures	71
4.2.4 Deviation from Test Standard	71
4.2.5 Test Setup	71
4.2.6 EUT Operating Conditions	71
4.2.7 Test Results (Mode 1)	72
4.2.8 Test Results (Mode 2)	78
4.3 6dB Bandwidth Measurement	84
4.3.1 Limits of 6dB Bandwidth Measurement	84
4.3.2 Test Setup	84
4.3.3 Test Instruments	84
4.3.4 Test Procedure	85
4.3.5 Deviation from Test Standard	85
4.3.6 EUT Operating Conditions	85
4.3.7 Test Result (Mode 1)	86
4.3.8 Test Result (Mode 2)	87
4.4 Output Power Measurement	88
4.4.1 Limits of Output Power Measurement	88
4.4.2 Test Setup	89
4.4.3 Test Instruments	89
4.4.4 Test Procedures	90
4.4.5 Deviation from Test Standard	90
4.4.6 EUT Operating Conditions	90
4.4.7 Test Results (Mode 1)	91
4.4.8 Test Results (Mode 2)	93
4.5 Frequency Stability Measurement	95
4.5.1 Limits of Frequency Stability Measurement	95
4.5.2 Test Setup	95
4.5.3 Test Instruments	96

4.5.4 Test Procedure	96
4.5.5 Deviation from Test Standard	96
4.5.6 EUT Operating Condition	96
4.5.7 Test Results (Mode 1).....	97
4.5.8 Test Results (Mode 2).....	98
5 Pictures of Test Arrangements.....	99
Appendix – Information of the Testing Laboratories	100

Release Control Record

Issue No.	Description	Date Issued
RFBFPI-WTW-P21123561	Original release.	2022/2/18

1 Certificate of Conformity

Product: airFiber 60 LR

Brand: UBIQUITI

Test Model: AF60-LR

Sample Status: Engineering sample


Applicant: Ubiquiti Inc.

Test Date: 2022/1/6 ~ 2022/1/24

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.255)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

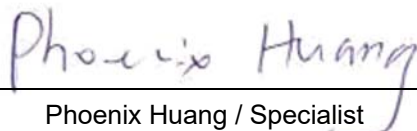
Phoenix Huang / Specialist

Date:

2022/2/18

Approved by :



Clark Lin / Technical Manager

Date:

2022/2/18

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.255)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -4.32 dB at 0.52891 MHz.
15.255(e)	6dB Bandwidth	-	Reference only.
15.255 (c) & (e)	Output Power	Pass	Meet the requirement of limit.
15.255(d)	Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -2.7 dB at 37.03 MHz.
15.255(f)	Frequency Stability	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB
	40GHz ~ 200GHz	5.4 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	airFiber 60 LR
Brand	UBIQUITI
Test Model	AF60-LR
Status of EUT	Engineering sample
Power Supply Method	48 Vdc from POE
Modulation Type	$\pi/2$ -BPSK, $\pi/2$ -QPSK, $\pi/2$ -16QAM
Modulation Technology	OFDM
Transfer Rate	4620 Mbps
Operating Frequency	58.32 ~ 69.12 GHz
Output Power (EIRP)	58.85 dBm
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	POE x 1
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC Class II permissive change. The difference compared with the Report No.: RF200312E01 design is as the following information:

- ◆ Add the operation channels before 64.8GHz by software.

2. According to above conditions, for new channels all of test items need to be performed and all data was verified to meet the requirements.

3. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
Bluetooth	WiGig (60GHz)	GPS

4. Simultaneously transmission condition.

Condition	Technology	
1	Bluetooth	WiGig (60GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The antenna information is listed as below.

With Dish Antenna Gain (dBi)	Frequency Range (GHz)	Connector Type
38	57-71	None

6. The EUT must be supplied with a POE as following table:

Brand	Model No.	Spec.
UBIQUITI	GP-H480-065G	AC Input: 100-240 Vac, 0.75 A, 50/60 Hz DC Output: 48 Vdc, 0.65 A DC Output Cable: Unshielded, 0.6 m

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for EUT and support Bandwidth 1080MHz and 2160MHz.

Channel	Frequency (GHz)	Channel	Frequency (GHz)	Channel	Frequency (GHz)
1	58.32	3	62.64	5	66.96
1.5	59.40	3.5	63.72	5.5	68.04
2	60.48	4	64.80	6	69.12
2.5	61.56	4.5	65.88		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO						DESCRIPTION
	PLC	BW	OP	FS	RE < 1G	RE ≥ 1G	
1	√	√	√	√	√	√	Bandwidth 1080MHz
2	√	√	√	√	√	√	Bandwidth 2160MHz

Where **PLC**: Power Line Conducted Emission **BW**: 6dB Bandwidth
OP: Output Power **FS**: Frequency Stability
RE < 1G: Radiated Emission below 1GHz **RE ≥ 1G**: Radiated Emission above 1GHz

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 2, 3.5	OFDM	$\pi/2$ -BPSK	385

6dB Bandwidth Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 2, 3.5	OFDM	$\pi/2$ -BPSK	385

Output Power Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 2, 3.5	OFDM	$\pi/2$ -BPSK	385

Frequency Stability Test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 3.5	OFDM	$\pi/2$ -BPSK	385

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 2, 3.5	OFDM	$\pi/2$ -BPSK	385

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1 to 6	1, 2, 3.5	OFDM	$\pi/2$ -BPSK	385

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25 deg. C, 75 %RH	120Vac, 60Hz	Cart Lin
BW	24 deg. C, 63 %RH	120Vac, 60Hz	Spencer Liao
OP	25 deg. C, 66 %RH	120Vac, 60Hz	Spencer Liao
FS	24 deg. C, 63 %RH	120Vac, 60Hz	Spencer Liao
RE<1G	25 deg. C, 65 %RH	120Vac, 60Hz	Nelson Teng
RE≥1G	25 deg. C, 65~66 %RH	120Vac, 60Hz	Nelson Teng, Spencer Liao

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	3	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	AC Cable	1	0.6	No	0	Supplied by client

3.3.1 Configuration of System under Test

For AC Power Conducted Emission test:

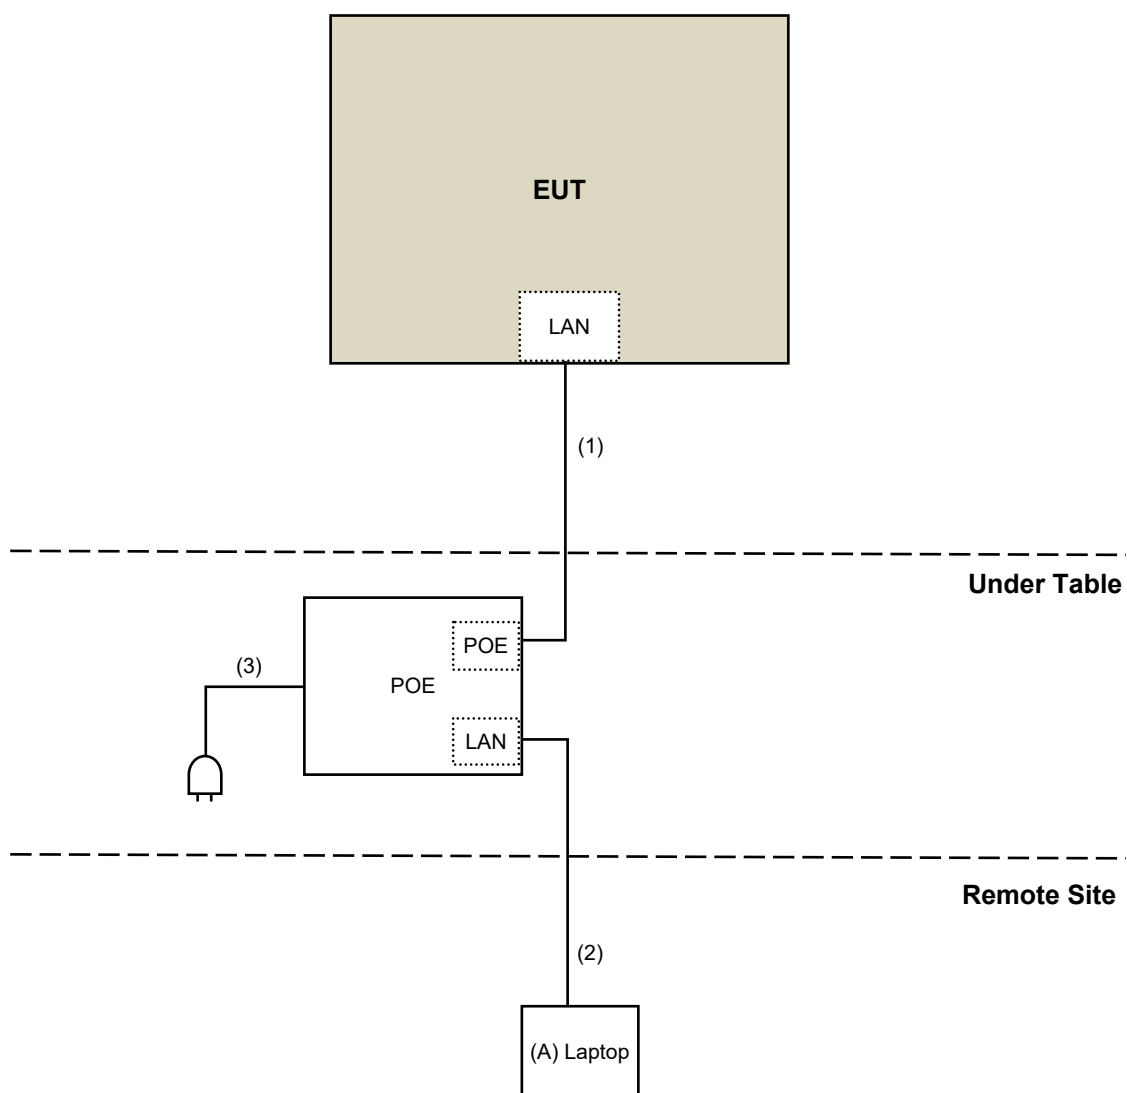

For Radiated Emission test:

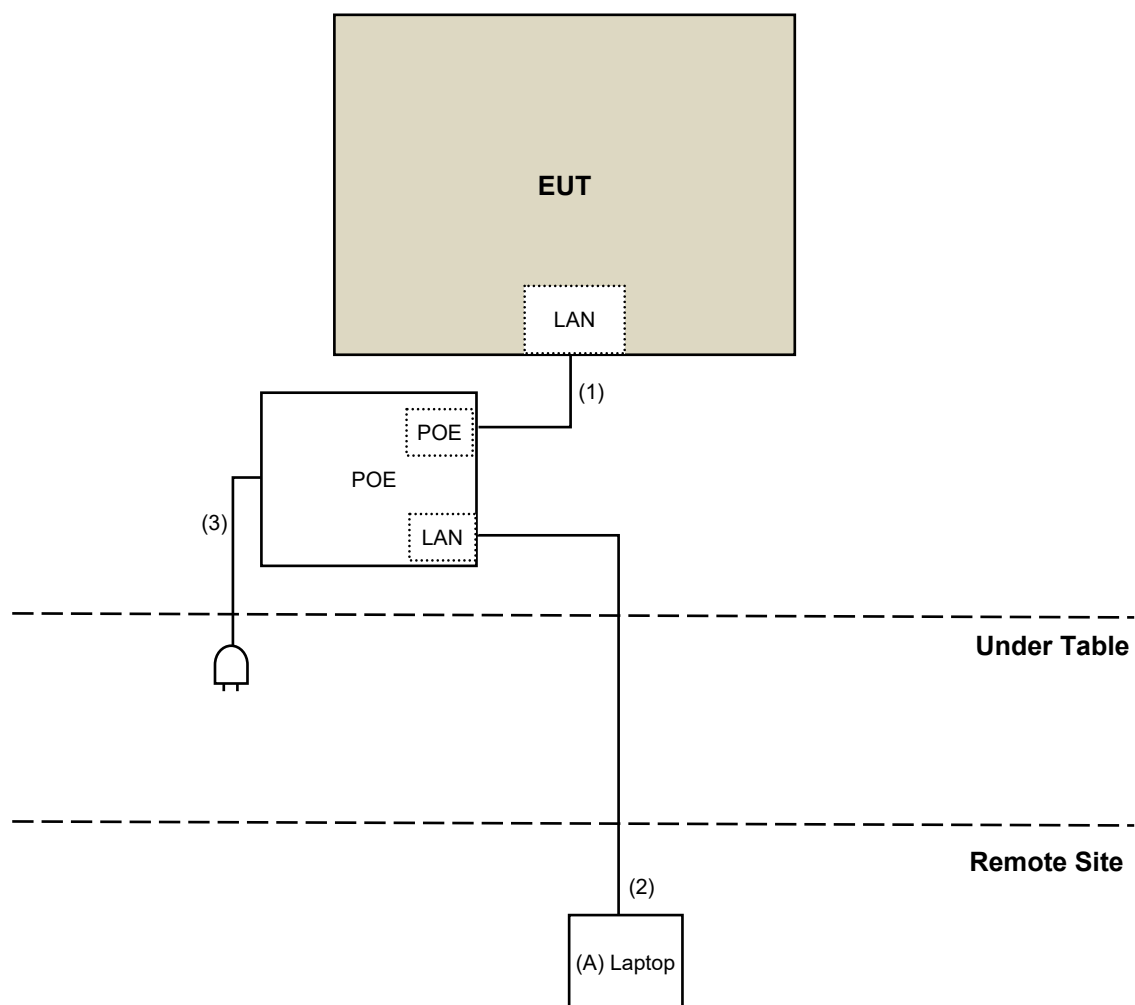

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.255)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

Spurious Emission	
Frequency Range	Limitation
Radiated emissions below 40GHz	Part 15.209
Between 40GHz and 200GHz	90pW/cm ² (at 3 meter)
Note: The levels of the spurious emissions shall not exceed the level of the fundamental emission	

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.

4.1.2 Test Instruments

For below 40GHz test:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R&S	ESR3	102528	2021/3/2	2022/3/1
Spectrum Analyzer KEYSIGHT	N9030B	MY57141948	2021/5/21	2022/5/20
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Pre_Amplifier EMCi	EMC001340	980142	2021/5/24	2022/5/23
LOOP ANTENNA Electro-Metrics	EM-6879	264	2021/3/5	2022/3/4
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/1/6	2023/1/5
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2022/1/6	2023/1/5
Pre_Amplifier EMCi	EMC330N	980538	2021/4/26	2022/4/25
Bilog Antenna Schwarzbeck	VULB 9168	9168-0842	2021/10/26	2022/10/25
RF Coaxial Cable COMMATE/PEWC	8D	966-5-1	2021/4/26	2022/4/25
RF Coaxial Cable COMMATE/PEWC	8D	966-5-2	2021/4/26	2022/4/25
RF Coaxial Cable COMMATE/PEWC	8D	966-5-3	2021/4/26	2022/4/25
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2022/1/10	2023/1/9
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2021/11/14	2022/11/13
Pre_Amplifier EMCi	EMC12630SE	980509	2021/4/26	2022/4/25
RF Coaxial Cable EMCi	EMC104-SM-SM-1500	180503	2021/4/26	2022/4/25
RF Coaxial Cable EMCi	EMC104-SM-SM-2000	180501	2021/4/26	2022/4/25
RF Coaxial Cable EMCi	EMC104-SM-SM-6000	180506	2021/4/26	2022/4/25
Pre_Amplifier EMCi	EMC184045SE	980387	2022/1/10	2023/1/9
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170519	2021/11/14	2022/11/13
RF Cable-Frequency range: 1-40GHz EMCi	EMC102-KM-KM-1200	160924	2022/1/10	2023/1/9
RF cable (40GHz) EMCi	EMC-KM-KM-4000	200214	2021/3/10	2022/3/9

- Note: 1. The test was performed in 966 Chamber No. 5.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2022/1/24

For above 40GHz test:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Keysight	N9030A	MY55330160	2021/2/5	2022/2/4
Zero-Bias Detector Vdi	WR15ZBD	WR15R5 1-30	CoC	CoC
4CH Infiniivision Oscilloscope Keysight	DSOX6004A	MY55190202	2021/6/28	2022/6/27
OXE89 Horn Antenna (33~55GHz) QuinStar	QWH-QPRR00	QWH-QPRR00-1	2021/6/11	2022/6/10
Conical Horn Antenna (50~75GHz) Keysight	WR15CH-Conical	RCHO15RL-1	2021/6/11	2022/6/10
Conical Horn Antenna (75~110GHz) Keysight	WR10CH-Conical	RCHO10RL-1	2021/6/11	2022/6/10
Conical Horn Antenna (110~170GHz) Keysight	WR6.5CH-Conical	RCHO6RL-1	2021/6/11	2022/6/10
Conical Horn Antenna (140~220GHz) Keysight	WR5.1CH-Conical	RCHO5RL-1	2021/6/11	2022/6/10
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
N9029AV10-DC9 - 75-110 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR10	SAX 378	CoC	CoC
N9029AV06-DC9 - 110-170 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR6.5	SAX 377	CoC	CoC
N9029AV05-DC9 - 140-220 GHz VDI Standard Downconverter with 9VDC supply Keysight	N9029AV05	SAX722	2021/6/11	2022/6/10
Power Meter VDI	PM5B	571V	2021/6/11	2022/6/10
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

- Note: 1. The test was performed in HC - 10m Chamber 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2022/1/21 ~ 2022/1/22

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission 30MHz to 40GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 40GHz


- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer to the spectrum analyzer.
- b. Set spectrum analyzer RBW = 1 MHz, VBW = 3 MHz, average detector.
- c. Calculate the distance to the far field boundary and determine the maximum measurement distance.
- d. Perform an exploratory search for emissions and determine the approximate direction at which each observed emission emanates from the EUT.
- e. Exploratory measurements be made at a closer distance than the validated maximum measurement distance.
- f. Perform a final measurement; begin with the test antenna at the approximate position where the maximum level occurred during the exploratory scan.
- g. Slowly scan the test antenna around this position, slowly vary the test antenna polarization by rotating through at least 0° to 180°, and slowly vary the orientation of the test antenna to find the final position, polarization, and orientation at which the maximum level of the emission is observed.
- h. Record the measured reading with the test antenna fixed at this maximized position, polarization, and orientation. Record the measurement distance.
- i. Calculate the maximum field strength of the emission at the measurement distance and the adjusted/corrected power at the output of the test antenna.
- j. Calculate the EIRP from the measured field strength and then convert to the linear.
- k. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit.
- l. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

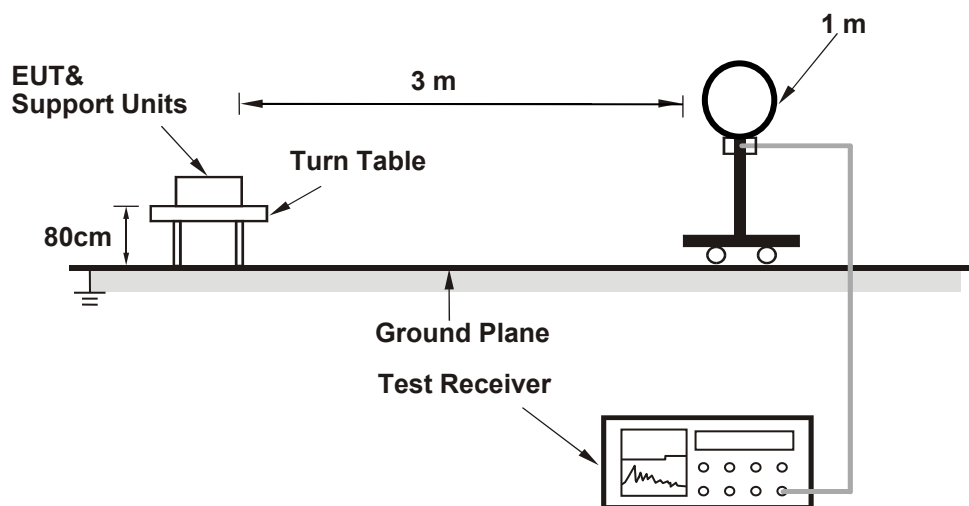


For Radiated emission 30MHz to 1GHz

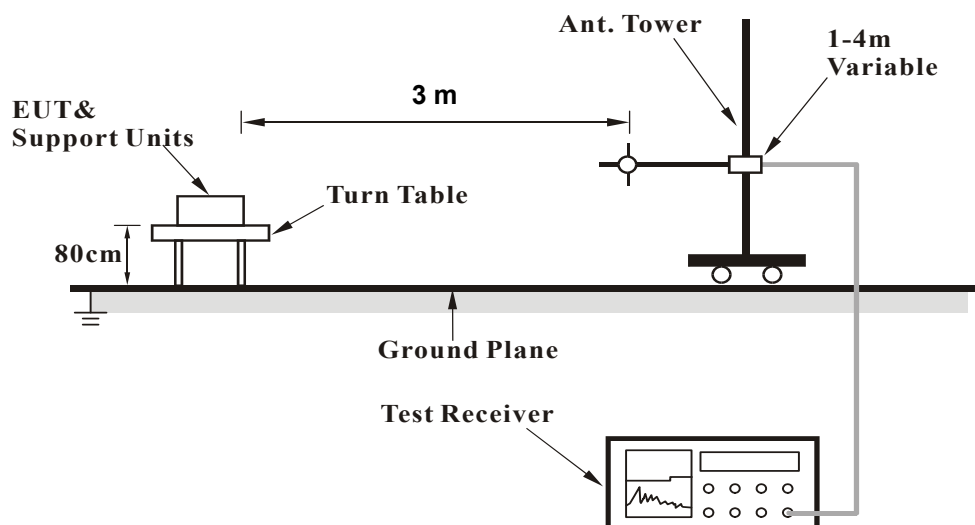

For Radiated emission 1GHz to 50GHz

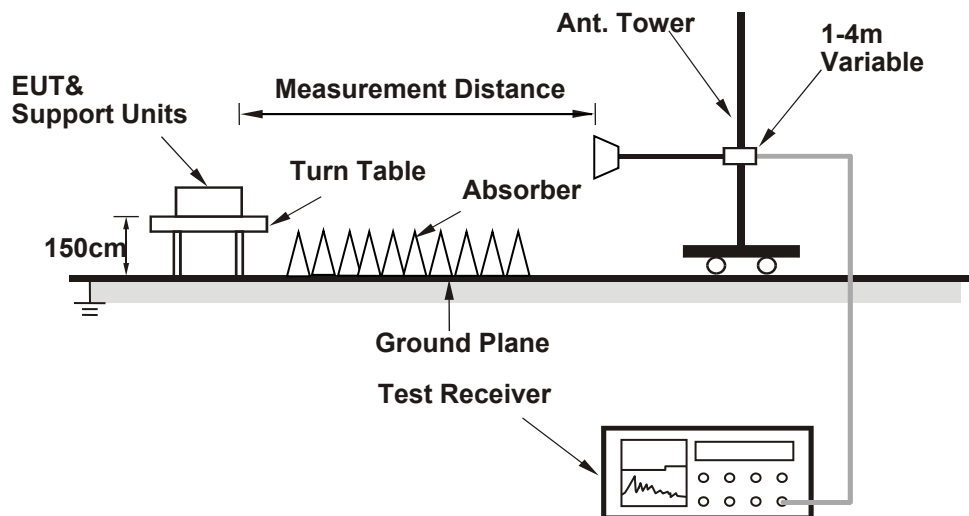

For Radiated emission above 50GHz

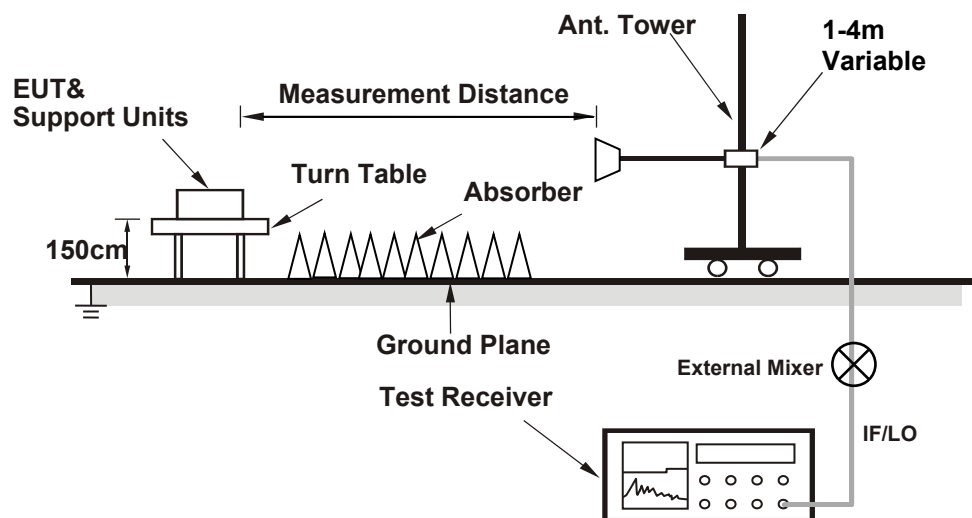

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (HyperTerminal paste AF60LR-60G Command 0326.txt command) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Above 1GHz Data:


For 1~18 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1754.12	54.8 PK	74.0	-19.2	3.39 H	66	60.2	-5.4
2	1754.12	43.6 AV	54.0	-10.4	3.39 H	66	49.0	-5.4
3	4035.42	46.7 PK	74.0	-27.3	2.12 H	348	46.7	0.0
4	4035.42	36.1 AV	54.0	-17.9	2.12 H	348	36.1	0.0
5	9493.83	49.4 PK	74.0	-24.6	1.45 H	313	38.9	10.5
6	9493.83	37.4 AV	54.0	-16.6	1.45 H	313	26.9	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

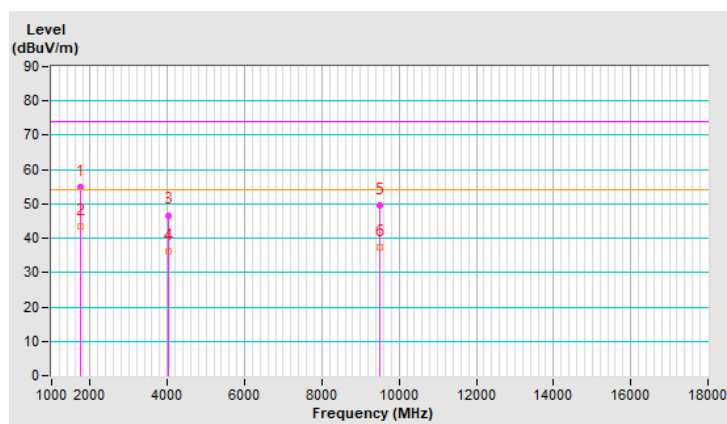


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.82	45.1 PK	74.0	-28.9	3.30 V	11	45.1	0.0
2	4036.82	33.7 AV	54.0	-20.3	3.30 V	11	33.7	0.0
3	7997.09	47.7 PK	74.0	-26.3	1.14 V	38	39.2	8.5
4	7997.09	34.5 AV	54.0	-19.5	1.14 V	38	26.0	8.5
5	11729.64	52.6 PK	74.0	-21.4	3.80 V	326	41.1	11.5
6	11729.64	37.5 AV	54.0	-16.5	3.80 V	326	26.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

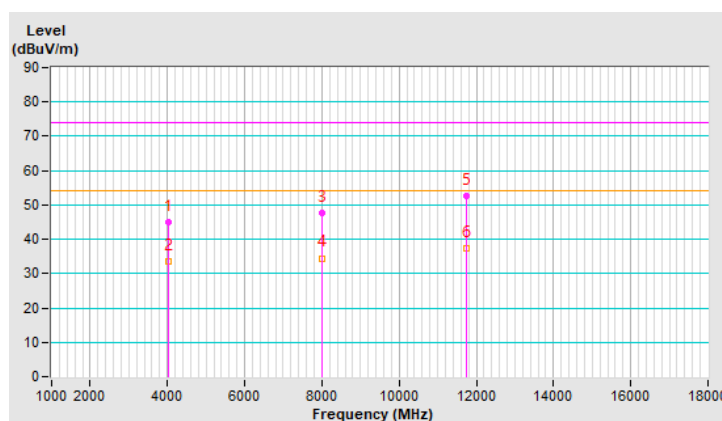


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1754.09	55.6 PK	74.0	-18.4	3.42 H	43	61.0	-5.4
2	1754.09	44.0 AV	54.0	-10.0	3.42 H	43	49.4	-5.4
3	4035.42	46.9 PK	74.0	-27.1	2.12 H	334	46.9	0.0
4	4035.42	36.0 AV	54.0	-18.0	2.12 H	334	36.0	0.0
5	9494.32	49.2 PK	74.0	-24.8	1.44 H	296	38.7	10.5
6	9494.32	38.0 AV	54.0	-16.0	1.44 H	296	27.5	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

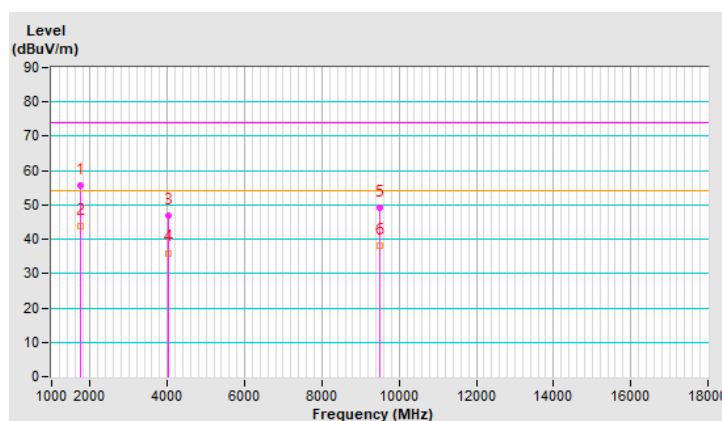


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.09	45.3 PK	74.0	-28.7	3.31 V	26	45.3	0.0
2	4036.09	33.2 AV	54.0	-20.8	3.31 V	26	33.2	0.0
3	7996.85	48.0 PK	74.0	-26.0	1.23 V	33	39.5	8.5
4	7996.85	34.2 AV	54.0	-19.8	1.23 V	33	25.7	8.5
5	11729.02	52.4 PK	74.0	-21.6	3.77 V	352	40.9	11.5
6	11729.02	37.4 AV	54.0	-16.6	3.77 V	352	25.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

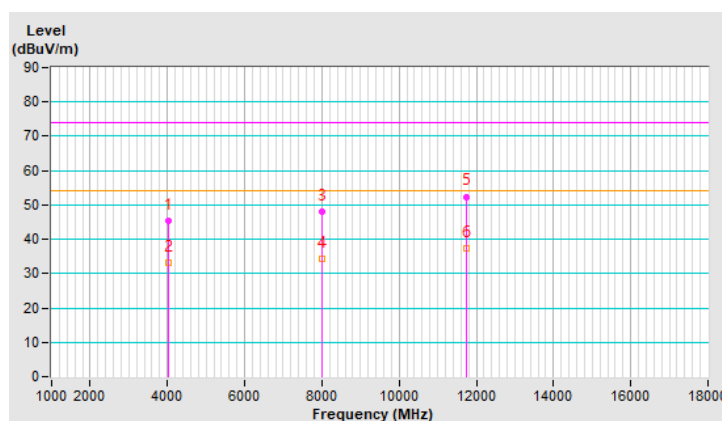


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1753.70	54.9 PK	74.0	-19.1	3.45 H	57	60.3	-5.4
2	1753.70	43.9 AV	54.0	-10.1	3.45 H	57	49.3	-5.4
3	4035.36	47.4 PK	74.0	-26.6	2.10 H	342	47.4	0.0
4	4035.36	35.7 AV	54.0	-18.3	2.10 H	342	35.7	0.0
5	9494.19	49.1 PK	74.0	-24.9	1.42 H	312	38.6	10.5
6	9494.19	37.7 AV	54.0	-16.3	1.42 H	312	27.2	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

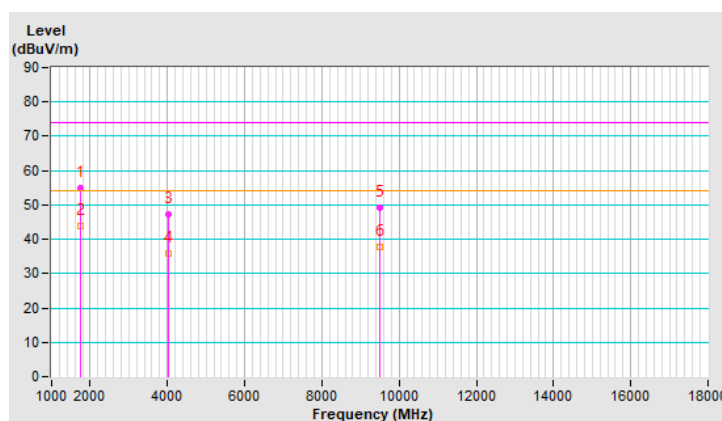


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.38	45.8 PK	74.0	-28.2	3.27 V	0	45.8	0.0
2	4036.38	33.1 AV	54.0	-20.9	3.27 V	0	33.1	0.0
3	7997.02	47.1 PK	74.0	-26.9	1.11 V	29	38.6	8.5
4	7997.02	34.6 AV	54.0	-19.4	1.11 V	29	26.1	8.5
5	11729.65	52.2 PK	74.0	-21.8	3.88 V	345	40.7	11.5
6	11729.65	37.9 AV	54.0	-16.1	3.88 V	345	26.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

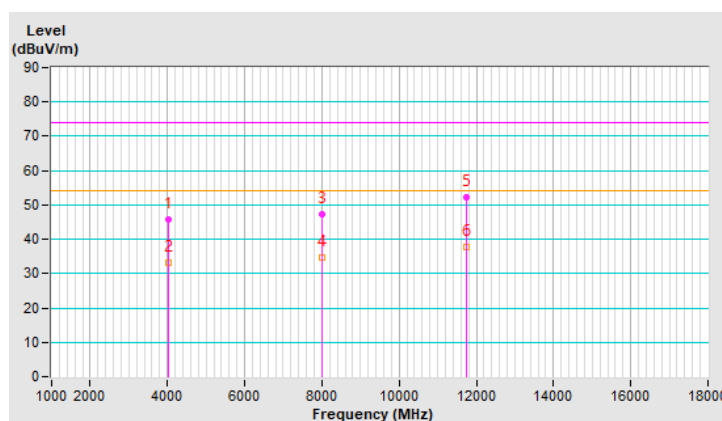


For 18~40 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.28	41.4 PK	74.0	-32.6	2.19 H	138	42.7	-1.3
2	25293.28	30.9 AV	54.0	-23.1	2.19 H	138	32.2	-1.3
3	29927.76	45.5 PK	74.0	-28.5	1.65 H	231	46.2	-0.7
4	29927.76	33.6 AV	54.0	-20.4	1.65 H	231	34.3	-0.7
5	33121.40	53.7 PK	74.0	-20.3	1.57 H	334	55.5	-1.8
6	33121.40	40.9 AV	54.0	-13.1	1.57 H	334	42.7	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

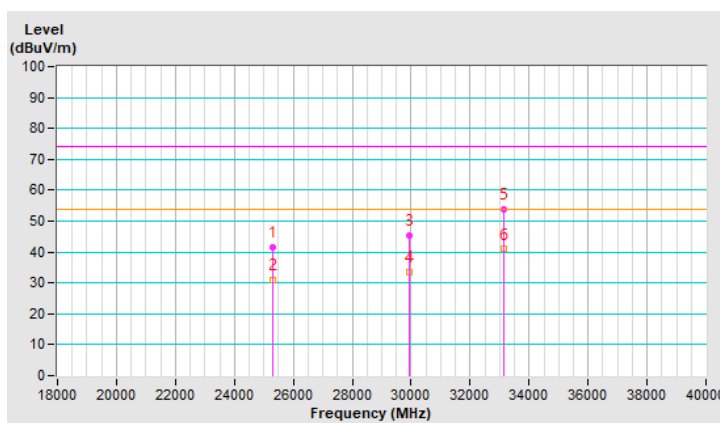


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22295.34	41.0 PK	74.0	-33.0	2.18 V	123	44.3	-3.3
2	22295.34	31.8 AV	54.0	-22.2	2.18 V	123	35.1	-3.3
3	27929.04	43.4 PK	74.0	-30.6	1.72 V	214	44.6	-1.2
4	27929.04	35.3 AV	54.0	-18.7	1.72 V	214	36.5	-1.2
5	34119.15	51.3 PK	74.0	-22.7	1.51 V	327	52.6	-1.3
6	34119.15	40.1 AV	54.0	-13.9	1.51 V	327	41.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

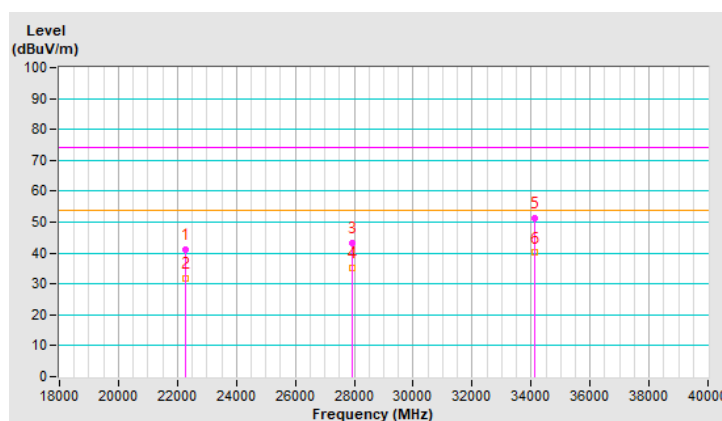


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.06	41.0 PK	74.0	-33.0	2.19 H	149	42.3	-1.3
2	25293.06	30.8 AV	54.0	-23.2	2.19 H	149	32.1	-1.3
3	29927.56	45.7 PK	74.0	-28.3	1.74 H	204	46.4	-0.7
4	29927.56	33.2 AV	54.0	-20.8	1.74 H	204	33.9	-0.7
5	33121.02	52.9 PK	74.0	-21.1	1.57 H	328	54.7	-1.8
6	33121.02	41.1 AV	54.0	-12.9	1.57 H	328	42.9	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

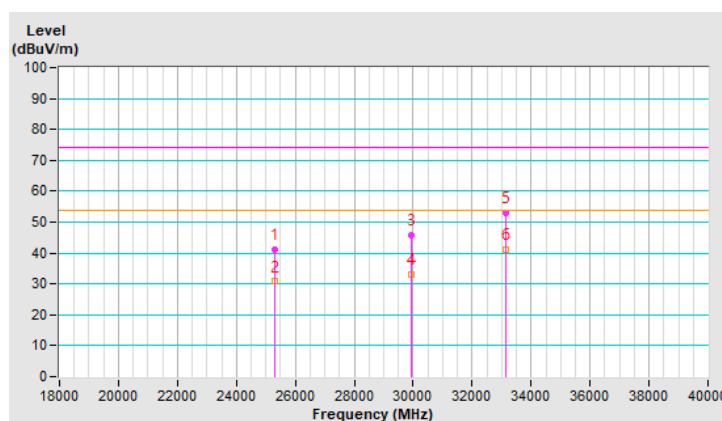


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22294.62	40.5 PK	74.0	-33.5	2.22 V	145	43.8	-3.3
2	22294.62	32.1 AV	54.0	-21.9	2.22 V	145	35.4	-3.3
3	27928.91	43.0 PK	74.0	-31.0	1.79 V	213	44.2	-1.2
4	27928.91	35.6 AV	54.0	-18.4	1.79 V	213	36.8	-1.2
5	34119.62	51.3 PK	74.0	-22.7	1.54 V	328	52.6	-1.3
6	34119.62	41.0 AV	54.0	-13.0	1.54 V	328	42.3	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

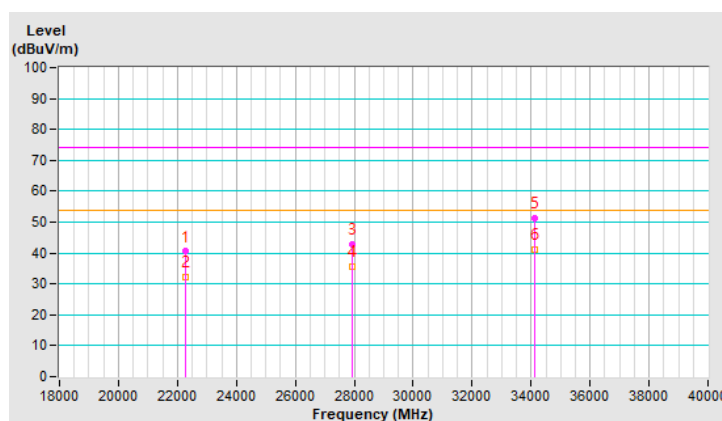


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.30	41.7 PK	74.0	-32.3	2.25 H	140	43.0	-1.3
2	25293.30	31.5 AV	54.0	-22.5	2.25 H	140	32.8	-1.3
3	29927.99	45.6 PK	74.0	-28.4	1.66 H	227	46.3	-0.7
4	29927.99	33.2 AV	54.0	-20.8	1.66 H	227	33.9	-0.7
5	33121.37	53.7 PK	74.0	-20.3	1.65 H	345	55.5	-1.8
6	33121.37	41.4 AV	54.0	-12.6	1.65 H	345	43.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

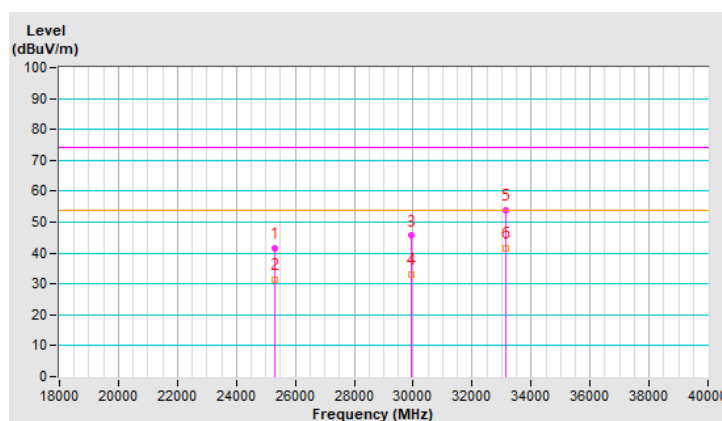


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22295.29	40.4 PK	74.0	-33.6	2.20 V	127	43.7	-3.3
2	22295.29	31.7 AV	54.0	-22.3	2.20 V	127	35.0	-3.3
3	27929.15	43.9 PK	74.0	-30.1	1.80 V	184	45.1	-1.2
4	27929.15	35.3 AV	54.0	-18.7	1.80 V	184	36.5	-1.2
5	34119.20	50.8 PK	74.0	-23.2	1.45 V	312	52.1	-1.3
6	34119.20	40.8 AV	54.0	-13.2	1.45 V	312	42.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

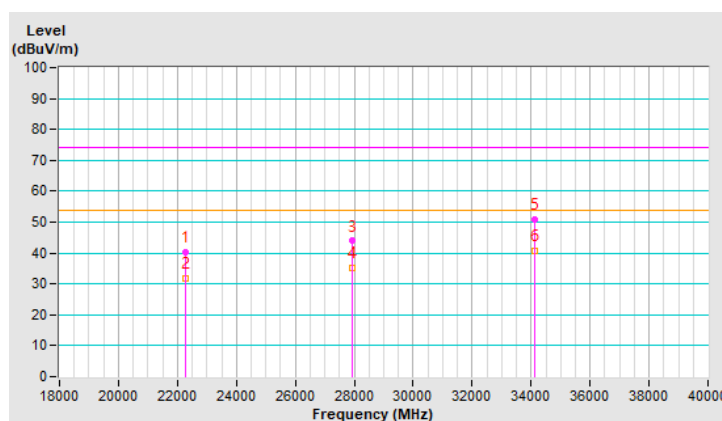

For above 40 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.34	-56.40	-85.78	20.30	65.04	-39.66	0.10	90.00	-89.90	Pass
2	55.04	-92.78	-88.56	19.90	63.61	-41.09	0.07	90.00	-89.93	Pass
3	74.27	-92.66	-87.67	21.40	65.60	-39.10	0.11	90.00	-89.89	Pass
4	102.38	-92.24	-86.36	21.50	69.60	-35.10	0.27	90.00	-89.73	Pass
5	169.62	-93.08	-92.44	20.50	68.91	-35.79	0.23	90.00	-89.77	Pass
6	194.88	-92.75	-87.50	23.90	71.65	-33.05	0.44	90.00	-89.56	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.34	-56.41	-85.46	20.30	65.36	-39.34	0.10	90.00	-89.90	Pass
2	55.13	-92.70	-88.97	19.90	63.22	-41.48	0.06	90.00	-89.94	Pass
3	74.06	-92.45	-87.81	21.40	65.44	-39.26	0.10	90.00	-89.90	Pass
4	102.31	-92.27	-86.64	21.50	69.32	-35.38	0.26	90.00	-89.74	Pass
5	169.51	-93.04	-92.85	20.50	68.49	-36.21	0.21	90.00	-89.79	Pass
6	195.02	-92.39	-87.53	23.90	71.63	-33.07	0.44	90.00	-89.56	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{\text{Meas}} (\text{dB}\mu\text{V/m}) = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{\text{Meas}} (\text{dB}\mu\text{V/m}) + 20 \cdot \log(d_{\text{Meas}}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111

RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.32	-56.18	-86.00	20.30	64.82	-39.88	0.09	90.00	-89.91	Pass
2	55.05	-92.53	-88.66	19.90	63.51	-41.19	0.07	90.00	-89.93	Pass
3	73.97	-92.31	-87.71	21.40	65.53	-39.17	0.11	90.00	-89.89	Pass
4	102.46	-92.06	-86.62	21.50	69.35	-35.35	0.26	90.00	-89.74	Pass
5	169.61	-92.80	-92.48	20.50	68.87	-35.83	0.23	90.00	-89.77	Pass
6	195.20	-92.67	-87.43	23.90	71.74	-32.96	0.45	90.00	-89.55	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.04	-56.60	-85.52	20.30	65.25	-39.45	0.10	90.00	-89.90	Pass
2	54.89	-92.71	-88.98	19.90	63.17	-41.53	0.06	90.00	-89.94	Pass
3	74.32	-92.37	-87.86	21.40	65.42	-39.28	0.10	90.00	-89.90	Pass
4	102.29	-92.45	-86.72	21.50	69.23	-35.47	0.25	90.00	-89.75	Pass
5	169.76	-93.19	-92.57	20.50	68.78	-35.92	0.23	90.00	-89.77	Pass
6	195.23	-92.67	-87.29	23.90	71.88	-32.82	0.46	90.00	-89.54	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{Meas} \text{ (dB}\mu\text{V/m)} = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{Meas} \text{ (dB}\mu\text{V/m)} + 20 \cdot \log(d_{Meas}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111

RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	48.97	-56.29	-85.81	20.30	64.95	-39.75	0.09	90.00	-89.91	Pass
2	54.97	-92.73	-88.63	19.90	63.53	-41.17	0.07	90.00	-89.93	Pass
3	74.28	-92.25	-87.58	21.40	65.70	-39.00	0.11	90.00	-89.89	Pass
4	102.29	-92.09	-86.79	21.50	69.16	-35.54	0.25	90.00	-89.75	Pass
5	169.84	-92.87	-92.50	20.50	68.86	-35.84	0.23	90.00	-89.77	Pass
6	194.83	-92.84	-87.54	23.90	71.61	-33.09	0.43	90.00	-89.57	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.03	-56.28	-85.74	20.30	65.03	-39.67	0.10	90.00	-89.90	Pass
2	54.92	-92.70	-88.90	19.90	63.25	-41.45	0.06	90.00	-89.94	Pass
3	74.07	-92.42	-87.71	21.40	65.54	-39.16	0.11	90.00	-89.89	Pass
4	102.32	-92.03	-86.96	21.50	69.00	-35.70	0.24	90.00	-89.76	Pass
5	169.50	-93.00	-92.77	20.50	68.57	-36.13	0.22	90.00	-89.78	Pass
6	195.05	-92.58	-87.37	23.90	71.79	-32.91	0.45	90.00	-89.55	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{Meas} \text{ (dB}\mu\text{V/m)} = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{Meas} \text{ (dB}\mu\text{V/m)} + 20 \cdot \log(d_{Meas}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111


Below 1GHz Data:

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.42	29.8 QP	40.0	-10.2	1.33 H	360	43.1	-13.3
2	110.41	30.2 QP	43.5	-13.3	2.12 H	6	46.1	-15.9
3	162.66	37.4 QP	43.5	-6.1	2.23 H	117	50.2	-12.8
4	209.03	30.8 QP	43.5	-12.7	1.40 H	88	47.0	-16.2
5	225.00	31.7 QP	46.0	-14.3	1.08 H	65	47.6	-15.9
6	282.80	25.2 QP	46.0	-20.8	1.00 H	217	37.9	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

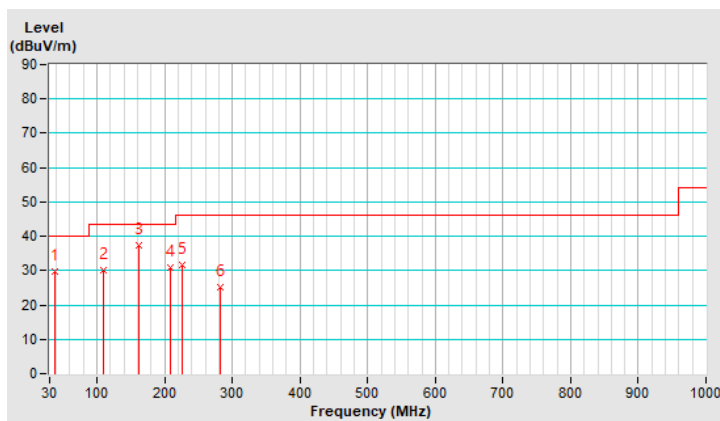


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.24	36.9 QP	40.0	-3.1	1.00 V	89	50.5	-13.6
2	57.57	32.3 QP	40.0	-7.7	1.11 V	115	45.5	-13.2
3	85.24	36.2 QP	40.0	-3.8	2.05 V	29	54.6	-18.4
4	151.92	36.4 QP	43.5	-7.1	1.22 V	295	49.0	-12.6
5	205.54	31.7 QP	43.5	-11.8	1.45 V	49	47.9	-16.2
6	334.22	24.5 QP	46.0	-21.5	1.80 V	233	35.7	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

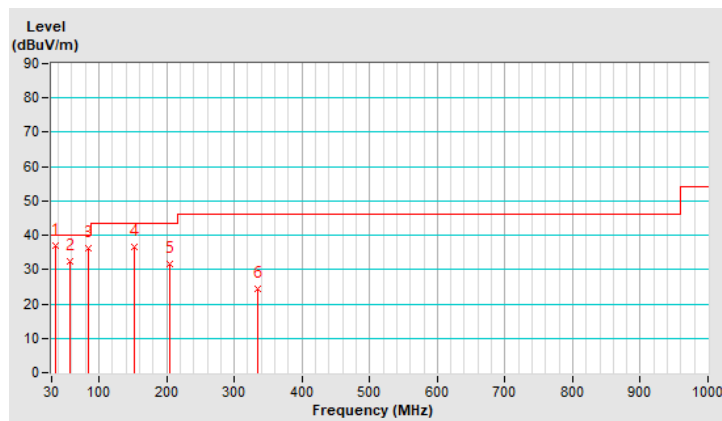


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.00	29.5 QP	40.0	-10.5	1.32 H	360	42.8	-13.3
2	110.07	30.2 QP	43.5	-13.3	2.20 H	10	46.1	-15.9
3	163.02	38.0 QP	43.5	-5.5	2.24 H	106	50.8	-12.8
4	209.13	31.3 QP	43.5	-12.2	1.38 H	90	47.5	-16.2
5	224.90	32.1 QP	46.0	-13.9	1.00 H	90	48.0	-15.9
6	282.89	24.9 QP	46.0	-21.1	1.06 H	213	37.6	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

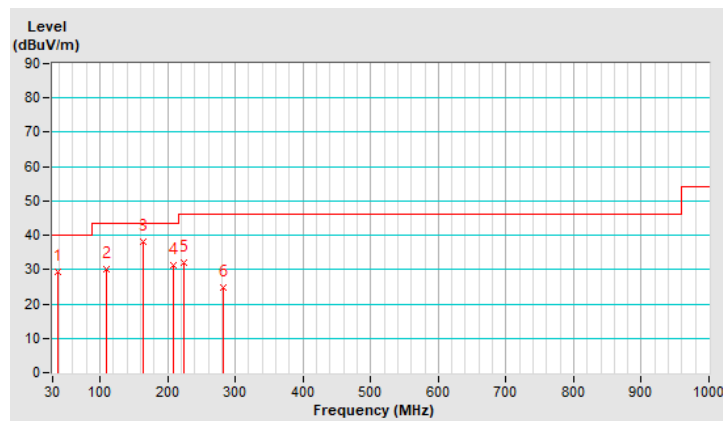


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.35	36.9 QP	40.0	-3.1	1.06 V	98	50.4	-13.5
2	57.94	32.3 QP	40.0	-7.7	1.22 V	115	45.6	-13.3
3	85.52	35.6 QP	40.0	-4.4	2.13 V	19	54.1	-18.5
4	151.45	36.0 QP	43.5	-7.5	1.15 V	269	48.6	-12.6
5	205.90	31.9 QP	43.5	-11.6	1.47 V	60	48.1	-16.2
6	333.45	24.4 QP	46.0	-21.6	1.79 V	260	35.6	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

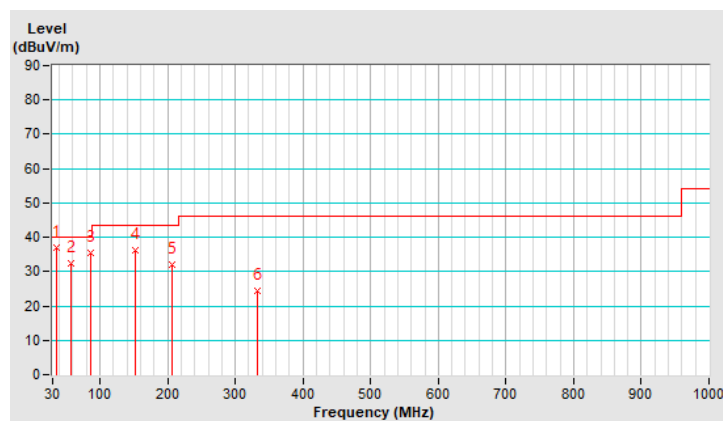


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.15	29.0 QP	40.0	-11.0	1.38 H	359	42.3	-13.3
2	110.17	29.9 QP	43.5	-13.6	2.14 H	4	45.8	-15.9
3	163.23	37.4 QP	43.5	-6.1	2.26 H	105	50.2	-12.8
4	209.15	30.7 QP	43.5	-12.8	1.43 H	86	46.9	-16.2
5	225.18	31.6 QP	46.0	-14.4	1.09 H	82	47.4	-15.8
6	283.24	24.6 QP	46.0	-21.4	1.09 H	231	37.3	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

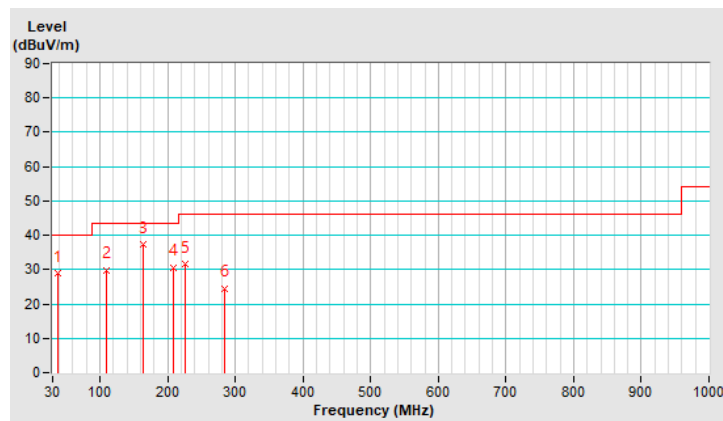


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.03	37.3 QP	40.0	-2.7	1.01 V	94	50.8	-13.5
2	57.61	33.0 QP	40.0	-7.0	1.11 V	129	46.2	-13.2
3	85.64	36.3 QP	40.0	-3.7	2.13 V	10	54.8	-18.5
4	151.80	36.3 QP	43.5	-7.2	1.18 V	285	48.9	-12.6
5	205.55	31.8 QP	43.5	-11.7	1.46 V	48	48.0	-16.2
6	333.40	23.9 QP	46.0	-22.1	1.82 V	247	35.1	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

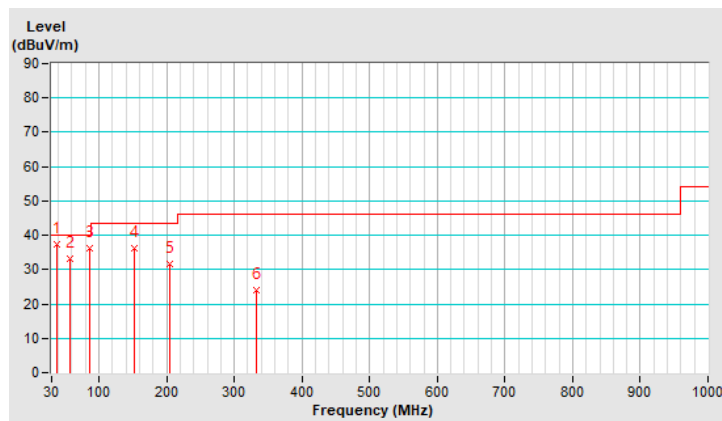

4.1.8 Test Results (Mode 2)

Above 1GHz Data:


For 1~18 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1753.80	55.1 PK	74.0	-18.9	3.40 H	51	60.5	-5.4
2	1753.80	43.8 AV	54.0	-10.2	3.40 H	51	49.2	-5.4
3	4035.32	47.1 PK	74.0	-26.9	2.10 H	336	47.1	0.0
4	4035.32	36.0 AV	54.0	-18.0	2.10 H	336	36.0	0.0
5	9493.84	49.3 PK	74.0	-24.7	1.43 H	302	38.8	10.5
6	9493.84	37.8 AV	54.0	-16.2	1.43 H	302	27.3	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

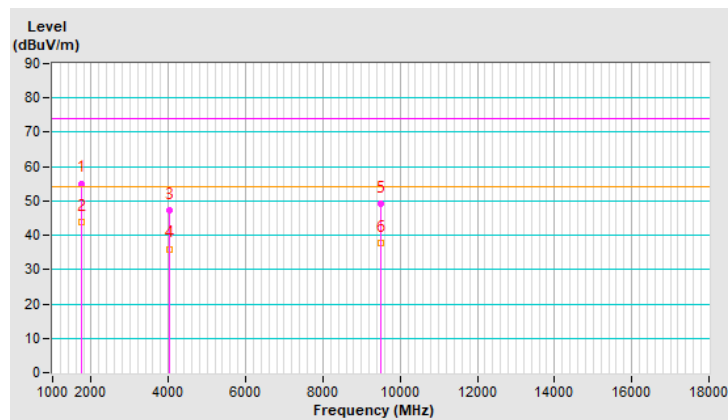


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.42	45.4 PK	74.0	-28.6	3.31 V	14	45.4	0.0
2	4036.42	33.2 AV	54.0	-20.8	3.31 V	14	33.2	0.0
3	7996.85	47.5 PK	74.0	-26.5	1.17 V	33	39.0	8.5
4	7996.85	34.6 AV	54.0	-19.4	1.17 V	33	26.1	8.5
5	11729.22	52.5 PK	74.0	-21.5	3.83 V	341	41.0	11.5
6	11729.22	37.8 AV	54.0	-16.2	3.83 V	341	26.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

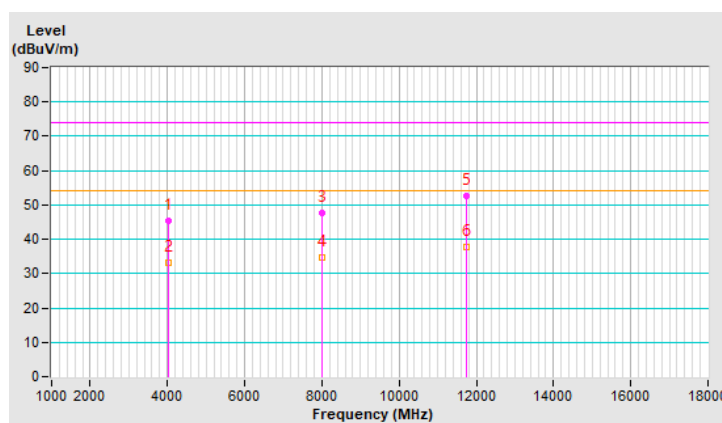


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1753.95	54.7 PK	74.0	-19.3	3.41 H	62	60.1	-5.4
2	1753.95	44.2 AV	54.0	-9.8	3.41 H	62	49.6	-5.4
3	4035.12	46.8 PK	74.0	-27.2	2.04 H	334	46.8	0.0
4	4035.12	36.0 AV	54.0	-18.0	2.04 H	334	36.0	0.0
5	9493.74	49.6 PK	74.0	-24.4	1.46 H	316	39.1	10.5
6	9493.74	37.3 AV	54.0	-16.7	1.46 H	316	26.8	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

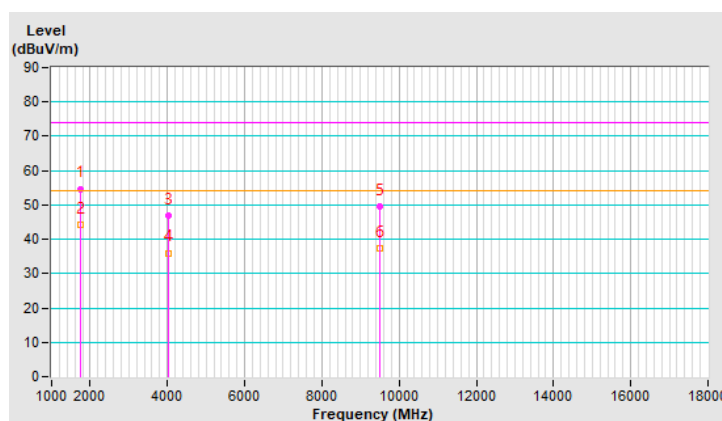


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.15	45.7 PK	74.0	-28.3	3.35 V	3	45.7	0.0
2	4036.15	33.0 AV	54.0	-21.0	3.35 V	3	33.0	0.0
3	7996.53	47.4 PK	74.0	-26.6	1.11 V	46	38.9	8.5
4	7996.53	34.7 AV	54.0	-19.3	1.11 V	46	26.2	8.5
5	11728.83	52.9 PK	74.0	-21.1	3.89 V	346	41.4	11.5
6	11728.83	38.0 AV	54.0	-16.0	3.89 V	346	26.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

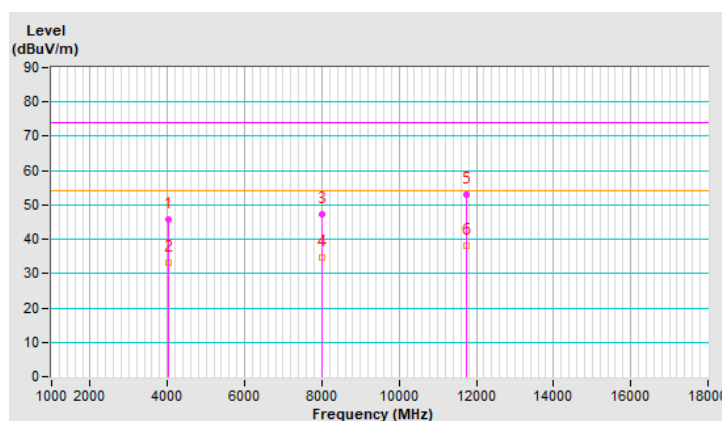


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1753.86	55.5 PK	74.0	-18.5	3.41 H	63	60.9	-5.4
2	1753.86	43.8 AV	54.0	-10.2	3.41 H	63	49.2	-5.4
3	4035.80	47.1 PK	74.0	-26.9	2.16 H	343	47.1	0.0
4	4035.80	36.5 AV	54.0	-17.5	2.16 H	343	36.5	0.0
5	9493.61	49.4 PK	74.0	-24.6	1.41 H	287	38.9	10.5
6	9493.61	37.6 AV	54.0	-16.4	1.41 H	287	27.1	10.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

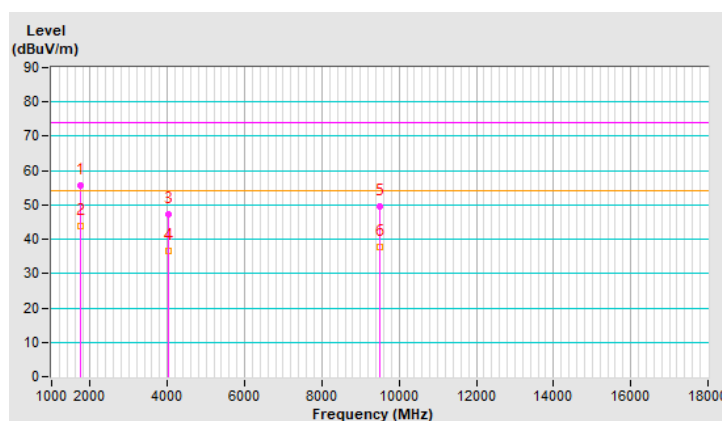


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	1GHz ~ 18GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4036.70	45.9 PK	74.0	-28.1	3.30 V	23	45.9	0.0
2	4036.70	32.8 AV	54.0	-21.2	3.30 V	23	32.8	0.0
3	7996.61	47.1 PK	74.0	-26.9	1.14 V	29	38.6	8.5
4	7996.61	34.4 AV	54.0	-19.6	1.14 V	29	25.9	8.5
5	11729.30	52.6 PK	74.0	-21.4	3.83 V	334	41.1	11.5
6	11729.30	38.2 AV	54.0	-15.8	3.83 V	334	26.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

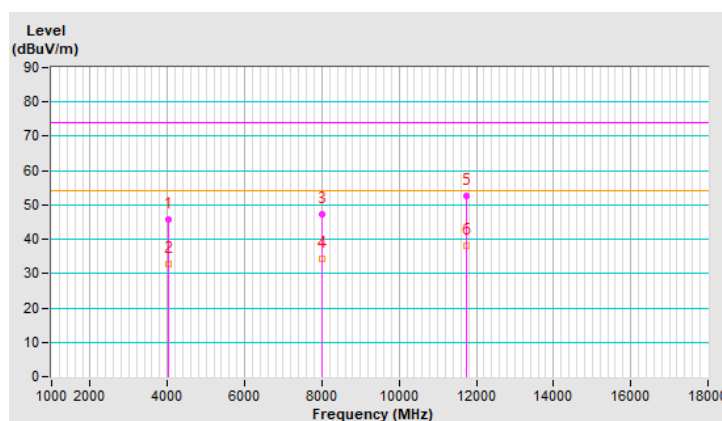


For 18~40 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.35	41.4 PK	74.0	-32.6	2.19 H	144	42.7	-1.3
2	25293.35	31.2 AV	54.0	-22.8	2.19 H	144	32.5	-1.3
3	29927.87	45.8 PK	74.0	-28.2	1.70 H	216	46.5	-0.7
4	29927.87	33.2 AV	54.0	-20.8	1.70 H	216	33.9	-0.7
5	33121.51	53.4 PK	74.0	-20.6	1.60 H	341	55.2	-1.8
6	33121.51	41.2 AV	54.0	-12.8	1.60 H	341	43.0	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

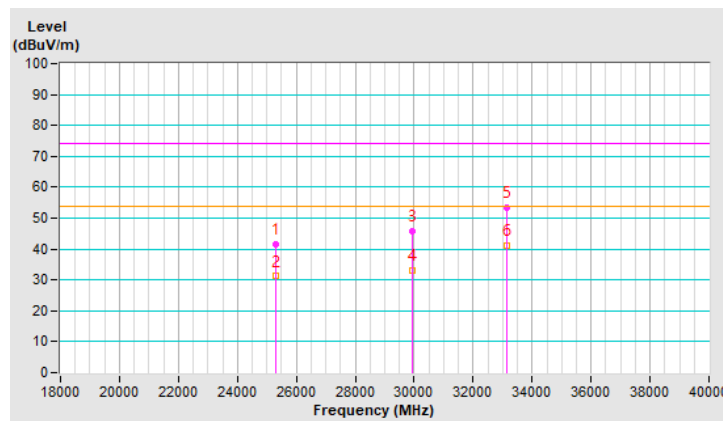


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22295.00	40.5 PK	74.0	-33.5	2.19 V	139	43.8	-3.3
2	22295.00	32.0 AV	54.0	-22.0	2.19 V	139	35.3	-3.3
3	27929.06	43.4 PK	74.0	-30.6	1.75 V	198	44.6	-1.2
4	27929.06	35.1 AV	54.0	-18.9	1.75 V	198	36.3	-1.2
5	34119.43	51.1 PK	74.0	-22.9	1.49 V	325	52.4	-1.3
6	34119.43	40.6 AV	54.0	-13.4	1.49 V	325	41.9	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

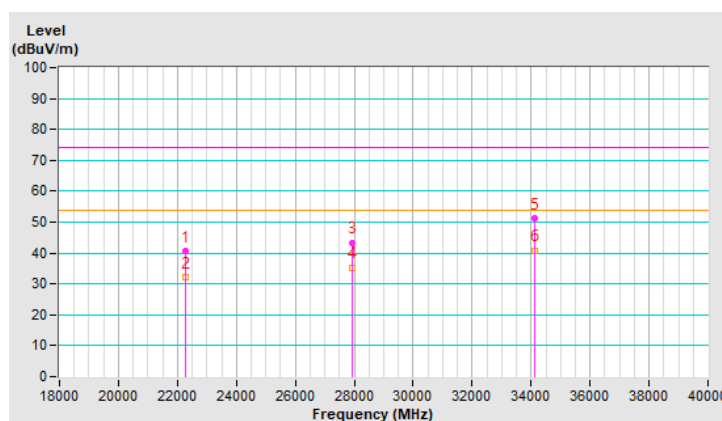


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.61	41.5 PK	74.0	-32.5	2.16 H	160	42.8	-1.3
2	25293.61	31.1 AV	54.0	-22.9	2.16 H	160	32.4	-1.3
3	29927.97	45.4 PK	74.0	-28.6	1.74 H	210	46.1	-0.7
4	29927.97	33.7 AV	54.0	-20.3	1.74 H	210	34.4	-0.7
5	33121.16	53.8 PK	74.0	-20.2	1.65 H	345	55.6	-1.8
6	33121.16	41.6 AV	54.0	-12.4	1.65 H	345	43.4	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

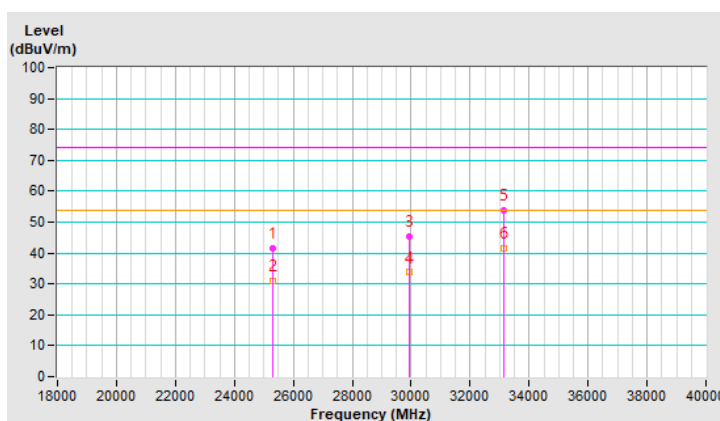


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22294.94	40.5 PK	74.0	-33.5	2.13 V	134	43.8	-3.3
2	22294.94	31.7 AV	54.0	-22.3	2.13 V	134	35.0	-3.3
3	27929.00	43.1 PK	74.0	-30.9	1.80 V	212	44.3	-1.2
4	27929.00	34.7 AV	54.0	-19.3	1.80 V	212	35.9	-1.2
5	34119.10	51.5 PK	74.0	-22.5	1.54 V	337	52.8	-1.3
6	34119.10	40.8 AV	54.0	-13.2	1.54 V	337	42.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

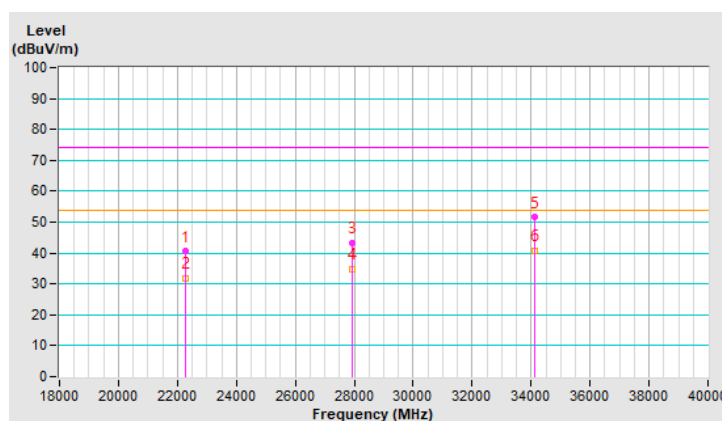


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	25293.85	41.2 PK	74.0	-32.8	2.16 H	140	42.5	-1.3
2	25293.85	31.3 AV	54.0	-22.7	2.16 H	140	32.6	-1.3
3	29927.53	46.1 PK	74.0	-27.9	1.73 H	204	46.8	-0.7
4	29927.53	33.6 AV	54.0	-20.4	1.73 H	204	34.3	-0.7
5	33121.19	53.4 PK	74.0	-20.6	1.58 H	349	55.2	-1.8
6	33121.19	41.4 AV	54.0	-12.6	1.58 H	349	43.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

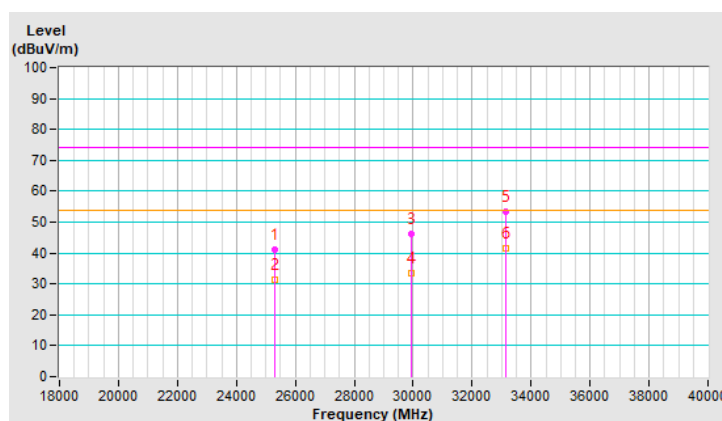


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	18GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	22295.07	40.5 PK	74.0	-33.5	2.20 V	125	43.8	-3.3
2	22295.07	32.4 AV	54.0	-21.6	2.20 V	125	35.7	-3.3
3	27929.20	43.3 PK	74.0	-30.7	1.74 V	210	44.5	-1.2
4	27929.20	35.4 AV	54.0	-18.6	1.74 V	210	36.6	-1.2
5	34119.15	51.6 PK	74.0	-22.4	1.45 V	332	52.9	-1.3
6	34119.15	40.6 AV	54.0	-13.4	1.45 V	332	41.9	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

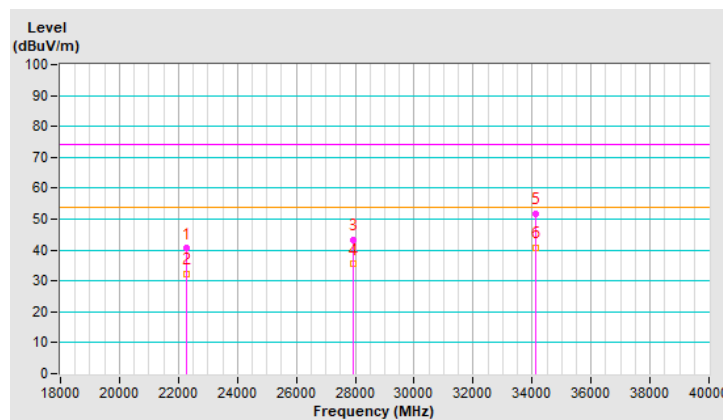

For above 40 GHz

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.14	-56.18	-85.97	20.30	64.82	-39.88	0.09	90.00	-89.91	Pass
2	55.03	-92.80	-88.80	19.90	63.37	-41.33	0.07	90.00	-89.93	Pass
3	73.95	-92.61	-87.62	21.40	65.62	-39.08	0.11	90.00	-89.89	Pass
4	102.43	-92.30	-86.62	21.50	69.35	-35.35	0.26	90.00	-89.74	Pass
5	169.67	-93.15	-92.53	20.50	68.82	-35.88	0.23	90.00	-89.77	Pass
6	194.81	-92.73	-87.43	23.90	71.72	-32.98	0.45	90.00	-89.55	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.18	-56.33	-85.87	20.30	64.92	-39.78	0.09	90.00	-89.91	Pass
2	55.38	-92.70	-88.85	19.90	63.37	-41.33	0.07	90.00	-89.93	Pass
3	73.96	-92.22	-87.82	21.40	65.42	-39.28	0.10	90.00	-89.90	Pass
4	102.26	-92.40	-86.96	21.50	68.99	-35.71	0.24	90.00	-89.76	Pass
5	169.42	-92.88	-92.82	20.50	68.52	-36.18	0.21	90.00	-89.79	Pass
6	194.98	-92.73	-87.50	23.90	71.66	-33.04	0.44	90.00	-89.56	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{\text{Meas}} (\text{dB}\mu\text{V/m}) = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{\text{Meas}} (\text{dB}\mu\text{V/m}) + 20 \cdot \log(d_{\text{Meas}}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111

RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.35	-56.29	-86.07	20.30	64.75	-39.95	0.09	90.00	-89.91	Pass
2	55.25	-92.33	-88.68	19.90	63.52	-41.18	0.07	90.00	-89.93	Pass
3	73.95	-92.39	-87.78	21.40	65.46	-39.24	0.11	90.00	-89.89	Pass
4	102.68	-92.08	-86.75	21.50	69.24	-35.46	0.25	90.00	-89.75	Pass
5	169.46	-92.77	-92.53	20.50	68.81	-35.89	0.23	90.00	-89.77	Pass
6	195.23	-92.74	-87.13	23.90	72.04	-32.66	0.48	90.00	-89.52	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.27	-56.15	-85.78	20.30	65.03	-39.67	0.10	90.00	-89.90	Pass
2	55.09	-92.64	-88.86	19.90	63.32	-41.38	0.06	90.00	-89.94	Pass
3	73.96	-92.41	-87.64	21.40	65.60	-39.10	0.11	90.00	-89.89	Pass
4	102.35	-92.09	-86.77	21.50	69.19	-35.51	0.25	90.00	-89.75	Pass
5	169.79	-92.78	-92.69	20.50	68.67	-36.03	0.22	90.00	-89.78	Pass
6	195.05	-92.60	-87.52	23.90	71.64	-33.06	0.44	90.00	-89.56	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{Meas} \text{ (dB}\mu\text{V/m)} = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{Meas} \text{ (dB}\mu\text{V/m)} + 20 \cdot \log(d_{Meas}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111

RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	40GHz ~ 200GHz	Detector Function	Average (AV)

Antenna Polarity: Horizontal										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	49.35	-56.47	-86.00	20.30	64.82	-39.88	0.09	90.00	-89.91	Pass
2	55.10	-92.71	-88.65	19.90	63.53	-41.17	0.07	90.00	-89.93	Pass
3	74.09	-92.66	-87.69	21.40	65.56	-39.14	0.11	90.00	-89.89	Pass
4	102.67	-92.15	-86.44	21.50	69.55	-35.15	0.27	90.00	-89.73	Pass
5	169.77	-92.92	-92.29	20.50	69.06	-35.64	0.24	90.00	-89.76	Pass
6	194.88	-92.75	-87.32	23.90	71.83	-32.87	0.46	90.00	-89.54	Pass
Antenna Polarity: Vertical										
No.	Frequency (GHz)	SA Value (dBm)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm/MHz)	Power Density (pW/cm ²)	Power Density Limit (pW/cm ²)	Margin (pW/cm ²)	Pass/Fail
1	48.99	-56.57	-85.69	20.30	65.07	-39.63	0.10	90.00	-89.90	Pass
2	55.01	-92.40	-88.60	19.90	63.57	-41.13	0.07	90.00	-89.93	Pass
3	74.07	-92.22	-88.10	21.40	65.15	-39.55	0.10	90.00	-89.90	Pass
4	102.39	-92.20	-86.67	21.50	69.29	-35.41	0.25	90.00	-89.75	Pass
5	169.43	-93.26	-92.61	20.50	68.73	-35.97	0.22	90.00	-89.78	Pass
6	194.95	-92.82	-87.26	23.90	71.90	-32.80	0.46	90.00	-89.54	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{\text{Meas}} (\text{dB}\mu\text{V/m}) = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{\text{Meas}} (\text{dB}\mu\text{V/m}) + 20 \cdot \log(d_{\text{Meas}}) - 104.7$$

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 1 meter distance.

2. Power density formula as follows

Follow ANSI 63.10 section 9.6 Equations to calculate power density

$$PD = \text{EIRP}_{\text{Linear}} / 4 \pi d^2$$

PD is the power density at the distance specified by the limit, in W/m²

EIRP_{Linear} is the equivalent isotropically radiated power, in watts

d is the 3m distance.

3. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R \text{ far field} = (2 * L^2) / \lambda$$

L is the Largest Antenna Dimension of measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
40	0.03	0.0075	0.240
50	0.03	0.0060	0.300

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
50	0.025	0.0060	0.208
75	0.025	0.0040	0.313

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
75	0.018	0.0040	0.162
110	0.018	0.0027	0.238

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
110	0.012	0.0027	0.106
170	0.012	0.0018	0.163

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
170	0.008	0.0018	0.073
260	0.008	0.0012	0.111


Below 1GHz Data:

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.49	29.4 QP	40.0	-10.6	1.36 H	360	42.7	-13.3
2	110.01	30.2 QP	43.5	-13.3	2.17 H	2	46.1	-15.9
3	162.76	37.9 QP	43.5	-5.6	2.28 H	119	50.7	-12.8
4	208.95	30.9 QP	43.5	-12.6	1.40 H	77	47.1	-16.2
5	225.28	31.9 QP	46.0	-14.1	1.04 H	75	47.7	-15.8
6	283.13	25.1 QP	46.0	-20.9	1.04 H	222	37.8	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

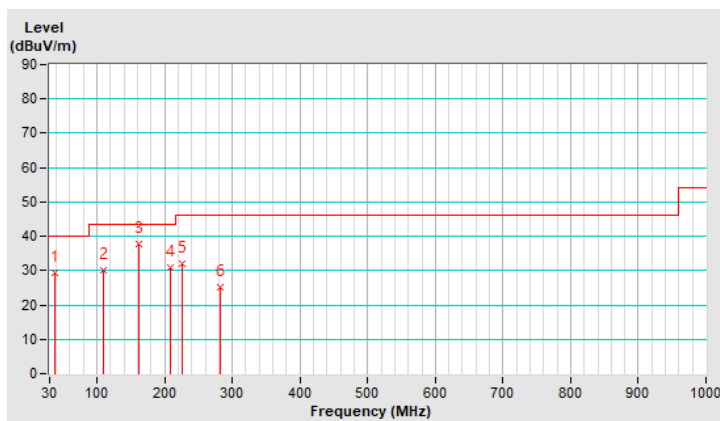


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.74	36.8 QP	40.0	-3.2	1.00 V	87	50.3	-13.5
2	57.50	32.6 QP	40.0	-7.4	1.17 V	123	45.8	-13.2
3	85.34	35.8 QP	40.0	-4.2	2.09 V	17	54.2	-18.4
4	151.69	36.1 QP	43.5	-7.4	1.16 V	282	48.7	-12.6
5	205.53	31.5 QP	43.5	-12.0	1.50 V	57	47.7	-16.2
6	333.77	24.1 QP	46.0	-21.9	1.85 V	248	35.3	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

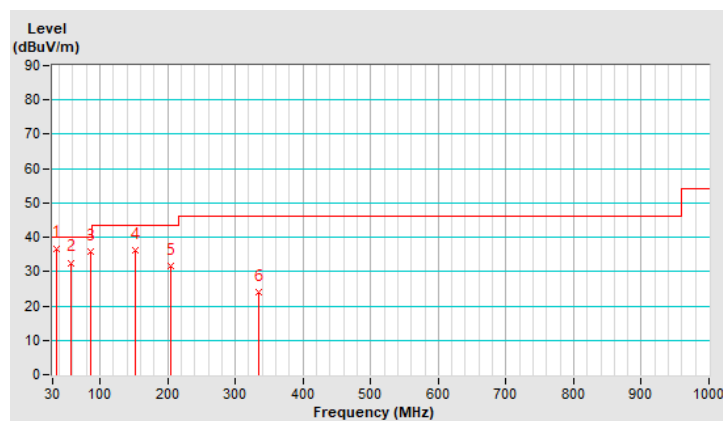


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.95	29.7 QP	40.0	-10.3	1.25 H	360	43.1	-13.4
2	109.69	29.8 QP	43.5	-13.7	2.17 H	0	45.7	-15.9
3	163.05	37.6 QP	43.5	-5.9	2.23 H	107	50.4	-12.8
4	209.36	31.1 QP	43.5	-12.4	1.39 H	104	47.3	-16.2
5	225.15	32.0 QP	46.0	-14.0	1.09 H	81	47.9	-15.9
6	282.82	24.8 QP	46.0	-21.2	1.07 H	236	37.5	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

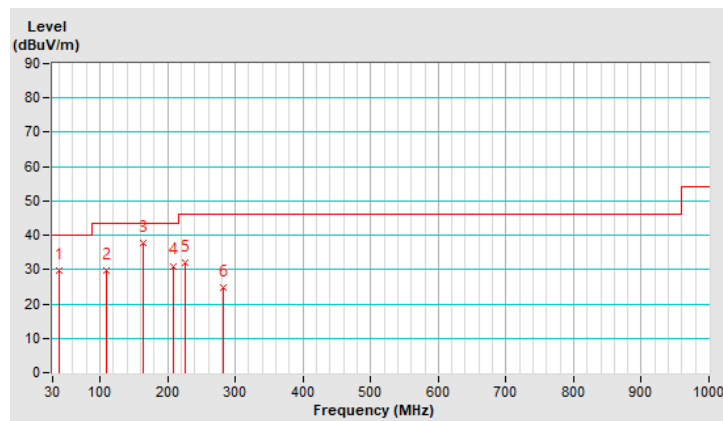


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.35	36.8 QP	40.0	-3.2	1.04 V	100	50.3	-13.5
2	57.06	33.0 QP	40.0	-7.0	1.11 V	137	46.2	-13.2
3	85.80	36.1 QP	40.0	-3.9	2.04 V	23	54.6	-18.5
4	151.90	35.6 QP	43.5	-7.9	1.11 V	277	48.2	-12.6
5	205.39	31.4 QP	43.5	-12.1	1.46 V	71	47.6	-16.2
6	333.33	24.1 QP	46.0	-21.9	1.88 V	256	35.3	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

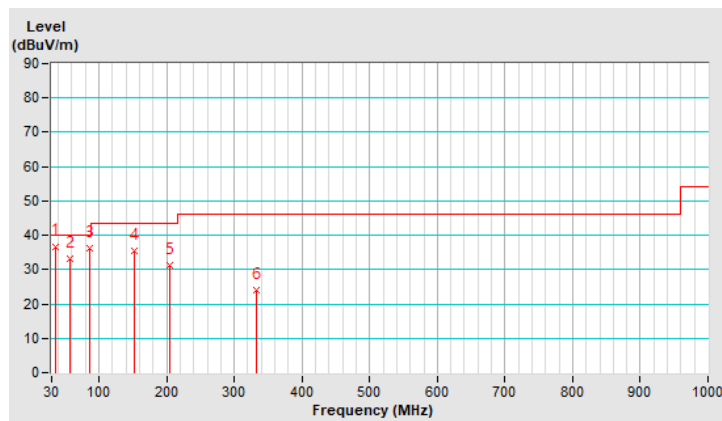


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.59	29.7 QP	40.0	-10.3	1.40 H	351	43.0	-13.3
2	110.00	30.1 QP	43.5	-13.4	2.20 H	9	46.0	-15.9
3	163.05	37.7 QP	43.5	-5.8	2.24 H	130	50.5	-12.8
4	208.52	31.2 QP	43.5	-12.3	1.39 H	78	47.4	-16.2
5	225.10	32.0 QP	46.0	-14.0	1.09 H	82	47.9	-15.9
6	283.12	25.3 QP	46.0	-20.7	1.05 H	231	38.0	-12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

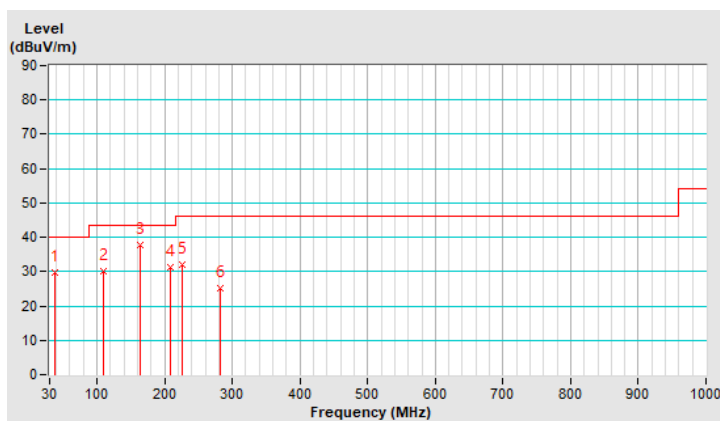


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.78	36.9 QP	40.0	-3.1	1.01 V	76	50.4	-13.5
2	57.93	32.7 QP	40.0	-7.3	1.23 V	113	46.0	-13.3
3	85.54	35.5 QP	40.0	-4.5	2.12 V	17	54.0	-18.5
4	151.90	36.2 QP	43.5	-7.3	1.10 V	297	48.8	-12.6
5	205.97	31.8 QP	43.5	-11.7	1.44 V	59	48.0	-16.2
6	333.74	23.7 QP	46.0	-22.3	1.84 V	237	34.9	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

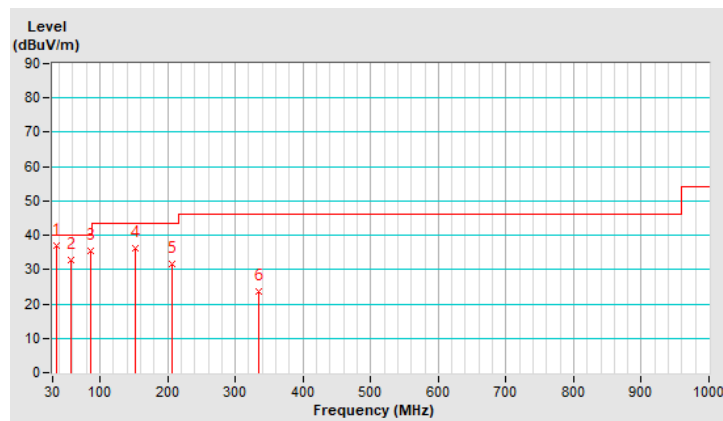

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R&S	ESCS 30	847124/029	2021/10/13	2022/10/12
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
LISN R & S	ESH3-Z5	835239/001	2021/3/26	2022/3/25
50 ohms Terminator NA	50	3	2021/10/27	2022/10/26
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2021/9/25	2022/9/24
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
Software BVADT	BVADT_Cond_V7.3 .7.4	NA	NA	NA

Note: 1. The test was performed in Conduction 1.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. Tested Date: 2022/1/24

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

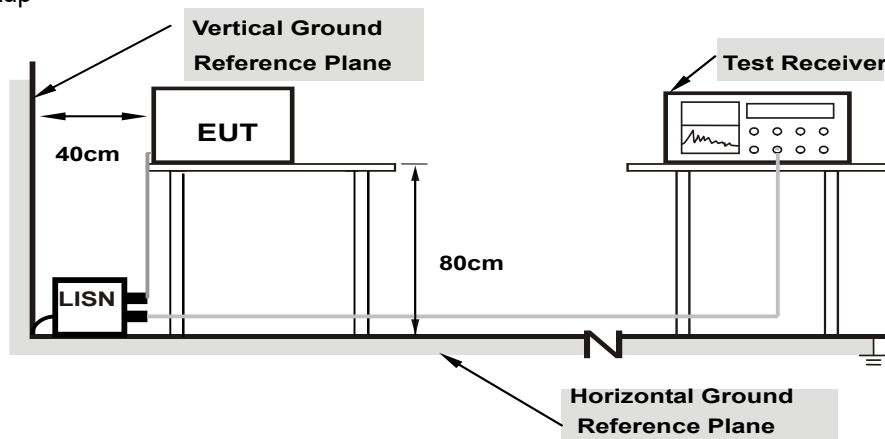

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.16	25.37	51.21	35.42	66.00	56.00	-14.79	-20.58
2	0.52500	10.08	38.65	31.43	48.73	41.51	56.00	46.00	-7.27	-4.49
3	1.03125	10.11	25.27	17.26	35.38	27.37	56.00	46.00	-20.62	-18.63
4	10.73047	10.66	26.85	19.73	37.51	30.39	60.00	50.00	-22.49	-19.61
5	11.83984	10.72	28.13	21.07	38.85	31.79	60.00	50.00	-21.15	-18.21
6	29.60547	11.37	26.67	21.17	38.04	32.54	60.00	50.00	-21.96	-17.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

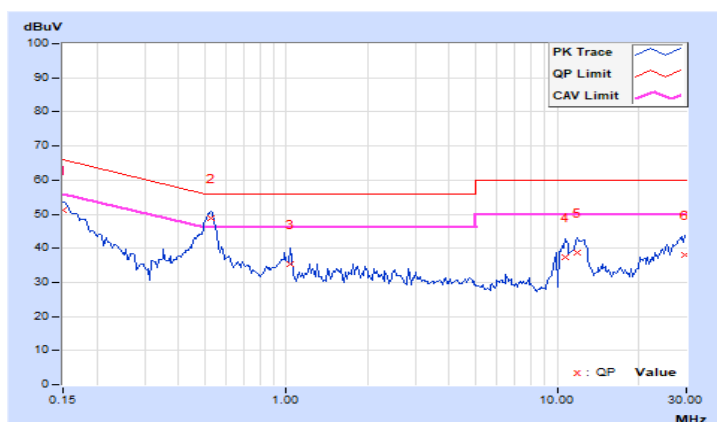


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.36	21.61	48.38	31.63	65.38	55.38	-17.00	-23.75
2	0.17734	10.03	35.63	20.47	45.66	30.50	64.61	54.61	-18.95	-24.11
3	0.52891	10.05	38.96	31.37	49.01	41.42	56.00	46.00	-6.99	-4.58
4	10.72656	10.52	27.46	20.57	37.98	31.09	60.00	50.00	-22.02	-18.91
5	12.06641	10.59	29.38	23.64	39.97	34.23	60.00	50.00	-20.03	-15.77
6	28.96484	10.99	27.44	21.59	38.43	32.58	60.00	50.00	-21.57	-17.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

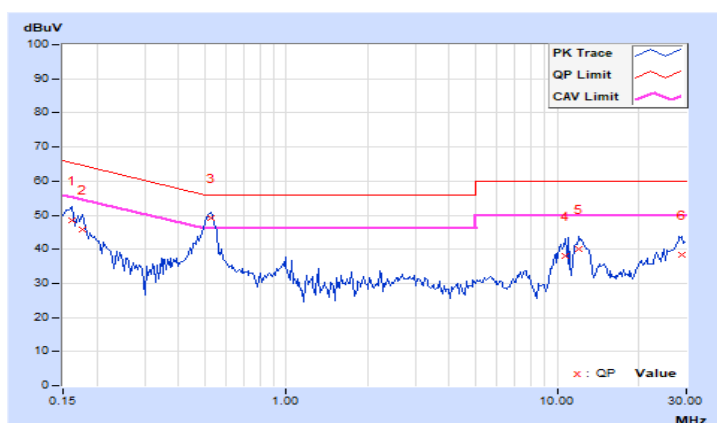


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.21	25.38	51.26	35.43	66.00	56.00	-14.74	-20.57
2	0.52500	10.08	38.86	31.43	48.94	41.51	56.00	46.00	-7.06	-4.49
3	1.03125	10.11	25.19	17.57	35.30	27.68	56.00	46.00	-20.70	-18.32
4	10.73047	10.66	26.86	19.66	37.52	30.32	60.00	50.00	-22.48	-19.68
5	11.83984	10.72	28.11	21.24	38.83	31.96	60.00	50.00	-21.17	-18.04
6	29.60547	11.37	26.39	21.18	37.76	32.55	60.00	50.00	-22.24	-17.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

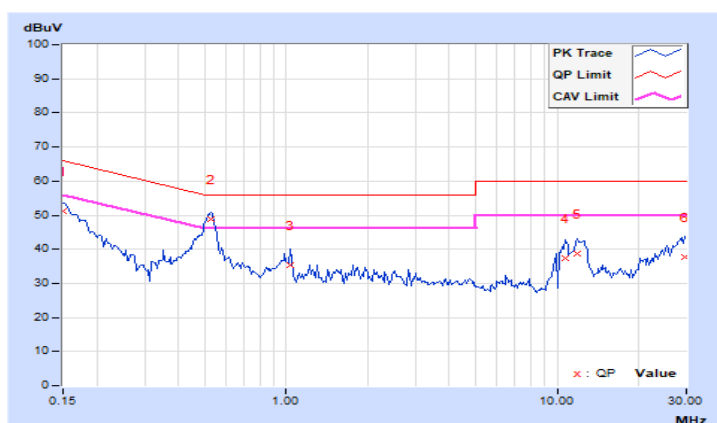


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.44	21.96	48.46	31.98	65.38	55.38	-16.92	-23.40
2	0.17734	10.03	35.86	20.52	45.89	30.55	64.61	54.61	-18.72	-24.06
3	0.52891	10.05	38.71	31.59	48.76	41.64	56.00	46.00	-7.24	-4.36
4	10.72656	10.52	27.46	20.39	37.98	30.91	60.00	50.00	-22.02	-19.09
5	12.06641	10.59	29.57	23.44	40.16	34.03	60.00	50.00	-19.84	-15.97
6	28.96484	10.99	27.28	21.61	38.27	32.60	60.00	50.00	-21.73	-17.40

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

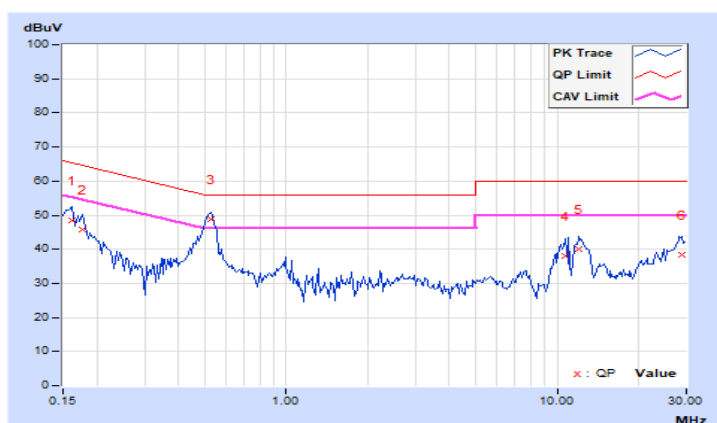


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.09	25.38	51.14	35.43	66.00	56.00	-14.86	-20.57
2	0.52500	10.08	38.86	31.23	48.94	41.31	56.00	46.00	-7.06	-4.69
3	1.03125	10.11	25.17	17.86	35.28	27.97	56.00	46.00	-20.72	-18.03
4	10.73047	10.66	26.45	19.91	37.11	30.57	60.00	50.00	-22.89	-19.43
5	11.83984	10.72	28.05	21.75	38.77	32.47	60.00	50.00	-21.23	-17.53
6	29.60547	11.37	26.52	21.67	37.89	33.04	60.00	50.00	-22.11	-16.96

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

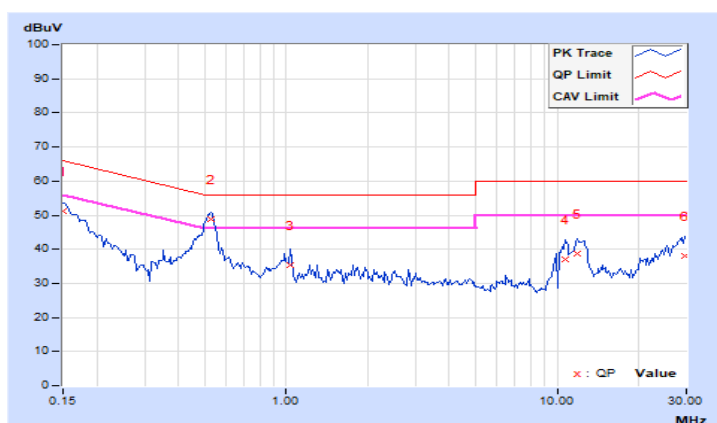


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.69	21.45	48.71	31.47	65.38	55.38	-16.67	-23.91
2	0.17734	10.03	35.78	20.35	45.81	30.38	64.61	54.61	-18.80	-24.23
3	0.52891	10.05	38.85	31.63	48.90	41.68	56.00	46.00	-7.10	-4.32
4	10.72656	10.52	27.87	20.52	38.39	31.04	60.00	50.00	-21.61	-18.96
5	12.06641	10.59	29.45	23.49	40.04	34.08	60.00	50.00	-19.96	-15.92
6	28.96484	10.99	27.12	21.54	38.11	32.53	60.00	50.00	-21.89	-17.47

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

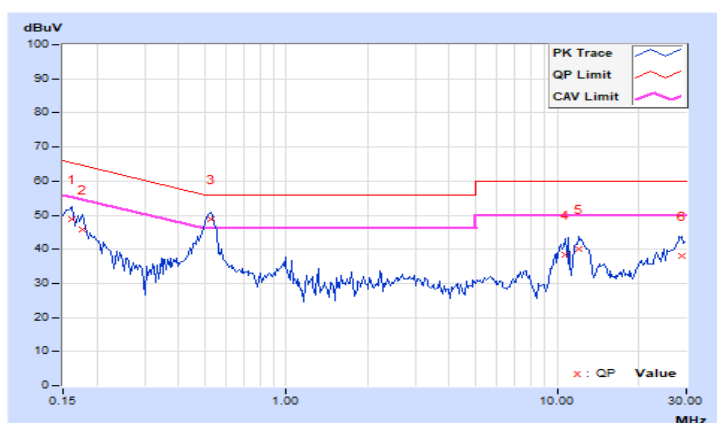


4.2.8 Test Results (Mode 2)

RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.11	25.28	51.16	35.33	66.00	56.00	-14.84	-20.67
2	0.52500	10.08	38.97	31.57	49.05	41.65	56.00	46.00	-6.95	-4.35
3	1.03125	10.11	25.35	17.21	35.46	27.32	56.00	46.00	-20.54	-18.68
4	10.73047	10.66	26.96	19.68	37.62	30.34	60.00	50.00	-22.38	-19.66
5	11.83984	10.72	28.08	21.02	38.80	31.74	60.00	50.00	-21.20	-18.26
6	29.60547	11.37	26.59	21.01	37.96	32.38	60.00	50.00	-22.04	-17.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

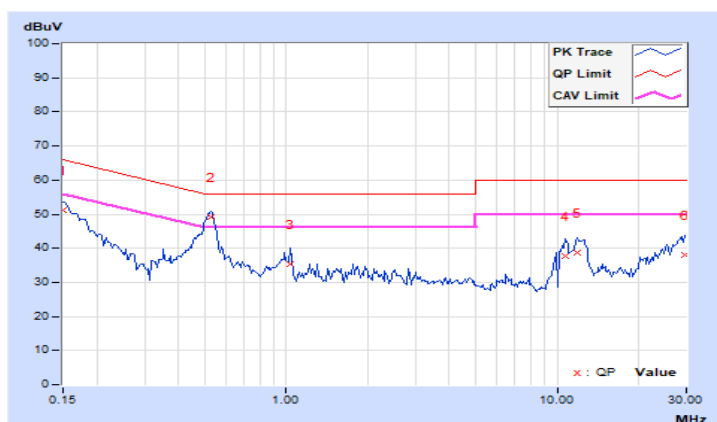


RF Mode	TX WiGig	Channel	CH 1 : 58.32 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.41	21.67	48.43	31.69	65.38	55.38	-16.95	-23.69
2	0.17734	10.03	35.68	20.53	45.71	30.56	64.61	54.61	-18.90	-24.05
3	0.52891	10.05	38.91	31.46	48.96	41.51	56.00	46.00	-7.04	-4.49
4	10.72656	10.52	27.57	20.69	38.09	31.21	60.00	50.00	-21.91	-18.79
5	12.06641	10.59	29.75	23.46	40.34	34.05	60.00	50.00	-19.66	-15.95
6	28.96484	10.99	27.41	21.73	38.40	32.72	60.00	50.00	-21.60	-17.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

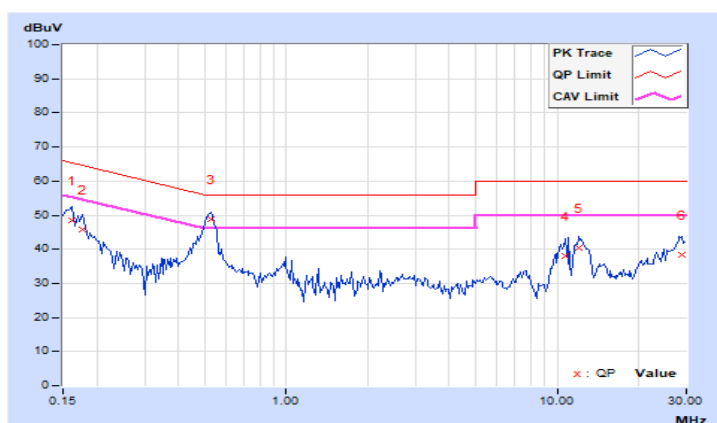


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.13	25.25	51.18	35.30	66.00	56.00	-14.82	-20.70
2	0.52500	10.08	38.91	31.54	48.99	41.62	56.00	46.00	-7.01	-4.38
3	1.03125	10.11	25.33	17.18	35.44	27.29	56.00	46.00	-20.56	-18.71
4	10.73047	10.66	26.93	19.65	37.59	30.31	60.00	50.00	-22.41	-19.69
5	11.83984	10.72	28.01	21.11	38.73	31.83	60.00	50.00	-21.27	-18.17
6	29.60547	11.37	26.51	21.07	37.88	32.44	60.00	50.00	-22.12	-17.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

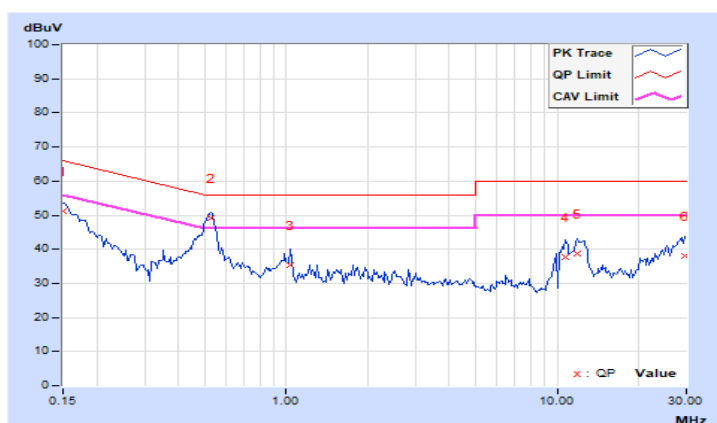


RF Mode	TX WiGig	Channel	CH 2 : 60.48 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.37	21.63	48.39	31.65	65.38	55.38	-16.99	-23.73
2	0.17734	10.03	35.64	20.44	45.67	30.47	64.61	54.61	-18.94	-24.14
3	0.52891	10.05	38.84	31.39	48.89	41.44	56.00	46.00	-7.11	-4.56
4	10.72656	10.52	27.51	20.62	38.03	31.14	60.00	50.00	-21.97	-18.86
5	12.06641	10.59	29.64	23.39	40.23	33.98	60.00	50.00	-19.77	-16.02
6	28.96484	10.99	27.31	21.63	38.30	32.62	60.00	50.00	-21.70	-17.38

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

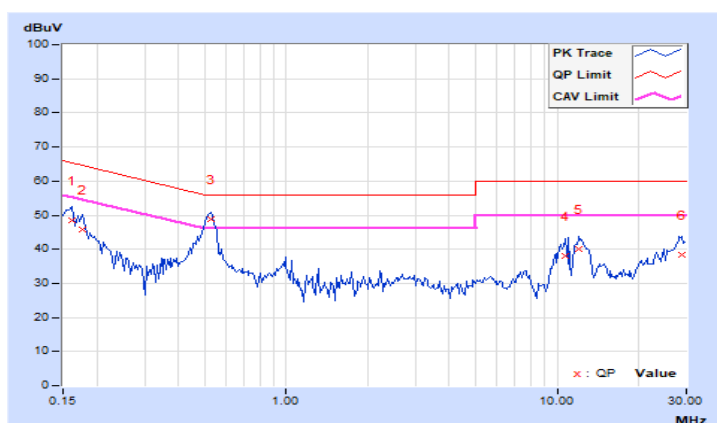


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	41.10	25.14	51.15	35.19	66.00	56.00	-14.85	-20.81
2	0.52500	10.08	38.84	31.43	48.92	41.51	56.00	46.00	-7.08	-4.49
3	1.03125	10.11	25.21	17.15	35.32	27.26	56.00	46.00	-20.68	-18.74
4	10.73047	10.66	26.76	19.57	37.42	30.23	60.00	50.00	-22.58	-19.77
5	11.83984	10.72	28.13	21.11	38.85	31.83	60.00	50.00	-21.15	-18.17
6	29.60547	11.37	26.42	21.22	37.79	32.59	60.00	50.00	-22.21	-17.41

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

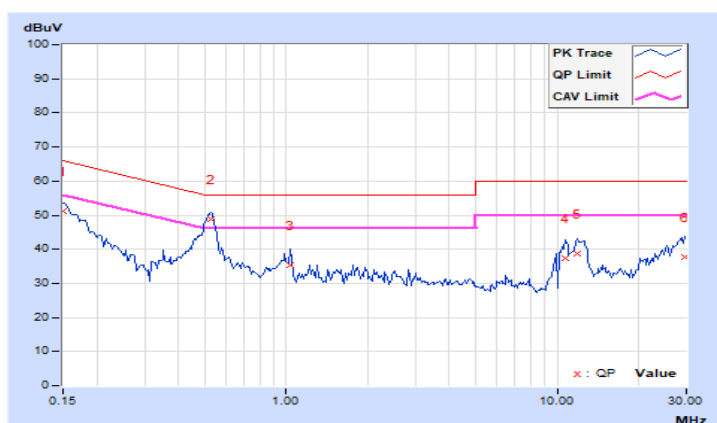


RF Mode	TX WiGig	Channel	CH 3.5 : 63.72 GHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.02	38.37	21.46	48.39	31.48	65.38	55.38	-16.99	-23.90
2	0.17734	10.03	35.40	20.39	45.43	30.42	64.61	54.61	-19.18	-24.19
3	0.52891	10.05	38.71	31.24	48.76	41.29	56.00	46.00	-7.24	-4.71
4	10.72656	10.52	27.36	20.51	37.88	31.03	60.00	50.00	-22.12	-18.97
5	12.06641	10.59	29.46	23.27	40.05	33.86	60.00	50.00	-19.95	-16.14
6	28.96484	10.99	27.21	21.43	38.20	32.42	60.00	50.00	-21.80	-17.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

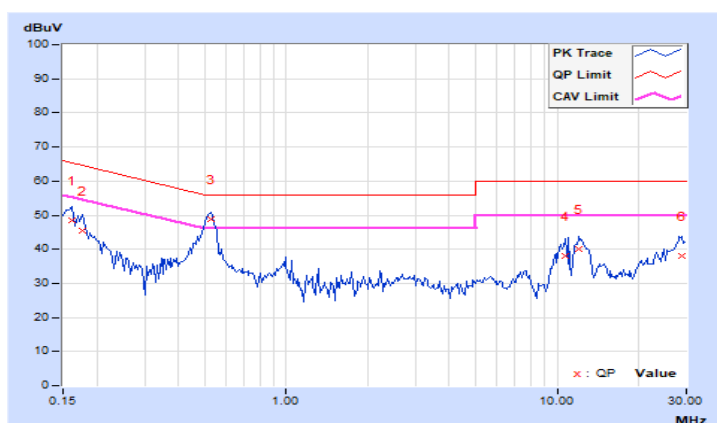


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

None: For reporting purposes only.

4.3.2 Test Setup

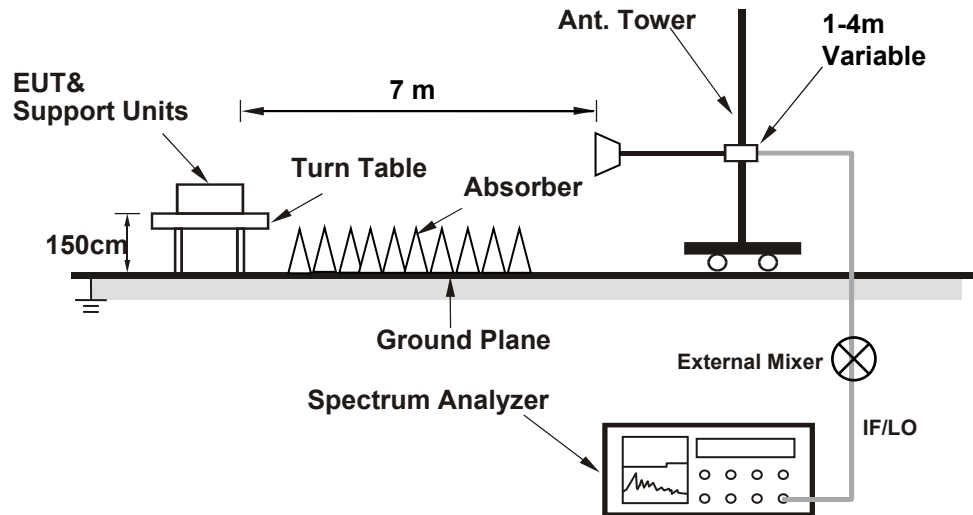

4.3.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Keysight	N9030A	MY55330160	2021/2/5	2022/2/4
Conical Horn Antenna (50~75GHz) Keysight	WR15CH-Conical	RCHO15RL-1	2021/6/11	2022/6/10
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
Antenna Tower & Turn Table CT	NA	NA	NA	NA

- Note: 1. The test was performed in HC - 10m Chamber 1.
 2. The calibrations are traceable to NML/ROC and NIST/USA.
 3. Certificate of Conformance (CoC) which is issued by manufacturer states that the product meets the specification.
 4. Tested Date: 2022/1/6 ~ 2022/1/22

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 Test Result (Mode 1)

Channel	Frequency (GHz)	6dB Bandwidth (MHz)
1	58.32	733.2
2	60.48	791.1
3.5	63.72	836.6

Spectrum Plot of Worst Value



4.3.8 Test Result (Mode 2)

Channel	Frequency (GHz)	6dB Bandwidth (GHz)
1	58.32	1.181
2	60.48	1.486
3.5	63.72	1.429

Spectrum Plot of Worst Value



4.4 Output Power Measurement

4.4.1 Limits of Output Power Measurement

15.255 (c) & (e)

Output Power (EIRP)					
Applicable	Type			Average EIRP Power	Peak EIRP Power
	Fixed field disturbance sensors and short-range devices for interactive motion sensing	(a)	For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz	40dBm (*Note 3)	43dBm (*Note 3)
		(b)	For fixed field disturbance sensors other than those operating under the provisions of (a) above, and short-range devices for interactive motion sensing	-	10dBm
V	Products other than fixed field disturbance sensors and short-range devices for interactive motion sensing	(c)	For fixed point-to-point transmitters located outdoors	82dBm (*Note 1)	85dBm (*Note 2)
		(d)	For other devices	40dBm	43dBm

Note:


1. The average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
2. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.
3. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-71 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

Peak Output Power (Conducted Power)			
Applicable	Type	6dB Bandwidth	Maximum Conducted Power
	For fixed field disturbance sensors other than those operating under the provisions of (a) above, and short-range devices for interactive motion sensing	-	-10 dBm (0.1mW)
V	Other	Greater than or equal to 100 MHz	500mW
		Less than 100MHz	500mW x (B/100)

Note:

1. B is 6dB Bandwidth (measured with a 100kHz resolution bandwidth)
2. Peak transmitter output power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-71 GHz band and the has a video bandwidth of at least 10 MHz, or using an equivalent measurement method.
3. For purposes of demonstrating compliance with this RSS, corrections to the transmitter output power may be made due to the antenna and circuit loss.

4.4.2 Test Setup

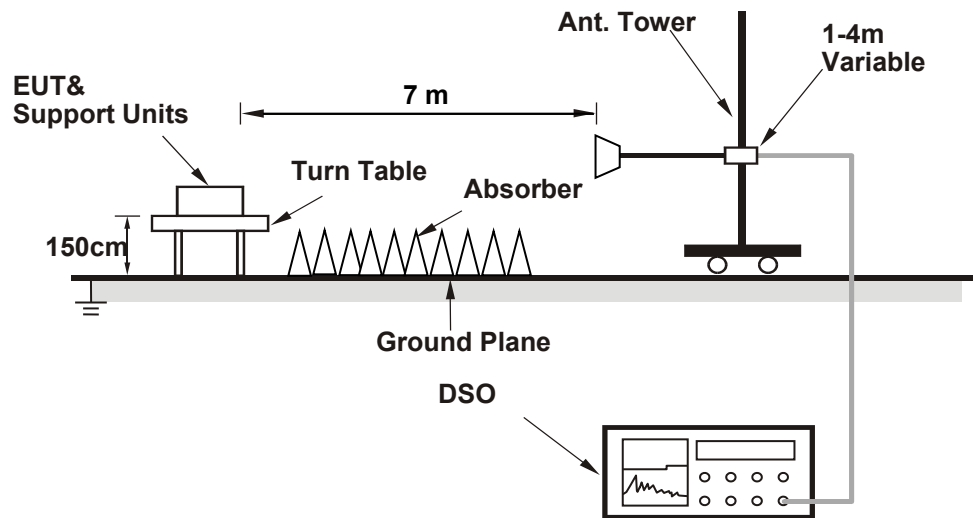

4.4.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Keysight	N9030A	MY55330160	2021/2/5	2022/2/4
Zero-Bias Detector Vdi	WR15ZBD	WR15R5 1-30	CoC	CoC
4CH Infiniivision Oscilloscope Keysight	DSOX6004A	MY55190202	2021/6/28	2022/6/27
Conical Horn Antenna (50~75GHz) Keysight	WR15CH-Conical	RCHO15RL-1	2021/6/11	2022/6/10
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
Antenna Tower & Turn Table CT	NA	NA	NA	NA

- Note: 1. The test was performed in HC - 10m Chamber 1.
2. The calibrations are traceable to NML/ROC and NIST/USA.
3. Certificate of Conformance (CoC) which is issued by manufacturer states that the product meets the specification.
4. Tested Date: 2022/1/22

4.4.4 Test Procedures

- Place the EUT in a continuous transmission mode.
- For radiated emission measurements, attach a test receive antenna for the fundamental frequency band to the RF input of an RF detector or a downconverter with an RF detector at the output.
- Connect the video output of the detector to the 50 ohm input of the DSO.
- Place the test receive antenna in the main beam of the EUT at a distance which will provide a signal within the operating range of the RF detector.
- Set the sampling rate of the DSO to the required value. Adjust the memory depth, the triggering and the sweep speed to obtain a display which is representative of the signal considering the type of modulation.
- For radiated emission measurements, calculate the distance to the far field boundary of the fundamental emission using following equation

$$R \text{ far field} = (2 * L^2) / \lambda$$

Where:

L is the Largest Antenna Dimension of either the EUT antenna or measurement antenna, including the reflector

λ is the wavelength

Frequency (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
58.32	0.41	0.00514	65.409
60.48	0.41	0.00496	67.782
63.72	0.41	0.00471	71.38

Note: Follow ANSI C63.10, when far-field measurements are not practical, and the test laboratory intends to use a distance attenuation factor other than 20 dB/decade of distance.

*Measurements made at 7 meter distance.

- Perform radiated emission measurements to keep maximize the received signal from the EUT in the far field.
- Record the average and peak from the DSO and the measurement distance.
- Disconnect the EUT from the RF input port of the instrumentation system.
- Connect a mm-wave source to the RF input port of the instrumentation system via a waveguide variable attenuator. The mm-wave source is unmodulated.
- Using substitution measurement.
- Measure and note the power.
- For conducted power measurements, calculate the conducted power using following equation

$$P_{\text{cond}} = \text{EIRP} - G_{\text{dBi}}$$

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results (Mode 1)

For Output Power (EIRP)

Antenna Polarity : Horizontal								
Channel	Frequency (GHz)	DSO Value (mV)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm)	EIRP Limit (dBm)	Pass/Fail
1	58.32	37.66	-19.84	20.50	132.23	44.44 PK	59.00	Pass
		28.24	-25.97	20.50	126.10	38.31 AV	56.00	Pass
2	60.48	38.01	-19.33	20.50	133.06	45.26 PK	59.00	Pass
		28.69	-25.48	20.50	126.91	39.11 AV	56.00	Pass
3.5	63.72	37.89	-20.02	20.50	132.82	45.03 PK	59.00	Pass
		28.48	-26.15	20.50	126.69	38.9 AV	56.00	Pass
Antenna Polarity : Vertical								
Channel	Frequency (GHz)	DSO Value (mV)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm)	EIRP Limit (dBm)	Pass/Fail
1	58.32	51.98	-6.37	20.50	145.70	57.91 PK	59.00	Pass
		40.01	-13.88	20.50	138.19	50.4 AV	56.00	Pass
2	60.48	52.58	-5.89	20.50	146.50	58.7 PK	59.00	Pass
		40.29	-13.39	20.50	139.00	51.2 AV	56.00	Pass
3.5	63.72	52.39	-6.55	20.50	146.29	58.5 PK	59.00	Pass
		40.08	-14.08	20.50	138.76	50.97 AV	56.00	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{\text{Meas}} (\text{dB}\mu\text{V/m}) = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{\text{Meas}} (\text{dB}\mu\text{V/m}) + 20 \cdot \log(d_{\text{Meas}}) - 104.7$$

where:

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 7 meter distance.

2. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R_{\text{far field}} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of either the EUT antenna or measurement antenna, including the reflector

λ is the wavelength

For Peak Output Power (Conducted Power)

Channel	Frequency (GHz)	EIRP (dBm)	Max. Gain (dBi)	Conducted Output Power (dBm)	Conducted Output Power (mW)	Conducted Output Power limit (mW)	Pass /Fail
1	58.32	57.91	38	19.91	97.95	500	Pass
2	60.48	58.70	38	20.70	117.49	500	Pass
3.5	63.72	58.50	38	20.50	112.20	500	Pass

4.4.8 Test Results (Mode 2)

For Output Power (EIRP)

Antenna Polarity : Horizontal								
Channel	Frequency (GHz)	DSO Value (mV)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm)	EIRP Limit (dBm)	Pass/Fail
1	58.32	37.72	-18.34	20.50	133.73	45.94 PK	59.00	Pass
		28.33	-29.05	20.50	123.02	35.23 AV	56.00	Pass
2	60.48	38.10	-18.19	20.50	134.20	46.4 PK	59.00	Pass
		28.80	-28.89	20.50	123.50	35.7 AV	56.00	Pass
3.5	63.72	38.00	-18.86	20.50	133.98	46.19 PK	59.00	Pass
		28.60	-29.58	20.50	123.26	35.47 AV	56.00	Pass
Antenna Polarity : Vertical								
Channel	Frequency (GHz)	DSO Value (mV)	Power (dBm)	Gain of test Antenna (dBi)	E _{Meas} (dBμV/m)	EIRP Level (dBm)	EIRP Limit (dBm)	Pass/Fail
1	58.32	52.07	-5.90	20.50	146.17	58.38 PK	59.00	Pass
		40.12	-16.72	20.50	135.35	47.56 AV	56.00	Pass
2	60.48	52.70	-5.74	20.50	146.65	58.85 PK	59.00	Pass
		40.40	-16.59	20.50	135.80	48 AV	56.00	Pass
3.5	63.72	52.55	-6.40	20.50	146.44	58.65 PK	59.00	Pass
		40.22	-17.28	20.50	135.56	47.77 AV	56.00	Pass

Remarks:

1. The measured power level is converted to EIRP using the equation:

Follow ANSI 63.10 section 9.4 Equations to calculate and extrapolate field strength

$$E_{\text{Meas}} (\text{dB}\mu\text{V/m}) = 126.8 - 20\log(\lambda) + P - G$$

where:

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

Follow ANSI 63.10 section 9.5 Equations to calculate EIRP

$$\text{EIRP Level (dBm/MHz)} = E_{\text{Meas}} (\text{dB}\mu\text{V/m}) + 20 \cdot \log(d_{\text{Meas}}) - 104.7$$

where:

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

Measurements made at 7 meter distance.

2. The far-field boundary is given in ANSI 63.10 section 9.1 as:

$$R_{\text{far field}} = (2 \cdot L^2) / \lambda$$

L is the Largest Antenna Dimension of either the EUT antenna or measurement antenna, including the reflector

λ is the wavelength

For Peak Output Power (Conducted Power)


Channel	Frequency (GHz)	EIRP (dBm)	Max. Gain (dBi)	Conducted Output Power (dBm)	Conducted Output Power (mW)	Conducted Output Power limit (mW)	Pass /Fail
1	58.32	58.38	38	20.38	109.14	500	Pass
2	60.48	58.85	38	20.85	121.62	500	Pass
3.5	63.72	58.65	38	20.65	116.14	500	Pass

4.5 Frequency Stability Measurement

4.5.1 Limits of Frequency Stability Measurement

15.255(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation.

4.5.2 Test Setup

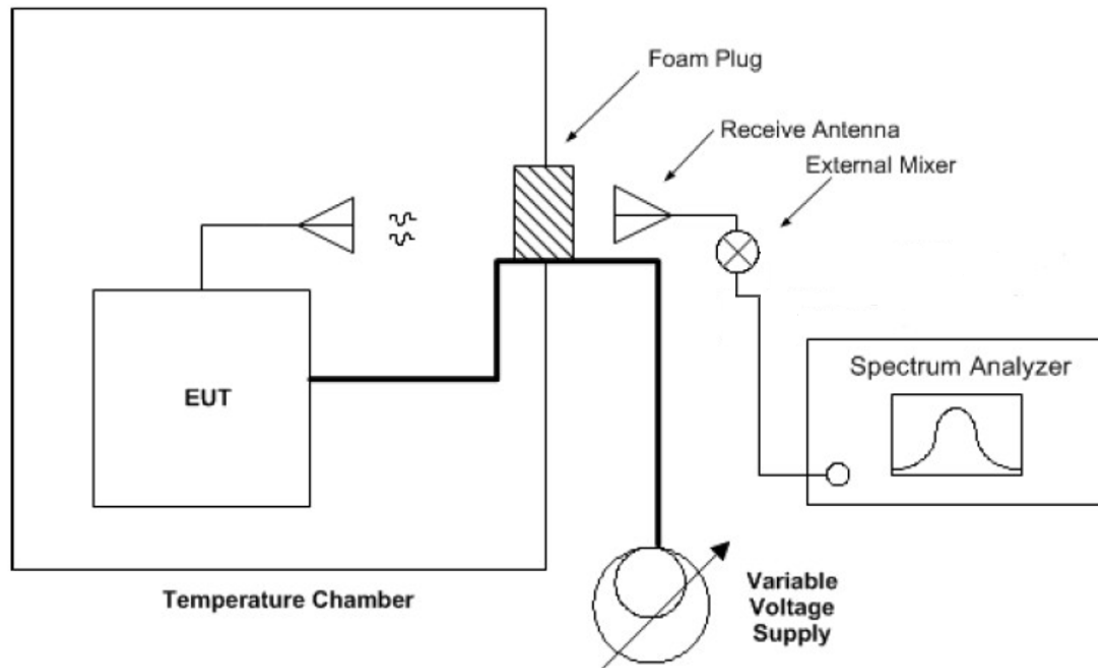

4.5.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Keysight	N9030A	MY55330160	2021/2/5	2022/2/4
Conical Horn Antenna (50~75GHz) Keysight	WR15CH-Conical	RCHO15RL-1	2021/6/11	2022/6/10
N9029AV15-DC9 - 50-75 GHz VDI Standard Downconverter with 9VDC supply Keysight	SA Extension WR15	SAX 381	CoC	CoC
Antenna Tower & Turn Table CT	NA	NA	NA	NA
AC Power Source GOOD WILL	6905S	1991551	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/1/14	2023/1/13
True RMS Clamp Meter Fluke	325	31130711WS	2021/6/2	2022/6/1

- Note: 1. The test was performed in HC - 10m Chamber 1.
 2. The calibrations are traceable to NML/ROC and NIST/USA.
 3. Certificate of Conformance (CoC) which is issued by manufacturer states that the product meets the specification.
 4. Tested Date: 2022/1/21

4.5.4 Test Procedure

- Arrange EUT and test equipment as above setup configuration.
- With the EUT at ambient temperature and voltage source set to the EUT nominal operating voltage (100%), record the spectrum mask of the EUT emission on the spectrum analyzer.
- Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- Set the power supply to 100% nominal setting, and raise EUT operating temperature to 50 °C. Record the frequency excursion of the EUT emission mask.
- Repeat step d) at each 10 °C increment down to -20 °C

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results (Mode 1)

Frequency Stability Versus Temp.														
Test Frequency :		58320 & 63720 MHz			Frequency Range (MHz):			57000 ~ 71000			Pass / Fail		Pass	
Temperature (°C)	Power Supply (Vac)	Frequency over time of reading tolerance												
		0 minutes			2 minutes			5 minutes			10 minutes			
		FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	
50	120	57829.81	64204.79	Pass	57829.82	64204.75	Pass	57829.85	64204.77	Pass	57829.85	64204.76	Pass	
40	120	57829.87	64204.71	Pass	57829.89	64204.71	Pass	57829.89	64204.72	Pass	57829.87	64204.73	Pass	
30	120	57829.91	64204.54	Pass	57829.92	64204.55	Pass	57829.93	64204.57	Pass	57829.94	64204.53	Pass	
20	120	57829.37	64204.93	Pass	57829.41	64204.93	Pass	57829.40	64204.95	Pass	57829.42	64204.94	Pass	
10	120	57829.78	64204.60	Pass	57829.78	64204.60	Pass	57829.78	64204.61	Pass	57829.77	64204.66	Pass	
0	120	57829.43	64205.11	Pass	57829.45	64205.10	Pass	57829.41	64205.09	Pass	57829.40	64205.08	Pass	
-10	120	57829.53	64204.68	Pass	57829.54	64204.72	Pass	57829.55	64204.69	Pass	57829.53	64204.72	Pass	
-20	120	57829.93	64204.62	Pass	57829.92	64204.62	Pass	57829.92	64204.61	Pass	57829.93	64204.63	Pass	

Frequency Stability Versus Voltage														
Test Frequency :		58320 & 63720 MHz			Frequency Range (MHz):			57000 ~ 71000			Pass / Fail		Pass	
Temperature (°C)	Power Supply (Vac)	Frequency over time of reading tolerance												
		0 minutes			2 minutes			5 minutes			10 minutes			
		FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	
20	138	57829.78	64204.61	Pass	57829.78	64204.60	Pass	57829.77	64204.60	Pass	57829.76	64204.65	Pass	
	120	57829.78	64204.60	Pass	57829.78	64204.60	Pass	57829.78	64204.61	Pass	57829.77	64204.66	Pass	
	102	57829.77	64204.59	Pass	57829.78	64204.60	Pass	57829.79	64204.60	Pass	57829.77	64204.65	Pass	

4.5.8 Test Results (Mode 2)

Frequency Stability Versus Temp.														
Test Frequency :		58320 & 63720 MHz			Frequency Range (MHz):			57000 ~ 71000			Pass / Fail		Pass	
Temperature (°C)	Power Supply (Vac)	Frequency over time of reading tolerance												
		0 minutes			2 minutes			5 minutes			10 minutes			
		FL(MHz)	FH(MHz)	Pass/fail	FL(MHz)	FH(MHz)	Pass/fail	FL(MHz)	FH(MHz)	Pass/fail	FL(MHz)	FH(MHz)	Pass/fail	
50	120	57300.62	64675.30	PASS	57300.62	64675.33	PASS	57300.62	64675.35	PASS	57300.63	64675.34	Pass	
40	120	57300.31	64675.35	PASS	57300.31	64675.39	PASS	57300.28	64675.35	PASS	57300.28	64675.33	Pass	
30	120	57300.49	64675.35	PASS	57300.53	64675.35	PASS	57300.51	64675.37	PASS	57300.52	64675.39	Pass	
20	120	57300.37	64675.59	PASS	57300.34	64675.64	PASS	57300.33	64675.61	PASS	57300.37	64675.63	Pass	
10	120	57300.48	64675.64	PASS	57300.51	64675.64	PASS	57300.51	64675.66	PASS	57300.49	64675.66	Pass	
0	120	57300.33	64675.53	PASS	57300.29	64675.48	PASS	57300.34	64675.53	PASS	57300.35	64675.49	Pass	
-10	120	57300.63	64675.11	PASS	57300.61	64675.14	PASS	57300.59	64675.14	PASS	57300.62	64675.13	Pass	
-20	120	57300.25	64675.67	PASS	57300.20	64675.67	PASS	57300.23	64675.66	PASS	57300.23	64675.68	Pass	

Frequency Stability Versus Voltage														
Test Frequency :		58320 & 63720 MHz			Frequency Range (MHz):			57000 ~ 71000			Pass / Fail		Pass	
Temperature (°C)	Power Supply (Vac)	Frequency over time of reading tolerance												
		0 minutes			2 minutes			5 minutes			10 minutes			
		FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/fail	FL(MHz)	FH(MHz)	Pass/Fail	FL(MHz)	FH(MHz)	Pass/Fail	
20	138	57300.49	64675.65	PASS	57300.52	64675.63	PASS	57300.50	64675.65	PASS	57300.49	64675.68	Pass	
	120	57300.48	64675.64	PASS	57300.51	64675.64	PASS	57300.51	64675.66	PASS	57300.49	64675.66	Pass	
	102	57300.48	64675.64	PASS	57300.52	64675.64	PASS	57300.52	64675.65	PASS	57300.48	64675.66	Pass	

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---