

# TEST REPORT

FCC 2G3G Test for TM19FNEUHD2  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2412-FC051

**DATE OF ISSUE**  
December 20, 2024

**Tested by**  
Jae Ryang Do



**Technical Manager**  
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



# TEST REPORT

**REPORT NO.**

HCT-RF-2412-FC051

**DATE OF ISSUE**

December 20, 2024

**Applicant**

**LG Electronics Inc.**

128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea

**Product Name**

Telematics

**Model Name**

TM19FNEUHD2

**Date of Test**

September 30, 2024 ~ December 13, 2024

**FCC ID**

BEJTM19FNEUHD2

**Location of Test**

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

**FCC Classification:**

PCB Licensed Transmitter (PCB)

**Test Standard Used**

FCC Rule Part: § 22, § 24, § 27

**Test Results**

PASS

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue     | Description     |
|--------------|-------------------|-----------------|
| 0            | December 20, 2024 | Initial Release |

## Notice

### Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.

(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

## CONTENTS

|  |     |
|--|-----|
| 1. GENERAL INFORMATION .....                                     | 5   |
| 1.1. MAXIMUM OUTPUT POWER.....                                   | 6   |
| 2. INTRODUCTION .....  | 7   |
| 2.1. DESCRIPTION OF EUT .....                                    | 7   |
| 2.2. MEASURING INSTRUMENT CALIBRATION .....                      | 7   |
| 2.3. TEST FACILITY .....   | 7   |
| 3. DESCRIPTION OF TESTS .....                                    | 8   |
| 3.1 TEST PROCEDURE.....  | 8   |
| 3.2 CONDUCTED OUTPUT POWER .....                                 | 9   |
| 3.3 RADIATED POWER .....   | 10  |
| 3.4 RADIATED SPURIOUS EMISSIONS .....                            | 11  |
| 3.5 PEAK- TO- AVERAGE RATIO.....                                 | 12  |
| 3.6 OCCUPIED BANDWIDTH. ....                                     | 14  |
| 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....     | 15  |
| 3.8 BAND EDGE.....   | 16  |
| 3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 18  |
| 3.10 WORST CASE(CONDUCTED TEST) .....                            | 19  |
| 3.11 WORST CASE(RADIATED TEST).....                              | 20  |
| 4. LIST OF TEST EQUIPMENT .....                                  | 21  |
| 5. MEASUREMENT UNCERTAINTY .....                                 | 22  |
| 6. SUMMARY OF TEST RESULTS .....                                 | 23  |
| 7. SAMPLE CALCULATION .....                                      | 24  |
| 8. TEST DATA .....   | 26  |
| 8.1 Conducted Output Power .....                                 | 26  |
| 8.2 EFFECTIVE RADIATED POWER .....                               | 30  |
| 8.3 EQUIVALENT ISOTROPIC RADIATED POWER .....                    | 31  |
| 8.4 RADIATED SPURIOUS EMISSIONS .....                            | 32  |
| 8.5 PEAK-TO-AVERAGE RATIO .....                                  | 37  |
| 8.6 OCCUPIED BANDWIDTH .....                                     | 38  |
| 8.7 CONDUCTED SPURIOUS EMISSIONS.....                            | 39  |
| 8.8 BAND EDGE.....   | 39  |
| 8.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 40  |
| 9. TEST PLOTS .....  | 51  |
| 10. ANNEX A_ TEST SETUP PHOTO .....                              | 140 |

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

|                            |   |
|----------------------------|---|
| <b>Applicant Name:</b>     | LG Electronics Inc.   |
| <b>Address:</b>            | 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea   |
| <b>FCC ID:</b>             | BEJTM19FNEUHD2  |
| <b>Application Type:</b>   | Certification   |
| <b>FCC Classification:</b> | PCB Licensed Transmitter (PCB)  |
| <b>FCC Rule Part(s):</b>   | § 22, § 24, § 27  |
| <b>EUT Type:</b>           | Telematics  |
| <b>Model(s):</b>           | TM19FNEUHD2   |
| <b>Tx Frequency:</b>       | 824.20 - 848.80 MHz (GSM850)<br>826.40 - 846.60 MHz (WCDMA850)<br>1 850.20 - 1 909.80 MHz (GSM1900)<br>1 852.4 - 1 907.6 MHz (WCDMA1900)<br>1 712.4 - 1 752.6 MHz (WCDMA1700) |
| <b>Rx Frequency:</b>       | 869.20 - 893.80 MHz (GSM850)<br>871.40 - 891.60 MHz (WCDMA850)<br>1 930.20 - 1 989.80 MHz (GSM1900)<br>1 932.4 - 1 987.6 MHz (WCDMA1900)<br>2 112.4 - 2 152.6 MHz (WCDMA1700) |
| <b>Date(s) of Tests:</b>   | September 30, 2024 ~ December 10, 2024  |
| <b>Serial number:</b>      | Honda MY26 #23  |
| <b>Antenna Information</b> | Please refer to the Antenna Approval Specification document.  |

### 1.1. MAXIMUM OUTPUT POWER

| Mode           | Tx Frequency<br>(MHz) | Rx Frequency<br>(MHz) | Emission<br>Designator | Conducted Output Power |                     |
|----------------|-----------------------|-----------------------|------------------------|------------------------|---------------------|
|                |                       |                       |                        | Max. Power<br>(W)      | Max. Power<br>(dBm) |
| GSM850         | 824.2 – 848.8         | 869.2 – 893.8         | 249KGXW                | 2.023                  | 33.06               |
| GSM850<br>EDGE |                       |                       | 247KG7W                | 0.653                  | 28.15               |
| WCDMA850       | 826.4 – 846.6         | 871.4 – 891.6         | 4M16F9W                | 0.244                  | 23.87               |

| Mode            | Tx Frequency<br>(MHz) | Rx Frequency<br>(MHz) | Emission<br>Designator | Conducted Output Power |                     |
|-----------------|-----------------------|-----------------------|------------------------|------------------------|---------------------|
|                 |                       |                       |                        | Max. Power<br>(W)      | Max. Power<br>(dBm) |
| GSM1900         | 1850.2 – 1909.8       | 1930.2 – 1989.8       | 247KGXW                | 0.811                  | 29.09               |
| GSM1900<br>EDGE |                       |                       | 245KG7W                | 0.338                  | 25.29               |
| WCDMA1900       | 1852.4 – 1907.6       | 1932.4 – 1987.6       | 4M15F9W                | 0.207                  | 23.15               |
| WCDMA1700       | 1712.4 – 1752.6       | 2112.4 – 2152.6       | 4M16F9W                | 0.202                  | 23.05               |

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Telematics with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6..

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**


### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

| Test Description                                    | Test Procedure Used   |
|---|---|
| Occupied Bandwidth                                  | - KDB 971168 D01 v03r01 – Section 4.3<br>- ANSI C63.26-2015 – Section 5.4.4   |
| Band Edge   | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7   |
| Spurious and Harmonic Emissions at Antenna Terminal | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7   |
| Conducted Output Power                              | - KDB 971168 D01 v03r01 - Section 5.2.4<br>- ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2                                       |
| Peak- to- Average Ratio                             | - KDB 971168 D01 v03r01 – Section 5.7<br>- ANSI C63.26-2015 – Section 5.2.3.4<br>- ANSI C63.26-2015 – Section 5.2.6(only GSM) |
| Frequency stability                                 | - ANSI C63.26-2015 – Section 5.6  |
| Radiated Power                                      | - ANSI C63.26-2015 – Section 5.2.4.4<br>- KDB 971168 D01 v03r01 – Section 5.8   |
| Radiated Spurious and Harmonic Emissions            | - ANSI C63.26-2015 – Section 5.5.3<br>- KDB 971168 D01 v03r01 – Section 5.8   |



### 3.2 CONDUCTED OUTPUT POWER

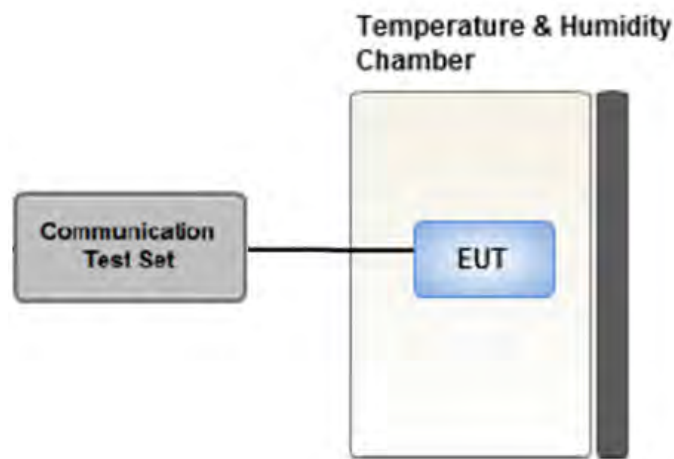

Test setup

#### Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

### 3.3 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.4 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: :  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

## 3.5 PEAK- TO- AVERAGE RATIO

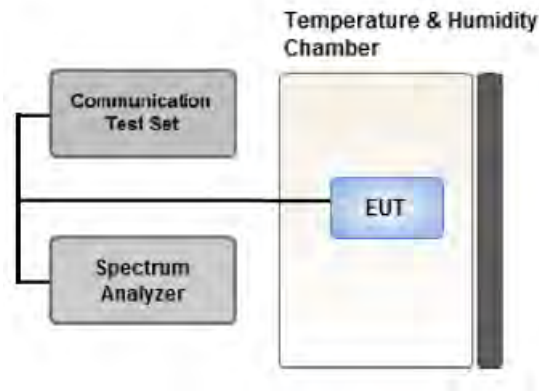

Test setup

### ① CCDF Procedure for PAPR

#### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .  
 Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \times \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \times \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.6 OCCUPIED BANDWIDTH.

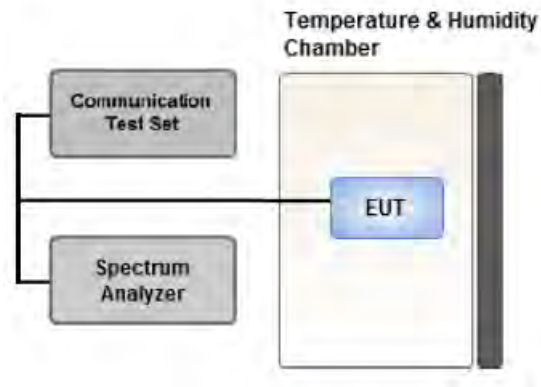

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

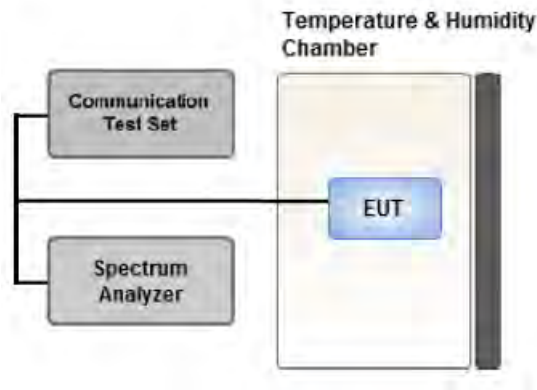

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings(GSM)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

#### Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

### 3.8 BAND EDGE

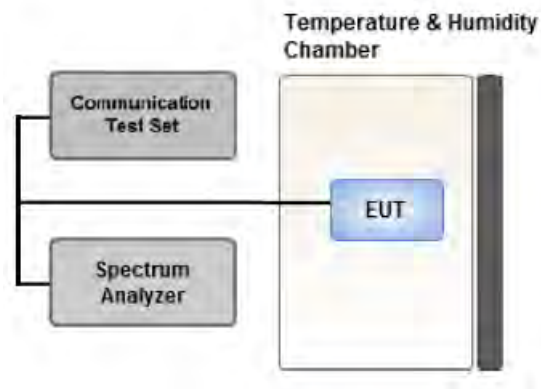

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize



**Test Notes**


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \times \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where  $\text{Margin} < 1$  dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

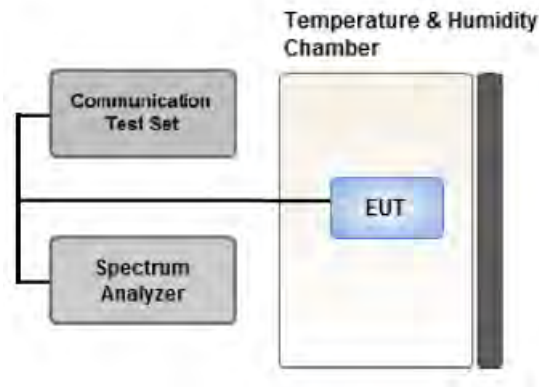

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

| Test Description                                    | Modulation   | Test Channel   |
|---|--|----------------|
| Occupied Bandwidth                                  | GSM : Voice & EDGE(1 TX Slot)<br>WCDMA : QPSK(RMC) | Low, Mid, High |
| Band Edge   | GSM : Voice & EDGE(1 TX Slot)<br>WCDMA : QPSK(RMC) | Low, High      |
| Peak-To-Average Ratio                               | GSM : Voice & EDGE(1 TX Slot)<br>WCDMA : QPSK(RMC) | Mid            |
| Spurious and Harmonic Emissions at Antenna Terminal | GSM : Voice<br>WCDMA : QPSK(RMC)                   | Low, Mid, High |

[ Test Channel ]

|      | Uplink Channel |                 |                  |                  |                  |
|------|----------------|-----------------|------------------|------------------|------------------|
|      | 2G<br>(GSM850) | 2G<br>(GSM1900) | 3G<br>(WCDMA B2) | 3G<br>(WCDMA B4) | 3G<br>(WCDMA B5) |
| Low  | 128            | 512             | 9262             | 1312             | 4132             |
| Mid  | 190            | 661             | 9400             | 1412             | 4183             |
| High | 251            | 810             | 9538             | 1513             | 4233             |

### 3.11 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.  
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[ Worst case\_3G ]

| Test Description  | Modulation      | Paging Service   | Axis   | Test Channel   |
|---|-----------------|------------------|--|----------------|
| Effective Radiated Power,<br>Effective Isotropic Radiated Power | QPSK<br>(WCDMA) | 12.2 kbps<br>RMC | WCDMA B2 : Y<br>WCDMA B4 : Z<br>WCDMA B5 : X | Low, Mid, High |
| Radiated Spurious and Harmonic<br>Emissions                     | QPSK<br>(WCDMA) | 12.2 kbps<br>RMC | WCDMA B2 : Y<br>WCDMA B4 : Z<br>WCDMA B5 : Y | Low, Mid, High |

[ Worst case\_2G ]

| Test Description  | Modulation          | Axis                      | Test Channel                    |
|---|---------------------|---------------------------|---------------------------------|
| Effective Radiated Power,<br>Effective Isotropic Radiated Power | Voice               | GSM850 : X<br>GSM1900 : Y | Low, Mid, High                  |
|   | EDGE<br>(1 TX Slot) | GSM850 : X<br>GSM1900 : Y | GSM 850 : High<br>GSM1900 : Mid |
| Radiated Spurious and Harmonic<br>Emissions                     | Voice               | GSM850 : X<br>GSM1900 : Y | Low, Mid, High                  |

[ Test Channel ]

|      | UplinkChannel  |                 |                  |                  |                  |
|------|----------------|-----------------|------------------|------------------|------------------|
|      | 2G<br>(GSM850) | 2G<br>(GSM1900) | 3G<br>(WCDMA B2) | 3G<br>(WCDMA B4) | 3G<br>(WCDMA B5) |
| Low  | 128            | 512             | 9262             | 1312             | 4132             |
| Mid  | 190            | 661             | 9400             | 1412             | 4183             |
| High | 251            | 810             | 9538             | 1513             | 4233             |

#### 4. LIST OF TEST EQUIPMENT

| Equipment  | Model                     | Manufacture      | Serial No.  | Due to Calibration | Calibration Interval |
|--|---------------------------|------------------|-------------|--------------------|----------------------|
| RF Switching System                                  | Switch box(1.2 G HPF+LNA) | HCT CO., LTD.,   | F1L1        | 11/11/2025         | Annual               |
| RF Switching System                                  | Switch box(3.3 G HPF+LNA) | HCT CO., LTD.,   | F1L2        | 11/11/2025         | Annual               |
| RF Switching System                                  | Switch box(LNA)           | HCT CO., LTD.,   | F1L4        | 11/11/2025         | Annual               |
| RF Switching System                                  | Switch box(6 G HPF+LNA)   | HCT CO., LTD.,   | F1L7        | 11/11/2025         | Annual               |
| Power Splitter(DC ~ 26.5 GHz)                        | 11667B                    | Hewlett Packard  | 5001        | 04/17/2025         | Annual               |
| DC Power Supply                                      | E3632A                    | Agilent          | MY40010147  | 08/06/2025         | Annual               |
| Dipole Antenna                                       | UHAP                      | Schwarzbeck      | 01274       | 03/10/2026         | Biennial             |
| Dipole Antenna                                       | UHAP                      | Schwarzbeck      | 01288       | 08/07/2026         | Biennial             |
| Chamber  | SU-642                    | ESPEC            | 93008124    | 02/19/2025         | Annual               |
| Horn Antenna(1 ~ 18 GHz)                             | BBHA 9120D                | Schwarzbeck      | 147         | 08/17/2025         | Biennial             |
| Horn Antenna(1 ~ 18 GHz)                             | BBHA 9120D                | Schwarzbeck      | 9120D-1298  | 09/11/2025         | Biennial             |
| Horn Antenna(15 ~ 40 GHz)                            | BBHA 9170                 | Schwarzbeck      | BBHA9170342 | 09/20/2026         | Biennial             |
| Horn Antenna(15 ~ 40 GHz)                            | BBHA 9170                 | Schwarzbeck      | BBHA9170124 | 03/28/2025         | Biennial             |
| Signal Analyzer(10 Hz ~ 26.5 GHz)                    | N9020A                    | Agilent          | MY52090906  | 04/19/2025         | Annual               |
| ATTENUATOR(20 dB)                                    | 8493C                     | Hewlett Packard  | 17280       | 04/17/2025         | Annual               |
| Spectrum Analyzer(10 Hz ~ 40 GHz)                    | FSV40                     | REOHDE & SCHWARZ | 100931      | 08/06/2025         | Annual               |
| Base Station   | 8960 (E5515C)             | Agilent          | MY48360800  | 08/05/2025         | Annual               |
| Loop Antenna(9 kHz ~ 30 MHz)                         | FMZB1513                  | Schwarzbeck      | 1513-333    | 03/07/2026         | Biennial             |
| Trilog Broadband Antenna                             | VULB9168                  | Schwarzbeck      | 895         | 08/28/2026         | Biennial             |
| Trilog Broadband Antenna                             | VULB9168                  | Schwarzbeck      | 1135        | 08/19/2026         | Biennial             |
| Wideband Radio Communication Tester                  | MT8821C                   | Anritsu Corp.    | 6262094331  | 11/13/2025         | Annual               |
| Wideband Radio Communication Tester                  | MT8820C                   | Anritsu Corp.    | 6201026545  | 11/20/2025         | Annual               |
| SIGNAL GENERATOR<br>(100 kHz ~ 40 GHz)               | SMB100A                   | REOHDE & SCHWARZ | 177633      | 07/26/2025         | Annual               |
| Signal Analyzer(5 Hz ~ 40.0 GHz)                     | N9030B                    | KEYSIGHT         | MY55480167  | 05/17/2025         | Annual               |
| FCC LTE Mobile Conducted RF Automation Test Software | -                         | HCT CO., LTD.,   | -           | -                  | -                    |

##### Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|--|--|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.98 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.36 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.70 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.52 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.66 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (Above 40 GHz)      | 5.58 (Confidence level about 95 %, $k=2$ ) |

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

| Test Description   | FCC Part Section(s)                                     | Test Limit   | Test Result |
|--|---|--|-------------|
| Occupied Bandwidth   | § 2.1049  | N/A  | PASS        |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | § 2.1051,<br>§ 22.917(a),<br>§ 24.238(a),<br>§ 27.53(h) | < 43 + 10 x log <sub>10</sub> (P[Watts]) at Band Edge<br>and for all out-of-band emissions | PASS        |
| Conducted Output Power   | § 2.1046  | N/A  | PASS        |
| Peak- to- Average Ratio  | § 22.913(d),<br>§ 24.232(d),<br>§ 27.50(d)(5)           | < 13 dB  | PASS        |
| Frequency stability / variation of ambient temperature           | § 2.1055,<br>§ 22.355                                   | < 2.5 ppm  | PASS        |
|  | § 24.235,<br>§ 27.54                                    | Emission must remain in band   | PASS        |

### 6.2 Test Condition: Radiated Test

| Test Description                         | FCC Part Section(s)                                     | Test Limit  | Test Result |
|--|---|---|-------------|
| Effective Radiated Power                 | § 22.913(a)(5)  | < 7 Watts max. ERP  | PASS        |
| Equivalent Isotropic Radiated Power      | § 24.232(c),<br>§ 27.50(d)(4)                           | < 2 Watts max. EIRP<br>< 1 Watts max. EIRP                                | PASS        |
| Radiated Spurious and Harmonic Emissions | § 2.1053,<br>§ 22.917(a),<br>§ 24.238(a),<br>§ 27.53(h) | < 43 + 10 x log <sub>10</sub> (P[Watts]) for<br>all out-of band emissions | PASS        |

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

| Ch./ Freq. |            | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant. Gain<br>(dBd) | C.L  | Pol. | ERP   |       |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                         |                           |                    |      |      | W     | dBm   |
| 128        | 824.20     | -21.37                  | 38.40                     | -10.61             | 0.95 | H    | 0.483 | 26.84 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

| Ch./ Freq. |            | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant. Gain<br>(dBi) | C.L  | Pol. | EIRP  |       |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                         |                           |                    |      |      | W     | dBm   |
| 20175      | 1,732.50   | -15.75                  | 18.45                     | 9.90               | 1.76 | H    | 0.456 | 26.59 |

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 Conducted Output Power

| Band         | Channel | GPRS Data                  |                            |                            |                            | EDGE Data                  |                            |                            |                            |
|--------------|---------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
|              |         | GPRS<br>1 TX Slot<br>(dBm) | GPRS<br>2 TX Slot<br>(dBm) | GPRS<br>3 TX Slot<br>(dBm) | GPRS<br>4 TX Slot<br>(dBm) | EDGE<br>1 TX Slot<br>(dBm) | EDGE<br>2 TX Slot<br>(dBm) | EDGE<br>3 TX Slot<br>(dBm) | EDGE<br>4 TX Slot<br>(dBm) |
| Target Power |         | 33.00                      |                            |                            |                            | 27.50                      |                            |                            |                            |
| GSM 850      | 128     | 33.06                      | 33.00                      | 32.96                      | 32.88                      | 27.41                      | 27.32                      | 27.27                      | 27.20                      |
|              | 190     | 32.96                      | 32.86                      | 32.83                      | 32.73                      | 27.51                      | 27.43                      | 27.36                      | 27.29                      |
|              | 251     | 32.98                      | 32.88                      | 32.80                      | 32.71                      | 28.15                      | 28.12                      | 28.00                      | 27.92                      |
| Target Power |         | 28.70                      |                            |                            |                            | 24.50                      |                            |                            |                            |
| GSM 1900     | 512     | 28.78                      | 28.65                      | 28.49                      | 28.35                      | 24.61                      | 24.44                      | 24.29                      | 24.17                      |
|              | 661     | 28.85                      | 28.69                      | 28.53                      | 28.36                      | 24.77                      | 24.65                      | 24.52                      | 24.40                      |
|              | 810     | 29.09                      | 29.03                      | 28.89                      | 28.73                      | 25.29                      | 25.16                      | 24.91                      | 24.82                      |

| Band      | Mode  | 3GPP 34.121   | Cellular Band [dBm] |       |       | MPR Target | Target Value | 3GPP    |
|-----------|-------|---------------|---------------------|-------|-------|------------|--------------|---------|
|           |       | Subtest       |                     |       |       |            |              | Release |
|           |       | DL Channel    | 9662                | 9800  | 9938  |            |              | Version |
|           |       | UL Channel    | 9262                | 9400  | 9538  |            |              |         |
| WCDMA1900 | WCDMA | 12.2 kbps RMC | 23.11               | 23.15 | 22.87 | -          | 23.00        | 99      |
|           | WCDMA | 12.2 kbps AMR | 23.08               | 23.14 | 22.82 | -          | 23.00        | 99      |
|           | HSUPA | Subtest 1     | 22.98               | 22.70 | 22.71 |            | 22.50        | 6       |
|           |       | Subtest 2     | 20.01               | 20.23 | 20.05 |            | 20.00        | 6       |
|           |       | Subtest 3     | 21.99               | 21.98 | 21.96 |            | 22.00        | 6       |
|           |       | Subtest 4     | 20.52               | 20.74 | 20.65 |            | 20.50        | 6       |
|           |       | Subtest 5     | 21.92               | 22.93 | 22.65 |            | 22.50        | 6       |

| Band      | Mode  | 3GPP 34.121      | Cellular Band [dBm] |       |       | MPR Target | Target Value | 3GPP    |
|-----------|-------|------------------|---------------------|-------|-------|------------|--------------|---------|
|           |       | Subtest          |                     |       |       |            |              | Release |
|           |       | DL Channel       | 1537                | 1637  | 1738  |            |              | Version |
|           |       | UL Channel       | 1312                | 1412  | 1513  |            |              |         |
| WCDMA1700 | WCDMA | 12.2 kbps<br>RMC | 22.90               | 22.98 | 23.05 | -          | 23.00        | 99      |
|           | WCDMA | 12. kbps<br>AMR  | 22.85               | 22.96 | 23.00 | -          | 23.00        | 99      |
|           | HSUPA | Subtest 1        | 22.76               | 22.19 | 22.69 |            | 22.50        | 6       |
|           |       | Subtest 2        | 20.04               | 20.06 | 20.01 |            | 20.00        | 6       |
|           |       | Subtest 3        | 21.93               | 21.95 | 21.97 |            | 22.00        | 6       |
|           |       | Subtest 4        | 20.44               | 20.54 | 20.57 |            | 20.50        | 6       |
|           |       | Subtest 5        | 22.60               | 22.72 | 22.73 |            | 22.50        | 6       |

| Band     | Mode  | 3GPP 34.121      | Cellular Band [dBm] |       |       | MPR Target | Target Value | 3GPP    |
|----------|-------|------------------|---------------------|-------|-------|------------|--------------|---------|
|          |       | Subtest          |                     |       |       |            |              | Release |
|          |       | DL Channel       | 4357                | 4408  | 4458  |            |              | Version |
|          |       | UL Channel       | 4132                | 4183  | 4233  |            |              |         |
| WCDMA850 | WCDMA | 12.2 kbps<br>RMC | 23.81               | 23.87 | 23.83 | -          | 23.00        | 99      |
|          | WCDMA | 12. kbps<br>AMR  | 23.71               | 23.80 | 23.75 | -          | 23.00        | 99      |
|          | HSUPA | Subtest 1        | 22.65               | 22.71 | 22.04 |            | 22.50        | 6       |
|          |       | Subtest 2        | 19.92               | 20.05 | 19.89 |            | 20.00        | 6       |
|          |       | Subtest 3        | 21.95               | 21.99 | 21.98 |            | 22.00        | 6       |
|          |       | Subtest 4        | 20.53               | 20.45 | 20.34 |            | 20.50        | 6       |
|          |       | Subtest 5        | 22.65               | 22.66 | 22.53 |            | 22.50        | 6       |

## 8.2 EFFECTIVE RADIATED POWER

| Mode   | Ch./ Freq. |            | Measured<br>Level<br>(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain<br>(dBd) | C.L  | Pol. | Limit  | ERP   |       |
|--------|------------|------------|----------------------------|------------------------------|-----------------------|------|------|--------|-------|-------|
|        | channel    | Freq.(MHz) |                            |                              |                       |      |      | W      | W     | dBm   |
| GSM850 | 128        | 824.2      | -19.95                     | 42.35                        | -10.24                | 1.44 | H    | < 7.00 | 1.167 | 30.67 |
|        | 190        | 836.6      | -19.28                     | 43.13                        | -10.18                | 1.45 | H    |        | 1.413 | 31.50 |
|        | 251        | 848.8      | -18.74                     | 44.00                        | -10.11                | 1.45 | H    |        | 1.754 | 32.44 |
| EDGE   | 251        | 848.8      | -24.24                     | 38.50                        | -10.11                | 1.45 | H    |        | 0.494 | 26.94 |

| Mode     | Ch./ Freq. |            | Measured Level (dBm) | Substitute LEVEL (dBm) | Ant. Gain (dBd) | C.L  | Pol. | Limit  | ERP   |       |
|----------|------------|------------|----------------------|------------------------|-----------------|------|------|--------|-------|-------|
|          | channel    | Freq.(MHz) |                      |                        |                 |      |      | W      | W     | dBm   |
| WCDMA850 | 4132       | 826.4      | -28.21               | 34.20                  | -10.23          | 1.44 | H    | < 7.00 | 0.179 | 22.53 |
|          | 4183       | 836.6      | -27.59               | 34.82                  | -10.18          | 1.45 | H    |        | 0.208 | 23.19 |
|          | 4233       | 846.6      | -27.68               | 35.08                  | -10.13          | 1.45 | H    |        | 0.224 | 23.50 |

### 8.3 EQUIVALENT ISOTROPIC RADIATED POWER

| Mode    | Ch./ Freq. |            | Measured<br>Level<br>(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain<br>(dBi) | C.L  | Pol. | Limit  | EIRP  |       |
|---------|------------|------------|----------------------------|------------------------------|-----------------------|------|------|--------|-------|-------|
|         | channel    | Freq.(MHz) |                            |                              |                       |      |      | W      | W     | dBm   |
| GSM1900 | 512        | 1850.2     | -11.13                     | 23.39                        | 10.40                 | 2.07 | V    | < 2.00 | 1.486 | 31.72 |
|         | 661        | 1880.0     | -11.10                     | 23.85                        | 10.40                 | 2.21 | V    |        | 1.600 | 32.04 |
|         | 810        | 1909.8     | -10.74                     | 24.20                        | 10.40                 | 2.17 | V    |        | 1.750 | 32.43 |
| EDGE    | 810        | 1909.8     | -16.58                     | 18.36                        | 10.40                 | 2.17 | V    |        | 0.456 | 26.59 |

| Mode      | Ch./ Freq. |            | Measured<br>Level<br>(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain<br>(dBi) | C.L  | Pol. | Limit  | EIRP  |       |
|-----------|------------|------------|----------------------------|------------------------------|-----------------------|------|------|--------|-------|-------|
|           | channel    | Freq.(MHz) |                            |                              |                       |      |      | W      | W     | dBm   |
| WCDMA1900 | 9262       | 1852.4     | -15.26                     | 19.26                        | 10.40                 | 2.07 | V    | < 2.00 | 0.574 | 27.59 |
|           | 9400       | 1880.0     | -15.19                     | 19.76                        | 10.40                 | 2.21 | V    |        | 0.624 | 27.95 |
|           | 9538       | 1907.6     | -15.84                     | 19.10                        | 10.40                 | 2.17 | V    |        | 0.541 | 27.33 |

| Mode      | Ch./ Freq. |            | Measured<br>Level<br>(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain<br>(dBi) | C.L  | Pol. | Limit  | EIRP  |       |
|-----------|------------|------------|----------------------------|------------------------------|-----------------------|------|------|--------|-------|-------|
|           | channel    | Freq.(MHz) |                            |                              |                       |      |      | W      | W     | dBm   |
| WCDMA1700 | 1312       | 1712.4     | -17.43                     | 15.94                        | 10.04                 | 2.06 | H    | < 1.00 | 0.247 | 23.92 |
|           | 1412       | 1732.4     | -15.95                     | 17.49                        | 10.12                 | 2.08 | H    |        | 0.357 | 25.53 |
|           | 1513       | 1752.6     | -14.92                     | 18.61                        | 10.21                 | 2.08 | H    |        | 0.472 | 26.74 |

## 8.4 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

| Ch.            | Freq.<br>(MHz) | <u>Measured</u><br><u>Level</u><br><u>[dBm]</u> | Ant.<br>Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br><u>[dBm]</u> | C.L  | Pol. | Result<br>(dBm) | Limit  |
|----------------|----------------|---|-----------------------|---|------|------|-----------------|--------|
| 128<br>(824.2) | 1 648.40       | -25.43  | 9.58                  | -41.02  | 2.02 | V    | -33.46          | -13.00 |
|                | 2 472.60       | -32.34  | 10.30                 | -43.63  | 2.57 | H    | -35.90          | -13.00 |
|                | 3 296.80       | -46.76  | 12.13                 | -55.95  | 2.95 | V    | -46.77          | -13.00 |
| 190<br>(836.6) | 1 673.20       | -26.99  | 9.72                  | -42.64  | 2.05 | H    | -34.97          | -13.00 |
|                | 2 509.80       | -40.54  | 10.59                 | -51.71  | 2.51 | H    | -43.63          | -13.00 |
|                | 3 346.40       | -46.62  | 12.37                 | -56.41  | 2.96 | H    | -47.00          | -13.00 |
| 251<br>(848.8) | 1 697.60       | -22.12  | 9.88                  | -37.60  | 2.07 | V    | -29.79          | -13.00 |
|                | 2 546.40       | -42.47  | 10.66                 | -53.61  | 2.53 | H    | -45.48          | -13.00 |
|                | 3 395.20       | -47.49  | 12.50                 | -57.44  | 2.98 | H    | -47.92          | -13.00 |



▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

| Ch.             | Freq.<br>(MHz) | <u>Measured</u><br><u>Level</u><br><u>[dBm]</u> | Ant.<br>Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br><u>[dBm]</u> | C.L  | Pol. | Result<br>(dBm) | Limit  |
|-----------------|----------------|---|-----------------------|---|------|------|-----------------|--------|
| 512<br>(1850.2) | 3 700.40       | -46.33  | 12.29                 | -53.58  | 3.07 | V    | -44.36          | -13.00 |
|                 | 5 550.60       | -48.03  | 13.03                 | -47.65  | 3.89 | H    | -38.51          | -13.00 |
|                 | 7 400.80       | -50.21  | 10.80                 | -39.93  | 4.58 | V    | -33.71          | -13.00 |
| 661<br>(1880.0) | 3 760.00       | -46.44  | 12.22                 | -52.17  | 3.12 | V    | -43.07          | -13.00 |
|                 | 5 640.00       | -48.30  | 13.12                 | -48.19  | 3.92 | H    | -38.99          | -13.00 |
|                 | 7 520.00       | -49.41  | 10.82                 | -38.57  | 4.61 | V    | -32.36          | -13.00 |
| 810<br>(1909.8) | 3 819.60       | -45.94  | 12.16                 | -53.12  | 3.19 | V    | -44.15          | -13.00 |
|                 | 5 729.40       | -48.32  | 13.04                 | -48.19  | 4.00 | V    | -39.15          | -13.00 |
|                 | 7 639.20       | -50.06  | 11.21                 | -39.85  | 4.68 | H    | -33.32          | -13.00 |

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

| Ch.             | Freq.<br>(MHz) | <u>Measured</u><br><u>Level</u><br><u>[dBm]</u> | Ant.<br>Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br><u>[dBm]</u> | C.L  | Pol. | Result<br>(dBm) | Limit  |
|-----------------|----------------|---|-----------------------|---|------|------|-----------------|--------|
| 4132<br>(826.4) | 1 652.80       | -39.35  | 9.61                  | -54.90  | 2.02 | V    | -47.31          | -13.00 |
|                 | 2 479.20       | -43.01  | 10.34                 | -54.23  | 2.55 | H    | -46.44          | -13.00 |
|                 | 3 305.60       | -43.34  | 12.18                 | -52.66  | 2.97 | H    | -43.45          | -13.00 |
| 4183<br>(836.6) | 1 673.20       | -37.01  | 9.72                  | -52.66  | 2.05 | H    | -44.99          | -13.00 |
|                 | 2 509.80       | -43.22  | 10.59                 | -54.39  | 2.51 | V    | -46.31          | -13.00 |
|                 | 3 346.40       | -43.15  | 12.37                 | -52.94  | 2.96 | V    | -43.53          | -13.00 |
| 4233<br>(846.6) | 1 693.20       | -33.88  | 9.85                  | -49.41  | 2.07 | V    | -41.63          | -13.00 |
|                 | 2 539.80       | -43.24  | 10.67                 | -54.29  | 2.53 | H    | -46.15          | -13.00 |
|                 | 3 386.40       | -42.99  | 12.52                 | -53.02  | 2.99 | V    | -43.49          | -13.00 |

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

| Ch.              | Freq.<br>(MHz) | <u>Measured</u><br><u>Level</u><br><u>[dBm]</u> | Ant.<br>Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br><u>[dBm]</u> | C.L  | Pol. | Result<br>(dBm) | Limit  |
|------------------|----------------|---|-----------------------|---|------|------|-----------------|--------|
| 9262<br>(1852.4) | 3 704.80       | -46.61  | 12.28                 | -53.90  | 3.08 | H    | -44.70          | -13.00 |
|                  | 5 557.20       | -51.66  | 13.03                 | -51.23  | 3.88 | V    | -42.08          | -13.00 |
|                  | 7 409.60       | -52.19  | 10.79                 | -42.16  | 4.57 | V    | -35.94          | -13.00 |
| 9400<br>(1880.0) | 3 760.00       | -46.76  | 12.22                 | -52.49  | 3.12 | H    | -43.39          | -13.00 |
|                  | 5 640.00       | -50.56  | 13.12                 | -50.45  | 3.92 | V    | -41.25          | -13.00 |
|                  | 7 520.00       | -53.19  | 10.82                 | -42.35  | 4.61 | V    | -36.14          | -13.00 |
| 9538<br>(1907.6) | 3 815.20       | -47.19  | 12.16                 | -54.20  | 3.20 | H    | -45.24          | -13.00 |
|                  | 5 722.80       | -50.63  | 13.05                 | -50.71  | 4.00 | V    | -41.66          | -13.00 |
|                  | 7 630.40       | -52.57  | 11.18                 | -42.11  | 4.66 | H    | -35.59          | -13.00 |

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

| Ch.              | Freq.<br>(MHz) | <u>Measured</u><br><u>Level</u><br><u>[dBm]</u> | Ant.<br>Gain<br>(dBi) | <u>Substitute</u><br><u>Level</u><br><u>[dBm]</u> | C.L  | Pol. | Result<br>(dBm) | Limit  |
|------------------|----------------|---|-----------------------|---|------|------|-----------------|--------|
| 1312<br>(1712.4) | 3 424.80       | -47.20  | 12.43                 | -55.95  | 2.99 | H    | -46.51          | -13.00 |
|                  | 5 137.20       | -51.10  | 12.33                 | -51.73  | 3.81 | H    | -43.21          | -13.00 |
|                  | 6 849.60       | -52.22  | 11.90                 | -45.58  | 4.36 | H    | -38.04          | -13.00 |
| 1412<br>(1732.4) | 3 464.80       | -47.92  | 12.34                 | -56.54  | 3.02 | V    | -47.22          | -13.00 |
|                  | 5 197.20       | -50.61  | 12.60                 | -51.17  | 3.79 | V    | -42.36          | -13.00 |
|                  | 6 929.60       | -51.27  | 11.65                 | -44.65  | 4.40 | H    | -37.40          | -13.00 |
| 1513<br>(1752.6) | 3 505.20       | -46.44  | 12.34                 | -54.71  | 3.05 | V    | -45.42          | -13.00 |
|                  | 5 257.80       | -51.28  | 12.99                 | -51.48  | 3.79 | V    | -42.28          | -13.00 |
|                  | 7 010.40       | -51.27  | 11.26                 | -43.55  | 4.42 | V    | -36.71          | -13.00 |

## 8.5 PEAK-TO-AVERAGE RATIO

| Band         | Ch.    | Measured<br>$P_{Pk}$<br>(dBm) | Measured<br>$P_{Avg}$<br>(dBm) | $P_{Avg}$ (Duty Cycle) |                   |                | $P.A.R.$<br>$= P_{Pk} - P_{Avg}$<br>(dB) | Limit<br>(dB) | Pass /<br>Fail |
|--------------|--------|-------------------------------|--------------------------------|------------------------|-------------------|----------------|--|---------------|----------------|
|              |        |                               |                                | $T_{XTotal}$<br>(ms)   | $T_{XOn}$<br>(ms) | Factor<br>(dB) |  |               |                |
| GSM1900      | 661    | 29.479                        | 19.50                          | 4.6160                 | 0.5475            | 9.26           | 0.72                                     | 13            | Pass           |
| GSM1900 EDGE | 661    | 28.560                        | 14.14                          | 4.616                  | 0.5475            | 9.26           | 5.16                                     |               |                |
| GSM850       | 190    | CCDF Procedure                |                                |                        |                   |                | 3.78                                     |               |                |
| GSM850 EDGE  | 190    |                               |                                |                        |                   |                | 6.44                                     |               |                |
| WCDMA850     | 4408   |                               |                                |                        |                   |                | 3.42                                     |               |                |
| WCDMA1900    | 9400   |                               |                                |                        |                   |                | 2.91                                     |               |                |
| WCDMA1700    | 1732.4 |                               |                                |                        |                   |                | 3.03                                     |               |                |

### Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 69 ~ 79.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), \quad X = T_{XOn} / T_{XTotal}$$

## 8.6 OCCUPIED BANDWIDTH

| Band         | Channel | Frequency (MHz) | Data (GSM: kHz / WCDMA : MHz) |
|--------------|---------|-----------------|-------------------------------|
| GSM850       | 128     | 824.20          | 243.92                        |
|              | 190     | 836.60          | 245.00                        |
|              | 251     | 848.80          | 248.63                        |
| GSM850 EDGE  | 128     | 824.20          | 236.17                        |
|              | 190     | 836.60          | 246.81                        |
|              | 251     | 848.80          | 242.57                        |
| GSM1900      | 512     | 1850.20         | 246.47                        |
|              | 661     | 1880.00         | 241.39                        |
|              | 810     | 1909.80         | 245.82                        |
| GSM1900 EDGE | 512     | 1850.20         | 240.78                        |
|              | 661     | 1880.00         | 244.13                        |
|              | 810     | 1909.80         | 245.25                        |
| WCDMA850     | 4132    | 826.40          | 4.1387                        |
|              | 4183    | 836.60          | 4.1346                        |
|              | 4233    | 846.60          | 4.1566                        |
| WCDMA1900    | 9262    | 1852.40         | 4.1500                        |
|              | 9400    | 1880.00         | 4.1472                        |
|              | 9538    | 1907.60         | 4.1320                        |
| WCDMA1700    | 1312    | 1712.40         | 4.1535                        |
|              | 1412    | 1732.40         | 4.1402                        |
|              | 1513    | 1752.60         | 4.1594                        |

### Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 52 ~ 68.

## 8.7 CONDUCTED SPURIOUS EMISSIONS

| Band      | Channel | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result  | Limit (dBm) |
|-----------|---------|-------------------------------------|-------------|--------------------------------|---------|-------------|
| GSM850    | 128     | 7.2408                              | 28.634      | -57.219                        | -28.585 | -13.00      |
|           | 190     | 6.5853                              | 28.634      | -57.099                        | -28.465 |             |
|           | 251     | 5.6152                              | 28.634      | -57.619                        | -28.985 |             |
| GSM1900   | 512     | 3.68899                             | 28.112      | -57.393                        | -29.281 |             |
|           | 661     | 2.66208                             | 28.112      | -56.969                        | -28.857 |             |
|           | 810     | 3.22040                             | 28.112      | -57.237                        | -29.125 |             |
| WCDMA850  | 4132    | 3.7214                              | 27.976      | -67.217                        | -39.241 |             |
|           | 4183    | 6.5952                              | 28.591      | -67.522                        | -38.931 |             |
|           | 4233    | 3.7174                              | 27.976      | -67.005                        | -39.029 |             |
| WCDMA1900 | 9262    | 18.9700                             | 29.511      | -62.314                        | -32.803 |             |
|           | 9400    | 19.5700                             | 29.511      | -63.583                        | -34.072 |             |
|           | 9538    | 18.9100                             | 29.511      | -62.091                        | -32.580 |             |
| WCDMA1700 | 1712.4  | 19.08000                            | 29.511      | -63.315                        | -33.804 |             |
|           | 1732.4  | 18.61000                            | 29.511      | -63.394                        | -33.883 |             |
|           | 1752.6  | 18.90000                            | 29.511      | -63.376                        | -33.865 |             |

### Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 116 ~ 139.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1              | 27.500      |
| 1 – 5                 | 28.112      |
| 5 – 10                | 28.634      |
| 10 – 15               | 29.245      |
| 15 – 20               | 29.511      |
| Above 20(26.5)        | 30.210      |


## 8.8 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 80 ~ 115.

## 8.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 13.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


| Voltage | Power  | Temp.    | Frequency   | Frequency  | Deviation | ppm    |
|---------|--------|----------|-------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)        | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 836 499 994 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 836 500 006 | 12.1       | 0.000 001 | 0.0145 |
| 100 %   |        | -20      | 836 500 009 | 15.3       | 0.000 002 | 0.0183 |
| 100 %   |        | -10      | 836 500 009 | 15.1       | 0.000 002 | 0.0181 |
| 100 %   |        | 0        | 836 500 007 | 13.0       | 0.000 002 | 0.0155 |
| 100 %   |        | +10      | 836 500 007 | 13.1       | 0.000 002 | 0.0157 |
| 100 %   |        | +30      | 836 500 003 | 8.8        | 0.000 001 | 0.0105 |
| 100 %   |        | +40      | 836 500 002 | 7.6        | 0.000 001 | 0.0091 |
| 100 %   |        | +50      | 836 499 999 | 5.1        | 0.000 001 | 0.0061 |
| 115%    |        | +20      | 836 499 999 | 4.9        | 0.000 001 | 0.0059 |
| 85%     |        | +20      | 836 499 999 | 5.3        | 0.000 001 | 0.0063 |

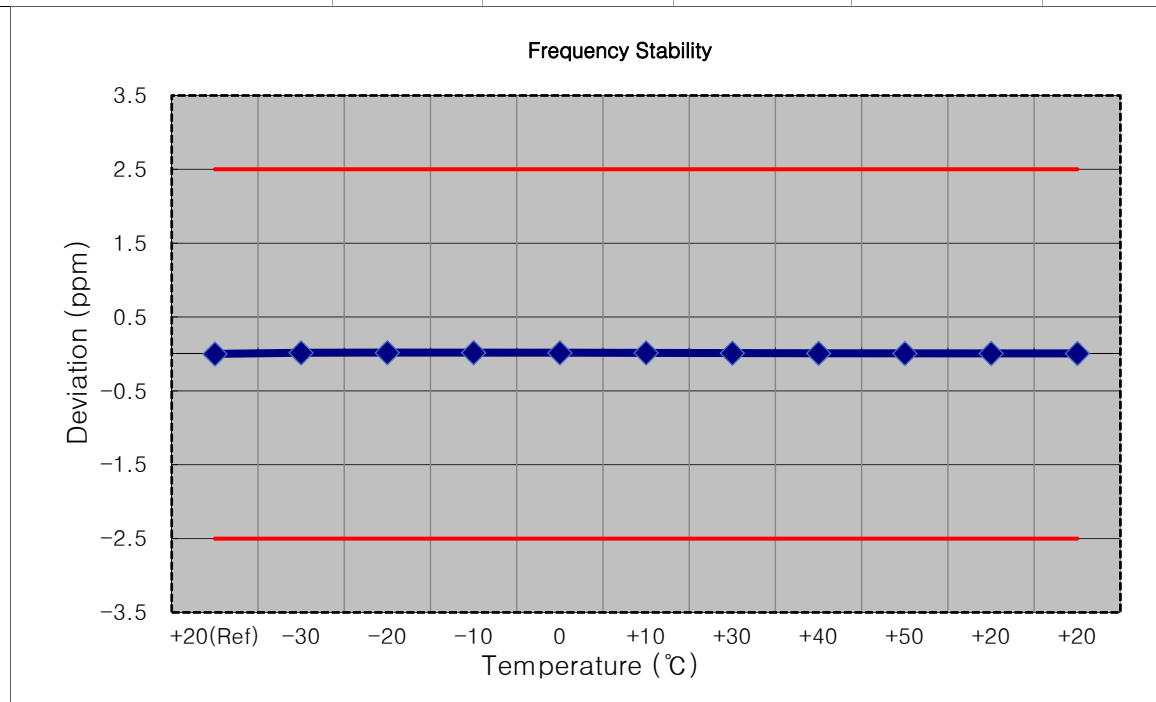




Mode: GSM1900  
 OPERATING FREQUENCY: 1850,200,000 Hz  
 CHANNEL: 512  
 REFERENCE VOLTAGE: 13.200 VDC  
 DEVIATION LIMIT: Emission must remain in band

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm    |
|---------|--------|----------|--------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 1850 200 001 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 1850 200 008 | 7.4        | 0.000 000 | 0.0040 |
| 100 %   |        | -20      | 1850 200 006 | 4.9        | 0.000 000 | 0.0026 |
| 100 %   |        | -10      | 1850 200 007 | 5.7        | 0.000 000 | 0.0031 |
| 100 %   |        | 0        | 1850 200 005 | 3.6        | 0.000 000 | 0.0019 |
| 100 %   |        | +10      | 1850 200 009 | 7.9        | 0.000 000 | 0.0043 |
| 100 %   |        | +30      | 1850 200 009 | 8.3        | 0.000 000 | 0.0045 |
| 100 %   |        | +40      | 1850 200 011 | 9.9        | 0.000 001 | 0.0054 |
| 100 %   |        | +50      | 1850 200 007 | 5.7        | 0.000 000 | 0.0031 |
| 115%    |        | +20      | 1850 200 004 | 2.9        | 0.000 000 | 0.0016 |
| 85%     |        | +20      | 1850 200 009 | 8.3        | 0.000 000 | 0.0045 |

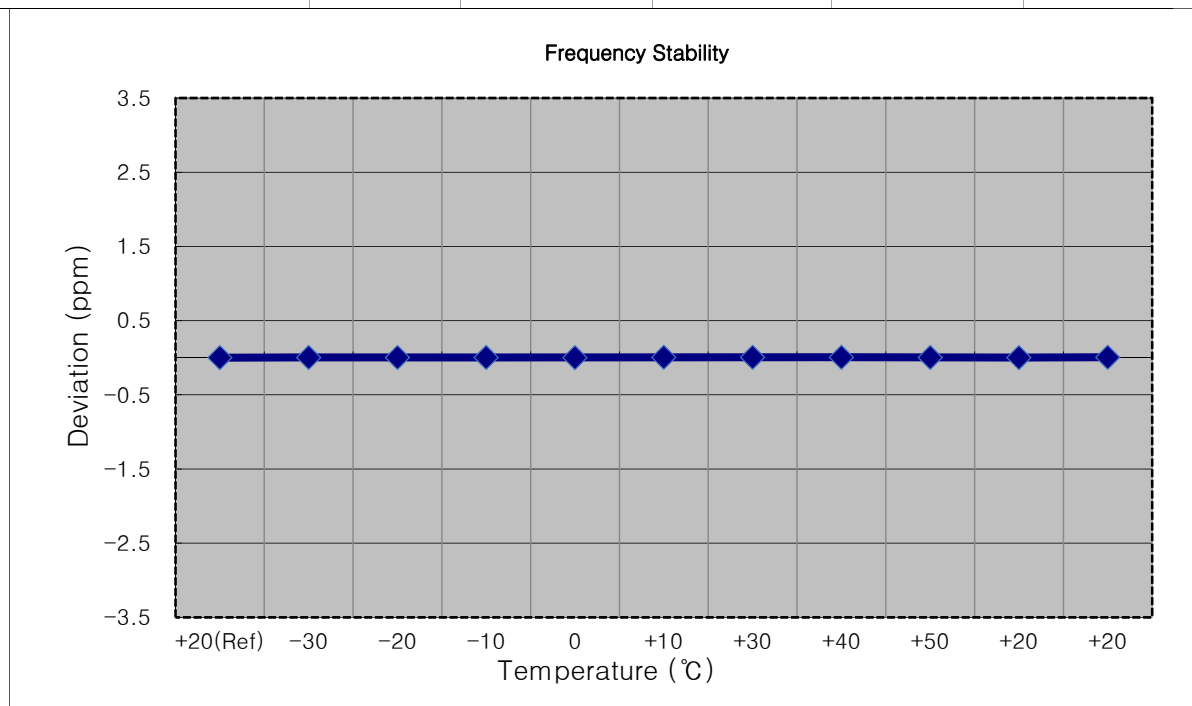


Mode: GSM1900  
 OPERATING FREQUENCY: 1880,000,000 Hz  
 CHANNEL: 661  
 REFERENCE VOLTAGE: 13.200 VDC  
 DEVIATION LIMIT: Emission must remain in band

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm   |
|---------|--------|----------|--------------|------------|-----------|-------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |       |
| 100 %   | 13.200 | +20(Ref) | 1879 999 997 | 0.0        | 0.000 000 | 0.000 |
| 100 %   |        | -30      | 1880 000 000 | 2.8        | 0.000 000 | 0.001 |
| 100 %   |        | -20      | 1880 000 007 | 10.1       | 0.000 001 | 0.005 |
| 100 %   |        | -10      | 1880 000 008 | 11.4       | 0.000 001 | 0.006 |
| 100 %   |        | 0        | 1880 000 010 | 12.9       | 0.000 001 | 0.007 |
| 100 %   |        | +10      | 1880 000 010 | 13.1       | 0.000 001 | 0.007 |
| 100 %   |        | +30      | 1880 000 006 | 8.8        | 0.000 000 | 0.005 |
| 100 %   |        | +40      | 1880 000 002 | 4.5        | 0.000 000 | 0.002 |
| 100 %   |        | +50      | 1880 000 007 | 9.7        | 0.000 001 | 0.005 |
| 115%    |        | +20      | 1880 000 001 | 4.4        | 0.000 000 | 0.002 |
| 85%     |        | +20      | 1879 999 999 | 1.9        | 0.000 000 | 0.001 |

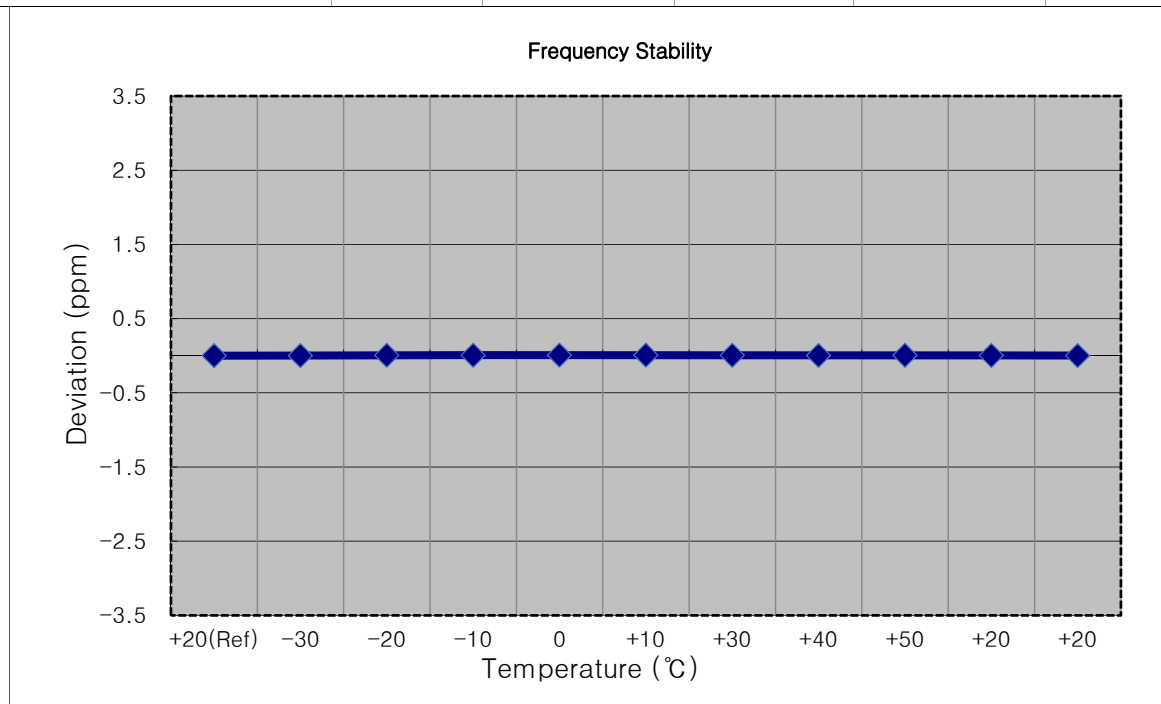


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 13.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm   |
|---------|--------|----------|--------------|------------|-----------|-------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |       |
| 100 %   | 13.200 | +20(Ref) | 1909 800 003 | 0.0        | 0.000 000 | 0.000 |
| 100 %   |        | -30      | 1909 800 004 | 1.1        | 0.000 000 | 0.001 |
| 100 %   |        | -20      | 1909 800 005 | 1.5        | 0.000 000 | 0.001 |
| 100 %   |        | -10      | 1909 800 010 | 7.3        | 0.000 000 | 0.004 |
| 100 %   |        | 0        | 1909 800 010 | 6.5        | 0.000 000 | 0.003 |
| 100 %   |        | +10      | 1909 800 012 | 8.7        | 0.000 000 | 0.005 |
| 100 %   |        | +30      | 1909 800 011 | 7.7        | 0.000 000 | 0.004 |
| 100 %   |        | +40      | 1909 800 008 | 4.9        | 0.000 000 | 0.003 |
| 100 %   |        | +50      | 1909 800 013 | 9.8        | 0.000 001 | 0.005 |
| 115%    |        | +20      | 1909 800 011 | 8.1        | 0.000 000 | 0.004 |
| 85%     |        | +20      | 1909 800 011 | 7.5        | 0.000 000 | 0.004 |

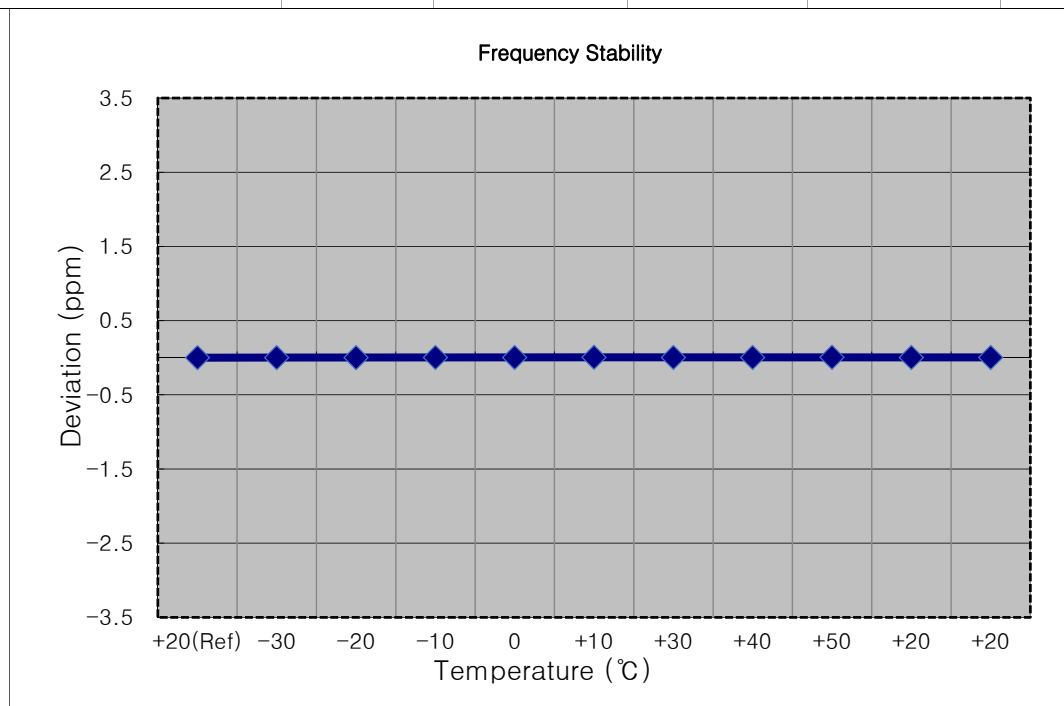


Mode: WCDMA850  
 OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 4183  
 REFERENCE VOLTAGE: 13.200 VDC  
 DEVIATION LIMIT:  $\pm 0.000\ 25\ \%$  or  $2.5\ \text{ppm}$

| Voltage | Power  | Temp.    | Frequency   | Frequency  | Deviation | ppm     |
|---------|--------|----------|-------------|------------|-----------|---------|
| (%)     | (VDC)  | (°C)     | (Hz)        | Error (Hz) | (%)       |         |
| 100 %   | 13.200 | +20(Ref) | 836 600 001 | 0.0        | 0.000 000 | 0.0000  |
| 100 %   |        | -30      | 836 599 999 | -1.7       | 0.000 000 | -0.0020 |
| 100 %   |        | -20      | 836 599 998 | -2.4       | 0.000 000 | -0.0029 |
| 100 %   |        | -10      | 836 600 000 | -0.9       | 0.000 000 | -0.0011 |
| 100 %   |        | 0        | 836 599 999 | -1.6       | 0.000 000 | -0.0020 |
| 100 %   |        | +10      | 836 600 002 | 1.7        | 0.000 000 | 0.0020  |
| 100 %   |        | +30      | 836 599 999 | -1.2       | 0.000 000 | -0.0015 |
| 100 %   |        | +40      | 836 599 999 | -1.6       | 0.000 000 | -0.0019 |
| 100 %   |        | +50      | 836 599 999 | -1.8       | 0.000 000 | -0.0022 |
| 115%    |        | +20      | 836 599 998 | -2.8       | 0.000 000 | -0.0033 |
| 85%     |        | +20      | 836 600 000 | -1.0       | 0.000 000 | -0.0012 |

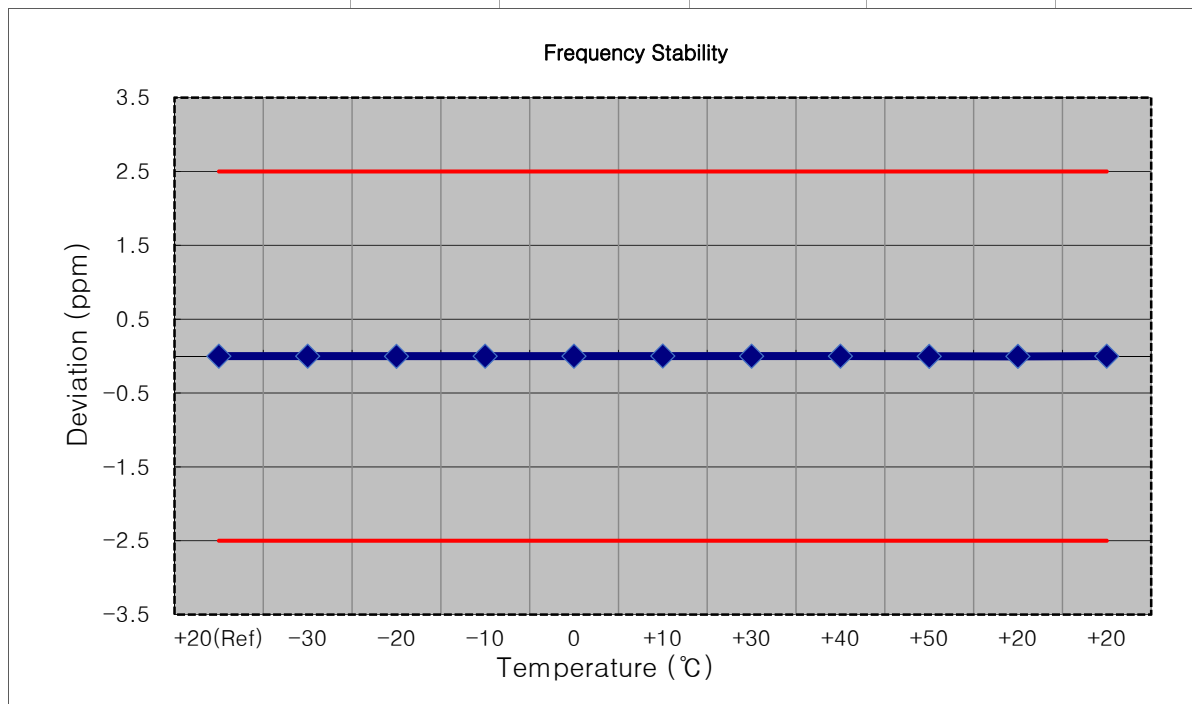


|                      |                              |
|----------------------|------------------------------|
| Mode:                | WCDMA1900                    |
| OPERATING FREQUENCY: | 1,852,400,000 Hz             |
| CHANNEL:             | 9262                         |
| REFERENCE VOLTAGE:   | 13.200 VDC                   |
| DEVIATION LIMIT:     | Emission must remain in band |

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm    |
|---------|--------|----------|--------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 1852 400 017 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 1852 400 032 | 15.3       | 0.000 001 | 0.0082 |
| 100 %   |        | -20      | 1852 400 033 | 15.9       | 0.000 001 | 0.0086 |
| 100 %   |        | -10      | 1852 400 032 | 15.4       | 0.000 001 | 0.0083 |
| 100 %   |        | 0        | 1852 400 033 | 15.7       | 0.000 001 | 0.0085 |
| 100 %   |        | +10      | 1852 400 034 | 17.1       | 0.000 001 | 0.0092 |
| 100 %   |        | +30      | 1852 400 033 | 16.1       | 0.000 001 | 0.0087 |
| 100 %   |        | +40      | 1852 400 034 | 17.0       | 0.000 001 | 0.0092 |
| 100 %   |        | +50      | 1852 400 034 | 17.1       | 0.000 001 | 0.0092 |
| 115%    |        | +20      | 1852 400 034 | 16.5       | 0.000 001 | 0.0089 |
| 85%     |        | +20      | 1852 400 034 | 17.1       | 0.000 001 | 0.0092 |

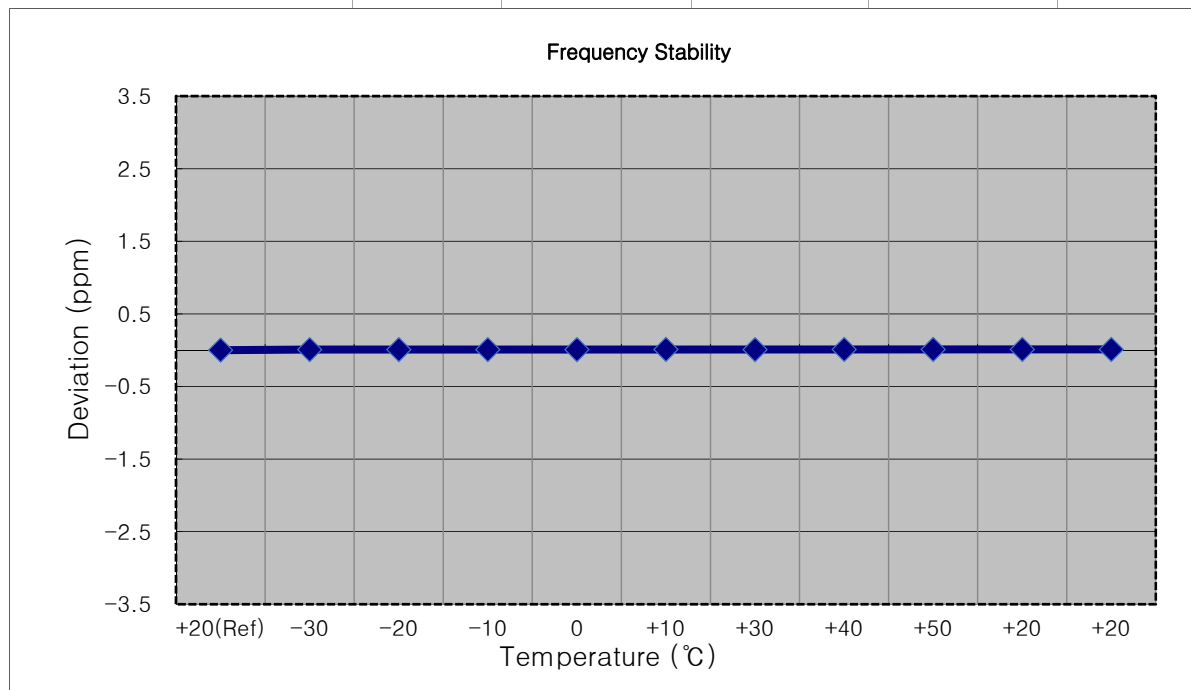


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 13.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm    |
|---------|--------|----------|--------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 1880 000 011 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 1880 000 023 | 12.4       | 0.000 001 | 0.0066 |
| 100 %   |        | -20      | 1880 000 022 | 11.4       | 0.000 001 | 0.0061 |
| 100 %   |        | -10      | 1880 000 024 | 12.9       | 0.000 001 | 0.0069 |
| 100 %   |        | 0        | 1880 000 025 | 13.5       | 0.000 001 | 0.0072 |
| 100 %   |        | +10      | 1880 000 023 | 11.8       | 0.000 001 | 0.0063 |
| 100 %   |        | +30      | 1880 000 023 | 11.7       | 0.000 001 | 0.0062 |
| 100 %   |        | +40      | 1880 000 023 | 12.4       | 0.000 001 | 0.0066 |
| 100 %   |        | +50      | 1880 000 023 | 11.6       | 0.000 001 | 0.0062 |
| 115%    |        | +20      | 1880 000 024 | 13.1       | 0.000 001 | 0.0070 |
| 85%     |        | +20      | 1880 000 024 | 12.7       | 0.000 001 | 0.0068 |

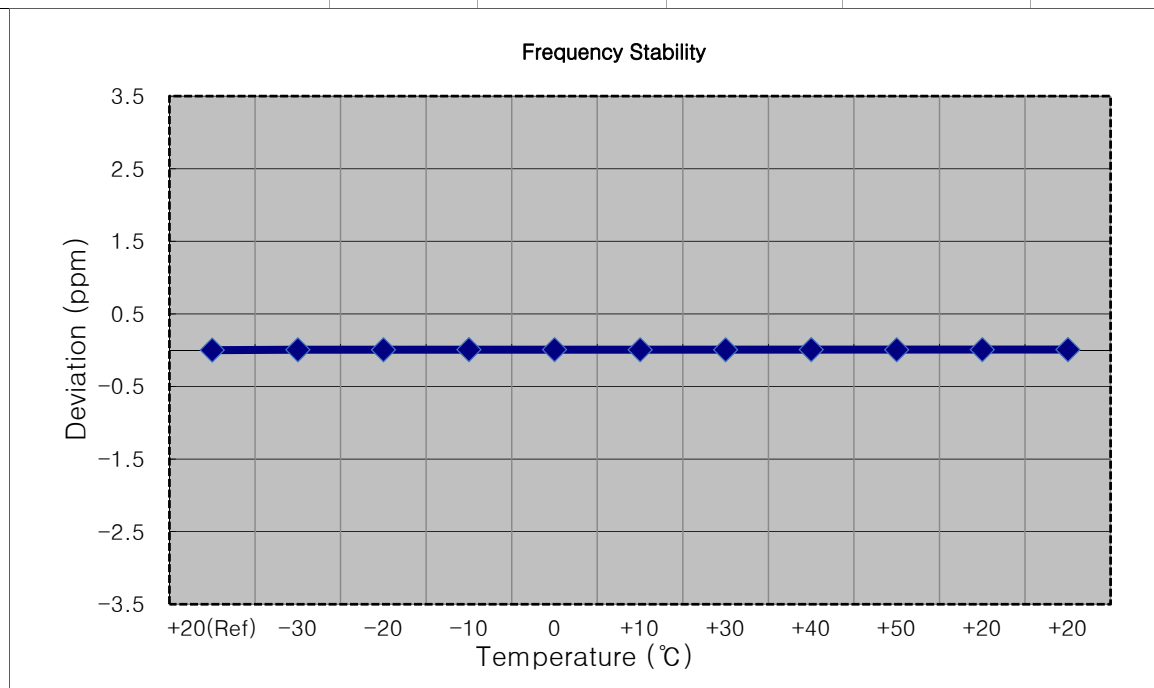


|                      |                              |
|----------------------|------------------------------|
| Mode:                | WCDMA1900                    |
| OPERATING FREQUENCY: | 1,907,600,000 Hz             |
| CHANNEL:             | 9538                         |
| REFERENCE VOLTAGE:   | 13.200 VDC                   |
| DEVIATION LIMIT:     | Emission must remain in band |

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm    |
|---------|--------|----------|--------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 1907 600 008 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 1907 600 015 | 7.1        | 0.000 000 | 0.0037 |
| 100 %   |        | -20      | 1907 600 017 | 9.0        | 0.000 000 | 0.0047 |
| 100 %   |        | -10      | 1907 600 016 | 7.8        | 0.000 000 | 0.0041 |
| 100 %   |        | 0        | 1907 600 016 | 8.6        | 0.000 000 | 0.0045 |
| 100 %   |        | +10      | 1907 600 016 | 8.2        | 0.000 000 | 0.0043 |
| 100 %   |        | +30      | 1907 600 016 | 7.9        | 0.000 000 | 0.0041 |
| 100 %   |        | +40      | 1907 600 016 | 8.0        | 0.000 000 | 0.0042 |
| 100 %   |        | +50      | 1907 600 017 | 9.6        | 0.000 001 | 0.0050 |
| 115%    |        | +20      | 1907 600 017 | 9.3        | 0.000 000 | 0.0049 |
| 85%     |        | +20      | 1907 600 017 | 9.6        | 0.000 001 | 0.0050 |

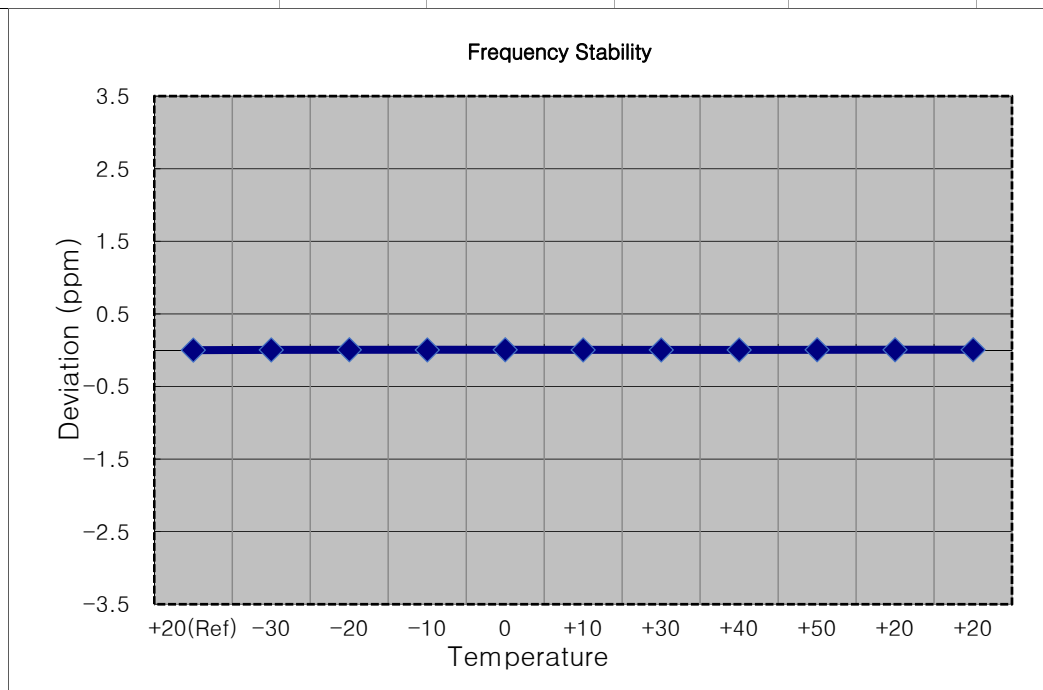

|                      |                              |
|----------------------|------------------------------|
| Mode:                | WCDMA1700                    |
| OPERATING FREQUENCY: | 1,712,400,000 Hz             |
| CHANNEL:             | 1312                         |
| REFERENCE VOLTAGE:   | 13.200 VDC                   |
| DEVIATION LIMIT:     | Emission must remain in band |


| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation | ppm    |
|---------|--------|----------|--------------|------------|-----------|--------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)       |        |
| 100 %   | 13.200 | +20(Ref) | 1712 400 024 | 0.0        | 0.000 000 | 0.0000 |
| 100 %   |        | -30      | 1712 400 048 | 24.8       | 0.000 001 | 0.0145 |
| 100 %   |        | -20      | 1712 400 048 | 24.3       | 0.000 001 | 0.0142 |
| 100 %   |        | -10      | 1712 400 049 | 24.9       | 0.000 001 | 0.0145 |
| 100 %   |        | 0        | 1712 400 048 | 24.2       | 0.000 001 | 0.0141 |
| 100 %   |        | +10      | 1712 400 048 | 24.8       | 0.000 001 | 0.0145 |
| 100 %   |        | +30      | 1712 400 049 | 24.9       | 0.000 001 | 0.0145 |
| 100 %   |        | +40      | 1712 400 047 | 23.4       | 0.000 001 | 0.0137 |
| 100 %   |        | +50      | 1712 400 047 | 23.8       | 0.000 001 | 0.0139 |
| 115%    |        | +20      | 1712 400 046 | 22.1       | 0.000 001 | 0.0129 |
| 85%     |        | +20      | 1712 400 047 | 23.8       | 0.000 001 | 0.0139 |

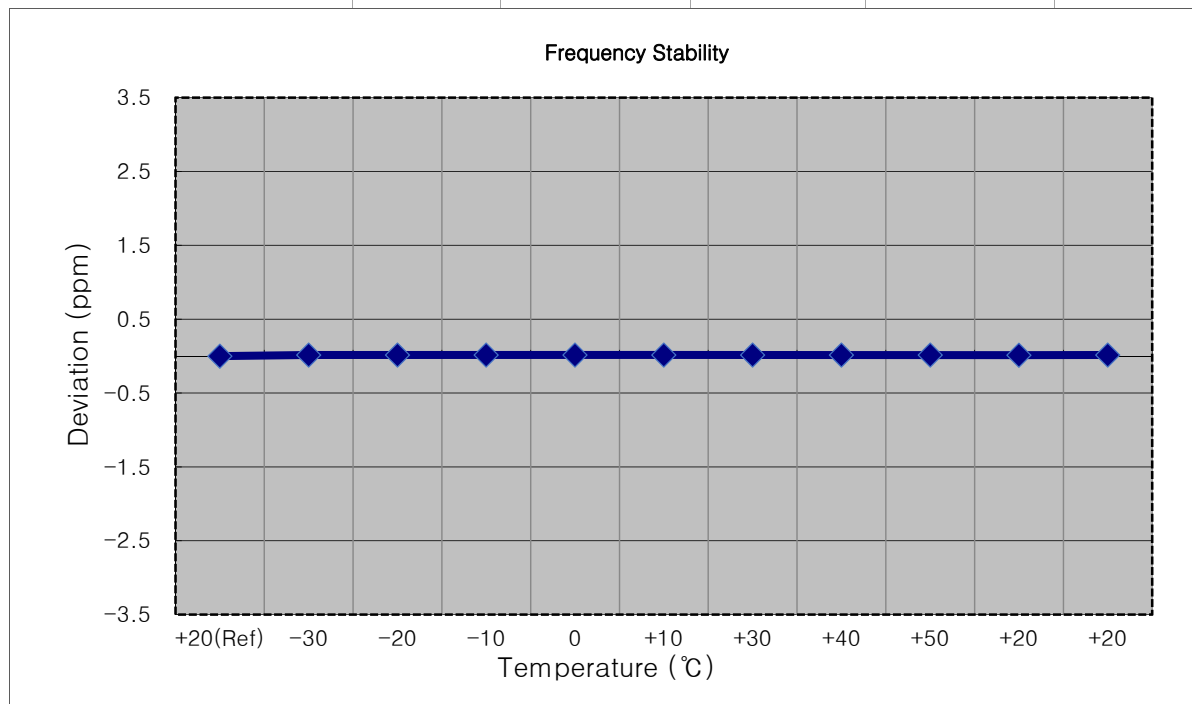




|                      |                              |
|----------------------|------------------------------|
| Mode:                | WCDMA1700                    |
| OPERATING FREQUENCY: | 1,732,400,000 Hz             |
| CHANNEL:             | 1412                         |
| REFERENCE VOLTAGE:   | 13.200 VDC                   |
| DEVIATION LIMIT:     | Emission must remain in band |

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|-------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %       | 13.200      | +20(Ref)   | 1732 400 005   | 0.0                  | 0.000 000     | 0.0000 |
| 100 %       |             | -30        | 1732 400 011   | 5.9                  | 0.000 000     | 0.0034 |
| 100 %       |             | -20        | 1732 400 012   | 6.9                  | 0.000 000     | 0.0040 |
| 100 %       |             | -10        | 1732 400 011   | 5.8                  | 0.000 000     | 0.0034 |
| 100 %       |             | 0          | 1732 400 011   | 6.2                  | 0.000 000     | 0.0036 |
| 100 %       |             | +10        | 1732 400 010   | 5.1                  | 0.000 000     | 0.0029 |
| 100 %       |             | +30        | 1732 400 010   | 5.2                  | 0.000 000     | 0.0030 |
| 100 %       |             | +40        | 1732 400 011   | 6.0                  | 0.000 000     | 0.0034 |
| 100 %       |             | +50        | 1732 400 011   | 6.4                  | 0.000 000     | 0.0037 |
| 115%        |             | +20        | 1732 400 012   | 7.3                  | 0.000 000     | 0.0042 |
| 85%         |             | +20        | 1732 400 011   | 6.0                  | 0.000 000     | 0.0035 |

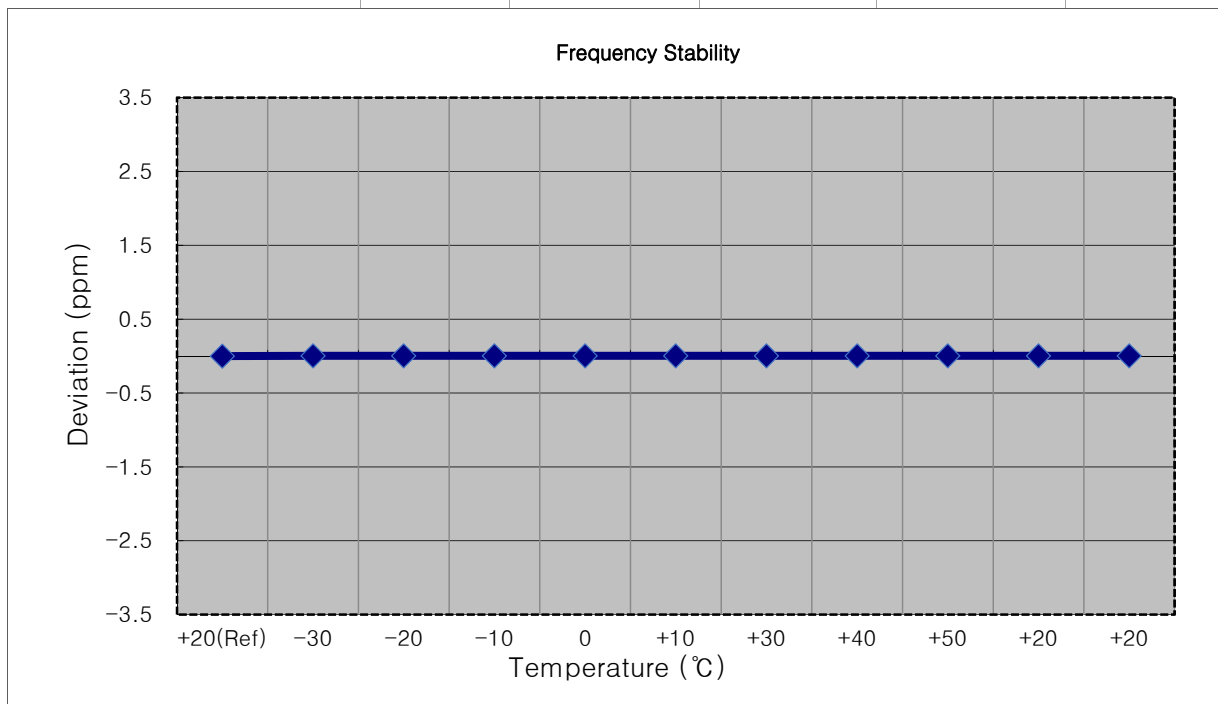


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 13.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage | Power  | Temp.    | Frequency    | Frequency  | Deviation  | ppm     |
|---------|--------|----------|--------------|------------|------------|---------|
| (%)     | (VDC)  | (°C)     | (Hz)         | Error (Hz) | (%)        |         |
| 100 %   | 13.200 | +20(Ref) | 1752 599 981 | 0.0        | 0.000 000  | 0.0000  |
| 100 %   |        | -30      | 1752 599 963 | -18.3      | -0.000 001 | -0.0104 |
| 100 %   |        | -20      | 1752 599 962 | -19.4      | -0.000 001 | -0.0111 |
| 100 %   |        | -10      | 1752 599 962 | -19.6      | -0.000 001 | -0.0112 |
| 100 %   |        | 0        | 1752 599 961 | -20.5      | -0.000 001 | -0.0117 |
| 100 %   |        | +10      | 1752 599 962 | -19.2      | -0.000 001 | -0.0109 |
| 100 %   |        | +30      | 1752 599 963 | -18.3      | -0.000 001 | -0.0105 |
| 100 %   |        | +40      | 1752 599 963 | -18.1      | -0.000 001 | -0.0103 |
| 100 %   |        | +50      | 1752 599 963 | -18.5      | -0.000 001 | -0.0106 |
| 115%    |        | +20      | 1752 599 965 | -16.4      | -0.000 001 | -0.0094 |
| 85%     |        | +20      | 1752 599 963 | -18.0      | -0.000 001 | -0.0103 |

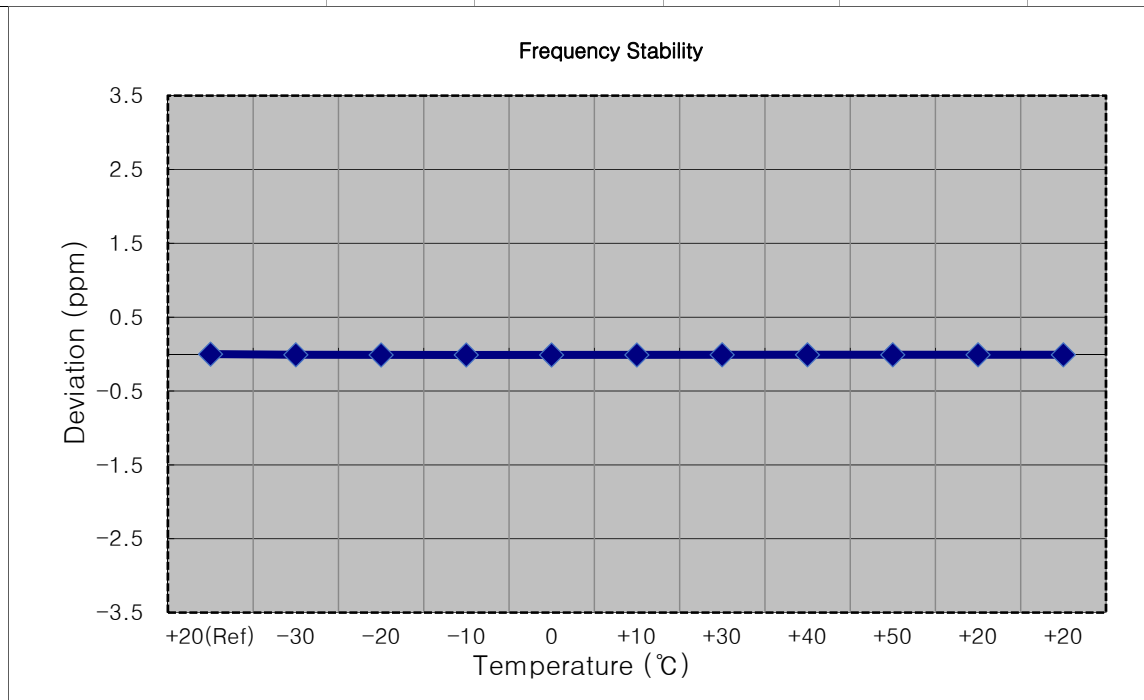


## 9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

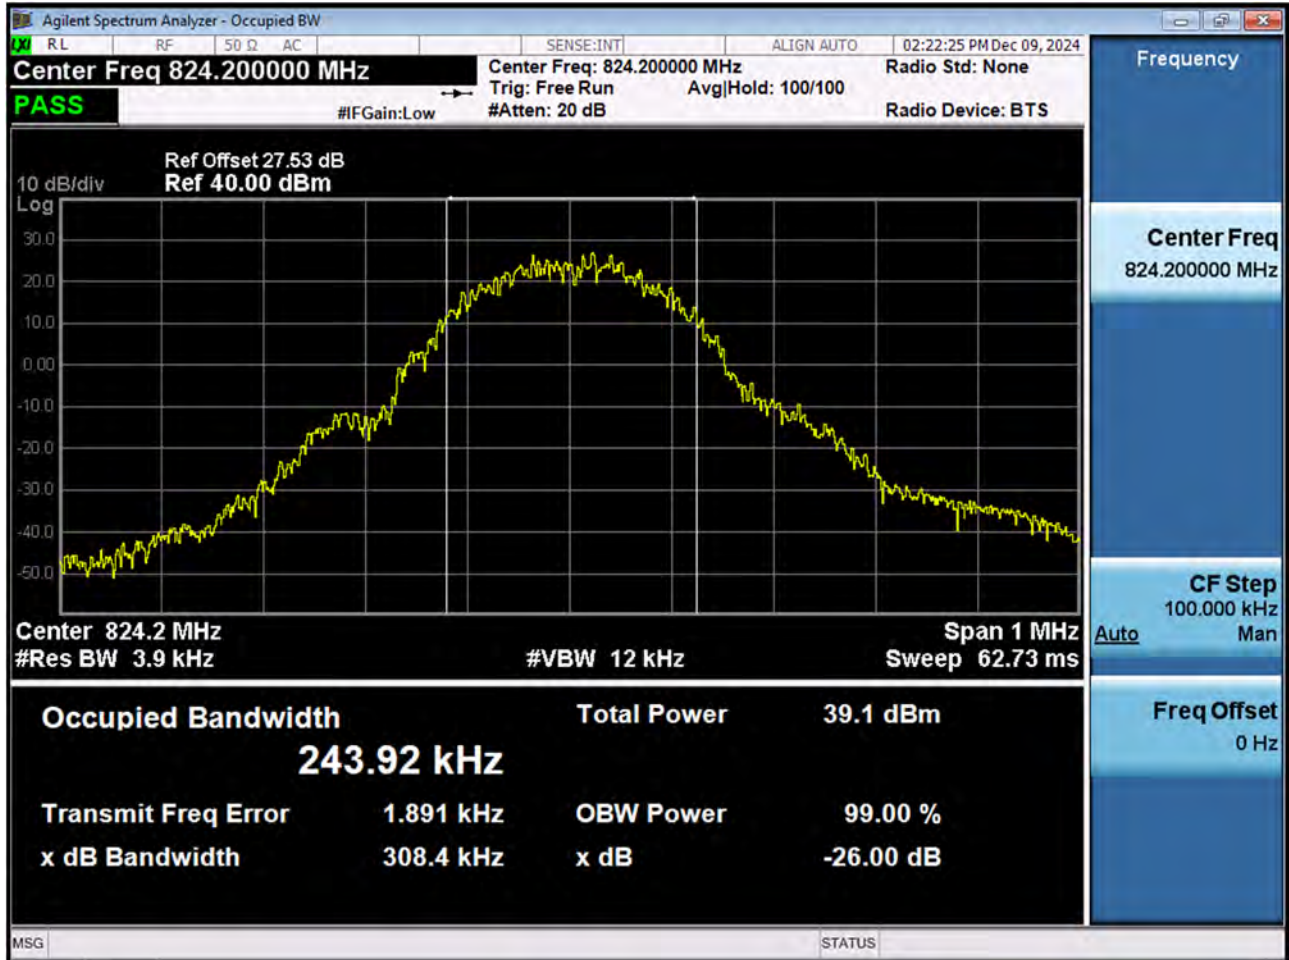


■ GSM850 MODE (190 CH.) Occupied Bandwidth

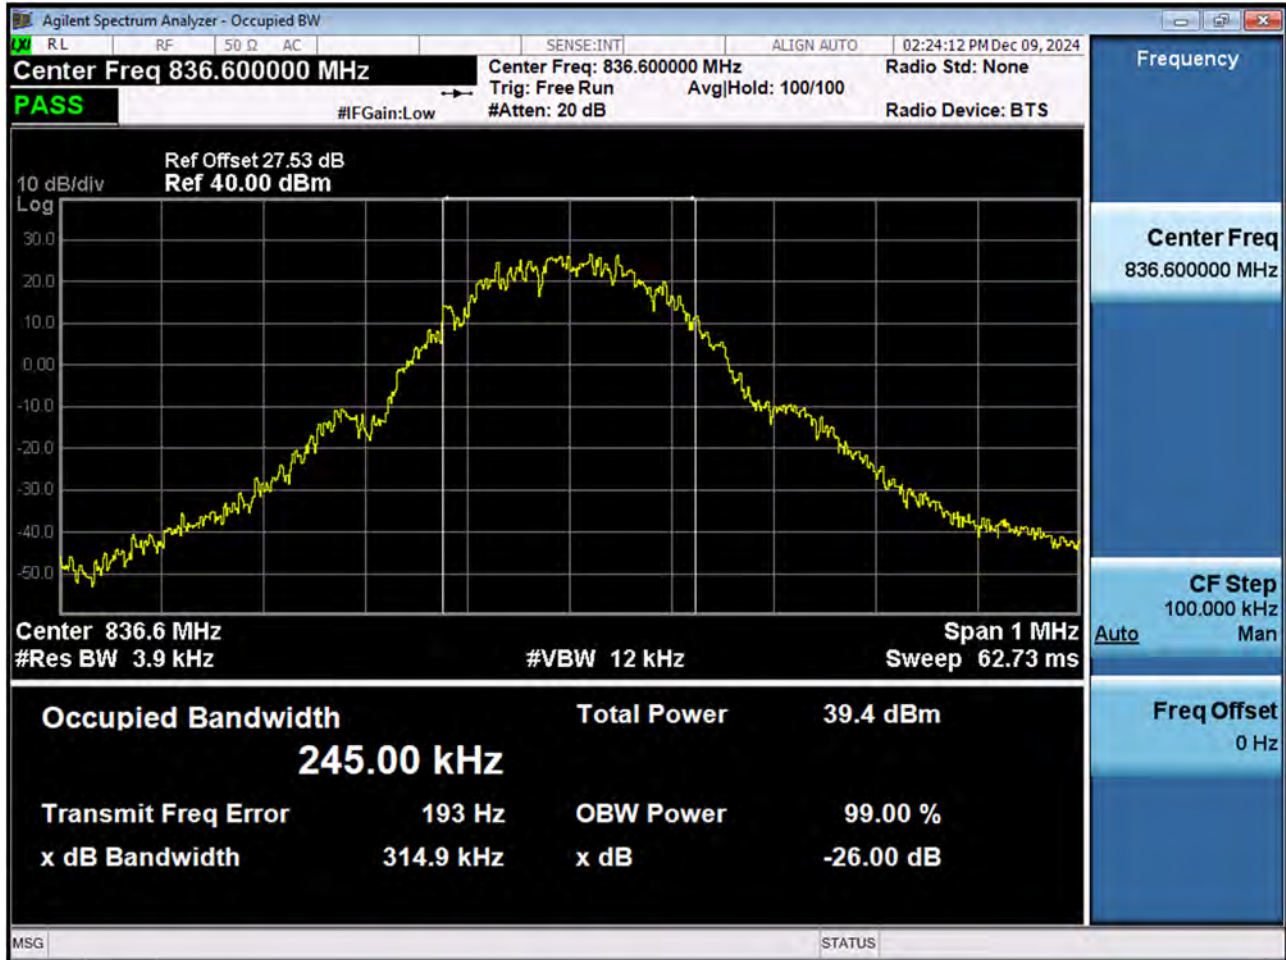

■ GSM850 MODE (251 CH.) Occupied Bandwidth

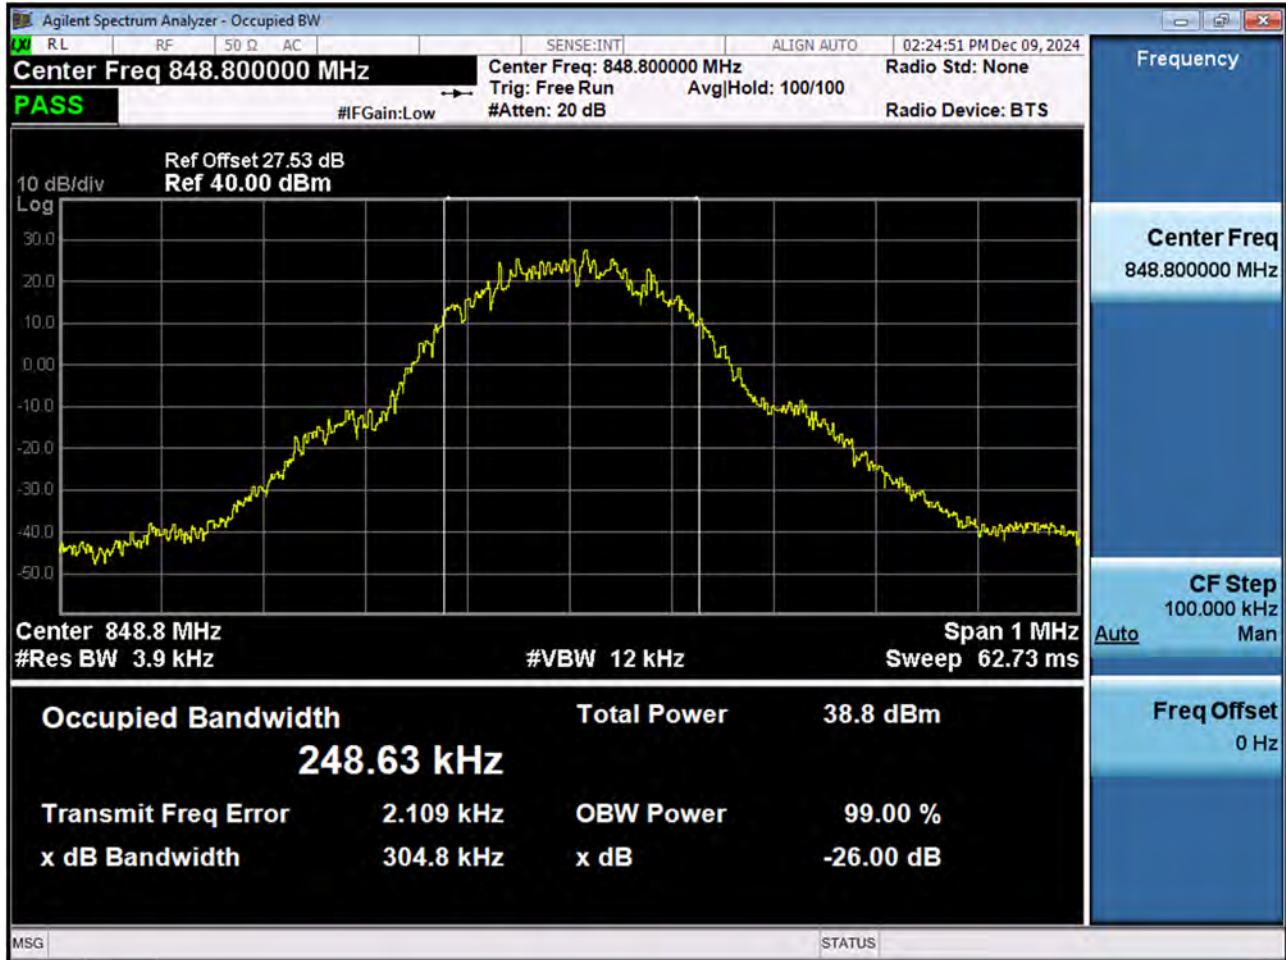


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

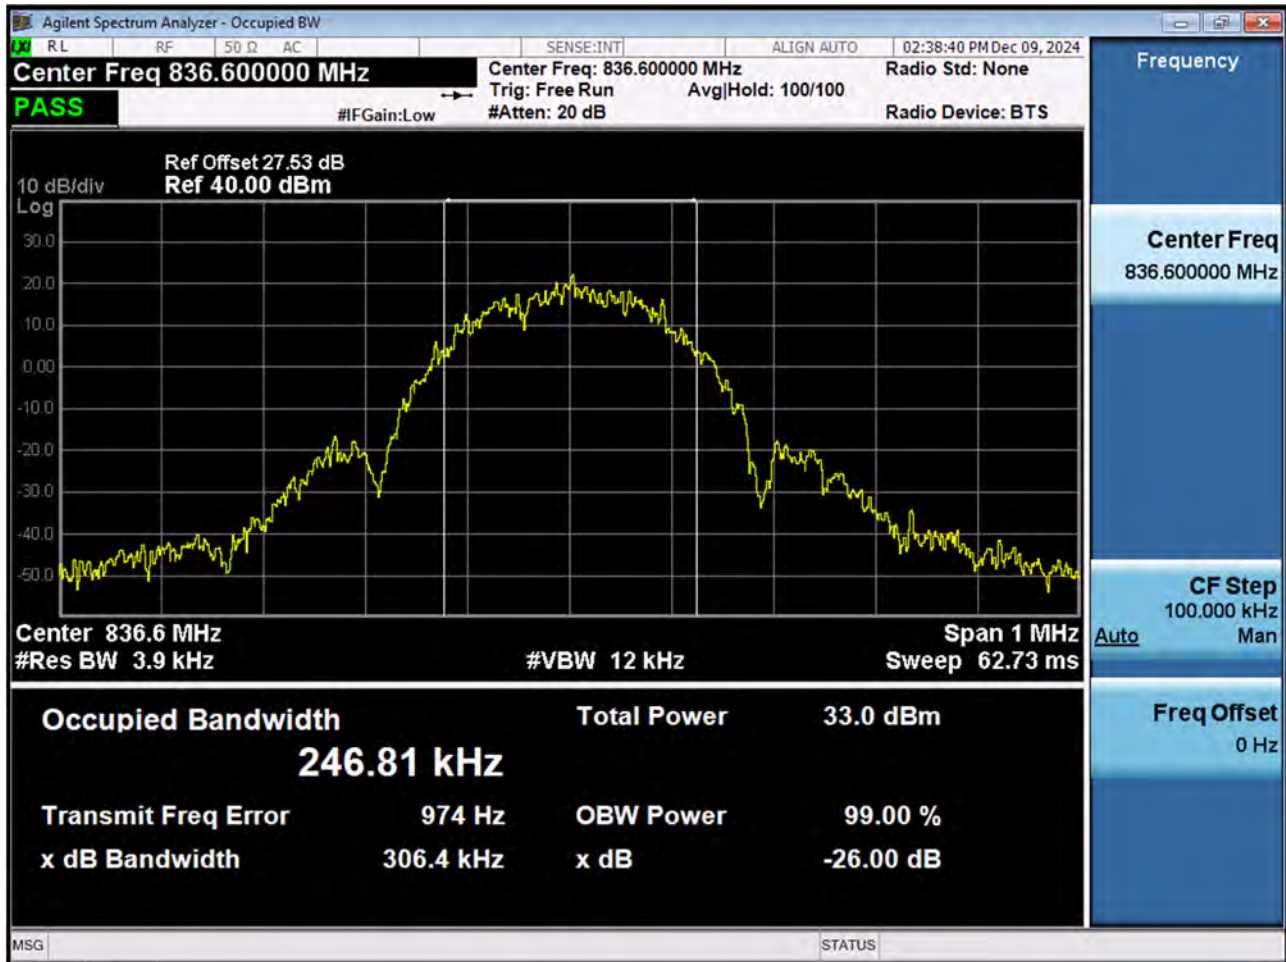




■ GSM1900 MODE (512 CH.) Occupied Bandwidth

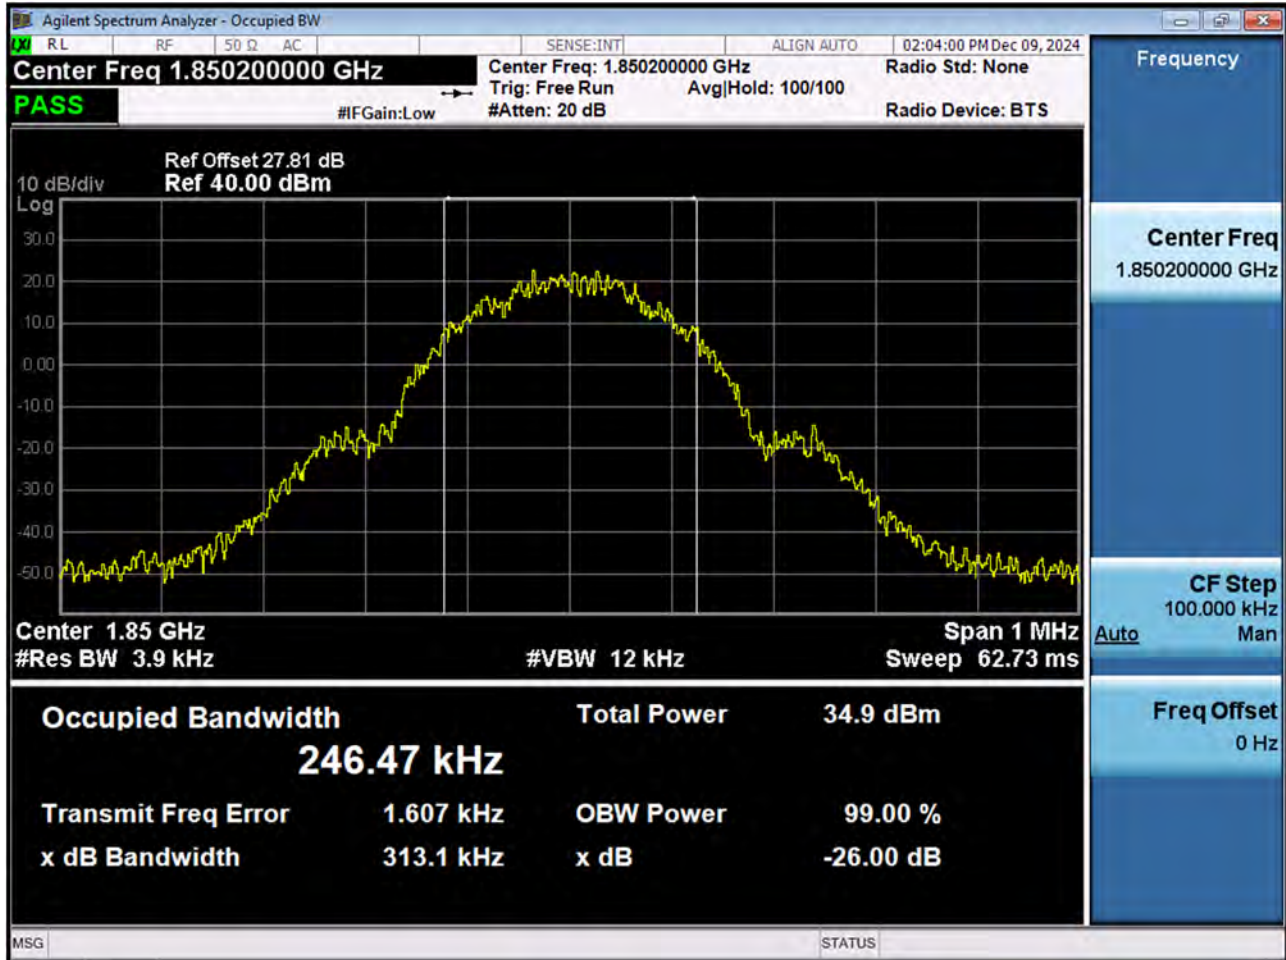




■ GSM1900 MODE (661 CH.) Occupied Bandwidth

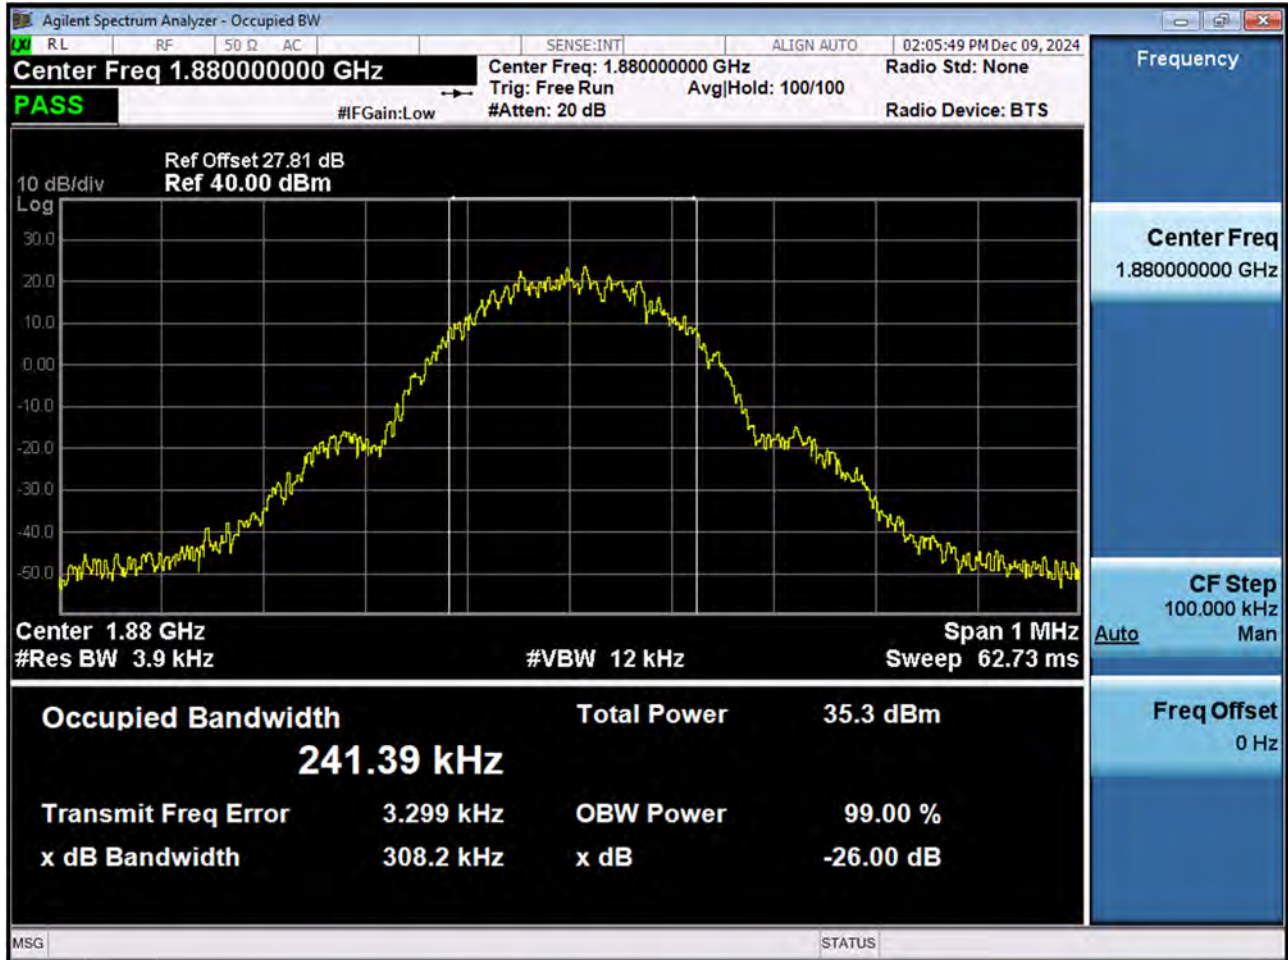

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

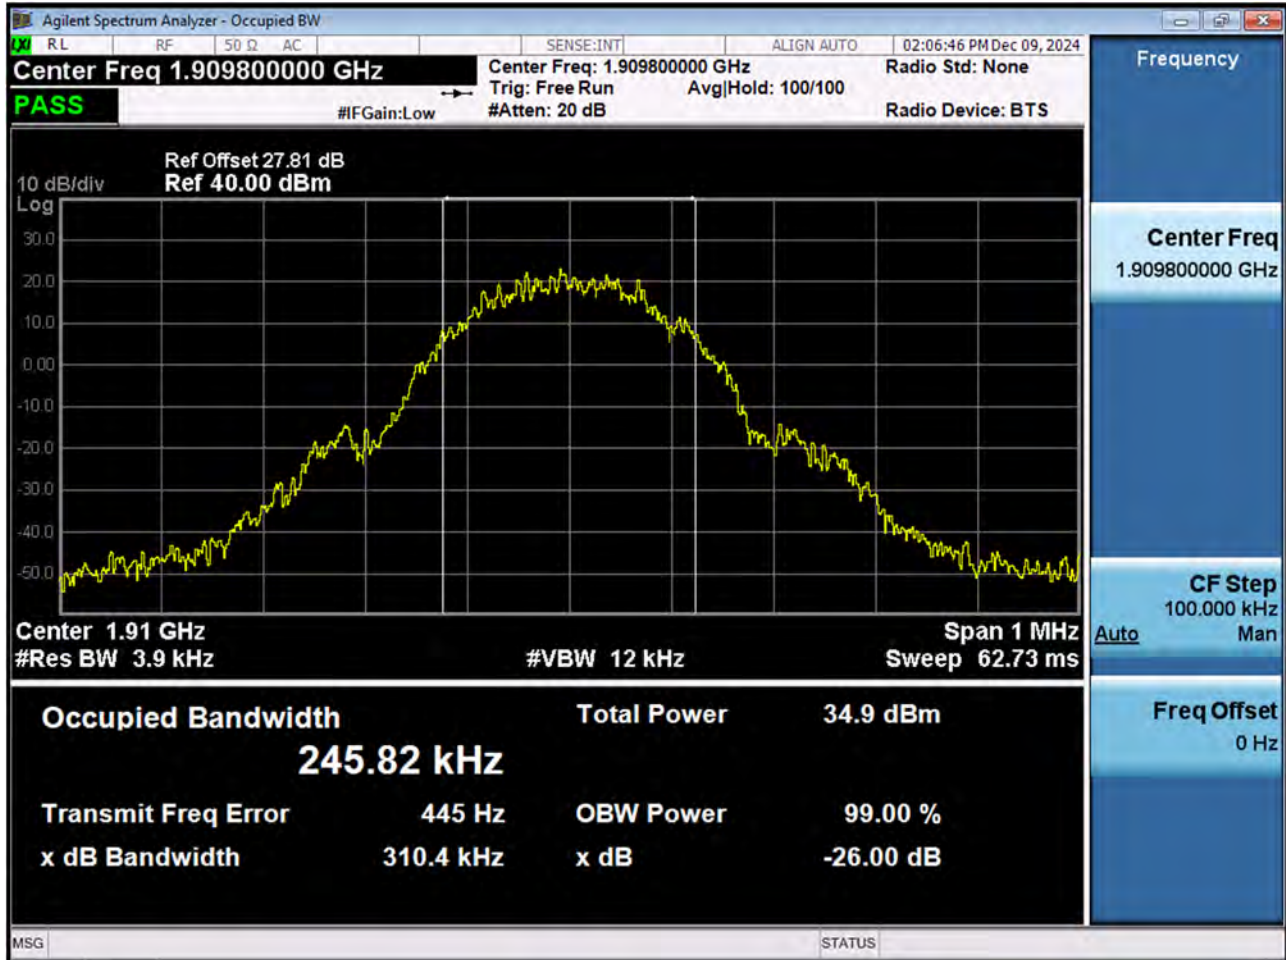

Agilent Spectrum Analyzer - Occupied BW

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 01:47:50 PM Dec 09, 2024

**Center Freq 1.909800000 GHz** Center Freq: 1.909800000 GHz Radio Std: None  
#IFGain:Low Trig: Free Run Avg/Hold: 100/100  
**PASS** #Atten: 20 dB Radio Device: BTS

Ref Offset 27.81 dB  
Ref 40.00 dBm

10 dB/div  
Log

Center 1.91 GHz Span 1 MHz  
#Res BW 3.9 kHz #VBW 12 kHz Sweep 62.73 ms

| Occupied Bandwidth  |           | Total Power |           |
|---------------------|-----------|-------------|-----------|
| 245.25 kHz          |           | 31.7 dBm    |           |
| Transmit Freq Error | 920 Hz    | OBW Power   | 99.00 %   |
| x dB Bandwidth      | 297.1 kHz | x dB        | -26.00 dB |

MSG STATUS


Frequency

Center Freq  
1.909800000 GHz

CF Step  
100.000 kHz  
Man


Freq Offset  
0 Hz

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

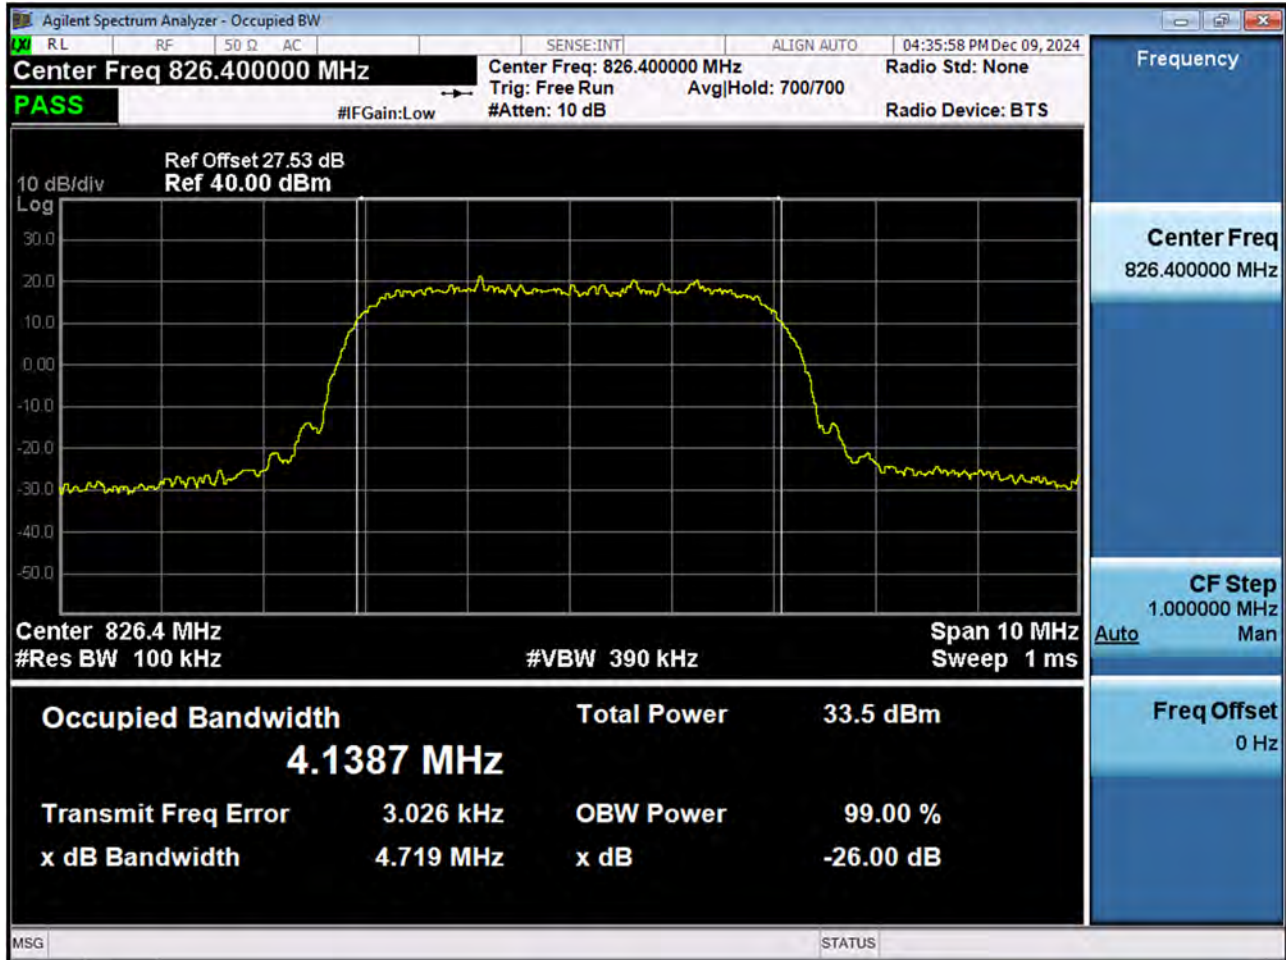





■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

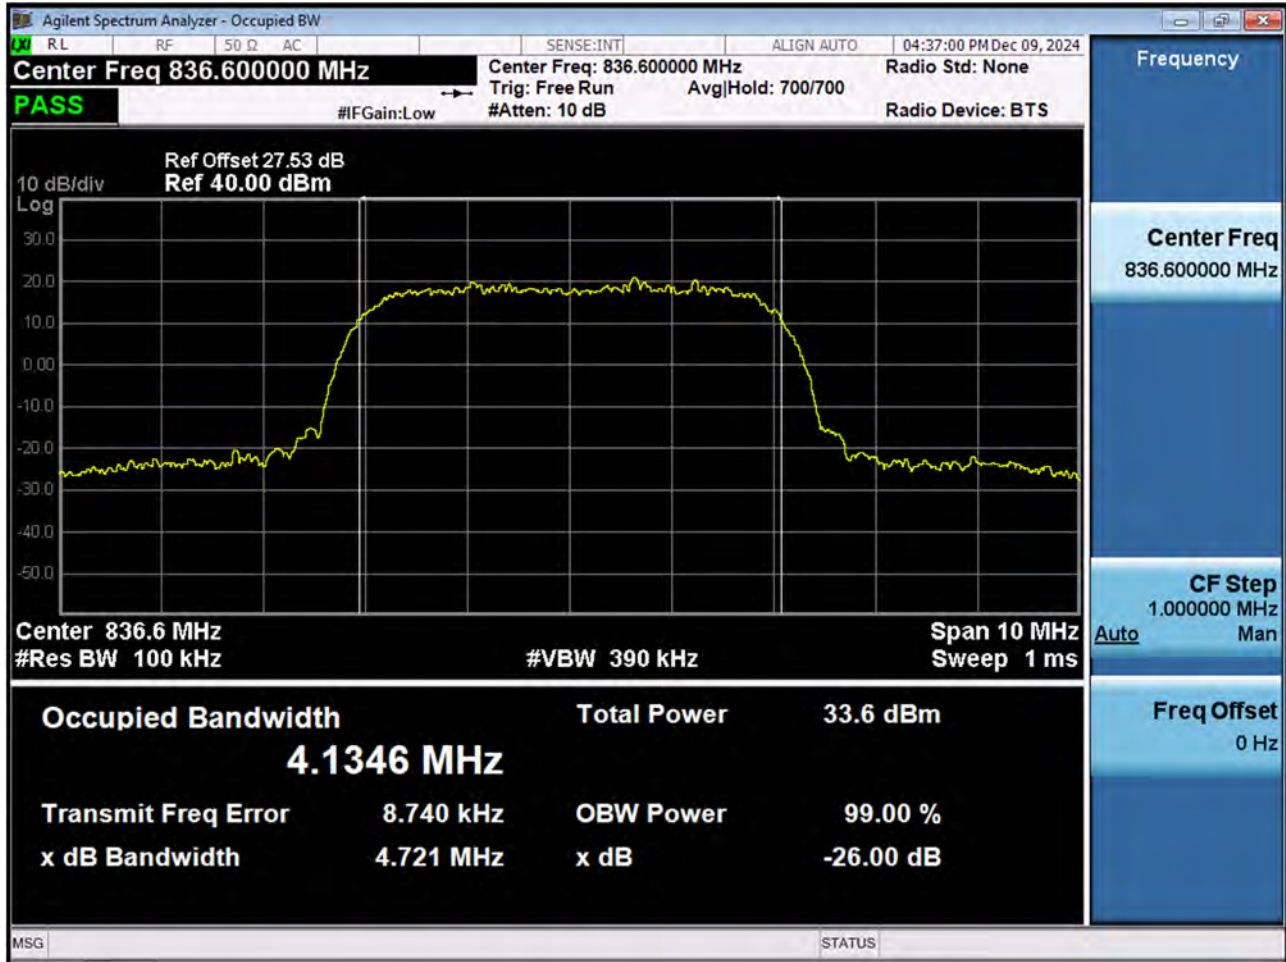


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

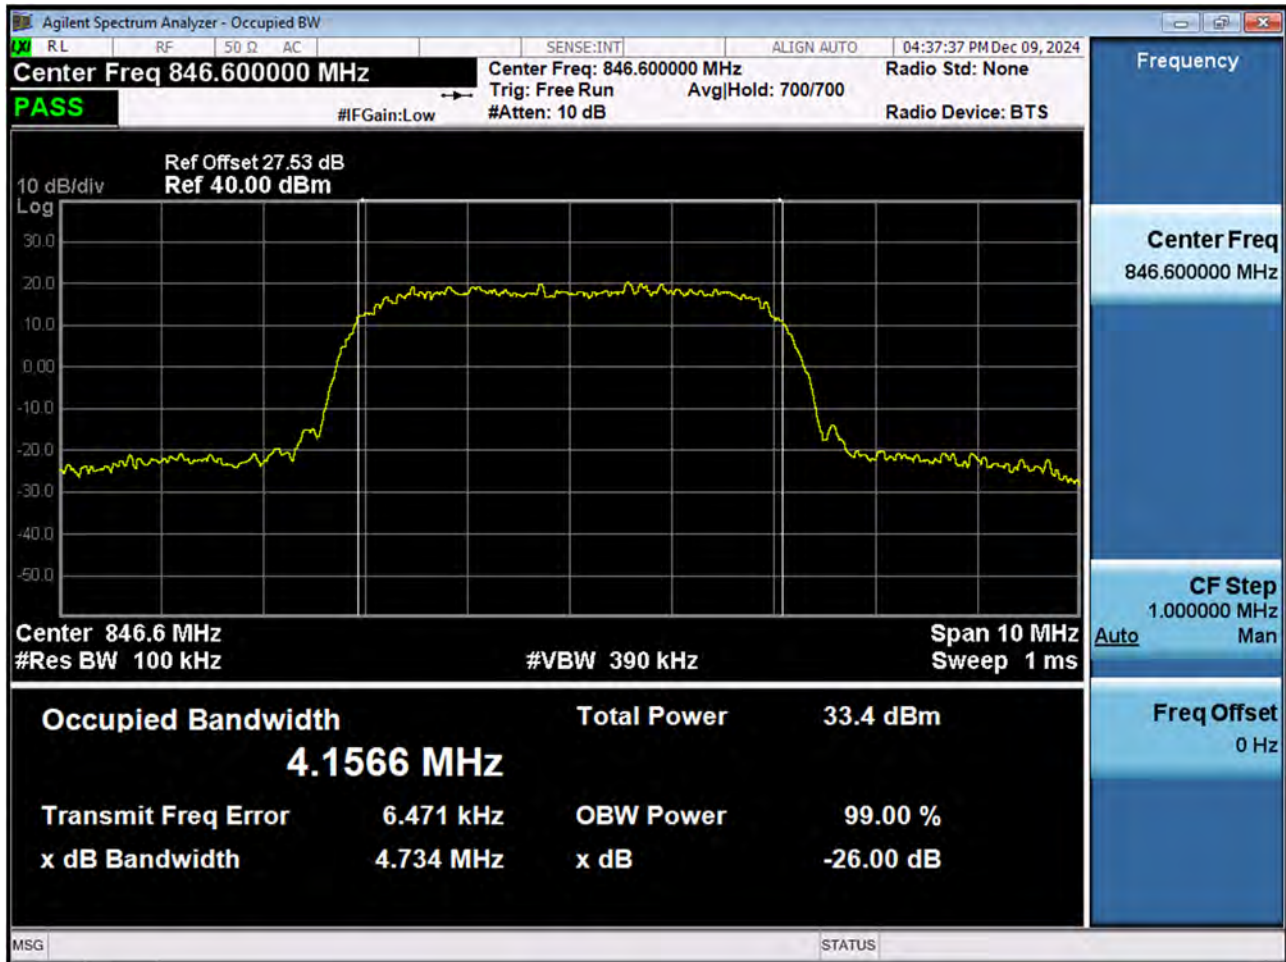

■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

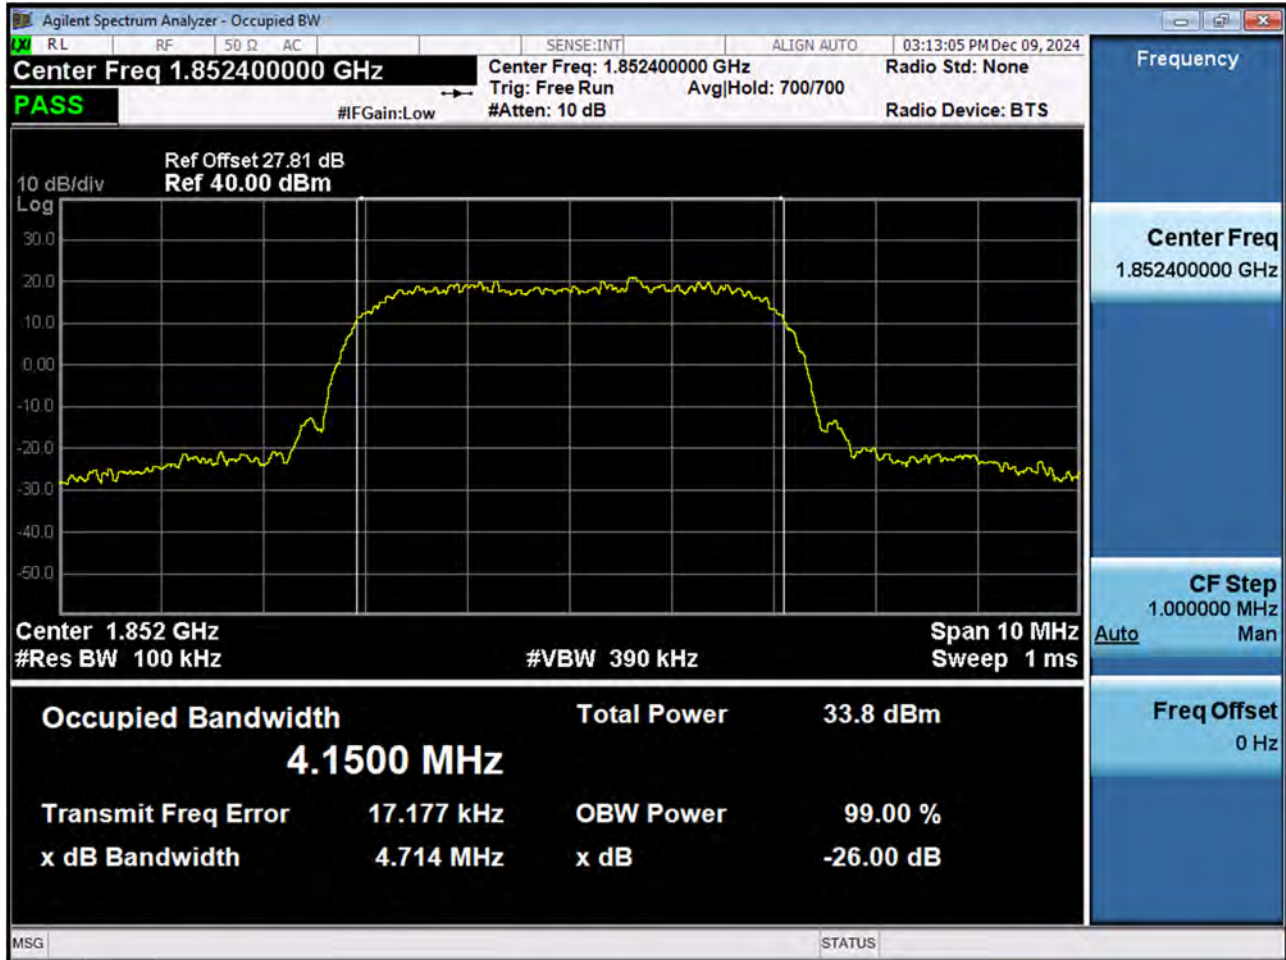


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

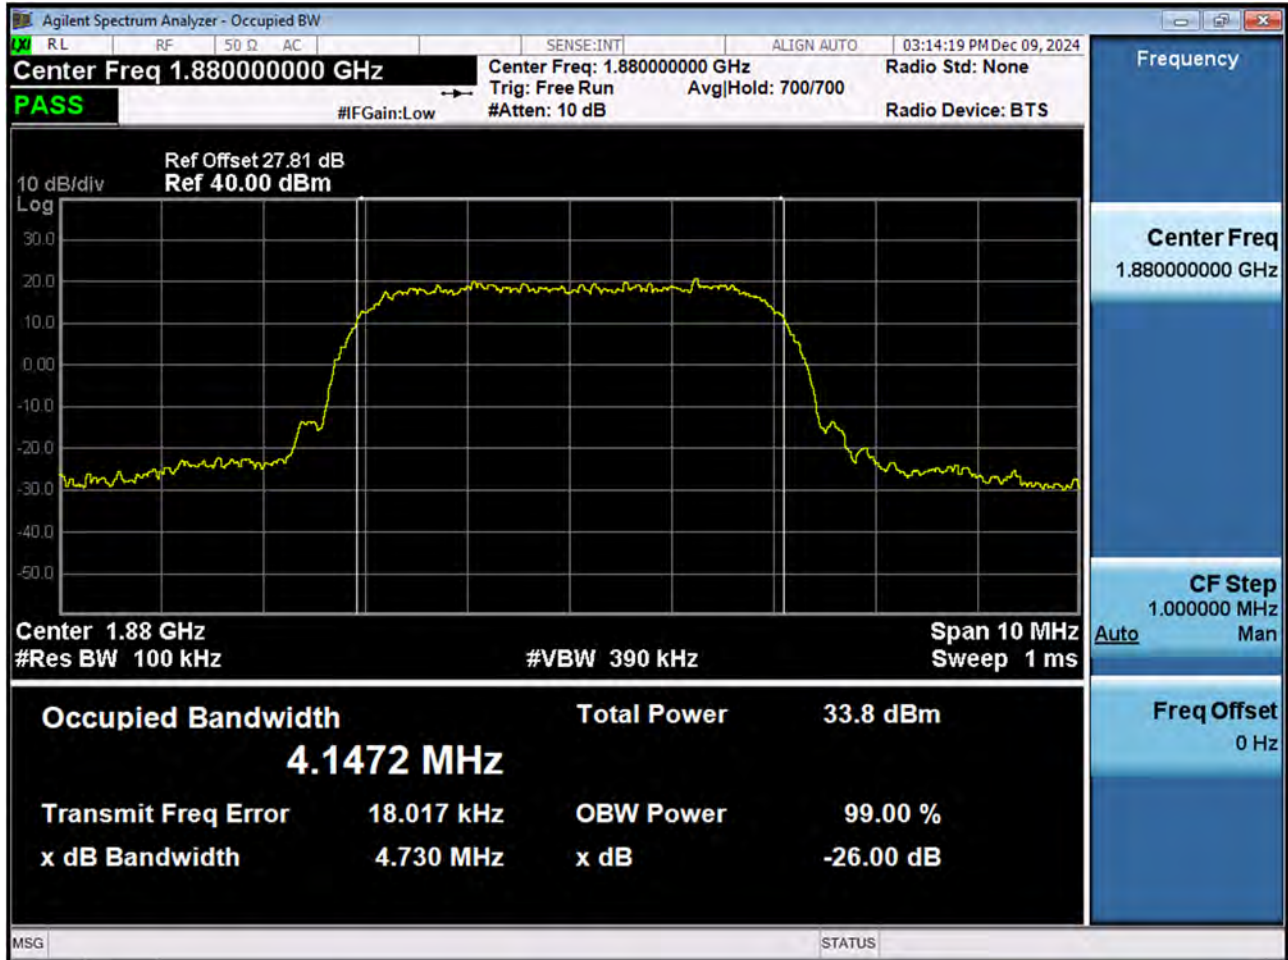





## WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

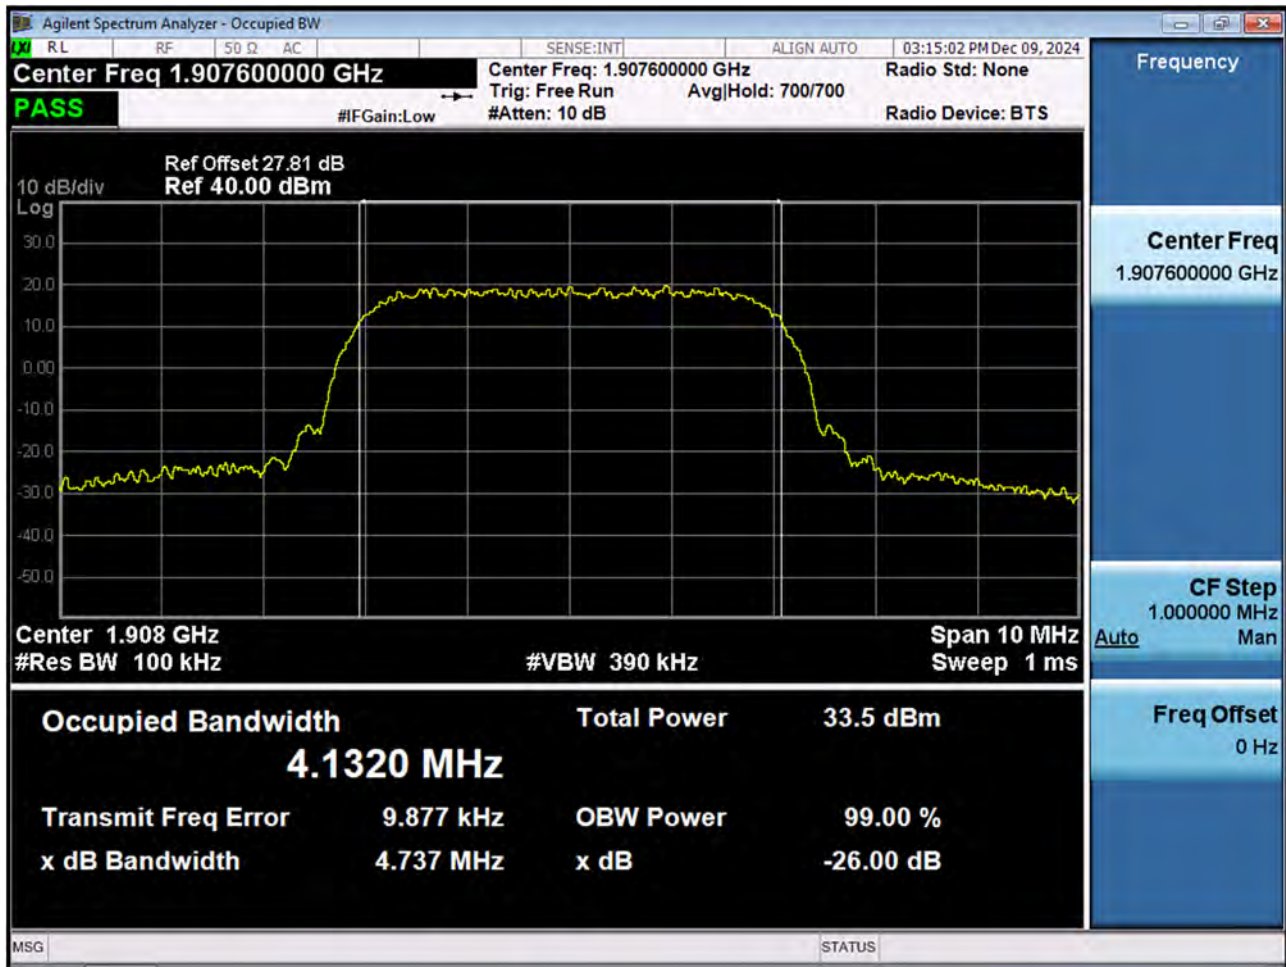


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

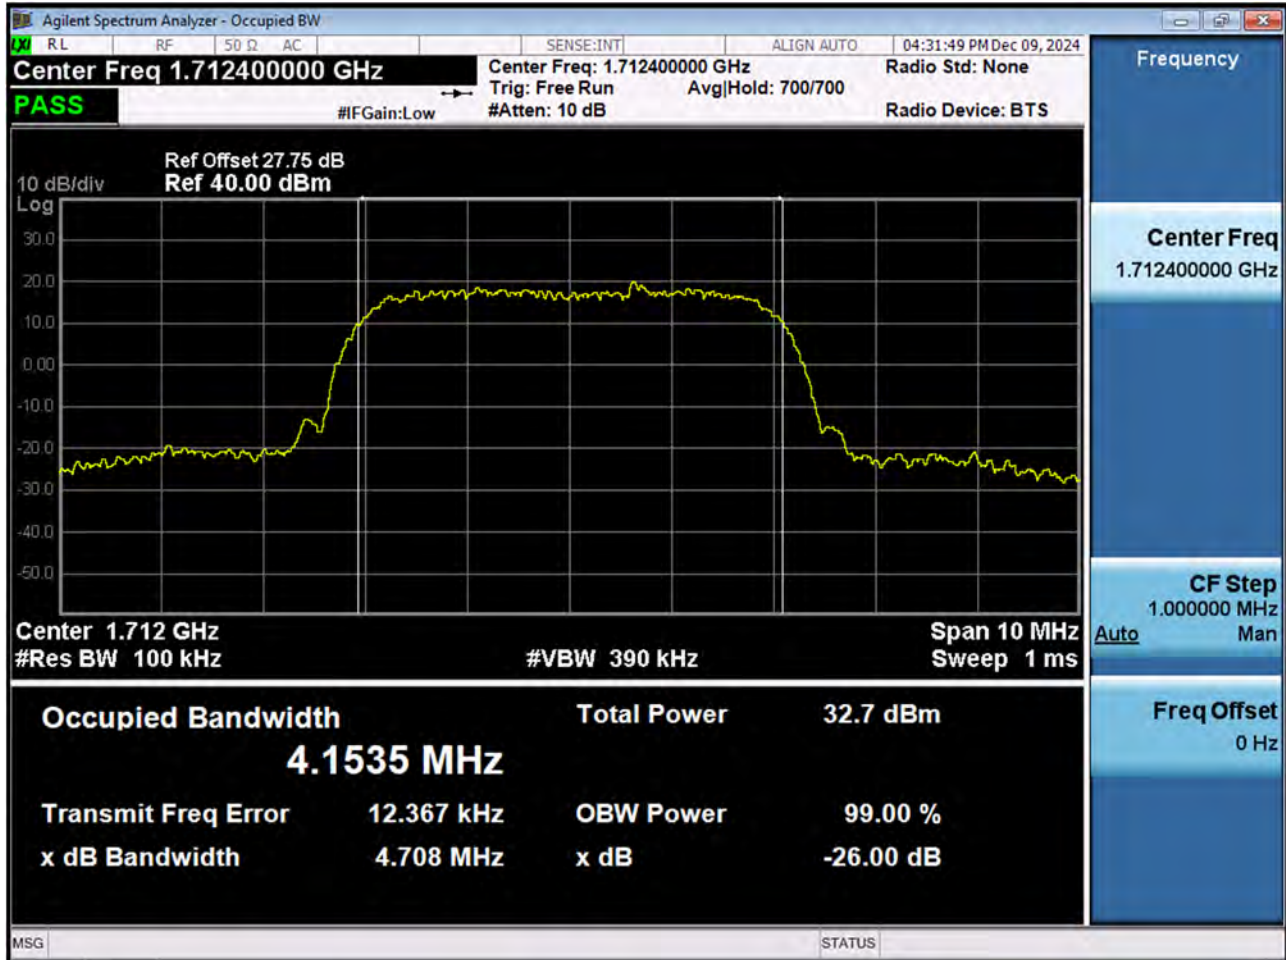

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

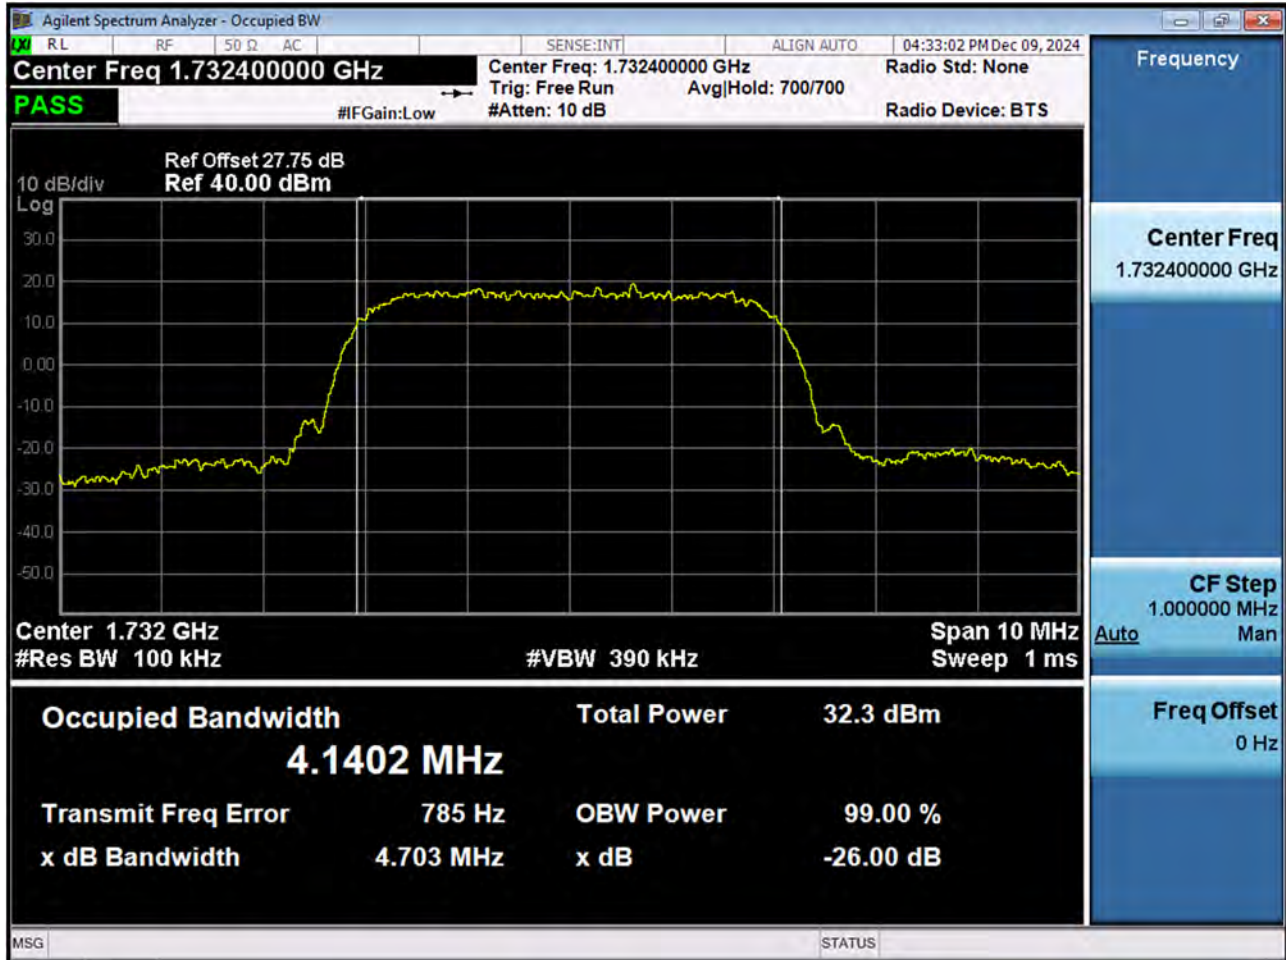


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

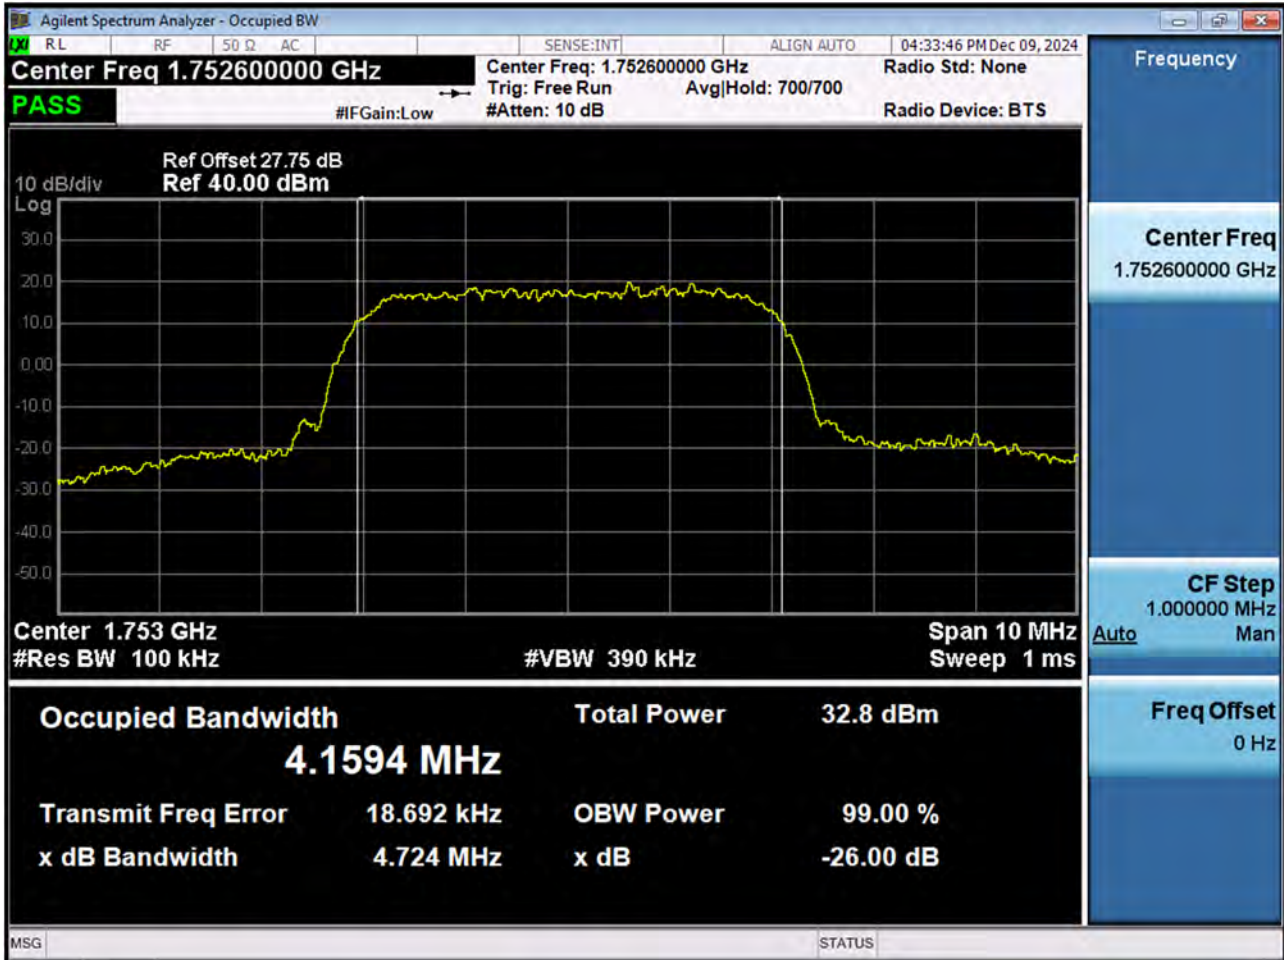





■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>pk</sub>

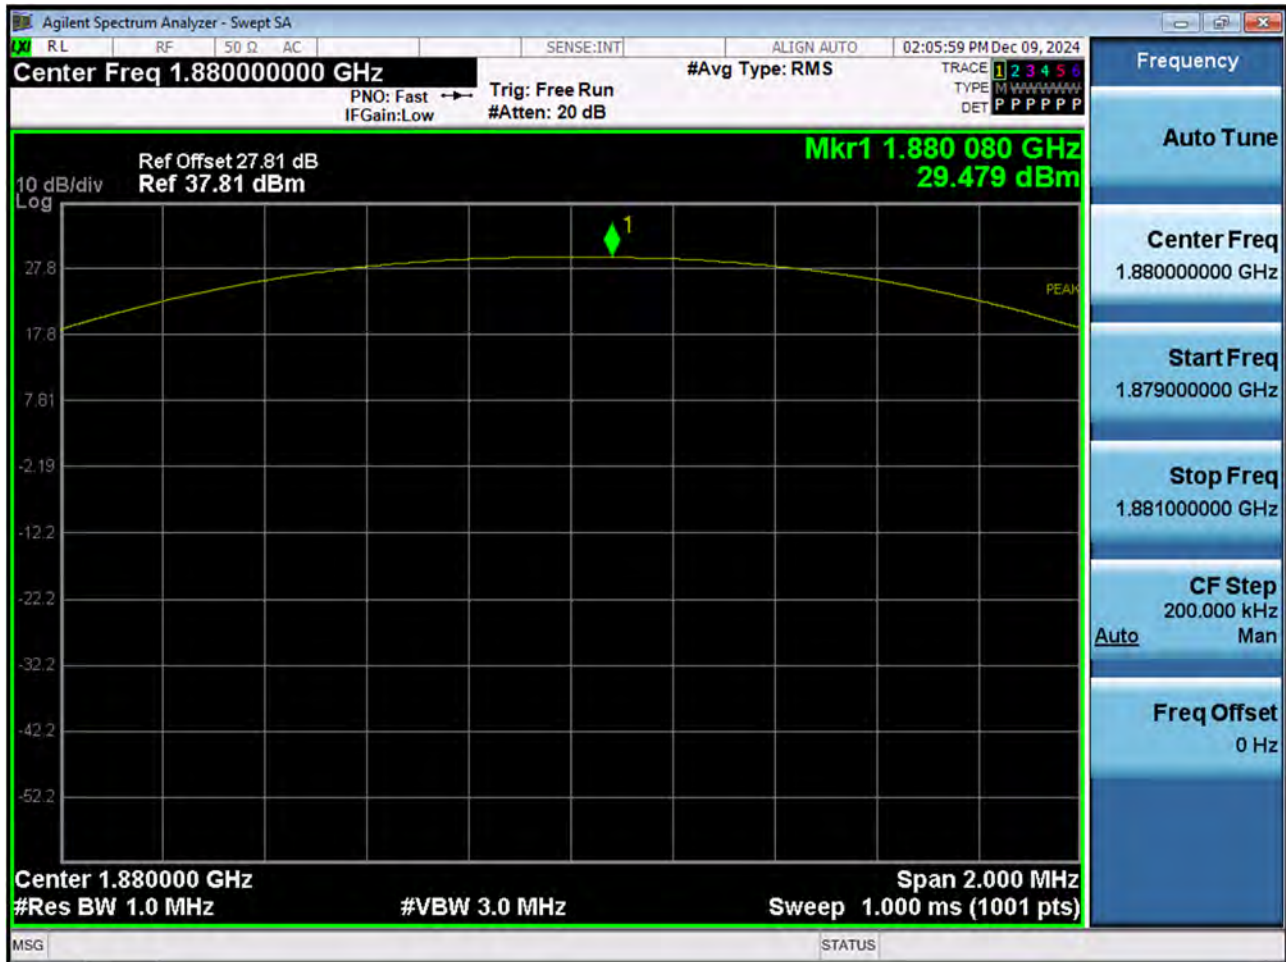


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio  $P_{Avg}$

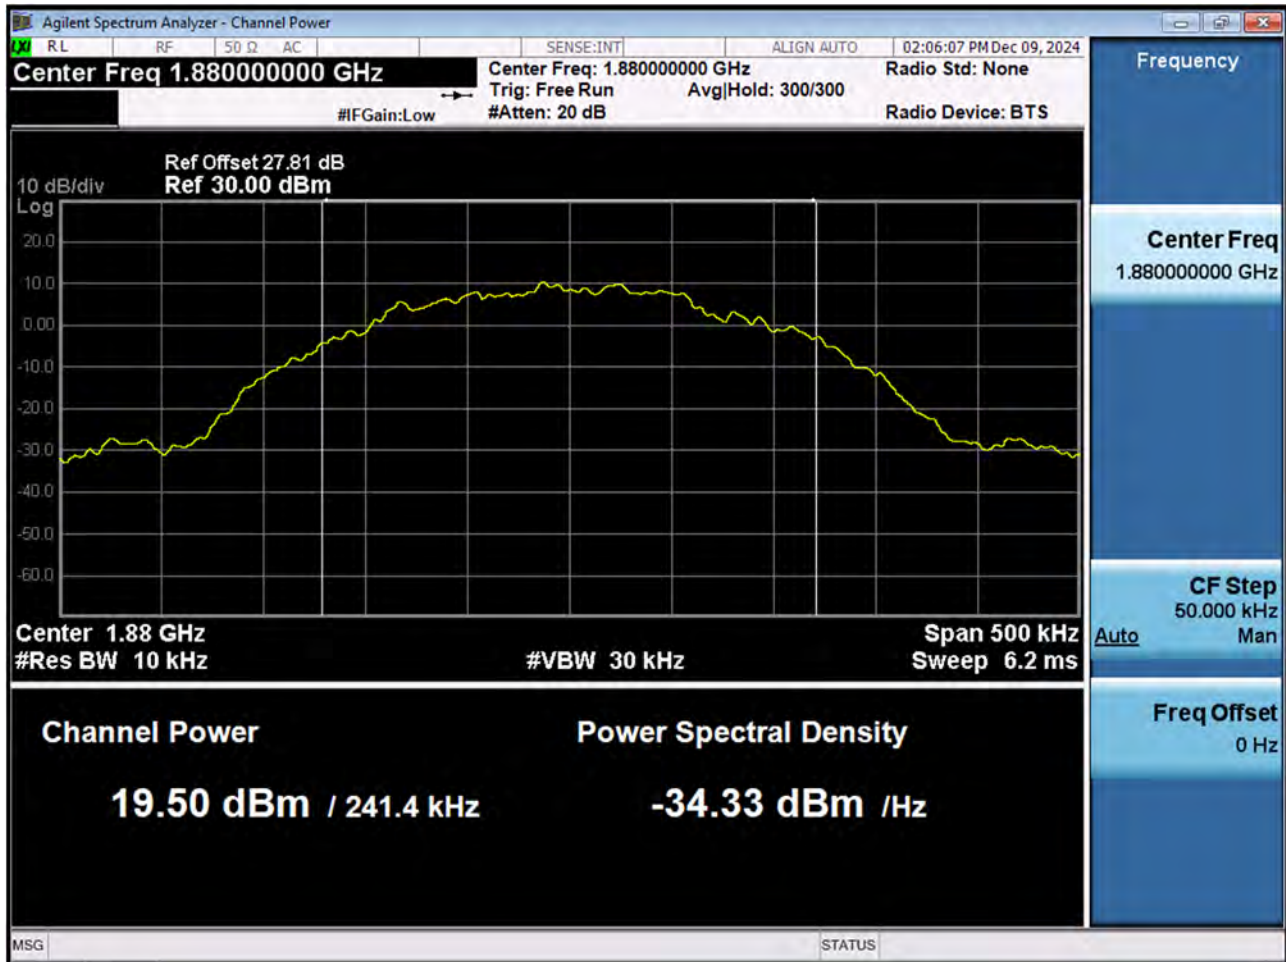

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

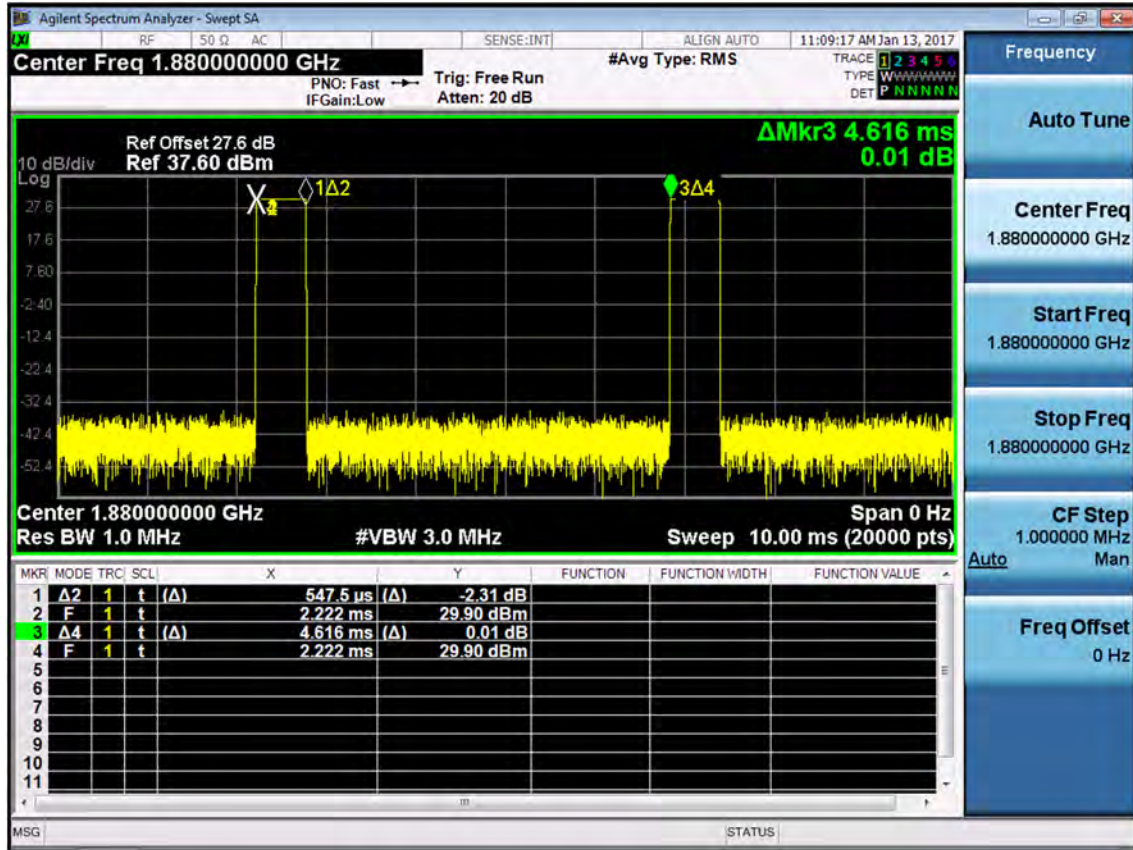


## ■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

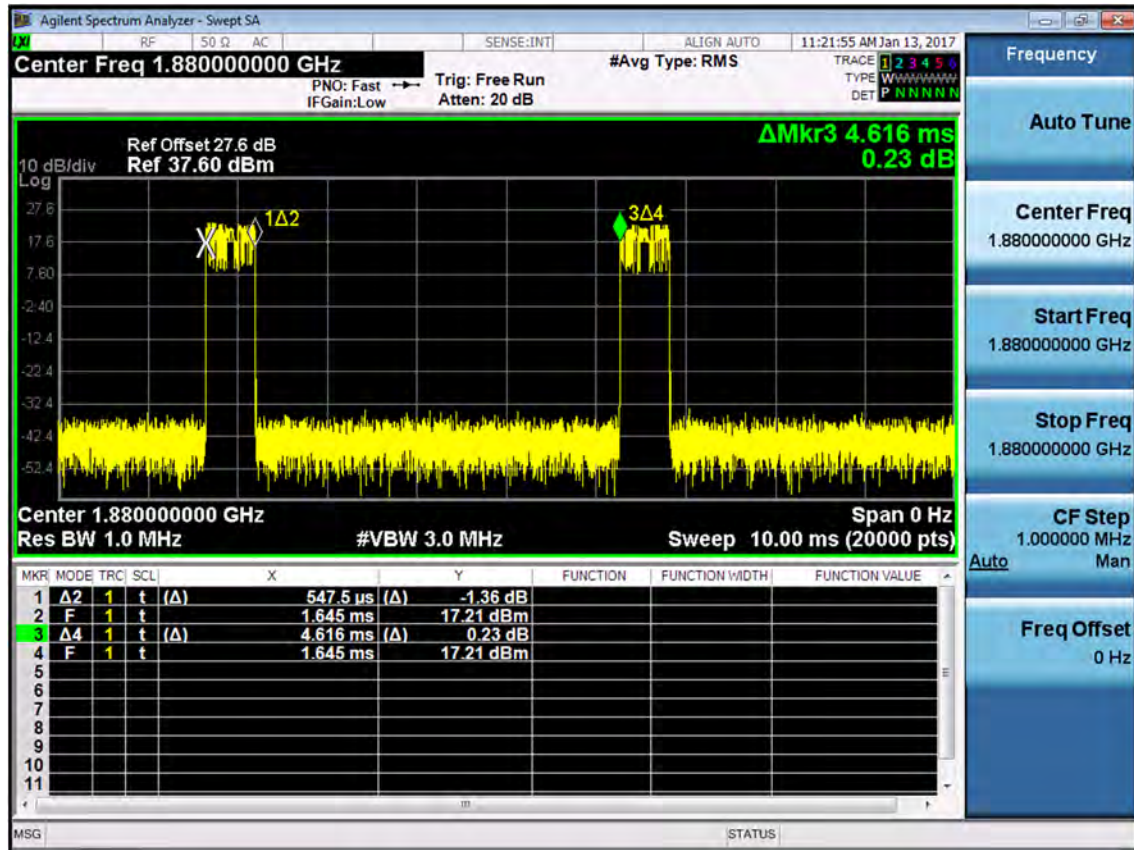





■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio  $P_{Pk}$

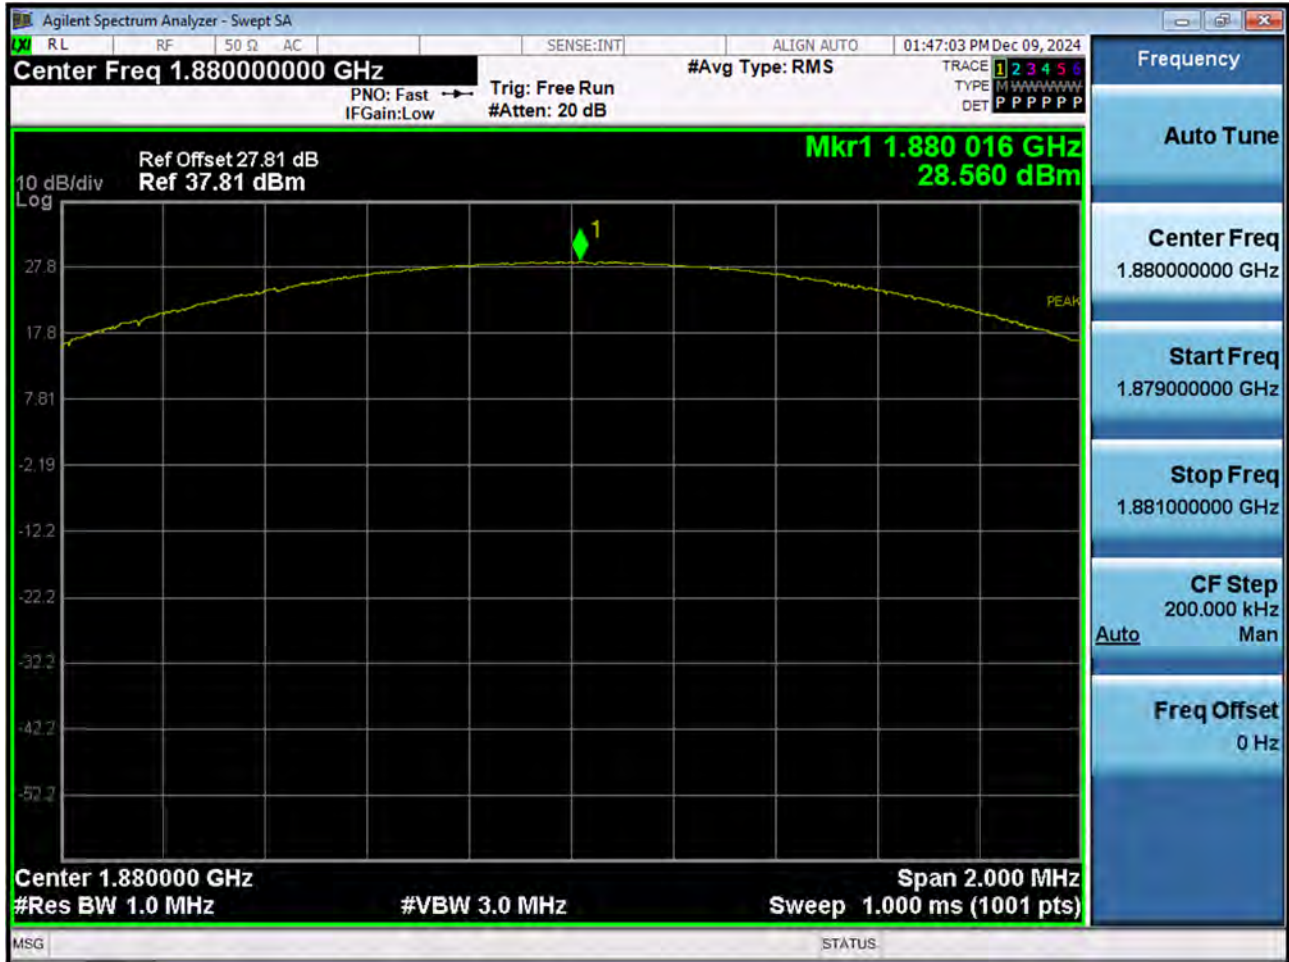


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio  $P_{Avg}$

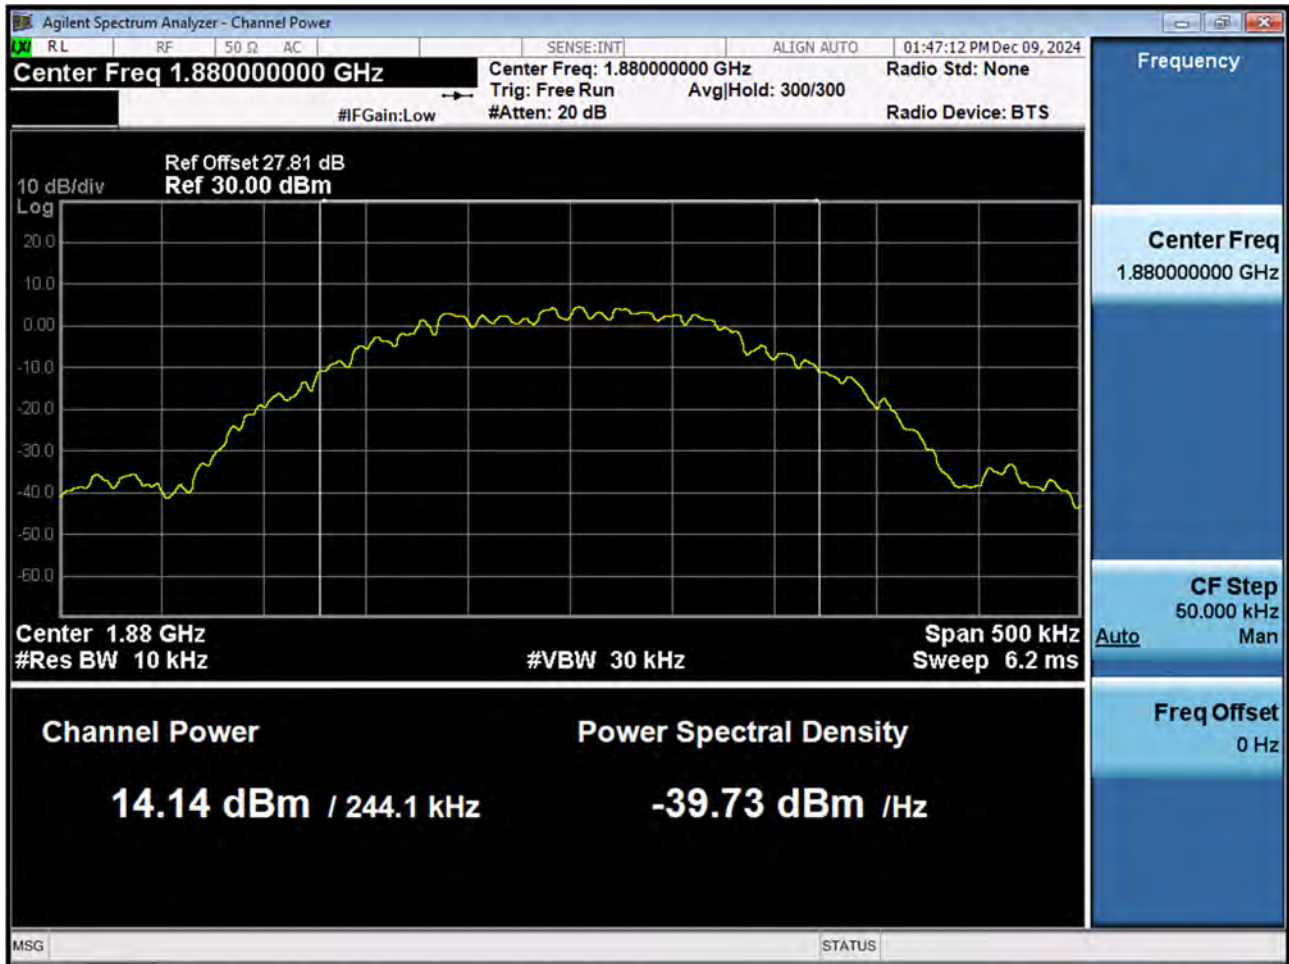


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

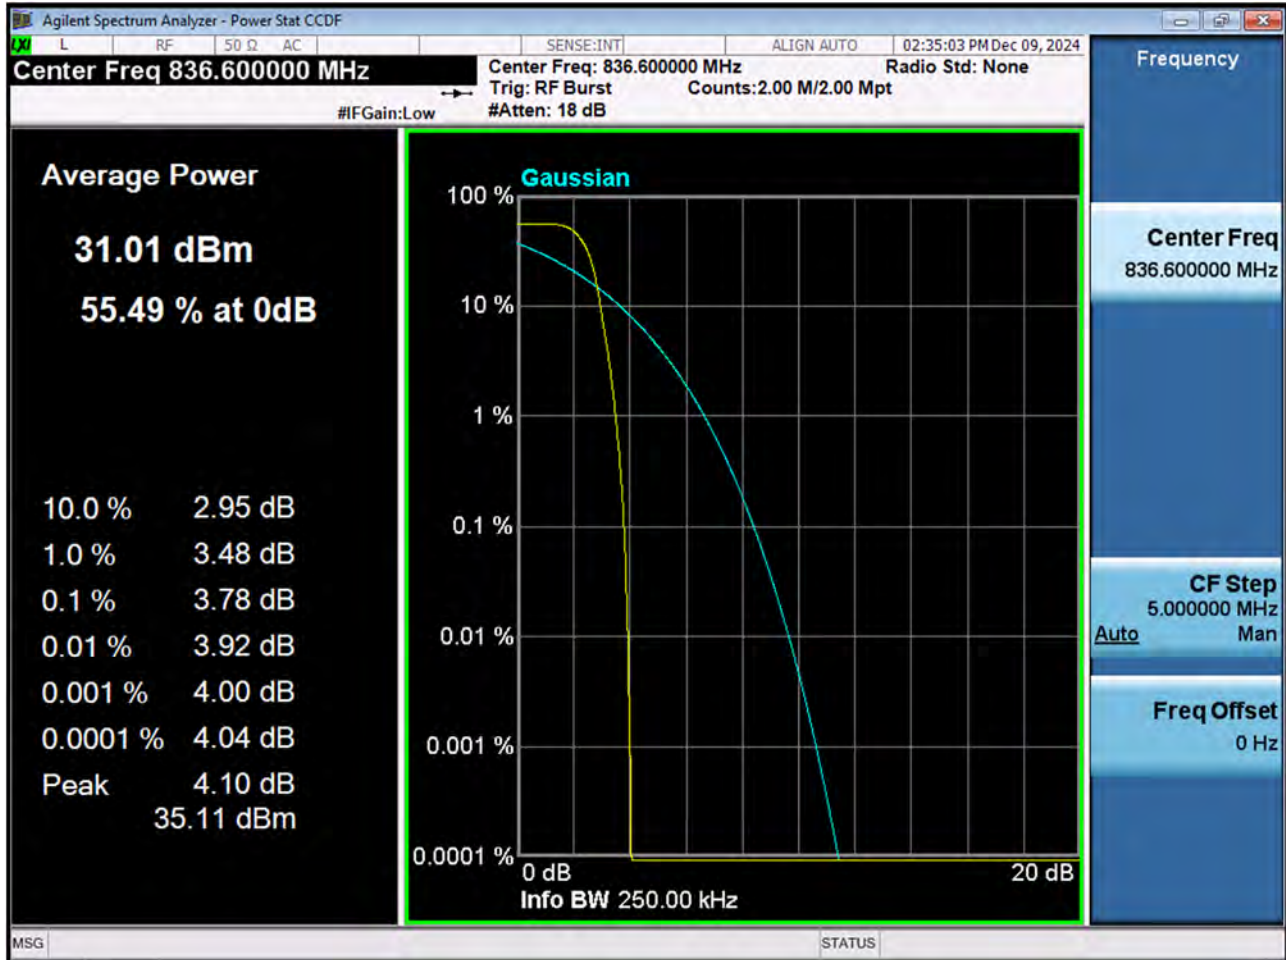

■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

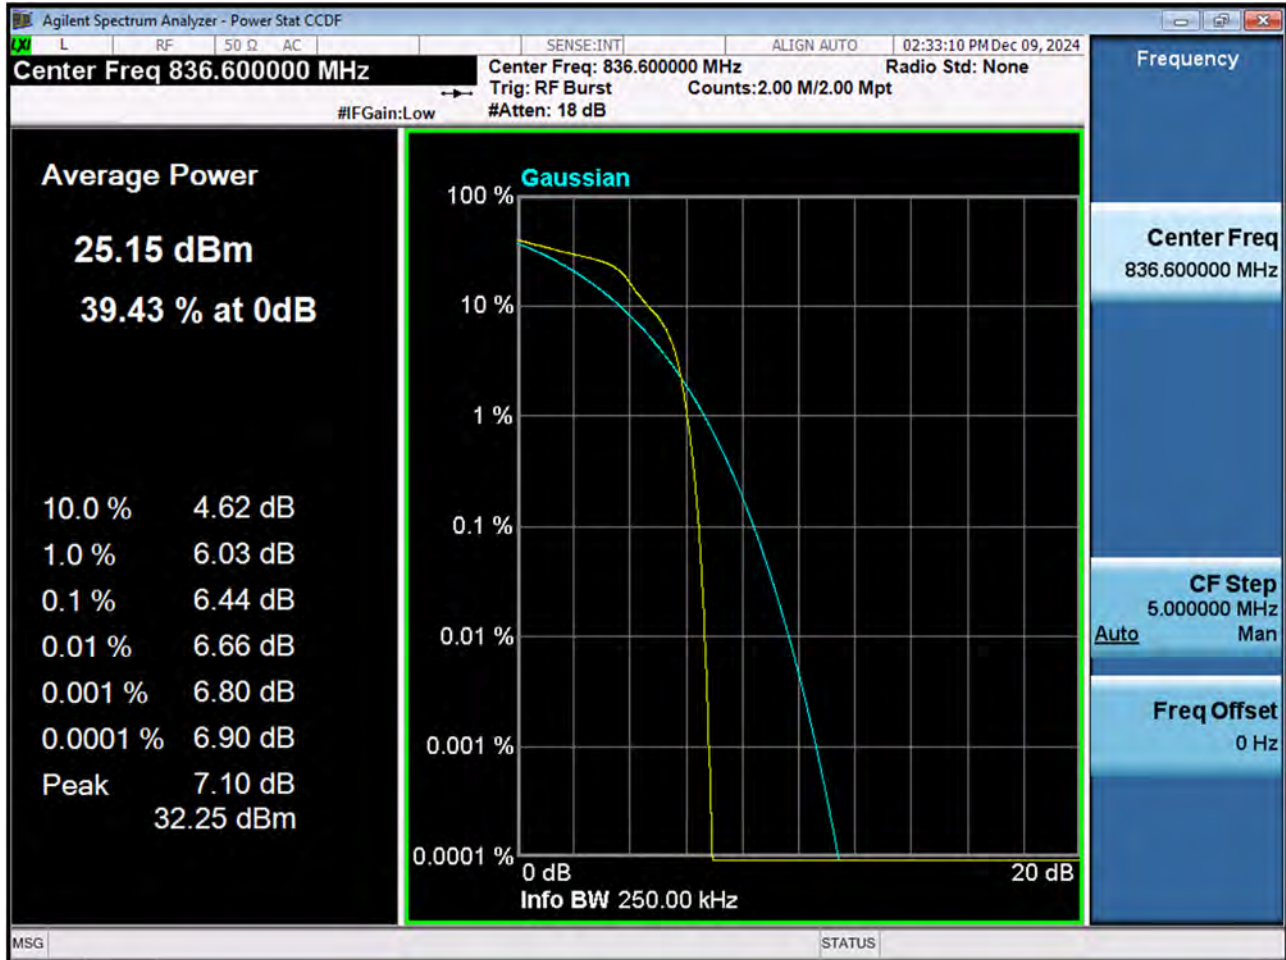


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

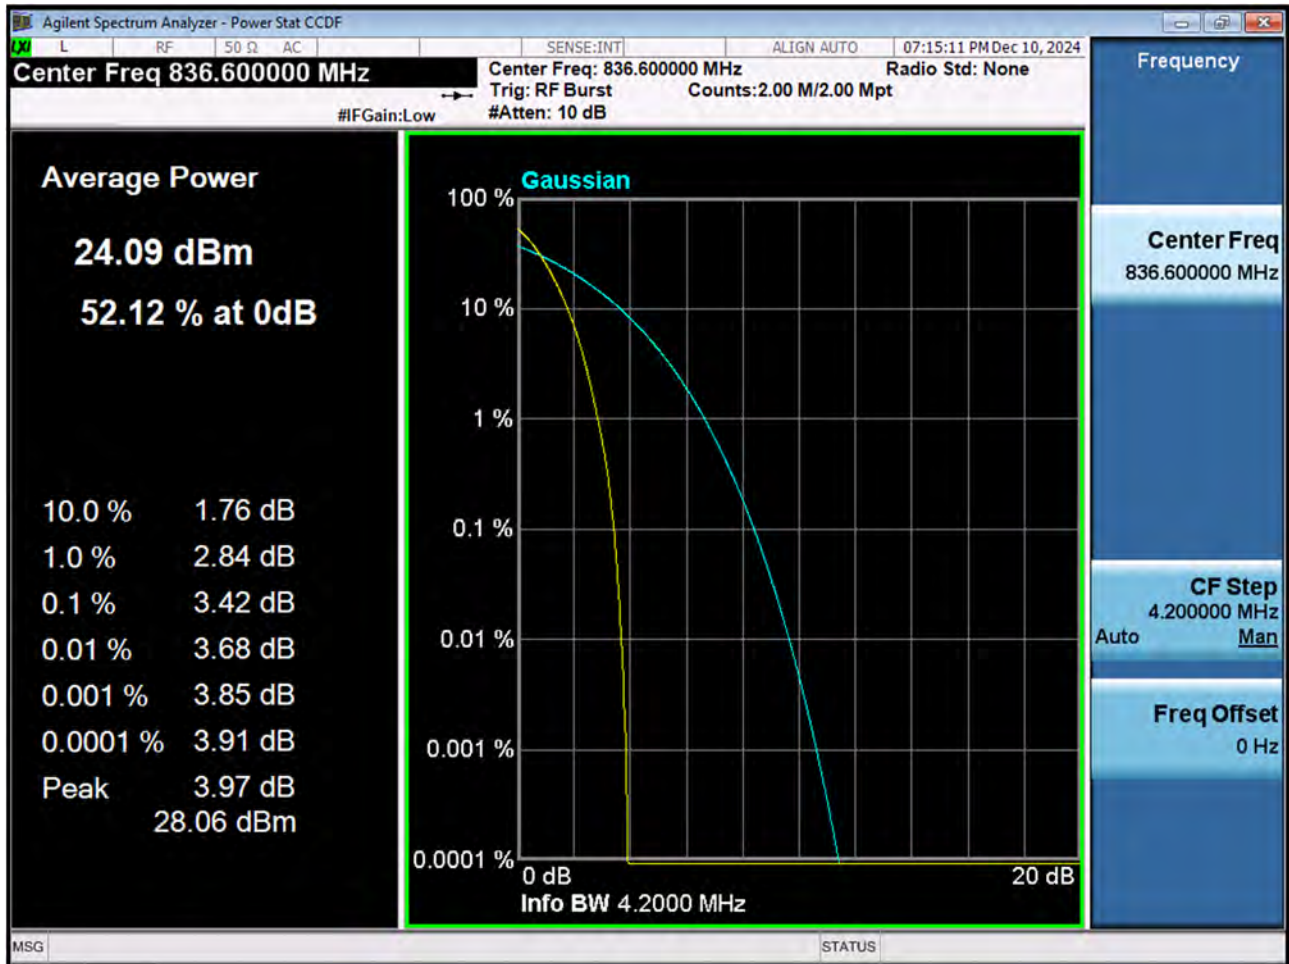





■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

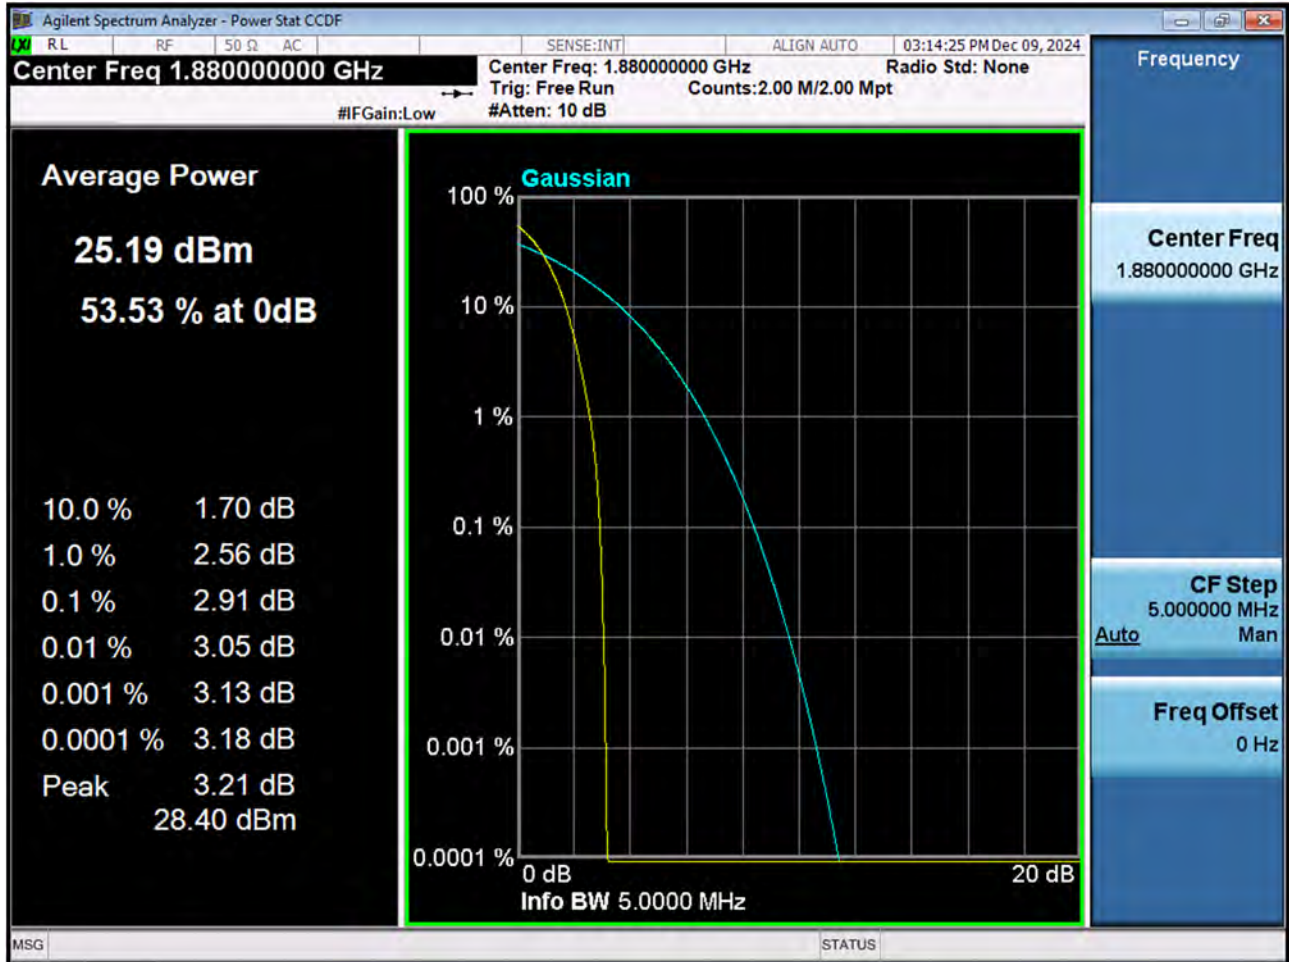

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

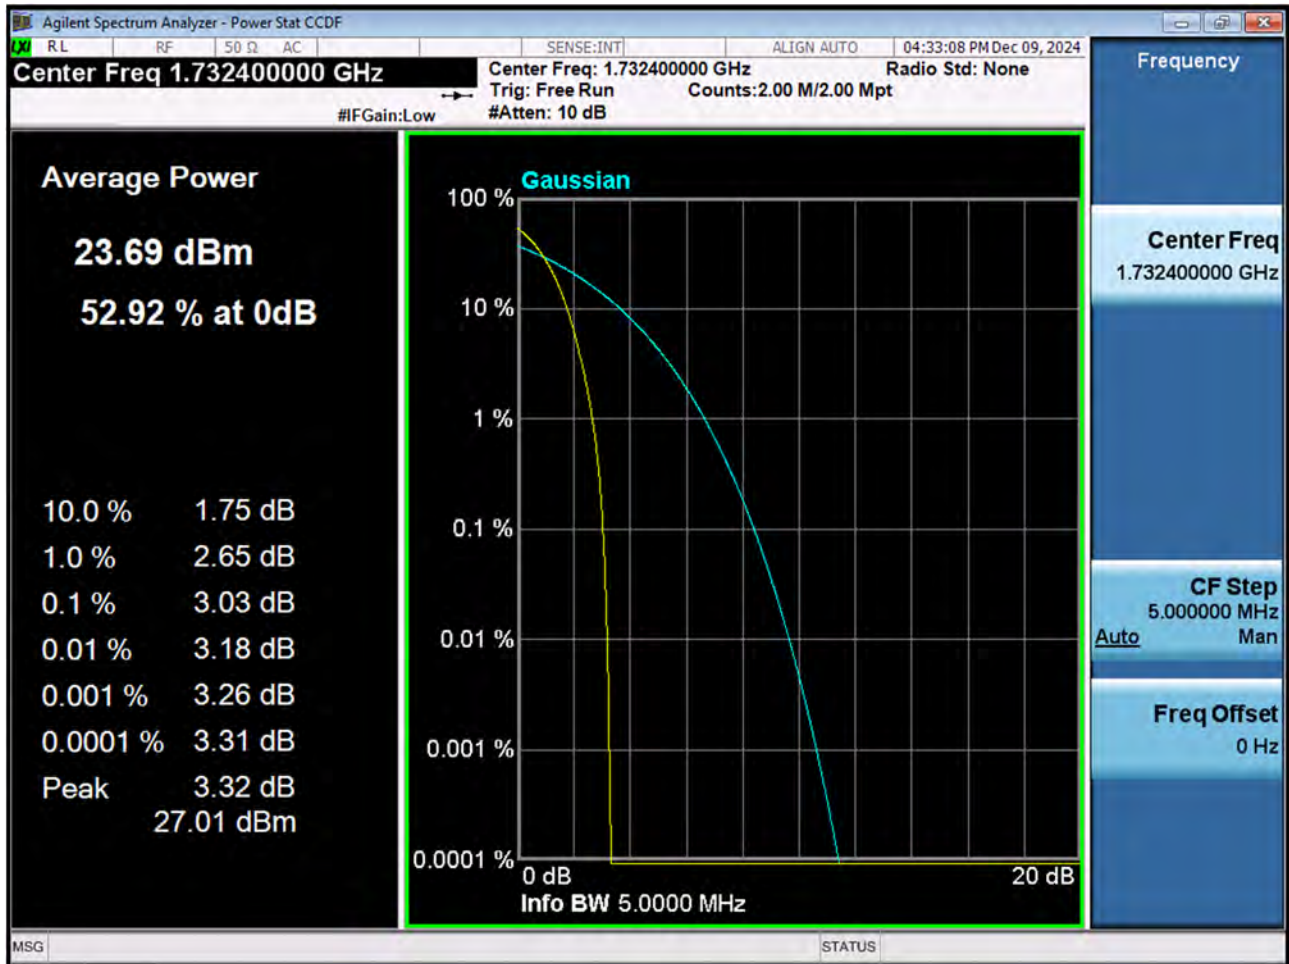


■ GSM850 MODE (128 CH.) Block Edge 1

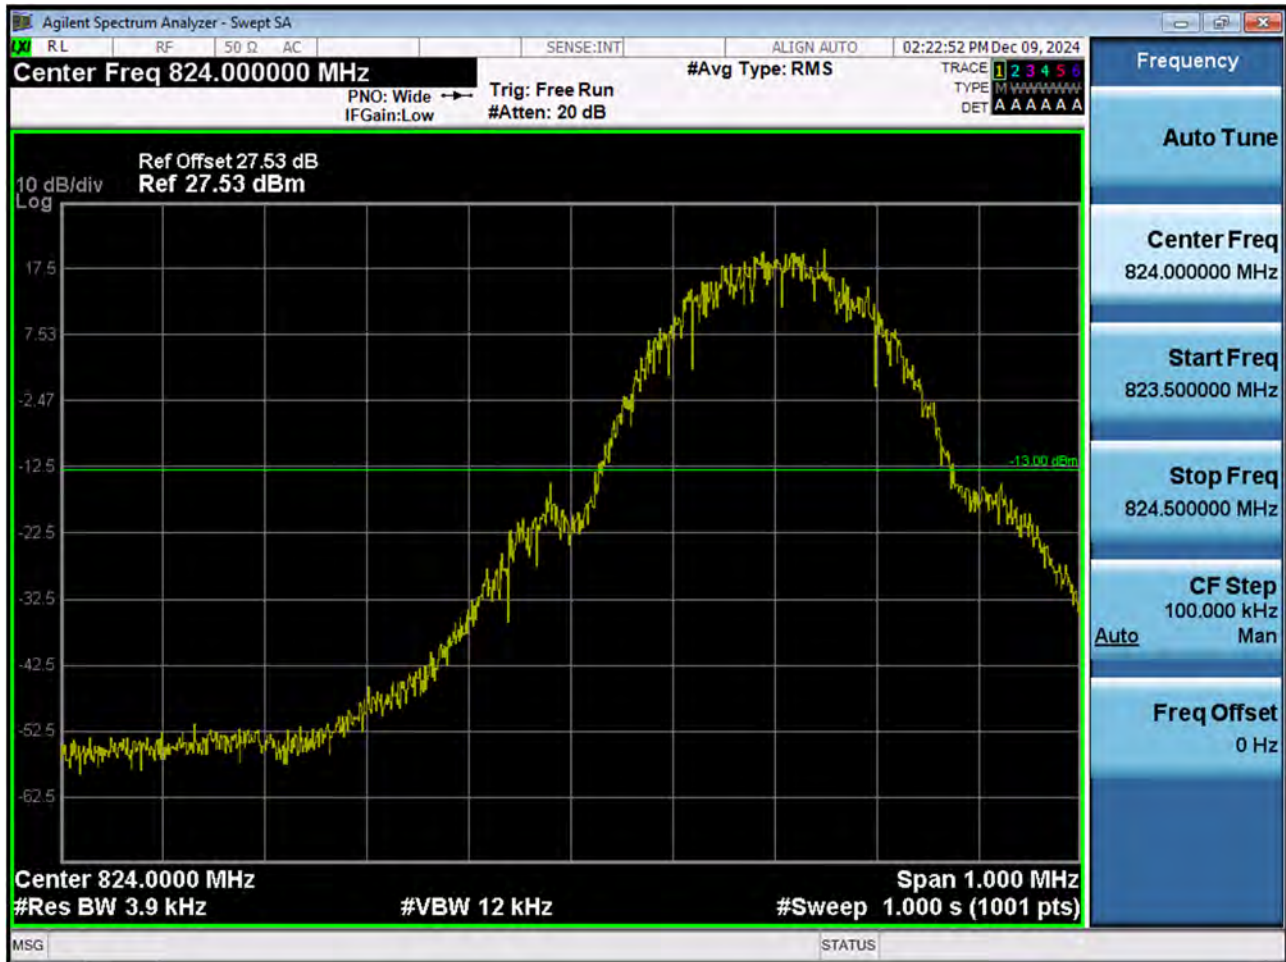




■ GSM850 MODE (128 CH.) Block Edge 2

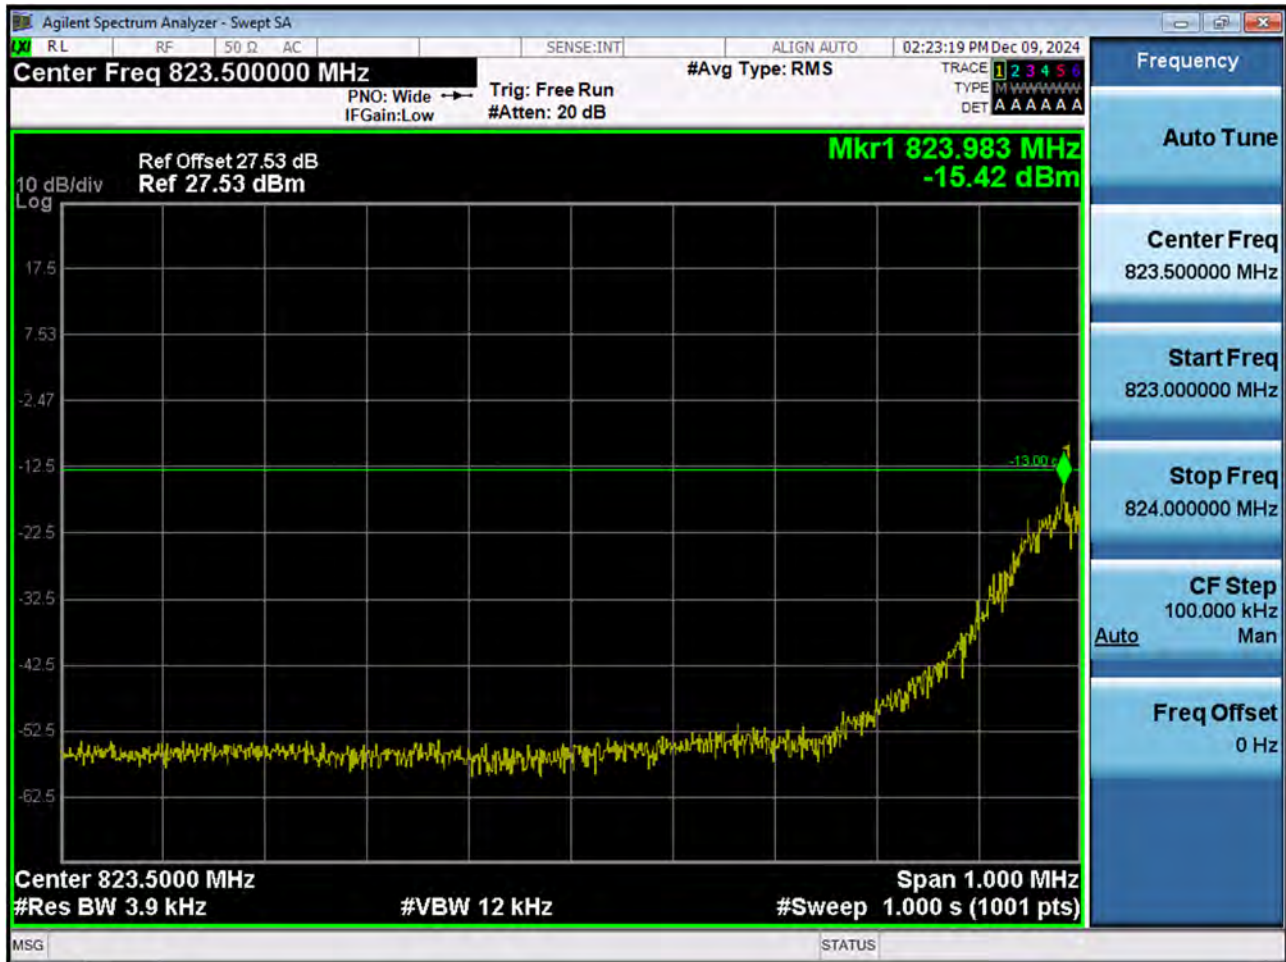

■ GSM850 MODE (128 CH.) Block Edge 3

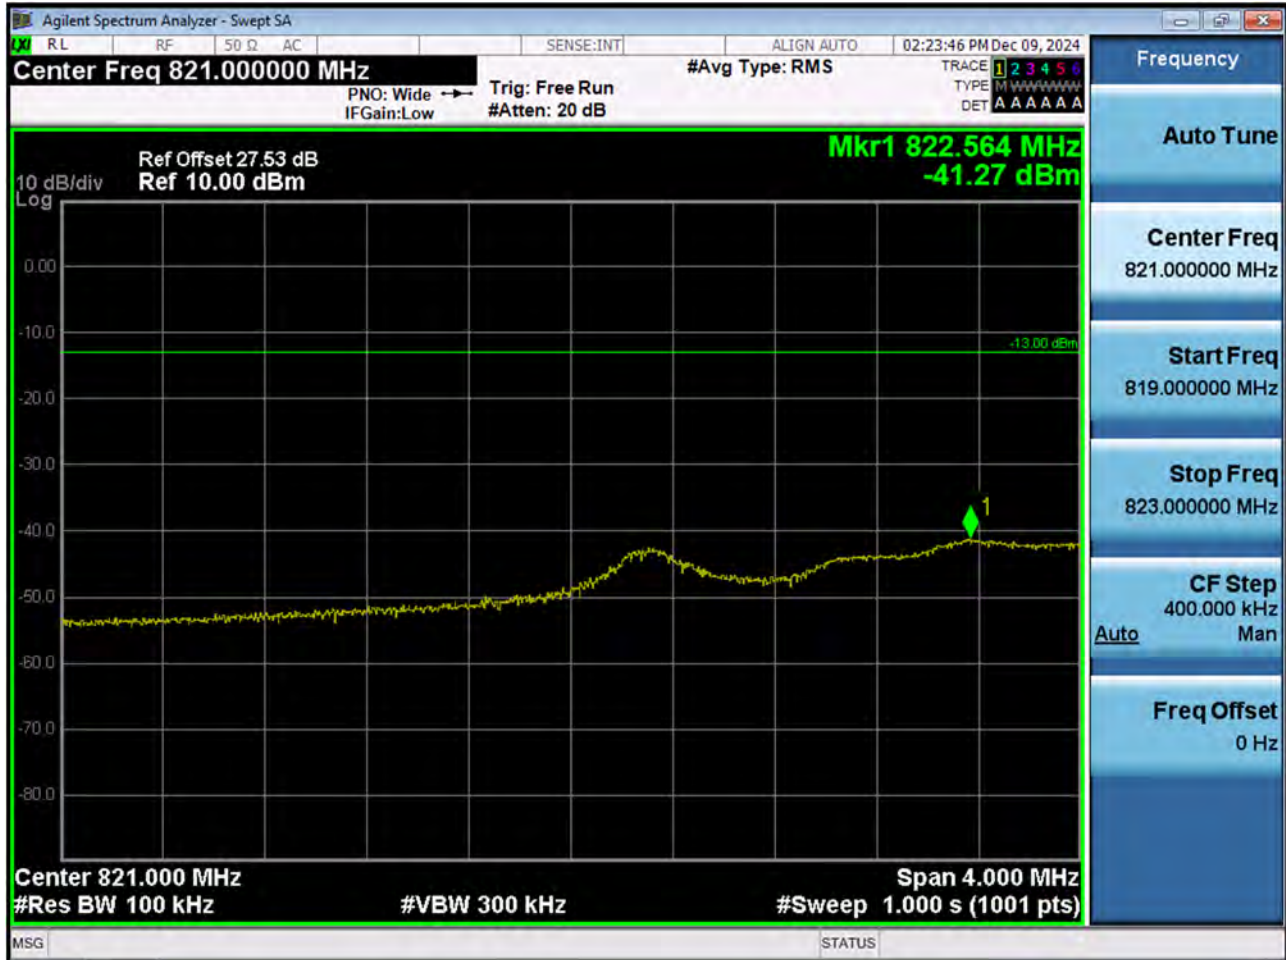

Agilent Spectrum Analyzer - Swept SA

Center Freq 849.000000 MHz #Avg Type: RMS

PNO: Wide → Trig: Free Run  
IFGain:Low #Atten: 20 dB


Ref Offset 27.53 dB  
Ref 27.53 dBm

10 dB/div  
Log

Center 849.0000 MHz #Res BW 3.9 kHz #VBW 12 kHz #Sweep 1.000 s (1001 pts)


MSG STATUS

■ GSM850 MODE (251 CH.) Block Edge 2

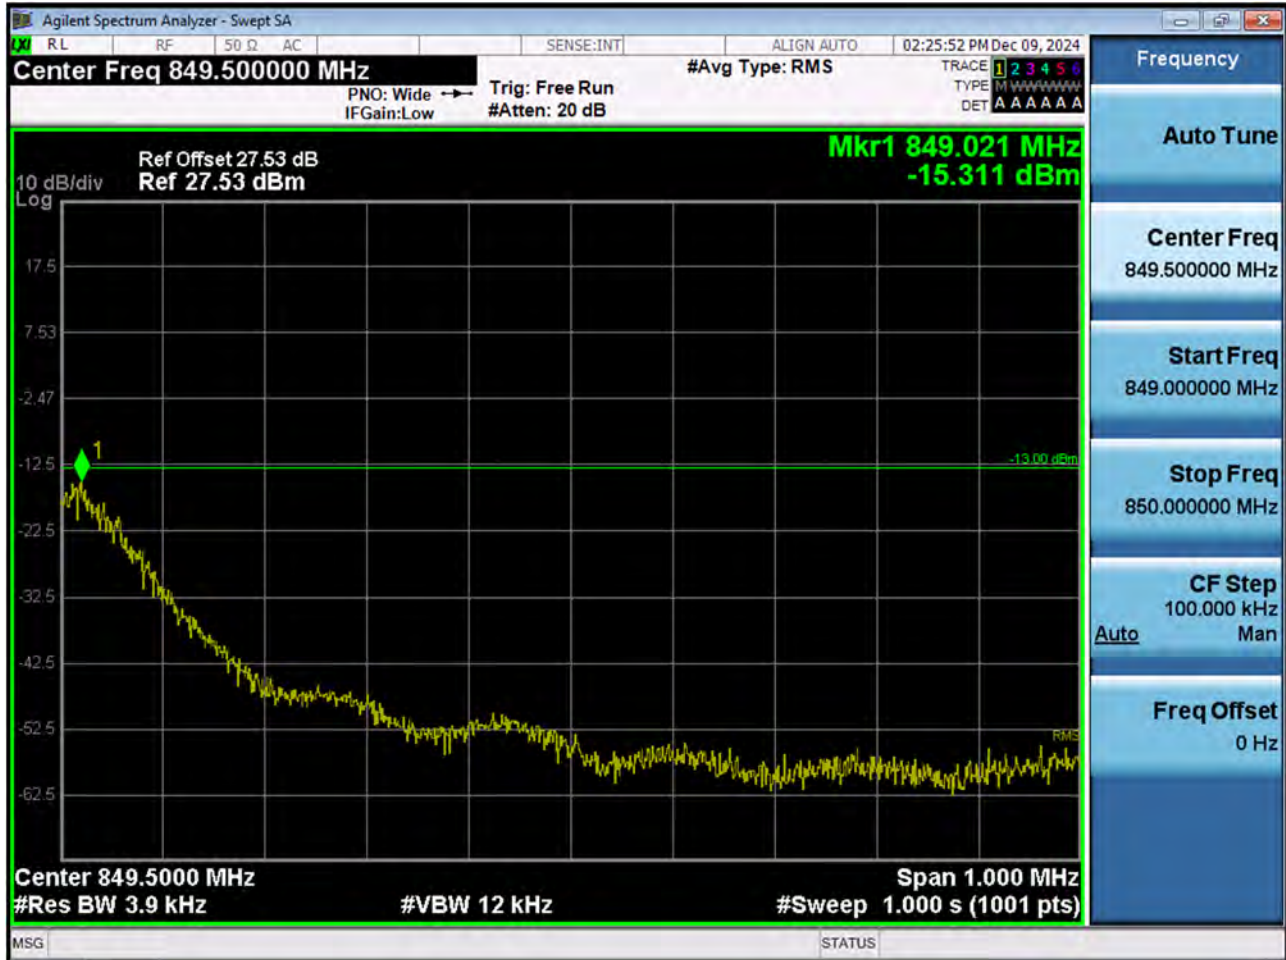





■ GSM850 MODE (251 CH.) Block Edge 3

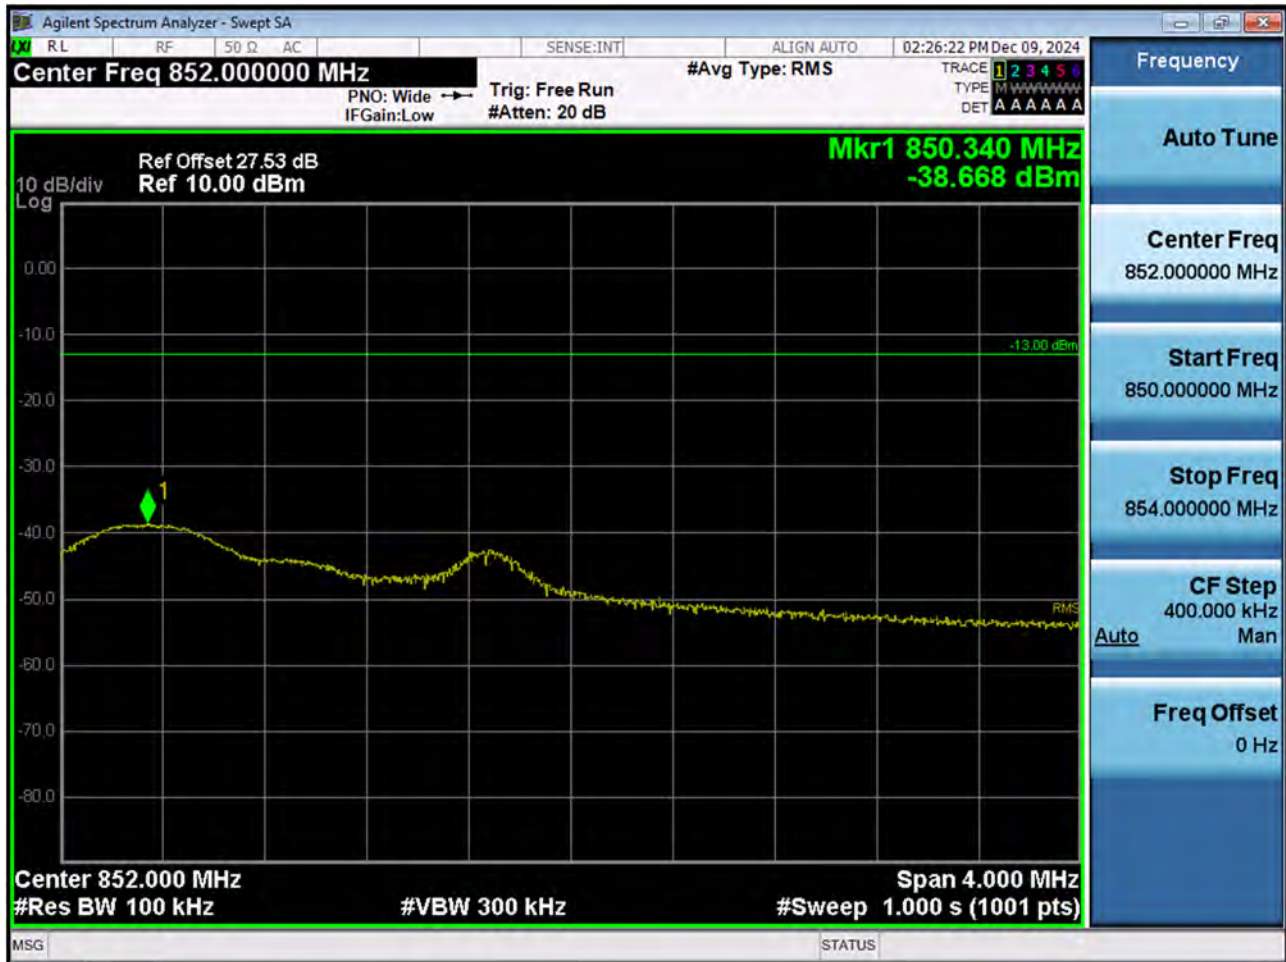


■ GSM850 EDGE MODE (128 CH.) Block Edge 1

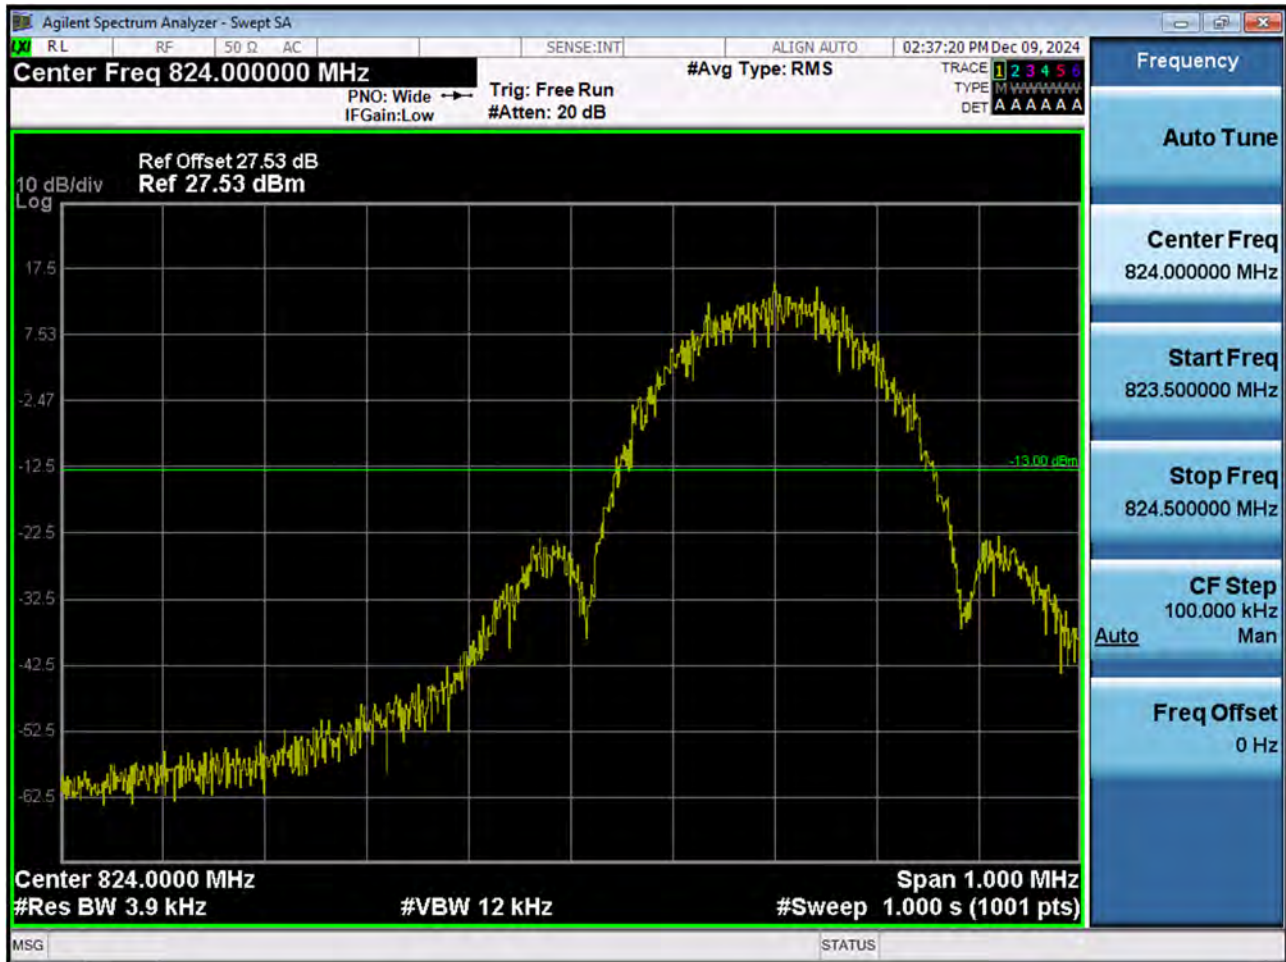

## ■ GSM850 EDGE MODE (128 CH.) Block Edge 2

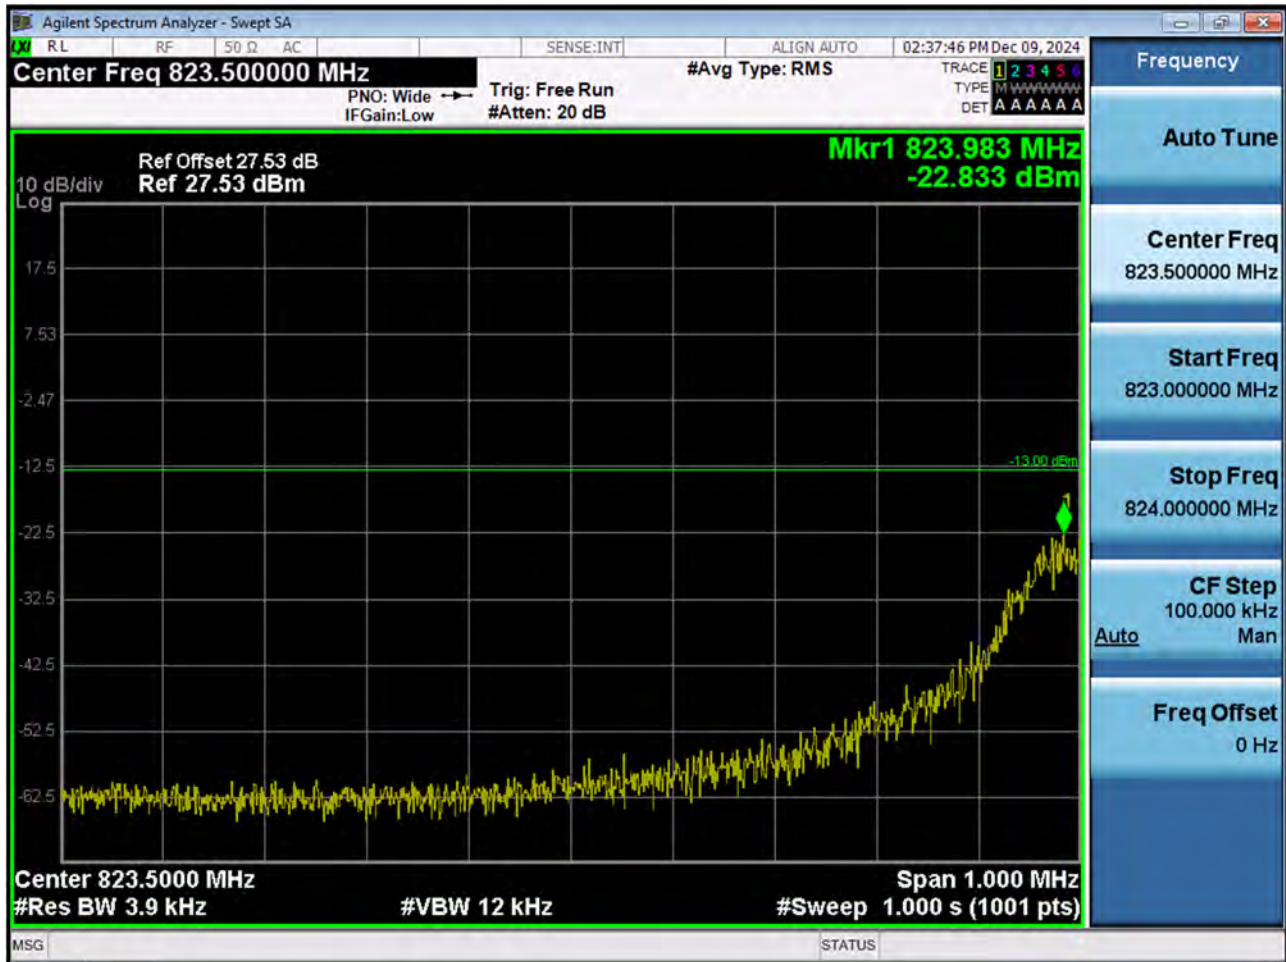


■ GSM850 EDGE MODE (128 CH.) Block Edge 3

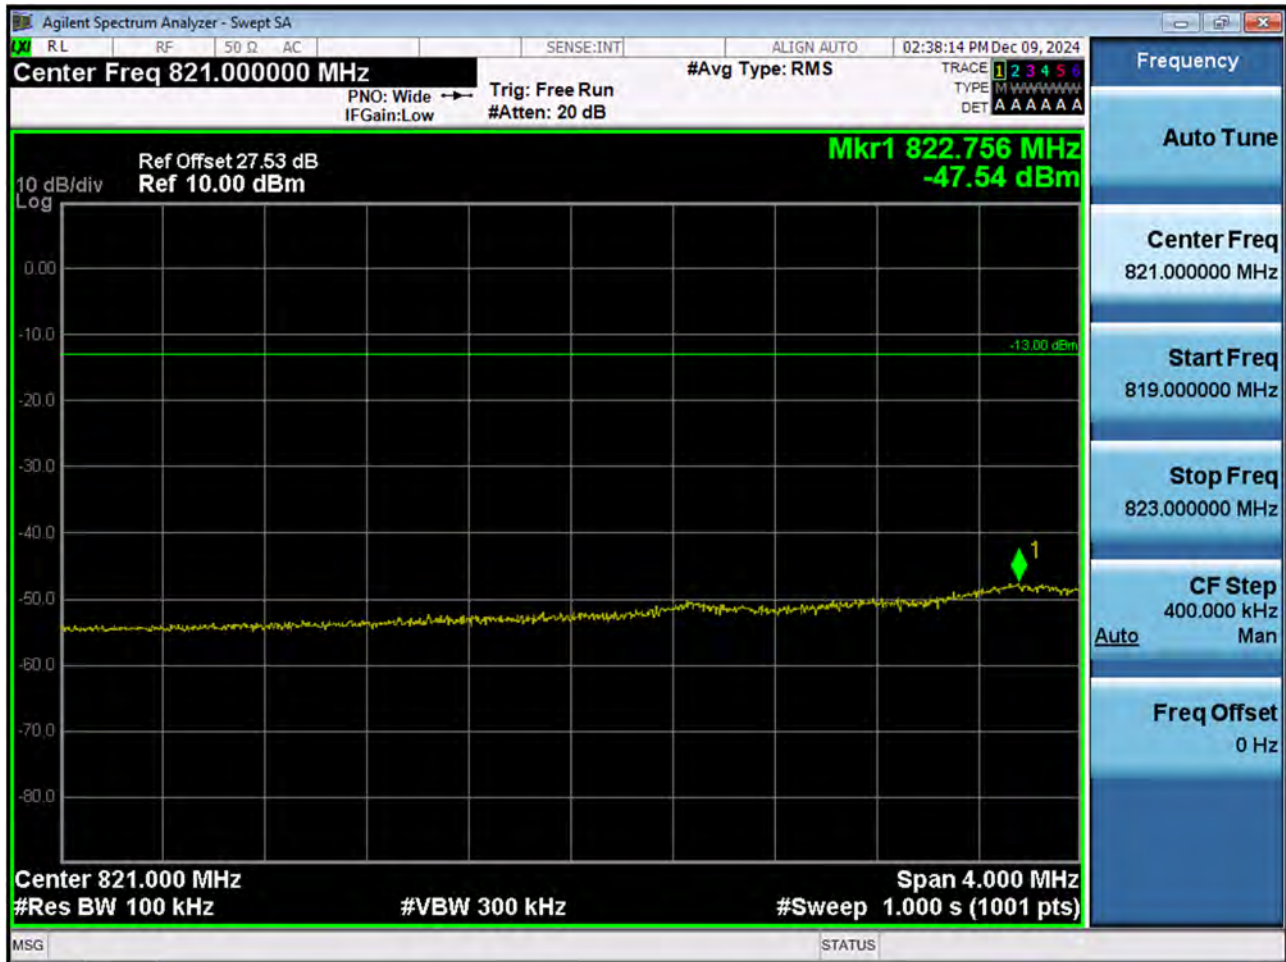





■ GSM850 EDGE MODE (251 CH.) Block Edge 1

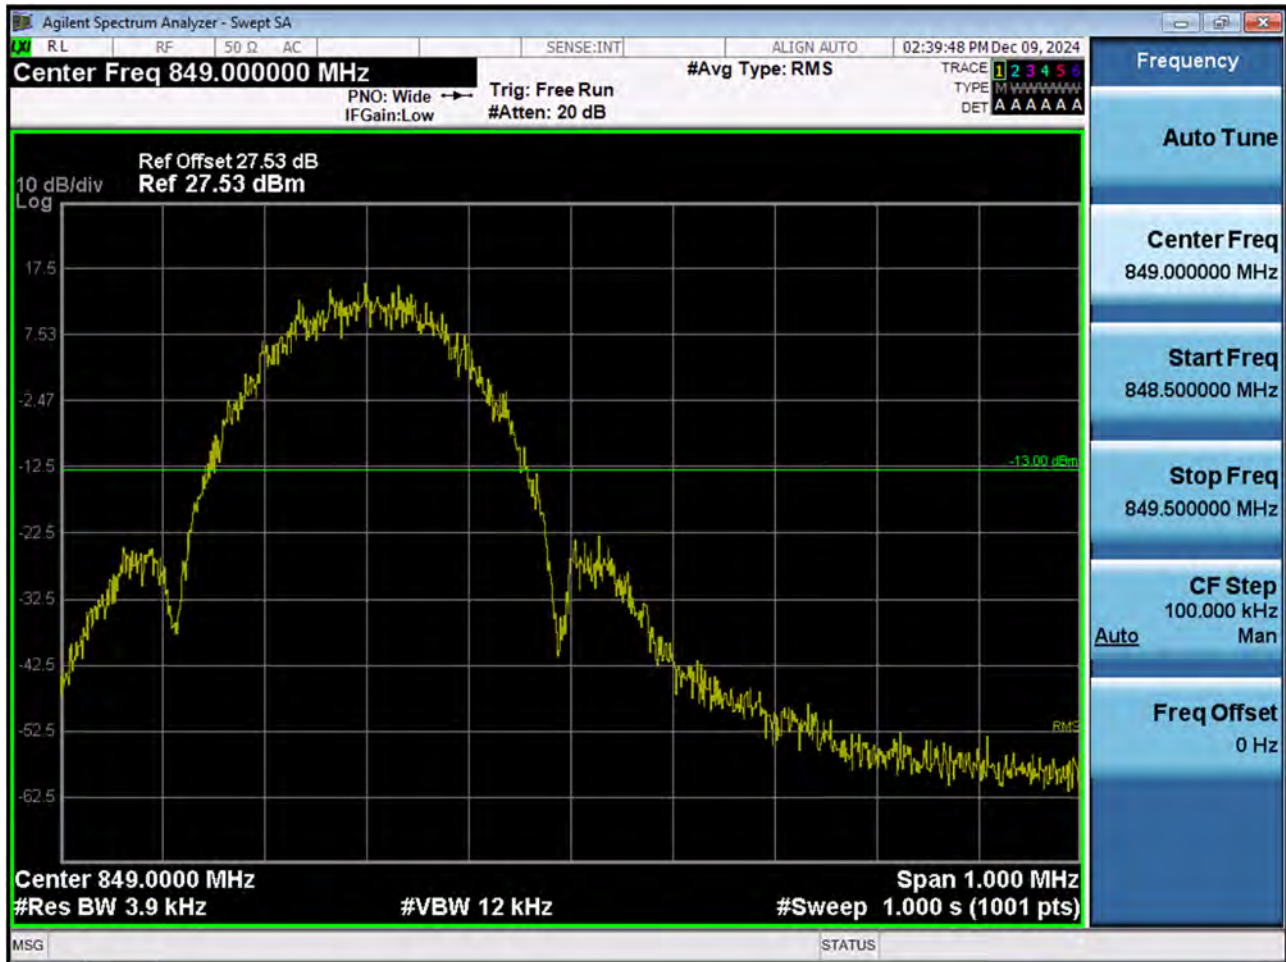


■ GSM850 EDGE MODE (251 CH.) Block Edge 2

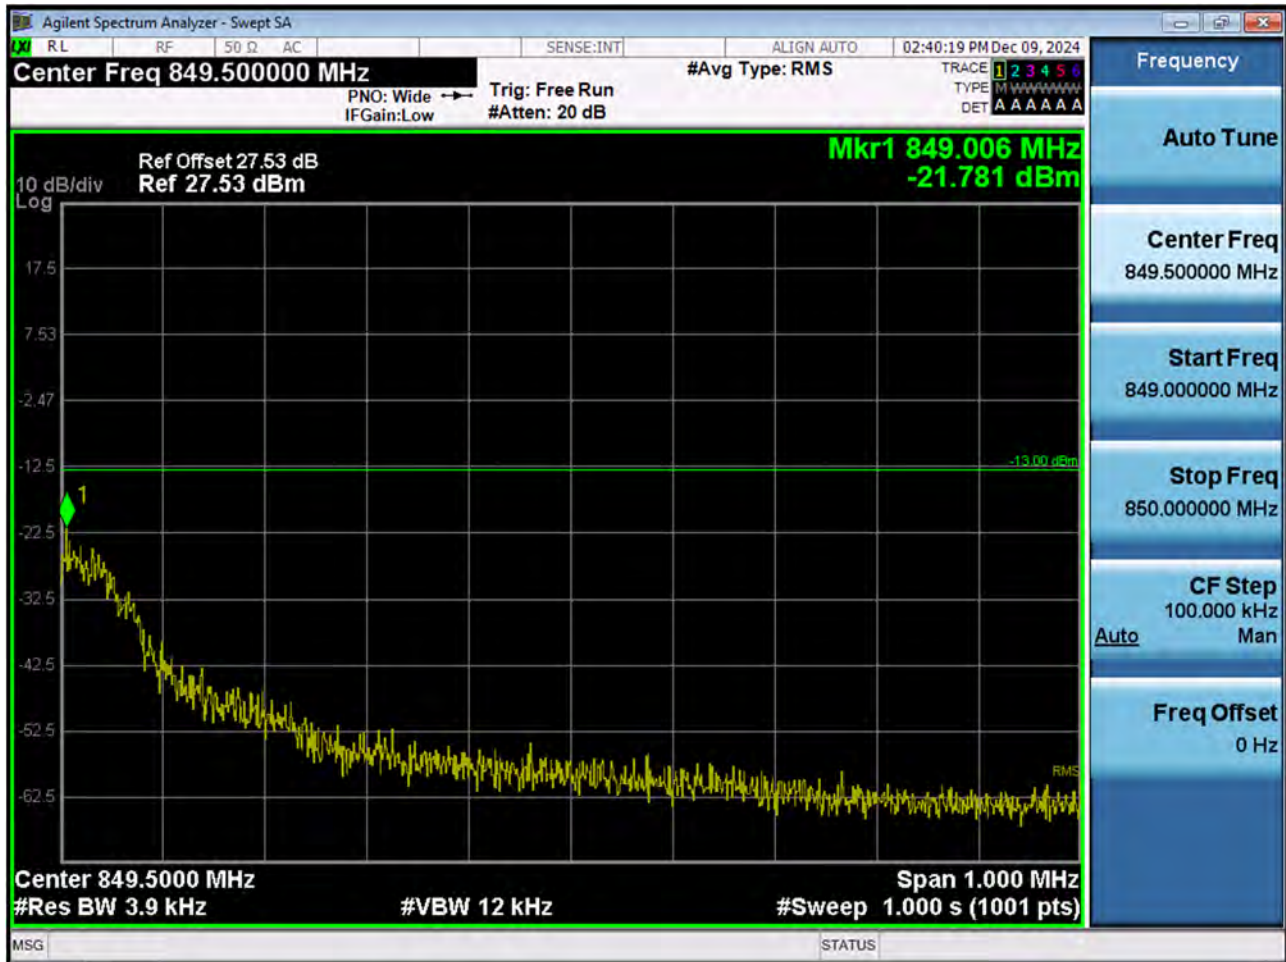

■ GSM850 EDGE MODE (251 CH.) Block Edge 3

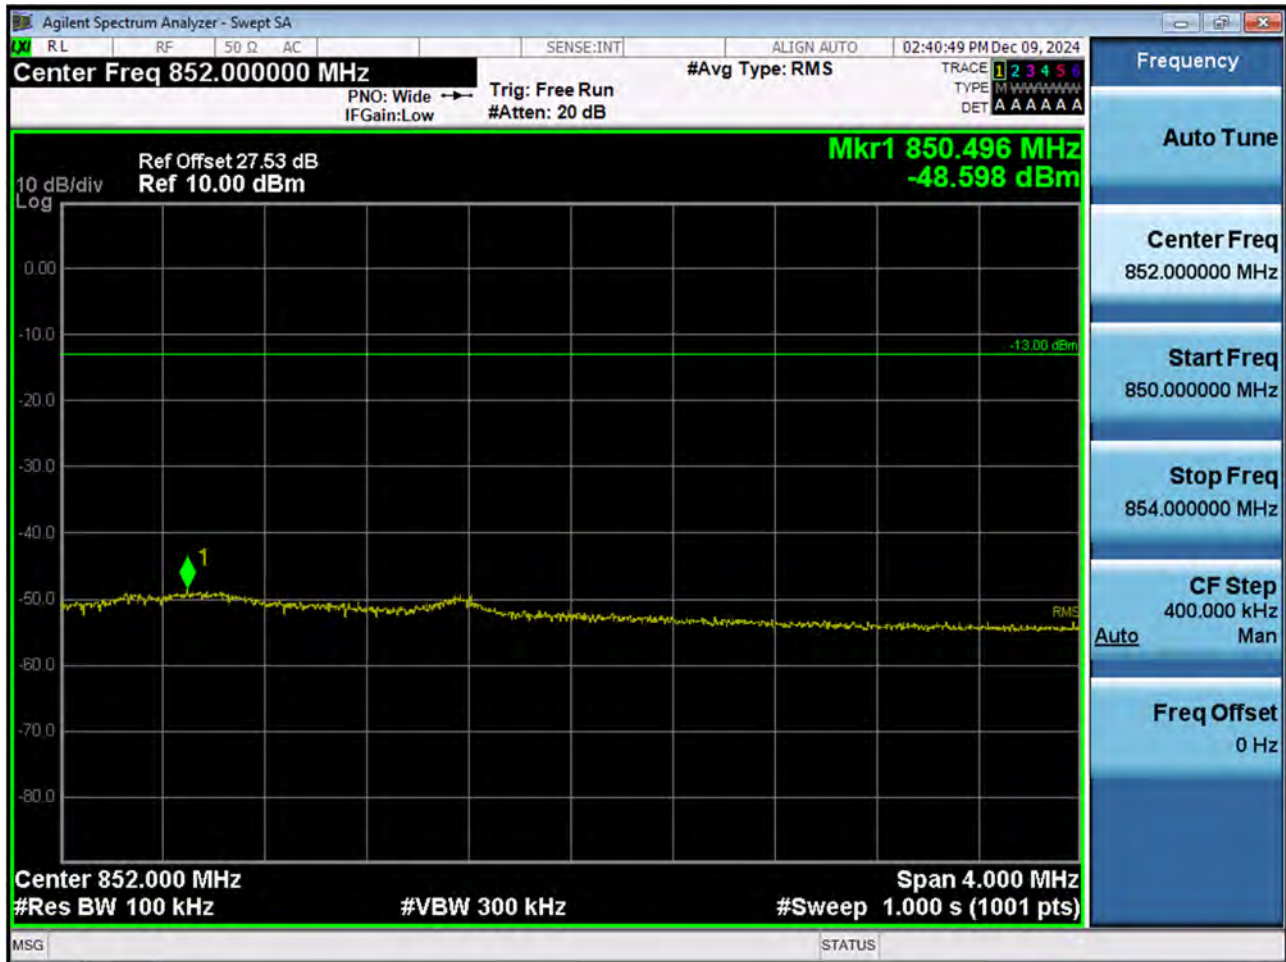


■ GSM1900 MODE (512 CH.) Block Edge 1

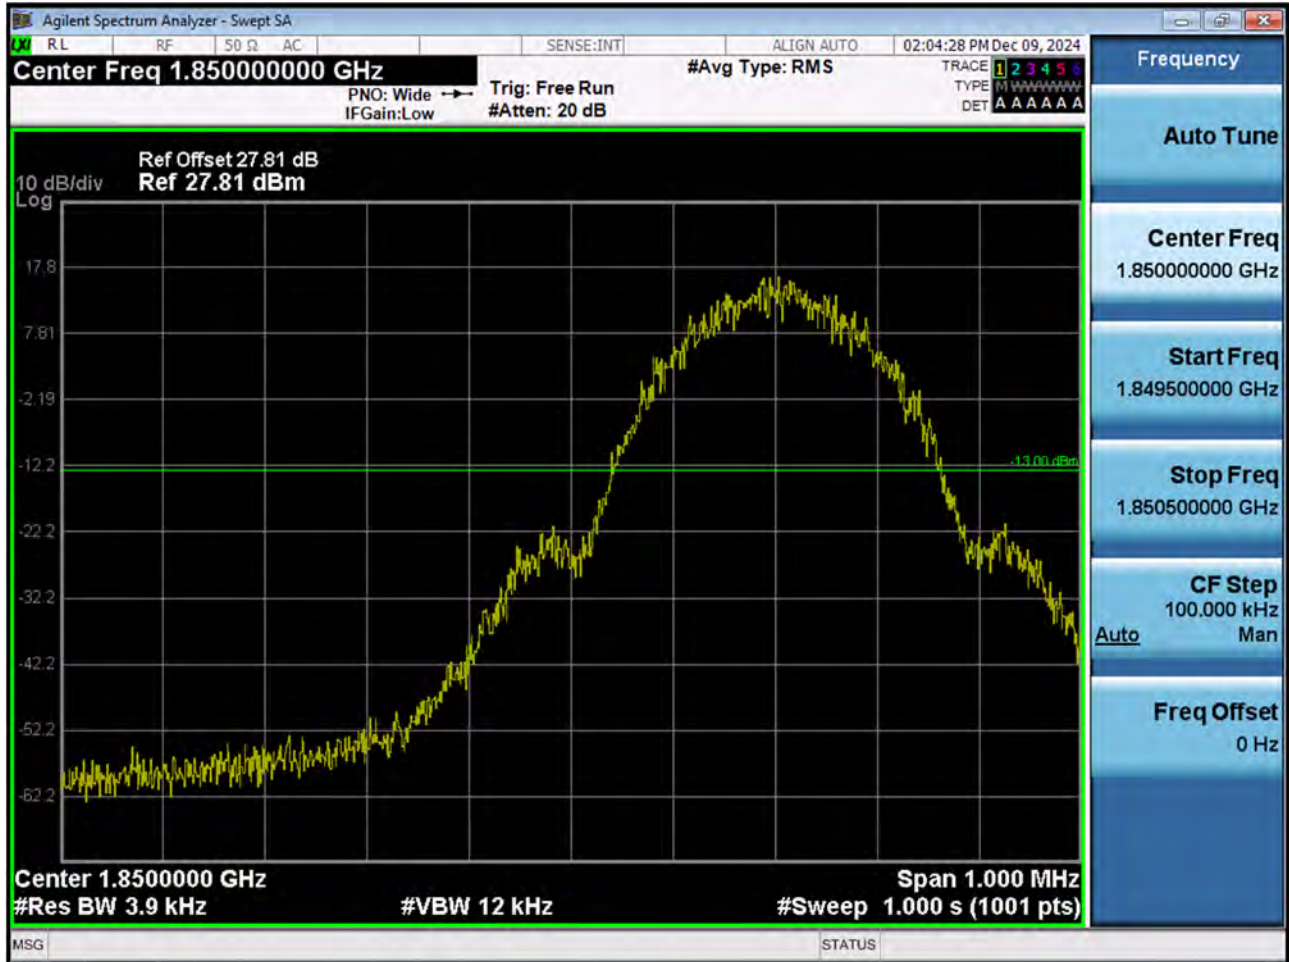




■ GSM1900 MODE (512 CH.) Block Edge 2

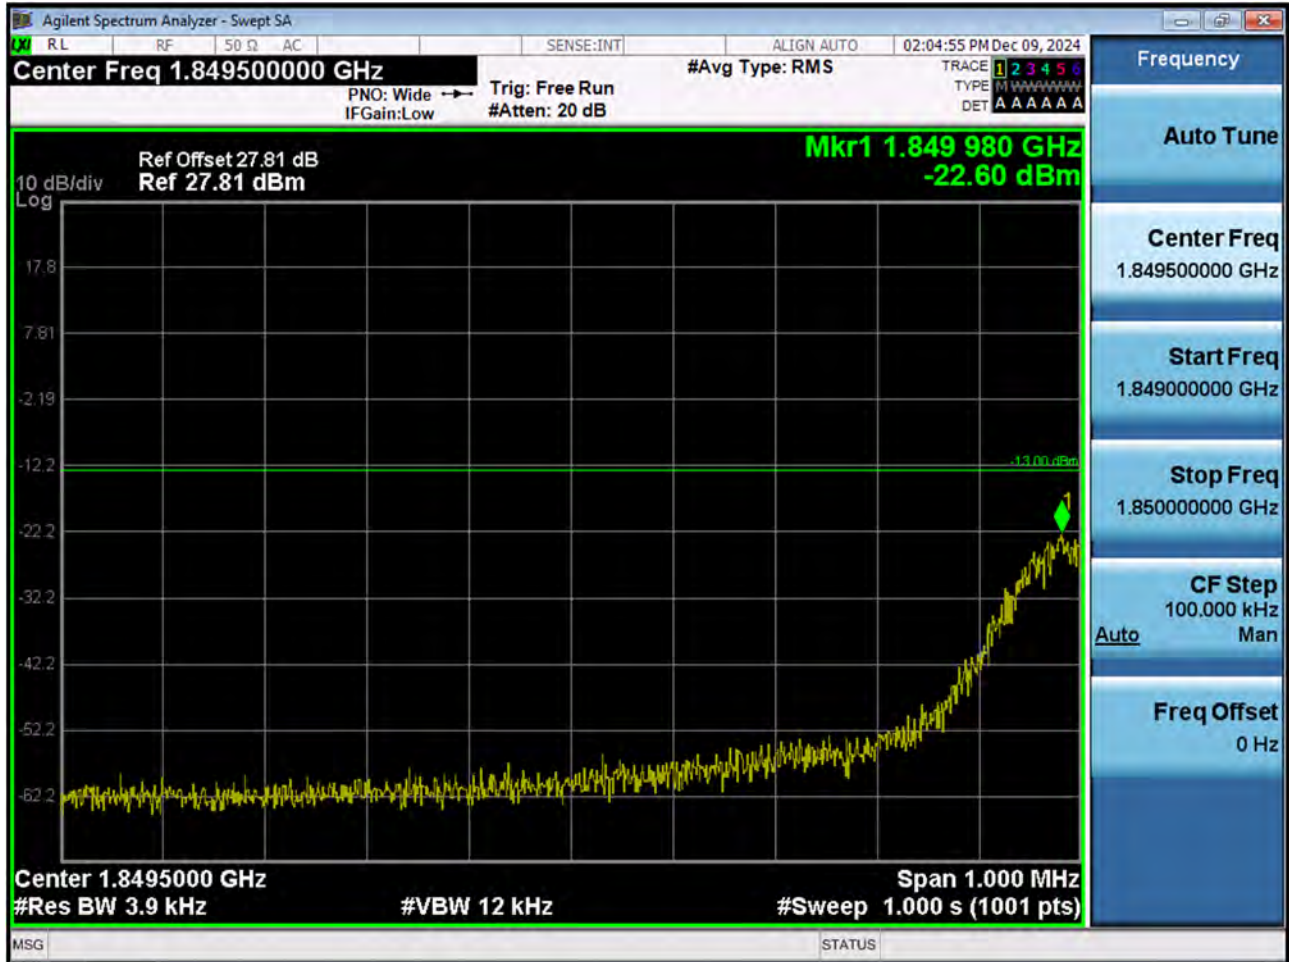

## ■ GSM1900 MODE (512 CH.) Block Edge 3

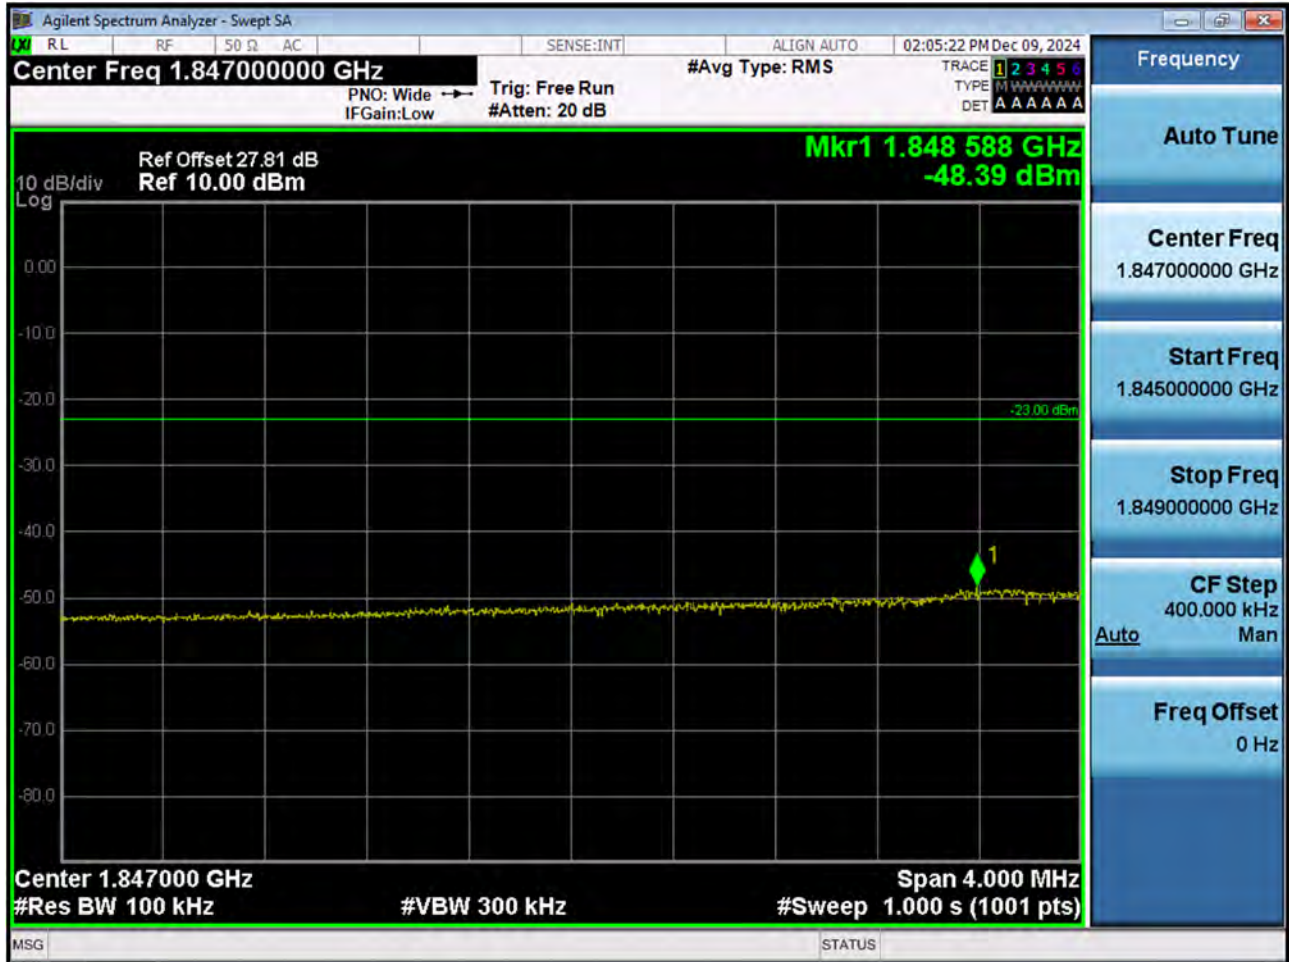

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = 58.39 dBm + 10 dB = -48.39 dBm

Agilent Spectrum Analyzer - Swept SA

RL RF 50  $\Omega$  AC SENSE:INT ALIGN AUTO 02:07:15 PM Dec 09, 2024

Center Freq 1.91000000 GHz #Avg Type: RMS

PNO: Wide Trg: Free Run  
IFGain: Low #Atten: 20 dB


TRACE 1 2 3 4 5 6  
TYPE M W W W W W W W W W  
DET A A A A A A

Ref Offset 27.81 dB  
Ref 27.81 dBm

10 dB/div  
Log

Center 1.9100000 GHz Span 1.000 MHz  
#Res BW 3.9 kHz #VBW 12 kHz #Sweep 1.000 s (1001 pts)

■ GSM1900 MODE (810 CH.) Block Edge 2

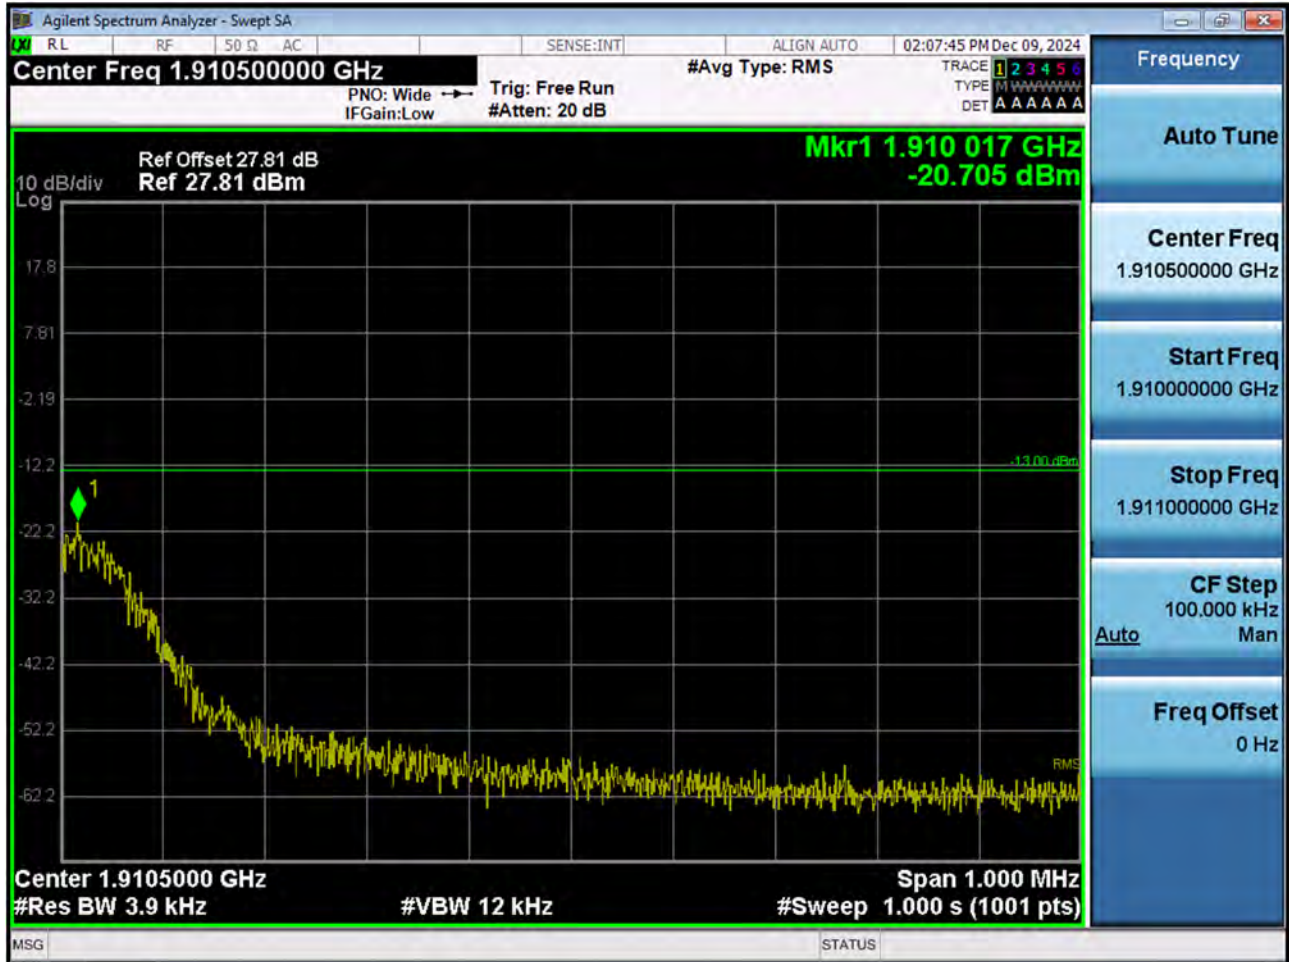




## ■ GSM1900 MODE (810 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -47.022 dBm + 10 dB = -37.022 dBm


■ GSM1900 EDGE MODE (512 CH.) Block Edge 1

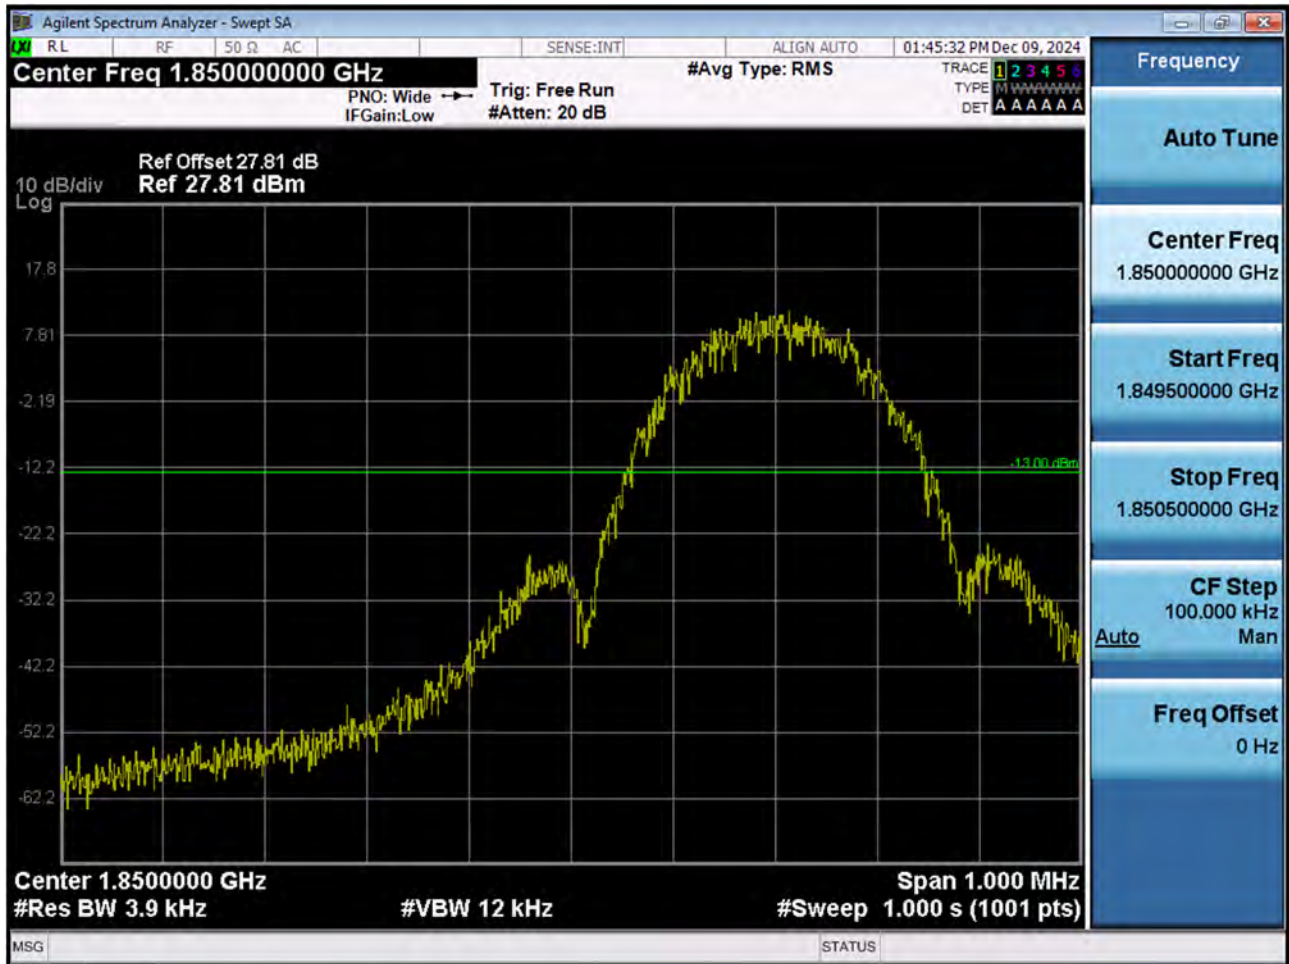

■ GSM1900 EDGE MODE (512 CH.) Block Edge 2

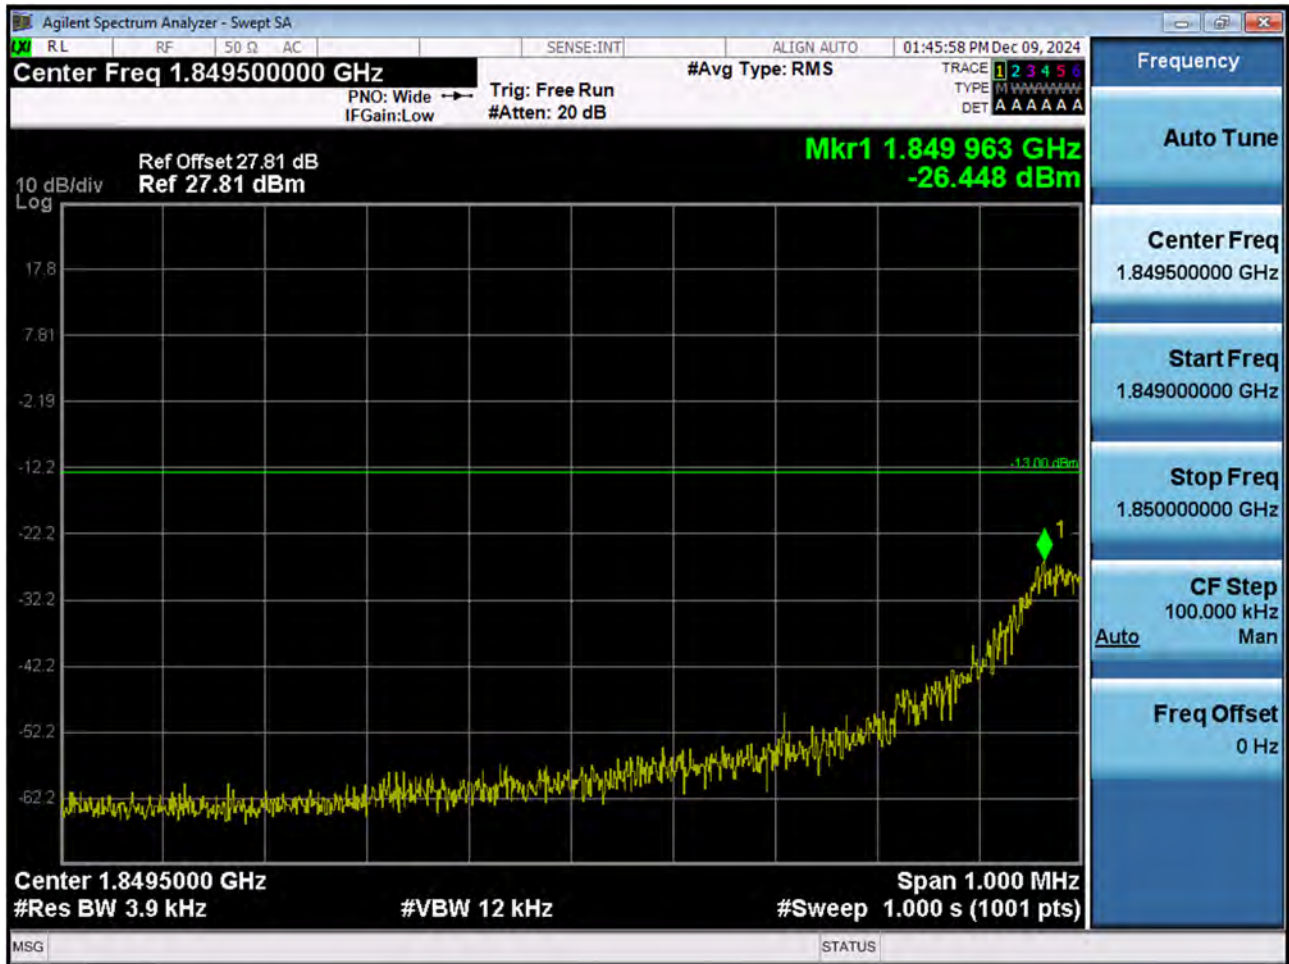

## ■ GSM1900 EDGE MODE (512 CH.) Block Edge 3

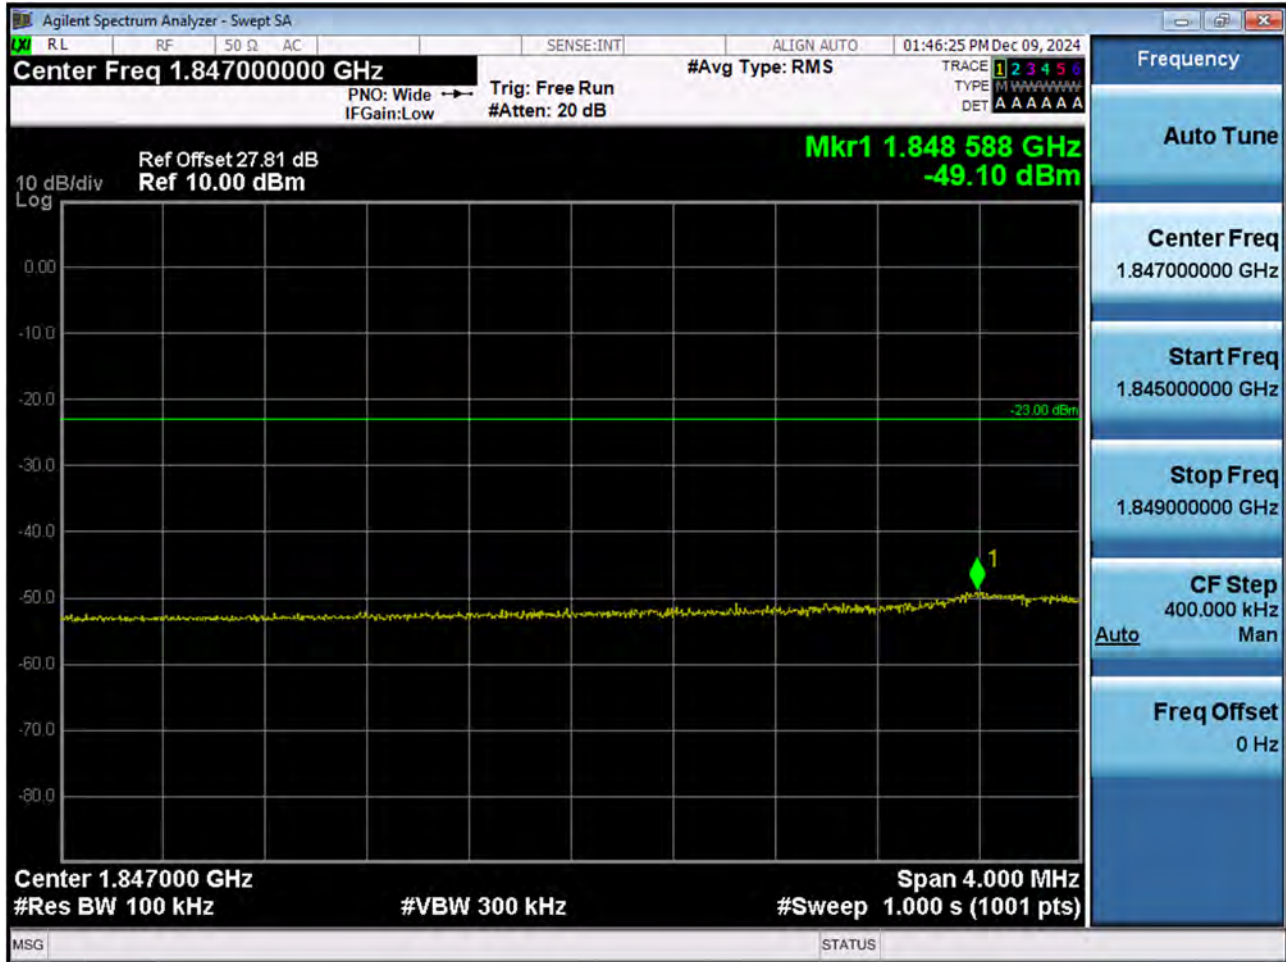


Note : We used a narrower RBW in order to increase accuracy.


Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -49.10 dBm + 10 dB = -39.10 dBm




■ GSM1900 EDGE MODE (810 CH.) Block Edge 1

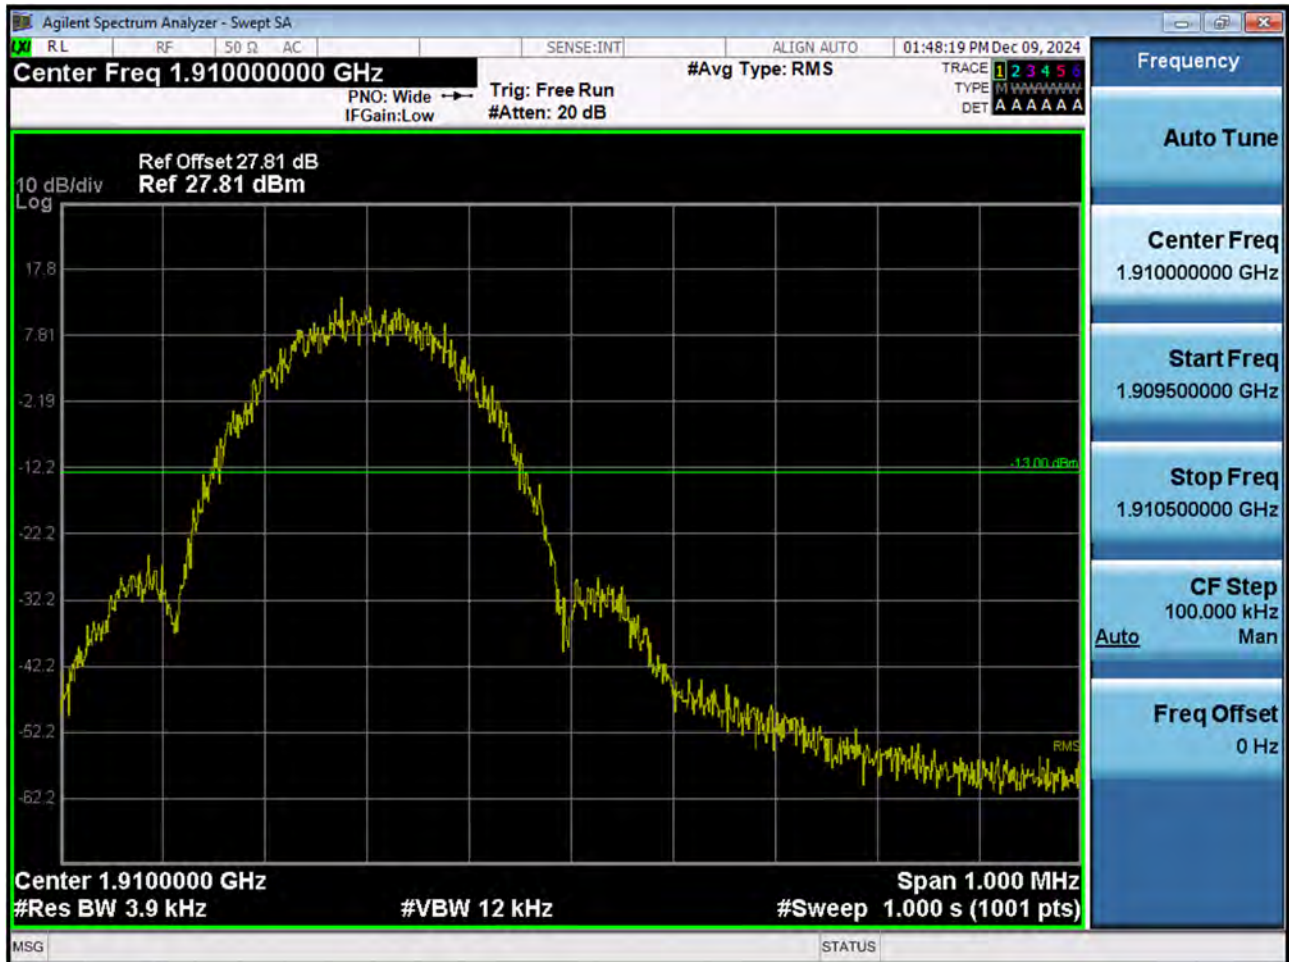

## ■ GSM1900 EDGE MODE (810 CH.) Block Edge 2

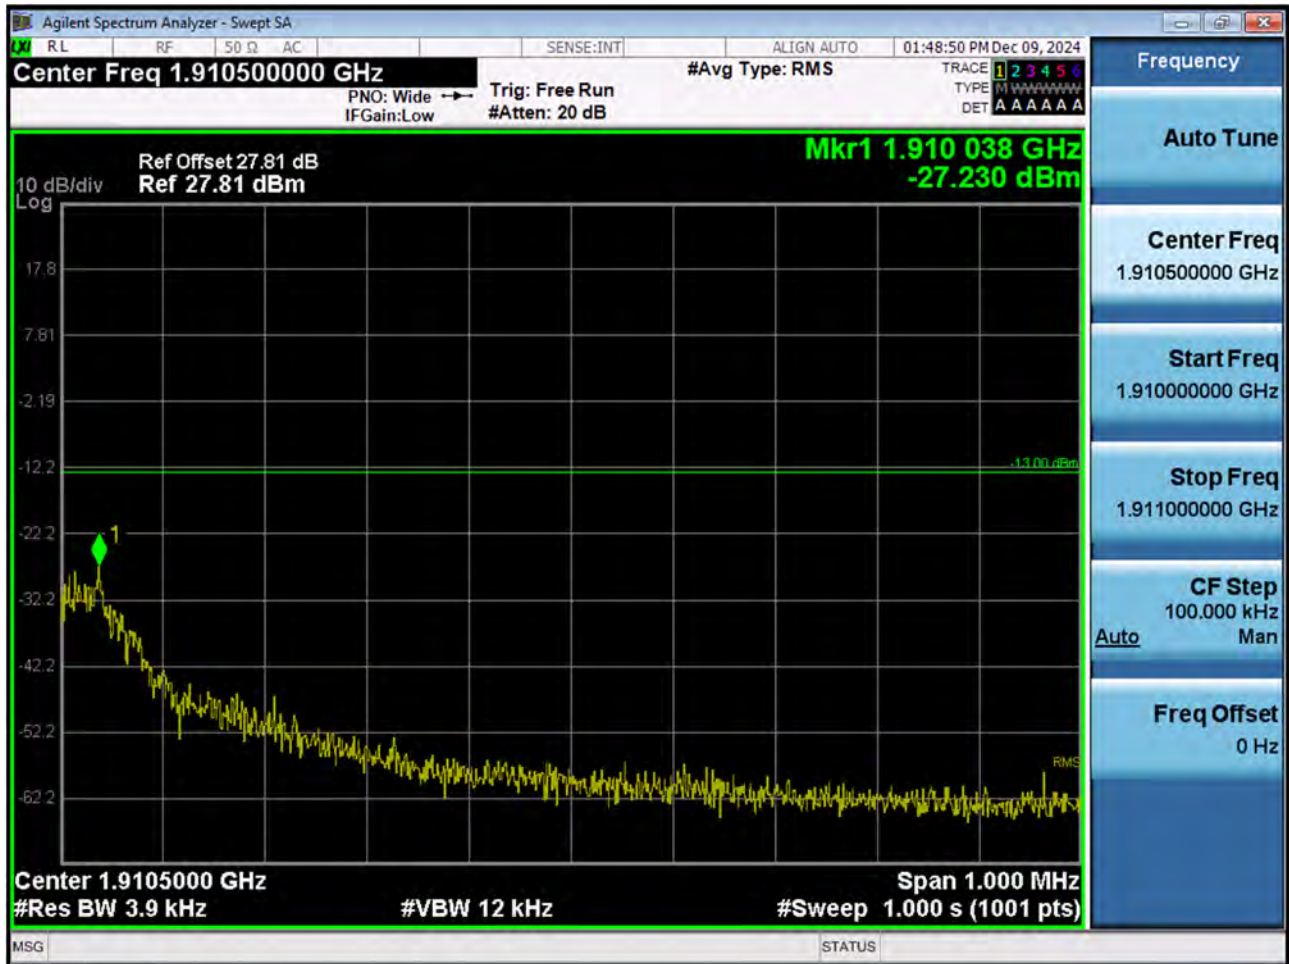

## ■ GSM1900 EDGE MODE (810 CH.) Block Edge 3

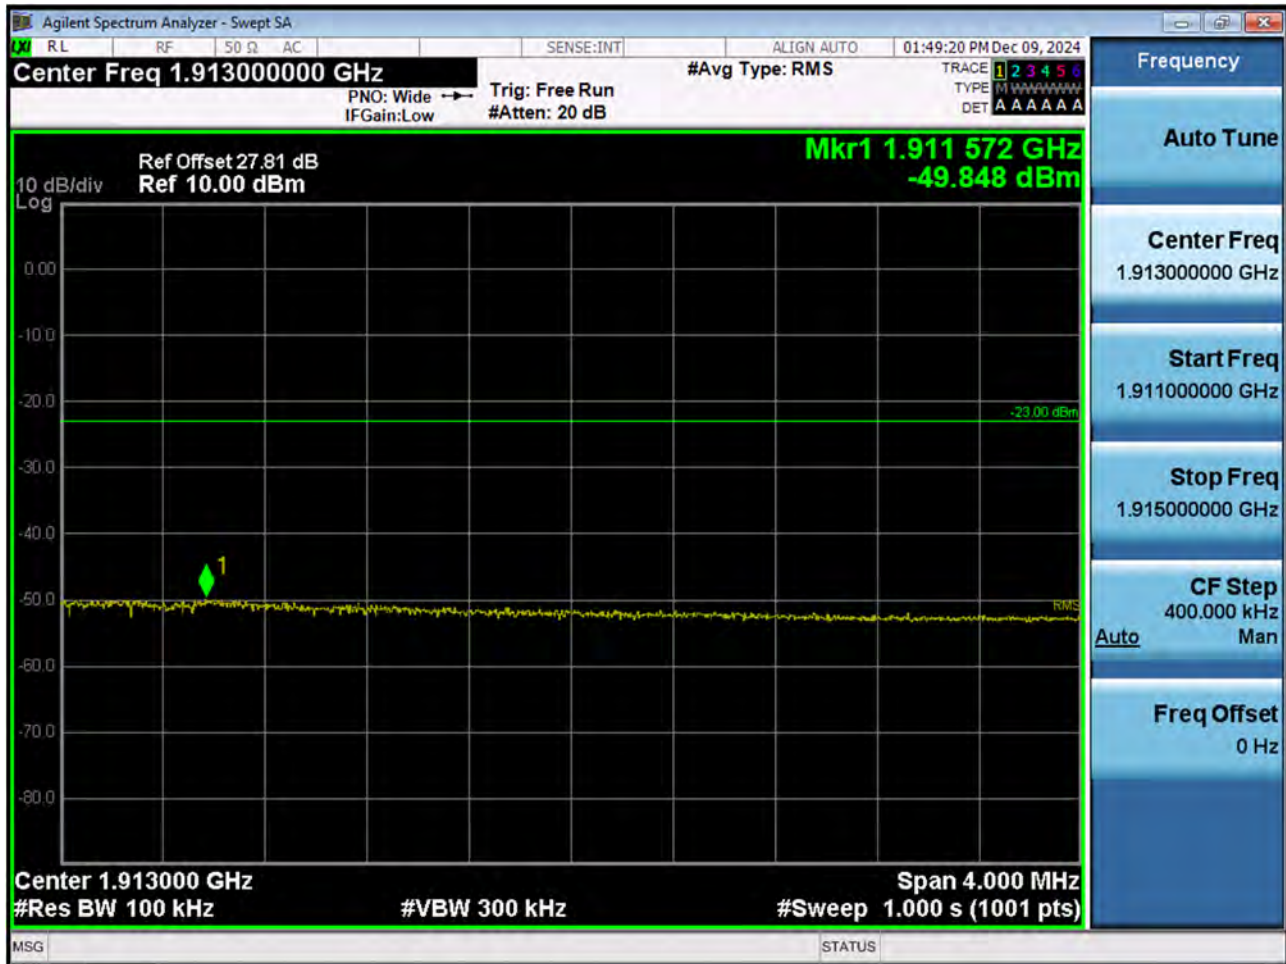

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -49.848 dBm + 10 dB = -39.848 dBm

■ WCDMA850 MODE (4132 CH.) Block Edge





■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge





■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge



## WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge





■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge



■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

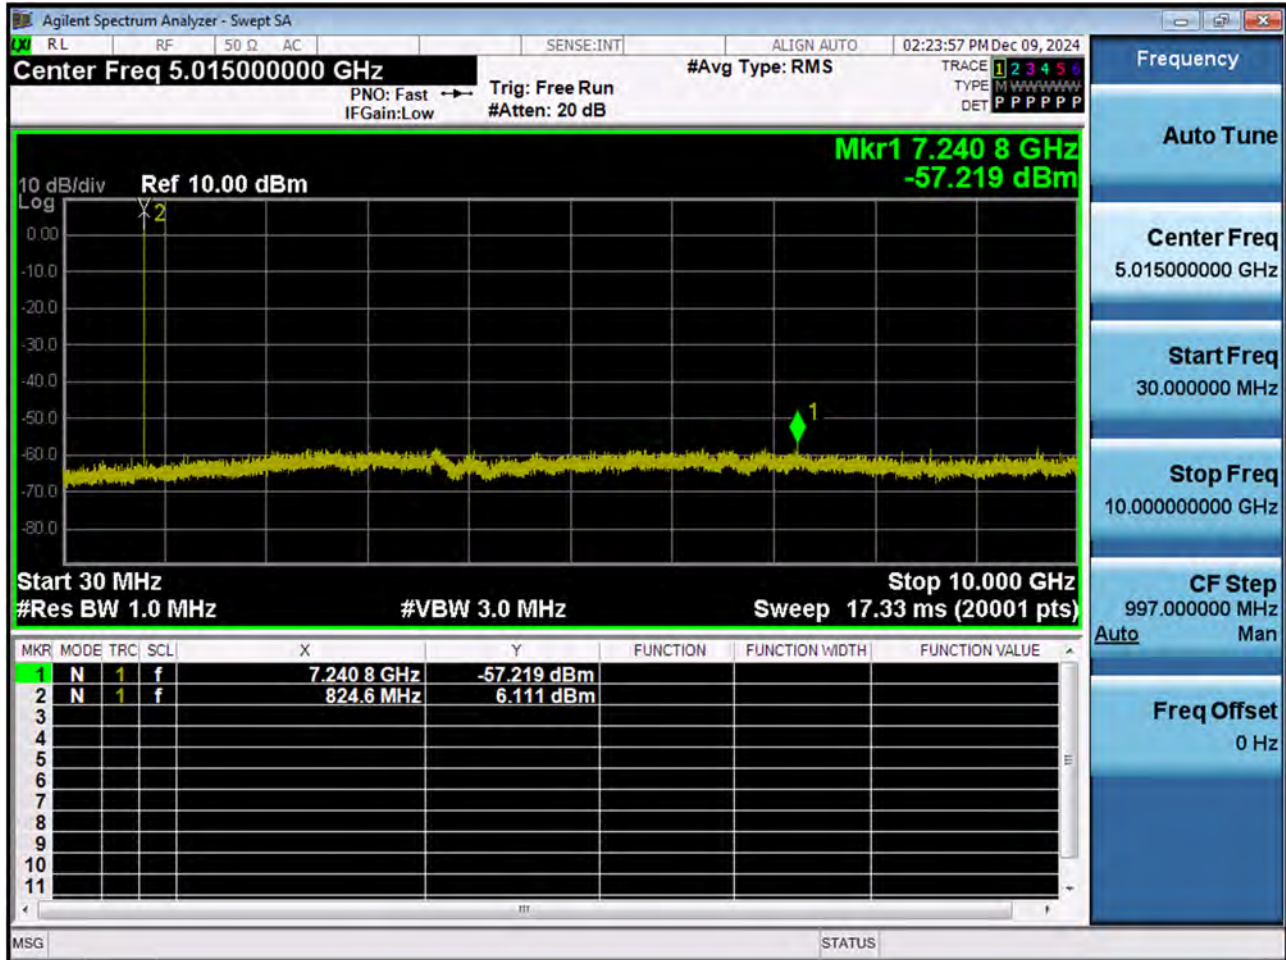





■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

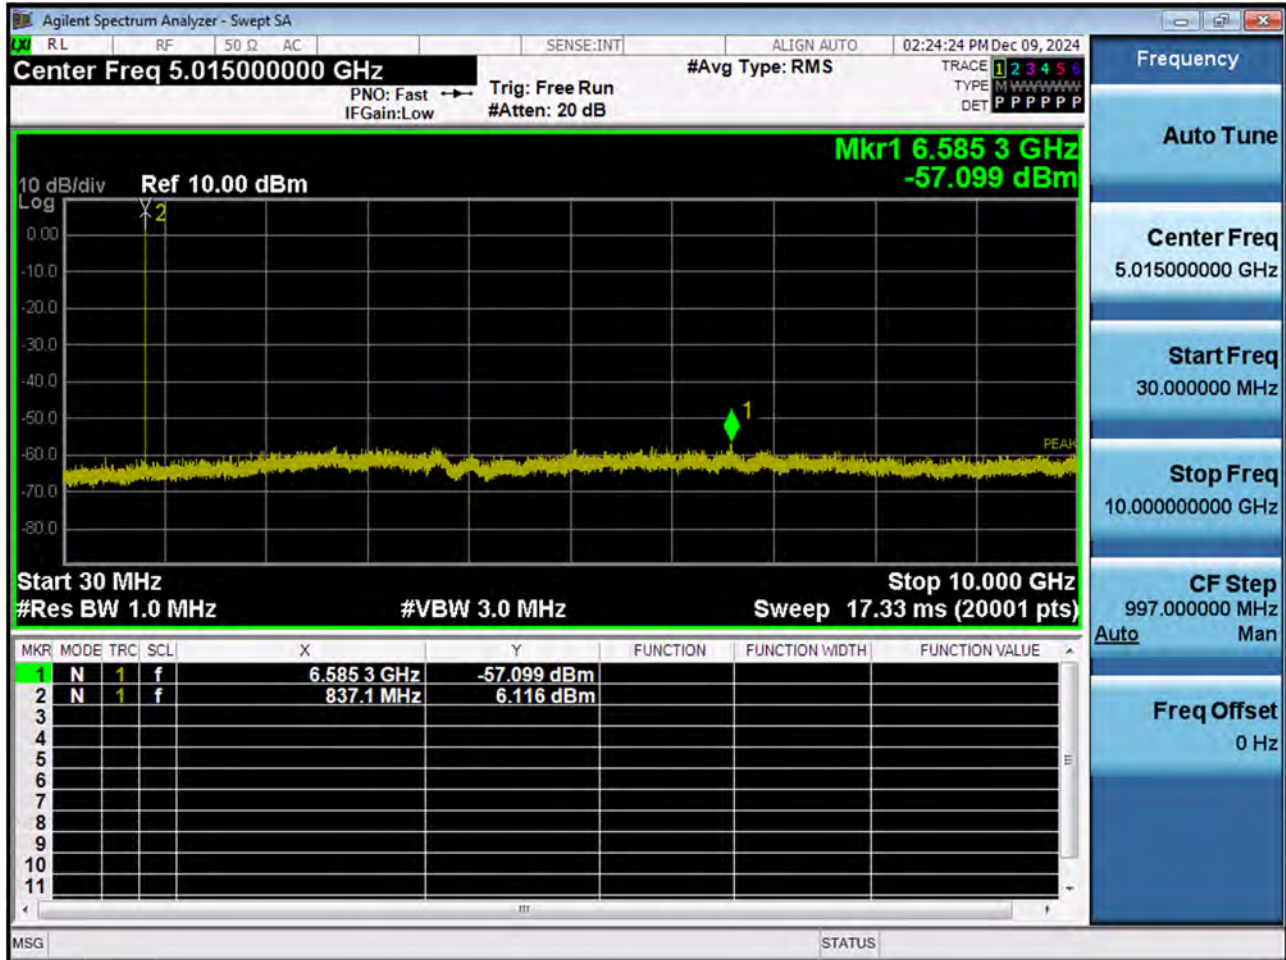

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

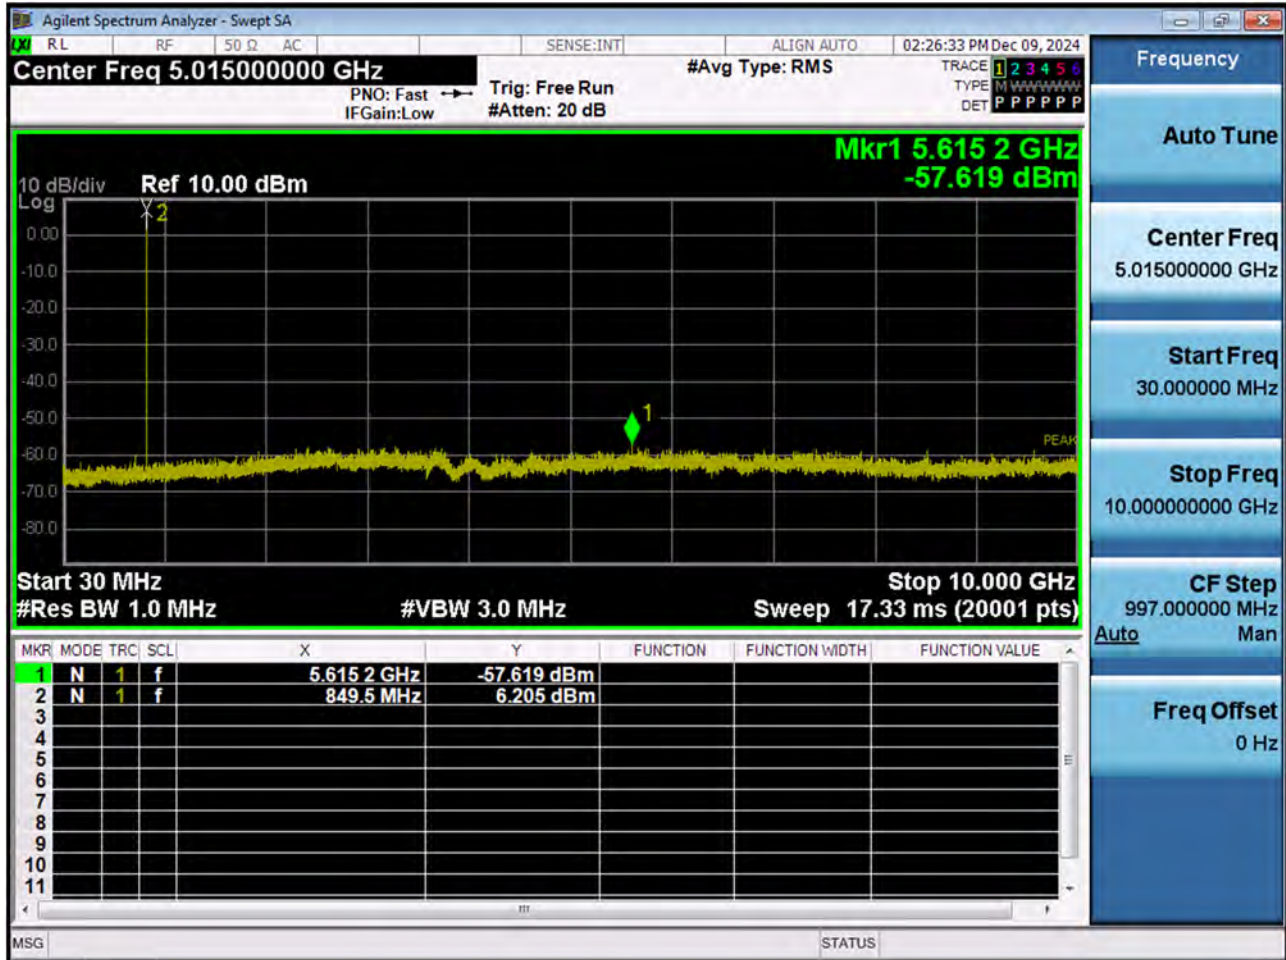

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

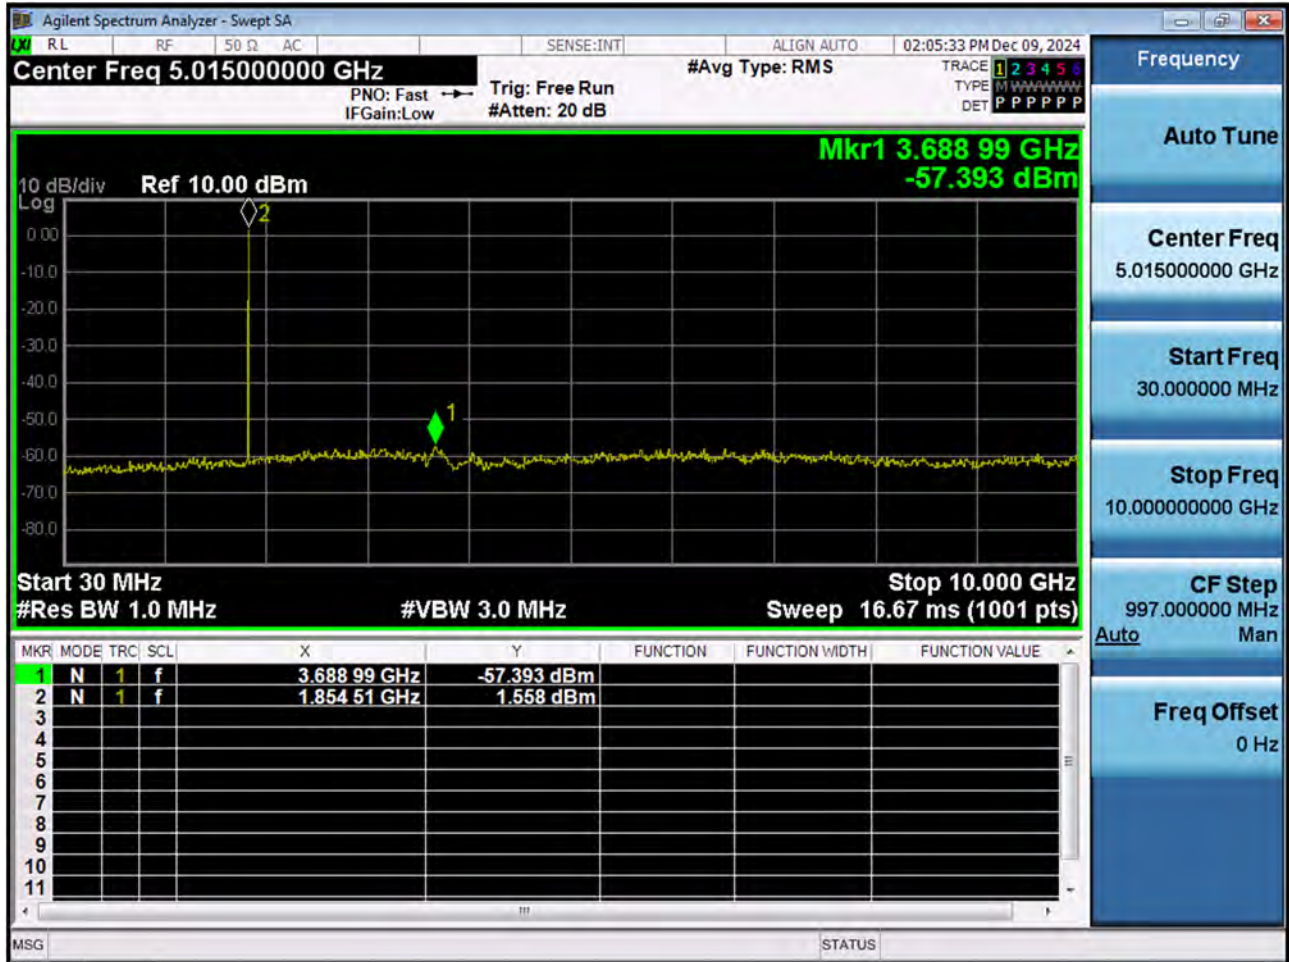




■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2




■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

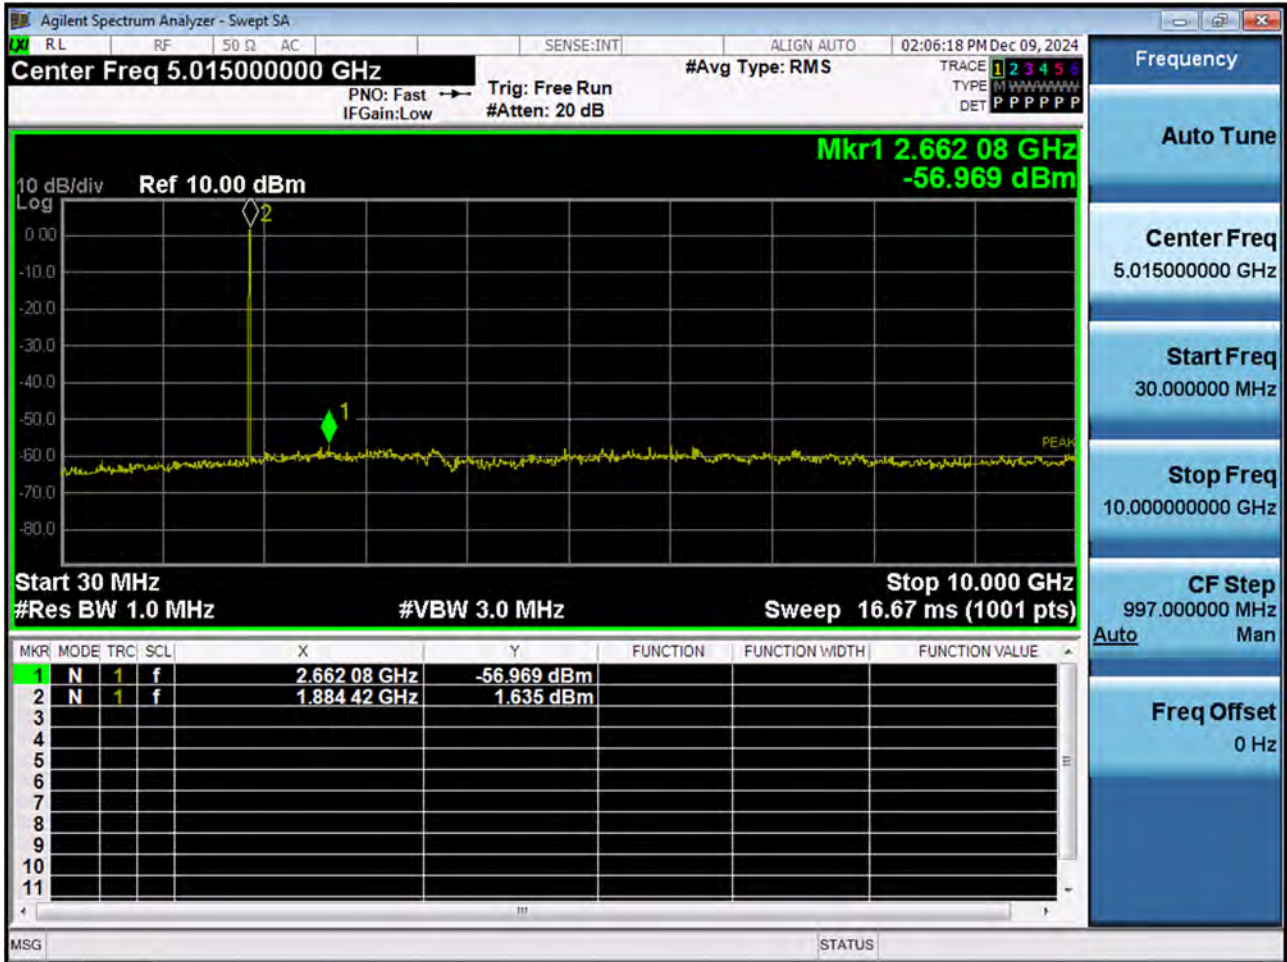

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2



■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

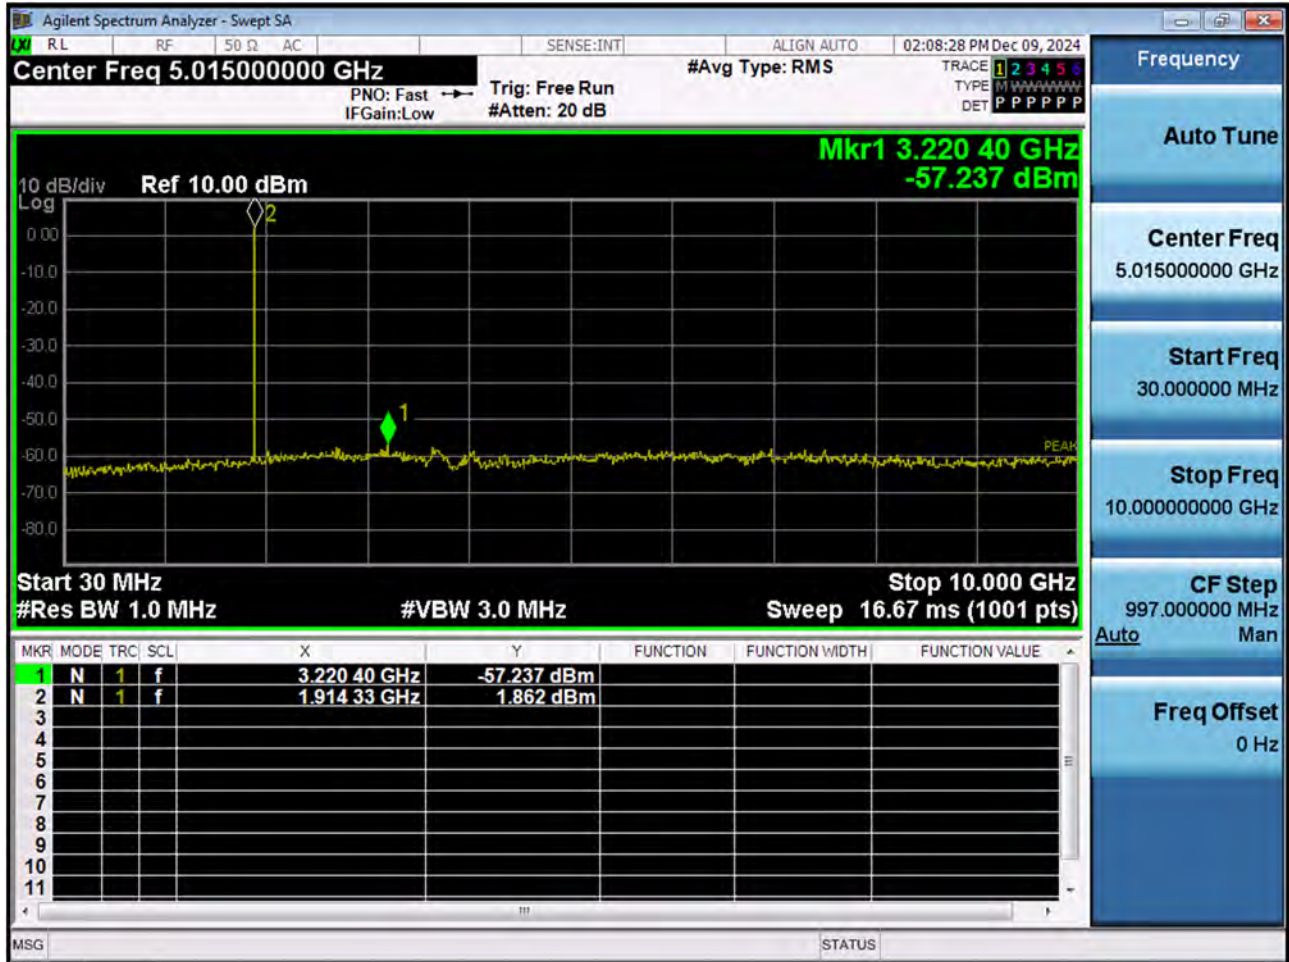





■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2



■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

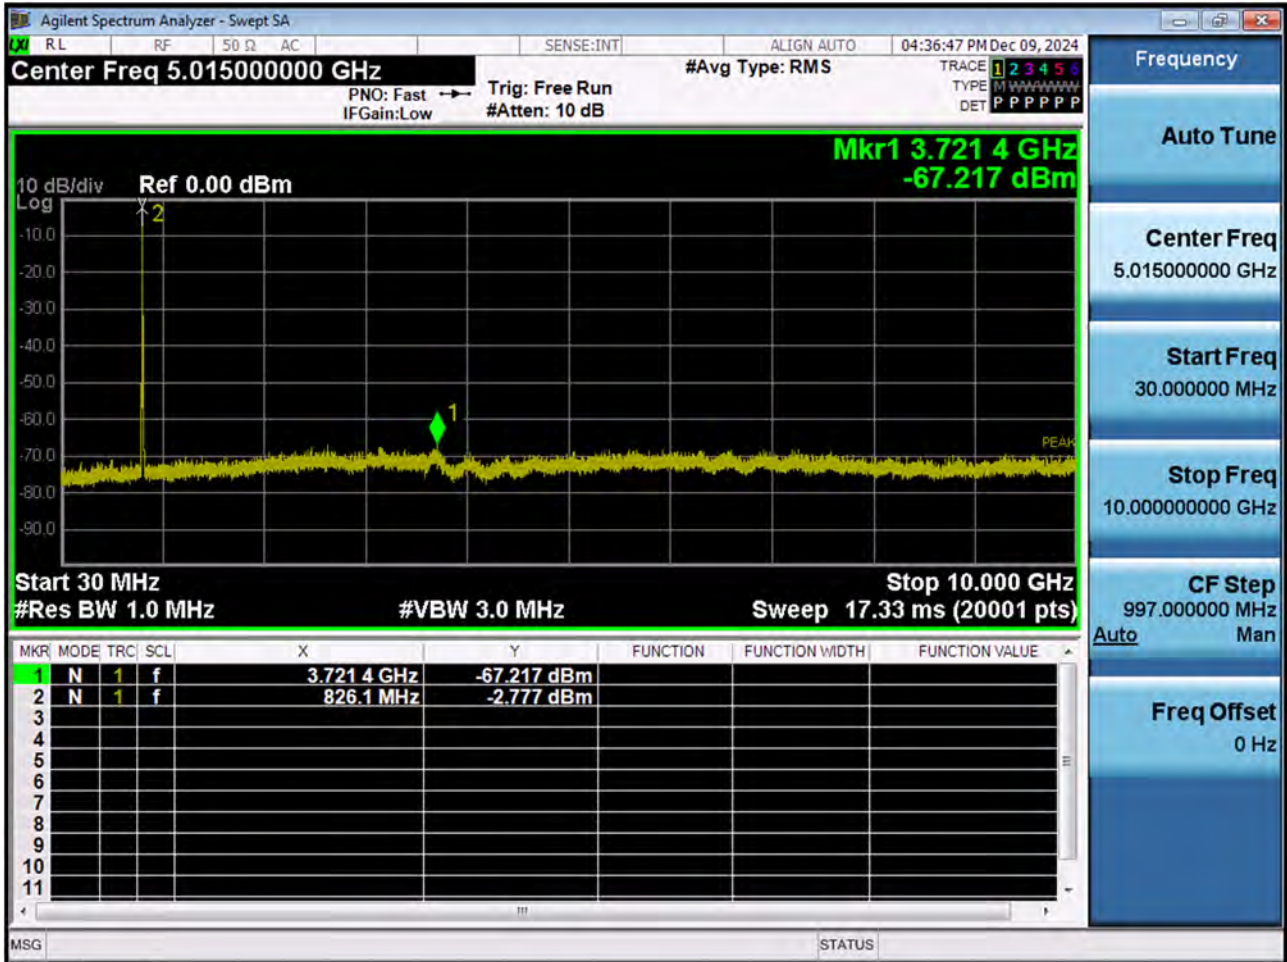


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

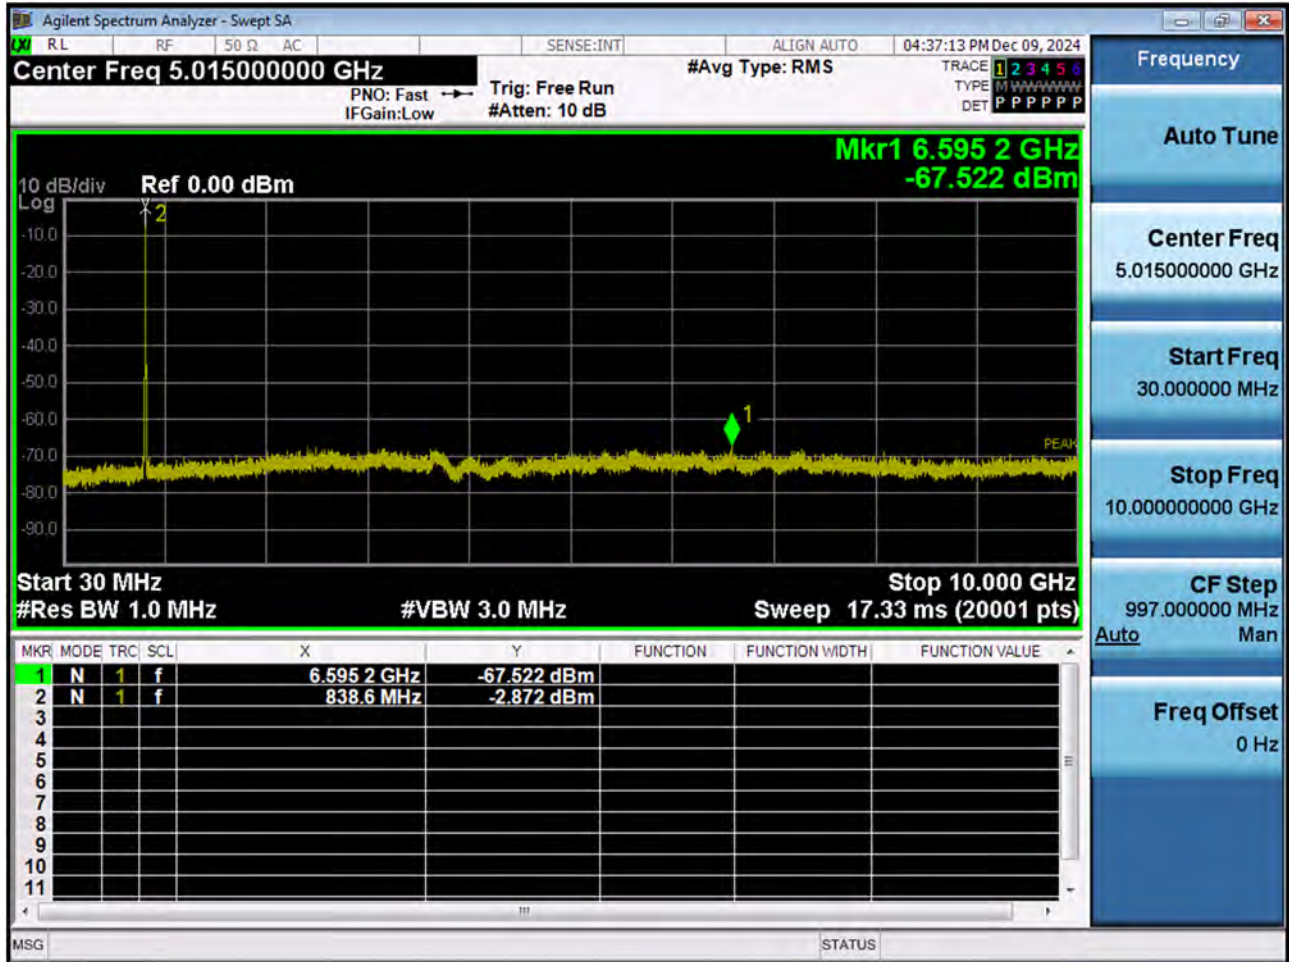





■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

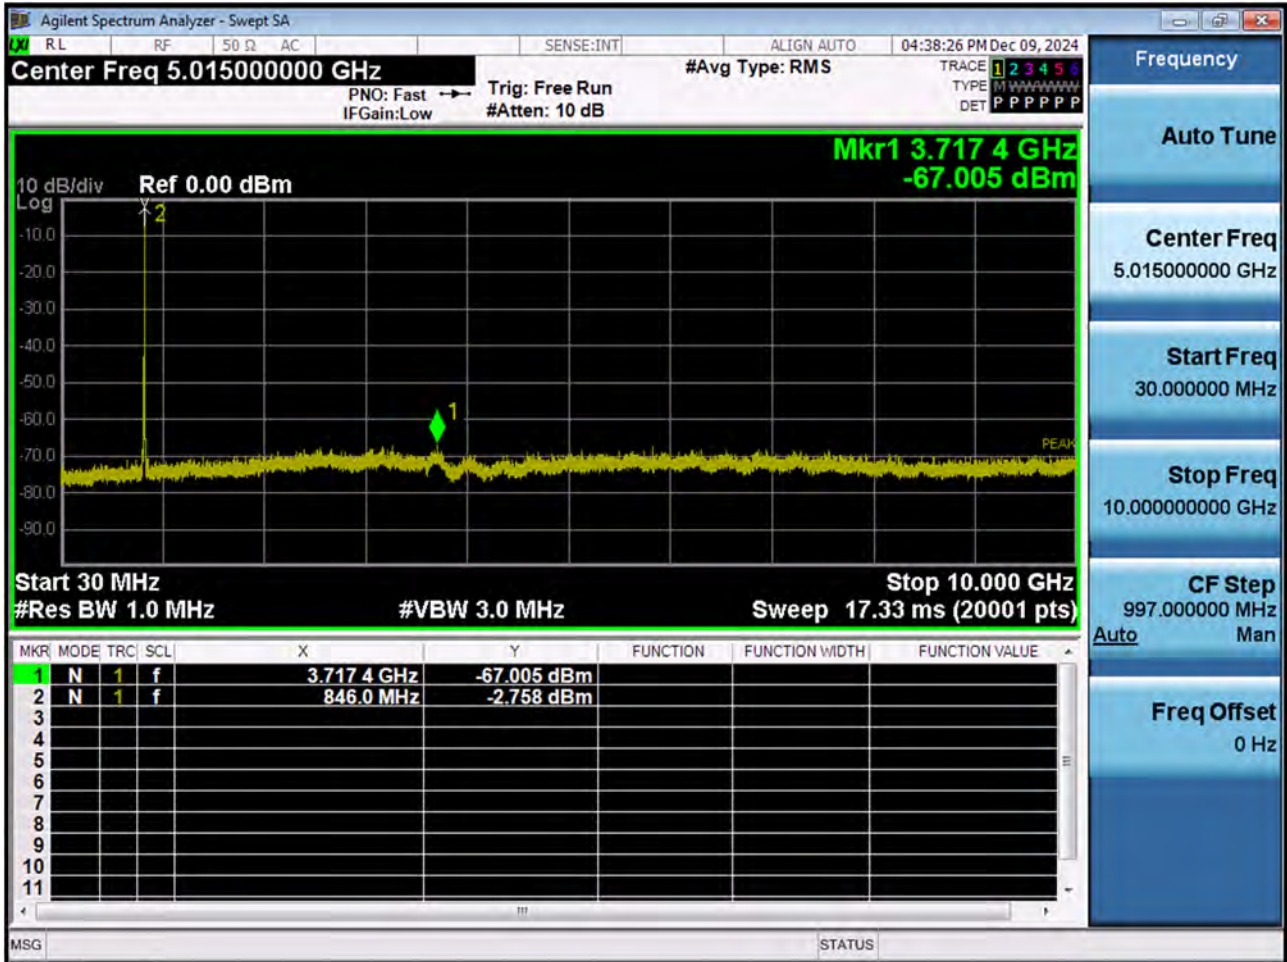


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

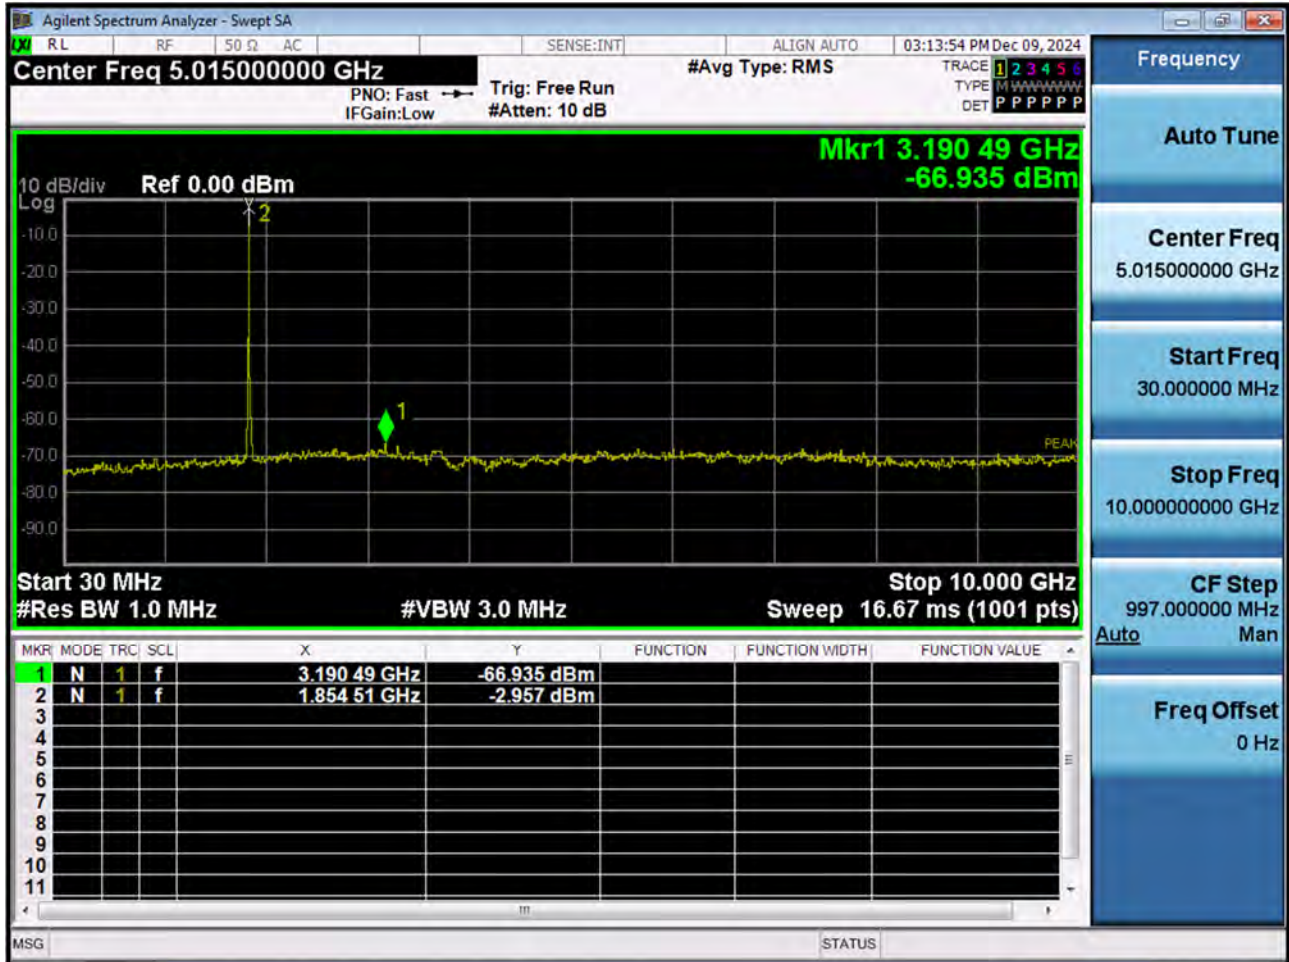

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

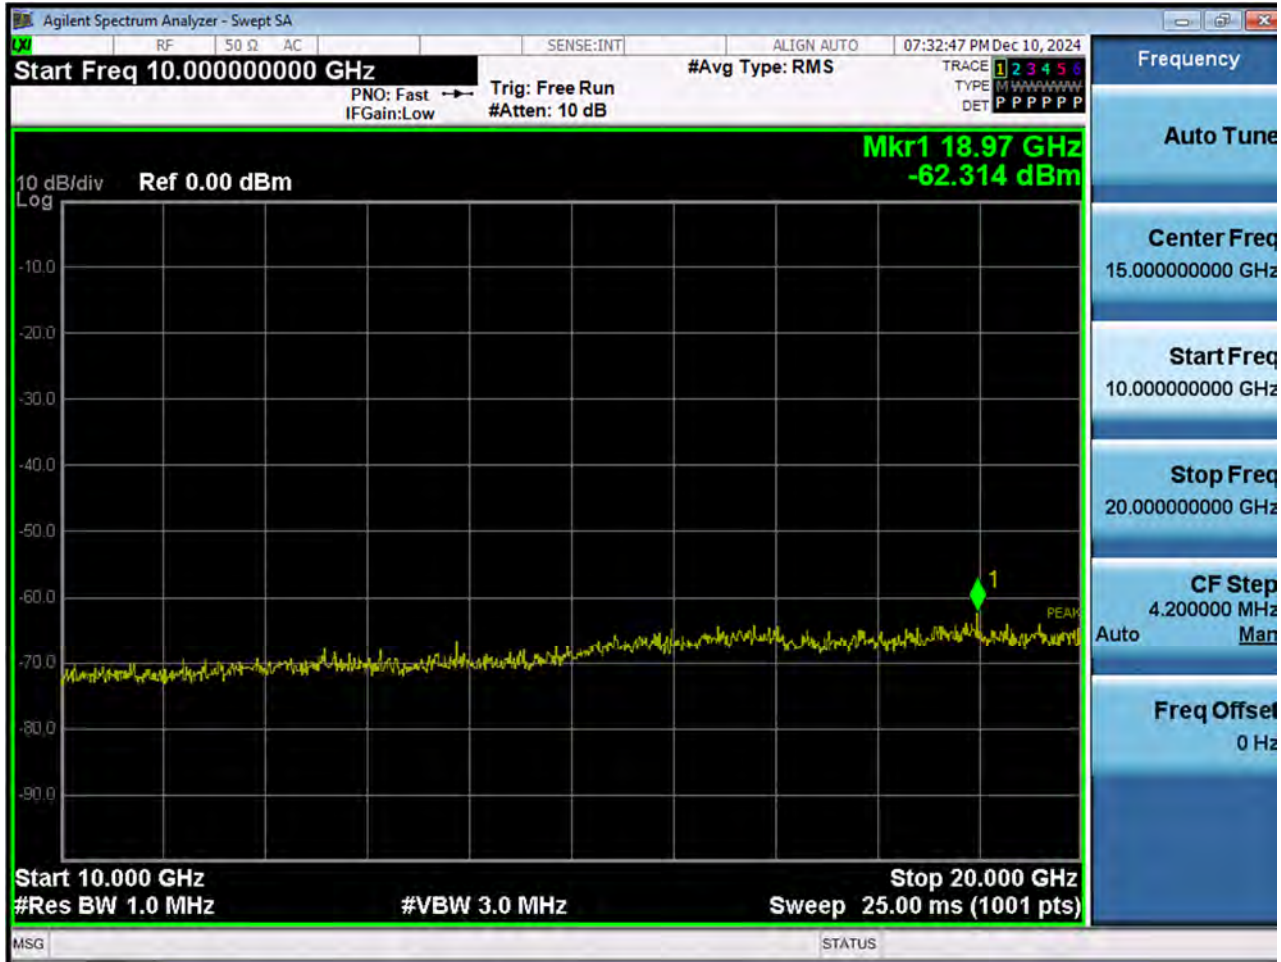

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

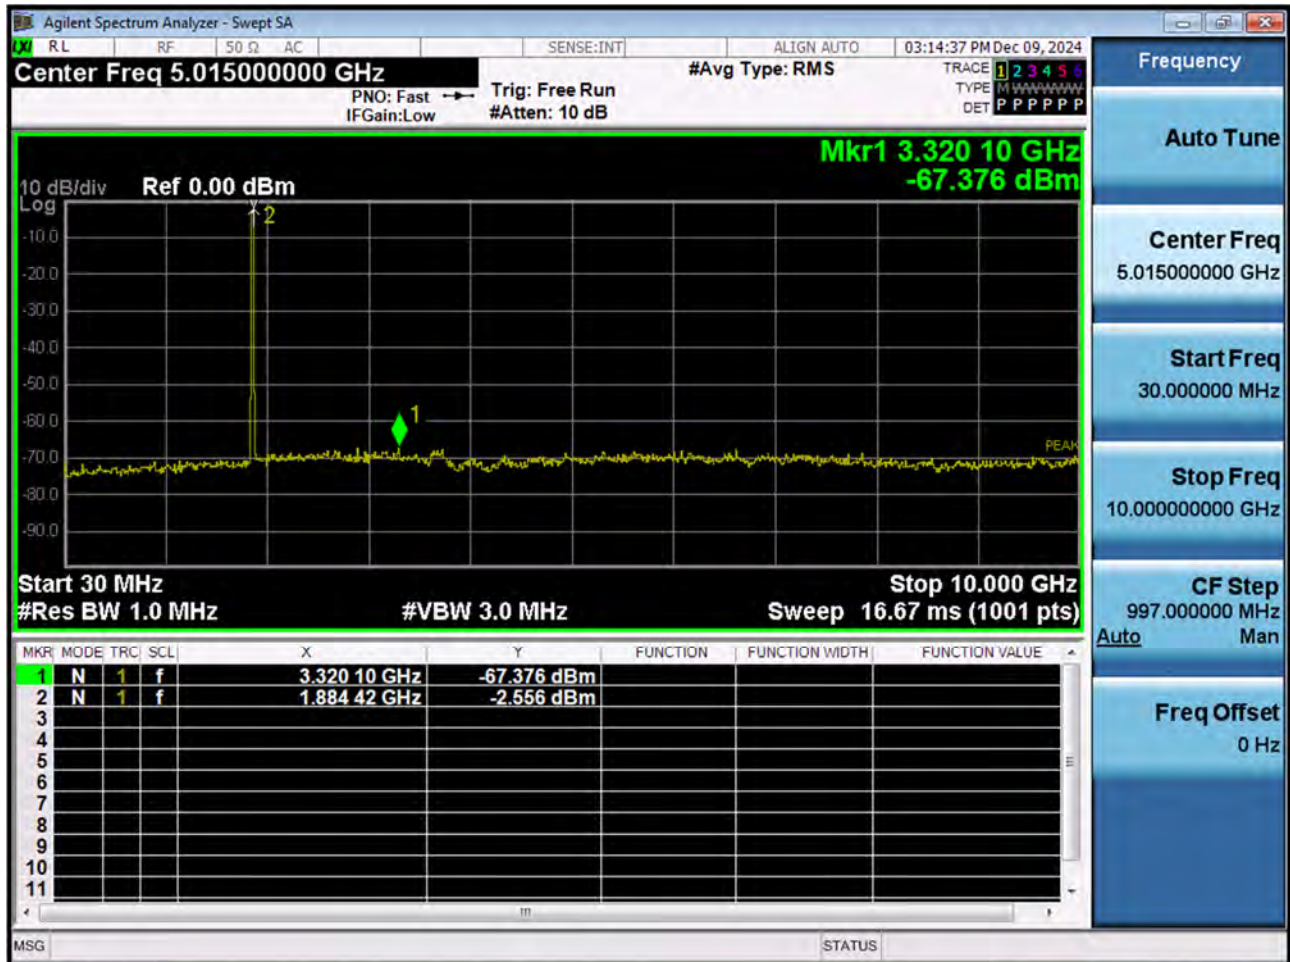




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2



■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

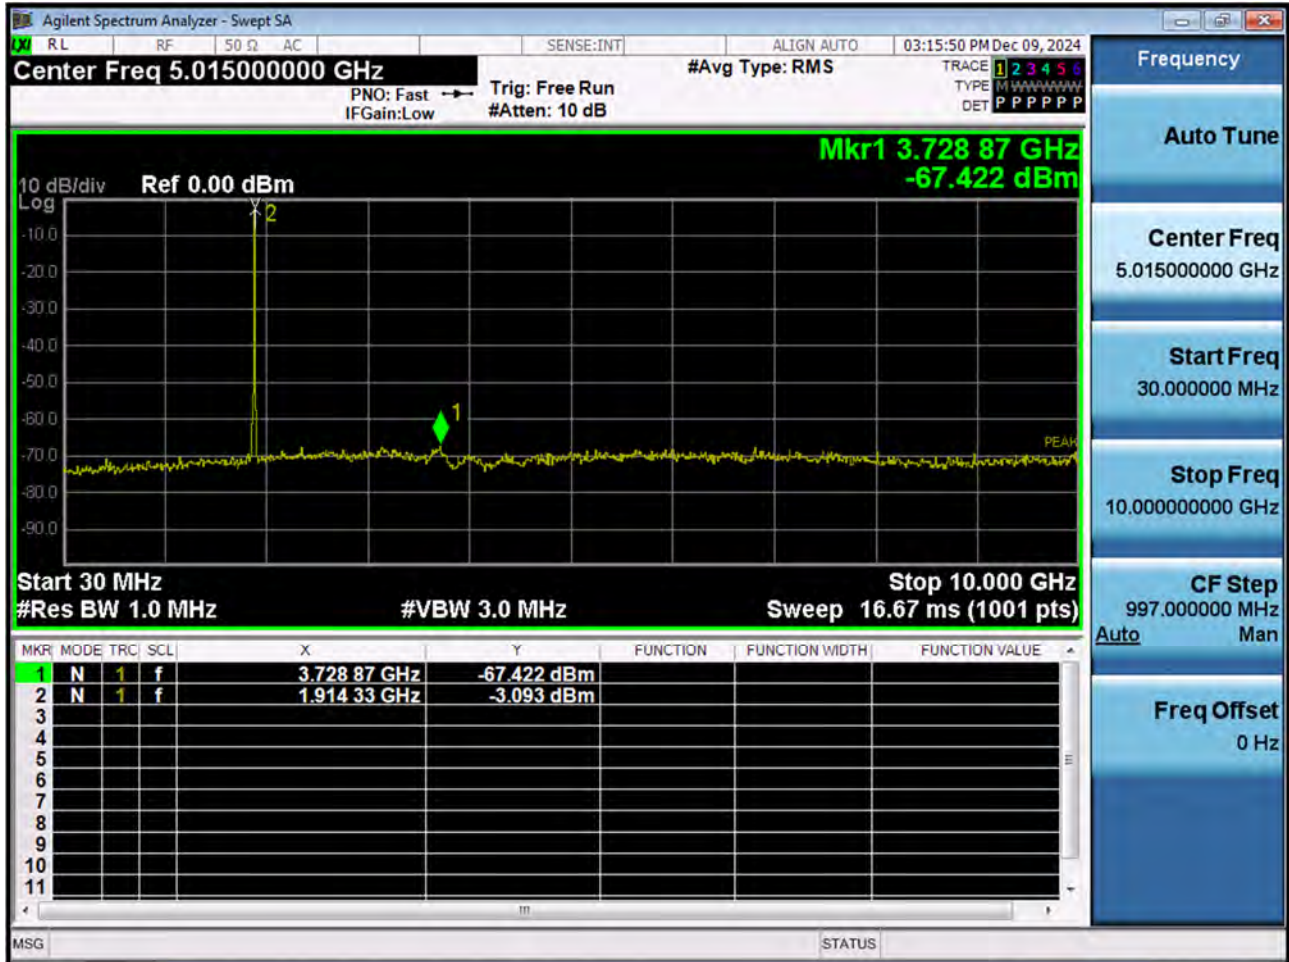



Agilent Spectrum Analyzer - Swept SA

RF 50  $\Omega$  AC SENSE:INT ALIGN AUTO 07:33:09 PM Dec 10, 2024

Start Freq 10.00000000 GHz #Avg Type: RMS

PNO: Fast Trig: Free Run

IFGain:Low #Atten: 10 dB

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P

10 dB/div Ref 0.00 dBm

Log

Mkr1 18.91 GHz  
-62.091 dBm


Start 10.000 GHz #Res BW 1.0 MHz

Stop 20.000 GHz

#VBW 3.0 MHz Sweep 25.00 ms (1001 pts)

The screenshot displays the Agilent Spectrum Analyzer interface. The main display area shows a spectrum plot with a noise floor around -70 dBm. A marker is placed at 18.91 GHz, indicating a signal level of -62.091 dBm. The plot is set to a logarithmic scale (Log) with a resolution bandwidth (Res BW) of 1.0 MHz. The frequency range is from 10.000 GHz to 20.000 GHz. The sweep rate is 25.00 ms (1001 pts). The interface includes various control panels on the right for Frequency, Auto Tune, Center Freq, Start Freq, Stop Freq, CF Step, and Freq Offset. The top panel shows the current settings for the analyzer, including the start frequency, average type, and trigger mode.


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

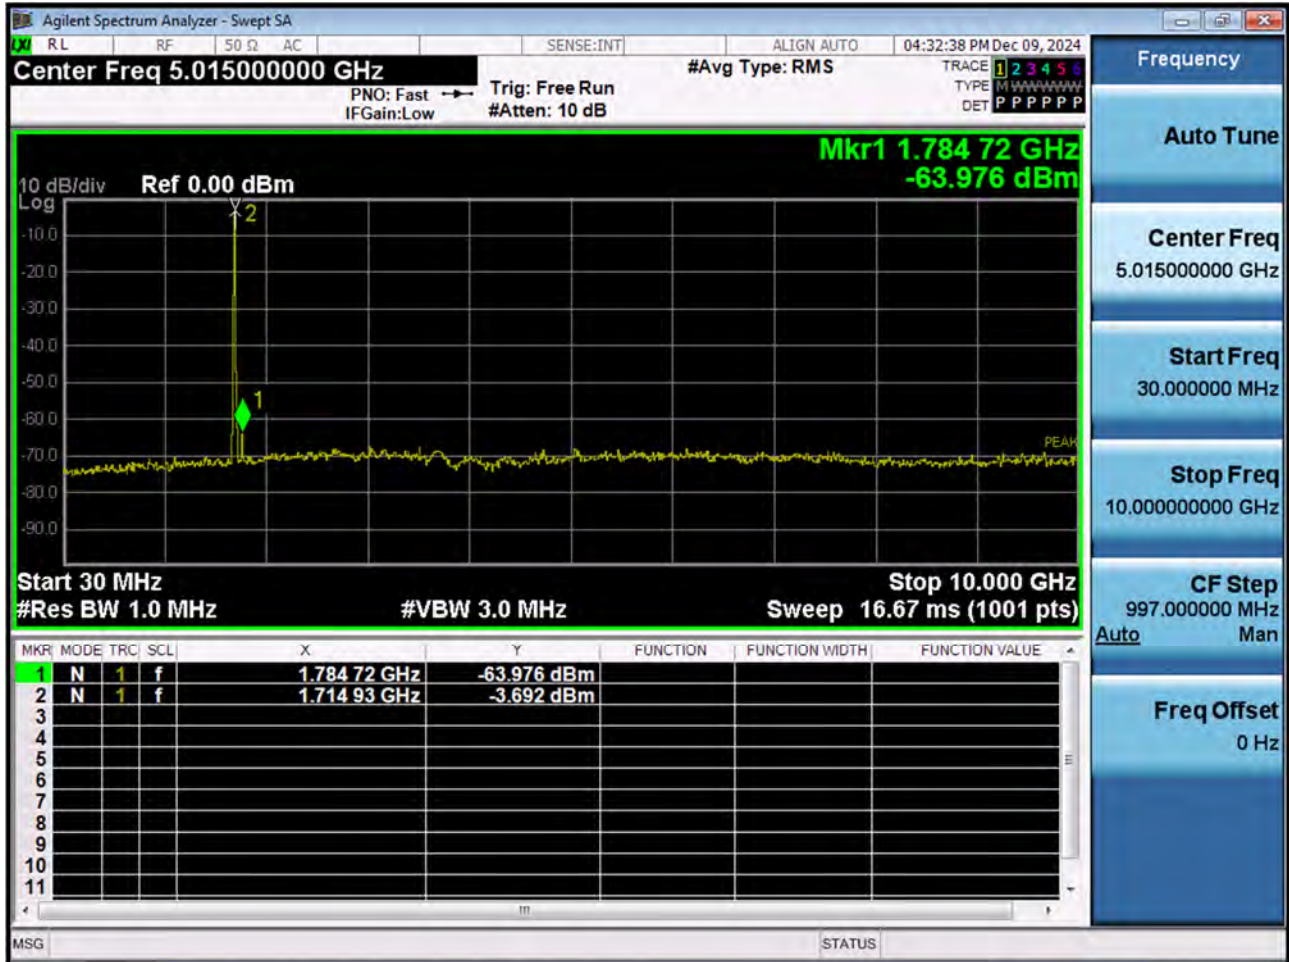

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2



■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

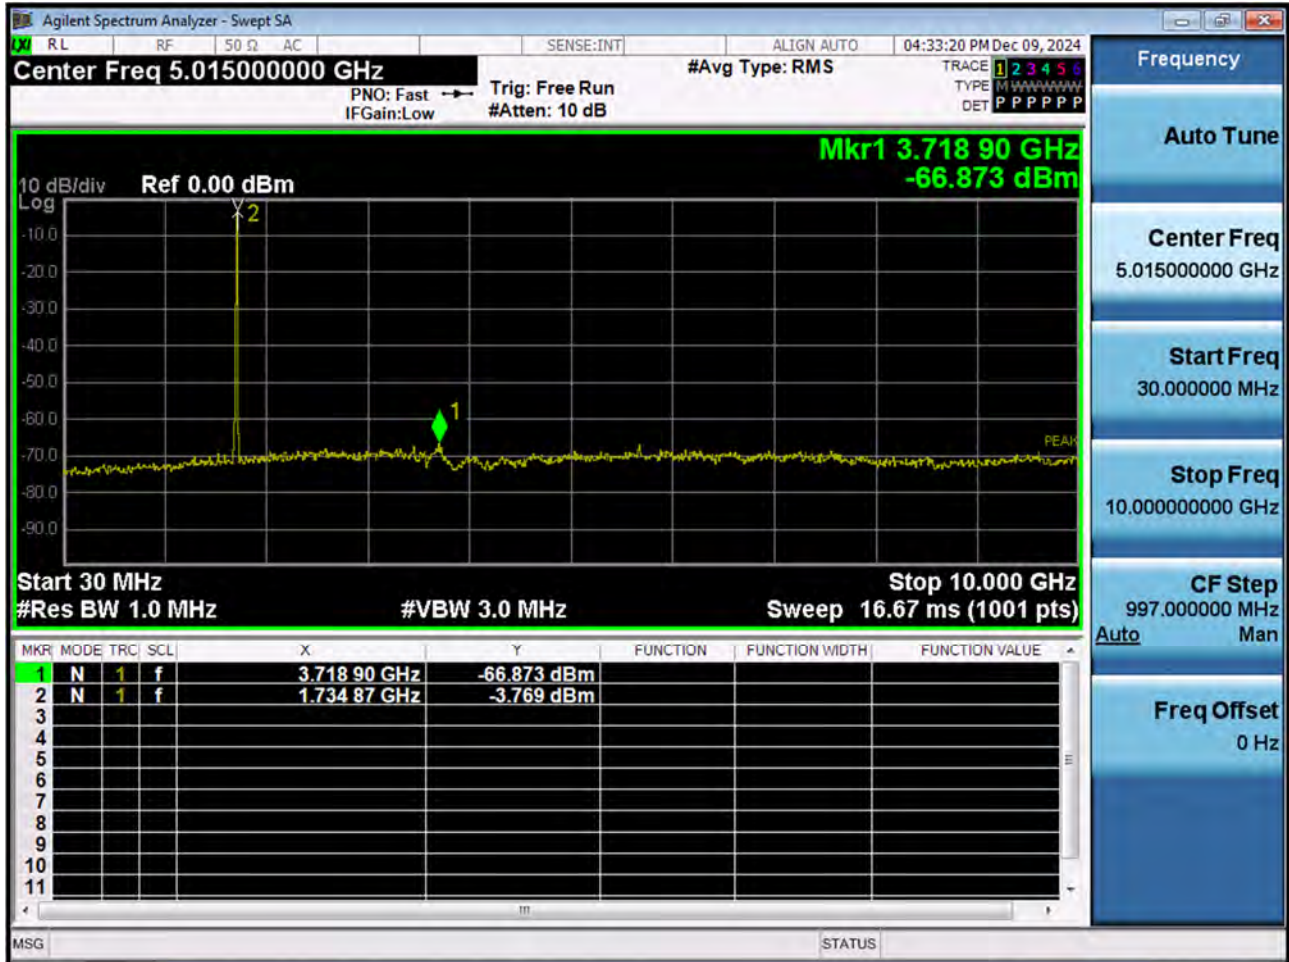




■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2



■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

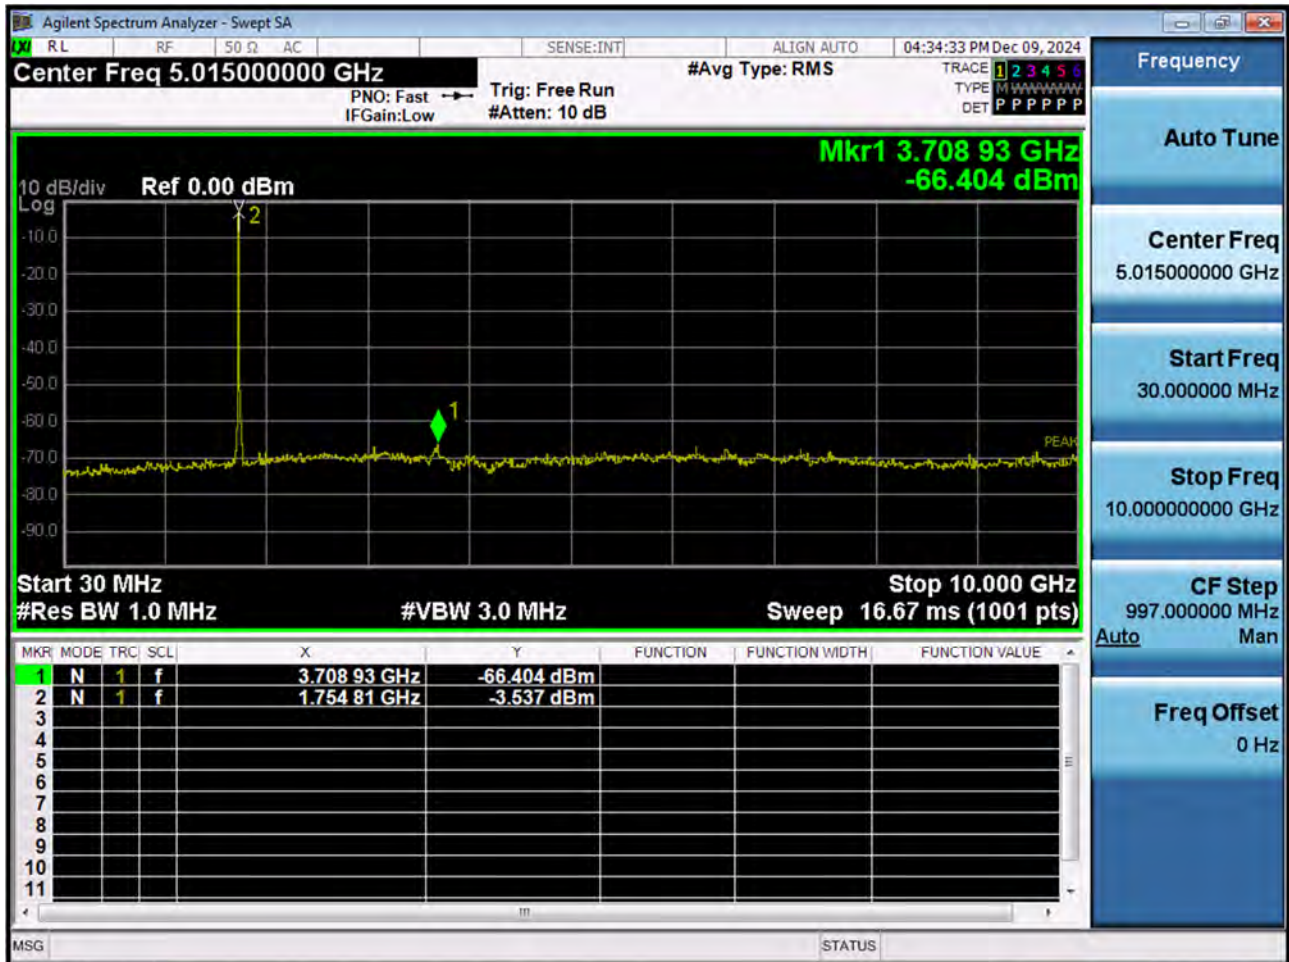



Agilent Spectrum Analyzer - Swept SA

RF 50  $\Omega$  AC SENSE:INT ALIGN AUTO 07:32:34 PM Dec 10, 2024

Start Freq 10.000000000 GHz #Avg Type: RMS

PNO: Fast Trig: Free Run  
IFGain:Low #Atten: 10 dB

TRACE 1 2 3 4 5 6  
TYPE M W W W W W W W W W  
DET P P P P P P

10 dB/div Ref 0.00 dBm

Mkr1 18.90 GHz  
-63.376 dBm

Start 10.000 GHz Stop 20.000 GHz  
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 25.00 ms (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq  
15.000000000 GHz

Start Freq  
10.000000000 GHz

Stop Freq  
20.000000000 GHz

CF Step  
4.200000 MHz

Auto Man

Freq Offset  
0 Hz

**10. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2412-FC051-P |