

TEST REPORT

ACCORDING TO: FCC 47CFR part 96

FOR:

Airspan Networks Inc.

LTE Base Station Radio

Models: AirVelocity 1500 3550-3700MHz (B48)

FCC ID: PIDAV1500

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 96.....	8
7.1	Maximum EIRP and maximum power spectral density	8
7.2	Peak to average power ratio test.....	36
7.3	Occupied bandwidth test	44
7.4	Emission mask test	56
7.5	Radiated spurious emission measurements.....	70
7.6	Spurious emissions at RF antenna connector test	83
7.7	Frequency stability test.....	100
8	APPENDIX A Test equipment and ancillaries used for tests	102
9	APPENDIX B Measurement uncertainties.....	103
10	APPENDIX C Test facility description	104
11	APPENDIX D Specification references	104
12	APPENDIX E Test equipment correction factors.....	105
13	APPENDIX F Abbreviations and acronyms.....	114

1 Applicant information

Client name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

2 Equipment under test attributes

Product name: LTE Base Station Radio
Product type: Transceiver
Model(s): AirVelocity 1500 3550-3700MHz (B48)
Serial number: E2DA330108C2
Hardware version: A9
Software release: SR-16.50
Receipt date 04-Apr-19

3 Manufacturer information

Manufacturer name: Airspan Networks Inc.
Address: 777 Yamato, Road Suite 310 Boca Raton, FL 33431, USA
Telephone: +1 561 893 8670
Fax: +1 561 893 8671
E-Mail: zlevi@airspan.com
Contact name: Mr. Zion Levi

4 Test details

Project ID: 32229
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 04-Apr-19
Test completed: 14-Apr-19
Test specification(s): FCC 47CFR part 96

5 Tests summary

Test	Status
Transmitter characteristics	
Section 96.41(b), Maximum EIRP and maximum power spectral density	Pass
Section 96.41(g), Peak-to- average power ratio	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 96.41(e)(1), Emission mask	Pass
Section 96.41(e)(2), Radiated spurious emissions	Pass
Section 96.41(e)(3), Conducted spurious emissions	Pass
Section 2.1055, Frequency stability	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID: AIRRAD_FCC.32229.Rev2

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	April 14, 2019	
Reviewed by:	Mrs. S Peysahov Sheynin test engineer EMC & Radio	November 26 2019	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 26 2019	

6 EUT description

6.1 General information

The EUT, Mobile Digital station, AirVelocity 1500 3550-3700 MHz, Band 48, is part of a LTE broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network to give high-speed data access. The AirVelocity's transceiver/receiver (up to 64 QAM modulation, data rate up to 95 Mbps) equipped with a 9 dBi internal antenna. The Advanced Antenna Techniques 2x2 MIMO are supported. The maximum RF output power (not including antenna gain) is 20.20 dBm for 9 dBi and it can be reduced by software.

The AirVelocity is installed indoors. The Subscriber transmits and receives traffic to and from the base station respectively. The transceiver provides subscribers with "always-on" Internet, high speed data only, or data and voice (VoIP) services and is configured with a unique base station reference number, preventing the LTE UE from relocating to another subscriber premises without authorization.

AV1500 equipment defined as Category A CBSD (Citizens Broadband Radio Service Device).

Antennas 1/2 arrange one sector while antenna 1 is cross polarized to antenna 2 and antennas 3/4 arrange another sector while antenna 3 is cross polarized to antenna 4. The transmitter output signals are completely uncorrelated. The sectors are working on different non overlapping frequency channels.

The sectors are either non overlapping by operation on different frequency channels or by different sectors coverage without overlapping of antenna beams.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Control	Ethernet	EUT	PoE	1	FTP	20


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	Dell	E7450	8TYRP32
USB to RS-232 convertor	ATEN	UC2324	NA

6.4 Changes made in the EUT

No changes were implemented in the EUT during testing.

6.5 Test configuration

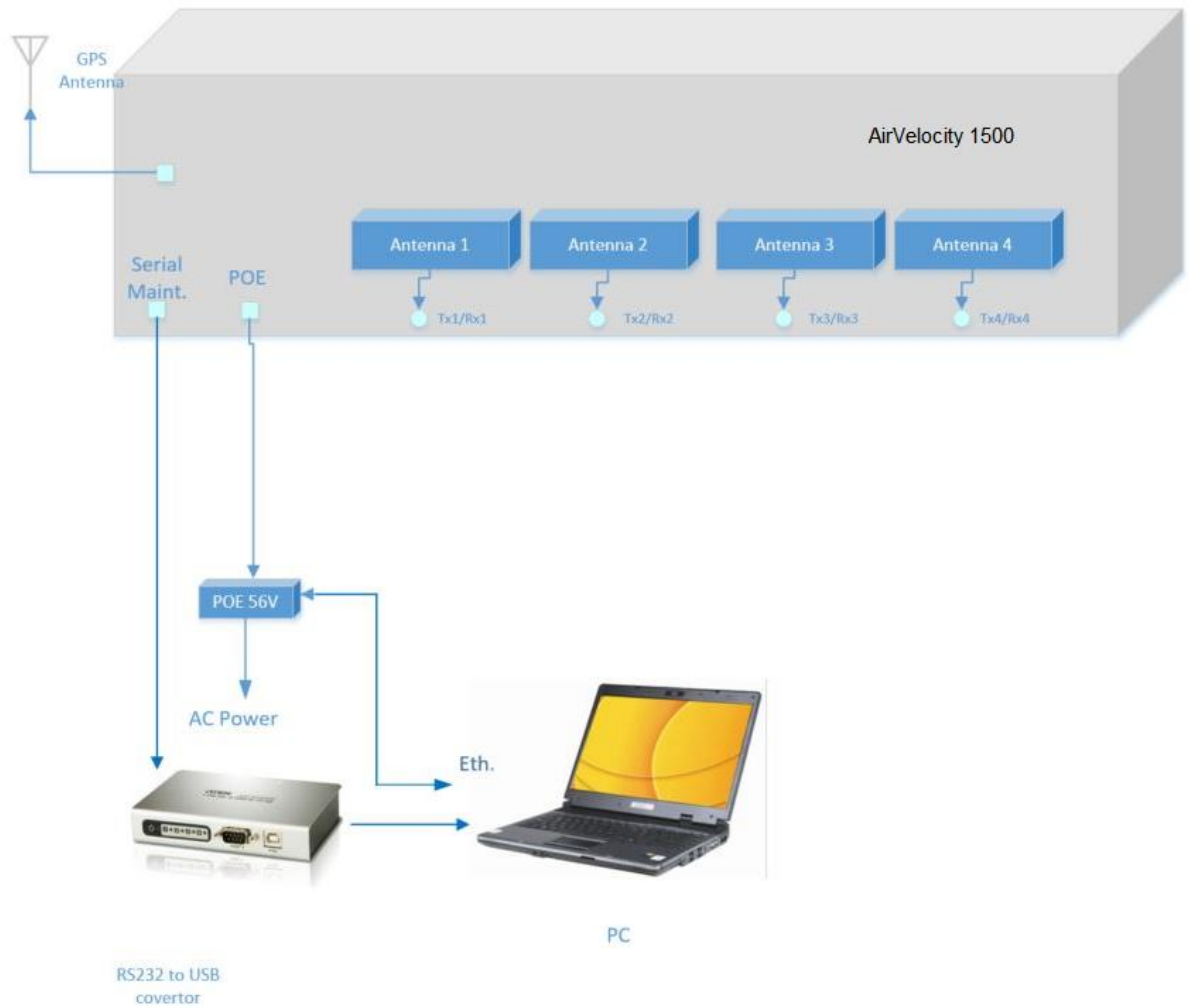



6.6 Transmitter characteristics

Type of equipment				
V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Intended use		Condition of use		
	fixed	Always at a distance more than 2 m from all people		
V	mobile	Always at a distance more than 20 cm from all people		
	portable	May operate at a distance closer than 20 cm to human body		
Assigned frequency range		3550.0 – 3700.0 MHz		
Operating frequency (full bands)		3555.0 – 3695.0 MHz		
RF channel spacing		10 MHz, 20 MHz		
Maximum rated output power		At transmitter 50 Ω RF output connector (per port) @10 MHz CBW 20.20 dBm At transmitter 50 Ω RF output connector (per port) @20 MHz CBW 22.93 dBm		
Is transmitter output power variable?		No		
		V	Yes	continuous variable
				stepped variable with step size 0.25 dB
				minimum RF power -30 dBm
		maximum RF power at antenna connector dBm		
Antenna connection				
unique coupling	V	standard connector	Integral V with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics				
Type	Manufacturer	Model number	Gain	
External	MTI Wireless Edge Ltd.	MT-402022/CD/A	9 dBi	
Transmitter aggregate data rate/s, Mbps				
Transmitter 26dBc power bandwidth		Type of modulation		
		QPSK	16QAM	64QAM
10 MHz		10.7	22.7	47.3
20 MHz		23.4	45.4	95
Type of multiplexing		TDD		
Modulating test signal (baseband)		PRBS		
Maximum transmitter duty cycle in normal use		0.74		
Transmitter power source				
		Nominal rated voltage	Battery type	
V	DC	Nominal rated voltage 56 VDC		
	AC mains	Nominal rated voltage	Frequency	
Common power source for transmitter and receiver		V	yes no	



Test specification:		Section 96.41(b), Maximum EIRP and maximum power spectral density	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 96

7.1 Maximum EIRP and maximum power spectral density

7.1.1 General

This test was performed to measure the maximum EIRP and maximum spectral power density at the transmitter RF antenna connector. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 Maximum EIRP limits

Assigned frequency range, MHz	EIRP	
	W/10 MHz	dBm/10 MHz
3550 - 3700	1.0	30.0

Table 7.1.2 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, MHz	Peak spectral power density, dBm
3550 - 3700	1.0	20.0

7.1.2 Test procedure


7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.1.2.3 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in average mode with resolution bandwidth set to 1.0 MHz, video bandwidth wider than resolution bandwidth, sweep time and sufficient number of sweeps was allowed for trace stabilization.

7.1.2.4 Spectrum analyzer was set in average mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.1.3, Table 7.1.4 and the associated plots.

Figure 7.1.1 Maximum EIRP and power spectral density test setup

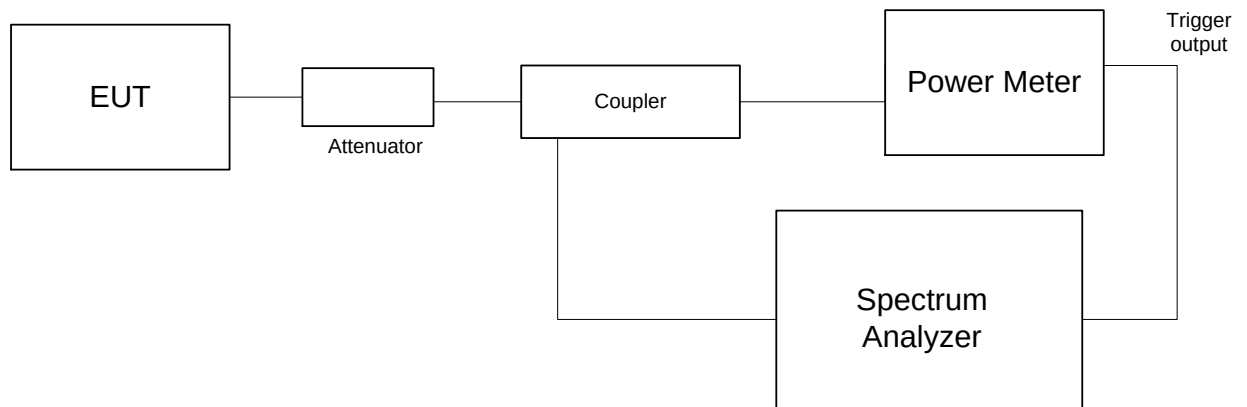



HERMON LABORATORIES

Report ID: AIRRAD_FCC.32229.Rev3

Date of Issue: 27-Nov-19

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Table 7.1.3 Maximum EIRP test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average

VIDEO BANDWIDTH:

≥ Resolution bandwidth

CHANNEL SPACING:

10 MHz

Frequency, MHz	RF Output power				Antenna gain, dBi	EIRP*, dBm/10 MHz	Limit, dBm/10 MHz	Margin, dB**	Verdic t
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm					
Modulation QPSK									
3555.0	19.77	19.84	19.59	19.89	9.0	28.89	30.0	-1.11	Pass
3625.0	20.07	19.77	19.51	19.79	9.0	29.07	30.0	-0.93	Pass
3695.0	19.87	19.75	19.44	19.90	9.0	28.90	30.0	-1.10	Pass
Modulation 16QAM									
3555.0	19.68	19.68	19.29	19.80	9.0	28.80	30.0	-1.20	Pass
3625.0	19.51	19.81	19.20	19.58	9.0	28.81	30.0	-1.19	Pass
3695.0	19.71	19.80	19.34	19.78	9.0	28.80	30.0	-1.20	Pass
Modulation 64QAM									
3555.0	20.20	19.82	19.22	19.86	9.0	29.20	30.0	-0.80	Pass
3625.0	19.93	19.57	19.87	19.73	9.0	28.93	30.0	-1.07	Pass
3695.0	19.81	19.63	19.78	20.14	9.0	29.14	30.0	-0.86	Pass

* - EIRP = Max SA reading (Chains #1&2 and #3&4) + Antenna gain

** Margin = EIRP, dBm – specification limit.

CHANNEL SPACING:

20 MHz

Frequency, MHz	RF Output power				Antenna gain, dBi	Total EIRP, dBm*	EIRP**, dBm/10 MHz	Limit, dBm/10 MHz	Margin , dB***	Verdic t
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm						
Modulation QPSK										
3560.0	22.54	22.81	22.93	22.59	9.0	31.93	29.48	30.0	-0.52	Pass
3625.0	21.57	21.71	21.28	21.09	9.0	30.71	28.26	30.0	-1.74	Pass
3690.0	21.32	21.67	21.32	21.56	9.0	30.67	28.22	30.0	-1.78	Pass
Modulation 16QAM										
3560.0	22.74	22.68	22.79	22.56	9.0	31.79	29.34	30.0	-0.66	Pass
3625.0	21.48	21.59	20.91	21.55	9.0	30.59	28.14	30.0	-1.86	Pass
3690.0	21.65	21.73	20.98	21.60	9.0	30.73	28.28	30.0	-1.72	Pass
Modulation 64QAM										
3560.0	22.73	22.43	22.68	22.59	9.0	31.73	29.28	30.0	-0.72	Pass
3625.0	21.50	21.77	22.37	21.51	9.0	31.37	28.92	30.0	-1.08	Pass
3690.0	21.60	21.53	21.07	21.71	9.0	30.71	28.26	30.0	-1.74	Pass

* - Total EIRP = Max SA reading (Chains #1&2 and #3&4) + Antenna gain

** - EIRP dBm/10MHz = Total EIRP, dBm + 10*log[10 MHz/OBW(MHz)] =

Max SA reading – 2.45 dB + Antenna gain

*** - Margin = EIRP, dBm – specification limit.



HERMON LABORATORIES

Report ID: AIRRAD_FCC.32229.Rev3

Date of Issue: 27-Nov-19

Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Table 7.1.4 Peak spectral power density test results

ASSIGNED FREQUENCY RANGE:

3550.0 – 3700.0 MHz

DETECTOR USED:

Average

VIDEO BANDWIDTH:

≥ Resolution bandwidth

NUMBER OF CHAINS:

4

Frequency, MHz	SA reading				Antenna gain, dBi	Total PSD*, dBm/ MHz	Limit, dBm/ MHz	Margin, dB**	Verdict
	Chain RF#1, dBm	Chain RF#2, dBm	Chain RF#3, dBm	Chain RF#4, dBm					
Channel Spacing 10 MHz									
Modulation QPSK									
3555.0	8.12	8.18	8.18	8.26	9.0	19.89	20.0	-0.11	Pass
3625.0	8.03	8.35	7.89	8.28	9.0	19.98	20.0	-0.02	Pass
3695.0	8.14	8.18	8.11	7.99	9.0	19.81	20.0	-0.19	Pass
Modulation 16QAM									
3555.0	7.99	8.26	7.82	8.02	9.0	19.89	20.0	-0.11	Pass
3625.0	8.13	8.34	7.49	8.19	9.0	19.97	20.0	-0.03	Pass
3695.0	8.17	8.07	7.94	8.28	9.0	19.91	20.0	-0.09	Pass
Modulation 64QAM									
3555.0	8.36	8.32	8.16	7.93	9.0	19.99	20.0	-0.01	Pass
3625.0	8.18	8.12	8.13	8.06	9.0	19.81	20.0	-0.19	Pass
3695.0	8.29	8.33	8.06	8.31	9.0	19.96	20.0	-0.04	Pass
Channel Spacing 20 MHz									
Modulation QPSK									
3560.0	8.32	8.19	8.11	8.04	9.0	19.95	20.0	-0.05	Pass
3625.0	8.15	7.92	8.00	8.14	9.0	19.78	20.0	-0.22	Pass
3690.0	8.26	8.2	8.16	8.17	9.0	19.89	20.0	-0.11	Pass
Modulation 16QAM									
3560.0	8.33	8.27	8.23	8.12	9.0	19.96	20.0	-0.04	Pass
3625.0	8.12	8.34	8.04	8.26	9.0	19.97	20.0	-0.03	Pass
3690.0	8.24	8.25	8.12	8.12	9.0	19.88	20.0	-0.12	Pass
Modulation 64QAM									
3560.0	8.07	8.25	8.35	8.07	9.0	19.98	20.0	-0.02	Pass
3625.0	8.31	8.36	8.16	8.32	9.0	19.99	20.0	-0.01	Pass
3690.0	8.34	8.06	8.02	8.18	9.0	19.97	20.0	-0.03	Pass

* - Total PSD = Max SA reading (Chains #1&2 or chains #3&4) + Antenna Gain + Duty Cycle Factor

** - Margin = Total PSD, dBm – specification limit.

Reference numbers of test equipment used

HL 3301	HL 3433	HL 3442	HL 3787	HL 5376	HL 5409		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.1 Peak spectral power density at low frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

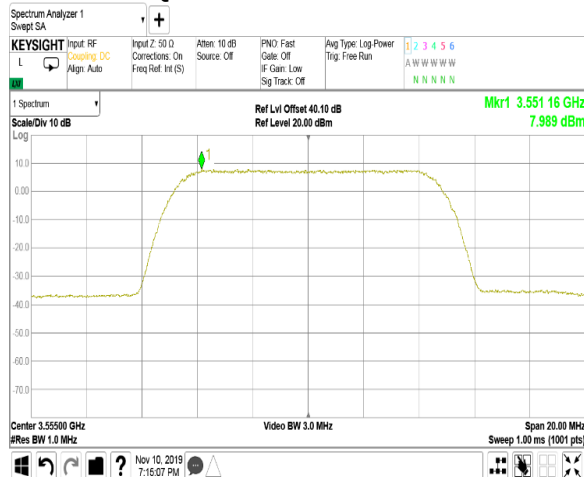


Modulation: 64QAM

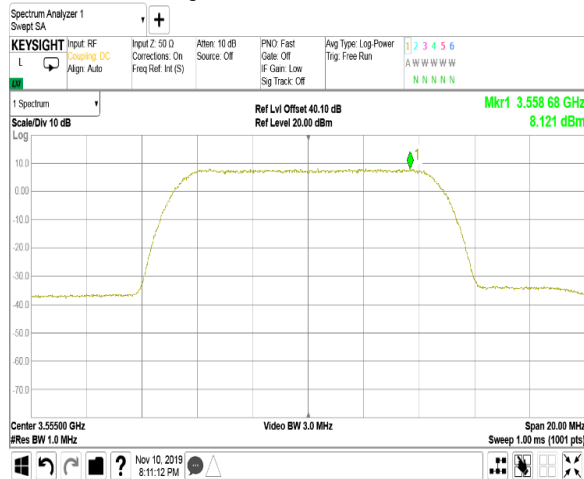

10 MHz

1

Modulation: 16QAM

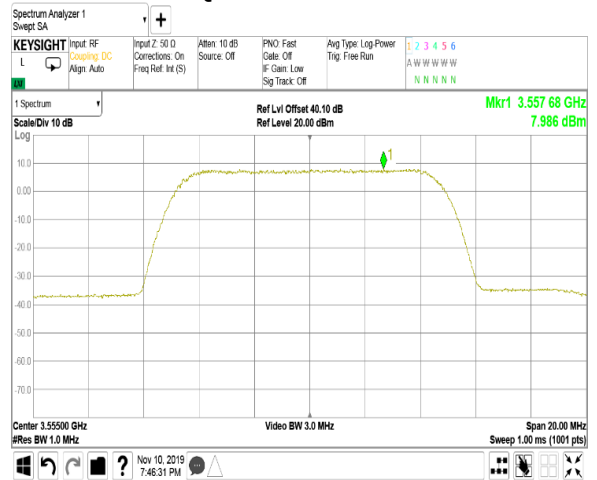



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.2 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

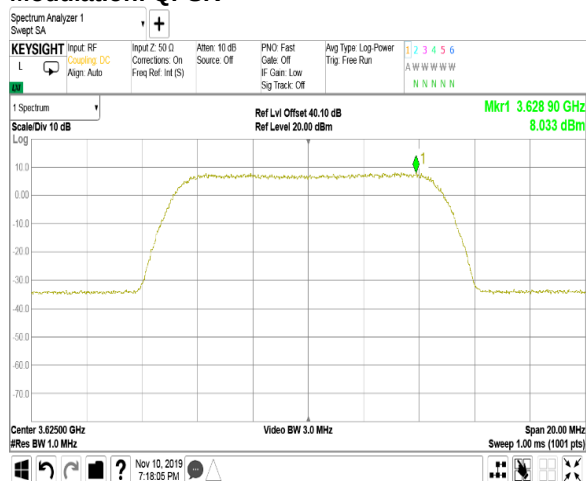


Modulation: 64QAM

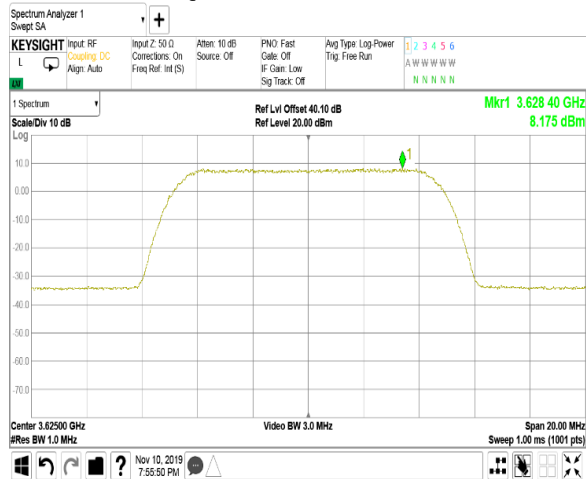

10 MHz

1

Modulation: 16QAM

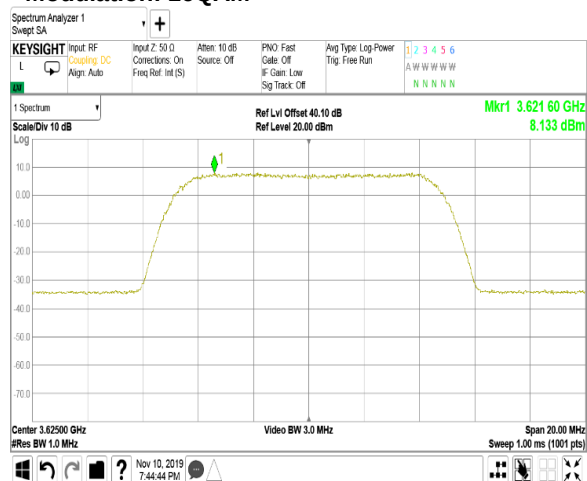



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.3 Peak spectral power density at high frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

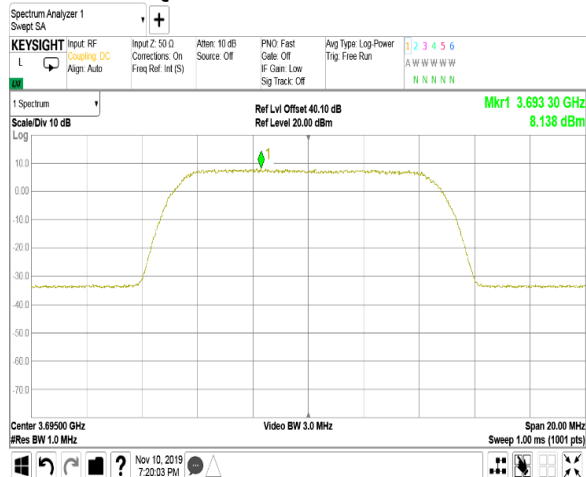


Modulation: 64QAM

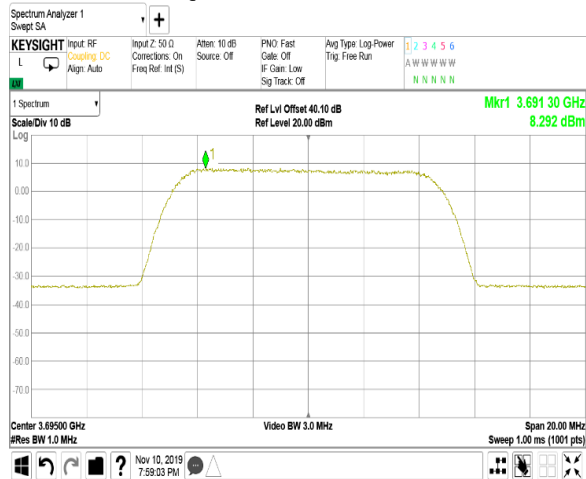

10 MHz

1

Modulation: 16QAM

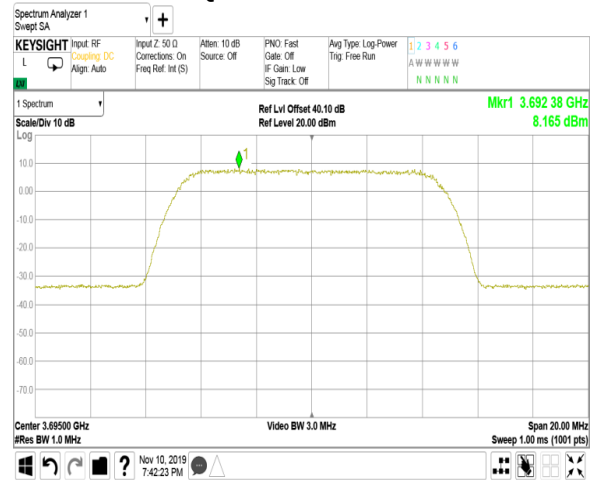



HERMON LABORATORIES

Report ID: AIRRAD_FCC.32229.Rev3

Date of Issue: 27-Nov-19


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.4 Peak spectral power density at low frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

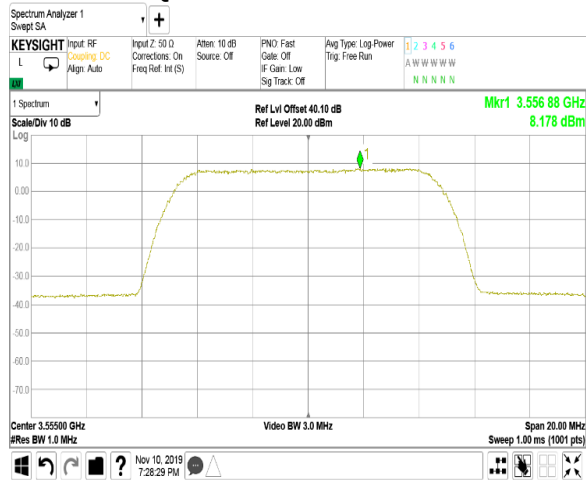


Modulation: 64QAM

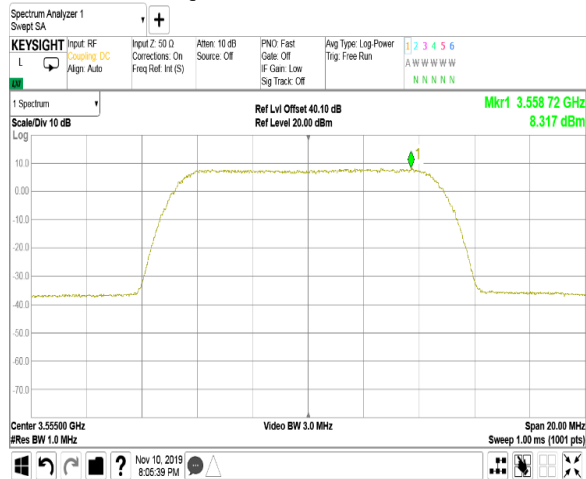

10 MHz

2

Modulation: 16QAM

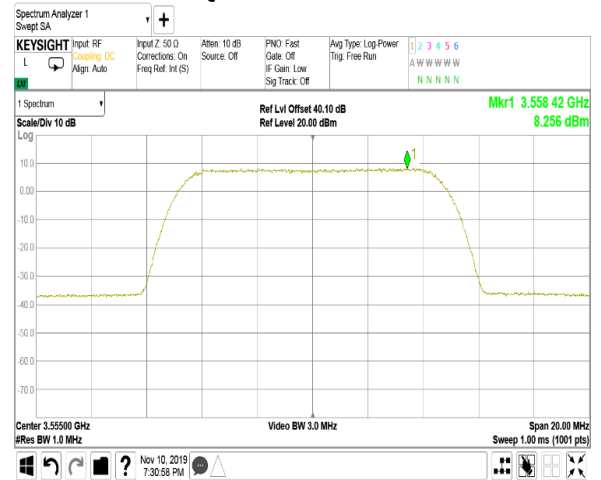



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.5 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

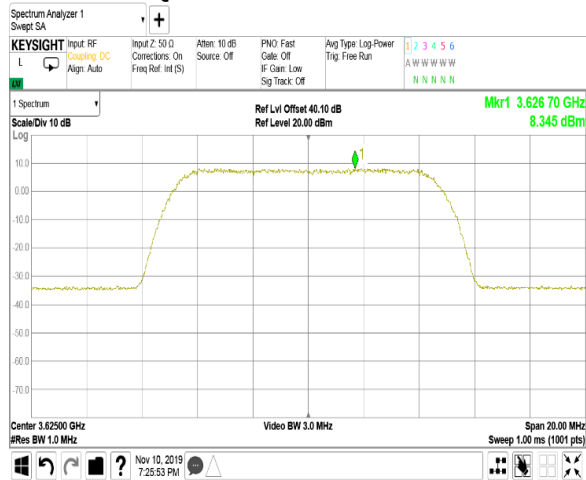


Modulation: 64QAM

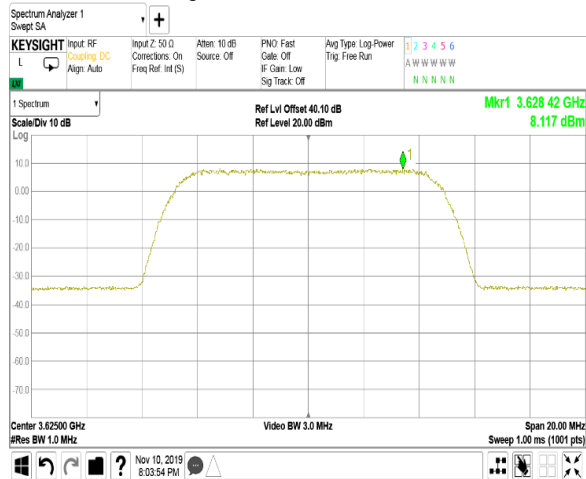

10 MHz

2

Modulation: 16QAM

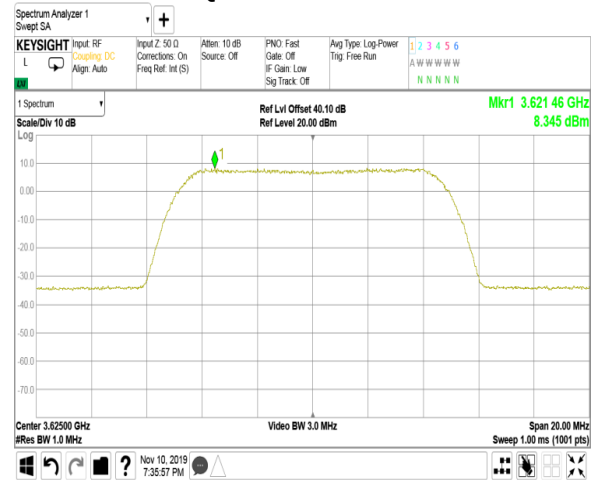



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.6 Peak spectral power density at high frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

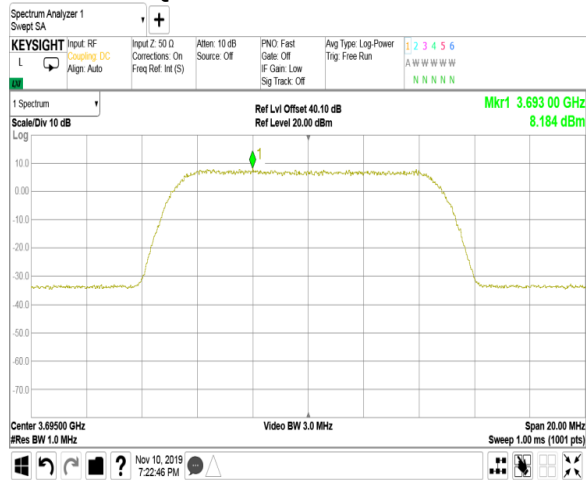


Modulation: 64QAM

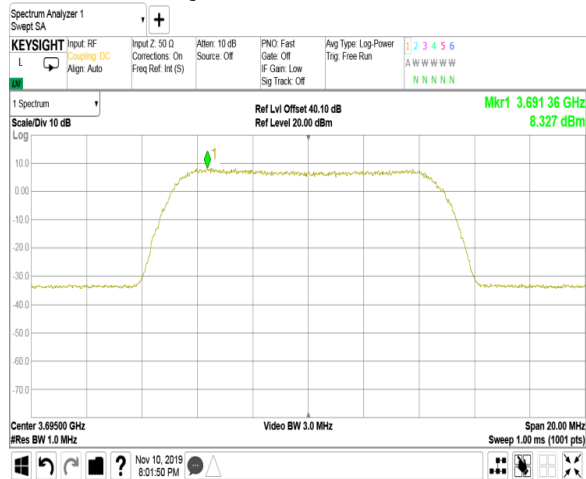

10 MHz

2

Modulation: 16QAM

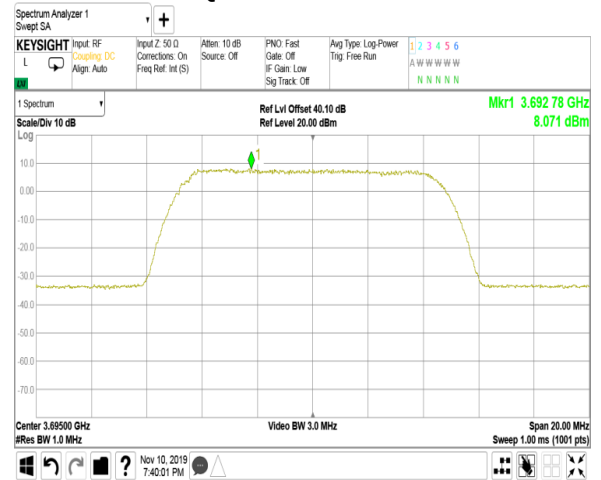



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.7 Peak spectral power density at low frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

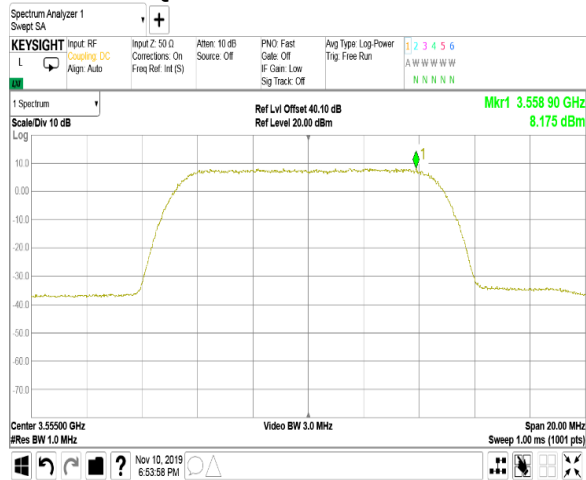


Modulation: 64QAM

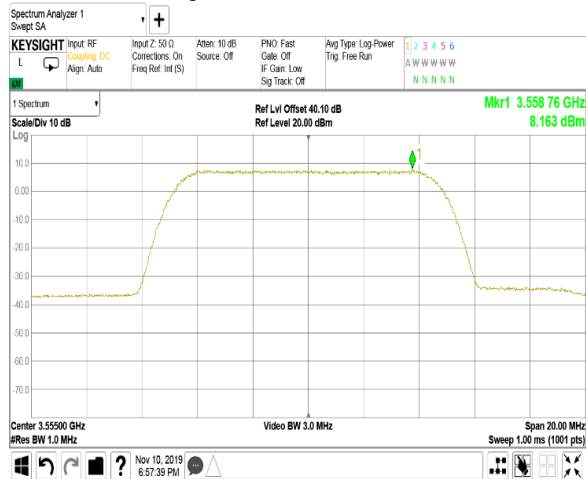

10 MHz

3

Modulation: 16QAM

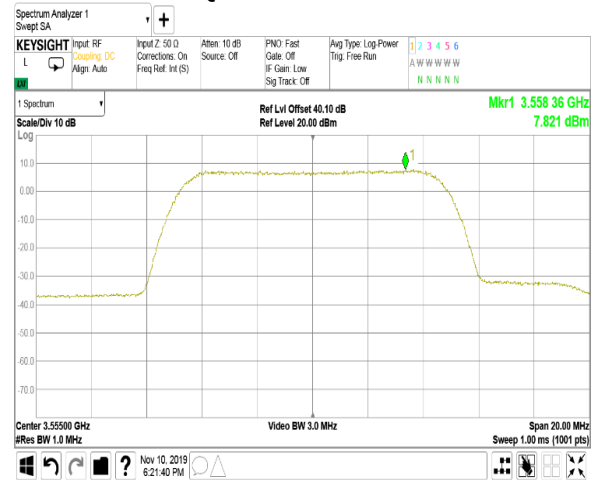



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.8 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

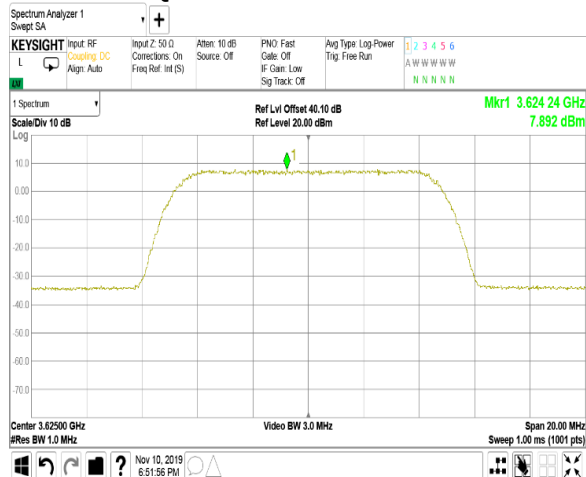


Modulation: 64QAM

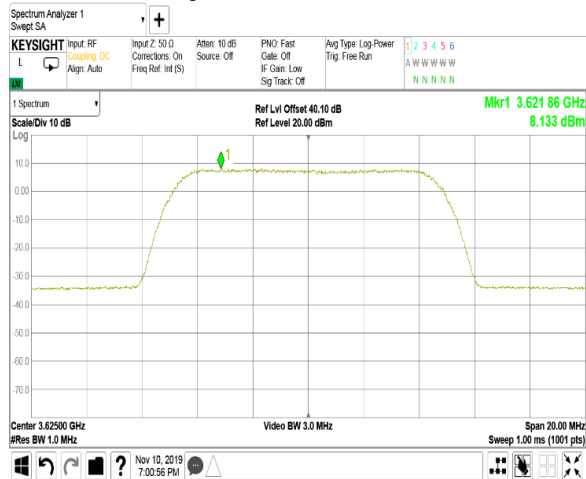

10 MHz

3

Modulation: 16QAM

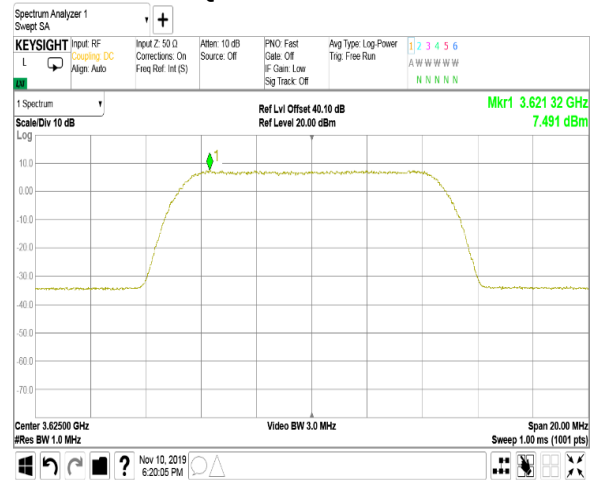



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.9 Peak spectral power density at high frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

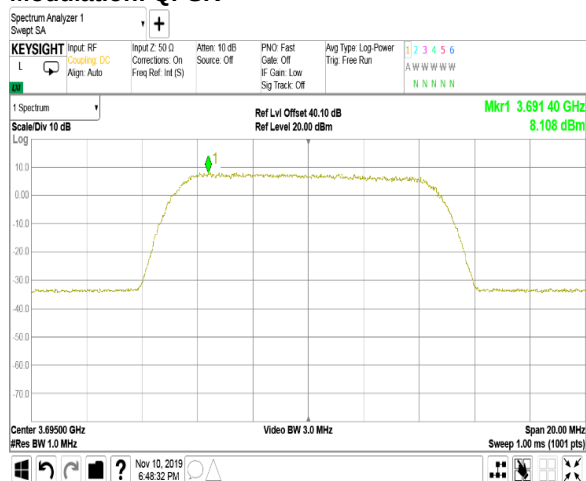


Modulation: 64QAM

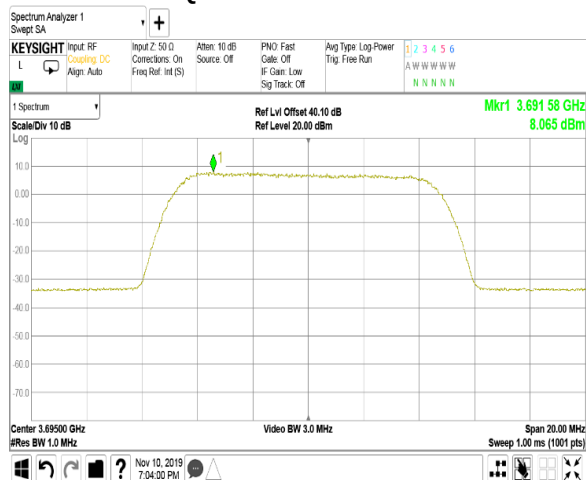

10 MHz

3

Modulation: 16QAM

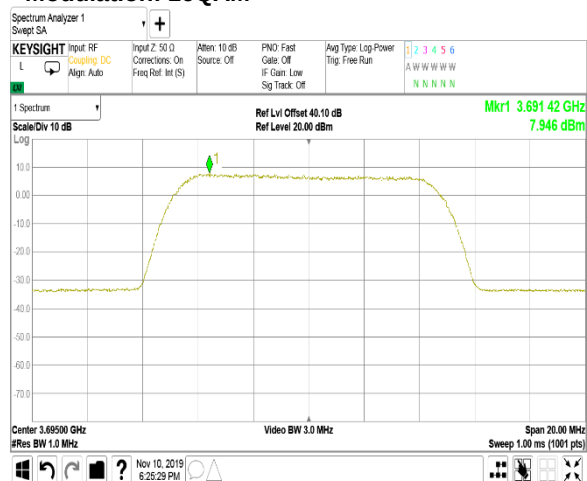



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.10 Peak spectral power density at low frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

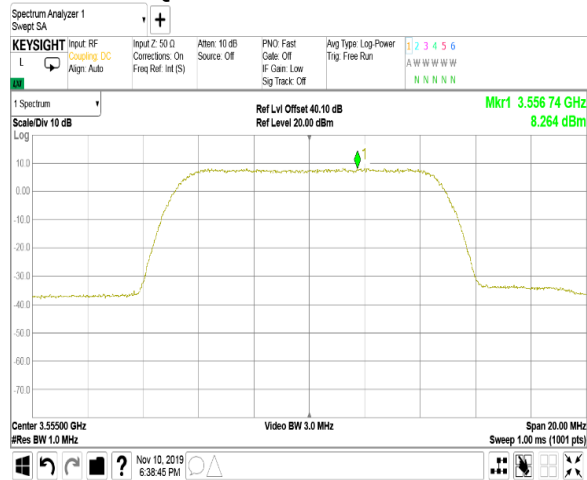


Modulation: 64QAM

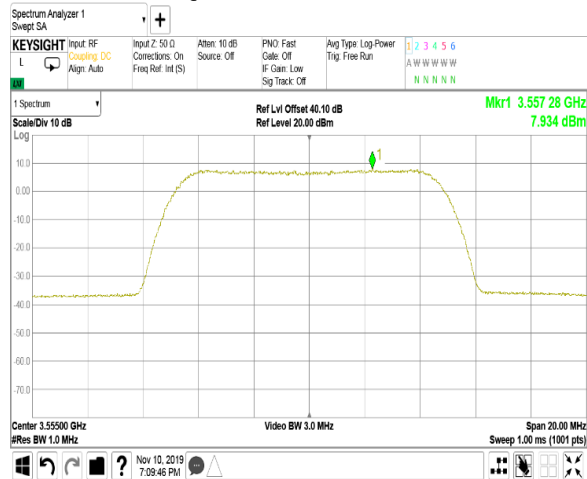

10 MHz

4

Modulation: 16QAM

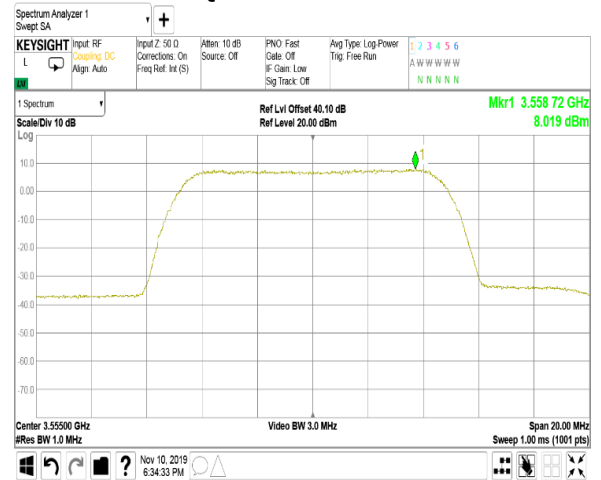



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.11 Peak spectral power density at mid frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

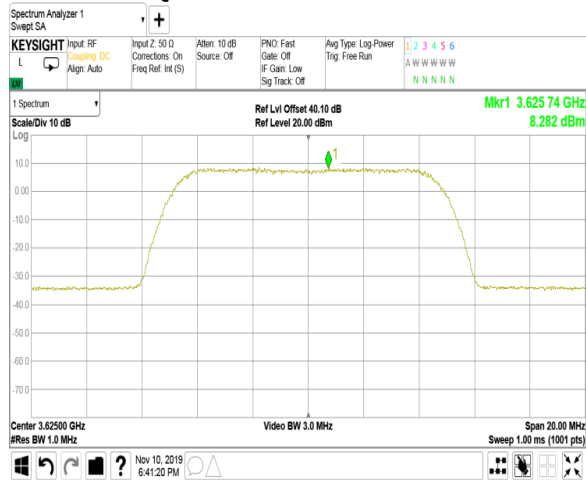


Modulation: 64QAM

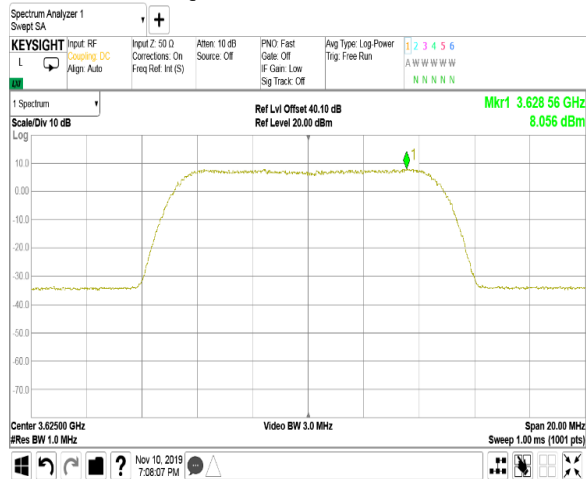

10 MHz

4

Modulation: 16QAM

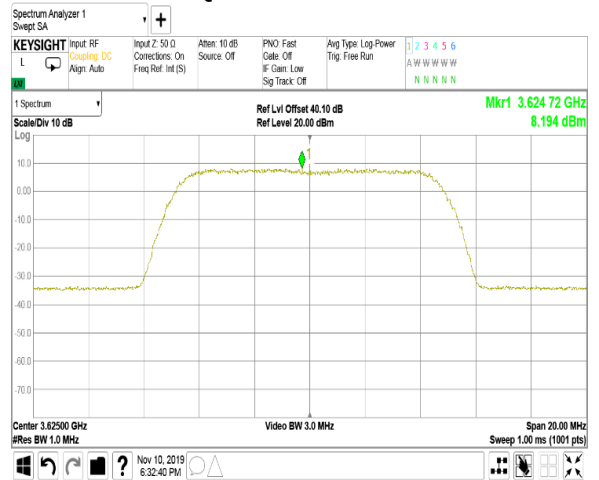



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.12 Peak spectral power density at high frequency


CHANNEL SPACING:

ANTENNA CHAIN:

Modulation: QPSK

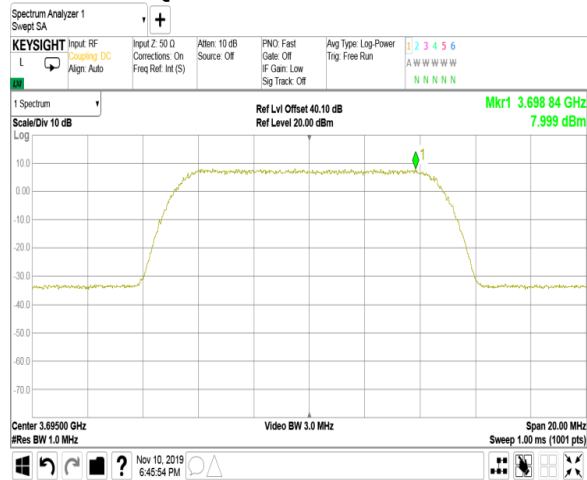


Modulation: 64QAM

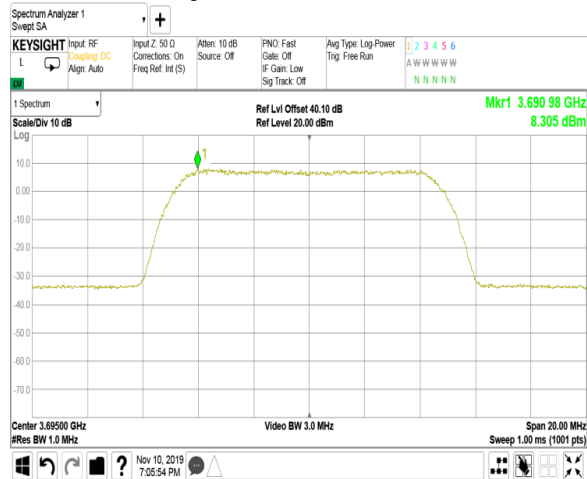

10 MHz

4

Modulation: 16QAM

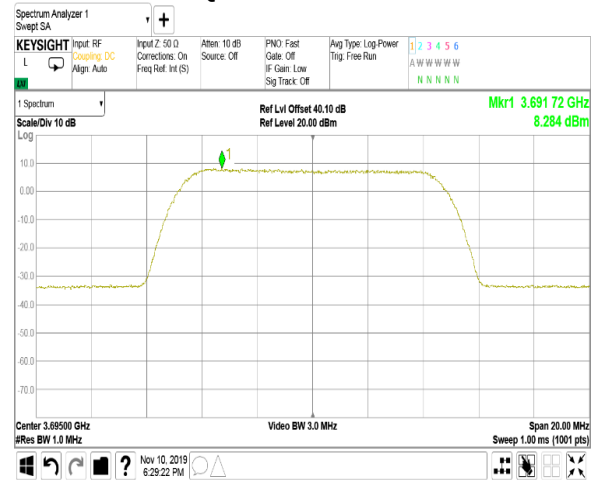



HERMON LABORATORIES


Test specification: Section 96.41(b), Maximum EIRP and maximum power spectral density			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Apr-19			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 56 VDC
Remarks:			

Plot 7.1.13 Peak spectral power density at low frequency within

CHANNEL SPACING:

ANTENNA CHAIN:


Modulation: QPSK

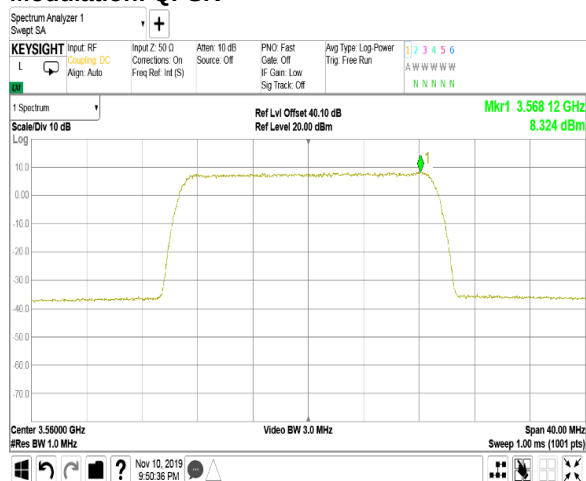

20 MHz

1

Modulation: 16QAM

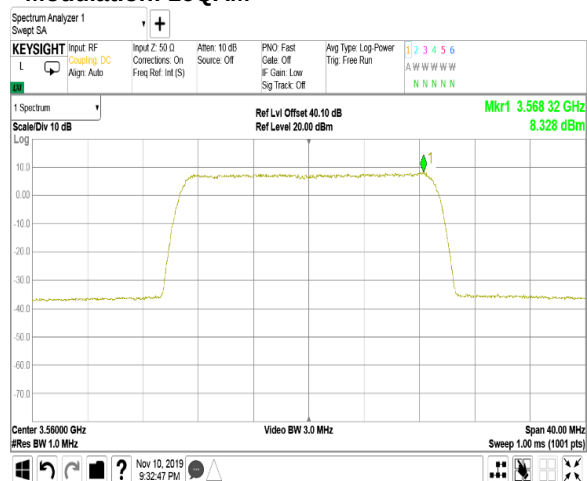

Modulation: 64QAM

