

MVOICE 1010-B

USB/Bluetooth Conference Speakerphone


Welcome!

MVOICE series speakerphone is specially designed to fulfill the customers' increasing demand for web-conferencing calls, hands-free calls and teleconferencing.

MVOICE 1010-B USB/Bluetooth speakerphone can connect to computer with USB cable for audio and video conference based on internet application, or connect to mobile phone or tablet via Bluetooth to realize wireless hands-free teleconference.

Highlights and features

- Connect to PC via USB.
- Connect to mobile device via Bluetooth.
- Connect to external loudspeaker.
- Three built-in 360° coverage microphone.
- DSP noise and echo cancellation.
- Low power consumption.

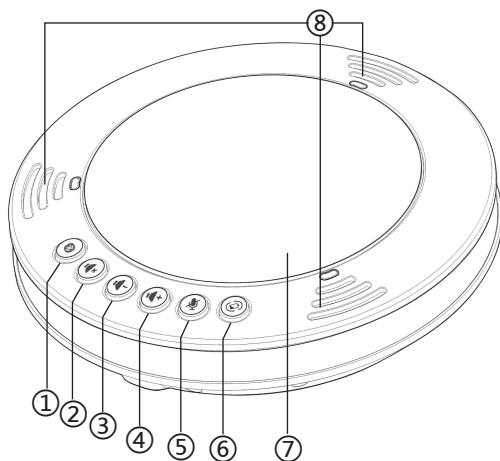


- | | |
|-----------------|--------------------------------------|
| 1. Bluetooth | 5. Mute microphone |
| 2. Mute speaker | 6. Battery level / Choose microphone |
| 3. Volume down | 7. Speaker |
| 4. Volume up | 8. Microphones |

Connecting to PC or laptop

Plug and play, simply connect the MVOICE 1010-B to the USB port on your PC with USB cable. Support Windows XP, Windows7/8/10, Android and MacOS etc.

Attention: MVOICE 1010-B works excellently in web-conferencing via Skype or other VoIP software. The PC can automatically recognize the MVOICE device, but you may need to choose M3 USB AUDIO in application software. For example, you would need to choose M3 USB AUDIO in Skype audio setting section.



Connect to mobile device

Press and hold (2secs) the Bluetooth button  until the light flashes blue. Enable Bluetooth on your mobile device, and select "M3 Bluetooth" from the list of available Bluetooth devices. The light turns solid blue when the connection is established.

Turn off the Bluetooth function

Press and hold (2secs) the Bluetooth button  and then the Bluetooth function will be closed.

Answer /Reject a call via Bluetooth

Short press  to answer the incoming call, long press  to reject the incoming call. When in a connected call or dialing, short press this button could hang up the call.

Attention: Press  too long (over 2 secs.) would turn off the Bluetooth function.

Mute the speaker

Press the button  can mute the speaker, the button turns orange

Mute the microphones

Press the button  can mute the microphones all, the button turns orange

Increase the volume

Press the button  can increase the volume level

Decrease the volume

Press the button  can decrease the volume level


ON/OFF button

Turn the button to ON side, the MVOICE 1010-B can be powered by built-in battery.

ON/OFF state will not affect the USB charging and USB connectivity to PC.

Attention: Please keep it OFF to save battery power if the unit is not using.

Charging the speakerphone

The speakerphone is equipped with a 2000mAh battery, which would last for over 10 hours talk time. When the battery indicator  turns orange and flashes, less than 10 minutes talk time remain. Plug the MVOICE 1010-B with USB cable to USB port on PC or charging adapter to charge the battery.

Specification:

System requirements	Windows XP/Windows7/8/10 etc. Andriod and Mac OS
Connections	USB version 2.0
Max volume	83dB
Speaker frequency	30Hz-16KHz
Microphone frequency	30Hz-16KHz
Power voltage	5V DC
Power consumption	300mAh max.
Battery capacity	2000mAh
Operating temperature	5°C-40°C
Storage temperature	-30°C-55°C
Accessories	6ft USB cable/User Guide/Protective bag/Gift box
Compliance	RoHS/FCC/CE

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20 cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.