

## Report on the RF Testing of:

KYOCERA Corporation  
Mobile Phone, Model: EB1035  
FCC ID: JOYEB1035

## In accordance with FCC Part 27 Subpart C and FCC Part 27 Subpart L Class II Permissive Change

Prepared for: KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku  
Yokohama-shi, Kanagawa, Japan  
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-21041-0

### SIGNATURE

#### NAME

#### JOB TITLE

#### RESPONSIBLE FOR

#### ISSUE DATE

Hiroaki Suzuki

Deputy Manager of RF Group

Approved Signatory

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

### EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 27 Subpart C and FCC Part 27 Subpart L.



Certificate #3686.03

### DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.

### ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.  
Yonezawa Testing Center  
5-4149-7 Hachimanpara,  
Yonezawa-shi, Yamagata,  
992-1128 Japan

Phone: +81 (0) 238 28 2881  
Fax: +81 (0) 238 28 2888  
[www.tuv-sud.jp](http://www.tuv-sud.jp)

## Contents

<b>1</b>	<b>Summary of Test .....</b>	<b>3</b>
1.1	Modification history of the test report .....	3
1.2	Standards .....	3
1.3	Test methods.....	3
1.4	Deviation from standards .....	3
1.5	List of applied test(s) of the EUT .....	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period .....	3
<b>2</b>	<b>Equipment Under Test.....</b>	<b>4</b>
2.1	EUT information .....	4
2.2	Modification to the EUT .....	5
2.3	Variation of family model(s).....	5
2.4	Description of test mode .....	5
<b>3</b>	<b>Configuration of Equipment.....</b>	<b>6</b>
3.1	Equipment used .....	6
3.2	System configuration .....	6
<b>4</b>	<b>Test Result .....</b>	<b>7</b>
4.1	Equivalent Isotropic Radiated Power .....	7
4.2	Peak to Average Ratio .....	9
4.3	Occupied Bandwidth .....	13
4.4	Band Edge Spurious and Harmonic at Antenna Terminals .....	16
4.5	Radiated Emissions and Harmonic Emissions .....	27
4.6	Frequency Stability.....	30
<b>5</b>	<b>Measurement Uncertainty .....</b>	<b>32</b>
<b>6</b>	<b>Laboratory Information.....</b>	<b>33</b>
	<b>Appendix A. Test Equipment.....</b>	<b>34</b>

## 1 Summary of Test

### 1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-21041-0	First Issue	Refer to the cover page

### 1.2 Standards

CFR47 FCC Part 27 Subpart C  
CFR47 FCC Part 27 Subpart L

### 1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01  
ANSI/TIA/EIA 603-E-2016  
ANSI C63.26-2015

### 1.4 Deviation from standards

None

### 1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
27.50	Equivalent Isotropic Radiated Power	Radiated	PASS	-
27.50	Peak to Average Ratio	Conducted	PASS	-
2.1049	Occupied Bandwidth	Conducted	PASS	-
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
27.54 2.1055	Frequency Stability	Conducted	PASS	-

\*1: Refer to RF Exposure Report (Test Report\_SAR)

### 1.6 Test information

None

### 1.7 Test set up

Table-top

### 1.8 Test period

10-May-2021 - 18-May-2021

## 2 Equipment Under Test

All information in this chapter was provided by the applicant.

### 2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1035
Serial number	355280110018263, 355280110018255
Trade name	Kyocera
Number of sample(s)	2
EUT condition	Pre-Production
Power rating	Battery: DC 3.85 V
Size	(W) 71.0 × (D) 159.0 × (H) 8.9 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	PMT
Software version	V0.060MI.0020.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link WCDMA Band IV: 1712.4-1752.6 MHz LTE Band IV: 1710.0-1755.0 MHz Down Link WCDMA Band IV: 2112.4-2152.6 MHz LTE Band IV: 2110.0-2155.0 MHz
Modulation type	WCDMA Band IV: QPSK, 16QAM LTE Band IV: QPSK, 16QAM, 64QAM
Emission designator	WCDMA Band IV: 4M17F9W LTE Band IV: BW 1.4M QPSK: 1M11G7D
Effective Radiated Power (E.R.P.)	WCDMA Band IV: 0.186 W (22.7 dBm) LTE Band IV: 0.214 W (23.3 dBm)
Antenna type	Internal antenna
Antenna gain	WCDMA Band IV: -1.2 dBi LTE Band IV: -1.2 dBi

## 2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1035, Serial Number: 355280110018263, 355280110018255			
0	As supplied by the applicant	Not Applicable	Not Applicable

## 2.3 Variation of family model(s)

### 2.3.1 List of family model(s)

Not applicable

### 2.3.2 Reason for selection of EUT

Not applicable

## 2.4 Description of test mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
WCDMA Band IV	QPSK	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
	16QAM	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
LTE Band IV	QPSK	1.4	19957, 20175, 20393	1710.7, 1732.5, 1754.3

The electric field strength of spurious radiation was measured in the previous worst case.  
The worst emission last time was on the X axis (all bands).

### 3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

#### 3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1035	355280110018263, 355280110018255	JOYEB1035	EUT

#### 3.2 System configuration

1. Mobile Phone  
(EUT)

## 4 Test Result

### 4.1 Equivalent Isotropic Radiated Power

#### 4.1.1 Measurement procedure

##### [FCC 27.50]

##### <Step 1>

The EUT and support equipment are placed on a 0.6 meter x 0.6 meter surface, 1.5 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

##### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

The frequency of the signal generator is adjusted to the measurement frequency.


Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW  $\geq 3 \times$  RBW
- d) Number of sweep points  $\geq 2 \times$  span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle  $\geq 98\%$ ), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle  $< 98\%$ ), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges.

If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

##### - Test configuration

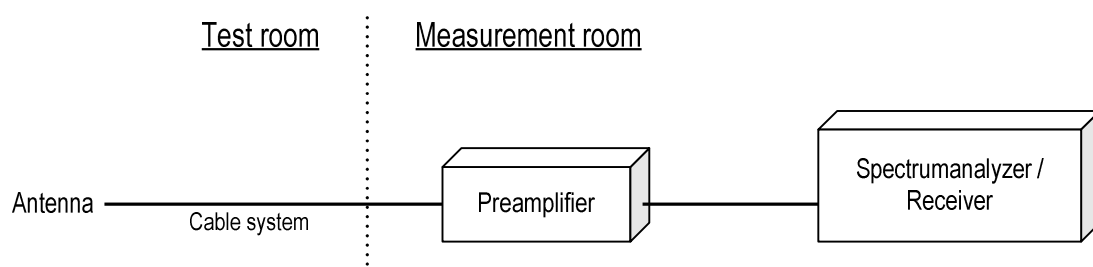

#### 4.1.2 Calculation method

Result (EIRP) = Ant. Input- Cable loss + Antenna Gain  
 Margin = Limit – Result (EIRP)

Example:

Limit @ 1732.6 MHz : 30.0 dBm  
 Ant. Input = 25.5 dBm Cable loss = 0.7 dB Ant. Gain = -10.1 dBi  
 Result = 25.5 - 0.7 + (-10.1) = 14.8 dBm  
 Margin = 30.0 - 14.8 = 19.9 dB

#### 4.1.3 Limit

1 W (30.0 dBm)

#### 4.1.4 Test data

Date : 10~11-May-2021  
 Temperature : 22.2 [°C]  
 Humidity : 33.1 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 11-May-2021  
 Temperature : 21.9 [°C]  
 Humidity : 35.6 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

#### [WCDMA Band IV]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.4	-26.8	18.3	1.1	5.5	22.7	30.0	7.3
H	1732.6	-27.2	18.0	1.1	5.1	22.0	30.0	8.0
H	1752.6	-26.7	18.4	1.1	4.8	22.1	30.0	7.9

#### [LTE Band IV]

##### QPSK, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-26.2	18.3	1.1	5.5	22.7	30.0	7.3
H	1732.5	-26.9	19.3	1.1	5.1	23.3	30.0	6.7
H	1754.3	-26.4	17.6	1.1	4.8	21.3	30.0	8.7



## 4.2 Peak to Average Ratio

### 4.2.1 Measurement procedure


#### [FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
  - 1) For continuous transmissions, set to 1ms.
  - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

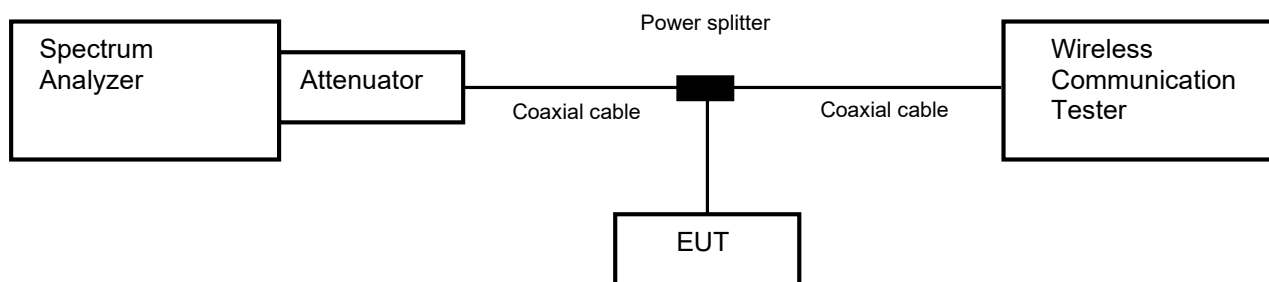

### 4.2.2 Limit

13 dB or less

#### 4.2.3 Measurement result

Date : 13-May-2021

Temperature : 22.4 [°C]

Humidity : 42.8 [%]

Test place : Shielded room No.4

Test engineer :


Chiaki Kanno

Band	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
WCDMA Band IV	1312	1712.4	3.22	13.0
	1413	1732.6	3.21	
	1513	1752.6	3.29	


Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band IV	20175	1732.5	QPSK	1.4	6-0	5.68	13.0

#### 4.2.4 Trace data


[WCDMA Band IV]  
Channel: 1312

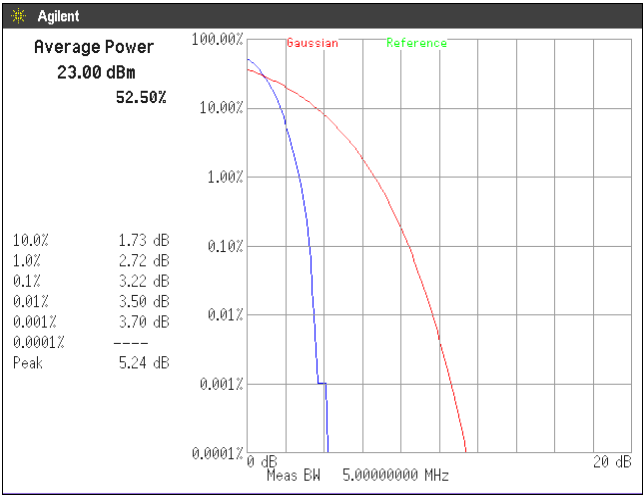

Channel: 1413

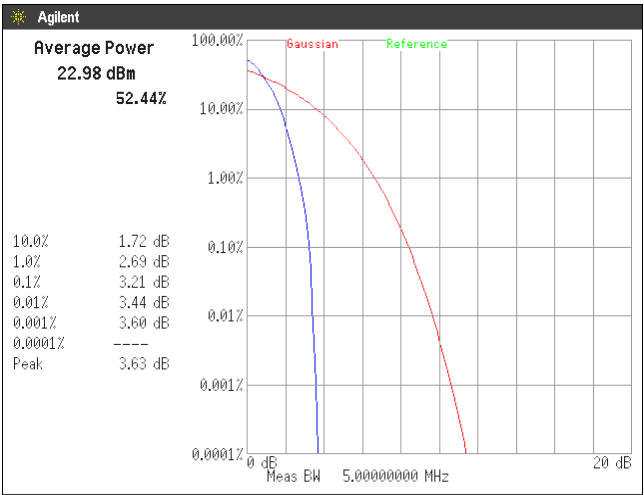


Channel: 1513

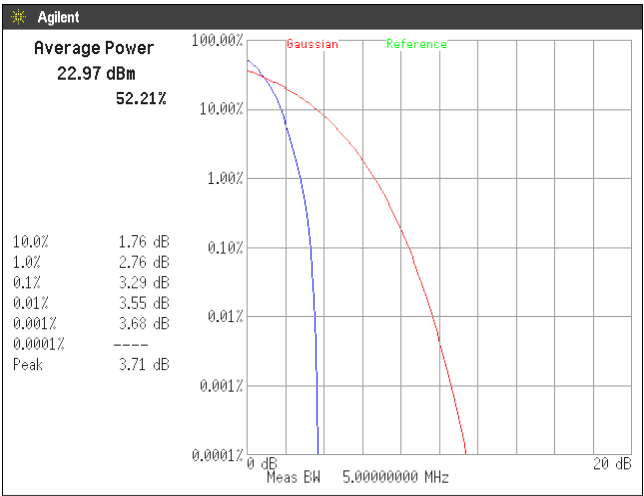



Japan

[LTE Band IV]  
Channel: 20175  
QPSK, BW 1.4MHz, RB6-0

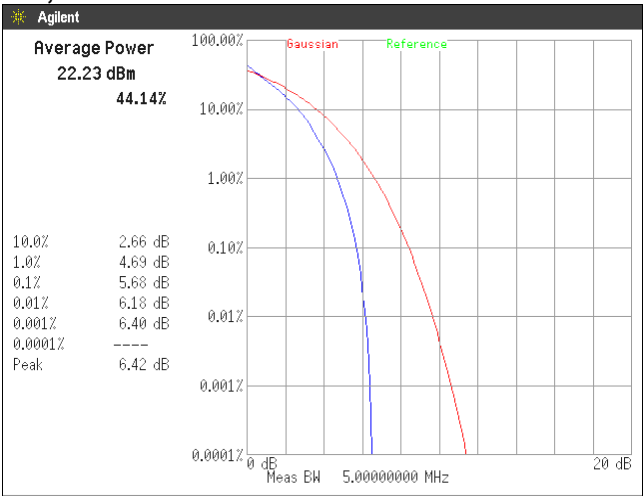

### 4.3 Occupied Bandwidth

#### 4.3.1 Measurement procedure


##### [FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW  $\geq 3 \times$  RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

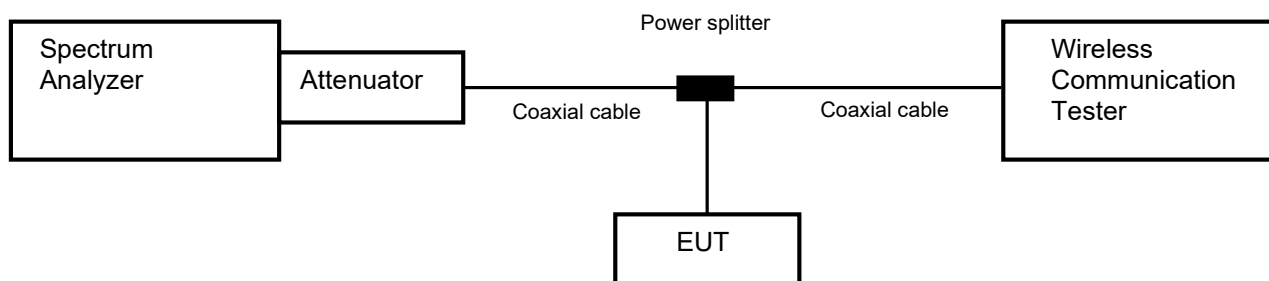

#### 4.3.2 Limit

None

#### 4.3.3 Measurement result

Date : 13-May-2021

Temperature : 22.4 [°C]

Humidity : 42.8 [%]

Test place : Shielded room No.4

Test engineer :


Chiaki Kanno

Band	Channel	Frequency [MHz]	Test Result [kHz]
WCDMA Band IV	1312	1712.4	4.1724
	1413	1732.6	4.1587
	1513	1752.6	4.1725


Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band IV	20175	1732.5	1.4	QPSK	3-1	0.602
					6-0	1.106

#### 4.3.4 Trace data


[WCDMA Band IV]  
Channel: 1312

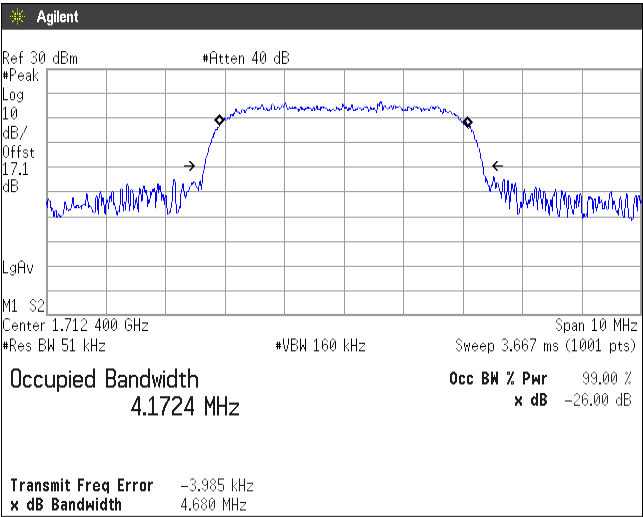

Channel: 1413

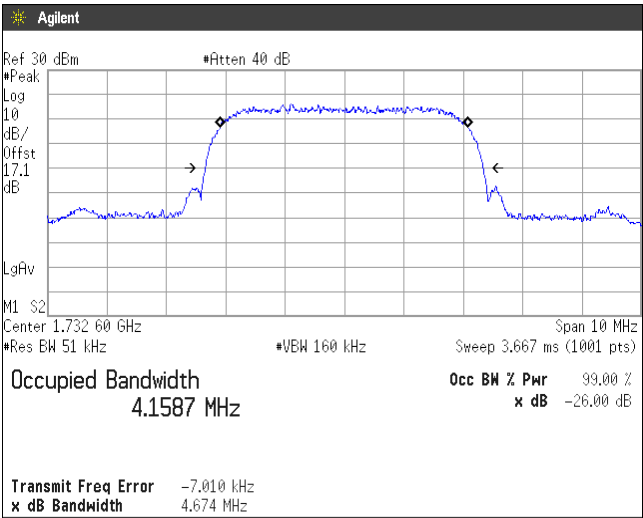


Channel: 1513

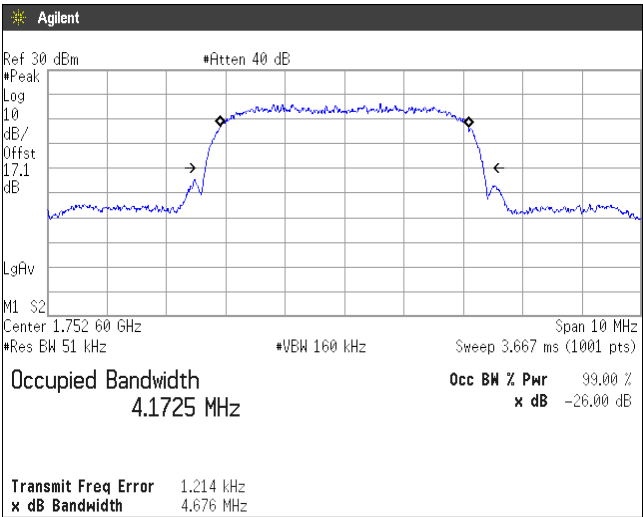


[LTE Band IV]  
Channel: 20175

QPSK, BW 1.4MHz

### RB3-1

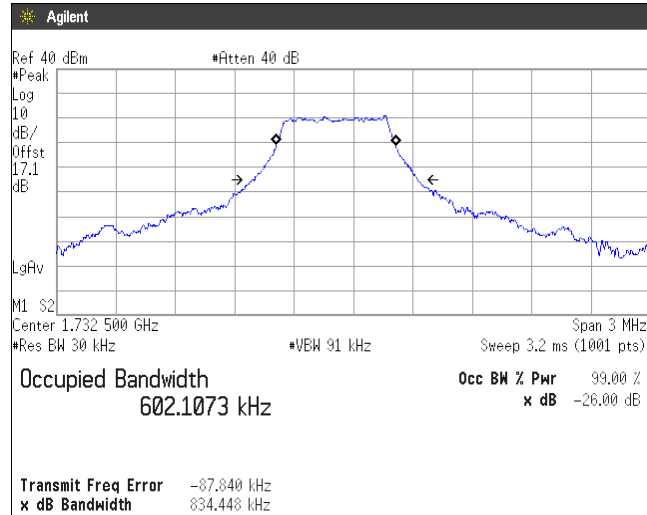

### RB6-0

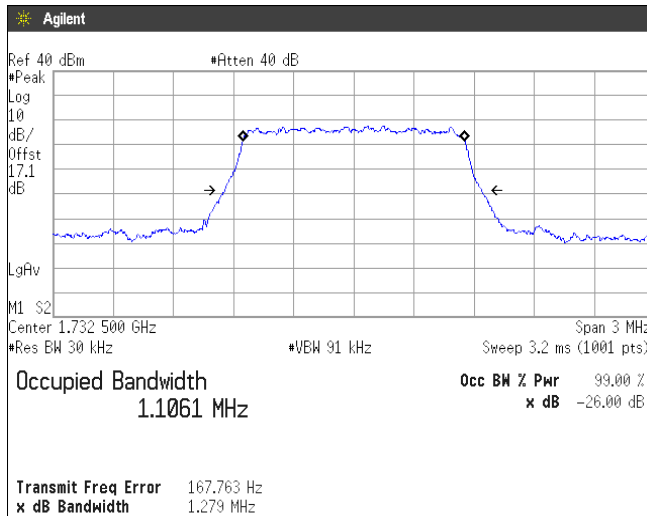

#### 4.4 Band Edge Spurious and Harmonic at Antenna Terminals

##### 4.4.1 Measurement procedure

###### [FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b)  $RBW \geq 1\%$  of the emission bandwidth or  $2\%$  of the emission bandwidth
- c)  $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point  $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a)  $RBW = 1\text{MHz}$  &  $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point  $\geq 2 \times \text{span} / RBW$

- Test configuration

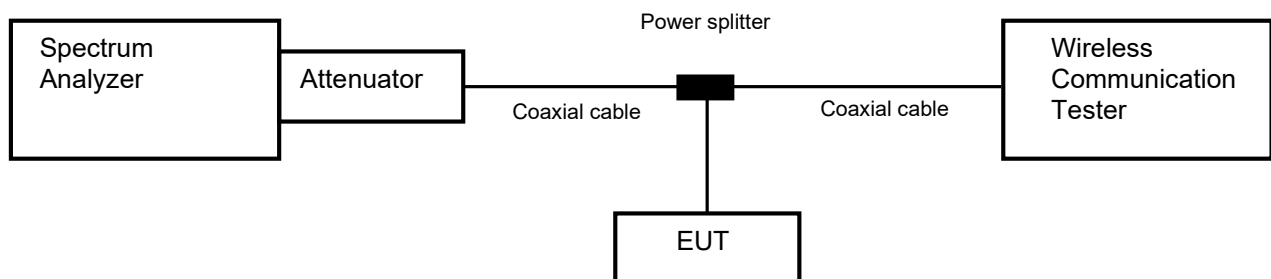

##### 4.4.2 Limit

-13 dB or less



**4.4.3 Measurement result**

Date : 13-May-2021

Temperature : 22.4 [°C]

Humidity : 42.8 [%]

Test place : Shielded room No.4

Test engineer :

Chiaki Kanno


Band	Channel	Frequency [MHz]	Limit [dB]	Results	
WCDMA Band IV	1312	1712.4	-13.0	See the trace data	PASS
	1513	1752.6	-13.0	See the trace data	PASS

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Limit [dB]	Results	
LTE Band IV	QPSK	1.4	19957	1710.7	-13.0	See the trace data	PASS
			20393	1754.3	-13.0	See the trace data	PASS


#### 4.4.4 Trace data

[WCDMA Band IV]  
(Band Edge)

Channel: 1312

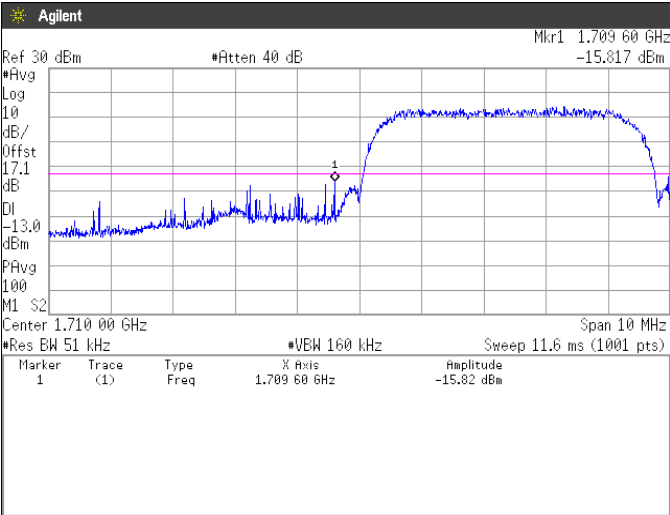

Channel: 1513

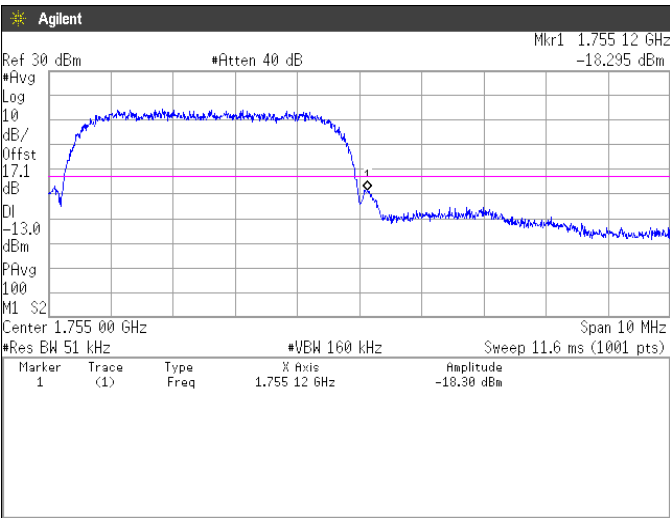


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

Channel: 1312


30MHz-5GHz

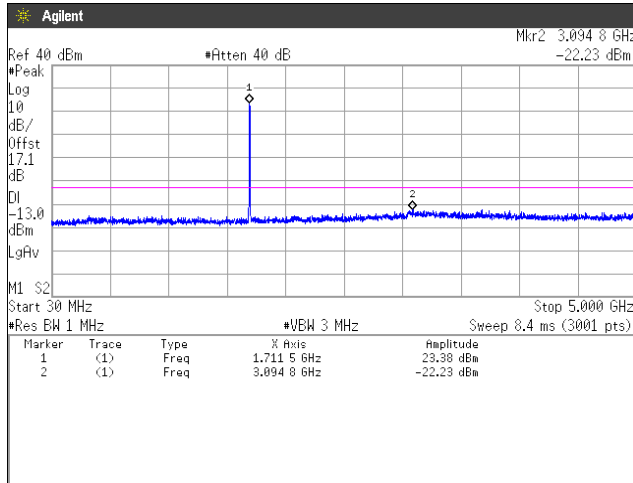


5GHz-10GHz

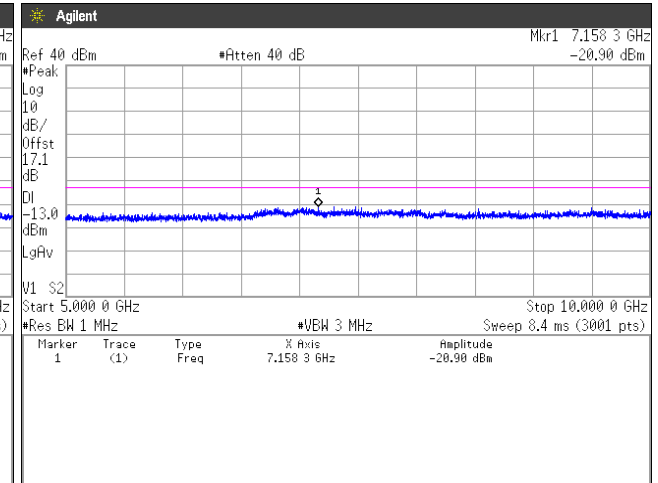

10GHz-15GHz

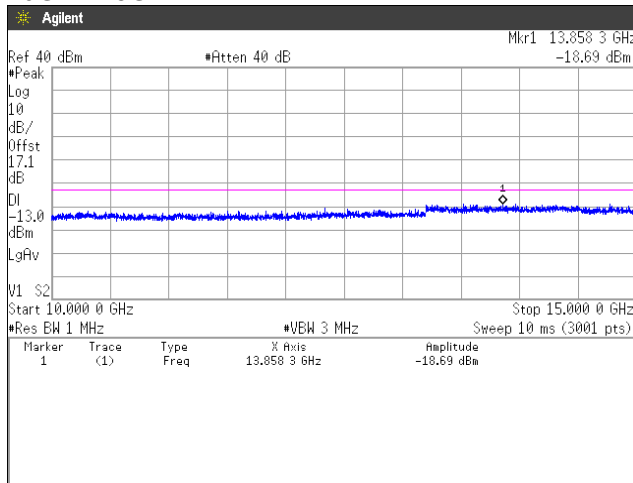


15GHz-20GHz

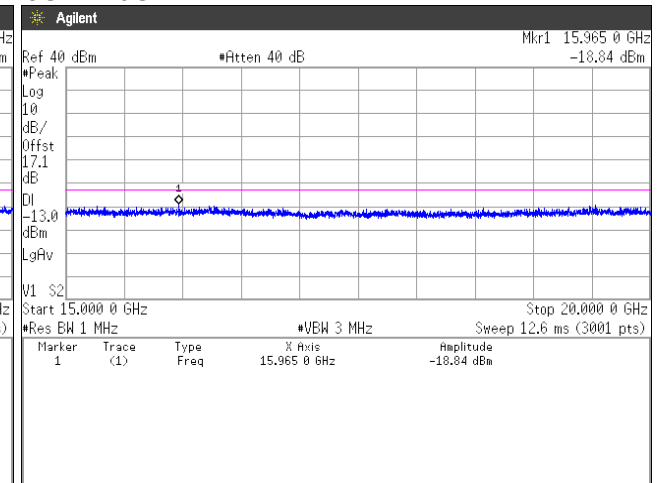


Channel: 1413


30MHz-5GHz

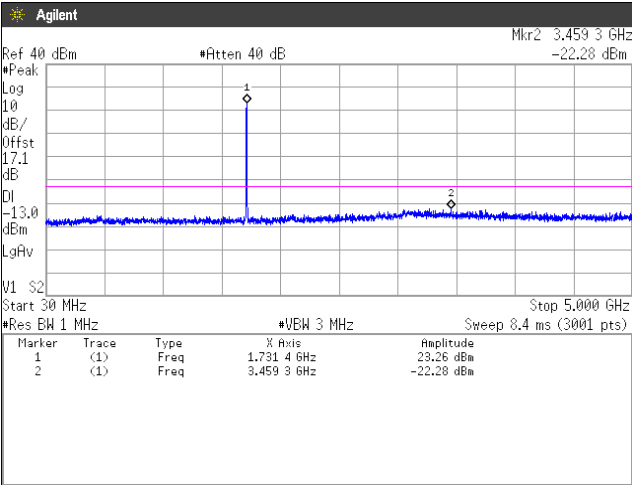


5GHz-10GHz




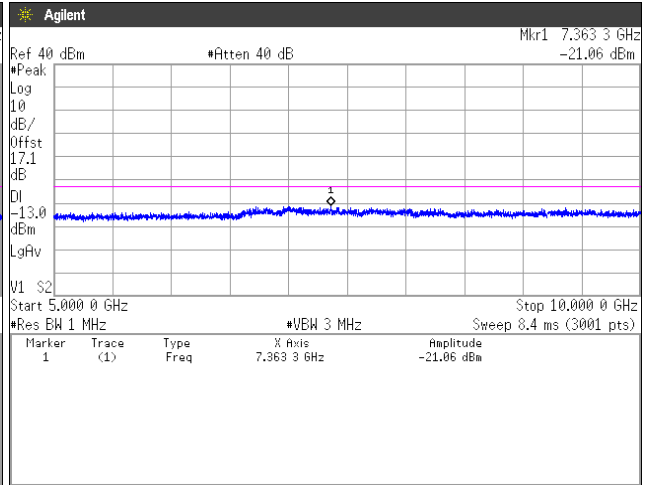


10GHz-15GHz

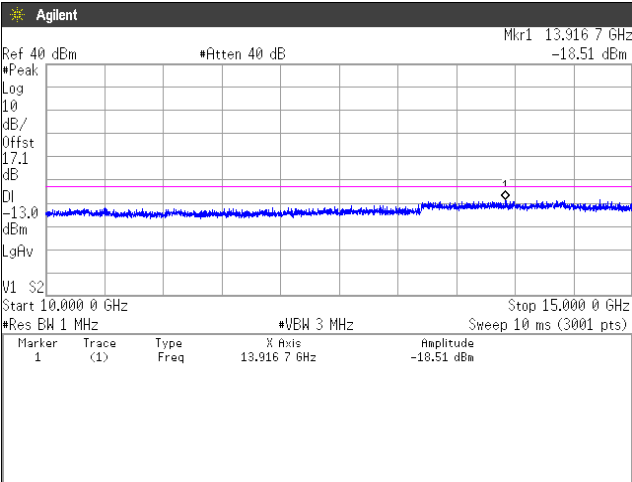


15GHz-20GHz

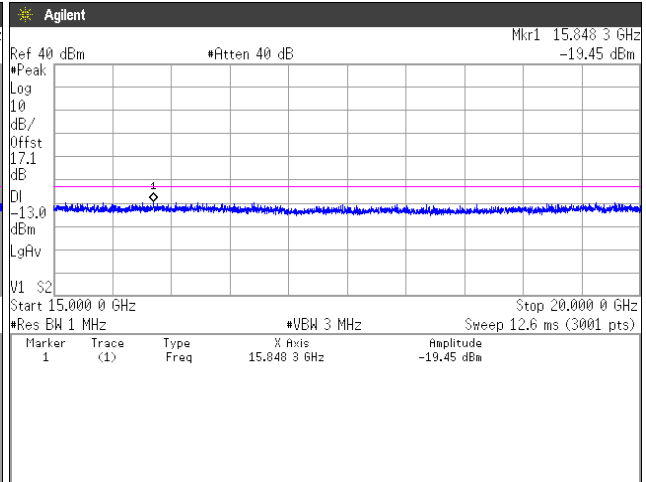


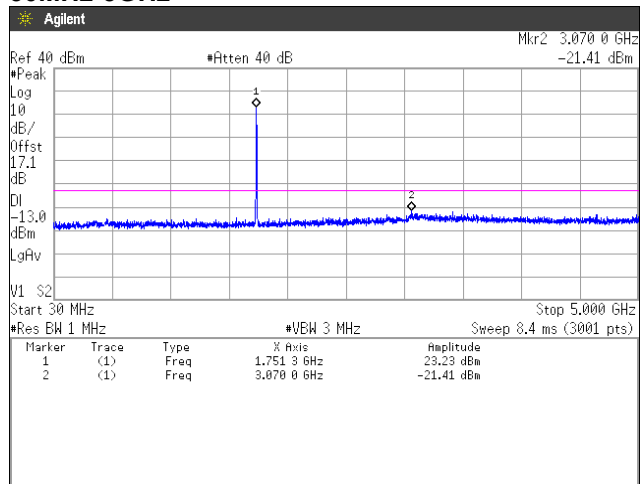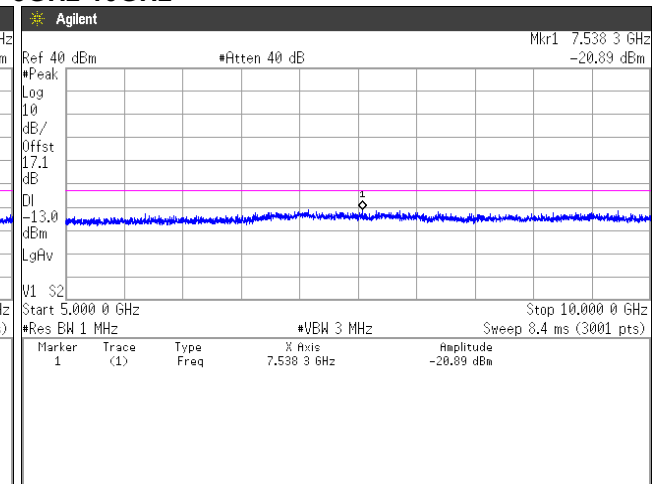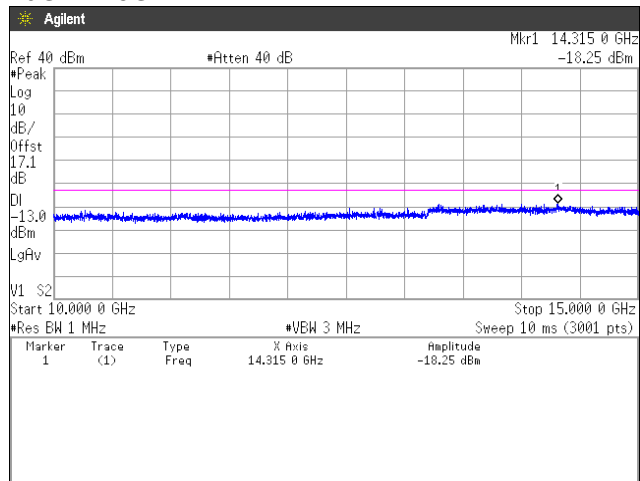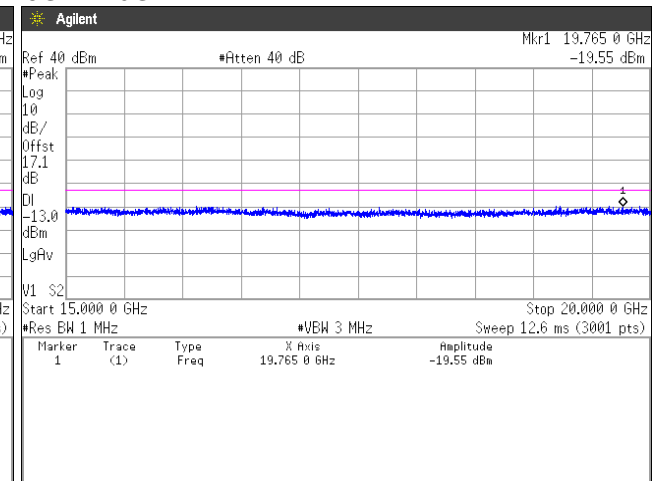**Channel: 1513****30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**


[LTE Band IV]  
(Band Edge)  
QPSK, BW 1.4MHz, RB1-0  
Channel: Low

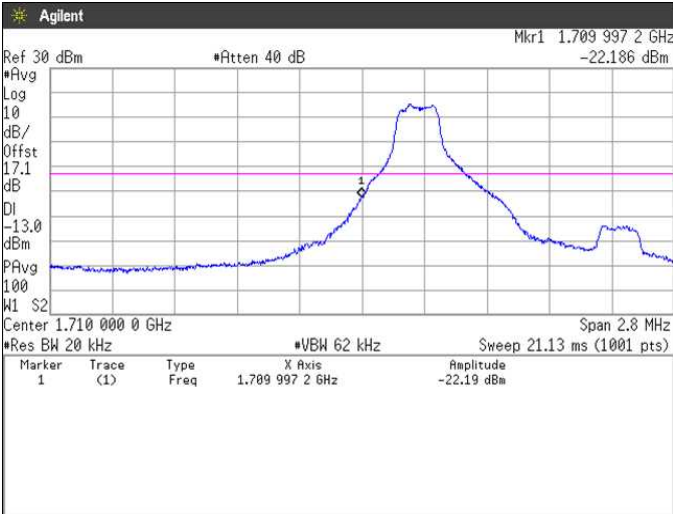


QPSK, BW 1.4MHz, RB1-5  
Channel: High

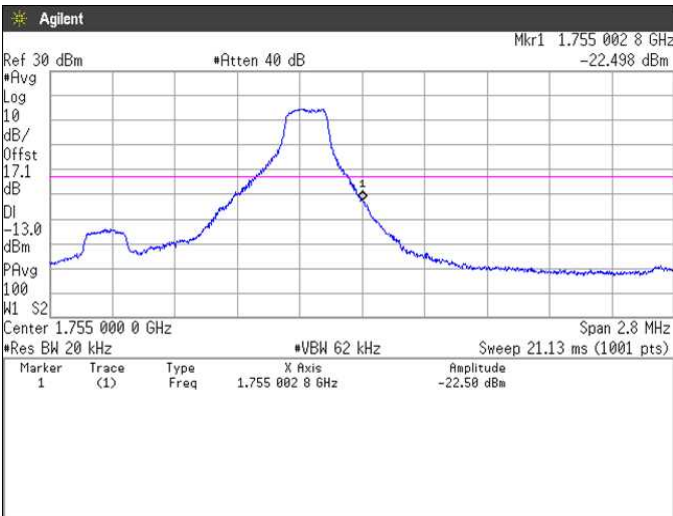

**QPSK, BW 1.4MHz, RB6-0**  
**Channel: Low**

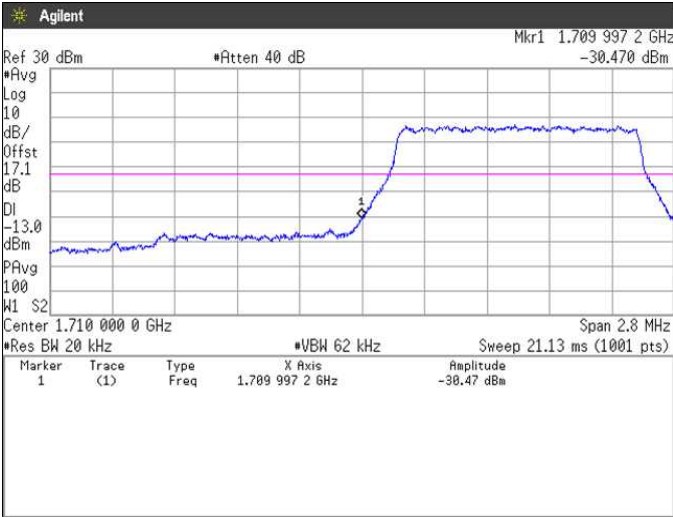

**QPSK, BW 1.4MHz, RB6-0**  
**Channel: High**

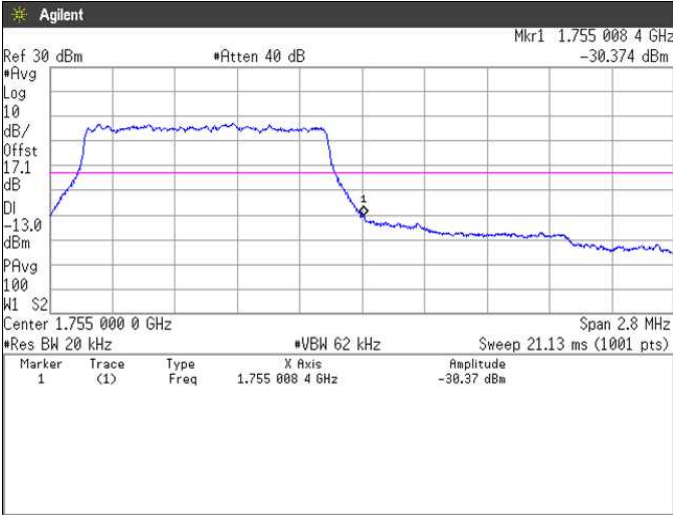


**(Spurious Emissions)**

**Note: Conducted spurious test was measured in the worst case of Effective Radiated Power.**


**QPSK, BW 1.4MHz**

**Channel: 19957**


**30MHz-5GHz**

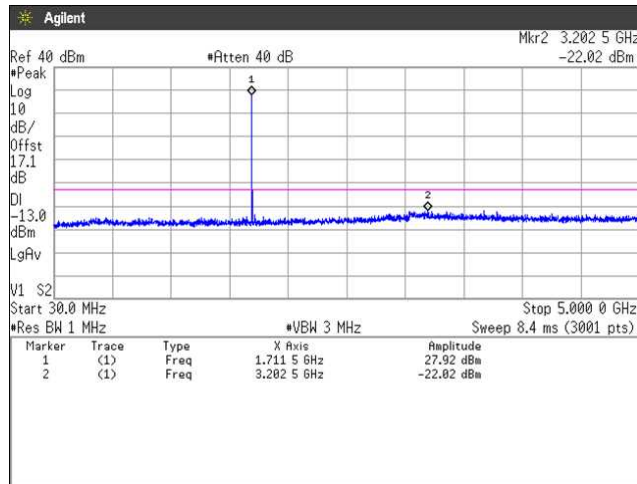


**5GHz-10GHz**

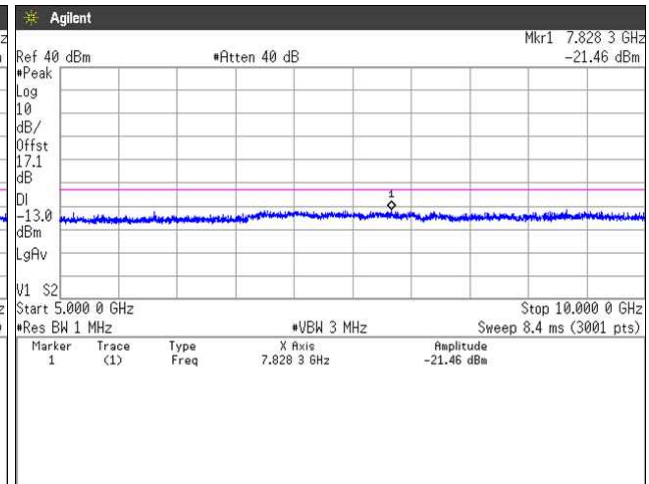

**10GHz-15GHz**

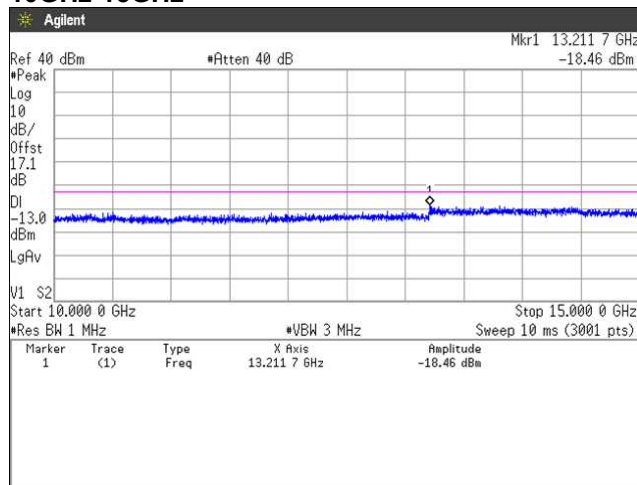


**15GHz-20GHz**

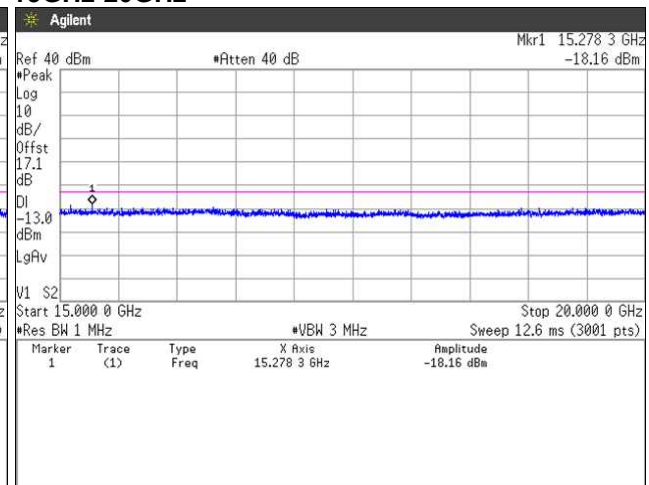





**Channel: 20175**  
**30MHz-5GHz**

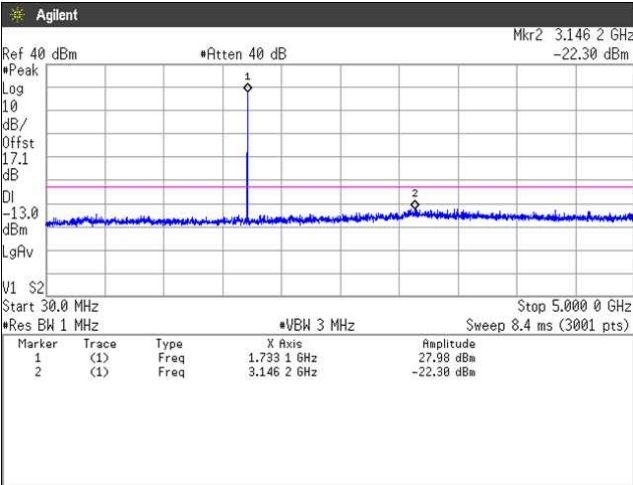


**5GHz-10GHz**

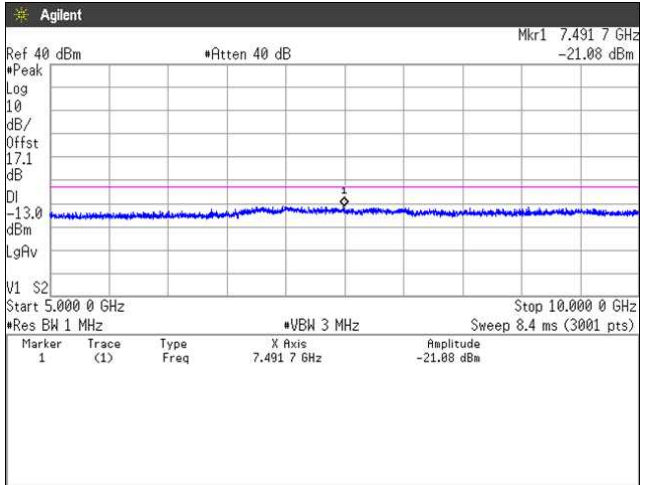

**10GHz-15GHz**

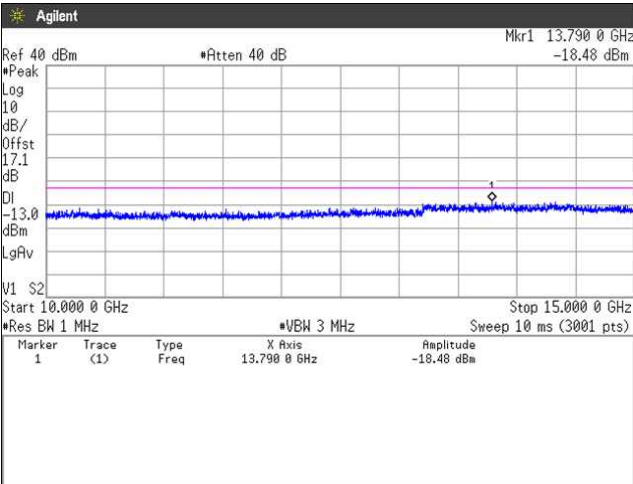


**15GHz-20GHz**

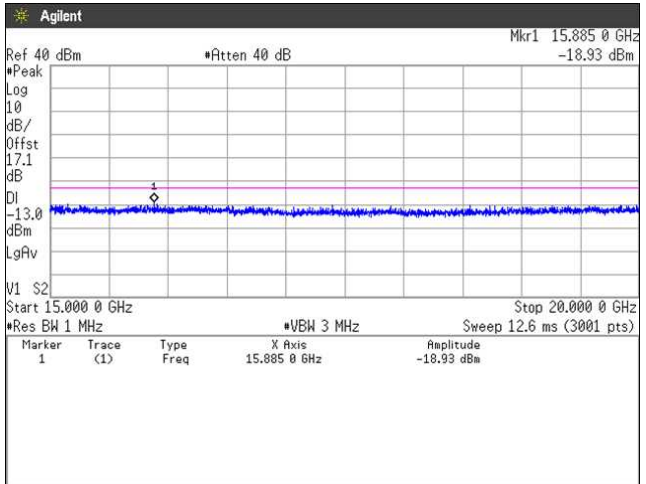


Channel: 20393


30MHz-5GHz

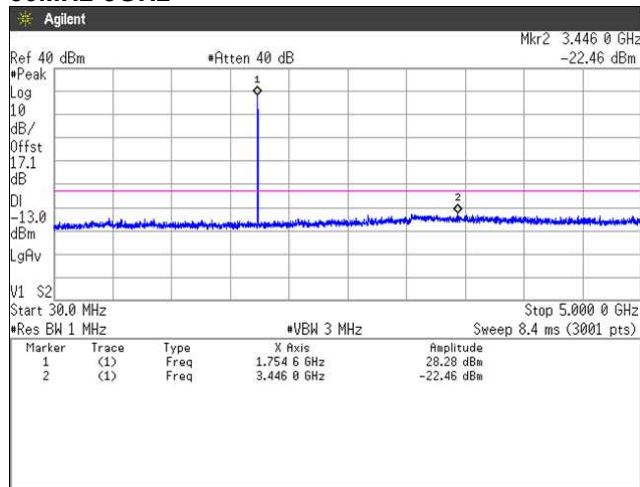


5GHz-10GHz

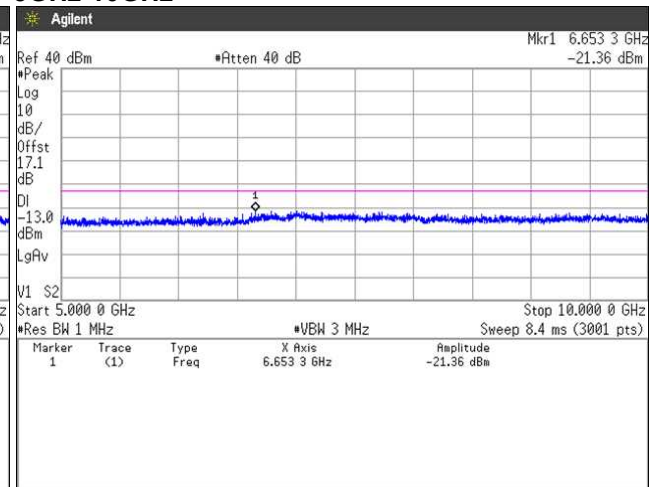

10GHz-15GHz

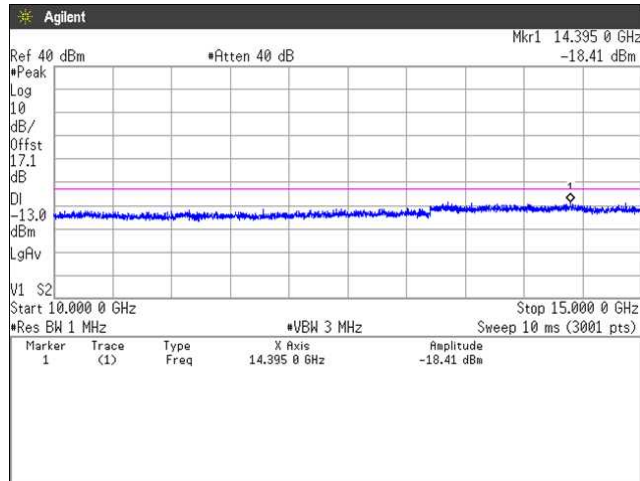

15GHz-20GHz

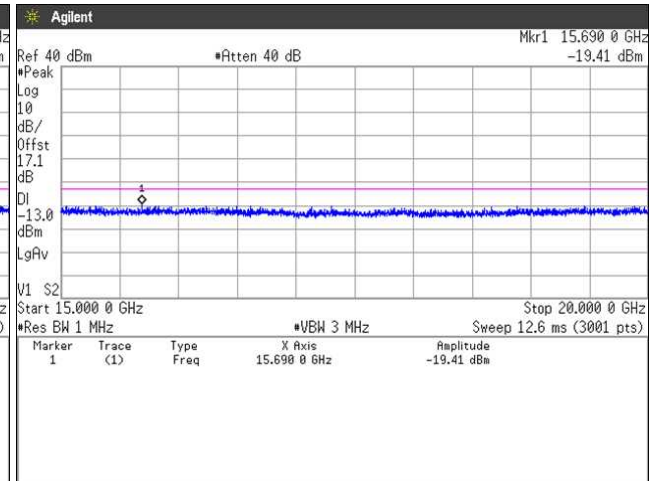

## 4.5 Radiated Emissions and Harmonic Emissions

### 4.5.1 Measurement procedure

#### [FCC 27.53, 2.1053]

##### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height (Below 1GHz) or 0.6 meter x 0.6 meter surface, 1.5 meter height (Above 1GHz) styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

##### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1GHz and 1MHz for above 1GHz / VBW  $\geq 3 \times$  RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

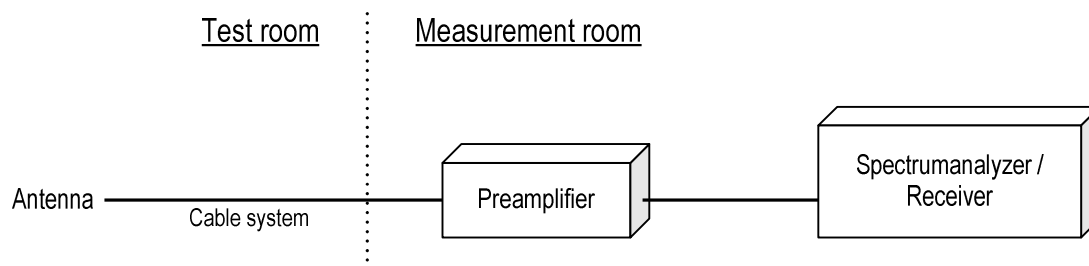

#### 4.5.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1413 MHz : -13.0 dBm

Ant. Input = -55.6 dBm Cable loss = 1.0dB Ant. Gain = 5.9 dBi

Result = -55.6 - 1.0 + 5.9 = -50.7 dBm

Margin = -13.0 - (-50.7) = 37.7 dB

#### 4.5.3 Limit

-13 dBm or less

#### 4.5.4 Test data

Date : 10~11-May-2021

Temperature : 22.2 [°C]

Humidity : 33.1 [%]

Test place : 3m Semi-anechoic chamber

Test engineer :

Chiaki Kanno

Date : 11-May-2021

Temperature : 21.9 [°C]

Humidity : 35.6 [%]

Test place : 3m Semi-anechoic chamber

Test engineer :

Chiaki Kanno

Date : 12~13-May-2021

Temperature : 21.5 [°C]

Humidity : 33.8 [%]

Test place : 3m Semi-anechoic chamber

Test engineer :

Chiaki Kanno

**[WCDMA Band IV]****Channel: 1312**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3424.8	-55.5	-56.2	1.6	8.0	-49.8	-13.0	36.8

**Channel: 1413**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.2	-55.2	-56.1	1.6	8.1	-49.6	-13.0	36.6

**Channel: 1513**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.2	-55.3	-56.3	1.6	8.1	-49.8	-13.0	36.8

**[LTE Band IV]****QPSK, BW 1.4MHz****Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-54.8	-55.4	1.6	8.0	-49.0	-13.0	36.0

**Channel: 20175**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.6	-55.2	1.6	8.1	-48.7	-13.0	35.7

**Channel: 20393**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-54.8	-55.5	1.6	8.1	-49.0	-13.0	36.0


## 4.6 Frequency Stability

### 4.6.1 Measurement procedure

[FCC 27.54, 2.1055]

The EUT was placed on the inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

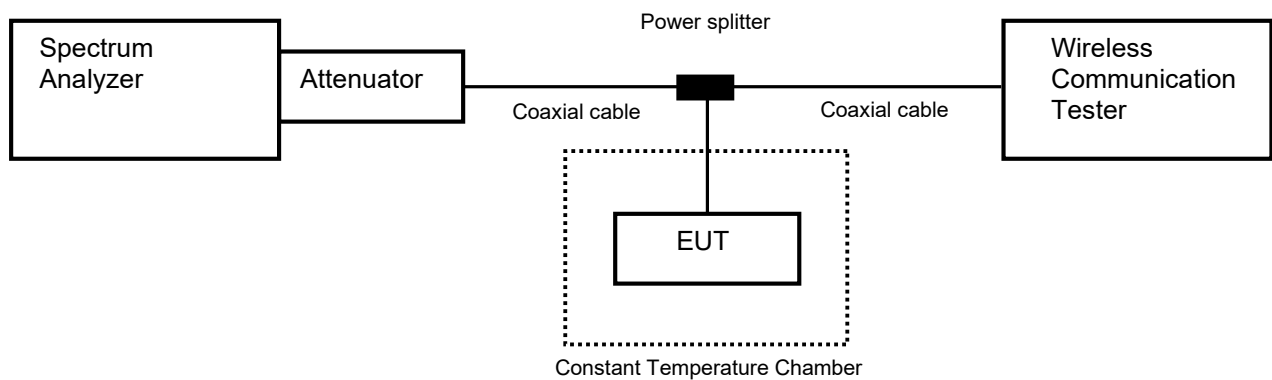

### 4.6.2 Limit

±2.5 ppm

### 4.6.3 Measurement result

Date : 7-May-2021  
Temperature : 22.2 [°C]  
Humidity : 55.9 [%]  
Test place : Shielded room No.4

Test engineer : Chiaki Kanno

**[WCDMA Band IV]**  
**Channel: 1413**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.85	25(Ref.)	1,732,599,977	0.00000	$\pm 2.5$	Pass
	50	1,732,599,979	0.00101	$\pm 2.5$	Pass
	40	1,732,599,982	0.00264	$\pm 2.5$	Pass
	30	1,732,599,984	0.00399	$\pm 2.5$	Pass
	20	1,732,599,985	0.00435	$\pm 2.5$	Pass
	10	1,732,599,983	0.00351	$\pm 2.5$	Pass
	0	1,732,599,987	0.00549	$\pm 2.5$	Pass
	-10	1,732,599,985	0.00450	$\pm 2.5$	Pass
	-20	1,732,599,985	0.00461	$\pm 2.5$	Pass
	-30	1,732,599,980	0.00184	$\pm 2.5$	Pass
3.47	25	1,732,599,981	0.00222	$\pm 2.5$	Pass
4.24	25	1,732,599,980	0.00132	$\pm 2.5$	Pass

**[LTE Band IV]**  
**QPSK, BW 20MHz**  
**Channel: 20175**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.85	25(Ref.)	1,732,499,986	0.00000	$\pm 2.5$	Pass
	50	1,732,499,985	-0.00087	$\pm 2.5$	Pass
	40	1,732,499,974	-0.00691	$\pm 2.5$	Pass
	30	1,732,499,990	0.00212	$\pm 2.5$	Pass
	20	1,732,499,992	0.00316	$\pm 2.5$	Pass
	10	1,732,499,984	-0.00117	$\pm 2.5$	Pass
	0	1,732,500,016	0.01740	$\pm 2.5$	Pass
	-10	1,732,499,982	-0.00256	$\pm 2.5$	Pass
	-20	1,732,499,979	-0.00394	$\pm 2.5$	Pass
	-30	1,732,500,015	0.01680	$\pm 2.5$	Pass
3.47	25	1,732,499,987	0.00071	$\pm 2.5$	Pass
4.24	25	1,732,499,994	0.00444	$\pm 2.5$	Pass





Calculation;

Frequency Tolerance (ppm) =  $\frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$

## 5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .  
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	$\pm 3.7$ dB
Conducted emission, AMN (150 kHz – 30 MHz)	$\pm 3.3$ dB
Radiated emission (9kHz – 30 MHz)	$\pm 3.2$ dB
Radiated emission (30 MHz – 1000 MHz)	$\pm 5.3$ dB
Radiated emission (1 GHz – 6 GHz)	$\pm 4.8$ dB
Radiated emission (6 GHz – 18 GHz)	$\pm 4.5$ dB
Radiated emission (18 GHz – 40 GHz)	$\pm 6.4$ dB
Radio Frequency	$\pm 1.4 \cdot 10^{-8}$
RF power, conducted	$\pm 0.8$ dB
Adjacent channel power	$\pm 2.4$ dB
Temperature	$\pm 0.6$ °C
Humidity	$\pm 1.2$ %
Voltage (DC)	$\pm 0.4$ %
Voltage (AC, <10kHz)	$\pm 0.2$ %

Judge	Measured value and standard limit value	
PASS	<div> <div>Standard limit value</div> <div> <div>Case1</div>  </div> <div>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</div> </div>	
	<div> <div>Case2</div>  </div> <div>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</div>	
FAIL	<div> <div>Case3</div>  </div> <div>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</div>	
	<div> <div>Case4</div>  </div> <div>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</div>	



## 6 Laboratory Information

Testing was performed and the report was issued at:

**TÜV SÜD Japan Ltd. Yonezawa Testing Center**

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881  
Fax: +81-238-28-2888

**Accreditation and Registration**

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada  
ISED#: 4224A

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

## Appendix A. Test Equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Aug-2021	20-Aug-2020
Attenuator	Weinschel	56-10	J4993	31-Dec-2021	14-Dec-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX 104/1m	199120/4	31-Dec-2021	14-Dec-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX104/1.5m	322087/4	31-Jul-2021	21-Jul-2020
Power divider	Keysight	11636B	MY51359874	30-Sep-2021	29-Sep-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	30-Sep-2021	02-Sep-2020
Temperature and humidity chamber	ESPEC	PL1KP	14007261	30-Sep-2021	02-Sep-2020

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2021	28-Sep-2020
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Aug-2021	20-Aug-2020
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Dec-2021	11-Dec-2020
Preamplifier	SONOMA	310	372170	30-Sep-2021	29-Sep-2020
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2021	15-Dec-2020
Log periodic antenna	Schwarzbeck	VUSLP9111B	345	31-Oct-2021	19-Oct-2020
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2021	29-Sep-2020
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2021	20-Jul-2020
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2021	15-Dec-2020
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2021	14-Dec-2020
Double ridged guide antenna	ETS LINDGREN	3117	00224193	31-Mar-2022	30-Mar-2021
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2021	15-Dec-2020
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	30-Sep-2021	02-Sep-2020
Preamplifier	TSJ	MLA-1840-B03-35	1240332	30-Sep-2021	02-Sep-2020
Notch Filter	Micro-Tronics	BRC50719	014	31-Dec-2021	14-Dec-2020
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Dec-2021	23-Dec-2020
RF power amplifier	R&K	CGA020M602-2633R	B40240	31-May-2021	15-May-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX102/2m	31648	31-Mar-2022	10-Mar-2021
Dipole antenna	Schwarzbeck	VHAP	1020	31-Aug-2021	13-Aug-2020
Dipole antenna	Schwarzbeck	UHAP	994	31-Aug-2021	06-Aug-2020
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2021	07-Dec-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Oct-2021	21-Oct-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	30-Sep-2021	02-Sep-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1m	my24610/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104	MY32976/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1.5m	SN MY28404/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/7m	41625/6	31-Dec-2021	15-Dec-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2021	29-May-2020
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2021	28-May-2020

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.