


User Manual

1. System connection diagram

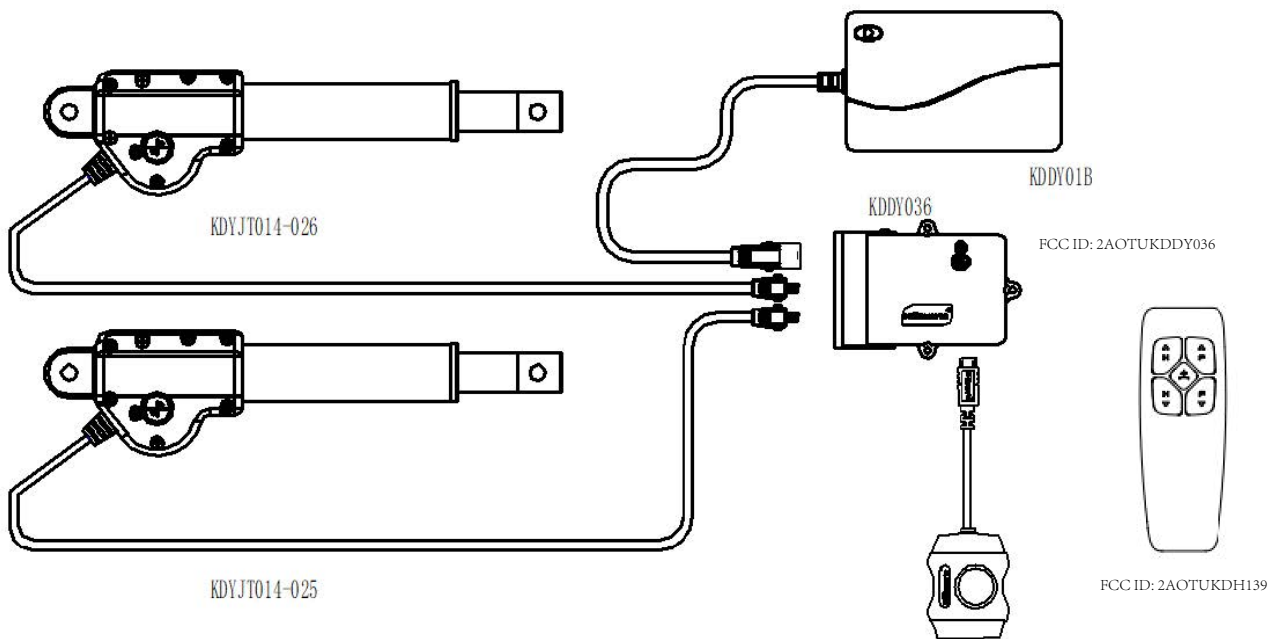

2. Product list

NO.	Mane	model	Quantity
1	Handset	KDH139	1
2	power	KDDY01B	1
3	Control box	KDDY036	1
4	Actuator1	KDYJT014-025	1
5	Actuator2	KDYJT014-026	1

3. Performance parameter

1. Power performance parameters:

INPUT	AC100~240V 50/ 60Hz
OUTPUT	29V DC / 2A
Max output	29VDC/4A

2. Control box performance parameters

INPUT	29V DC
Actuator output	29VDC/4A
Overcurrent protection	5A(single)

3. Actuator performance parameters:

N/M	Actuator1	Actuator2
v/c	29VDC/ 4A	
No-load speed	4-6mm	4-6mm
Installation size	330mm	300 mm
stroke	100 mm	60 mm
Max Thrust	6000N	6000N

4. Instructions for use

1. Before use, please make sure to wire correctly according to the system connection diagram, and then connect the main power;

2. Before using for the first time, you should pair the wireless hand controller with the control box. The specific operation method is as follows:

- a. Press the pairing button on the control box and hold it for more than 3s, release the button when the pairing indicator flashes quickly;
- b. While the indicator light is flashing, press any key on the wireless controller. At this time, the control box indicator light stops flashing and pairing is successful.
- c. After pairing is successful, operate the corresponding keys on the hand controller to start

the corresponding functions.

5. Matters needing attention

- 1、 Children, the elderly and people with disabilities, please use under supervision;
- 2、 Do not plug or unplug any cables while the power is on, it may cause malfunction of the operation function. If this happens, you can cut off the main power, and then reconnect it after about 30s to recover;
- 3、 When the remote control presses multiple keys at the same time, the system will recognize them as invalid keys and will not respond, except for special combination keys;
- 4、 It is not recommended to operate multiple faders at the same time, except for special functions;
- 5、 Please replace the battery of the controller in time. When not in use for a long time, remove the battery.

FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note : This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.