

## TEST REPORT

**Product** : Wireless Headset  
**Trade mark** : CORSAIR  
**Model/Type reference** : RDA0034  
**Serial Number** : N/A  
**Report Number** : EED32M00213601  
**FCC ID** : 2AAFMRDA0034  
**Date of Issue:** : Aug. 28, 2020  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Corsair Memory Inc**  
**47100 Bayside Pkwy Fremont, CA 94538, U.S.A**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

*Sunlight Sun*

Sunlight Sun

Reviewed by:

*Jok Yang*

Jok Yang

Approved by:

*Sam Chuang*

Sam Chuang

Date:

Aug. 28, 2020

Check No.:3096381001



## 2 Version

Version No.	Date	Description
00	Aug. 28, 2020	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2)	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>13</b>
Appendix A): 20dB Occupied Bandwidth	16
Appendix B): Carrier Frequency Separation	21
Appendix C): Dwell Time	26
Appendix D): Hopping Channel Number	31
Appendix E): Conducted Peak Output Power	34
Appendix F): Band-edge for RF Conducted Emissions	39
Appendix G): RF Conducted Spurious Emissions	45
Appendix H) Pseudorandom Frequency Hopping Sequence	56
Appendix I) Antenna Requirement	57
Appendix J) AC Power Line Conducted Emission	58
Appendix K) Restricted bands around fundamental frequency (Radiated)	61
Appendix L) Radiated Spurious Emissions	78
<b>PHOTOGRAPHS OF TEST SETUP</b>	<b>84</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>87</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

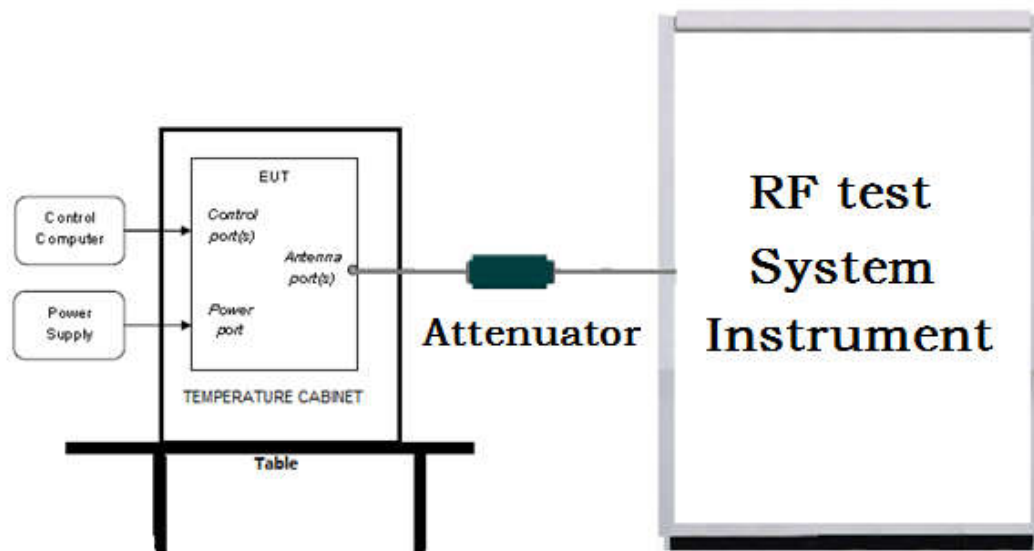

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

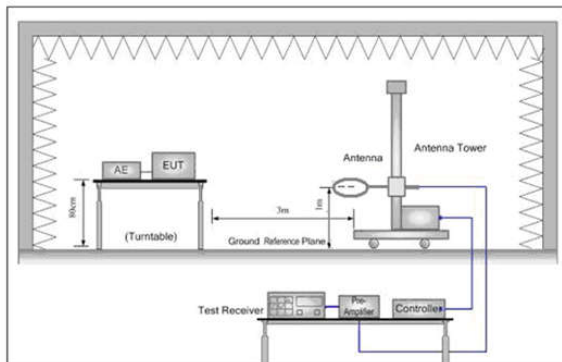


Figure 1. Below 30MHz

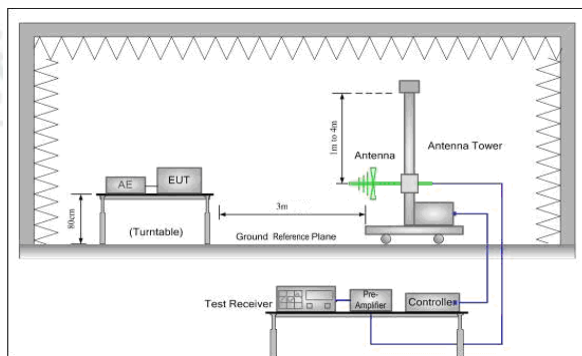


Figure 2. 30MHz to 1GHz


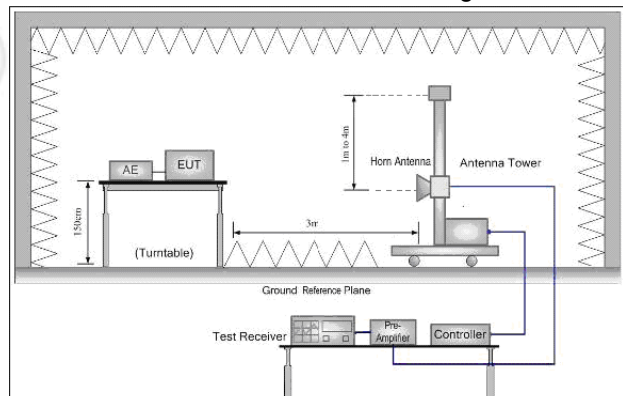


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

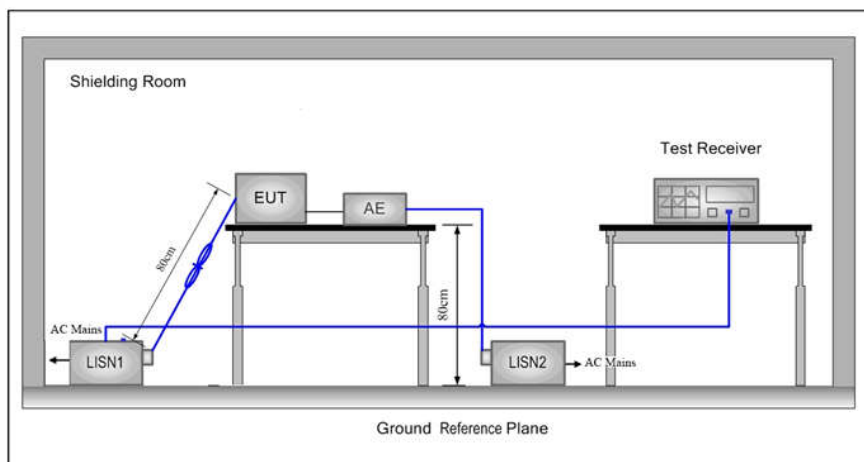

## 5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ $\pi$ /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel78
		2402MHz	2441MHz	2480MHz

## 6 General Information

### 6.1 Client Information

Applicant:	Corsair Memory Inc
Address of Applicant:	47100 Bayside Pkwy Fremont, CA 94538, U.S.A
Manufacturer:	Corsair Memory Inc
Address of Manufacturer:	47100 Bayside Pkwy Fremont, CA 94538, U.S.A
Factory 1:	Minami Acoustics Limited
Address of Factory 1:	Shangou Industrial Park GongJiang Town,Yudu County Ganzhou City Jiangxi 342300 China
Factory 2:	Minami Electronics Malaysia Sdn Bhd
Address of Factory 2:	1208 Lorong Perindustrian Bukit Minyak 22, Kawasan Perindustrian Bukit Minyak,14100 Simpang Ampat, Penang, Malaysia

### 6.2 General Description of EUT

Product Name:	Wireless Headset	
Model No.(EUT):	RDA0034	
Tark mark:	CORSAIR	
Frequency Range of Operation:	BT 5.0 Single mode, 2400MHz to 2483.5MHz	
Power Supply:	Battery	603450 3.7V 1050mAh 3.885Wh
Sample Received Date:	Jul. 17, 2020	
Sample tested Date:	Jul. 17, 2020 to Aug. 24, 2020	

### 6.3 Product Specification subjective to this standard

Operating Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	Default
Test Software of EUT:	Lab Test Tool-2.3.7
Antenna Type:	FPC Antenna
Antenna Gain:	1.48 dBi
Test Voltage:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		



## 6.4 Description of Support Units

The EUT has been tested with associated equipment below

Description	Manufacturer	Model No.	Certification	Supplied by
Notebook	DELL	DELL 3490	CE&FCC	DELL

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	matur	NCD/070/107 11112	---	---	---
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)



## EUT DUTY CYCLE

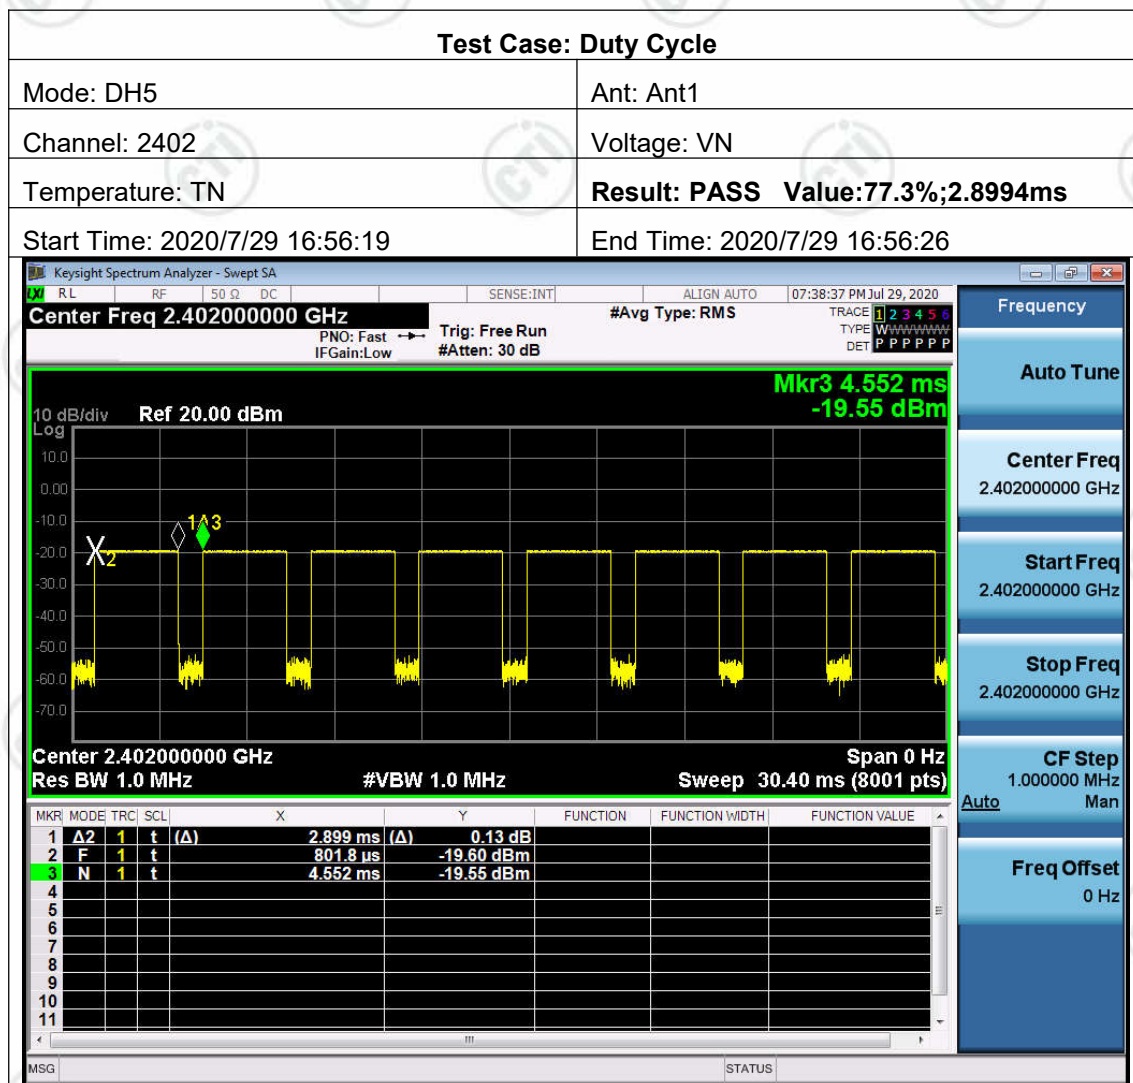

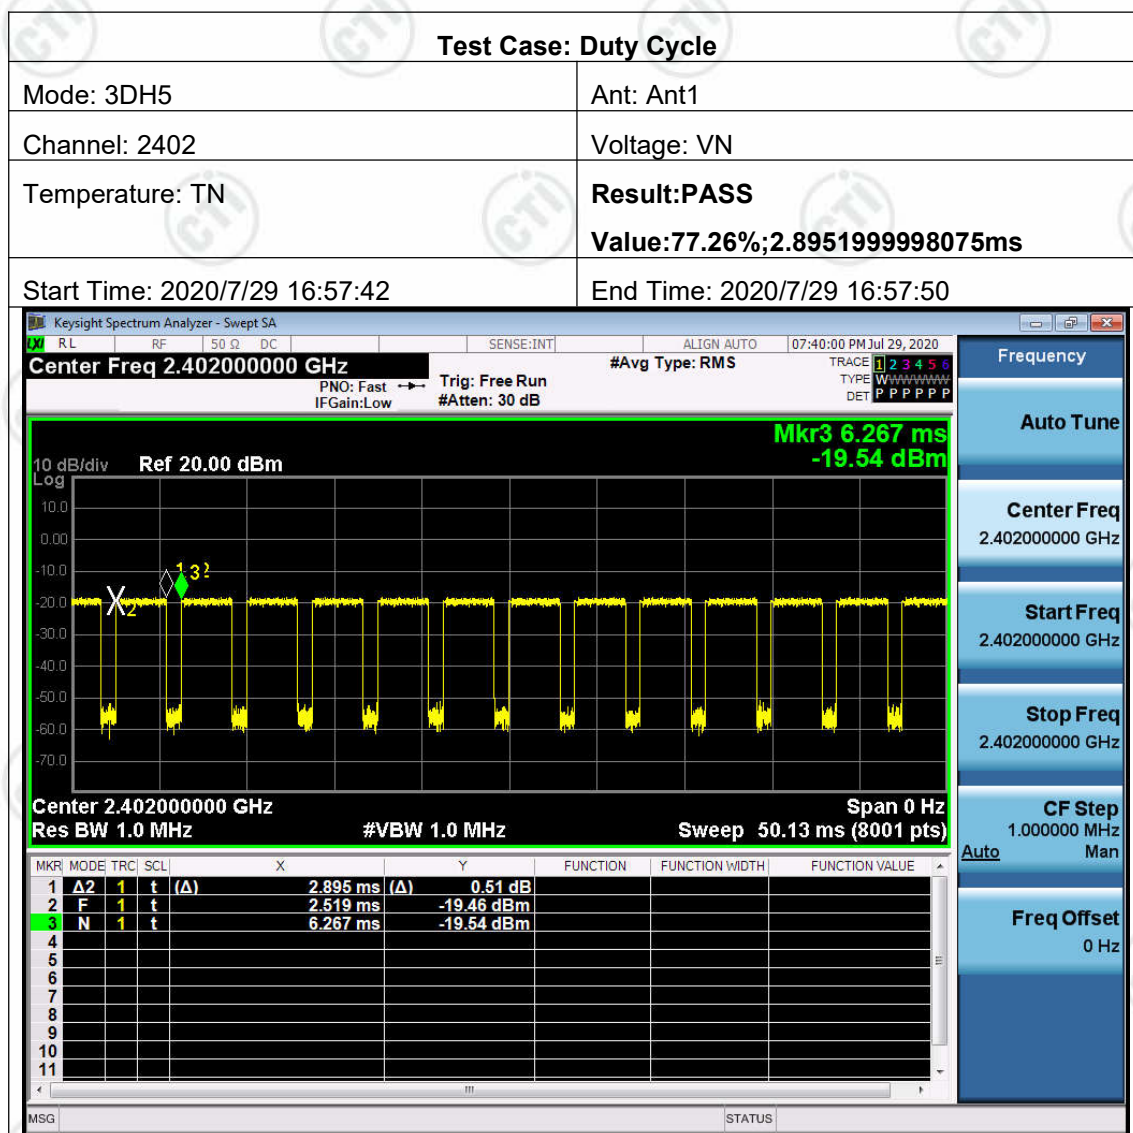

## Appendix A): 20dB Occupied Bandwidth

### Test Limit

According to §15.247(a) (1),

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

### Test Setup

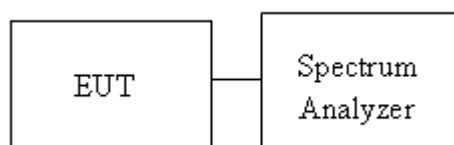




### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9275	0.87449	PASS
GFSK	MCH	0.9241	0.86739	PASS
GFSK	HCH	0.9230	0.86758	PASS
$\pi/4$ DQPSK	LCH	1.256	1.1646	PASS
$\pi/4$ DQPSK	MCH	1.229	1.1641	PASS
$\pi/4$ DQPSK	HCH	1.228	1.1622	PASS
8DPSK	LCH	1.269	1.1688	PASS
8DPSK	MCH	1.258	1.1713	PASS
8DPSK	HCH	1.259	1.1728	PASS

## Test Graph



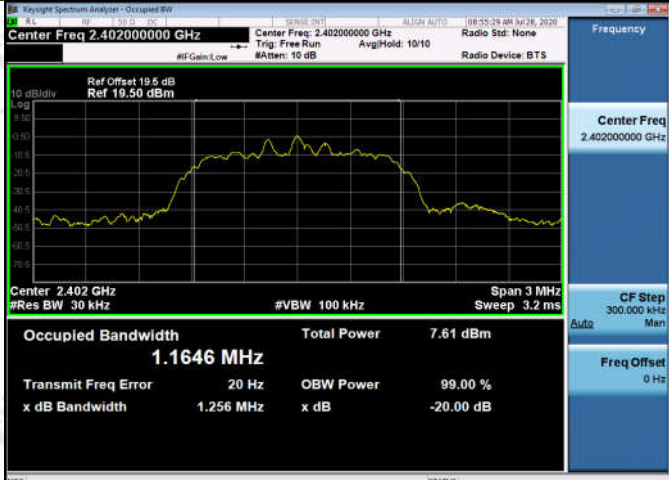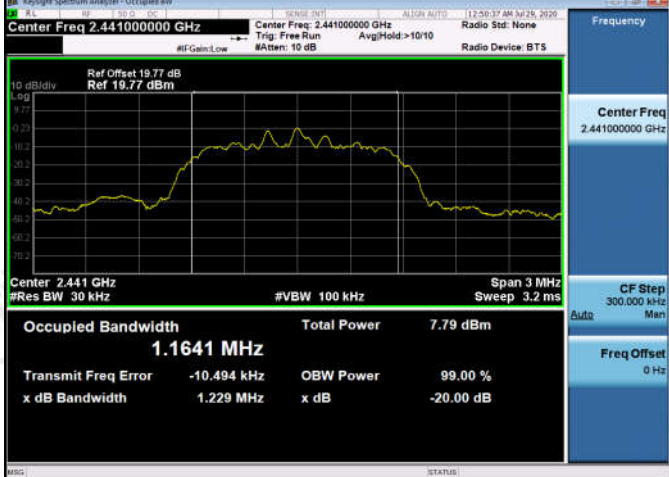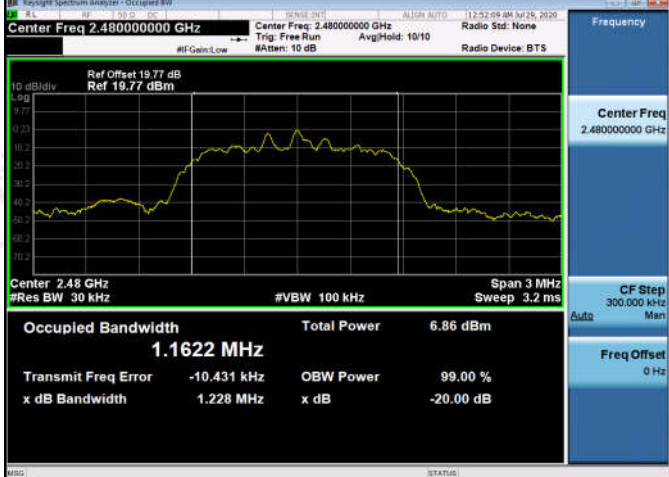

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

8DPSK/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.1688 MHz</p> <p>Total Power 7.91 dBm</p> <p>Transmit Freq Error 3.580 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.269 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.1713 MHz</p> <p>Total Power 7.90 dBm</p> <p>Transmit Freq Error -6.377 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.258 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.1728 MHz</p> <p>Total Power 7.09 dBm</p> <p>Transmit Freq Error -6.240 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.259 MHz</p> <p>x dB -20.00 dB</p>

## Appendix B): Carrier Frequency Separation

### Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### Test Setup

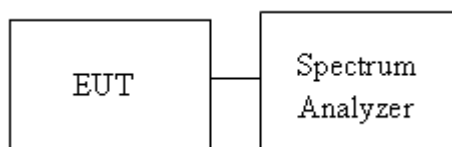

### Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.154	PASS
GFSK	MCH	0.992	PASS
GFSK	HCH	1.004	PASS
$\pi/4$ DQPSK	LCH	1.008	PASS
$\pi/4$ DQPSK	MCH	1.158	PASS
$\pi/4$ DQPSK	HCH	1.018	PASS
8DPSK	LCH	0.904	PASS
8DPSK	MCH	1.004	PASS
8DPSK	HCH	0.996	PASS






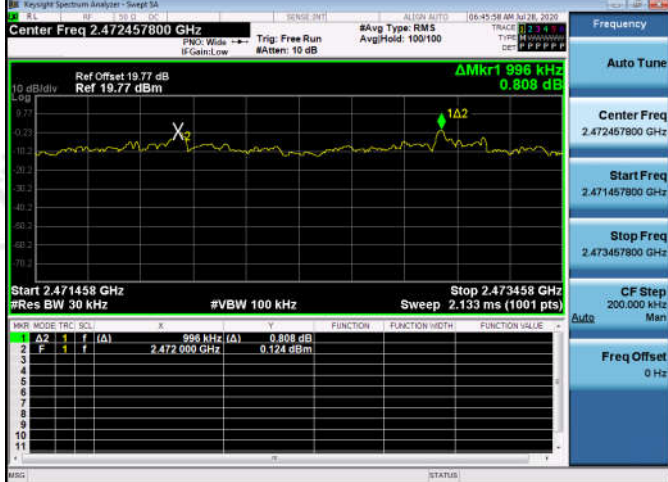
## Test Graph

Graphs





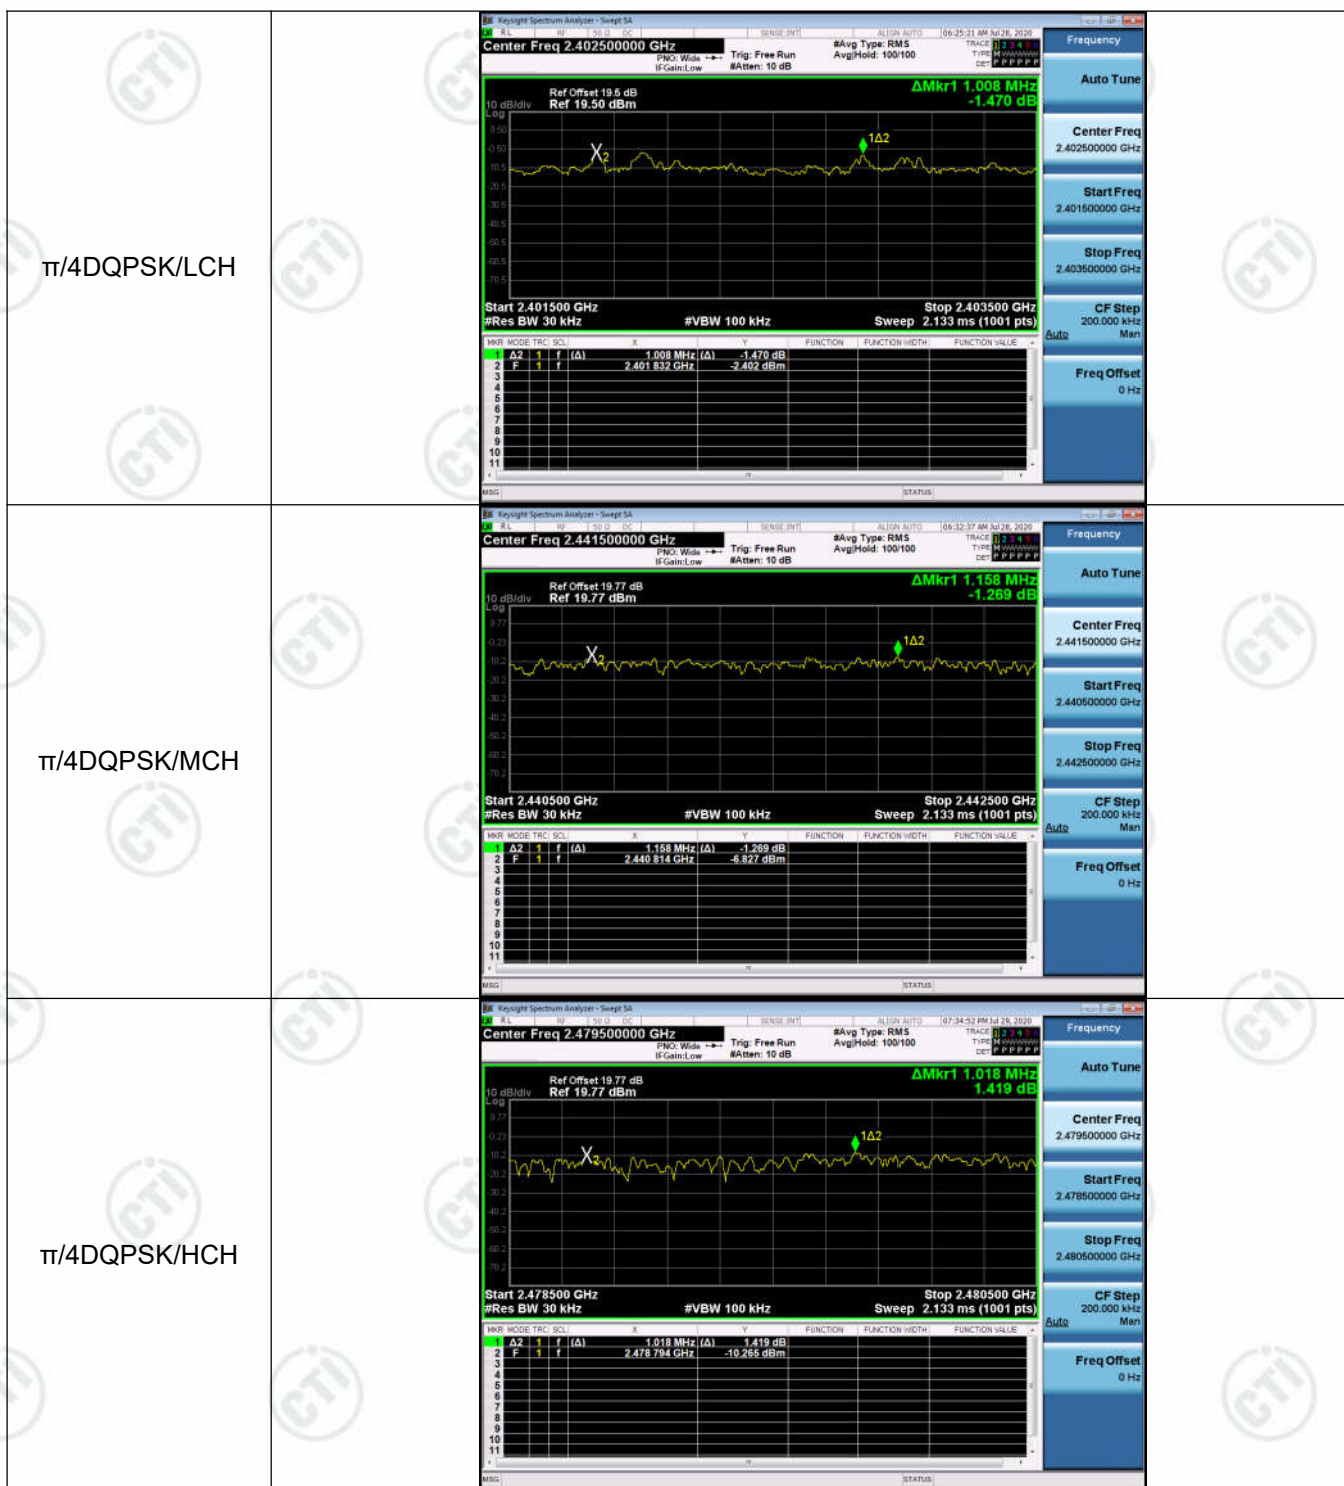

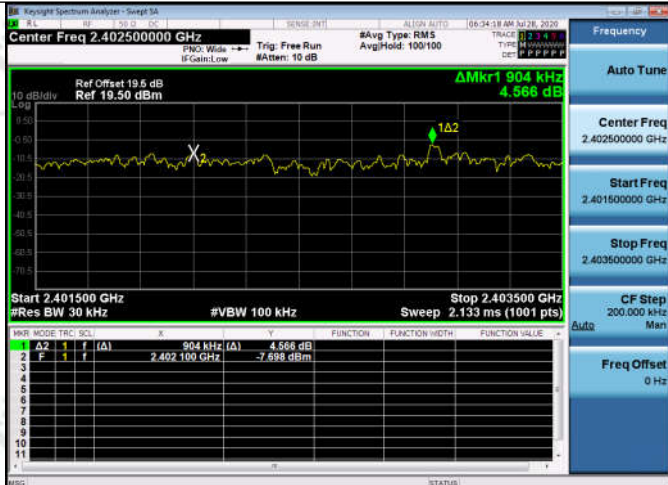8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	

## Appendix C): Dwell Time

### Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep =auto

### Test Setup

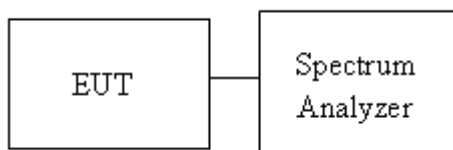


### Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.399	320	0.128	0.32	PASS
GFSK	DH1	MCH	0.399	320	0.128	0.32	PASS
GFSK	DH1	HCH	0.399	320	0.128	0.32	PASS
GFSK	DH3	LCH	1.65553	160	0.265	0.66	PASS
GFSK	DH3	MCH	1.655537	160	0.265	0.66	PASS
GFSK	DH3	HCH	1.65427	160	0.265	0.66	PASS
GFSK	DH5	LCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	MCH	2.8888	106.7	0.308	0.77	PASS
GFSK	DH5	HCH	2.8888	106.7	0.308	0.77	PASS





## Test Graph

Graphs

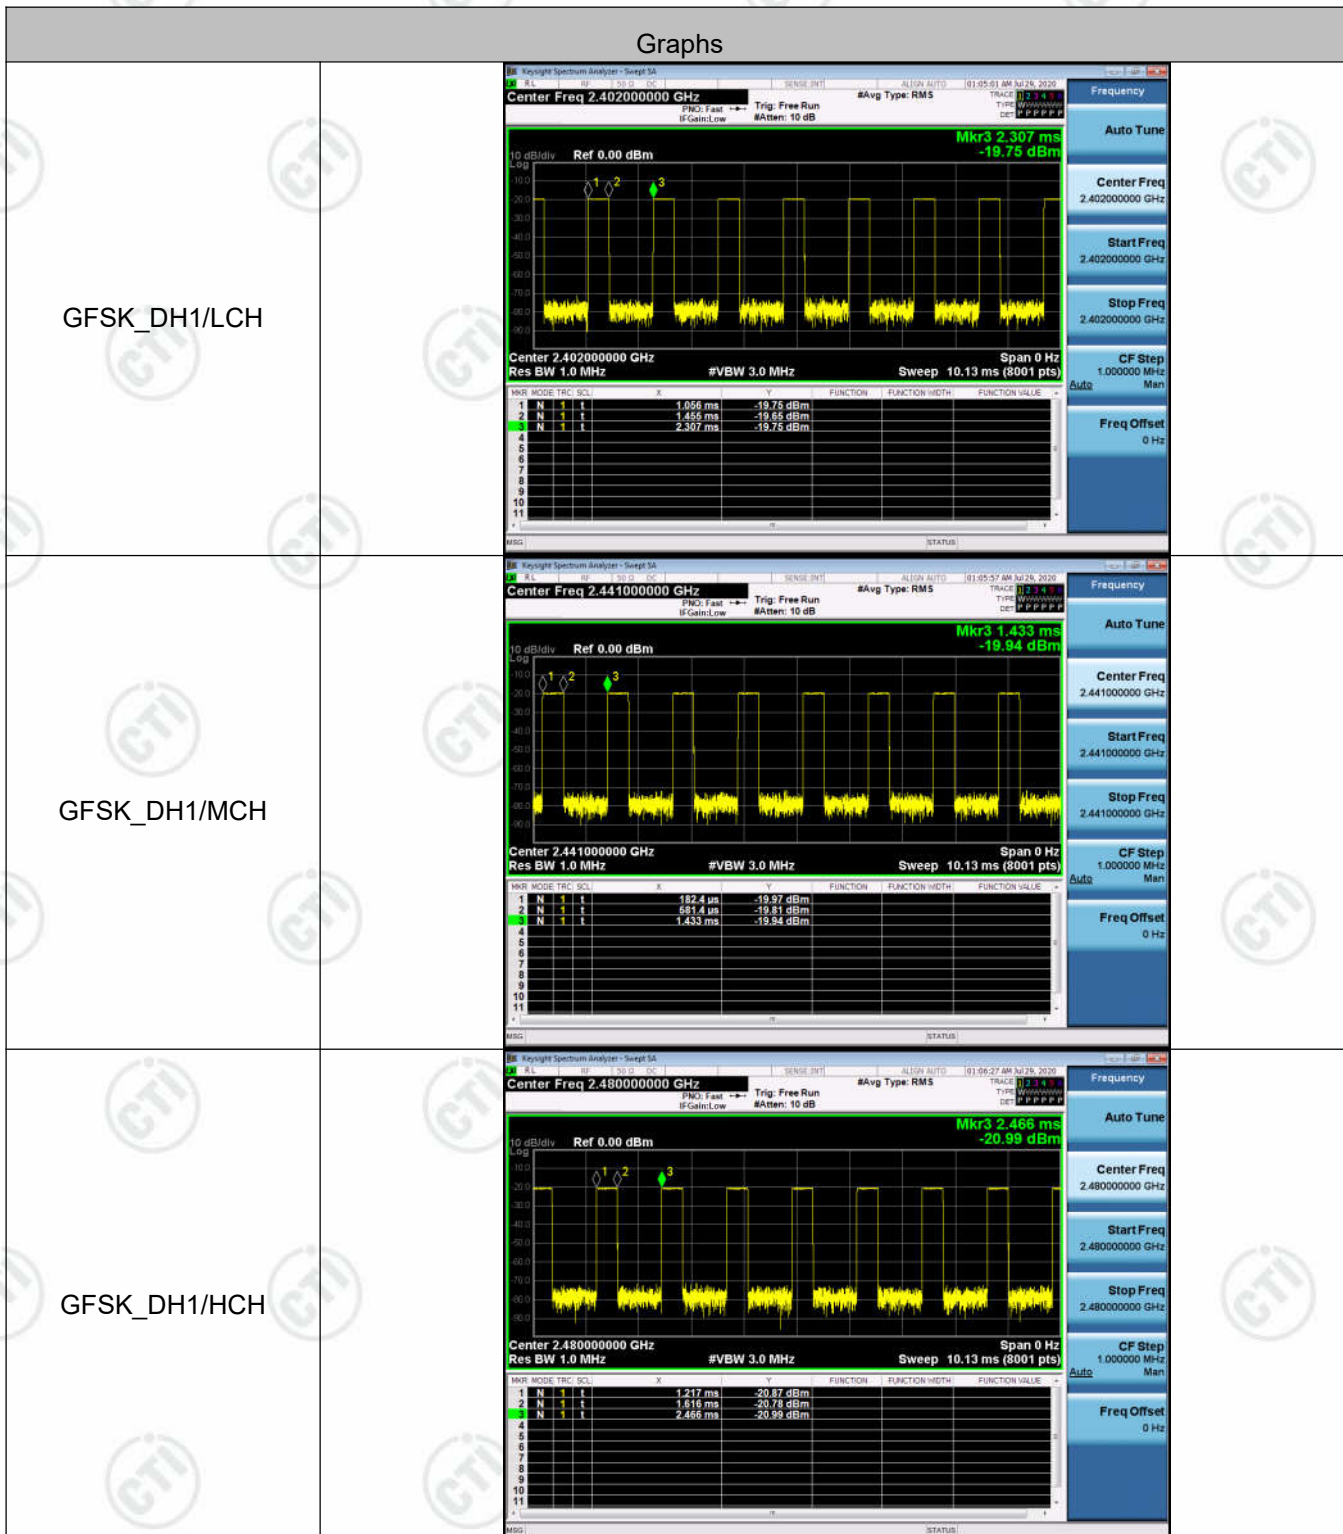



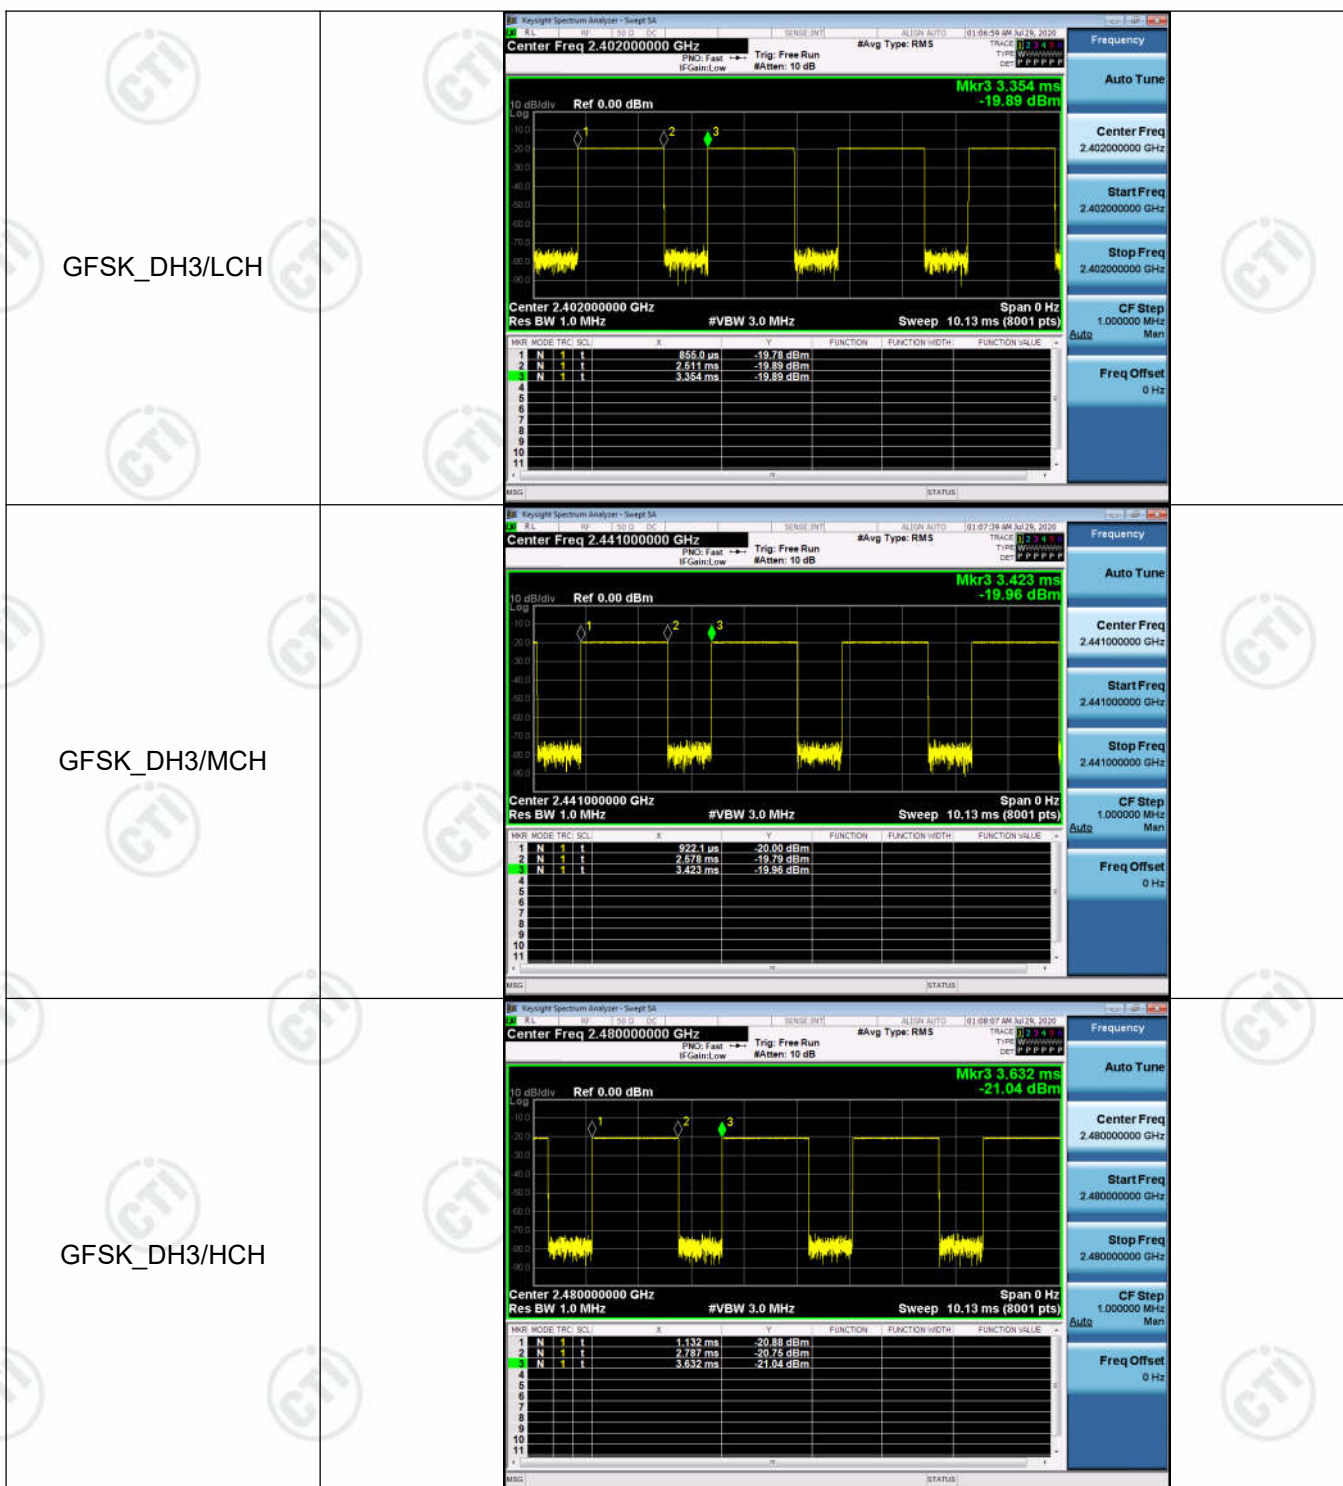

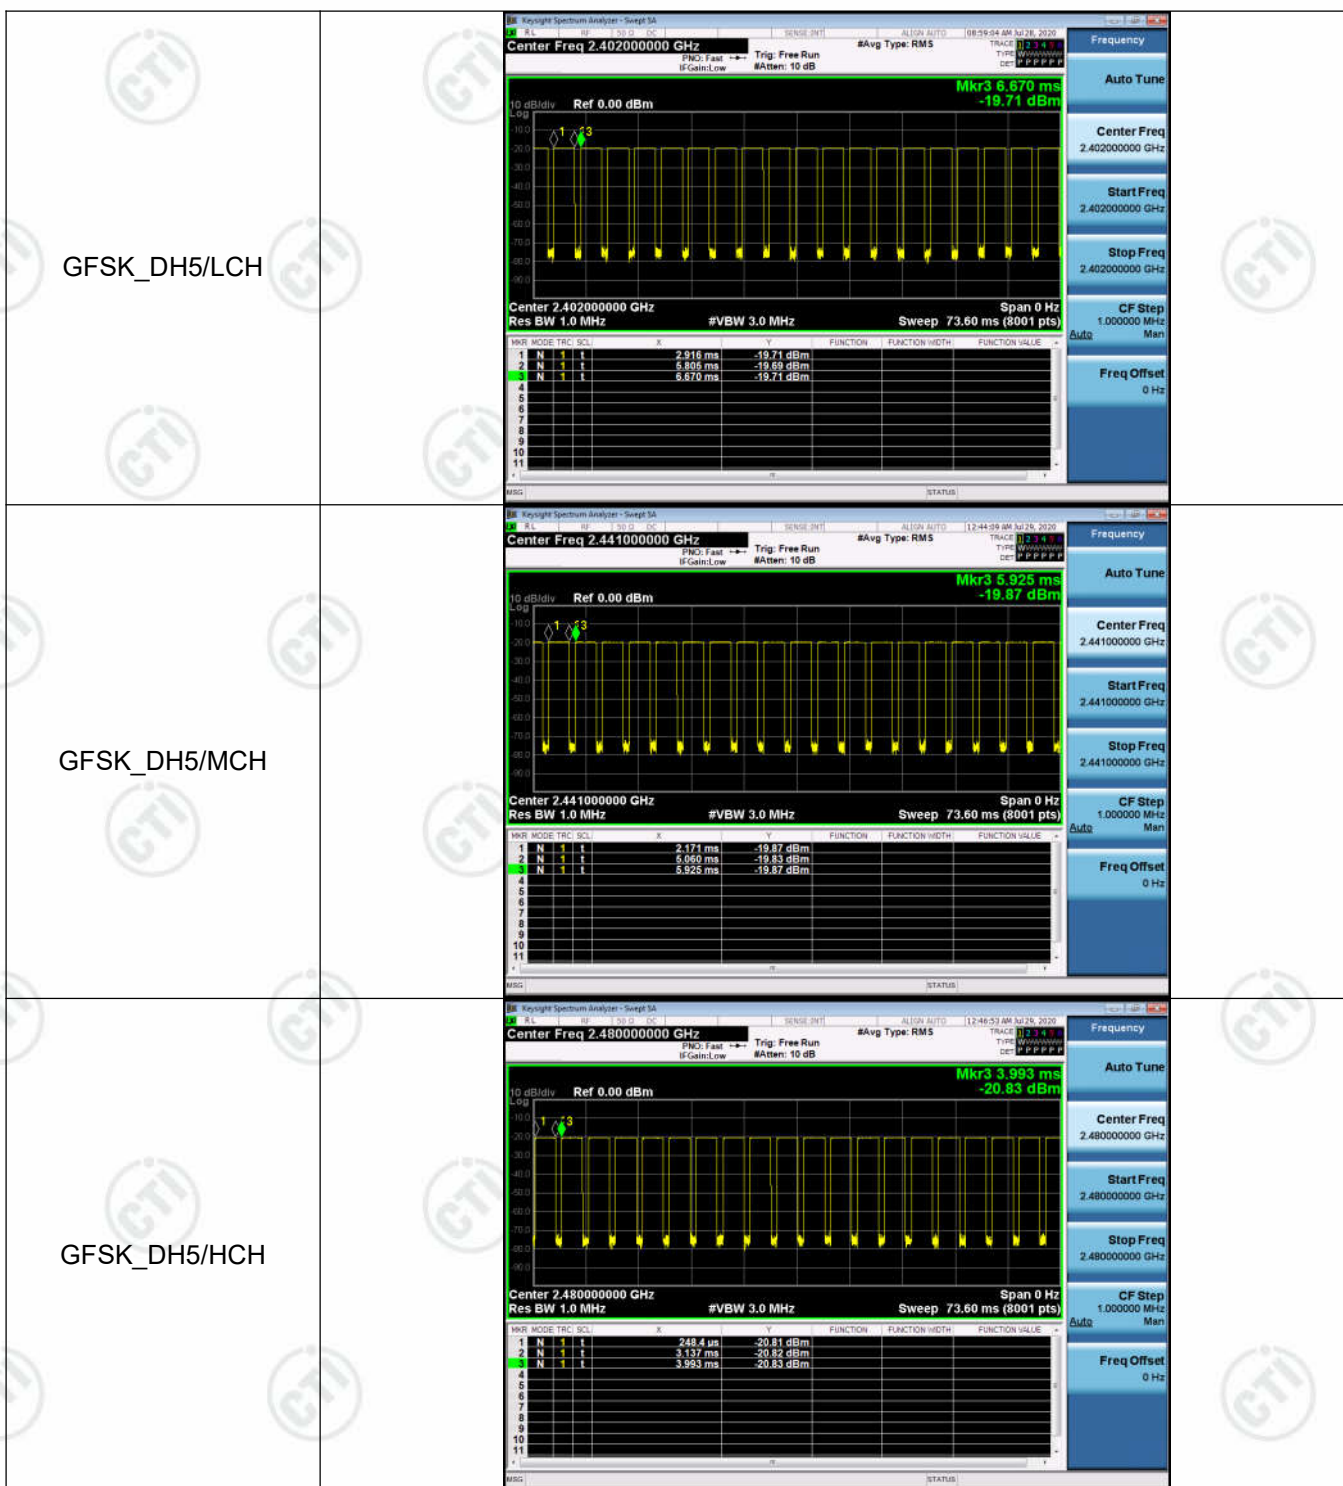

## Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz,  
RBW =100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

### Test Setup

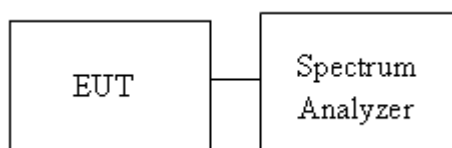


### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS



## Test Graph

### Graphs

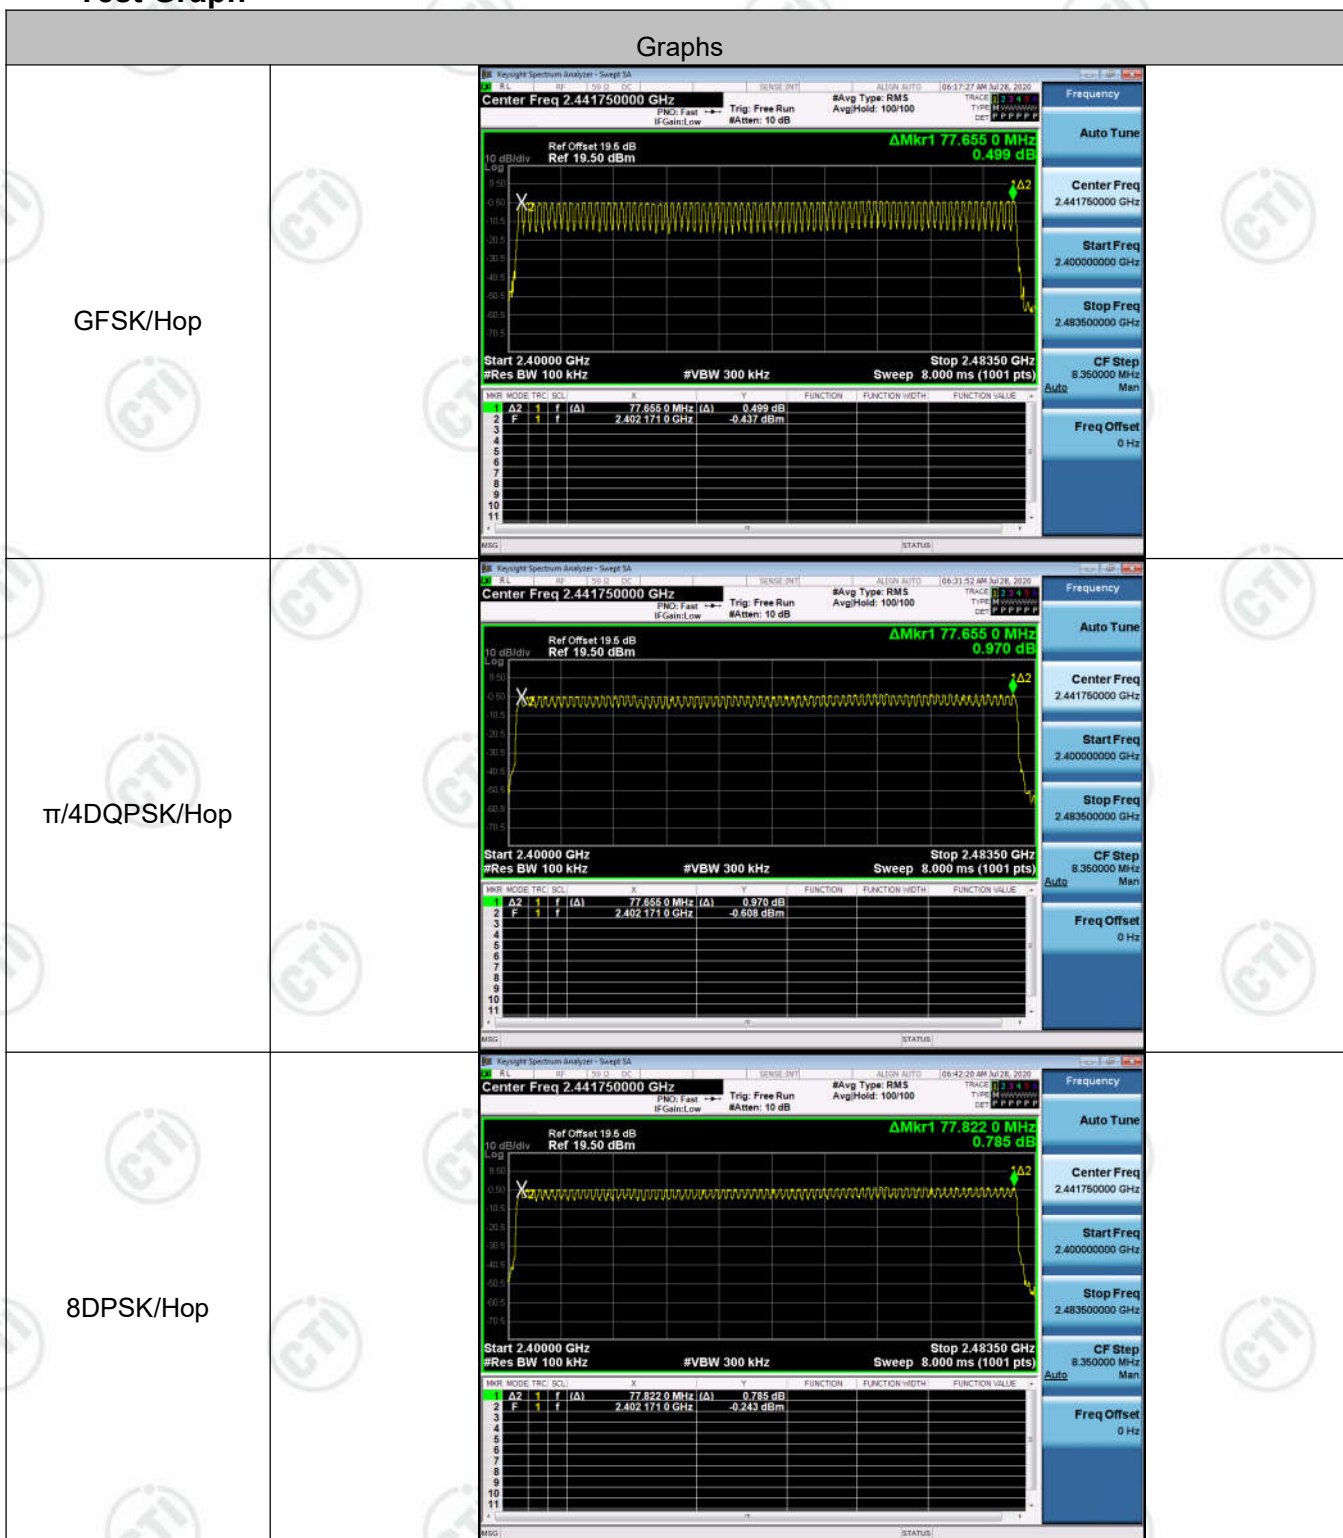



## Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

### Peak output power :

#### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

## Test Procedure

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
  - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - b) RBW > 20 dB bandwidth of the emission being measured.
  - c) VBW ≥ RBW.
  - d) Sweep: Auto.
  - e) Detector function: Peak.
  - f) Trace: Max hold.
  - g) Allow trace to stabilize.
  - h) Use the marker-to-peak function to set the marker to the peak of the emission
4. Measure and record the result in the test report.



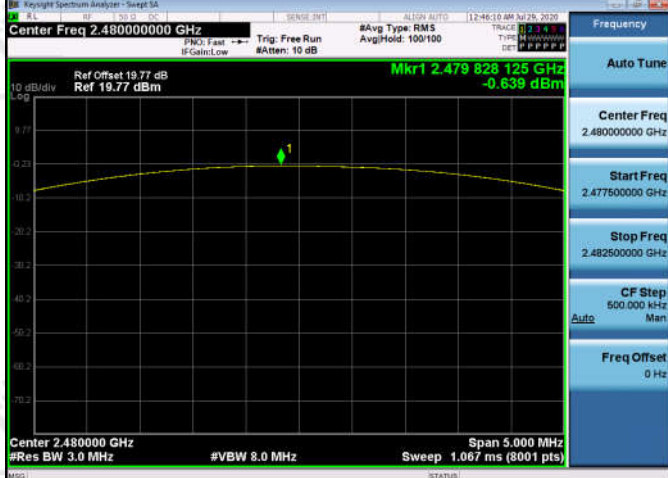
## Test Setup

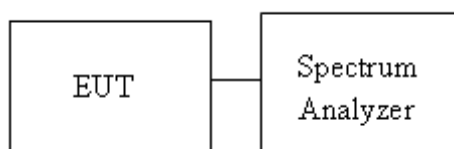







## Result Table

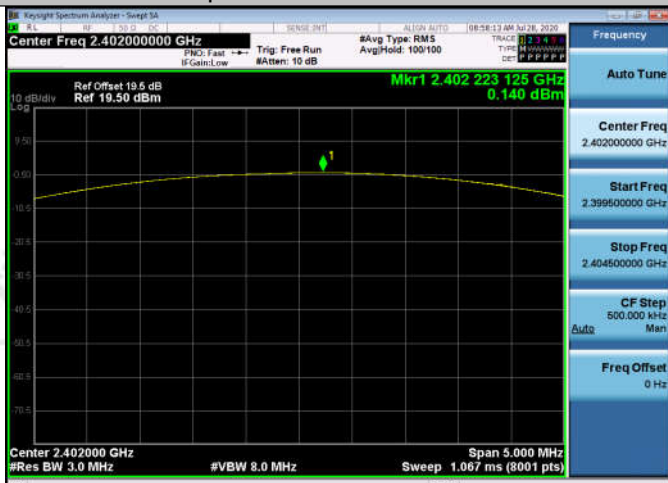Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.140	PASS
GFSK	MCH	0.238	PASS
GFSK	HCH	-0.639	PASS
$\pi/4$ DQPSK	LCH	1.336	PASS
$\pi/4$ DQPSK	MCH	1.446	PASS
$\pi/4$ DQPSK	HCH	0.508	PASS
8DPSK	LCH	1.727	PASS
8DPSK	MCH	1.819	PASS
8DPSK	HCH	0.966	PASS

## Test Graph

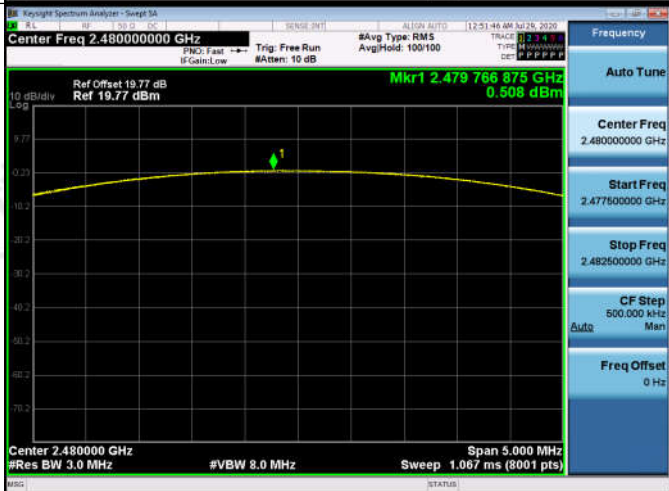Graphs		
GFSK/LCH		
GFSK/MCH		
GFSK/HCH		
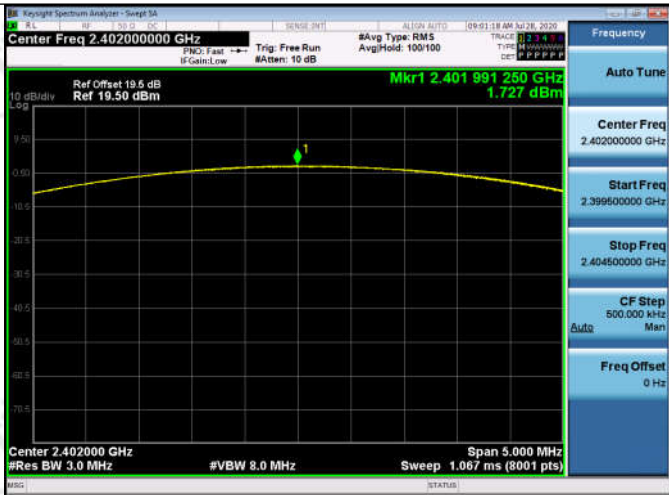
<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Key: Keysight Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Mkr1 2.402197500 GHz 1.336 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 5.000 MHz</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Key: Keysight Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.440820000 GHz 1.446 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 5.000 MHz</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Key: Keysight Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.479766875 GHz 0.508 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Span 5.000 MHz</p>

8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	



## Appendix F): Band-edge for RF Conducted Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


### Test Setup



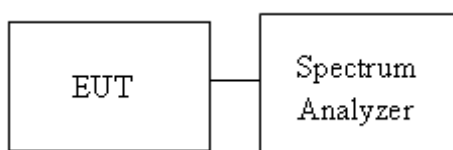


**Result Table**



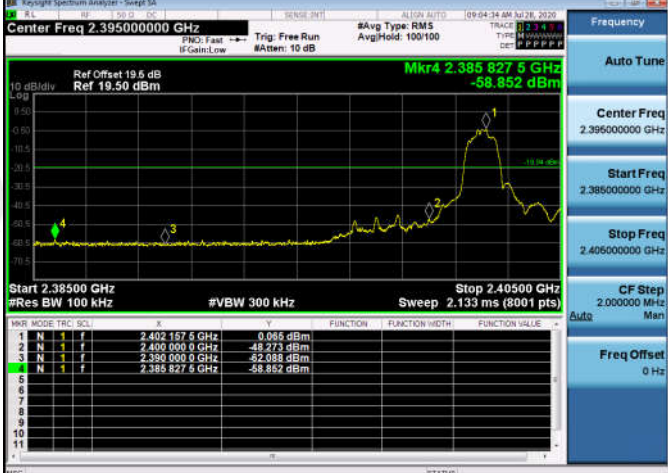
Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	0.086	Off	-59.126	-19.91	PASS
			-0.418	On	-59.401	-20.42	PASS
GFSK	HCH	2480	-0.809	Off	-52.835	-20.81	PASS
			0.631	On	-55.537	-19.37	PASS
$\pi/4$ DQPSK	LCH	2402	-0.073	Off	-59.408	-20.07	PASS
			-0.409	On	-59.279	-20.41	PASS
$\pi/4$ DQPSK	HCH	2480	-0.791	Off	-52.072	-20.79	PASS
			0.731	On	-58.106	-19.27	PASS
8DPSK	LCH	2402	0.065	Off	-58.852	-19.94	PASS
			-0.167	On	-59.628	-20.17	PASS
8DPSK	HCH	2480	-0.870	Off	-52.585	-20.87	PASS
			0.996	On	-53.083	-19	PASS

## Test Graph

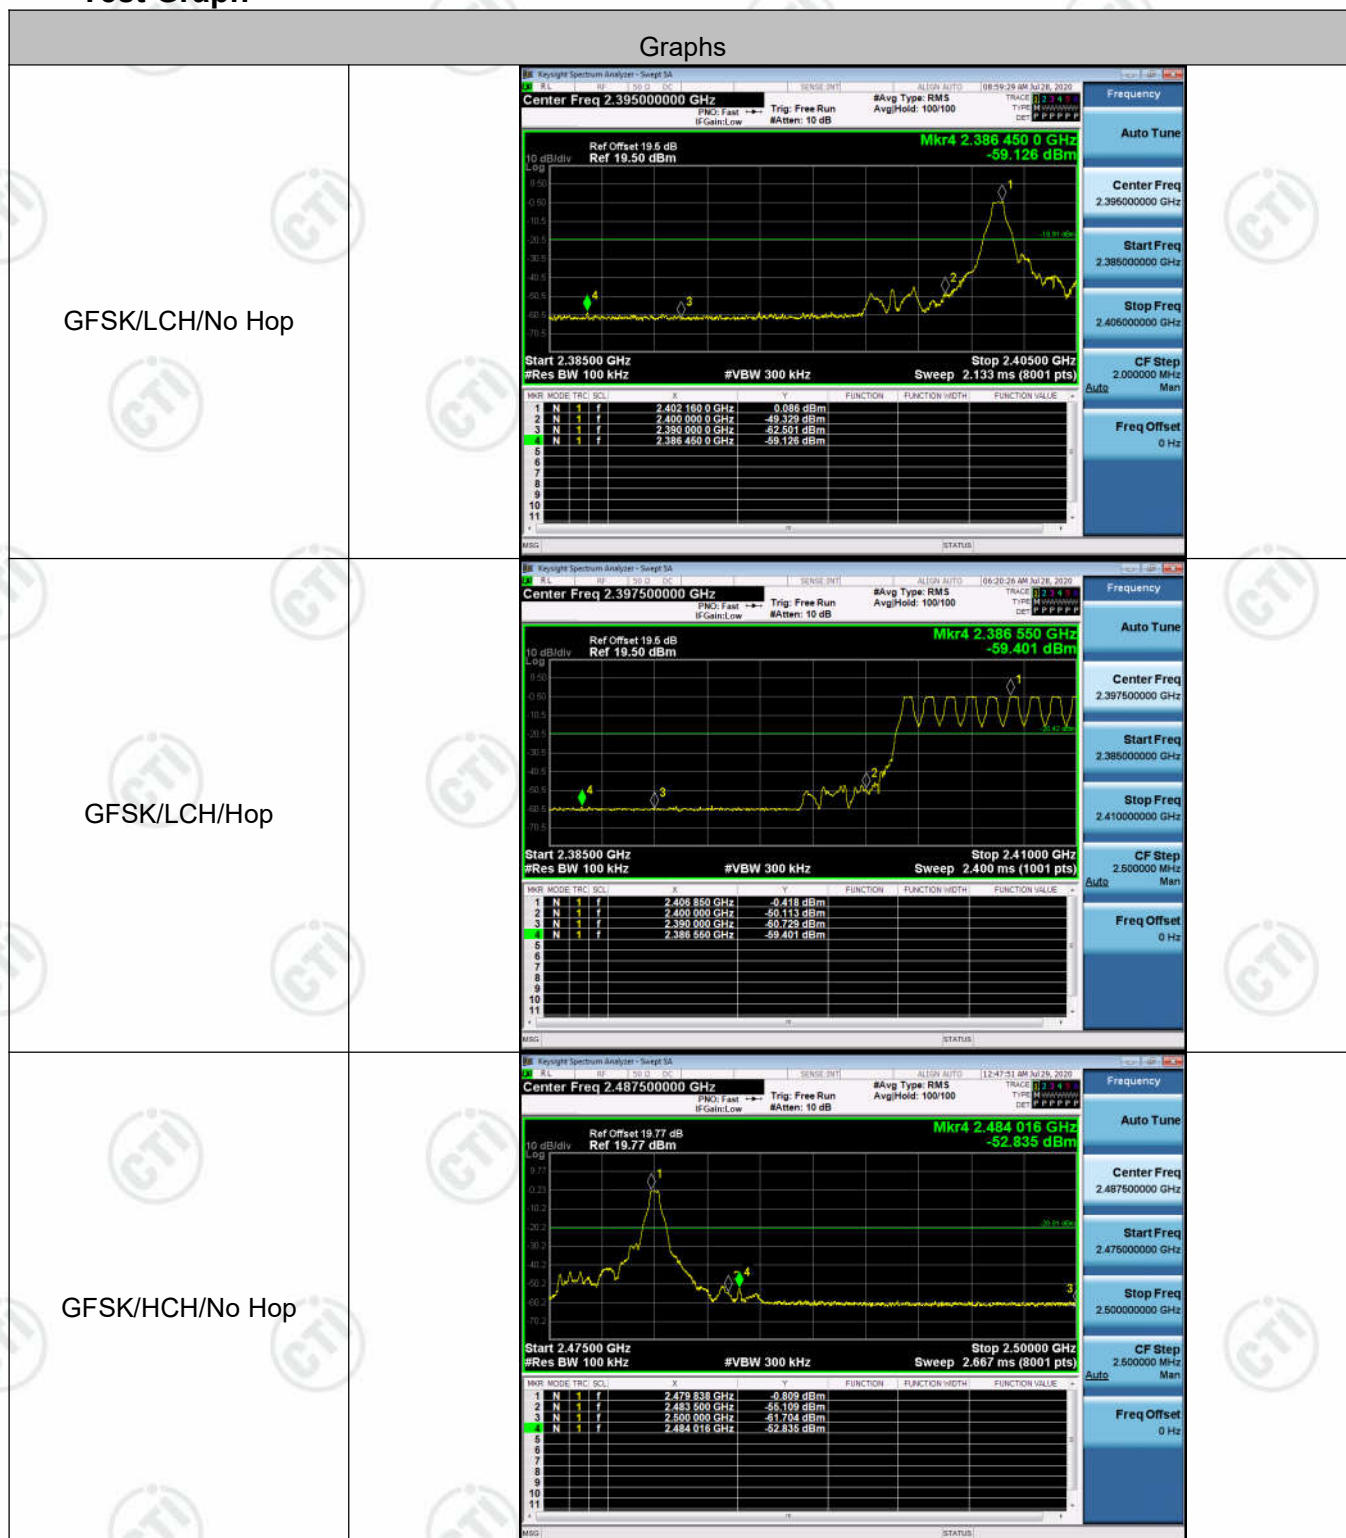

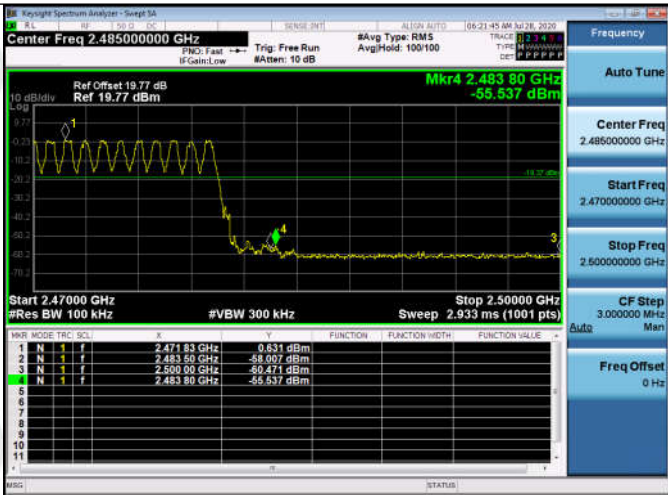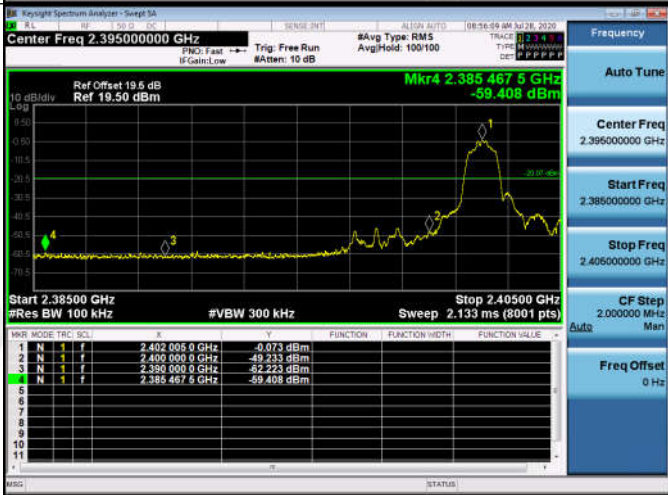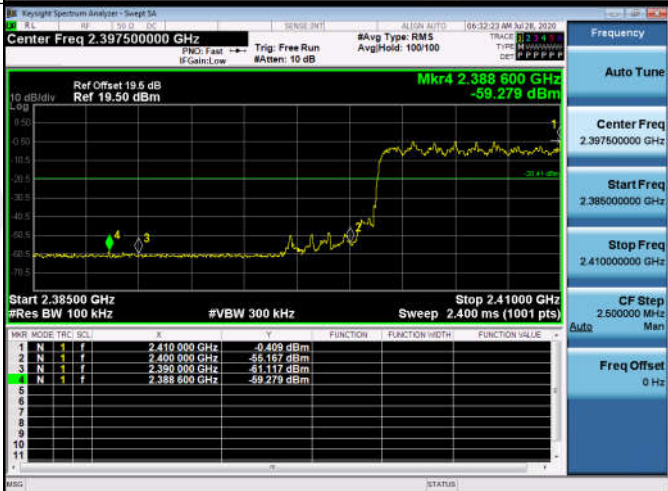GFSK/HCH/Hop	
$\pi/4$ DQPSK/LCH/No Hop	
$\pi/4$ DQPSK/LCH/Hop	

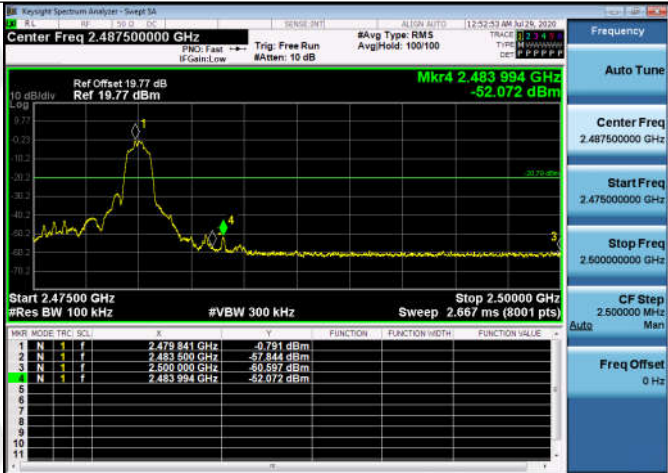

<p><math>\pi/4</math>DQPSK/HCH/No Hop</p>	
<p><math>\pi/4</math>DQPSK/HCH/Hop</p>	
<p>8DPSK/LCH/No Hop</p>	



8DPSK/LCH/Hop	<div><div><div>Keynote Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.397500000 GHz</div><div>Ref Offset 19.6 dB Ref 19.50 dBm</div><div>Mkr4 2.388 350 GHz -59.628 dBm</div><div>Start 2.385000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.400 ms (1001 pts)</div><table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.403 150 GHz</td><td>-61.67 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-49.127 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-60.911 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.388 350 GHz</td><td>-59.628 dBm</td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.397500000 GHz</div><div>Start Freq 2.385000000 GHz</div><div>Stop Freq 2.410000000 GHz</div><div>CF Step 2.500000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.403 150 GHz	-61.67 dBm				2	N	1	f		2.400 000 GHz	-49.127 dBm				3	N	1	f		2.390 000 GHz	-60.911 dBm				4	N	1	f		2.388 350 GHz	-59.628 dBm			
MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.403 150 GHz	-61.67 dBm																																													
2	N	1	f		2.400 000 GHz	-49.127 dBm																																													
3	N	1	f		2.390 000 GHz	-60.911 dBm																																													
4	N	1	f		2.388 350 GHz	-59.628 dBm																																													
8DPSK/HCH/No Hop	<div><div><div>Keynote Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.487500000 GHz</div><div>Ref Offset 19.77 dB Ref 19.77 dBm</div><div>Mkr4 2.483 988 GHz -52.585 dBm</div><div>Start 2.475000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (8001 pts)</div><table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.480 000 GHz</td><td>-58.710 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 GHz</td><td>-57.545 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 GHz</td><td>-60.883 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 988 GHz</td><td>-52.585 dBm</td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.487500000 GHz</div><div>Start Freq 2.475000000 GHz</div><div>Stop Freq 2.500000000 GHz</div><div>CF Step 2.500000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.480 000 GHz	-58.710 dBm				2	N	1	f		2.483 500 GHz	-57.545 dBm				3	N	1	f		2.500 000 GHz	-60.883 dBm				4	N	1	f		2.483 988 GHz	-52.585 dBm			
MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.480 000 GHz	-58.710 dBm																																													
2	N	1	f		2.483 500 GHz	-57.545 dBm																																													
3	N	1	f		2.500 000 GHz	-60.883 dBm																																													
4	N	1	f		2.483 988 GHz	-52.585 dBm																																													
8DPSK/HCH/Hop	<div><div><div>Keynote Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.485000000 GHz</div><div>Ref Offset 19.77 dB Ref 19.77 dBm</div><div>Mkr4 2.484 01 GHz -53.083 dBm</div><div>Start 2.470000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</div><table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.470 84 GHz</td><td>-59.996 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 50 GHz</td><td>-57.534 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 00 GHz</td><td>-60.075 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.484 01 GHz</td><td>-53.083 dBm</td><td></td><td></td><td></td></tr></tbody></table></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.485000000 GHz</div><div>Start Freq 2.470000000 GHz</div><div>Stop Freq 2.500000000 GHz</div><div>CF Step 3.000000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.470 84 GHz	-59.996 dBm				2	N	1	f		2.483 50 GHz	-57.534 dBm				3	N	1	f		2.500 00 GHz	-60.075 dBm				4	N	1	f		2.484 01 GHz	-53.083 dBm			
MKR	MODE	TRC	SCL	F	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f		2.470 84 GHz	-59.996 dBm																																													
2	N	1	f		2.483 50 GHz	-57.534 dBm																																													
3	N	1	f		2.500 00 GHz	-60.075 dBm																																													
4	N	1	f		2.484 01 GHz	-53.083 dBm																																													

## Appendix G): RF Conducted Spurious Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

### Test Setup

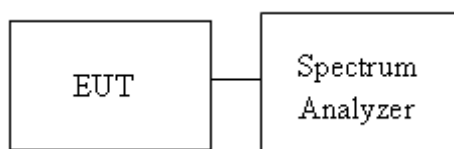

## Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	0.03	<Limit	PASS
GFSK	MCH	-0.034	<Limit	PASS
GFSK	HCH	-0.969	<Limit	PASS
$\pi/4$ DQPSK	LCH	-0.148	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.093	<Limit	PASS
$\pi/4$ DQPSK	HCH	-0.806	<Limit	PASS
8DPSK	LCH	0.052	<Limit	PASS
8DPSK	MCH	-0.067	<Limit	PASS
8DPSK	HCH	-0.956	<Limit	PASS

## Test Graph













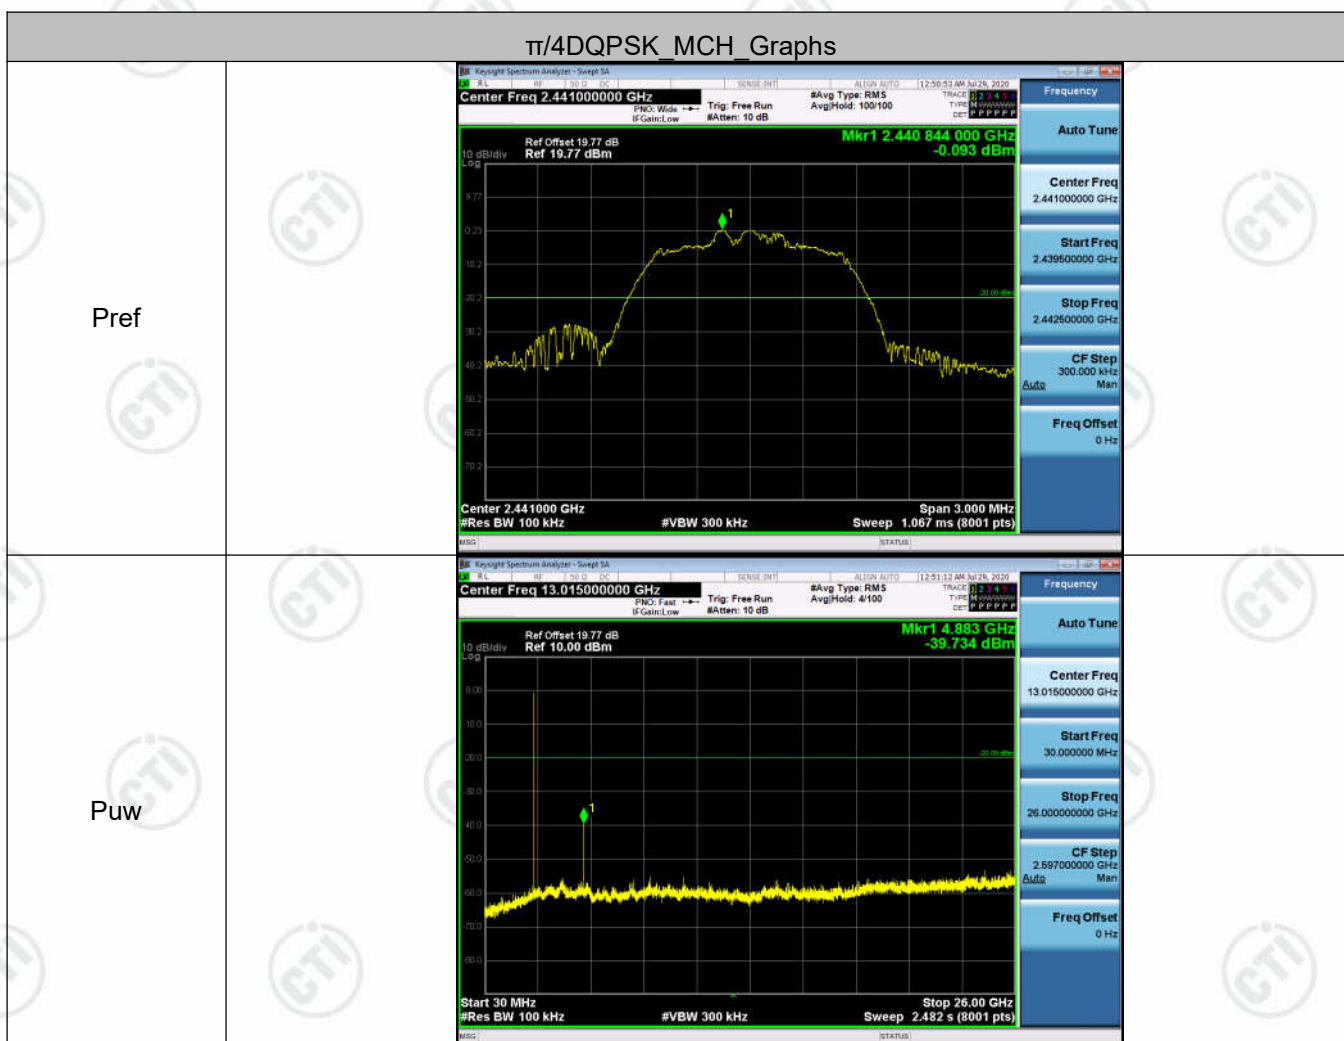

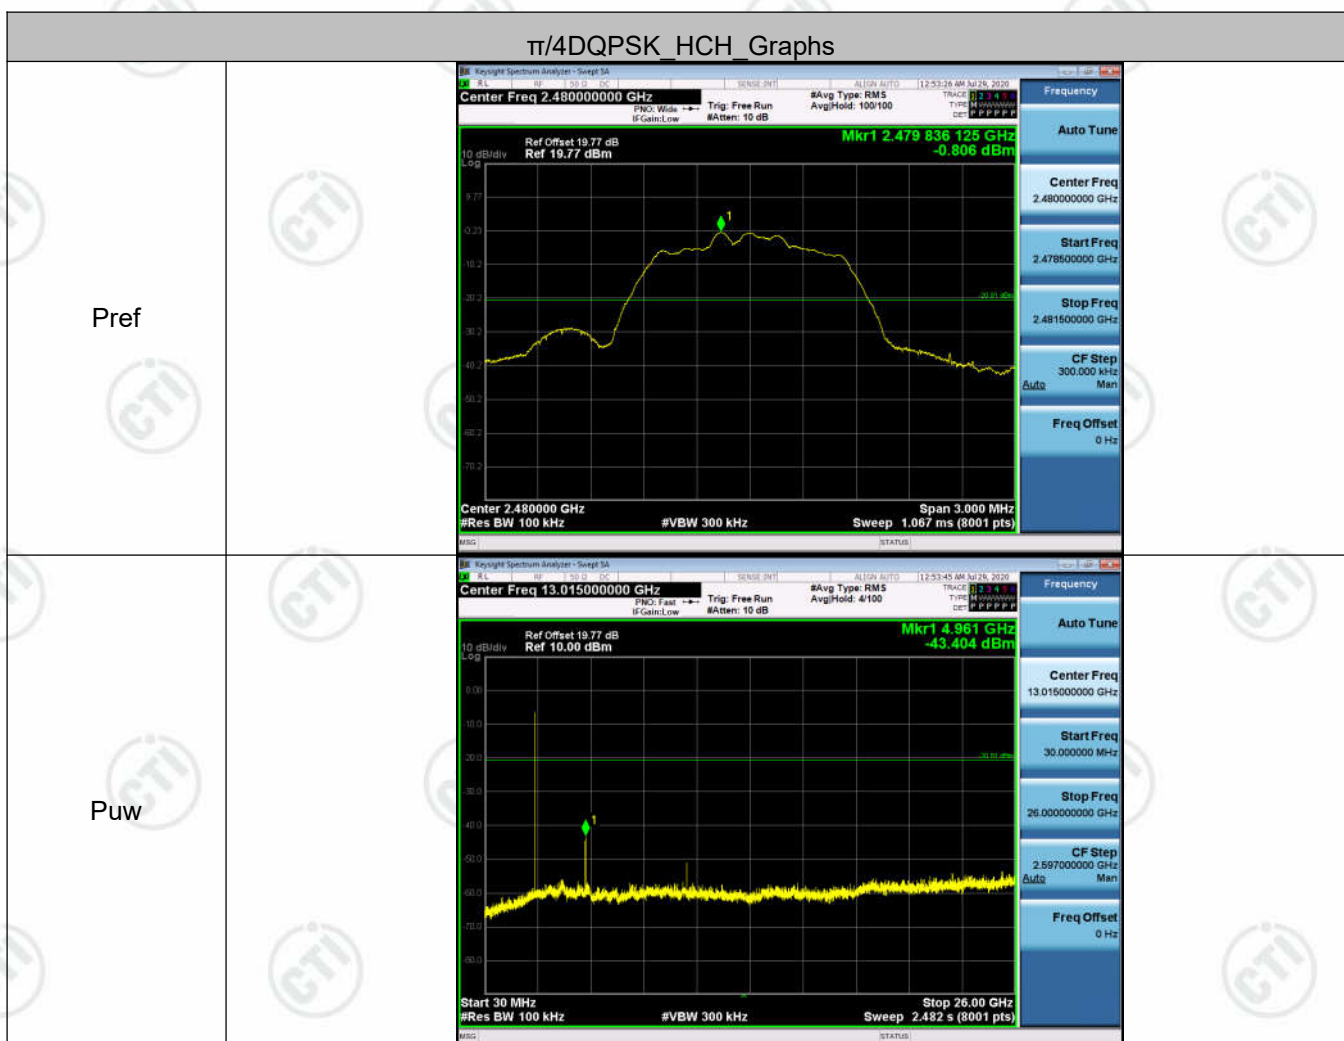


### 8DPSK\_LCH\_Graphs


Pref



Puw

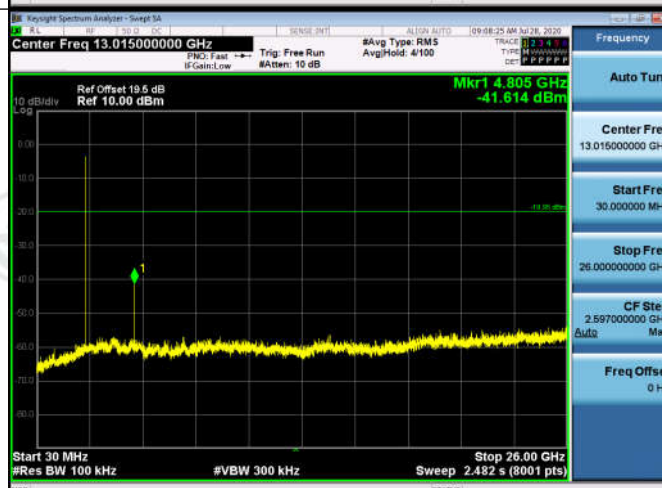



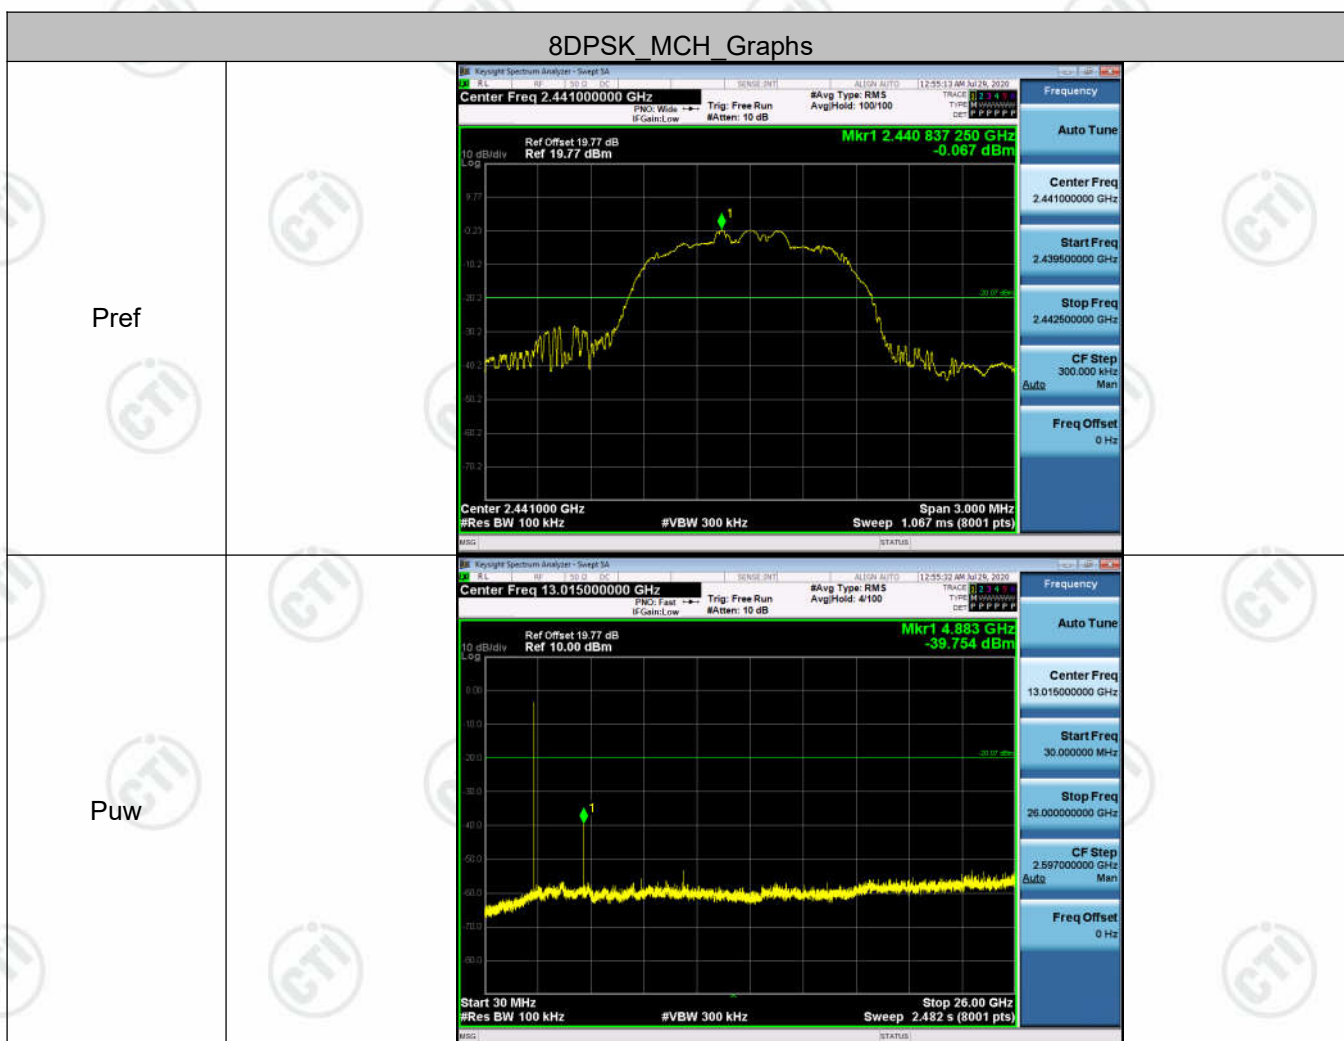



## Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="320 1052 1372 1200" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="268 1294 1249 1444" data-label="Figure"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**



The antenna is FPC Antenna. The best case gain of the antenna is 1.48 dBi.



## Appendix J) AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50		
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency																




## Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

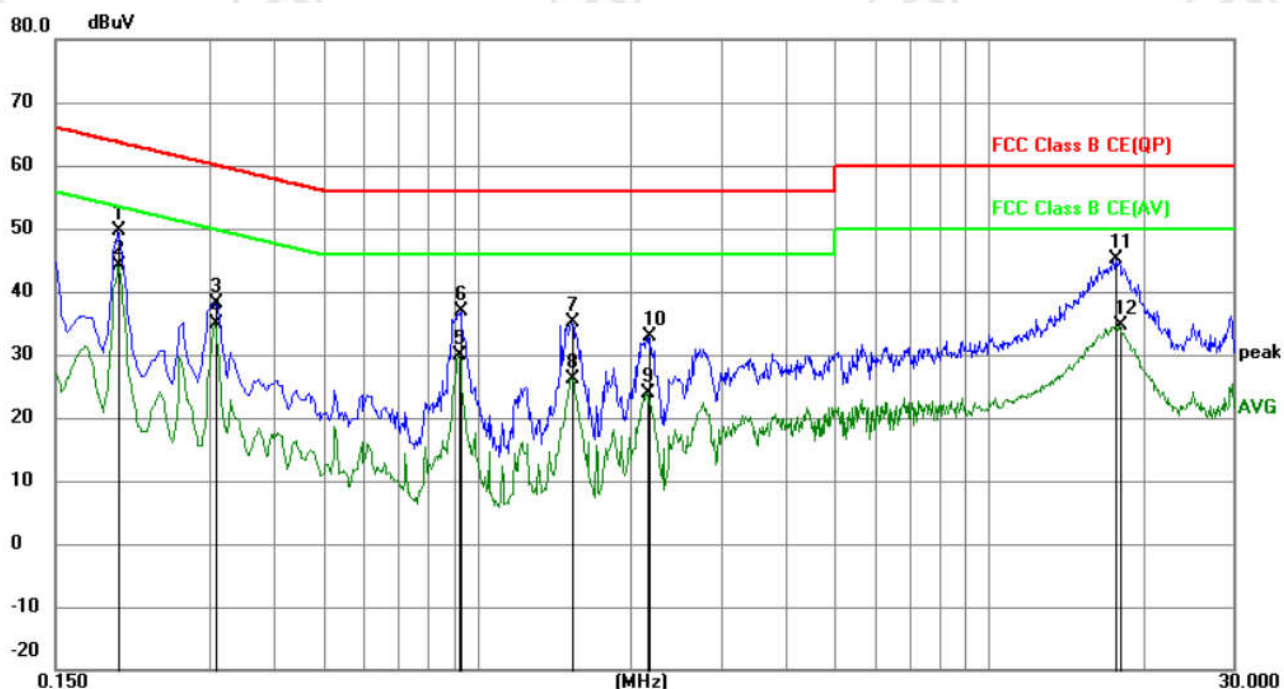

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1995	39.65	10.02	49.67	63.63	-13.96	QP	
2	*	0.1995	34.04	10.02	44.06	53.63	-9.57	AVG	
3		0.3075	28.02	10.09	38.11	60.04	-21.93	QP	
4		0.3075	24.71	10.09	34.80	50.04	-15.24	AVG	
5		0.9195	19.92	9.92	29.84	46.00	-16.16	AVG	
6		0.9285	27.06	9.92	36.98	56.00	-19.02	QP	
7		1.5315	25.37	9.87	35.24	56.00	-20.76	QP	
8		1.5315	16.34	9.87	26.21	46.00	-19.79	AVG	
9		2.1480	14.16	9.83	23.99	46.00	-22.01	AVG	
10		2.1660	23.16	9.83	32.99	56.00	-23.01	QP	
11		17.7270	35.18	9.95	45.13	60.00	-14.87	QP	
12		17.9475	24.74	9.95	34.69	50.00	-15.31	AVG	

Neutral line:

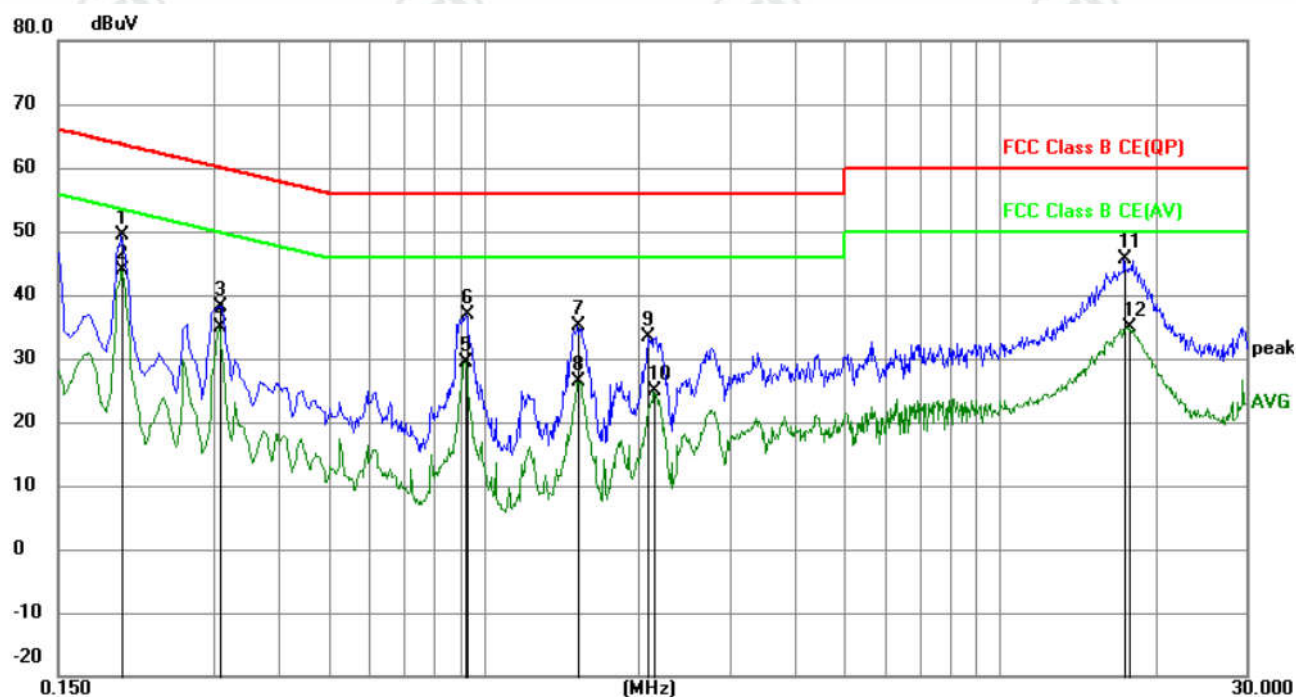

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1995	39.28	10.02	49.30	63.63	-14.33	QP	
2	*	0.1995	33.94	10.02	43.96	53.63	-9.67	AVG	
3		0.3075	28.05	10.09	38.14	60.04	-21.90	QP	
4		0.3075	24.75	10.09	34.84	50.04	-15.20	AVG	
5		0.9195	19.54	9.92	29.46	46.00	-16.54	AVG	
6		0.9240	26.86	9.92	36.78	56.00	-19.22	QP	
7		1.5225	25.18	9.87	35.05	56.00	-20.95	QP	
8		1.5225	16.59	9.87	26.46	46.00	-19.54	AVG	
9		2.0850	23.63	9.83	33.46	56.00	-22.54	QP	
10		2.1345	14.97	9.83	24.80	46.00	-21.20	AVG	
11		17.4345	35.63	9.96	45.59	60.00	-14.41	QP	
12		17.7855	24.89	9.95	34.84	50.00	-15.16	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


## Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		

Test Graph

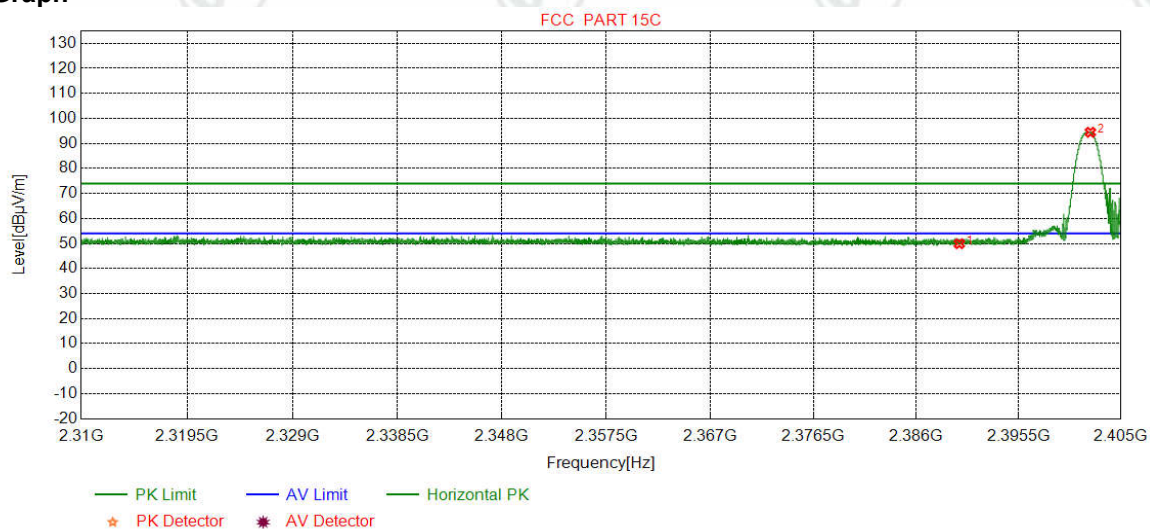


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.41	49.91	74.00	24.09	Pass	Horizontal
2	2402.1751	32.26	13.31	-43.12	92.02	94.47	74.00	-20.47	Pass	Horizontal



Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		

### Test Graph

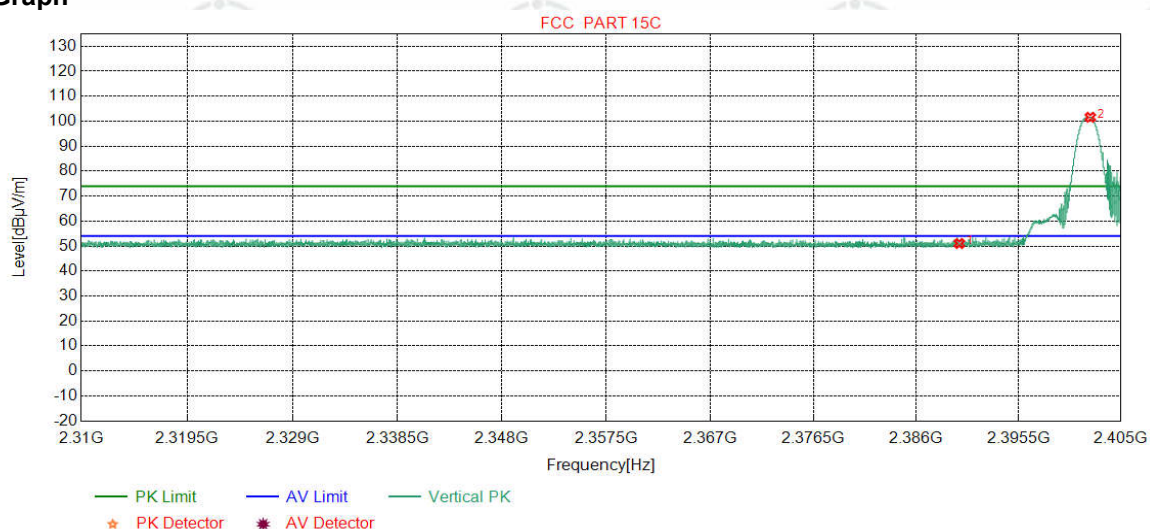


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.52	51.02	74.00	22.98	Pass	Vertical
2	2402.1625	32.26	13.31	-43.12	99.12	101.57	74.00	-27.57	Pass	Vertical



Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

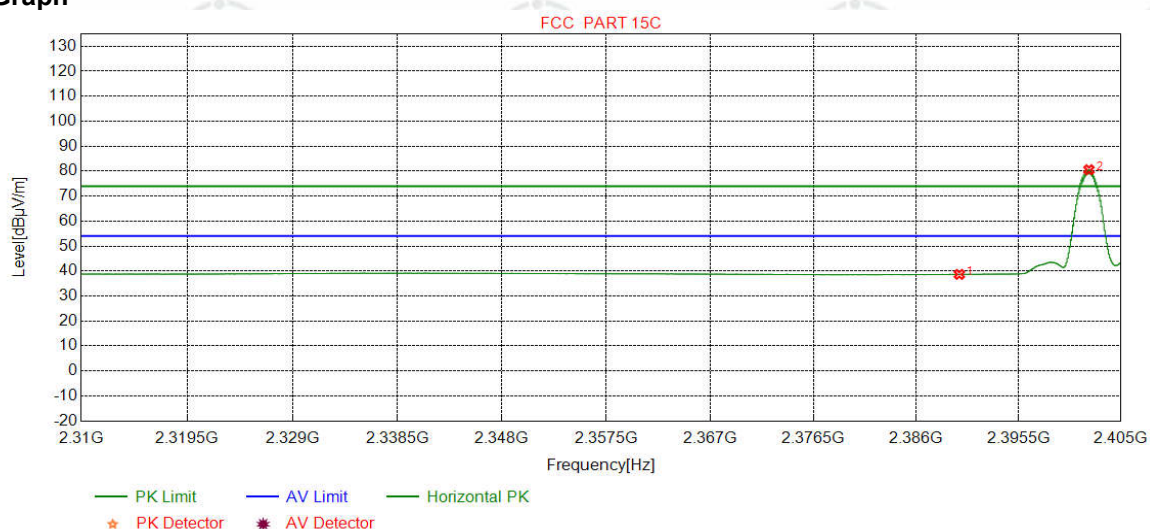

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.15	38.65	54.00	15.35	Pass	Horizontal
2	2402.0358	32.26	13.31	-43.12	78.12	80.57	54.00	-26.57	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

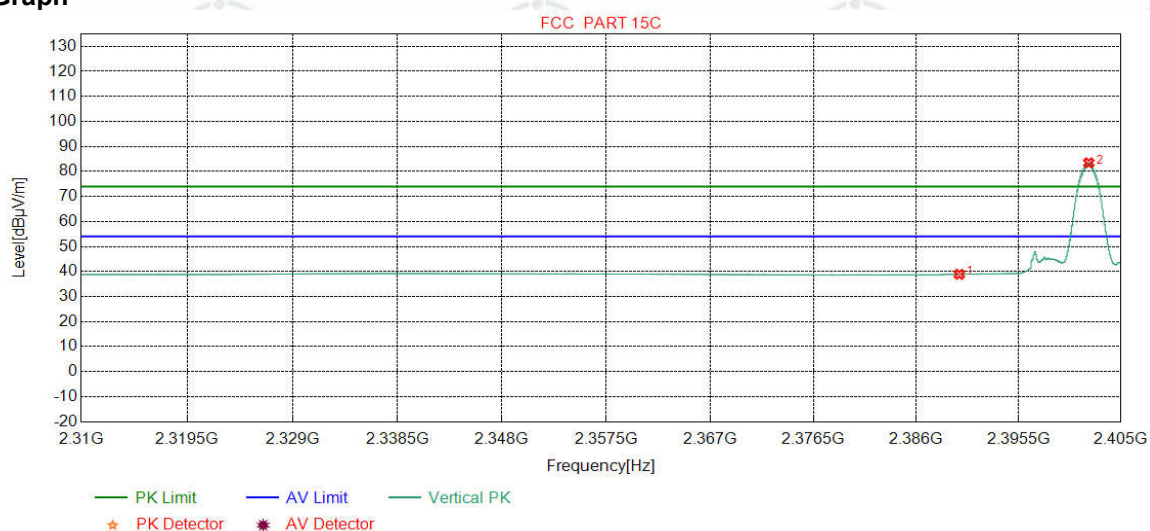

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.40	38.90	54.00	15.10	Pass	Vertical
2	2402.0231	32.26	13.31	-43.12	81.00	83.45	54.00	-29.45	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

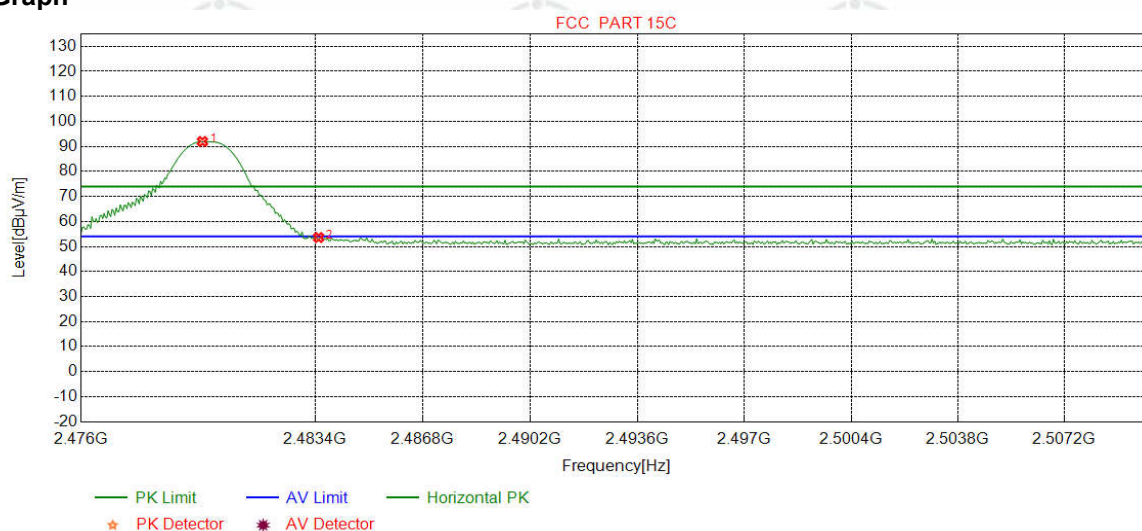

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8298	32.37	13.39	-43.10	89.31	91.97	74.00	-17.97	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	50.95	53.60	74.00	20.40	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

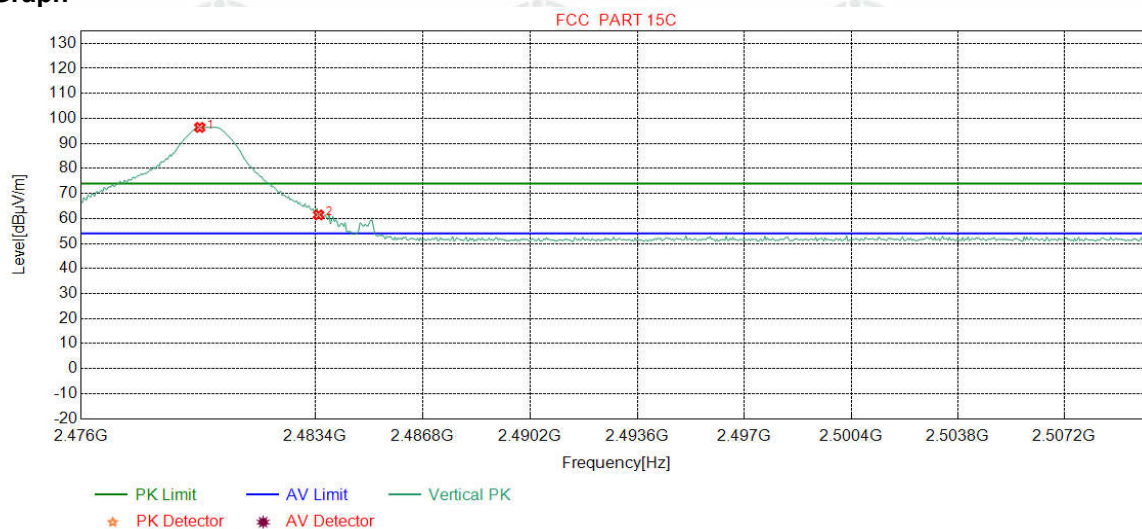

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7447	32.37	13.39	-43.10	93.75	96.41	74.00	-22.41	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	58.79	61.44	74.00	12.56	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

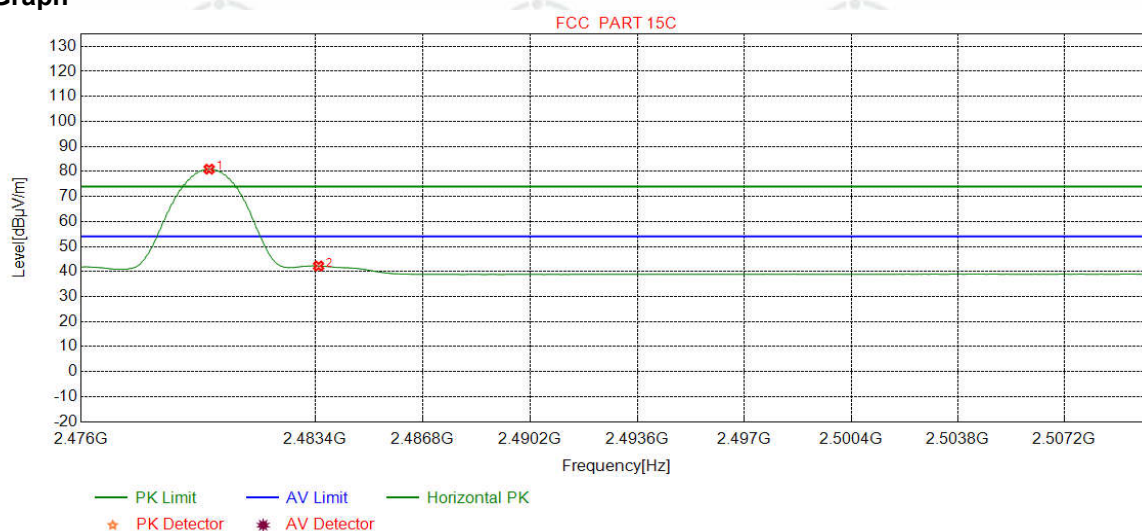


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	78.26	80.92	54.00	-26.92	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	39.57	42.22	54.00	11.78	Pass	Horizontal



Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

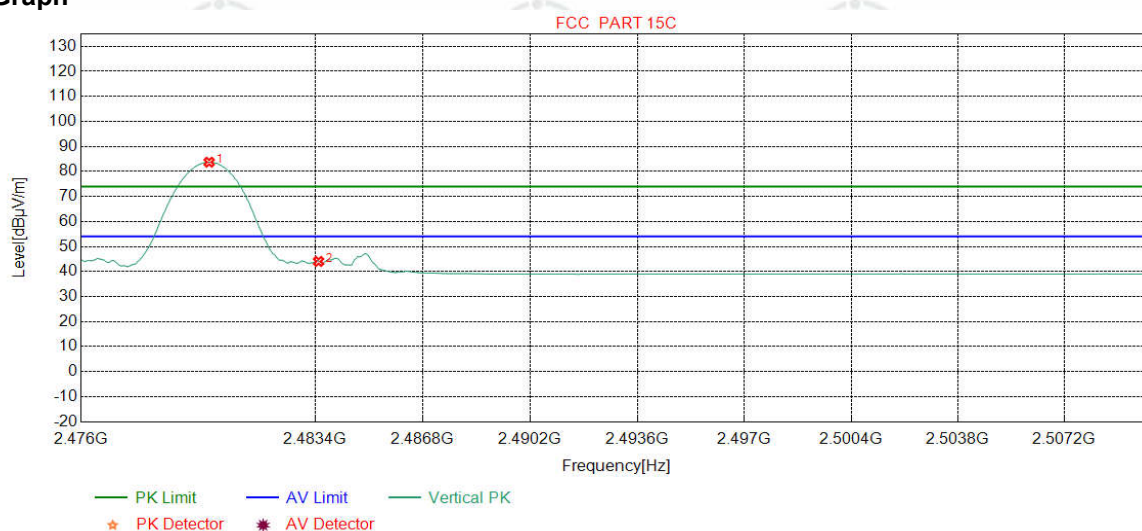

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	81.05	83.71	54.00	-29.71	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	41.38	44.03	54.00	9.97	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

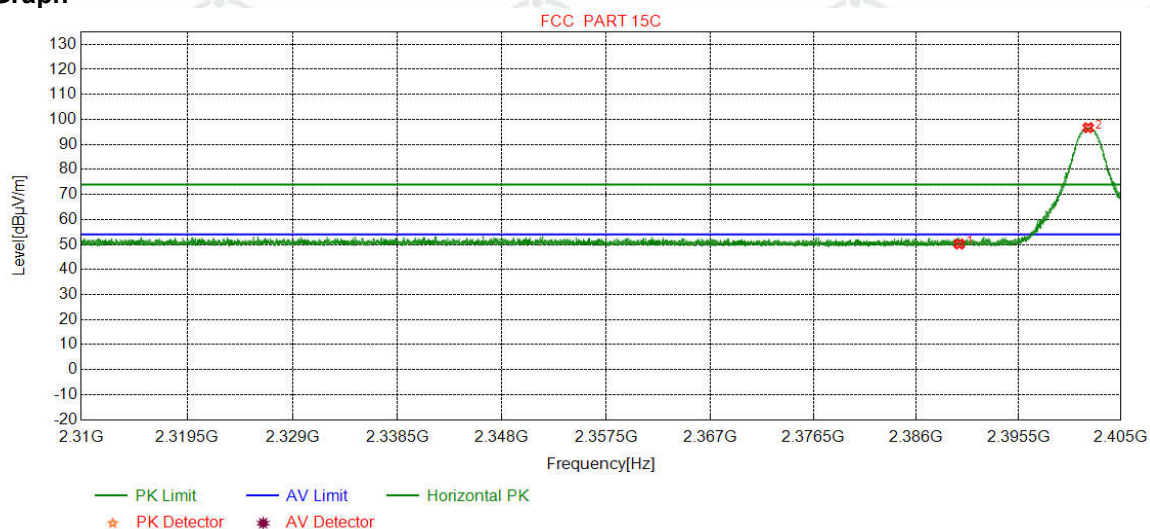

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.67	50.17	74.00	23.83	Pass	Horizontal
2	2401.9661	32.26	13.31	-43.12	94.22	96.67	74.00	-22.67	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

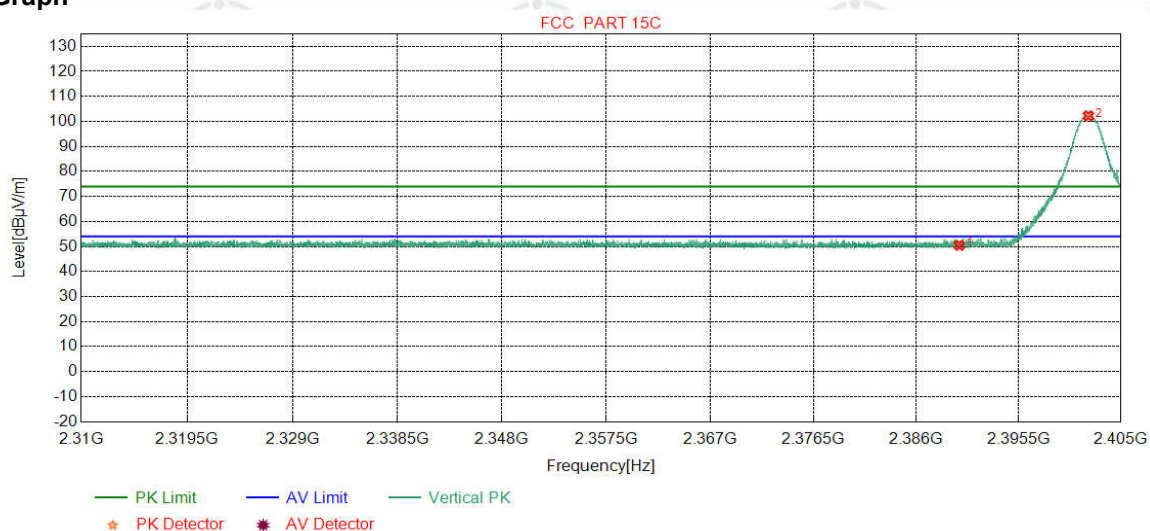

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.97	50.47	74.00	23.53	Pass	Vertical
2	2401.9851	32.26	13.31	-43.12	99.78	102.23	74.00	-28.23	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

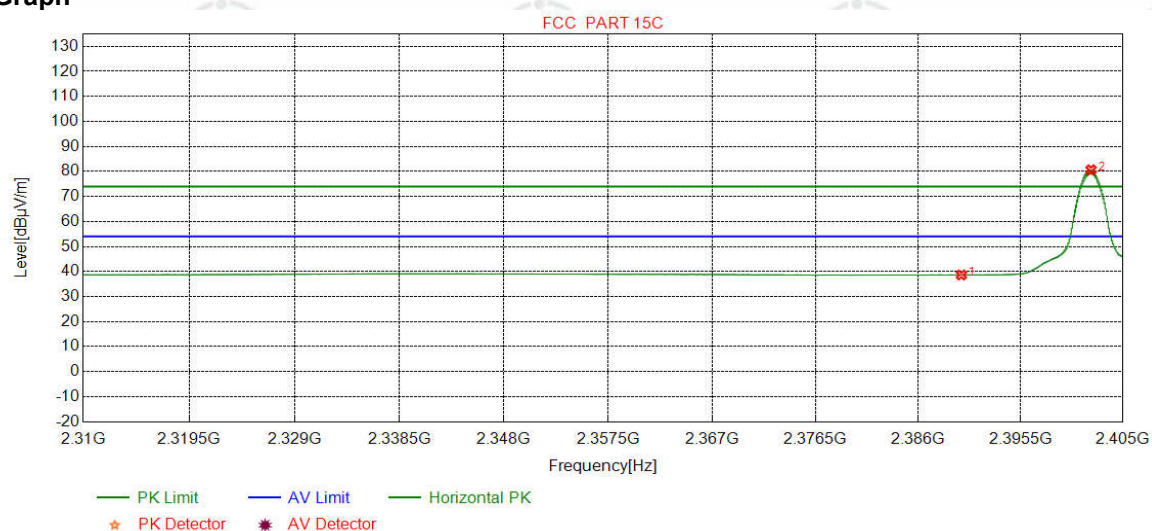

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.12	38.62	54.00	15.38	Pass	Horizontal
2	2402.0421	32.26	13.31	-43.12	78.20	80.65	54.00	-26.65	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		

### Test Graph

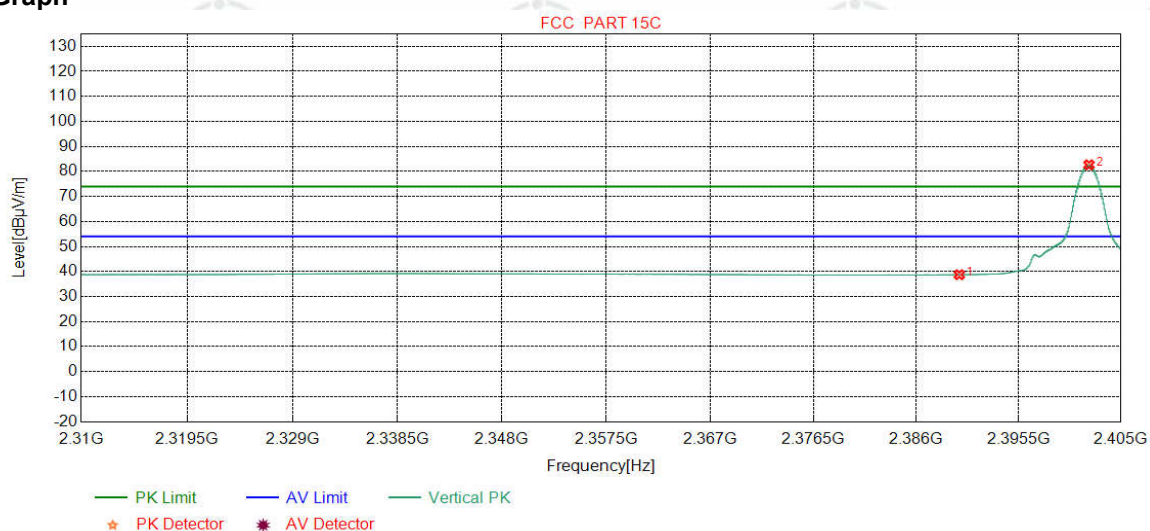


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.24	38.74	54.00	15.26	Pass	Vertical
2	2402.0421	32.26	13.31	-43.12	80.21	82.66	54.00	-28.66	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

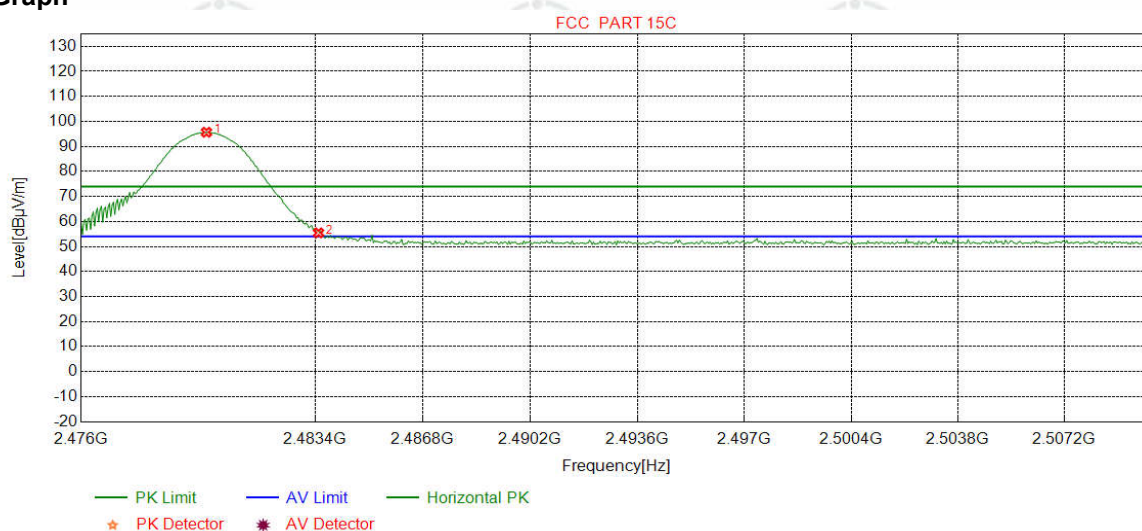

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	93.01	95.67	74.00	-21.67	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	52.80	55.45	74.00	18.55	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

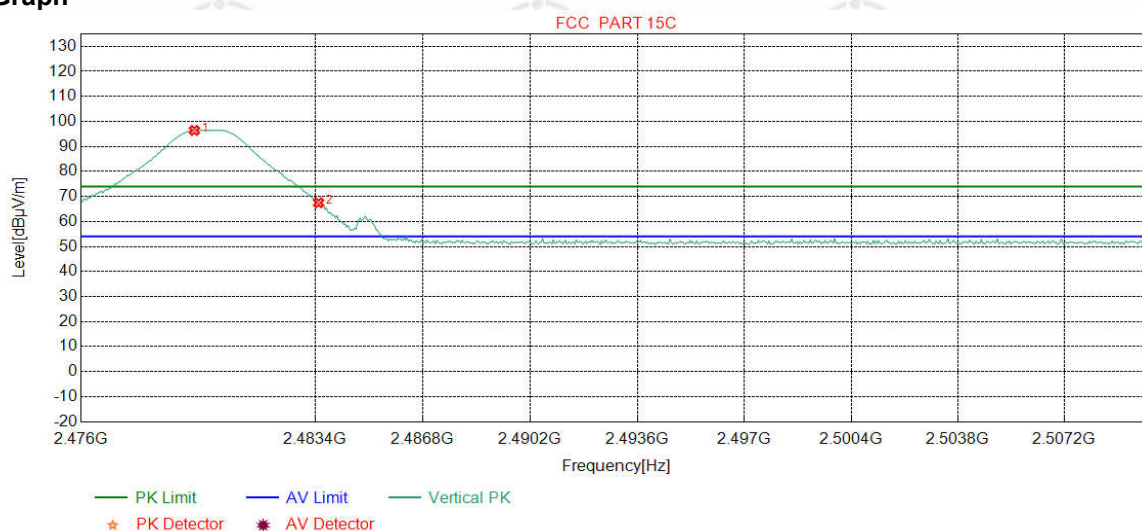

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.5745	32.37	13.39	-43.10	93.73	96.39	74.00	-22.39	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	64.81	67.46	74.00	6.54	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

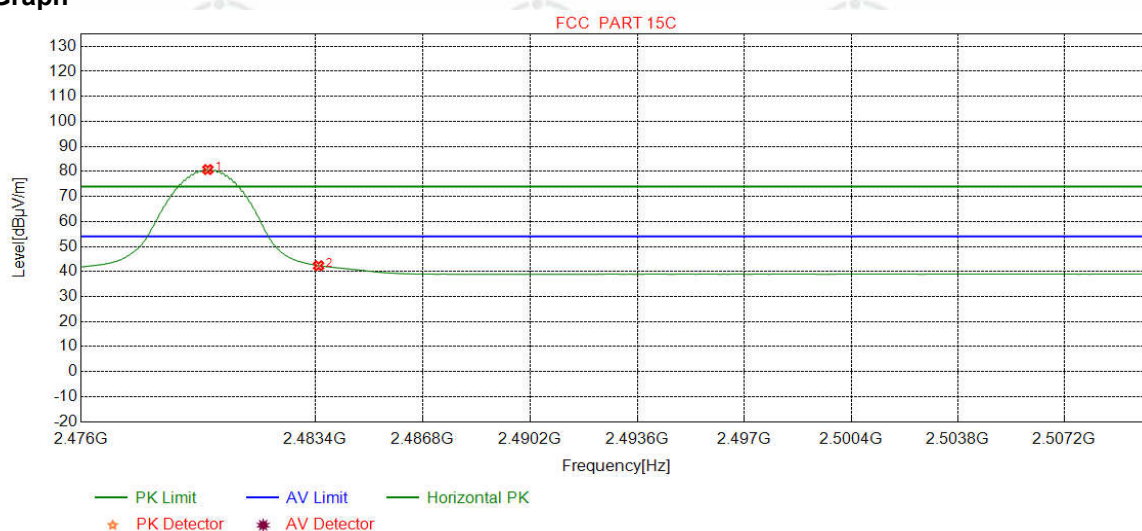

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	78.10	80.76	54.00	-26.76	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	39.67	42.32	54.00	11.68	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

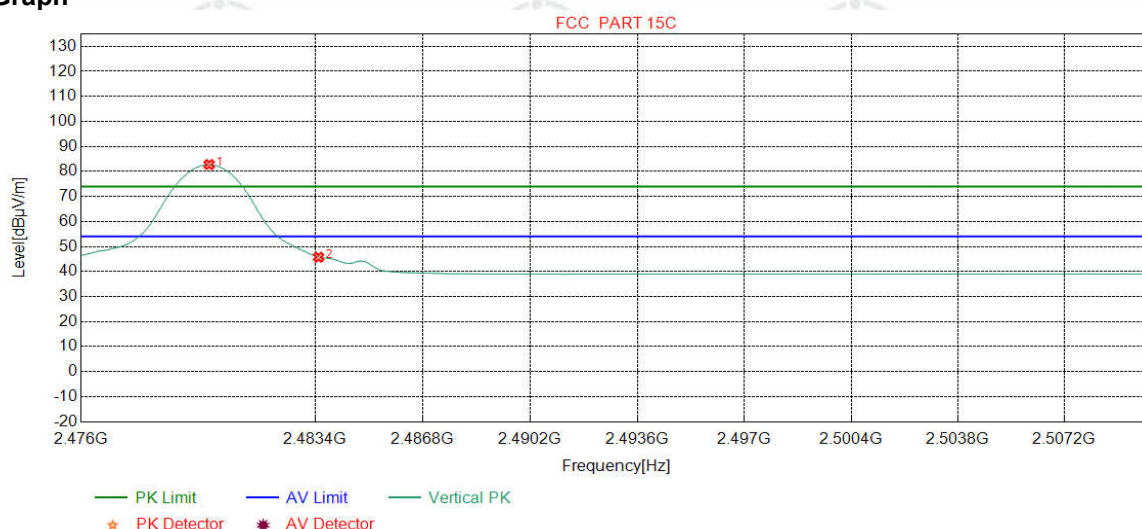

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	80.09	82.75	54.00	-28.75	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	43.07	45.72	54.00	8.28	Pass	Vertical

### Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.find the 3DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## Appendix L) Radiated Spurious Emissions

<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
<b>Test Procedure:</b>		Peak	1MHz	10Hz	Average
	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).</li> <li>Test the EUT in the lowest channel ,the middle channel ,the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
<b>Limit:</b>	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					



# **Radiated Spurious Emissions test Data:**

## **Radiated Emission below 1GHz**

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.5967	11.21	0.67	-31.38	40.42	20.92	40.00	19.08	Pass	H	PK
2	96.4516	10.43	1.13	-31.96	52.29	31.89	43.50	11.61	Pass	H	PK
3	264.2784	12.49	1.94	-31.88	44.19	26.74	46.00	19.26	Pass	H	PK
4	324.9095	13.75	2.14	-31.80	42.78	26.87	46.00	19.13	Pass	H	PK
5	600.0290	19.00	2.96	-31.50	42.80	33.26	46.00	12.74	Pass	H	PK
6	844.9785	21.44	3.50	-31.82	42.18	35.30	46.00	10.70	Pass	H	PK
7	36.5967	11.21	0.67	-31.38	42.64	23.14	40.00	16.86	Pass	V	PK
8	60.0730	11.58	0.90	-31.80	39.47	20.15	40.00	19.85	Pass	V	PK
9	90.9221	9.55	1.10	-32.07	44.33	22.91	43.50	20.59	Pass	V	PK
10	240.0260	11.94	1.84	-31.90	42.81	24.69	46.00	21.31	Pass	V	PK
11	600.0290	19.00	2.96	-31.50	42.89	33.35	46.00	12.65	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	37.75	33.10	54.00	20.90	Pass	V	PK

**Transmitter Emission above 1GHz**

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1794.6795	30.34	3.31	-42.70	57.88	48.83	74.00	25.17	Pass	H	PK
2	1990.8991	31.64	3.46	-43.18	61.33	53.25	74.00	20.75	Pass	H	PK
3	4804.0000	34.50	4.55	-42.80	56.35	52.60	74.00	21.40	Pass	H	PK
4	7205.2804	36.31	5.82	-42.17	54.80	54.76	74.00	19.24	Pass	H	PK
5	9612.4408	37.64	6.64	-42.10	51.89	54.07	74.00	19.93	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	48.55	53.56	74.00	20.44	Pass	H	PK
7	7205.2808	36.31	5.82	-42.16	41.44	41.41	54.00	12.59	Pass	H	AV
8	9612.4401	37.64	6.64	-42.10	40.88	43.06	54.00	10.94	Pass	H	AV
9	1312.8313	28.21	2.77	-42.77	56.65	44.86	74.00	29.14	Pass	V	PK
10	1798.2798	30.37	3.32	-42.71	61.70	52.68	74.00	21.32	Pass	V	PK
11	4804.1203	34.50	4.55	-42.80	60.21	56.46	74.00	17.54	Pass	V	PK
12	7205.2804	36.31	5.82	-42.17	56.24	56.20	74.00	17.80	Pass	V	PK
13	9612.4408	37.64	6.64	-42.10	51.98	54.16	74.00	19.84	Pass	V	PK
14	12010.000	39.31	7.60	-41.90	47.75	52.76	74.00	21.24	Pass	V	PK
15	4804.1199	34.50	4.55	-42.80	54.06	50.31	54.00	3.69	Pass	V	AV
16	7205.2812	36.31	5.82	-42.16	43.66	43.63	54.00	10.37	Pass	V	AV
17	9612.4406	37.64	6.64	-42.10	41.76	43.94	54.00	10.06	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1792.2792	30.33	3.31	-42.71	57.78	48.71	74.00	25.29	Pass	H	PK
2	1990.6991	31.64	3.46	-43.18	56.64	48.56	74.00	25.44	Pass	H	PK
3	4882.1255	34.50	4.81	-42.80	56.57	53.08	74.00	20.92	Pass	H	PK
4	7322.2882	36.42	5.85	-42.13	56.17	56.31	74.00	17.69	Pass	H	PK
5	9760.4507	37.70	6.73	-42.10	52.10	54.43	74.00	19.57	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	46.72	51.92	74.00	22.08	Pass	H	PK
7	7322.2891	36.42	5.85	-42.14	43.54	43.67	54.00	10.33	Pass	H	AV
8	9760.4504	37.70	6.73	-42.10	40.30	42.63	54.00	11.37	Pass	H	AV
9	1795.0795	30.35	3.31	-42.71	59.26	50.21	74.00	23.79	Pass	V	PK
10	1992.8993	31.65	3.46	-43.18	61.47	53.40	74.00	20.60	Pass	V	PK
11	4882.1255	34.50	4.81	-42.80	60.85	57.36	74.00	16.64	Pass	V	PK
12	7323.2882	36.42	5.85	-42.13	57.23	57.37	74.00	16.63	Pass	V	PK
13	9759.4506	37.70	6.73	-42.09	53.95	56.29	74.00	17.71	Pass	V	PK
14	12205.000	39.42	7.67	-41.89	46.76	51.96	74.00	22.04	Pass	V	PK
15	4882.1246	34.50	4.81	-42.80	54.00	50.51	54.00	3.49	Pass	V	AV
16	7323.2872	36.42	5.85	-42.14	47.85	47.98	54.00	6.02	Pass	V	AV
17	9759.4508	37.70	6.73	-42.10	42.33	44.66	54.00	9.34	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1796.6797	30.36	3.31	-42.71	57.22	48.18	74.00	25.82	Pass	H	PK
2	1996.4997	31.68	3.47	-43.20	55.94	47.89	74.00	26.11	Pass	H	PK
3	4960.1307	34.50	4.82	-42.80	59.17	55.69	74.00	18.31	Pass	H	PK
4	7440.2960	36.54	5.85	-42.11	57.72	58.00	74.00	16.00	Pass	H	PK
5	9916.4611	37.77	6.78	-42.10	52.66	55.11	74.00	18.89	Pass	H	PK
6	12400.000	39.54	7.86	-41.90	46.82	52.32	74.00	21.68	Pass	H	PK
7	4960.1314	34.50	4.82	-42.80	51.70	48.22	54.00	5.78	Pass	H	AV
8	7440.2954	36.54	5.85	-42.11	48.06	48.34	54.00	5.66	Pass	H	AV
9	9916.4612	37.77	6.78	-42.10	44.60	47.05	54.00	6.95	Pass	H	AV
10	1800.0800	30.38	3.32	-42.71	59.80	50.79	74.00	23.21	Pass	V	PK
11	1998.4999	31.69	3.47	-43.20	59.58	51.54	74.00	22.46	Pass	V	PK
12	4960.1307	34.50	4.82	-42.80	62.20	58.72	74.00	15.28	Pass	V	PK
13	7439.2960	36.54	5.85	-42.11	58.46	58.74	74.00	15.26	Pass	V	PK
14	9916.4611	37.77	6.78	-42.10	53.95	56.40	74.00	17.60	Pass	V	PK
15	12400.000	39.54	7.86	-41.90	46.91	52.41	74.00	21.59	Pass	V	PK
16	4960.1306	34.50	4.82	-42.80	55.41	51.93	54.00	2.07	Pass	V	AV
17	7439.2963	36.54	5.85	-42.11	45.66	45.94	54.00	8.06	Pass	V	AV
18	9916.4602	37.77	6.78	-42.10	45.13	47.58	54.00	6.42	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1999.7000	31.70	3.47	-43.20	54.37	46.34	74.00	27.66	Pass	H	PK
2	3024.0016	33.21	4.88	-43.10	50.66	45.65	74.00	28.35	Pass	H	PK
3	4803.1202	34.50	4.55	-42.80	58.75	55.00	74.00	19.00	Pass	H	PK
4	7206.2804	36.31	5.81	-42.16	55.51	55.47	74.00	18.53	Pass	H	PK
5	9612.4408	37.64	6.64	-42.10	52.52	54.70	74.00	19.30	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	47.26	52.27	74.00	21.73	Pass	H	PK
7	4803.1203	34.50	4.55	-42.80	43.85	40.10	54.00	13.90	Pass	H	AV
8	7206.2798	36.31	5.81	-42.16	44.68	44.64	54.00	9.36	Pass	H	AV
9	9612.4399	37.64	6.64	-42.10	41.86	44.04	54.00	9.96	Pass	H	AV
10	1399.4399	28.30	2.90	-42.68	56.00	44.52	74.00	29.48	Pass	V	PK
11	1791.2791	30.32	3.30	-42.70	62.89	53.81	74.00	20.19	Pass	V	PK
12	4803.1202	34.50	4.55	-42.80	61.70	57.95	74.00	16.05	Pass	V	PK
13	7206.2804	36.31	5.81	-42.16	57.65	57.61	74.00	16.39	Pass	V	PK
14	9611.4408	37.64	6.64	-42.10	53.84	56.02	74.00	17.98	Pass	V	PK
15	12010.000	39.31	7.60	-41.90	47.08	52.09	74.00	21.91	Pass	V	PK
16	4803.1204	34.50	4.55	-42.80	46.08	42.33	54.00	11.67	Pass	V	AV
17	7206.2806	36.31	5.81	-42.16	46.94	46.90	54.00	7.10	Pass	V	AV
18	9611.4418	37.64	6.64	-42.10	43.24	45.42	54.00	8.58	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1117.0117	28.02	2.60	-42.98	61.20	48.84	74.00	25.16	Pass	H	PK
2	2987.5988	33.18	4.51	-43.10	54.81	49.40	74.00	24.60	Pass	H	PK
3	4883.1255	34.50	4.81	-42.80	58.69	55.20	74.00	18.80	Pass	H	PK
4	7322.2882	36.42	5.85	-42.13	53.70	53.84	74.00	20.16	Pass	H	PK
5	9760.4507	37.70	6.73	-42.10	53.04	55.37	74.00	18.63	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	45.66	50.86	74.00	23.14	Pass	H	PK
7	4883.1257	34.50	4.81	-42.80	42.06	38.57	54.00	15.43	Pass	H	AV
8	9760.4501	37.70	6.73	-42.10	42.15	44.48	54.00	9.52	Pass	H	AV
9	1158.6159	28.06	2.68	-42.93	54.36	42.17	74.00	31.83	Pass	V	PK
10	1994.2994	31.66	3.46	-43.18	60.49	52.43	74.00	21.57	Pass	V	PK
11	4882.1255	34.50	4.81	-42.80	60.97	57.48	74.00	16.52	Pass	V	PK
12	7323.2882	36.42	5.85	-42.13	55.08	55.22	74.00	18.78	Pass	V	PK
13	9760.4507	37.70	6.73	-42.10	52.63	54.96	74.00	19.04	Pass	V	PK
14	12205.000	39.42	7.67	-41.89	45.65	50.85	74.00	23.15	Pass	V	PK
15	4882.1255	34.50	4.81	-42.80	53.26	49.77	54.00	4.23	Pass	V	AV
16	7323.2873	36.42	5.85	-42.14	46.63	46.76	54.00	7.24	Pass	V	AV
17	9760.4501	37.70	6.73	-42.10	40.79	43.12	54.00	10.88	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2480	
N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1800.2800	30.38	3.32	-42.71	54.67	45.66	74.00	28.34	Pass	H	PK
2	2000.1000	31.70	3.47	-43.20	56.13	48.10	74.00	25.90	Pass	H	PK
3	4960.1307	34.50	4.82	-42.80	59.84	56.36	74.00	17.64	Pass	H	PK
4	7440.2960	36.54	5.85	-42.11	56.37	56.65	74.00	17.35	Pass	H	PK
5	9915.4610	37.77	6.78	-42.10	52.49	54.94	74.00	19.06	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	47.40	52.90	74.00	21.10	Pass	H	PK
7	4960.1297	34.50	4.82	-42.80	50.34	46.86	54.00	7.14	Pass	H	AV
8	7440.2953	36.54	5.85	-42.11	45.40	45.68	54.00	8.32	Pass	H	AV
9	9915.4613	37.77	6.78	-42.10	44.89	47.34	54.00	6.66	Pass	H	AV
10	4960.1307	34.50	4.82	-42.80	63.85	60.37	74.00	13.63	Pass	V	PK
11	7440.2960	36.54	5.85	-42.11	57.15	57.43	74.00	16.57	Pass	V	PK
12	9916.4611	37.77	6.78	-42.10	52.54	54.99	74.00	19.01	Pass	V	PK
13	12400.0000	39.54	7.86	-41.90	46.70	52.20	74.00	21.80	Pass	V	PK
14	4960.1299	34.50	4.82	-42.80	54.07	50.59	54.00	3.41	Pass	V	AV
15	7440.2966	36.54	5.85	-42.11	46.31	46.59	54.00	7.41	Pass	V	AV
16	9916.4602	37.77	6.78	-42.10	46.16	48.61	54.00	5.39	Pass	V	AV

**Note:**

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.find the 3DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.