

**FCC Part 15.247
Direct Sequence Test Report
for
Symbol Technologies
on the
WLAN PC Card
Model: LA-4131
FCC ID: H9PLA4131M**

Test Report #: 2036369E2
Date of Report: May 25, 2001

Job #: J20036369E
Date of Test: April 1 to May 24, 2001

Total No of Pages Contained in this Report: 63 + Data Sheets



NVLAP Laboratory Code: 200201-0

<i>0 el. 43 for</i>	Suresh Kondapalli, Test Engineer
<i>David Chernomordik</i>	David Chernomordik, Ph.D., EMC Site Manager

Review Date: *5/31/01*

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

FCC Part 15 DSSS Cert, Rev 01/01

Intertek Testing Services NA, Inc.

1365 Adams Court, Menlo Park, CA 94025

Telephone 650-463-2900 Fax 650-463-2910 Home Page www.etlsemko.com



Table of Contents

1.0	Summary of Tests	2
2.0	General Description	3
2.1	Product Description	3
2.2	Related Submittal(s) Grants	4
2.3	Test Methodology	4
2.4	Test Facility	4
3.0	System Test Configuration.....	5
3.1	Support Equipment and description	5
3.2	Block Diagram of Test Setup	5
3.3	Justification	6
3.4	Software Exercise Program.....	6
3.5	Mode of Operation during Test	6
3.6	Modifications Required for Compliance	6
4.0	Measurement Results.....	7
4.1	Conducted Output Power at Antenna Terminals.....	7
4.2	6 dB RF Bandwidth	8
4.3	Power Density	12
4.4	Out-of-Band Conducted Emissions	19
4.5	Out-of-Band Radiated Emissions	19
4.7	AC Line Conducted Emission.....	58
4.8	Radiated Emissions from Digital Section of Transceiver (Transmitter).....	60
4.9	Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation)	61
5.0	List of test Equipment	62
6.0	Document History.....	63

Symbol Technologies, Model No. LA-4131
FCC ID: H9PLA4131M

Date of Test: April 1 to May 24, 2001

1.0 Summary of Tests**MODEL: Model: LA-4131
FCC ID: H9PLA4131M**

TEST	REFERENCE	RESULTS
Output power	15.247(b)	Passed
6 dB Bandwidth	15.247(a)(2)	Passed
Power Density	15.247(d)	Passed
Out-of-band Antenna Conducted Emission	15.247(c)	Passed
Out-of-band Radiated Emission (except emissions in restricted bands)	15.247(c)	Not Applicable. The EUT passed out-of-band antenna conducted emission
Radiated Emission in Restricted Bands	15.35(b)(c)	Passed
AC Line-conducted Emission	15.207	Passed
Radiated Emission from Digital Part	15.109	Passed, see separate DoC report
Radiated Emission from Receiver L.O.	15.109	Not Applicable. The operating frequency is above 960 MHz
Processing Gain	15.247(e)	Passed, see exhibit "Processing Gain"
RF Exposure Requirement	2.1091	Passed, see exhibit "RF Exposure"
Antenna Requirement	15.203	Passed


Test Engineer:


Suresh Kondapalli

Date:

05/31/01

EMC Site Manager:


David Chernomordik, Ph.D.
EMC Site Manager

Date:

5/31/01

2.0 General Description

2.1 Product Description

The Symbol Technologies model LA-4131 is a 2.4 GHz Direct Sequence Spread Spectrum radio in the form of a PC Card that is used for wireless communication from a LAN to remote wireless devices.

This device is used in a mobile configuration of fixed mounted antennas that are typically wall, ceiling, or mast mounted and more than 2 m from personnel. Antennas are mounted in pairs for diversity. The highest gain of each of the five types used was tested.

Overview of WLAN PC Card Model: LA-4131

Applicant	Symbol Technologies
Trade Name & Model No.	Symbol Technologies, LA-4131
FCC Identifier	H9PLA4131
Use of Product	Wireless LAN communications
Manufacturer & Model of Spread Spectrum Module	Symbol Technologies
Type of Transmission	Direct Sequence Spread Spectrum
Rated RF Output	60 mW
Frequency Range	2412 - 2462
Number of Channel(s)	11
Antenna(s) & Gain,	See below
Antenna Requirement	☐ The EUT uses a permanently connected antenna. ☒ The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector. ☐ The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	Symbol Technologies 6480 Via Del Oro San Jose, CA 95119-1208

Ant. No	Model	Symbol P/N	Type	Gain, dBi	Cable Loss, dB	Net Gain, dBi
01	Ceiling Panel	50-21900-015	Plane	3.3	1.50	1.8
02	Panel 7.5	ML-2499-PNA1-01	Panel	11.0	3.48	7.5
03	Panel 9	50-21900-047	Patch	13.0	3.53	9.5
04	Pipe Bomb 11"x4'	50-11901-048P	Dipole Array	5.2	1.00	4.2
05	Yagi	ML-2499-YGA1-00	Yagi	13.9	2.50	11.4

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to LA-4131 distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data is site 2 located in Menlo Park, California. This test facility and site measurement data have been fully placed on file with the FCC.

3.0 System Test Configuration

3.1 Support Equipment and description

Item #	Description	Model No.	Serial No.	FCC ID
1	Compaq Laptop	Armada	3882B400	N/A

3.2 Block Diagram of Test Setup

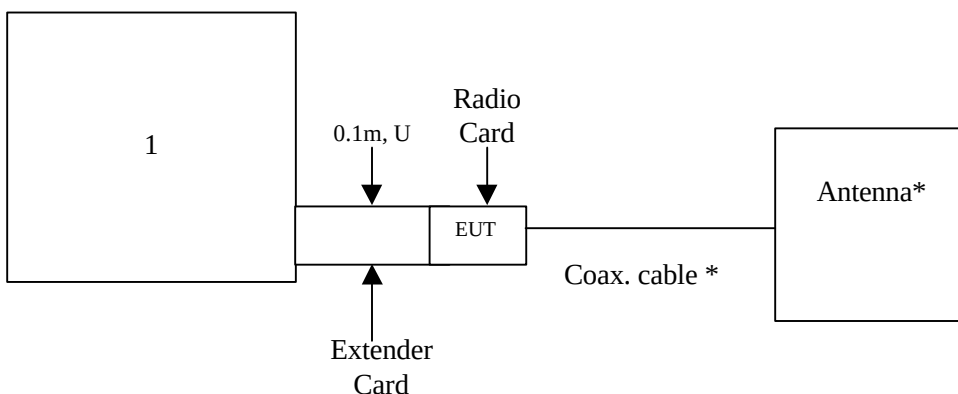

* For the list of antennas and cables, see sec.2.1.

m: Length in meters
U: Unshielded
S: Shielded

3.3 Justification

For radiated emission measurements the LA-4131 is placed on the wooden turntable. The LA-4131 is attached to peripherals and they are connected and operational (as typical as possible). The LA-4131 is wired to transmit full power. During testing, all cables were manipulated to produce worst case emissions.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The LA-4131 exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

3.5 Mode of Operation during Test

For emissions testing, the units were setup to transmit continuously at the low, middle, and high frequencies.

3.6 Modifications Required for Compliance

No modifications were installed by Intertek Testing Services during compliance testing in order to bring the product into compliance (Please note that this does not include changes made specifically by Symbol Technologies prior to compliance testing).

4.0 Measurement Results

4.1 Conducted Output Power at Antenna Terminals FCC Rules 15.247(b):

Requirements

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm).
For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6) dBm.

Procedure

The antenna port of the LA-4131 was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the LA-4131 antenna terminal.

Test Results

Frequency (MHz)	Output in dBm	Output in mWatt
2412	17.8	60
2437	16.0	40
2462	16.3	43

The maximum EIRP (with antenna gain 12.5 dBi) is 30.3 dBm.

4.2 6 dB RF Bandwidth
FCC Rule 15.247(a)(2):Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz

Procedure


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


Test Result


Frequency (MHz)	6 dB Bandwidth
2412	10.14 MHz
2437	10.38 MHz
2462	9.52 MHz

Refer to the following plots for 6 dB bandwidth:

Plot 2a: Low Channel 6 dB RF Bandwidth
Plot 2b: Middle Channel 6 dB RF Bandwidth
Plot 2c: High Channel 6 dB RF Bandwidth

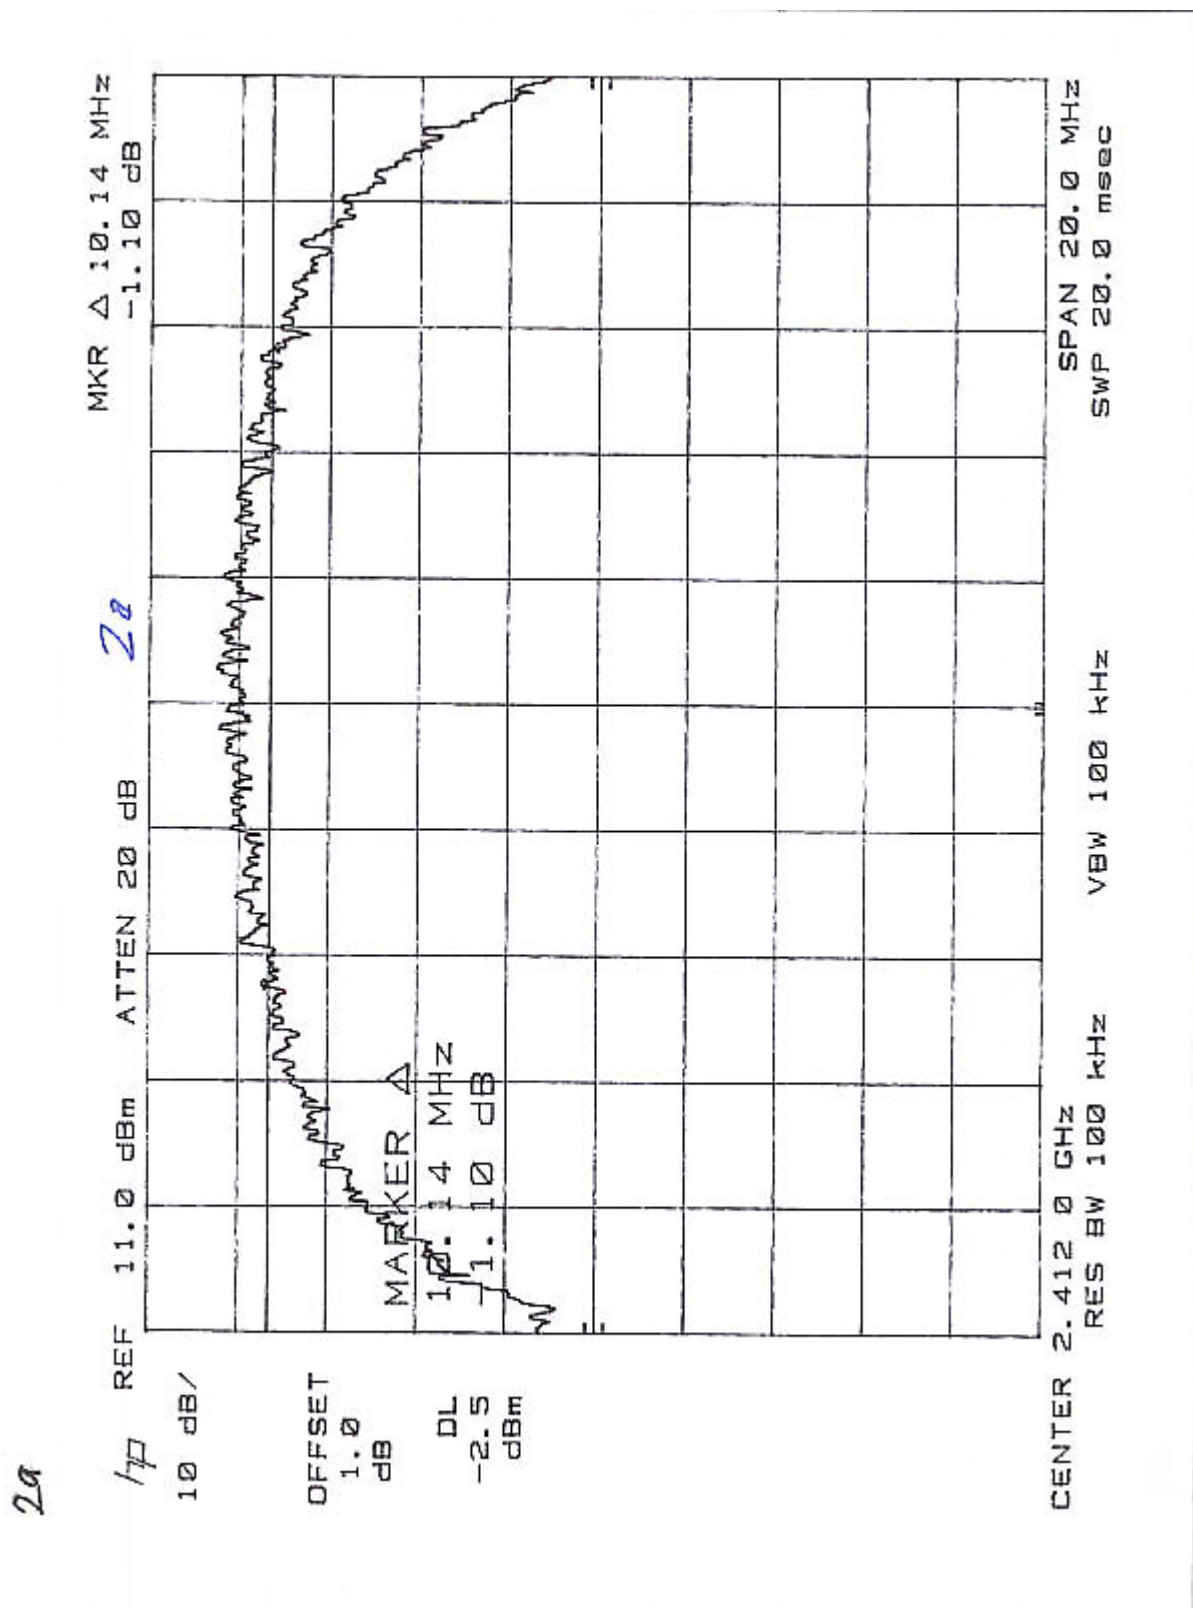

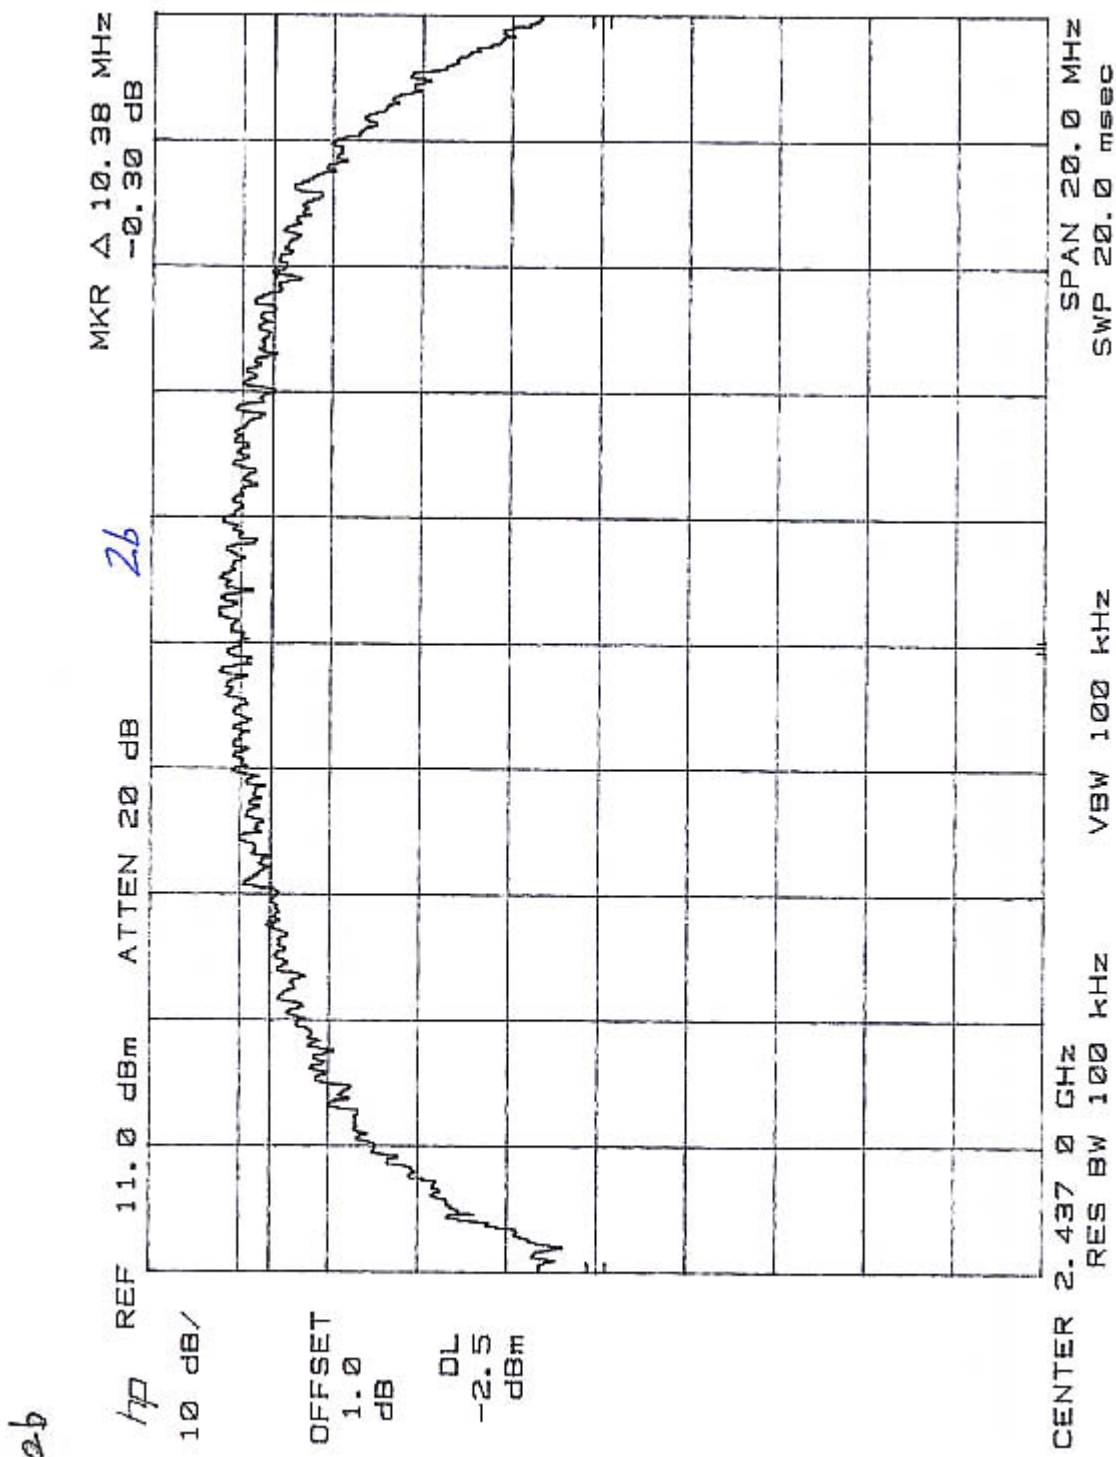

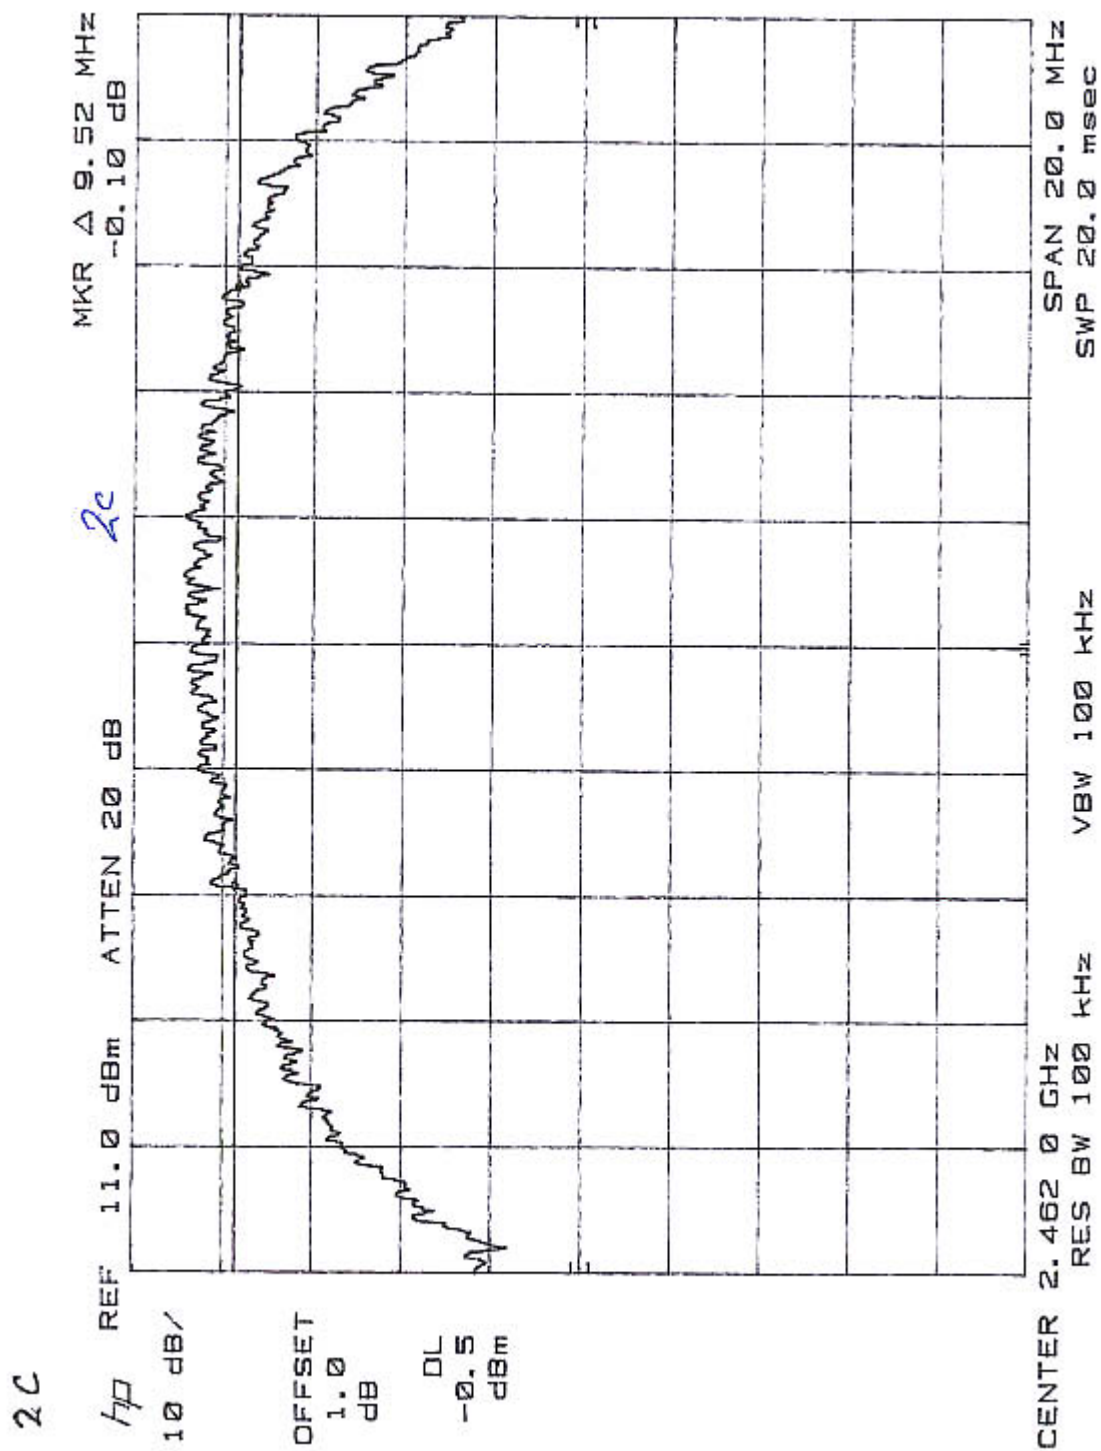

4.3 Power Density
FCC Rule 15.247(d):Requirements

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Procedure

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. Total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Test Result


Frequency (MHz)	Power Density (dBm)
2412	-9.6


Frequency Span = 600 kHz


Sweep Time = Frequency Span/3 kHz
= 200 Seconds


Refer to the following plots for power density data:


Plot 3a1 – 3a2: Low Channel Power Density
Plot 3b1 – 3b2: Middle Channel Power Density
Plot 3c1 – 3c2: High Channel Power Density

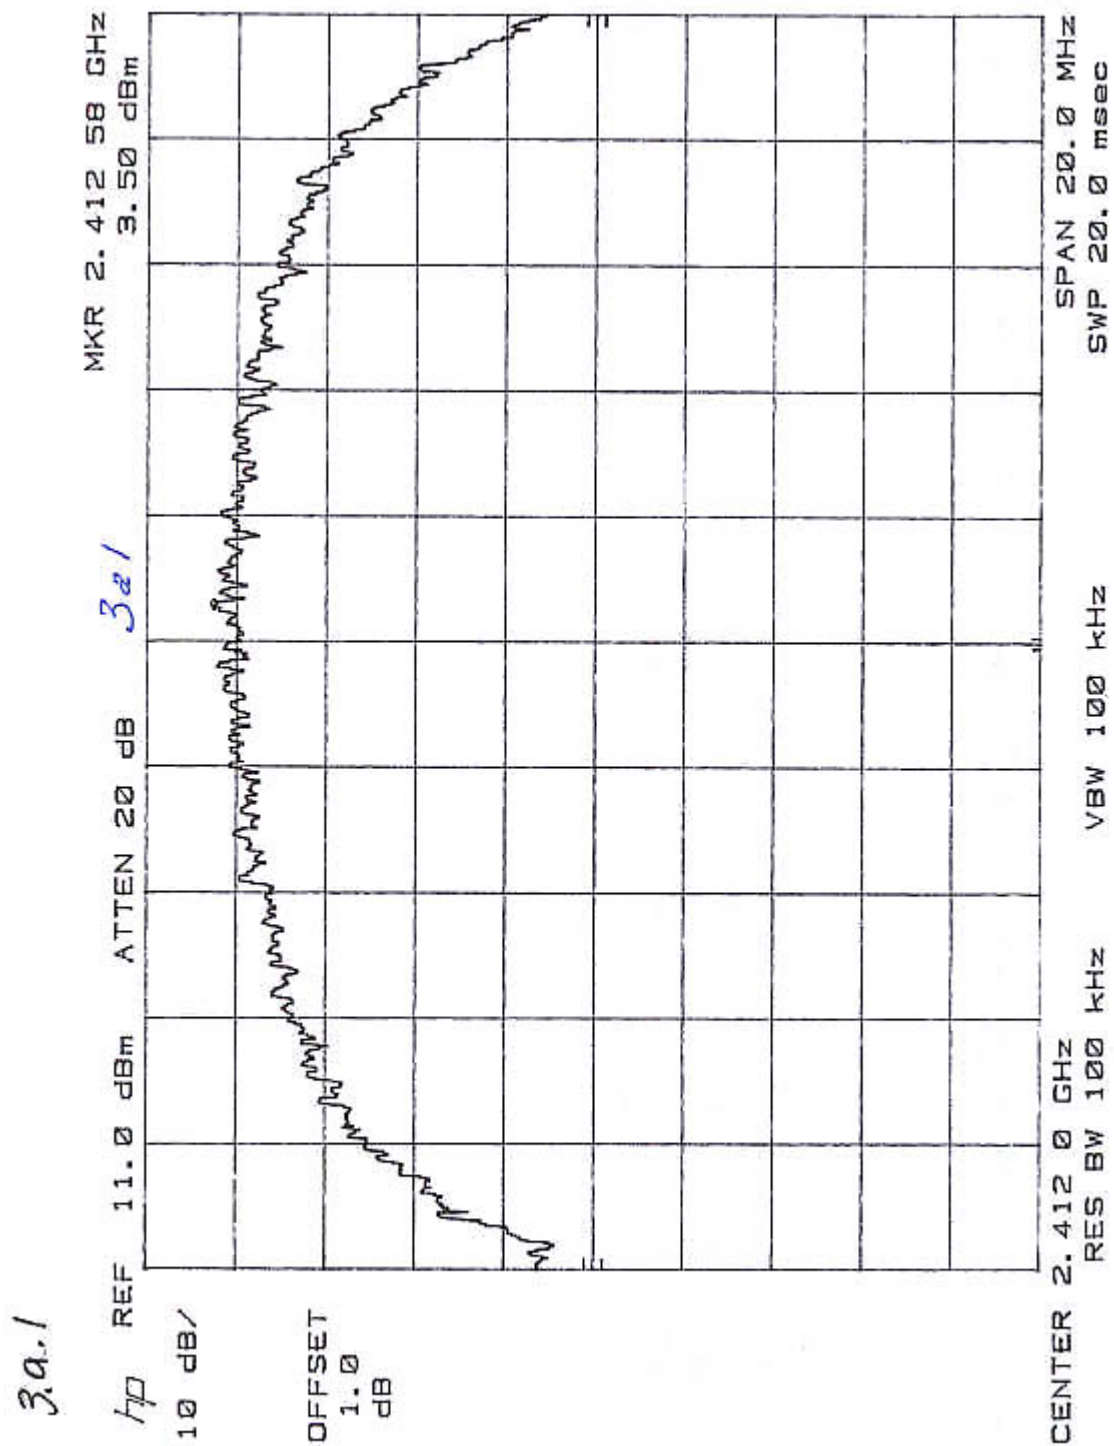


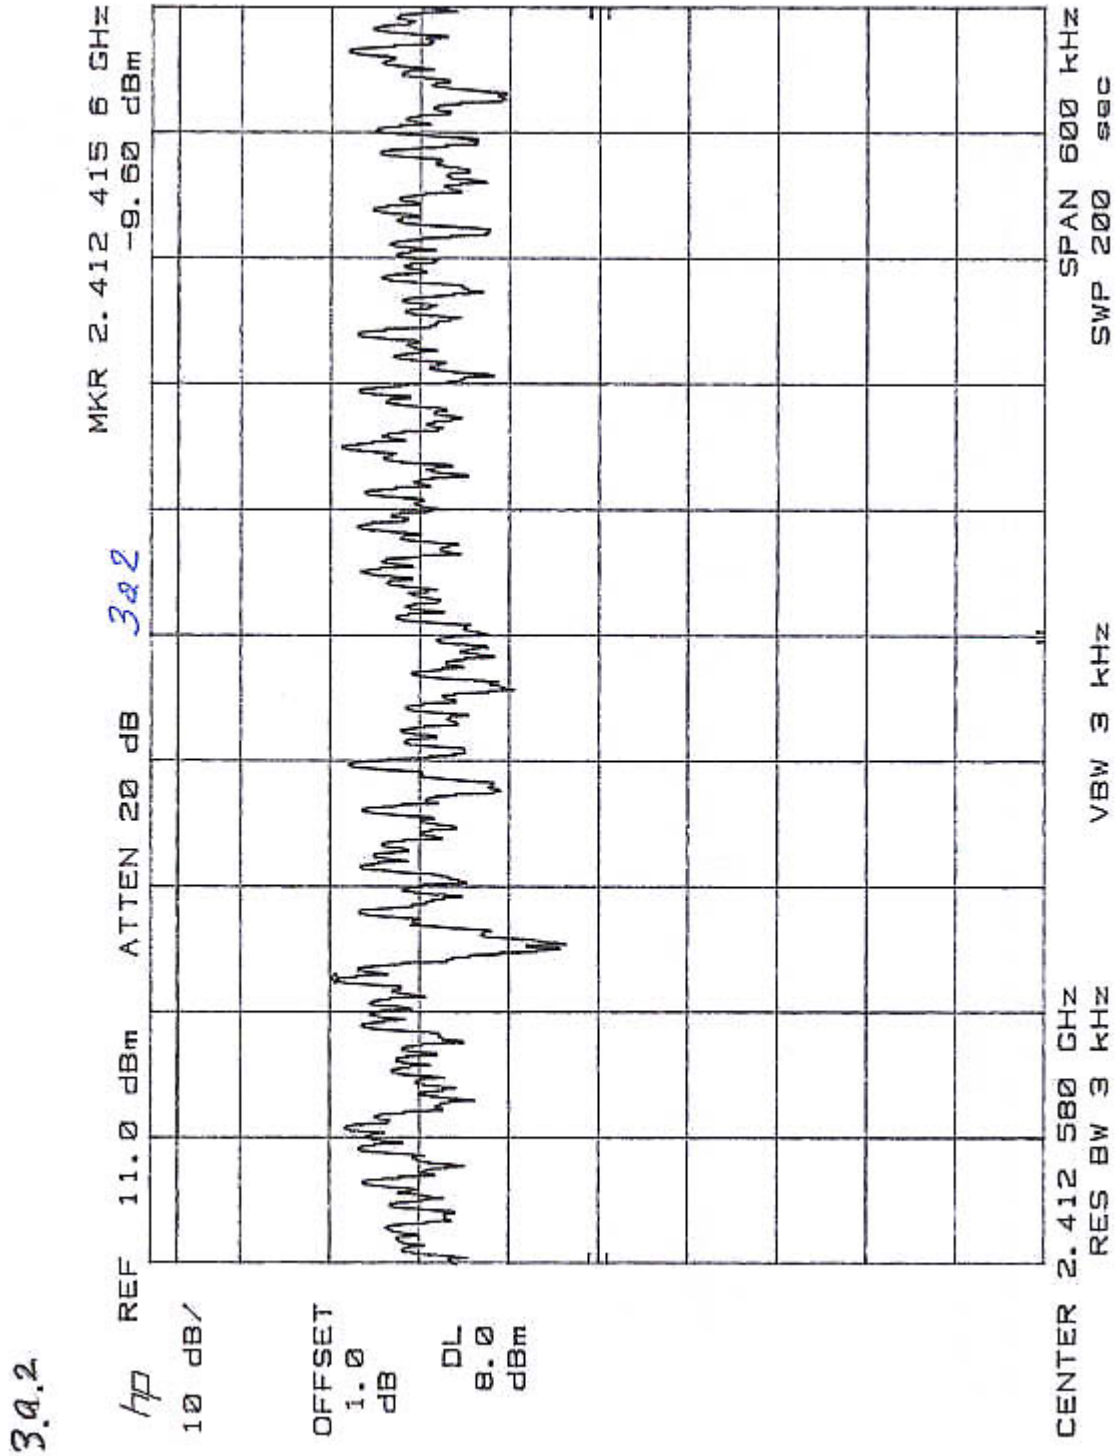

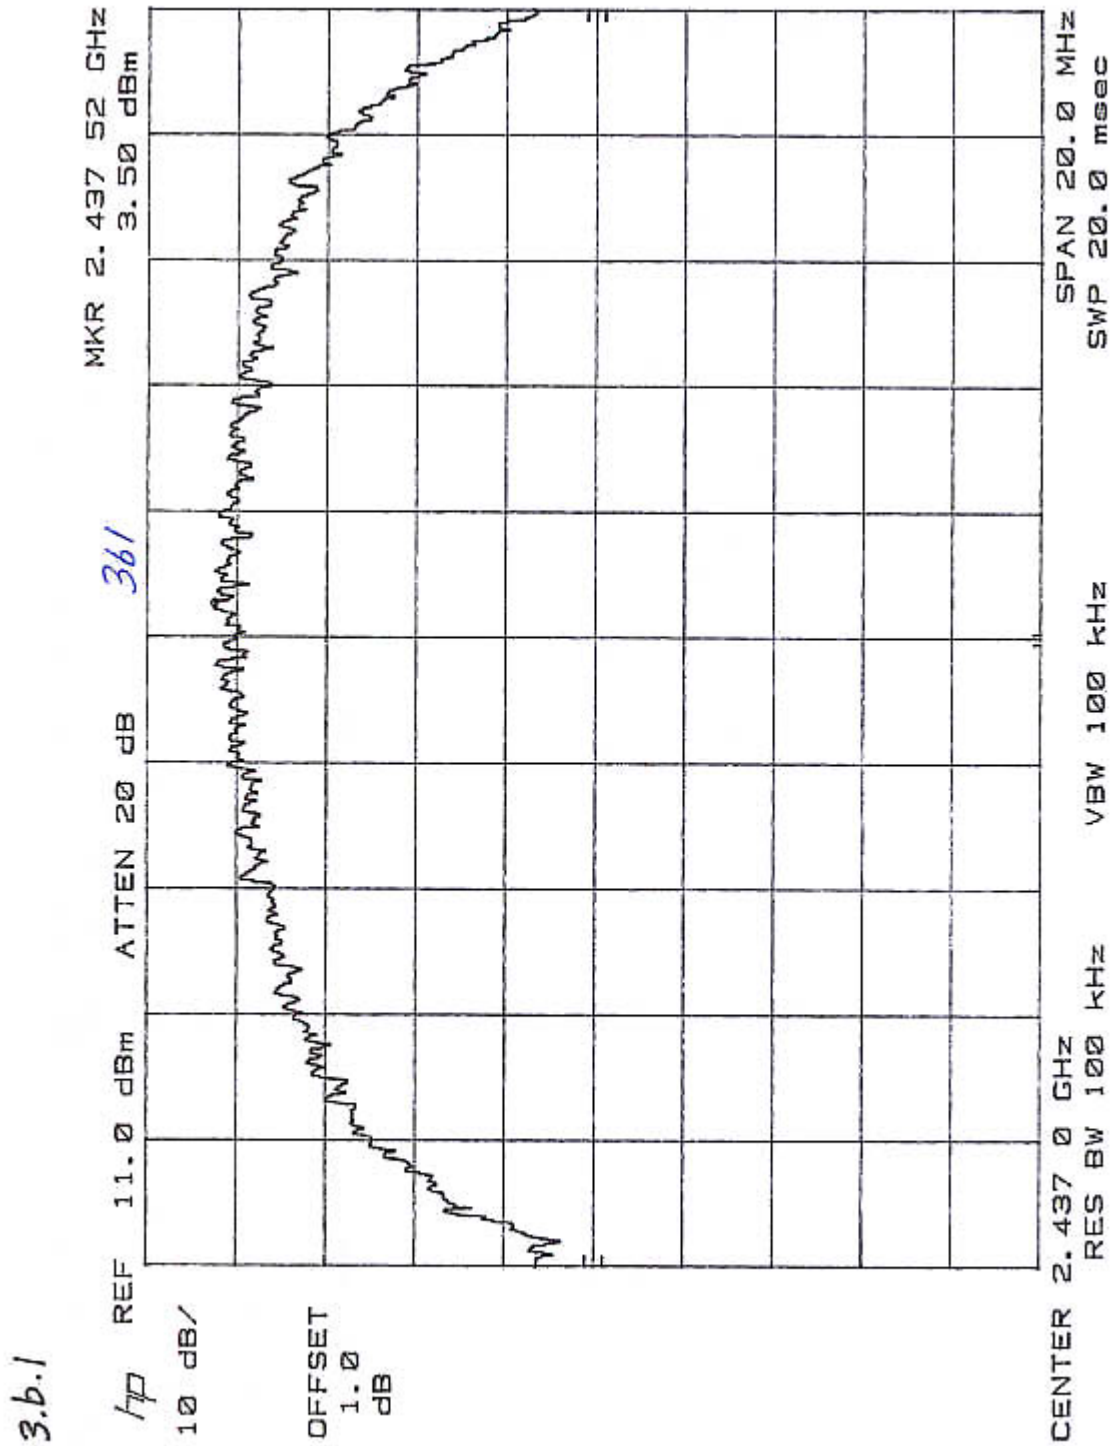

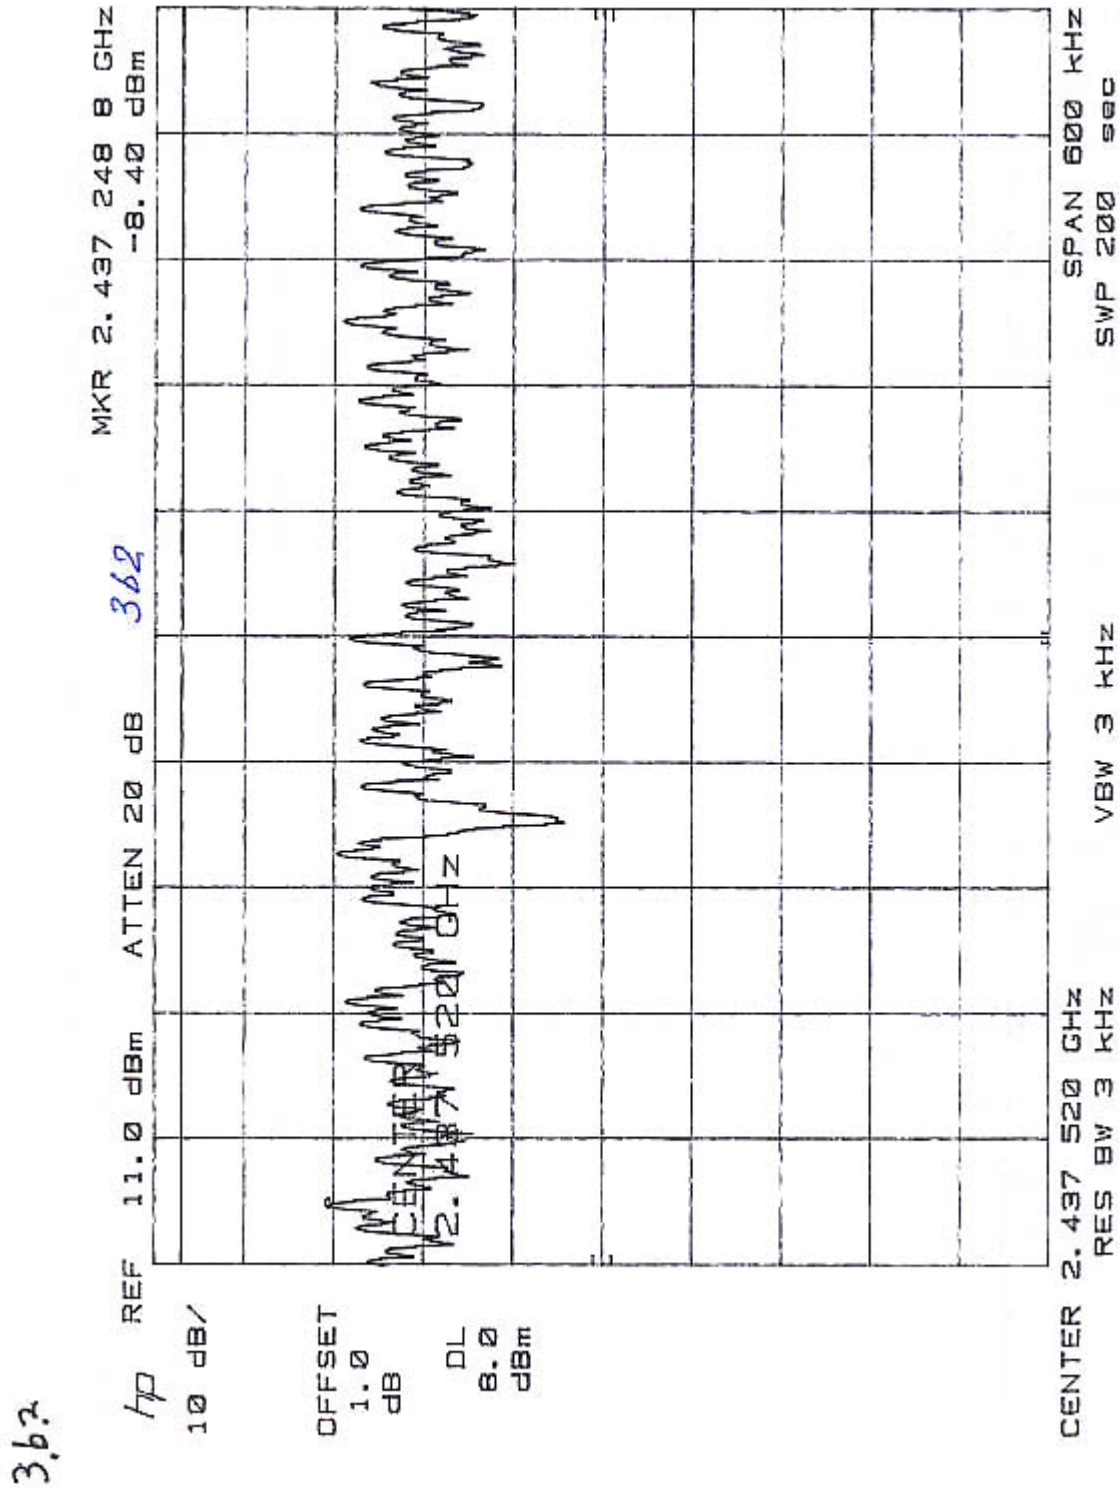

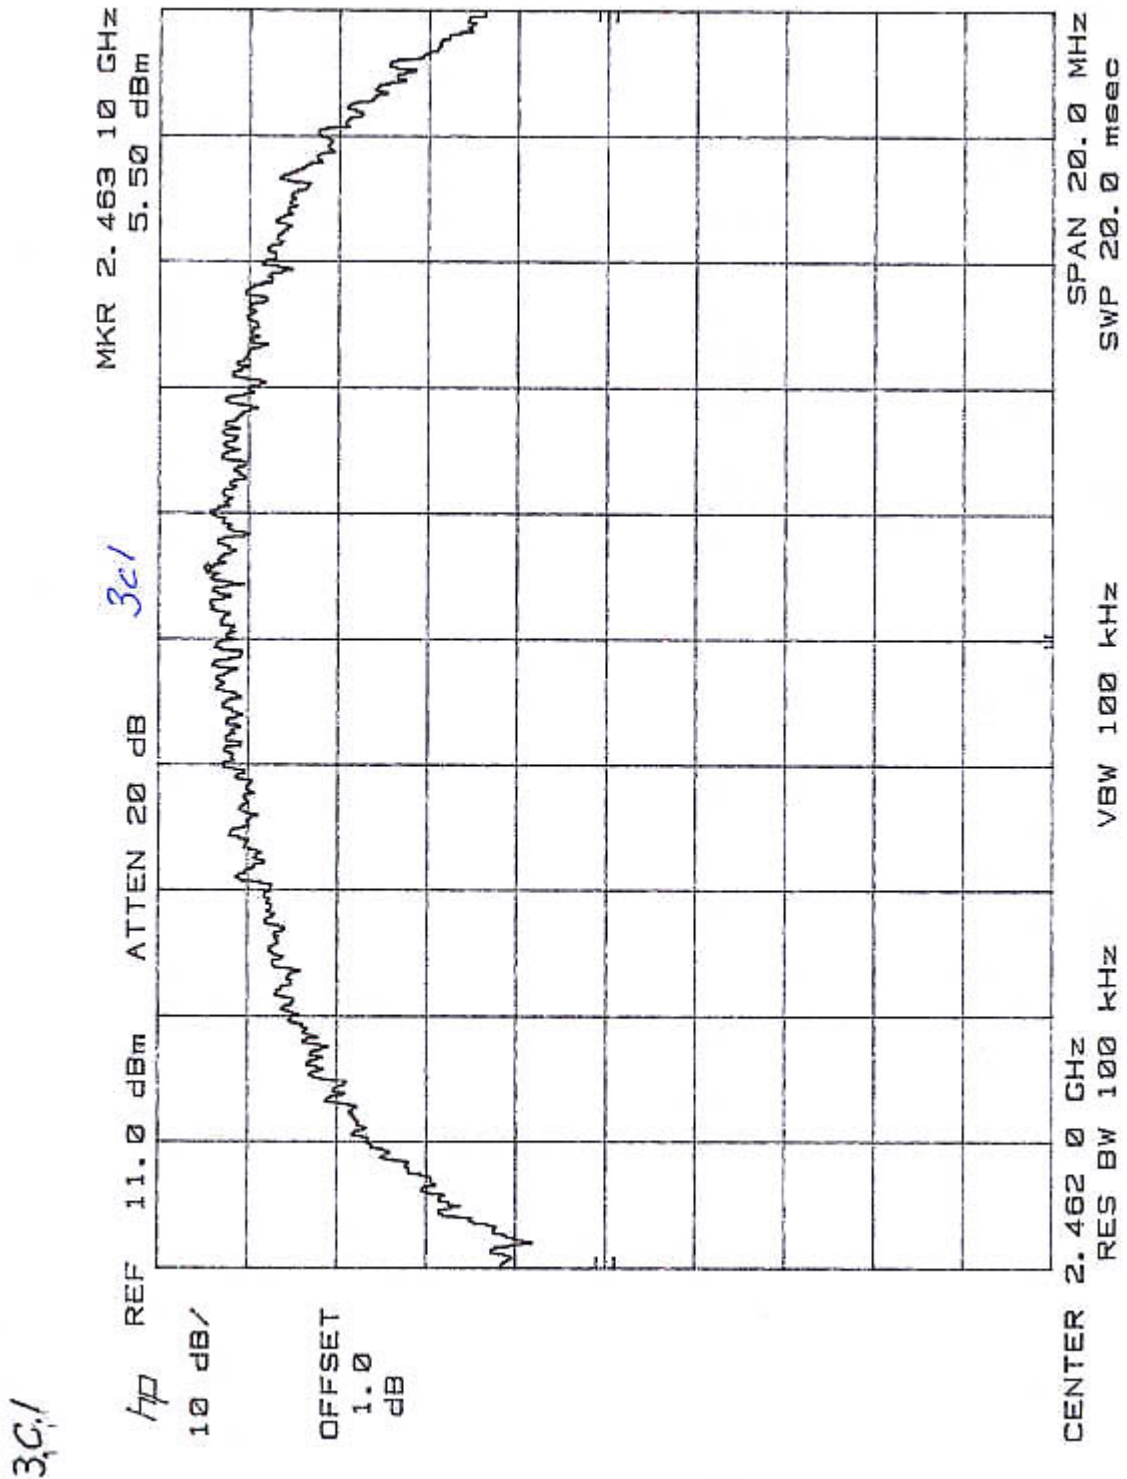

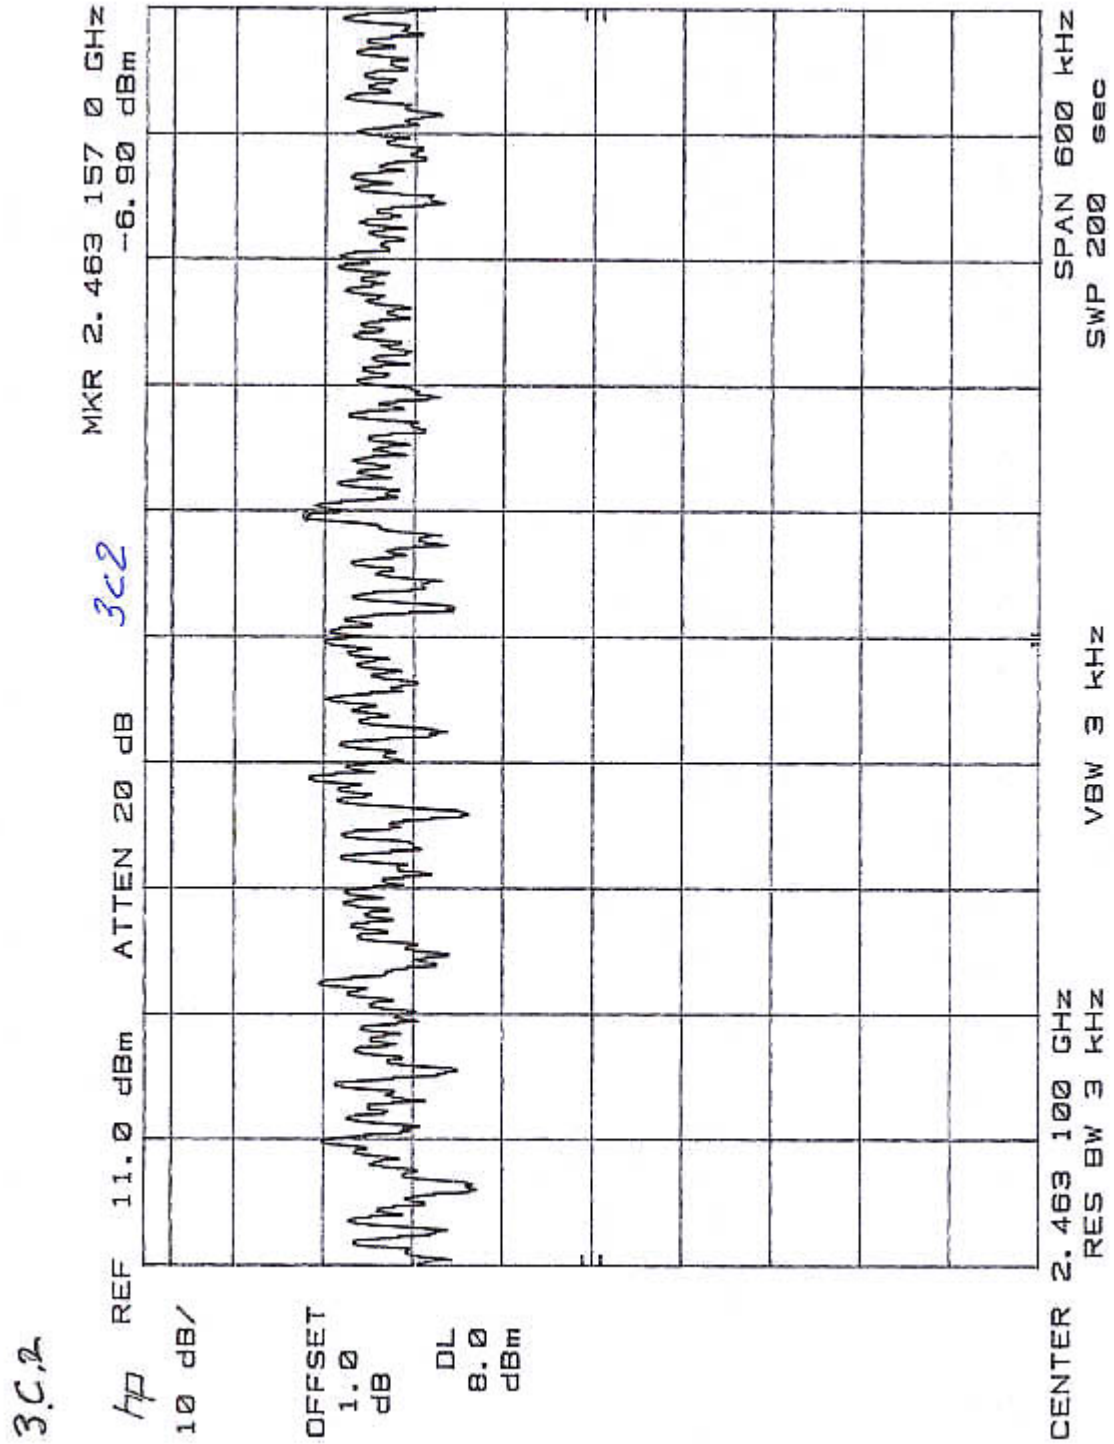

Symbol Technologies, Model No. LA-4131
FCC ID: H9PLA4131M

Date of Test: April 1 to May 24, 2001

4.4 Out-of-Band Conducted Emissions
FCC Rule 15.247(c):

Requirements

In any 100 kHz bandwidth outside the EUT passband, the RF power shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

Test Result


Refer to the following plots for out of band conducted emissions data:


Plot 4a1 - 4a5: Low Channel Emissions
Plot 4b1 - 4b5: Middle Channel Emissions
Plot 4c1 - 4c5: High Channel Emissions


4.5 Out-of-Band Radiated Emissions
FCC Rule 15.247(c):


For out-of-band emissions that are close to or less than the 20 dB attenuation requirement described in the section 4.4, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the 20 dB attenuation.


Not required, all conducted emissions more than 20 dB below fundamental.

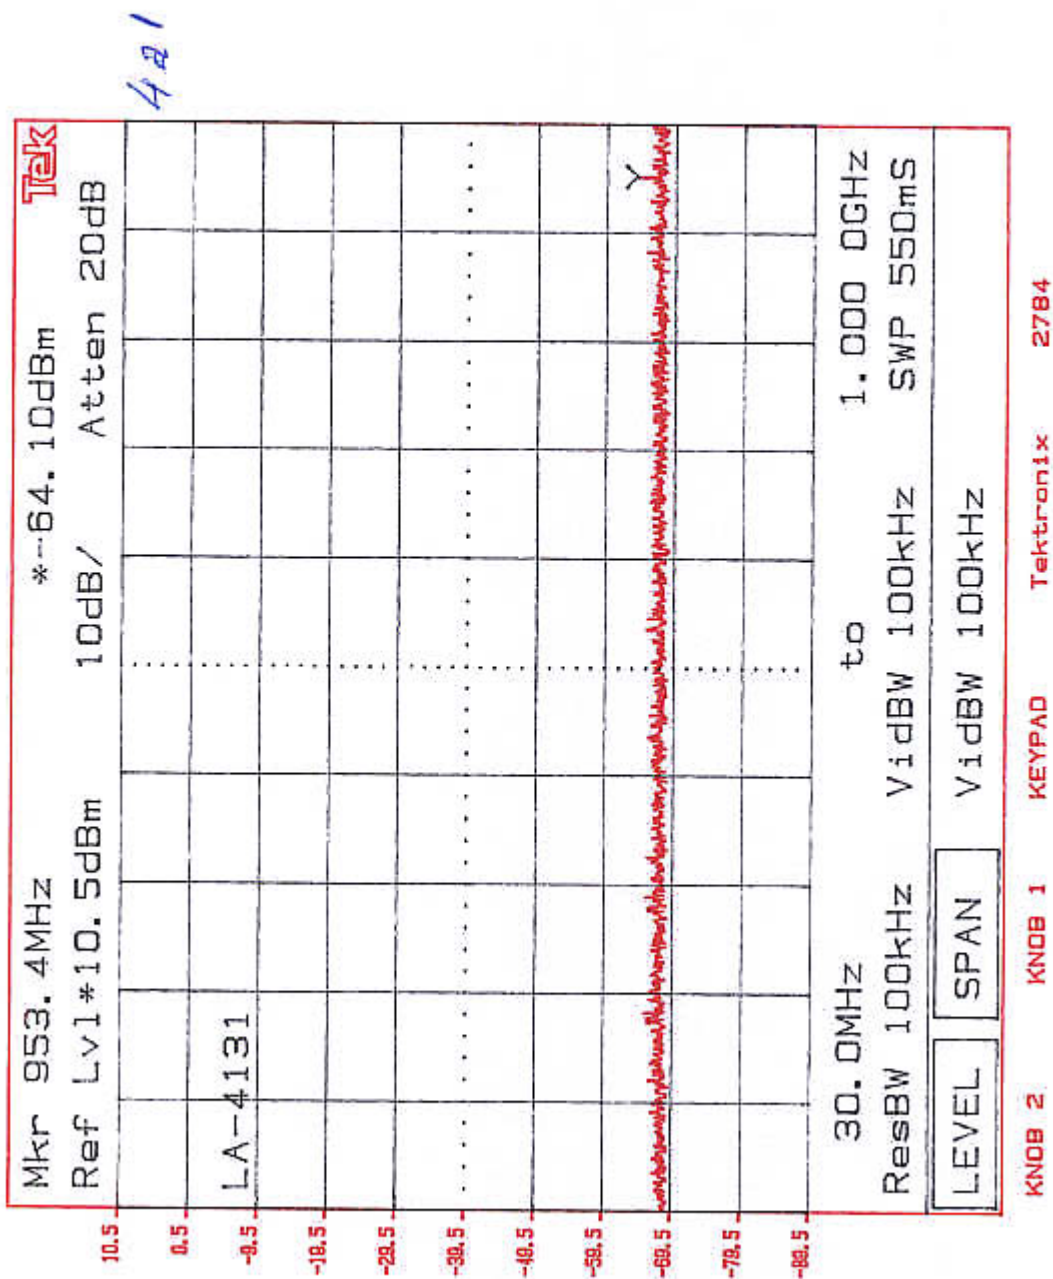


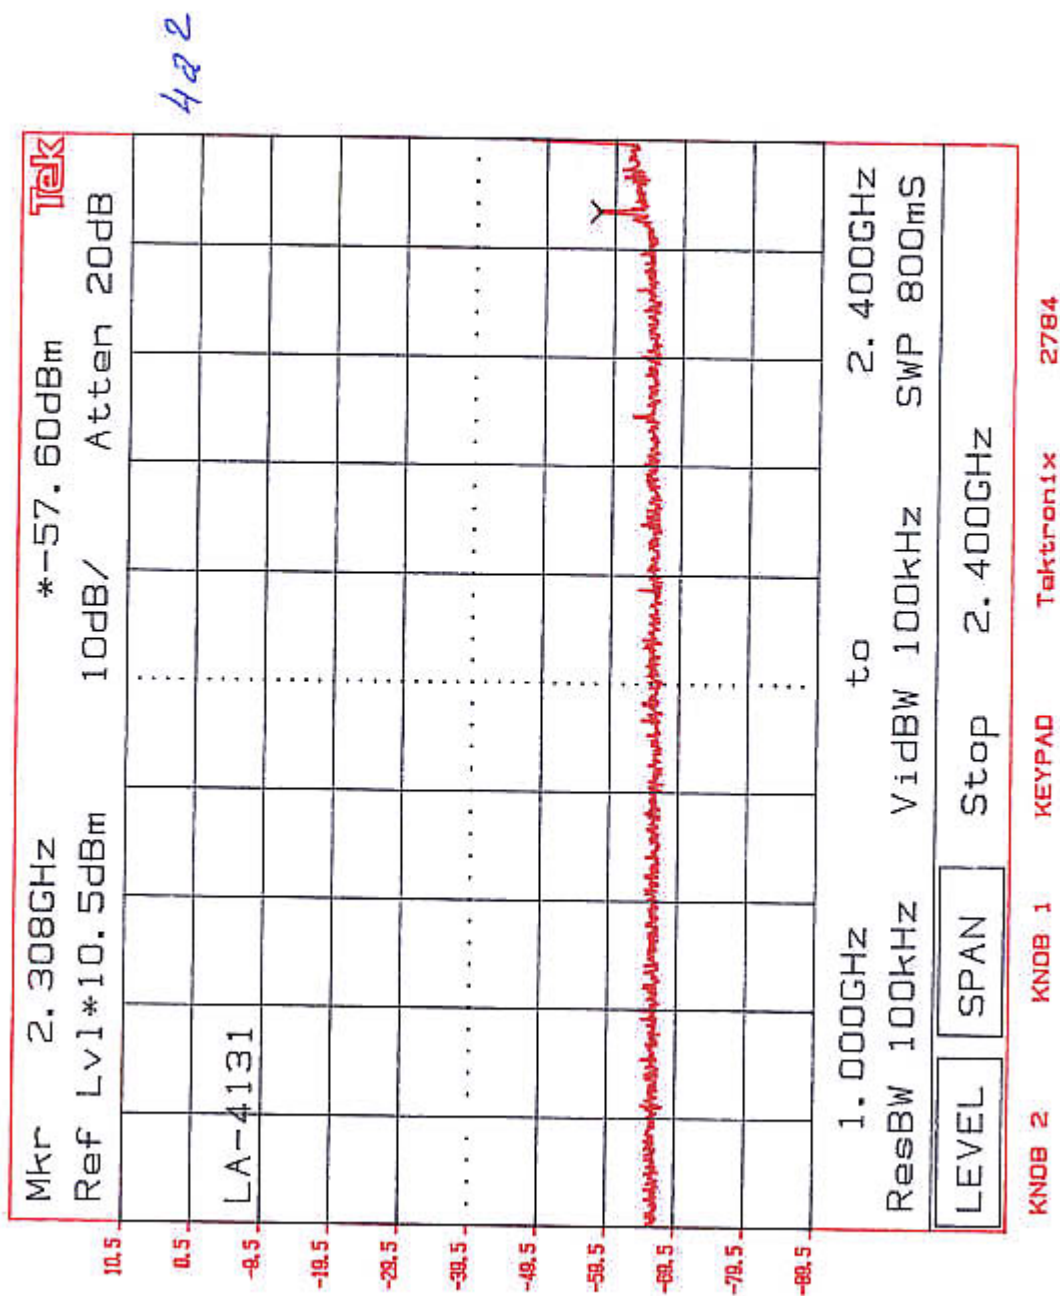


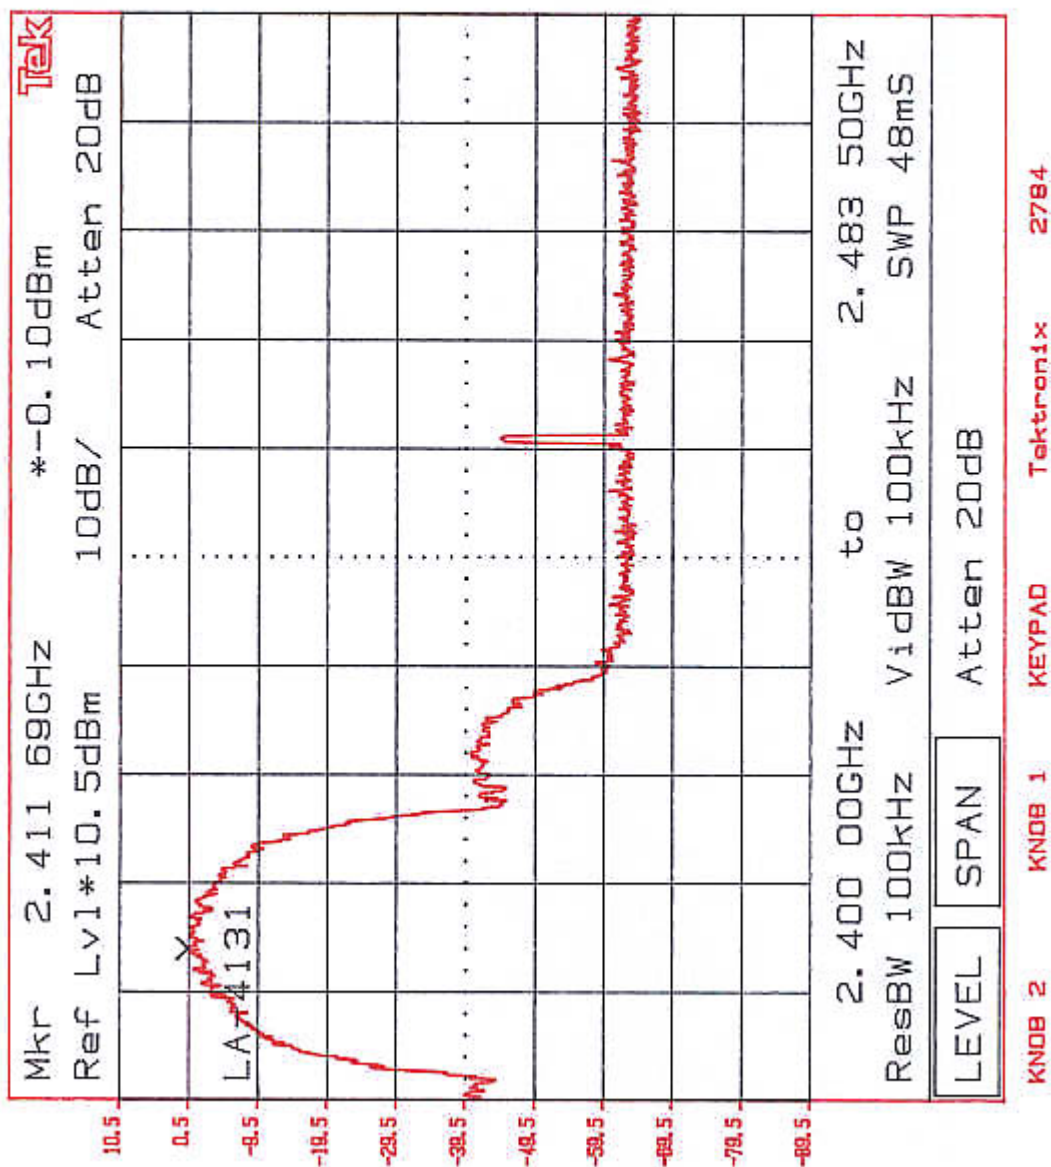


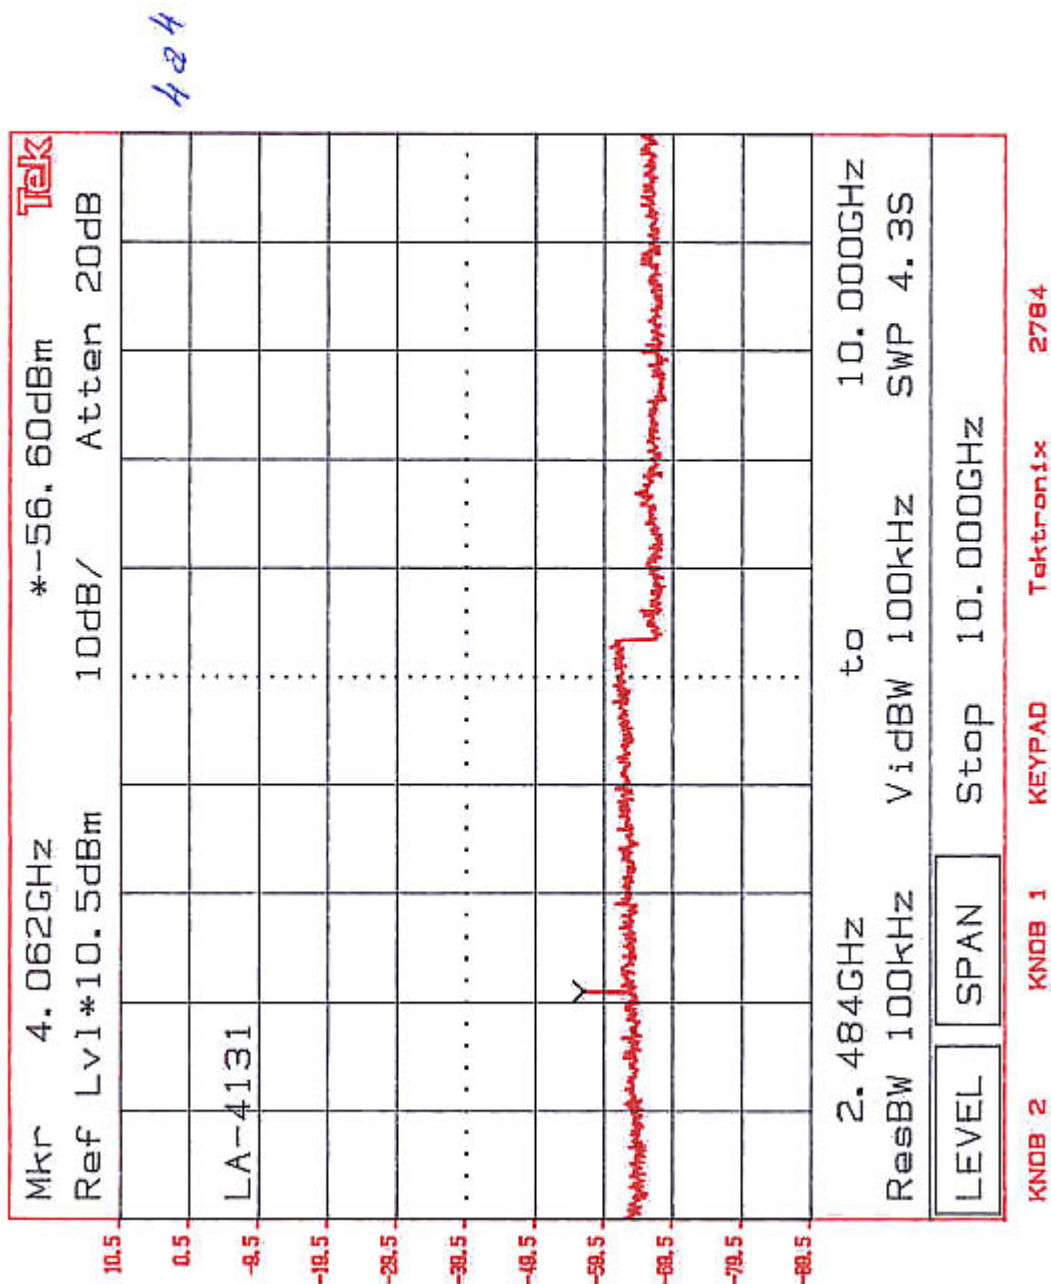


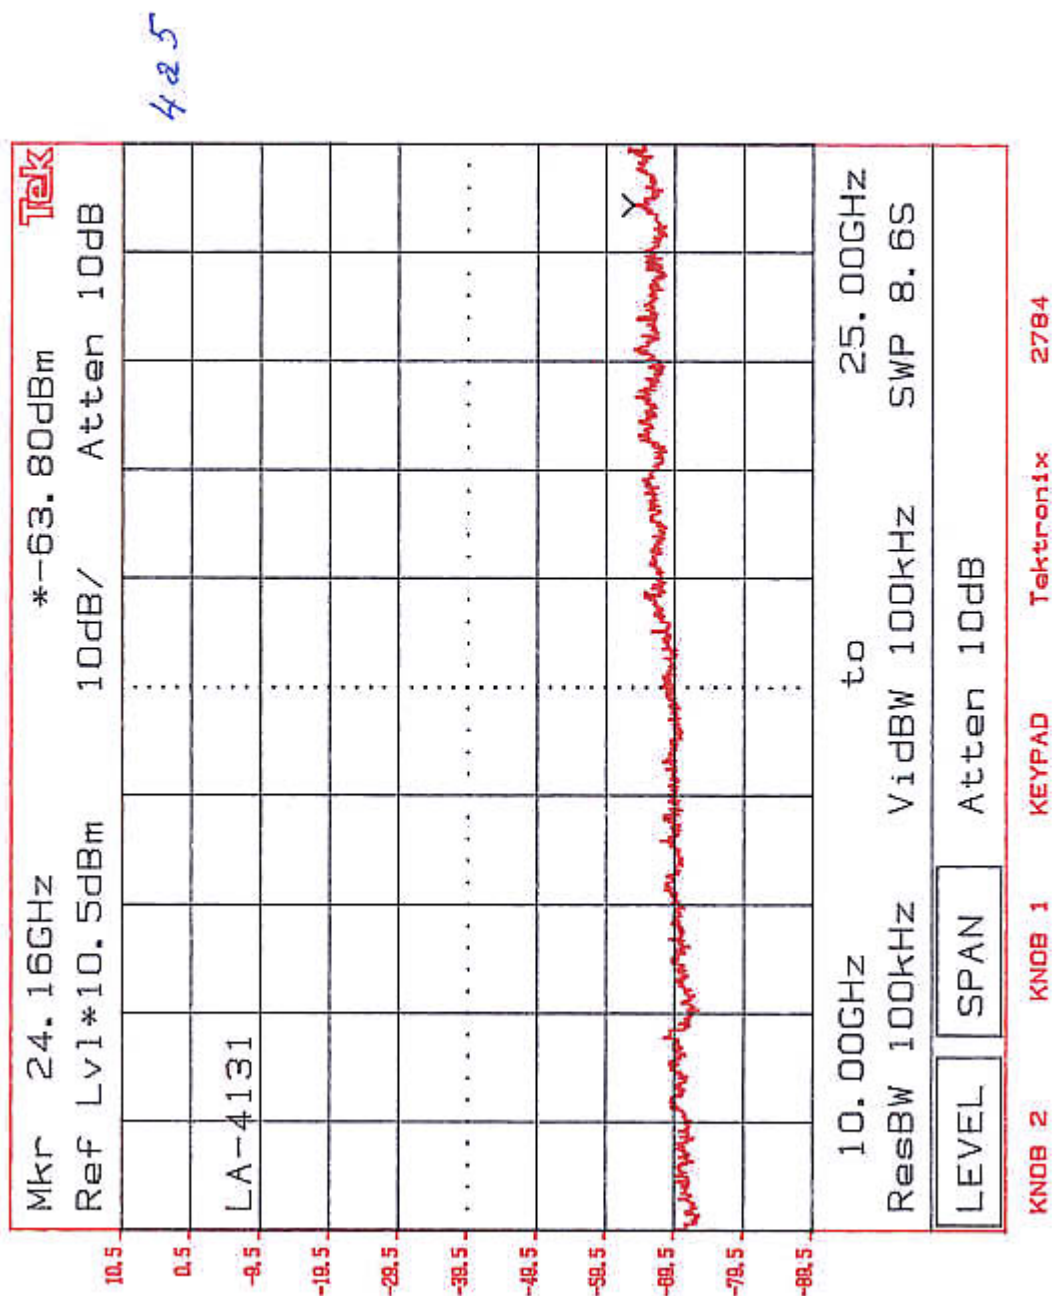


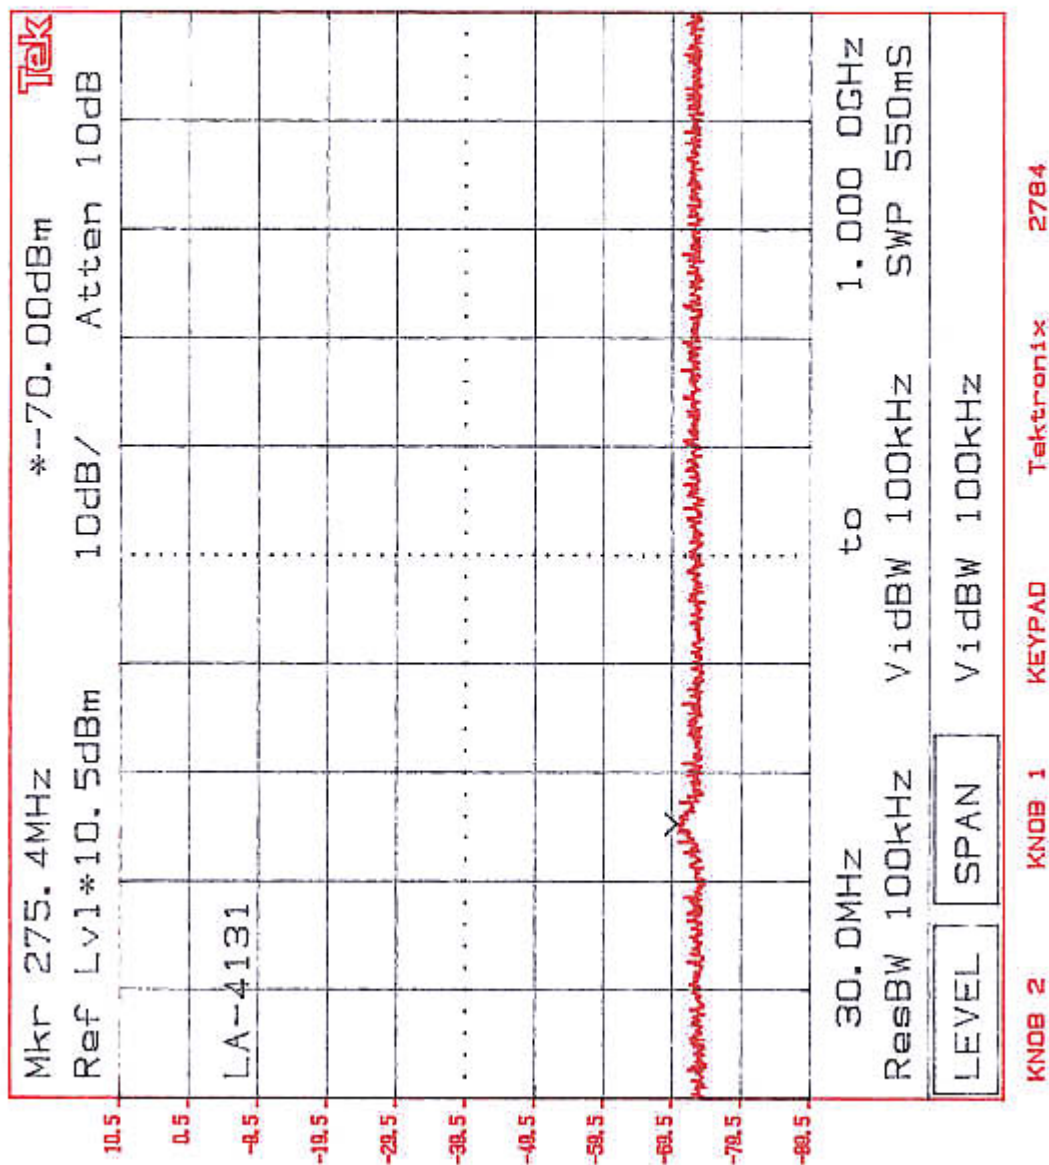


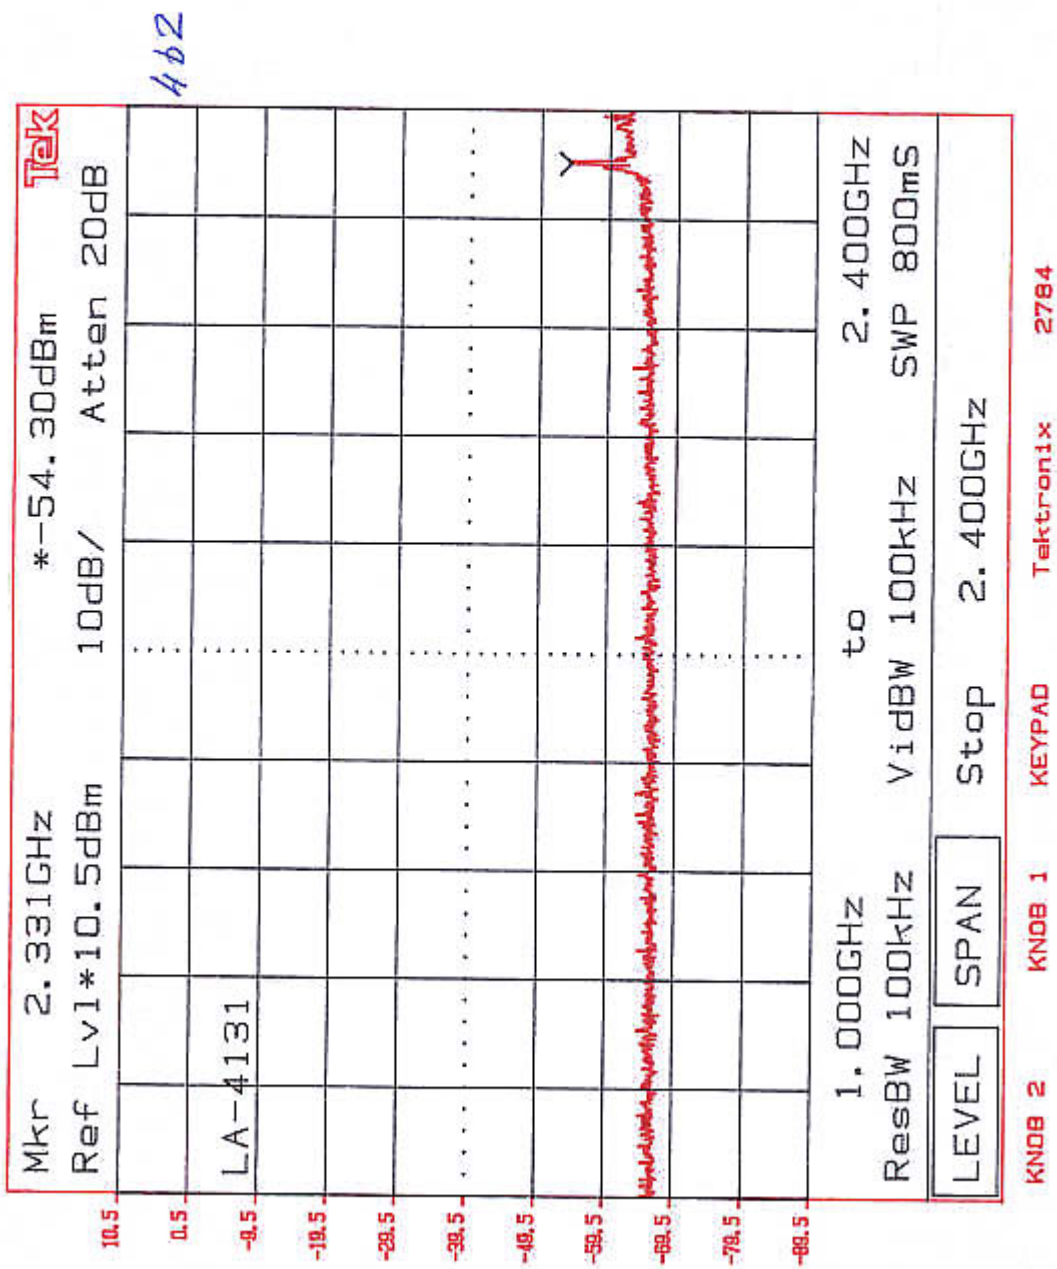


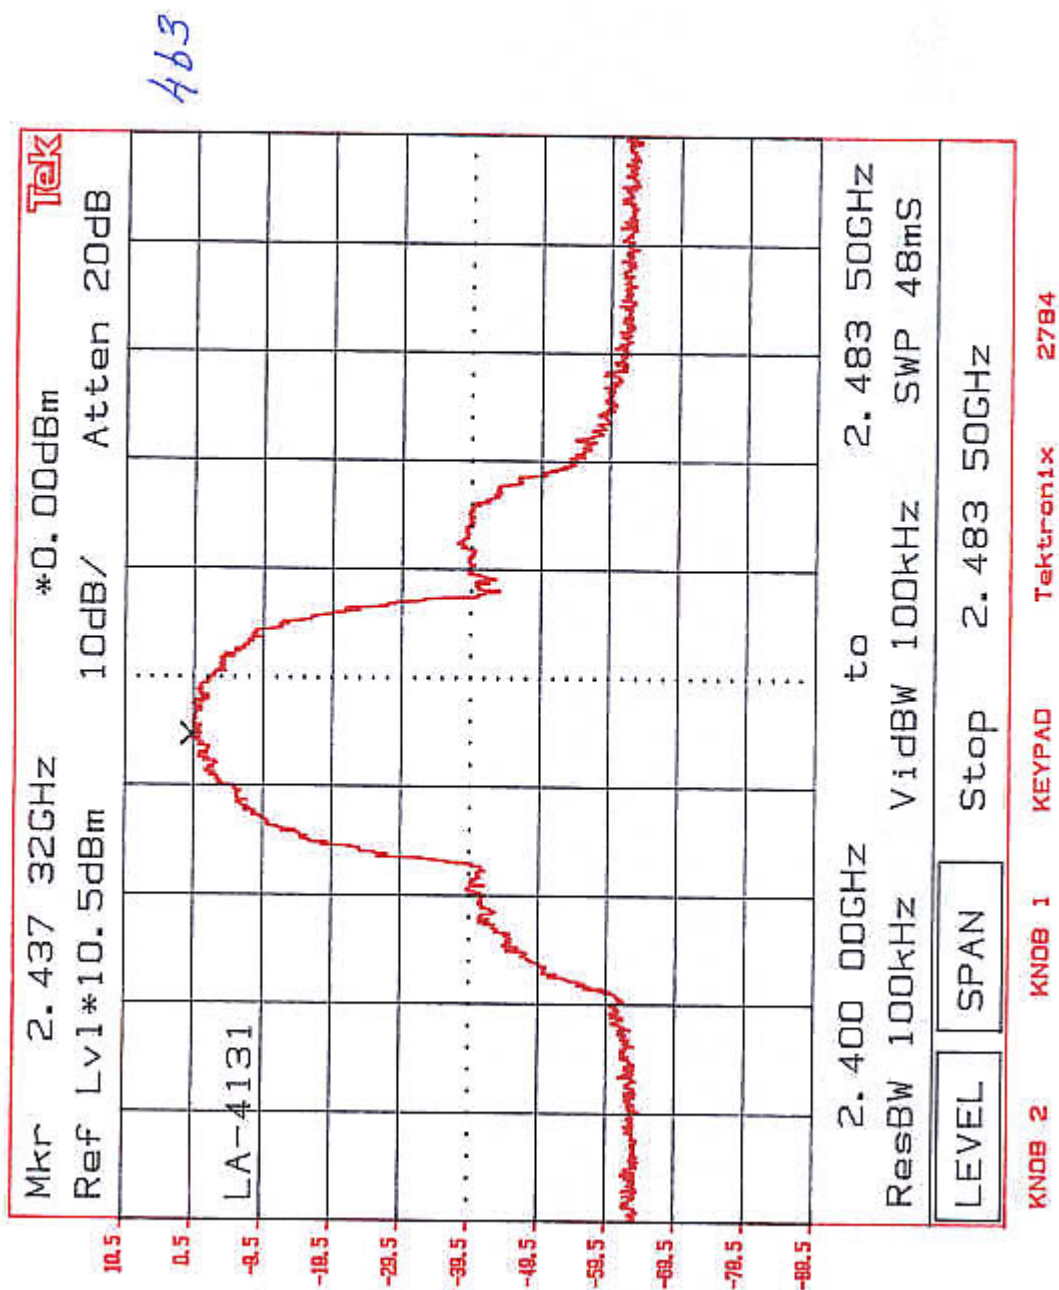


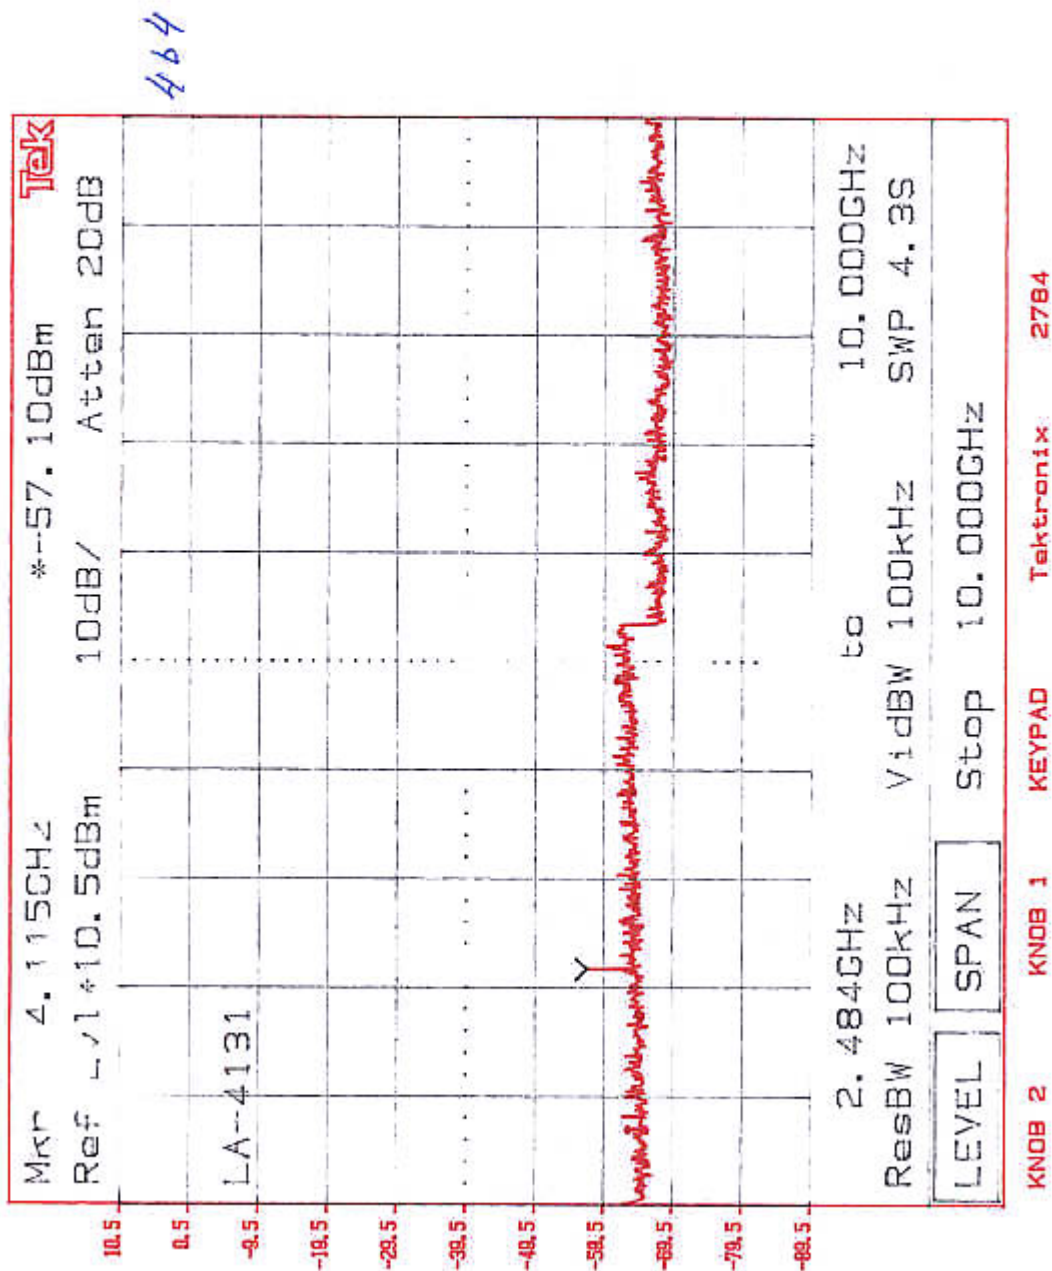


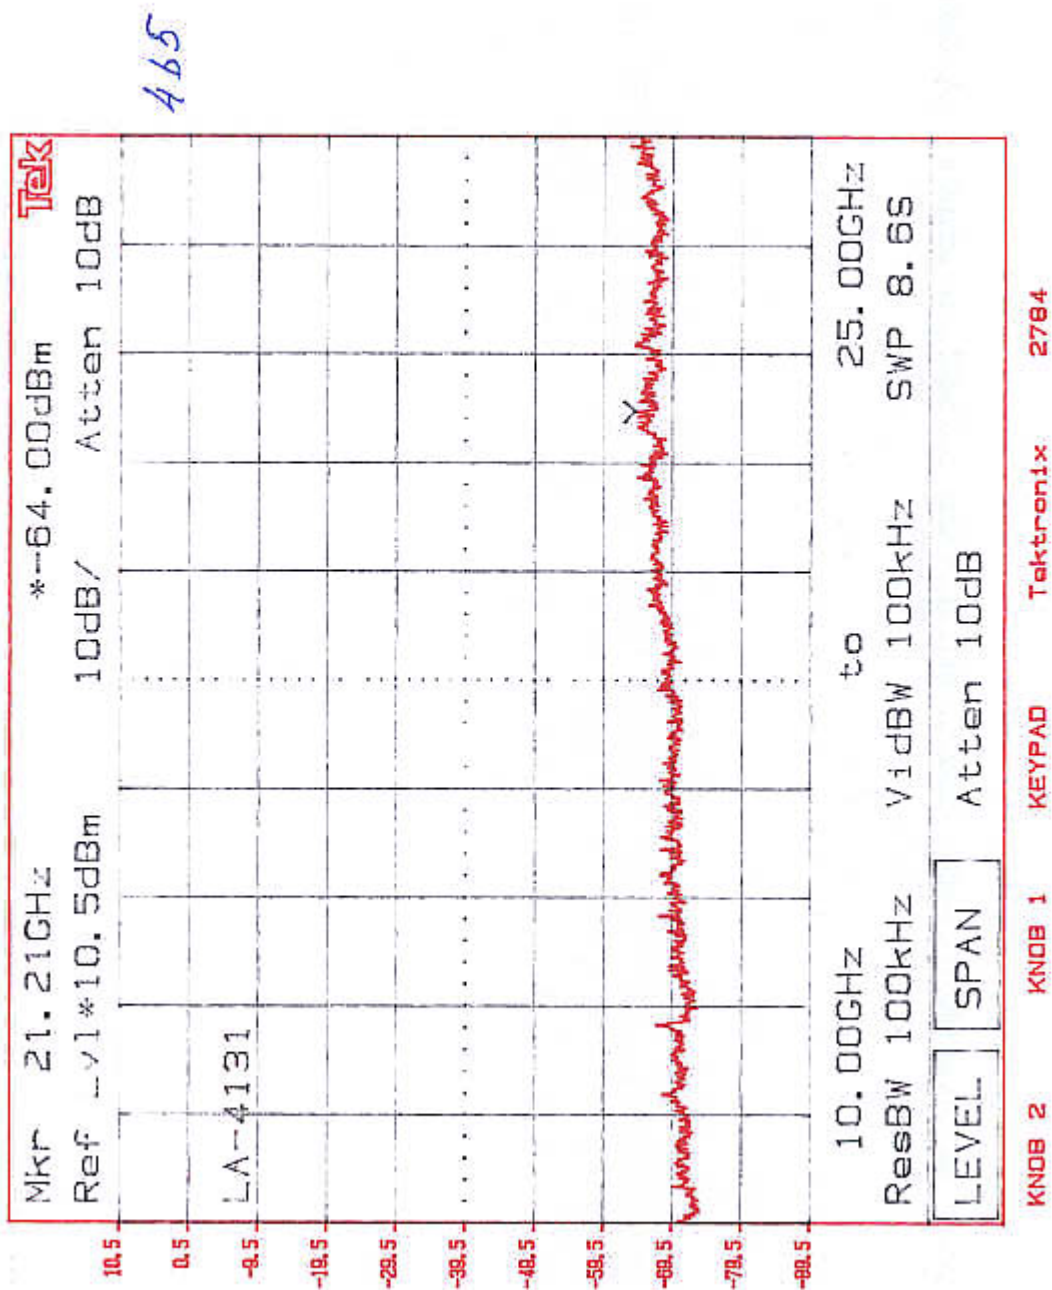


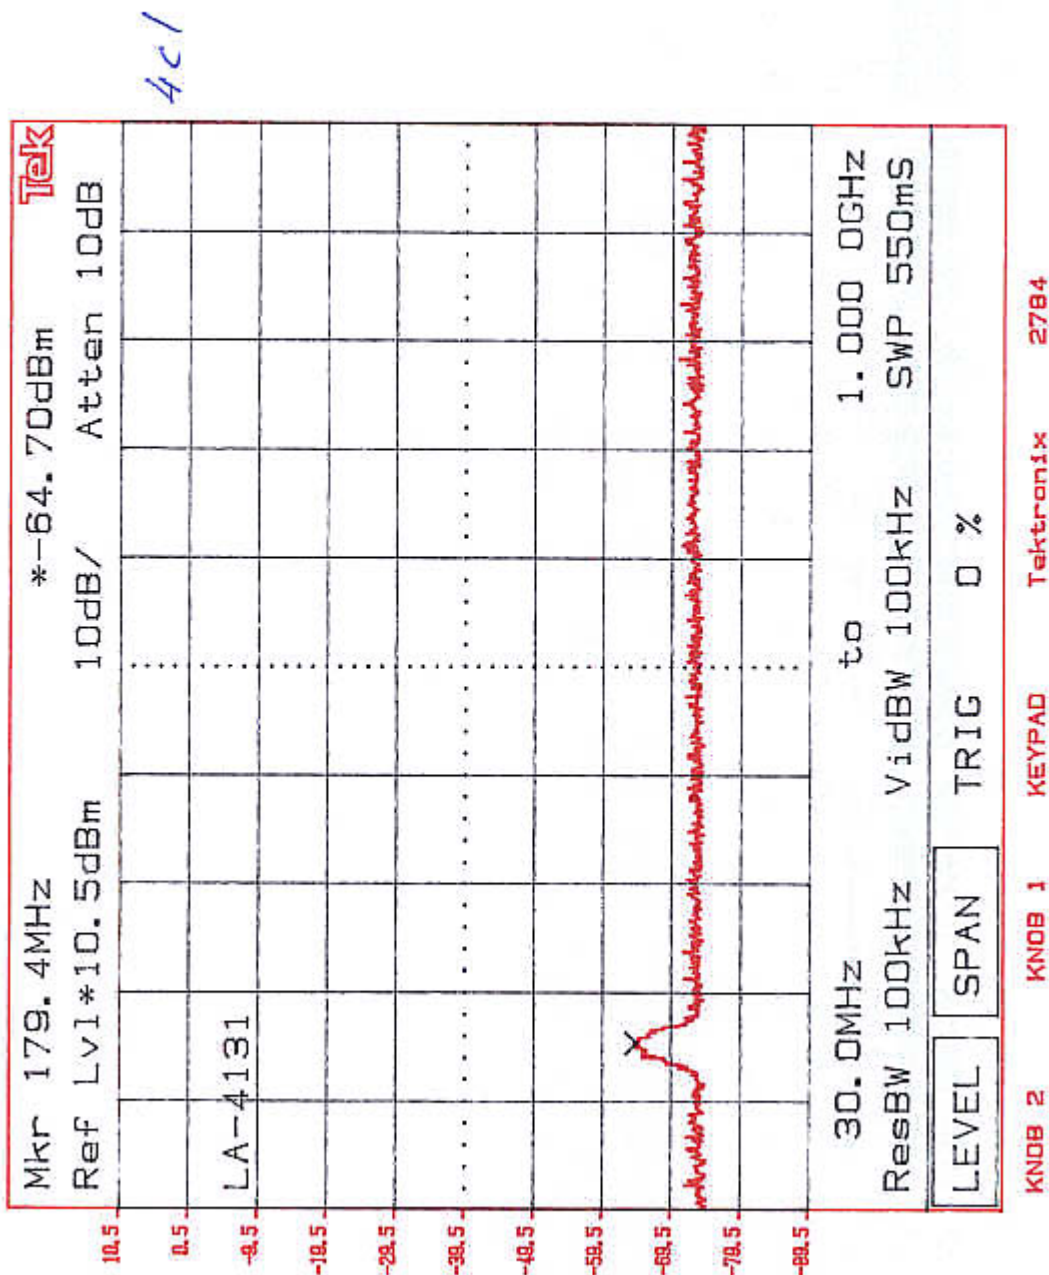

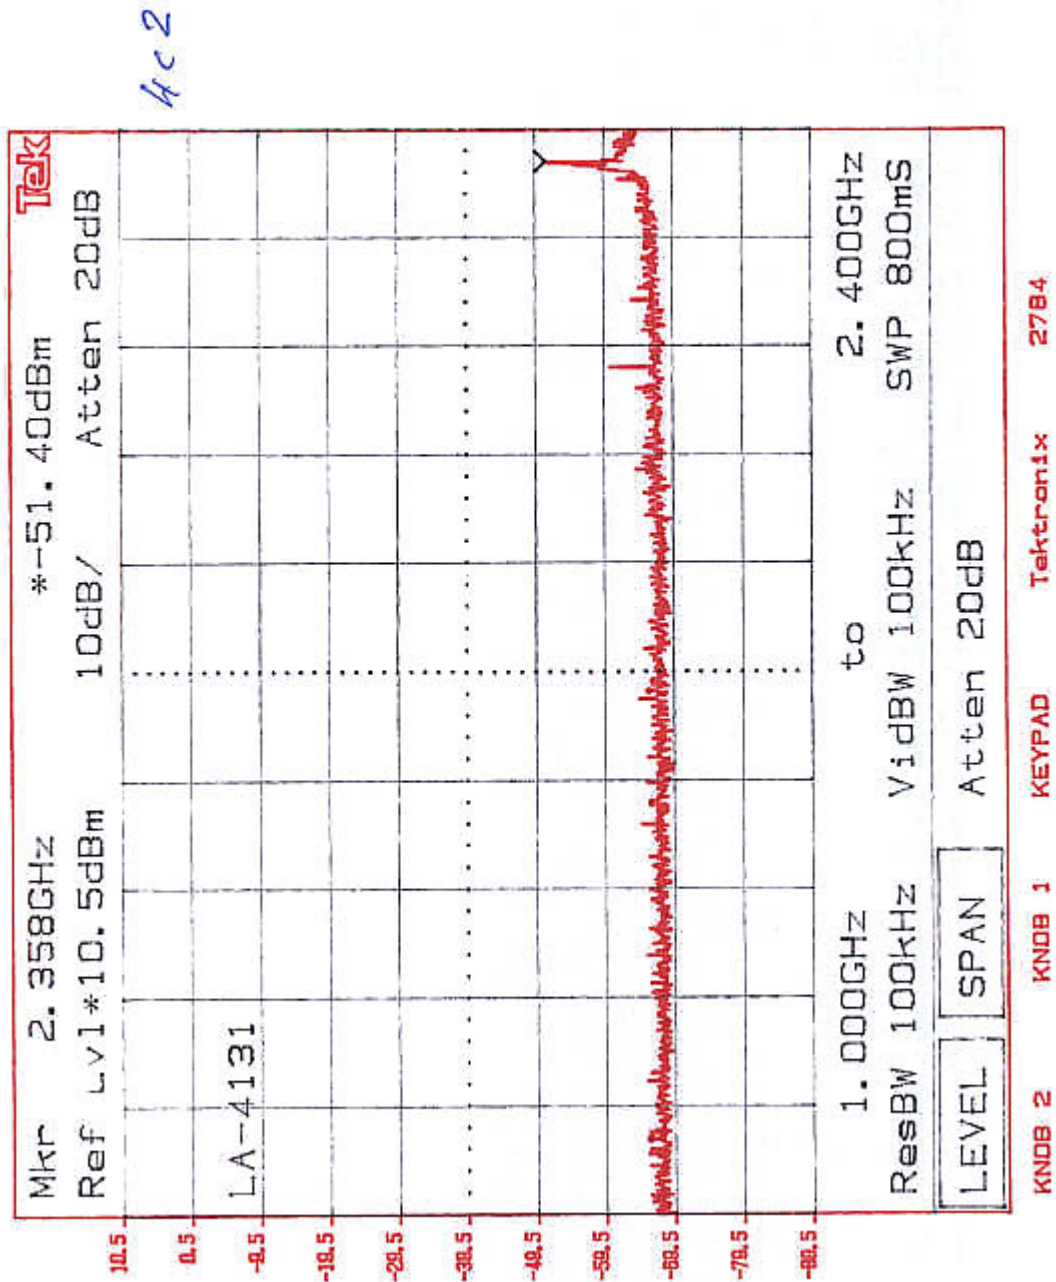

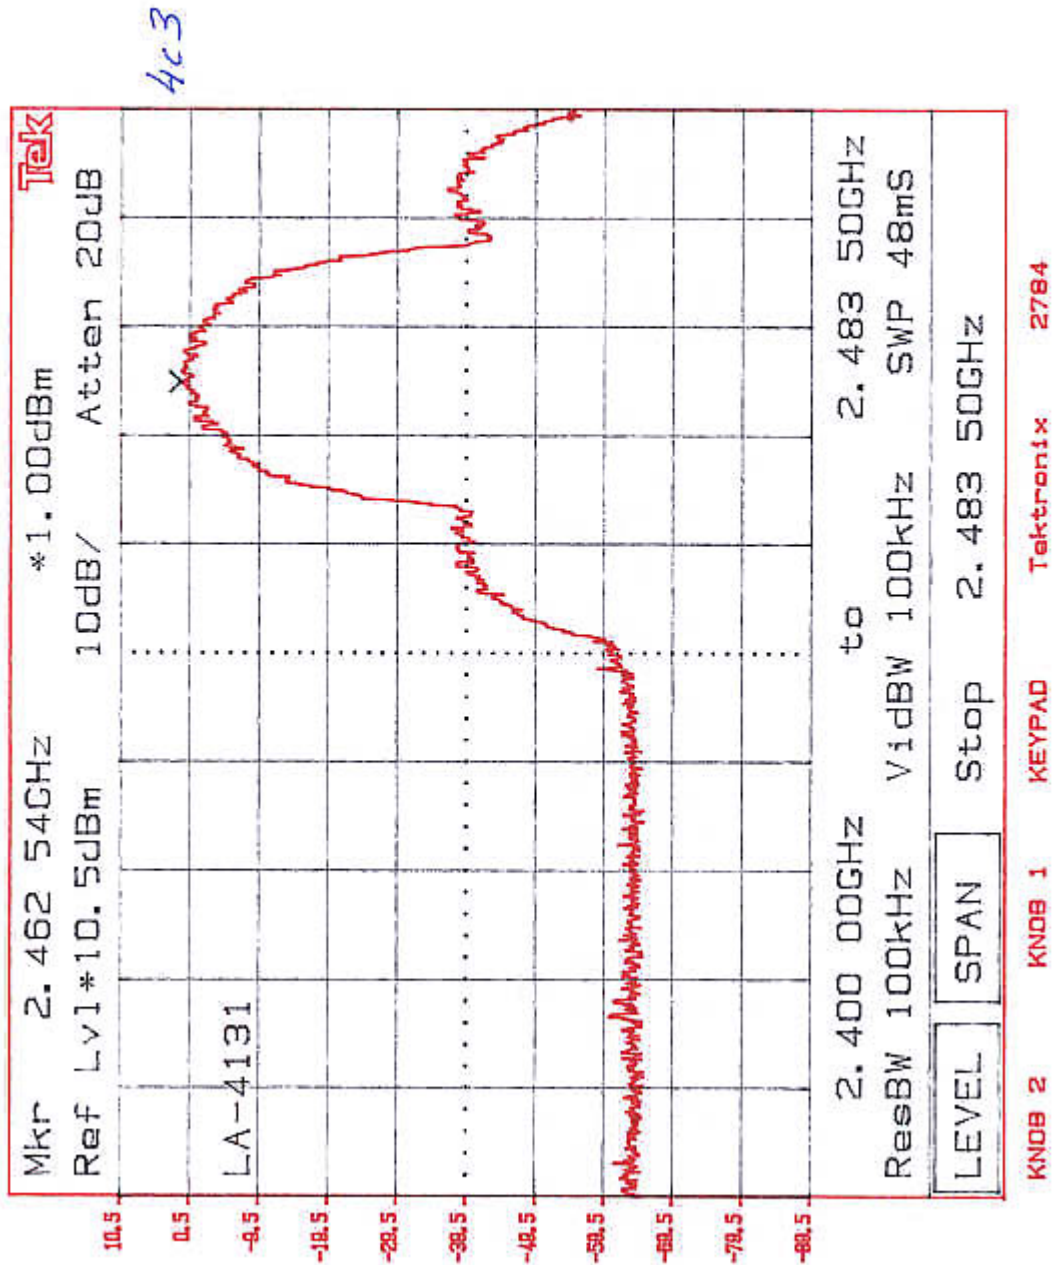

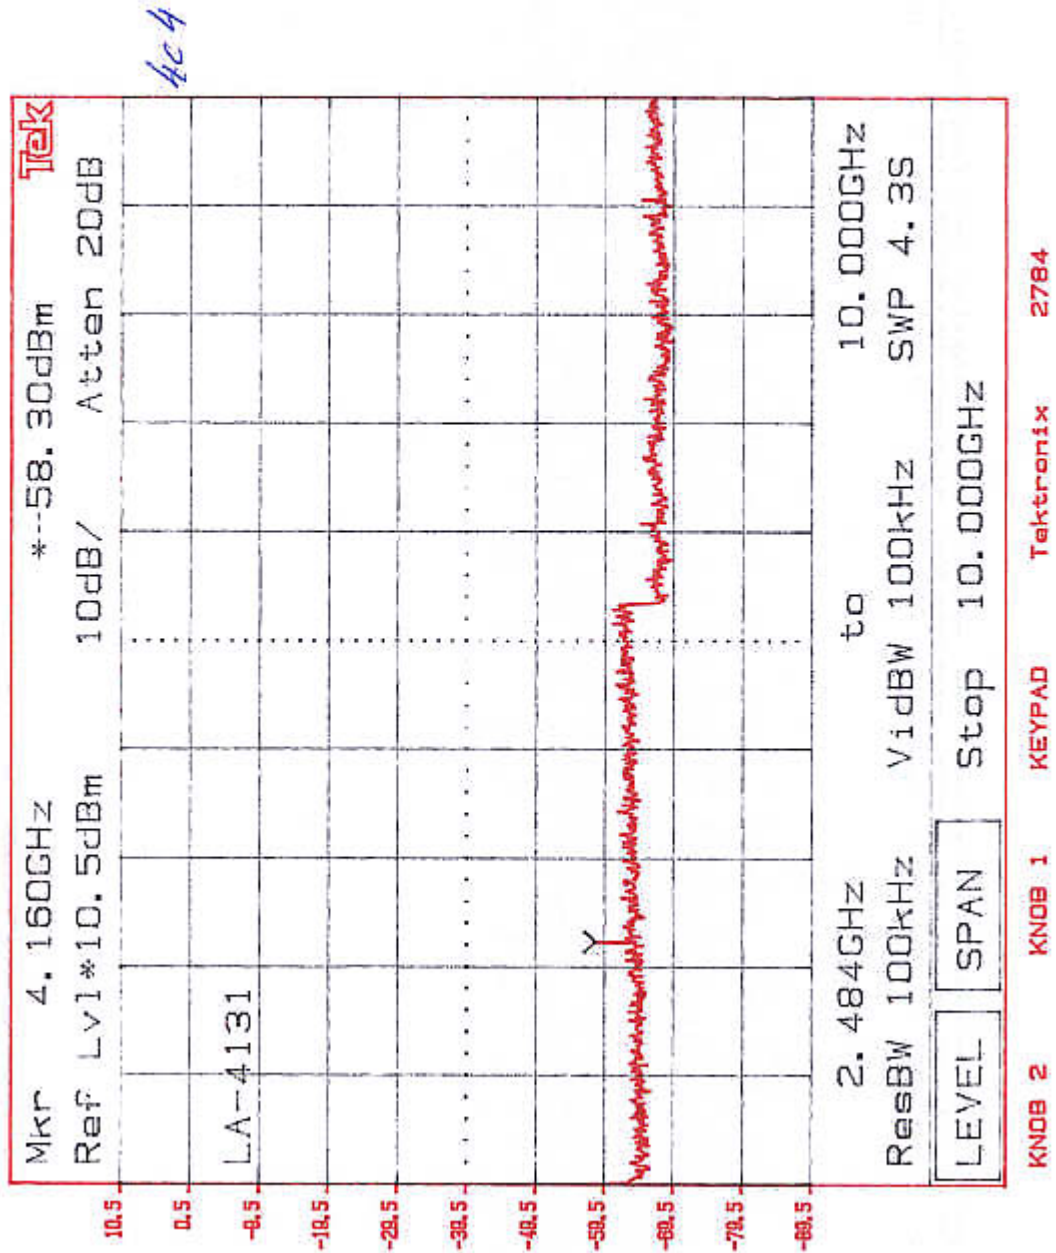

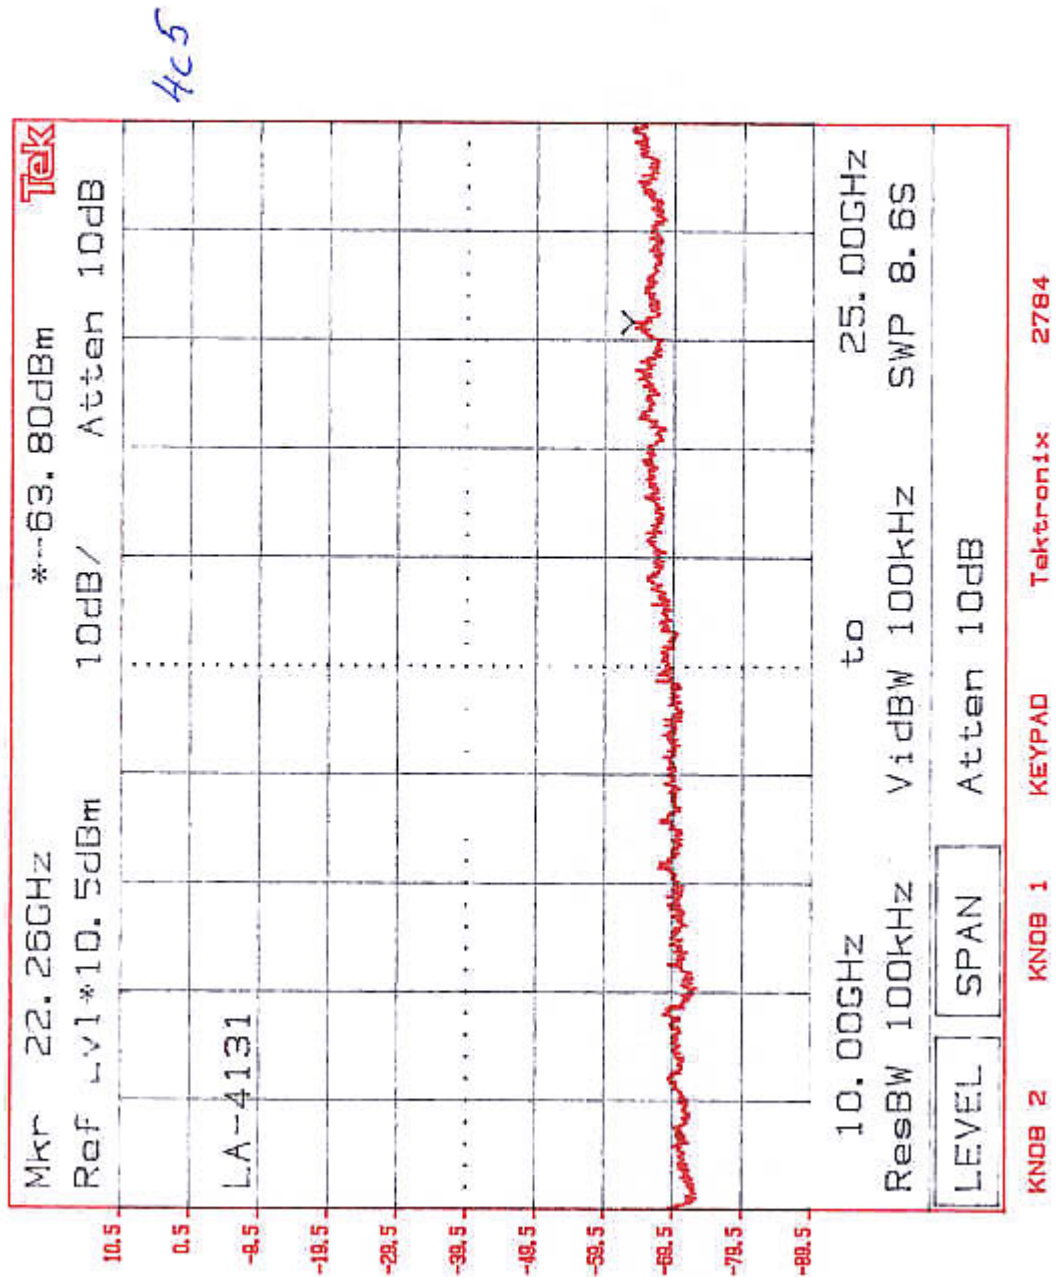

4.6 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 25000 MHz.

For radiated emission tests, the analyzer setting was as followings:

	<u>RES BW</u>	<u>VID BW</u>	
Frequency <1 GHz	100 kHz	100 kHz	
Frequency ≥1 GHz	1 MHz	1 MHz	(Peak measurements)
	1 MHz	10 Hz	(Average measurements)
	or 1 MHz	≥ 1 MHz with sampling	(Average measurements)

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels).

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

The field strength at the band-edge frequencies was calculated as $E_F = E_o - \Delta$.

Where:

E_F = Field Strength at bandedge frequency, dBuV/m

E_o = Field Strength at fundamental frequency , dBuV/m

Δ = Delta between output power at fundamental frequency and at band-edge frequency.

Refer to following data sheets and plots 6.1 – 6.7 for details.

Fundamental Frequency, MHz	Average FS at fundamental frequency, dBuV/m *	Minimum Delta, dB	Calculated Average FS in restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz, dBuV/m **	Average FS Limit in restricted bands, dBuV/m	Plot number
2412	109.1	65.0	44.1	54.0	6.1
2437	109.3	59.3	50.0	54.0	6.4
2462	111.1	57.8	53.3	54.0	6.5

* The highest measured level (radio with antenna Yagi) is taken into account.

** Worst case calculated

FS – Field Strength

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Yagi	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance_	3 meters
Test Mode:	Tx @ 2412 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2412.0	86.8	Peak	8	0	V	29.1	0.0	3.0	0.0	118.9	-	-
2412.0	77.0	Ave.	8	0	V	29.1	0.0	3.0	0.0	109.1	-	-
4824.1	46.6	Peak	8	8	V	34.0	28.1	4.3	0.0	56.8	74.0	-17.2
4824.1	33.7	Ave.	8	8	V	34.0	28.1	4.3	0.0	43.9	54.0	-10.1
7235.0	35.7	Peak	8	8	V	37.0	28.0	5.5	0.0	50.2	74.0	-23.8
7235.0	26.0	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.5	54.0	-13.5
9647.9	32.9	Peak	8	8	V	38.5	27.3	6.7	0.0	50.8	74.0	-23.2
9647.9	23.0	Ave.	8	8	V	38.5	27.3	6.7	0.0	40.9	54.0	-13.1
12060	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12060	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14472	37.9	Peak	8	10	V	40.7	37.8	8.2	0.0	49.0	74.0	-25.0
14472	28.0	Ave.	8	10	V	40.7	37.8	8.2	0.0	39.1	54.0	-14.9
16884	38.0	Peak	8	10	V	40.8	39.4	9.0	0.0	48.4	74.0	-25.6
16884	28.0	Ave.	8	10	V	40.8	39.4	9.0	0.0	38.4	54.0	-15.6
19296	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19296	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21708	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21708	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24120	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24120	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 B below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard	FCC § 15.247 (R.B.)
EUT:	Antenna Yagi	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2437 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2437.0	87.1	Peak	8	0	V	29.1	0.0	3.0	0.0	119.2	-	-
2437.0	77.2	Ave.	8	0	V	29.1	0.0	3.0	0.0	109.3	-	-
4874.0	46.0	Peak	8	8	V	34.0	28.1	4.3	0.0	56.2	74.0	-17.8
4874.0	33.2	Ave.	8	8	V	34.0	28.1	4.3	0.0	43.4	54.0	-10.6
7311.0	35.8	Peak	8	8	V	37.0	28.0	5.5	0.0	50.3	74.0	-23.7
7311.0	26.2	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.7	54.0	-13.3
9748.0	32.5	Peak	8	8	V	38.5	27.3	6.7	0.0	50.4	74.0	-23.6
9748.0	23.0	Ave.	8	8	V	38.5	27.3	6.7	0.0	40.9	54.0	-13.1
12185	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12185	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14622	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14622	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17059	38.0	Peak	8	10	V	42.0	38.8	9.2	0.0	50.4	74.0	-23.6
17059	28.0	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.4	54.0	-13.6
19496	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19496	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21933	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21933	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24370	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24370	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 B below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard_	FCC § 15.247 (R.B.)
EUT:	Antenna Yagi	S/N #:	Sample # 1	Limits_	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance_	3 meters
Test Mode:	Tx @ 2462 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2462.0	88.0	Peak	8	0	V	29.1	0.0	3.0	0.0	120.1	-	-
2462.0	79.0	Ave.	8	0	V	29.1	0.0	3.0	0.0	111.1	-	-
4924.0	44.9	Peak	8	8	V	34.0	28.1	4.3	0.0	55.1	74.0	-18.9
4924.0	32.2	Ave.	8	8	V	34.0	28.1	4.3	0.0	42.4	54.0	-11.6
7386.0	39.8	Peak	8	8	V	37.0	28.0	5.5	0.0	54.3	74.0	-19.7
7386.0	30.0	Ave.	8	8	V	37.0	28.0	5.5	0.0	44.5	54.0	-9.5
9848.0	32.0	Peak	8	8	V	38.5	27.6	6.7	0.0	49.6	74.0	-24.4
9848.0	22.6	Ave.	8	8	V	38.5	27.6	6.7	0.0	40.2	54.0	-13.8
12310	40.8	Peak	8	10	V	41.6	39.1	7.6	0.0	50.9	74.0	-23.1
12310	30.6	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.7	54.0	-13.3
14772	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14772	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17234	37.9	Peak	8	10	V	42.0	38.8	9.2	0.0	50.3	74.0	-23.7
17234	27.8	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.2	54.0	-13.8
19696	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19696	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
22158	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
22158	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24620	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
2462.0	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C.
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard_	FCC § 15.247 (R.B.)
EUT:	Antenna Pipe Bomb 11" X 4"	S/N #:	Sample # 1	Limits_	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance_	3 meters
Test Mode:	Tx @ 2412 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2412.0	84.0	Peak	8	0	V	29.1	0.0	3.0	0.0	116.1	-	-
2412.0	73.0	Ave.	8	0	V	29.1	0.0	3.0	0.0	105.1	-	-
4824.1	50.0	Peak	8	8	V	34.0	28.1	4.3	0.0	60.2	74.0	-13.8
4824.1	36.5	Ave.	8	8	V	34.0	28.1	4.3	0.0	46.7	54.0	-7.3
7235.0	34.0	Peak	8	8	V	37.0	28.0	5.5	0.0	48.5	74.0	-25.5
7235.0	23.5	Ave.	8	8	V	37.0	28.0	5.5	0.0	38.0	54.0	-16.0
9647.9	32.0	Peak	8	8	V	38.5	27.3	6.7	0.0	49.9	74.0	-24.1
9647.9	22.0	Ave.	8	8	V	38.5	27.3	6.7	0.0	39.9	54.0	-14.1
12060	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12060	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14472	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14472	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
16884	38.0	Peak	8	10	V	40.8	39.4	9.0	0.0	48.4	74.0	-25.6
16884	28.0	Ave.	8	10	V	40.8	39.4	9.0	0.0	38.4	54.0	-15.6
19296	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19296	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21708	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21708	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24120	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24120	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C.
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Pipe Bomb 11" X 4"	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2437 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2437.0	83.5	Peak	8	0	V	29.1	0.0	3.0	0.0	115.6	-	-
2437.0	72.5	Ave.	8	0	V	29.1	0.0	3.0	0.0	104.6	-	-
4874.0	48.9	Peak	8	8	V	34.0	28.1	4.3	0.0	59.1	74.0	-14.9
4874.0	36.0	Ave.	8	8	V	34.0	28.1	4.3	0.0	46.2	54.0	-7.8
7311.0	36.0	Peak	8	8	V	37.0	28.0	5.5	0.0	50.5	74.0	-23.5
7311.0	26.2	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.7	54.0	-13.3
9748.0	32.2	Peak	8	8	V	38.5	27.3	6.7	0.0	50.1	74.0	-23.9
9748.0	23.1	Ave.	8	8	V	38.5	27.3	6.7	0.0	41.0	54.0	-13.0
12185	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12185	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14622	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14622	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17059	38.0	Peak	8	10	V	42.0	38.8	9.2	0.0	50.4	74.0	-23.6
17059	28.0	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.4	54.0	-13.6
19496	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19496	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21933	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21933	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24370	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24370	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:

- D.C.F.:Distance Correction Factor
- Insert. Loss (dB) = Cable A + Cable B + Cable C .
- Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
- Negative signs (-) in Margin column signify levels below the limits.
- All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
- All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard	FCC § 15.247 (R.B.)
EUT:	Antenna Pipe Bomb 11" X 4"	S/N #:	Sample # 1	Limits_	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2462 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2462.0	84.5	Peak	8	0	V	29.1	0.0	3.0	0.0	116.6	-	-
2462.0	73.5	Ave.	8	0	V	29.1	0.0	3.0	0.0	105.6	-	-
4924.0	43.4	Peak	8	8	V	34.0	28.1	4.3	0.0	53.6	74.0	-20.4
4924.0	32.0	Ave.	8	8	V	34.0	28.1	4.3	0.0	42.2	54.0	-11.8
7386.0	36.0	Peak	8	8	V	37.0	28.0	5.5	0.0	50.5	74.0	-23.5
7386.0	26.0	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.5	54.0	-13.5
9848.0	32.5	Peak	8	8	V	38.5	27.6	6.7	0.0	50.1	74.0	-23.9
9848.0	22.6	Ave.	8	8	V	38.5	27.6	6.7	0.0	40.2	54.0	-13.8
12310	41.0	Peak	8	10	V	41.6	39.1	7.6	0.0	51.1	74.0	-22.9
12310	30.6	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.7	54.0	-13.3
14772	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14772	28.4	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.7	54.0	-13.3
17234	37.9	Peak	8	10	V	42.0	38.8	9.2	0.0	50.3	74.0	-23.7
17234	27.8	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.2	54.0	-13.8
19696	32.9	Peak	21	13	H	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19696	23.0	Ave.	21	13	H	40.3	23.3	7.0	-9.5	37.5	54.0	-16.5
22158	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
22158	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24620	39.7	Peak	21	13	H	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
2462.0	30.0	Ave.	21	13	H	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Ceiling Panel	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2412 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2412.0	79.9	Peak	8	0	H	29.1	0.0	3.0	0.0	112.0	-	-
2412.0	70.2	Ave.	8	0	H	29.1	0.0	3.0	0.0	102.3	-	-
4824.1	41.0	Peak	8	8	V	34.0	28.1	4.3	0.0	51.2	74.0	-22.8
4824.1	31.0	Ave.	8	8	V	34.0	28.1	4.3	0.0	41.2	54.0	-12.8
7235.0	35.0	Peak	8	8	V	37.0	28.0	5.5	0.0	49.5	74.0	-24.5
7235.0	25.3	Ave.	8	8	V	37.0	28.0	5.5	0.0	39.8	54.0	-14.2
9647.9	32.5	Peak	8	8	V	38.5	27.3	6.7	0.0	50.4	74.0	-23.6
9647.9	23.1	Ave.	8	8	V	38.5	27.3	6.7	0.0	41.0	54.0	-13.0
12060	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12060	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14472	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14472	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
16884	38.0	Peak	8	10	V	40.8	39.4	9.0	0.0	48.4	74.0	-25.6
16884	28.0	Ave.	8	10	V	40.8	39.4	9.0	0.0	38.4	54.0	-15.6
19296	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19296	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21708	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21708	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24120	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24120	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Ceiling Panel	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2437 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2437.0	79.9	Peak	8	0	H	29.1	0.0	3.0	0.0	112.0	-	-
2437.0	70.3	Ave.	8	0	H	29.1	0.0	3.0	0.0	102.4	-	-
4874.0	45.0	Peak	8	8	H	33.9	28.1	4.3	0.0	55.1	74.0	-18.9
4874.0	35.0	Ave.	8	8	H	33.9	28.1	4.3	0.0	45.1	54.0	-8.9
7311.0	35.5	Peak	8	8	V	37.0	28.0	5.5	0.0	50.0	74.0	-24.0
7311.0	25.6	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.1	54.0	-13.9
9748.0	32.5	Peak	8	8	V	38.5	27.3	6.7	0.0	50.4	74.0	-23.6
9748.0	23.0	Ave.	8	8	V	38.5	27.3	6.7	0.0	40.9	54.0	-13.1
12185	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12185	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14622	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14622	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17059	38.0	Peak	8	10	V	42.0	38.8	9.2	0.0	50.4	74.0	-23.6
17059	28.0	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.4	54.0	-13.6
19496	32.9	Peak	21	13	V	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19496	23.0	Ave.	21	13	V	40.3	23.3	7.0	-9.5	37.5	54.0	-16.5
21933	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21933	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24370	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24370	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard	FCC § 15.247 (R.B.)
EUT:	Antenna Ceiling Panel	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2462 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2462.0	81.1	Peak	8	0	H	29.1	0.0	3.0	0.0	113.2	-	-
2462.0	72.0	Ave.	8	0	H	29.1	0.0	3.0	0.0	104.1	-	-
4924.0	42.5	Peak	8	8	H	33.9	28.1	4.3	0.0	52.6	74.0	-21.4
4924.0	31.0	Ave.	8	8	H	33.9	28.1	4.3	0.0	41.1	54.0	-12.9
7386.0	37.5	Peak	8	8	V	37.0	28.0	5.5	0.0	52.0	74.0	-22.0
7386.0	28.0	Ave.	8	8	V	37.0	28.0	5.5	0.0	42.5	54.0	-11.5
9848.0	32.0	Peak	8	8	V	38.5	27.6	6.7	0.0	49.6	74.0	-24.4
9848.0	22.6	Ave.	8	8	V	38.5	27.6	6.7	0.0	40.2	54.0	-13.8
12310	40.8	Peak	8	10	V	41.6	39.1	7.6	0.0	50.9	74.0	-23.1
12310	30.6	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.7	54.0	-13.3
14772	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14772	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17234	37.9	Peak	8	10	V	42.0	38.8	9.2	0.0	50.3	74.0	-23.7
17234	27.8	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.2	54.0	-13.8
19696	32.9	Peak	21	13	V	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19696	23.0	Ave.	21	13	V	40.3	23.3	7.0	-9.5	37.5	54.0	-16.5
22158	38.6	Peak	21	13	H	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
22158	29.0	Ave.	21	13	H	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24620	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
2462.0	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 7.5	S/N #:	Sample # 1	Limits:	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance:	3 meters
Test Mode:	Tx @ 2412 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation:	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2412.0	82.5	Peak	8	0	H	29.1	0.0	3.0	0.0	114.6	-	-
2412.0	72.3	Ave.	8	0	H	29.1	0.0	3.0	0.0	104.4	-	-
4824.1	44.5	Peak	8	8	V	34.0	28.1	4.3	0.0	54.7	74.0	-19.3
4824.1	33.5	Ave.	8	8	V	34.0	28.1	4.3	0.0	43.7	54.0	-10.3
7235.0	34.9	Peak	8	8	V	37.0	28.0	5.5	0.0	49.4	74.0	-24.6
7235.0	23.2	Ave.	8	8	V	37.0	28.0	5.5	0.0	37.7	54.0	-16.3
9647.9	33.0	Peak	8	8	V	38.5	27.3	6.7	0.0	50.9	74.0	-23.1
9647.9	23.5	Ave.	8	8	V	38.5	27.3	6.7	0.0	41.4	54.0	-12.6
12060	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12060	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14472	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14472	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
16884	38.0	Peak	8	10	V	40.8	39.4	9.0	0.0	48.4	74.0	-25.6
16884	28.0	Ave.	8	10	V	40.8	39.4	9.0	0.0	38.4	54.0	-15.6
19296	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19296	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21708	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21708	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24120	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24120	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 7.5	S/N #:	Sample # 1	Limits:	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance:	3 meters
Test Mode:	Tx @ 2437 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation:	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2437.0	83.0	Peak	8	0	H	29.1	0.0	3.0	0.0	115.1	-	-
2437.0	73.0	Ave.	8	0	H	29.1	0.0	3.0	0.0	105.1	-	-
4874.0	49.0	Peak	8	8	H	33.9	28.1	4.3	0.0	59.1	74.0	-14.9
4874.0	36.0	Ave.	8	8	H	33.9	28.1	4.3	0.0	46.1	54.0	-7.9
7311.0	37.0	Peak	8	8	V	37.0	28.0	5.5	0.0	51.5	74.0	-22.5
7311.0	26.9	Ave.	8	8	V	37.0	28.0	5.5	0.0	41.4	54.0	-12.6
9748.0	32.4	Peak	8	8	V	38.5	27.3	6.7	0.0	50.3	74.0	-23.7
9748.0	22.8	Ave.	8	8	V	38.5	27.3	6.7	0.0	40.7	54.0	-13.3
12185	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12185	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14622	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14622	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17059	38.0	Peak	8	10	V	42.0	38.8	9.2	0.0	50.4	74.0	-23.6
17059	28.0	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.4	54.0	-13.6
19496	32.9	Peak	21	13	V	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19496	23.1	Ave.	21	13	V	40.3	23.3	7.0	-9.5	37.6	54.0	-16.4
21933	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21933	29.3	Ave.	21	13	V	40.3	23.3	7.2	-9.5	44.0	54.0	-10.0
24370	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24370	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 7.5	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2462 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2462.0	84.3	Peak	8	0	H	29.1	0.0	3.0	0.0	116.4	-	-
2462.0	74.5	Ave.	8	0	H	29.1	0.0	3.0	0.0	106.6	-	-
4924.0	48.0	Peak	8	8	H	33.9	28.1	4.3	0.0	58.1	74.0	-15.9
4924.0	36.0	Ave.	8	8	H	33.9	28.1	4.3	0.0	46.1	54.0	-7.9
7386.0	36.0	Peak	8	8	V	37.0	28.0	5.5	0.0	50.5	74.0	-23.5
7386.0	26.0	Ave.	8	8	V	37.0	28.0	5.5	0.0	40.5	54.0	-13.5
9848.0	32.5	Peak	8	8	V	38.5	27.6	6.7	0.0	50.1	74.0	-23.9
9848.0	22.6	Ave.	8	8	V	38.5	27.6	6.7	0.0	40.2	54.0	-13.8
12310	41.0	Peak	8	10	V	41.6	39.1	7.6	0.0	51.1	74.0	-22.9
12310	30.6	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.7	54.0	-13.3
14772	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14772	28.4	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.7	54.0	-13.3
17234	37.9	Peak	8	10	V	42.0	38.8	9.2	0.0	50.3	74.0	-23.7
17234	27.8	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.2	54.0	-13.8
19696	32.9	Peak	21	13	H	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19696	23.0	Ave.	21	13	H	40.3	23.3	7.0	-9.5	37.5	54.0	-16.5
22158	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
22158	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24620	39.7	Peak	21	13	H	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
2462.0	30.0	Ave.	21	13	H	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 9	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2412 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant .	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2412.0	83.7	Peak	8	0	H	29.1	0.0	3.0	0.0	115.8	-	-
2412.0	74.0	Ave.	8	0	H	29.1	0.0	3.0	0.0	106.1	-	-
4824.1	45.0	Peak	8	8	H	33.9	28.1	4.3	0.0	55.1	74.0	-18.9
4824.1	33.5	Ave.	8	8	H	33.9	28.1	4.3	0.0	43.6	54.0	-10.4
7235.0	36.0	Peak	8	8	H	36.8	28.0	5.5	0.0	50.3	74.0	-23.7
7235.0	25.0	Ave.	8	8	H	36.8	28.0	5.5	0.0	39.3	54.0	-14.7
9647.9	33.0	Peak	8	8	V	38.5	27.3	6.7	0.0	50.9	74.0	-23.1
9647.9	23.5	Ave.	8	8	V	38.5	27.3	6.7	0.0	41.4	54.0	-12.6
12060	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12060	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14472	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14472	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
16884	38.0	Peak	8	10	V	40.8	39.4	9.0	0.0	48.4	74.0	-25.6
16884	28.0	Ave.	8	10	V	40.8	39.4	9.0	0.0	38.4	54.0	-15.6
19296	32.9	Peak	21	13	V	40.2	23.3	7.0	-9.5	47.3	74.0	-26.7
19296	23.0	Ave.	21	13	V	40.2	23.3	7.0	-9.5	37.4	54.0	-16.6
21708	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21708	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24120	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24120	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

Radiated Emissions Test Data

Company:	Symbol	Model #:	LA4131	Standard:	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 9	S/N #:	Sample # 1	Limits:	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance:	3 meters
Test Mode:	Tx @ 2437 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation:	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None

Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2437.0	84.3	Peak	8	0	H	29.1	0.0	3.0	0.0	116.4	-	-
2437.0	74.4	Ave.	8	0	H	29.1	0.0	3.0	0.0	106.5	-	-
4874.0	46.8	Peak	8	8	H	33.9	28.1	4.3	0.0	56.9	74.0	-17.1
4874.0	34.5	Ave.	8	8	H	33.9	28.1	4.3	0.0	44.6	54.0	-9.4
7311.0	40.0	Peak	8	8	V	37.0	28.0	5.5	0.0	54.5	74.0	-19.5
7311.0	30.2	Ave.	8	8	V	37.0	28.0	5.5	0.0	44.7	54.0	-9.3
9748.0	36.0	Peak	8	8	V	38.5	27.3	6.7	0.0	53.9	74.0	-20.1
9748.0	25.0	Ave.	8	8	V	38.5	27.3	6.7	0.0	42.9	54.0	-11.1
12185	40.2	Peak	8	10	V	41.6	39.1	7.6	0.0	50.3	74.0	-23.7
12185	30.5	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.6	54.0	-13.4
14622	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14622	28.0	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.3	54.0	-13.7
17059	38.0	Peak	8	10	V	42.0	38.8	9.2	0.0	50.4	74.0	-23.6
17059	28.0	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.4	54.0	-13.6
19496	32.9	Peak	21	13	V	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19496	23.1	Ave.	21	13	V	40.3	23.3	7.0	-9.5	37.6	54.0	-16.4
21933	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
21933	29.3	Ave.	21	13	V	40.3	23.3	7.2	-9.5	44.0	54.0	-10.0
24370	39.7	Peak	21	13	V	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
24370	30.0	Ave.	21	13	V	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6

Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.


Radiated Emissions Test Data


Company:	Symbol	Model #:	LA4131	Standard	FCC § 15.247 (R.B.)
EUT:	Antenna Panel 9	S/N #:	Sample # 1	Limits	11
Project #:	J20036369	Test Date:	April 1, 2000	Test Distance	3 meters
Test Mode:	Tx @ 2462 MHz	Engineer:	Xi-Ming Y.	Duty Relaxation	0 dB


	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
Number:	2	21	8	10	8	13	12	0	0	0
Model:	EMCO 3143	3160-9	EMCO 3115	AFT18855	CDI_P1000	ACO/400	NPS366	None	None	None


Frequency	Reading	Detector	Ant	Amp.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
2462.0	83.4	Peak	8	0	H	29.1	0.0	3.0	0.0	115.5	-	-
2462.0	75.5	Ave.	8	0	H	29.1	0.0	3.0	0.0	107.6	-	-
4924.0	46.5	Peak	8	8	H	33.9	28.1	4.3	0.0	56.6	74.0	-17.4
4924.0	35.0	Ave.	8	8	H	33.9	28.1	4.3	0.0	45.1	54.0	-8.9
7386.0	41.9	Peak	8	8	H	36.8	28.0	5.5	0.0	56.2	74.0	-17.8
7386.0	32.2	Ave.	8	8	H	36.8	28.0	5.5	0.0	46.5	54.0	-7.5
9848.0	31.0	Peak	8	8	H	38.5	27.6	6.7	0.0	48.6	74.0	-25.4
9848.0	25.9	Ave.	8	8	H	38.5	27.6	6.7	0.0	43.5	54.0	-10.5
12310	41.0	Peak	8	10	V	41.6	39.1	7.6	0.0	51.1	74.0	-22.9
12310	30.6	Ave.	8	10	V	41.6	39.1	7.6	0.0	40.7	54.0	-13.3
14772	37.9	Peak	8	10	V	41.3	37.4	8.4	0.0	50.2	74.0	-23.8
14772	28.4	Ave.	8	10	V	41.3	37.4	8.4	0.0	40.7	54.0	-13.3
17234	37.9	Peak	8	10	V	42.0	38.8	9.2	0.0	50.3	74.0	-23.7
17234	27.8	Ave.	8	10	V	42.0	38.8	9.2	0.0	40.2	54.0	-13.8
19696	32.9	Peak	21	13	H	40.3	23.3	7.0	-9.5	47.4	74.0	-26.6
19696	23.0	Ave.	21	13	H	40.3	23.3	7.0	-9.5	37.5	54.0	-16.5
22158	38.6	Peak	21	13	V	40.3	23.3	7.2	-9.5	53.3	74.0	-20.7
22158	29.0	Ave.	21	13	V	40.3	23.3	7.2	-9.5	43.7	54.0	-10.3
24620	39.7	Peak	21	13	H	40.4	24.2	7.7	-9.5	54.1	74.0	-19.9
2462.0	30.0	Ave.	21	13	H	40.4	24.2	7.7	-9.5	44.4	54.0	-9.6


Notes:	a) D.C.F.:Distance Correction Factor
	b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
	c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss. - Transducer Loss - Duty Relaxation (transmitter only).
	d) Negative signs (-) in Margin column signify levels below the limits.
	e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.
	f) All emissions above 18 GHz were measured at 1 m distance.

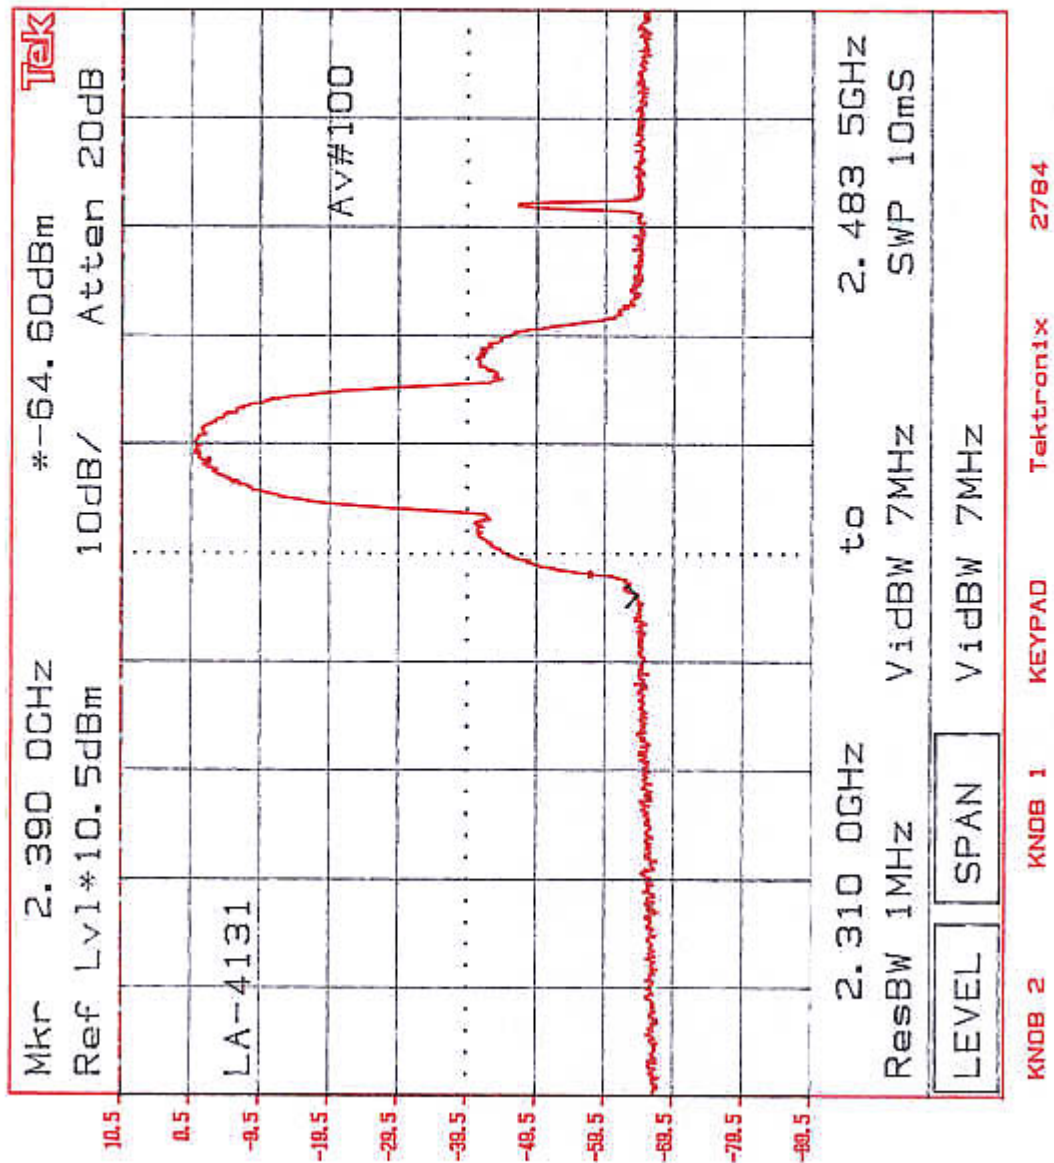


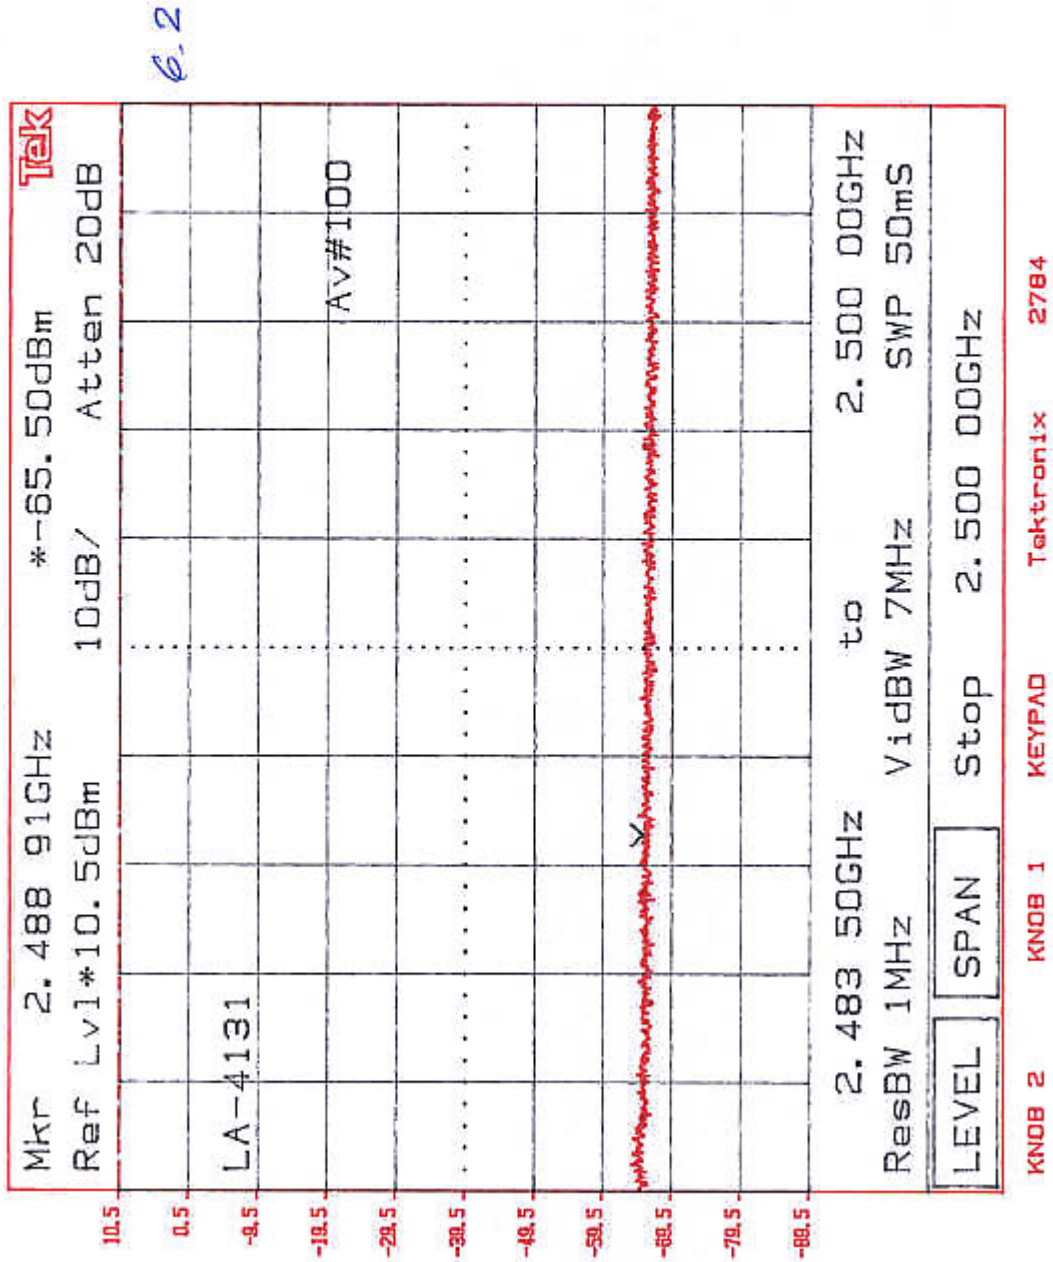


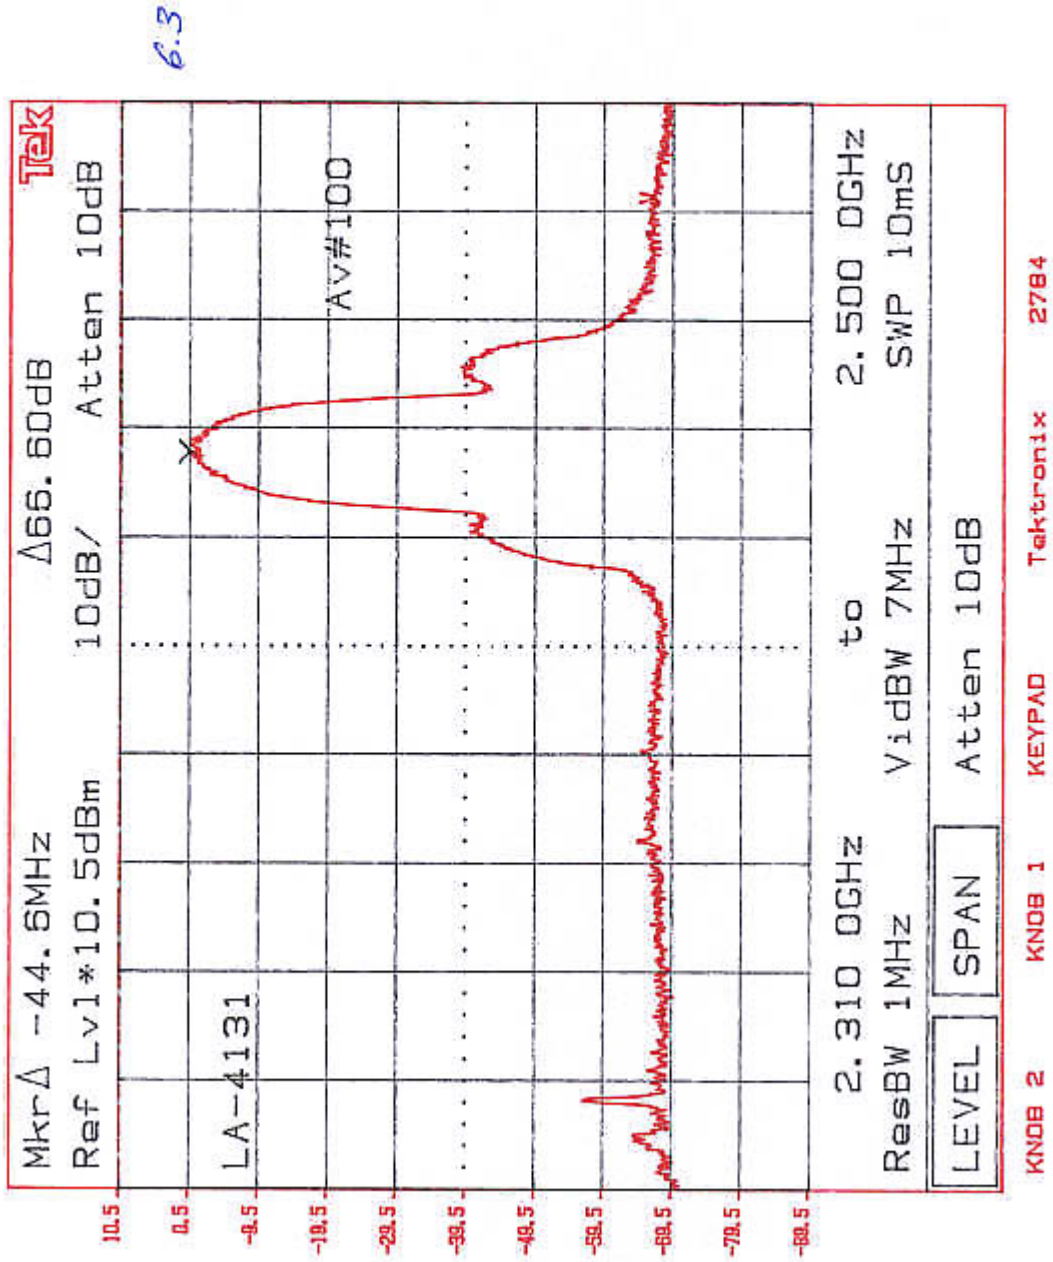

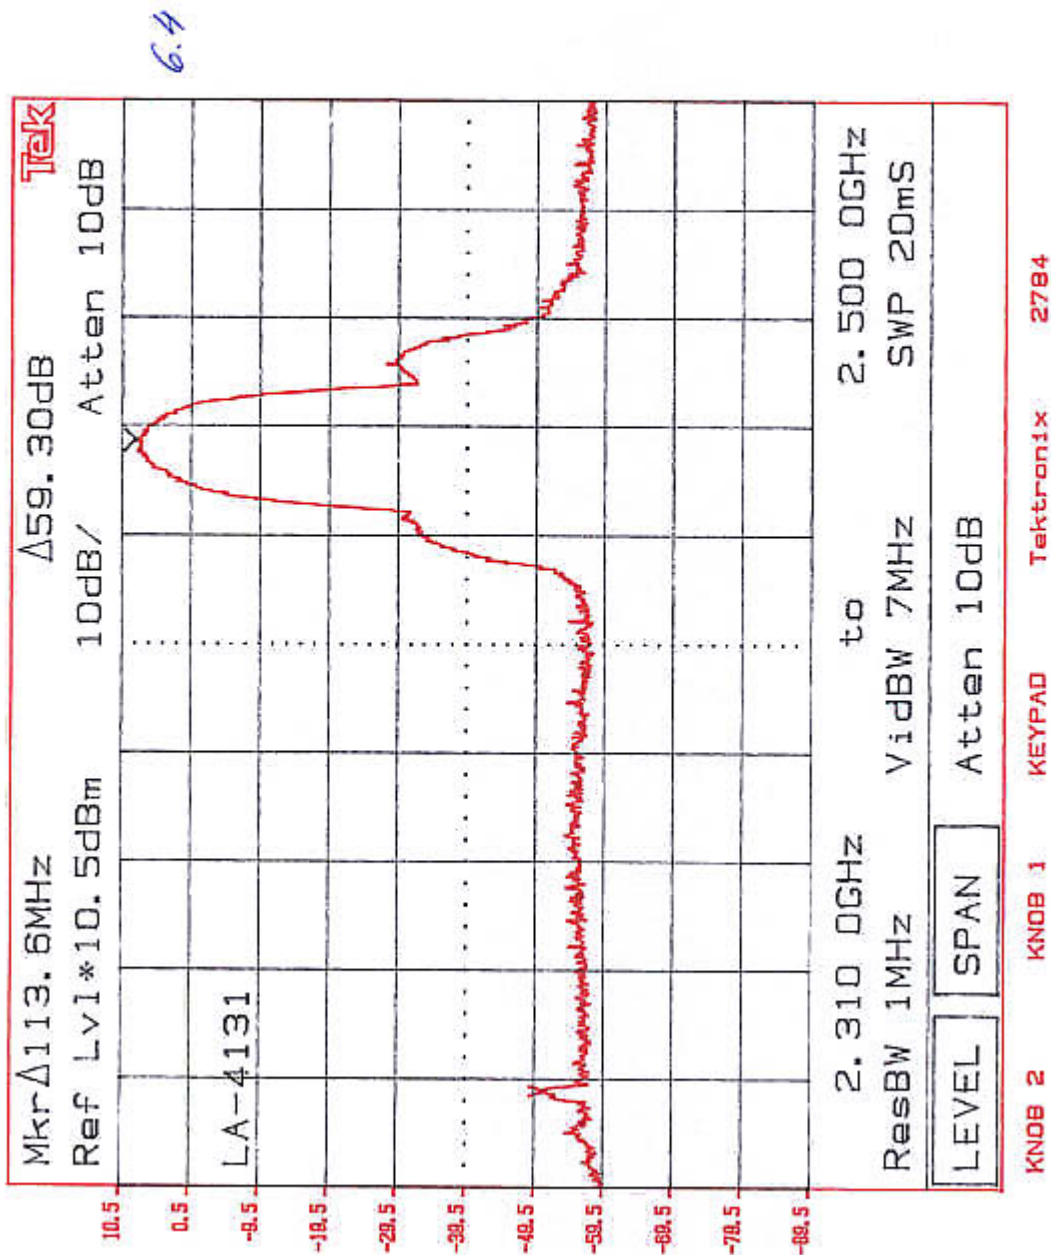

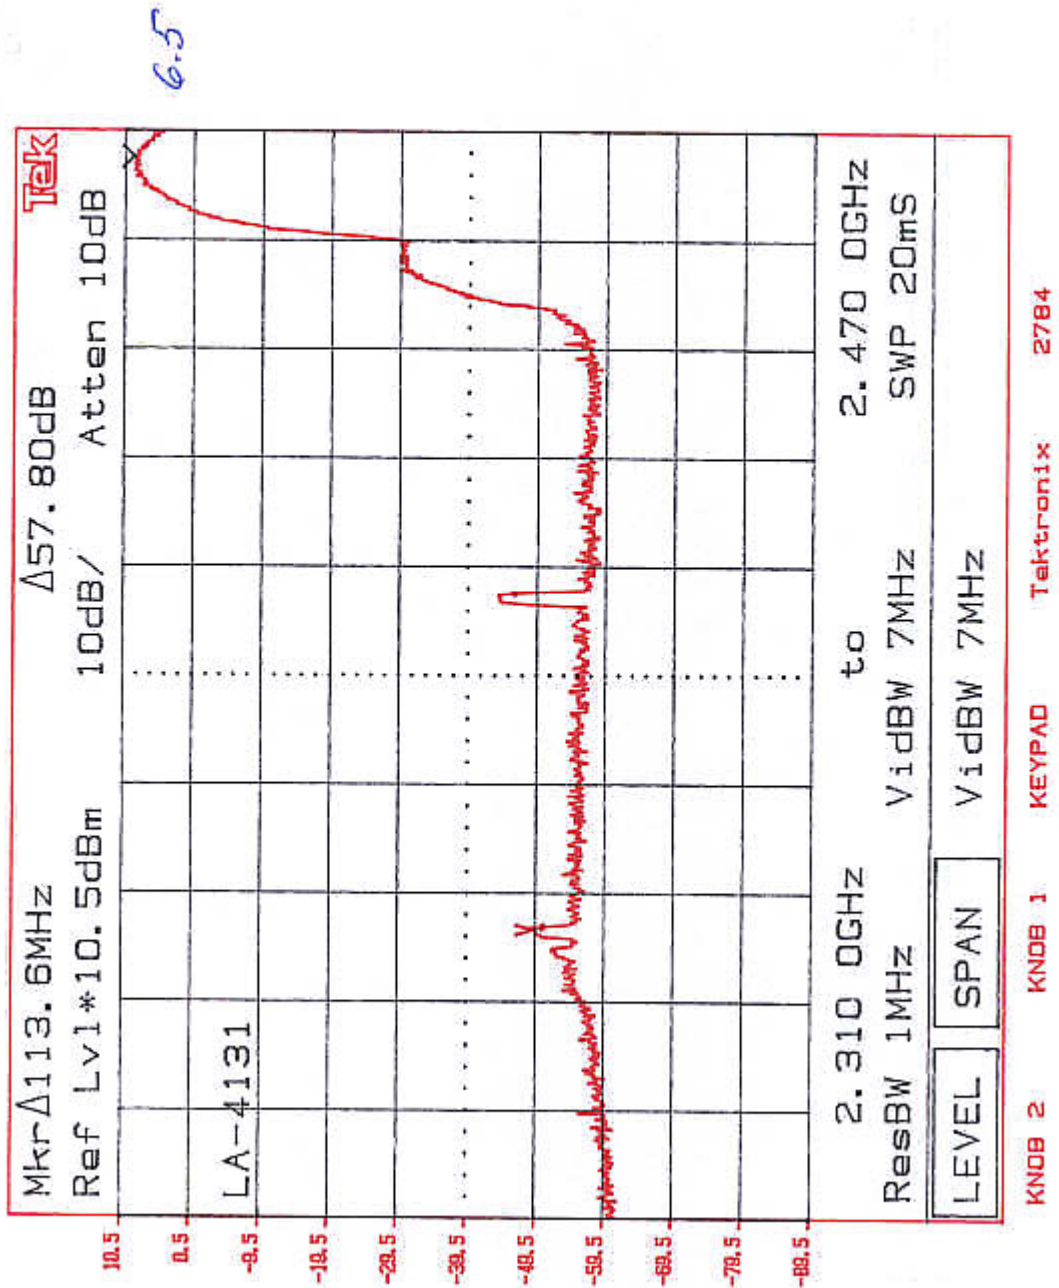

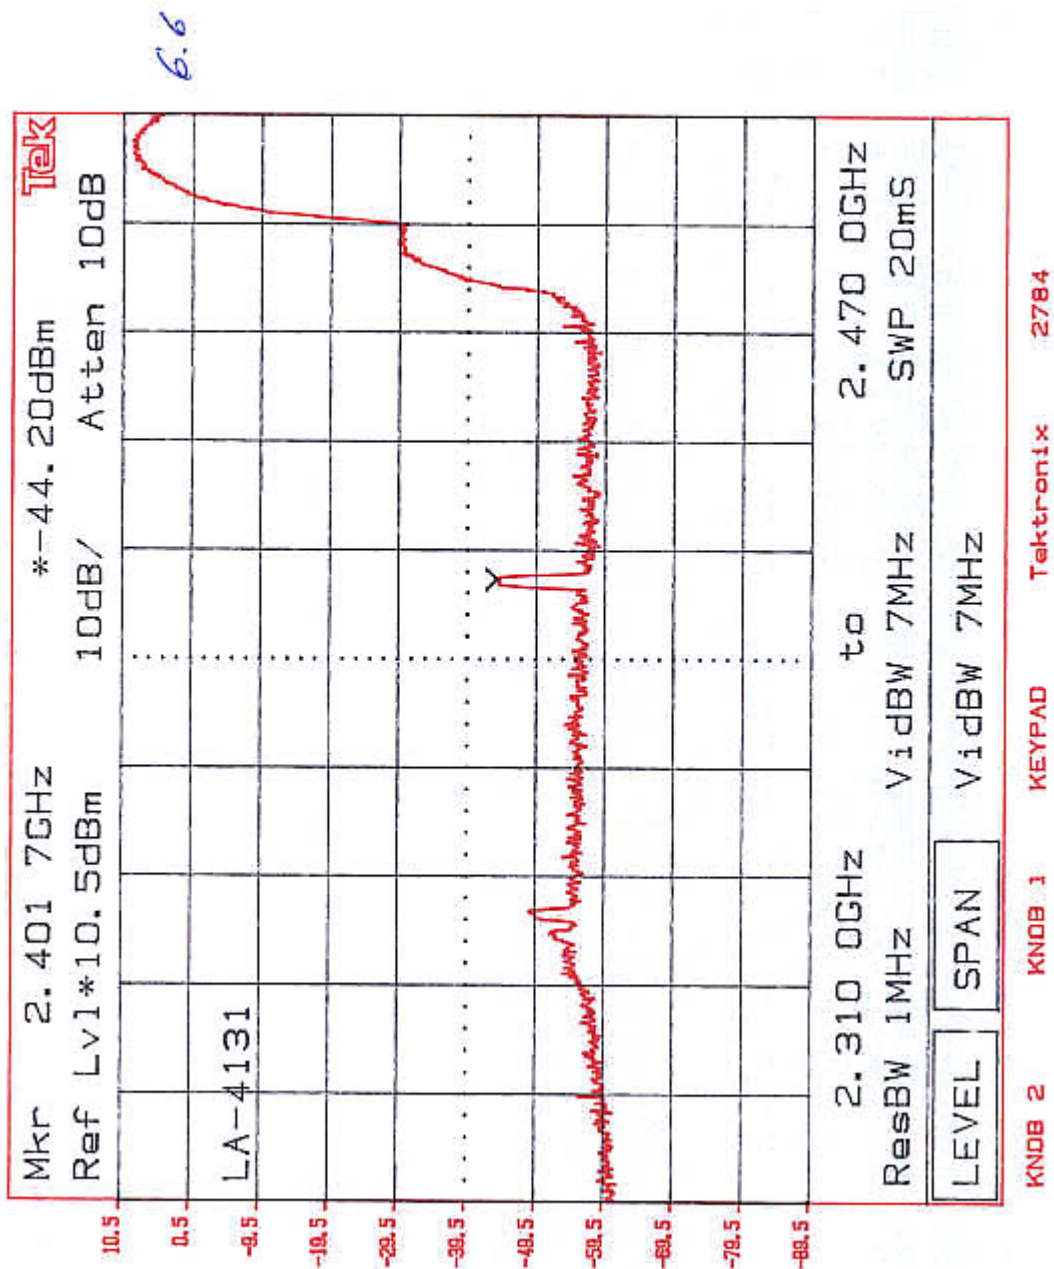

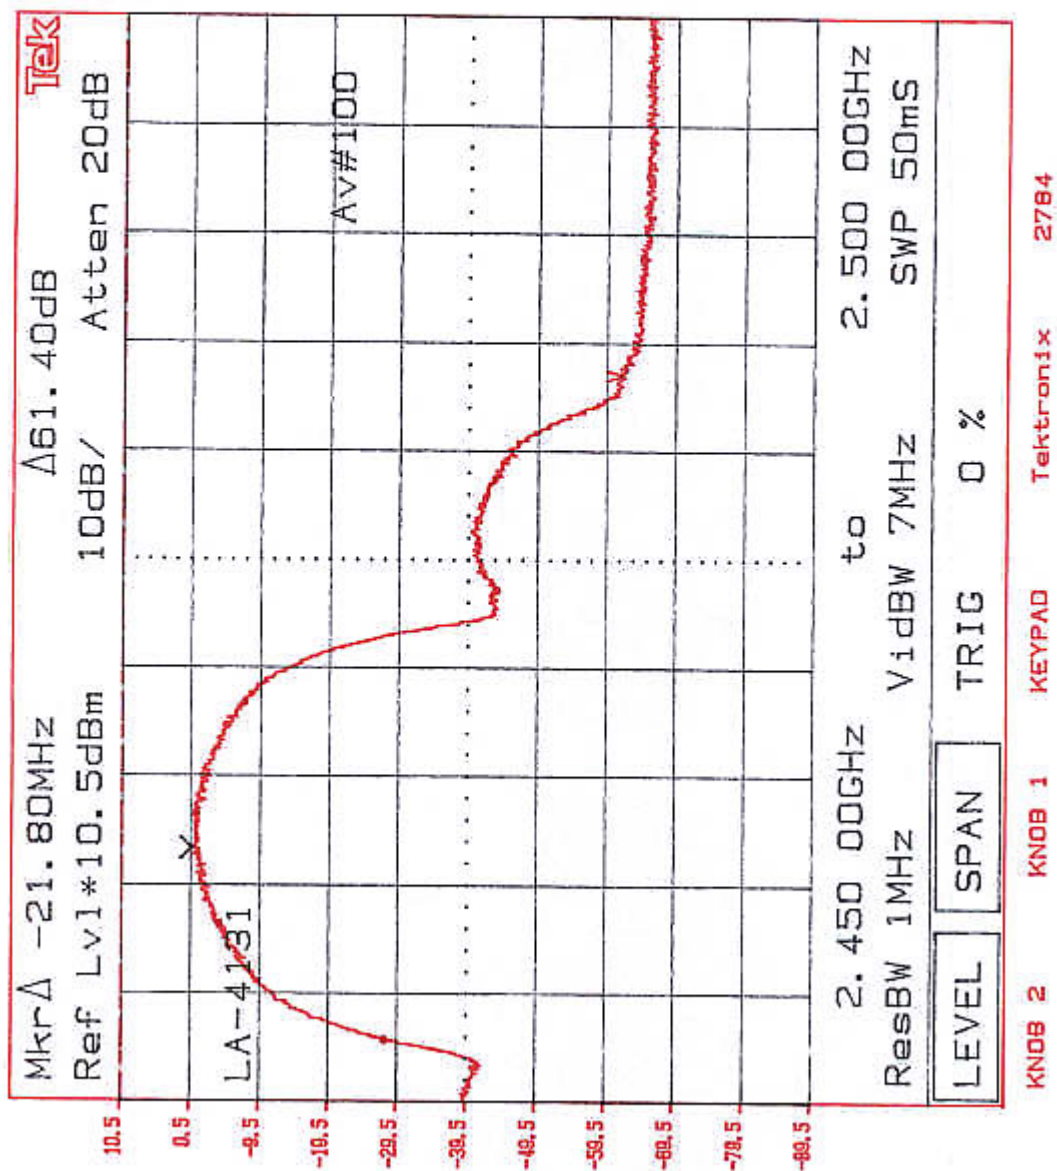


Symbol Technologies, Model No. LA-4131
FCC ID: H9PLA4131M

Date of Test: April 1 to May 24, 2001

4.7 AC Line Conducted Emission
FCC Rule 15.207:

AC line conducted emission test was performed according the ANSI C63.4 standard. The EUT was connected to AC Line through the LISNs.

For the test result, see attached plot 7.1.

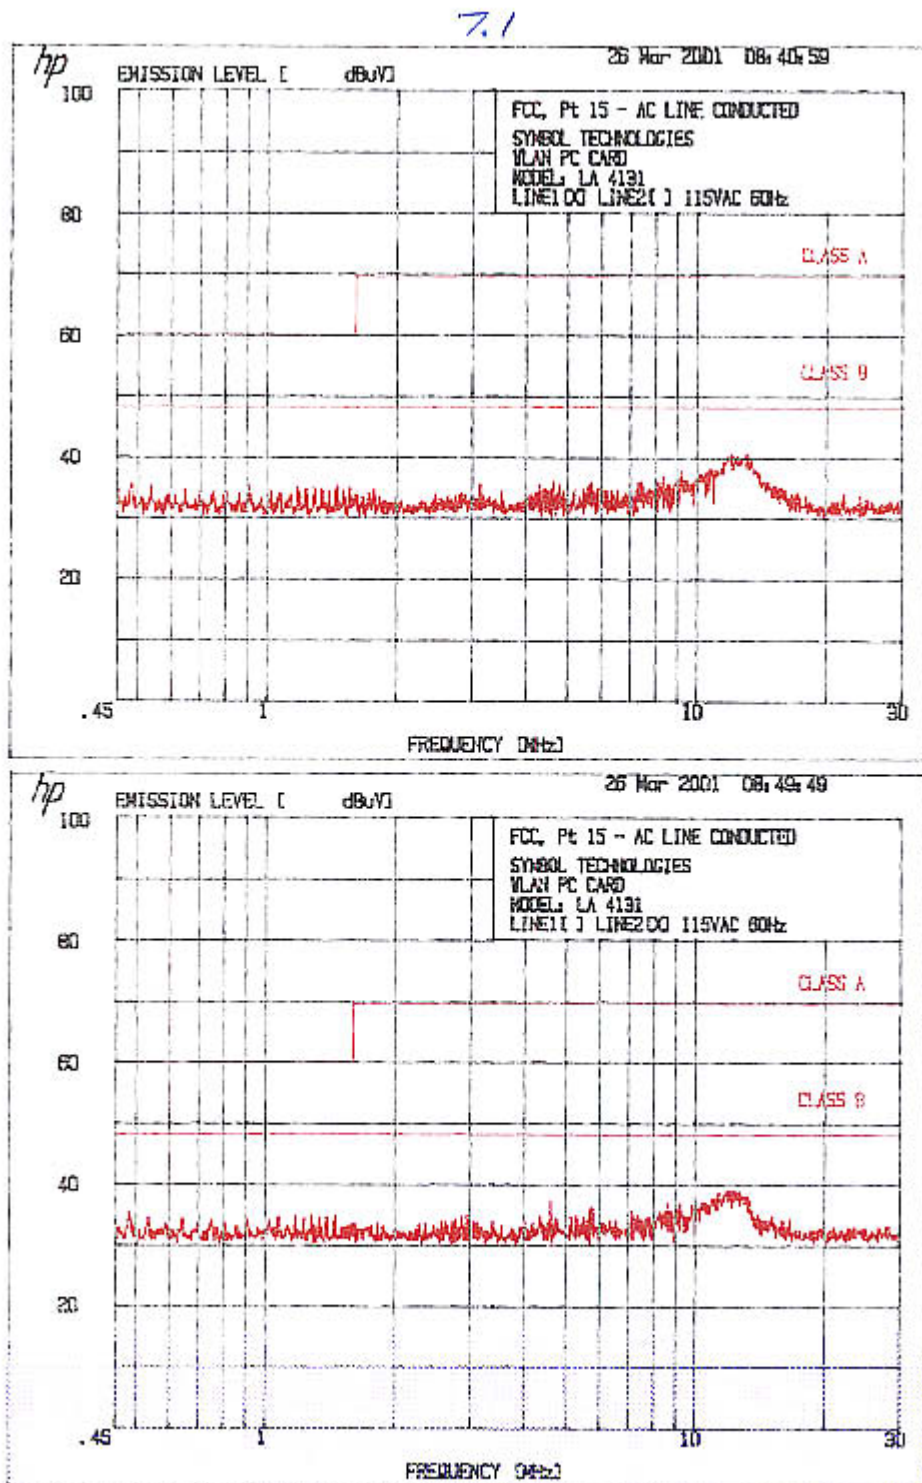

Symbol Technologies, Model No. LA-4131

Date of Test: April 1 to May 24, 2001

FCC ID: H9PLA4131M

4.8 Radiated Emissions from Digital Section of Transceiver (Transmitter)

FCC Ref: 15.109

See separate DoC report.

Symbol Technologies, Model No. LA-4131
FCC ID: H9PLA4131M

Date of Test: April 1 to May 24, 2001

4.9 Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation)
FCC Ref: 15.109, 15.111

Not required - EUT operation above 960 MHz only.

5.0 List of test Equipment

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. INTERVAL	CAL. DUE
Spectrum Analyzer w/85650 QP Adapter	Hewlett Packard	8566B	2416A00317 2043A00251	12	4/6/02
Spectrum Analyzer w/85650 QP Adapter	Hewlett Packard	8568B	1912A0053 2521A01021	12	2/23/02
Spectrum Analyzer	Tektronix	2784	B3020108	12	8/4/01
Double-ridged Horn Antenna	EMCO	3115	9107-3712	12	3/17/02
Horn Antenna	EMCO	3160-09	-	#	#
Pre-Amplifier	CDI	P950	ITS009	12	10/6/01
Pre-Amplifier	CDI	P1000	N/A	12	10/06/01
Pre-Amplifier	Avantek	AFT-18855	8723H705	12	10/5/01
Pre-amplifier	CTT	ACO/400	47526	12	10/5/01
Power Meter	Hewlett Packard	8900D	3607U00673	12	7/31/01

No calibration required

6.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / J20036369E	SS	May 25, 2001	Original document